

Tx. Spurious NVNT 2-DH1 2441MHz Ant1 Ref

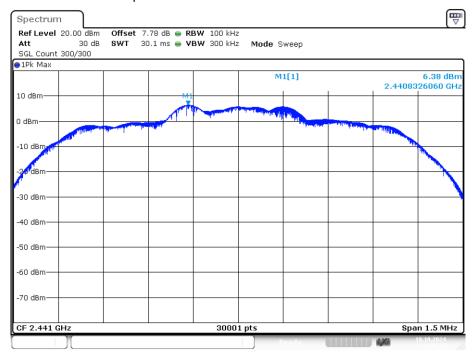


Date: 18.0CT.2024 16:38:36

Tx. Spurious NVNT 2-DH1 2441MHz Ant1 Emission

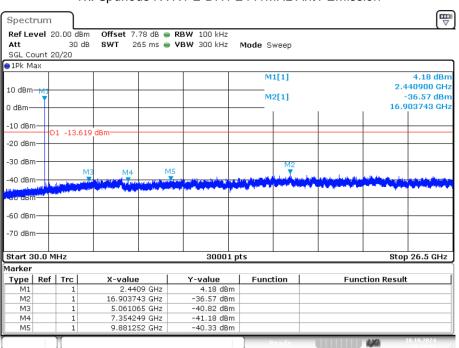


Date: 18.0CT.2024 16:39:01

Tx. Spurious NVNT 2-DH1 2480MHz Ant1 Ref

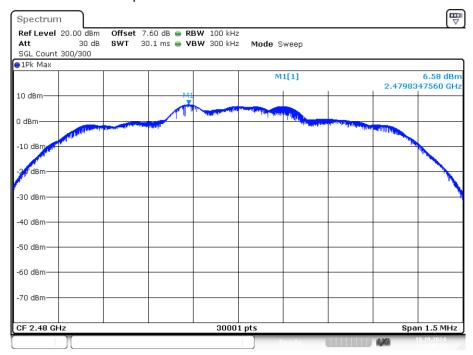


Date: 18.0CT.2024 16:40:27

Tx. Spurious NVNT 2-DH1 2480MHz Ant1 Emission

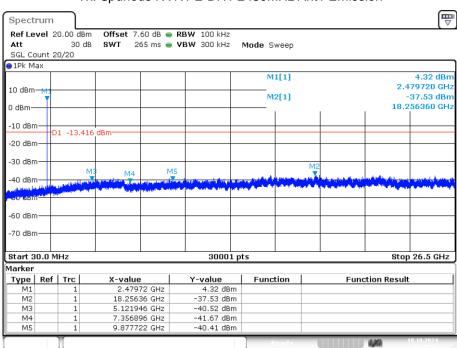


Date: 18.0CT.2024 16:40:52

Tx. Spurious NVNT 3-DH1 2402MHz Ant1 Ref

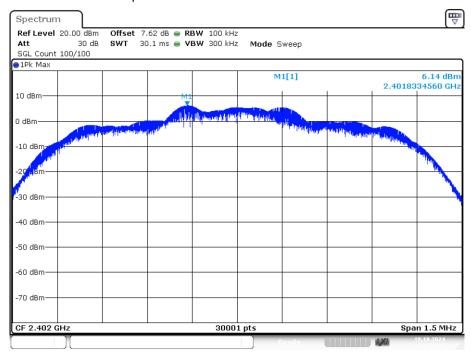


Date: 18.0CT.2024 16:50:36

Tx. Spurious NVNT 3-DH1 2402MHz Ant1 Emission

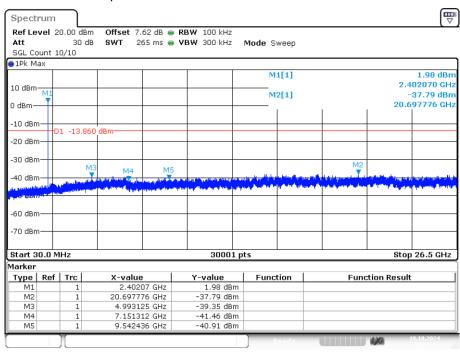


Date: 18.0CT.2024 16:50:50

Tx. Spurious NVNT 3-DH1 2441MHz Ant1 Ref

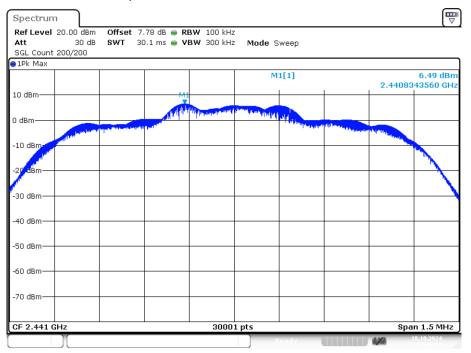


Date: 18.OCT.2024 17:09:00

Tx. Spurious NVNT 3-DH1 2441MHz Ant1 Emission

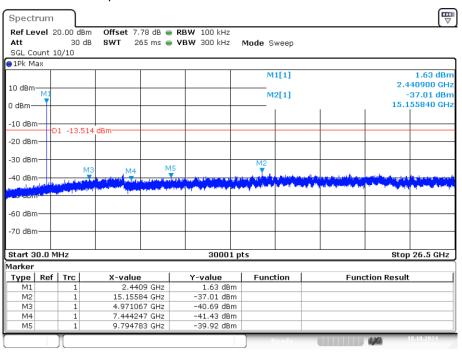


Date: 18.0CT.2024 17:09:14

Tx. Spurious NVNT 3-DH1 2480MHz Ant1 Ref

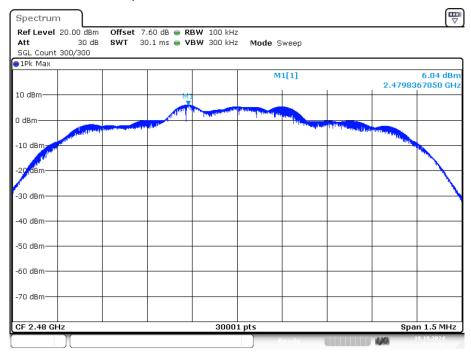

Date: 18.OCT.2024 17:11:08


Tx. Spurious NVNT 3-DH1 2480MHz Ant1 Emission

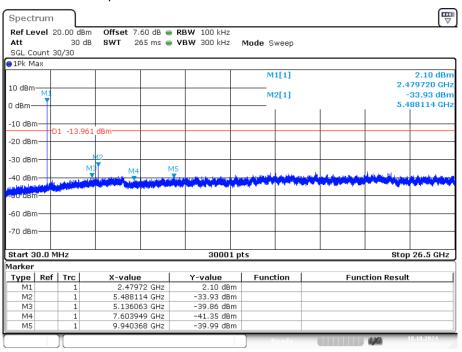

Date: 18.OCT.2024 17:11:43

9. BAND EDGE COMPLIANCE

9.1. Block Diagram of Test Setup

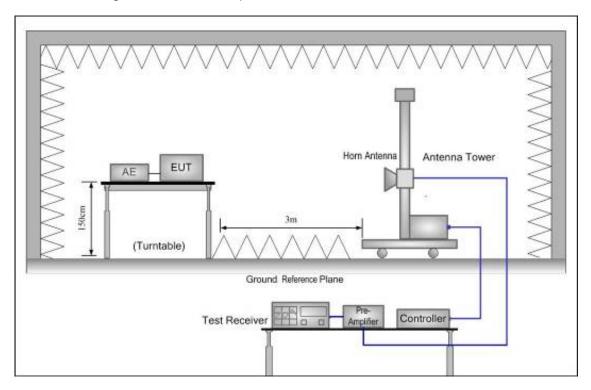

9.2. Limit

All the lower and upper band-edges emissions appearing within restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation shall be at least 20dB below the fundamental emissions, or comply with 15.209 and RSS-GEN limits.


9.3. Test Procedure

All restriction band and non- restriction band have been tested , only worse case is reported.


9.4. Test Result

PASS. (See below detailed test data)


Test Mode: GFSK-Low Hopping-off

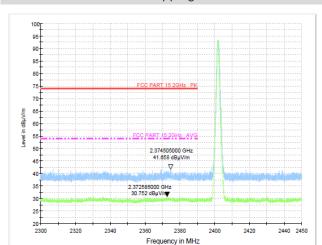



Test Mode: GFSK-High Hopping-off

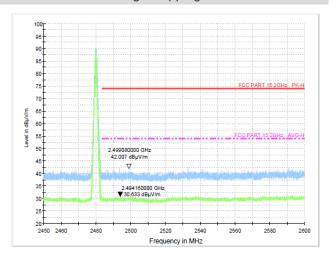

Test Mode: GFSK-Low Hopping-on




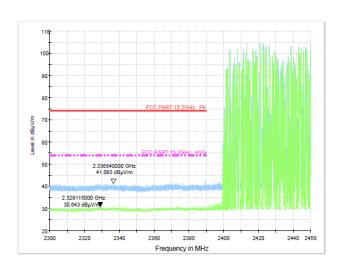

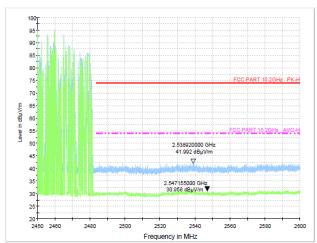

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

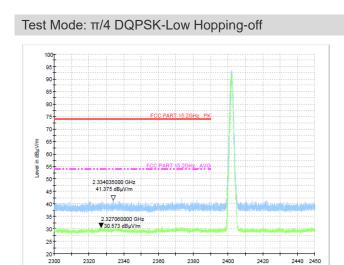

2380


Frequency in MHz

2400

2420


2440 2450

Test Mode: π/4 DQPSK-High Hopping-off

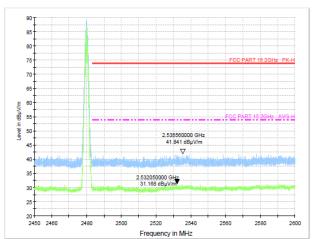




2340

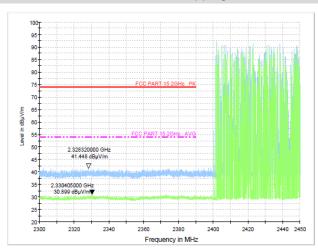


Test Mode: π/4 DQPSK-High Hopping-on

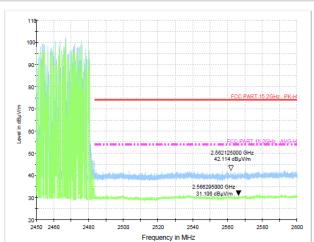

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

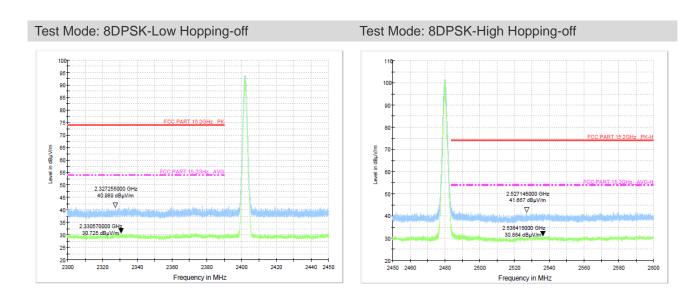




Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Conducted Method

Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Ref

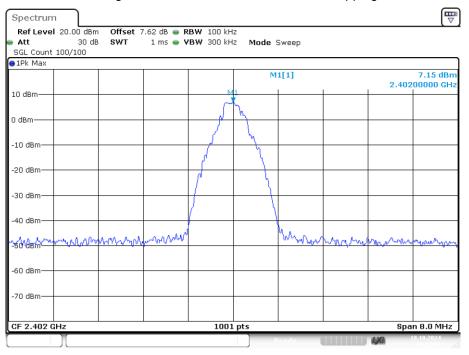


Date: 18.OCT.2024 16:23:40

Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Emission

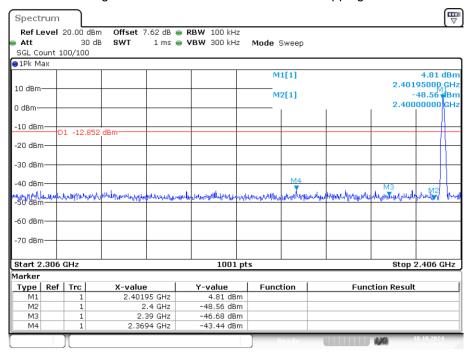


Date: 18.0CT.2024 16:23:44

Band Edge NVNT 1-DH1 2480MHz Ant1 No-Hopping Ref

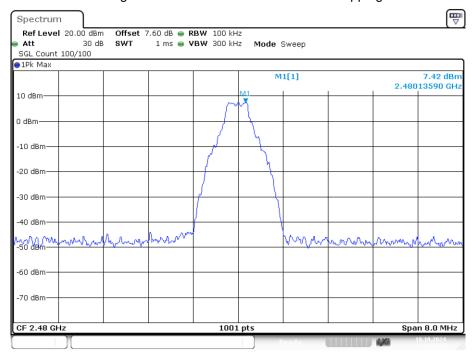


Date: 18.OCT.2024 16:26:55

Band Edge NVNT 1-DH1 2480MHz Ant1 No-Hopping Emission

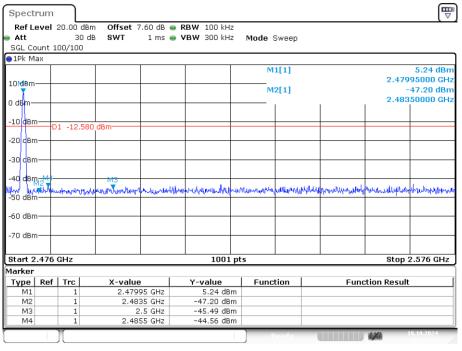


Date: 18.OCT.2024 16:26:59

Band Edge NVNT 2-DH1 2402MHz Ant1 No-Hopping Ref

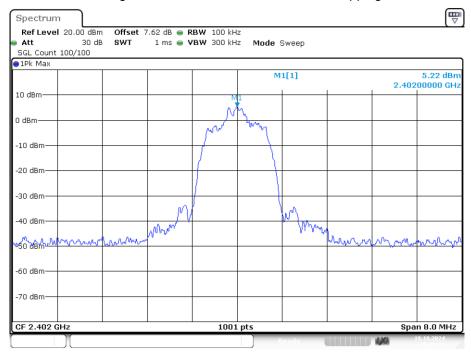


Date: 18.OCT.2024 16:36:19

Band Edge NVNT 2-DH1 2402MHz Ant1 No-Hopping Emission

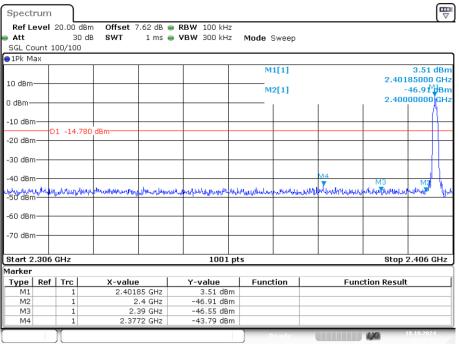


Date: 18.0CT.2024 16:36:23

Band Edge NVNT 2-DH1 2480MHz Ant1 No-Hopping Ref

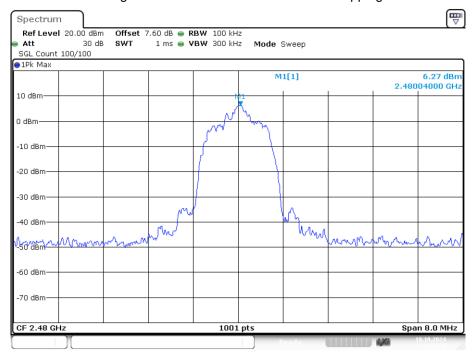


Date: 18.OCT.2024 16:39:58

Band Edge NVNT 2-DH1 2480MHz Ant1 No-Hopping Emission

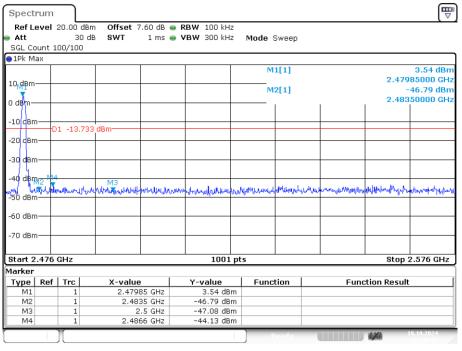


Date: 18.0CT.2024 16:40:01

Band Edge NVNT 3-DH1 2402MHz Ant1 No-Hopping Ref

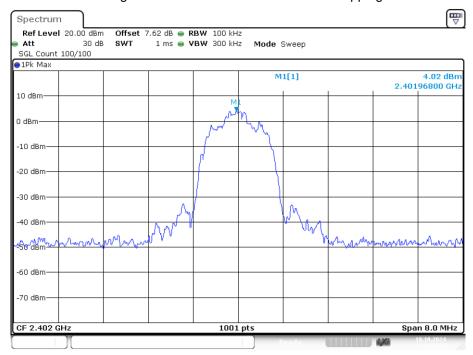


Date: 18.0CT.2024 16:50:19

Band Edge NVNT 3-DH1 2402MHz Ant1 No-Hopping Emission

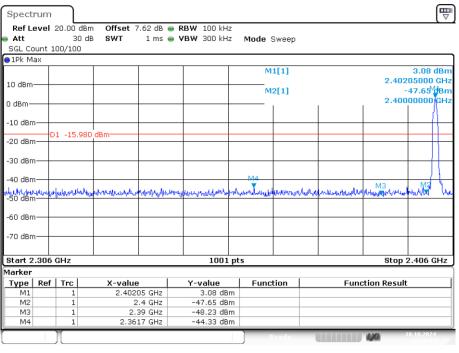


Date: 18.OCT.2024 16:50:23

Band Edge NVNT 3-DH1 2480MHz Ant1 No-Hopping Ref

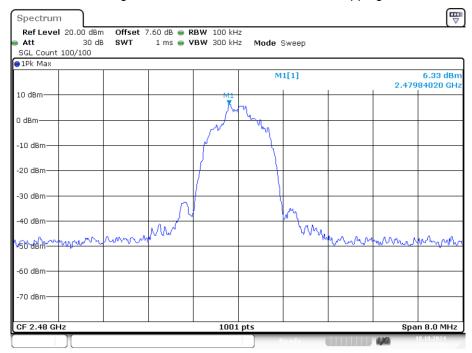

Date: 18.0CT.2024 17:10:39

Band Edge NVNT 3-DH1 2480MHz Ant1 No-Hopping Emission

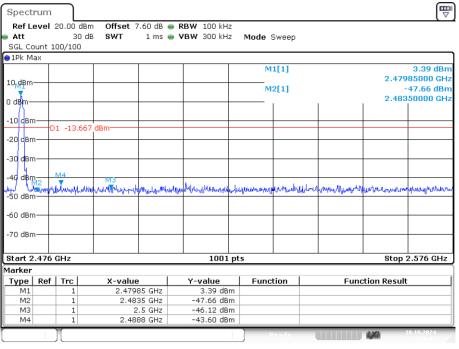


Date: 18.OCT.2024 17:10:43

Band Edge(Hopping) NVNT 1-DH1 2402MHz Ant1 Hopping Ref




Date: 18.0CT.2024 16:28:26

Band Edge(Hopping) NVNT 1-DH1 2402MHz Ant1 Hopping Emission

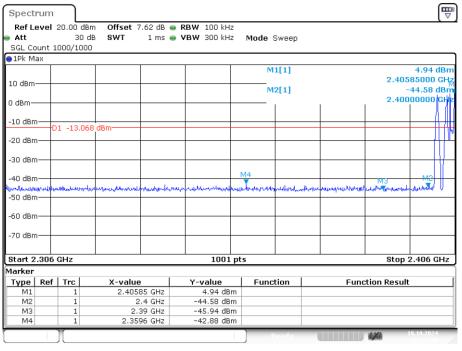


Date: 18.0CT.2024 16:28:40

Band Edge(Hopping) NVNT 1-DH1 2480MHz Ant1 Hopping Ref

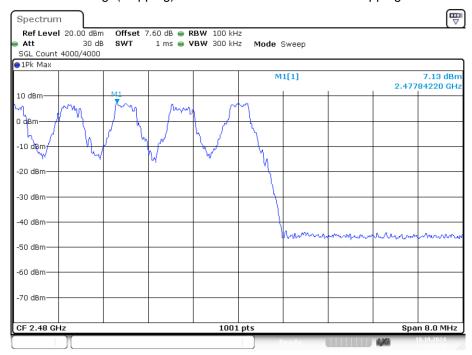

Date: 18.0CT.2024 16:31:50

Band Edge(Hopping) NVNT 1-DH1 2480MHz Ant1 Hopping Emission

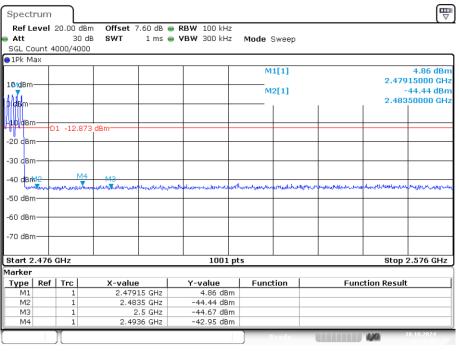


Date: 18.0CT.2024 16:32:15

Band Edge(Hopping) NVNT 2-DH1 2402MHz Ant1 Hopping Ref



Date: 18.0CT.2024 16:41:40

Band Edge(Hopping) NVNT 2-DH1 2402MHz Ant1 Hopping Emission

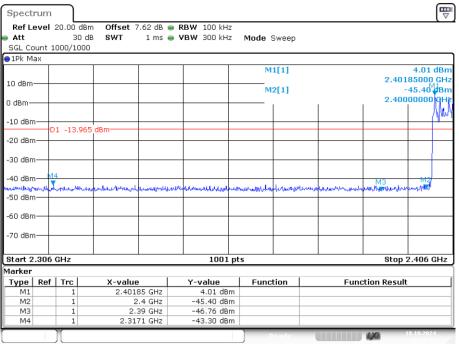


Date: 18.OCT.2024 16:41:54

Band Edge(Hopping) NVNT 2-DH1 2480MHz Ant1 Hopping Ref



Date: 18.0CT.2024 16:45:43

Band Edge(Hopping) NVNT 2-DH1 2480MHz Ant1 Hopping Emission

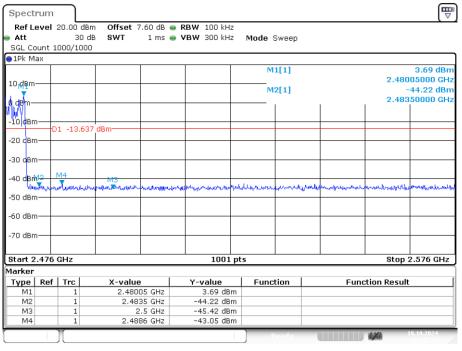


Date: 18.0CT.2024 16:45:52

Band Edge(Hopping) NVNT 3-DH1 2402MHz Ant1 Hopping Ref




Date: 18.OCT.2024 17:16:03

Band Edge(Hopping) NVNT 3-DH1 2402MHz Ant1 Hopping Emission

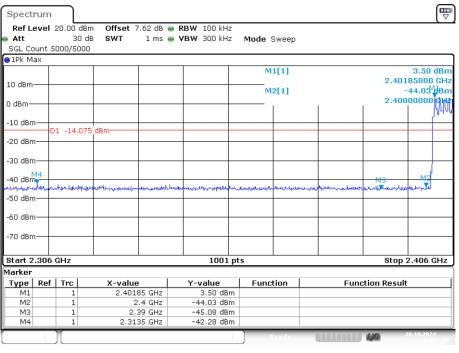


Date: 18.0CT.2024 17:17:00

Band Edge(Hopping) NVNT 3-DH1 2480MHz Ant1 Hopping Ref

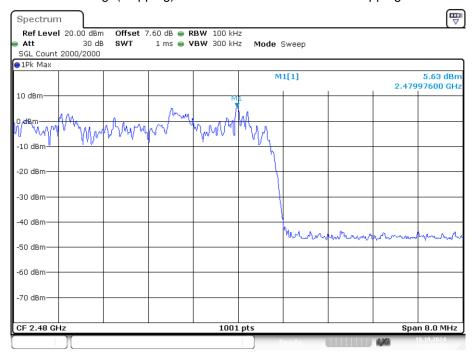

Date: 18.OCT.2024 17:20:53

Band Edge(Hopping) NVNT 3-DH1 2480MHz Ant1 Hopping Emission

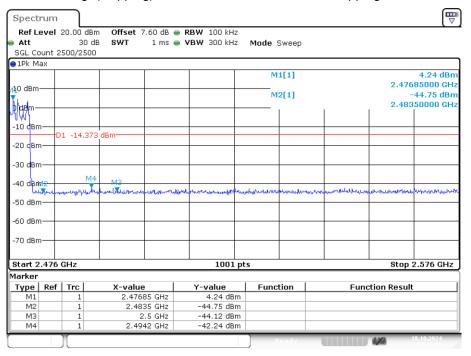


Date: 18.0CT.2024 17:21:10

Report No.: A2409152-C02-R14

10. POWER LINE CONDUCTED EMISSIONS

10.1.Block Diagram of Test Setup

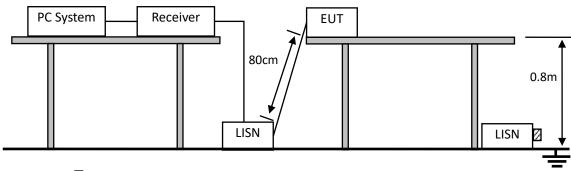

 \square :50 Ω Terminator

10.2.Limit

	Maximum RF Line Voltage		
Frequency	Quasi-Peak Level	Average Level	
	dB(μV)	dB(μV)	
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*	
500kHz ~ 5MHz	56	46	
5MHz ~ 30MHz	60	50	

Notes: 1. * Decreasing linearly with logarithm of frequency.

10.3.Test Procedure

- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane.
- (2) Setup the EUT and simulator as shown in 10.1
- (3) The EUT Power connected to the power mains through a power adapter and a line impedance stabilization network (L.I.S.N1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N2), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 :2013on conducted Emission test.
- (4) The bandwidth of test receiver is set at 10KHz.
- (5) The frequency range from 150 KHz to 30MHz is checked.

10.4.Test Result

Not applicable for equipment operated with battery or DC power supply.

^{2.} The lower limit shall apply at the transition frequencies.

Report No.: A2409152-C02-R14

11.FREQUENCY STABILITY

11.1.Test limit


Please refer section RSS-Gen.

Regulation RSS-Gen If the frequency stability of the licence-exempt radio apparatus is not specified in the applicable RSS, the fundamental emissions of the radio apparatus should be kept within at least the central 80% of its permitted operating frequency band in order to minimize the possibility of out-of-band operation. In addition, its occupied bandwidth shall be entirely outside the restricted bands and the prohibited TV bands of 54-72 MHz, 76-88 MHz, 174-216 MHz, and 470-602 MHz, unless otherwise indicated.

11.2.Test Procedure

The following equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

11.3.Test Setup

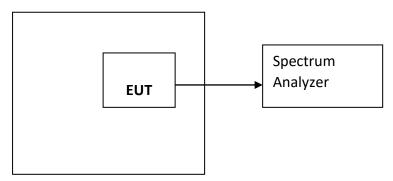

Temperature controller

11.4.Test Results

PASS.

Detailed information please see the following page.

Assigned Frequency(MHz): 2402MHz(GFSK)					
Voltage	Temperature	Measured Frequency (MHz)	Frequency stability(MHz)	Limit(MHz)	
Low DC 9V	+20°C	2402.000	0.000	±0.020	
Normal DC 24V	-10°C	2402.001	0.001	±0.020	
	-5°C	2402.004	0.004	±0.020	
	0°C	2401.995	-0.005	±0.020	
	+10°C	2401.995	-0.005	±0.020	
	+20°C	2401.992	-0.008	±0.020	
	+30°C	2401.997	-0.003	±0.020	
	+40°C	2401.994	-0.006	±0.020	
	+50°C	2401.994	-0.006	±0.020	
	+60°C	2402.000	0.000	±0.020	
High DC 36V	+20°C	2402.002	0.002	±0.020	

12. ANTENNA REQUIREMENTS

12.1.Limit


For intentional device, according to FCC 47 CFR Section 15.203 and RSS-GEN, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi..


12.2.Result

The EUT antenna is Internal Antenna. It complies with the standard requirement.

13.TEST SETUP PHOTO

13.1.Photo of Radiated Emission test

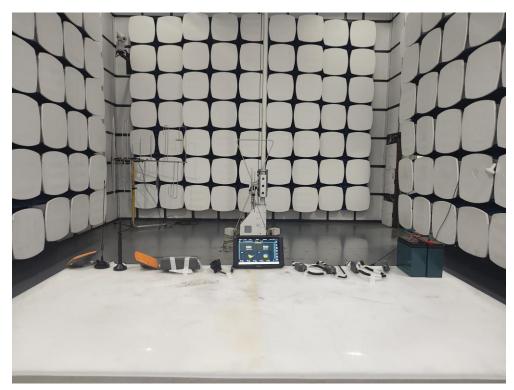

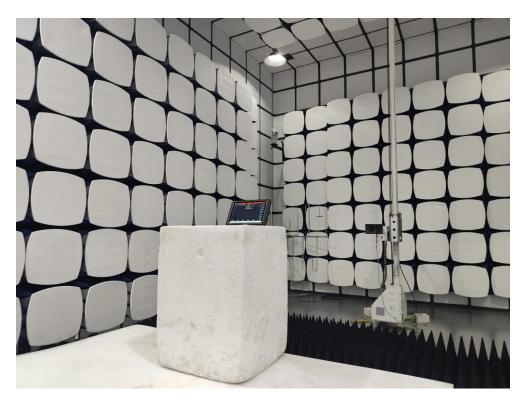

13.2.Photo of Conducted Emission test



14. EUT Photo









