



FCC TEST REPORT

FCC ID: SY4-A02065

On Behalf of

Shanghai Huace Navigation Technology Ltd.

Geodetic GNSS Receiver

Model No.: i85

Prepared for : Shanghai Huace Navigation Technology Ltd.
Address : 577 Songying Road, Qingpu District, 201706 Shanghai, China

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103, Shenzhen, Guangdong, China

Report Number : A2507136-C09-R03
Date of Receipt : July 9, 2025
Date of Test : July 9, 2025 – August 14, 2025
Date of Report : August 15, 2025
Version Number : v0
Test Result : Pass

TABLE OF CONTENTS

	Description	Page
1	TEST SUMMARY	5
1.1	MEASUREMENT UNCERTAINTY.....	5
2	GENERAL INFORMATION	6
2.1	GENERAL DESCRIPTION OF EUT	6
2.2	TEST MODE	7
2.3	TEST FACILITY	7
2.4	DESCRIPTION OF SUPPORT UNITS	7
2.5	DEVIATION FROM STANDARDS.....	7
2.6	ABNORMALITIES FROM STANDARD CONDITIONS.....	7
2.7	OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
2.8	ADDITIONAL INSTRUCTIONS	7
3	TEST INSTRUMENTS LIST	8
4	TEST RESULTS AND MEASUREMENT DATA.....	10
4.1	ANTENNA REQUIREMENT:	10
4.2	CONDUCTED EMISSIONS	11
4.3	EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....	14
4.4	DUTY CYCLE	19
4.5	MAXIMUM CONDUCTED OUTPUT POWER.....	21
4.6	POWER SPECTRAL DENSITY	23
4.7	RADIATED BAND EDGE.....	26
4.8	CONDUCTED BAND EDGE.....	30
4.9	RADIATED EMISSION	33
4.10	CONDUCTED SPURIOUS EMISSION.....	39

TEST REPORT DECLARATION

Applicant : Shanghai Huace Navigation Technology Ltd.
Address : 577 Songying Road, Qingpu District, 201706 Shanghai, China
Manufacturer : Shanghai Huace Navigation Technology Ltd.
Address : 577 Songying Road, Qingpu District, 201706 Shanghai, China
EUT Description : Geodetic GNSS Receiver
(A) Model No. : i85
(B) Trademark : 

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart E, ANSI C63.10:2013

KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart E limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.


After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....:

Yannis Wen

Project Engineer


.....

Approved by (name + signature).....:

Jack Xu

Project Manager


.....

Date of issue.....:

August 15, 2025

Revision History

Revision	Issue Date	Revisions	Revised By
V0	August 15, 2025	Initial released Issue	Yannis Wen

1 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	Section 15.203	PASS
AC Power Line Conducted Emission	Section 15.207(a)	PASS
Maximum Conducted Output Power	Section 15.407(a) (c) (g)	PASS
Power Spectral Density	Section 15.407(a) (c) (g)	PASS
Undesirable Emission	Section 15.407(b) (c) (g)	PASS
Conducted Spurious Emission	Section 15.407(b) (c) (g)	PASS
Radiated Emission	15.205&15.209 (a)	PASS
Conducted Band Edge	Section 15.407(b) (c) (g)	PASS
Radiated Band Edge	15.205&15.209 (a)	PASS

Remark:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Frequency Stability: The manufacturer stated in the user's manual.
3. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.

1.1 Measurement Uncertainty

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	1.63dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.74dB(Polarize: V)
	3.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (18GHz to 40GHz)	4.31 dB(Polarize: V)
	4.30 dB(Polarize: H)
Uncertainty for radio frequency	5.06×10^{-8} GHz
Uncertainty for conducted RF Power	0.40dB
Uncertainty for temperature	0.2℃
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2 General Information

2.1 General Description of EUT

EUT Name : Geodetic GNSS Receiver
Model No. : i85
DIFF. : N/A
Power supply : DC 7.2V from battery and DC 5V form adapter

Radio Technology : 5G WIFI

Operation Frequency : 802.11ac(VHT80): 5210MHz, 5775MHz

Channel separation : 80MHz for 802.11ac(VHT80)

Modulation technology: : IEEE 802.11ac: OFDM (64QAM, 16QAM, 256QAM, QPSK, BPSK)

Antenna Type : PCB antenna, Maximum Gain is 3.89dBi
(Antenna information is provided by applicant.)

Software version : V1.0

Hardware version : V1.1.0

Intend use environment : Residential, commercial and light industrial environment

2.2 Test mode

U-NII-1:			
Mode	data rate (Mbps)(see Note)	Channel	Frequency (MHz)
IEEE 802.11ac VHT80	433.3	CH42	5210
U-NII-3:			
Mode	data rate (Mbps)(see Note)	Channel	Frequency
IEEE 802.11ac VHT80	433.3	CH155	5775

Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.

2.3 Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103, Shenzhen, Guangdong, China

2.4 Description of Support Units

Accessories : AC Adapter
 Manufacturer : Yisheng Electronics Co., LTD
 Model : EA1012AVRU-050
 Ratings : AC Input: 100-240Vac, 1.0A, 50~60Hz
 : DC Output: 5.0V=2.4A 12.0W

2.5 Deviation from Standards

None.

2.6 Abnormalities from Standard Conditions

None.

2.7 Other Information Requested by the Customer

None.

2.8 Additional instructions

Software (Used for test) from client

Channel	Power level
5210MHz	Default
5775MHz	Default

Note: Using SecureCRT testing software to control EUT work in Continuous TX mode, and select test channel, wireless mode, the power level of the test is set to default.

3 Test Instruments list

Equipment	Manufacturer	Model No.	Firmware version	Serial No.	Last Cal.	Cal. Due day
9*6*6 anechoic chamber	CHENYU	9*6*6	/	N/A	2025.03.09	4Year
4*4*3 Shielded room	CHENYU	4*4*3	/	N/A	2025.03.09	4Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	2.3	102137	2025.08.04	1Year
Spectrum analyzer	Agilent	N9020A	A.14.16	MY499100060	2025.08.04	1Year
Test Receiver	ROHDE&SCHWARZ	ESR	2.28 SP1	1316.3003K03-102082-Wa	2025.08.04	1Year
Test Receiver	ROHDE&SCHWARZ	ESCI	4.42 SP1	101165	2025.08.04	1Year
Bilog Antenna	SCHWARZBECK	VULB 9168	/	VULB 9168#627	2023.08.28	2Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	/	2106	2023.08.19	2Year
Loop Antenna	SCHWARZBECK	FMZB 1519B	/	00128	2023.08.19	2Year
RF Cable	Resenberger	Cable 1	/	RE1	2025.08.04	1Year
RF Cable	Resenberger	Cable 2	/	RE2	2025.08.04	1Year
RF Cable	Resenberger	Cable 3	/	CE1	2025.08.04	1Year
Amplifier	HP	HP8347A	/	2834A00455	2025.08.04	1Year
Amplifier	Agilent	8449B	/	3008A02664	2025.08.04	1Year
L.I.S.N.#1	SCHWARZBECK	NSLK8126	/	8126-466	2025.08.04	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	101043	2025.08.04	1Year
Horn Antenna	SCHWARZBECK	BBHA 9170	/	00946	2023.08.19	2Year
Preamplifier	SKET	LNPA_1840-50	/	SK2018101801	2025.08.04	1 Year
Power Meter	Agilent	E4419B	/	GB40202122	2025.08.04	1 Year
Power Sensor	Agilent	E9300A	/	MY41496628	2025.08.04	1 Year
Power Sensor	Agilent	E9304A	/	MY41496815	2025.08.04	1 Year
Temp. & Humid. Chamber	Teelong	TL-HW408S	/	TL-20191205-01	2025.07.14	1 Year
Electronic Thermo-Hygrometer	S.H.Qixiang	HTC-1	/	N/A	2025.08.04	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	/	20140927-6	2025.08.04	1 Year
Adjustable attenuator	MWRFTest	N/A	/	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	/	N/A	N/A	N/A

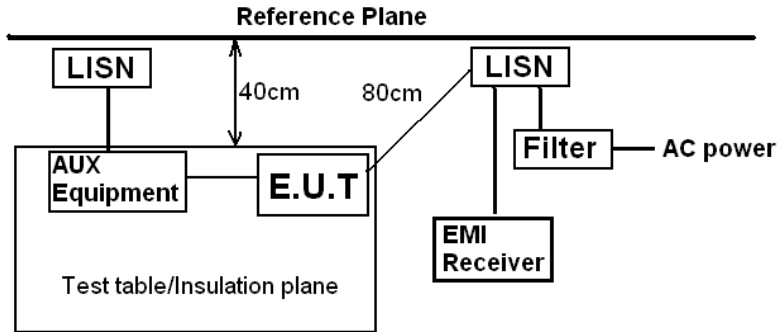
Software Information			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	Farad	Alpha-3A1
CE	EZ-EMC	Farad	Alpha-3A1
RF-CE	MTS 8310	MWRFtest	V2.0.0.0

4 Test results and Measurement Data

4.1 Antenna requirement:

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
E.U.T Antenna:	
The antenna is PCB antenna. The best case gain of the antenna is 3.89dBi for 5.15~5.25GHz, 5.725~5.85GHz	

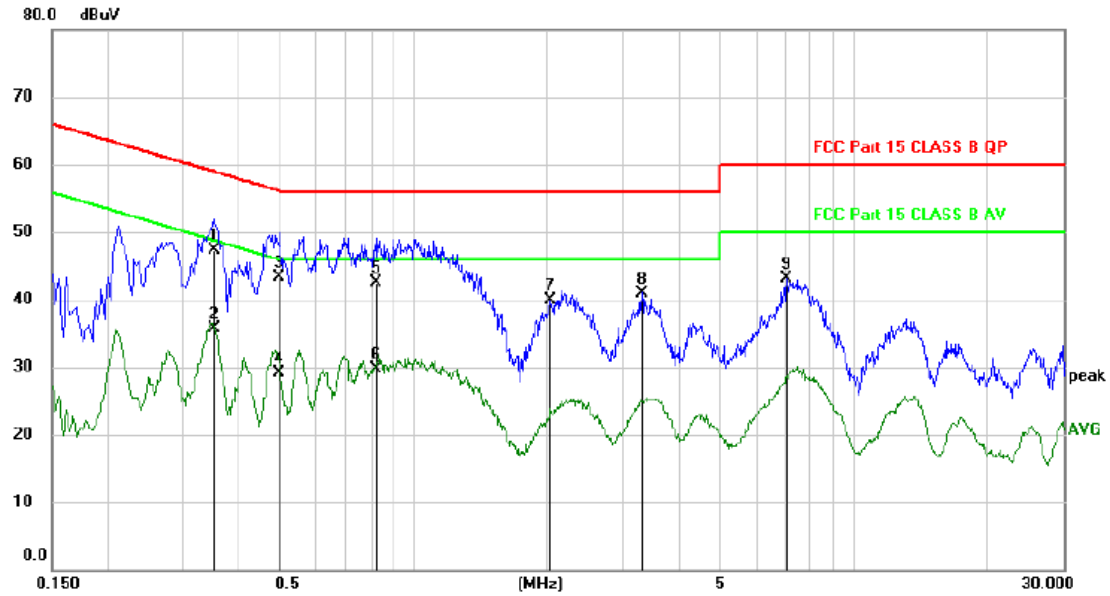
4.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207		
Test Method:	ANSI C63.10:2013		
Test Frequency Range:	150KHz to 30MHz		
Class Severity:	Class B		
Class B			
Receiver setup:	RBW=9KHz, VBW=30KHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test procedure	The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.		
Test setup:	 Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m		
Test results:	Pass		

Measurement Data

An initial pre-scan was performed on the line and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Line:

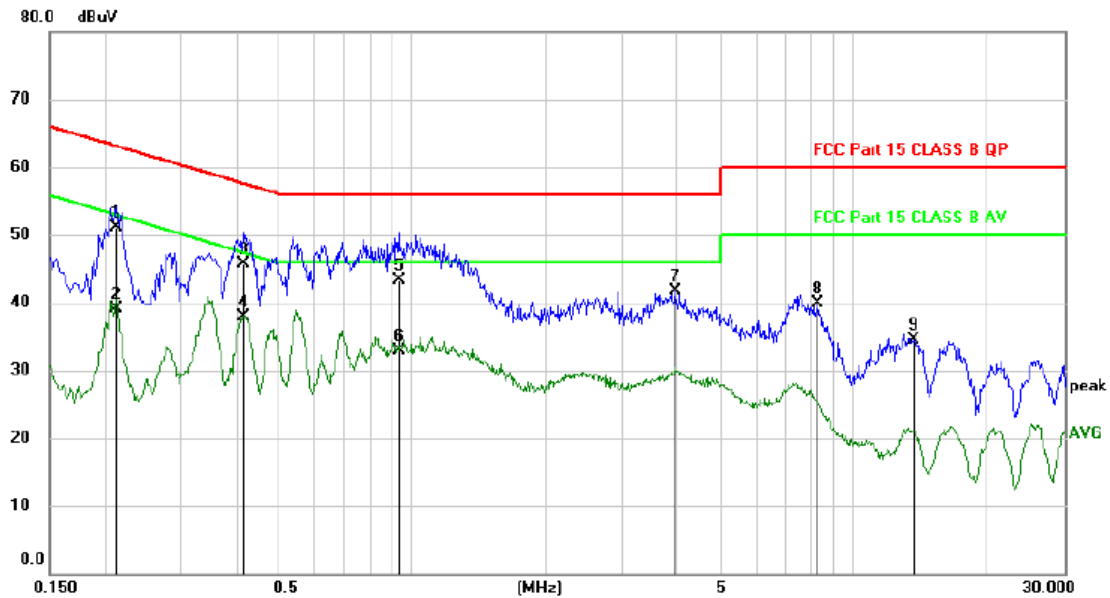


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.3509	37.31	9.95	47.26	58.94	-11.68	QP	
2		0.3509	25.85	9.95	35.80	48.94	-13.14	AVG	
3		0.4950	33.38	9.96	43.34	56.08	-12.74	QP	
4		0.4950	19.10	9.96	29.06	46.08	-17.02	AVG	
5		0.8220	32.62	9.95	42.57	56.00	-13.43	QP	
6		0.8220	19.73	9.95	29.68	46.00	-16.32	AVG	
7		2.0520	30.08	9.88	39.96	56.00	-16.04	peak	
8		3.2970	31.05	9.95	41.00	56.00	-15.00	peak	
9		7.0560	32.94	10.12	43.06	60.00	-16.94	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Neutral:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2130	41.17	9.93	51.10	63.09	-11.99	QP	
2		0.2130	29.20	9.93	39.13	53.09	-13.96	AVG	
3		0.4140	35.73	9.94	45.67	57.57	-11.90	QP	
4	*	0.4140	28.04	9.94	37.98	47.57	-9.59	AVG	
5		0.9330	33.45	9.95	43.40	56.00	-12.60	QP	
6		0.9330	22.94	9.95	32.89	46.00	-13.11	AVG	
7		3.9270	31.68	9.96	41.64	56.00	-14.36	peak	
8		8.2890	29.69	10.16	39.85	60.00	-20.15	peak	
9		13.6500	24.29	10.30	34.59	60.00	-25.41	peak	

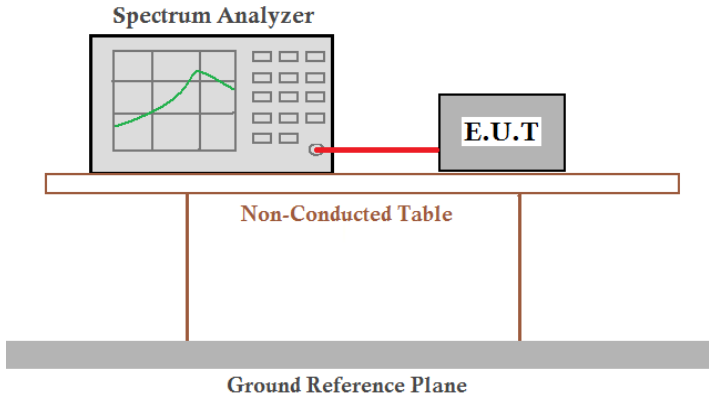
*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Note: All modes and channels have been tested and only the ac 5210MHz mode with the worst data is listed.

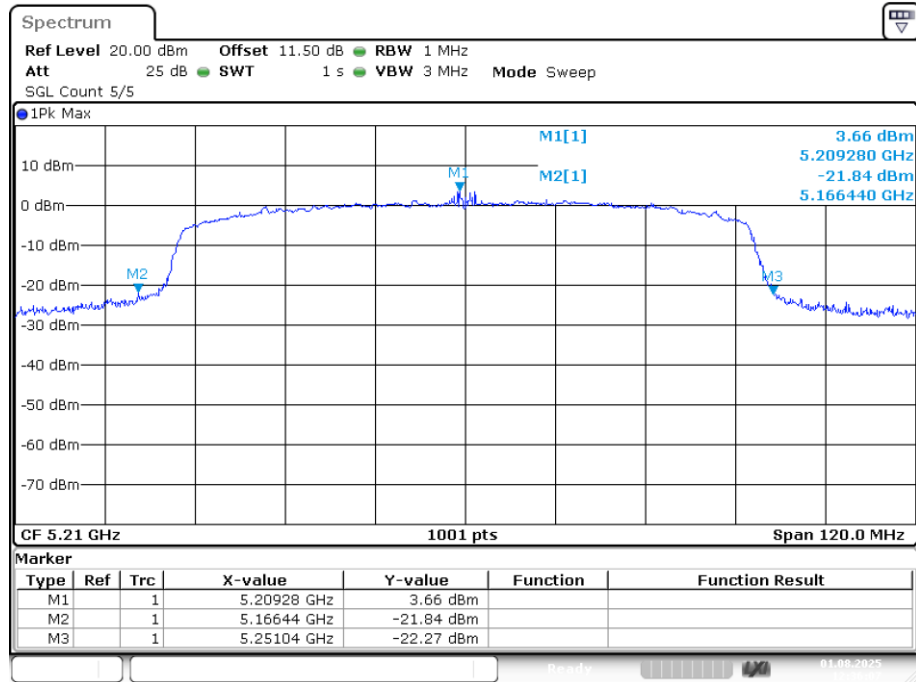
4.3 Emission Bandwidth and 99% Occupied Bandwidth

Test Requirement:	FCC Part15 E Section 15.407
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	N/A
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by two vertical legs and sits on a Ground Reference Plane.
Test procedure:	1. Set center frequency to the nominal EUT channel center frequency. 2. Set span = 1.5 times to 5.0 times the OBW. 3. Set RBW = 1% to 5% of the OBW 4. Set VBW ≥ 3 RBW 5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used. 6. Use the 99% power bandwidth function of the instrument (if available). 7. If the instrument does not have a 99% power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.
Test results:	Pass

Measurement Data:

**Band 1 (5150-5250 MHz):
-26dB Bandwidth**

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	ac80	5210	Ant1	84.6	N/A	Pass

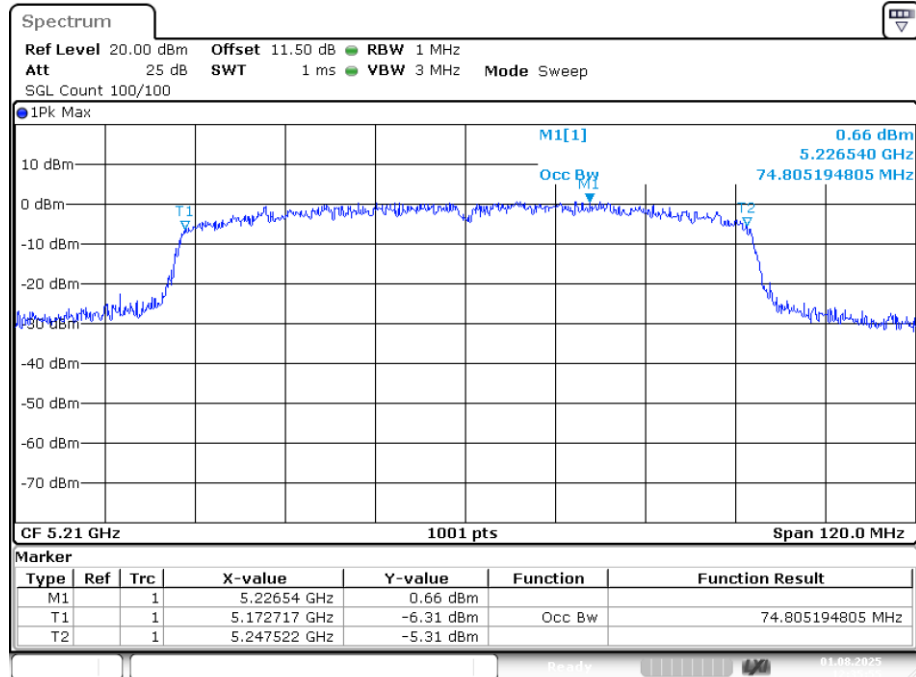
-26dB Bandwidth NVNT ac80 5210MHz Ant1

Date: 1.AUG.2025 12:36:07

Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	ac80	5210	Ant1	74.805

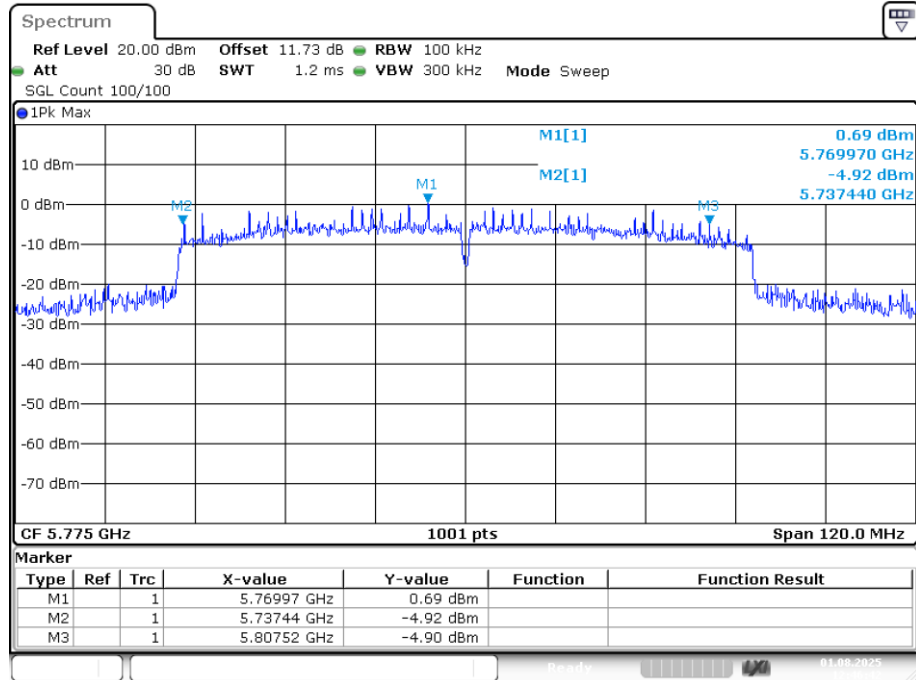
OBW NVNT ac80 5210MHz Ant1



Date: 1.AUG.2025 12:35:55

Band 4 (5725-5850 MHz):**-6dB Bandwidth**

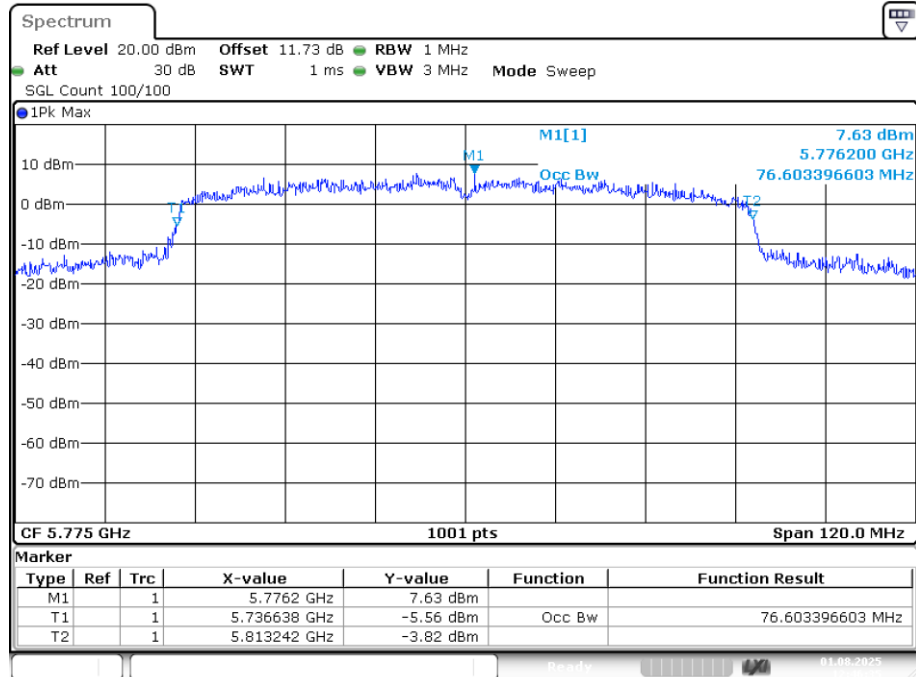
Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	ac80	5775	Ant1	70.08	0.5	Pass

-6dB Bandwidth NVNT ac80 5775MHz Ant1

Date: 1.AUG.2025 12:46:42

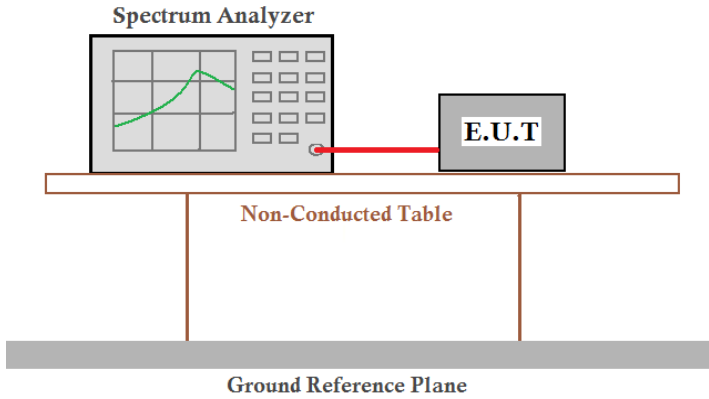
Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	ac80	5775	Ant1	76.603

OBW NVNT ac80 5775MHz Ant1

Date: 1.AUG.2025 12:46:35

4.4 Duty Cycle

Test Requirement:	FCC Part15 E Section 15.407
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	/
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer, shown with a grid and a green signal trace, is connected to an E.U.T. (Equipment Under Test) box by a red cable. Both the Spectrum Analyzer and the E.U.T. are positioned on a 'Non-Conducted Table', which is a rectangular platform supported by two vertical legs. Below this table is a 'Ground Reference Plane', represented by a thick grey horizontal bar.
Test procedure:	a) A diode detector and an oscilloscope that together have sufficiently short response time to permit accurate measurements of the on and off times of the transmitted signal. 789033 D02 General UNII Test Procedures New Rules v02r01 Page 3 b) Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq EBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak
Test results:	Pass

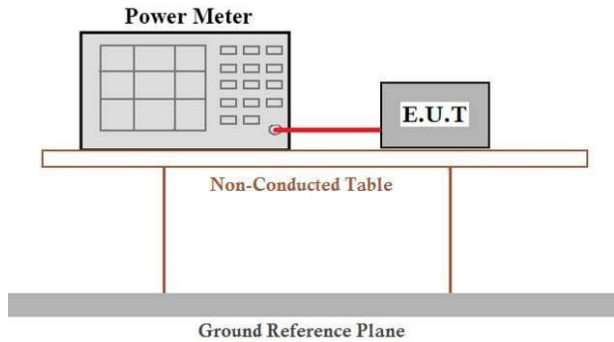
U-NII 1

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)
NVNT	ac80	5210	Ant1	79.44	1

U-NII 3

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)
NVNT	ac80	5775	Ant1	67.96	1.68

4.5 Maximum Conducted Output Power

Test Requirement:	FCC Part15 E Section 15.407
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	For the band 5.15-5.25GHz, 5.25-5.35GHz, 5.47-5.725GHz, the maximum conducted output power over the frequency bands of operation shall not exceed 250mW. For the band 5.725-5.85GHz, the maximum conducted output power over the frequency bands of operation shall not exceed 1W.
Test setup:	 The diagram illustrates the test setup. A 'Power Meter' is connected to an 'E.U.T.' (Equipment Under Test) via a red cable. Both the Power Meter and the E.U.T. are placed on a 'Non-Conducted Table'. This table is supported by a 'Ground Reference Plane'.
Test procedure:	Measurement using an RF average power meter (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied a) The EUT is configured to transmit continuously or to transmit with a constant duty cycle. b) At all times when the EUT is transmitting, it must be transmitting at its maximum power control level. c) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five. (ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in section B). (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter. (iv) Adjust the measurement in dBm by adding $10 \log(1/x)$ where x is the duty cycle (e.g., $10 \log(1/0.25)$ if the duty cycle is 25 percent).
Test results:	Pass

Measurement Data**Band 1 (5150-5250 MHz)**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Cycle Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	ac80	5210	Ant1	7.145	1	8.145	24	Pass

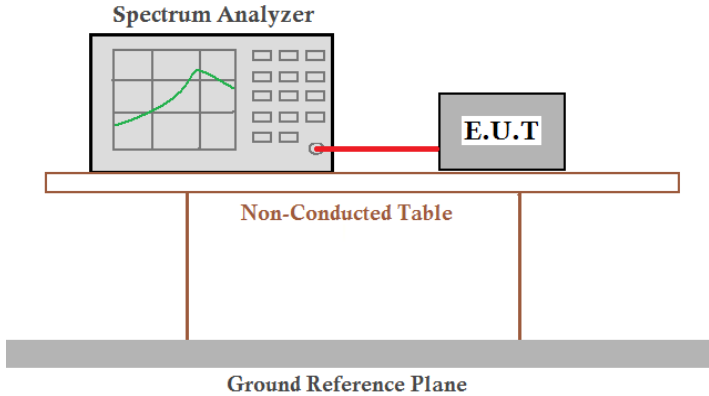
Note: Total Power= Conducted Power+ Duty Cycle Factor

Band 4 (5725 – 5850 MHz)

Condition	Mode	Frequency (MHz)	Antenna	Conducte d Power (dBm)	Duty Cycle Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	ac80	5775	Ant1	7.5	1.68	9.18	30	Pass

Note: Total Power= Conducted Power+ Duty Cycle Factor

4.6 Power Spectral Density

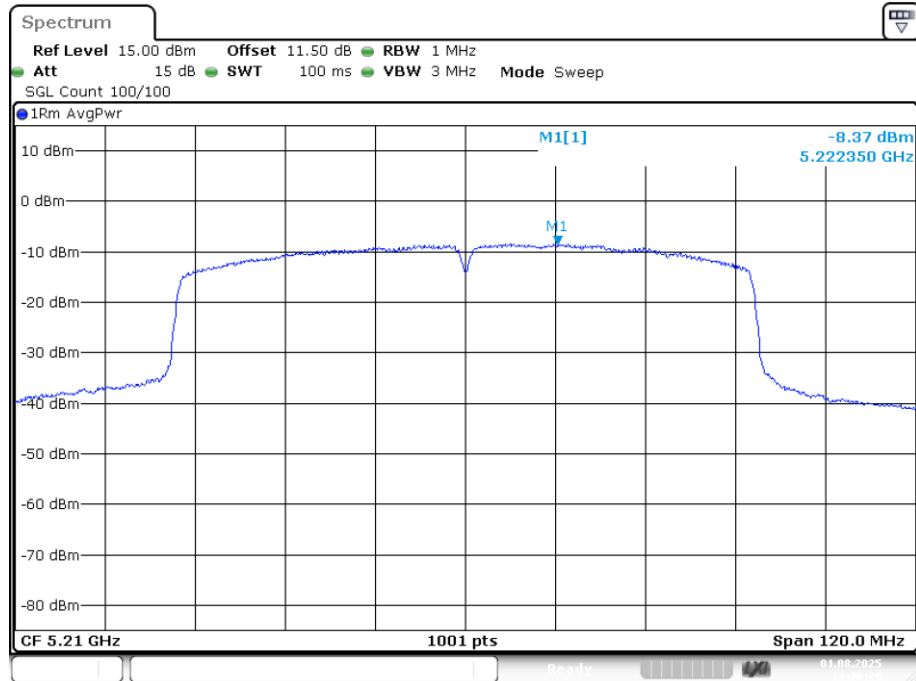
Test Requirement:	47-CFR-Part-15.407
Test Method:	ANSI C63.10-2020, section 12.6
Limit:	$\leq 11.00\text{dBm/MHz}$ for 5150MHz-5250MHz, 5250-5350MHz and 5470-5725 MHz $\leq 30.00\text{dBm/500KHz}$ for 5725MHz-5850MHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer, shown with a grid and a green trace, is connected to an E.U.T (Equipment Under Test) box by a red cable. Both the Spectrum Analyzer and the E.U.T are positioned on a Non-Conducted Table, which is supported by two vertical legs. Below the table, a Ground Reference Plane is indicated by a thick gray bar.
Test procedure:	Refer to ANSI-C63.10-2020, section.12.6-
Test results:	Pass

Measurement Data**Band 1 (5150 - 5250 MHz)**

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD(dBm)	Duty Cycle Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	ac80	5210	Ant1	-8.372	1	-7.372	11	Pass

Note: 1. Total PSD= Conducted PSD+ Duty Cycle Factor,**2. Offset = Cable loss**

PSD NVNT ac80 5210MHz Ant1



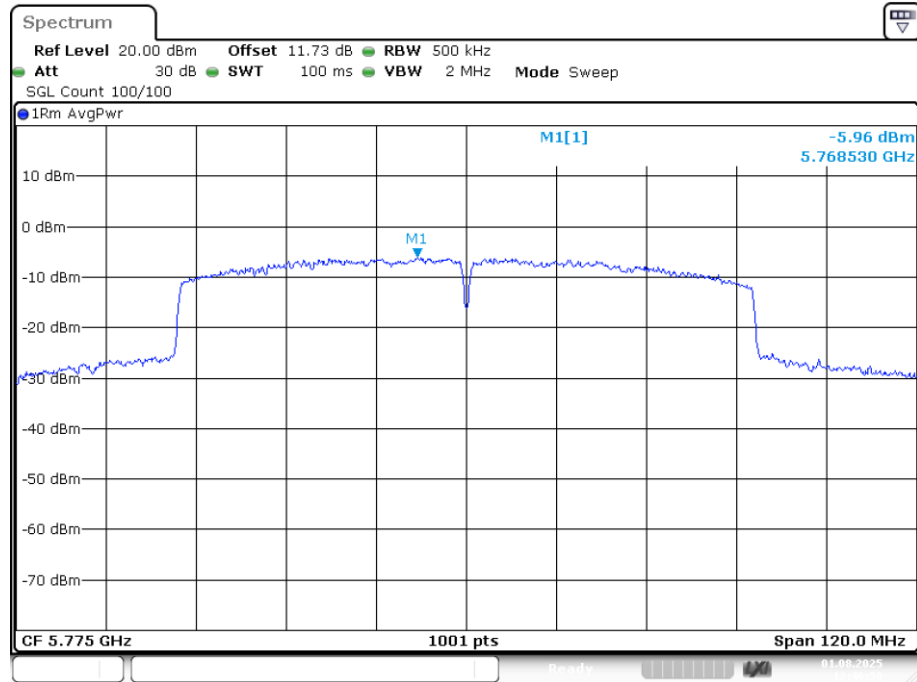
Date: 1.AUG.2025 12:36:25

Band 4 (5725 - 5850 MHz)

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD(dBm)	Duty Cycle Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	ac80	5775	Ant1	-5.958	1.68	-4.278	30	Pass

**Note: 1. Total PSD= Conducted PSD+ Duty Cycle Factor,
2. Offset = Cable loss**

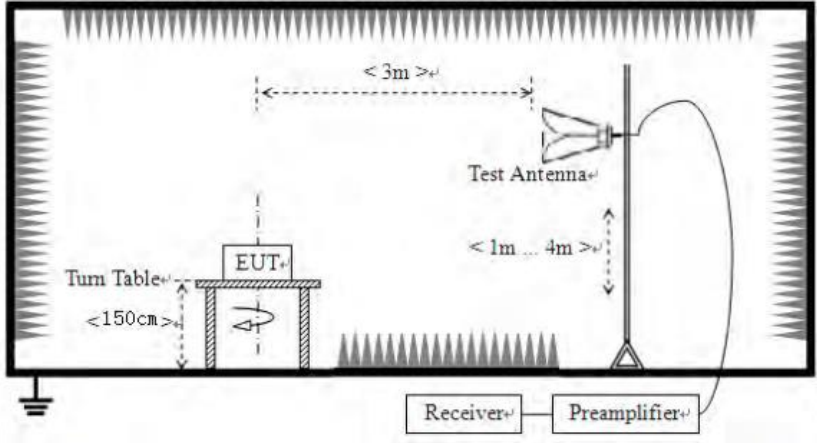
PSD NVNT ac80 5775MHz Ant1



Date: 1.AUG.2025 12:46:59

4.7 Radiated Band Edge

Test Requirement:	15.205&15.209																								
Test Method:	ANSI C63.10:2013																								
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																								
Receiver setup:	<table><tr><td>Frequency</td><td>Detector</td><td>RBW</td><td>VBW</td><td>Remark</td></tr><tr><td>30MHz-1GHz</td><td>Quasi-peak</td><td>100KHz</td><td>300KHz</td><td>Quasi-peak Value</td></tr><tr><td rowspan="2">Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak Value</td></tr><tr><td>AV</td><td>1MHz</td><td>3MHz</td><td>Average Value</td></tr></table>					Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	AV	1MHz	3MHz	Average Value	
Frequency	Detector	RBW	VBW	Remark																					
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value																					
Above 1GHz	Peak	1MHz	3MHz	Peak Value																					
	AV	1MHz	3MHz	Average Value																					
Limit:	<table><tr><td>Frequency</td><td>Limit (dBuV/m @3m)</td><td>Remark</td></tr><tr><td>30MHz-88MHz</td><td>40.0</td><td>Quasi-peak Value</td></tr><tr><td>88MHz-216MHz</td><td>43.5</td><td>Quasi-peak Value</td></tr><tr><td>216MHz-960MHz</td><td>46.0</td><td>Quasi-peak Value</td></tr><tr><td>960MHz-1GHz</td><td>54.0</td><td>Quasi-peak Value</td></tr><tr><td rowspan="2">Above 1GHz</td><td>54.0</td><td>Average Value</td></tr><tr><td>68.2</td><td>Peak Value</td></tr></table> Undesirable emission limits: (1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. (2) For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band. (3) For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.					Frequency	Limit (dBuV/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	68.2	Peak Value
Frequency	Limit (dBuV/m @3m)	Remark																							
30MHz-88MHz	40.0	Quasi-peak Value																							
88MHz-216MHz	43.5	Quasi-peak Value																							
216MHz-960MHz	46.0	Quasi-peak Value																							
960MHz-1GHz	54.0	Quasi-peak Value																							
Above 1GHz	54.0	Average Value																							
	68.2	Peak Value																							
Test Procedure:	a. The EUT was placed on the top of a rotating table 1.5 m above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.																								
Test setup:	Above 1GHz																								

	
Test results:	Pass

Remark:

According to KDB 789033 D02 v02r01 section G) 1) (d), for For measurements above 1000 MHz @ 3m distance, the limit of field strength is computed as follows:

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2,$$

For example, if EIRP = -27dBm

$$E[\text{dBuV/m}] = -27 + 95.2 = 68.2\text{dBuV/m}.$$

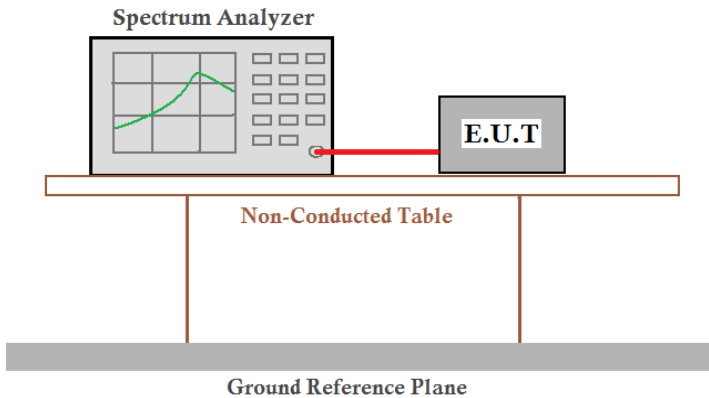
Measurement Data:**Band1**

Mode:		802.11ac		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	32.83	17.18	50.01	68.20	-18.19	PK
V	5150.00	34.27	17.18	51.45	68.20	-16.75	PK
Mode:		802.11ac		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	25.37	17.18	42.55	54.00	-11.45	AV
V	5150.00	26.79	17.18	43.97	54.00	-10.03	AV
Mode:		802.11ac		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	34.72	17.18	51.90	68.20	-16.30	PK
V	5350.00	35.07	17.18	52.25	68.20	-15.95	PK
Mode:		802.11ac		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	22.21	17.18	39.39	54.00	-14.61	AV
V	5350.00	26.99	17.18	44.17	54.00	-9.83	AV

Band 4

Mode:		802.11ac		Frequency:		5775MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	31.74	17.18	48.92	68.20	-19.28	PK
V	5725.00	32.72	17.18	49.90	68.20	-18.30	PK
Mode:		802.11ac		Frequency:		5775MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	21.97	17.18	39.15	54.00	-14.85	AV
V	5725.00	24.81	17.18	41.99	54.00	-12.01	AV
Mode:		802.11ac		Frequency:		5775MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)
H	5850.00	33.45	17.18	50.63	68.20	-17.57	PK
V	5850.00	33.59	17.18	50.77	68.20	-17.43	PK
Mode:		802.11ac		Frequency:		5775MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)
H	5850.00	22.12	17.18	39.30	54.00	-14.70	AV
V	5850.00	25.96	17.18	43.14	54.00	-10.86	AV

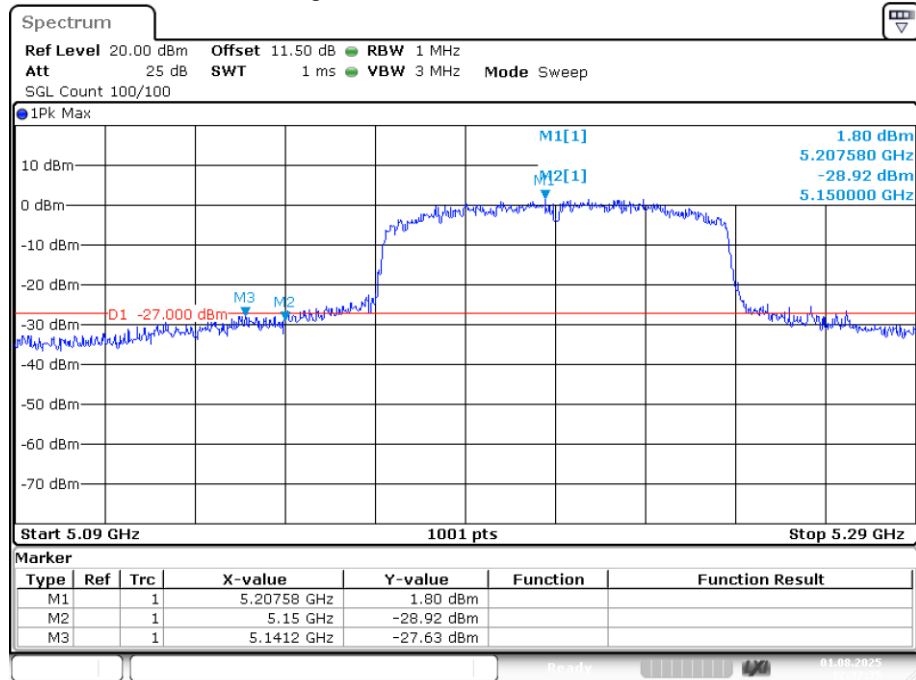
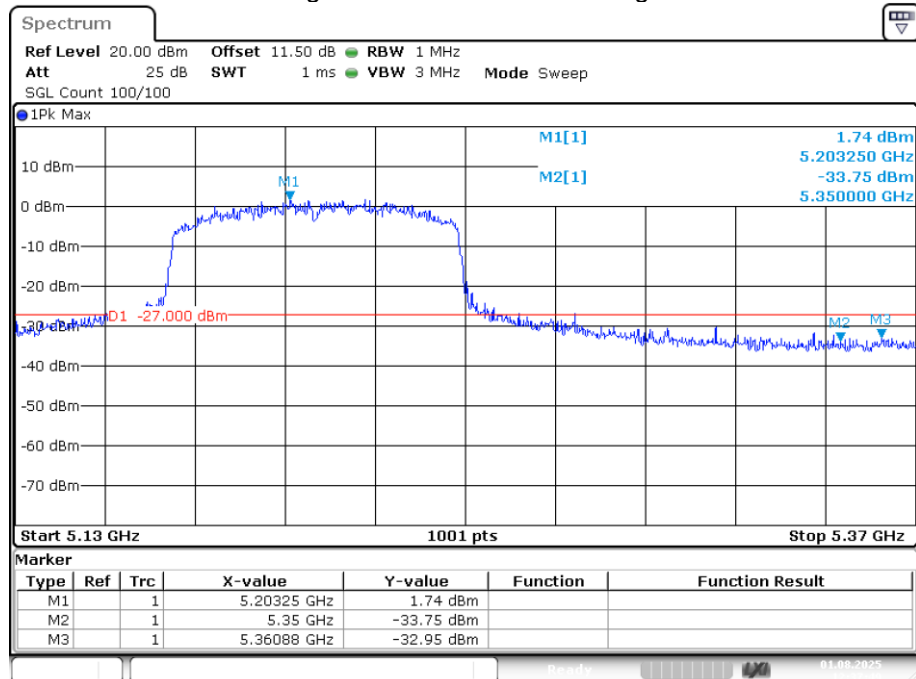
4.8 Conducted Band Edge

Test Requirement:	FCC Part15 E Section 15.407
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	1. For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. 2. For transmitters operating solely in the 5.725-5.850 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test procedure:	The procedure for peak unwanted emissions measurements above 1000 MHz is as follows: a) Peak emission levels are measured by setting the instrument as follows: 1) RBW = 1 MHz. 2) VBW $\geq [3 \times \text{RBW}]$. 3) Detector = peak. 4) Sweep time = auto. 5) Trace mode = max hold. 6) Allow sweeps to continue until the trace stabilizes.
Test results:	Pass

Band 1

Condition	Mode	Band Edge Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	ac80	5180	Ant1	-27.63	-27	Pass
NVNT	ac80	5240	Ant1	-32.95	-27	Pass

Note: The margin is at least greater than the antenna gain plus the cable loss.

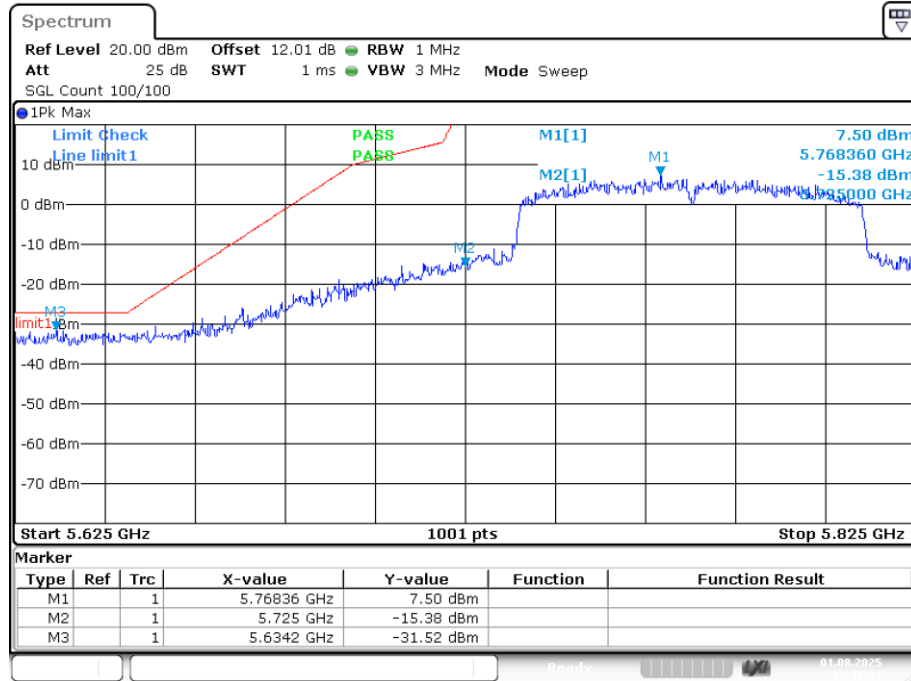
Band Edge NVNT ac80 5180MHz Low Ant1**Band Edge NVNT ac80 5240MHz High Ant1**

Band4

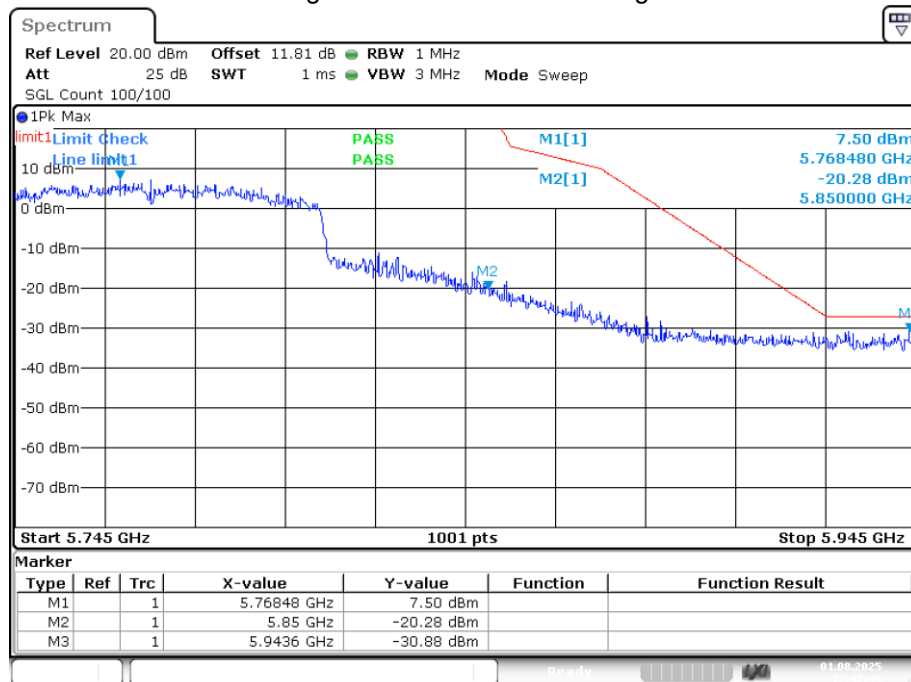
Condition	Mode	Band Edge Frequency (MHz)	Antenna	Max Value (dBm)	Limit (dBm)	Verdict
NVNT	ac80	5745	Ant1	-31.51	-27	Pass
NVNT	ac80	5825	Ant1	-30.88	-27	Pass

Note: The margin is at least greater than the antenna gain plus the cable loss.

Band Edge NVNT ac80 5745MHz Low Ant1

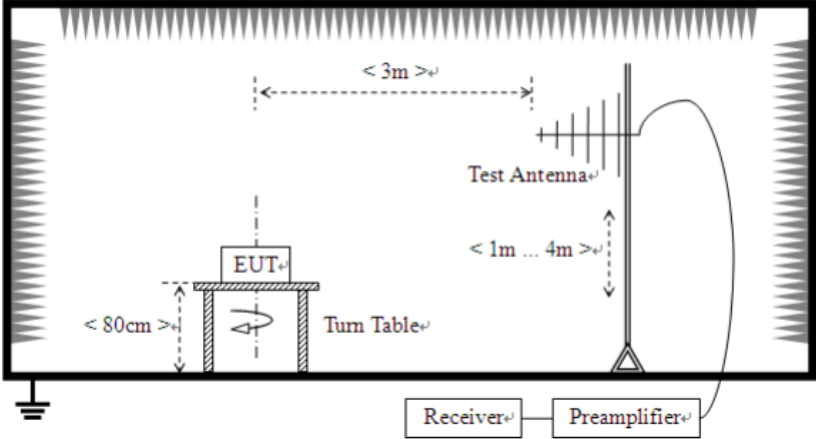


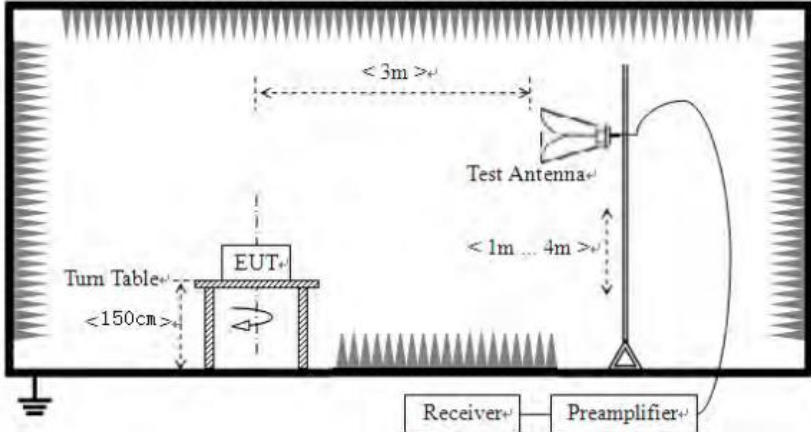
Band Edge NVNT ac80 5825MHz High Ant1

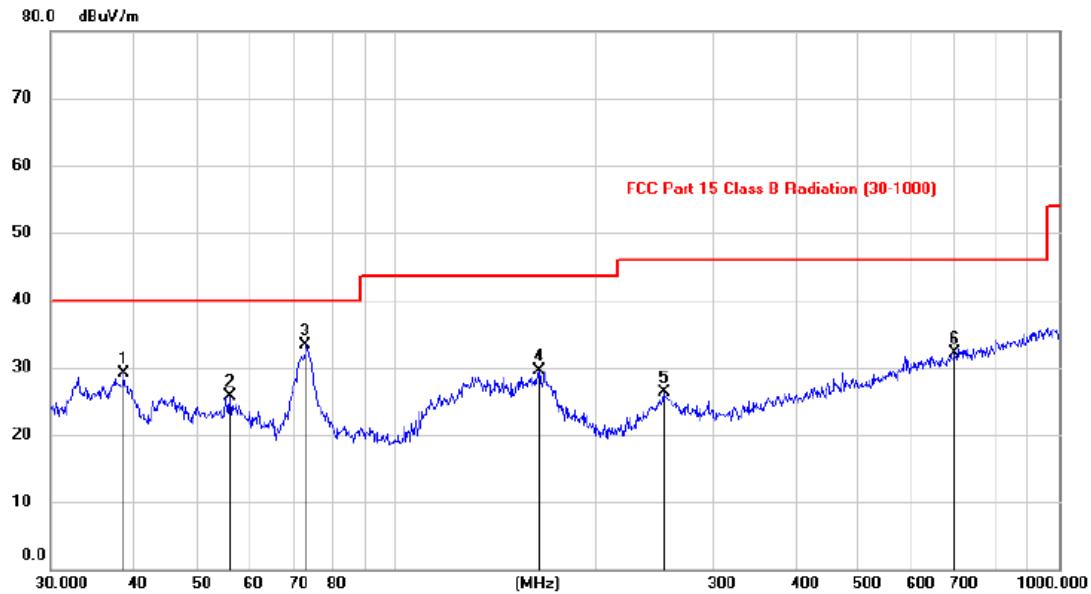


4.9 Radiated Emission

Test Requirement:	15.205&15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	30MHz to 40GHz				
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		AV	1MHz	3MHz	Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.0		Quasi-peak Value
	88MHz-216MHz		43.5		Quasi-peak Value
	216MHz-960MHz		46.0		Quasi-peak Value
	960MHz-1GHz		54.0		Quasi-peak Value
	Above 1GHz		74.0		Peak Value
			54.0		Average Value
Test Procedure:	Substitution method was performed to determine the actual ERP emission levels of the EUT. The following test procedure as below: 1>.Below 1GHz test procedure: 1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 2>.Above 1GHz test procedure: 1. On the test site as test setup graph above, the EUT shall be placed at the 1.5m support on the turntable and in the position closest to normal use as declared by the provider. 2. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter.The output of the test antenna shall be connected to the measuring receiver. 3. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test.				

	4. The test antenna shall be raised and lowered from 1m to 4m until a maximum signal level is detected by the measuring receiver. Then the turntable should be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver. 5. Repeat step 4 for test frequency with the test antenna polarized horizontally. 6. Remove the transmitter and replace it with a substitution antenna 7. Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a nonradiating cable. With the antennas at both ends vertically polarized, and with the signal generator tuned to a particular test frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output. 8. Repeat step 7 with both antennas horizontally polarized for each test frequency. 9. Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps 7 and 8 by the power loss in the cable between the generator and the antenna, and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna by the following formula: $\text{EIRP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$ where: Pg is the generator output power into the substitution antenna.
Test setup:	Below 1GHz  Above 1GHz

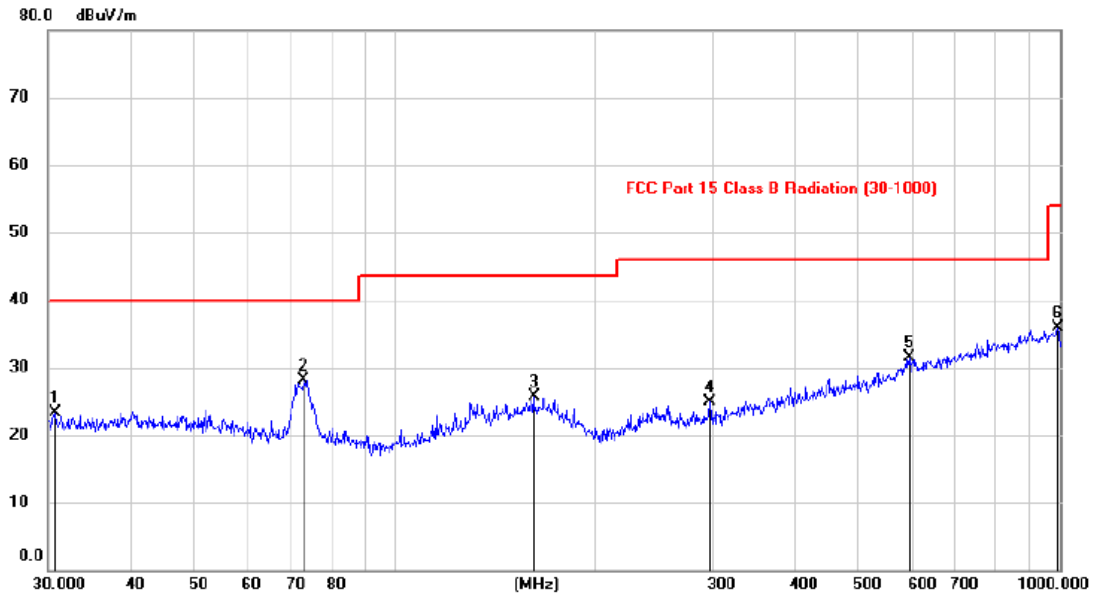
	
Test results:	Pass

Vertical:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table
		MHz	Level	Factor	ment			Height	Degree
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		38.8152	14.62	14.40	29.02	40.00	-10.98	peak	
2		56.0990	12.19	13.55	25.74	40.00	-14.26	peak	
3	*	73.0940	22.50	10.81	33.31	40.00	-6.69	peak	
4		164.8689	15.02	14.57	29.59	43.50	-13.91	peak	
5		253.5105	13.51	12.84	26.35	46.00	-19.65	peak	
6		698.3244	10.46	21.70	32.16	46.00	-13.84	peak	

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Horizontal:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		30.7491	9.64	13.57	23.21	40.00	-16.79	peak		
2	*	72.6766	17.20	10.91	28.11	40.00	-11.89	peak		
3		161.6441	10.88	14.88	25.76	43.50	-17.74	peak		
4		297.7107	10.85	14.05	24.90	46.00	-21.10	peak		
5		595.0633	11.45	20.12	31.57	46.00	-14.43	peak		
6		993.2436	11.24	24.75	35.99	54.00	-18.01	peak		

Note: 1. *: Maximum data; x: Over limit; !: over margin.

2. Measurement = Reading Level + Correct Factor; Correct Factor = Antenna Factor + Cable Loss.

Remark: All modes have been tested, and only worst data of 802.11ac mode, Channel 5210MHz was listed in this report.

Above 1GHz (U-NII-1):

802.11ac 5210MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10420.19	47.03	16.29	14.62	32.65	45.29	74.00	-28.71	Vertical
15630.11	47.09	21.83	17.66	34.46	52.12	74.00	-21.88	Vertical
10420.01	50.90	8.73	14.62	32.65	41.60	74.00	-32.40	Horizontal
15630.04	52.20	11.73	17.66	34.46	47.13	74.00	-26.87	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10420.27	39.61	16.29	14.62	32.65	37.87	54.00	-16.13	Vertical
15630.11	41.41	21.83	17.66	34.46	46.44	54.00	-7.56	Vertical
10420.03	41.67	8.73	14.62	32.65	32.37	54.00	-21.63	Horizontal
15630.24	42.51	11.73	17.66	34.46	37.44	54.00	-16.56	Horizontal

802.11ac 5775MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11550.23	47.85	16.29	14.62	32.65	46.11	74.00	-27.89	Vertical
17325.32	48.90	21.83	17.66	34.46	53.93	74.00	-20.07	Vertical
11550.28	51.95	8.73	14.62	32.65	42.65	74.00	-31.35	Horizontal
17325.05	52.65	11.73	17.66	34.46	47.58	74.00	-26.42	Horizontal

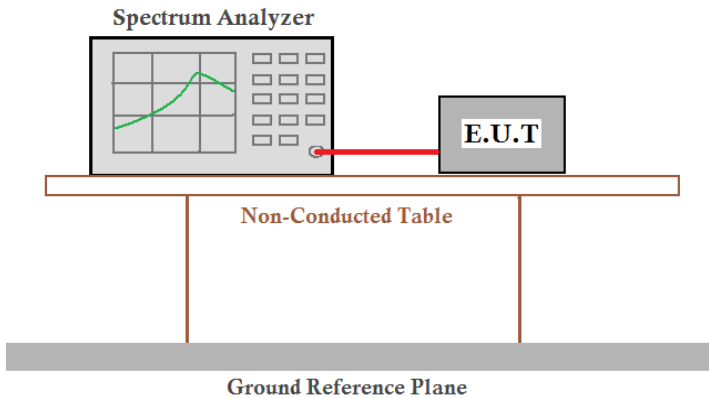
Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11550.05	40.30	16.29	14.62	32.65	38.56	54.00	-15.44	Vertical
17325.25	39.51	21.83	17.66	34.46	44.54	54.00	-9.46	Vertical
11550.03	41.08	8.73	14.62	32.65	31.78	54.00	-22.22	Horizontal
17325.25	43.35	11.73	17.66	34.46	38.28	54.00	-15.72	Horizontal

Note:

1. Level = Read Level + Antenna Factor+ Cable loss- Preamp Factor.
2. The test trace is same as the ambient noise (the test frequency range: 18GHz~40GHz), therefore no data appear in the report.
3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

4.10 Conducted Spurious Emission

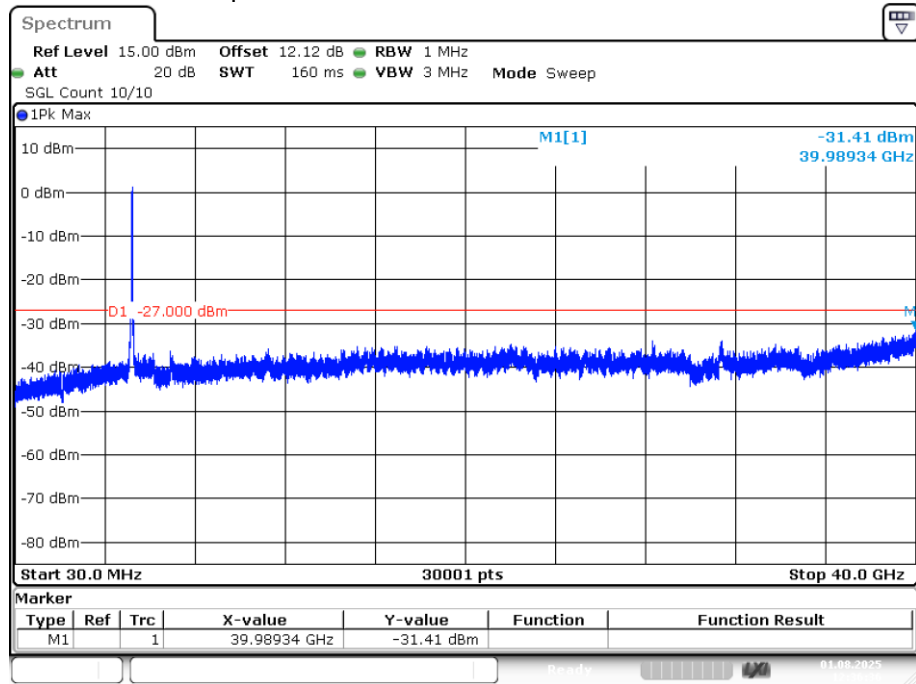
Test Requirement:	FCC Part15 E Section 15.407
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	1. For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. 2. For transmitters operating solely in the 5.725-5.850 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test procedure:	The procedure for peak unwanted emissions measurements above 1000 MHz is as follows: a) Peak emission levels are measured by setting the instrument as follows: 1) RBW = 1 MHz. 2) VBW $\geq [3 \times \text{RBW}]$. 3) Detector = peak. 4) Sweep time = auto. 5) Trace mode = max hold. 6) Allow sweeps to continue until the trace stabilizes.
Test results:	Pass

U-NII 1

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	ac80	5210	Ant1	-31.4	-27	Pass

Note: The margin is at least greater than the antenna gain plus the cable loss.

Tx. Spurious NVNT ac80 5210MHz Ant1 Emission

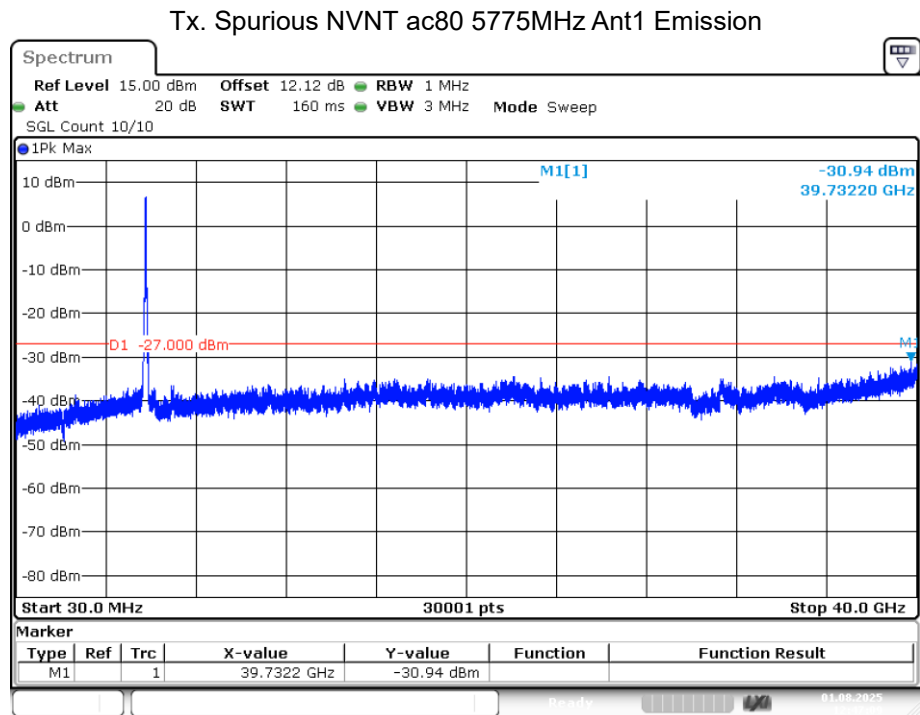


Date: 1.AUG.2025 12:36:36

U-NII 3

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	ac80	5775	Ant1	-30.94	-27	Pass

Note: The margin is at least greater than the antenna gain plus the cable loss.



-----END OF REPORT-----