

## FCC/ IC TEST REPORT

**Test report No:** EMC- FCC- R0102  
**FCC ID:** SY5DHCNA433  
**IC ID:** 8325A-DHCNA433  
**Type of equipment:** Smart Card Key  
**Model Name:** SVI-DHCNA433  
**Applicant:** Continental Automotive Systems Corporation  
**FCC Rule Part(s):** FCC Part 15 Subpart C  
Section 15.209, Section 15.231  
IC RSS-210, Issue 8 : 2010  
**Frequency Range:** 433.92 MHz (Tx)  
125kHz (Rx)  
**Test result:** Complied

The above equipment was tested by EMC compliance Testing Laboratory for compliance with the requirements of FCC Rules and Regulations.

The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

**Date of test:** March 11, 2013 ~ March 14, 2013

**Issued date:** March 27, 2013



**Tested by:**

SON, MIN GI



**Approved by:**

KIM, CHANG MIN

## [ Contents ]

<b>1. Client information.....</b>	<b>3</b>
<b>2. Laboratory information .....</b>	<b>4</b>
<b>3. Description of E.U.T.....</b>	<b>5</b>
3.1 Basic description .....	5
3.2 General description .....	5
3.3 Test frequency.....	6
3.4 Test Voltage .....	6
<b>4. Summary of test results.....</b>	<b>7</b>
4.1 Standards & results .....	7
4.2 Uncertainty .....	7
<b>5. Test results .....</b>	<b>8</b>
5.1 Field strength of Fundamental .....	8
5.2 Spurious Emission .....	10
5.3 Receiver Spurious Emission .....	13
5.4 Bandwidth of Operation Frequency.....	15
5.5 Transmission Time.....	16
5.6 Occupied Bandwidth .....	17
<b>6. Test equipment used for test .....</b>	<b>18</b>

## 1. Client information

**Applicant:** Continental Automotive Systems Corporation

**Address:** 29, Siemens-Road, Icheon-City, Gyeonggi-Do, 467-080,  
Korea

**Telephone number:** +82-31-645-4864

**Facsimile number :** +82-31-637-0371

**Contact person:** SungMin Jang/Manager

**Manufacturer:** Continental Automotive Systems Corporation

**Address :** 29, Siemens-Road, Icheon-City, Gyeonggi-Do, 467-080,  
Korea

## 2. Laboratory information

### Address

EMC Compliance Ltd.  
480-5 Shin-dong, Yeongtong-gu, Suwon-city, Gyunggi-do, 443-390, Korea,  
Telephone Number: 82 31 336 9919 Facsimile Number: 82 31 336 4767

### Certificate

CBTL Testing Laboratory, KOLAS NO.: 231  
FCC Filing No.: 508758  
IC Filing No.: 8035A-2  
VCCI Registration No.: C-1713, R-1606, T-258

### SITE MAP



### 3. Description of E.U.T.

#### 3.1 Basic description

<b>Applicant :</b>	Continental Automotive Systems Corporation
<b>Address of Applicant:</b>	29, Siemens-Road, Icheon-City, Gyeonggi-Do, 467-080, Korea
<b>Manufacturer:</b>	Continental Automotive Systems Corporation
<b>Address of Manufacturer:</b>	29, Siemens-Road, Icheon-City, Gyeonggi-Do, 467-080, Korea
<b>Type of equipment:</b>	Smart Card Key
<b>Basic Model:</b>	SVI-DHCFNA433
<b>Serial number:</b>	N/A

#### 3.2 General description

<b>Frequency Range</b>	433.92 MHz (Tx), 125 kHz (Rx)
<b>Type of Modulation</b>	FSK
<b>Number of Channels</b>	1 channel
<b>Type of Antenna</b>	PCB Antenna
<b>Antenna Gain</b>	-14.29 dBi
<b>Power supply</b>	DC 3 V
<b>Dimension</b>	mm

### 3.3 Test frequency

	<b>Frequency</b>
<b>Low frequency</b>	-
<b>Middle frequency</b>	<b>433.92 MHz</b>
<b>High frequency</b>	-

### 3.4 Test Voltage

<b>mode</b>	<b>Voltage</b>
<b>Norminal voltage</b>	<b>DC 3 V</b>

## 4. Summary of test results

### 4.1 Standards & results

Section in FCC 15 Subpart C §15.209	Section in RSS-210, Issue 8 : 2010	Parameter	Test Result
15.209(a) 15.231(b)	RSS-210, Issue 8, Table B	Radiated emission, Spurious Emission and Field Strength of Fundamental	C
-	RSS-Gen, Issue 3,6	Receiver Spurious Emission (Radiated)	C
15.231(c)	RSS-210, Issue 8, A1.1.3	Bandwidth of Operation frequency	C
15.231(a)	RSS-210, Issue 8, A1.1.1	Transmission Time	C
-	RSS-Gen, Issue 3, 4.6.1	Occupied Bandwidth	C

Note: C=complies

NC= Not complies

NT=Not tested

NA=Not Applicable

\*The test is not applicable since the EUT is not the device that is designed to be connected to the public utility(AC) power line.

### 4.2 Uncertainty

Measurement Item	Combined Standard Uncertainty U <sub>c</sub>	Expanded Uncertainty U = KU <sub>c</sub> (K = 2)
Conducted RF power	± 0.29 dB	± 0.58 dB
Radiated disturbance	+ 2.97 dB / - 2.975 dB	+ 5.94 dB / - 5.95 dB
Conducted disturbance	9 ~ 150 kHz: ± 1.975 [dB] 150 kHz ~ 30 MHz: ± 1.775 [dB]	9 kHz ~ 150 kHz: ± 3.95 [dB] 150 kHz ~ 30 MHz: ± 3.55 [dB]

## 5. Test results

### 5.1 Field strength of Fundamental

#### 5.1.1 Regulation

According to §15.209(a),

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table: 83

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100 **	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241..

According to §15.231(b)

In addition to the provisions of Section 15.205, the field strength of emissions from intentional radiators operated under this Section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66 - 40.70	2,250	225
70 - 130	1,250	125
130 - 174	1,250 to 3,750 **	125 to 375 **
174 - 260	3,750	375
260 - 470	3,750 to 12,500 **	375 to 1,250 **
Above 470	12,500	1,250

\*\* linear interpolations

Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz,  $\mu\text{V/m}$  at 3 meters =  $56.81818(F) - 6136.3636$ ; for the band 260-470 MHz,  $\mu\text{V/m}$  at 3 meters =  $41.6667(F) - 7083.3333$ . The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.

### 5.1.2 Test procedure

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. It tested x,y and z – 3 axis each, mentioned only worst case data at this report.

### 5.1.2 Test Result

-Complied

Frequency [MHz]	Receiver Bandwidth [kHz]	Detector	Pol. [V/H]	Reading [dB(µV)]	Factor	Result [dB(µV/m)]	Limit [dB(µV/m)]	Margin [dB]
433.92	120	Quasi – Peak	H	89.3	-20.5	68.8	80.82	12.02

NOTE:

1. Limit =  $20\log(41.6667(F)-7083.3333) = 80.82$
2. Factor = Amp Gain + Attenuator + AF + CL+Duty cycle factor)

## 5.2 Spurious Emission

### 5.2.1 Regulation

According to §15.209(a),

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table: 83

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100 **	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241..

According to §15.231(b)

In addition to the provisions of Section 15.205, the field strength of emissions from intentional radiators operated under this Section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66 - 40.70	2,250	225
70 - 130	1,250	125
130 - 174	1,250 to 3,750 **	125 to 375 **
174 - 260	3,750	375
260 - 470	3,750 to 12,500 **	375 to 1,250 **
Above 470	12,500	1,250

\*\* linear interpolations

Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz,  $\mu\text{V/m}$  at 3 meters =  $56.81818(F) - 6136.3636$ ; for the band 260-470 MHz,  $\mu\text{V/m}$  at 3 meters =  $41.6667(F) - 7083.3333$ . The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.

### 5.2.2 Measurement Procedure

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. It tested x,y and z – 3 axis each, mentioned only worst case data at this report.

### 5.2.3 Test Result

-complied

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(µV)]	Factor (Amp Gain + Attenuator + AF + CL)	Result [dB(µV/m)]	Limit [dB(µV/m)]	Margin [dB]
<b>Quasi-Peak DATA. Emissions below 30MHz</b>							
			<b>Not detected</b> <b>(In the noise floor)</b>				
<b>Quasi-Peak DATA. Emissions below 1GHz</b>							
867.838	120	H	43.9	0.3	44.2	61.0	16.8
<b>Peak DATA. Emissions above 1GHz</b>							
1301.500	1000	H	62.8	-6.7	56.1	74.0	17.9
1735.750	1000	H	51.4	-3.5	47.9	81.0	33.1
2169.250	1000	H	63.9	-1.4	62.5	81.0	18.5
2603.500	1000	H	58.3	-0.8	57.5	81.0	23.5
3037.000	1000	V	58.9	0.0	58.9	81.0	22.1
3471.250	1000	V	57.9	1.7	59.6	81.0	21.4
3905.500	1000	V	51.5	3.4	54.9	74.0	19.1
<b>Average DATA. Emissions above 1GHz</b>							
1301.500	1000	H	44.4	-6.7	37.7	54.0	16.3
1735.750	1000	H	38.1	-3.5	34.6	61.0	26.4
2169.250	1000	H	43.2	-1.4	41.8	61.0	19.2
2603.500	1000	H	36.6	-0.8	35.8	61.0	25.2
3037.000	1000	V	40.0	0.0	40.0	61.0	21.0
3471.250	1000	V	40.0	1.7	41.7	61.0	19.3
3905.500	1000	V	36.0	3.4	39.4	54.0	14.6

NOTE:

1. Factor(dB) = ANT Factor + Amp Gain + Cable Loss

2. Margin (dB) = Limit - Result

[Result = Reading - Factor]

H = Horizontal, V = Vertical Polarization

ATT = Attenuation (10dB pad and/or Insertion Loss of HPF), AF/CL = Antenna Factor and Cable Loss

\* The spurious emission at the frequency does not fall in the restricted bands.

\*\* The measured result is within the test standard limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95 % level of confidence. However, the result indicates that compliance is more probable than non-compliance.

## 5.3 Receiver Spurious Emission

### 5.3.1 Regulation

According to §15.209(a),

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table: 83

Frequency (MHz)	Field Strength (microvolts/m at 3 meters)
30 – 88	100
88 – 216	150
216 -960	200
Above 960	500

### 5.3.2 Measurement Procedure

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. It tested x,y and z – 3 axis each, mentioned only worst case data at this report.

### 5.3.3 Test Result

-complied

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Factor (Amp Gain + Attenuator + AF + CL)	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
<b>Quasi-Peak DATA. Emissions below 30MHz</b>							
Below 1000.00	<b>Not Detected</b>	-	-	-	-	-	-
<b>Quasi-Peak DATA. Emissions below 1GHz</b>							
Above 1000.00	<b>Not Detected</b>	-	-	-	-	-	-
<b>Average DATA. Emissions above 1GHz</b>							
Above 1000.00	<b>Not Detected</b>	-	-	-	-	-	-

NOTE:

3. Factor(dB) = ANT Factor+ Amp Gain + Cable Loss

4. Margin (dB) = Limit - Result

[Result = Reading - Factor]

H = Horizontal, V = Vertical Polarization

ATT = Attenuation (10dB pad and/or Insertion Loss of HPF), AF/CL = Antenna Factor and Cable Loss

\* The spurious emission at the frequency does not fall in the restricted bands.

\*\* The measured result is within the test standard limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95 % level of confidence. However, the result indicates that compliance is more probable than non-compliance.

All emissions not reported were more than 20 dB below the specified limit or in the noise floor.

## 5.4 Bandwidth of Operation Frequency

### 5.4.1 Regulation

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

### 5.4.2 Measurement Procedure


1. The transmitter output is connected to the spectrum analyzer.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW=10 kHz, VBW=10 kHz and Span=1 MHz.
3. The bandwidth of fundamental frequency was measured and recorded.

### 5.4.3 Test Result

-complied

Frequency [MHz]	Bandwidth of the emission [kHz]	Limit [kHz]
433.92	80.128	787.500

### 5.4.4 Test plot

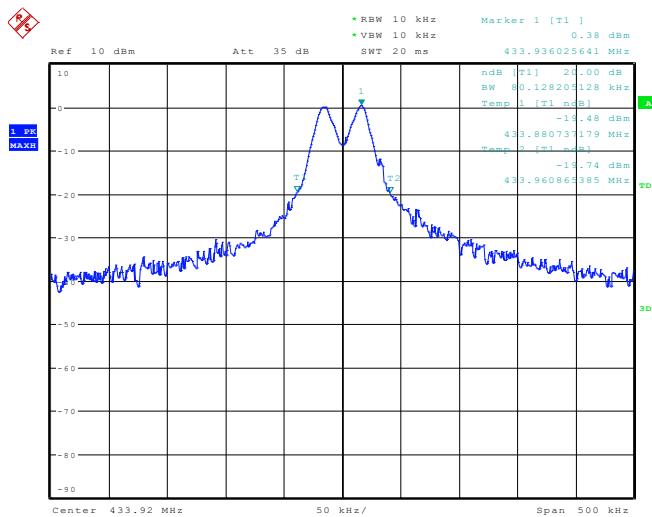

## 5.5 Transmission Time

### 5.5.1 Regulation

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

### 5.5.2 Measurement Procedure


1. The transmitter output is connected to the spectrum analyzer.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW=1 MHz, VBW=1 MHz, Span=0 Hz, Sweep Time=10 sec
3. The bandwidth of fundamental frequency was measured and recorded.

### 5.5.3 Test Result

-complied

Frequency [MHz]	Transmission Time [s]	Limit [s]
433.92	0.083	5

### 5.5.4 Test plot

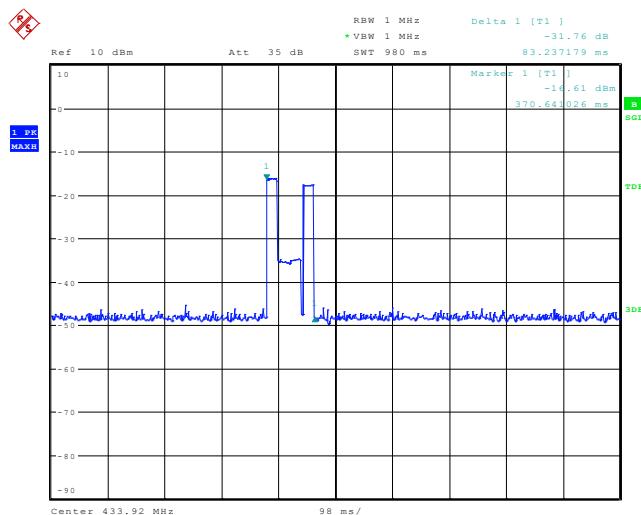

## 5.6 Occupied Bandwidth

### 5.3.1 Regulation

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

### 5.3.2 Measurement Procedure


1. The transmitter output is connected to the spectrum analyzer.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using  $RBW \geq 1\% \text{ of Span, VBW to 3 times RBW.}$
3. The bandwidth of fundamental frequency was measured and recorded.

### 5.3.3 Test Result

-complied

Frequency [MHz]	Occupied Bandwidth [kHz]	Limit [kHz]	Remark
433.92	96.154	787.500	99% Occupied Bandwidth

### 5.3.3 Test plot

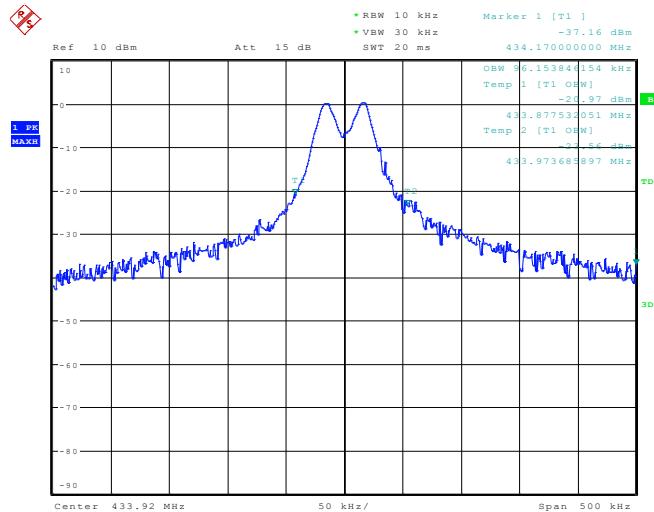

## 6. Test equipment used for test

	<b>Description</b>	<b>Manufacture</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Next Cal Date.</b>
<input type="checkbox"/>	Temp & humidity chamber	taekwang	TK-04	TK001	13.12.07
<input type="checkbox"/>	Temp & humidity chamber	taekwang	TK-500	TK002	13.09.03
<input type="checkbox"/>	Frequency Counter	HP	53150A	US39250565	13.09.04
<input checked="" type="checkbox"/>	Spectrum Analyzer	Agilent	E4440A	MY44303500	13.06.27
<input type="checkbox"/>	Spectrum Analyzer	R & S	FSP40	100209	13.10.23
<input checked="" type="checkbox"/>	Signal Generator	R & S	SMR40	100007	13.06.27
<input type="checkbox"/>	Modulation Analyzer	HP	8901B	3538A05527	13.11.06
<input type="checkbox"/>	Audio Analyzer	HP	8903B	3729A19213	14.01.06
<input type="checkbox"/>	AC Power Supply	KIKUSUI	PCR2000W	GB001619	13.10.23
<input checked="" type="checkbox"/>	DC Power Supply	Tektronix	PS2520G	TW50517	14.03.12
<input type="checkbox"/>	DC Power Supply	Tektronix	PS2521G	TW53135	13.10.23
<input type="checkbox"/>	Dummy Load	BIRD	8141	7560	13.09.09
<input type="checkbox"/>	Dummy Load	BIRD	8401-025	799	13.09.09
<input checked="" type="checkbox"/>	EMI Test Receiver	R&S	ESCI	100001	13.07.10
<input type="checkbox"/>	Attenuator	HP	8494A	2631A09825	13.10.24
<input type="checkbox"/>	Attenuator	HP	8496A	3308A16640	13.10.24
<input type="checkbox"/>	Attenuator	R&S	RBS1000	D67079	13.10.24
<input type="checkbox"/>	WIDEBAND POWER SENSOR	R & S	NRP-Z81	100677	13.05.04
<input type="checkbox"/>	LOOP Antenna	EMCO	EMCO6502	9205-2745	13.05.23
<input checked="" type="checkbox"/>	BILOG Antenna	Schwarzbeck	VULB 9168	375	13.09.21
<input type="checkbox"/>	BILOG Antenna	Schwarzbeck	VULB 9168	375	13.10.04
<input checked="" type="checkbox"/>	HORN Antenna	ETS	3115	00086706	13.11.21
<input type="checkbox"/>	HORN Antenna	ETS	3115	00062589	13.09.06
<input type="checkbox"/>	HORN Antenna	ETS	3116	00086632	13.11.15
<input type="checkbox"/>	HORN Antenna	ETS	3116	00086632	13.11.15
<input checked="" type="checkbox"/>	Amplifier	SONOMA INSTRUMENT	310N	293004	13.11.06
<input type="checkbox"/>	Power Divider	Weinschel	1580-1	NX375	12.10.26
<input type="checkbox"/>	Power Divider	Weinschel	1580-1	NX380	13.09.09
<input type="checkbox"/>	Power Divider	Weinschel	1594	671	13.09.09
<input type="checkbox"/>	Test Receiver	R&S	ESHS30	828765/009	12.10.28
<input type="checkbox"/>	LISN	R&S	ENV216	101358	12.10.26
<input type="checkbox"/>	LISN	PMM	L2-16A	0000J10705	-

## Test setup photos

