

FCC PART 15.247 TEST REPORT

For

Acomdata Technology, INC.

12F.-1, No.99, Sec. 1, Nankan Rd., Luzhu Township, Taoyuan County 338, Taiwan (R.O.C.)

FCC ID: SYO-BIGPOWERBOOM


Report Type: **Product Type:** Wireless Speaker Original Report Allen Dious **Test Engineer:** Allen Qiao Report Number: RDG140716003-00B Report Date: 2014-08-14 Zhang Jerry Zhang **Reviewed By: EMC Manager** Bay Area Compliance Laboratories Corp. (Dongguan) **Test Laboratory:** No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	
RELATED SUBMITTAL(S)/GRANT(S)	
TEST METHODOLOGY TEST FACILITY	
SYSTEM TEST CONFIGURATION DESCRIPTION OF TEST CONFIGURATION	
EUT Exercise Software	
EQUIPMENT MODIFICATIONS	
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL CABLE	6
BLOCK DIAGRAM OF TEST SETUP	
SUMMARY OF TEST RESULTS	
FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE	9
APPLICABLE STANDARD	9
FCC §15.203 - ANTENNA REQUIREMENT	10
APPLICABLE STANDARD	
ANTENNA CONNECTOR CONSTRUCTION	
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	
MEASUREMENT UNCERTAINTY	
EUT SETUP	
EMI TEST RECEIVER SETUP	
TEST PROCEDURE	
TEST EQUIPMENT LIST AND DETAILS	12 12
TEST RESULTS SUMMARY	
TEST RESULTS SUMMARY	
Test Data	
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS	16
APPLICABLE STANDARD	
MEASUREMENT UNCERTAINTY	
EUT SETUP	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	
TEST PROCEDURE	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	
TEST EQUIPMENT LIST AND DETAILS	
TEST DATA	
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH	
APPLICABLE STANDARD	
TEST PROCEDURE	
TEST EQUIPMENT LIST AND DETAILS	
Test Data	23
FCC §15.247(b) (3) - MAXIMUM PEAK OUTPUT POWER	26

APPLICABLE STANDARD	26
TEST PROCEDURE	
TEST EQUIPMENT LIST AND DETAILS	26
TEST DATA	26
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE	29
APPLICABLE STANDARD	29
TEST PROCEDURE	
TEST EQUIPMENT LIST AND DETAILS	29
TEST DATA	29
FCC §15.247(e) - POWER SPECTRAL DENSITY	31
APPLICABLE STANDARD	31
Test Procedure	31
TEST EQUIPMENT LIST AND DETAILS	31
TEST DATA	
DECLADATION OF SIMILADITY	3/

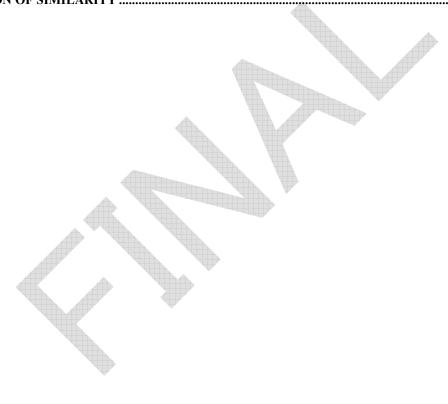

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The Acomdata Technology, INC.'s product, model number: PowerBoom mobile175 (FCC ID: SYO-BIGPOWERBOOM) (the "EUT") in this report was a Wireless Speaker, which was measured approximately: DC 7.4V from rechargeable Li-ion battery or DC 9V from adapter.

Report No.: RDG140716003-00B

Adapter information:

Model: PS1012-090HUB100 Input: 100-240Vac, 50-60Hz, 0.4A Output: DC 9V, 1.0A, 9W Max

Manufacture: Powertron Electronics Corp

Note: The series product, model PowerBoom10A, PowerBoom mobile175, PowerBoom_175, MB-20-10, MB-20-10-A, MB-20-10-B, MB-20-10-C, MB-20-10-D, BigPowerBoom, SportsBuddy2, BRICK120 are electrically identical, the differences between them are the model name and color of appearance, we selected PowerBoom mobile175 for fully testing, the details was explained in the attached declaration letter.

All measurement and test data in this report was gathered from production sample serial number: 140716003 (Assigned by BACL, Dongguan). The EUT was received on 2014-07-17.

Objective

This report is prepared on behalf of *Acomdata Technology, INC*. in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communications Commission's rules.

The tests were performed in order to determine the compliance of the EUT with FCC Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part15C DSS submissions with FCC ID: SYO-BIGPOWERBOOM for Bluetooth BDR, EDR mode.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

FCC Part 15.247 Page 4 of 34

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Report No.: RDG140716003-00B

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The

facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.



FCC Part 15.247 Page 5 of 34

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer. The engineering mode was configured the system transmitting with maximum power.

Report No.: RDG140716003-00B

For Bluetooth LE mode, 40 channels are provided for testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404		•••
	•••	•••	•••
•••	•••	•••	•••
		38	2478
19	2440	39	2480

EUT was tested with channel 0, 19 and 39.

EUT Exercise Software

The software "CSR Bluesuite 2.5.0" was used.

Equipment Modifications

No modification was made to the EUT.

Support Equipment List and Details


Manufacturer Description		Model	Serial Number
1	1	/	/

External Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	То
/	/	/	/	/	/

FCC Part 15.247 Page 6 of 34

Block Diagram of Test Setup

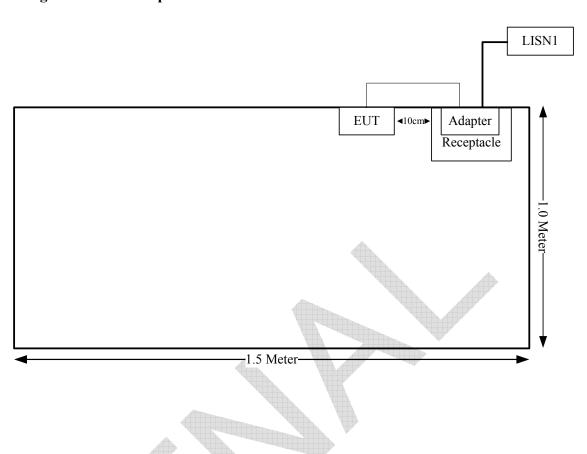

FCC Part 15.247 Page 7 of 34

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1093	RF Exposure	Compliace
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Peak Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

Report No.: RDG140716003-00B



FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

Report No.: RDG140716003-00B

According to KDB447498 D01 General RF Exposure Guidance v05r02:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances \leq 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance,

mm)] $\cdot [\sqrt{f(GHz)}] \le 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is ≤ 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

Measurement Result

The maximum conducted output power= 8.08 dBm (6.43 mW) at 2480 MHz [(max. power of channel, mW)/(min. test separation distance, mm)] $\cdot [\sqrt{f(GHz)}]$ = $6.43/5*(\sqrt{2.48}) = 2.02 < 3.0$

So the stand-alone SAR evaluation is not necessary.

FCC Part 15.247 Page 9 of 34

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

Report No.: RDG140716003-00B

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

The EUT has one integral antenna arrangement, which was soldered on the main board and the antenna gain is 0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.



FCC §15.207 (a) - AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

Measurement Uncertainty

Compliance or non- compliance with a disturbance limit shall be determined in the following manner:

Report No.: RDG140716003-00B

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:


- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit. If U_{lab} is greater than U_{cispr} of Table 1, then:
- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} U_{cispr})$, exceeds the disturbance limit;
- non compliance is deemed to occur if any measured disturbance level, increased by $(U_{\text{lab}} U_{\text{cispr}})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cispr}

Measurement	$U_{ m cispr}$
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup

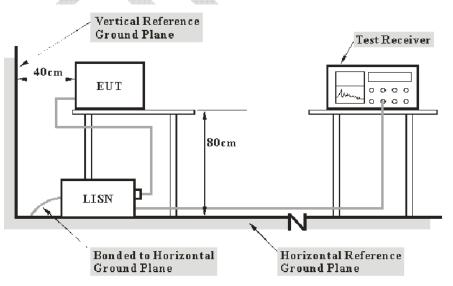

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

FCC Part 15.247 Page 11 of 34

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.207 limits.

Report No.: RDG140716003-00B

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W	
150 kHz – 30 MHz	9 kHz	

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2013-11-20	2014-11-20
R&S	L.I.S.N	ESH3-Z5	843331/015	2013-09-25	2014-09-25
R&S	Two-line V-network	ENV 216	3560.6550.12	2014-01-22	2015-01-22
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$\begin{aligned} V_C &= V_R + A_C + VDF \\ C_f &= A_C + VDF \end{aligned}$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

FCC Part 15.247 Page 12 of 34

 V_R : reading voltage amplitude A_c : attenuation caused by cable loss VDF: voltage division factor of AMN C_f : Correction Factor

The "Margin" column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

Report No.: RDG140716003-00B

Margin = Limit – Corrected Amplitude

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

Test Results Summary

According to the recorded data in following table, the EUT complied with the <u>FCC Part 15.207</u>, with the worst margin reading of:

9.6 dB at 2.579298 MHz in the Line conducted mode.

Test Data

Environmental Conditions

Temperature:	27.5 °C	
Relative Humidity:	50 %	
ATM Pressure:	100 kPa	


The testing was performed by Allen Qiao on 2014-07-21.

FCC Part 15.247 Page 13 of 34

Report No.: RDG140716003-00B

Test Mode: Charging&Transmitting

AC 120V/60 Hz, Line

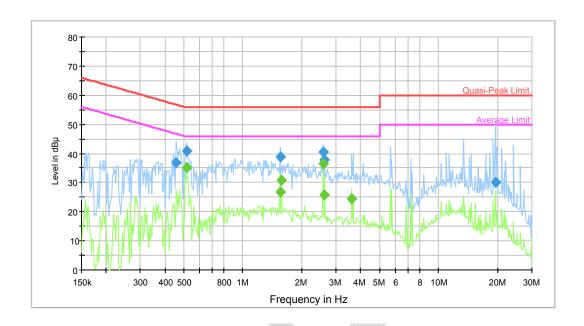


Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.457684	36.9	9.000	L1	10.5	19.8	56.7	Compliance
0.515791	40.9	9.000	L1	10.4	15.1	56.0	Compliance
1.548915	38.9	9.000	L1	10.5	17.1	56.0	Compliance
2.579298	40.4	9.000	L1	10.5	15.6	56.0	Compliance
2.620732	37.8	9.000	L1	10.5	18.2	56.0	Compliance
19.519859	30.3	9.000	L1	11.1	29.7	60.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.515791	35.2	9.000	L1	10.4	10.8	46.0	Compliance
1.548915	26.7	9.000	L1	10.5	19.3	46.0	Compliance
1.573796	30.9	9.000	L1	10.5	15.1	46.0	Compliance
2.579298	36.4	9.000	L1	10.5	9.6	46.0	Compliance
2.620732	25.8	9.000	L1	10.5	20.2	46.0	Compliance
3.604490	24.5	9.000	L1	10.7	21.5	46.0	Compliance

FCC Part 15.247 Page 14 of 34

AC 120V/60 Hz, Neutral

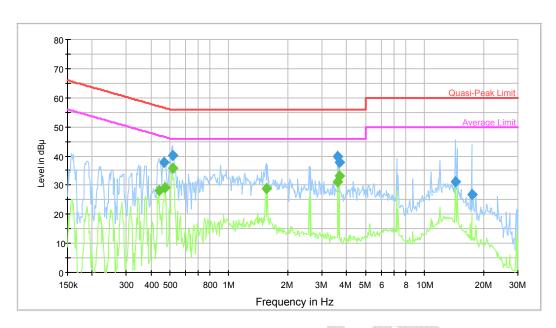

Report No.: RDG140716003-00B

				1000000000		destroy.	
Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.465037	37.8	9.000	N	10.5	18.8	56.6	Compliance
0.515791	40.2	9.000	N	10.4	15.8	56.0	Compliance
3.604490	39.9	9.000	N	10.7	16.1	56.0	Compliance
3.662393	37.9	9.000	N	10.8	18.1	56.0	Compliance
14.420371	31.0	9.000	N	10.6	29.0	60.0	Compliance
17.459396	26.7	9.000	N	10.8	33.3	60.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.439808	28.0	9.000	N	10.6	19.0	47.1	Compliance
0.472507	29.3	9.000	N	10.5	17.2	46.5	Compliance
0.515791	35.9	9.000	N	10.4	10.1	46.0	Compliance
1.548915	28.8	9.000	N	10.5	17.2	46.0	Compliance
3.604490	31.1	9.000	N	10.7	14.9	46.0	Compliance
3.662393	33.3	9.000	N	10.8	12.7	46.0	Compliance

FCC Part 15.247 Page 15 of 34

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

Compliance or non- compliance with a disturbance limit shall be determined in the following manner:

Report No.: RDG140716003-00B

If U_{lab} is less than or equal to U_{cispr} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit. If U_{lab} is greater than U_{cispr} of Table 1, then:
- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} U_{cispr})$, exceeds the disturbance limit;
- non compliance is deemed to occur if any measured disturbance level, increased by $(U_{\text{lab}} U_{\text{cispr}})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:


30M~200MHz: 5.0 dB 200M~1GHz: 6.2 dB 1G~6GHz: 4.45 dB 6G~18GHz: 5.23 dB

Table 2 – Values of U_{cispr}

Measurement	$U_{ m cispr}$
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB


EUT Setup

Below 1GHz:

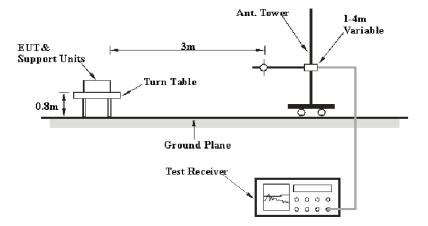

FCC Part 15.247 Page 16 of 34

Above 1GHz:

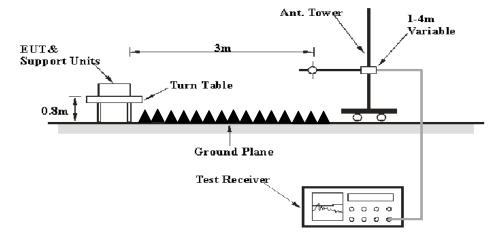

Report No.: RDG140716003-00B

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
Above I GHZ	1MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

FCC Part 15.247 Page 17 of 34

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Report No.: RDG140716003-00B

Corrected Amplitude = Meter Reading + Antenna Factor + Cable Loss - Amplifier Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

Test Equipment List and Details

			A		
Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2014-05-09	2015-05-09
Sunol Sciences	Antenna	ЈВ3	A060611-1	2011-09-06	2014-09-05
HP	Amplifier	8447E	2434A02181	2013-09-06	2014-09-06
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09
ETS LINDGREN	Horn Antenna	3115	000 527 35	2012-09-06	2015-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2014-02-19	2015-02-19
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-09
Ducommun Technolagies	Horn Antenna	ARH-4223-02	1007726-01 1304	2014-06-16	2017-06-15
Quinstar	Amplifier	QLW- 18405536-JO	15964001001	2013-09-06	2014-09-06

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the <u>FCC Title 47, Part 15, Section 15.205, 15.209 and 15.247</u>, with the worst margin reading of:

8.90 dB at 4880 MHz in the Horizontal polarization

FCC Part 15.247 Page 18 of 34

Test Data

Environmental Conditions

Temperature:	26.8~29.1 °C
Relative Humidity:	53~57 %
ATM Pressure:	99.5~99.8 kPa

^{*} The testing was performed by Allen Qiao from 2014-08-07 to 2014-08-13.



Report No.: RDG140716003-00B

FCC Part 15.247 Page 19 of 34

Report No.: RDG140716003-00B

Mode: Transmitting


Frequency	e: Transmi	eceiver	Rv A	ntenna	Cable	Amplifier	Corrected	FCC 1	5 247
Frequency	Reading	Detector	Polar	Factor	loss	Gain	Amplitude	Limit	
(MHz)	(dBµV)	(PK/QP/AV)	(H/V)	(dB)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	Margin (dB)
	(uD μ v)	(FK/QF/AV)		ow Channe	(/	()	(ubµ v/III)	(u bµ v /III)	(ub)
2402	96.60	PK	Н	25.65	4.42	27.32	99.35	N/A	N/A
2402	91.76	AV	Н	25.65	4.42	27.32	94.51	N/A	N/A
2402	97.66	PK	V	25.65	4.42	27.32	100.41	N/A	N/A
2402	93.39	AV	V	25.65	4.42	27.32	96.14	N/A	N/A
2390	37.19	PK	V	25.61	4.39	27.32	39.87	74.00	34.13
2390	25.72	AV	V	25.61	4.39	27.32	28.40	54.00	25.60
4804	44.45	PK	H	30.59	5.98	27.41	53.61	74.00	20.39
4804	32.27	AV	Н	30.59	5.98	27.41	41.43	54.00	12.57
7206	30.64	PK	Н	34.09	7.45	25.91	46.27	74.00	27.73
7206	20.21	AV	Н	34.09	7.45	25.91	35.84	54.00	18.16
9608	29.48	PK	Н	35.96	8.80	27.55	46.69	74.00	27.31
9608	18.86	AV	Н	35.96	8.80	27.55	36.07	54.00	17.93
2502	47.16	PK	Н	25.91	4.53	27.37	50.23	74.00	23.77
2502	35.29	AV	Н	25.91	4.53	27.37	38.36	54.00	15.64
294.8	33.16	QP	Н	13.95	2.07	21.52	27.66	46.00	18.34
				iddle Chan					
2440	95.97	PK	Н	25.74	4.40	27.34	98.77	N/A	N/A
2440	92.03	AV	Н	25.74	4.40	27.34	94.83	N/A	N/A
2440	97.49	PK	V	25.74	4.40	27.34	100.29	N/A	N/A
2440	93.12	AV	V	25.74	4.40	27.34	95.92	N/A	N/A
4880	43.98	PK	Н	30.79	6.08	27.42	53.43	74.00	20.57
4880	35.65	AV	Н	30.79	6.08	27.42	45.10	54.00	8.90
7320	32.44	PK	Н	34.37	7.51	25.88	48.44	74.00	25.56
7320	24.13	AV	Н	34.37	7.51	25.88	40.13	54.00	13.87
9760	29.95	PK	Н	36.32	8.83	27.21	47.89	74.00	26.11
9760	18.87	AV	H	36.32	8.83	27.21	36.81	54.00	17.20
7626	30.99	PK	Н	34.90	7.58	26.49	46.98	74.00	27.02
7626	19.85	AV	H	34.90	7.58	26.49	35.84	54.00	18.17
2545 2545	44.31	PK	H	26.02 26.02	4.63	27.39	47.57 37.12	74.00	26.43 16.88
294.8	33.86 32.75	AV QP	Н	13.95	4.63 2.07	27.39 21.52	27.25	54.00 46.00	18.75
<i>27</i> 4.8	32.13	QP		ligh Chann			21.23	40.00	10./3
2480	97.17	PK	Н	25.85	4.48	27.36	100.14	N/A	N/A
2480	92.73	AV	H	25.85	4.48	27.36	95.70	N/A	N/A
2480	97.70	PK	V	25.85	4.48	27.36	100.67	N/A	N/A
2480	93.43	AV	V	25.85	4.48	27.36	96.40	N/A	N/A
2483.5	45.35	PK	V	25.86	4.49	27.36	48.34	74.00	25.66
2483.5	32.63	AV	V	25.86	4.49	27.36	35.62	54.00	18.38
4960	43.07	PK	H	31.00	5.90	27.43	52.54	74.00	21.46
4960	31.38	AV	Н	31.00	5.90	27.43	40.85	54.00	13.15
7440	31.21	PK	Н	34.66	7.58	25.97	47.48	74.00	26.52
7440	22.66	AV	Н	34.66	7.58	25.97	38.93	54.00	15.07
9920	29.78	PK	Н	36.71	8.87	26.66	48.70	74.00	25.30
9920	19.78	AV	Н	36.71	8.87	26.66	38.70	54.00	15.30
2532	45.48	PK	Н	25.98	4.60	27.39	48.67	74.00	25.33
2532	33.99	AV	Н	25.98	4.60	27.39	37.18	54.00	16.82
294.8	32.59	QP	Н	13.95	2.07	21.52	27.09	46.00	18.91

FCC Part 15.247 Page 20 of 34

Conducted Spurious Emissions at Antenna Port


Report No.: RDG140716003-00B

Low Channel

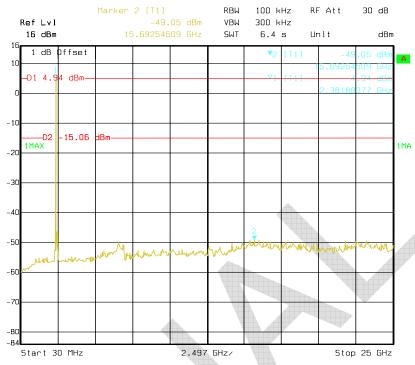

Date: 13.AUG.2014 10:56:44


Middle Channel

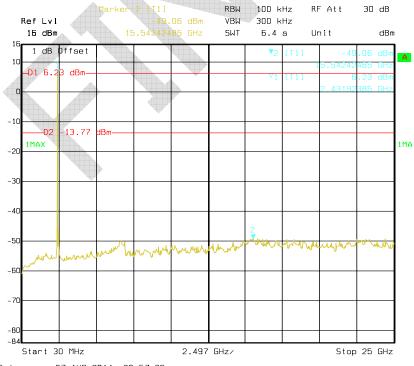

Date: 07.AUG.2014 20:57:36

FCC Part 15.247 Page 21 of 34

High Channel

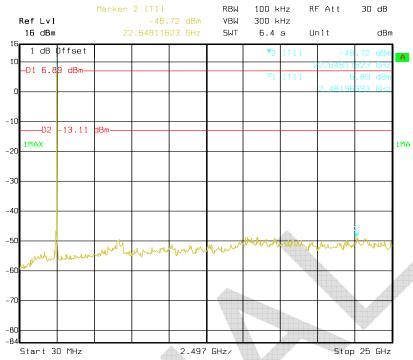

Date: 07.AUG.2014 21:02:46

FCC Part 15.247 Page 22 of 34

FCC $\S15.247(a)$ (2) – 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Report No.: RDG140716003-00B

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r01clause8.1 Option 1:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times RBW$.
- c) Detector = Peak.
- d) Trace mode = \max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	29.5~30.8 °C
Relative Humidity:	64~67 %
ATM Pressure:	99.5~99.8 kPa

^{*} The testing was performed by Allen Qiao from 2014-08-07 to 2014-08-13.


Test Result: Pass.

Please refer to the following tables and plots.

FCC Part 15.247 Page 23 of 34

Channel	Frequency	6 dB Bandwidth	Limit
	(MHz)	(MHz)	(kHz)
Low	2402	0.721	≥500
Middle	2440	0.729	≥500
High	2480	0.729	≥500


Low Channel

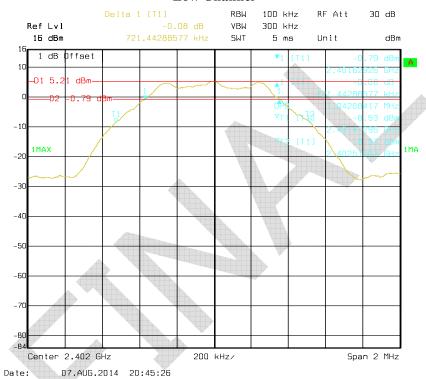

FCC Part 15.247 Page 24 of 34


Middle Channel

Report No.: RDG140716003-00B

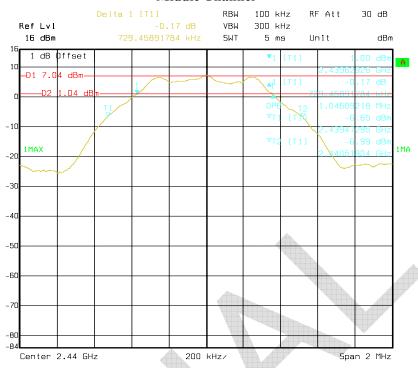

Date: 13.AUG.2014 10:49:08

High Channel

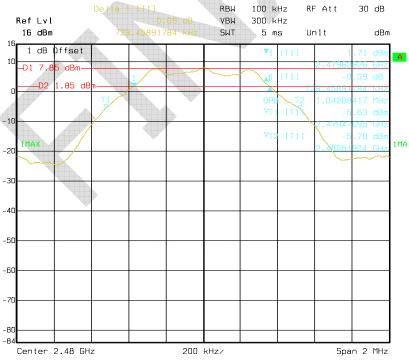

Date: 13.AUG.2014 10:45:37

FCC Part 15.247 Page 25 of 34

FCC §15.247(b) (3) - MAXIMUM PEAK OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Report No.: RDG140716003-00B

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r01clause9.1.1:

- a) Set the RBW \geq DTS bandwidth.
- b) Set VBW $\geq 3 \times RBW$.
- c) Set span $\geq 3 \times RBW$
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
 h) Use peak marker function to determine the peak amplitude level.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	29.8 °C
Relative Humidity:	65 %
ATM Pressure:	99.6 kPa

^{*} The testing was performed by Allen Qiao on 2014-08-13.


FCC Part 15.247 Page 26 of 34

Test Mode: Transmitting

Channel	Frequency	Max Peak Conducted Output Power	Limit	Result	
	(MHz)	(dBm)	(dBm)		
Low	2402	6.11	30	PASS	
Middle	2440	7.16	30	PASS	
High	2480	8.08	30	PASS	

Please refer to the following plots

RF Output Power, Low Channel

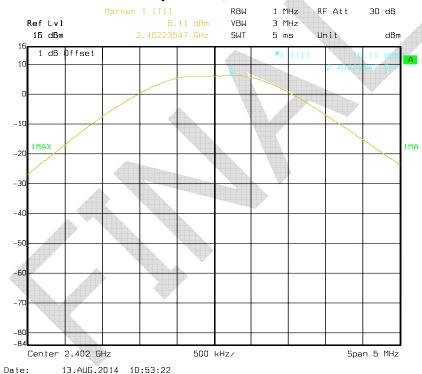

FCC Part 15.247 Page 27 of 34


RF Output Power, Middle Channel

Report No.: RDG140716003-00B



Date: 13.AUG.2014 10:53:43

RF Output Power, High Channel

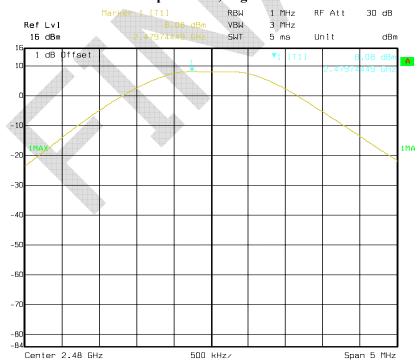

Date: 13.AUG.2014 10:54:02

FCC Part 15.247 Page 28 of 34

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Report No.: RDG140716003-00B

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- 3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- 5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	29.9 °C	
Relative Humidity:	64 %	
ATM Pressure:	99.8 kPa	

^{*} The testing was performed by Allen Qiao on 2014-08-07.


Test Result: Compliance

Please refer to following plots.

FCC Part 15.247 Page 29 of 34


Band Edge, Left Side

Report No.: RDG140716003-00B

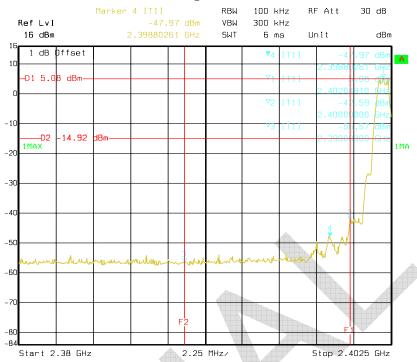

Date: 07.AUG.2014 20:50:47

Band Edge, Right Side

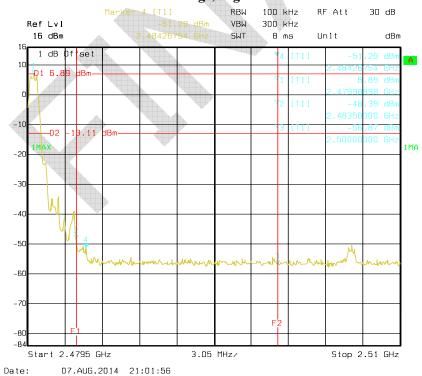

FCC Part 15.247 Page 30 of 34

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Report No.: RDG140716003-00B

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r01clause10.2:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \le \text{RBW} \le 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times RBW$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	29.9 °C	
Relative Humidity:	64 %	
ATM Pressure:	99.8 kPa	

^{*} The testing was performed by Allen Qiao on 2014-08-07.

FCC Part 15.247 Page 31 of 34

1 \ 00

Test Result: Pass


Test Mode: Transmitting

Channel	Frequency MHz	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low	2402	-10.56	≪8	PASS
Middle	2440	-9.38	≪8	PASS
High	2480	-8.62	€8	PASS

Report No.: RDG140716003-00B

Please refer to the following plots


Power Spectral Density, Low Channel

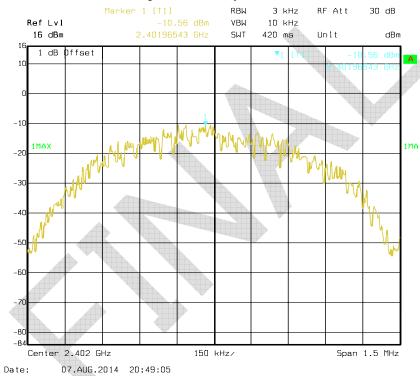

FCC Part 15.247 Page 32 of 34


Report No.: RDG140716003-00B

Power Spectral Density, Middle Channel

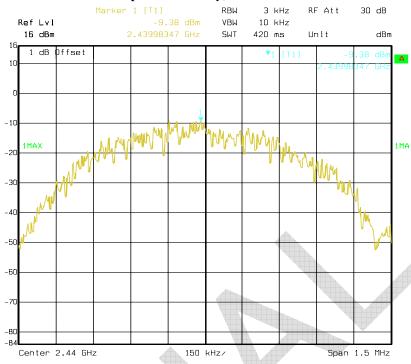

Date: 07.AUG.2014 20:55:20

Power Spectral Density, High Channel

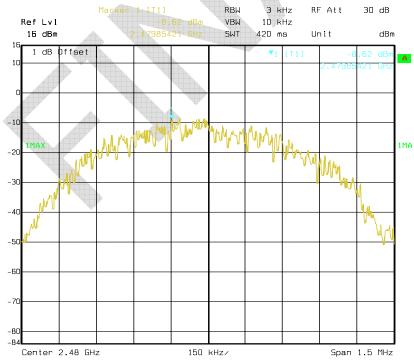

Date: 07.AUG.2014 20:59:46

FCC Part 15.247 Page 33 of 34

DECLARATION OF SIMILARITY



Report No.: RDG140716003-00B

Acomdata Technology, INC.

Declaration of Alteration

To Whom It May Concern,

We, 'Acomdata Technology, INC.', hereby declare that there are some differences between our Multiple Models and testing products. Details as below:

	Name oducts Brand		Wireless 8	Speaker	
Products			rondo		
Description	Manuf	acturer	Qinyi Elec	tronic Company Limited	
			RDG1407	16003, RDG140716004	
			Differe	nces Description	
Testing Pro	ducts	Multipl	e Models	Differences Items	Details
PowerBoom Pow		PowerB	oom10A	Color of appearance	
mobile175		PowerBoom_175		and Model name	
		MB-20-	10		
		MB-20-	10-A		
		MB-20-	10-B		
		MB-20-	10-C		
		MB-20-	10-D		
		BigPow	erBoom		
		SportsB	uddy2		
		BRICK1	20		

Notes: Testing products-the products tested by BACL

Multiple Model- have the same or similar appearance, structure, PCB, Material and function to the testing products, and only are different for color of appearance and model name.

Besides the differences in the table above, we declare the products are identical We guarantee all the information provided above is true, and notice that we'll bear all the consequences caused by any false information or concealing

Best Regards,

Signature: Tina Asieh
Print Name: Tina Heish
Title: Address

Title: Manager

12F.-1, No.99, Sec. 1, Nankan Rd., Luzhu Township, Taoyuan County 338, Taiwan (R.O.C.) tina@marquess-inc.com Tel: 886.3.2126157 Fax: 886.3.2124480 QPDG004R32 Version1.0 (20140717)

*****END OF REPORT****

FCC Part 15.247 Page 34 of 34