

CAUTIONS & WARNINGS

9

Do not recharge the Battery Pack if it is warm to the touch. Allow the Battery Pack to cool before recharging. Recharging a warm Battery Pack will shorten the life of the Pack.

Recharging batteries should be done by an adult.

Do not charge a damaged, leaking, hot or wet Battery Pack.

When not in use, remove Battery from its compartment.

When not in use, Transformer should be unplugged from the electrical outlet.

Under no circumstance should the Battery Pack be disposed of in fire. This may cause injury, leakage or explosion.

Please dispose of Ni-Cd Battery cells properly.

Do not break open or disassemble the Battery Pack.

Do not use the Battery Pack or Charger for any other reason than charging and running a MACK® Radio Control Vehicle.

Do not stall the motor during use.

WARNING:

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation of the device.

ATTENTION PARENTS: The Battery Charger & Battery Pack need to be periodically examined for potential hazards and any potential hazardous parts be repaired or replaced.

ITEM NO. 3615



Full-Function 9.6V Ni-Cd Radio Control Vehicle

OPERATING INSTRUCTIONS

***IMPORTANT: IF VEHICLE DOES NOT RESPOND PROPERLY, PLEASE REPLACE THE 9.6V NI-CD BATTERY PACK.**

CAUTION: THE MANUFACTURER IS NOT RESPONSIBLE FOR ANY RADIO OR TV INTERFERENCE CAUSED BY UNAUTHORIZED MODIFICATIONS TO THIS EQUIPMENT. SUCH MODIFICATIONS COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.



PLEASE DO NOT RETURN TO STORE

For more information or questions, please call Consumer Services:
1-877-FUN-TOYS
(1-877-386-8697)

Colors and decorations may vary.
Keep content details for future reference.



Manufactured & Distributed by
© 2005 Planet Toys Inc.

NY, NY 10010

All Rights Reserved

MADE IN CHINA

www.planettoysltd.com

092705

CAUTION-ELECTRICALLY OPERATED PRODUCT

NOT RECOMMENDED FOR CHILDREN UNDER 16 YEARS OF AGE. AS WITH ALL ELECTRIC PRODUCTS, PRECAUTIONS SHOULD BE OBSERVED DURING HANDLING AND USE TO PREVENT ELECTRIC SHOCK. INPUT: 120V AC 60Hz 7W, OUTPUT: 12V DC 200mA.

1 TABLE OF CONTENTS

PAGE 1: Table of Contents, MACK® Features.

PAGE 2: MACK® Checklist.

PAGES 3-4: Charging & Installing the 9.6V Ni-Cd Battery Pack.

PAGE 5: Controller Battery

PAGE 6: Power On/Off Switch, Band A,B,C,D & Alignment Control.

PAGE 7: Operating the Vehicle, Proper Use, Precautions & Care.

PAGE 8: Please Note and Troubleshooting.

PAGE 9: Caution, Warning & Attention Parents.

MACK® FEATURES



MACK® Rawhide With Mid Rise Sleeper



Both With Working Headlights and Taillights



MACK® Vision With Hi Rise Sleeper

2 MACK® CHECKLIST

IMPORTANT: THE INCLUDED 9.6V NI-Cd BATTERY PACK IS NOT CHARGED PRIOR TO SHIPMENT AND MUST BE CHARGED BEFORE USE.

To prevent damage, the contents of the package that are listed below have been packed in the tray and may be out of plain sight. Please remove all contents from the tray.

VEHICLE



MACK® Rawhide With Mid Rise Sleeper



MACK® Vision With Hi Rise Sleeper

9.6V NI-Cd BATTERY PACK



CONTROLLER
(1 9V battery included)



TRANSFORMER

9V BATTERY



3

CHARGING THE BATTERY PACK

IMPORTANT: The included 9.6V Ni-Cd Battery is not charged, please charge prior to use.



1. First, plug the Transformer into a Standard 110/120V Household electrical outlet. Then, insert the connecting plug into the opening located on the side of the Charger.

2. Plug the battery wire connector and transformer wire connector together.

3. Charge the battery pack for 5 hours. The battery pack will feel warm. In this condition, the battery is fully charged.

NOTE: Leaving the Battery in the Charger will not increase the life of your battery.


4. After charging and during use, the Battery Pack will become warm.

IMPORTANT: Please allow the Battery Pack to cool prior to recharging. Charging before doing so will greatly reduce the life of the Battery.

INSTALLING THE BATTERY PACK

1. Carefully turn the vehicle on its side and locate the battery compartment found on bottom of the vehicle chassis.

2. Unscrew and remove the battery cover on the vehicle chassis.

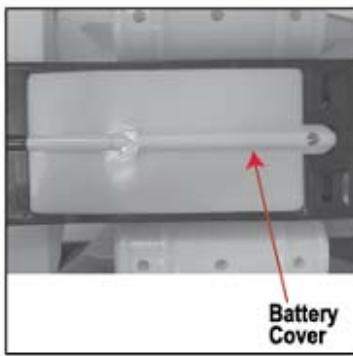

3. Connect the wire plug on the battery to the wire plug on the vehicle.



4. Place the wire plug into the gap in the battery compartment.



5. Insert the 9.6V Ni-Cd battery to the compartment.

6. Replace the battery compartment cover and tighten the screw.