



FCC RADIO TEST REPORT

FCC ID : SZG-G99E5
Equipment : Wireless Device
Model Name : G99E5
Applicant : Weifang Goertek Electronics Co., Ltd
Gaoxin 2 Road, Free Trade Zone,
Weifang, Shandong, 261205, P.R.China
Standard : FCC Part 15 Subpart C §15.247

The product was received on May 23, 2025 and testing was performed from May 26, 2025 to Jun. 12, 2025. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory
No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 Test Result	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	14
3.5 Radiated Band Edges and Spurious Emission Measurement	15
3.6 AC Conducted Emission Measurement.....	20
3.7 Antenna Requirements.....	22
4 List of Measuring Equipment.....	23
5 Measurement Uncertainty	25
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Result	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR550853C	01	Initial issue of report	Jun. 25, 2025
FR550853C	02	Revise List of Measuring Equipment This report is an updated version, replacing the report issued on Jun. 25, 2025.	Jul. 10, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.247(b)	Power Output Measurement	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges	Pass	-
		Conducted Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	-
3.6	15.207	AC Conducted Emission	Pass	-
3.7	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Avis Chuang

Report Producer: Freda Wu



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature
General Specs Bluetooth, BLE, Thread and Wi-Fi 802.11ax.
Antenna Type WLAN: PCB Antenna

EUT Information List	
S/N	Performed Test Item
1Y7G6501600802M154JS0801	RF Conducted Measurement
5421FATPSN0381	Radiated Spurious Emission
5421FATPSN0415	Conducted Emission

Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	0.7

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.



1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333 TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY CO07-HY, 03CH20-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

2.2 Test Mode

This device support 26/52/106/242/484-tone RU.

The PSD of partial RU is reduced to be smaller than full RU according to TCB workshop interim guidance Oct. 2022.

The 802.11ax mode is investigated among different tones, full resource units (RU), partial resource units. The partial RU has no higher power than full RU's, thus the full RU is chosen as main test configuration.

The 242-tone RU is covered by 20MHz channel, 484-tone RU is covered by 40MHz channel.


The final test modes include the worst data rates for each modulation shown in the table below.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0


Test Cases	
AC Conducted Emission	Mode 1 :WLAN (2.4GHz) 802.11b Channel 06 Tx + AC Adapter
Remark: - The detailed Radiated test modes are shown in Appendix C. - For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.	

2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

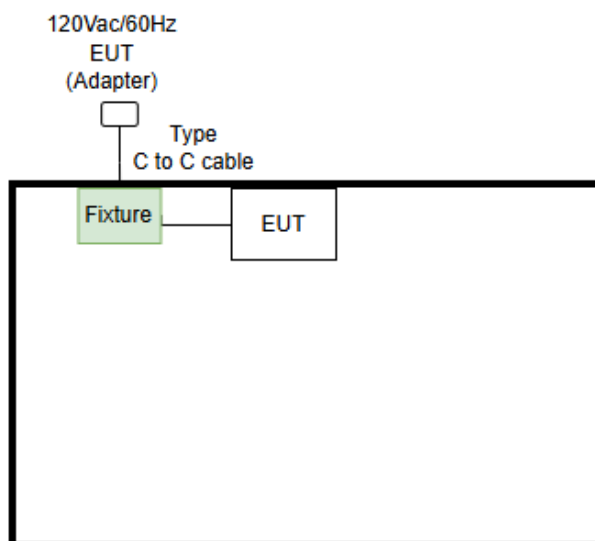

<WLAN Tx Mode>

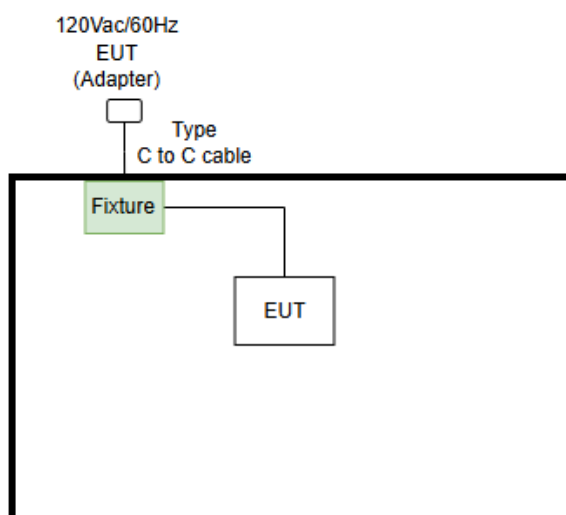

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	DELL	N/A	N/A	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
2.	Type C to C cable	Cable Tech	G021A, GV4U8	N/A	N/A	Shielded, 1.0m
3.	Fixture	Goertek	DG01	N/A	N/A	N/A



2.5 EUT Operation Test Setup

The RF test items, utility “ADB v1.0.40” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup

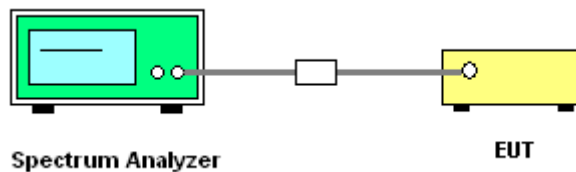

3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna with directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

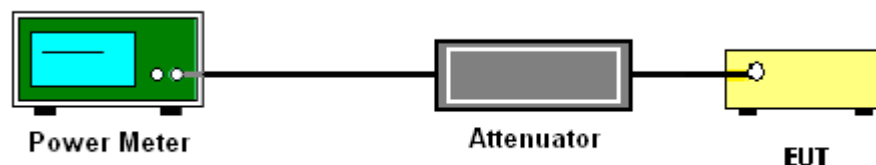

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

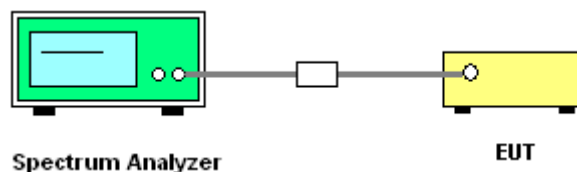

3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Please refer to Appendix A.

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.

7. Method AVGSA-2

Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction:

If continuous transmission of the EUT ($D \geq 98\%$) cannot be achieved and the duty cycle is constant (duty cycle variations are less than $\pm 2\%$), then the following procedure shall be used:


- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle D of the transmitter output signal as described in 11.6.
- c) RBW = 1 MHz (unless otherwise specified).
- d) VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = RMS (power averaging), if $\text{span} / (\# \text{ of points in sweep}) \leq (\text{RBW} / 2)$.
Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., rms):
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
- i) A correction factor shall be added to the measurement results prior to comparing with the emission limit to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (rms) mode was used in step f), then the applicable correction factor is $[10 \log (1 / D)]$, where D is the duty cycle.

Reduction of the measured emission amplitude levels to account for operational duty cycle is not permitted. Determining compliance is based on emission levels occurring during transmission; it is not based on an average across ON and OFF times of the transmitter.


8. Use the following spectrum analyzer settings:
- (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3 MHz for $f \geq 1$ GHz for peak measurement.
- For average measurement:
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

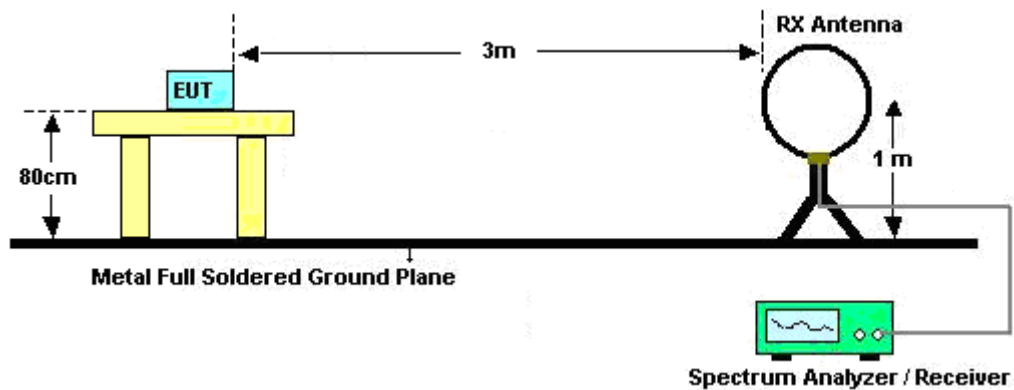


For radiated emissions from 30MHz to 1GHz

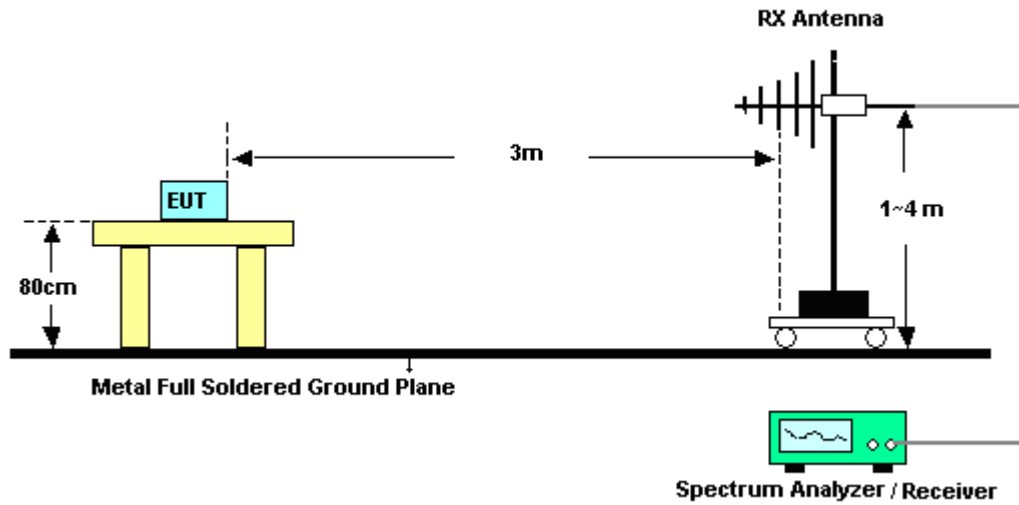

For radiated test from 1GHz to 18GHz

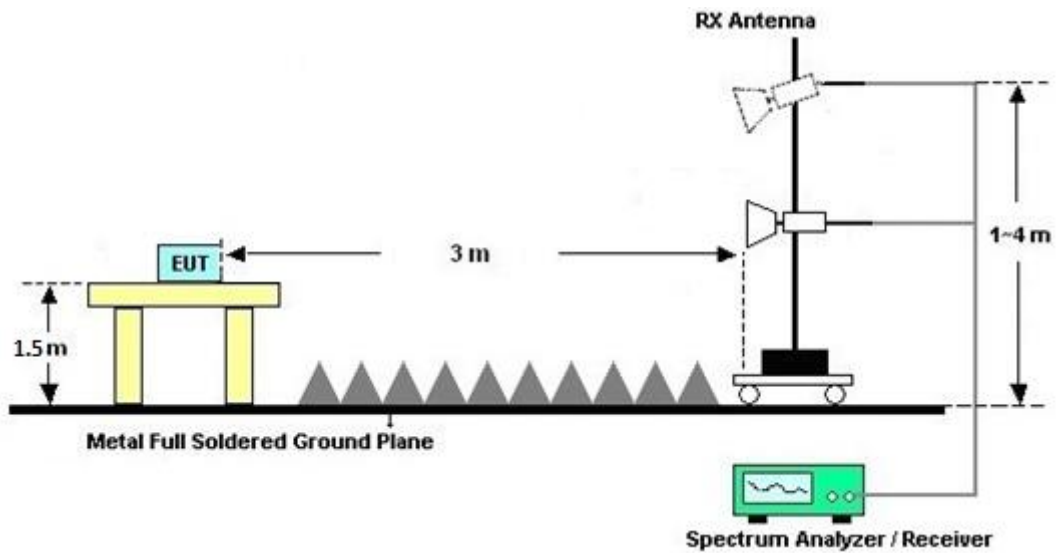

For radiated test above 18GHz

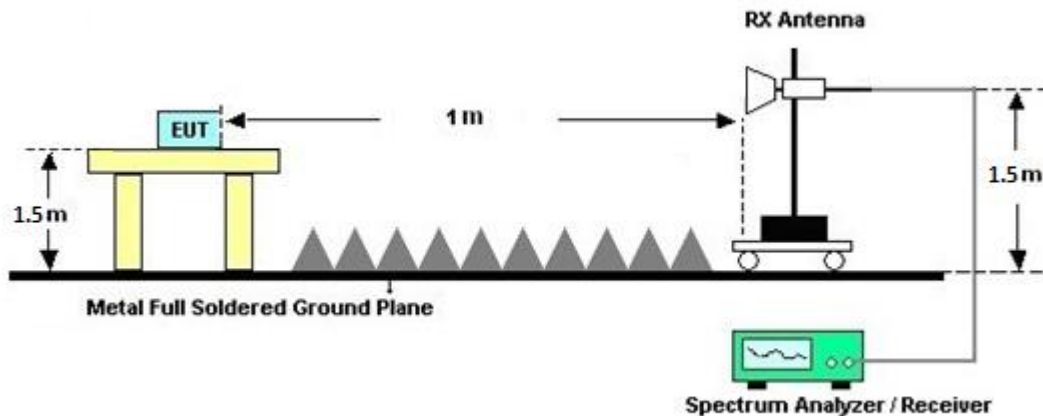

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

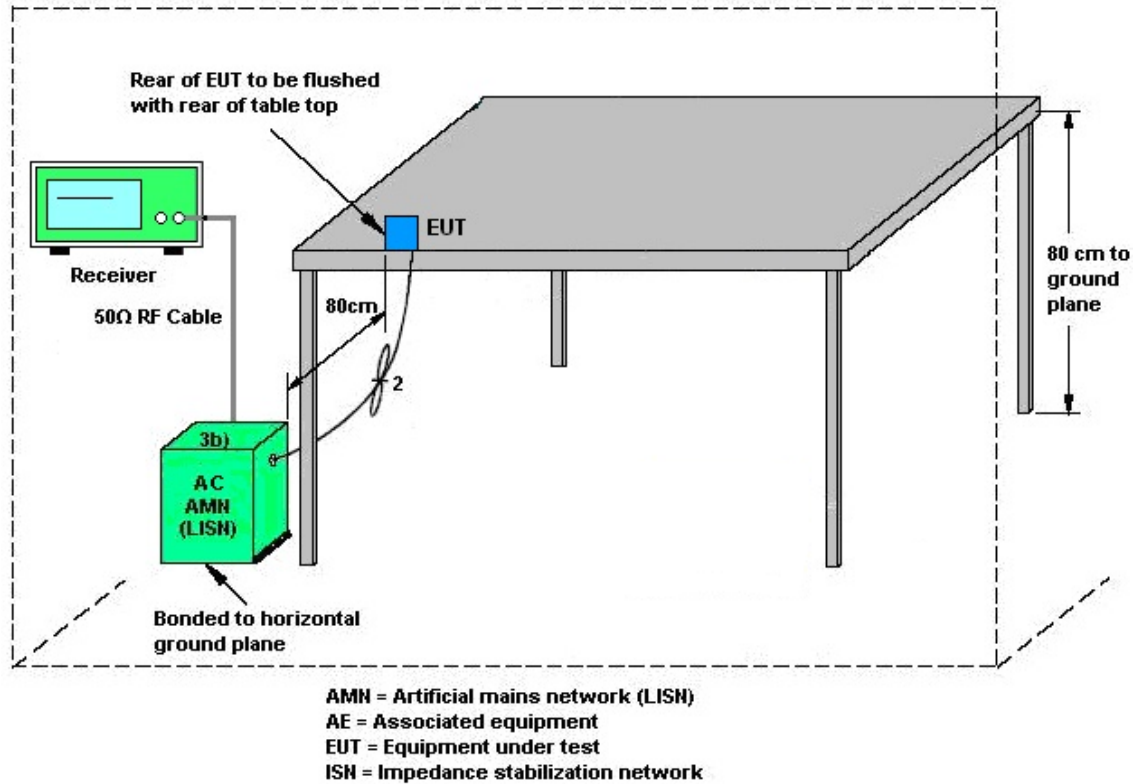

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.7.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A(MXE)	MY54130085	N/A	Oct. 16, 2024	May 26, 2025~ Jun. 11, 2025	Oct. 15, 2025	Radiation (03CH20-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Aug. 29, 2024	May 26, 2025~ Jun. 11, 2025	Aug. 28, 2025	Radiation (03CH20-HY)
Preamplifier	EMEC	EM18G40G	060871	18GHz~40GHz	Aug. 23, 2024	May 26, 2025~ Jun. 11, 2025	Aug. 22, 2025	Radiation (03CH20-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	May 26, 2025~ Jun. 11, 2025	N/A	Radiation (03CH20-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	May 26, 2025~ Jun. 11, 2025	N/A	Radiation (03CH20-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	May 26, 2025~ Jun. 11, 2025	N/A	Radiation (03CH20-HY)
Signal Analyzer	Keysight	N9010B	MY60240520	N/A	Dec. 09, 2024	May 26, 2025~ Jun. 11, 2025	Dec. 08, 2025	Radiation (03CH20-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	55606 & 08	30MHz~1GHz	Nov. 27, 2024	May 26, 2025~ Jun. 11, 2025	Nov. 26, 2025	Radiation (03CH20-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	02360	1GHz-18GHz	Nov. 01, 2024	May 26, 2025~ Jun. 11, 2025	Oct. 31, 2025	Radiation (03CH20-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	1223	18GHz-40GHz	Jun. 24, 2024	May 26, 2025~ Jun. 11, 2025	Jun. 23, 2025	Radiation (03CH20-HY)
Preamplifier	COM-POWER	PAM-103	18020201	1MHz-1000MH z	Dec. 31, 2024	May 26, 2025~ Jun. 11, 2025	Dec. 30, 2025	Radiation (03CH20-HY)
Amplifier	EMCI	EMC118A45S E	980792	N/A	Nov. 12, 2024	May 26, 2025~ Jun. 11, 2025	Nov. 11, 2025	Radiation (03CH20-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	519229/2,80 4015/2,8040 27/2	N/A	Jan. 16, 2025	May 26, 2025~ Jun. 11, 2025	Jan. 15, 2026	Radiation (03CH20-HY)
Hygrometer	TECEPEL	DTM-303A	TP211382	N/A	Mar. 31, 2025	May 26, 2025~ Jun. 11, 2025	Mar. 30, 2026	Radiation (03CH20-HY)
Software	Audix	N/A	RK-002156	N/A	N/A	May 26, 2025~ Jun. 11, 2025	N/A	Radiation (03CH20-HY)
Attenuator	Woken	WATT-218FS- 10	N/A	10dB	Sep. 25, 2024	May 26, 2025~ Jun. 11, 2025	Sep. 24, 2025	Radiation (03CH20-HY)
Notch Filter	Wainwright	WHKX12-270 0-3000-18000- 60ST	SN8	3GHz High Pass Filter	Mar. 22, 2025	May 26, 2025~ Jun. 11, 2025	Mar. 21, 2026	Radiation (03CH20-HY)
Notch Filter	Wainwright	WLK4-1000-1 530-8000-40S S	SN27	1.53GHz Low Pass Filter	May 21, 2025	May 26, 2025~ Jun. 11, 2025	May 20, 2026	Radiation (03CH20-HY)

**FCC RADIO TEST REPORT****Report No. : FR550853C**

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECEPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	May 26, 2025~ Jun. 05, 2025	Oct. 31, 2025	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	13I00030SNO 31 (NO:182)	9kHz~6GHz	Jan. 09, 2025	May 26, 2025~ Jun. 05, 2025	Jan. 08, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 23, 2024	May 26, 2025~ Jun. 05, 2025	Aug. 22, 2025	Conducted (TH05-HY)
Switch Control Mainframe	E-Instument	ETF-1405-0	EC1900157 (BOX6)	N/A	Feb. 10, 2025	May 26, 2025~ Jun. 05, 2025	Feb. 09, 2026	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_ version_24051 3	N/A	Conducted Other Test Item	N/A	May 26, 2025~ Jun. 05, 2025	N/A	Conducted (TH05-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Jun. 12, 2025	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Jun. 12, 2025	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Oct. 23, 2024	Jun. 12, 2025	Oct. 22, 2025	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 3, 2025	Jun. 12, 2025	Mar. 2, 2026	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 24, 2025	Jun. 12, 2025	Mar. 23, 2026	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 23, 2024	Jun. 12, 2025	Sep. 22, 2025	Conduction (CO07-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.4 dB
---	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.6 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.7 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Benny Ku/Junyu Jhou	Temperature:	21~25	°C
Test Date:	2025/5/26~2025/6/5	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band Single Antenna										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
					Ant1	Ant2	Ant1	Ant2		
11b	1Mbps	1	1	2412	-	13.48	-	10.06	0.50	Pass
11b	1Mbps	1	6	2437	-	13.44	-	10.07	0.50	Pass
11b	1Mbps	1	11	2462	-	13.46	-	10.06	0.50	Pass
11g	6Mbps	1	1	2412	-	16.84	-	16.34	0.50	Pass
11g	6Mbps	1	6	2437	-	16.92	-	16.33	0.50	Pass
11g	6Mbps	1	11	2462	-	16.85	-	16.33	0.50	Pass
HT20	MCS0	1	1	2412	-	17.77	-	17.31	0.50	Pass
HT20	MCS0	1	6	2437	-	17.79	-	17.31	0.50	Pass
HT20	MCS0	1	11	2462	-	17.79	-	17.07	0.50	Pass
HT40	MCS0	1	3	2422	-	36.82	-	35.48	0.50	Pass
HT40	MCS0	1	6	2437	-	36.90	-	35.79	0.50	Pass
HT40	MCS0	1	9	2452	-	36.95	-	35.66	0.50	Pass

TEST RESULTS DATA
Average Output Power

2.4GHz Band Single Antenna																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	1	1	2412	-	19.00		-	30.00	-	0.70	-	19.70	-	36.00	Pass
11b	1Mbps	1	6	2437	-	19.00		-	30.00	-	0.70	-	19.70	-	36.00	Pass
11b	1Mbps	1	11	2462	-	18.70		-	30.00	-	0.70	-	19.40	-	36.00	Pass
11g	6Mbps	1	1	2412	-	17.00		-	30.00	-	0.70	-	17.70	-	36.00	Pass
11g	6Mbps	1	6	2437	-	17.20		-	30.00	-	0.70	-	17.90	-	36.00	Pass
11g	6Mbps	1	11	2462	-	16.80		-	30.00	-	0.70	-	17.50	-	36.00	Pass
HT20	MCS0	1	1	2412	-	17.00		-	30.00	-	0.70	-	17.70	-	36.00	Pass
HT20	MCS0	1	6	2437	-	17.20		-	30.00	-	0.70	-	17.90	-	36.00	Pass
HT20	MCS0	1	11	2462	-	16.90		-	30.00	-	0.70	-	17.60	-	36.00	Pass
HT40	MCS0	1	3	2422	-	16.30		-	30.00	-	0.70	-	17.00	-	36.00	Pass
HT40	MCS0	1	6	2437	-	16.80		-	30.00	-	0.70	-	17.50	-	36.00	Pass
HT40	MCS0	1	9	2452	-	16.30		-	30.00	-	0.70	-	17.00	-	36.00	Pass

TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band Single Antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
					Ant1	Ant2	Worse + 3.01	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	1	1	2412	-	0.50		-	0.70	-	8.00	Pass
11b	1Mbps	1	6	2437	-	-1.06		-	0.70	-	8.00	Pass
11b	1Mbps	1	11	2462	-	-0.35		-	0.70	-	8.00	Pass
11g	6Mbps	1	1	2412	-	-7.94		-	0.70	-	8.00	Pass
11g	6Mbps	1	6	2437	-	-7.29		-	0.70	-	8.00	Pass
11g	6Mbps	1	11	2462	-	-8.27		-	0.70	-	8.00	Pass
HT20	MCS0	1	1	2412	-	-9.13		-	0.70	-	8.00	Pass
HT20	MCS0	1	6	2437	-	-8.29		-	0.70	-	8.00	Pass
HT20	MCS0	1	11	2462	-	-7.83		-	0.70	-	8.00	Pass
HT40	MCS0	1	3	2422	-	-11.24		-	0.70	-	8.00	Pass
HT40	MCS0	1	6	2437	-	-10.69		-	0.70	-	8.00	Pass
HT40	MCS0	1	9	2452	-	-12.05		-	0.70	-	8.00	Pass

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band Single Antenna											
Mod.	Data Rate	N _{Tx}	CH.	Freq. (MHz)	RU Config	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
						Ant1	Ant2	Ant1	Ant2		
HE20	MCS0	1	1	2412	Full	-	18.80	-	18.49	0.50	Pass
HE20	MCS0	1	6	2437	Full	-	18.81	-	18.44	0.50	Pass
HE20	MCS0	1	11	2462	Full	-	18.80	-	18.41	0.50	Pass
HE40	MCS0	1	3	2422	Full	-	37.78	-	36.84	0.50	Pass
HE40	MCS0	1	6	2437	Full	-	37.75	-	36.42	0.50	Pass
HE40	MCS0	1	9	2452	Full	-	37.81	-	36.18	0.50	Pass

TEST RESULTS DATA
Average Output Power


2.4GHz Band Single Antenna																	
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
HE20	MCS0	1	1	2412	Full	-	16.50		-	30.00	-	0.70	-	17.20	-	36.00	Pass
HE20	MCS0	1	1	2412	26/0	-	8.00		-	30.00	-	0.70	-	8.70	-	36.00	Pass
HE20	MCS0	1	1	2412	52/37	-	11.10		-	30.00	-	0.70	-	11.80	-	36.00	Pass
HE20	MCS0	1	1	2412	106/53	-	13.70		-	30.00	-	0.70	-	14.40	-	36.00	Pass
HE20	MCS0	1	6	2437	Full	-	16.50		-	30.00	-	0.70	-	17.20	-	36.00	Pass
HE20	MCS0	1	6	2437	26/4	-	8.60		-	30.00	-	0.70	-	9.30	-	36.00	Pass
HE20	MCS0	1	6	2437	52/38	-	10.10		-	30.00	-	0.70	-	10.80	-	36.00	Pass
HE20	MCS0	1	6	2437	106/53	-	13.00		-	30.00	-	0.70	-	13.70	-	36.00	Pass
HE20	MCS0	1	11	2462	Full	-	16.30		-	30.00	-	0.70	-	17.00	-	36.00	Pass
HE20	MCS0	1	11	2462	26/8	-	8.00		-	30.00	-	0.70	-	8.70	-	36.00	Pass
HE20	MCS0	1	11	2462	52/40	-	10.70		-	30.00	-	0.70	-	11.40	-	36.00	Pass
HE20	MCS0	1	11	2462	106/54	-	13.70		-	30.00	-	0.70	-	14.40	-	36.00	Pass
HE40	MCS0	1	3	2422	Full	-	15.50		-	30.00	-	0.70	-	16.20	-	36.00	Pass
HE40	MCS0	1	6	2437	Full	-	15.50		-	30.00	-	0.70	-	16.20	-	36.00	Pass
HE40	MCS0	1	9	2452	Full	-	15.50		-	30.00	-	0.70	-	16.20	-	36.00	Pass

TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band Single Antenna													
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
						Ant1	Ant2	Worse + 3.01	Ant1	Ant2	Ant1	Ant2	
HE20	MCS0	1	1	2412	Full	-	-9.45		-	0.70	-	8.00	Pass
HE20	MCS0	1	1	2412	26/0	-	-9.94		-	0.70	-	8.00	Pass
HE20	MCS0	1	1	2412	52/37	-	-9.85		-	0.70	-	8.00	Pass
HE20	MCS0	1	1	2412	106/53	-	-9.84		-	0.70	-	8.00	Pass
HE20	MCS0	1	6	2437	Full	-	-10.17		-	0.70	-	8.00	Pass
HE20	MCS0	1	6	2437	26/4	-	-10.30		-	0.70	-	8.00	Pass
HE20	MCS0	1	6	2437	52/38	-	-10.31		-	0.70	-	8.00	Pass
HE20	MCS0	1	6	2437	106/53	-	-10.27		-	0.70	-	8.00	Pass
HE20	MCS0	1	11	2462	Full	-	-9.46		-	0.70	-	8.00	Pass
HE20	MCS0	1	11	2462	26/8	-	-9.73		-	0.70	-	8.00	Pass
HE20	MCS0	1	11	2462	52/40	-	-9.61		-	0.70	-	8.00	Pass
HE20	MCS0	1	11	2462	106/54	-	-9.63		-	0.70	-	8.00	Pass
HE40	MCS0	1	3	2422	Full	-	-13.02		-	0.70	-	8.00	Pass
HE40	MCS0	1	6	2437	Full	-	-12.65		-	0.70	-	8.00	Pass
HE40	MCS0	1	9	2452	Full	-	-13.89		-	0.70	-	8.00	Pass

**6dB and 99% Occupied Bandwidth**


<802.11b>

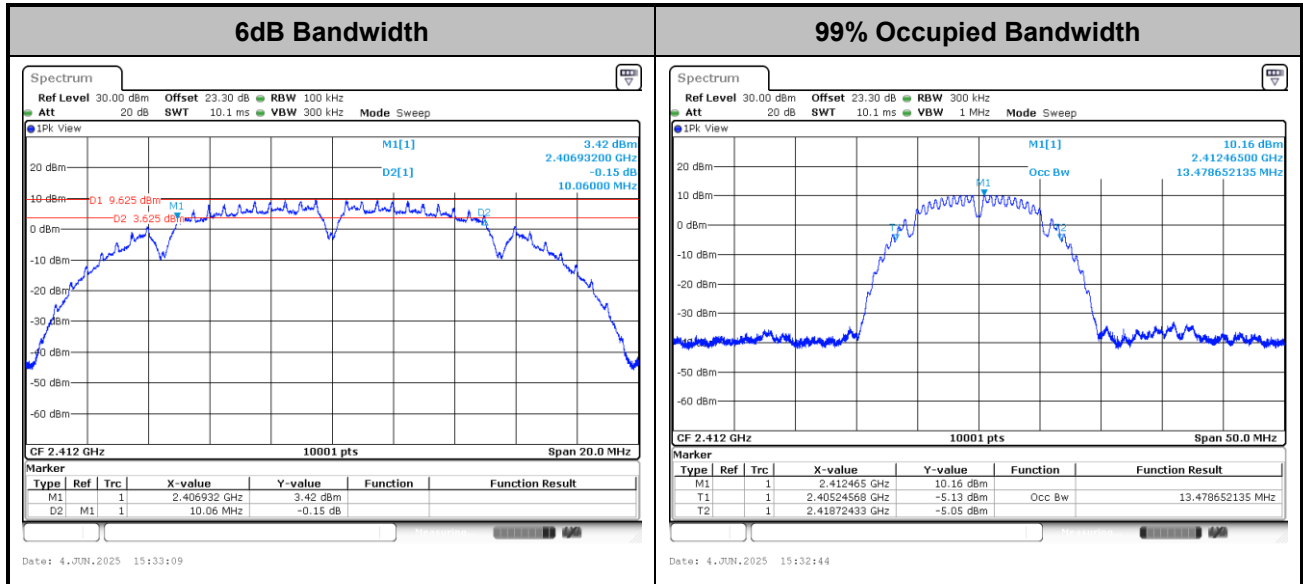

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11g>

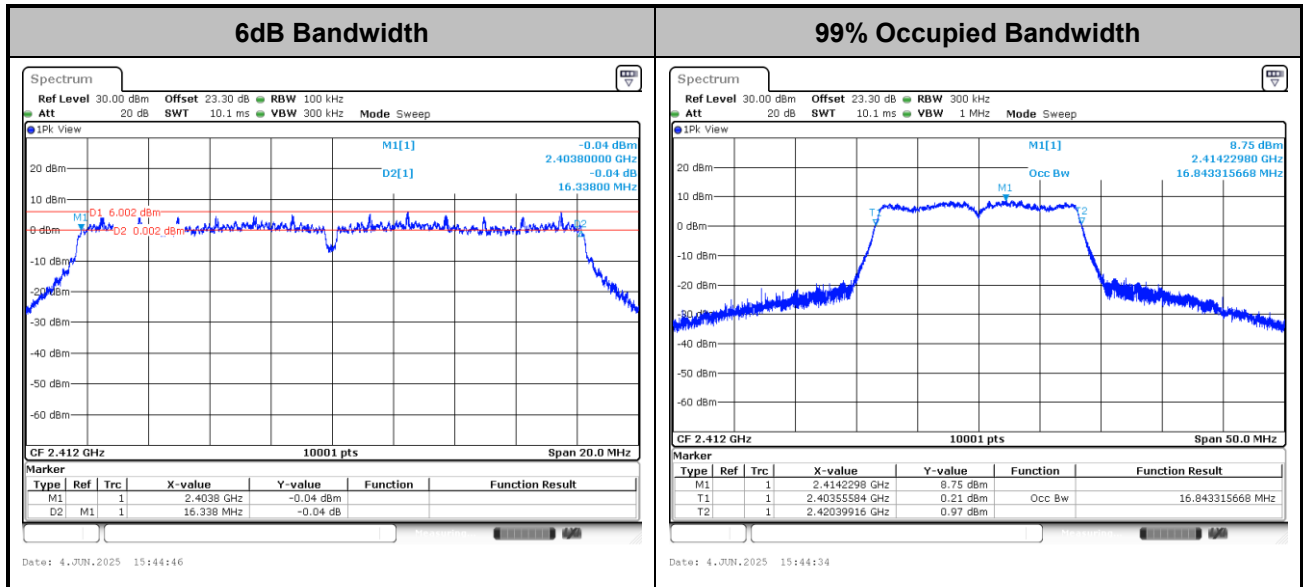

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11gN20>

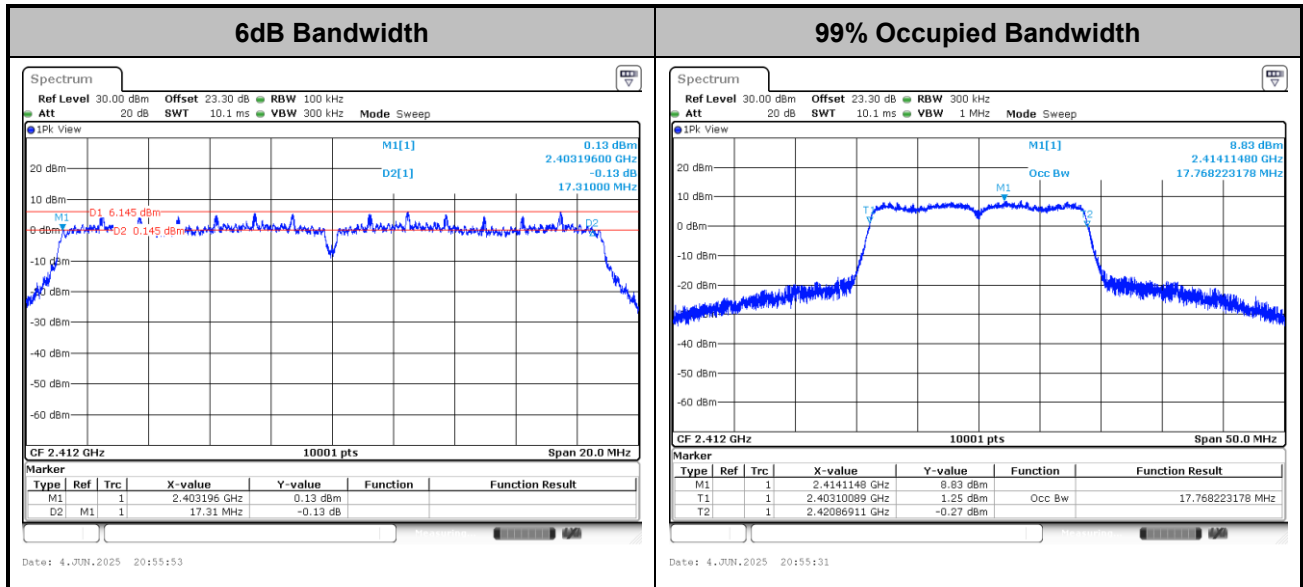

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11gN40>

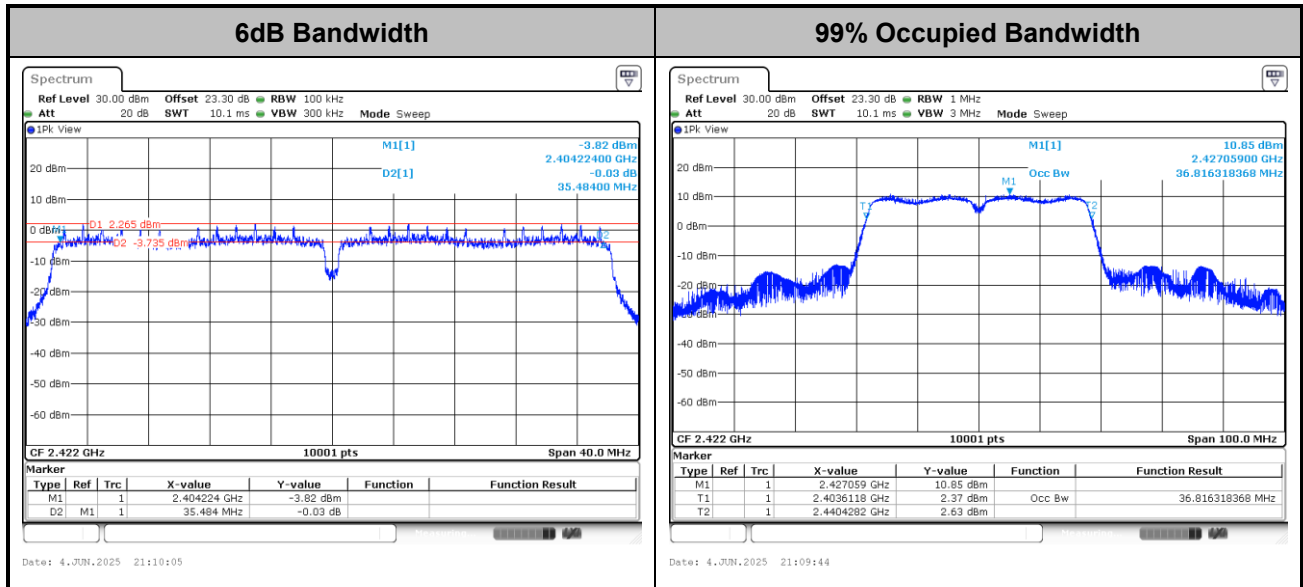

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11ax20>

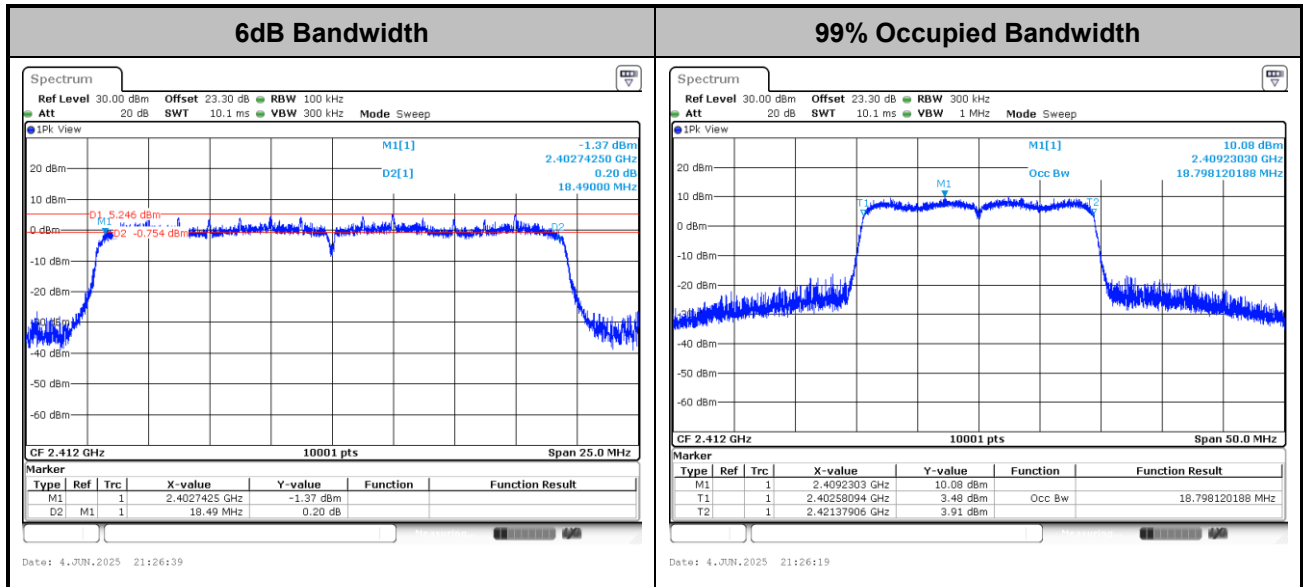

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



<802.11ax40>

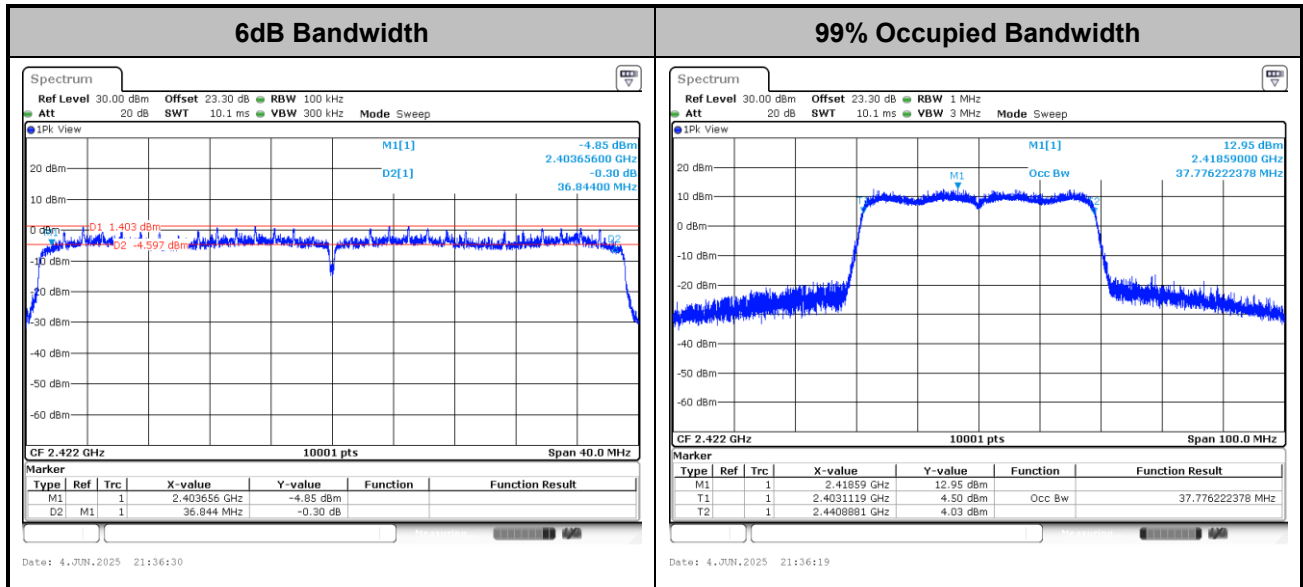


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




Power Spectral Density(dBm/3kHz)

<802.11b>

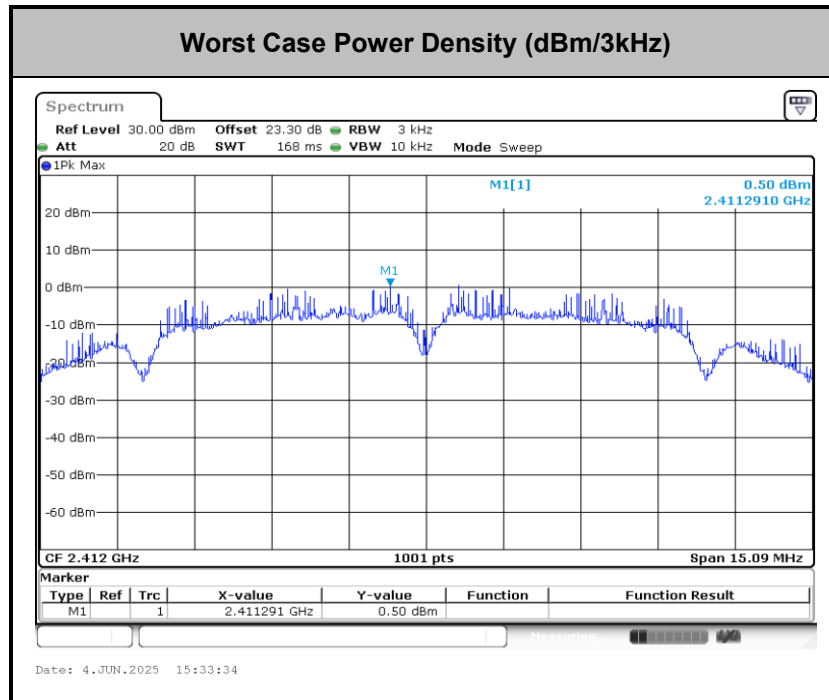




<802.11g>

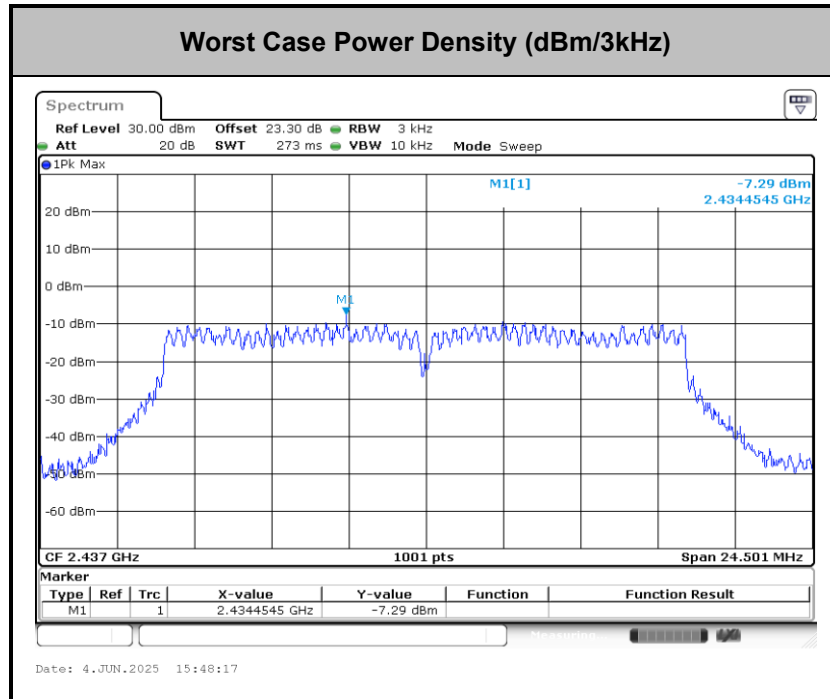




<802.11gN20>

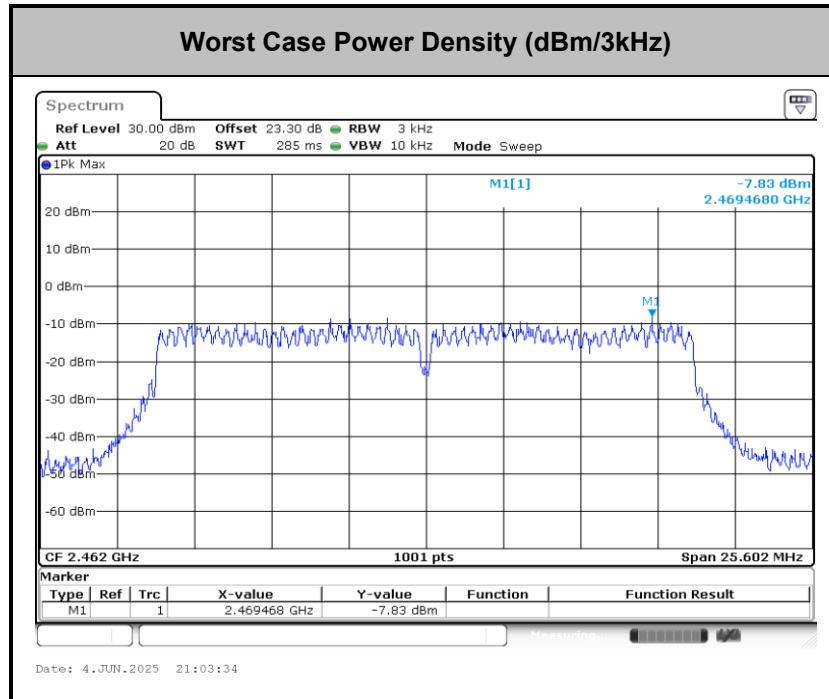




<802.11gN40>

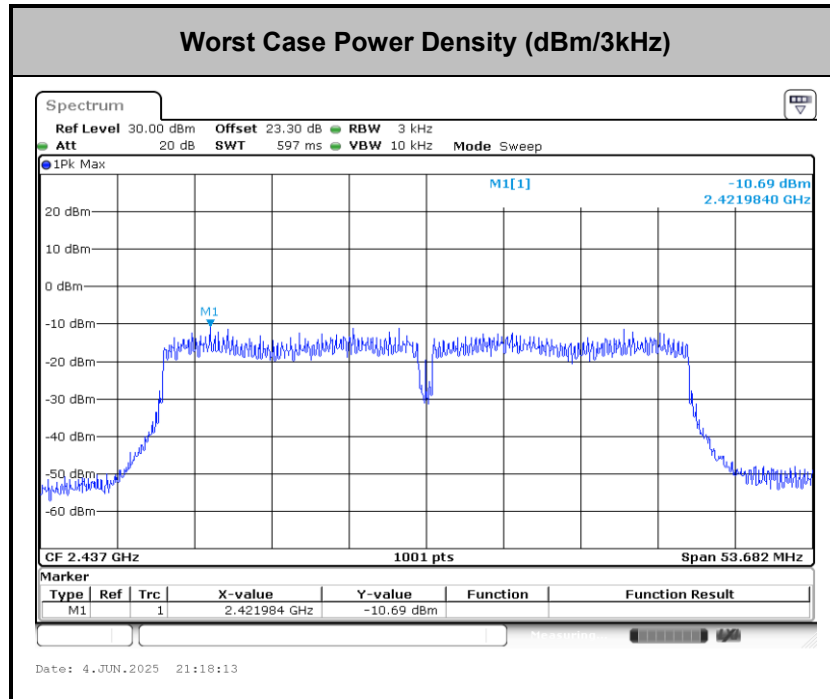




<802.11ax20>

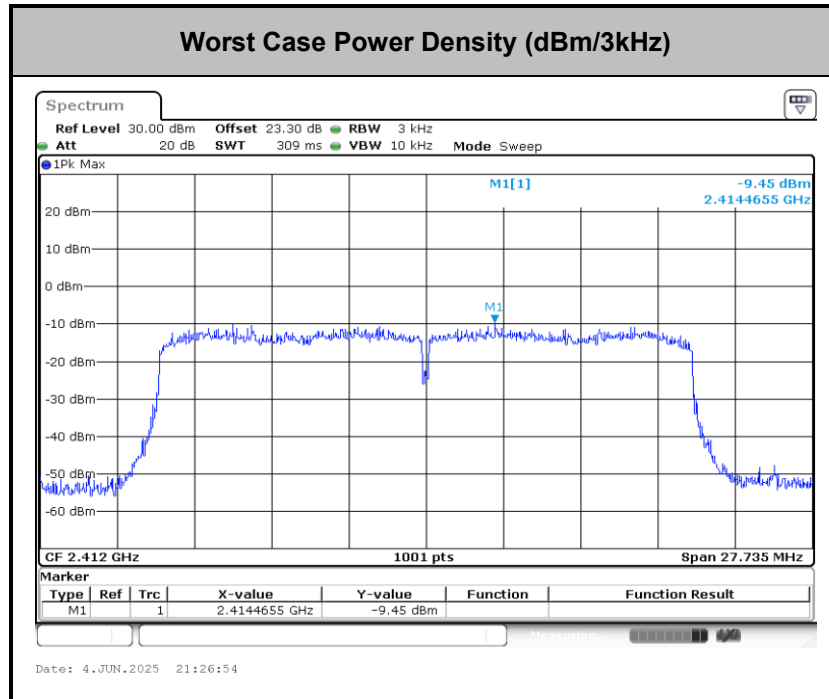



<802.11ax40>




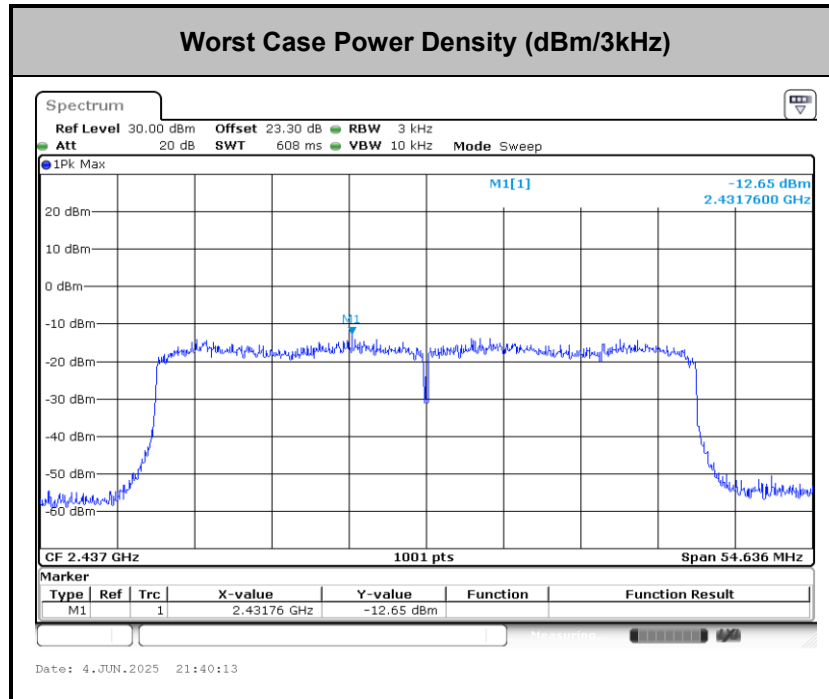


**Band Edges and Spurious Emission**

Number of TX = 1, Ant. 2 (Measured)

Test Mode : 802.11b

Test Channel : 01

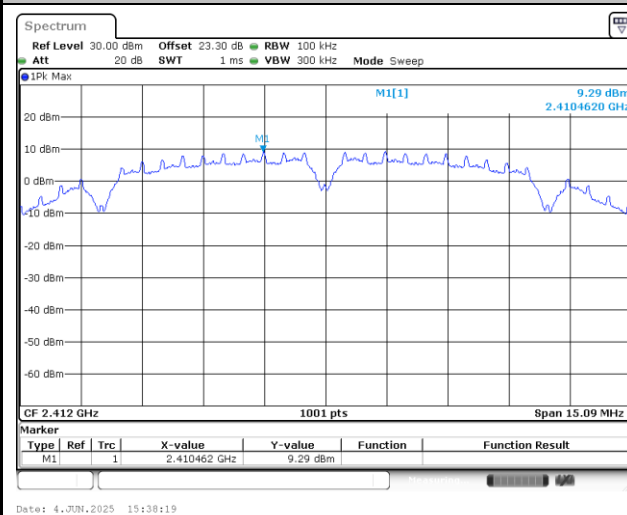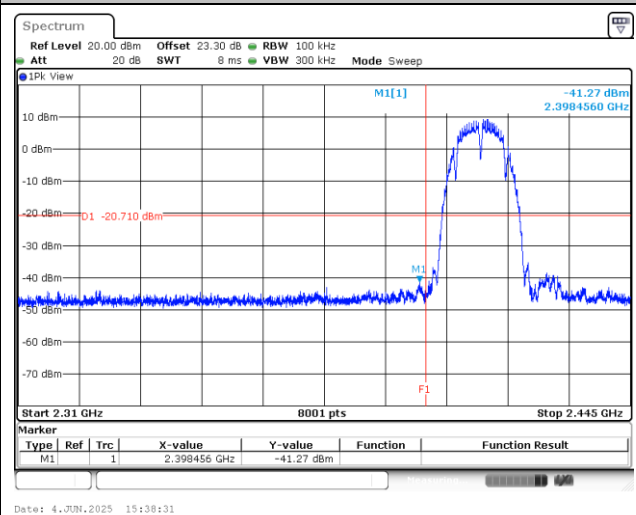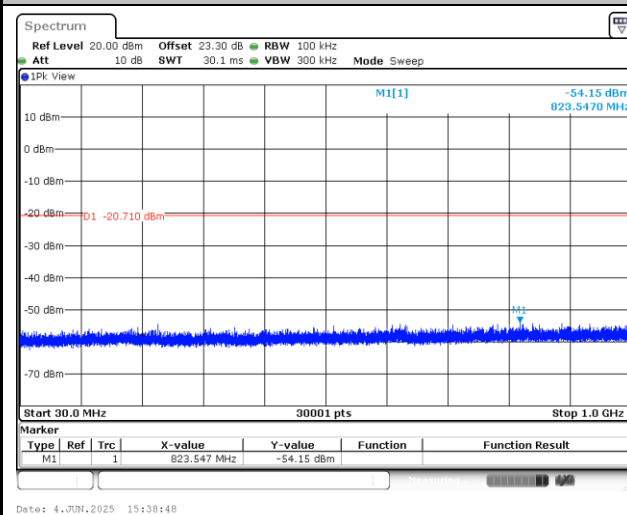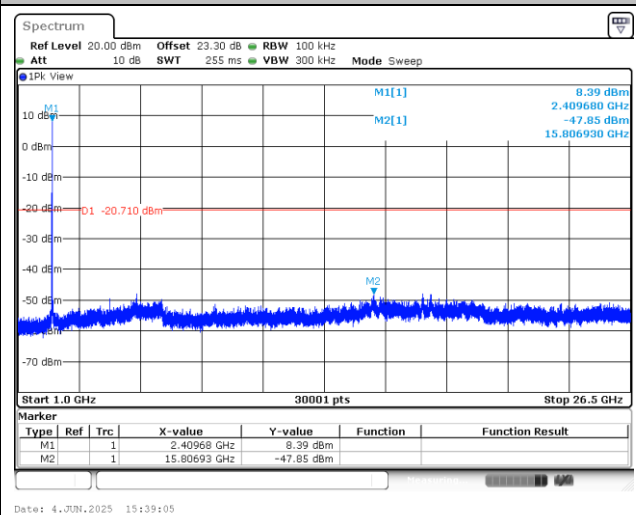
100kHz PSD reference Level**Channel 01 Plot****Spurious Emission 30MHz~1GHz****Spurious Emission 1GHz~26.5GHz**



Test Mode : 802.11b


Test Channel : 06

100kHz PSD reference Level

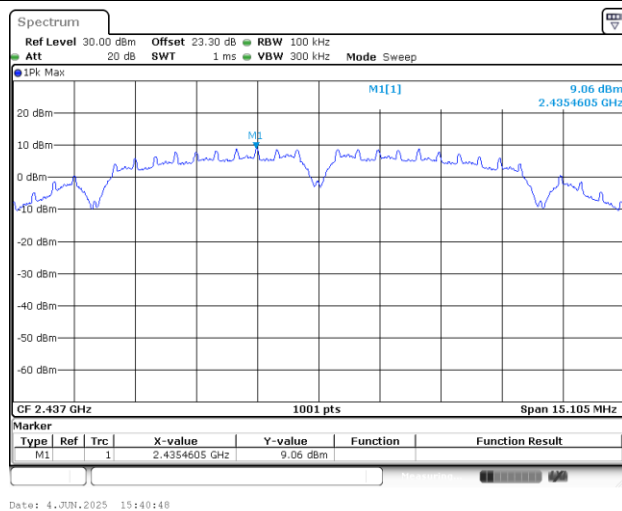


Channel 06 Plot

Spurious Emission 30MHz~1GHz

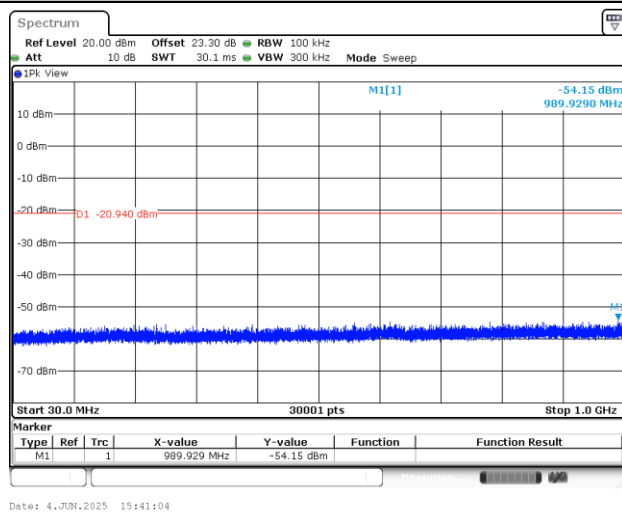

Spurious Emission 1GHz~26.5GHz

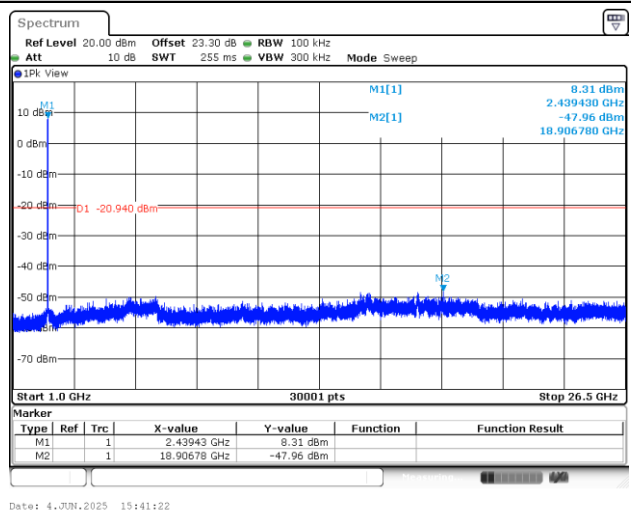





Test Mode : 802.11b

Test Channel : 11


100kHz PSD reference Level

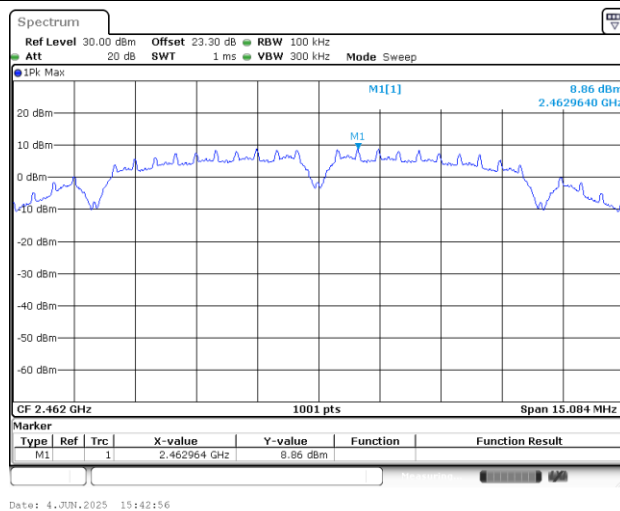


Channel 11 Plot

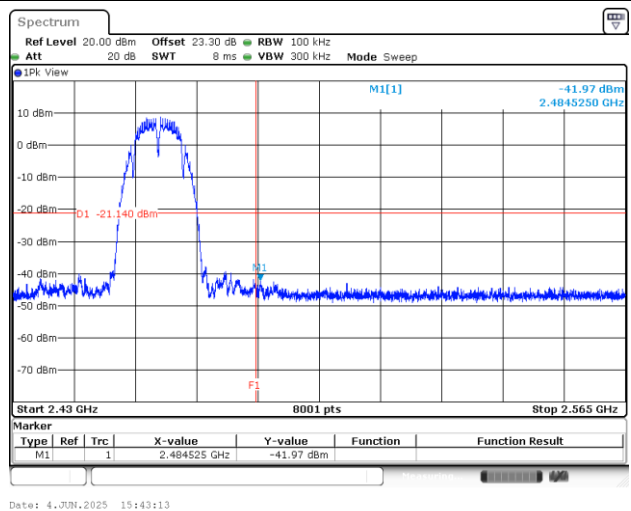

Spurious Emission 30MHz~1GHz

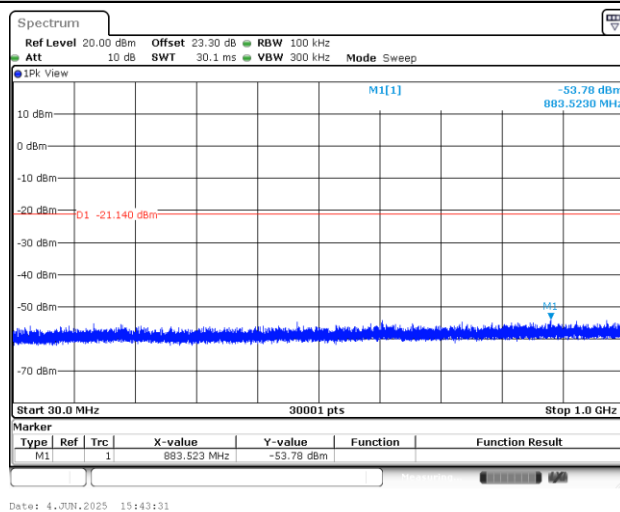

Spurious Emission 1GHz~26.5GHz

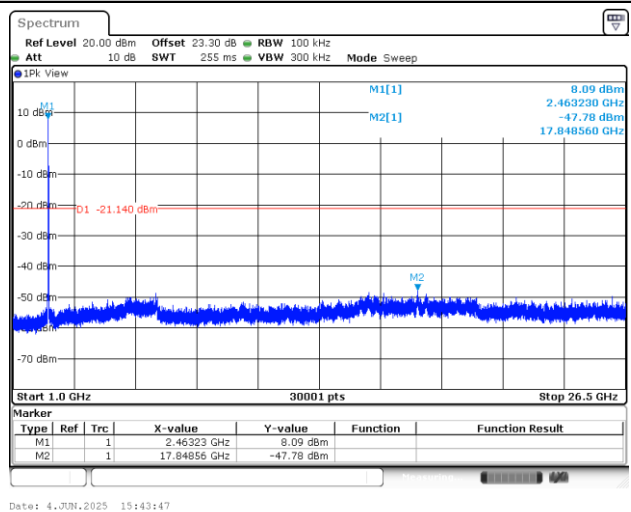





Test Mode : 802.11g

Test Channel : 01


100kHz PSD reference Level

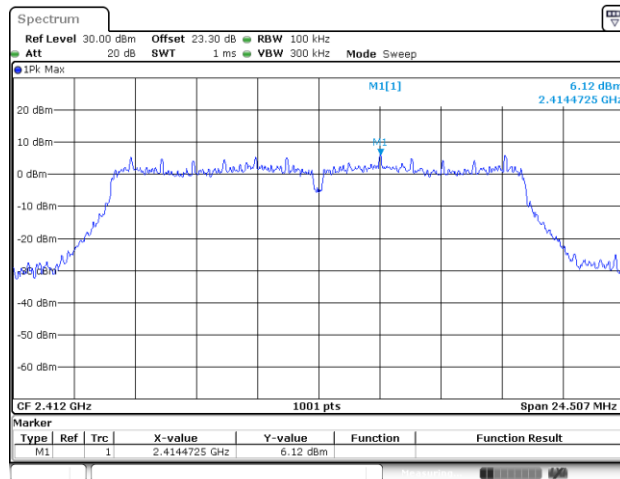


Channel 01 Plot

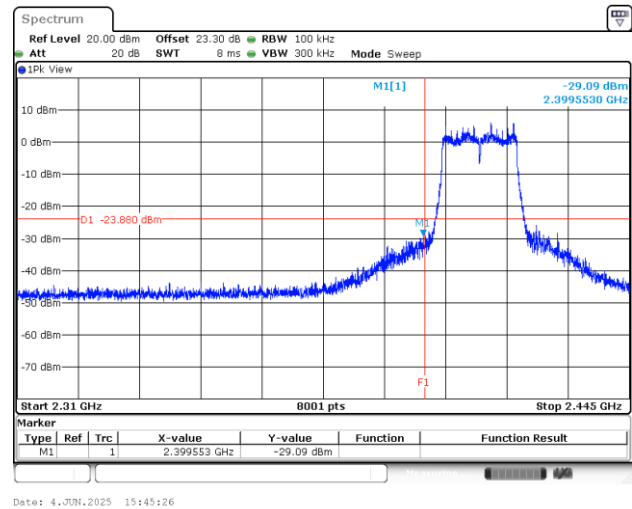

Spurious Emission 30MHz~1GHz

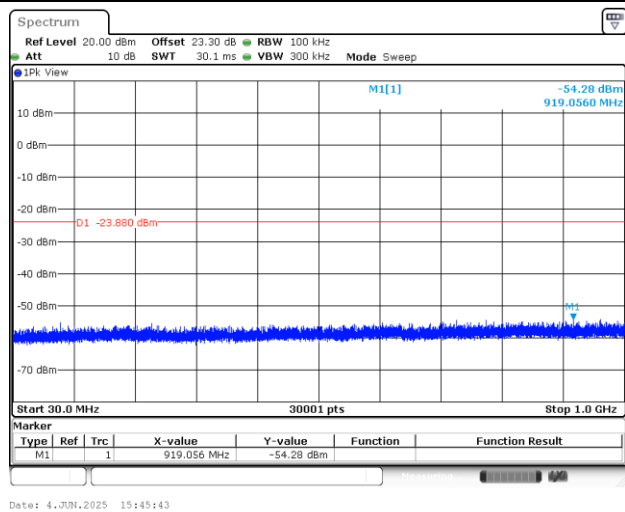

Spurious Emission 1GHz~26.5GHz

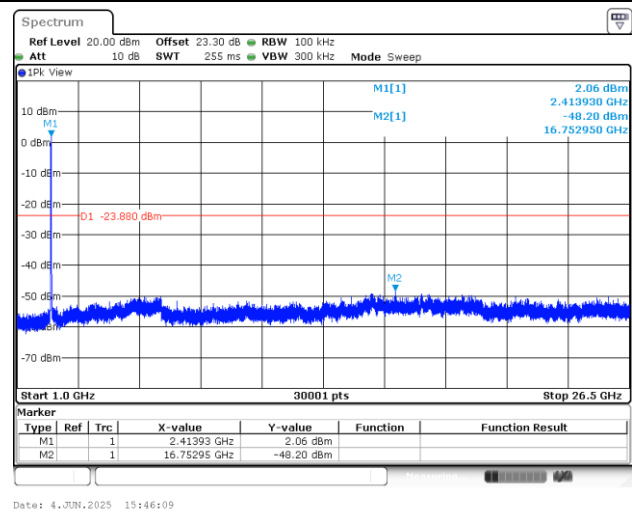




Test Mode : 802.11g


Test Channel : 06

100kHz PSD reference Level

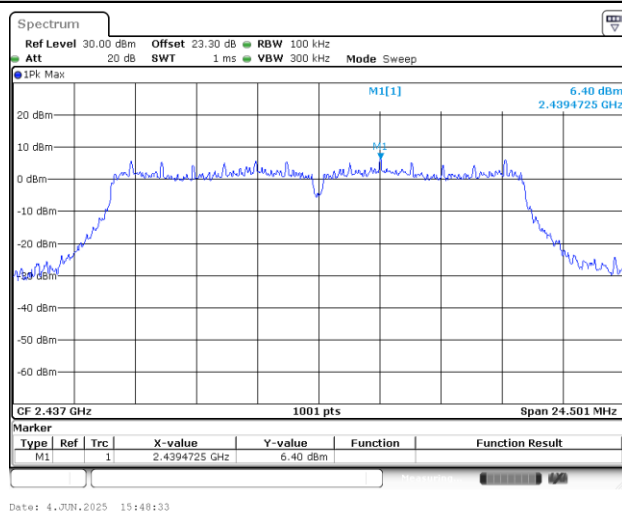


Channel 06 Plot

Spurious Emission 30MHz~1GHz

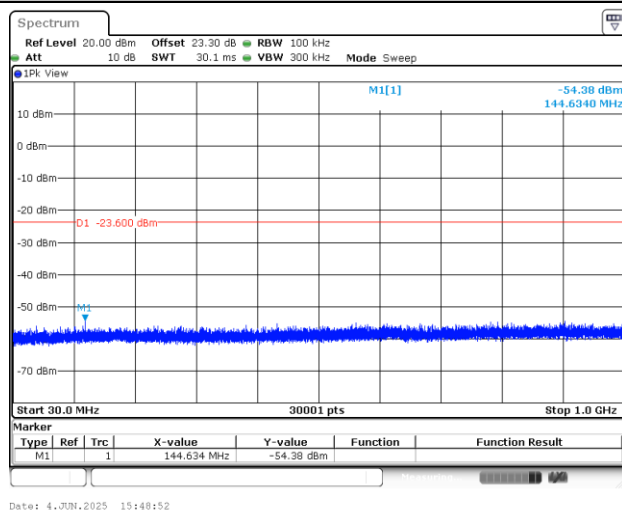

Spurious Emission 1GHz~26.5GHz

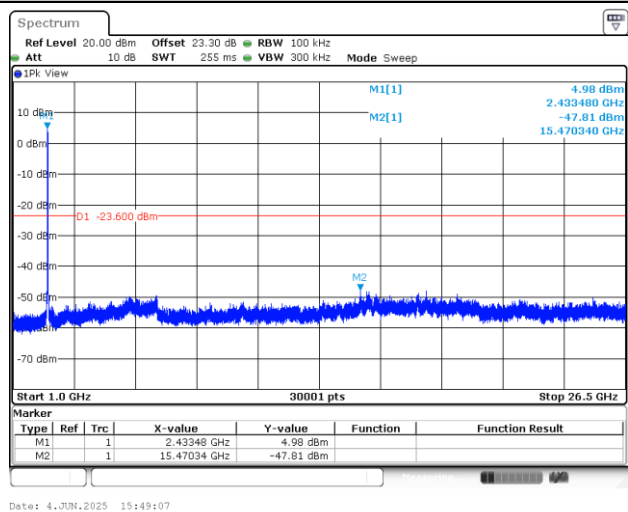





Test Mode : 802.11g

Test Channel : 11


100kHz PSD reference Level

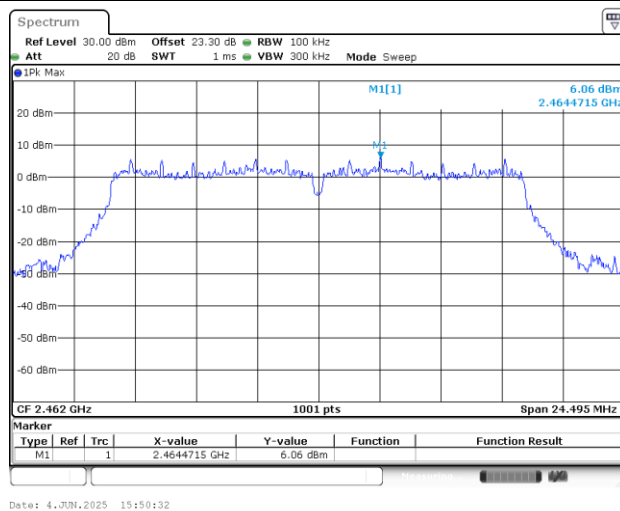


Channel 11 Plot

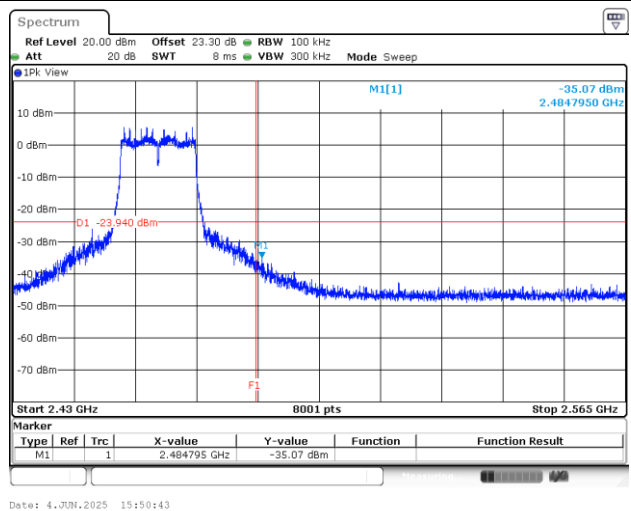

Spurious Emission 30MHz~1GHz

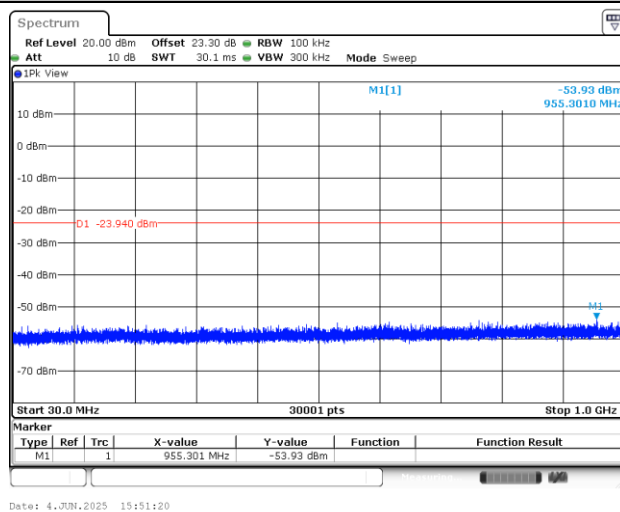

Spurious Emission 1GHz~26.5GHz

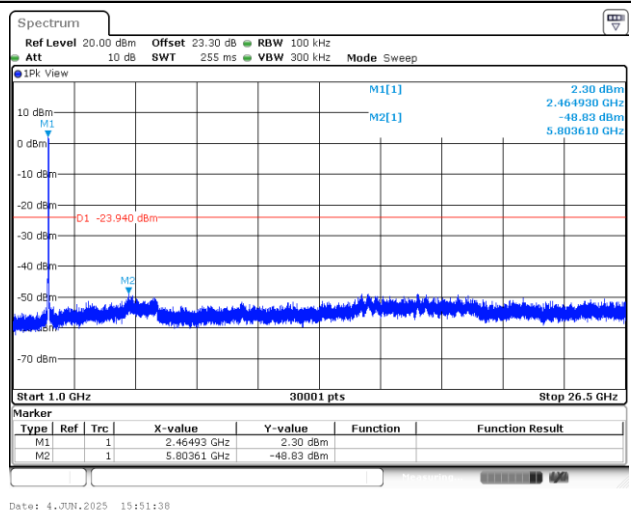





Test Mode : 802.11gN20

Test Channel : 01


100kHz PSD reference Level

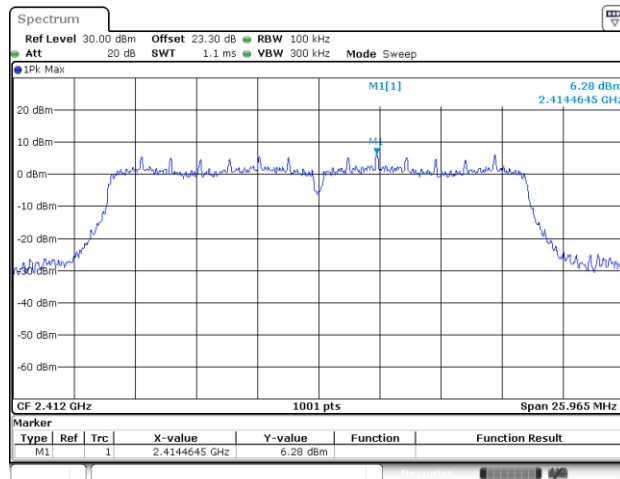


Channel 01 Plot

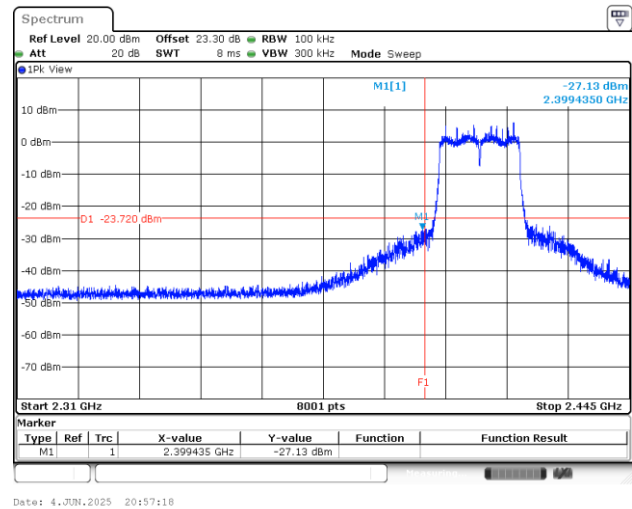

Spurious Emission 30MHz~1GHz

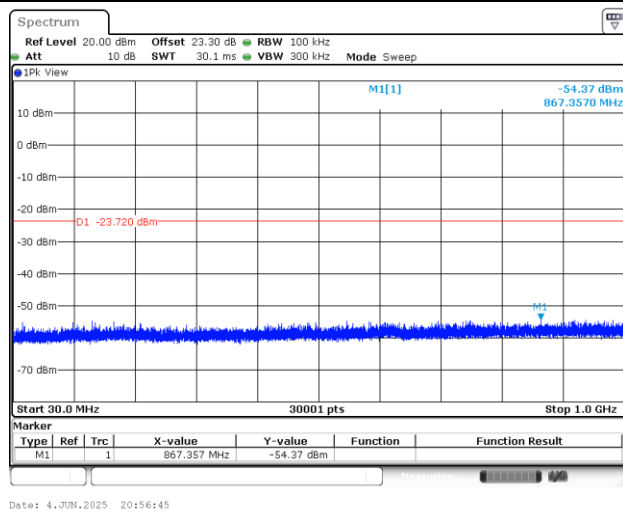

Spurious Emission 1GHz~26.5GHz

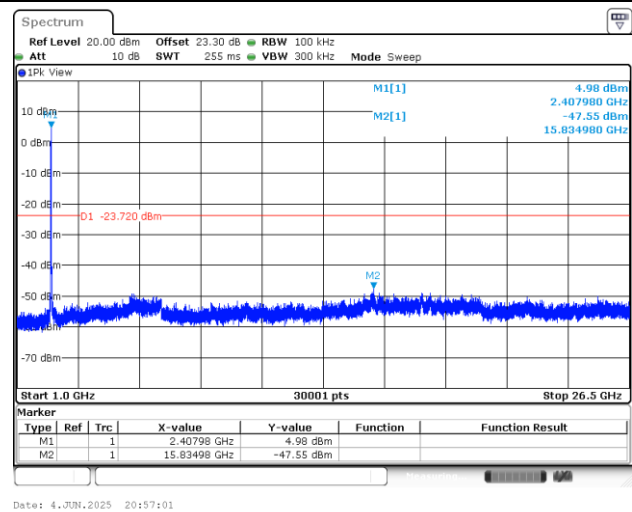




Test Mode : 802.11gN20


Test Channel : 06

100kHz PSD reference Level

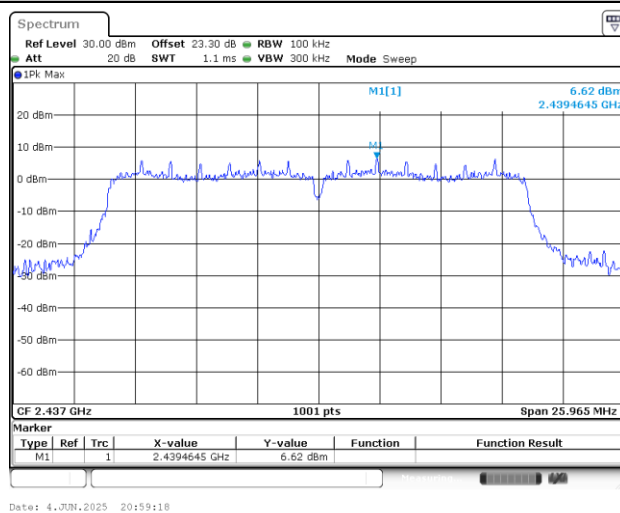


Channel 06 Plot

Spurious Emission 30MHz~1GHz

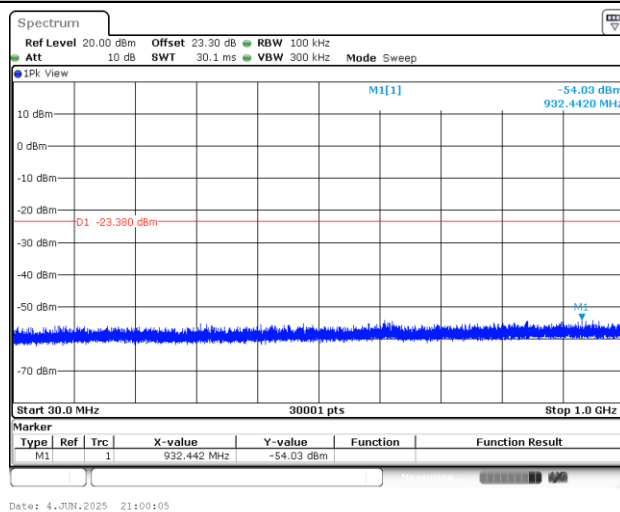

Spurious Emission 1GHz~26.5GHz

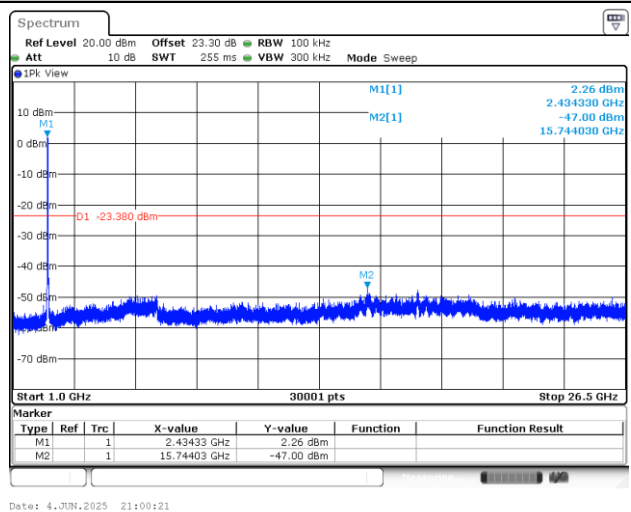





Test Mode : 802.11gN20

Test Channel : 11


100kHz PSD reference Level

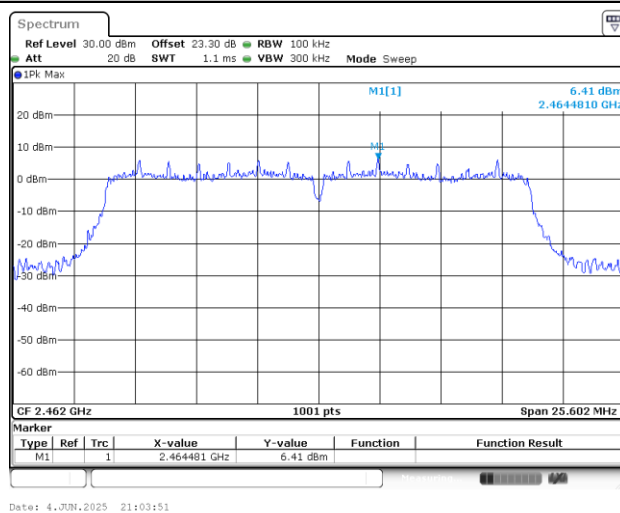


Channel 11 Plot

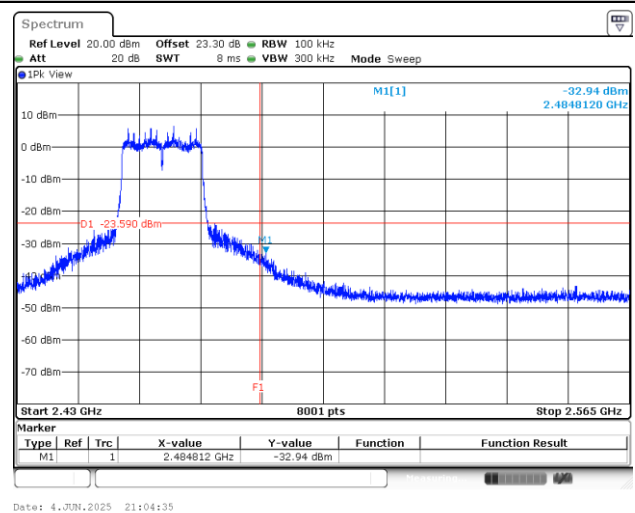

Spurious Emission 30MHz~1GHz

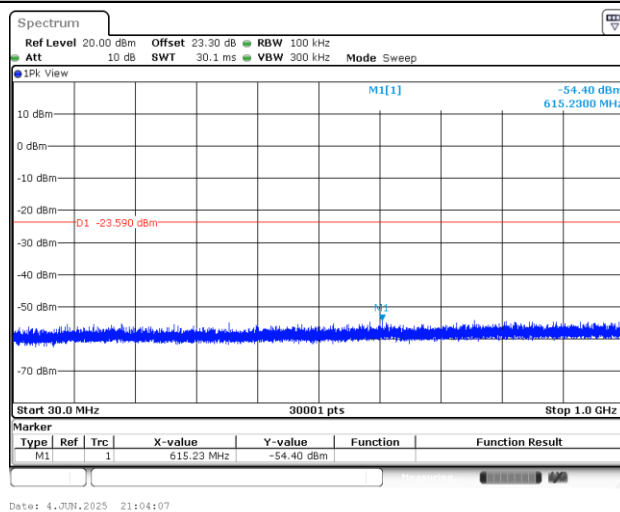

Spurious Emission 1GHz~26.5GHz

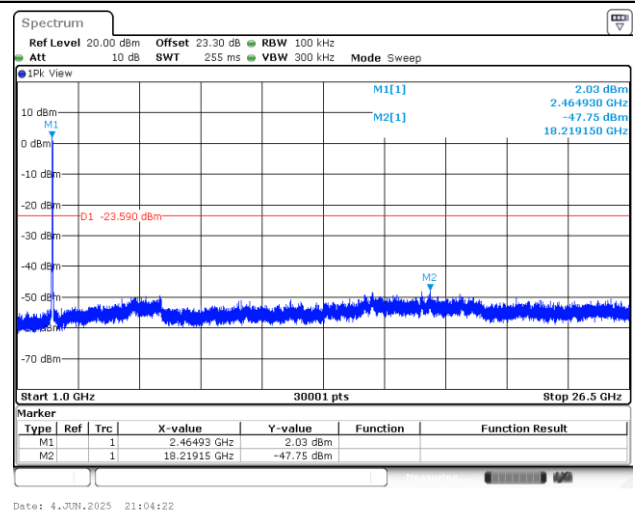





Test Mode : 802.11gN40

Test Channel : 03


100kHz PSD reference Level

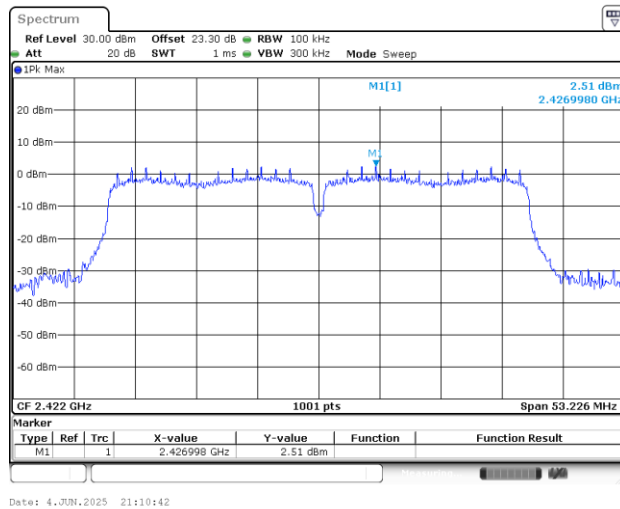


Channel 03 Plot

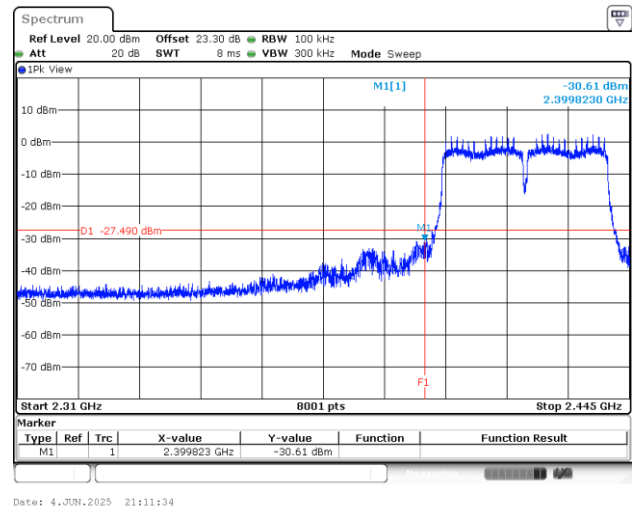

Spurious Emission 30MHz~1GHz

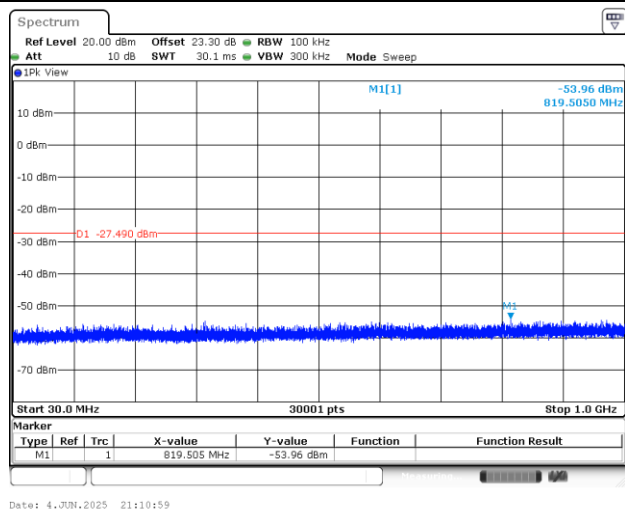

Spurious Emission 1GHz~26.5GHz

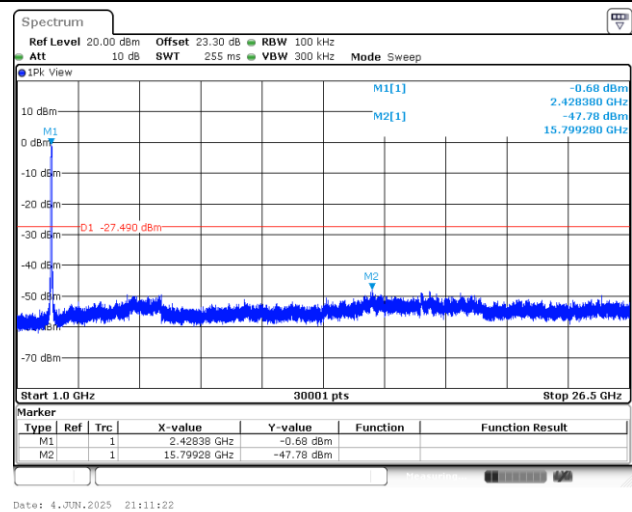




Test Mode : 802.11gN40


Test Channel : 06

100kHz PSD reference Level

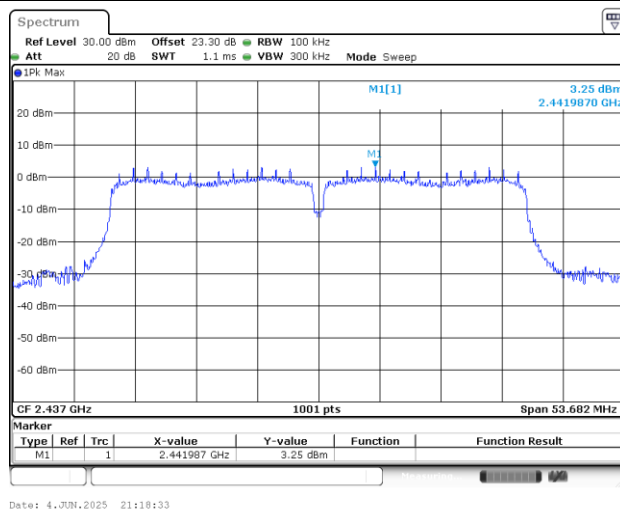


Channel 06 Plot

Spurious Emission 30MHz~1GHz

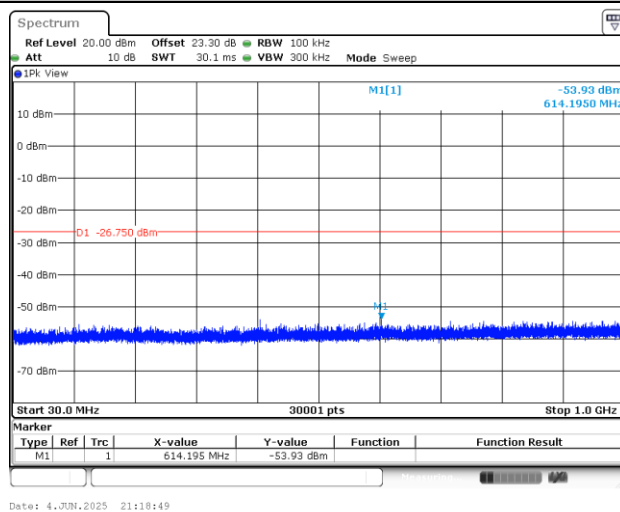

Spurious Emission 1GHz~26.5GHz

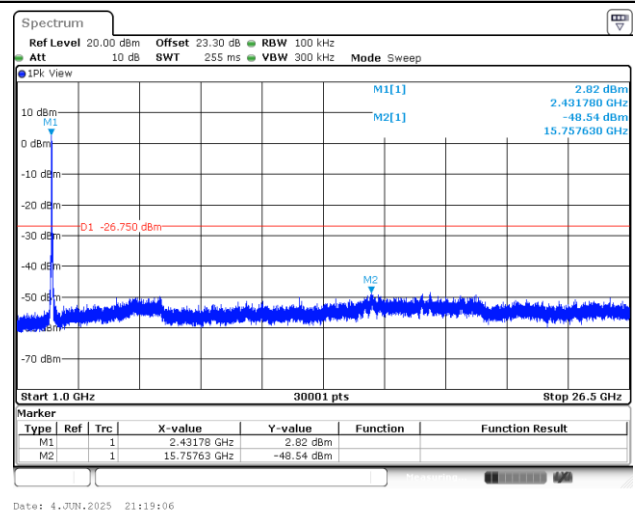





Test Mode : 802.11gN40

Test Channel : 09


100kHz PSD reference Level

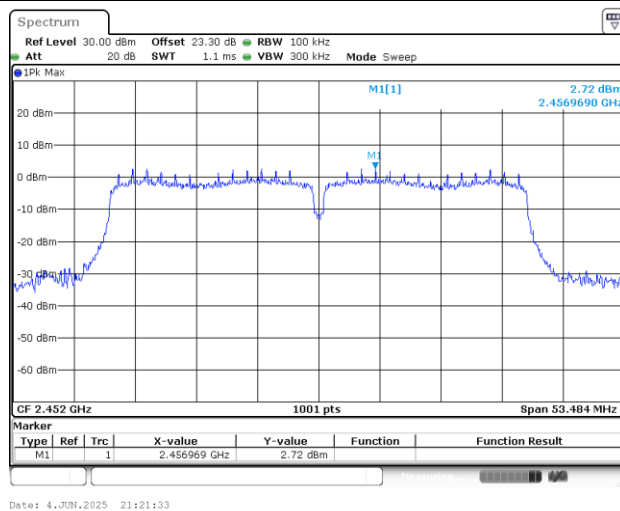


Channel 09 Plot

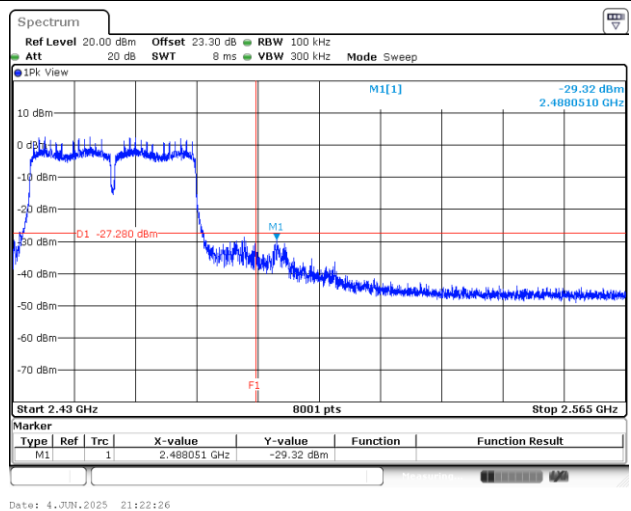

Spurious Emission 30MHz~1GHz

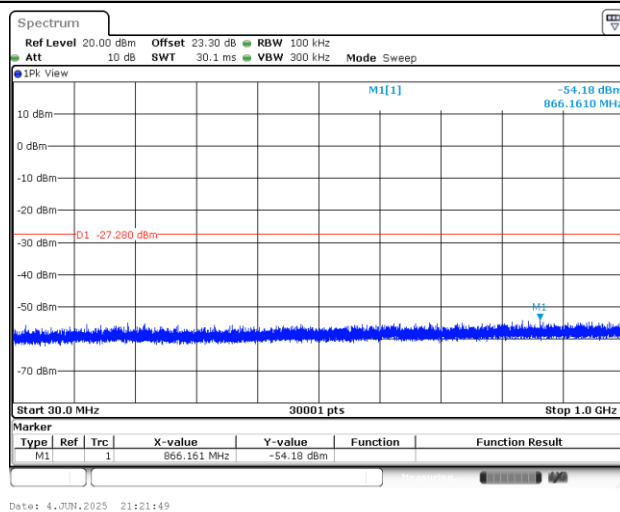

Spurious Emission 1GHz~26.5GHz

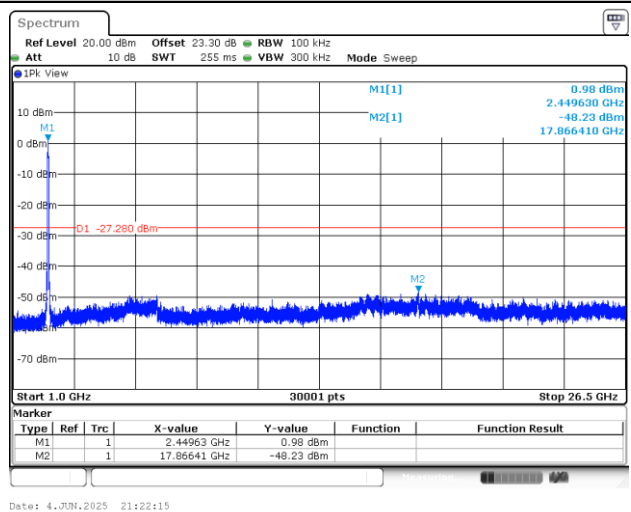





Test Mode : 802.11ax20_FullIRU

Test Channel : 01


100kHz PSD reference Level

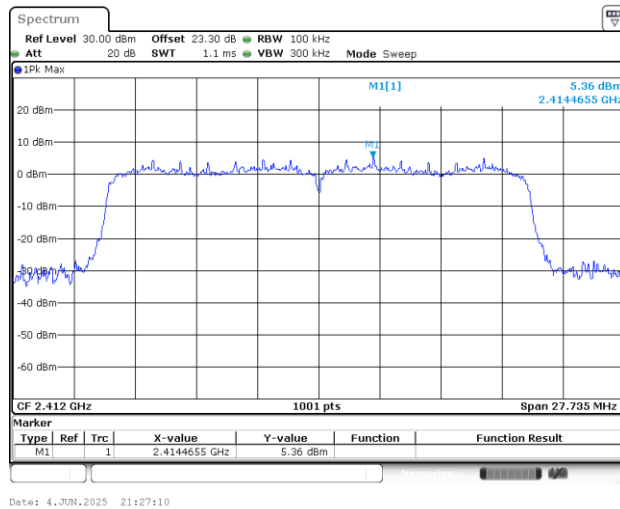


Channel 01 Plot

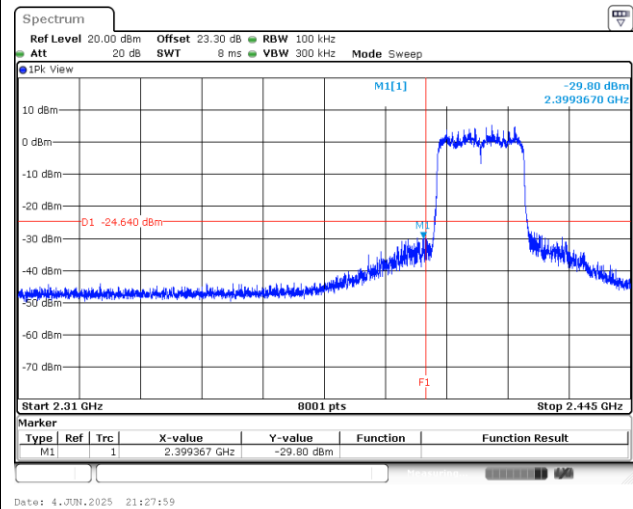

Spurious Emission 30MHz~1GHz

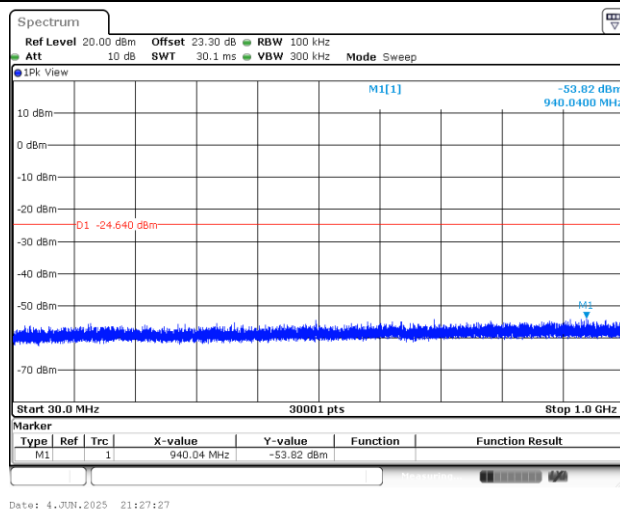

Spurious Emission 1GHz~26.5GHz

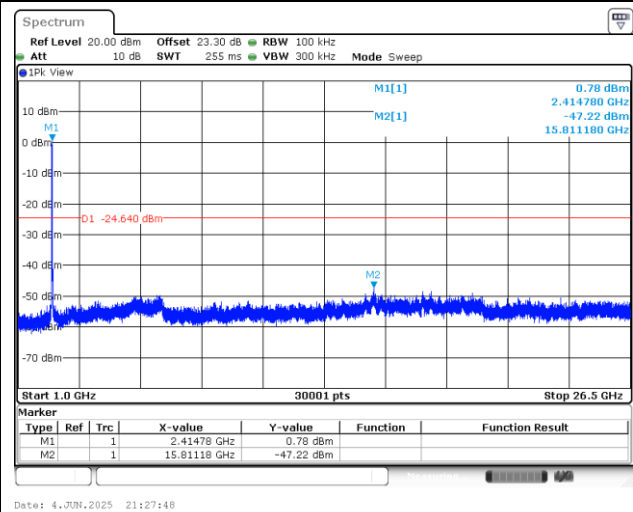




Test Mode : 802.11ax20_FullRU


Test Channel : 06

100kHz PSD reference Level

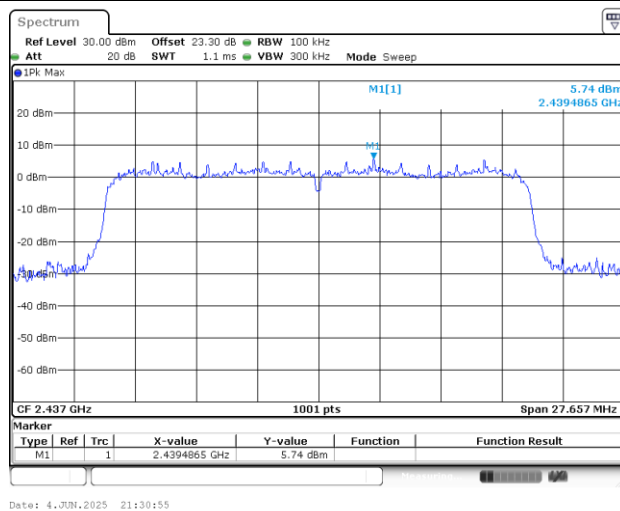


Channel 06 Plot

Spurious Emission 30MHz~1GHz

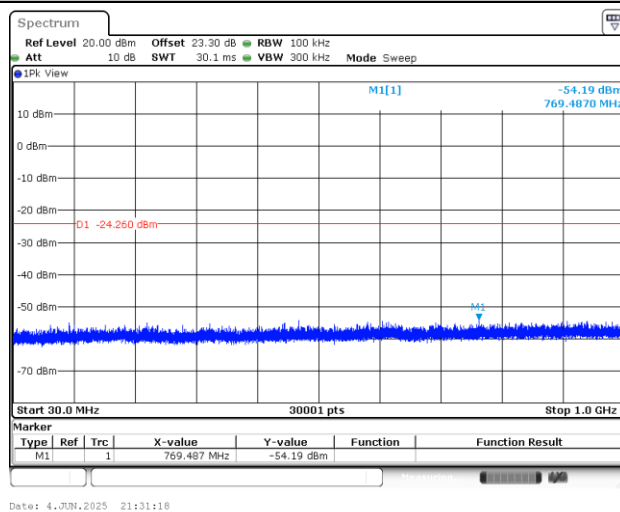

Spurious Emission 1GHz~26.5GHz

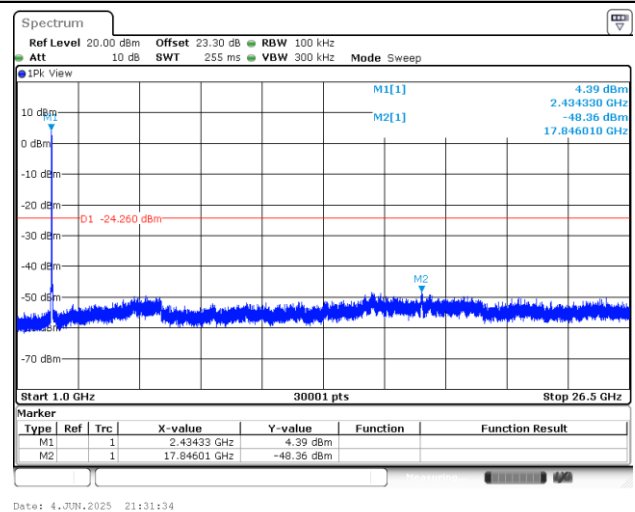





Test Mode : 802.11ax20_FullRU

Test Channel : 11


100kHz PSD reference Level

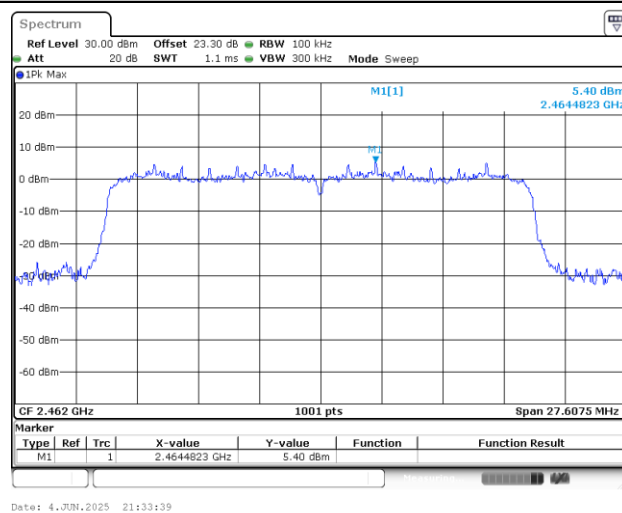


Channel 11 Plot

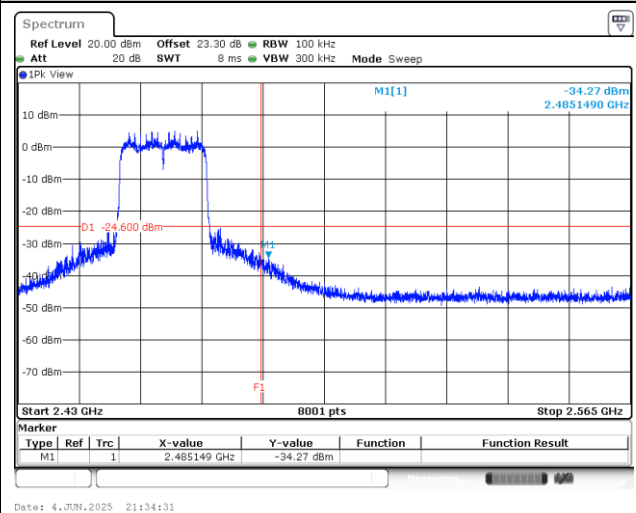

Spurious Emission 30MHz~1GHz

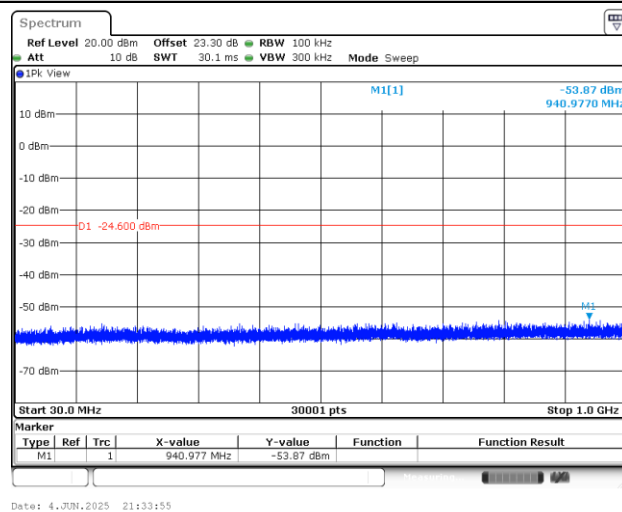

Spurious Emission 1GHz~26.5GHz

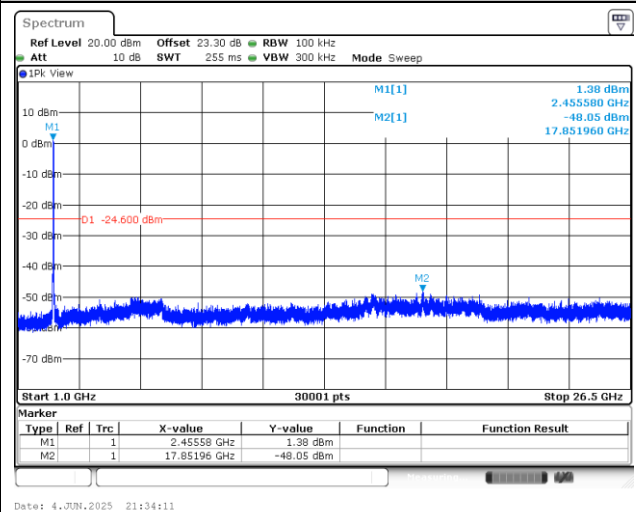





Test Mode : 802.11ax40_FullIRU

Test Channel : 03


100kHz PSD reference Level

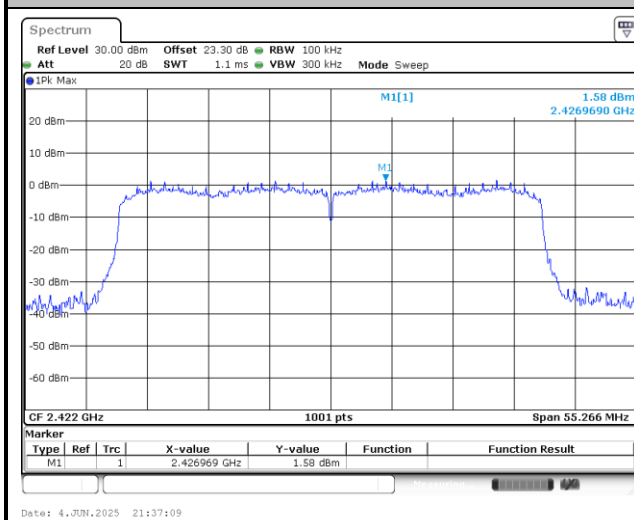


Channel 03 Plot

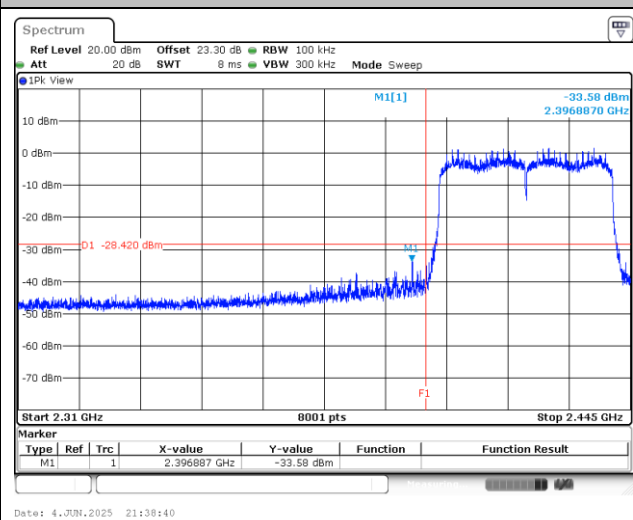

Spurious Emission 30MHz~1GHz

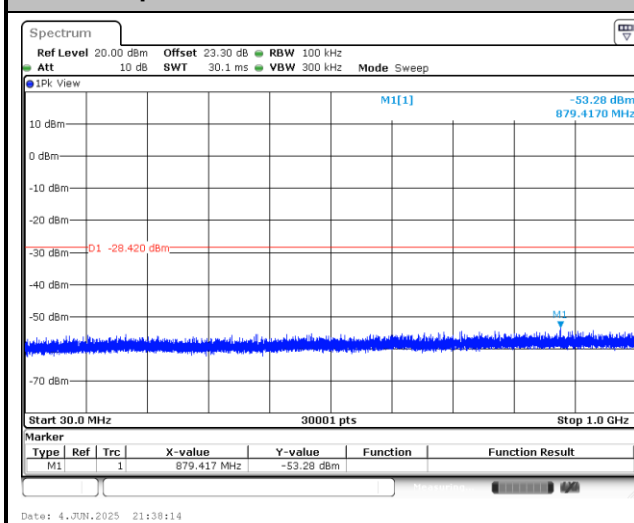

Spurious Emission 1GHz~26.5GHz

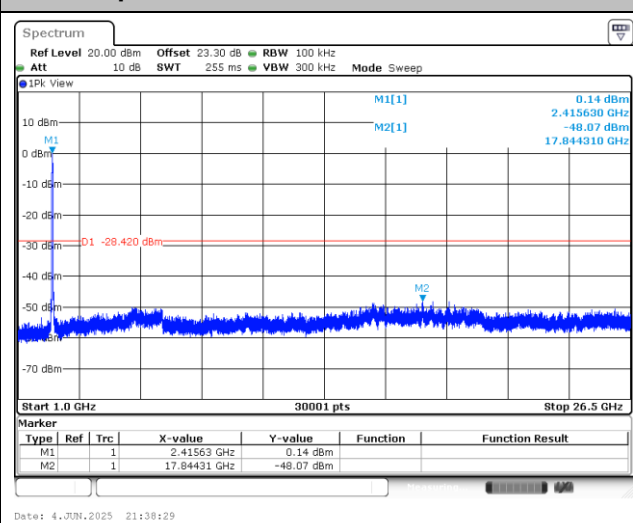




Test Mode : 802.11ax40_FullIRU


Test Channel : 06

100kHz PSD reference Level

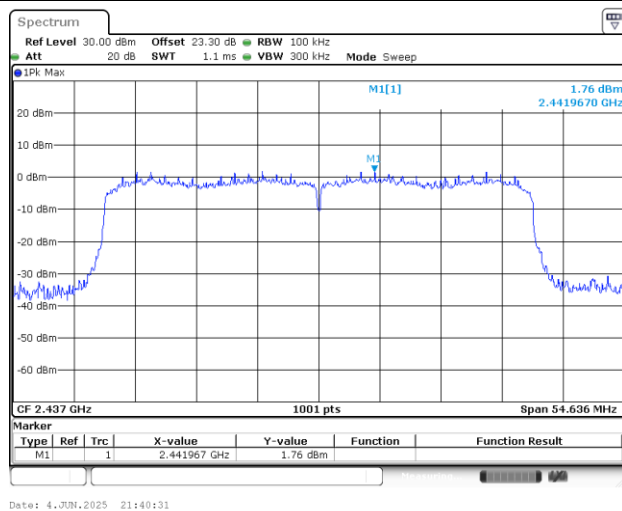


Channel 06 Plot

Spurious Emission 30MHz~1GHz

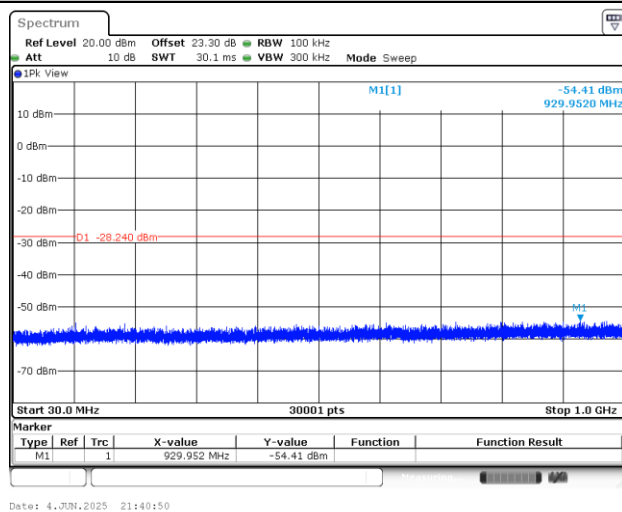

Spurious Emission 1GHz~26.5GHz

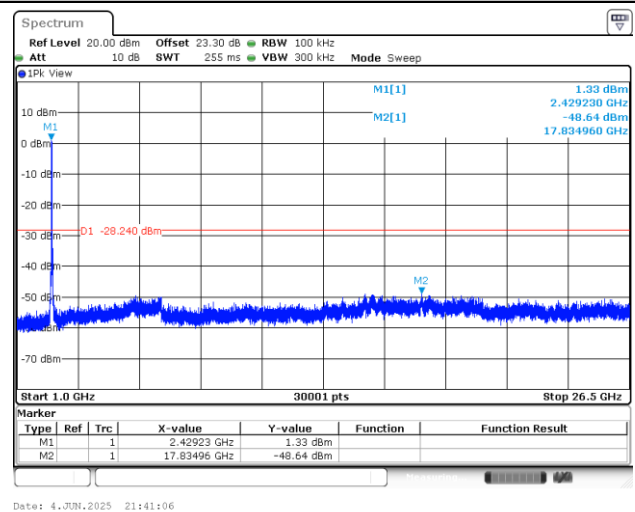





Test Mode : 802.11ax40_FullRU

Test Channel : 09


100kHz PSD reference Level

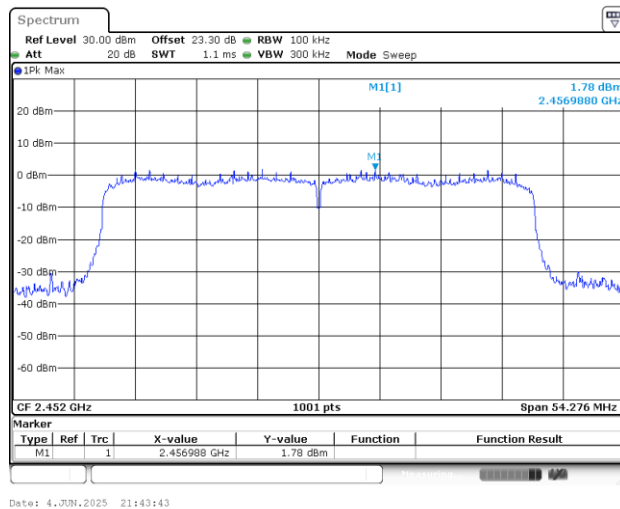


Channel 09 Plot

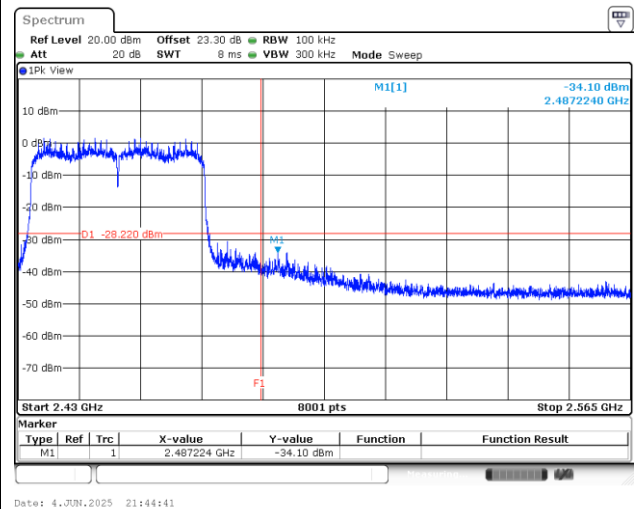

Spurious Emission 30MHz~1GHz

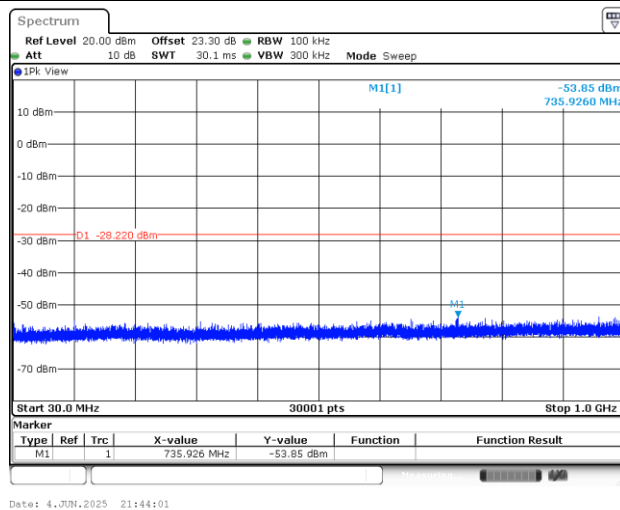

Spurious Emission 1GHz~26.5GHz

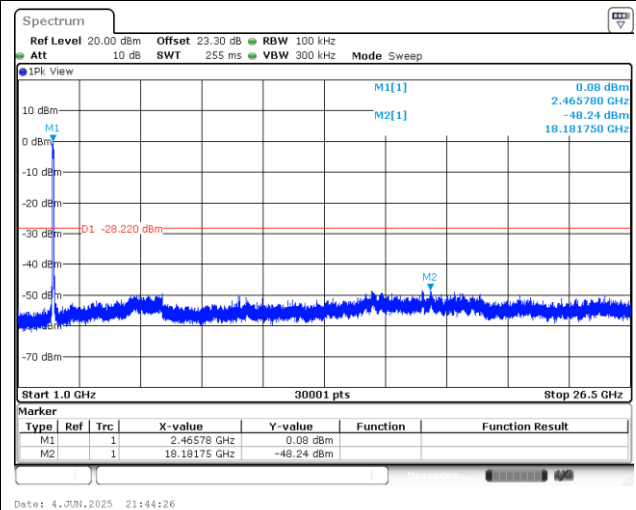



Appendix B. AC Conducted Emission Test Results


Test Engineer :	Louis Chung	Temperature :	23.3~26.7℃
		Relative Humidity :	45.6~68.1%

EUT Information

Report NO :
Test Mode :
Test Voltage :
Phase :

550853
Mode 1
120Vac/60Hz
Line

Full Spectrum

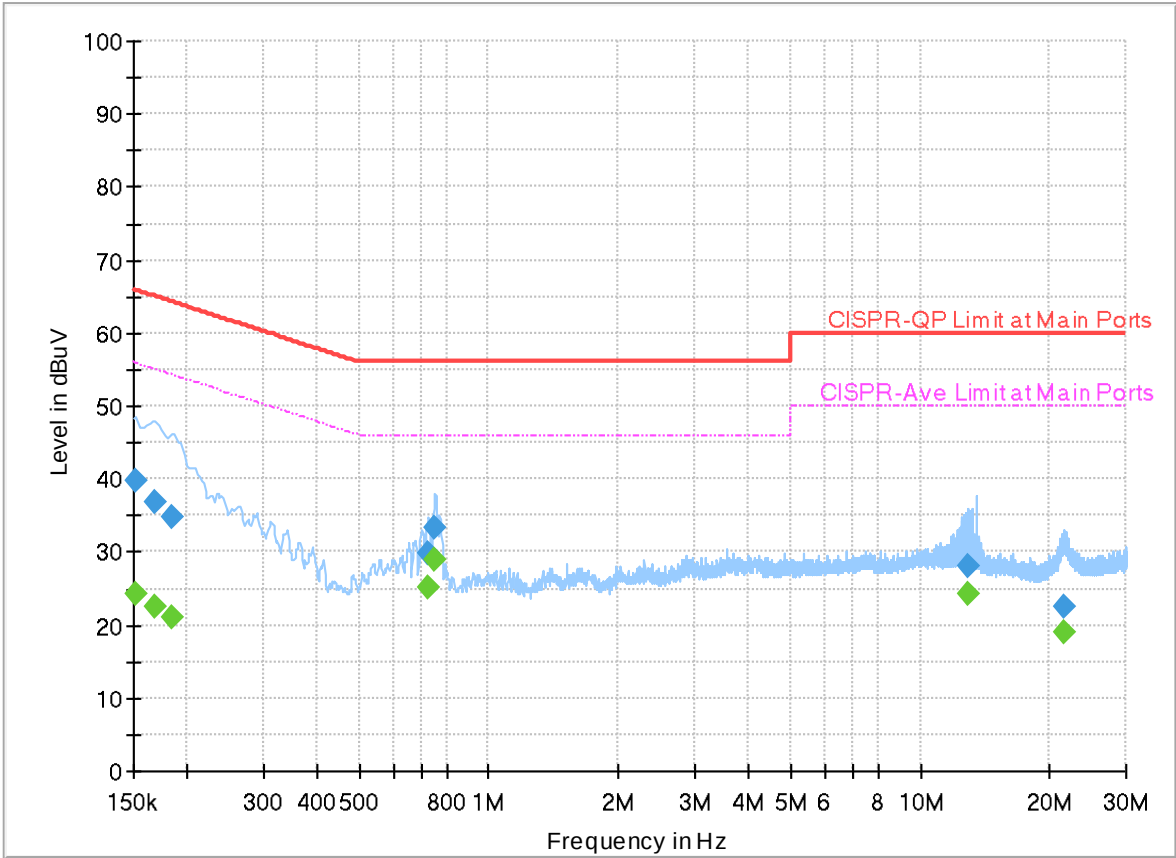

Final_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.151823	---	24.27	55.90	31.63	L1	FLO	20.0
0.151823	39.73	---	65.90	26.17	L1	FLO	20.0
0.167460	---	22.37	55.09	32.72	L1	FLO	20.0
0.167460	36.71	---	65.09	28.38	L1	FLO	20.0
0.183750	---	20.95	54.31	33.36	L1	FLO	20.0
0.183750	34.82	---	64.31	29.49	L1	FLO	20.0
0.723120	---	25.04	46.00	20.96	L1	FLO	20.0
0.723120	29.68	---	56.00	26.32	L1	FLO	20.0
0.751290	---	28.90	46.00	17.10	L1	FLO	20.0
0.751290	33.42	---	56.00	22.58	L1	FLO	20.0
12.952500	---	24.15	50.00	25.85	L1	FLO	20.5
12.952500	28.08	---	60.00	31.92	L1	FLO	20.5
21.522750	---	19.06	50.00	30.94	L1	FLO	20.9
21.522750	22.54	---	60.00	37.46	L1	FLO	20.9

EUT Information

Report NO :
Test Mode :
Test Voltage :
Phase :

550853
Mode 1
120Vac/60Hz
Neutral

Full Spectrum

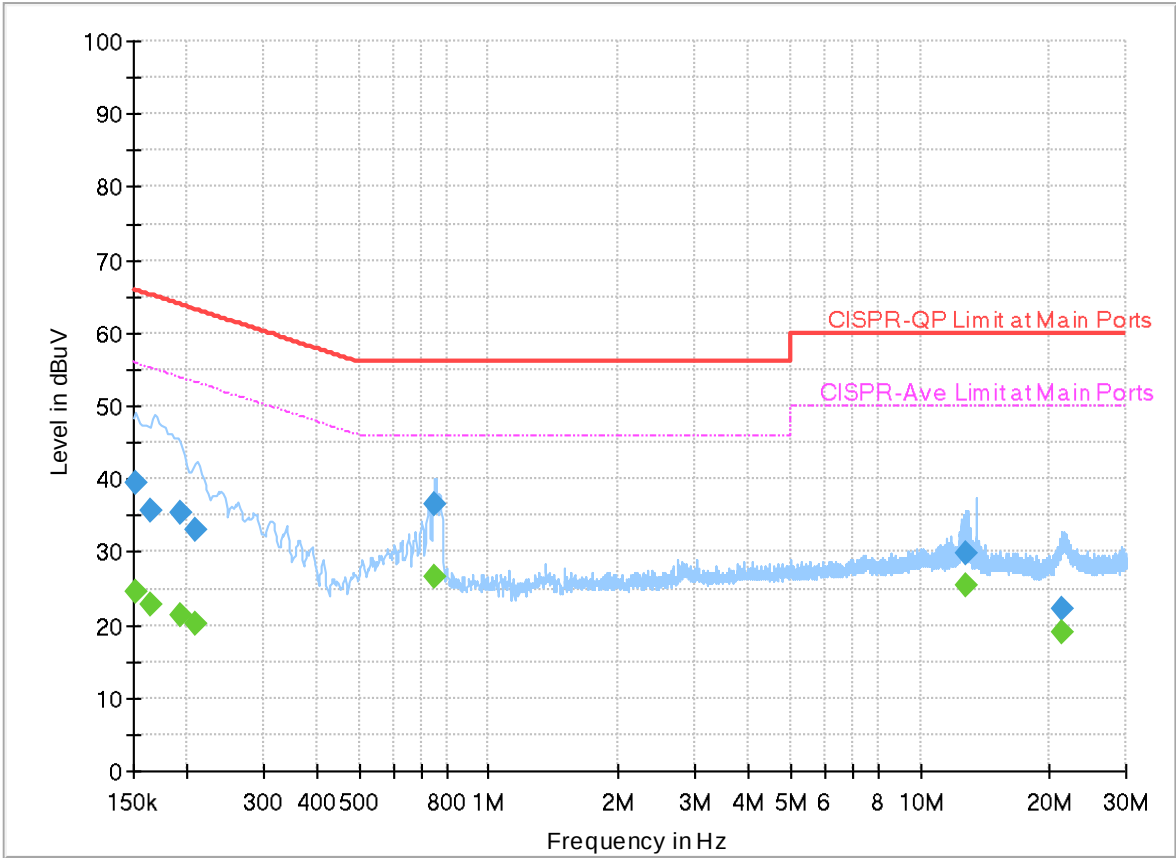

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.152093	---	24.50	55.89	31.39	N	FLO	20.0
0.152093	39.52	---	65.89	26.37	N	FLO	20.0
0.163500	---	22.79	55.28	32.49	N	FLO	20.0
0.163500	35.60	---	65.28	29.68	N	FLO	20.0
0.191670	---	21.20	53.96	32.76	N	FLO	20.0
0.191670	35.47	---	63.96	28.49	N	FLO	20.0
0.209850	---	20.03	53.21	33.18	N	FLO	20.0
0.209850	32.94	---	63.21	30.27	N	FLO	20.0
0.749850	---	26.65	46.00	19.35	N	FLO	20.0
0.749850	36.59	---	56.00	19.41	N	FLO	20.0
12.751260	---	25.50	50.00	24.50	N	FLO	20.5
12.751260	29.84	---	60.00	30.16	N	FLO	20.5
21.318900	---	19.06	50.00	30.94	N	FLO	20.9
21.318900	22.32	---	60.00	37.68	N	FLO	20.9



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	John Chuang, David Dai and Sam Chou	Relative Humidity(%):	65.4~70.3
		Temperature(°C):	19.3~22.4

Note symbol

-L	Low channel location
-R	High channel location



C1. Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	2	802.11b	01	2412	1Mbps	-	-
Mode 2	2400-2483.5	2	802.11b	06	2437	1Mbps	-	-
Mode 3	2400-2483.5	2	802.11b	11	2462	1Mbps	-	-
Mode 4	2400-2483.5	2	802.11g	01	2412	6Mbps	-	-
Mode 5	2400-2483.5	2	802.11g	06	2437	6Mbps	-	-
Mode 6	2400-2483.5	2	802.11g	11	2462	6Mbps	-	-
Mode 7	2400-2483.5	2	802.11n HT20	01	2412	MCS0	-	-
Mode 8	2400-2483.5	2	802.11n HT20	06	2437	MCS0	-	-
Mode 9	2400-2483.5	2	802.11n HT20	11	2462	MCS0	-	-
Mode 10	2400-2483.5	2	802.11n HT40	03	2422	MCS0	-	-
Mode 11	2400-2483.5	2	802.11n HT40	06	2437	MCS0	-	-

**FCC RADIO TEST REPORT**

Report No. : FR550853C

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 12	2400-2483.5	2	802.11n HT40	09	2452	MCS0	-	-
Mode 13	2400-2483.5	2	802.11ax HE20	01	2412	MCS0	Full RU	-
Mode 14	2400-2483.5	2	802.11ax HE20	06	2437	MCS0	Full RU	-
Mode 15	2400-2483.5	2	802.11ax HE20	11	2462	MCS0	Full RU	-
Mode 16	2400-2483.5	2	802.11ax HE40	03	2422	MCS0	Full RU	-
Mode 17	2400-2483.5	2	802.11ax HE40	06	2437	MCS0	Full RU	-
Mode 18	2400-2483.5	2	802.11ax HE40	09	2452	MCS0	Full RU	-
Mode 19	2400-2483.5	2	802.11ax HE20	01	2412	MCS0	Partial_106/53RU	-
Mode 20	2400-2483.5	2	802.11ax HE20	11	2462	MCS0	Partial_106/54RU	-
Mode 21	2400-2483.5	2	802.11n HT40	09	2452	MCS0	-	LF
Mode 22	2400-2483.5	2	802.11n HT40	09	2452	MCS0	-	SHF

C2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	802.11b	01	2386.31	42.40	54.00	-11.60	V	Avg.	Pass	-	Band Edge
	802.11b	01	4824.00	45.82	54.00	-8.18	H	Avg.	Pass	-	Harmonic
2	802.11b	06	2484.06	40.09	54.00	-13.91	V	Avg.	Pass	-	Band Edge
	802.11b	06	4874.00	46.63	54.00	-7.37	H	Avg.	Pass	-	Harmonic
3	802.11b	11	2484.53	42.61	54.00	-11.39	V	Avg.	Pass	-	Band Edge
	802.11b	11	4924.00	44.05	54.00	-9.95	H	Avg.	Pass	-	Harmonic
4	802.11g	01	2389.95	48.92	54.00	-5.08	V	Avg.	Pass	-	Band Edge
	802.11g	01	4824.00	44.96	74.00	-29.04	V	Peak	Pass	-	Harmonic
5	802.11g	06	2483.87	41.02	54.00	-12.98	V	Avg.	Pass	-	Band Edge
	802.11g	06	7311.00	38.35	54.00	-15.65	H	Avg.	Pass	-	Harmonic
6	802.11g	11	2483.81	67.17	74.00	-6.83	V	Peak	Pass	-	Band Edge

**FCC RADIO TEST REPORT**

Report No. : FR550853C

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
6	802.11g	11	7386.00	37.89	54.00	-16.11	V	Avg.	Pass	-	Harmonic
7	802.11n HT20	01	2389.43	70.63	74.00	-3.37	V	Peak	Pass	-	Band Edge
	802.11n HT20	01	4824.00	44.87	74.00	-29.13	H	Peak	Pass	-	Harmonic
8	802.11n HT20	06	2483.56	40.85	54.00	-13.15	V	Avg.	Pass	-	Band Edge
	802.11n HT20	06	7311.00	38.17	54.00	-15.83	V	Avg.	Pass	-	Harmonic
9	802.11n HT20	11	2483.51	48.97	54.00	-5.03	V	Avg.	Pass	-	Band Edge
	802.11n HT20	11	7386.00	47.98	74.00	-26.02	H	Peak	Pass	-	Harmonic
10	802.11n HT40	03	2389.86	52.26	54.00	-1.74	V	Avg.	Pass	-	Band Edge
	802.11n HT40	03	-	-	-	-	-	-	-	-	Harmonic
11	802.11n HT40	06	2485.64	51.85	54.00	-2.15	V	Avg.	Pass	-	Band Edge
	802.11n HT40	06	-	-	-	-	-	-	-	-	Harmonic





Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
12	802.11n HT40	09	2488.10	52.31	54.00	-1.69	V	Avg.	Pass	-	Band Edge
	802.11n HT40	09	-	-	-	-	-	-	-	-	Harmonic
13	802.11ax HE20	01	2389.69	68.26	74.00	-5.74	V	Peak	Pass	Full RU	Band Edge
	802.11ax HE20	01	4824.00	44.45	74.00	-29.55	V	Peak	Pass	Full RU	Harmonic
14	802.11ax HE20	06	2483.81	40.76	54.00	-13.24	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	06	7311.00	38.05	54.00	-15.95	V	Avg.	Pass	Full RU	Harmonic
15	802.11ax HE20	11	2483.55	46.93	54.00	-7.07	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	11	7386.00	37.28	54.00	-16.72	H	Avg.	Pass	Full RU	Harmonic
16	802.11ax HE40	03	2385.71	50.43	54.00	-3.57	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE40	03	-	-	-	-	-	-	-	Full RU	Harmonic
17	802.11ax HE40	06	2483.56	48.12	54.00	-5.88	V	Avg.	Pass	Full RU	Band Edge

**FCC RADIO TEST REPORT**

Report No. : FR550853C

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
17	802.11ax HE40	06	-	-	-	-	-	-	-	Full RU	Harmonic
18	802.11ax HE40	09	2486.94	51.56	54.00	-2.44	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE40	09	-	-	-	-	-	-	-	Full RU	Harmonic
19	802.11ax HE20	01	2385.14	67.26	74.00	-6.74	V	Peak	Pass	Partial_106/53RU	Band Edge
	802.11ax HE20	01	-	-	-	-	-	-	-	Partial_106/53RU	Harmonic
20	802.11ax HE20	11	2484.91	69.37	74.00	-4.63	H	Peak	Pass	Partial_106/54RU	Band Edge
	802.11ax HE20	11	-	-	-	-	-	-	-	Partial_106/54RU	Harmonic
21	802.11n HT40	09	84.32	29.92	40.00	-10.08	V	Peak	Pass	-	LF
22	802.11n HT40	09	24815.41	40.75	74.00	-33.25	H	Peak	Pass	-	SHF

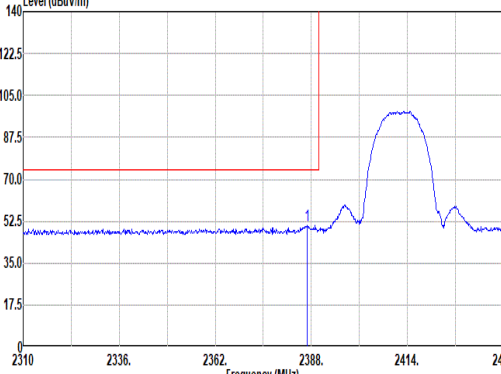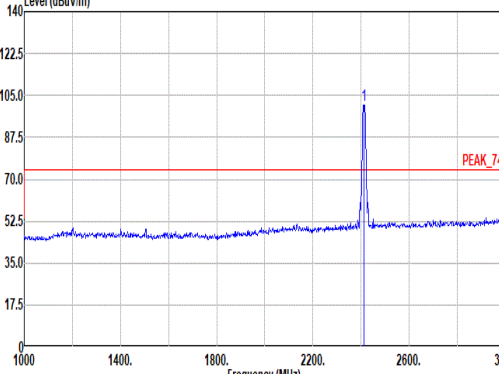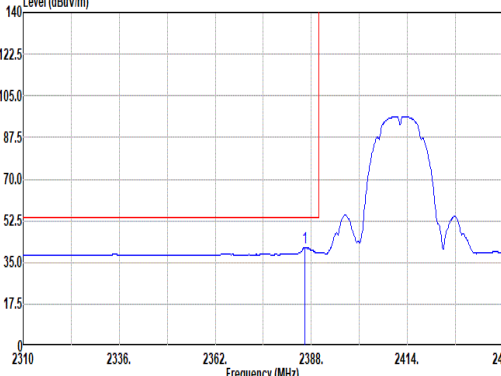
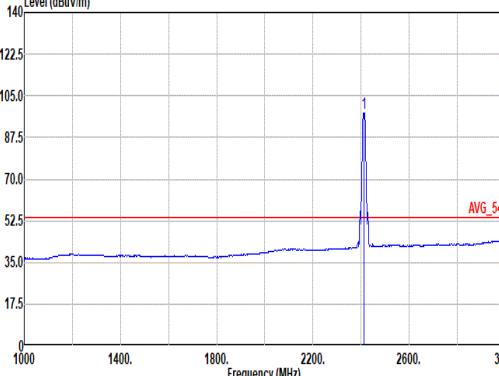


Mode	1																																																																																																											
	Band Edge																																																																																																											
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																											
ANT	2																																																																																																											
Pol.	Horizontal						Fundamental																																																																																																					
Peak	Level (dBuV/m) Date: 2025-05-26  Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2386.83</td><td>50.84</td><td>74.00</td><td>-23.16</td><td>41.47</td><td>27.34</td><td>8.62</td><td>36.27</td><td>9.68</td><td>134</td><td>133 Peak</td></tr></tbody></table> Level (dBuV/m) Date: 2025-05-26  Site : 03CH20-HY Condition: PEAK_74 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>100.96</td><td>-----</td><td>-----</td><td>91.39</td><td>27.50</td><td>8.66</td><td>36.27</td><td>9.68</td><td>134</td><td>133 Peak</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2386.83	50.84	74.00	-23.16	41.47	27.34	8.62	36.27	9.68	134	133 Peak		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2412.00	100.96	-----	-----	91.39	27.50	8.66	36.27	9.68	134	133 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2386.83	50.84	74.00	-23.16	41.47	27.34	8.62	36.27	9.68	134	133 Peak																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2412.00	100.96	-----	-----	91.39	27.50	8.66	36.27	9.68	134	133 Peak																																																																																																	
Avg	Level (dBuV/m) Date: 2025-05-26  Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2386.31</td><td>41.26</td><td>54.00</td><td>-12.74</td><td>31.91</td><td>27.33</td><td>8.61</td><td>36.27</td><td>9.68</td><td>134</td><td>133 Average</td></tr></tbody></table> Level (dBuV/m) Date: 2025-05-26  Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>97.92</td><td>-----</td><td>-----</td><td>88.34</td><td>27.50</td><td>8.67</td><td>36.27</td><td>9.68</td><td>134</td><td>133 Average</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2386.31	41.26	54.00	-12.74	31.91	27.33	8.61	36.27	9.68	134	133 Average		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2412.00	97.92	-----	-----	88.34	27.50	8.67	36.27	9.68	134	133 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2386.31	41.26	54.00	-12.74	31.91	27.33	8.61	36.27	9.68	134	133 Average																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2412.00	97.92	-----	-----	88.34	27.50	8.67	36.27	9.68	134	133 Average																																																																																																	



Mode	1																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																			
ANT	2																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2025-05-26 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2386.44</td><td>50.88</td><td>74.00</td><td>-23.12</td><td>41.53</td><td>27.33</td><td>8.61</td><td>36.27</td><td>9.68</td><td>300</td><td>102</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.44	50.88	74.00	-23.12	41.53	27.33	8.61	36.27	9.68	300	102	Peak	Level (dBuV/m) Date: 2025-05-26 Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>104.77</td><td>-----</td><td>-----</td><td>95.20</td><td>27.50</td><td>8.66</td><td>36.27</td><td>9.68</td><td>300</td><td>102</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	104.77	-----	-----	95.20	27.50	8.66	36.27	9.68	300	102	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2386.44	50.88	74.00	-23.12	41.53	27.33	8.61	36.27	9.68	300	102	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2412.00	104.77	-----	-----	95.20	27.50	8.66	36.27	9.68	300	102	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2025-05-26 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2386.31</td><td>42.40</td><td>54.00</td><td>-11.60</td><td>33.05</td><td>27.33</td><td>8.61</td><td>36.27</td><td>9.68</td><td>300</td><td>102</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.31	42.40	54.00	-11.60	33.05	27.33	8.61	36.27	9.68	300	102	Average	Level (dBuV/m) Date: 2025-05-26 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>101.71</td><td>-----</td><td>-----</td><td>92.13</td><td>27.50</td><td>8.67</td><td>36.27</td><td>9.68</td><td>300</td><td>102</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	101.71	-----	-----	92.13	27.50	8.67	36.27	9.68	300	102	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2386.31	42.40	54.00	-11.60	33.05	27.33	8.61	36.27	9.68	300	102	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2412.00	101.71	-----	-----	92.13	27.50	8.67	36.27	9.68	300	102	Average																																																																																								

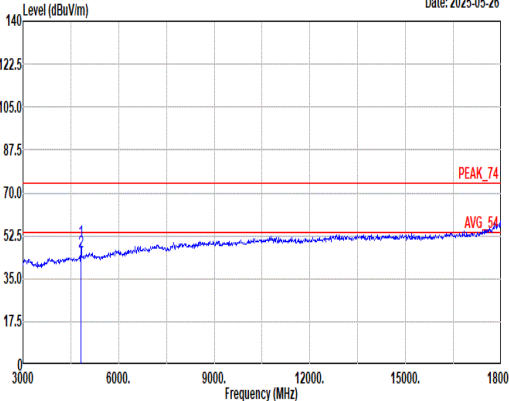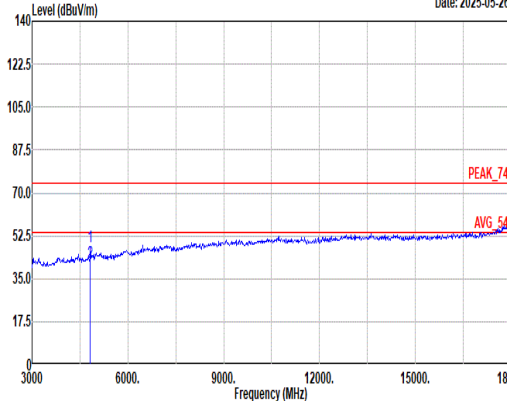

Mode	1																																																																																																																							
	Harmonic																																																																																																																							
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																																							
ANT	2																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																	
Peak Avg	Level (dBuV/m) Date: 2025-05-26 						Level (dBuV/m) Date: 2025-05-26 																																																																																																																	
	Site : 03CH20-HY Condition: PEAK_74 3m HF_91280_02360_241101 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>50.38</td><td>74.00</td><td>-23.62</td><td>42.61</td><td>32.39</td><td>12.28</td><td>37.53</td><td>0.63</td><td>260</td><td>234 Peak</td></tr><tr><td>2</td><td>4824.00</td><td>45.82</td><td>54.00</td><td>-8.18</td><td>38.05</td><td>32.39</td><td>12.28</td><td>37.53</td><td>0.63</td><td>260</td><td>234 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	50.38	74.00	-23.62	42.61	32.39	12.28	37.53	0.63	260	234 Peak	2	4824.00	45.82	54.00	-8.18	38.05	32.39	12.28	37.53	0.63	260	234 Average	Site : 03CH20-HY Condition: PEAK_74 3m HF_91280_02360_241101 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>48.19</td><td>74.00</td><td>-25.81</td><td>40.42</td><td>32.39</td><td>12.28</td><td>37.53</td><td>0.63</td><td>100</td><td>3 Peak</td></tr><tr><td>2</td><td>4824.00</td><td>41.48</td><td>54.00</td><td>-12.52</td><td>33.71</td><td>32.39</td><td>12.28</td><td>37.53</td><td>0.63</td><td>100</td><td>3 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	48.19	74.00	-25.81	40.42	32.39	12.28	37.53	0.63	100	3 Peak	2	4824.00	41.48	54.00	-12.52	33.71	32.39	12.28	37.53	0.63	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	4824.00	50.38	74.00	-23.62	42.61	32.39	12.28	37.53	0.63	260	234 Peak																																																																																																													
2	4824.00	45.82	54.00	-8.18	38.05	32.39	12.28	37.53	0.63	260	234 Average																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	4824.00	48.19	74.00	-25.81	40.42	32.39	12.28	37.53	0.63	100	3 Peak																																																																																																													
2	4824.00	41.48	54.00	-12.52	33.71	32.39	12.28	37.53	0.63	100	3 Average																																																																																																													



Mode	1	
	Harmonic	
	2400-2483.5_802.11b_CH01_2412MHz	
ANT	2	
Pol.	Horizontal	Vertical
10G ~18G Avg	Level (dBuV/m) Date: 2025-05-26 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_241101 HORIZONTAL	Level (dBuV/m) Date: 2025-05-26 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_241101 VERTICAL



FCC RADIO TEST REPORT





Report No. : FR550853C

Mode	2																																																																																																			
	Band Edge - L																																																																																																			
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																			
ANT	2																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2025-05-26 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.96</td><td>49.97</td><td>74.00</td><td>-24.03</td><td>40.60</td><td>27.34</td><td>8.62</td><td>36.27</td><td>9.68</td><td>100</td><td>288</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.96	49.97	74.00	-24.03	40.60	27.34	8.62	36.27	9.68	100	288	Peak	Level (dBuV/m) Date: 2025-05-26 Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>102.00</td><td>-----</td><td>-----</td><td>93.11</td><td>27.58</td><td>8.71</td><td>36.28</td><td>9.68</td><td>100</td><td>288</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	102.00	-----	-----	93.11	27.58	8.71	36.28	9.68	100	288	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2386.96	49.97	74.00	-24.03	40.60	27.34	8.62	36.27	9.68	100	288	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2437.00	102.00	-----	-----	93.11	27.58	8.71	36.28	9.68	100	288	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2025-05-26 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2359.53</td><td>38.75</td><td>54.00</td><td>-15.25</td><td>29.46</td><td>27.30</td><td>8.57</td><td>36.26</td><td>9.68</td><td>100</td><td>288</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2359.53	38.75	54.00	-15.25	29.46	27.30	8.57	36.26	9.68	100	288	Average	Level (dBuV/m) Date: 2025-05-26 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>99.82</td><td>-----</td><td>-----</td><td>90.13</td><td>27.58</td><td>8.71</td><td>36.28</td><td>9.68</td><td>100</td><td>288</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	99.82	-----	-----	90.13	27.58	8.71	36.28	9.68	100	288	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2359.53	38.75	54.00	-15.25	29.46	27.30	8.57	36.26	9.68	100	288	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2437.00	99.82	-----	-----	90.13	27.58	8.71	36.28	9.68	100	288	Average																																																																																								



Mode	2	
	Band Edge - R	
	2400-2483.5_802.11b_CH06_2437MHz	
ANT	2	
Pol.	Horizontal	Fundamental
Peak		

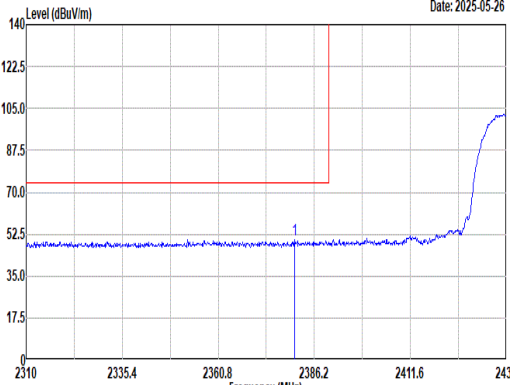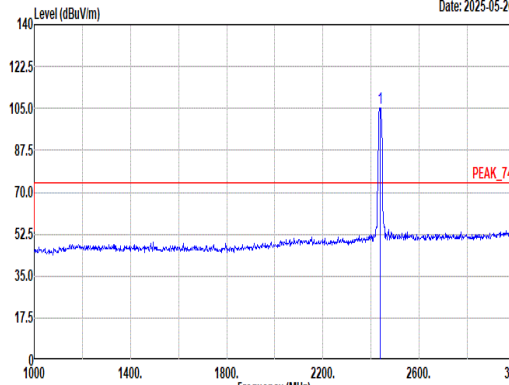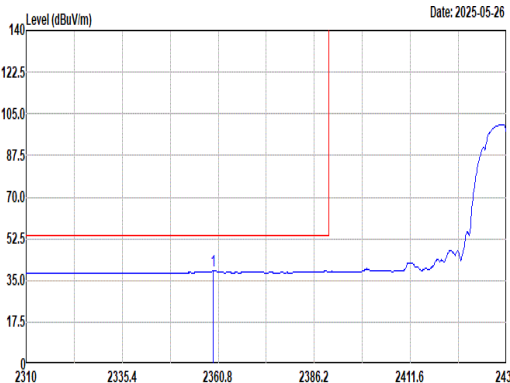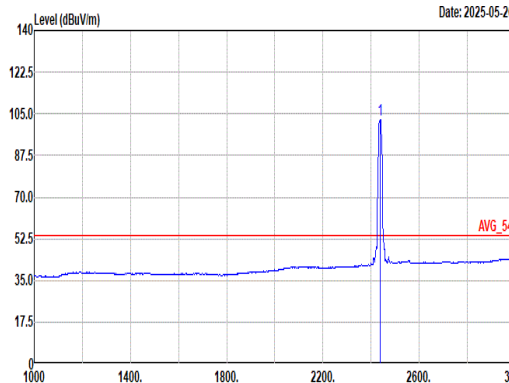

Mode	2																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																		
ANT	2																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak	Level (dBuV/m) Date: 2025-05-26  Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91280_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.2</td><td>50.10</td><td>74.00</td><td>-23.90</td><td>40.86</td><td>27.22</td><td>8.60</td><td>36.26</td><td>9.68</td><td>292 81 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.2	50.10	74.00	-23.90	40.86	27.22	8.60	36.26	9.68	292 81 Peak	Level (dBuV/m) Date: 2025-05-26  Site : 03CH20-HY Condition: PEAK_74 3m HF_91280_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>105.36</td><td>-----</td><td>-----</td><td>95.67</td><td>27.58</td><td>8.71</td><td>36.28</td><td>9.68</td><td>292 81 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	105.36	-----	-----	95.67	27.58	8.71	36.28	9.68	292 81 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2386.2	50.10	74.00	-23.90	40.86	27.22	8.60	36.26	9.68	292 81 Peak																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2437.00	105.36	-----	-----	95.67	27.58	8.71	36.28	9.68	292 81 Peak																																																																																									
Avg	Level (dBuV/m) Date: 2025-05-26  Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91280_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.2</td><td>39.05</td><td>54.00</td><td>-14.95</td><td>29.76</td><td>27.30</td><td>8.57</td><td>36.26</td><td>9.68</td><td>292 81 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.2	39.05	54.00	-14.95	29.76	27.30	8.57	36.26	9.68	292 81 Average	Level (dBuV/m) Date: 2025-05-26  Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>102.34</td><td>-----</td><td>-----</td><td>92.65</td><td>27.58</td><td>8.71</td><td>36.28</td><td>9.68</td><td>292 81 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	102.34	-----	-----	92.65	27.58	8.71	36.28	9.68	292 81 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2386.2	39.05	54.00	-14.95	29.76	27.30	8.57	36.26	9.68	292 81 Average																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2437.00	102.34	-----	-----	92.65	27.58	8.71	36.28	9.68	292 81 Average																																																																																									



Mode	2	
	Band Edge - R	
	2400-2483.5_802.11b_CH06_2437MHz	
ANT	2	
Pol.	Vertical	Fundamental
Peak	</	



Mode	2																																																																																																																																																																								
	Harmonic																																																																																																																																																																								
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																																																																								
ANT	2																																																																																																																																																																								
Pol.	Horizontal						Vertical																																																																																																																																																																		
Peak Avg	Level (dBuV/m) Date: 2025-05-26 Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>51.28</td><td>74.00</td><td>-22.72</td><td>43.14</td><td>32.70</td><td>12.38</td><td>37.57</td><td>0.63</td><td>258</td><td>245 Peak</td></tr><tr><td>2</td><td>4874.00</td><td>46.63</td><td>54.00</td><td>-7.37</td><td>38.49</td><td>32.70</td><td>12.38</td><td>37.57</td><td>0.63</td><td>258</td><td>245 Average</td></tr><tr><td>3</td><td>7311.00</td><td>49.26</td><td>74.00</td><td>-24.74</td><td>35.11</td><td>36.83</td><td>15.37</td><td>38.47</td><td>0.42</td><td>300</td><td>238 Peak</td></tr><tr><td>4</td><td>7311.00</td><td>38.45</td><td>54.00</td><td>-15.55</td><td>24.30</td><td>36.83</td><td>15.37</td><td>38.47</td><td>0.42</td><td>300</td><td>238 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	51.28	74.00	-22.72	43.14	32.70	12.38	37.57	0.63	258	245 Peak	2	4874.00	46.63	54.00	-7.37	38.49	32.70	12.38	37.57	0.63	258	245 Average	3	7311.00	49.26	74.00	-24.74	35.11	36.83	15.37	38.47	0.42	300	238 Peak	4	7311.00	38.45	54.00	-15.55	24.30	36.83	15.37	38.47	0.42	300	238 Average	Level (dBuV/m) Date: 2025-05-26 Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>49.15</td><td>74.00</td><td>-24.85</td><td>41.01</td><td>32.70</td><td>12.38</td><td>37.57</td><td>0.63</td><td>272</td><td>215 Peak</td></tr><tr><td>2</td><td>4874.00</td><td>42.92</td><td>54.00</td><td>-11.08</td><td>34.78</td><td>32.70</td><td>12.38</td><td>37.57</td><td>0.63</td><td>272</td><td>215 Average</td></tr><tr><td>3</td><td>7311.00</td><td>48.95</td><td>74.00</td><td>-25.05</td><td>34.00</td><td>36.83</td><td>15.37</td><td>38.47</td><td>0.42</td><td>400</td><td>73 Peak</td></tr><tr><td>4</td><td>7311.00</td><td>38.44</td><td>54.00</td><td>-15.56</td><td>24.29</td><td>36.83</td><td>15.37</td><td>38.47</td><td>0.42</td><td>400</td><td>73 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	49.15	74.00	-24.85	41.01	32.70	12.38	37.57	0.63	272	215 Peak	2	4874.00	42.92	54.00	-11.08	34.78	32.70	12.38	37.57	0.63	272	215 Average	3	7311.00	48.95	74.00	-25.05	34.00	36.83	15.37	38.47	0.42	400	73 Peak	4	7311.00	38.44	54.00	-15.56	24.29	36.83	15.37	38.47	0.42	400	73 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																															
1	4874.00	51.28	74.00	-22.72	43.14	32.70	12.38	37.57	0.63	258	245 Peak																																																																																																																																																														
2	4874.00	46.63	54.00	-7.37	38.49	32.70	12.38	37.57	0.63	258	245 Average																																																																																																																																																														
3	7311.00	49.26	74.00	-24.74	35.11	36.83	15.37	38.47	0.42	300	238 Peak																																																																																																																																																														
4	7311.00	38.45	54.00	-15.55	24.30	36.83	15.37	38.47	0.42	300	238 Average																																																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																															
1	4874.00	49.15	74.00	-24.85	41.01	32.70	12.38	37.57	0.63	272	215 Peak																																																																																																																																																														
2	4874.00	42.92	54.00	-11.08	34.78	32.70	12.38	37.57	0.63	272	215 Average																																																																																																																																																														
3	7311.00	48.95	74.00	-25.05	34.00	36.83	15.37	38.47	0.42	400	73 Peak																																																																																																																																																														
4	7311.00	38.44	54.00	-15.56	24.29	36.83	15.37	38.47	0.42	400	73 Average																																																																																																																																																														



Mode	2	
	Harmonic	
	2400-2483.5_802.11b_CH06_2437MHz	
ANT	2	
Pol.	Horizontal	Vertical
10G ~18G Avg	Level (dBuV/m) Date: 2025-05-26 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_241101 HORIZONTAL	Level (dBuV/m) Date: 2025-05-26 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_241101 VERTICAL



FCC RADIO TEST REPORT

Report No. : FR550853C

Mode	3																																																																																			
	Band Edge																																																																																			
	2400-2483.5_802.11b_CH11_2462MHz																																																																																			
ANT	2																																																																																			
Pol.	Horizontal						Fundamental																																																																													
Peak	Level (dBuV/m) Date: 2025-05-26 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2484.42</td><td>51.51</td><td>74.00</td><td>-22.49</td><td>41.39</td><td>27.94</td><td>8.80</td><td>36.30</td><td>9.68</td><td>104</td><td>121</td><td>Peak</td></tr></tbody></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2484.42	51.51	74.00	-22.49	41.39	27.94	8.80	36.30	9.68	104	121	Peak	Level (dBuV/m) Date: 2025-05-26 Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2462.00</td><td>103.52</td><td>-----</td><td>-----</td><td>93.74</td><td>27.64</td><td>8.75</td><td>36.29</td><td>9.68</td><td>104</td><td>121</td><td>Peak</td></tr></tbody></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2462.00	103.52	-----	-----	93.74	27.64	8.75	36.29	9.68	104	121	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2484.42	51.51	74.00	-22.49	41.39	27.94	8.80	36.30	9.68	104	121	Peak																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2462.00	103.52	-----	-----	93.74	27.64	8.75	36.29	9.68	104	121	Peak																																																																									
Avg	Level (dBuV/m) Date: 2025-05-26 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2484.53</td><td>41.27</td><td>54.00</td><td>-12.73</td><td>31.14</td><td>27.95</td><td>8.80</td><td>36.30</td><td>9.68</td><td>104</td><td>121</td><td>Average</td></tr></tbody></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2484.53	41.27	54.00	-12.73	31.14	27.95	8.80	36.30	9.68	104	121	Average	Level (dBuV/m) Date: 2025-05-26 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2462.00</td><td>100.48</td><td>-----</td><td>-----</td><td>90.65</td><td>27.68</td><td>8.76</td><td>36.29</td><td>9.68</td><td>104</td><td>121</td><td>Average</td></tr></tbody></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2462.00	100.48	-----	-----	90.65	27.68	8.76	36.29	9.68	104	121	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2484.53	41.27	54.00	-12.73	31.14	27.95	8.80	36.30	9.68	104	121	Average																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2462.00	100.48	-----	-----	90.65	27.68	8.76	36.29	9.68	104	121	Average																																																																									



FCC RADIO TEST REPORT

Report No. : FR550853C

Mode	3																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11b_CH11_2462MHz																																																																																	
ANT	2																																																																																	
Pol.	Vertical					Fundamental																																																																												
Peak	Level (dBuV/m) Date: 2025-05-26 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1 2483.62</td><td>53.00</td><td>74.00</td><td>-21.00</td><td>42.89</td><td>27.94</td><td>8.79</td><td>36.30</td><td>9.68</td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2483.62	53.00	74.00	-21.00	42.89	27.94	8.79	36.30	9.68	Level (dBuV/m) Date: 2025-05-26 Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1 2462.00</td><td>105.78</td><td>-----</td><td>-----</td><td>96.00</td><td>27.64</td><td>8.75</td><td>36.29</td><td>9.68</td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2462.00	105.78	-----	-----	96.00	27.64	8.75	36.29	9.68
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1 2483.62	53.00	74.00	-21.00	42.89	27.94	8.79	36.30	9.68																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1 2462.00	105.78	-----	-----	96.00	27.64	8.75	36.29	9.68																																																																										
Avg	Level (dBuV/m) Date: 2025-05-26 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1 2484.53</td><td>42.61</td><td>54.00</td><td>-11.39</td><td>32.48</td><td>27.95</td><td>8.80</td><td>36.30</td><td>9.68</td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2484.53	42.61	54.00	-11.39	32.48	27.95	8.80	36.30	9.68	Level (dBuV/m) Date: 2025-05-26 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1 2462.00</td><td>102.64</td><td>-----</td><td>-----</td><td>92.81</td><td>27.68</td><td>8.76</td><td>36.29</td><td>9.68</td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2462.00	102.64	-----	-----	92.81	27.68	8.76	36.29	9.68
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1 2484.53	42.61	54.00	-11.39	32.48	27.95	8.80	36.30	9.68																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1 2462.00	102.64	-----	-----	92.81	27.68	8.76	36.29	9.68																																																																										