



FCC RADIO TEST REPORT

FCC ID : SZGGG01
Equipment : Wireless Device
Model Name : GG01
Applicant : Weifang Goertek Electronics Co., Ltd
Gaoxin 2 Road, Free Trade Zone, Weifang,
Shandong, 261205, P.R.China
Standard : FCC 47 CFR Part 15.255

The product was received on Dec. 17, 2024 and testing was performed from Dec. 25, 2024 to Apr. 08, 2025. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures ANSI C63.10-2020 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	5
1.4 Applied Standards	5
2 Test Configuration of Equipment Under Test	6
2.1 Test Mode.....	6
2.2 Connection Diagram of Test System	7
2.3 Support Unit used in test configuration and system	7
2.4 Far Field Condition for Frequency above 18GHz.....	8
3 Radiated Test Items	9
3.1 Measuring Instruments.....	9
3.2 Test Setup	9
3.3 Test Result of Radiated Test.....	10
3.4 Emission Bandwidth	11
3.5 EIRP Power Measurement.....	14
3.6 Transmit Spurious Emission.....	16
3.7 Frequency Stability	28
4 AC conducted Emission Measurement	29
4.1 Limit of AC Conducted Emission.....	29
4.2 Measuring Instruments.....	29
4.3 Test Procedures	29
4.4 Test Setup	30
4.5 Test Result of AC Conducted Emission	30
5 List of Measuring Equipment.....	31
6 Measurement Uncertainty	34
Appendix A. AC Conducted Emission Test Result	
Appendix B. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR4D1606	01	Initial issue of report	Apr. 24, 2025
FR4D1606	02	Revise Product Feature This report is an updated version, replacing the report issued on Apr. 24, 2025.	May 09, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Limit	Result (PASS/FAIL)
3.4	§15.215(c) §15.255(e)(2)	Emission Bandwidth	Within 57 ~ 71 GHz	Pass
3.5	§15.255(c)(1)(i) §15.255(e)(1)	EIRP Power & Conducted Output Power	EIRP : - 43 dBm @ Peak Power - 40 dBm @ Average Power Conducted Power : - 500 mW @ Peak	Pass
3.6	§15.255(d)	Transmitter Spurious Emissions	Below 40GHz refer to 15.209 Above 40GHz: 90 pW/cm ² @ 3 m	Pass
3.7	§15.255(f)	Frequency Stability for Temperature & Voltage	Within 57 ~ 71 GHz	Pass
4	§15.207	AC Power Conducted Emission	§15.207	Pass

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Yun Huang

Report Producer: Ming Chen



1 General Description

1.1 Feature of Equipment Under Test

Product Feature
General Specs 60GHz
Antenna Type 60GHz: aperture coupled patch single antenna

Antenna information		
60.5 GHz	Peak Gain (dBi)	4

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH11-HY, 03CH18-HY, CO07-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.4 Applied Standards

- ♦ FCC 47 CFR Part 2, 15.255
- ♦ KDB 364244 D01
- ♦ ANSI C63.10-2020

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).
- b. AC power line Conducted Emission was tested under maximum output power.


2.1 Test Mode

Frequency (GHz)	Modulation	Data Rate (Mbps)
60.5	2ASK	480

Test Cases	
AC Conducted Emission	Mode 1 : 60.5 GHz Tx + Notebook

2.2 Connection Diagram of Test System

<60GHz Tx Mode>

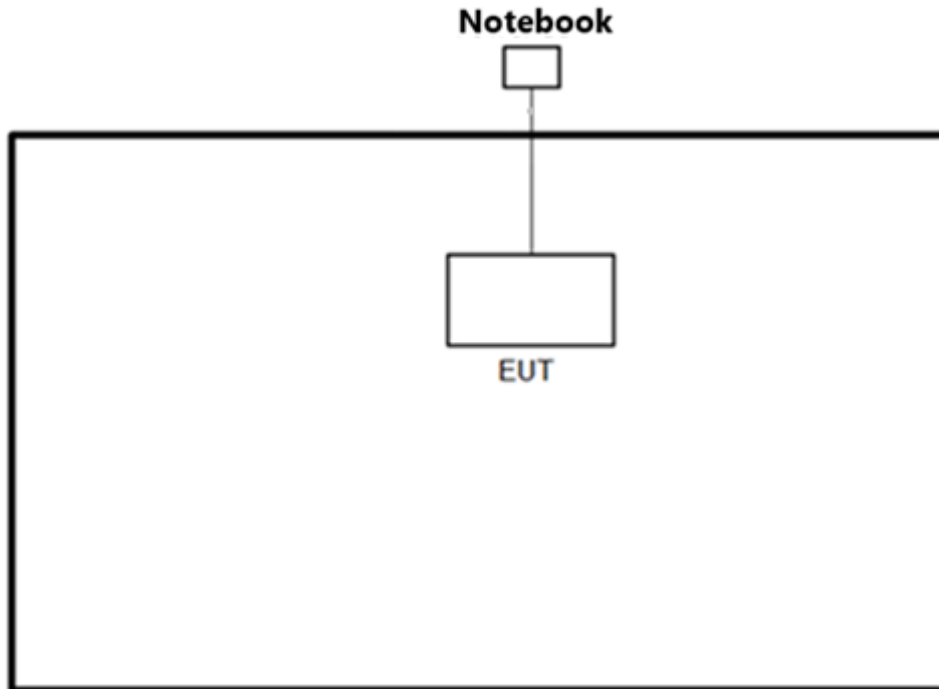

2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	Dell	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

2.4 Far Field Condition for Frequency above 18GHz

Horn Antenna	Frequency (GHz)	Antenna Dimension A (mm)	Wavelength (λ) (m)	Far field R (m) $\geq 2A^2 / \lambda$	Measurement Distance (D) (m)
BBHA 9170	18	60	0.0167	0.43	1
	40	60	0.0075	0.96	
QWH-UPRR00	40	48	0.0075	0.61	0.87
	57	48	0.0053	0.87	
QWH-VPRR00	57	38	0.0053	0.54	0.62
	65	38	0.0046	0.62	
QWH-EPRR00	60	31	0.0050	0.38	0.6
	90	31	0.0033	0.60	
QWH-FPRR00	90	21	0.0033	0.26	0.43
	140	21	0.0021	0.42	
QWH-GPRR00	140	14	0.0021	0.18	0.27
	200	14	0.0015	0.26	

Note:

1. The measurement distance may be far than the measurement distance above.
2. $\lambda = [300/f \text{ MHz}]$, in m ; This table only keeps the rounding to four decimal places to reference.


3 Radiated Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


For radiated emissions from 9kHz to 30MHz

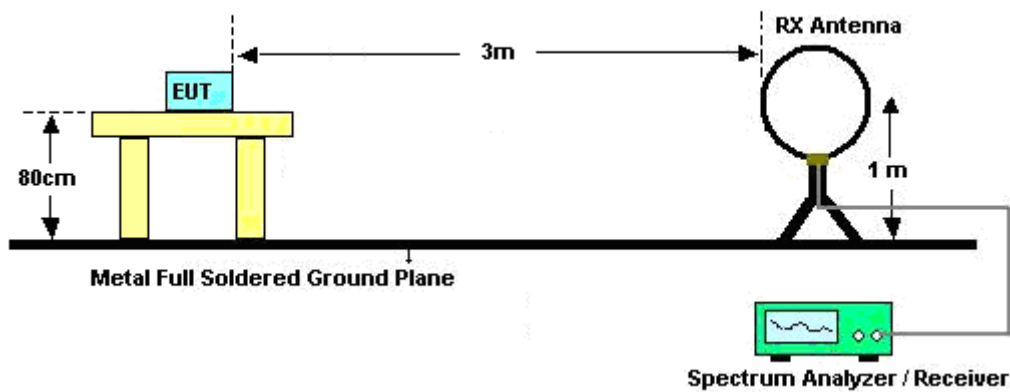


For radiated emissions from 30MHz to 1GHz

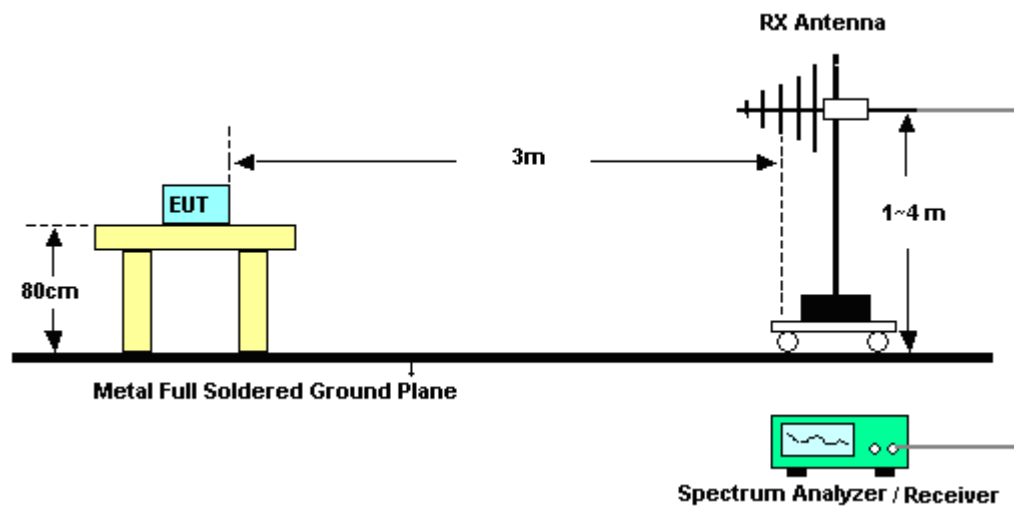

For radiated emissions 1GHz to 18GHz

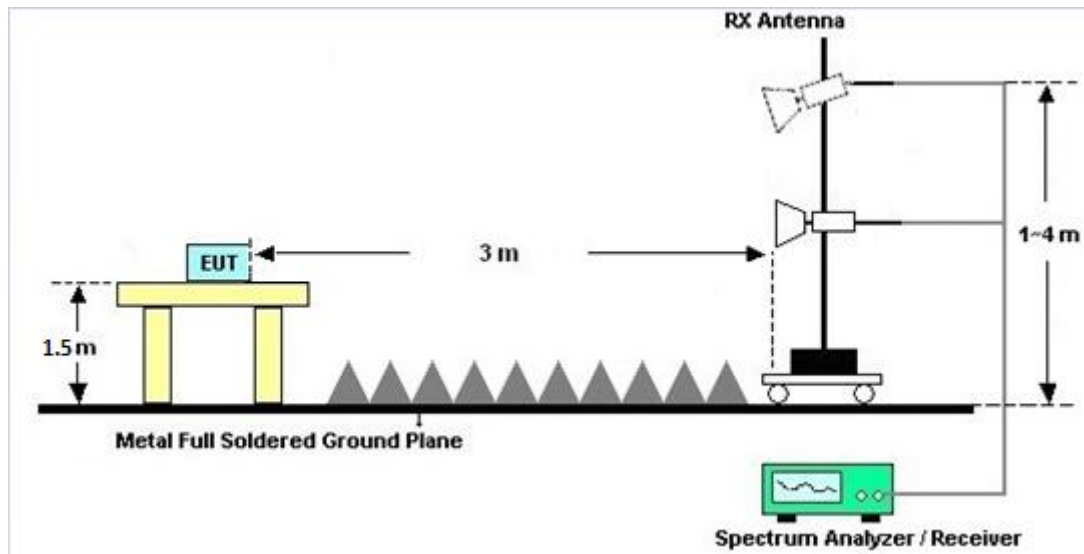

For radiated emissions above 18GHz

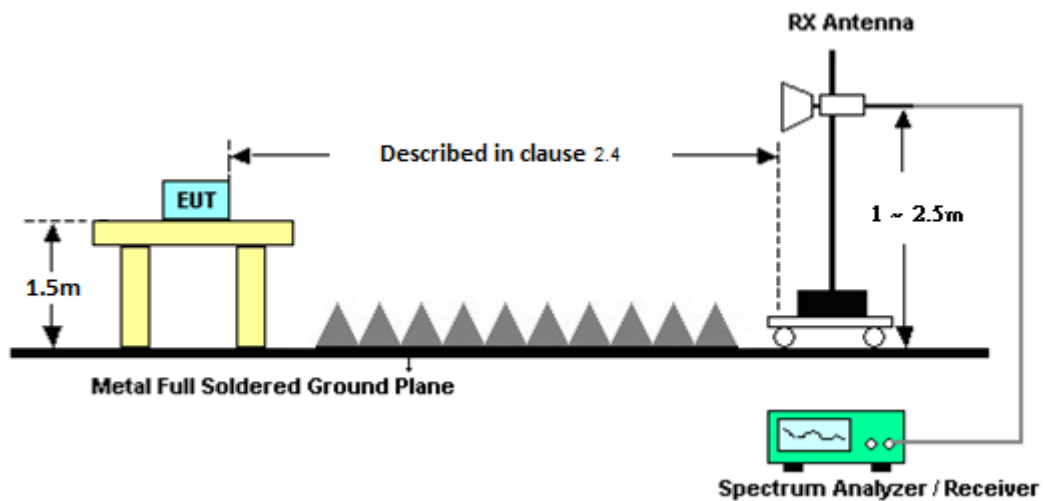

3.3 Test Result of Radiated Test

Please refer to Clause 3.6.



3.4 Emission Bandwidth

3.4.1 Limit of Emission Bandwidth Measurement

99% Occupied Bandwidth & 6 dB Bandwidth is for reporting only.

3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2020 Section 9.3 and 9.4.
2. Set the maximum power setting.
3. The EUT is placed on a turntable with 1.6 meter respectively above ground.
4. The EUT is set 0.62 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Use 50-75 GHz receiver antenna, mixer and spectrum analyzer.
6. The EUT is arranged to its worst case and then tune the antenna tower and turntable (from 0 degree to 360 degrees) to find the maximum reading.
7. For 6dB Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 100 kHz and Video bandwidth (VBW) is set 300 kHz.
8. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 20 MHz and Video bandwidth (VBW) is set 80 MHz.
9. Measure and record the results in the test report.

**3.4.4 Test Results**



Temperature	20~25℃	Relative Humidity	50~60%
Test Engineer	Eric Jeng		

99% Occupied Bandwidth (GHz)	Limit (GHz)
3.32	Report Only

6 dB Bandwidth (GHz)	Limit (GHz)
0.002	Report Only



3.4.5 Test Plots

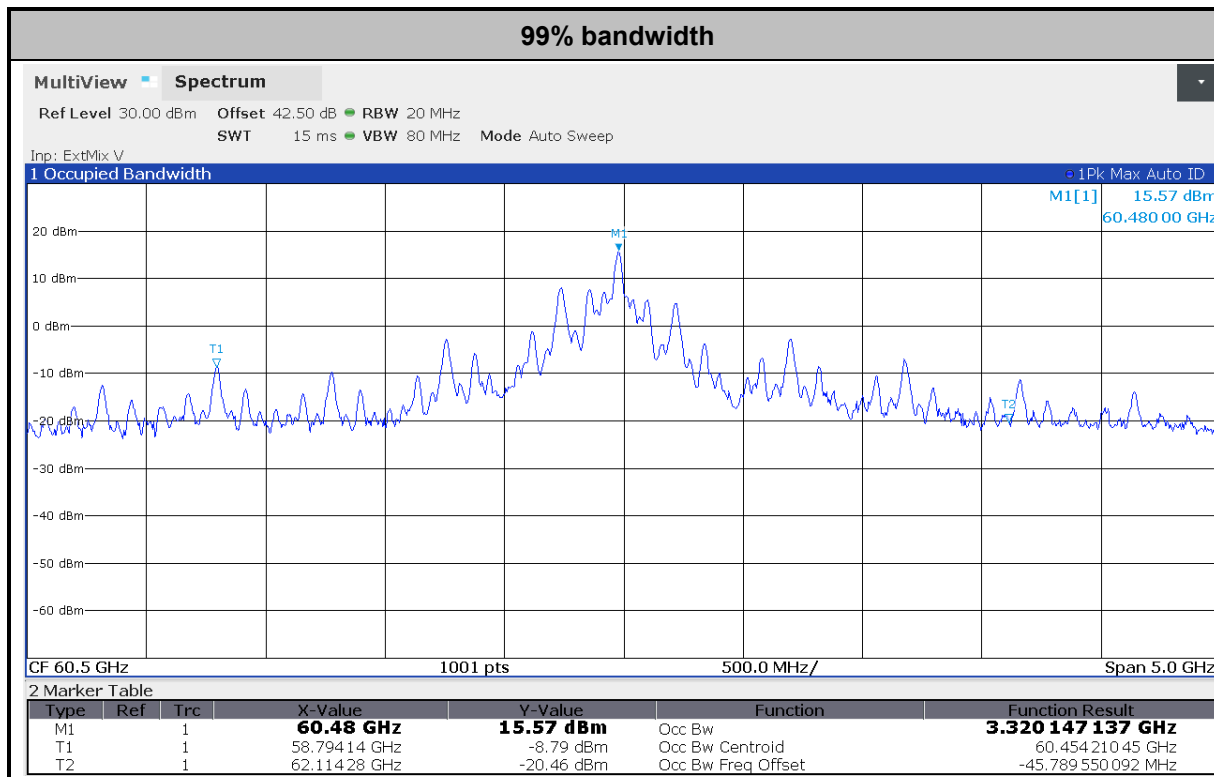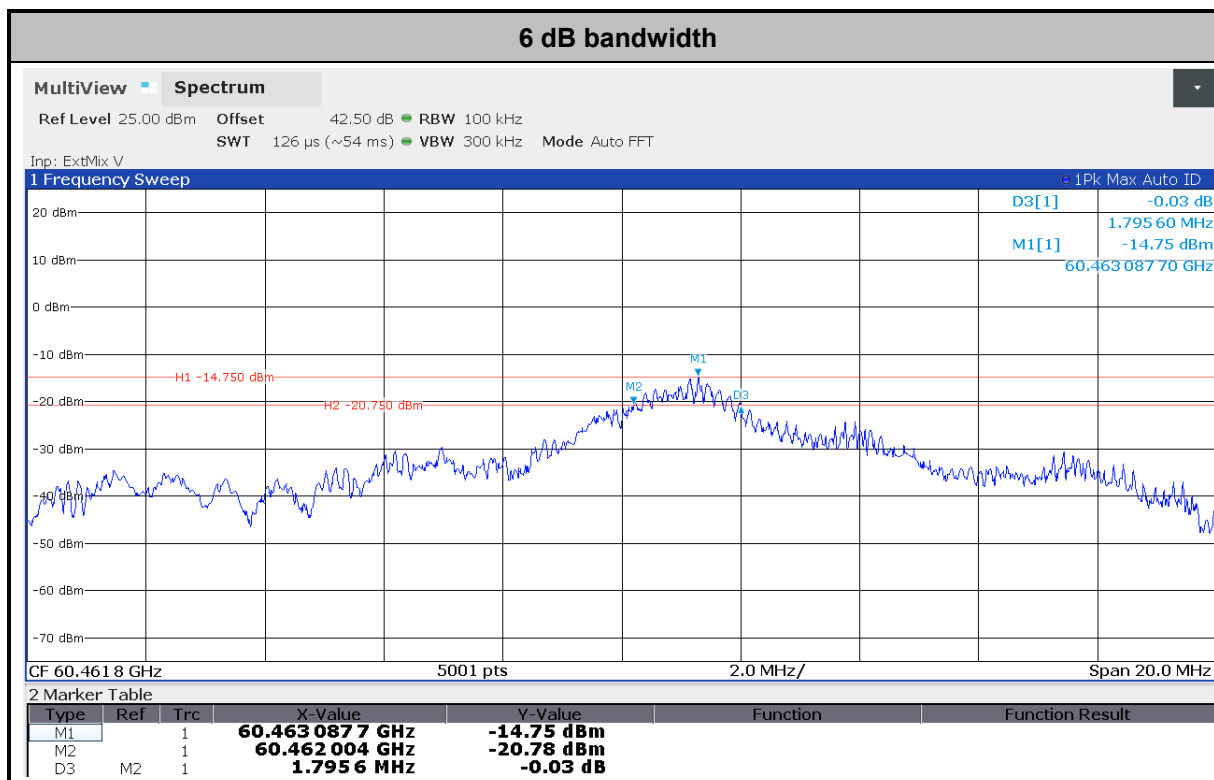



3.5 EIRP Power Measurement

3.5.1 Limit of EIRP Power Measurement

Devices other than field disturbance sensors shall comply with one of the following power limits, as measured during the transmit interval: The average power of any emission shall not exceed 40 dBm and the peak power of any emission shall not exceed 43 dBm;

The peak transmitter conducted output power of devices other than field disturbance sensors/radars shall not exceed 500 mW.

3.5.2 Measuring Instruments

See list of measuring equipment of this test report.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2020 Section 9.8.
2. Set the maximum power setting.
3. The EUT is placed on a turntable with 1.6 meter respectively above ground.
4. The EUT is set 0.62 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Use 50-75 GHz receiver antenna, mixer and spectrum analyzer.
6. The EUT is arranged to its worst case and then tune the antenna tower and turntable (from 0 degree to 360 degrees) to find the maximum reading.
7. The spectrum analyzer's resolution bandwidth (RBW) is set 50 MHz and Video bandwidth (VBW) is set 80 MHz.
8. Use mark Peak function to check result.
9. Measure and record the results in the test report.

**3.5.4 Test Results**

Temperature	20~25℃		Relative Humidity	50~60%	
Test Engineer	Eric Jeng				
EIRP Power					
Measurement	Measure Dist. (m)	Measure Ant Gain (dBi)	EIRP (dBm)	Limit (dBm)	Result
Peak EIRP	0.62	22.6	5.80	43	PASS


Note:

- Total path loss (dB) = Air loss - Measure Ant Gain (dBi) + Cable loss(dB)
Ex: Total path loss (dB) = 63.92 (dB) - 22.6 (dBi) + 1.18 (dB) = 42.50 (dB)
- No additional measurements for the Average EIRP as the Peak EIRP is less than 40 dBm.

Peak Conducted Power					
Peak EIRP (dBm)	Ant Gain (dBi)	Conducted Power (dBm)	Conducted Power (mW)	Limit (mW)	Result
5.80	4.00	1.80	1.51	500	PASS

Note:

- Peak conducted power (dBm) = Peak EIRP Power - Ant Gain (dBi)

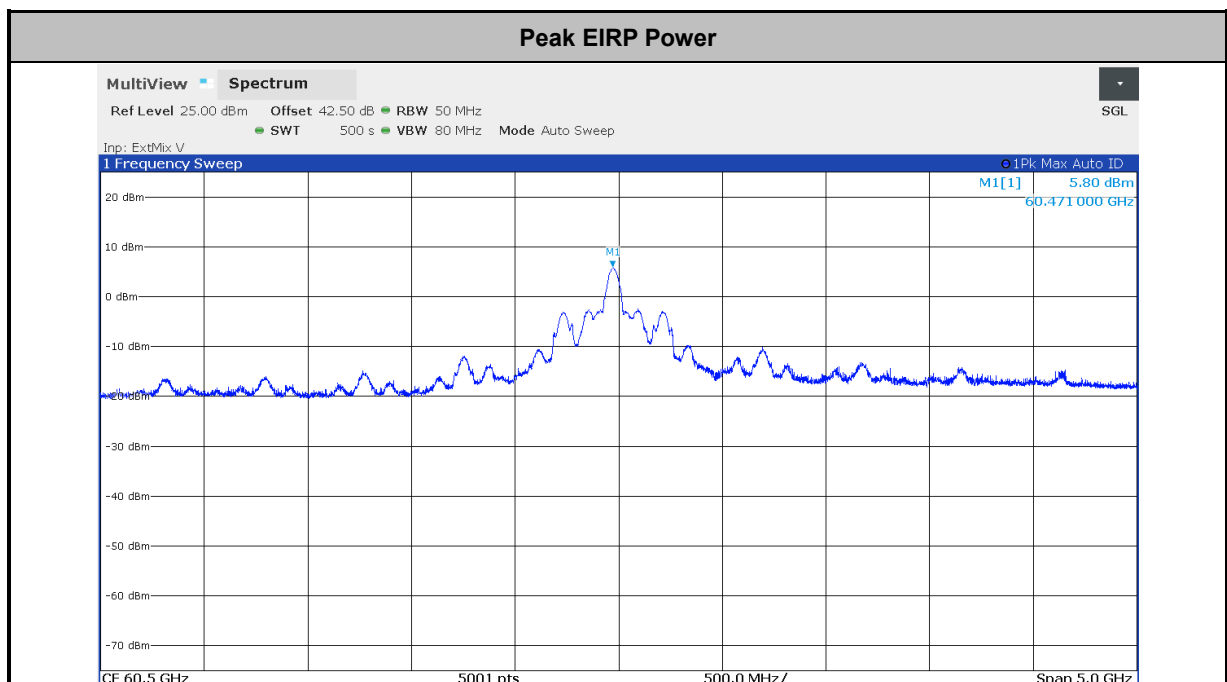3.5.5 Test Plots

3.6 Transmit Spurious Emission

3.6.1 Limit of Radiated Spurious Emission

Frequency Range	Limit
Below 40GHz	Follow 15.209
Above 40GHz	90 pW/cm ² @ 3m (equivalent EIRP 102μW, -10dBm)
Note 1: For the applicable limit, see FCC 15.255 (d) Note 2: Spurious emissions shall not exceed the level of fundamental emission. Note 3: Per Part 15.215(c), the provisions in Part 15.35(b) and (c) that require emissions to be averaged over a 100 millisecond period and that limits the peak power to 20 dB above the average limit do not apply to devices operating under paragraphs Part 15.255(c)(2) and (3) of this section.	

3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

3.6.3 Test Procedures

The testing follows ANSI C63.10-2020 Section 9.10 and 9.11 and ANSI C63.10-2020 clause 4.1.5.2.8 and Annex L.

For above 40GHz emission:

$$\text{EIRP} = \text{Prx} - \text{Grx} + \text{Free space loss} = \text{Prx} - \text{Grx} + 20 \cdot \log(4 \pi d / \lambda) + \text{Path Loss}$$

Which

Prx = Read Level

Grx = Rx Antenna Gain

A distance factor is offset and formula is $20 \cdot \log(D1/D2)$

Which

D1 = Specification distance = 3m

D2 = Measurement distance


$$\text{Power Density (W/m}^2\text{)} = 10^{[(\text{EIRP}-30)/10]} / 4 \pi d$$

$$\text{Power Density (pW/cm}^2\text{)} = \text{Power Density (W/m}^2\text{)} * 10^{(-8)}$$

3.6.4 Test Result

<Below 30MHz>

Temperature	19.1 ~ 20.5℃	Relative Humidity	51.2 ~ 65.1%
Test Engineer	Fu Chen, Troye Hsieh	Test Distance	3m
Test Range	9KHz to 30MHz	Test Polarization	Horizontal
Remark	1. Level (dBμV/m) = Read Level (dBμV) + Antenna Factor (dB) + Cable Loss (dB) + Distance extrapolation factor (dB). 2. Distance extrapolation factor (dB) = 40 log (specific distance / test distance) 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.		

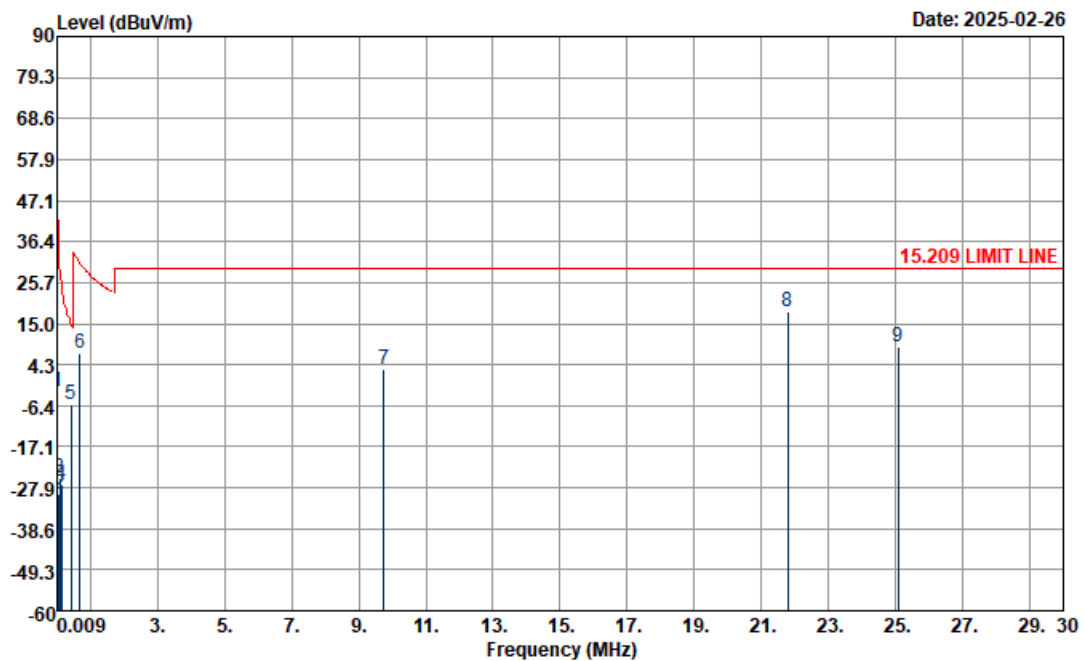


Site : 03CH11-HY

Condition : 15.209 LIMIT LINE 3m LOOP_100488_240829 HORIZONTAL

Mark	Frequency (MHz)	Level (dBμV/m)	Distance extrapolation Factor (dB)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
1	0.01930	-2.66	-80	-44.55	41.89	57.81	19.47	0.06	-	-	Average
2	0.06651	-29.66	-80	-60.81	31.15	32.08	18.19	0.07	-	-	Average
3	0.09640	-25.40	-80	-53.32	27.92	36.54	17.99	0.07	-	-	QP
4	0.14464	-27.07	-80	-51.47	24.40	34.63	18.23	0.07	-	-	Average
5	0.42710	-6.19	-80	-21.18	14.99	55.22	18.53	0.06	-	-	Average
6	0.68526	7.15	-40	-23.74	30.89	28.59	18.50	0.06	-	-	QP
7	9.73600	3.23	-40	-26.27	29.50	22.75	20.37	0.11	-	-	QP
8	21.79600	18.22	-40	-11.28	29.50	36.40	21.72	0.10	-	-	QP
9	25.07500	9.03	-40	-20.47	29.50	25.97	22.96	0.10	-	-	QP



Temperature	19.1 ~ 20.5℃	Relative Humidity	51.2 ~ 65.1%
Test Engineer	Fu Chen, Troye Hsieh	Test Distance	3m
Test Range	9KHz to 30MHz	Test Polarization	Vertical
Remark	1. Level (dBμV/m) = Read Level (dBμV) + Antenna Factor (dB) + Cable Loss (dB) + Distance extrapolation factor (dB). 2. Distance extrapolation factor (dB) = 40 log (specific distance / test distance) 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.		

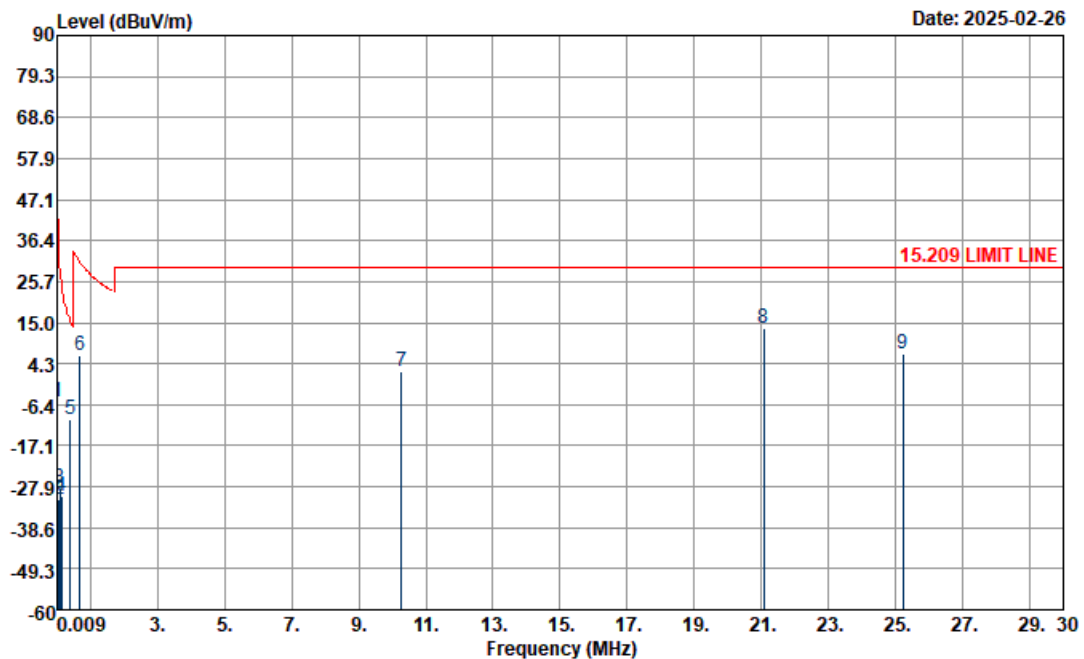

Site : 03CH11-HY


Condition : 15.209 LIMIT LINE 3m LOOP_100488_240829 VERTICAL

Mark	Frequency (MHz)	Level (dBμV/m)	Distance extrapolation Factor (dB)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
1	0.01925	-5.79	-80	-47.71	41.92	54.69	19.46	0.06	-	-	Average
2	0.06651	-31.21	-80	-62.36	31.15	30.53	18.19	0.07	-	-	Average
3	0.09642	-28.17	-80	-56.09	27.92	33.77	17.99	0.07	-	-	QP
4	0.14464	-30.13	-80	-54.53	24.40	31.57	18.23	0.07	-	-	Average
5	0.40874	-10.25	-80	-25.63	15.38	51.18	18.51	0.06	-	-	Average
6	0.68526	6.33	-40	-24.56	30.89	27.77	18.50	0.06	-	-	QP
7	10.27200	2.10	-40	-27.40	29.50	21.44	20.55	0.11	-	-	QP
8	21.06700	13.34	-40	-16.16	29.50	31.45	21.79	0.10	-	-	QP
9	25.21500	6.66	-40	-22.84	29.50	23.66	22.89	0.11	-	-	QP



<30MHz to 1GHz>

Temperature	19.1 ~ 20.5°C	Relative Humidity	51.2 ~ 65.1%
Test Engineer	Fu Chen, Troye Hsieh	Test Distance	3m
Test Range	30MHz to 1GHz	Test Polarization	Horizontal
Remark	1. Level (dB μ V/m) = Read Level (dB μ V) + Antenna Factor (dB) + Path Loss(dB) - Preamp Factor (dB) 2. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) 3. The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.		

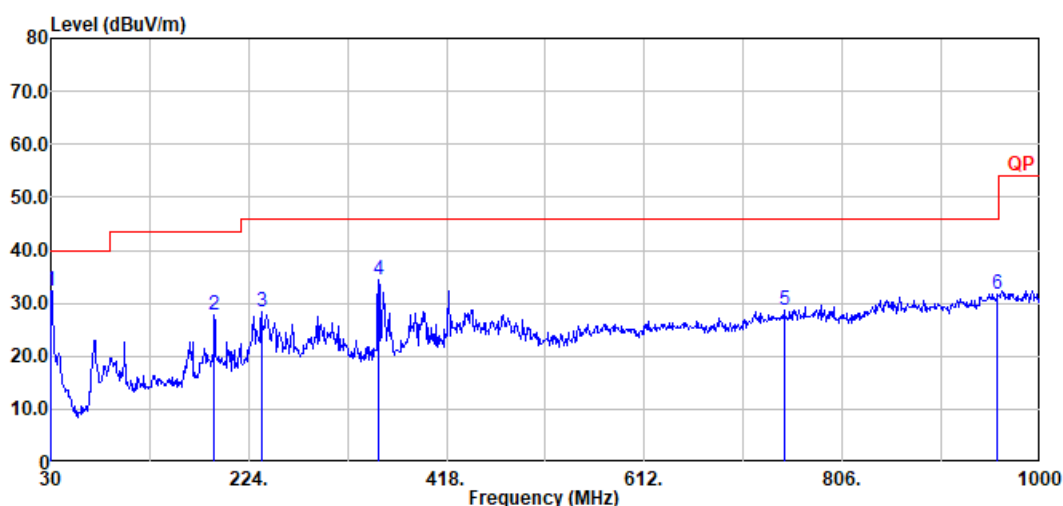


Site : 03CH11-HY
 Condition: QP 3m Bilog_63304_241217 HORIZONTAL

Mark	Frequency (MHz)	Level (dB μ V/m)	Margin (dB)	Limit Line (dB μ V/m)	Read Level (dB μ V)	Antenna Factor (dB)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
1	30.00	32.22	40.0	-7.78	38.77	25.30	0.58	32.43	-	-	Peak
2	190.05	27.74	43.5	-15.76	43.49	14.70	1.75	32.20	-	-	Peak
3	236.61	28.53	46.0	-17.47	41.81	16.89	2.03	32.20	-	-	Peak
4	351.07	34.31	46.0	-11.69	43.48	20.52	2.47	32.16	-	-	Peak
5	748.77	28.75	46.0	-17.25	28.80	28.28	3.77	32.10	-	-	Peak
6	958.29	31.78	46.0	-14.22	26.77	31.50	4.32	30.81	-	-	Peak



Temperature	19.1 ~ 20.5℃	Relative Humidity	51.2 ~ 65.1%
Test Engineer	Fu Chen, Troye Hsieh	Test Distance	3m
Test Range	30MHz to 1GHz	Test Polarization	Vertical
Remark	- Level (dBμV/m) = Read Level (dBμV) + Antenna Factor (dB) + Path Loss(dB) - Preamp Factor (dB) - Path Loss(dB) = Cable loss(dB) + Filter loss(dB) - The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.		

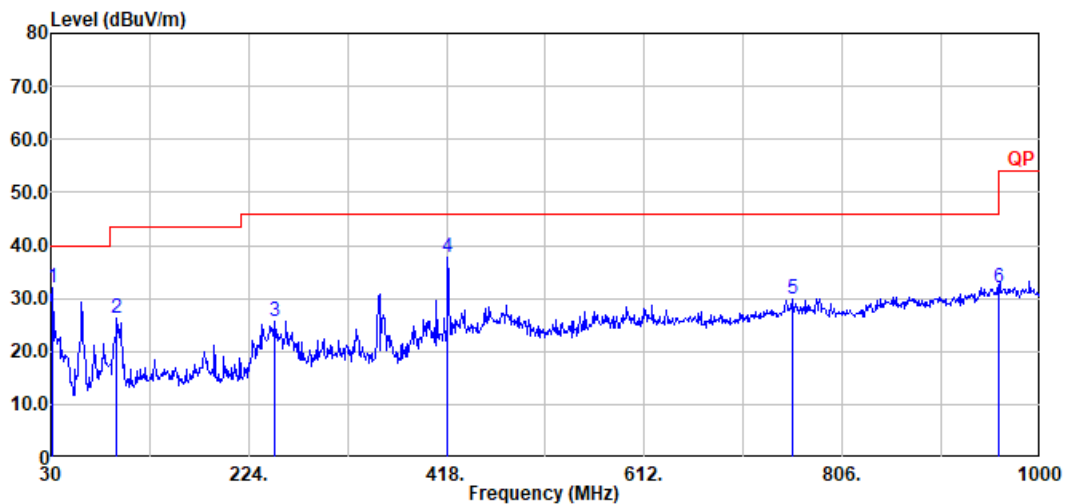


Mark	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
1	30.97	32.14	40.0	-7.86	39.57	24.43	0.55	32.41	-	-	Peak
2	94.99	26.32	43.5	-17.18	42.44	15.10	1.10	32.32	-	-	Peak
3	249.22	25.74	46.0	-20.26	37.24	18.59	2.11	32.20	-	-	Peak
4	418.97	37.78	46.0	-8.22	44.60	22.58	2.71	32.11	-	-	Peak
5	756.53	29.88	46.0	-16.12	29.87	28.30	3.79	32.08	-	-	Peak
6	959.26	32.01	46.0	-13.99	26.98	31.50	4.33	30.80	-	-	Peak



<1GHz to 18GHz>

Temperature	19.1 ~ 20.5℃	Relative Humidity	51.2 ~ 65.1%
Test Engineer	Fu Chen, Troye Hsieh	Test Distance	3m
Test Range	1GHz to 18GHz	Test Polarization	Horizontal
Remark	1. Level (dBμV/m) = Read Level (dBμV) + Antenna Factor (dB) + Path Loss(dB) - Preamp Factor (dB) 2. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.		

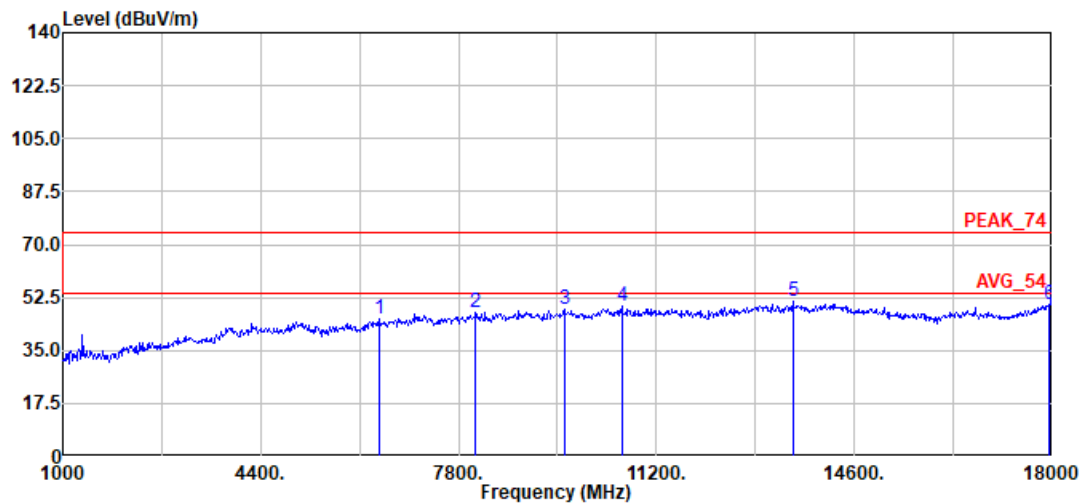


Site : 03CH11-HY

Condition: PEAK_74 3m 9120D_01620_240828 HORIZONTAL

Mark	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
1	6440	45.27	-28.73	74	32.74	34.78	13.22	35.47	-	-	Peak
2	8089	47.38	-26.62	74	32.47	36.82	15.33	37.24	-	-	Peak
3	9619	48.50	-25.50	74	31.61	38.12	17.80	39.03	-	-	Peak
4	10605	49.89	-24.11	74	33.59	39.01	17.61	40.32	-	-	Peak
5	13546	51.18	-22.82	74	33.30	40.48	19.98	42.58	-	-	Peak
6	17949	50.19	-23.81	74	32.49	41.79	23.59	47.68	-	-	Peak



Temperature	19.1 ~ 20.5℃	Relative Humidity	51.2 ~ 65.1%
Test Engineer	Fu Chen, Troye Hsieh	Test Distance	3m
Test Range	1GHz to 18GHz	Test Polarization	Vertical
Remark	1. Level (dBμV/m) = Read Level (dBμV) + Antenna Factor (dB) + Path Loss(dB) - Preamp Factor (dB) 2. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.		

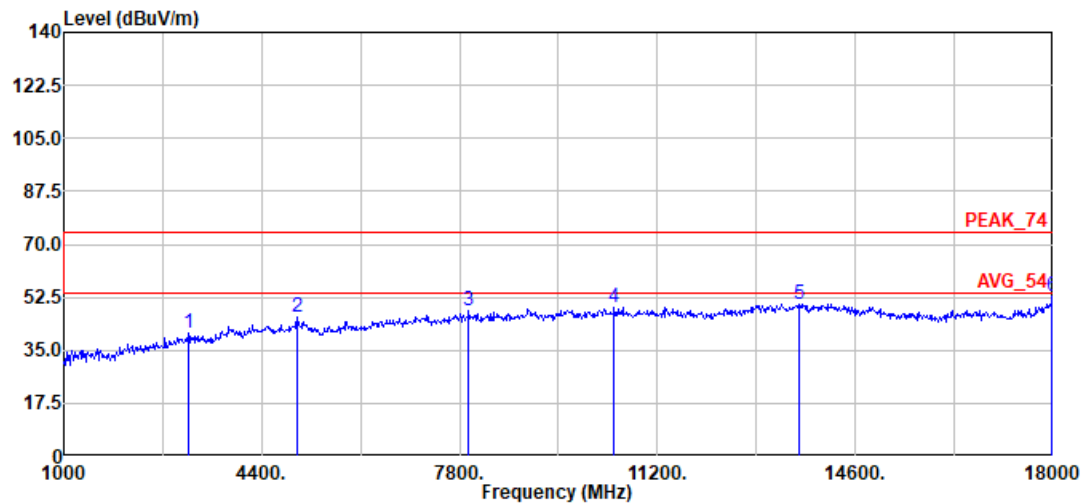



Site : 03CH11-HY
 Condition: PEAK_74 3m 9120D_01620_240828 VERTICAL

Mark	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
1	3142	40.80	-33.20	74	35.35	29.85	9.06	33.46	-	-	Peak
2	5012	45.78	-28.22	74	34.91	33.05	11.68	33.86	-	-	Peak
3	7953	48.25	-25.75	74	33.30	36.81	15.24	37.10	-	-	Peak
4	10452	49.18	-24.82	74	33.16	38.60	17.56	40.14	-	-	Peak
5	13631	50.41	-23.59	74	32.99	40.14	20.00	42.72	-	-	Peak
6	17983	53.05	-20.95	74	35.16	41.93	23.61	47.65	-	-	Peak



<18GHz to 40GHz>



Temperature	19.1 ~ 20.5°C	Relative Humidity	51.2 ~ 65.1%
Test Engineer	Fu Chen, Troye Hsieh	Test Distance	1m
Test Range	18GHz to 40GHz	Test Polarization	Horizontal
Remark	1. Level (dBμV/m) = Read Level (dBμV) + Antenna Factor (dB) + Path Loss(dB) - Preamp Factor (dB) 2. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Distance extrapolation factor (dB). 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.		

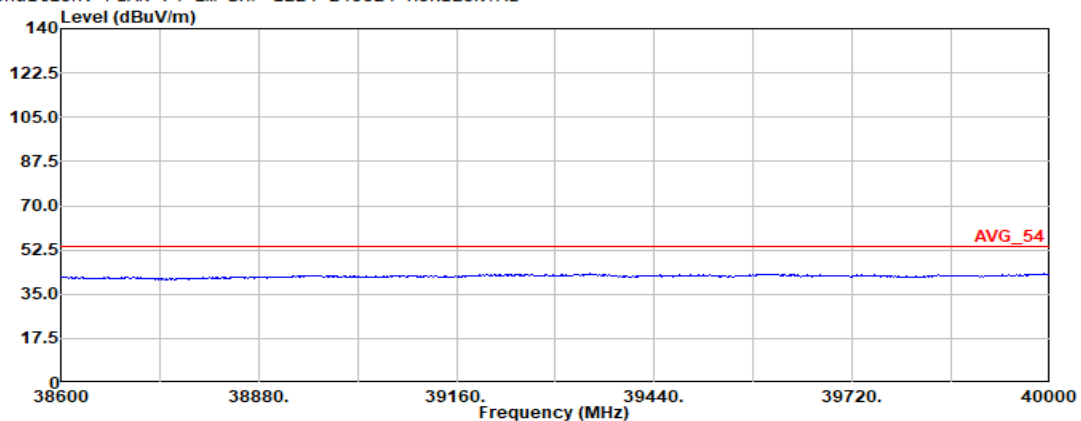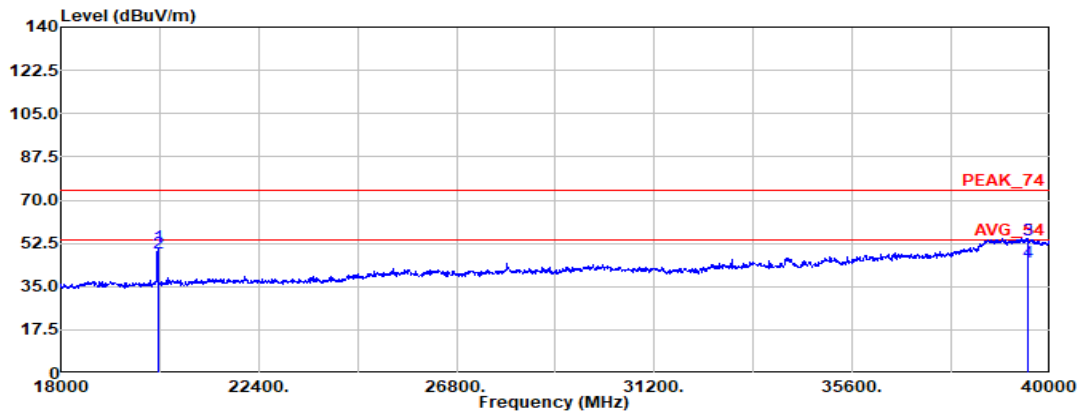

Mark	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
1	20152	51.30	-22.70	74	52.21	37.70	16.39	55.00	100	137	Peak
2	20152	48.79	-5.21	54	49.70	37.70	16.39	55.00	100	137	Average
3	39492.17	53.86	-20.14	74	37.88	45.72	26.46	56.20	-	-	Peak
4	39492.17	44.97	-9.03	54	28.99	45.72	26.46	56.20	-	-	Average



Temperature	19.1 ~ 20.5℃	Relative Humidity	51.2 ~ 65.1%
Test Engineer	Fu Chen, Troye Hsieh	Test Distance	1m
Test Range	18GHz to 40GHz	Test Polarization	Vertical
Remark	- Level (dBμV/m) = Read Level (dBμV) + Antenna Factor (dB) + Path Loss(dB) - Preamp Factor (dB) - Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Distance extrapolation factor (dB). - The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.		

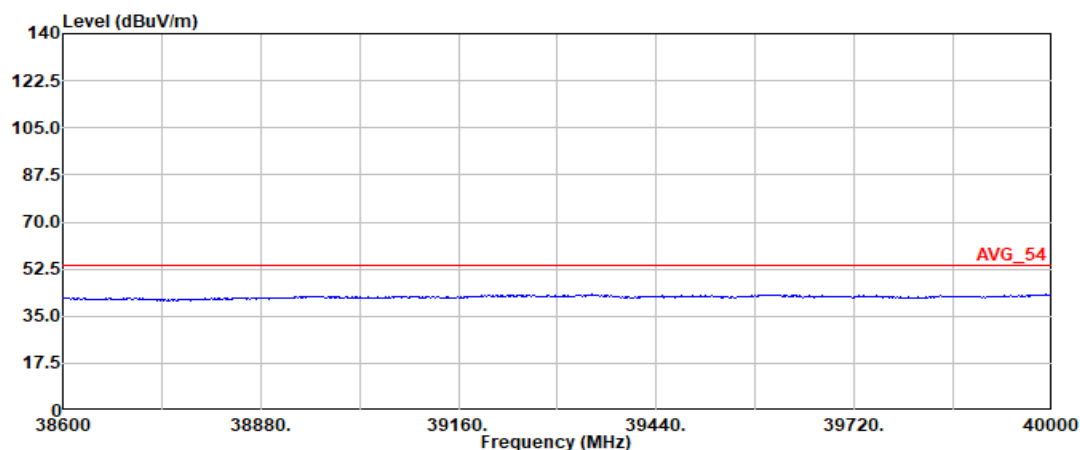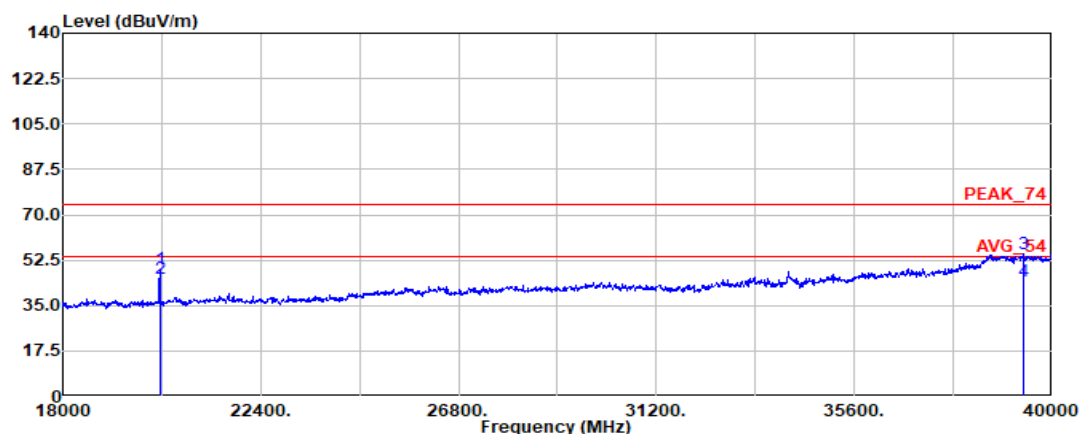

Mark	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
1	20152.00	49.09	-24.91	74	50	37.70	16.39	55.00	100	201	Peak
2	20152.00	45.40	-8.60	54	46.31	37.70	16.39	55.00	100	201	Average
3	39369.51	54.76	-19.24	74	39.01	45.43	26.60	56.28	-	-	Peak
4	39369.51	44.56	-9.44	54	28.81	45.43	26.60	56.28	-	-	Average



<40GHz to 200GHz>

Temperature	20~25°C	Relative Humidity	50~60%
Test Engineer	Eric Jeng	Test Range	40GHz to 200GHz

Test Frequency (GHz)	Rx Antenna Gain (dBi)	Measurement Distance (m)	Read Worse Frequency (GHz)	Read Level (dBm)
40 - 57	22.70	0.87	40.3165	-89.70
EIRP (dBm)	Specification Distance (m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Test Result
-45.56	3	0.024578	90	PASS

Note: Path Loss = 1.18 dB; the calculate of λ using 57GHz as f.

Test Frequency (GHz)	Rx Antenna Gain (dBi)	Measurement Distance (m)	Read Worse Frequency (GHz)	Read Level (dBm)
71 - 90	23.10	0.6	89.9435	-86.12
EIRP (dBm)	Specification Distance (m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Test Result
-41.00	3	0.070234	90	PASS



Note: Path Loss = 1.18 dB; the calculate of λ using 90GHz as f.



Test Frequency (GHz)	Rx Antenna Gain (dBi)	Measurement Distance (m)	Read Worse Frequency (GHz)	Read Level (dBm)
90 - 140	22.50	0.43	90.2655	-74.25
EIRP (dBm)	Specification Distance (m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Test Result
-28.19	3	1.341367	90	PASS

Note: Path Loss = 1.18 dB; the calculate of λ using 140GHz as f.

Test Frequency (GHz)	Rx Antenna Gain (dBi)	Measurement Distance (m)	Read Worse Frequency (GHz)	Read Level (dBm)
140 - 200	21.80	0.27	176.8489	-70.88
EIRP (dBm)	Specification Distance (m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Test Result
-26.16	3	2.140660	90	PASS

Note: Path Loss = 1.18 dB; the calculate of λ using 200GHz as f.

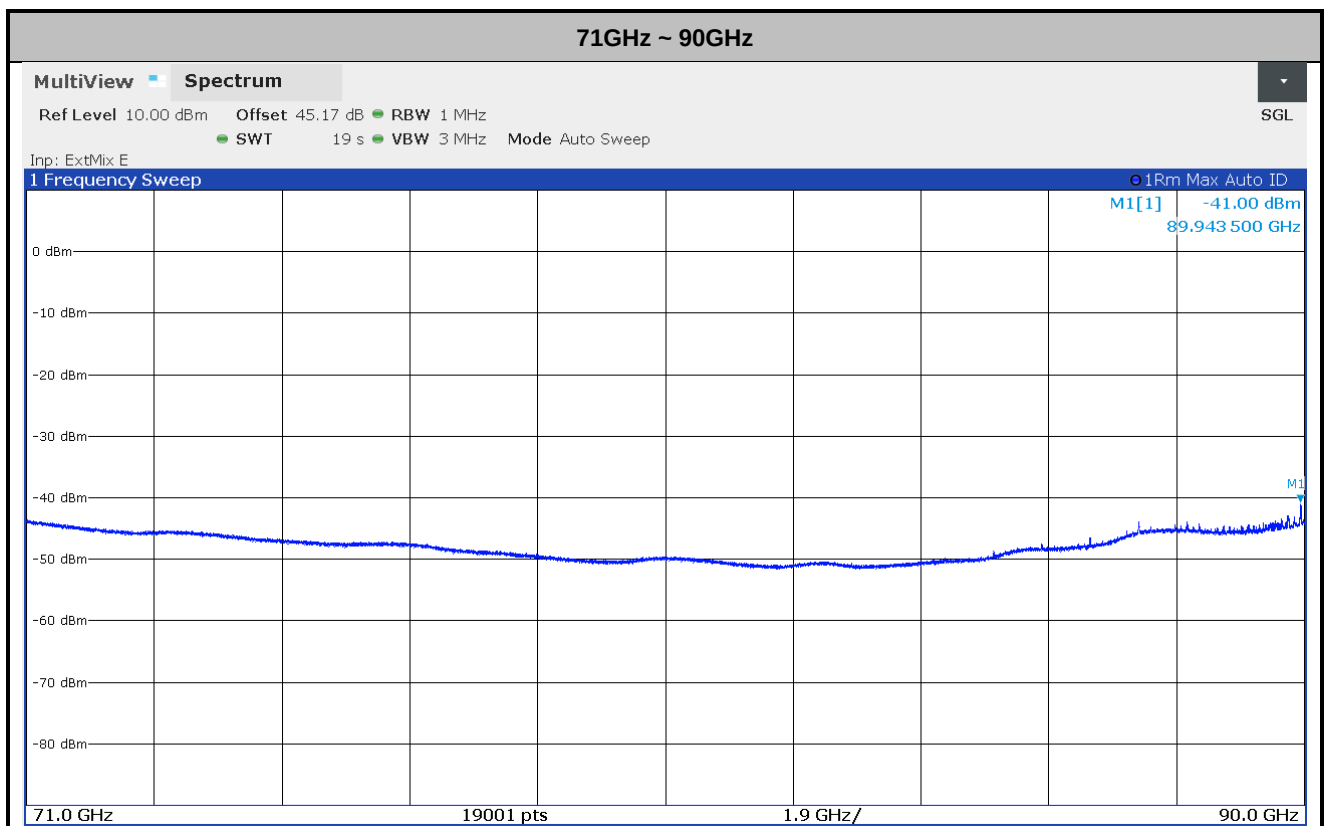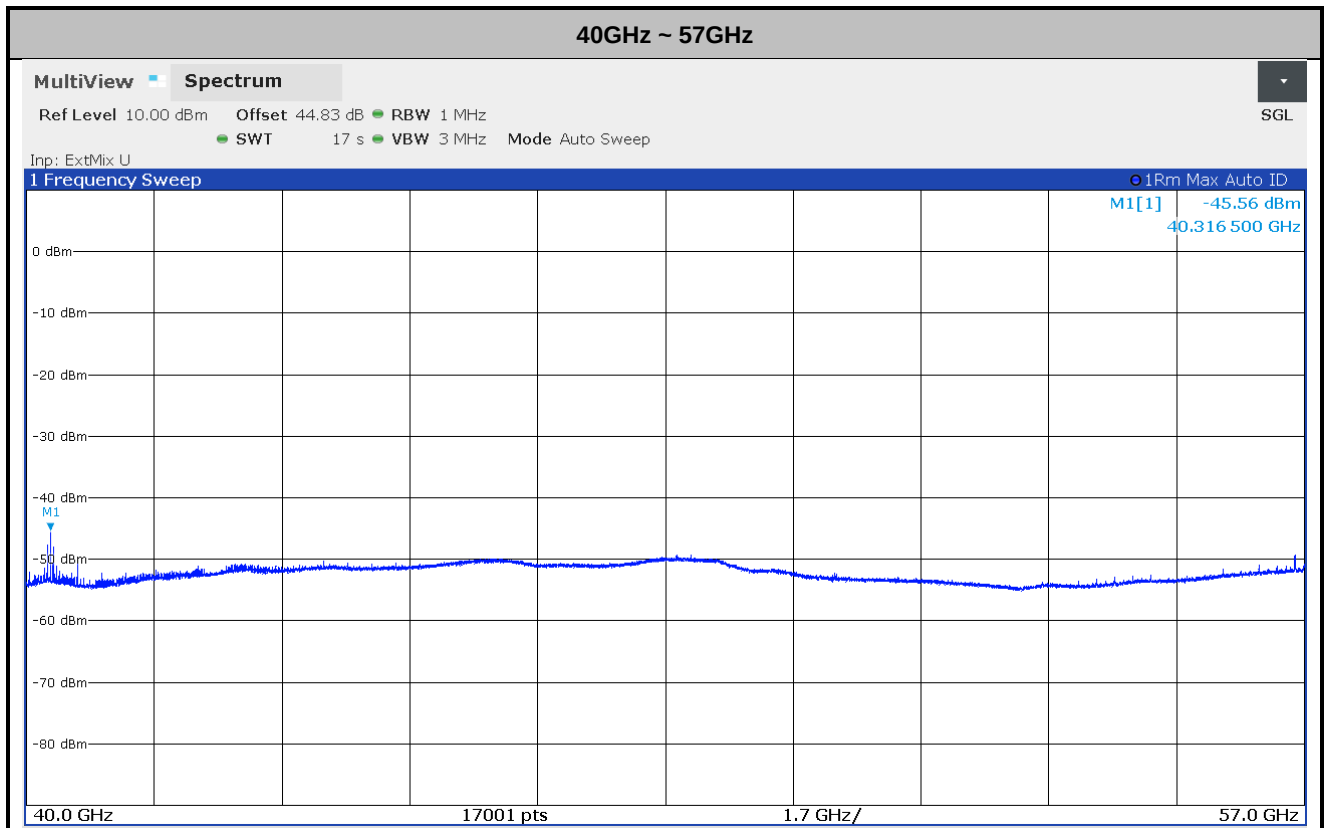

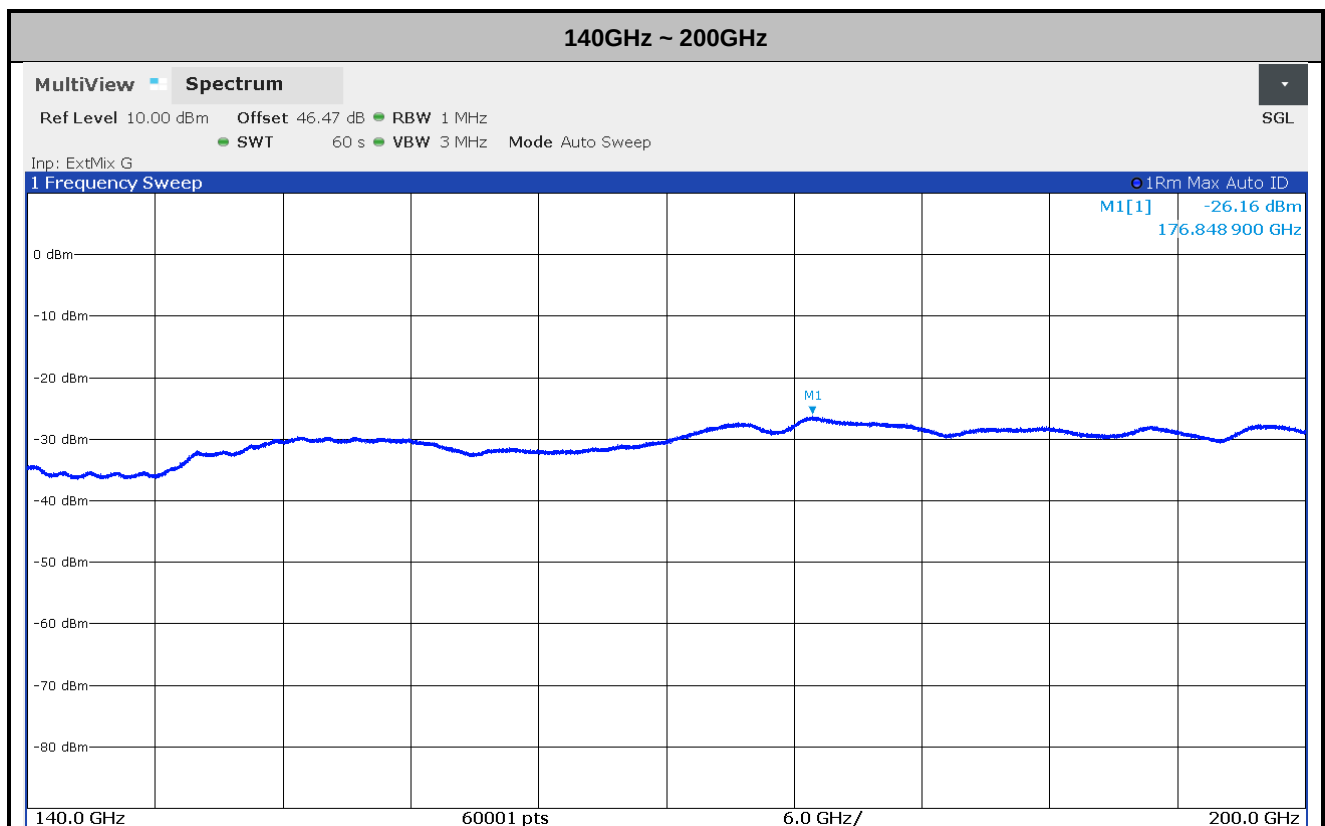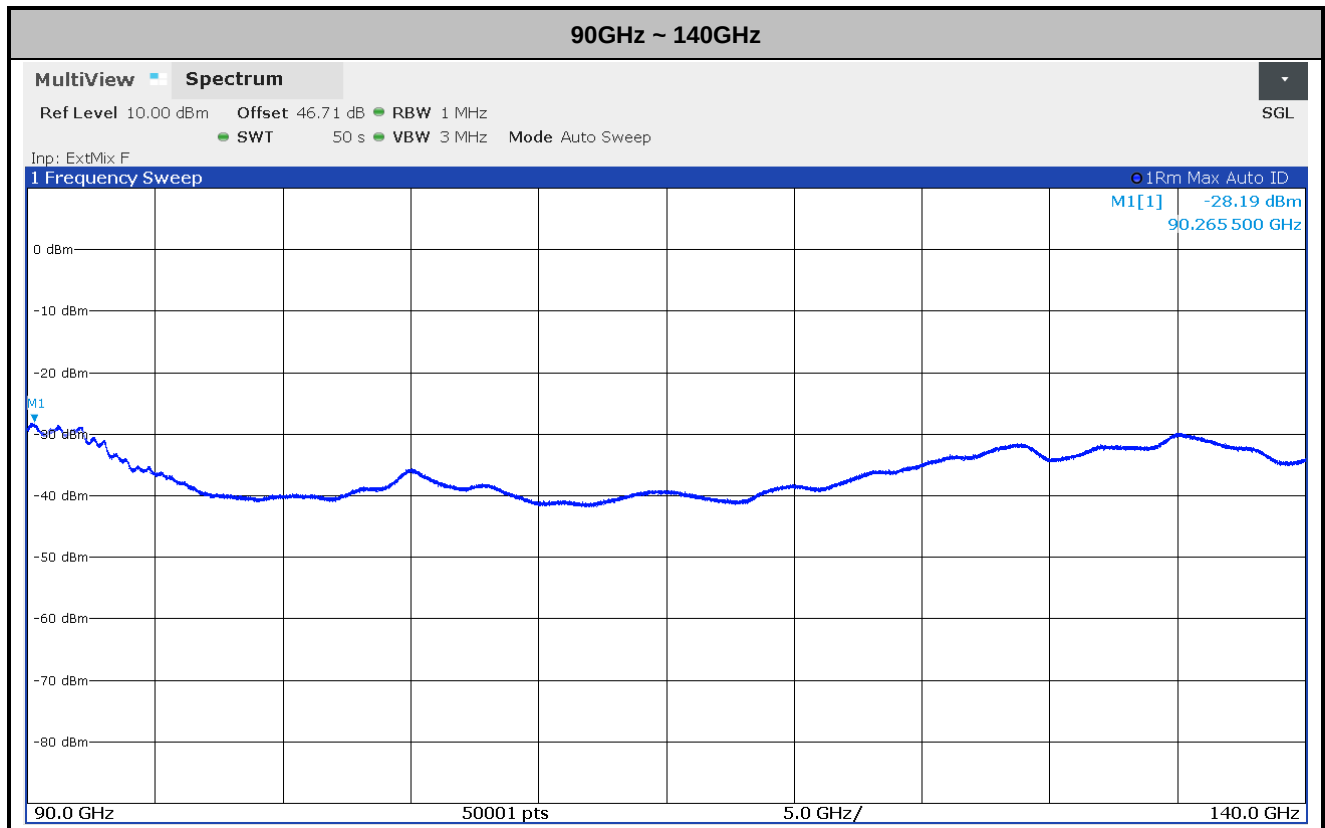

3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency range, 57 GHz – 71 GHz.

3.7.2 Measuring Instruments

See list of measuring equipment of this test report.

3.7.3 Test Procedures

The testing follows ANSI C63.10-2020 Section 9.5.

3.7.4 Test Result

Test Engineer	Eric Jeng				
Test Temperature (°C)	Voltage (Volt)	Low Frequency (GHz)	High Frequency (GHz)	Limit	Result
50	5.0	58.7881	62.1466	Within 57 ~ 71 GHz	pass
40	5.0	58.7864	62.1510		
30	5.0	58.7895	62.1407		
20	5.0	58.7863	62.1468		
10	5.0	58.7820	62.1518		
0	5.0	58.7860	62.1487		
-10	5.0	58.7864	62.1485		
-20	5.0	58.7899	62.1460		
20	4.2	58.7801	62.1559		
20	5.5	58.7844	62.1510		

Note:

1. Normal Voltage =5 Vdc. ; Low Voltage = 4.2 Vdc. ; Maximum Voltage = 5.5 Vdc.
2. The frequency fundamental emissions stay within the operation band.

4 AC conducted Emission Measurement

4.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


4.2 Measuring Instruments

See list of measuring equipment of this test report.

4.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

4.4 Test Setup

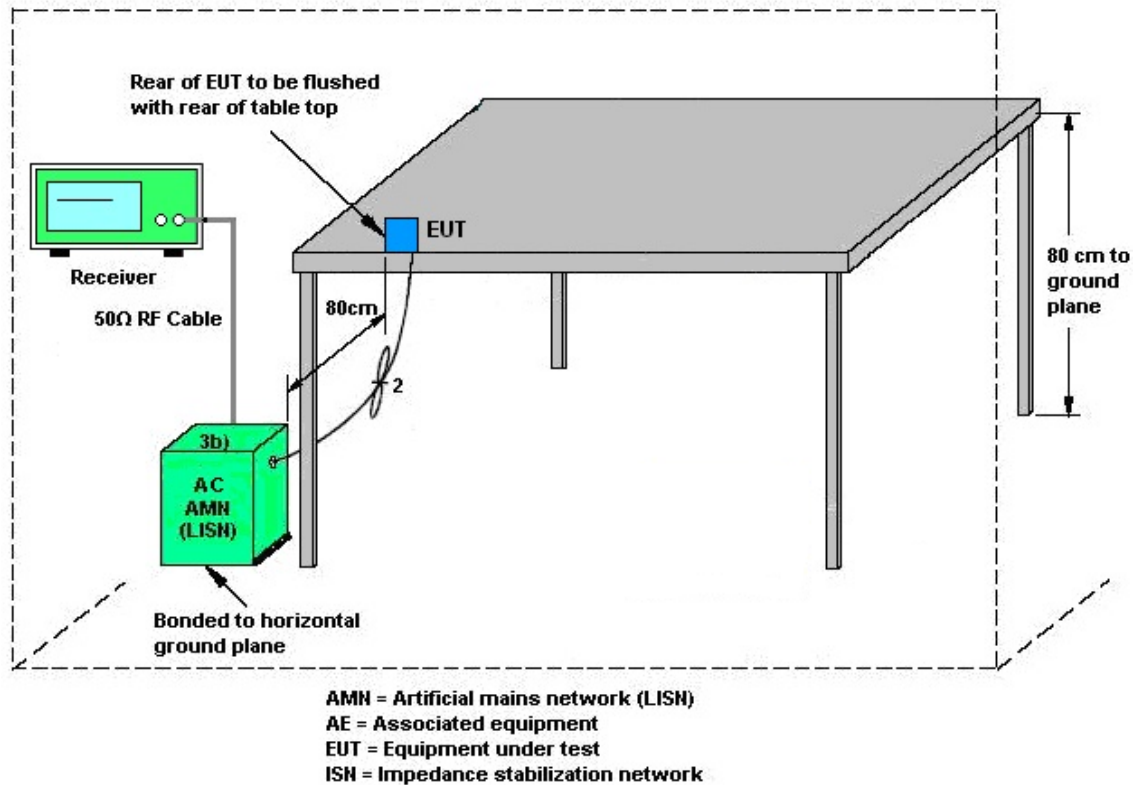

4.5 Test Result of AC Conducted Emission

Please refer to Appendix A.



5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Dec. 25, 2024	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Dec. 25, 2024	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Oct. 23, 2024	Dec. 25, 2024	Oct. 22, 2025	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 14, 2024	Dec. 25, 2024	Mar. 13, 2025	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 10, 2024	Dec. 25, 2024	Mar. 9, 2025	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 7, 2024	Dec. 25, 2024	Mar. 6, 2025	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 23, 2024	Dec. 25, 2024	Sep. 22, 2025	Conduction (CO07-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	63304 & 002	30MHz~1GHz	Dec. 17, 2024	Feb. 26, 2025~ Feb. 28, 2025	Dec. 16, 2025	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-01620	1GHz~18GHz	Aug. 28, 2024	Feb. 26, 2025~ Feb. 28, 2025	Aug. 27, 2025	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1224	18GHz~40GHz	Jun. 24, 2024	Feb. 26, 2025~ Feb. 28, 2025	Jun. 23, 2025	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 07, 2024	Feb. 26, 2025~ Feb. 28, 2025	Dec. 06, 2025	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Mar. 25, 2024	Feb. 26, 2025~ Feb. 28, 2025	Mar. 24, 2025	Radiation (03CH11-HY)
Preamplifier	Jet-Power	JPA0118-55-303	1710001800055007	1GHz~18GHz	Jun. 13, 2024	Feb. 26, 2025~ Feb. 28, 2025	Jun. 12, 2025	Radiation (03CH11-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	May 27, 2024	Feb. 26, 2025~ Feb. 28, 2025	May 26, 2025	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz~44GHz	Oct. 14, 2024	Feb. 26, 2025~ Feb. 28, 2025	Oct. 13, 2025	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY55420170	20MHz~8.4GHz	Jul. 19, 2024	Feb. 26, 2025~ Feb. 28, 2025	Jul. 18, 2025	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Feb. 26, 2025~ Feb. 28, 2025	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Feb. 26, 2025~ Feb. 28, 2025	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Feb. 26, 2025~ Feb. 28, 2025	N/A	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Feb. 26, 2025~ Feb. 28, 2025	N/A	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804013/2	30M~40G	May 23, 2024	Feb. 26, 2025~ Feb. 28, 2025	May 22, 2025	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz~40GHz	Mar. 06, 2024	Feb. 26, 2025~ Feb. 28, 2025	Mar. 05, 2025	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9K~30M	Mar. 06, 2024	Feb. 26, 2025~ Feb. 28, 2025	Mar. 05, 2025	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	30M~40G	Mar. 06, 2024	Feb. 26, 2025~ Feb. 28, 2025	Mar. 05, 2025	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60SS	SN3	3GHz High Pass Filter	Sep. 10, 2024	Feb. 26, 2025~ Feb. 28, 2025	Sep. 09, 2025	Radiation (03CH11-HY)
Filter	Wainwright	WLK4-1000-1530-8000-40SS	SN11	1.53GHz Low Pass Filter	Sep. 10, 2024	Feb. 26, 2025~ Feb. 28, 2025	Sep. 09, 2025	Radiation (03CH11-HY)
Attenuator	HONOVA	5910 SMA-50-005	0028	N/A	Sep. 10, 2024	Feb. 26, 2025~ Feb. 28, 2025	Sep. 09, 2025	Radiation (03CH11-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSW43	101456	2Hz to 43.5GHz	Feb. 19, 2024	Feb. 11, 2025~ Feb. 17, 2025	Feb. 18, 2025	Radiation (03CH18-HY)
Spectrum Analyzer	Rohde & Schwarz	FSW43	101456	2Hz to 43.5GHz	Feb. 20, 2025	Apr. 08, 2025	Feb. 19, 2026	Radiation (03CH18-HY)
Harmonic Mixer*	Rohde & Schwarz	RPG FS-Z60	101033	40GHz to 60GHz	Jun. 27, 2024	Feb. 11, 2025~ Apr. 08, 2025	Jun. 26, 2025	Radiation (03CH18-HY)
Harmonic Mixer	Rohde & Schwarz	RPG FS-Z75	102042	50 GHz to 75 GHz	Jun. 27, 2024	Feb. 11, 2025~ Apr. 08, 2025	Jun. 26, 2025	Radiation (03CH18-HY)
Harmonic Mixer*	Rohde & Schwarz	FSZ-90	101867	60GHz to 90GHz	Jun. 27, 2024	Feb. 11, 2025~ Apr. 08, 2025	Jun. 26, 2025	Radiation (03CH18-HY)
Harmonic Mixer*	Rohde & Schwarz	RPG FS-Z140	101130	90GHz to 140GHz	Jun. 27, 2024	Feb. 11, 2025~ Apr. 08, 2025	Jun. 26, 2025	Radiation (03CH18-HY)
Harmonic Mixer	Rohde & Schwarz	RPG FS-Z220	101042	140GHz to 220GHz	Jun. 27, 2024	Feb. 11, 2025~ Apr. 08, 2025	Jun. 26, 2025	Radiation (03CH18-HY)
Antenna	Quinstar	QWH-UPRR00	1410300003	40-60 GHz	Jun. 27, 2024	Feb. 11, 2025~ Apr. 08, 2025	Jun. 26, 2025	Radiation (03CH18-HY)
Antenna	Quinstar	QWH-VPRR00	1371800008	50-75 GHz	Jun. 27, 2024	Feb. 11, 2025~ Apr. 08, 2025	Jun. 26, 2025	Radiation (03CH18-HY)
Antenna	Quinstar	QWH-EPRR00	1372000000	60-90 GHz	Jun. 27, 2024	Feb. 11, 2025~ Apr. 08, 2025	Jun. 26, 2025	Radiation (03CH18-HY)
Antenna	Quinstar	QWH-FPRR00	1011500008	90-140 GHz	Jun. 27, 2024	Feb. 11, 2025~ Apr. 08, 2025	Jun. 26, 2025	Radiation (03CH18-HY)
Antenna	Quinstar	QWH-GPRR00	QWH-GPRR00-01	140-220 GHz	Jun. 27, 2024	Feb. 11, 2025~ Apr. 08, 2025	Jun. 26, 2025	Radiation (03CH18-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801607/2	N/A	Nov. 28, 2023	Feb. 11, 2025~ Apr. 08, 2025	Nov. 27, 2024	Radiation (03CH18-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	519231/2	N/A	Nov. 28, 2023	Feb. 11, 2025~ Apr. 08, 2025	Nov. 27, 2024	Radiation (03CH18-HY)
Detector	Quinstars	QEA-FBFBVP	2672009	50 ~ 75 GHz	Jul. 09, 2024	Feb. 11, 2025~ Apr. 08, 2025	Jul. 08, 2025	Radiation (03CH18-HY)
Oscilloscope	Rohde & Schwarz	RTO 1002	400025	600MHz, 10GSa/sec	Sep. 25, 2024	Feb. 11, 2025~ Apr. 08, 2025	Sep. 24, 2025	Radiation (03CH18-HY)
Thermal Chamber	ESPEC	SU-641	92013721	-30℃ ~70℃	Oct. 08, 2024	Feb. 11, 2025~ Apr. 08, 2025	Oct. 07, 2025	Radiation (03CH18-HY)
AC Power Source	AC POWER	AFC-500W	F104070011	50Hz~60Hz	N/A	Feb. 11, 2025~ Apr. 08, 2025	N/A	Radiation (03CH18-HY)

Note: (*) Equipment manufacturer's Calibration Certificate.

6 Measurement Uncertainty

Test Item	Uncertainty
AC Power Conducted Emission Measurement (150 kHz ~ 30 MHz)	±3.7dB
Radiated Emission Measurement (9 kHz ~ 30 MHz)	±3.3dB
Radiated Emission Measurement (30 MHz ~ 1000 MHz)	±6.4dB
Radiated Emission Measurement (1 GHz ~ 6 GHz)	±5.1dB
Radiated Emission Measurement (6 GHz ~ 18 GHz)	±5.3dB
Radiated Emission Measurement (18 GHz ~ 40 GHz)	±5.3dB
Radiated Emission Measurement (40 GHz ~ 140 GHz)	±5.59dB
Radiated Emission Measurement (140 GHz ~ 200 GHz)	±6.57dB
99% Occupied Bandwidth	±1.324 MHz
6dB Bandwidth	±0.676 MHz
Frequency Stability	±0.671 MHz
Temperature	±0.58 °C

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)




Appendix A. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	Temperature :	20.2~23.4°C
		Relative Humidity :	42.7~49.1%

EUT Information

Report NO : 4D1606
 Test Mode : Mode 1
 Test Voltage : Power From System
 Phase : Line

Full Spectrum

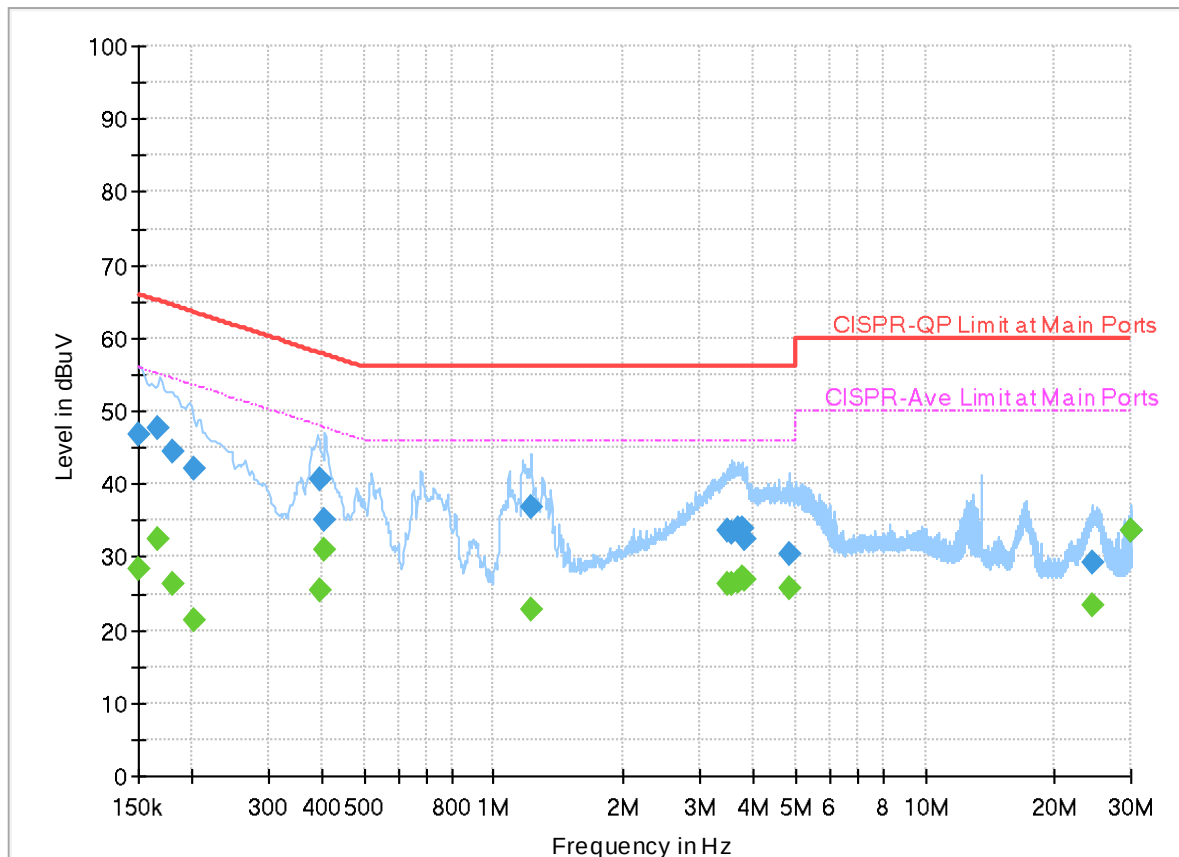

Final_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.150000	---	28.44	56.00	27.56	L1	FLO	19.9
0.150000	46.82	---	66.00	19.18	L1	FLO	19.9
0.166740	---	32.44	55.12	22.68	L1	FLO	19.9
0.166740	47.56	---	65.12	17.56	L1	FLO	19.9
0.179430	---	26.39	54.51	28.12	L1	FLO	19.9
0.179430	44.42	---	64.51	20.09	L1	FLO	19.9
0.201750	---	21.36	53.54	32.18	L1	FLO	19.9
0.201750	42.01	---	63.54	21.53	L1	FLO	19.9
0.392910	---	25.39	48.00	22.61	L1	FLO	19.9
0.392910	40.65	---	58.00	17.35	L1	FLO	19.9
0.402000	---	31.00	47.81	16.81	L1	FLO	19.9
0.402000	35.22	---	57.81	22.59	L1	FLO	19.9
1.216500	---	22.90	46.00	23.10	L1	FLO	19.9
1.216500	36.76	---	56.00	19.24	L1	FLO	19.9
3.464520	---	26.19	46.00	19.81	L1	FLO	20.0
3.464520	33.50	---	56.00	22.50	L1	FLO	20.0
3.564780	---	26.44	46.00	19.56	L1	FLO	20.0
3.564780	33.40	---	56.00	22.60	L1	FLO	20.0
3.666750	---	26.73	46.00	19.27	L1	FLO	20.0

3.666750	33.84	---	56.00	22.16	L1	FLO	20.0
3.777810	---	27.17	46.00	18.83	L1	FLO	20.0
3.777810	33.82	---	56.00	22.18	L1	FLO	20.0
3.833250	---	26.98	46.00	19.02	L1	FLO	20.0
3.833250	32.43	---	56.00	23.57	L1	FLO	20.0
4.827750	---	25.84	46.00	20.16	L1	FLO	20.0
4.827750	30.53	---	56.00	25.47	L1	FLO	20.0
24.528750	---	23.31	50.00	26.69	L1	FLO	20.2
24.528750	29.27	---	60.00	30.73	L1	FLO	20.2
29.833530	---	33.51	50.00	16.49	L1	FLO	20.2
29.833530	33.77	---	60.00	26.23	L1	FLO	20.2

EUT Information

Report NO : 4D1606
 Test Mode : Mode 1
 Test Voltage : Power From System
 Phase : Neutral

Full Spectrum

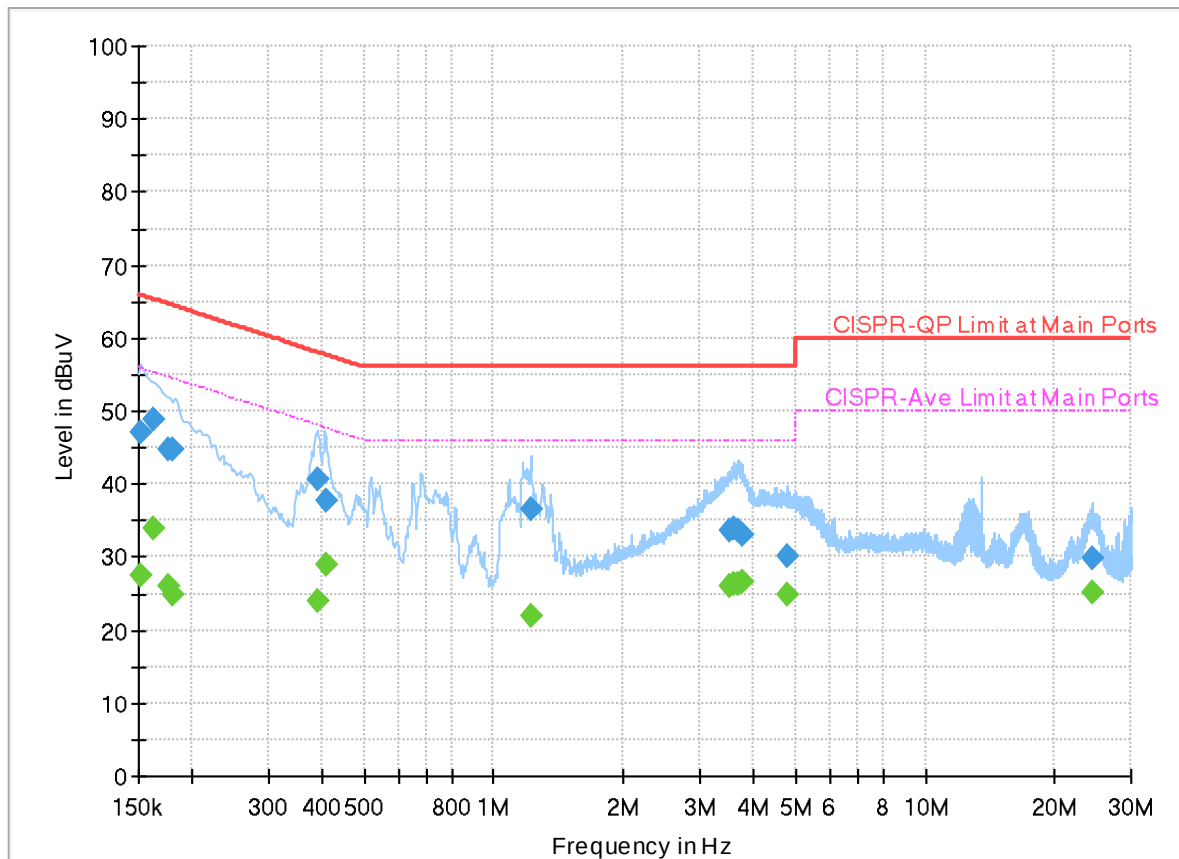

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.152025	---	27.34	55.89	28.55	N	FLO	20.0
0.152025	47.01	---	65.89	18.88	N	FLO	20.0
0.162510	---	33.90	55.34	21.44	N	FLO	19.9
0.162510	48.69	---	65.34	16.65	N	FLO	19.9
0.175920	---	26.03	54.68	28.65	N	FLO	19.9
0.175920	44.87	---	64.68	19.81	N	FLO	19.9
0.179250	---	24.97	54.52	29.55	N	FLO	19.9
0.179250	44.73	---	64.52	19.79	N	FLO	19.9
0.392640	---	24.05	48.01	23.96	N	FLO	19.9
0.392640	40.62	---	58.01	17.39	N	FLO	19.9
0.406770	---	28.86	47.71	18.85	N	FLO	19.9
0.406770	37.85	---	57.71	19.86	N	FLO	19.9
1.216500	---	21.92	46.00	24.08	N	FLO	20.0
1.216500	36.53	---	56.00	19.47	N	FLO	20.0
3.511500	---	25.95	46.00	20.05	N	FLO	20.0
3.511500	33.50	---	56.00	22.50	N	FLO	20.0
3.606000	---	26.40	46.00	19.60	N	FLO	20.0
3.606000	33.78	---	56.00	22.22	N	FLO	20.0
3.678000	---	26.40	46.00	19.60	N	FLO	20.0

3.678000	33.48	---	56.00	22.52	N	FLO	20.0
3.767820	---	26.58	46.00	19.42	N	FLO	20.0
3.767820	32.91	---	56.00	23.09	N	FLO	20.0
4.808490	---	24.98	46.00	21.02	N	FLO	20.0
4.808490	30.00	---	56.00	26.00	N	FLO	20.0
24.349470	---	25.23	50.00	24.77	N	FLO	20.2
24.349470	29.96	---	60.00	30.04	N	FLO	20.2

————THE END————