




FCC RADIO TEST REPORT

FCC ID : SZGGNN2Z
Equipment : Wireless Device
Model Name : GNN2Z
Applicant : Weifang Goertek Electronics Co., Ltd
Gaoxin 2 Road, Free Trade Zone, Weifang,
Shandong, 261205, P.R.China
Standard : FCC Part 15 Subpart C §15.247

The product was received on Dec. 09, 2024 and testing was performed from Dec. 13, 2024 to Jan. 25, 2025. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	6
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 Test Result.....	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	14
3.5 Radiated Band Edges and Spurious Emission Measurement	15
3.6 AC Conducted Emission Measurement.....	19
3.7 Antenna Requirements.....	21
4 List of Measuring Equipment	22
5 Measurement Uncertainty	24
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Data	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR4N2022A	01	Initial issue of report	Feb. 28, 2025
FR4N2022A	02	Revise appendix C This report is an updated version, replacing the report issued on Feb. 28, 2025.	May 09, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	-
3.6	15.207	AC Conducted Emission	Pass	-
3.7	15.203	Antenna Requirement	Pass	-

Remark: Except Conducted and Radiated Band Edges and Radiated Spurious Emission are carrying out, The FR4N2022A report reuses test data from the FR4N2548B report.

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Duko Chen

Report Producer: Wilda Wei



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature
General Specs Bluetooth-LE, BLE ASK and BLE GFSK.
Antenna Type Bluetooth-LE, BLE ASK and BLE GFSK: PCB Antenna

EUT Information List	
S/N	Performed Test Item
M14AFC1736	RF Conducted Measurement
4C23C7584	Radiated Spurious Emission
4A31LZACOL6416 4A31LZACOR6448	Conducted Emission

Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	0.2

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, CO07-HY, 03CH20-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-

2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth – LE / GFSK
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
Radiated Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
AC Conducted Emission	Mode 1: Bluetooth Link + MP3 + Battery + Wireless Device + USB Cable (Charging from Adapter)
Remark: - For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power. - The detailed Radiated test modes are shown in Appendix C.	

2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

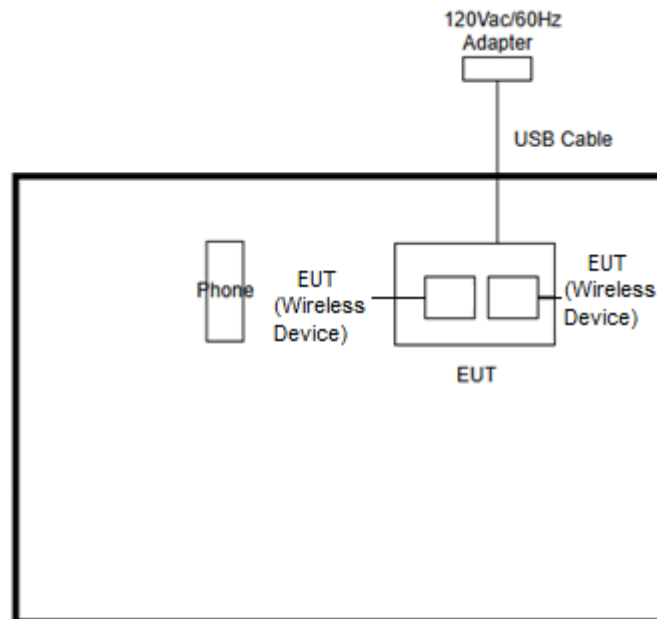

<Bluetooth-LE Tx Mode>

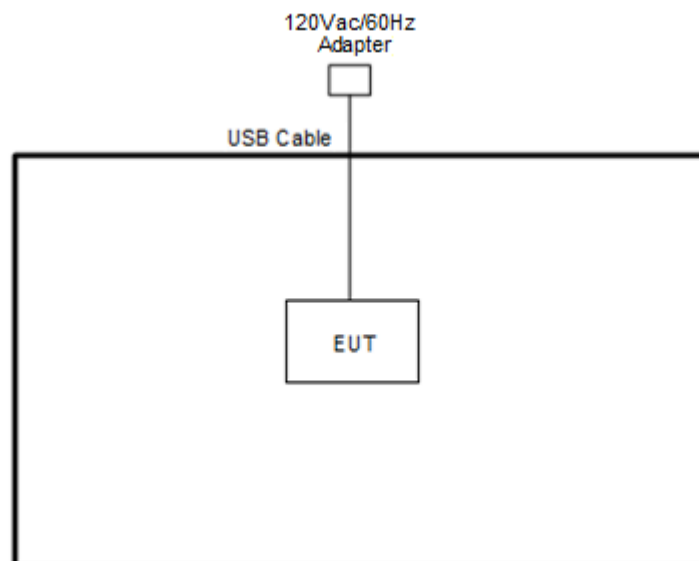

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Phone	N/A	N/A	N/A	N/A	N/A
2.	Adapter	N/A	N/A	N/A	N/A	N/A
3.	USB Cable	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility "SSCOM v5.13.1" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

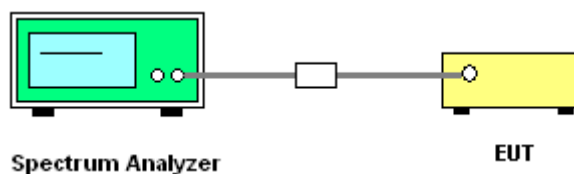

3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamplifier Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated test below 30MHz

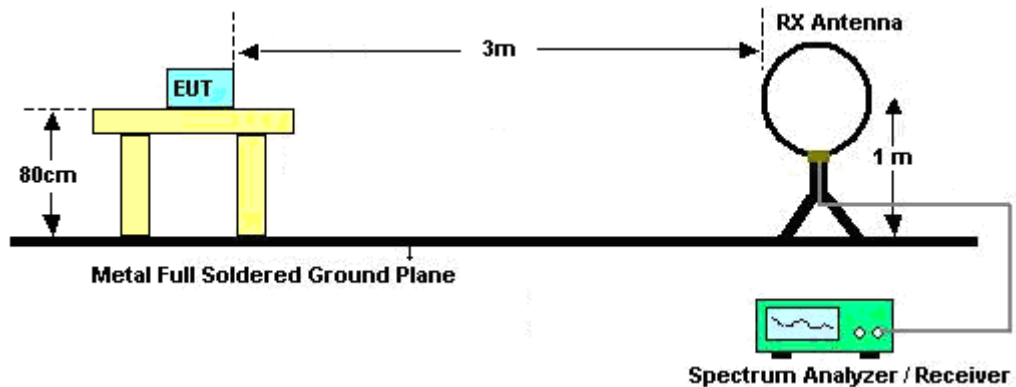

For radiated test from 30MHz to 1GHz

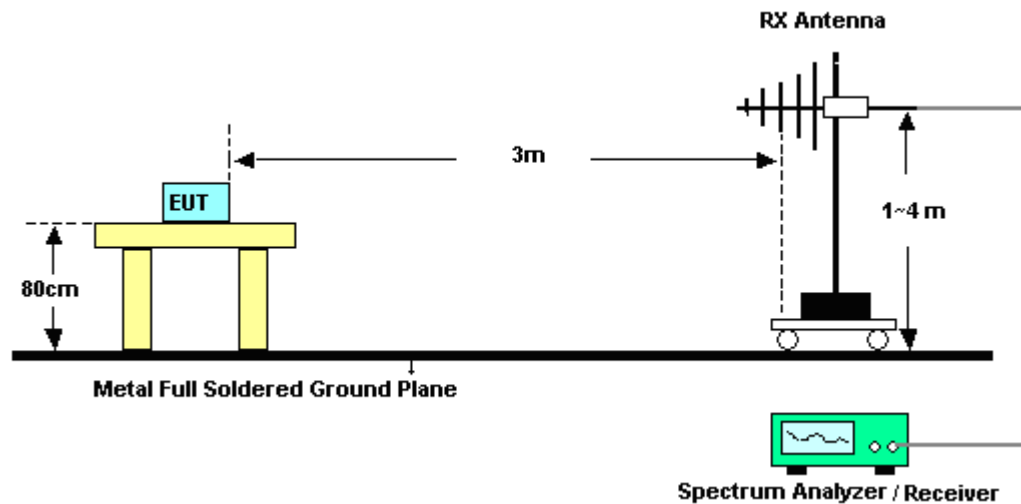

For radiated test from 1GHz to 18GHz

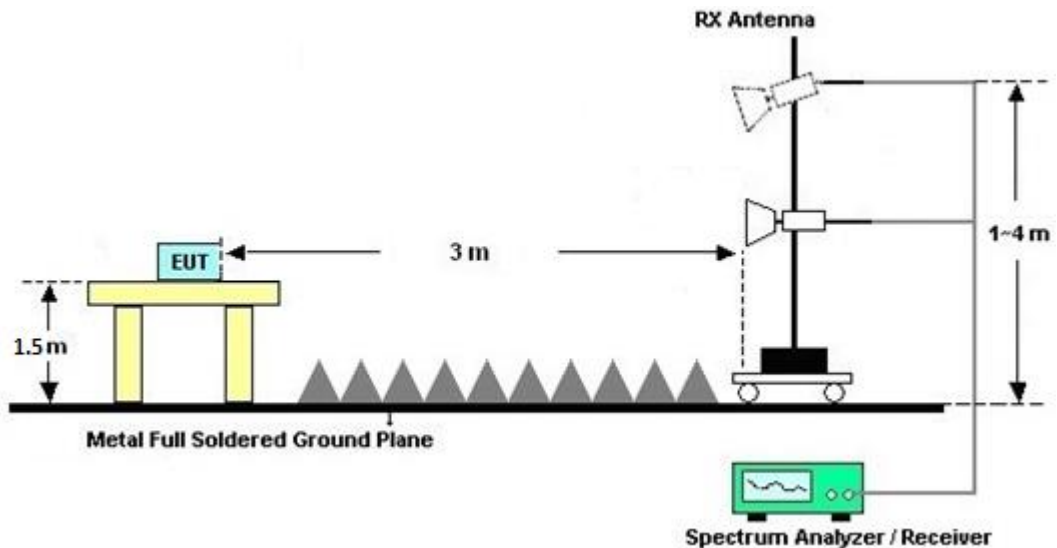

For radiated test above 18GHz



3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

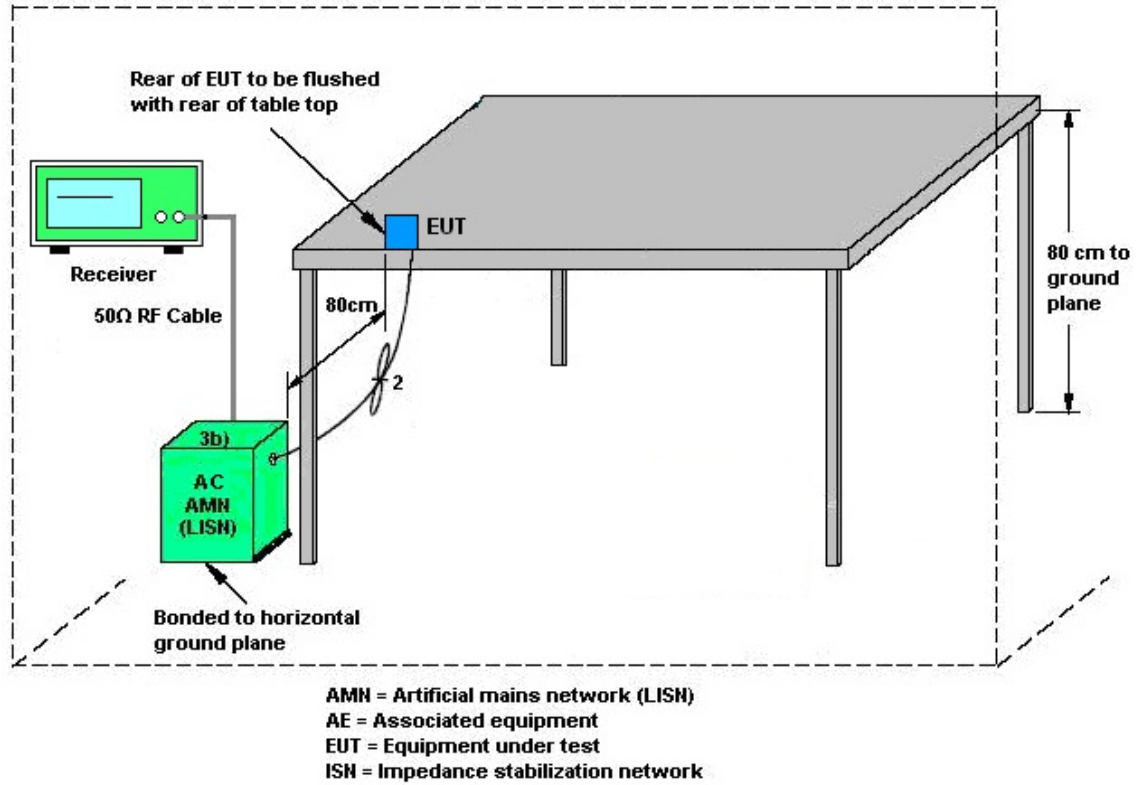

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.7.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A(MXE)	MY54130085	N/A	Oct. 16, 2024	Jan. 17, 2025~ Jan. 25, 2025	Oct. 15, 2025	Radiation (03CH20-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Aug. 29, 2024	Jan. 17, 2025~ Jan. 25, 2025	Aug. 28, 2025	Radiation (03CH20-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 02, 2024	Jan. 17, 2025~ Jan. 25, 2025	Dec. 01, 2025	Radiation (03CH20-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Jan. 17, 2025~ Jan. 25, 2025	N/A	Radiation (03CH20-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Jan. 17, 2025~ Jan. 25, 2025	N/A	Radiation (03CH20-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Jan. 17, 2025~ Jan. 25, 2025	N/A	Radiation (03CH20-HY)
Signal Analyzer	Keysight	N9010B	MY60240520	N/A	Dec. 09, 2024	Jan. 17, 2025~ Jan. 25, 2025	Dec. 08, 2025	Radiation (03CH20-HY)
Bilog Antenna	TESEQ	CBL 6111D&00802N 1D01N-06	55606 & 08	30MHz~1GHz	Nov. 27, 2024	Jan. 17, 2025~ Jan. 25, 2025	Nov. 26, 2025	Radiation (03CH20-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	02360	1GHz-18GHz	Nov. 01, 2024	Jan. 17, 2025~ Jan. 25, 2025	Oct. 31, 2025	Radiation (03CH20-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1224	18GHz-40GHz	Jun. 24, 2024	Jan. 17, 2025~ Jan. 25, 2025	Jun. 23, 2025	Radiation (03CH20-HY)
Preamplifier	COM-POWER	PAM-103	18020201	1MHz-1000MHz	Dec. 31, 2024	Jan. 17, 2025~ Jan. 25, 2025	Dec. 30, 2025	Radiation (03CH20-HY)
Amplifier	EMCI	EMC118A45SE	980792	N/A	Nov. 12, 2024	Jan. 17, 2025~ Jan. 25, 2025	Nov. 11, 2025	Radiation (03CH20-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	519229/2,8040 15/2,804027/2	N/A	Jan. 16, 2025	Jan. 17, 2025~ Jan. 25, 2025	Jan. 15, 2026	Radiation (03CH20-HY)
Hygrometer	TECPEL	DTM-303A	TP211382	N/A	Mar. 27, 2024	Jan. 17, 2025~ Jan. 25, 2025	Mar. 26, 2025	Radiation (03CH20-HY)
Software	Audix	N/A	RK-002156	N/A	N/A	Jan. 17, 2025~ Jan. 25, 2025	N/A	Radiation (03CH20-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Jan. 09, 2025	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Jan. 09, 2025	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Oct. 23, 2024	Jan. 09, 2025	Oct. 22, 2025	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 14, 2024	Jan. 09, 2025	Mar. 13, 2025	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 10, 2024	Jan. 09, 2025	Mar. 09, 2025	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 23, 2024	Jan. 09, 2025	Sep. 22, 2025	Conduction (CO07-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Dec. 13, 2024~ Dec. 26, 2024	Oct. 30, 2025	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	17I00015SNO 35 (NO:109)	10MHz~6GHz	Jan. 15, 2024	Dec. 13, 2024~ Dec. 26, 2024	Jan. 14, 2025	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 23, 2024	Dec. 13, 2024~ Dec. 26, 2024	Aug. 22, 2025	Conducted (TH05-HY)
Switch Control Mainframe	Burgeon	ETF-058	EC1300484 (BOX3)	N/A	May 20, 2024	Dec. 13, 2024~ Dec. 26, 2024	May 19, 2025	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_ version_241211	N/A	Conducted Other Test Item	N/A	Dec. 13, 2024~ Dec. 26, 2024	N/A	Conducted (TH05-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.4 dB
---	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.6 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.7 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Mina Liu	Temperature:	21~25	°C
Test Date:	2024/12/13~2024/12/26	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.021	0.656	0.50	Pass
BLE	1Mbps	1	19	2440	1.022	0.658	0.50	Pass
BLE	1Mbps	1	39	2480	1.021	0.653	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	6.60	30.00	0.20	6.80	36.00	Pass
BLE	1Mbps	1	19	2440	6.50	30.00	0.20	6.70	36.00	Pass
BLE	1Mbps	1	39	2480	6.51	30.00	0.20	6.71	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	6.33	0.37	0.20	8.00	Pass
BLE	1Mbps	1	19	2440	6.07	0.11	0.20	8.00	Pass
BLE	1Mbps	1	39	2480	6.32	0.30	0.20	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.024	1.159	0.50	Pass
BLE	2Mbps	1	19	2440	2.027	1.165	0.50	Pass
BLE	2Mbps	1	39	2480	2.023	1.166	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	6.69	30.00	0.20	6.89	36.00	Pass
BLE	2Mbps	1	19	2440	6.53	30.00	0.20	6.73	36.00	Pass
BLE	2Mbps	1	39	2480	6.54	30.00	0.20	6.74	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	5.63	0.38	0.20	8.00	Pass
BLE	2Mbps	1	19	2440	5.36	0.09	0.20	8.00	Pass
BLE	2Mbps	1	39	2480	5.60	0.35	0.20	8.00	Pass


Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.




6dB Bandwidth

<1Mbps>


6 dB Bandwidth Plot on Channel 00

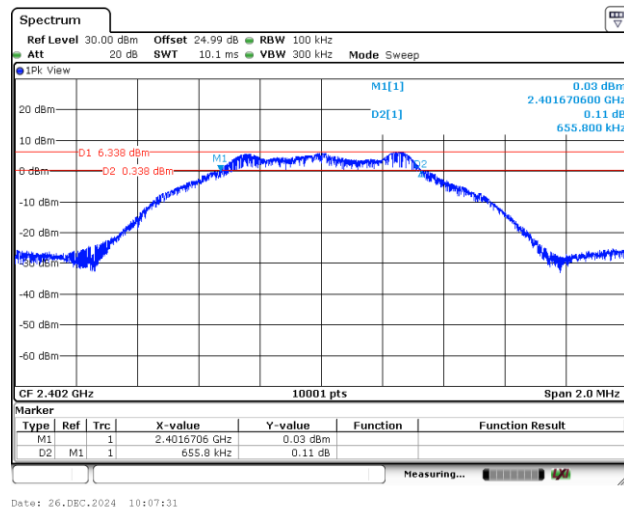

6 dB Bandwidth Plot on Channel 19

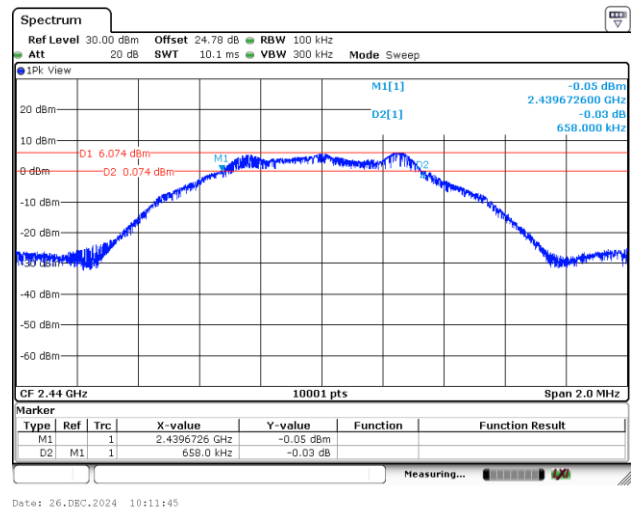


6 dB Bandwidth Plot on Channel 39

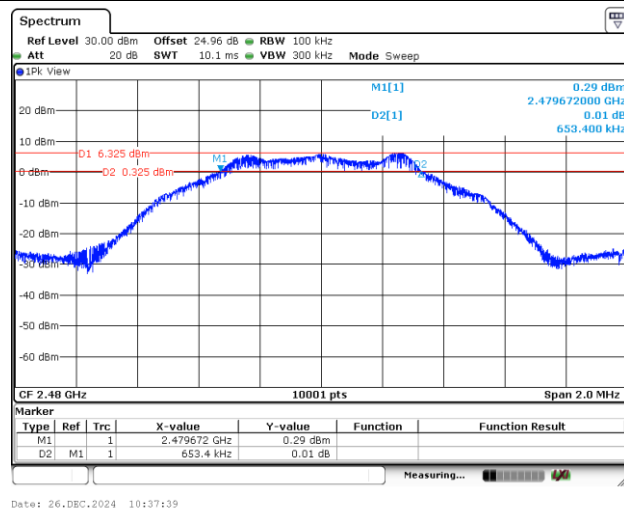




<2Mbps>


6 dB Bandwidth Plot on Channel 00

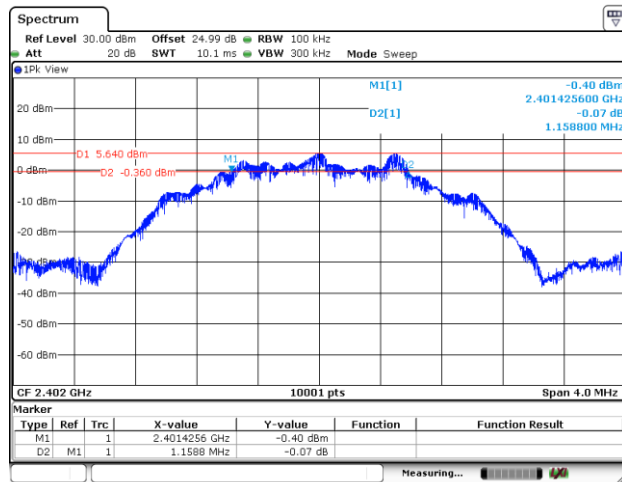

6 dB Bandwidth Plot on Channel 19

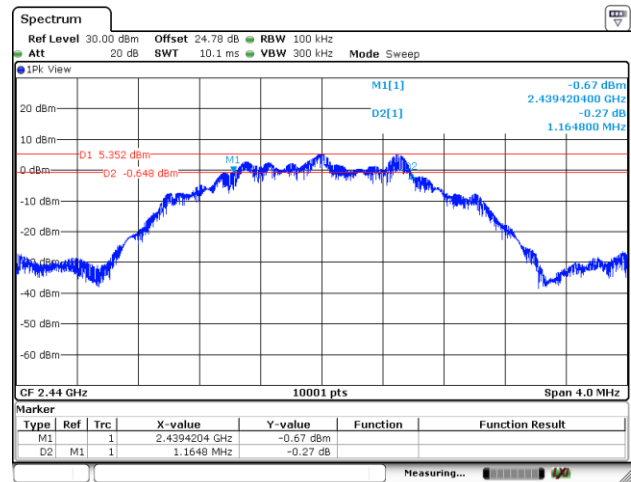

6 dB Bandwidth Plot on Channel 39

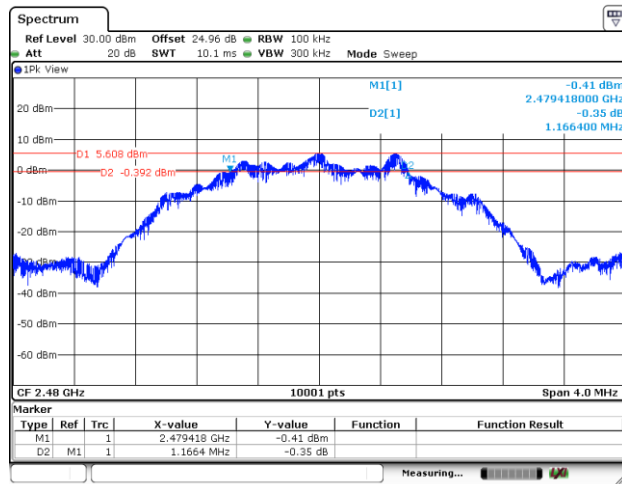





99% Occupied Bandwidth

<1Mbps>


99% Occupied Bandwidth Plot on Channel 00

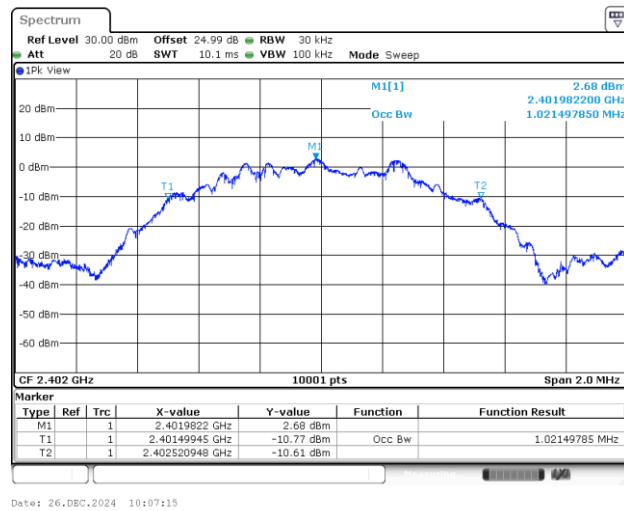

99% Occupied Bandwidth Plot on Channel 19

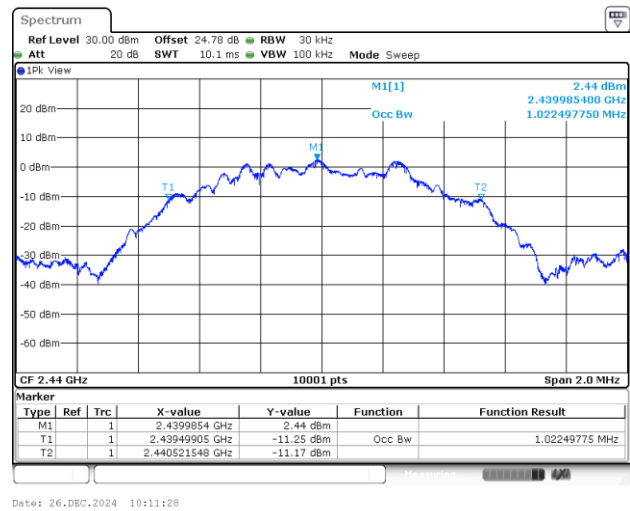


99% Occupied Bandwidth Plot on Channel 39

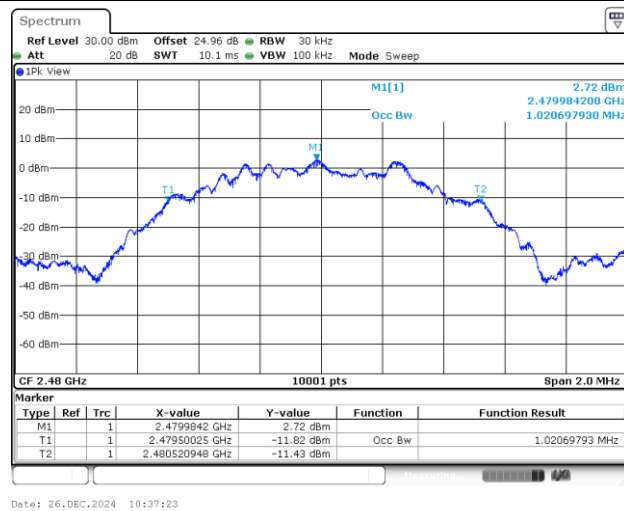




<2Mbps>


99% Occupied Bandwidth Plot on Channel 00

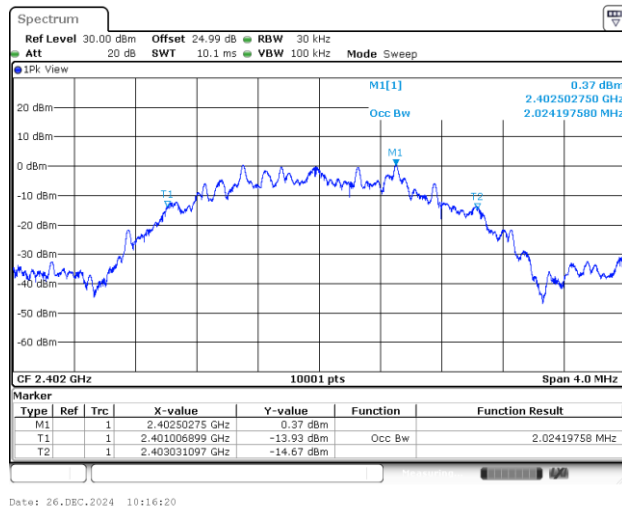

99% Occupied Bandwidth Plot on Channel 19

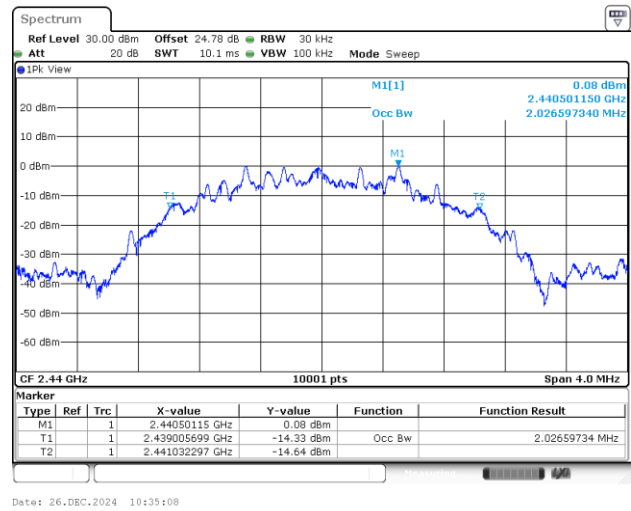

99% Occupied Bandwidth Plot on Channel 39

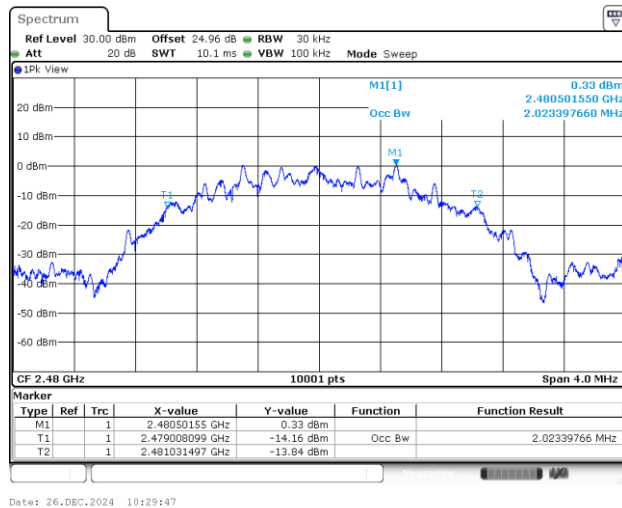





Power Spectral Density (dBm/3kHz)

<1Mbps>


Power Density (dBm/3kHz) Plot Channel 00

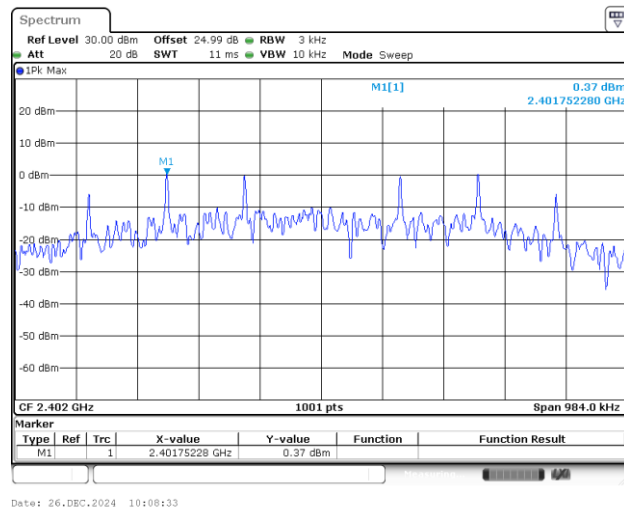

Power Density (dBm/3kHz) Plot Channel 19

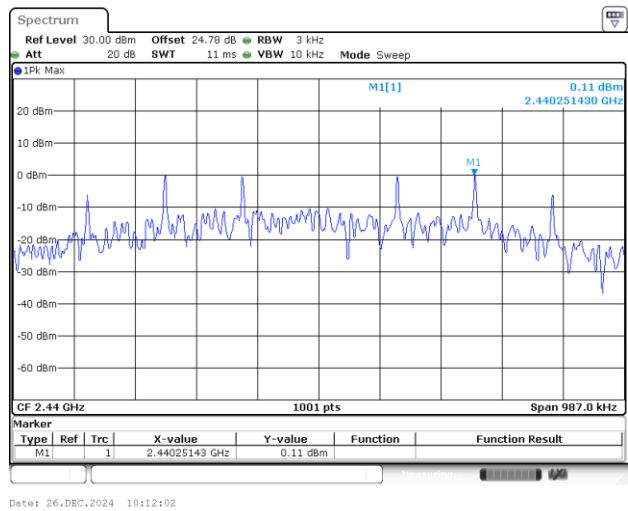


Power Density (dBm/3kHz) Plot Channel 39

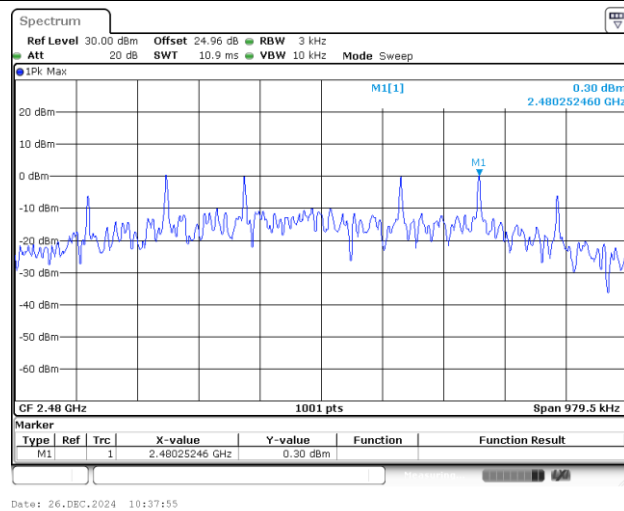




<2Mbps>


Power Density (dBm/3kHz) Plot Channel 00

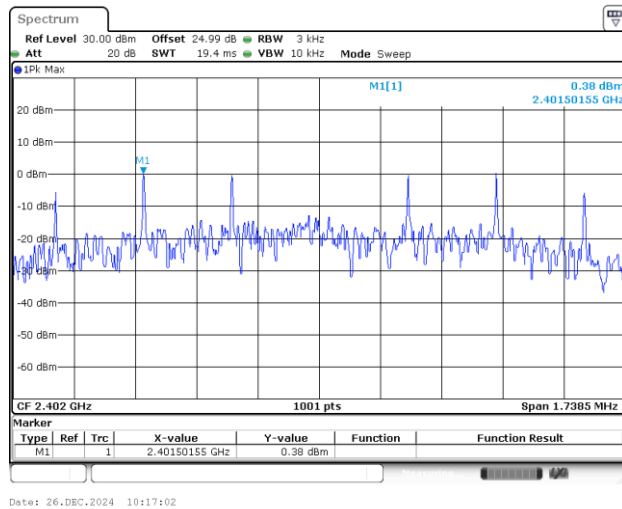

Power Density (dBm/3kHz) Plot Channel 19

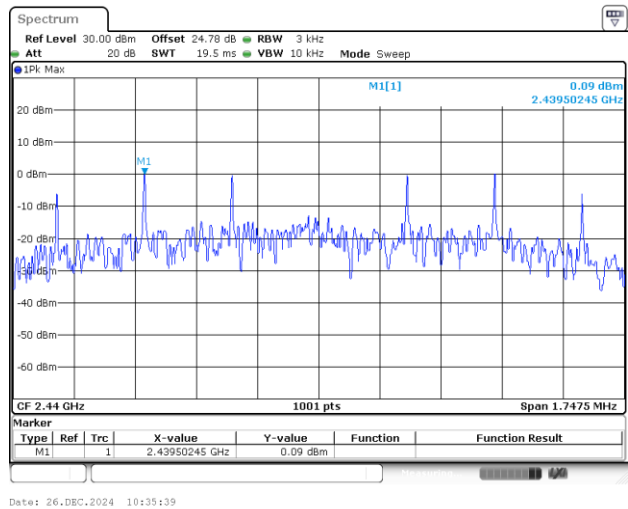


Power Density (dBm/3kHz) Plot Channel 39

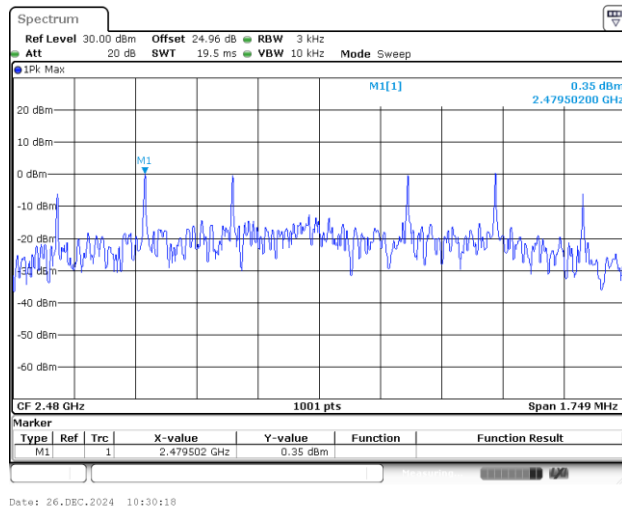



Band Edge and Conducted Spurious Emission


<1Mbps>

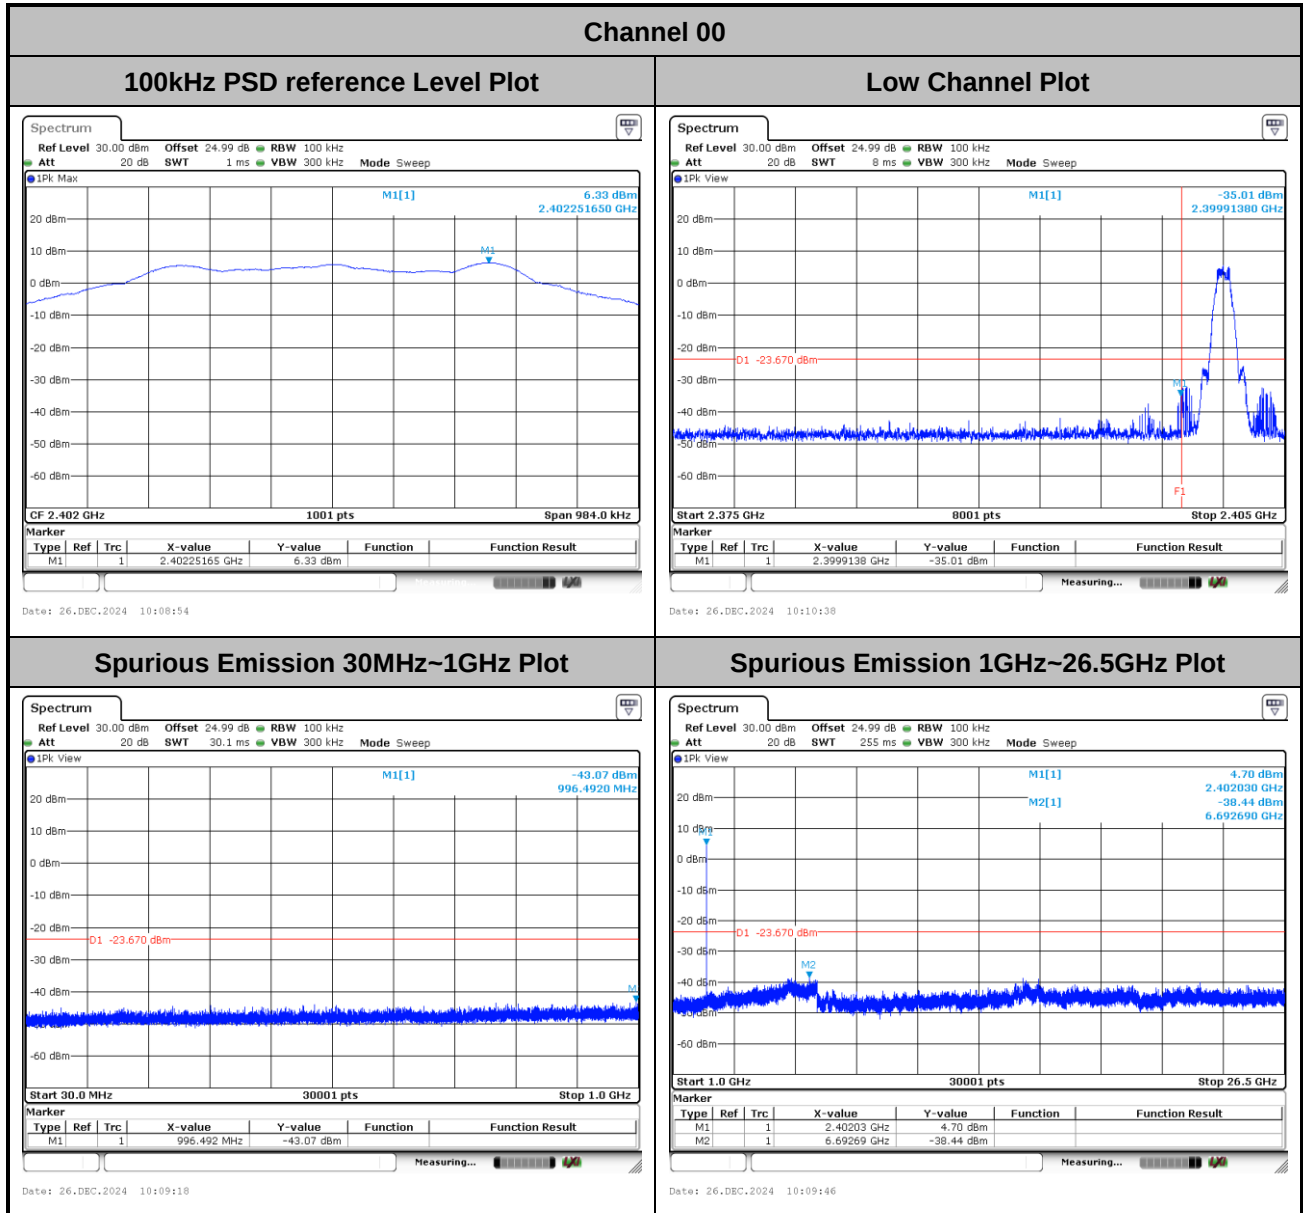




Channel 19

100kHz PSD reference Level Plot

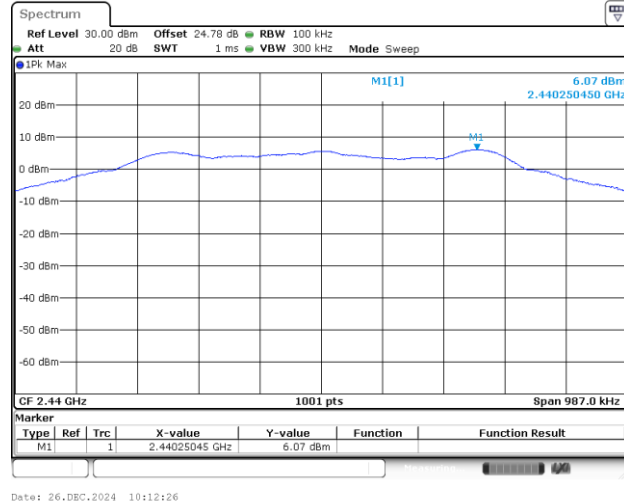


Mid Channel Plot

Spurious Emission 30MHz~1GHz Plot

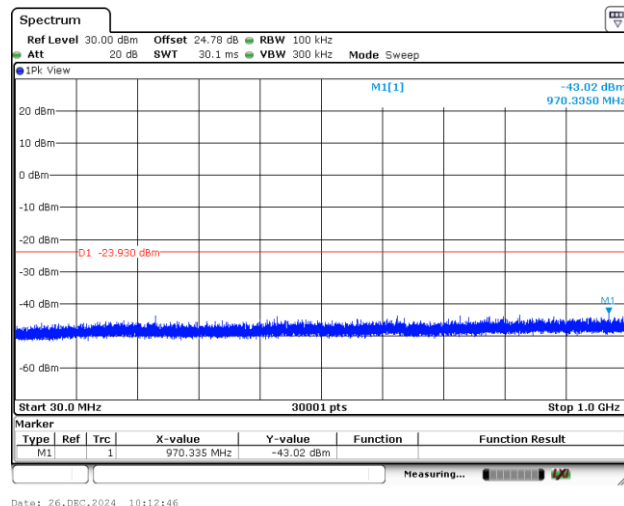


Spurious Emission 1GHz~26.5GHz Plot

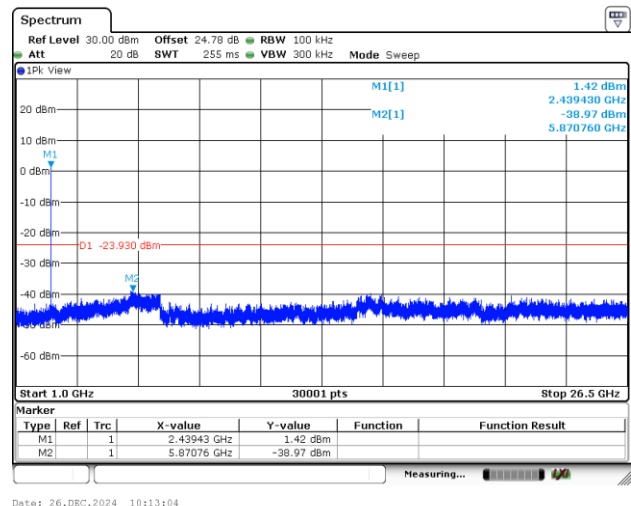




Channel 39


100kHz PSD reference Level Plot

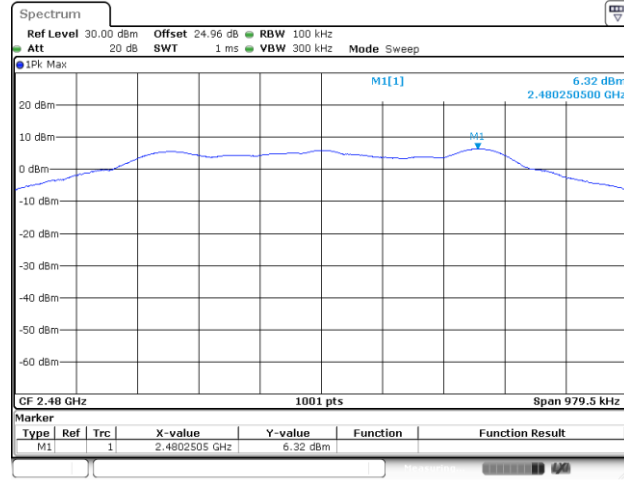


High Channel Plot

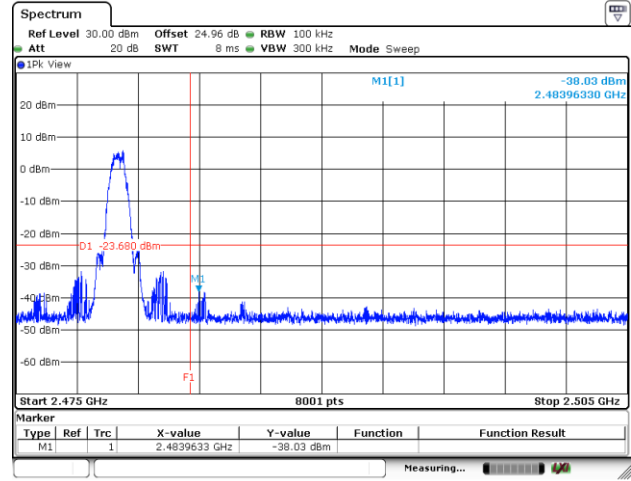

Spurious Emission 30MHz~1GHz Plot

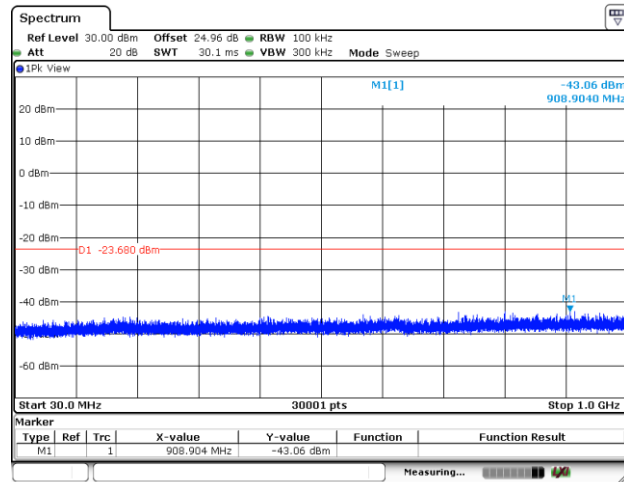

Spurious Emission 1GHz~26.5GHz Plot

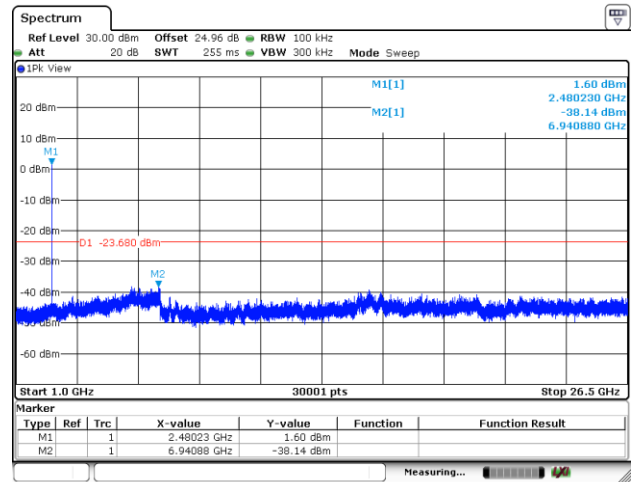





<2Mbps>

Channel 00


100kHz PSD reference Level Plot

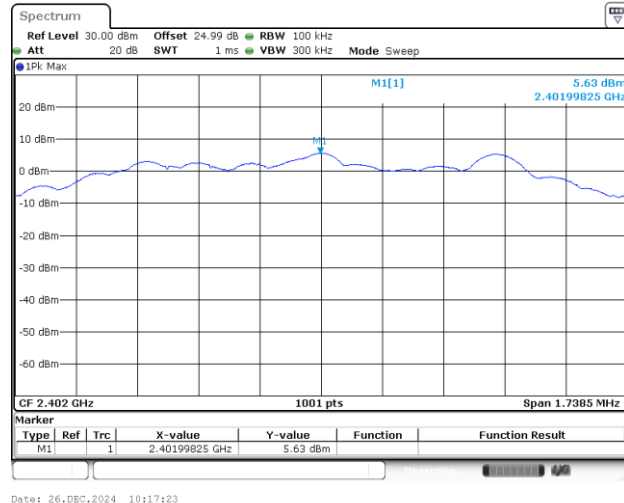


Low Channel Plot

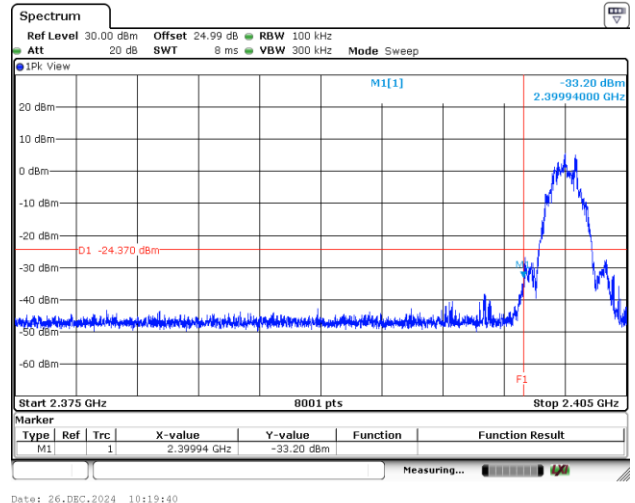

Spurious Emission 30MHz~1GHz Plot

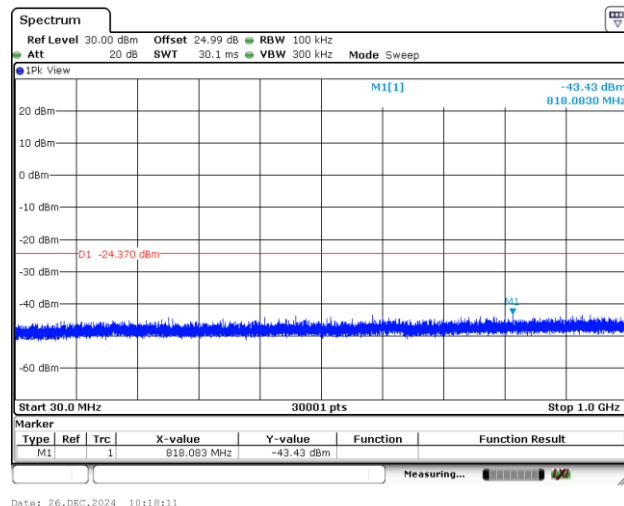


Spurious Emission 1GHz~26.5GHz Plot

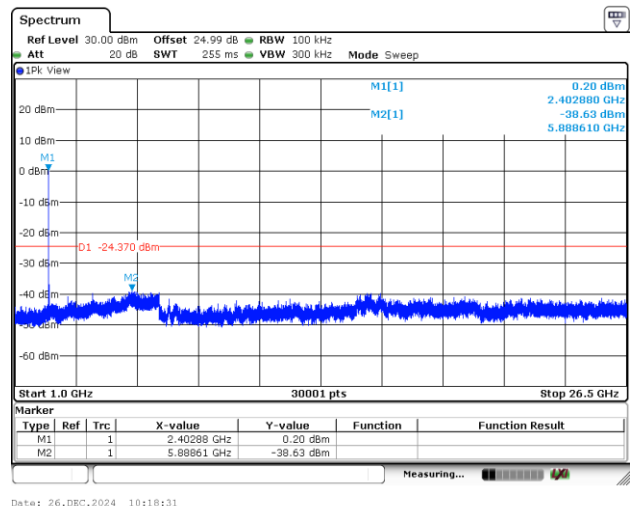




Channel 19

100kHz PSD reference Level Plot

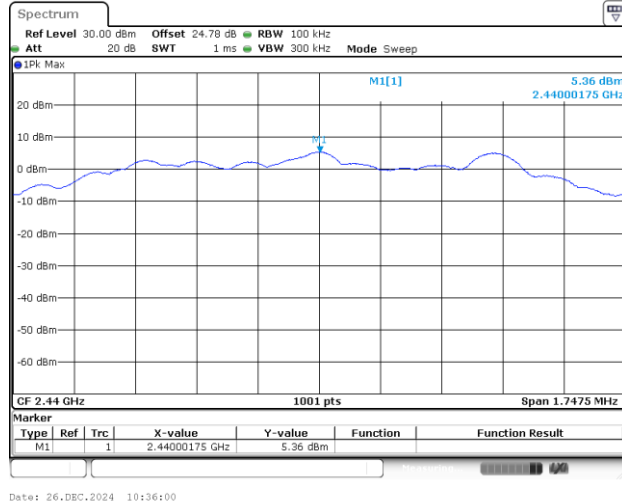


Mid Channel Plot

Spurious Emission 30MHz~1GHz Plot

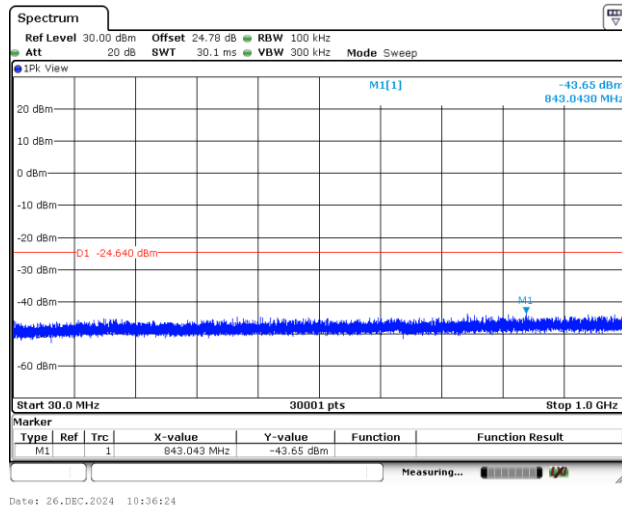


Spurious Emission 1GHz~26.5GHz Plot

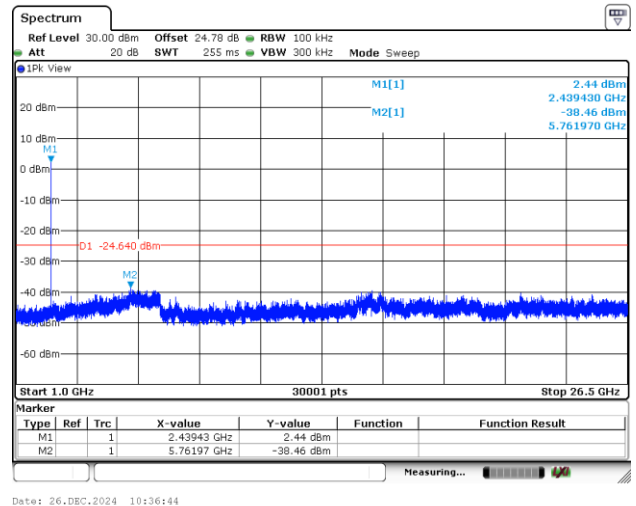




Channel 39


100kHz PSD reference Level Plot

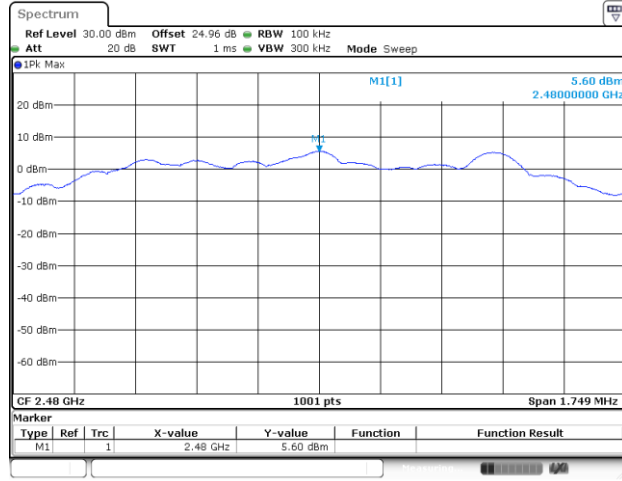


High Channel Plot

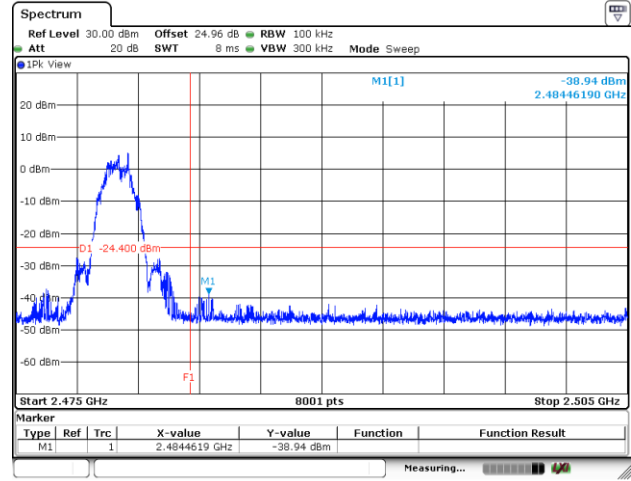

Spurious Emission 30MHz~1GHz Plot

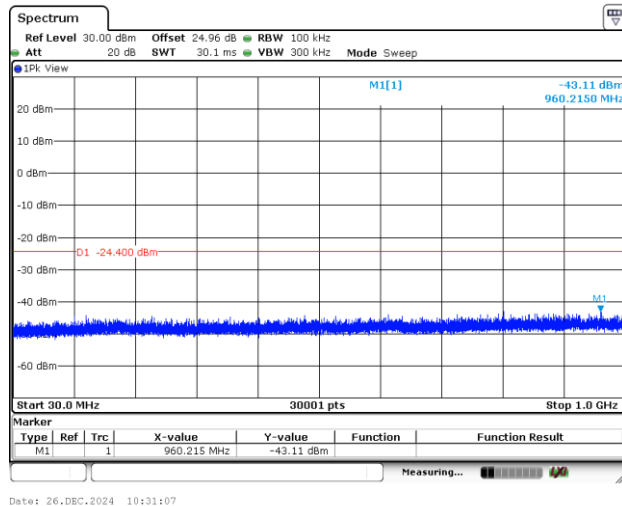

Spurious Emission 1GHz~26.5GHz Plot

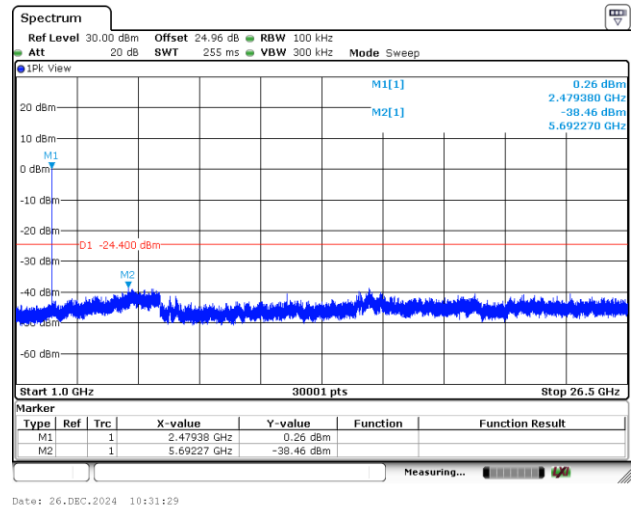



Appendix B. AC Conducted Emission Test Results


Test Engineer :	Louis Chung	Temperature :	18.2~20.3℃
		Relative Humidity :	40.2~47.6%

EUT Information

Test Mode :
Test Voltage :
Phase :

Mode 1
120Vac/60Hz
Line

Full Spectrum

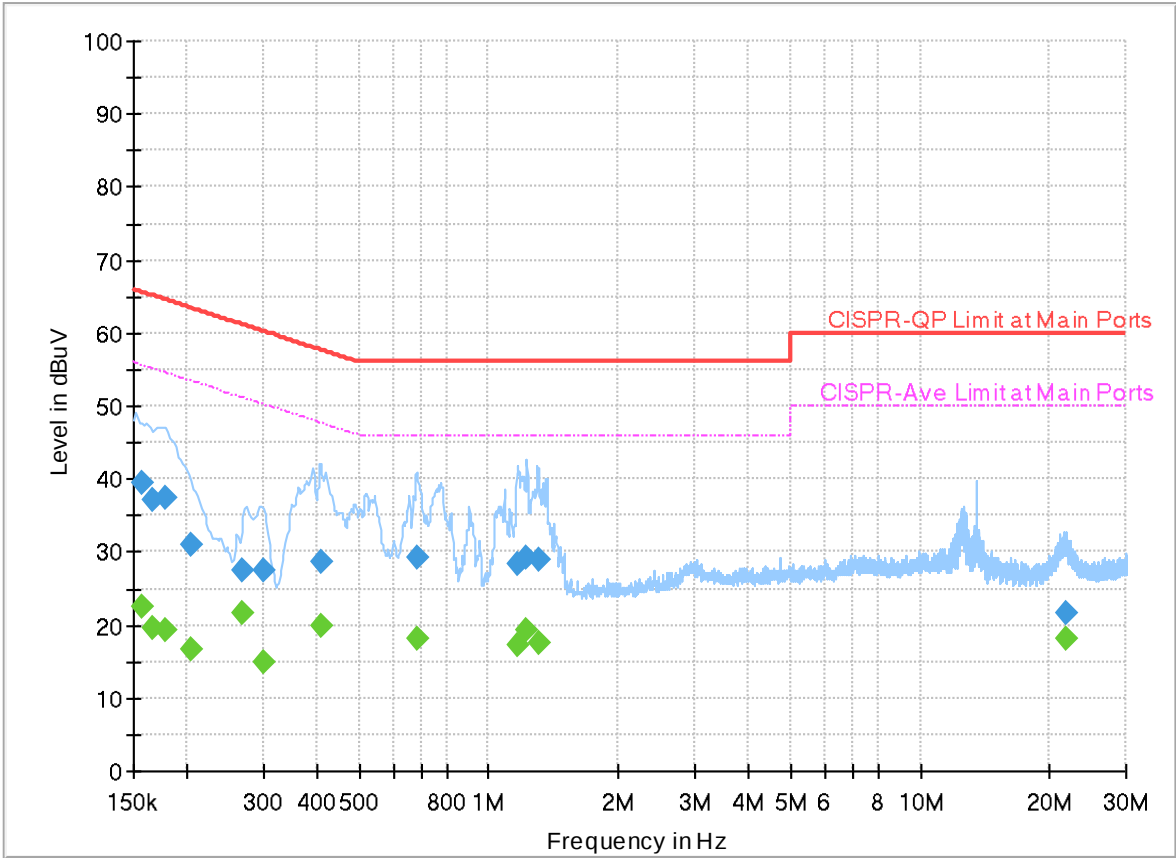

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.156278	39.39	---	65.66	26.27	L1	FLO	19.9
0.156278	---	22.42	55.66	33.24	L1	FLO	19.9
0.165750	37.28	---	65.17	27.89	L1	FLO	19.9
0.165750	---	19.58	55.17	35.59	L1	FLO	19.9
0.177810	37.44	---	64.59	27.15	L1	FLO	19.9
0.177810	---	19.22	54.59	35.37	L1	FLO	19.9
0.204000	31.13	---	63.45	32.32	L1	FLO	19.9
0.204000	---	16.66	53.45	36.79	L1	FLO	19.9
0.269070	27.46	---	61.15	33.69	L1	FLO	19.9
0.269070	---	21.66	51.15	29.49	L1	FLO	19.9
0.299040	27.54	---	60.27	32.73	L1	FLO	19.9
0.299040	---	14.81	50.27	35.46	L1	FLO	19.9
0.408030	28.52	---	57.69	29.17	L1	FLO	19.9
0.408030	---	19.91	47.69	27.78	L1	FLO	19.9
0.678930	29.33	---	56.00	26.67	L1	FLO	19.9
0.678930	---	18.08	46.00	27.92	L1	FLO	19.9
1.169610	28.31	---	56.00	27.69	L1	FLO	19.9
1.169610	---	17.17	46.00	28.83	L1	FLO	19.9
1.221180	29.24	---	56.00	26.76	L1	FLO	19.9


1.221180	---	19.17	46.00	26.83	L1	FLO	19.9
1.302000	28.90	---	56.00	27.10	L1	FLO	19.9
1.302000	---	17.64	46.00	28.36	L1	FLO	19.9
21.859080	21.51	---	60.00	38.49	L1	FLO	20.2
21.859080	---	18.10	50.00	31.90	L1	FLO	20.2

EUT Information

Test Mode :
Test Voltage :
Phase :

Mode 1
120Vac/60Hz
Neutral

Full Spectrum

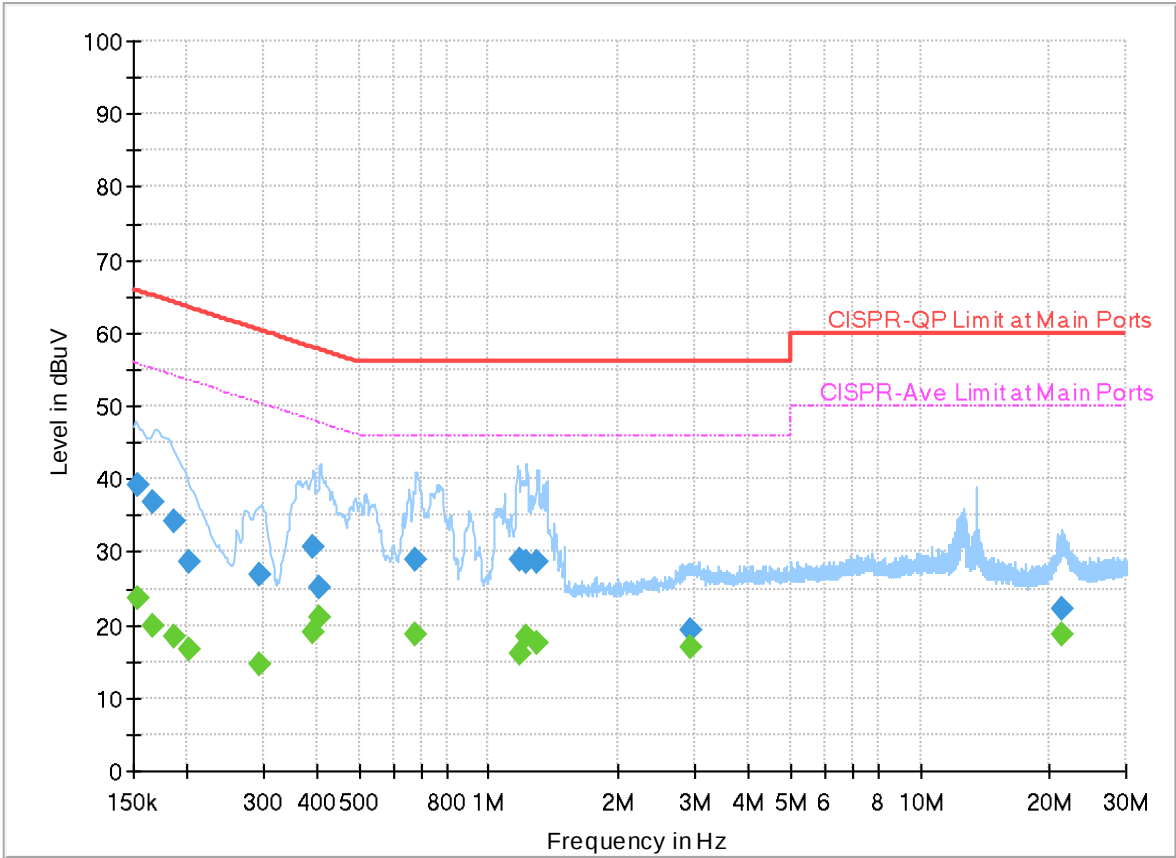

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.153578	---	23.73	55.80	32.07	N	FLO	20.0
0.153578	39.26	---	65.80	26.54	N	FLO	20.0
0.165750	---	19.75	55.17	35.42	N	FLO	19.9
0.165750	36.93	---	65.17	28.24	N	FLO	19.9
0.185460	---	18.42	54.24	35.82	N	FLO	19.9
0.185460	34.17	---	64.24	30.07	N	FLO	19.9
0.201750	---	16.68	53.54	36.86	N	FLO	19.9
0.201750	28.69	---	63.54	34.85	N	FLO	19.9
0.294000	---	14.59	50.41	35.82	N	FLO	19.9
0.294000	26.85	---	60.41	33.56	N	FLO	19.9
0.391200	---	18.95	48.04	29.09	N	FLO	19.9
0.391200	30.79	---	58.04	27.25	N	FLO	19.9
0.404250	---	21.00	47.77	26.77	N	FLO	19.9
0.404250	25.17	---	57.77	32.60	N	FLO	19.9
0.674250	---	18.72	46.00	27.28	N	FLO	19.9
0.674250	28.97	---	56.00	27.03	N	FLO	19.9
1.173120	---	16.07	46.00	29.93	N	FLO	20.0
1.173120	28.98	---	56.00	27.02	N	FLO	20.0
1.218750	---	18.29	46.00	27.71	N	FLO	20.0

1.218750	28.63	---	56.00	27.37	N	FLO	20.0
1.293090	---	17.51	46.00	28.49	N	FLO	20.0
1.293090	28.51	---	56.00	27.49	N	FLO	20.0
2.931180	---	16.93	46.00	29.07	N	FLO	20.0
2.931180	19.42	---	56.00	36.58	N	FLO	20.0
21.425100	---	18.71	50.00	31.29	N	FLO	20.2
21.425100	22.29	---	60.00	37.71	N	FLO	20.2



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	John Chuang, David Dai and Sam Chou	Temperature :	19.1~22.2°C
		Relative Humidity :	65.4~70.5%

Note symbol

-L	Low channel location
-R	High channel location



<1Mbps>

C1-1. Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	1	Bluetooth-LE_GFSK	00	2402	1Mbps	-	-
Mode 2	2400-2483.5	1	Bluetooth-LE_GFSK	19	2440	1Mbps	-	-
Mode 3	2400-2483.5	1	Bluetooth-LE_GFSK	39	2480	1Mbps	-	-
Mode 7	2400-2483.5	1	Bluetooth-LE_GFSK	39	2480	1Mbps	-	LF
Mode 8	2400-2483.5	1	Bluetooth-LE_GFSK	39	2480	1Mbps	-	SHF

**C1-2. Summary of each worse mode**

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	Bluetooth-LE_GFSK	00	2389.95	39.54	54.00	-14.46	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GFSK	00	4804.00	46.65	54.00	-7.35	H	Avg.	Pass	-	Harmonic
2	Bluetooth-LE_GFSK	19	2487.88	39.63	54.00	-14.37	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GFSK	19	4880.00	46.78	54.00	-7.22	H	Avg.	Pass	-	Harmonic
3	Bluetooth-LE_GFSK	39	2484.08	69.05	74.00	-4.95	H	Peak	Pass	-	Band Edge
	Bluetooth-LE_GFSK	39	7440.00	49.40	54.00	-4.60	H	Avg.	Pass	-	Harmonic
7	LF	39	52.31	33.16	40.00	-6.84	V	Peak	Pass	-	LF
8	SHF	39	24580.00	42.02	74.00	-31.98	H	Peak	Pass	-	SHF





Mode	1																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Bluetooth-LE_GFSK_CH00_2402MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2388.29</td><td>56.52</td><td>74.00</td><td>-17.48</td><td>47.12</td><td>27.37</td><td>8.62</td><td>36.27</td><td>9.68</td><td>352 207 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2388.29	56.52	74.00	-17.48	47.12	27.37	8.62	36.27	9.68	352 207 PEAK	Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2402.00</td><td>101.06</td><td>-----</td><td>-----</td><td>91.59</td><td>27.42</td><td>8.64</td><td>36.27</td><td>9.68</td><td>352 207 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2402.00	101.06	-----	-----	91.59	27.42	8.64	36.27	9.68	352 207 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2388.29	56.52	74.00	-17.48	47.12	27.37	8.62	36.27	9.68	352 207 PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2402.00	101.06	-----	-----	91.59	27.42	8.64	36.27	9.68	352 207 PEAK																																																																									
Avg	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.510kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2389.95</td><td>39.53</td><td>54.00</td><td>-14.47</td><td>30.10</td><td>27.40</td><td>8.62</td><td>36.27</td><td>9.68</td><td>352 207 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2389.95	39.53	54.00	-14.47	30.10	27.40	8.62	36.27	9.68	352 207 AVERAGE	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.510kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2402.00</td><td>99.47</td><td>-----</td><td>-----</td><td>90.00</td><td>27.42</td><td>8.64</td><td>36.27</td><td>9.68</td><td>352 207 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2402.00	99.47	-----	-----	90.00	27.42	8.64	36.27	9.68	352 207 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2389.95	39.53	54.00	-14.47	30.10	27.40	8.62	36.27	9.68	352 207 AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2402.00	99.47	-----	-----	90.00	27.42	8.64	36.27	9.68	352 207 AVERAGE																																																																									





Mode	1																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_Bluetooth-LE_GFSK_CH00_2402MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.29</td><td>55.70</td><td>74.00</td><td>-18.30</td><td>46.30</td><td>27.37</td><td>8.62</td><td>36.27</td><td>9.68</td><td>100</td><td>176</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	2389.29	55.70	74.00	-18.30	46.30	27.37	8.62	36.27	9.68	100	176	PEAK	Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>99.12</td><td>-----</td><td>-----</td><td>89.65</td><td>27.42</td><td>8.64</td><td>36.27</td><td>9.68</td><td>100</td><td>176</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	2402.00	99.12	-----	-----	89.65	27.42	8.64	36.27	9.68	100	176	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																										
1	2389.29	55.70	74.00	-18.30	46.30	27.37	8.62	36.27	9.68	100	176	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																										
1	2402.00	99.12	-----	-----	89.65	27.42	8.64	36.27	9.68	100	176	PEAK																																																																																								
Avg	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.510kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>39.54</td><td>54.00</td><td>-14.46</td><td>30.11</td><td>27.40</td><td>8.62</td><td>36.27</td><td>9.68</td><td>100</td><td>176</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	2389.95	39.54	54.00	-14.46	30.11	27.40	8.62	36.27	9.68	100	176	AVERAGE	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.510kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>98.44</td><td>-----</td><td>-----</td><td>88.97</td><td>27.42</td><td>8.64</td><td>36.27</td><td>9.68</td><td>100</td><td>176</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	2402.00	98.44	-----	-----	88.97	27.42	8.64	36.27	9.68	100	176	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																										
1	2389.95	39.54	54.00	-14.46	30.11	27.40	8.62	36.27	9.68	100	176	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																										
1	2402.00	98.44	-----	-----	88.97	27.42	8.64	36.27	9.68	100	176	AVERAGE																																																																																								



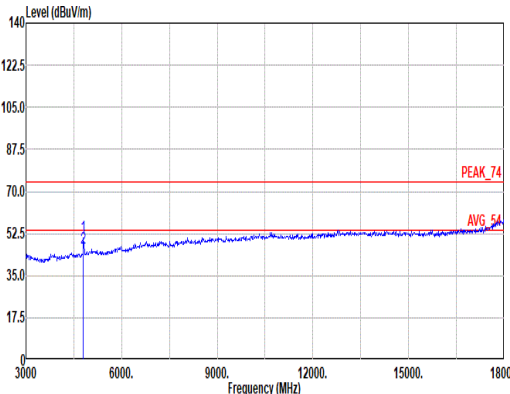
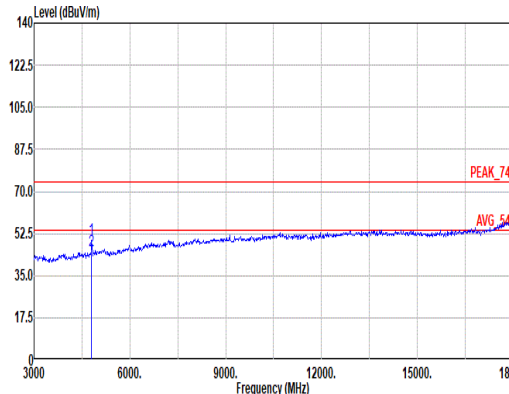


Mode	1																																																																																																																																
	Harmonic																																																																																																																																
	2400-2483.5_Bluetooth-LE_GFSK_CH00_2402MHz																																																																																																																																
ANT	1																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																										
Peak Avg																																																																																																																																	
	Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 HORIZONTAL						Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 VERTICAL																																																																																																																										
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>51.10</td><td>74.00</td><td>-22.90</td><td>43.30</td><td>32.23</td><td>12.25</td><td>37.51</td><td>0.83</td><td>114</td><td>148</td><td>PEAK</td></tr><tr><td>2</td><td>4804.00</td><td>46.65</td><td>54.00</td><td>-7.35</td><td>38.85</td><td>32.23</td><td>12.25</td><td>37.51</td><td>0.83</td><td>114</td><td>148</td><td>Average</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	51.10	74.00	-22.90	43.30	32.23	12.25	37.51	0.83	114	148	PEAK	2	4804.00	46.65	54.00	-7.35	38.85	32.23	12.25	37.51	0.83	114	148	Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>50.10</td><td>74.00</td><td>-23.90</td><td>42.30</td><td>32.23</td><td>12.25</td><td>37.51</td><td>0.83</td><td>106</td><td>240</td><td>PEAK</td></tr><tr><td>2</td><td>4804.00</td><td>45.39</td><td>54.00</td><td>-8.61</td><td>37.59</td><td>32.23</td><td>12.25</td><td>37.51</td><td>0.83</td><td>106</td><td>240</td><td>Average</td></tr></table>				Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	50.10	74.00	-23.90	42.30	32.23	12.25	37.51	0.83	106	240	PEAK	2	4804.00	45.39	54.00	-8.61	37.59	32.23	12.25	37.51	0.83	106	240	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	4804.00	51.10	74.00	-22.90	43.30	32.23	12.25	37.51	0.83	114	148	PEAK																																																																																																																					
2	4804.00	46.65	54.00	-7.35	38.85	32.23	12.25	37.51	0.83	114	148	Average																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	4804.00	50.10	74.00	-23.90	42.30	32.23	12.25	37.51	0.83	106	240	PEAK																																																																																																																					
2	4804.00	45.39	54.00	-8.61	37.59	32.23	12.25	37.51	0.83	106	240	Average																																																																																																																					

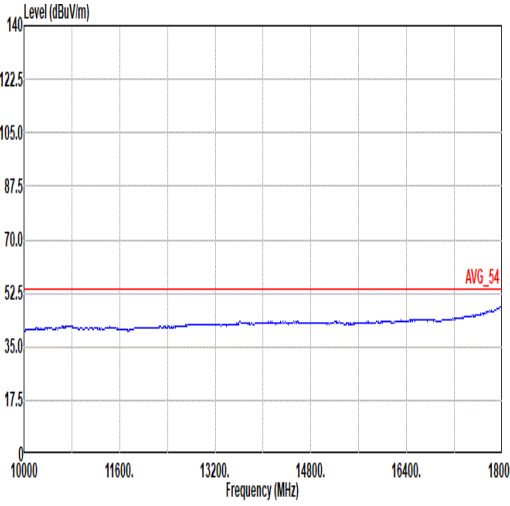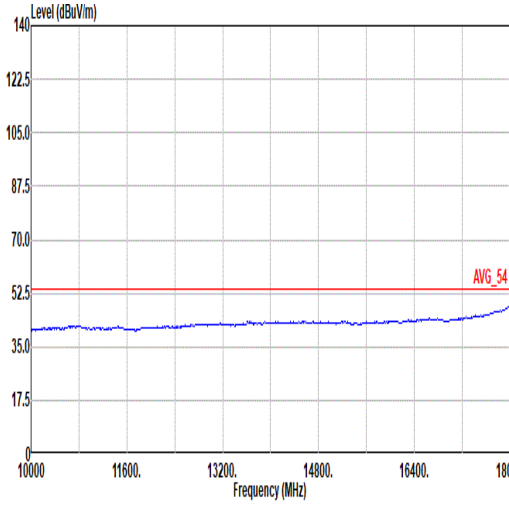

Mode	1	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GFSK_CH00_2402MHz	
ANT	1	
Pol.	Horizontal	Vertical
10G -18G Avg	 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL	 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL

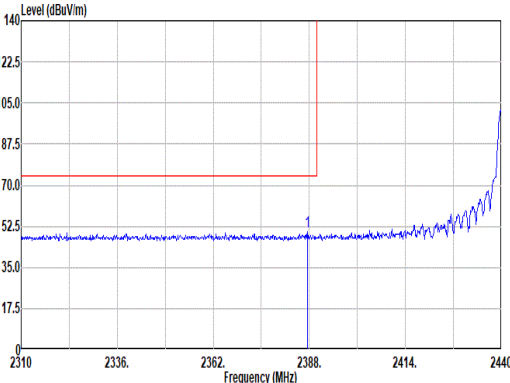
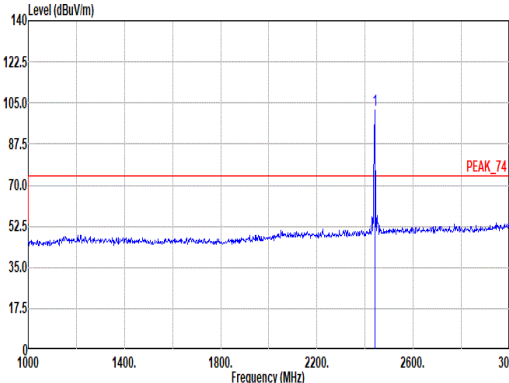
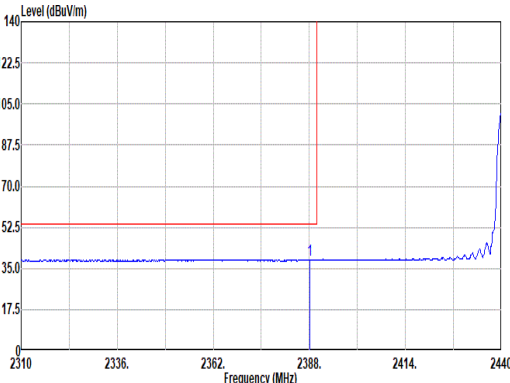
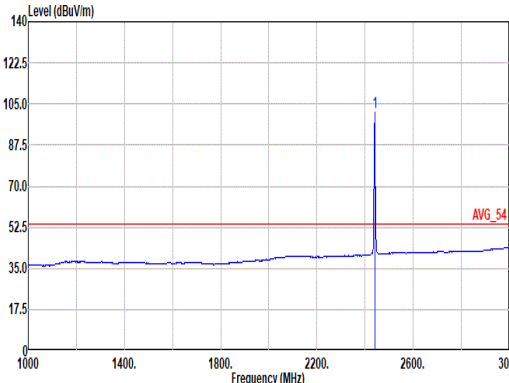


Mode	2																																																																																									
	Band Edge - L																																																																																									
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal	Fundamental																																																																																								
Peak	 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2387.48</td><td>50.13</td><td>74.00</td><td>-23.87</td><td>40.75</td><td>27.35</td><td>8.62</td><td>36.27</td><td>9.68</td><td>175</td><td>64</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.48	50.13	74.00	-23.87	40.75	27.35	8.62	36.27	9.68	175	64	PEAK	 Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>101.97</td><td>-----</td><td>-----</td><td>92.26</td><td>27.60</td><td>8.71</td><td>36.28</td><td>9.68</td><td>175</td><td>64</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	101.97	-----	-----	92.26	27.60	8.71	36.28	9.68	175	64	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2387.48	50.13	74.00	-23.87	40.75	27.35	8.62	36.27	9.68	175	64	PEAK																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2440.00	101.97	-----	-----	92.26	27.60	8.71	36.28	9.68	175	64	PEAK																																																																														
Avg	 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.510kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.13</td><td>38.63</td><td>54.00</td><td>-15.37</td><td>29.24</td><td>27.36</td><td>8.62</td><td>36.27</td><td>9.68</td><td>175</td><td>64</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.13	38.63	54.00	-15.37	29.24	27.36	8.62	36.27	9.68	175	64	AVERAGE	 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.510kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>101.29</td><td>-----</td><td>-----</td><td>91.58</td><td>27.60</td><td>8.71</td><td>36.28</td><td>9.68</td><td>175</td><td>64</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	101.29	-----	-----	91.58	27.60	8.71	36.28	9.68	175	64	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2388.13	38.63	54.00	-15.37	29.24	27.36	8.62	36.27	9.68	175	64	AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2440.00	101.29	-----	-----	91.58	27.60	8.71	36.28	9.68	175	64	AVERAGE																																																																														





Mode	2																																								
	Band Edge - R																																								
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																								
ANT	1																																								
Pol.	Horizontal	Fundamental																																							
Peak	Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2487.10</td><td>50.01</td><td>74.00</td><td>-23.99</td><td></td><td>39.86</td><td>27.97</td><td>8.80</td><td>36.30</td><td>9.68</td><td>175</td><td>64</td><td>PEAK</td></tr></table>	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2487.10	50.01	74.00	-23.99		39.86	27.97	8.80	36.30	9.68	175	64	PEAK	Blank
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																													
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																														
1 2487.10	50.01	74.00	-23.99		39.86	27.97	8.80	36.30	9.68	175	64	PEAK																													
Avg	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.510kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2498.08</td><td>39.44</td><td>54.00</td><td>-14.56</td><td></td><td>29.24</td><td>28.00</td><td>8.82</td><td>36.30</td><td>9.68</td><td>175</td><td>64</td><td>AVERAGE</td></tr></table>	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2498.08	39.44	54.00	-14.56		29.24	28.00	8.82	36.30	9.68	175	64	AVERAGE	Blank
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																													
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																														
1 2498.08	39.44	54.00	-14.56		29.24	28.00	8.82	36.30	9.68	175	64	AVERAGE																													

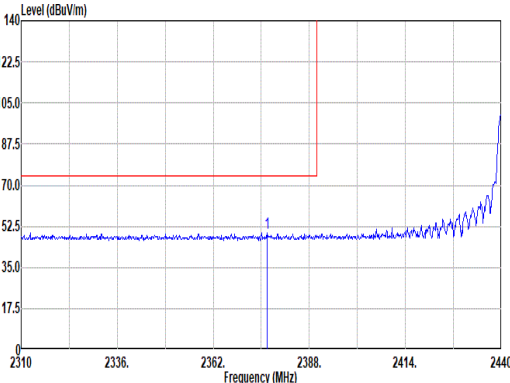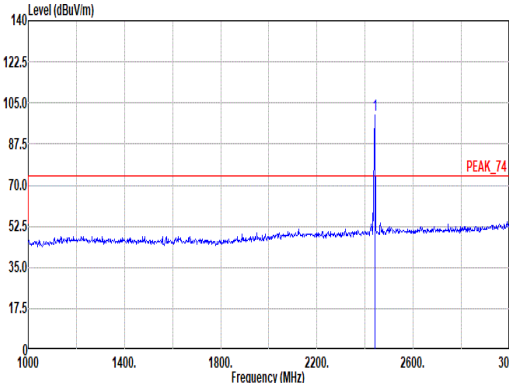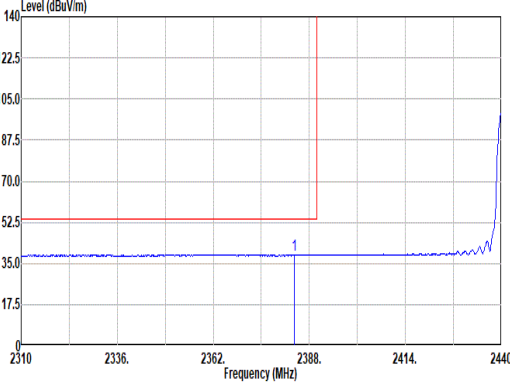
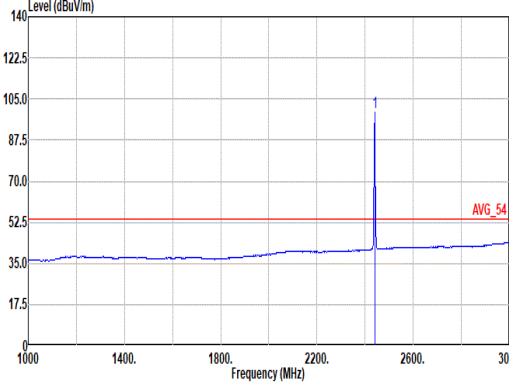


Mode	2																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2376.56</td><td>49.56</td><td>74.00</td><td>-24.44</td><td>40.31</td><td>27.23</td><td>8.60</td><td>36.26</td><td>9.68</td><td>263</td><td>193 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2376.56	49.56	74.00	-24.44	40.31	27.23	8.60	36.26	9.68	263	193 PEAK	Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>99.96</td><td>-----</td><td>-----</td><td>90.25</td><td>27.60</td><td>8.71</td><td>36.28</td><td>9.68</td><td>263</td><td>193 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2440.00	99.96	-----	-----	90.25	27.60	8.71	36.28	9.68	263
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2376.56	49.56	74.00	-24.44	40.31	27.23	8.60	36.26	9.68	263	193 PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2440.00	99.96	-----	-----	90.25	27.60	8.71	36.28	9.68	263	193 PEAK																																																																																								
Avg																																																																																																			
	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.510kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2383.84</td><td>38.70</td><td>54.00</td><td>-15.30</td><td>29.40</td><td>27.28</td><td>8.61</td><td>36.27</td><td>9.68</td><td>263</td><td>193 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2383.84	38.70	54.00	-15.30	29.40	27.28	8.61	36.27	9.68	263	193 AVERAGE	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.510kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>99.29</td><td>-----</td><td>-----</td><td>89.58</td><td>27.60</td><td>8.71</td><td>36.28</td><td>9.68</td><td>263</td><td>193 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2440.00	99.29	-----	-----	89.58	27.60	8.71	36.28	9.68	263
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2383.84	38.70	54.00	-15.30	29.40	27.28	8.61	36.27	9.68	263	193 AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2440.00	99.29	-----	-----	89.58	27.60	8.71	36.28	9.68	263	193 AVERAGE																																																																																								

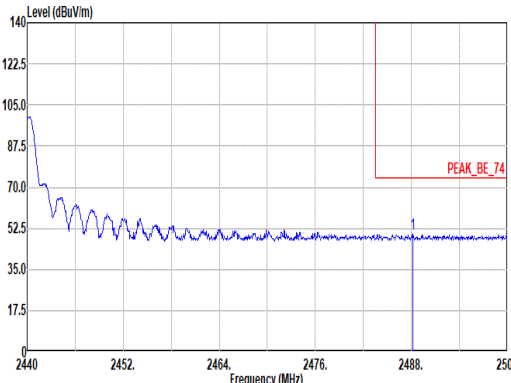
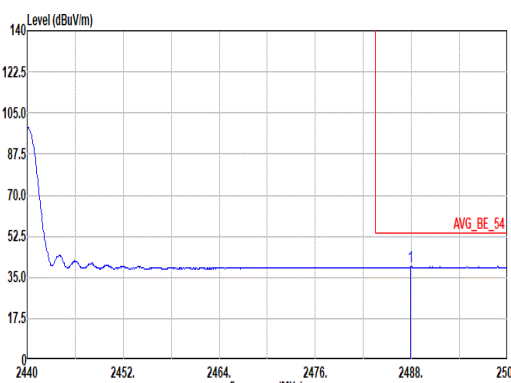


Mode	2																																													
	Band Edge - R																																													
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																													
ANT	1																																													
Pol.	Vertical	Fundamental																																												
Peak	 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2488.18</td><td>49.93</td><td>74.00</td><td>-24.07</td><td>39.77</td><td>27.98</td><td>8.80</td><td>36.30</td><td>9.68</td><td>263</td><td>193</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2488.18	49.93	74.00	-24.07	39.77	27.98	8.80	36.30	9.68	263	193	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2488.18	49.93	74.00	-24.07	39.77	27.98	8.80	36.30	9.68	263	193	PEAK																																		
Avg	 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.510kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.88</td><td>39.63</td><td>54.00</td><td>-14.37</td><td>29.47</td><td>27.98</td><td>8.80</td><td>36.30</td><td>9.68</td><td>263</td><td>193</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2487.88	39.63	54.00	-14.37	29.47	27.98	8.80	36.30	9.68	263	193	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2487.88	39.63	54.00	-14.37	29.47	27.98	8.80	36.30	9.68	263	193	AVERAGE																																		



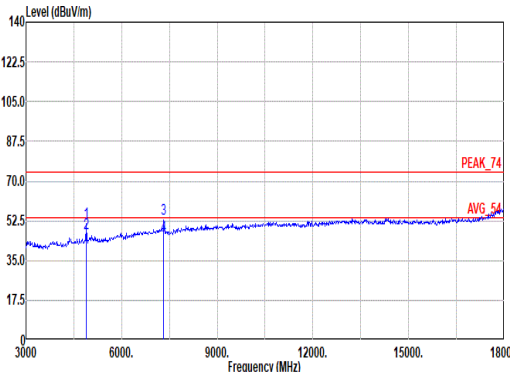
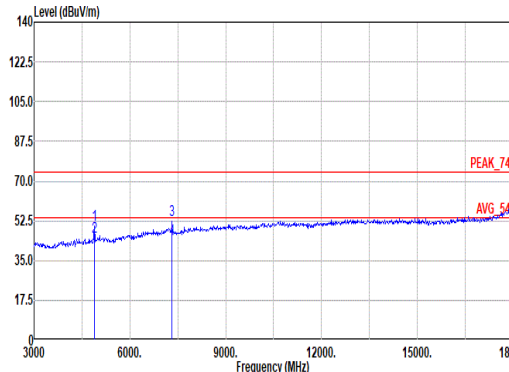


Mode	2																																																																																																																																																															
	Harmonic																																																																																																																																																															
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																																																																																																																																															
ANT	1																																																																																																																																																															
Pol.	Horizontal	Vertical																																																																																																																																																														
Peak																																																																																																																																																																
	Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 HORIZONTAL	Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 VERTICAL																																																																																																																																																														
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 4880.00</td><td>51.80</td><td>74.00</td><td>-22.20</td><td>43.59</td><td>32.72</td><td>12.39</td><td>37.57</td><td>0.67</td><td>100</td><td>156</td><td>PEAK</td></tr><tr><td>2 4880.00</td><td>46.78</td><td>54.00</td><td>-7.22</td><td>38.57</td><td>32.72</td><td>12.39</td><td>37.57</td><td>0.67</td><td>100</td><td>156</td><td>Average</td></tr><tr><td>3 7320.00</td><td>53.10</td><td>74.00</td><td>-20.90</td><td>39.07</td><td>36.78</td><td>15.38</td><td>38.48</td><td>0.35</td><td>100</td><td>202</td><td>PEAK</td></tr><tr><td>4 7320.00</td><td>45.82</td><td>54.00</td><td>-8.18</td><td>31.79</td><td>36.78</td><td>15.38</td><td>38.48</td><td>0.35</td><td>100</td><td>202</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 4880.00	51.80	74.00	-22.20	43.59	32.72	12.39	37.57	0.67	100	156	PEAK	2 4880.00	46.78	54.00	-7.22	38.57	32.72	12.39	37.57	0.67	100	156	Average	3 7320.00	53.10	74.00	-20.90	39.07	36.78	15.38	38.48	0.35	100	202	PEAK	4 7320.00	45.82	54.00	-8.18	31.79	36.78	15.38	38.48	0.35	100	202	Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 4880.00</td><td>50.64</td><td>74.00</td><td>-23.36</td><td>42.43</td><td>32.72</td><td>12.39</td><td>37.57</td><td>0.67</td><td>100</td><td>245</td><td>PEAK</td></tr><tr><td>2 4880.00</td><td>45.54</td><td>54.00</td><td>-8.46</td><td>37.33</td><td>32.72</td><td>12.39</td><td>37.57</td><td>0.67</td><td>100</td><td>245</td><td>Average</td></tr><tr><td>3 7320.00</td><td>53.01</td><td>74.00</td><td>-20.99</td><td>38.98</td><td>36.78</td><td>15.38</td><td>38.48</td><td>0.35</td><td>100</td><td>220</td><td>PEAK</td></tr><tr><td>4 7320.00</td><td>44.61</td><td>54.00</td><td>-9.39</td><td>30.58</td><td>36.78</td><td>15.38</td><td>38.48</td><td>0.35</td><td>100</td><td>220</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 4880.00	50.64	74.00	-23.36	42.43	32.72	12.39	37.57	0.67	100	245	PEAK	2 4880.00	45.54	54.00	-8.46	37.33	32.72	12.39	37.57	0.67	100	245	Average	3 7320.00	53.01	74.00	-20.99	38.98	36.78	15.38	38.48	0.35	100	220	PEAK	4 7320.00	44.61	54.00	-9.39	30.58	36.78	15.38	38.48	0.35	100	220	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																						
1 4880.00	51.80	74.00	-22.20	43.59	32.72	12.39	37.57	0.67	100	156	PEAK																																																																																																																																																					
2 4880.00	46.78	54.00	-7.22	38.57	32.72	12.39	37.57	0.67	100	156	Average																																																																																																																																																					
3 7320.00	53.10	74.00	-20.90	39.07	36.78	15.38	38.48	0.35	100	202	PEAK																																																																																																																																																					
4 7320.00	45.82	54.00	-8.18	31.79	36.78	15.38	38.48	0.35	100	202	Average																																																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																						
1 4880.00	50.64	74.00	-23.36	42.43	32.72	12.39	37.57	0.67	100	245	PEAK																																																																																																																																																					
2 4880.00	45.54	54.00	-8.46	37.33	32.72	12.39	37.57	0.67	100	245	Average																																																																																																																																																					
3 7320.00	53.01	74.00	-20.99	38.98	36.78	15.38	38.48	0.35	100	220	PEAK																																																																																																																																																					
4 7320.00	44.61	54.00	-9.39	30.58	36.78	15.38	38.48	0.35	100	220	Average																																																																																																																																																					



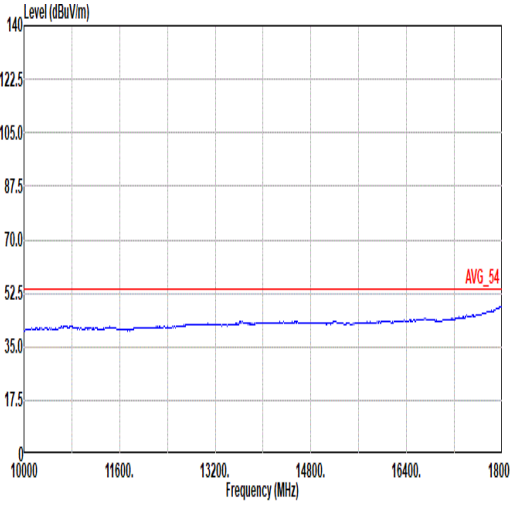
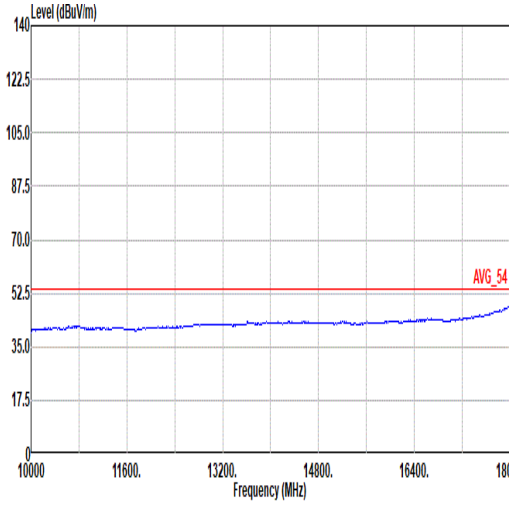


Mode	2	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz	
ANT	1	
Pol.	Horizontal	Vertical
10G -18G Avg	 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL	 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL

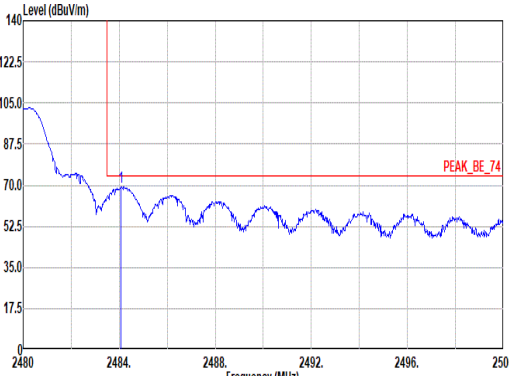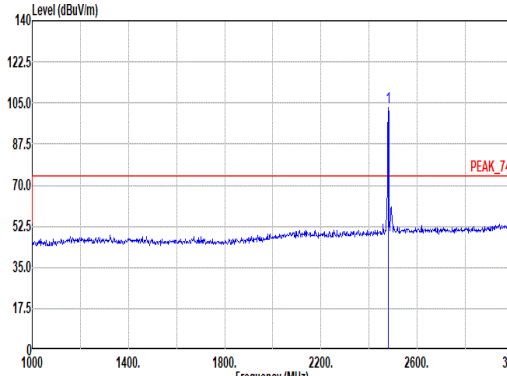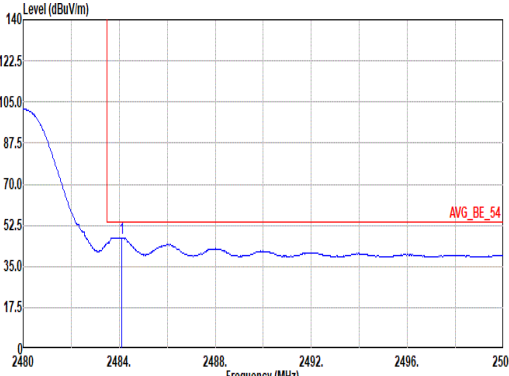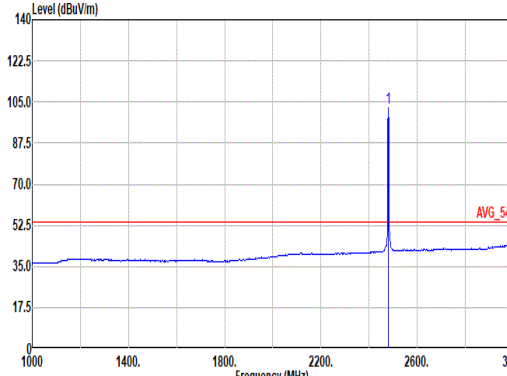

Mode	3																																																																																								
	Band Edge																																																																																								
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz																																																																																								
ANT	1																																																																																								
Pol.	Horizontal						Fundamental																																																																																		
Peak																																																																																									
	Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2484.00</td><td>69.05</td><td>74.00</td><td>-4.95</td><td>58.93</td><td>27.94</td><td>8.80</td><td>36.30</td><td>9.68</td><td>108</td><td>88</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2484.00	69.05	74.00	-4.95	58.93	27.94	8.80	36.30	9.68	108	88	PEAK	Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>103.02</td><td>-----</td><td>-----</td><td>92.94</td><td>27.90</td><td>8.79</td><td>36.29</td><td>9.68</td><td>108</td><td>88</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2480.00	103.02	-----	-----	92.94	27.90	8.79	36.29	9.68	108	88
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2484.00	69.05	74.00	-4.95	58.93	27.94	8.80	36.30	9.68	108	88	PEAK																																																																													
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2480.00	103.02	-----	-----	92.94	27.90	8.79	36.29	9.68	108	88	PEAK																																																																													
Avg																																																																																									
	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.510kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2484.10</td><td>47.02</td><td>54.00</td><td>-6.98</td><td>36.90</td><td>27.94</td><td>8.80</td><td>36.30</td><td>9.68</td><td>108</td><td>88</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2484.10	47.02	54.00	-6.98	36.90	27.94	8.80	36.30	9.68	108	88	AVERAGE	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>102.36</td><td>-----</td><td>-----</td><td>92.28</td><td>27.90</td><td>8.79</td><td>36.29</td><td>9.68</td><td>108</td><td>88</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2480.00	102.36	-----	-----	92.28	27.90	8.79	36.29	9.68	108	88
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2484.10	47.02	54.00	-6.98	36.90	27.94	8.80	36.30	9.68	108	88	AVERAGE																																																																													
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2480.00	102.36	-----	-----	92.28	27.90	8.79	36.29	9.68	108	88	AVERAGE																																																																													

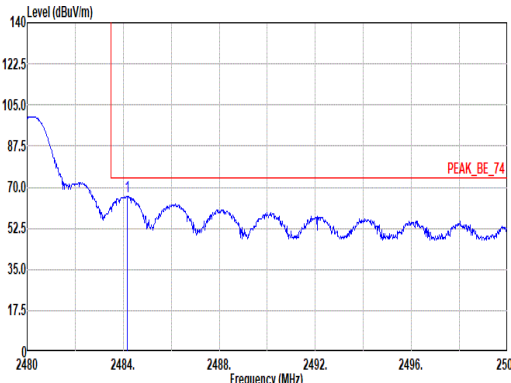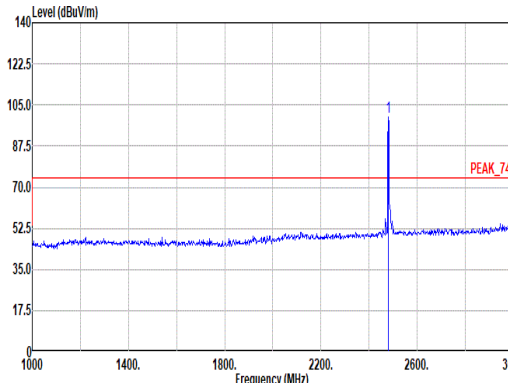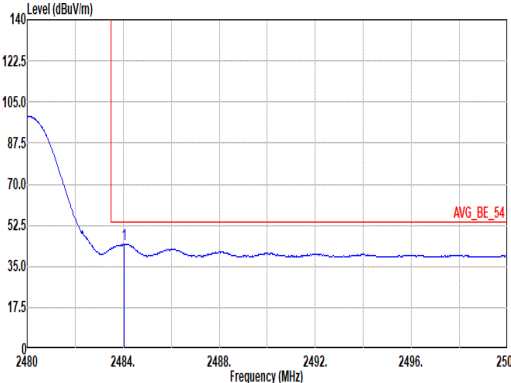
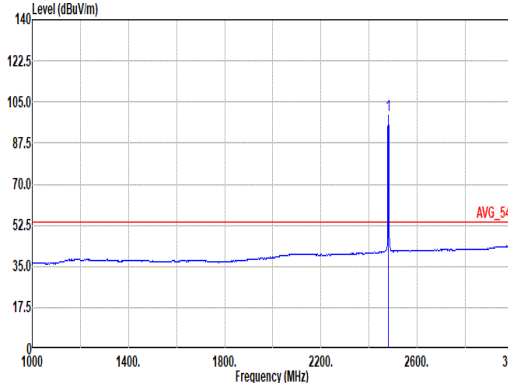


Mode	3																																																																																									
	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz																																																																																									
ANT	1																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE_74 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2484.18</td><td>66.14</td><td>74.00</td><td>-7.86</td><td>56.02</td><td>27.94</td><td>8.80</td><td>36.30</td><td>9.68</td><td>100</td><td>234 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2484.18	66.14	74.00	-7.86	56.02	27.94	8.80	36.30	9.68	100	234 PEAK	 Level (dBuV/m) Frequency (MHz) PEAK_74 Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2480.00</td><td>100.06</td><td>-----</td><td>-----</td><td>89.98</td><td>27.90</td><td>8.79</td><td>36.29</td><td>9.68</td><td>100</td><td>234 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2480.00	100.06	-----	-----	89.98	27.90	8.79	36.29	9.68	100	234 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2484.18	66.14	74.00	-7.86	56.02	27.94	8.80	36.30	9.68	100	234 PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2480.00	100.06	-----	-----	89.98	27.90	8.79	36.29	9.68	100	234 PEAK																																																																															
Avg	 Level (dBuV/m) Frequency (MHz) AVG_BE_54 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.510kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2484.04</td><td>44.57</td><td>54.00</td><td>-9.43</td><td>34.45</td><td>27.94</td><td>8.80</td><td>36.30</td><td>9.68</td><td>100</td><td>234 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2484.04	44.57	54.00	-9.43	34.45	27.94	8.80	36.30	9.68	100	234 AVERAGE	 Level (dBuV/m) Frequency (MHz) AVG_54 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.510kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2480.00</td><td>99.38</td><td>-----</td><td>-----</td><td>89.30</td><td>27.90</td><td>8.79</td><td>36.29</td><td>9.68</td><td>100</td><td>234 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2480.00	99.38	-----	-----	89.30	27.90	8.79	36.29	9.68	100	234 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2484.04	44.57	54.00	-9.43	34.45	27.94	8.80	36.30	9.68	100	234 AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2480.00	99.38	-----	-----	89.30	27.90	8.79	36.29	9.68	100	234 AVERAGE																																																																															





Mode	3																																																																																												
	Harmonic																																																																																												
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz																																																																																												
ANT	1																																																																																												
Pol.	Horizontal																																																																																												
Peak Avg																																																																																													
	Site : 03CH20-HY Condition: PEAK_74 3m HF_91280_02360_241101 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>50.67</td><td>74.00</td><td>-23.33</td><td>42.11</td><td>33.16</td><td>12.54</td><td>37.64</td><td>0.50</td><td>101</td><td>159</td><td>PEAK</td></tr><tr><td>2</td><td>4960.00</td><td>46.01</td><td>54.00</td><td>-7.99</td><td>37.45</td><td>33.16</td><td>12.54</td><td>37.64</td><td>0.50</td><td>101</td><td>159</td><td>Average</td></tr><tr><td>3</td><td>7440.00</td><td>54.70</td><td>74.00</td><td>-19.30</td><td>41.22</td><td>36.22</td><td>15.51</td><td>38.58</td><td>0.33</td><td>100</td><td>210</td><td>PEAK</td></tr><tr><td>4</td><td>7440.00</td><td>49.40</td><td>54.00</td><td>-4.60</td><td>35.92</td><td>36.22</td><td>15.51</td><td>38.58</td><td>0.33</td><td>100</td><td>210</td><td>Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	50.67	74.00	-23.33	42.11	33.16	12.54	37.64	0.50	101	159	PEAK	2	4960.00	46.01	54.00	-7.99	37.45	33.16	12.54	37.64	0.50	101	159	Average	3	7440.00	54.70	74.00	-19.30	41.22	36.22	15.51	38.58	0.33	100	210	PEAK	4	7440.00	49.40	54.00	-4.60	35.92	36.22	15.51	38.58	0.33	100	210
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	4960.00	50.67	74.00	-23.33	42.11	33.16	12.54	37.64	0.50	101	159	PEAK																																																																																	
2	4960.00	46.01	54.00	-7.99	37.45	33.16	12.54	37.64	0.50	101	159	Average																																																																																	
3	7440.00	54.70	74.00	-19.30	41.22	36.22	15.51	38.58	0.33	100	210	PEAK																																																																																	
4	7440.00	49.40	54.00	-4.60	35.92	36.22	15.51	38.58	0.33	100	210	Average																																																																																	
Peak Avg																																																																																													
	Site : 03CH20-HY Condition: PEAK_74 3m HF_91280_02360_241101 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>48.22</td><td>74.00</td><td>-25.78</td><td>39.66</td><td>33.16</td><td>12.54</td><td>37.64</td><td>0.50</td><td>100</td><td>234</td><td>PEAK</td></tr><tr><td>2</td><td>4960.00</td><td>43.16</td><td>54.00</td><td>-10.84</td><td>34.60</td><td>33.16</td><td>12.54</td><td>37.64</td><td>0.50</td><td>100</td><td>234</td><td>Average</td></tr><tr><td>3</td><td>7440.00</td><td>48.60</td><td>74.00</td><td>-25.32</td><td>35.20</td><td>36.22</td><td>15.51</td><td>38.58</td><td>0.33</td><td>100</td><td>248</td><td>PEAK</td></tr><tr><td>4</td><td>7440.00</td><td>43.63</td><td>54.00</td><td>-10.37</td><td>30.15</td><td>36.22</td><td>15.51</td><td>38.58</td><td>0.33</td><td>100</td><td>248</td><td>Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	48.22	74.00	-25.78	39.66	33.16	12.54	37.64	0.50	100	234	PEAK	2	4960.00	43.16	54.00	-10.84	34.60	33.16	12.54	37.64	0.50	100	234	Average	3	7440.00	48.60	74.00	-25.32	35.20	36.22	15.51	38.58	0.33	100	248	PEAK	4	7440.00	43.63	54.00	-10.37	30.15	36.22	15.51	38.58	0.33	100	248
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	4960.00	48.22	74.00	-25.78	39.66	33.16	12.54	37.64	0.50	100	234	PEAK																																																																																	
2	4960.00	43.16	54.00	-10.84	34.60	33.16	12.54	37.64	0.50	100	234	Average																																																																																	
3	7440.00	48.60	74.00	-25.32	35.20	36.22	15.51	38.58	0.33	100	248	PEAK																																																																																	
4	7440.00	43.63	54.00	-10.37	30.15	36.22	15.51	38.58	0.33	100	248	Average																																																																																	

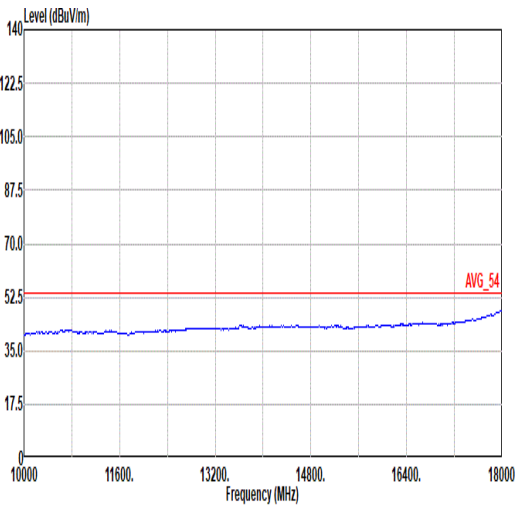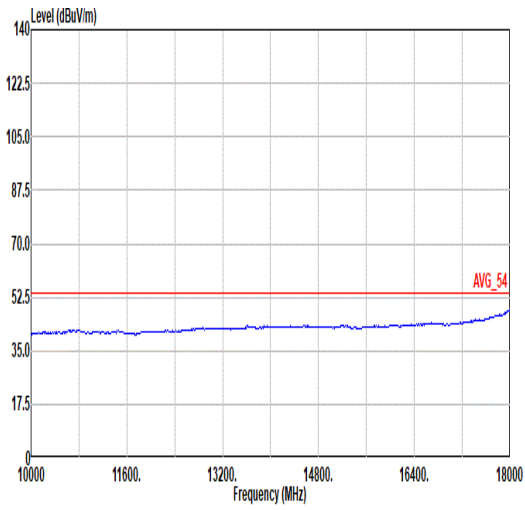

Mode	3	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz	
ANT	1	
Pol.	Horizontal	Vertical
10G -18G Avg	 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL	 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL

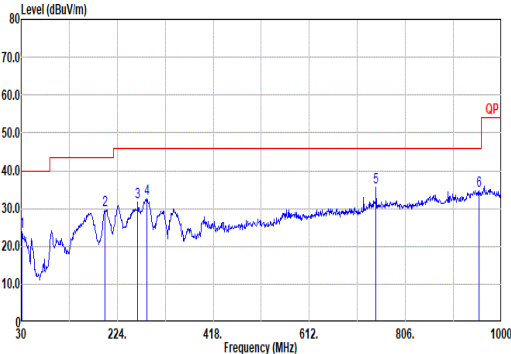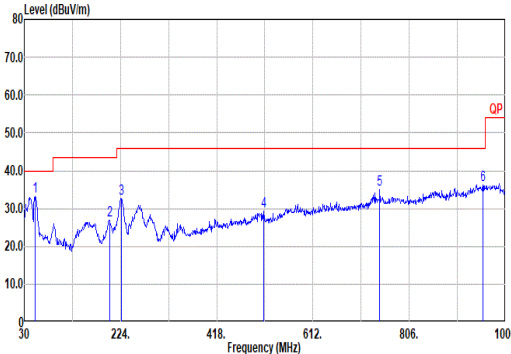

Mode	7																																																																																																																																																																																																																																				
	LF																																																																																																																																																																																																																																				
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz																																																																																																																																																																																																																																				
ANT	1																																																																																																																																																																																																																																				
Pol.	Horizontal						Vertical																																																																																																																																																																																																																														
QPI Peak																																																																																																																																																																																																																																					
	Site : 03CH20-HY Condition: QP 3m Bilog_55606 & 00_241127 HORIZONTAL						Site : 03CH20-HY Condition: QP 3m Bilog_55606 & 00_241127 VERTICAL																																																																																																																																																																																																																														
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>31.94</td><td>23.72</td><td>40.00</td><td>-16.28</td><td>34.68</td><td>23.56</td><td>0.99</td><td>35.75</td><td>0.24</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>198.78</td><td>29.59</td><td>43.50</td><td>-13.91</td><td>47.34</td><td>15.05</td><td>2.51</td><td>35.51</td><td>0.20</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>265.71</td><td>31.68</td><td>46.00</td><td>-14.32</td><td>43.94</td><td>20.02</td><td>2.89</td><td>35.36</td><td>0.19</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>283.17</td><td>32.53</td><td>46.00</td><td>-13.47</td><td>45.62</td><td>19.06</td><td>2.98</td><td>35.32</td><td>0.19</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>746.83</td><td>35.58</td><td>46.00</td><td>-10.42</td><td>36.35</td><td>28.15</td><td>4.84</td><td>33.90</td><td>0.14</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>954.41</td><td>34.86</td><td>46.00</td><td>-11.14</td><td>31.53</td><td>30.94</td><td>5.44</td><td>33.14</td><td>0.09</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	31.94	23.72	40.00	-16.28	34.68	23.56	0.99	35.75	0.24	--	--	Peak	2	198.78	29.59	43.50	-13.91	47.34	15.05	2.51	35.51	0.20	--	--	Peak	3	265.71	31.68	46.00	-14.32	43.94	20.02	2.89	35.36	0.19	--	--	Peak	4	283.17	32.53	46.00	-13.47	45.62	19.06	2.98	35.32	0.19	--	--	Peak	5	746.83	35.58	46.00	-10.42	36.35	28.15	4.84	33.90	0.14	--	--	Peak	6	954.41	34.86	46.00	-11.14	31.53	30.94	5.44	33.14	0.09	--	--	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>52.31</td><td>33.16</td><td>40.00</td><td>-6.84</td><td>53.85</td><td>13.54</td><td>1.27</td><td>35.74</td><td>0.24</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>201.69</td><td>26.76</td><td>43.50</td><td>-16.74</td><td>44.43</td><td>15.11</td><td>2.53</td><td>35.51</td><td>0.20</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>225.94</td><td>32.56</td><td>46.00</td><td>-13.44</td><td>49.29</td><td>15.86</td><td>2.67</td><td>35.45</td><td>0.19</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>512.09</td><td>29.35</td><td>46.00</td><td>-16.65</td><td>35.96</td><td>24.00</td><td>3.99</td><td>34.73</td><td>0.13</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>746.83</td><td>35.07</td><td>46.00</td><td>-10.93</td><td>35.84</td><td>28.15</td><td>4.84</td><td>33.90</td><td>0.14</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>954.41</td><td>36.11</td><td>46.00</td><td>-9.89</td><td>32.78</td><td>30.94</td><td>5.44</td><td>33.14</td><td>0.09</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	52.31	33.16	40.00	-6.84	53.85	13.54	1.27	35.74	0.24	--	--	Peak	2	201.69	26.76	43.50	-16.74	44.43	15.11	2.53	35.51	0.20	--	--	Peak	3	225.94	32.56	46.00	-13.44	49.29	15.86	2.67	35.45	0.19	--	--	Peak	4	512.09	29.35	46.00	-16.65	35.96	24.00	3.99	34.73	0.13	--	--	Peak	5	746.83	35.07	46.00	-10.93	35.84	28.15	4.84	33.90	0.14	--	--	Peak	6	954.41	36.11	46.00	-9.89	32.78	30.94	5.44	33.14	0.09	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																											
1	31.94	23.72	40.00	-16.28	34.68	23.56	0.99	35.75	0.24	--	--	Peak																																																																																																																																																																																																																									
2	198.78	29.59	43.50	-13.91	47.34	15.05	2.51	35.51	0.20	--	--	Peak																																																																																																																																																																																																																									
3	265.71	31.68	46.00	-14.32	43.94	20.02	2.89	35.36	0.19	--	--	Peak																																																																																																																																																																																																																									
4	283.17	32.53	46.00	-13.47	45.62	19.06	2.98	35.32	0.19	--	--	Peak																																																																																																																																																																																																																									
5	746.83	35.58	46.00	-10.42	36.35	28.15	4.84	33.90	0.14	--	--	Peak																																																																																																																																																																																																																									
6	954.41	34.86	46.00	-11.14	31.53	30.94	5.44	33.14	0.09	--	--	Peak																																																																																																																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																											
1	52.31	33.16	40.00	-6.84	53.85	13.54	1.27	35.74	0.24	--	--	Peak																																																																																																																																																																																																																									
2	201.69	26.76	43.50	-16.74	44.43	15.11	2.53	35.51	0.20	--	--	Peak																																																																																																																																																																																																																									
3	225.94	32.56	46.00	-13.44	49.29	15.86	2.67	35.45	0.19	--	--	Peak																																																																																																																																																																																																																									
4	512.09	29.35	46.00	-16.65	35.96	24.00	3.99	34.73	0.13	--	--	Peak																																																																																																																																																																																																																									
5	746.83	35.07	46.00	-10.93	35.84	28.15	4.84	33.90	0.14	--	--	Peak																																																																																																																																																																																																																									
6	954.41	36.11	46.00	-9.89	32.78	30.94	5.44	33.14	0.09	--	--	Peak																																																																																																																																																																																																																									



Mode	8																																																																																							
	SHF																																																																																							
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz																																																																																							
ANT	1																																																																																							
Pol.	Horizontal						Vertical																																																																																	
Peak																																																																																								
	Site : 03CH20-HY Condition: PEAK_74 1m BBHA9170_1224_240624 HORIZONTAL						Site : 03CH20-HY Condition: PEAK_74 1m BBHA9170_1224_240624 VERTICAL																																																																																	
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>24580.00</td><td>42.02</td><td>74.00</td><td>-31.98</td><td>36.24</td><td>39.36</td><td>28.88</td><td>52.92</td><td>-9.54</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	24580.00	42.02	74.00	-31.98	36.24	39.36	28.88	52.92	-9.54	--	--	Peak	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>24671.00</td><td>41.90</td><td>74.00</td><td>-32.10</td><td>36.15</td><td>39.30</td><td>28.92</td><td>52.93</td><td>-9.54</td><td>--</td><td>--</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	24671.00	41.90	74.00	-32.10	36.15	39.30	28.92	52.93	-9.54	--	--
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																													
1	24580.00	42.02	74.00	-31.98	36.24	39.36	28.88	52.92	-9.54	--	--	Peak																																																																												
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																													
1	24671.00	41.90	74.00	-32.10	36.15	39.30	28.92	52.93	-9.54	--	--	Peak																																																																												



<2Mbps>

C2-1. Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 4	2400-2483.5	1	Bluetooth-LE_GFSK	00	2402	2Mbps	-	-
Mode 5	2400-2483.5	1	Bluetooth-LE_GFSK	19	2440	2Mbps	-	-
Mode 6	2400-2483.5	1	Bluetooth-LE_GFSK	39	2480	2Mbps	-	-





**C2-2. Summary of each worse mode**

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
4	Bluetooth-LE_GFSK	00	2389.86	40.37	54.00	-13.63	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GFSK	00	4804.00	45.84	54.00	-8.16	H	Avg.	Pass	-	Harmonic
5	Bluetooth-LE_GFSK	19	2488.36	39.92	54.00	-14.08	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GFSK	19	7320.00	45.88	54.00	-8.12	H	Avg.	Pass	-	Harmonic
6	Bluetooth-LE_GFSK	39	2484.30	50.08	54.00	-3.92	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GFSK	39	7440.00	45.80	54.00	-8.20	H	Avg.	Pass	-	Harmonic





Mode	4																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_Bluetooth-LE_GFSK_CH00_2402MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.66</td><td>56.23</td><td>74.00</td><td>-17.77</td><td>46.83</td><td>27.37</td><td>8.62</td><td>36.27</td><td>9.68</td><td>100</td><td>197</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	2388.66	56.23	74.00	-17.77	46.83	27.37	8.62	36.27	9.68	100	197	PEAK	Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>100.63</td><td>-----</td><td>-----</td><td>91.16</td><td>27.42</td><td>8.64</td><td>36.27</td><td>9.68</td><td>100</td><td>197</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	2402.00	100.63	-----	-----	91.16	27.42	8.64	36.27	9.68	100	197	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																										
1	2388.66	56.23	74.00	-17.77	46.83	27.37	8.62	36.27	9.68	100	197	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																										
1	2402.00	100.63	-----	-----	91.16	27.42	8.64	36.27	9.68	100	197	PEAK																																																																																								
Avg	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.86</td><td>40.37</td><td>54.00</td><td>-13.63</td><td>30.94</td><td>27.40</td><td>8.62</td><td>36.27</td><td>9.68</td><td>100</td><td>197</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	2389.86	40.37	54.00	-13.63	30.94	27.40	8.62	36.27	9.68	100	197	AVERAGE	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>98.45</td><td>-----</td><td>-----</td><td>88.98</td><td>27.42</td><td>8.64</td><td>36.27</td><td>9.68</td><td>100</td><td>197</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	2402.00	98.45	-----	-----	88.98	27.42	8.64	36.27	9.68	100	197	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																										
1	2389.86	40.37	54.00	-13.63	30.94	27.40	8.62	36.27	9.68	100	197	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																										
1	2402.00	98.45	-----	-----	88.98	27.42	8.64	36.27	9.68	100	197	AVERAGE																																																																																								

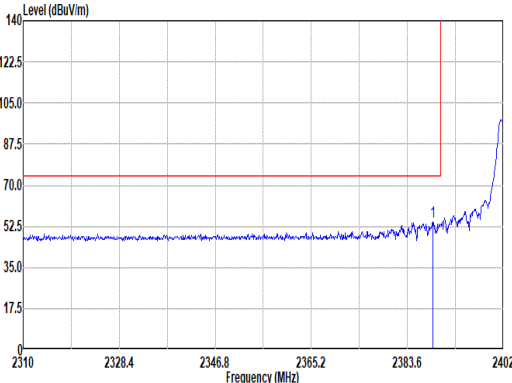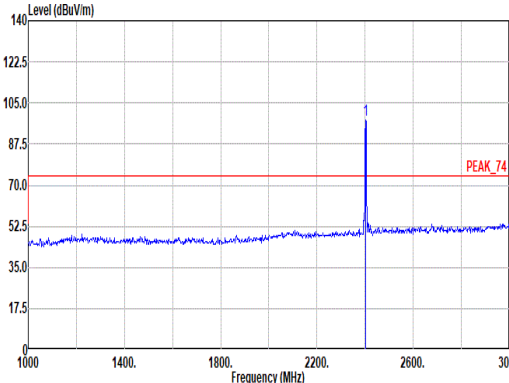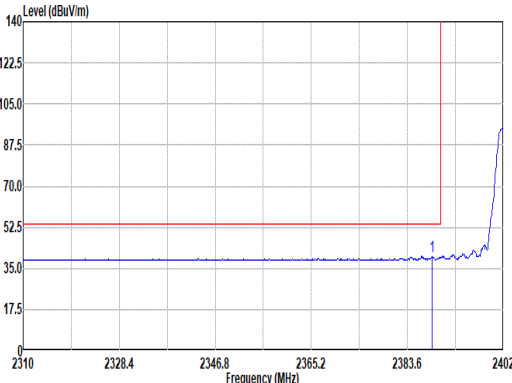
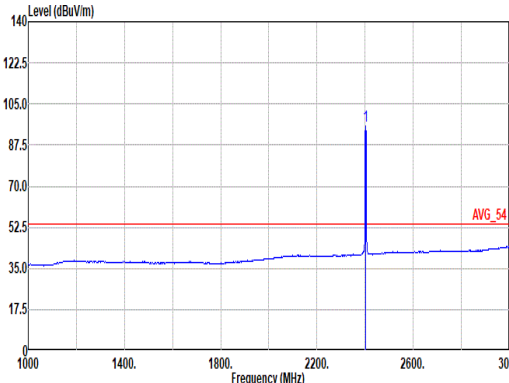


Mode	4																																																																																																											
	Band Edge																																																																																																											
	2400-2483.5_Bluetooth-LE_GFSK_CH00_2402MHz																																																																																																											
ANT	1																																																																																																											
Pol.	Vertical						Fundamental																																																																																																					
Peak	 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2388.48</td><td>54.21</td><td>74.00</td><td>-19.79</td><td>44.81</td><td>27.37</td><td>8.62</td><td>36.27</td><td>9.68</td><td>100</td><td>167 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor							MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg		1	2388.48	54.21	74.00	-19.79	44.81	27.37	8.62	36.27	9.68	100	167 PEAK	 Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2402.00</td><td>97.83</td><td>-----</td><td>-----</td><td>88.36</td><td>27.42</td><td>8.64</td><td>36.27</td><td>9.68</td><td>100</td><td>167 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor							MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg		1	2402.00	97.83	-----	-----	88.36	27.42	8.64	36.27	9.68	100	167 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																																		
1	2388.48	54.21	74.00	-19.79	44.81	27.37	8.62	36.27	9.68	100	167 PEAK																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																																		
1	2402.00	97.83	-----	-----	88.36	27.42	8.64	36.27	9.68	100	167 PEAK																																																																																																	
Avg	 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:1.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2388.29</td><td>40.05</td><td>54.00</td><td>-13.95</td><td>30.65</td><td>27.37</td><td>8.62</td><td>36.27</td><td>9.68</td><td>100</td><td>167 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor							MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg		1	2388.29	40.05	54.00	-13.95	30.65	27.37	8.62	36.27	9.68	100	167 AVERAGE	 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:1.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2402.00</td><td>95.74</td><td>-----</td><td>-----</td><td>86.27</td><td>27.42</td><td>8.64</td><td>36.27</td><td>9.68</td><td>100</td><td>167 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor							MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg		1	2402.00	95.74	-----	-----	86.27	27.42	8.64	36.27	9.68	100	167 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																																		
1	2388.29	40.05	54.00	-13.95	30.65	27.37	8.62	36.27	9.68	100	167 AVERAGE																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																																		
1	2402.00	95.74	-----	-----	86.27	27.42	8.64	36.27	9.68	100	167 AVERAGE																																																																																																	



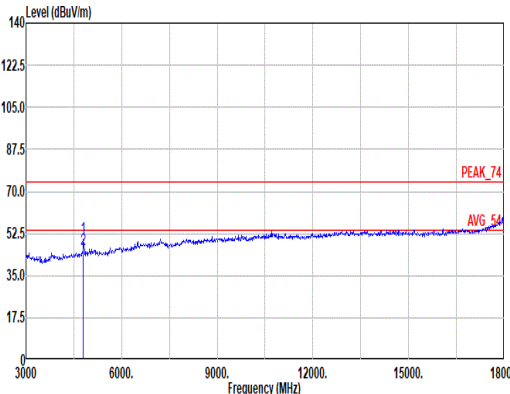
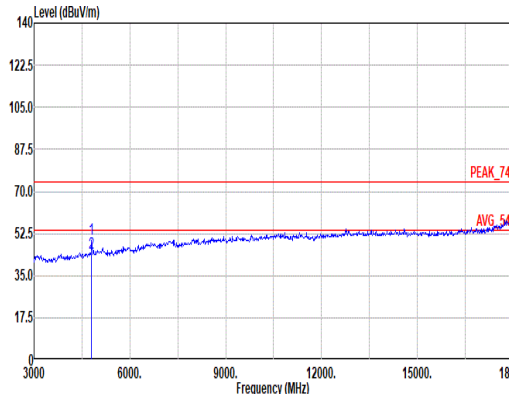


Mode	4																																																																																																																																
	Harmonic																																																																																																																																
	2400-2483.5_Bluetooth-LE_GFSK_CH00_2402MHz																																																																																																																																
ANT	1																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																										
Peak Avg																																																																																																																																	
	Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 HORIZONTAL						Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 VERTICAL																																																																																																																										
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>50.79</td><td>74.00</td><td>-23.21</td><td>42.99</td><td>32.23</td><td>12.25</td><td>37.51</td><td>0.83</td><td>111</td><td>149</td><td>PEAK</td></tr><tr><td>2</td><td>4804.00</td><td>45.84</td><td>54.00</td><td>-8.16</td><td>38.04</td><td>32.23</td><td>12.25</td><td>37.51</td><td>0.83</td><td>111</td><td>149</td><td>Average</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	50.79	74.00	-23.21	42.99	32.23	12.25	37.51	0.83	111	149	PEAK	2	4804.00	45.84	54.00	-8.16	38.04	32.23	12.25	37.51	0.83	111	149	Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>50.28</td><td>74.00</td><td>-23.72</td><td>42.48</td><td>32.23</td><td>12.25</td><td>37.51</td><td>0.83</td><td>101</td><td>239</td><td>PEAK</td></tr><tr><td>2</td><td>4804.00</td><td>44.54</td><td>54.00</td><td>-9.46</td><td>36.74</td><td>32.23</td><td>12.25</td><td>37.51</td><td>0.83</td><td>101</td><td>239</td><td>Average</td></tr></table>				Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	50.28	74.00	-23.72	42.48	32.23	12.25	37.51	0.83	101	239	PEAK	2	4804.00	44.54	54.00	-9.46	36.74	32.23	12.25	37.51	0.83	101	239	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	4804.00	50.79	74.00	-23.21	42.99	32.23	12.25	37.51	0.83	111	149	PEAK																																																																																																																					
2	4804.00	45.84	54.00	-8.16	38.04	32.23	12.25	37.51	0.83	111	149	Average																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	4804.00	50.28	74.00	-23.72	42.48	32.23	12.25	37.51	0.83	101	239	PEAK																																																																																																																					
2	4804.00	44.54	54.00	-9.46	36.74	32.23	12.25	37.51	0.83	101	239	Average																																																																																																																					

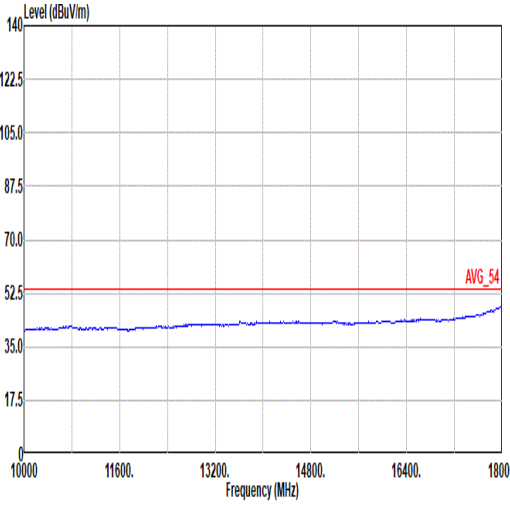
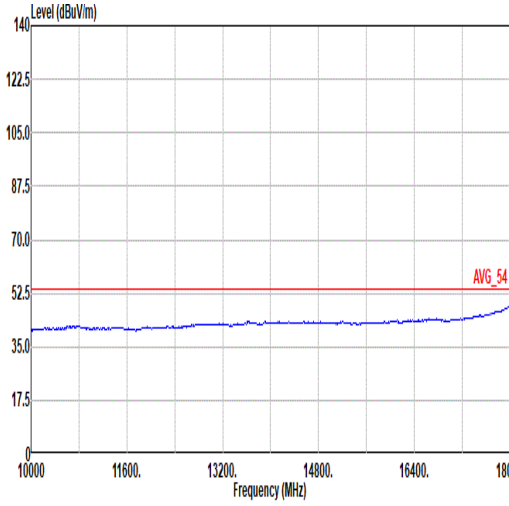


Mode	4	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GFSK_CH00_2402MHz	
ANT	1	
Pol.	Horizontal	Vertical
10G -18G Avg	 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL	 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL

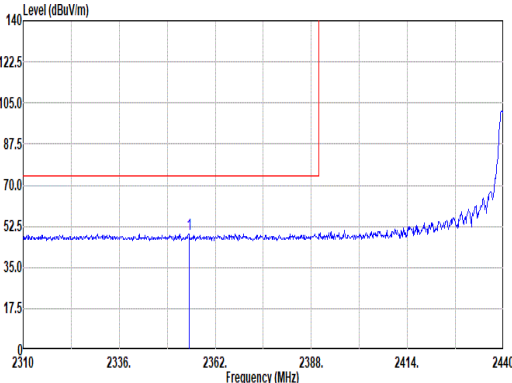
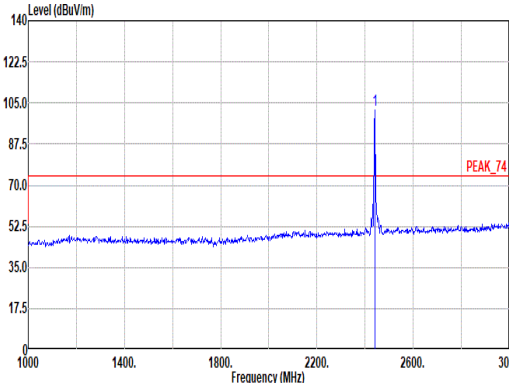
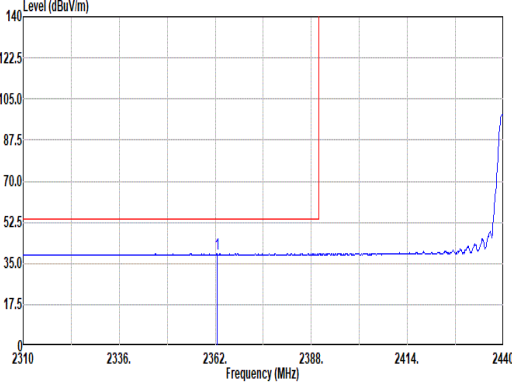
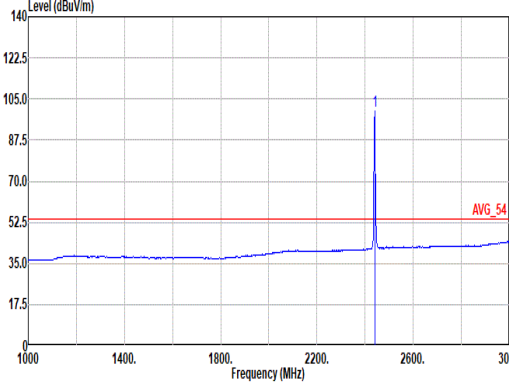


Mode	5																																																																																																														
	Band Edge - L																																																																																																														
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																																																																																														
ANT	1																																																																																																														
Pol.	Horizontal						Fundamental																																																																																																								
Peak																																																																																																															
	Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto						Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto																																																																																																								
Avg																																																																																																															
	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:1.000kHz SMT:Auto						Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:1.000kHz SMT:Auto																																																																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2354.85</td><td>49.39</td><td>74.00</td><td>-24.61</td><td>40.11</td><td>27.30</td><td>8.56</td><td>36.26</td><td>9.68</td><td>107</td><td>83</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2354.85	49.39	74.00	-24.61	40.11	27.30	8.56	36.26	9.68	107	83	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>101.91</td><td>-----</td><td>-----</td><td>92.20</td><td>27.60</td><td>8.71</td><td>36.28</td><td>9.68</td><td>107</td><td>83</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	101.91	-----	-----	92.20	27.60	8.71	36.28	9.68	107	83	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2354.85	49.39	74.00	-24.61	40.11	27.30	8.56	36.26	9.68	107	83	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2440.00	101.91	-----	-----	92.20	27.60	8.71	36.28	9.68	107	83	PEAK																																																																																																			
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2362.52</td><td>39.06</td><td>54.00</td><td>-14.94</td><td>29.77</td><td>27.30</td><td>8.57</td><td>36.26</td><td>9.68</td><td>107</td><td>83</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2362.52	39.06	54.00	-14.94	29.77	27.30	8.57	36.26	9.68	107	83	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>99.85</td><td>-----</td><td>-----</td><td>90.14</td><td>27.60</td><td>8.71</td><td>36.28</td><td>9.68</td><td>107</td><td>83</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	99.85	-----	-----	90.14	27.60	8.71	36.28	9.68	107	83	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2362.52	39.06	54.00	-14.94	29.77	27.30	8.57	36.26	9.68	107	83	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2440.00	99.85	-----	-----	90.14	27.60	8.71	36.28	9.68	107	83	AVERAGE																																																																																																			

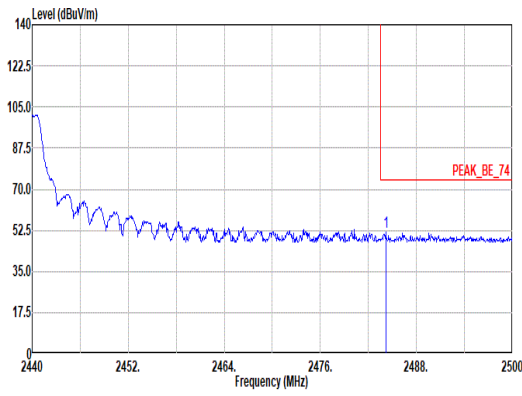
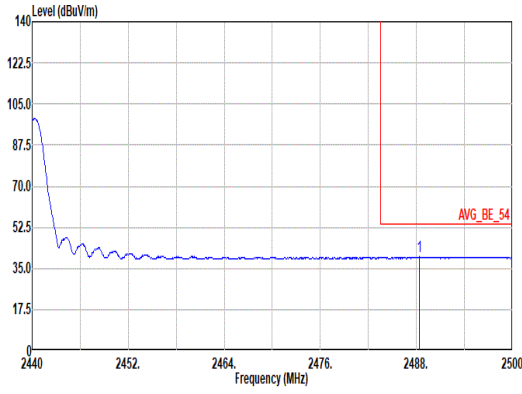


Mode	5																																																	
	Band Edge - R																																																	
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																																	
ANT	1																																																	
Pol.	Horizontal						Fundamental																																											
Peak	 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2484.16</td><td>52.00</td><td>74.00</td><td>-22.00</td><td>41.88</td><td>27.94</td><td>8.80</td><td>36.30</td><td>9.68</td><td>107</td><td>83</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2484.16	52.00	74.00	-22.00	41.88	27.94	8.80	36.30	9.68	107	83	PEAK	Blank				
		Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																							
1	2484.16	52.00	74.00	-22.00	41.88	27.94	8.80	36.30	9.68	107	83	PEAK																																						
Avg	 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2488.36</td><td>39.92</td><td>54.00</td><td>-14.08</td><td>29.76</td><td>27.98</td><td>8.80</td><td>36.30</td><td>9.68</td><td>107</td><td>83</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2488.36	39.92	54.00	-14.08	29.76	27.98	8.80	36.30	9.68	107	83	AVERAGE	Blank				
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																							
1	2488.36	39.92	54.00	-14.08	29.76	27.98	8.80	36.30	9.68	107	83	AVERAGE																																						

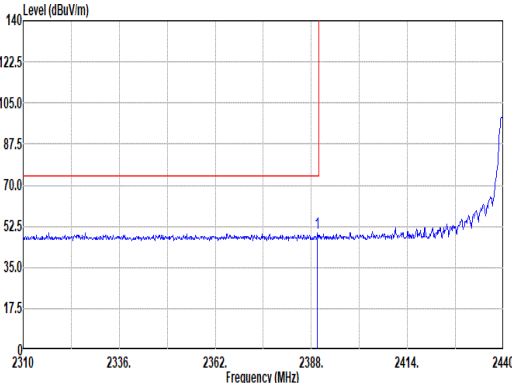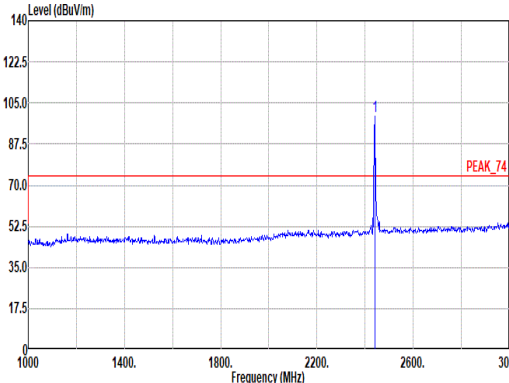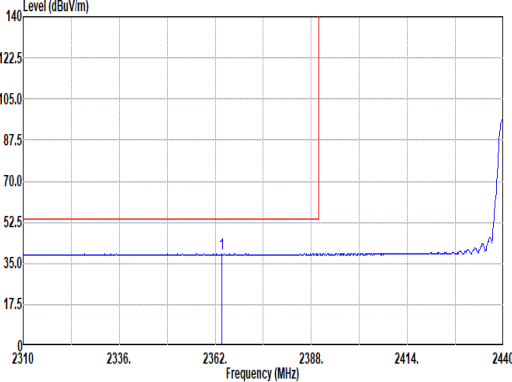
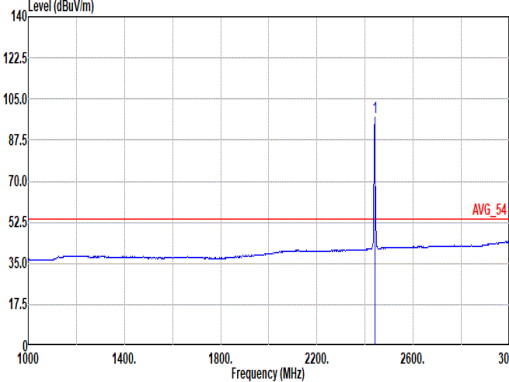


Mode	5																																																																																								
	Band Edge - L																																																																																								
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																																																																								
ANT	1																																																																																								
Pol.	Vertical						Fundamental																																																																																		
Peak																																																																																									
	Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.69</td><td>49.87</td><td>74.00</td><td>-24.13</td><td>40.45</td><td>27.39</td><td>8.62</td><td>36.27</td><td>9.68</td><td>115</td><td>166</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.69	49.87	74.00	-24.13	40.45	27.39	8.62	36.27	9.68	115	166	PEAK	Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>99.37</td><td>-----</td><td>-----</td><td>89.66</td><td>27.60</td><td>8.71</td><td>36.28</td><td>9.68</td><td>115</td><td>166</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2440.00	99.37	-----	-----	89.66	27.60	8.71	36.28	9.68	115	166
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2389.69	49.87	74.00	-24.13	40.45	27.39	8.62	36.27	9.68	115	166	PEAK																																																																													
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2440.00	99.37	-----	-----	89.66	27.60	8.71	36.28	9.68	115	166	PEAK																																																																													
Avg																																																																																									
	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:1.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2363.82</td><td>39.04</td><td>54.00</td><td>-14.96</td><td>29.75</td><td>27.30</td><td>8.57</td><td>36.26</td><td>9.68</td><td>115</td><td>166</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2363.82	39.04	54.00	-14.96	29.75	27.30	8.57	36.26	9.68	115	166	AVERAGE	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:1.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>97.40</td><td>-----</td><td>-----</td><td>87.69</td><td>27.60</td><td>8.71</td><td>36.28</td><td>9.68</td><td>115</td><td>166</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2440.00	97.40	-----	-----	87.69	27.60	8.71	36.28	9.68	115	166
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2363.82	39.04	54.00	-14.96	29.75	27.30	8.57	36.26	9.68	115	166	AVERAGE																																																																													
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2440.00	97.40	-----	-----	87.69	27.60	8.71	36.28	9.68	115	166	AVERAGE																																																																													

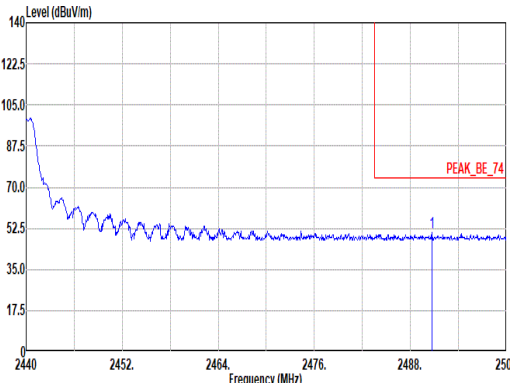
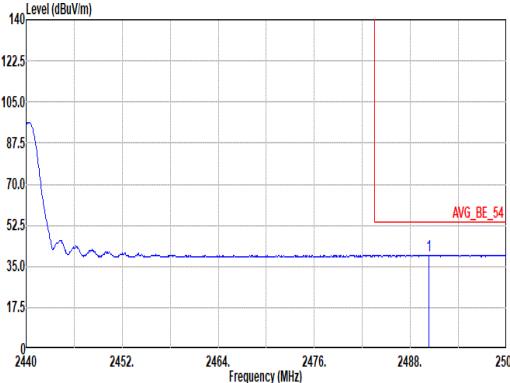


Mode	5																																																							
	Band Edge - R																																																							
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																																							
ANT	1																																																							
Pol.	Vertical						Fundamental																																																	
Peak	 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2490.70</td><td>50.46</td><td>74.00</td><td>-23.54</td><td>40.27</td><td>28.00</td><td>8.81</td><td>36.30</td><td>9.68</td><td>115</td><td>166</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2490.70	50.46	74.00	-23.54	40.27	28.00	8.81	36.30	9.68	115	166	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2490.70	50.46	74.00	-23.54	40.27	28.00	8.81	36.30	9.68	115	166	PEAK																																												
Avg	 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:1.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2490.34</td><td>39.84</td><td>54.00</td><td>-14.16</td><td>29.65</td><td>28.00</td><td>8.81</td><td>36.30</td><td>9.68</td><td>115</td><td>166</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2490.34	39.84	54.00	-14.16	29.65	28.00	8.81	36.30	9.68	115	166	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2490.34	39.84	54.00	-14.16	29.65	28.00	8.81	36.30	9.68	115	166	AVERAGE																																												



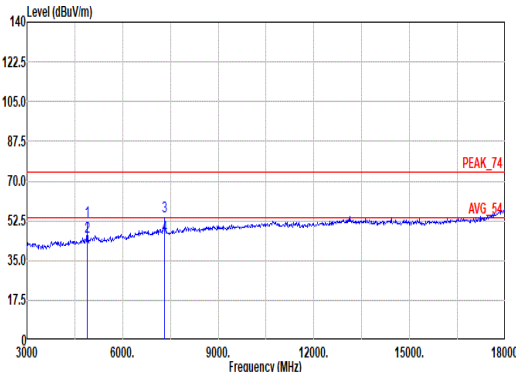
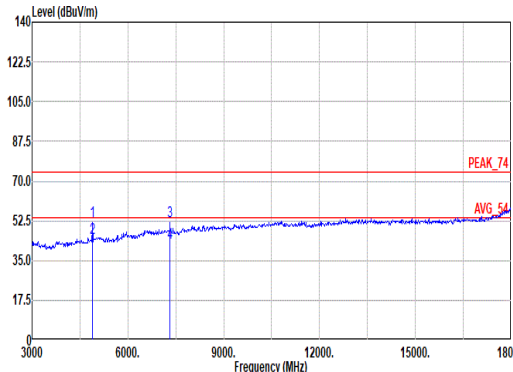


Mode	5																																																																																													
	Harmonic																																																																																													
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																																																																													
ANT	1																																																																																													
Pol.	Horizontal																																																																																													
Peak Avg	 Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>52.23</td><td>74.00</td><td>-21.77</td><td>44.02</td><td>32.72</td><td>12.39</td><td>37.57</td><td>0.67</td><td>125</td><td>165</td><td>PEAK</td></tr><tr><td>2</td><td>4880.00</td><td>45.49</td><td>54.00</td><td>-8.51</td><td>37.28</td><td>32.72</td><td>12.39</td><td>37.57</td><td>0.67</td><td>125</td><td>165</td><td>Average</td></tr><tr><td>3</td><td>7320.00</td><td>54.24</td><td>74.00</td><td>-19.76</td><td>40.21</td><td>36.78</td><td>15.38</td><td>38.48</td><td>0.35</td><td>100</td><td>204</td><td>PEAK</td></tr><tr><td>4</td><td>7320.00</td><td>45.88</td><td>54.00</td><td>-8.12</td><td>31.85</td><td>36.78</td><td>15.38</td><td>38.48</td><td>0.35</td><td>100</td><td>204</td><td>Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4880.00	52.23	74.00	-21.77	44.02	32.72	12.39	37.57	0.67	125	165	PEAK	2	4880.00	45.49	54.00	-8.51	37.28	32.72	12.39	37.57	0.67	125	165	Average	3	7320.00	54.24	74.00	-19.76	40.21	36.78	15.38	38.48	0.35	100	204	PEAK	4	7320.00	45.88	54.00	-8.12	31.85	36.78	15.38	38.48	0.35	100	204	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																				
1	4880.00	52.23	74.00	-21.77	44.02	32.72	12.39	37.57	0.67	125	165	PEAK																																																																																		
2	4880.00	45.49	54.00	-8.51	37.28	32.72	12.39	37.57	0.67	125	165	Average																																																																																		
3	7320.00	54.24	74.00	-19.76	40.21	36.78	15.38	38.48	0.35	100	204	PEAK																																																																																		
4	7320.00	45.88	54.00	-8.12	31.85	36.78	15.38	38.48	0.35	100	204	Average																																																																																		
Peak Avg	 Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>52.06</td><td>74.00</td><td>-21.94</td><td>43.85</td><td>32.72</td><td>12.39</td><td>37.57</td><td>0.67</td><td>100</td><td>244</td><td>PEAK</td></tr><tr><td>2</td><td>4880.00</td><td>44.70</td><td>54.00</td><td>-9.30</td><td>36.49</td><td>32.72</td><td>12.39</td><td>37.57</td><td>0.67</td><td>100</td><td>244</td><td>Average</td></tr><tr><td>3</td><td>7320.00</td><td>52.25</td><td>74.00</td><td>-21.75</td><td>38.22</td><td>36.78</td><td>15.38</td><td>38.48</td><td>0.35</td><td>100</td><td>143</td><td>PEAK</td></tr><tr><td>4</td><td>7320.00</td><td>42.57</td><td>54.00</td><td>-11.43</td><td>28.54</td><td>36.78</td><td>15.38</td><td>38.48</td><td>0.35</td><td>100</td><td>143</td><td>Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4880.00	52.06	74.00	-21.94	43.85	32.72	12.39	37.57	0.67	100	244	PEAK	2	4880.00	44.70	54.00	-9.30	36.49	32.72	12.39	37.57	0.67	100	244	Average	3	7320.00	52.25	74.00	-21.75	38.22	36.78	15.38	38.48	0.35	100	143	PEAK	4	7320.00	42.57	54.00	-11.43	28.54	36.78	15.38	38.48	0.35	100	143	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																				
1	4880.00	52.06	74.00	-21.94	43.85	32.72	12.39	37.57	0.67	100	244	PEAK																																																																																		
2	4880.00	44.70	54.00	-9.30	36.49	32.72	12.39	37.57	0.67	100	244	Average																																																																																		
3	7320.00	52.25	74.00	-21.75	38.22	36.78	15.38	38.48	0.35	100	143	PEAK																																																																																		
4	7320.00	42.57	54.00	-11.43	28.54	36.78	15.38	38.48	0.35	100	143	Average																																																																																		



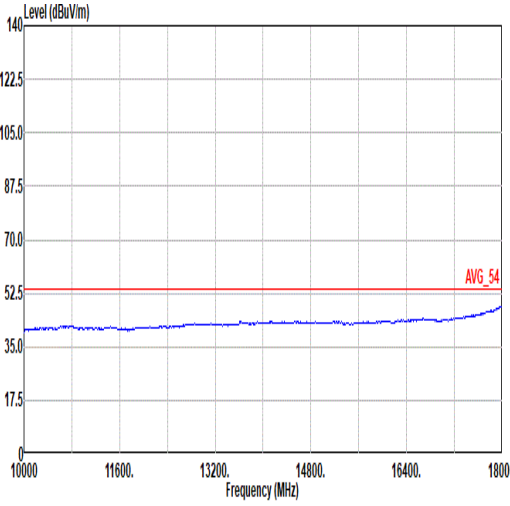
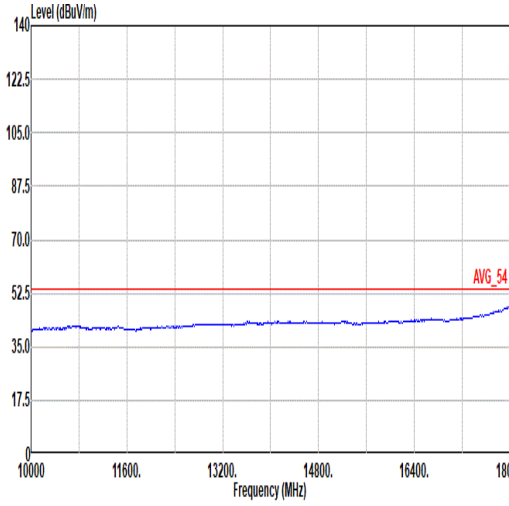


Mode	5	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz	
ANT	1	
Pol.	Horizontal	Vertical
10G -18G Avg	 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL	 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL

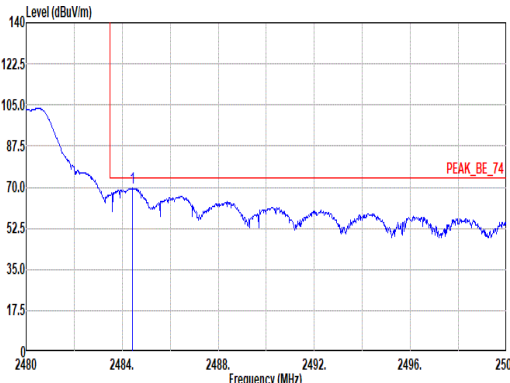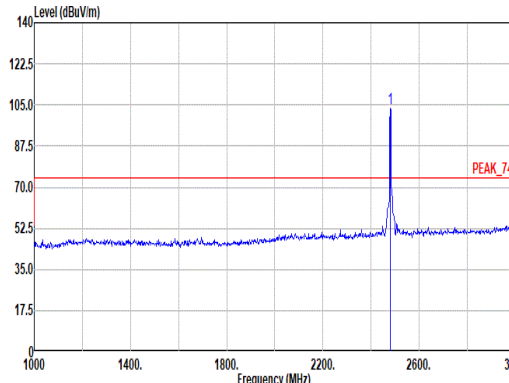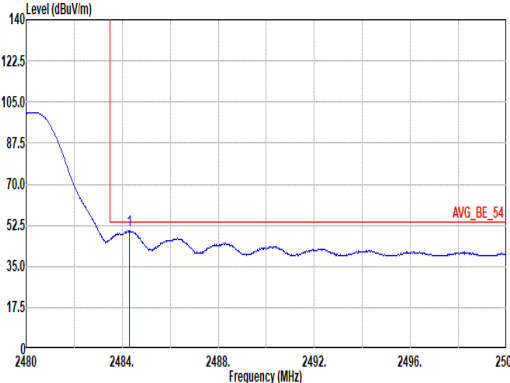
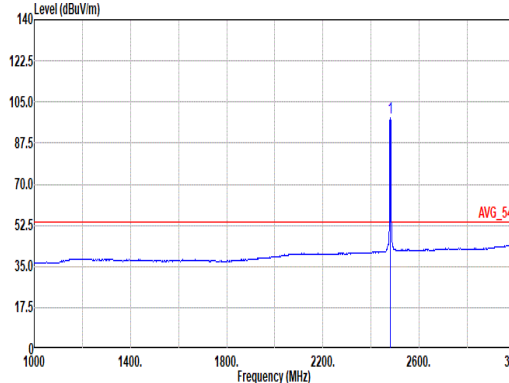


		6																																																																																							
Mode	Band Edge																																																																																								
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz																																																																																								
ANT	1																																																																																								
Pol.	Horizontal						Fundamental																																																																																		
Peak																																																																																									
	Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																		
<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2484.44</td><td>69.61</td><td>74.00</td><td>-4.39</td><td>59.49</td><td>27.94</td><td>8.80</td><td>36.30</td><td>9.68</td><td>111</td><td>87</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2484.44	69.61	74.00	-4.39	59.49	27.94	8.80	36.30	9.68	111	87	PEAK	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>103.75</td><td>-----</td><td>-----</td><td>93.67</td><td>27.90</td><td>8.79</td><td>36.29</td><td>9.68</td><td>111</td><td>87</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2480.00	103.75	-----	-----	93.67	27.90	8.79	36.29	9.68	111	87	PEAK
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2484.44	69.61	74.00	-4.39	59.49	27.94	8.80	36.30	9.68	111	87	PEAK																																																																													
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2480.00	103.75	-----	-----	93.67	27.90	8.79	36.29	9.68	111	87	PEAK																																																																													
Avg																																																																																									
	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto						Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto																																																																																		
<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2484.30</td><td>50.08</td><td>54.00</td><td>-3.92</td><td>39.96</td><td>27.94</td><td>8.80</td><td>36.30</td><td>9.68</td><td>111</td><td>87</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2484.30	50.08	54.00	-3.92	39.96	27.94	8.80	36.30	9.68	111	87	AVERAGE	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>98.21</td><td>-----</td><td>-----</td><td>88.13</td><td>27.90</td><td>8.79</td><td>36.29</td><td>9.68</td><td>111</td><td>87</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2480.00	98.21	-----	-----	88.13	27.90	8.79	36.29	9.68	111	87	AVERAGE
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2484.30	50.08	54.00	-3.92	39.96	27.94	8.80	36.30	9.68	111	87	AVERAGE																																																																													
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2480.00	98.21	-----	-----	88.13	27.90	8.79	36.29	9.68	111	87	AVERAGE																																																																													

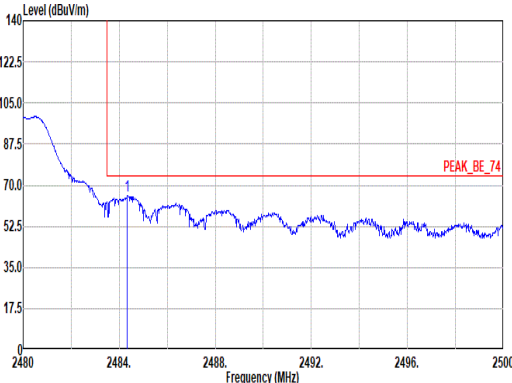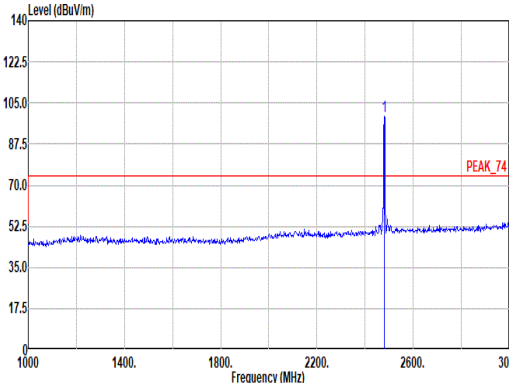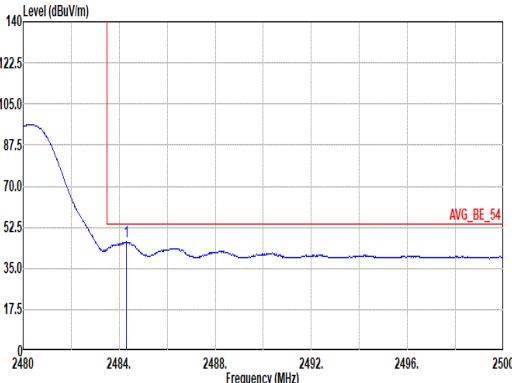
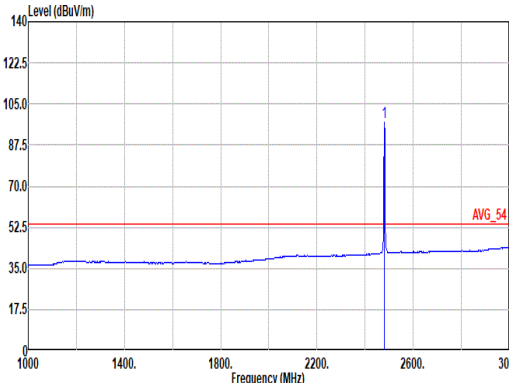


Mode	6																																																																																								
	Band Edge																																																																																								
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz																																																																																								
ANT	1																																																																																								
Pol.	Vertical						Fundamental																																																																																		
Peak																																																																																									
	Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2484.34</td><td>65.34</td><td>74.00</td><td>-8.66</td><td>55.22</td><td>27.94</td><td>8.80</td><td>36.30</td><td>9.68</td><td>106</td><td>162</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2484.34	65.34	74.00	-8.66	55.22	27.94	8.80	36.30	9.68	106	162	PEAK	Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>99.42</td><td>-----</td><td>-----</td><td>89.34</td><td>27.90</td><td>8.79</td><td>36.29</td><td>9.68</td><td>106</td><td>162</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2480.00	99.42	-----	-----	89.34	27.90	8.79	36.29	9.68	106	162
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2484.34	65.34	74.00	-8.66	55.22	27.94	8.80	36.30	9.68	106	162	PEAK																																																																													
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2480.00	99.42	-----	-----	89.34	27.90	8.79	36.29	9.68	106	162	PEAK																																																																													
Avg																																																																																									
	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:1.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2484.30</td><td>46.26</td><td>54.00</td><td>-7.74</td><td>36.14</td><td>27.94</td><td>8.80</td><td>36.30</td><td>9.68</td><td>106</td><td>162</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2484.30	46.26	54.00	-7.74	36.14	27.94	8.80	36.30	9.68	106	162	AVERAGE	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:1.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>97.31</td><td>-----</td><td>-----</td><td>87.23</td><td>27.90</td><td>8.79</td><td>36.29</td><td>9.68</td><td>106</td><td>162</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2480.00	97.31	-----	-----	87.23	27.90	8.79	36.29	9.68	106	162
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2484.30	46.26	54.00	-7.74	36.14	27.94	8.80	36.30	9.68	106	162	AVERAGE																																																																													
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2480.00	97.31	-----	-----	87.23	27.90	8.79	36.29	9.68	106	162	AVERAGE																																																																													

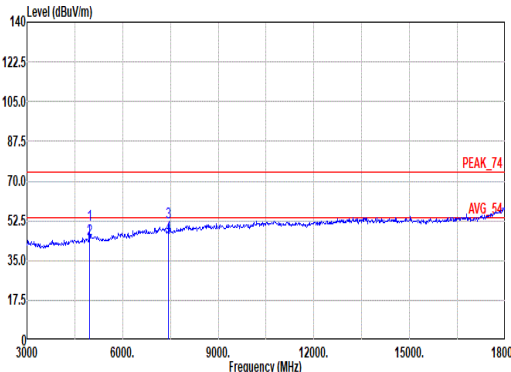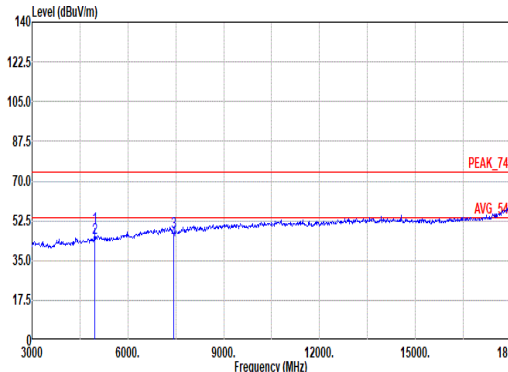


Mode	6																																																																																													
	Harmonic																																																																																													
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz																																																																																													
ANT	1																																																																																													
Pol.	Horizontal																																																																																													
Peak Avg	 Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>50.68</td><td>74.00</td><td>-23.32</td><td>42.12</td><td>33.16</td><td>12.54</td><td>37.64</td><td>0.50</td><td>102</td><td>172</td><td>PEAK</td></tr><tr><td>2</td><td>4960.00</td><td>44.51</td><td>54.00</td><td>-9.49</td><td>35.95</td><td>33.16</td><td>12.54</td><td>37.64</td><td>0.50</td><td>102</td><td>172</td><td>Average</td></tr><tr><td>3</td><td>7440.00</td><td>52.01</td><td>74.00</td><td>-21.99</td><td>38.53</td><td>36.22</td><td>15.51</td><td>38.58</td><td>0.33</td><td>100</td><td>296</td><td>PEAK</td></tr><tr><td>4</td><td>7440.00</td><td>45.80</td><td>54.00</td><td>-8.20</td><td>32.32</td><td>36.22</td><td>15.51</td><td>38.58</td><td>0.33</td><td>100</td><td>296</td><td>Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	50.68	74.00	-23.32	42.12	33.16	12.54	37.64	0.50	102	172	PEAK	2	4960.00	44.51	54.00	-9.49	35.95	33.16	12.54	37.64	0.50	102	172	Average	3	7440.00	52.01	74.00	-21.99	38.53	36.22	15.51	38.58	0.33	100	296	PEAK	4	7440.00	45.80	54.00	-8.20	32.32	36.22	15.51	38.58	0.33	100	296	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	4960.00	50.68	74.00	-23.32	42.12	33.16	12.54	37.64	0.50	102	172	PEAK																																																																																		
2	4960.00	44.51	54.00	-9.49	35.95	33.16	12.54	37.64	0.50	102	172	Average																																																																																		
3	7440.00	52.01	74.00	-21.99	38.53	36.22	15.51	38.58	0.33	100	296	PEAK																																																																																		
4	7440.00	45.80	54.00	-8.20	32.32	36.22	15.51	38.58	0.33	100	296	Average																																																																																		
Peak Avg	 Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>49.50</td><td>74.00</td><td>-24.50</td><td>40.94</td><td>33.16</td><td>12.54</td><td>37.64</td><td>0.50</td><td>104</td><td>237</td><td>PEAK</td></tr><tr><td>2</td><td>4960.00</td><td>45.01</td><td>54.00</td><td>-8.99</td><td>36.45</td><td>33.16</td><td>12.54</td><td>37.64</td><td>0.50</td><td>104</td><td>237</td><td>Average</td></tr><tr><td>3</td><td>7440.00</td><td>47.51</td><td>74.00</td><td>-26.49</td><td>34.03</td><td>36.22</td><td>15.51</td><td>38.58</td><td>0.33</td><td>100</td><td>184</td><td>PEAK</td></tr><tr><td>4</td><td>7440.00</td><td>43.63</td><td>54.00</td><td>-10.37</td><td>30.15</td><td>36.22</td><td>15.51</td><td>38.58</td><td>0.33</td><td>100</td><td>184</td><td>Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	49.50	74.00	-24.50	40.94	33.16	12.54	37.64	0.50	104	237	PEAK	2	4960.00	45.01	54.00	-8.99	36.45	33.16	12.54	37.64	0.50	104	237	Average	3	7440.00	47.51	74.00	-26.49	34.03	36.22	15.51	38.58	0.33	100	184	PEAK	4	7440.00	43.63	54.00	-10.37	30.15	36.22	15.51	38.58	0.33	100	184	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	4960.00	49.50	74.00	-24.50	40.94	33.16	12.54	37.64	0.50	104	237	PEAK																																																																																		
2	4960.00	45.01	54.00	-8.99	36.45	33.16	12.54	37.64	0.50	104	237	Average																																																																																		
3	7440.00	47.51	74.00	-26.49	34.03	36.22	15.51	38.58	0.33	100	184	PEAK																																																																																		
4	7440.00	43.63	54.00	-10.37	30.15	36.22	15.51	38.58	0.33	100	184	Average																																																																																		

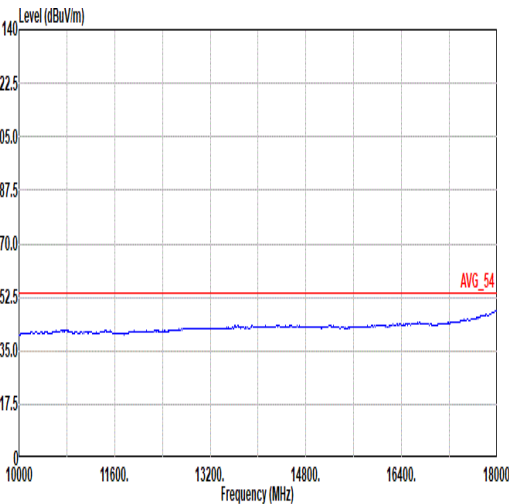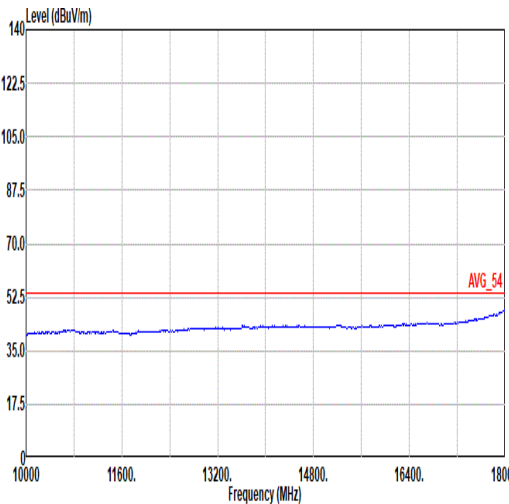

Mode	6	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz	
ANT	1	
Pol.	Horizontal	Vertical
10G -18G Avg	 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL	 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL

Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth - LE for 1Mbps	48.80	2130	0.47	510Hz
Bluetooth - LE for 2Mbps	32.27	1065	0.94	1kHz

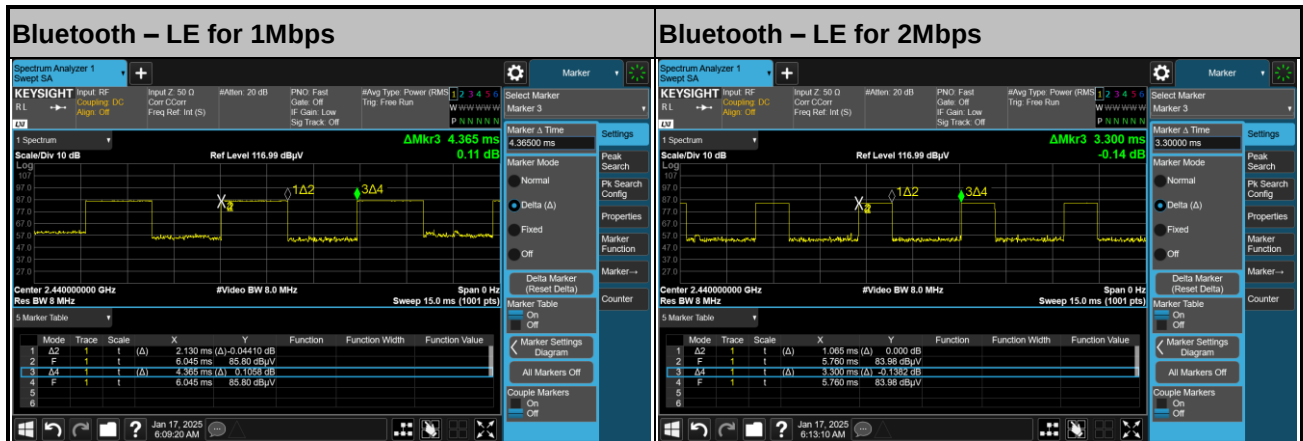

————THE END————