



**Spectrum Research
& Testing Lab., Inc.**

No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.:A04123102

Report No.:FCCA04123102-01

Page:1 of 45

Date:Feb. 04, 2005

Product Name: Wireless Link
Model No.: WL 101
Applicant: Raysin Technology Co., Ltd.
9F, No. 2-1 Chung Ho Rd., Keelung Taiwan
Date of Receipt: Dec. 31, 2004
Finished date of Test: Feb. 03, 2005
Applicable Standards: 47 CFR Part 15, Subpart C
ANSI C63.4:2003

We, **Spectrum Research & Testing Laboratory Inc.**, hereby certify that one sample of the above was tested in our laboratory with positive results according to the above-mentioned standards. The records in the report are an accurate account of the results. Details of the results are given in the subsequent pages of this report.

Checked By : Hugo Yeh , Date: 2/4/2005
(Hugo Yeh)

Approved By : J. Ho , Date: 2/4/2005
(Johnson Ho, Director)



Table of Contents

1.	DOCUMENT POLICY AND TEST STATEMENT	3
1.1	DOCUMENT POLICY	3
1.2	TEST STATEMENT.....	3
1.3	EUT MODIFICATION	3
2.	DESCRIPTION OF EUT AND TEST MODE	4
2.1	GENERAL DESCRIPTION OF EUT	4
2.2	DESCRIPTION OF EUT INTERNAL DEVICE	4
2.3	DESCRIPTION OF TEST MODE.....	5
2.4	DESCRIPTION OF SUPPORT UNIT	5
3.	DESCRIPTION OF APPLIED STANDARDS.....	5
4.	CONDUCTED EMISSION TEST	6
4.1	CONDUCTED EMISSION LIMIT	6
4.2	TEST EQUIPMENT.....	6
4.3	TEST SETUP.....	7
4.4	TEST PROCEDURE	7
4.5	EUT OPERATING CONDITION	7
4.6	TEST RESULT	8
5.	RADIATED EMISSION TEST	11
5.1	RADIATED EMISSION LIMIT.....	11
5.2	TEST EQUIPMENT.....	12
5.3	TEST SET-UP	13
5.4	TEST PROCEDURE	14
5.5	EUT OPERATING CONDITION	14
5.6	RADIATED EMISSION TEST RESULT	15
6.	BANDWIDTH	21
6.1	LIMIT	21
6.2	TEST EQUIPMENT.....	21
6.3	TEST SET-UP	21
6.4	TEST PROCEDURE	21
6.5	EUT OPERATING CONDITION	21
6.6	TEST RESULT	22
7.	CHANGE THE VOLTAGE FROM -15% TO +15% TO CHECK THE FREQUENCY VARIATION.....	26
8.	THE TEMPERATURE CHANGE TEST.....	29
9.	REMOTE BANDWIDTH WITH MODULATION AND BASE WITH 2.5KHZ TONE	38
10.	VERIFY CHANNELS AND FREQUENCIES	41
11.	PHOTOS OF TESTING	42
12.	TERMS OF ABRIVATION.....	45

	Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.	TEST REPORT	Reference No.:A04123102 Report No.:FCCA04123102-01 Page:3 of 45 Date:Feb. 04, 2005
---	--	----------------------	---

1. DOCUMENT POLICY AND TEST STATEMENT

1.1 DOCUMENT POLICY

- The report shall not be reproduced except in full, without the written approval of SRT Lab, Inc.
- The report must not be used by the applicant to claim that the product is endorsed by NVLAP, TÜV, NEMKO and SRT.
- The NVLAP logo applies only to the applicable standards specified in this report.

1.2 TEST STATEMENT

- The test results in the report apply only to the unit tested by SRT Lab.
- There was no deviation from the requirements of test standards during the test.
- AC power source, 120 Vac/60 Hz, was used during the test.

1.3 EUT MODIFICATION

- No modification in SRT Lab.

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.	TEST REPORT	Reference No.:A04123102 Report No.:FCCA04123102-01 Page:4 of 45 Date:Feb. 04, 2005
--	----------------------	---

2. DESCRIPTION OF EUT AND TEST MODE

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless Link
MODEL NO.	WL-101
FREQUENCY BAND	900MHz
CARRIER FREQUENCY	902.1~927.9MHz
CHANNEL NUMBER	10
CHANNEL SPACING	200KHz
RF OUTPUT POWER	0dBm, 1mW
MODULATION TYPE	FM
POWER REQUIREMENTS	DC 9V, 200mA
I.F.	10.7MHz
L.O.	CF±110.7MHz
MODE OF OPERATION	Duplex
CHANNEL BANDWIDTH	0.2MHz

NOTE :

For more detailed features, please refer to the manufacturer' s specification or User' s Manual.

2.2 DESCRIPTION OF EUT INTERNAL DEVICE

DEVICE	BRAND / MAKER	MODEL #	FCC ID/DOC	REMARK
N/A				

	Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.	TEST REPORT	Reference No.:A04123102 Report No.:FCCA04123102-01 Page:5 of 45 Date:Feb. 04, 2005
---	--	----------------------	---

2.3 DESCRIPTION OF TEST MODE

The EUT was tested for emission measurement under the following situations:

Mode	
1	Remote Channel 1
2	Remote Channel 5
3	Remote Channel 10

2.4 DESCRIPTION OF SUPPORT UNIT

The EUT was configured by the requirement of ANSI C63.4:2003 and CISRP22:2003. All interface ports were connected to the appropriate support units via specific cables. The support units and cables are listed below.

NO	DEVICE	BRAND	MODEL #	FCC ID/DOC	CABLE
1	NOTEBOOK	COMPAQ	Presario2200	DOC	N/A
2	TELEPHONE	ROMEO	TC-756	N/A	1.8m unshielded power cord 1.5m shielded data cable
3					

NOTE : For the actual test configuration, please refer to the photos of testing.

3. DESCRIPTION OF APPLIED STANDARDS

The EUT is a kind of wireless product and to be connected with a notebook for normal use. According to the specifications provided by the applicant, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C

ANSI C63.4:2003

All tests have been performed and recorded as per the above standards.

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.	TEST REPORT	Reference No.:A04123102 Report No.:FCCA04123102-01 Page:6 of 45 Date:Feb. 04, 2005
--	----------------------	---

4. CONDUCTED EMISSION TEST

4.1 CONDUCTED EMISSION LIMIT

FREQUENCY (MHz)	Class A (dB _{mV})		Class B (dB _{mV})	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.5 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.2 TEST EQUIPMENT


The following test equipment was used for the test:

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
EMI TEST RECEIVER	9 kHz TO 2750 MHz	ROHDE & SCHWARZ	ESCS30/ 830245/012	AUG. 2005 ETC
LISN (for EUT)	50 μ H, 50 ohm	SOLAR ELECTRONICS	FCC-LISN-50-25-2 / 01018	NOV. 2005 ETC
LISN (for Peripheral)	50 μ H, 50 ohm	SOLAR ELECTRONICS	9252-50-R-24-BNC / 951318	JUN. 2005 ETC
50 ohm TERMINATOR	50 ohm	HP	11593A/ 2	MAR. 2005 ETC
COAXIAL CABLE	3m	SUNCITY	J400/ 3M	JUL. 2005 SRT
ISOLATION TRANSFORMER	N/A	APC	AFC-11015/ F102040016	N/A
FILTER	2 LINE, 30A	FIL.COIL	FC-943/ 771	N/A
GROUND PLANE	2.3M (H) x 2.4M (W)	SRT	N/A	N/A
GROUND PLANE	2.4M (H) x 2.4M (W)	SRT	N/A	N/A

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.



4.3 TEST SETUP

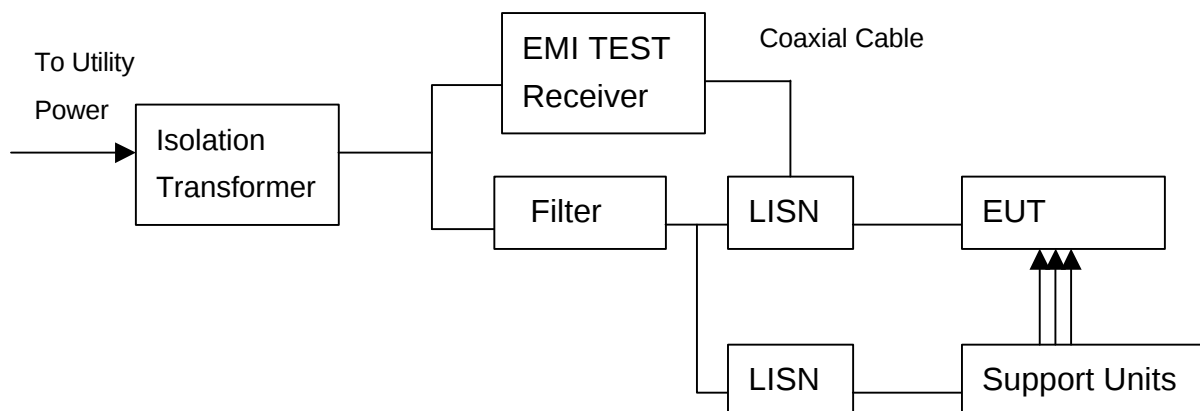

NOTE:

1. The EUT was put on a wooden table with 0.8m heights above ground plane, and 0.4m away from reference ground plane (> 2mx2m).
2. For the actual test configuration, please refer to the photos of testing.
3. The serial no. of the LISN connected to EUT is 01018.
4. The serial no. of the LISN connected to support units is 951318.

4.4 TEST PROCEDURE

The EUT was tested according to the requirement of ANSI C63.4:2003 and CISRP22:2003. The frequency spectrum from 0.15 MHz to 30 MHz was investigated. The LISN used was 50 ohm/50μH as specified. All readings were quasi-peak and average values with 10 kHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. Both lines of the power mains of EUT were measured and the cables connected to EUT and support units were moved to find the maximum emission levels for each frequency. First, find the margin or higher points at least 6 points by software, then use manual to find the maximum data. The procedure is referred on the test procedure of SRT LAB.

4.5 EUT OPERATING CONDITION

1. Under Windows XP, dial up and connect to the net, keep on downloading.



4.6 TEST RESULT

Temperature:	20 °C	Humidity:	62 %RH
Ferquency Range:	0.15 – 30 MHz	Tested Mode:	1(Remote Channel 1)
Receiver Detector:	Q.P. and AV.	Tested By:	Pisces Chu
		Tested Date:	Jan. 12, 2005

Power Line Measured : Line

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dBmV)		Emission Level (dBmV)		Limit (dBmV)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.529	0.20	34.4	33.0	34.6	33.2	56.0	46.0	-21.4	-12.8
3.447	0.20	35.3	28.9	35.5	29.1	56.0	46.0	-20.5	-16.9
3.645	0.20	36.1	28.3	36.3	28.5	56.0	46.0	-19.7	-17.5
12.410	0.20	29.9	20.9	30.1	21.1	60.0	50.0	-29.9	-28.9
12.673	0.20	30.5	22.1	30.7	22.3	60.0	50.0	-29.3	-27.7
16.035	0.20	31.1	23.1	31.3	23.3	60.0	50.0	-28.7	-26.8

Power Line Measured : Neutral

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dBmV)		Emission Level (dBmV)		Limit (dBmV)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.529	0.20	36.6	35.2	36.8	35.4	56.0	46.0	-19.2	-10.6
3.398	0.20	37.4	28.5	37.6	28.7	56.0	46.0	-18.4	-17.3
3.695	0.20	33.4	13.5	33.6	13.7	56.0	46.0	-22.4	-32.4
6.116	0.20	35.3	27.3	35.5	27.5	60.0	46.0	-24.5	-22.5
9.517	0.20	34.2	25.9	34.4	26.1	60.0	50.0	-25.6	-23.9
16.087	0.20	23.9	12.7	24.1	12.9	60.0	50.0	-35.9	-37.1

NOTE :

1. Measurement uncertainty is +/-1.32dB
2. Emission level = Reading value + Correction factor
3. Correction Factor = Cable loss + Insertion loss of LISN
4. Margin value = Emission level - Limit
5. The emission of other frequencies were very low against the limit.
6. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

**Spectrum Research
& Testing Lab., Inc.**No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.**TEST REPORT**Reference No.:A04123102
Report No.:FCCA04123102-01
Page:9 of 45
Date:Feb. 04, 2005

Temperature:	20 °C	Humidity:	62 %RH
Ferquency Range:	0.15 – 30 MHz	Tested Mode:	2(Remote Channel 5)
Receiver Detector:	Q.P. and AV.	Tested By:	Pisces Chu
		Tested Date:	Jan. 12, 2005

Power Line Measured : Line

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB _{mV})		Emission Level (dB _{mV})		Limit (dB _{mV})		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.529	0.20	38.0	36.9	38.2	37.1	56.0	46.0	-17.8	-8.9
2.794	0.20	37.1	25.2	37.3	25.4	56.0	46.0	-18.7	-20.7
3.121	0.20	38.2	22.8	38.4	23.0	56.0	46.0	-17.6	-23.0
6.523	0.20	34.3	24.8	34.5	25.0	60.0	50.0	-25.5	-25.0
8.492	0.20	31.7	17.0	31.9	17.2	60.0	50.0	-28.1	-32.8
16.230	0.20	24.6	15.6	24.8	15.8	60.0	50.0	-35.2	-34.2

Power Line Measured : Neutral

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB _{mV})		Emission Level (dB _{mV})		Limit (dB _{mV})		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.529	0.20	34.1	32.9	34.3	33.1	56.0	46.0	-21.7	-12.9
2.853	0.20	32.4	28.3	32.6	28.5	56.0	46.0	-23.4	-17.5
3.121	0.20	32.6	26.5	32.8	26.7	56.0	46.0	-23.2	-19.4
12.410	0.20	30.0	22.3	30.2	22.5	60.0	50.0	-29.8	-27.5
12.684	0.20	29.9	20.7	30.1	20.9	60.0	50.0	-29.9	-29.1
16.527	0.20	33.1	21.9	33.3	22.1	60.0	50.0	-26.7	-27.9

NOTE :

1. Measurement uncertainty is +/-1.32dB
2. Emission level = Reading value + Correction factor
3. Correction Factor = Cable loss + Insertion loss of LISN
4. Margin value = Emission level - Limit
5. The emission of other frequencies were very low against the limit.
6. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.



TEST REPORT

Temperature:	20 °C	Humidity:	62 %RH
Ferquency Range:	0.15 – 30 MHz	Tested Mode:	3(Remote Channel 10)
Receiver Detector:	Q.P. and AV.	Tested By:	Pisces Chu
		Tested Date:	Jan. 12, 2005

Power Line Measured : Line

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB _{mV})		Emission Level (dB _{mV})		Limit (dB _{mV})		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.529	0.20	38.2	37.0	38.4	37.2	56.0	46.0	-17.6	-8.8
2.586	0.20	37.4	34.2	37.6	34.4	56.0	46.0	-18.4	-11.6
3.715	0.20	36.0	30.5	36.2	30.7	56.0	46.0	-19.8	-15.3
7.548	0.20	34.4	22.8	34.6	23.0	60.0	50.0	-25.4	-27.1
8.969	0.20	34.2	25.3	34.4	25.5	60.0	50.0	-25.6	-24.5
16.671	0.20	28.6	16.3	28.8	16.5	60.0	50.0	-31.2	-33.5

Power Line Measured : Neutral

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB _{mV})		Emission Level (dB _{mV})		Limit (dB _{mV})		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.529	0.20	38.1	37.0	38.3	37.2	56.0	46.0	-17.7	-8.8
3.586	0.20	40.5	31.8	40.7	32.0	56.0	46.0	-15.3	-14.0
3.645	0.20	36.6	31.5	36.8	31.7	56.0	46.0	-19.2	-14.3
6.573	0.20	36.3	28.7	36.5	28.9	60.0	50.0	-23.5	-21.1
6.837	0.20	36.5	28.7	36.7	28.9	60.0	50.0	-23.3	-21.1
17.122	0.20	29.0	16.5	29.2	16.7	60.0	50.0	-30.8	-33.3

NOTE :

1. Measurement uncertainty is +/-1.32dB
2. Emission level = Reading value + Correction factor
3. Correction Factor = Cable loss + Insertion loss of LISN
4. Margin value = Emission level - Limit
5. The emission of other frequencies were very low against the limit.
6. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.



5. RADIATED EMISSION TEST

5.1 RADIATED EMISSION LIMIT

FCC Part15, Subpart C Section 15.209 limit of radiated emission for frequency below1000MHz. The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

FREQUENCY (MHz)	DISTANCE (m)	FIELD STRENGTH (dB _m V/m)
30 - 88	3	40.0
88 - 216	3	43.5
216 - 960	3	46.0
ABOVE 960	3	54.0

- NOTE** : 1. In the emission tables above , the tighter limit applies at the band edges.
2. Distance refers to the distance between measuring instrument, antenna , and the closest point of any part of the device or system.

FCC Part 15, Section15.35(b) limit of radiated emission for frequency above 1000 MHz

FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80.0	60.0	74.0	54.0

FCC Part 15, Subpart C Section 15.249. The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

FUNDAMENTAL FREQUENCY (MHz)	FIELD STRENGTH OF FUNDAMENTAL (dBuV/m) (at 3m)		FIELD STRENGTH OF HARMONICS (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
902-928	114	94	74.0	54.0
2400-2483.5	114	94	74.0	54.0
5725-5875	114	94	74.0	54.0
24000-24250	128	108	88.0	68.0

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.	TEST REPORT	Reference No.:A04123102 Report No.:FCCA04123102-01 Page:12 of 45 Date:Feb. 04, 2005
--	----------------------	--

5.2 TEST EQUIPMENT

The following test equipment was used during the radiated emission test:


EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
EMI TEST RECEIVER	20 MHz TO 1000 MHz	ROHDE & SCHWARZ	ESVS30/ 841977/003	AUG. 2005 ETC
BI-LOG ANTENNA	25 MHz TO 2 GHz	EMCO	3142/ 9701-1124	APR. 2005 SRT
DIPOLE ANTENNA	30 MHz TO 1 GHz	EMCO	3121C/ 9611-1239	MAR. 2005 ETC
SPECTRUM ANALYZER	9 KHz TO 26.5 GHz	HP	8593E/ 3710A03220	MAY 2005 ETC
PRE-AMPLIFIER	1 GHz TO 26.5 GHz	HP	8449B/ 3008A01019	NOV. 2005 ETC
HORN ANTENNA	1 GHz TO 18 GHz	EMCO	3115/ 9602-4681	DEC. 2005 ETC
OATS	3 – 10 M MEASUREMENT	SRT	SRT-1	APR. 2005 SRT
COAXIAL CABLE	25M	SUNCITY	J400/ 25M	AUG. 2005 SRT
FILTER	2 LINE, 30A	FIL.COIL	FC-943/ 869	N/A
FREQUENCY CONVERTER	N/A	APC	AFC-2KBB/ F100030031	AUG. 2005 SRT

NOTE:

1. The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.
2. The Open Area Test Site (SRT-1) is registered by FCC with No. 90957 and VCCI with No. R-1081.
3. The Open Area Test Site (SRT-2) is registered by FCC with No. 98458 and VCCI with No. R-1168.



5.3 TEST SET-UP

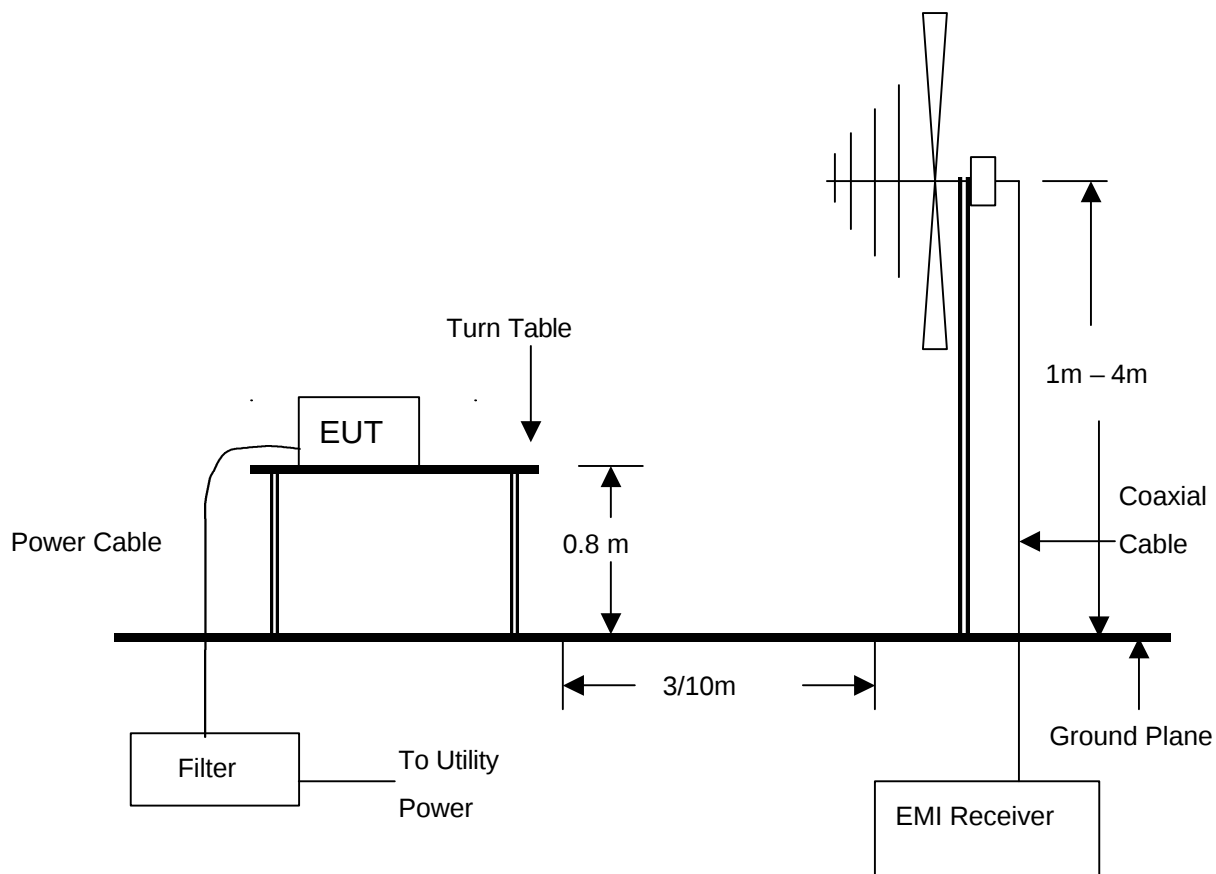

NOTE :

1. The EUT system was put on a wooden table with 0.8m heights above a ground plane.
2. For the actual test configuration, please refer to the photos of testing.



5.4 TEST PROCEDURE

The EUT was tested according to the requirement of ANSI C63.4:2003 and CISPR 22:2003. The measurements were made at an open area test site with 10 meter measurement distance under 1 GHz and with 3m distance above 1GHz. The frequency spectrum measured started from 30 MHz. Under 1 GHz, all readings were quasi-peak values with 120 kHz resolution bandwidth of the test receiver. Above 1 GHz, the measurements were made at an open area test site with 3 meter measurement distance and all readings were peak or average values with 1 MHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. The cables connected to EUT and support units were moved to find the maximum emission levels for each frequency.

First, find the margin or higher points at least 6 points by software, then use manual to find the maximum data. The procedure is referred on the test procedure of SRT LAB.

5.5 EUT OPERATING CONDITION

Same as section 4.5 of this report.



5.6 RADIATED EMISSION TEST RESULT

Temperature:	18.2°C	Humidity:	55 %RH
Ferquency Range:	30 – 1000 MHz	Measured Distance:	3m
Receiver Detector:	Q.P.	Tested Mode:	Channel 1
Tested Date:	Feb. 02, 2005		
Tested By:	Pisces Chu		

Antenna Polarization:Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
450.9278	2.95	16.90	18.2	38.1	46.0	-8.0	76.9	1.0
467.1284	3.14	17.21	19.8	40.1	46.0	-5.9	128.3	1.0
576.5578	3.70	18.94	20.1	42.7	46.0	-3.3	33.8	1.0
623.0122	4.21	19.65	18.2	42.1	46.0	-3.9	273.0	1.0
902.1123	4.71	24.60	56.8	86.1	114.0	-27.9	90.2	1.0
926.1262	4.81	24.57	55.3	84.7	114.0	-29.3	289.3	1.0

Antenna Polarization:Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
66.0023	1.10	5.92	15.8	22.8	40.0	-17.2	345.1	1.0
519.1832	3.57	18.09	9.8	31.5	46.0	-14.5	122.9	1.0
576.2386	3.70	18.94	14.5	37.1	46.0	-8.9	87.9	1.0
749.2232	4.20	21.39	16.9	42.5	46.0	-3.5	231.5	1.0
902.1587	4.71	24.60	54.3	83.6	114.0	-30.4	67.9	1.0
926.1954	4.81	24.57	57.6	87.0	114.0	-27.0	38.0	1.0

NOTE :

1. Measurement uncertainty is +/-2dB.
2. "*": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss.
4. The field strength of other emission frequencies were very low against the limit.

**Spectrum Research
& Testing Lab., Inc.**No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.**TEST REPORT**Reference No.:A04123102
Report No.:FCCA04123102-01
Page:16 of 45
Date:Feb. 04, 2005

Temperature:	18.2° C	Humidity:	55 %RH
Ferquency Range:	30 – 1000 MHz	Measured Distance:	3m
Receiver Detector:	Q.P.	Tested Mode:	Channel 5
Tested Date:	Feb. 02, 2005		
Tested By:	Pisces Chu		

Antenna Polarization:Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
450.9780	2.95	16.90	16.2	36.1	46.0	-10.0	312.5	1.0
467.0342	3.14	17.21	18.7	39.0	46.0	-7.0	221.4	1.0
575.9365	3.70	18.93	19.7	42.3	46.0	-3.7	93.0	1.0
623.0443	4.21	19.65	15.4	39.3	46.0	-6.7	147.8	1.0
902.0884	4.71	24.60	55.8	85.1	114.0	-28.9	55.2	1.0
926.8758	4.81	24.57	54.3	83.7	114.0	-30.3	336.9	1.0

Antenna Polarization:Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
66.0114	1.10	5.92	14.7	21.7	40.0	-18.3	110.2	1.0
519.8745	3.57	18.09	8.8	30.5	46.0	-15.5	127.9	1.0
576.0368	3.70	18.94	13.8	36.4	46.0	-9.6	245.9	1.0
750.1132	4.20	21.40	16.8	42.4	46.0	-3.6	181.0	1.0
902.0795	4.71	24.60	55.7	85.0	114.0	-29.0	146.0	1.0
927.0013	4.82	24.57	54.2	83.6	114.0	-30.4	92.7	1.0

NOTE :

1. Measurement uncertainty is +/-2dB.
2. "*": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss.
4. The field strength of other emission frequencies were very low against the limit.

**Spectrum Research
& Testing Lab., Inc.**No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.**TEST REPORT**Reference No.:A04123102
Report No.:FCCA04123102-01
Page:17 of 45
Date:Feb. 04, 2005

Temperature:	18.2° C	Humidity:	55 %RH
Ferquency Range:	30 – 1000 MHz	Measured Distance:	3m
Receiver Detector:	Q.P.	Tested Mode:	Channel 10
Tested Date:	Feb. 02, 2005		
Tested By:	Pisces Chu		

Antenna Polarization:Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
451.8575	2.96	16.92	16.2	36.1	46.0	-9.9	23.2	1.0
466.9250	3.13	17.19	18.7	39.0	46.0	-7.0	117.4	1.0
576.1260	3.70	18.94	19.7	42.3	46.0	-3.7	90.3	1.0
623.6402	4.21	19.65	14.7	38.6	46.0	-7.4	54.7	1.0
903.7150	4.71	24.60	50.3	79.6	114.0	-34.4	88.9	1.0
927.6912	4.82	24.57	56.0	85.4	114.0	-28.6	152.7	1.0

Antenna Polarization:Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
65.8903	1.09	5.85	14.7	21.6	40.0	-18.4	334.7	1.0
520.8260	3.57	18.10	8.8	30.5	46.0	-15.5	278.1	1.0
576.1198	3.70	18.94	13.8	36.4	46.0	-9.6	67.7	1.0
749.2401	4.20	21.39	16.8	42.4	46.0	-3.6	178.9	1.0
903.7500	4.71	24.60	56.4	85.7	114.0	-28.3	25.9	1.0
927.7850	4.82	24.57	53.5	82.9	114.0	-31.1	29.0	1.0

NOTE :

1. Measurement uncertainty is +/-2dB.
2. "*": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss.
4. The field strength of other emission frequencies were very low against the limit.



TEST REPORT

Temperature:	19°C	Humidity:	52%RH
Ferquency Range:	1 – 25GHz	Test mode:	Channel 1
Receiver Detector:	PK. or AV.	Measured Distance:	3m
Tested by:	Pisces Chu		

Antenna Polarization : Horizontal

Freq./MHz	Cable Loss (dB)	Ant. Fact. (dB)	Reading (dBuV)		Emission (dBuV/m)		Limit Line (dBuV/m)		Margin (dBuV/m)		AZ (o)	EL (m)
			PK	AV	PK	AV	PK	AV	PK	AV		
1804.20	-33.05	26.80	43.1	33.9	36.8	27.6	74.0	54.0	-37.2	-26.4	123.9	1.0
2706.37	-32.12	29.35	39.9	31.0	37.1	28.2	74.0	54.0	-36.9	-25.8	27.9	1.0
3608.40	-30.86	32.46	34.5	24.8	36.1	26.4	74.0	54.0	-37.9	-27.6	346.9	2.7
4512.99	-30.39	33.41	*	*	*	*	74.0	54.0	*	*	302.7	1.0
5422.77	-29.44	33.97	*	*	*	*	74.0	54.0	*	*	165.0	1.0
6325.09	-29.30	34.75	*	*	*	*	74.0	54.0	*	*	54.0	1.0

Antenna Polarization : Vertical

Freq./MHz	Cable Loss (dB)	Ant. Fact. (dB)	Reading (dBuV)		Emission (dBuV/m)		Limit Line (dBuV/m)		Margin (dBuV/m)		AZ (o)	EL (m)
			PK	AV	PK	AV	PK	AV	PK	AV		
1803.90	-33.05	26.45	42.7	33.7	36.1	27.1	74.0	54.0	-37.9	-26.9	91.2	3.7
2707.77	-32.11	29.36	41.1	31.8	38.3	29.0	74.0	54.0	-35.7	-25.0	78.0	1.0
3608.33	-30.86	32.46	34.7	24.9	36.3	26.5	74.0	54.0	-37.7	-27.5	45.9	1.0
4513.09	-30.39	33.41	*	*	*	*	74.0	54.0	*	*	38.0	1.4
5419.18	-29.43	33.97	*	*	*	*	74.0	54.0	*	*	55.8	1.0
6325.79	-29.30	34.75	*	*	*	*	74.0	54.0	*	*	99.0	1.0

- NOTE :**
1. Measurement uncertainty is less than +/- 2dB
 2. "*": Measurement does not apply for this frequency.
 3. Emission Level = Reading Value + Ant. Factor + Cable Loss
 4. The field strength of other emission frequencies were very low against the limit.

**Spectrum Research
& Testing Lab., Inc.**No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.**TEST REPORT**Reference No.:A04123102
Report No.:FCCA04123102-01
Page:19 of 45
Date:Feb. 04, 2005

Temperature:	19°C	Humidity:	52%RH
Ferquency Range:	1 – 25GHz	Test mode:	Channel 5
Receiver Detector:	PK. or AV.	Measured Distance:	3m
Tested by:	Pisces Chu		

Antenna Polarization : Horizontal

Freq./MHz	Cable Loss (dB)	Ant. Fact. (dB)	Reading (dBuV)		Emission (dBuV/m)		Limit Line (dBuV/m)		Margin (dBuV/m)		AZ (o)	EL (m)
			PK	AV	PK	AV	PK	AV	PK	AV		
1805.60	-33.05	26.80	44.3	34.4	38.0	28.1	74.0	54.0	-36.0	-25.9	90.2	1.0
2708.50	-32.11	29.36	40.2	30.8	37.5	28.1	74.0	54.0	-36.5	-25.9	118.0	3.6
3610.12	-30.86	32.46	35.5	24.9	37.1	26.5	74.0	54.0	-36.9	-27.5	112.7	1.0
4513.00	-30.39	33.41	*	*	*	*	74.0	54.0	*	*	302.7	1.0
5423.77	-29.44	33.97	*	*	*	*	74.0	54.0	*	*	165.0	1.0
6325.08	-29.30	34.75	*	*	*	*	74.0	54.0	*	*	273.4	1.0

Antenna Polarization : Vertical

Freq./MHz	Cable Loss (dB)	Ant. Fact. (dB)	Reading (dBuV)		Emission (dBuV/m)		Limit Line (dBuV/m)		Margin (dBuV/m)		AZ (o)	EL (m)
			PK	AV	PK	AV	PK	AV	PK	AV		
1805.55	-33.05	26.46	41.5	33.9	34.9	27.3	74.0	54.0	-39.1	-26.7	91.2	1.0
2710.19	-32.10	29.38	40.8	30.9	38.1	28.2	74.0	54.0	-35.9	-25.8	55.9	1.0
3610.55	-30.86	32.46	33.6	23.2	35.2	24.8	74.0	54.0	-38.8	-29.2	339.0	2.1
4513.09	-30.39	33.41	*	*	*	*	74.0	54.0	*	*	67.8	1.0
5422.37	-29.44	33.97	*	*	*	*	74.0	54.0	*	*	54.8	1.0
6326.80	-29.29	34.75	*	*	*	*	74.0	54.0	*	*	23.0	1.7

- NOTE :**
1. Measurement uncertainty is less than +/- 2dB
 2. "**": Measurement does not apply for this frequency.
 3. Emission Level = Reading Value + Ant. Factor + Cable Loss
 4. The field strength of other emission frequencies were very low against the limit.

**Spectrum Research
& Testing Lab., Inc.**No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.**TEST REPORT**Reference No.:A04123102
Report No.:FCCA04123102-01
Page:20 of 45
Date:Feb. 04, 2005

Temperature:	19°C	Humidity:	52%RH
Ferquency Range:	1 – 25GHz	Test mode:	Channel 10
Receiver Detector:	PK. or AV.	Measured Distance:	3m
Tested by:	Pisces Chu		

Antenna Polarization : Horizontal

Freq./MHz	Cable Loss (dB)	Ant. Fact. (dB)	Reading (dBuV)		Emission (dBuV/m)		Limit Line (dBuV/m)		Margin (dBuV/m)		AZ (o)	EL (m)
			PK	AV	PK	AV	PK	AV	PK	AV		
1807.60	-33.05	26.81	42.3	33.1	36.1	26.8	74.0	54.0	-37.9	-27.2	54.8	1.0
2711.14	-32.09	29.38	39.7	30.3	37.0	27.6	74.0	54.0	-37.0	-26.4	132.7	1.2
3605.40	-30.85	32.46	33.5	24.3	35.1	25.9	74.0	54.0	-38.9	-28.1	204.9	1.0
4509.75	-30.40	33.41	*	*	*	*	74.0	54.0	*	*	302.7	1.2
5423.80	-29.44	33.97	*	*	*	*	74.0	54.0	*	*	165.0	1.0
6326.60	-29.29	34.75	*	*	*	*	74.0	54.0	*	*	273.4	1.0

Antenna Polarization : Vertical

Freq./MHz	Cable Loss (dB)	Ant. Fact. (dB)	Reading (dBuV)		Emission (dBuV/m)		Limit Line (dBuV/m)		Margin (dBuV/m)		AZ (o)	EL (m)
			PK	AV	PK	AV	PK	AV	PK	AV		
1807.55	-33.05	26.47	43.5	34.2	36.9	27.6	74.0	54.0	-37.1	-26.4	91.2	1.0
2713.19	-32.08	29.39	41.4	33.0	38.7	30.3	74.0	54.0	-35.3	-23.7	127.0	1.2
3607.04	-30.86	32.46	32.7	23.9	34.3	25.5	74.0	54.0	-39.7	-28.5	325.3	1.0
4510.23	-30.40	33.41	*	*	*	*	74.0	54.0	*	*	38.0	1.0
5420.89	-29.43	33.97	*	*	*	*	74.0	54.0	*	*	267.1	1.0
6327.14	-29.29	34.75	*	*	*	*	74.0	54.0	*	*	188.0	1.0

- NOTE :**
1. Measurement uncertainty is less than +/- 2dB
 2. "**": Measurement does not apply for this frequency.
 3. Emission Level = Reading Value + Ant. Factor + Cable Loss
 4. The field strength of other emission frequencies were very low against the limit.

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.	TEST REPORT	Reference No.:A04123102 Report No.:FCCA04123102-01 Page:21 of 45 Date:Feb. 04, 2005
--	----------------------	--

6. Bandwidth

6.1 LIMIT

FREQUENCY Range (MHz)	Quantity of Hopping Channel	Limit(kHz)			
		50	25	15	75
902-928		<250	>250	NA	NA
2400-2483.5		NA	NA	>1000	<1000


6.2 TEST EQUIPMENT

The following test equipment was used during the test:

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
SPECTRUM	9kHz-7GHz	ROHDE & SCHWARZ	FSP7/ 839511/010	MAR. 2005 ETC

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

6.3 TEST SET-UP



The EUT was connected to a spectrum through a 50 Ω RF cable.

6.4 TEST PROCEDURE

The EUT was operating in hopping mode or could be controlled its channel.
 Printed out the test result from the spectrum by hard copy function.

6.5 EUT OPERATING CONDITION

Same as section 4.1.5 of this report.

**Spectrum Research
& Testing Lab., Inc.**

No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.:A04123102
Report No.:FCCA04123102-01
Page:22 of 45
Date:Feb. 04, 2005

6.6 TEST RESULT

Temperature:	<u>26°C</u>	Humidity:	<u>58%RH</u>
Spectrum Detector:	<u>PK</u>	Tested by:	<u>Pisces Chu</u>
Test Result:	<u>PASS</u>		

Mode: Remote

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	20dB Bandwidth (kHz)
1	926.1	47.28
5	926.9	47.95
10	927.9	40.25



**Spectrum Research
& Testing Lab., Inc.**

No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT


Reference No.:A04123102

Report No.:FCCA04123102-01

Page:23 of 45

Date:Feb. 04, 2005

Mode: Remote CH 1:

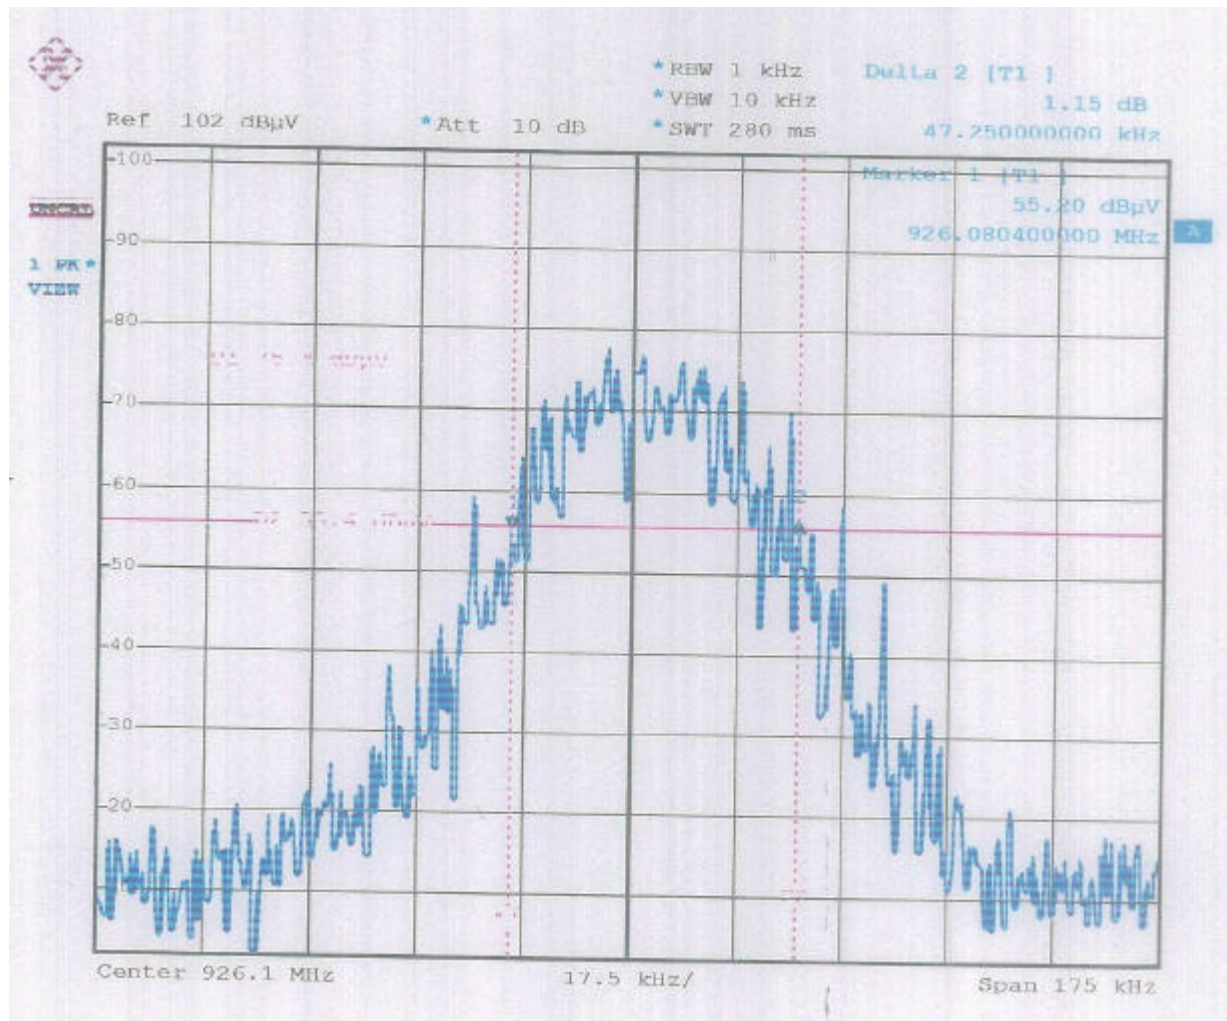



**Spectrum Research
& Testing Lab., Inc.**

No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT


Reference No.:A04123102

Report No.:FCCA04123102-01

Page:24 of 45

Date:Feb. 04, 2005

Mode: Remote CH 5:

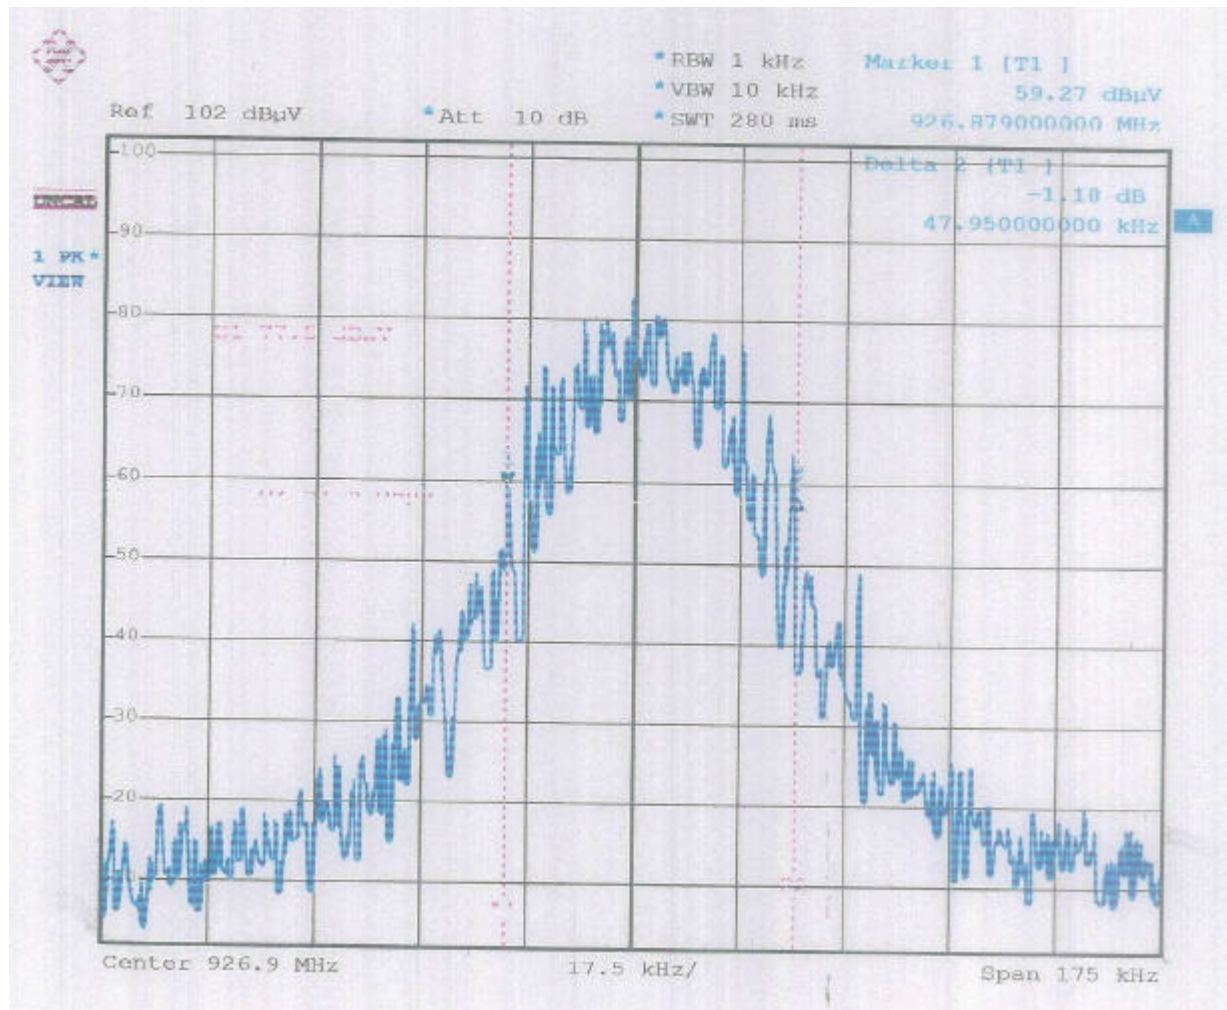



**Spectrum Research
& Testing Lab., Inc.**

No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT


Reference No.:A04123102

Report No.:FCCA04123102-01

Page:25 of 45

Date:Feb. 04, 2005

Mode: Remote CH 10:

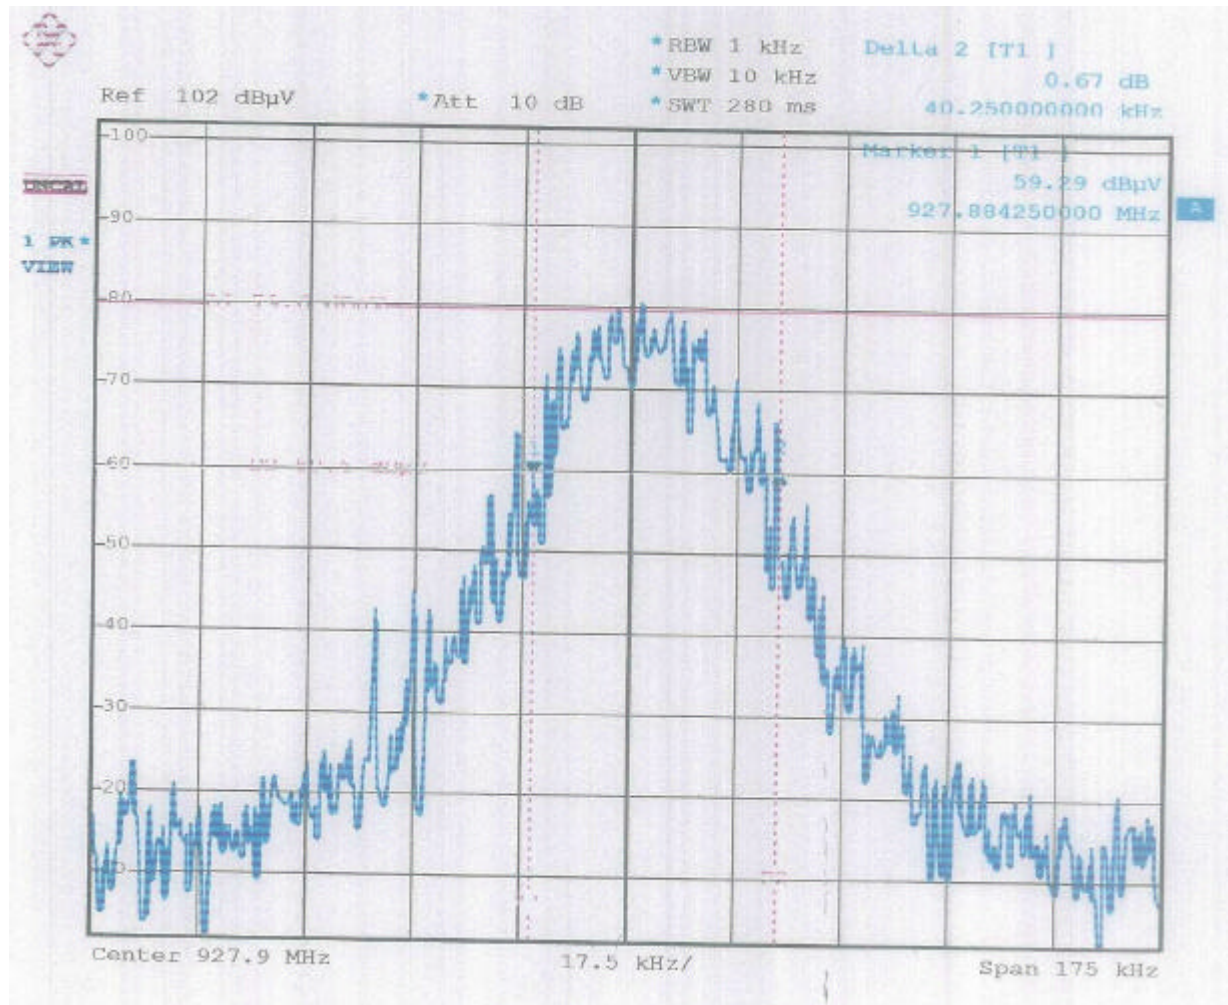




7. CHANGE THE VOLTAGE FROM -15% TO +15% TO CHECK THE FREQUENCY VARIATION

Mode: Remote

A. When voltage is 5V

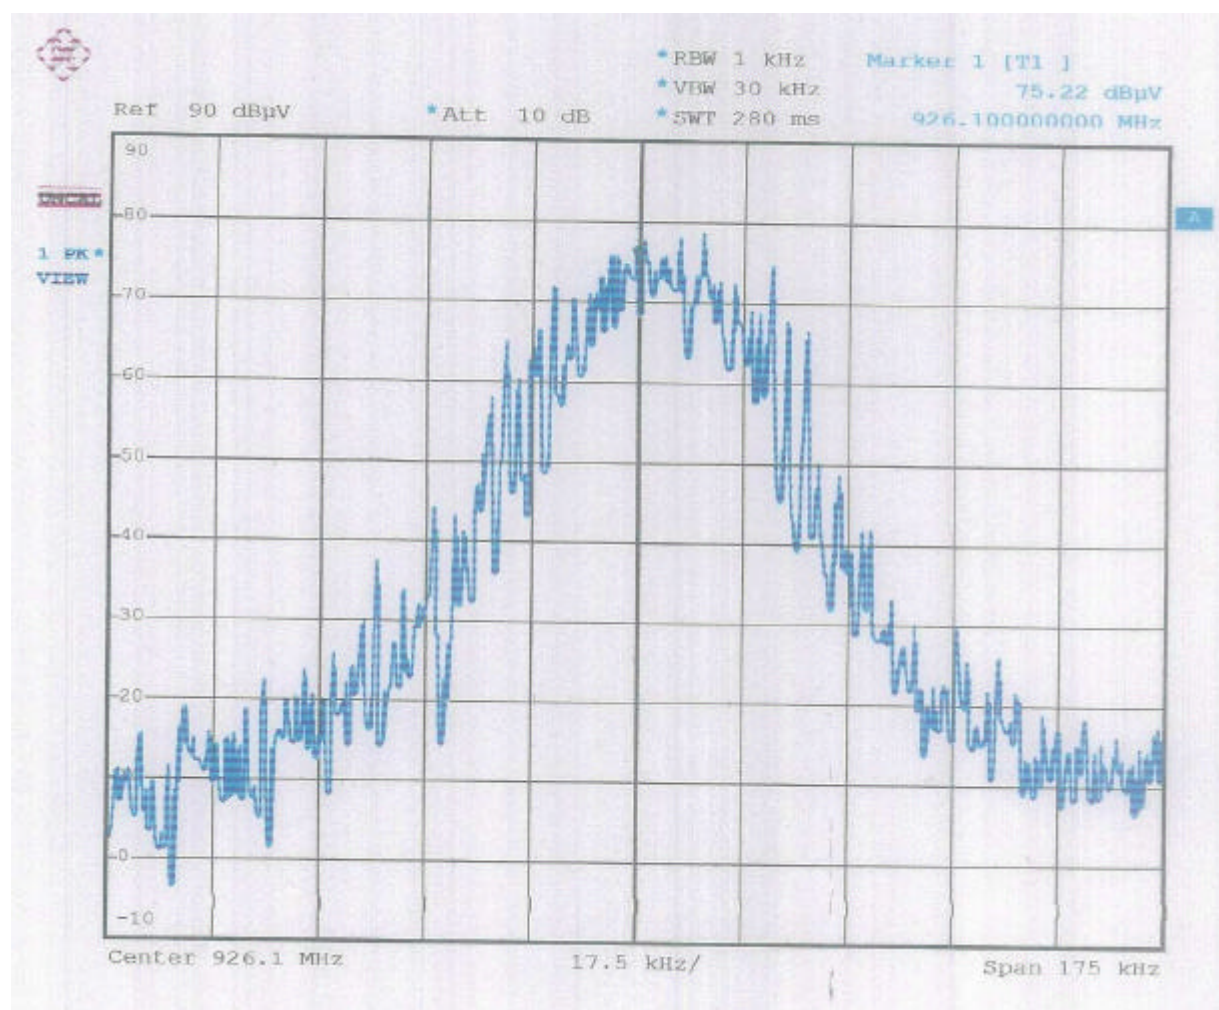



**Spectrum Research
& Testing Lab., Inc.**

No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT


Reference No.:A04123102

Report No.:FCCA04123102-01

Page:27 of 45

Date:Feb. 04, 2005

B. When voltage is 5.75V (change +15%)

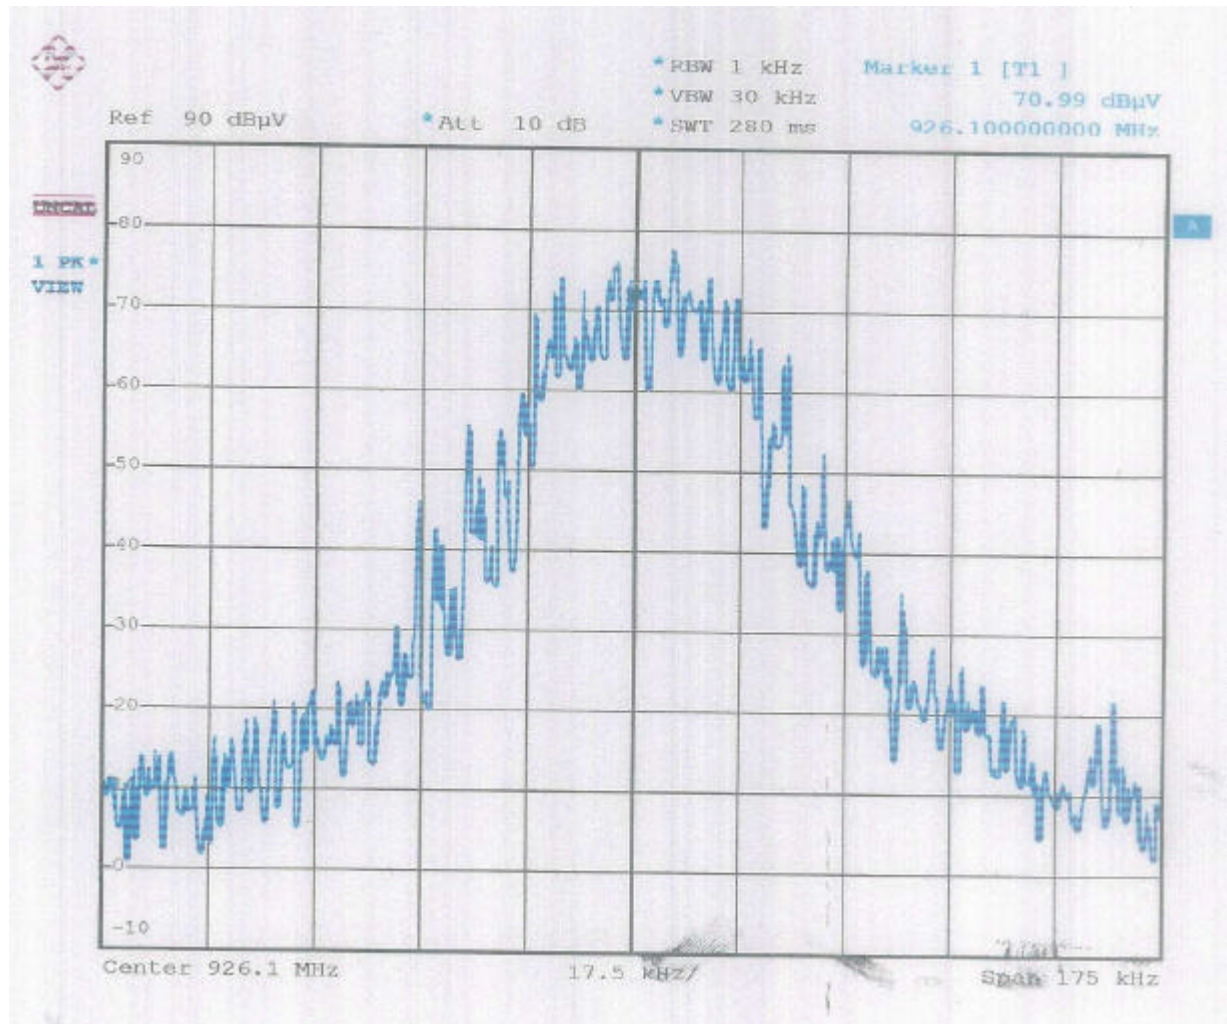



**Spectrum Research
& Testing Lab., Inc.**

No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT


Reference No.:A04123102

Report No.:FCCA04123102-01

Page:28 of 45

Date:Feb. 04, 2005

C. When voltage is 4.25V (change -15%)

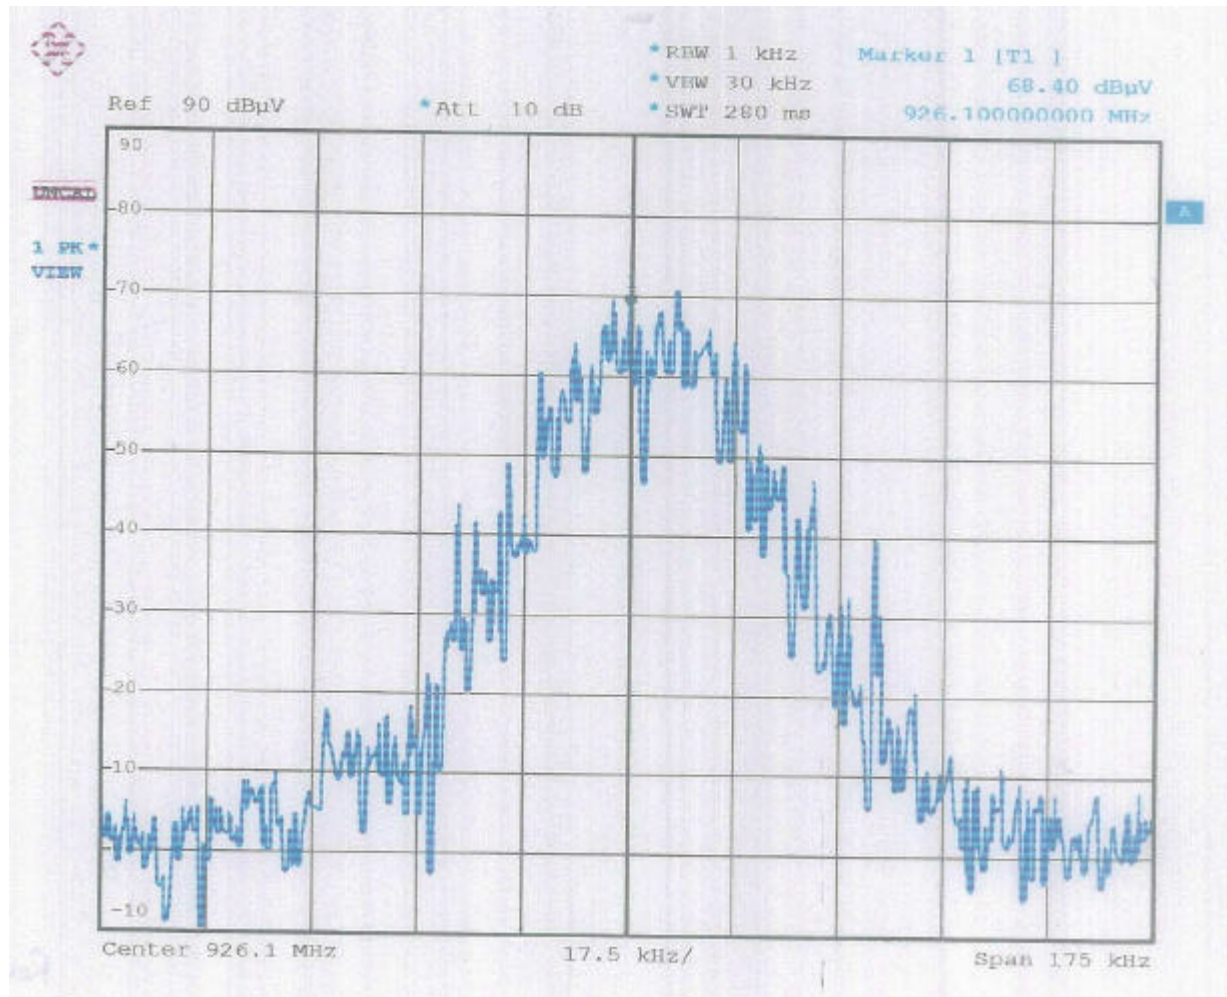




8. THE TEMPERATURE CHANGE TEST

Mode: Remote

A. Temperature is -30°C

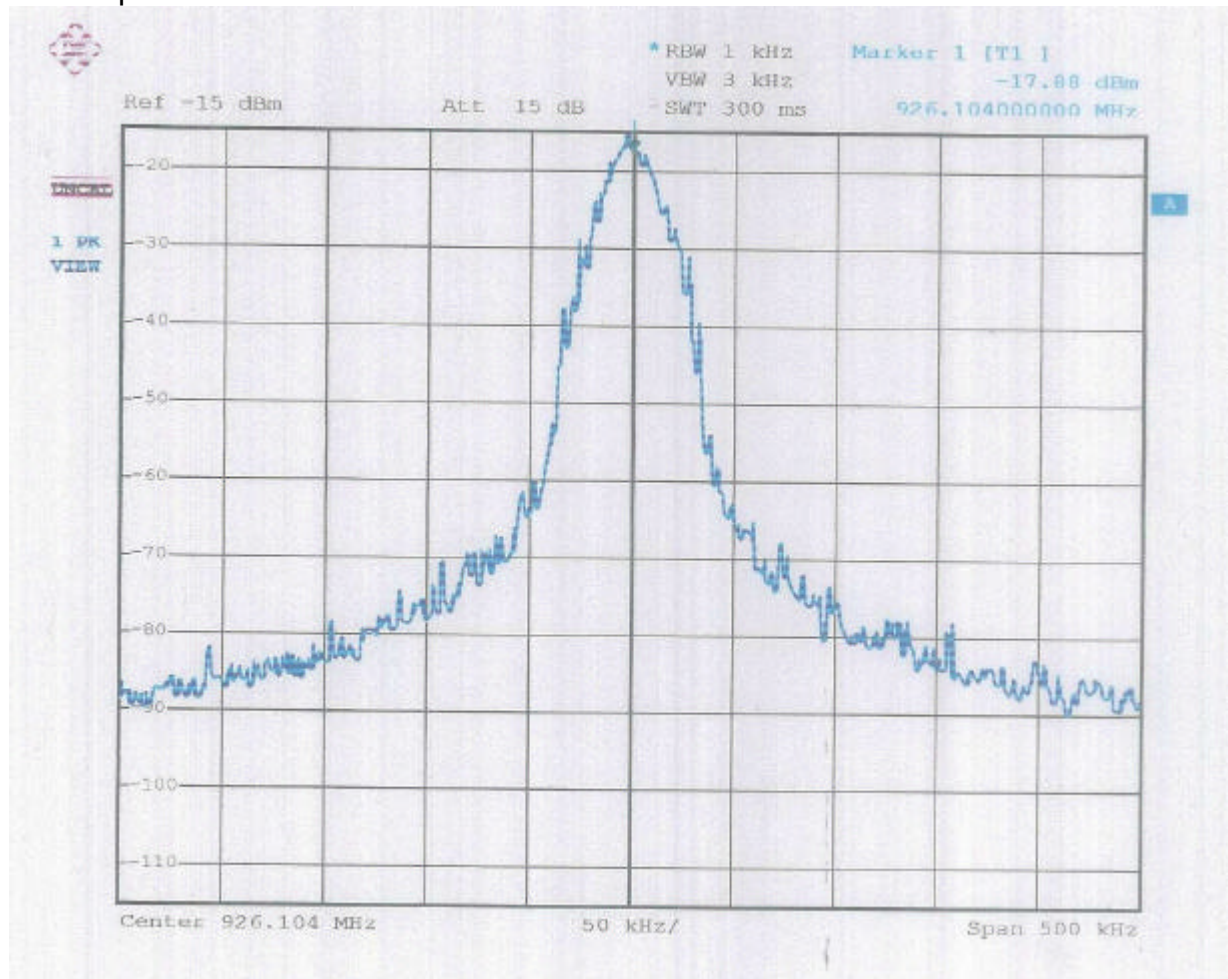



**Spectrum Research
& Testing Lab., Inc.**

No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT


Reference No.:A04123102

Report No.:FCCA04123102-01

Page:30 of 45

Date:Feb. 04, 2005

B. Temperature is -20°C

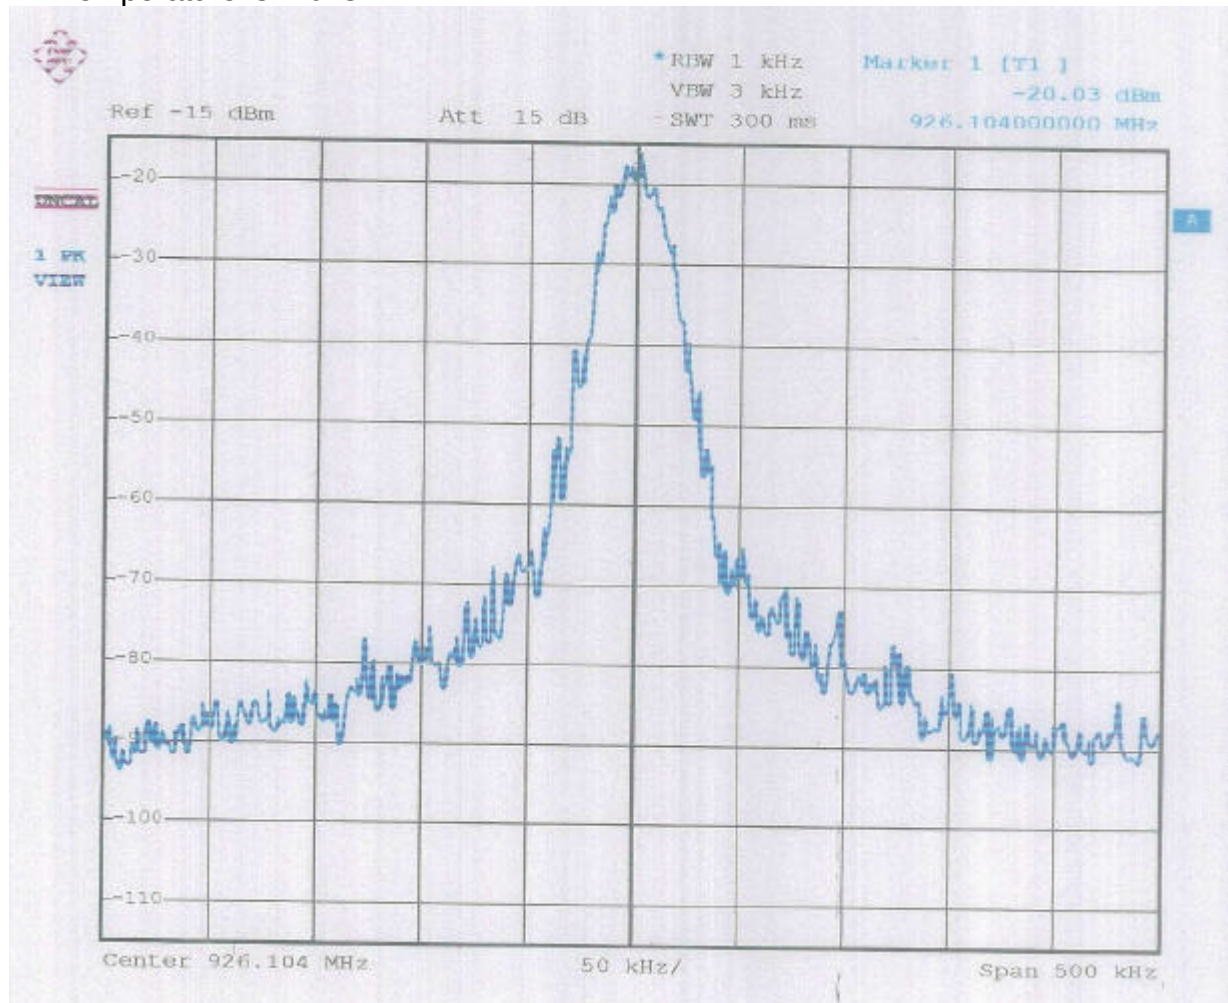



**Spectrum Research
& Testing Lab., Inc.**

No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT


Reference No.:A04123102

Report No.:FCCA04123102-01

Page:31 of 45

Date:Feb. 04, 2005

C. Temperature is -10°C

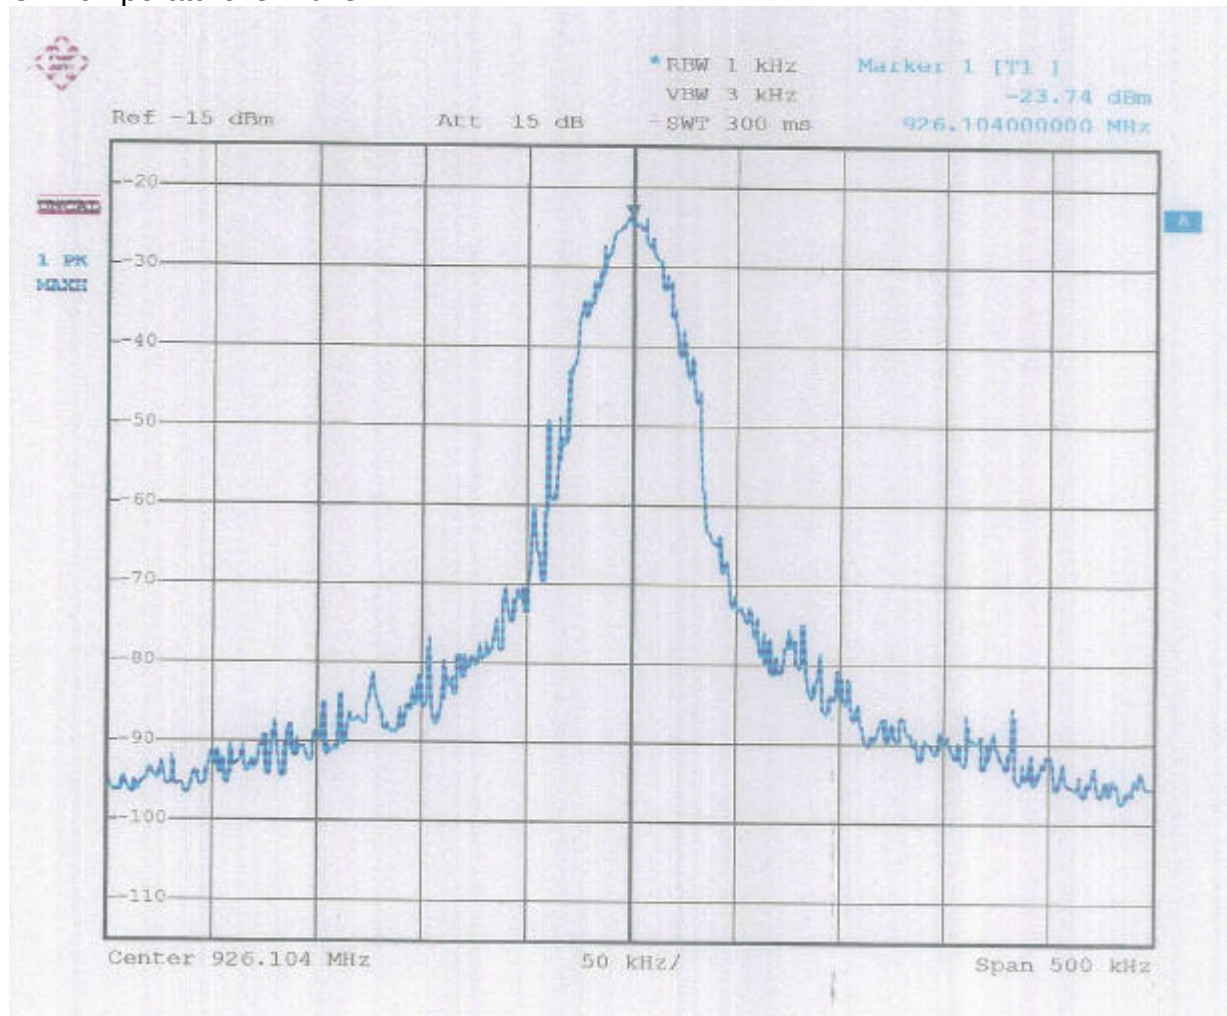




**Spectrum Research
& Testing Lab., Inc.**

No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.:A04123102
Report No.:FCCA04123102-01
Page:32 of 45
Date:Feb. 04, 2005


D. Temperature is 0°C

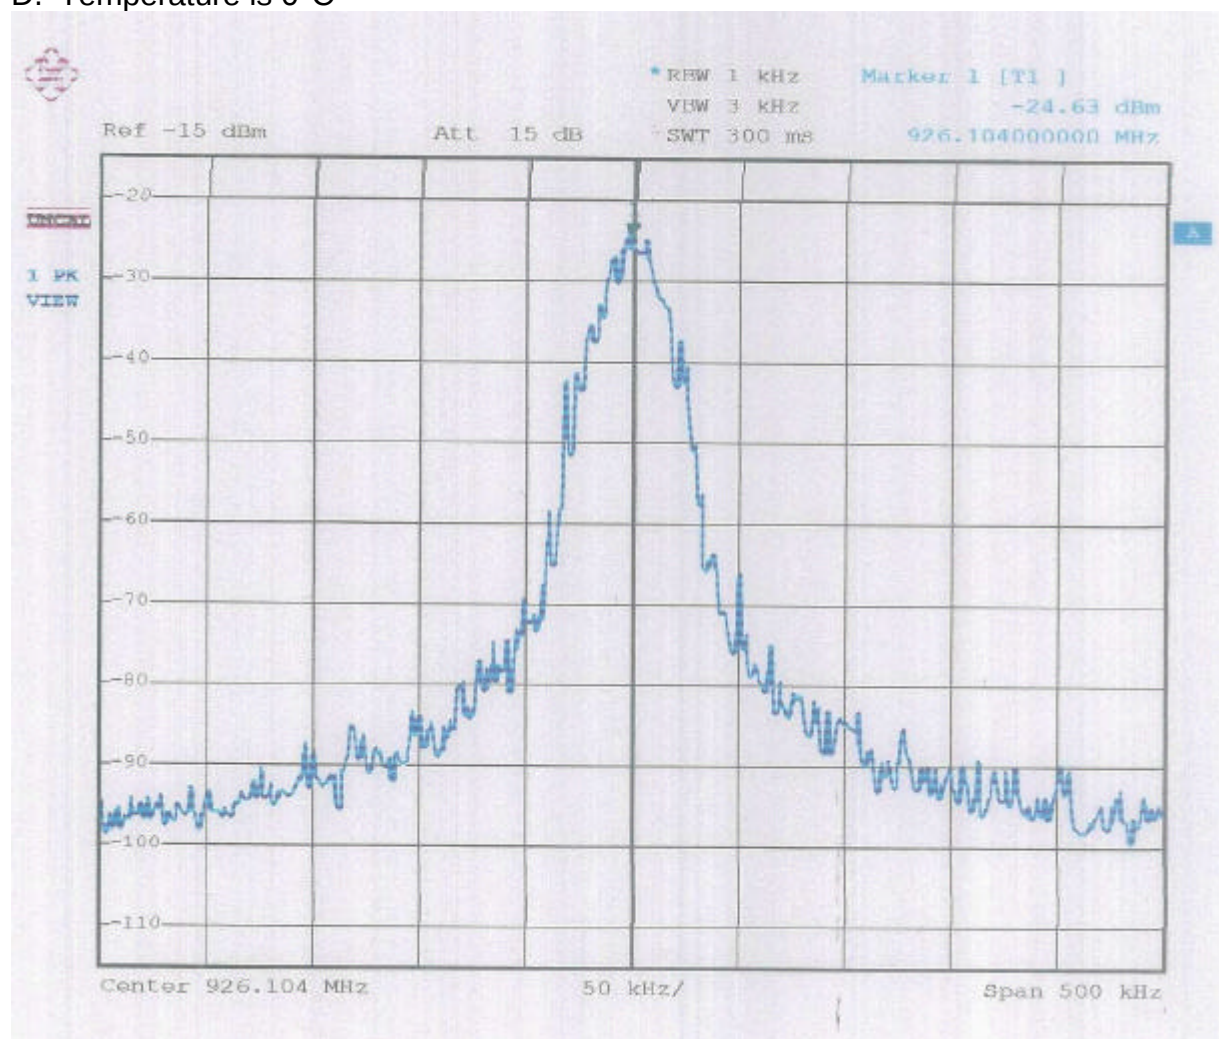



TEST REPORT

E. Temperature is +10°C

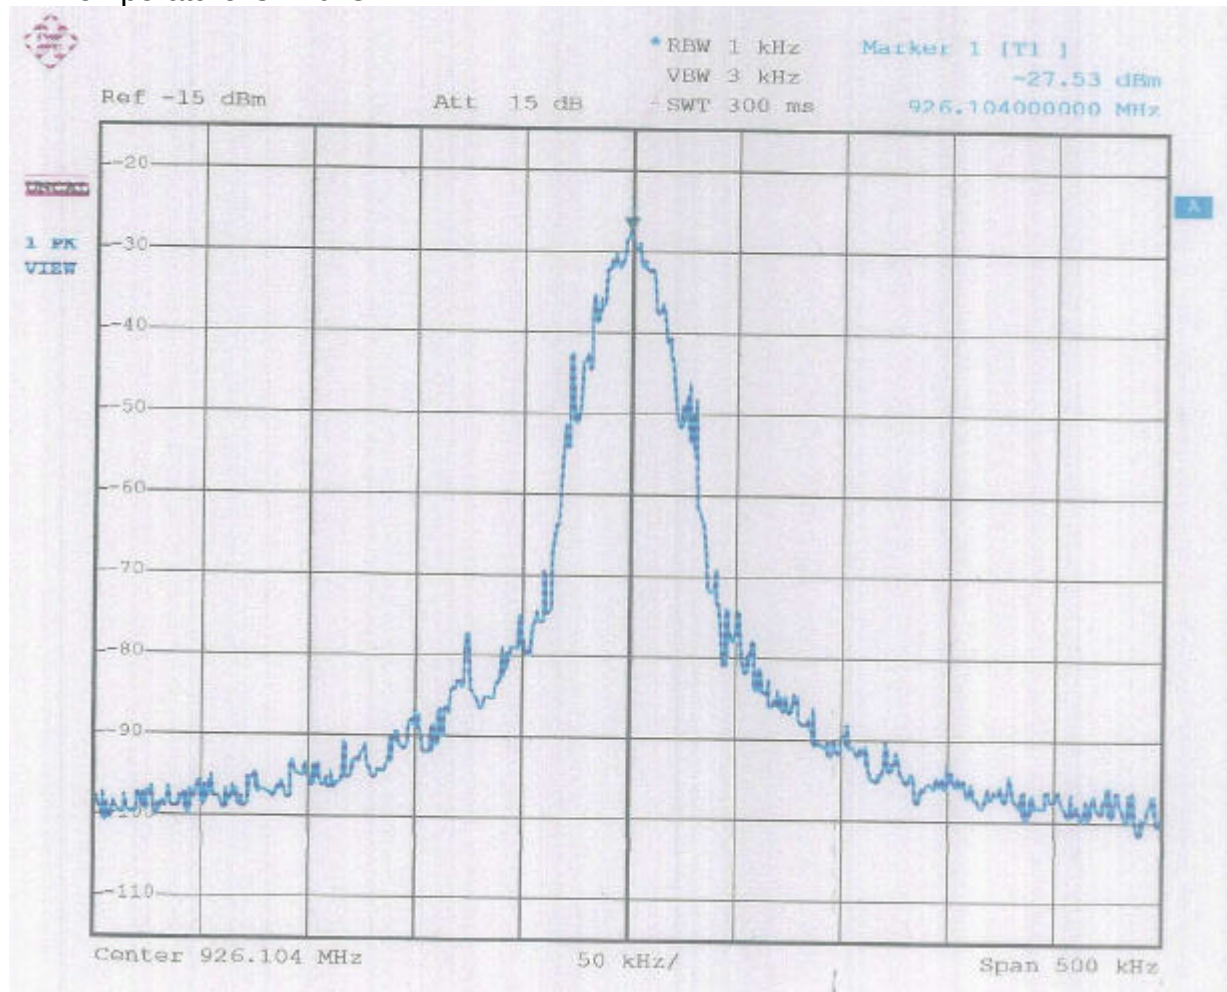



**Spectrum Research
& Testing Lab., Inc.**

No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT


Reference No.:A04123102

Report No.:FCCA04123102-01

Page:34 of 45

Date:Feb. 04, 2005

F. Temperature is +20°C

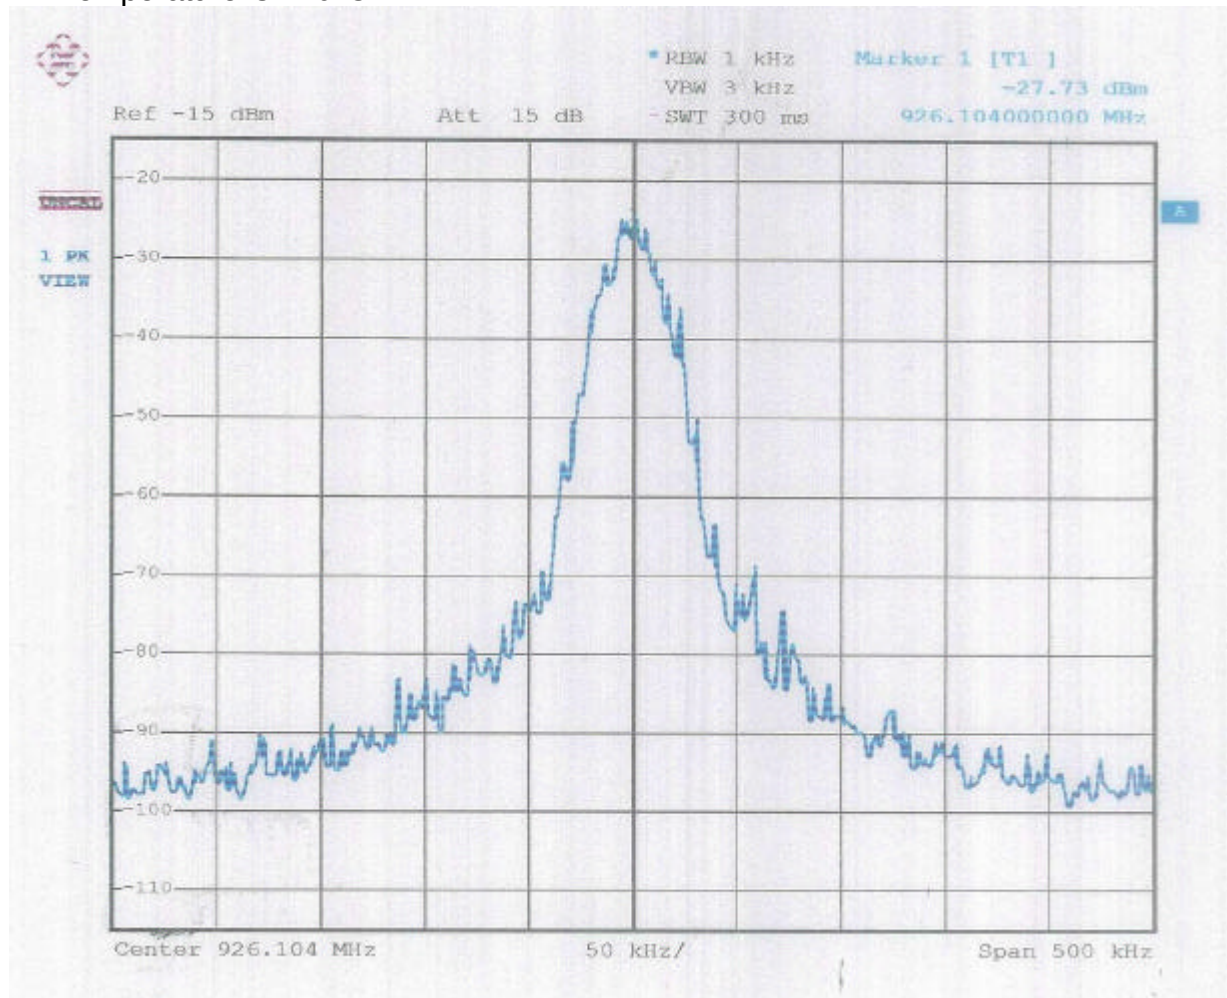



**Spectrum Research
& Testing Lab., Inc.**

No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT


Reference No.:A04123102

Report No.:FCCA04123102-01

Page:35 of 45

Date:Feb. 04, 2005


G. Temperature is +30°C

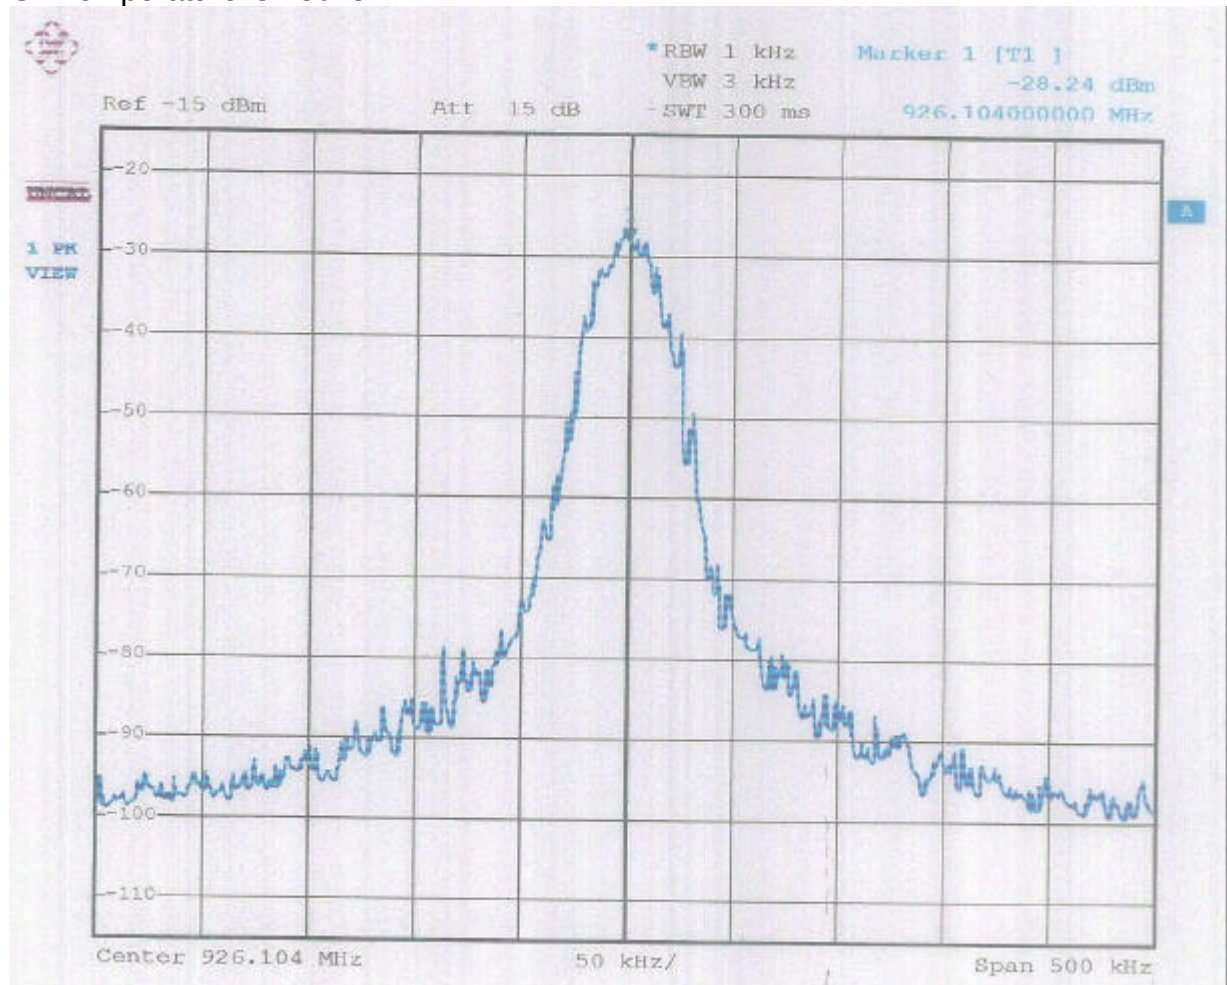



TEST REPORT

H. Temperature is +40°C

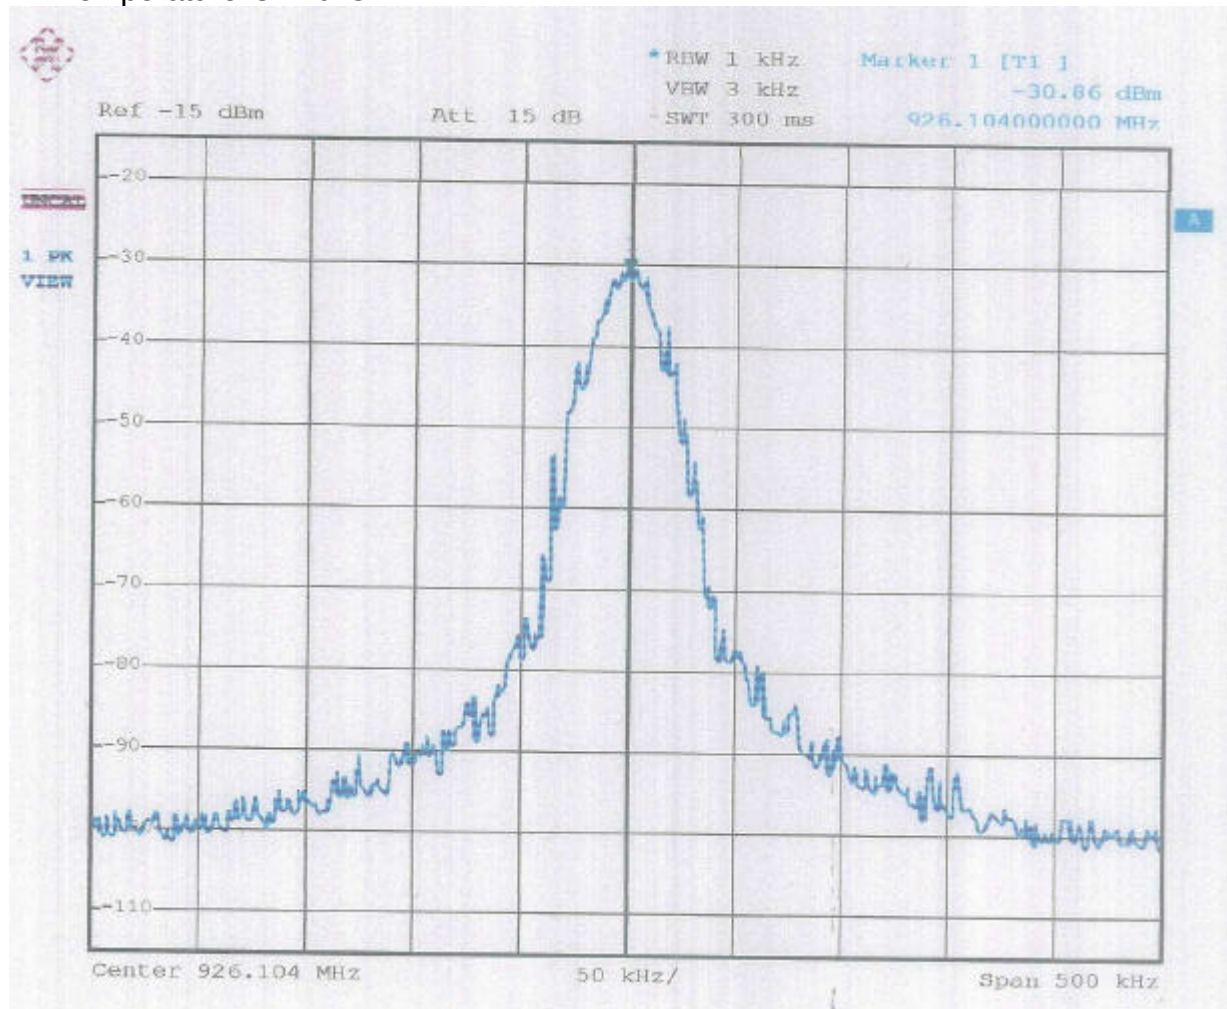



**Spectrum Research
& Testing Lab., Inc.**

No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT


Reference No.:A04123102

Report No.:FCCA04123102-01

Page:37 of 45

Date:Feb. 04, 2005

I. Temperature is +50°C

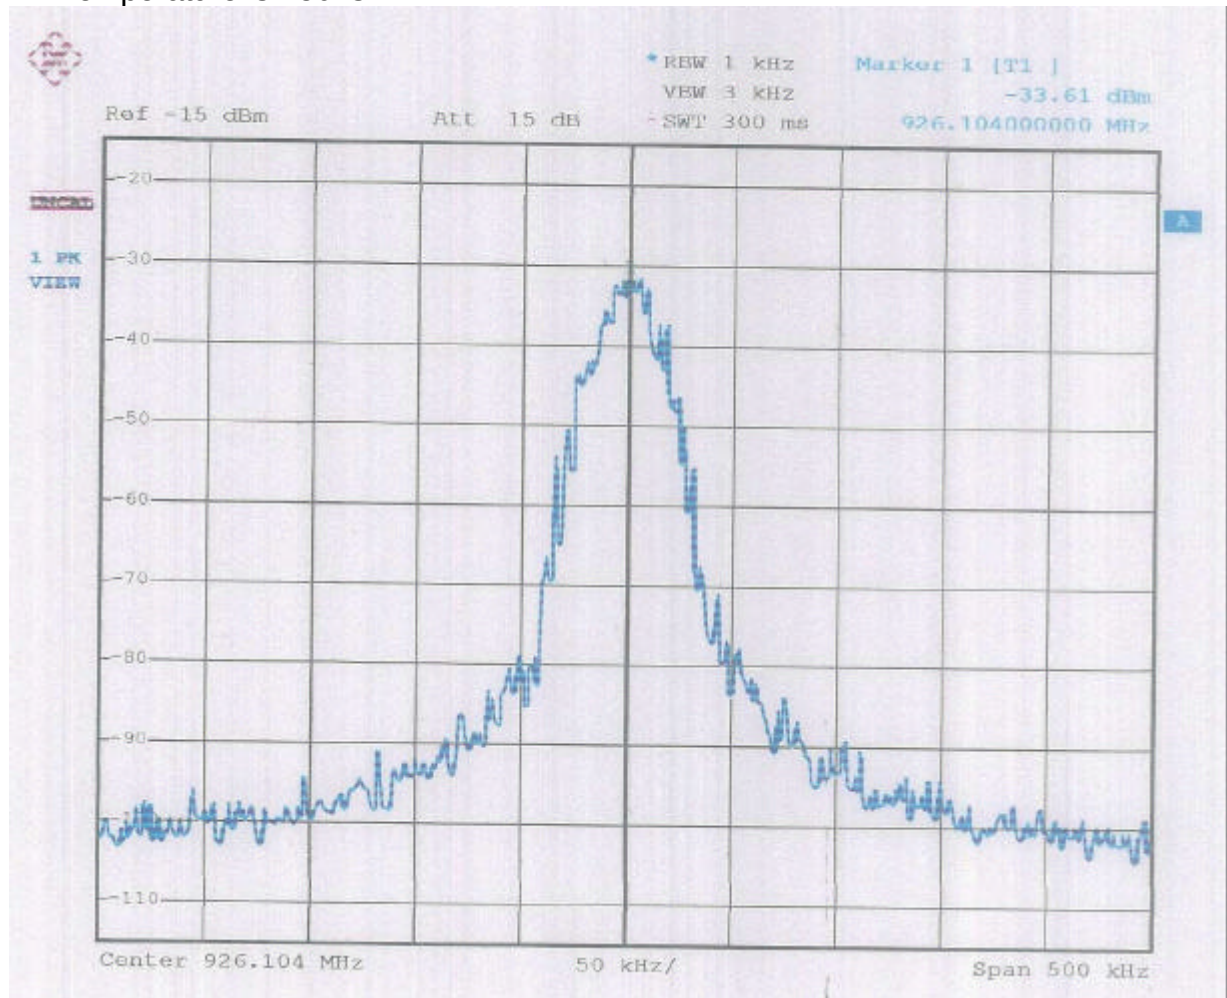



**Spectrum Research
& Testing Lab., Inc.**

No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT


Reference No.:A04123102

Report No.:FCCA04123102-01

Page:39 of 45

Date:Feb. 04, 2005

Mode: Remote Channel 5

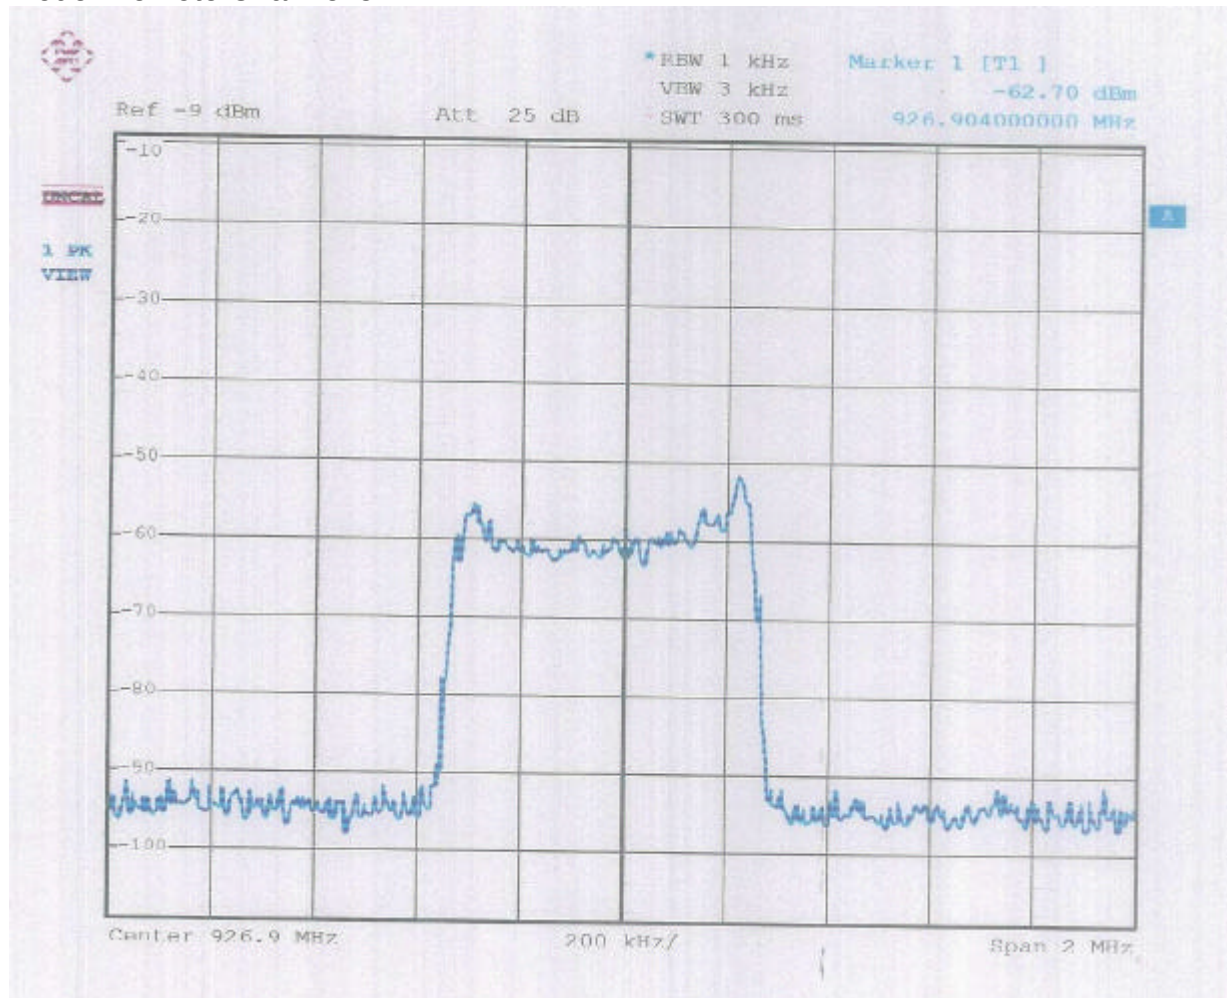




**Spectrum Research
& Testing Lab., Inc.**

No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.:A04123102
Report No.:FCCA04123102-01
Page:40 of 45
Date:Feb. 04, 2005

Mode: Remote Channel 10

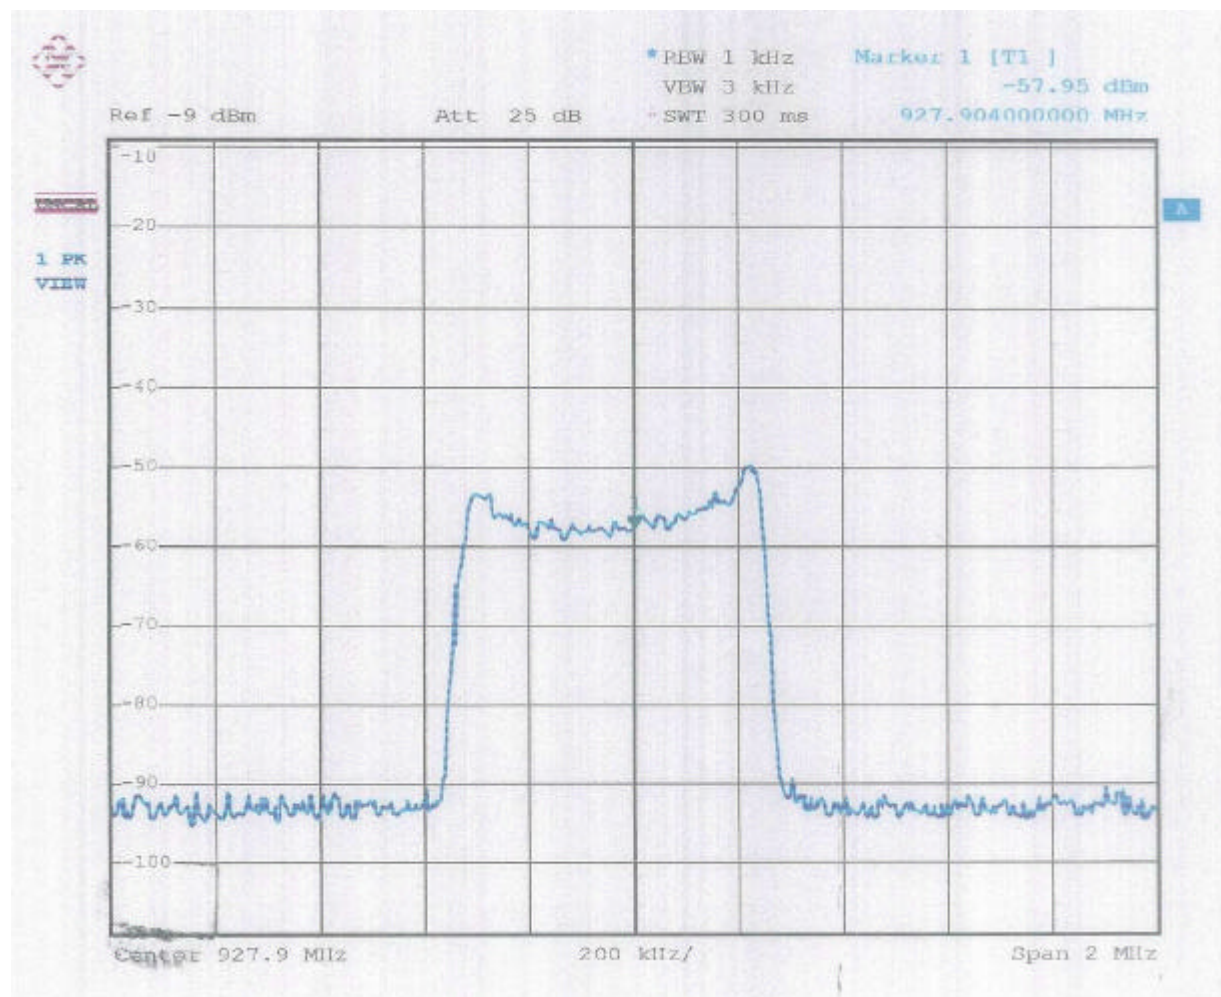

**Spectrum Research
& Testing Lab., Inc.**

No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.:A04123102
Report No.:FCCA04123102-01
Page:41 of 45
Date:Feb. 04, 2005



10. VERIFY CHANNELS AND FREQUENCIES

Channel	Remote Section	
	TX Freq.(MHz)	RX Freq.(MHz)
1	926.1	902.1
2	926.3	902.3
3	926.5	902.5
4	926.7	902.7
5	926.9	902.9
6	927.1	903.1
7	927.3	903.3
8	927.5	903.5
9	927.7	903.7
10	927.9	903.9



11. PHOTOS OF TESTING

- Conducted test

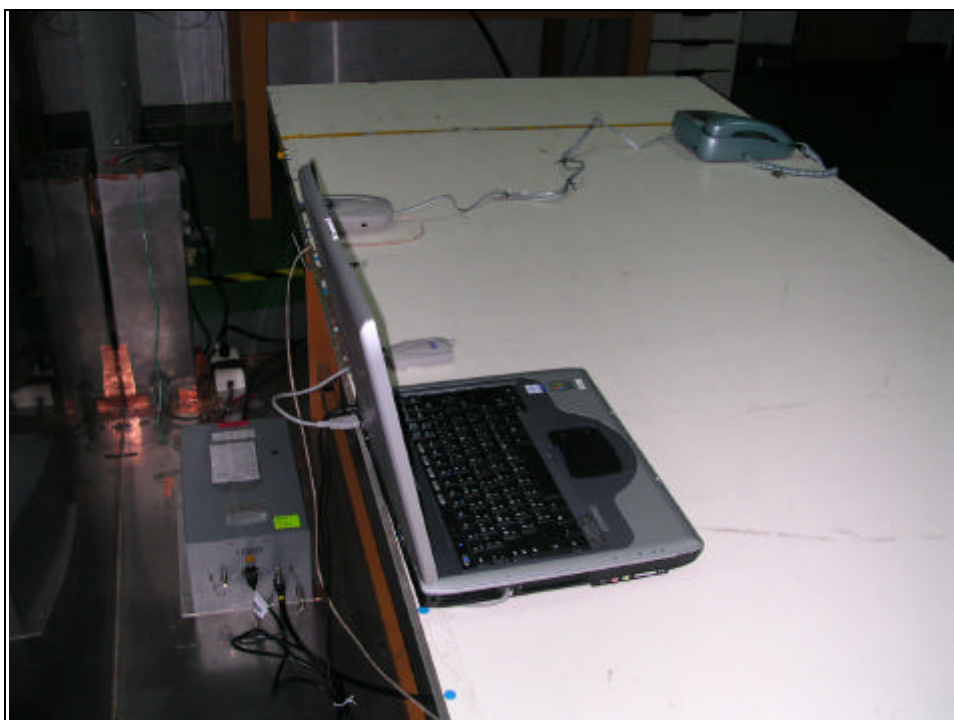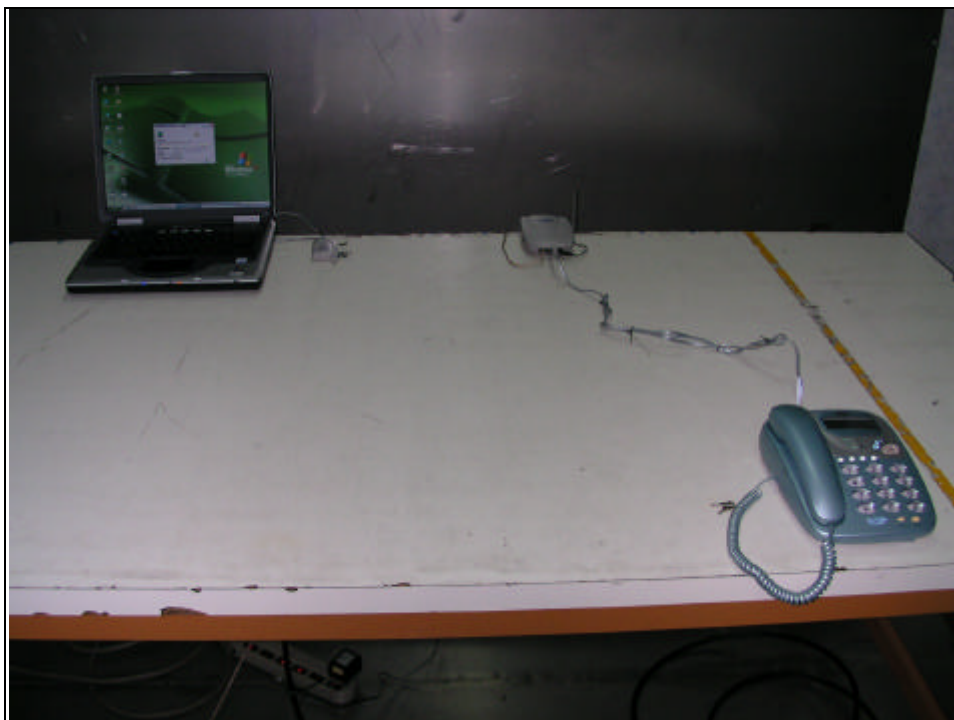





**Spectrum Research
& Testing Lab., Inc.**

No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.:A04123102
Report No.:FCCA04123102-01
Page:43 of 45
Date:Feb. 04, 2005

- Radiated test –below 1GHz

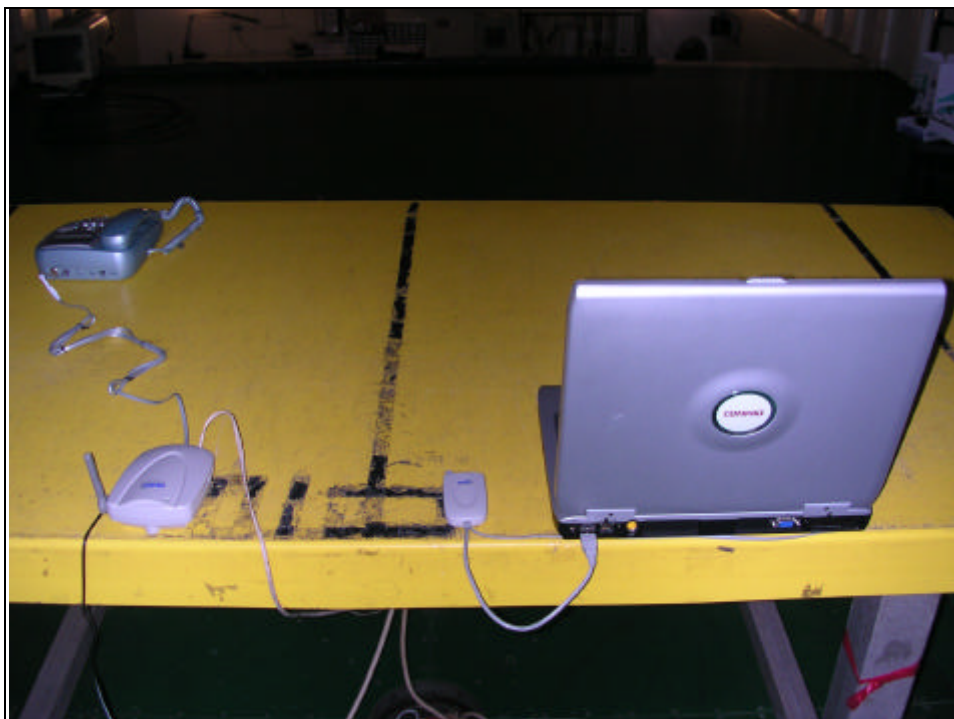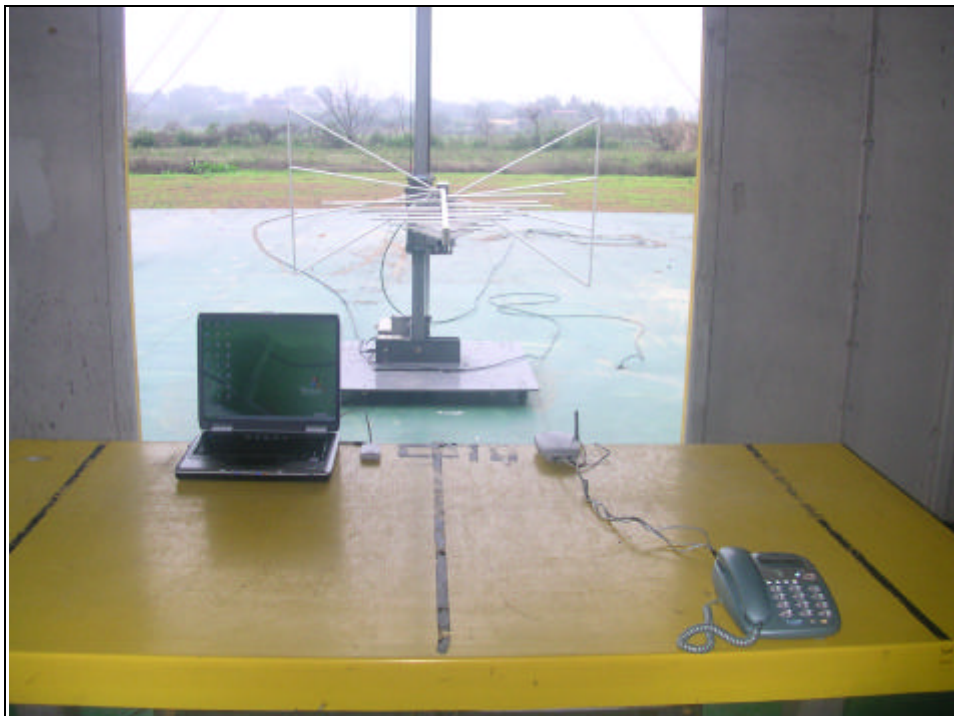





**Spectrum Research
& Testing Lab., Inc.**

No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.:A04123102
Report No.:FCCA04123102-01
Page:44 of 45
Date:Feb. 04, 2005

- Radiated test-Above 1GHz

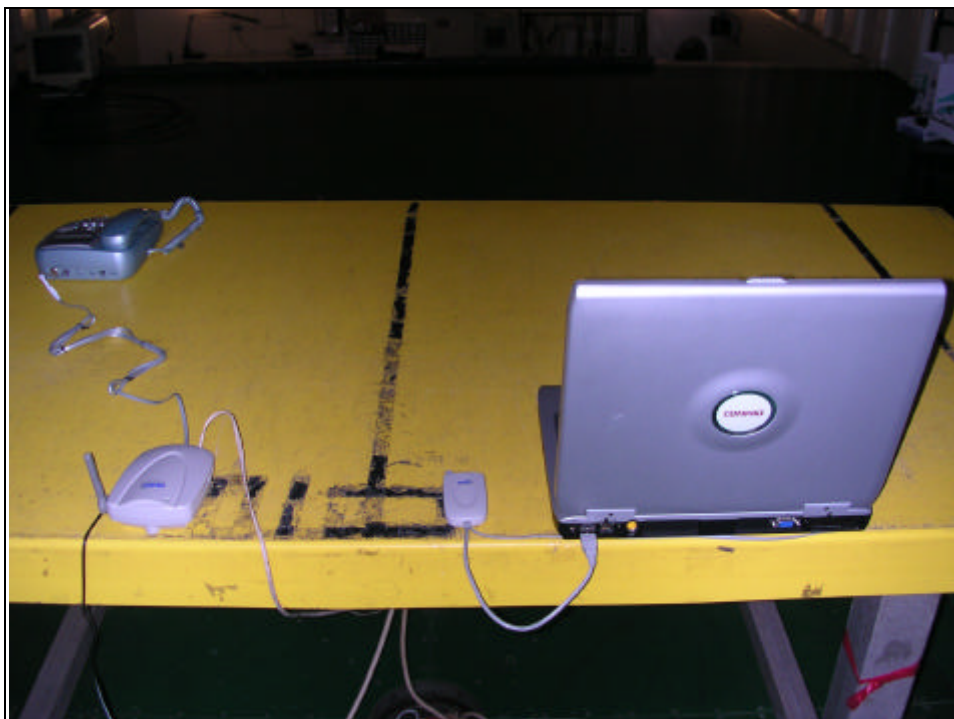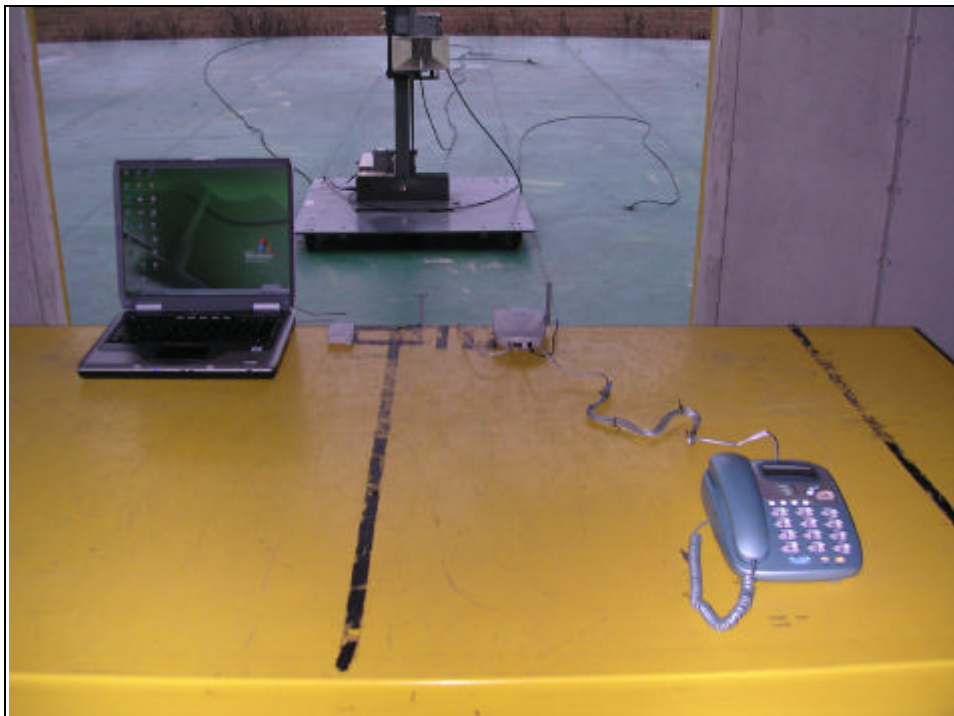

**Spectrum Research
& Testing Lab., Inc.**

No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.:A04123102
Report No.:FCCA04123102-01
Page:45 of 45
Date:Feb. 04, 2005

12. TERMS OF ABRIVATION

AV.	Average detection
AZ(°)	Turn table azimuth
Correct.	Correction
EL(m)	Antenna height (meter)
EUT	Equipment Under Test
Horiz.	Horizontal direction
LISN	Line Impedance Stabilization Network
NSA	Normalized Site Attenuation
Q.P.	Quasi-peak detection
SRT Lab	Spectrum Research & Testing Laboratory, Inc.
Vert.	Vertical direction