

TEST REPORT

Applicant Name: YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD.
Address: No.666 Hu'an Rd. Huli District Xiamen City, Fujian, P.R. China
Report Number: 2401T59982E-RF
FCC ID: T2C-CP50
IC: 10741A-CP50

Test Standard (s)

FCC PART 15.247; RSS-GEN ISSUE 5, FEBRUARY 2021 AMENDMENT 2;
RSS-247 ISSUE 3, AUGUST 2023

Sample Description

Product Type: Video Conferencing Speakerphone
Model No.: CP50
Multiple Model(s) No.: N/A
Trade Mark: **Yealink**
Date Received: 2024-05-28
Issue Date: 2024-07-15

Test Result:

Pass▲

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Wills Yu

Wills Yu
RF Engineer

Approved By:

Nancy Wang

Nancy Wang
RF Supervisor

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	3
GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
REQUIREMENTS AND TEST PROCEDURES	12
AC LINE CONDUCTED EMISSIONS.....	12
RADIATED EMISSIONS	14
20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH.....	17
CHANNEL SEPARATION TEST	19
QUANTITY OF HOPPING CHANNEL TEST	20
TIME OF OCCUPANCY (DWELL TIME)	21
PEAK OUTPUT POWER MEASUREMENT	22
BAND EDGES.....	23
ANTENNA REQUIREMENT	24
TEST DATA AND RESULTS	25
AC LINE CONDUCTED EMISSIONS.....	25
RADIATED EMISSIONS	28
20 dB EMISSION BANDWIDTH.....	42
CHANNEL SEPARATION.....	46
NUMBER OF HOPPING FREQUENCY	50
TIME OF OCCUPANCY (DWELL TIME)	53
MAXIMUM CONDUCTED OUTPUT POWER	57
100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	61
OBW	64
RF EXPOSURE EVALUATION	68
EUT PHOTOGRAPHS.....	70
TEST SETUP PHOTOGRAPHS	71

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2401T59982E-RF	Original Report	2024-07-15

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

HVIN	CP50
FVIN	CP50
Frequency Range	2402~2480MHz
Transmit Peak Power	11.47dBm
Modulation Technique	Bluetooth: GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Specification[#]	-3.41dBi (provided by the applicant)
Voltage Range	DC 48V from adapter
Sample serial number	2M4C-3 for Radiated Emissions Test and AC Line Conducted Emissions 2M4C-1 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	Model:YLPS480700C Input: AC 100-240V~50/60Hz 1.0A Output: DC 48.0V, 0.7A 33.6W

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules and RSS-247 Issue 3, August 2023, RSS-GEN Issue 5, Feb. 2021Amendment 2 of the Innovation, Science and Economic Development Canada rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and RSS-247 Issue 3, August 2023, RSS-GEN Issue 5, Feb. 2021Amendment 2 of the Innovation, Science and Economic Development Canada rules.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF output power, conducted		0.72 dB(k=2, 95% level of confidence)
AC Power Lines Conducted Emissions	9kHz-150kHz	3.94dB(k=2, 95% level of confidence)
	150kHz-30MHz	3.84dB(k=2, 95% level of confidence)
Radiated Emissions	9kHz - 30MHz	3.30dB(k=2, 95% level of confidence)
	30MHz~200MHz (Horizontal)	4.48dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	4.55dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	4.85dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.05dB(k=2, 95% level of confidence)
	1GHz - 6GHz	5.35dB(k=2, 95% level of confidence)
	6GHz - 18GHz	5.44dB(k=2, 95% level of confidence)
	18GHz - 40GHz	5.16dB(k=2, 95% level of confidence)
Temperature		±1°C
Humidity		±1%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0023.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	40	2442
1	2403	41	2443
2	2404	42	2444
...	...	...	...
...	...	...	...
36	2438	75	2477
37	2439	76	2478
38	2440	77	2479
39	2441	78	2480

EUT was tested with Channel 0, 39 and 78.

EUT Exercise Software

Exercise Software [#]	Authentication Tool.exe
Power Level [#]	default

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
YEALINK	Video Conferencing Speakerphone	CPE40	unknown
YEALINK	Video Conferencing Speakerphone	CPE40	unknown
YEALINK	Video Conferencing Speakerphone	CPE40	unknown
YEALINK	Video Conferencing Endpoint	Meeting Eye 500	803614E110000069
Grandstream	IP Phone	GXV3480	T11223323B898
AOC	Monitor	24B1	QVGP3HA038953
DELL	PC	DESKTOP-PL23U4T	JG3NLV1
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	146520


Cable Description	Length (m)	From Port	To
Un-shielding Un-Detachable DC Cable	2	EUT	Adapter
Un-shielding Detachable AC Cable	1.5	LINS	Adapter
Un-shielding Detachable AC Cable	1.5	Receptacle	Adapter
Un-shielding Detachable AC Cable	2	CMW500	AC Mains
Unshielded Detachable RJ45 cable	10	EUT	CPE40
Unshielded Detachable RJ45 cable	1	CPE40	CPE40
Unshielded Detachable RJ45 cable	1	CPE40	CPE40
Unshielded Detachable USB cable	3	EUT	PC
Unshielded Detachable RJ45 cable	10	EUT	Meeting Eye 500
Unshielded Detachable RJ45 cable	1	IP phone	Meeting Eye 500
Unshielded Detachable RJ45 cable	1	Monitor	Meeting Eye 500

The diagram illustrates the experimental setup. A large rectangular area represents the 'Non-Conductive Table 80 cm above Ground Plane', which is 1.5 Meters wide and 1.0 Meter high. On the table, three components are positioned horizontally: 'Adapter', 'EUT', and 'antenna'. The distance between 'Adapter' and 'EUT' is 10cm, and the distance between 'EUT' and 'antenna' is 10cm. To the left of the table, there are three vertical stacks of equipment: 'LISN' connected to 'AC Mains', 'CMW500' connected to 'AC Mains', and a stack of three 'CPE40' units. A 'PC' is connected to the 'EUT' and the 'Meeting Eye 500'. The 'Meeting Eye 500' is connected to an 'IP Phone' and a 'monitor'. The 'IP Phone' is also connected to the 'antenna'.

For Radiated Emissions below 1GHz:

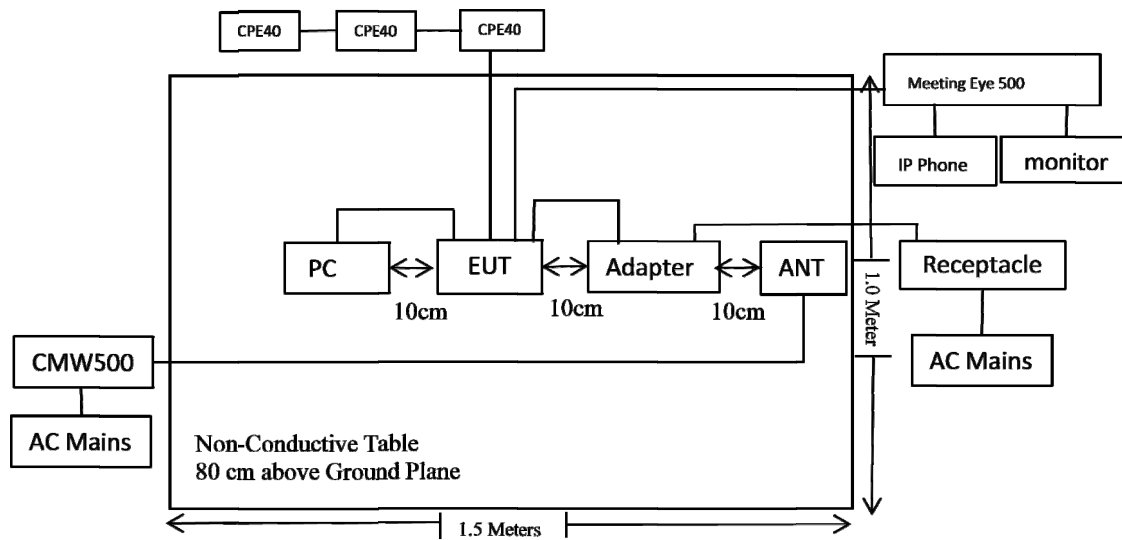

For Radiated Emissions above 1GHz:

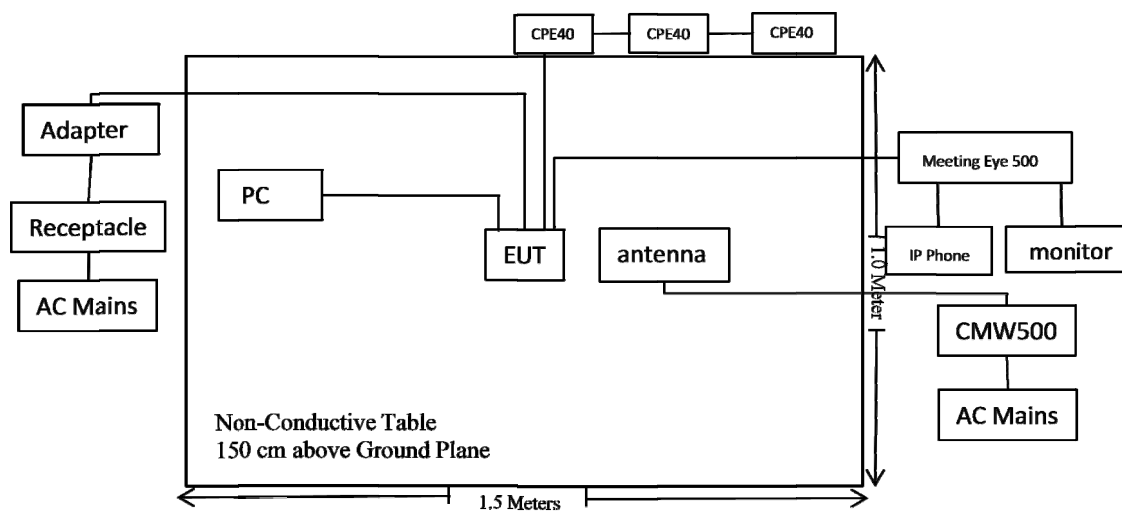

SUMMARY OF TEST RESULTS

FCC Rules	RSS Rules	Description of Test	Result
FCC §15.203	RSS-Gen §6.8	Antenna Requirement	Compliant
FCC §15.207(a)	RSS-Gen §8.8	AC Line Conducted Emissions	Compliant
FCC §15.205, §15.209, §15.247(d)	RSS-247 § 5.5, RSS- GEN § 8.10	Radiated Spurious Emission	Compliant
FCC §15.247(a)(1)	RSS-247 § 5.1(a), RSS-GEN § 6.7	20 dB Emission Bandwidth	Compliant
FCC §15.247(a)(1)	RSS-247 § 5.1 (b)	Channel Separation	Compliant
FCC §15.247(a)(1)(iii)	RSS-247 § 5.1 (d)	Number of Hopping Frequency	Compliant
FCC §15.247(a)(1)(iii)	RSS-247 § 5.1 (d)	Time of Occupancy (dwell time)	Compliant
FCC §15.247(b)(1)	RSS-247 § 5.1 (d)	Maximum Conducted Output Power	Compliant
FCC §15.247(d)	RSS-247 § 5.1(a)& § 5.5	100 kHz Bandwidth of Frequency Band Edge	Compliant
FCC §1.1307&§2.1093&§15.247 (i)	RSS-102 § 2.5.2	RF Exposure	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emission Test					
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2023/08/03	2024/08/02
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/01/16	2025/01/15
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
Rohde & Schwarz	LISN	ENV216	101613	2024/01/16	2025/01/15
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2023/08/03	2024/08/02
Radiated Emission Test_ Above 1GHz					
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
Rohde&Schwarz	Spectrum Analyzer	FSV40	101605	2024/03/27	2025/03/26
COM-POWER	Pre-amplifier	PA-122	181919	2024/06/18	2025/06/17
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2026/07/25
Unknown	RF Cable	KMSE	0735	2023/10/08	2024/10/08
Unknown	RF Cable	XH750A-N	J-10M	2023/10/08	2024/10/07
JD	Multiplex Switch Test Control Set	DT7220FSU	DQ77926	NCR	NCR
A.H.System	Pre-amplifier	PAM-1840VH	190	2023/08/02	2024/08/01
Electro-Mechanics Co	Horn Antenna	3116	2026	2023/09/18	2026/09/17
UTIFLEX	RF Cable	NO. 13	232308-001	2023/08/03	2024/08/02
Radiated Emission Test_ Below 1GHz					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2024/01/16	2025/01/15
Sonoma instrument	Pre-amplifier	310N	186238	2024/05/21	2025/05/20
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Cable	Chamber Cable 1	F-03-EM236	2024/05/21	2025/05/20
Unknown	Cable	XH500C	J-10M-A	2024/05/21	2025/05/20
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13
Unknown	6dB Attenuator	Unknown	F-03-EM236-2	2023/07/20	2026/07/19
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde&Schwarz	Wideband Radio Communication Tester	CMW500	141718	2023/09/06	2024/09/05
Rohde & Schwarz	Spectrum Analyzer	FSU26	200120	2024/01/08	2025/01/07
Unknown	3dB Attenuator	Unknown	F-03-EM121	2023/07/04	2024/07/03
WEINSCHTEL	Power Splitter	1515	RH476	2023/07/04	2024/07/03
Unknown	RF Cable	UFA147	219661	2023/10/08	2024/10/07

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).


REQUIREMENTS AND TEST PROCEDURES

AC Line Conducted Emissions

Applicable Standard

FCC §15.207(a), RSS-GEN § 8.8

EUT Setup

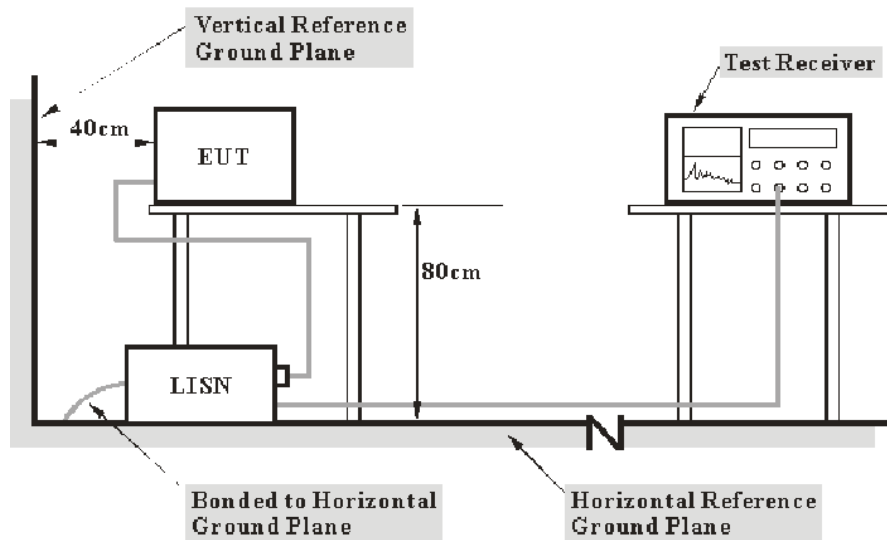

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207 & RSS-Gen.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).


Radiated Emissions

Applicable Standard


FCC §15.205; §15.209; §15.247(d); RSS-247§ 5.5; RSS-GEN § 8.10


EUT Setup

9 kHz-30MHz:

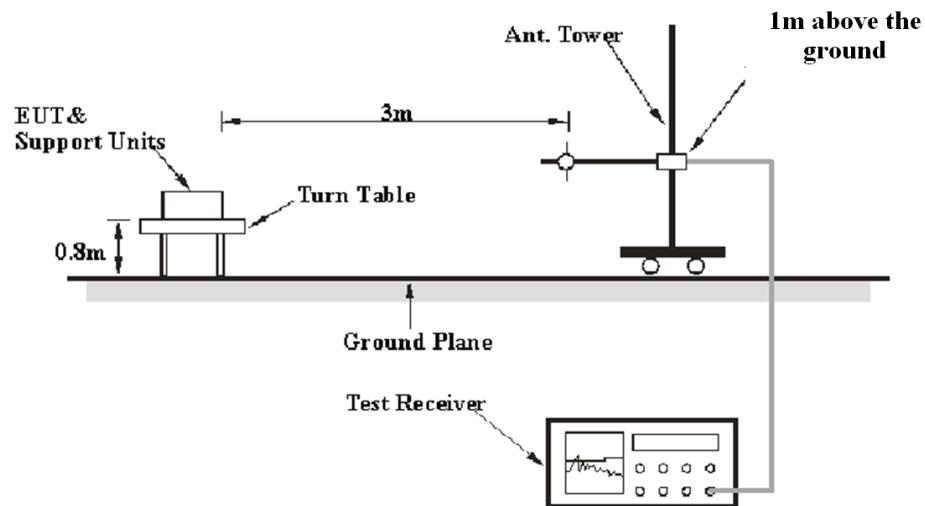

30MHz-1GHz:

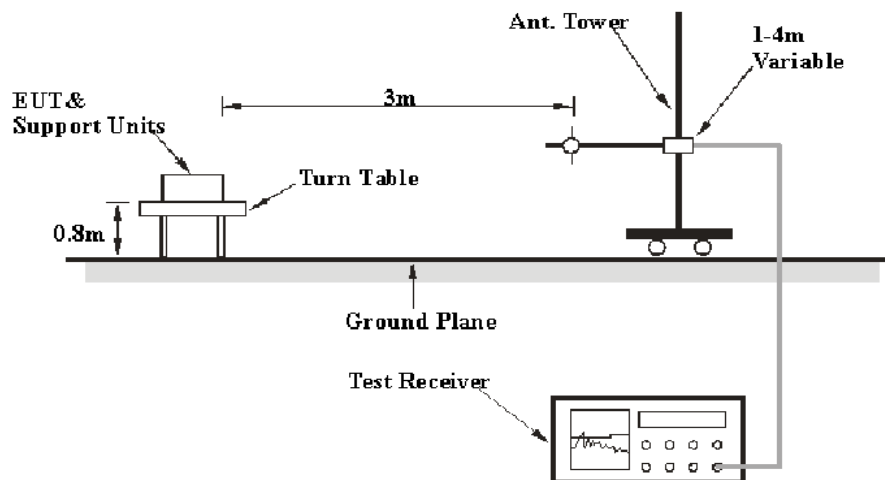

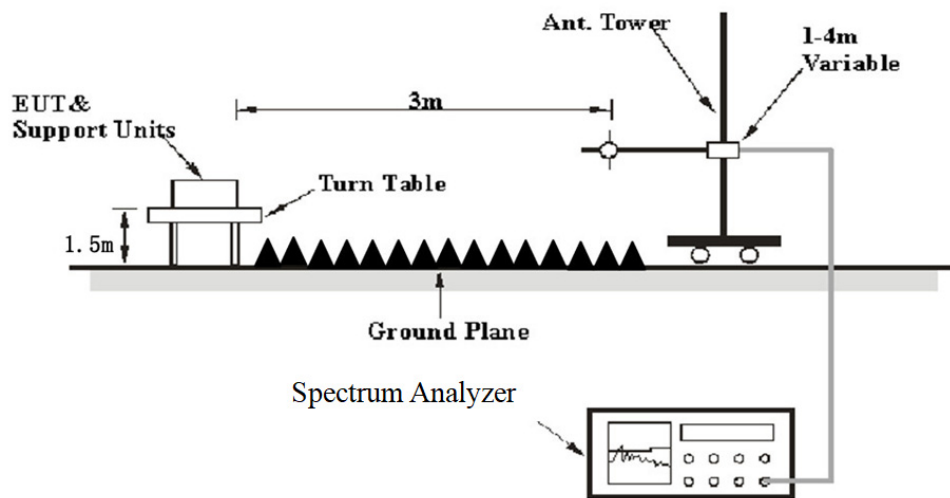Above 1GHz:

The radiated emission performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, FCC 15.247, RSS-247, RSS-Gen limits.

EMI Test Receiver & Spectrum Analyzer Setup

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	/	/	200 Hz	QP
	300 Hz	1 kHz	/	PK
150 kHz – 30 MHz	/	/	9 kHz	QP
	10 kHz	30 kHz	/	PK
30 MHz – 1000 MHz	/	/	120 kHz	QP
	100 kHz	300 kHz	/	PK
Above 1 GHz	Harmonics & Band Edge			
	1MHz	3 MHz	/	PK
	Average Emission Level=Peak Emission Level+20*log(Duty cycle)			
	Other Emissions			
	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Average

For Duty cycle measurement:

Use the duty cycle factor correction factor method per 15.35(c).

Duty cycle=On time/100milliseconds, On time= $N_1 \cdot L_1 + N_2 \cdot L_2 + \dots + N_{n-1} \cdot L_{n-1} + N_n \cdot L_n$,

Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulse, etc.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

All emissions under the average limit and under the noise floor have not recorded in the report.

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit/Margin} &= \text{Level/Corrected Amplitude} - \text{Limit} \\ \text{Level / Corrected Amplitude} &= \text{Read Level} + \text{Factor}\end{aligned}$$

20 dB Emission Bandwidth & 99% Occupied Bandwidth

According to FCC §15.247(a) (1):

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

According to RSS-247 § 5.1 (a), RSS-GEN § 6.7:

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “20 dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated 20 dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

Test Procedure


Test Method: ANSI C63.10-2013 Clause 7.8.7 & Clause 6.9.2

The following conditions shall be observed for measuring the occupied bandwidth and 20 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 20 dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 20 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

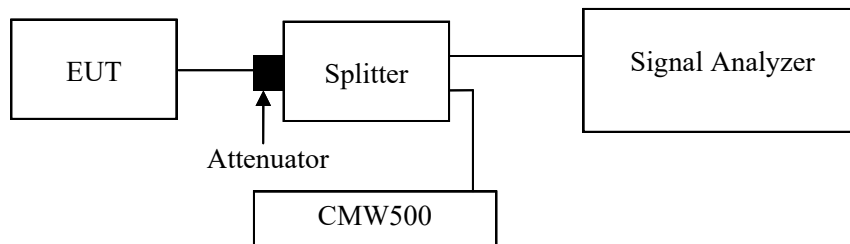

Channel Separation Test

According to FCC §15.247(a) (1):

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


According to RSS-247 § 5.1 (b):

Frequency hopping systems (FHSs) shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the -20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the -20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.2

1. Set the EUT in transmitting mode, max hold the channel.
2. Set the adjacent channel of the EUT and max hold another trace.
3. Measure the channel separation.

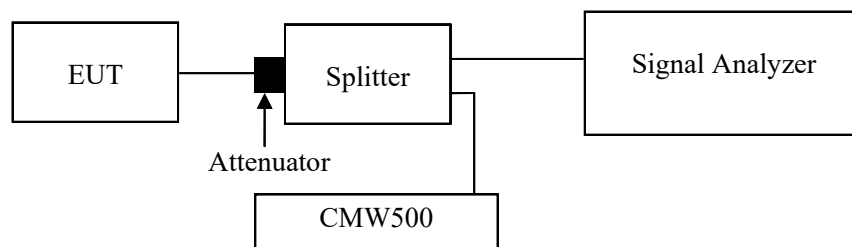

Quantity of Hopping Channel Test

Applicable Standard

According to FCC §15.247(a) (1) (iii):

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.


According to RSS-247 § 5.1 (d):

Frequency hopping systems (FHSS) operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that at least 15 hopping channels are used.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.3

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

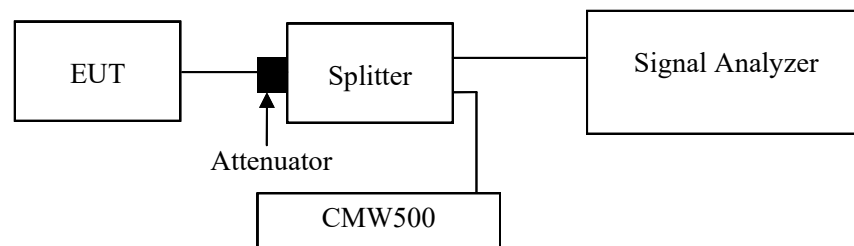

Time of Occupancy (Dwell Time)

Applicable Standard

According to FCC §15.247(a) (1) (iii):

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.


According to RSS-247 § 5.1 (d):

Frequency hopping systems (FHSs) operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that at least 15 hopping channels are used.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.4

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

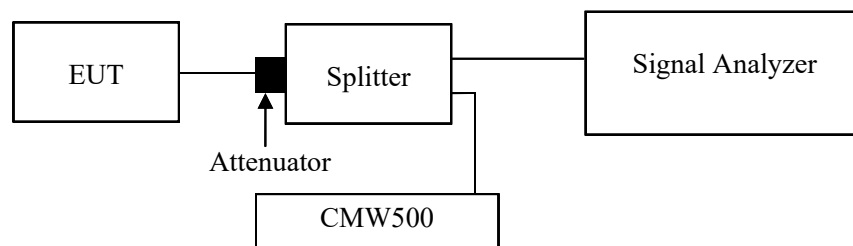

Peak Output Power Measurement

Applicable Standard

According to FCC §15.247(b) (1):

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

According to RSS-247§ 5.1(b) & § 5.4(b):


For frequency hopping systems (FHSs) operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W (see Section 5.4(e) for exceptions).

Frequency hopping systems (FHSs) shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the -20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the -20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.5

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

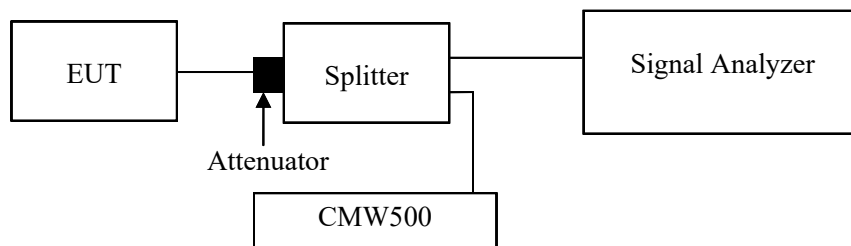

Band Edges

Applicable Standard

According to FCC §15.247(d).

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


According to RSS-247 § 5.5.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(e), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.6 & Clause 6.10

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

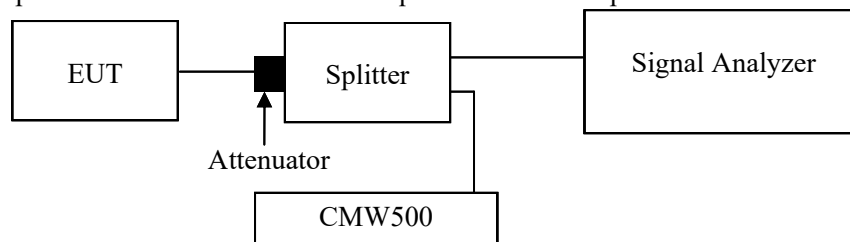

ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

According to FCC § 15.203, the applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer. The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device. Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Connector Construction

The EUT has an internal antenna arrangement, which was permanently attached, the antenna gain[#] is -3.41dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant

TEST DATA AND RESULTS

AC Line Conducted Emissions


Environmental Conditions

Temperature (°C)	26	Relative Humidity (%)	73
ATM Pressure (kPa)	101	Test engineer	Macy.shi
Test date	2024.6.17		
EUT operation mode	Transmitting(Maximum output power mode, EDR (8DPSK) Low Channel)		

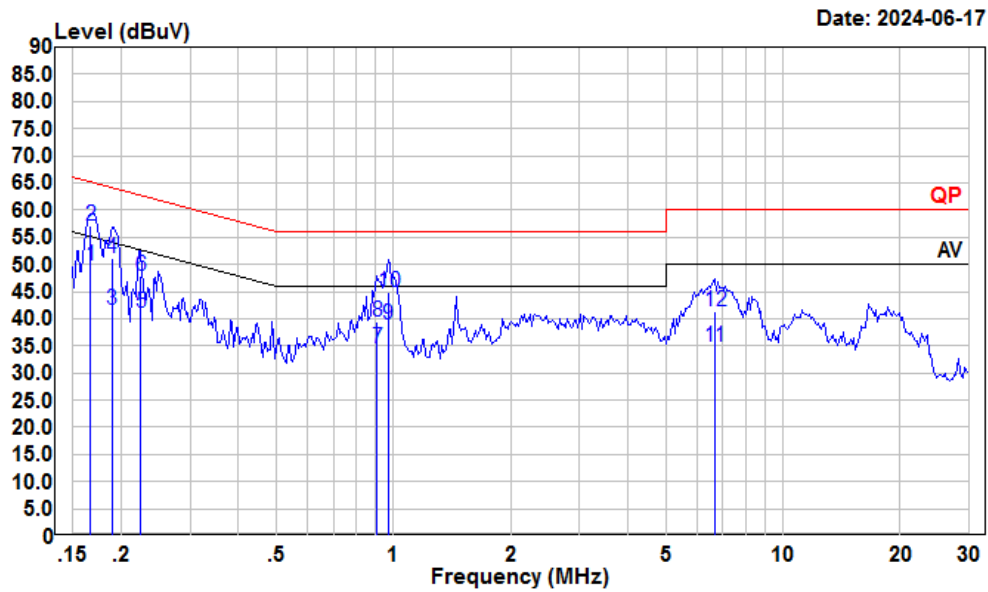

Condition: Line
 Project : 2401T59982E-RF
 tester : Macy.shi
 Note : BT

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.17	29.32	49.82	10.40	10.10	55.12	-5.30	Average
2	0.17	36.67	57.17	10.40	10.10	65.12	-7.95	QP
3	0.19	21.22	41.71	10.40	10.09	54.06	-12.35	Average
4	0.19	30.62	51.11	10.40	10.09	64.06	-12.95	QP
5	0.22	20.48	40.94	10.37	10.09	52.66	-11.72	Average
6	0.22	27.34	47.80	10.37	10.09	62.66	-14.86	QP
7	0.91	13.98	34.63	10.55	10.10	46.00	-11.37	Average
8	0.91	18.68	39.33	10.55	10.10	56.00	-16.67	QP
9	0.97	18.19	38.88	10.58	10.11	46.00	-7.12	Average
10	0.97	24.22	44.91	10.58	10.11	56.00	-11.09	QP
11	6.66	14.03	34.80	10.58	10.19	50.00	-15.20	Average
12	6.66	20.66	41.43	10.58	10.19	60.00	-18.57	QP

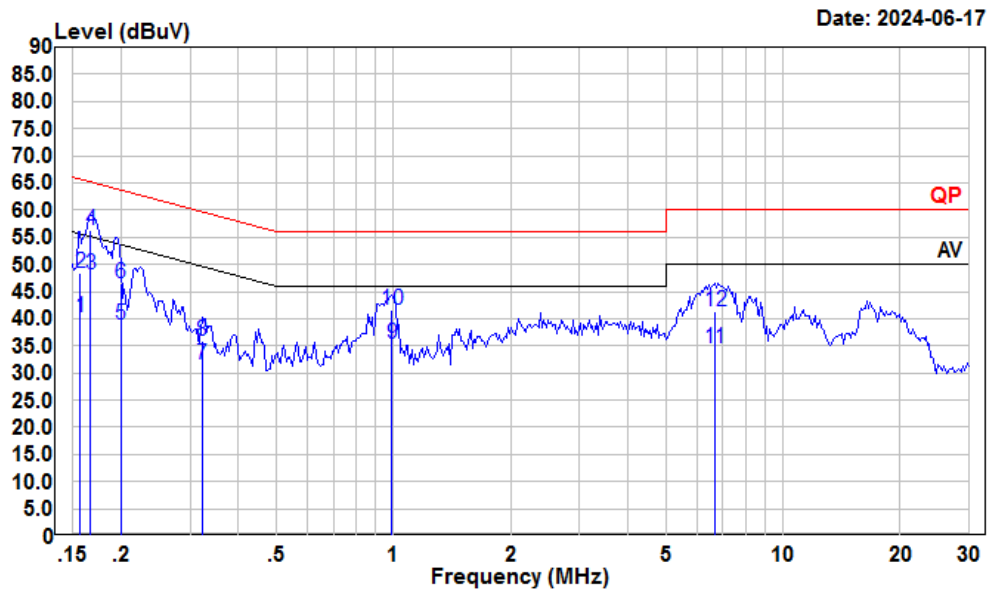

Condition: Neutral

Project : 2401T59982E-RF

tester : Macy.shi


Note : BT

		Read		LISN	Cable	Limit	Over	
	Freq	Level	Level	Factor	Loss	Line	Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.16	19.91	40.29	10.26	10.12	55.65	-15.36	Average
2	0.16	28.11	48.49	10.26	10.12	65.65	-17.16	QP
3	0.17	27.63	48.08	10.35	10.10	55.12	-7.04	Average
4	0.17	35.85	56.30	10.35	10.10	65.12	-8.82	QP
5	0.20	18.25	38.94	10.60	10.09	53.62	-14.68	Average
6	0.20	25.71	46.40	10.60	10.09	63.62	-17.22	QP
7	0.32	10.78	31.59	10.70	10.11	49.66	-18.07	Average
8	0.32	15.08	35.89	10.70	10.11	59.66	-23.77	QP
9	0.99	15.01	35.43	10.31	10.11	46.00	-10.57	Average
10	0.99	21.22	41.64	10.31	10.11	56.00	-14.36	QP
11	6.66	13.93	34.52	10.40	10.19	50.00	-15.48	Average
12	6.66	20.69	41.28	10.40	10.19	60.00	-18.72	QP

Radiated Emissions**Environmental Conditions**


Temperature (°C)	25.6-26	Relative Humidity (%)	50-56
ATM Pressure (kPa):	101	Test engineer:	Jack Liu & Sadow Tan
Test date:	Below 1GHz: 2024.06.25 Above 1GHz: 2024.06.29		
EUT operation mode:	Below 1GHz: Transmitting(Maximum output power mode, 8DPSK Low Channel) Above 1GHz: Transmitting(Maximum output power mode, 8DPSK)		
Note:	For the radiated spurious emission below 30MHz, the emissions are 20dB below the limit or the noise floor which are not recorded.		

Below 1GHz:

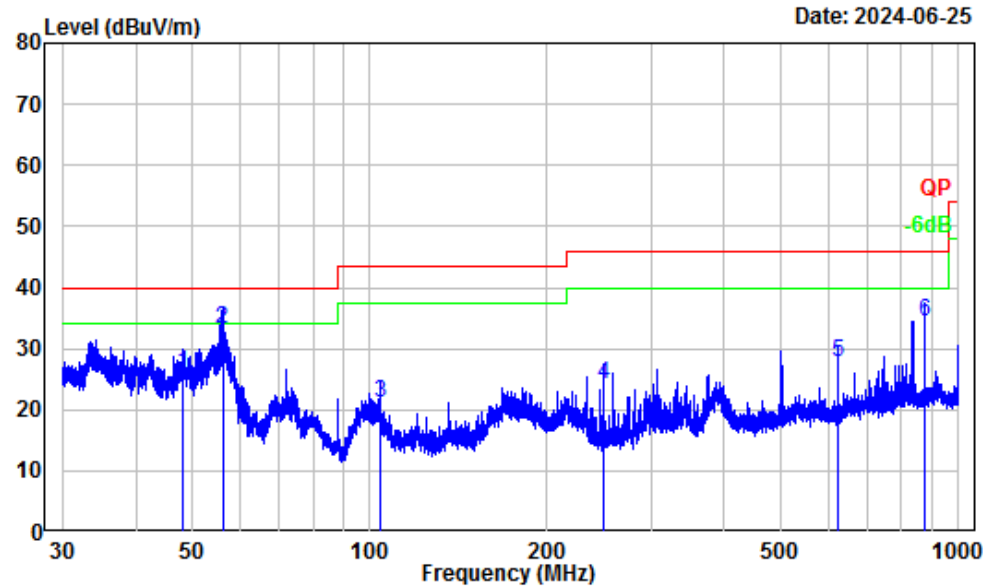

Site : Chamber A
Condition : 3m Vertical
Project Number: 2401T59982E-RF
Test Mode : BT
Tester : Jack Liu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	48.06	-17.54	43.43	25.89	40.00	-14.11	QP
2	56.15	-18.76	51.89	33.13	40.00	-6.87	QP
3	104.12	-15.84	37.08	21.24	43.50	-22.26	QP
4	249.97	-14.93	39.21	24.28	46.00	-21.72	QP
5	625.08	-7.68	35.38	27.70	46.00	-18.30	QP
6	875.25	-4.98	39.38	34.40	46.00	-11.60	QP

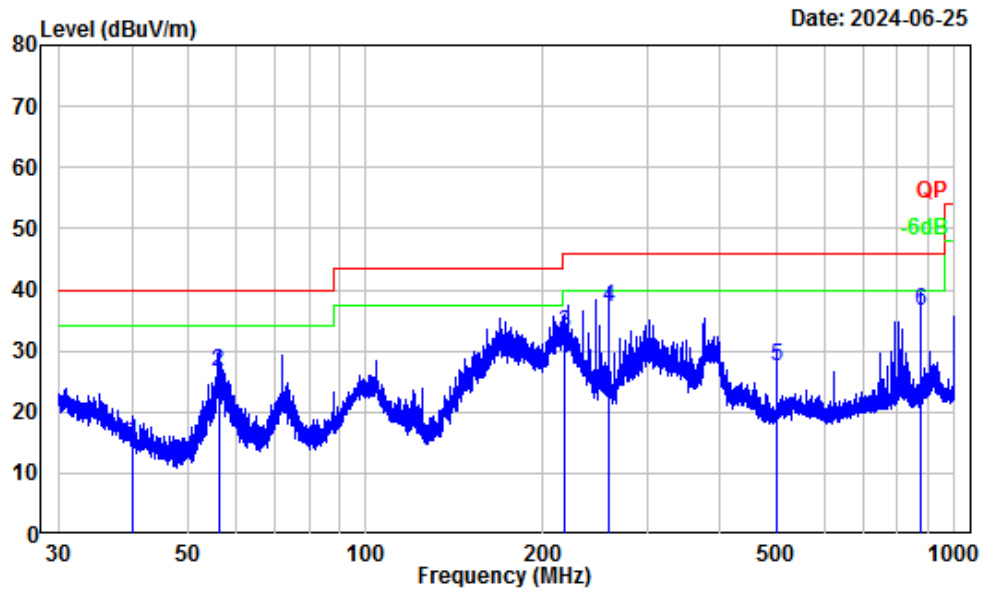

Site : Chamber A
 Condition : 3m Horizontal
 Project Number: 2401T59982E-RF
 Test Mode : BT
 Tester : Jack Liu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	40.05	-11.55	26.74	15.19	40.00	-24.81	QP
2	56.15	-17.78	44.22	26.44	40.00	-13.56	QP
3	216.97	-13.84	46.76	32.92	46.00	-13.08	QP
4	258.10	-14.25	51.50	37.25	46.00	-8.75	QP
5	500.08	-8.27	35.62	27.35	46.00	-18.65	QP
6	875.25	-4.63	41.20	36.57	46.00	-9.43	QP

Above 1GHz:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
EDR Mode (8DPSK)							
Low Channel 2402MHz							
2374.31	55.32	PK	H	-2.93	52.39	74	-21.61
2377.32	54.7	PK	V	-2.93	51.77	74	-22.23
4804	46.09	PK	H	1.69	47.78	74	-26.22
4804	45.95	PK	V	1.69	47.64	74	-26.36
Middle Channel 2441MHz							
4882	45.87	PK	H	1.69	47.56	74	-26.44
4882	46.51	PK	V	1.69	48.2	74	-25.80
High Channel 2480MEHz							
2483.78	59.64	PK	H	-3.17	56.47	74	-17.53
2484.03	58.47	PK	V	-3.17	55.3	74	-18.70
4960	45.88	PK	H	2.77	48.65	74	-25.35
4960	46.6	PK	V	2.77	49.37	74	-24.63

Note:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Factor + Reading

Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.


Field Strength of Average							
Frequency (MHz)	Peak Measurement @3m (dBμV/m)	Polar (H/V)	Duty Cycle Correction Factor (dB)	Average Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Comment
Low Channel							
2374.31	52.39	H	-24.73	27.66	54	-26.34	Bandedge
2377.32	51.77	V	-24.73	27.04	54	-26.96	Bandedge
4804	47.78	H	-24.73	23.05	54	-30.95	Harmonic
4804	47.64	V	-24.73	22.91	54	-31.09	Harmonic
Middle Channel							
4882	47.56	H	-24.73	22.83	54	-31.17	Harmonic
4882	48.2	V	-24.73	23.47	54	-30.53	Harmonic
High Channel							
2483.78	56.47	H	-24.73	31.74	54	-22.26	Bandedge
2484.03	55.3	V	-24.73	30.57	54	-23.43	Bandedge
4960	48.65	H	-24.73	23.92	54	-30.08	Harmonic
4960	49.37	V	-24.73	24.64	54	-29.36	Harmonic

Note: Average level= Peak level + Duty Cycle Corrected Factor


Worst case duty cycle:

Duty cycle = Ton/100ms = 2.899*2/100=0.05798

Duty Cycle Corrected Factor = 20lg (Duty cycle) = 20lg0.05798 = -24.73

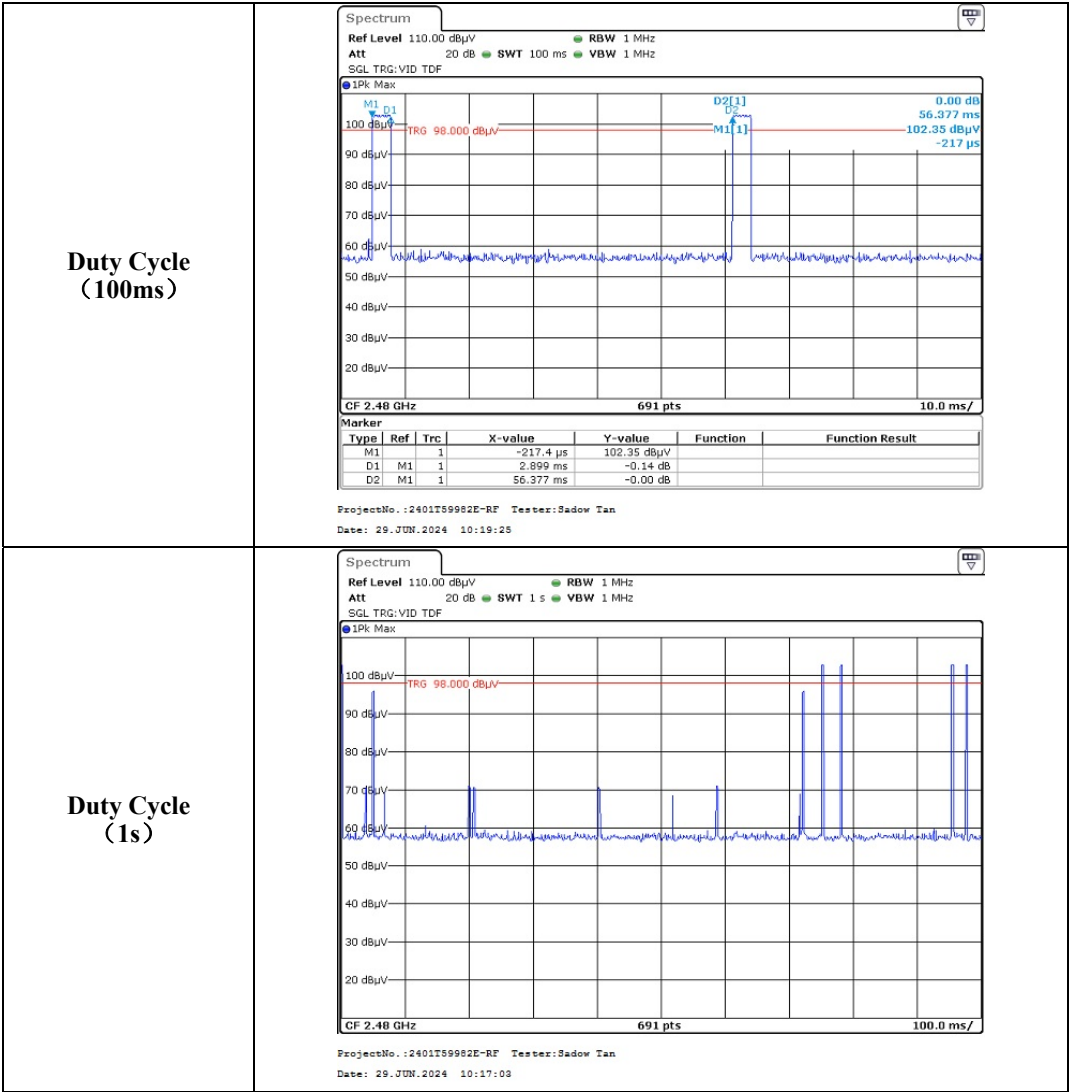


Test plots

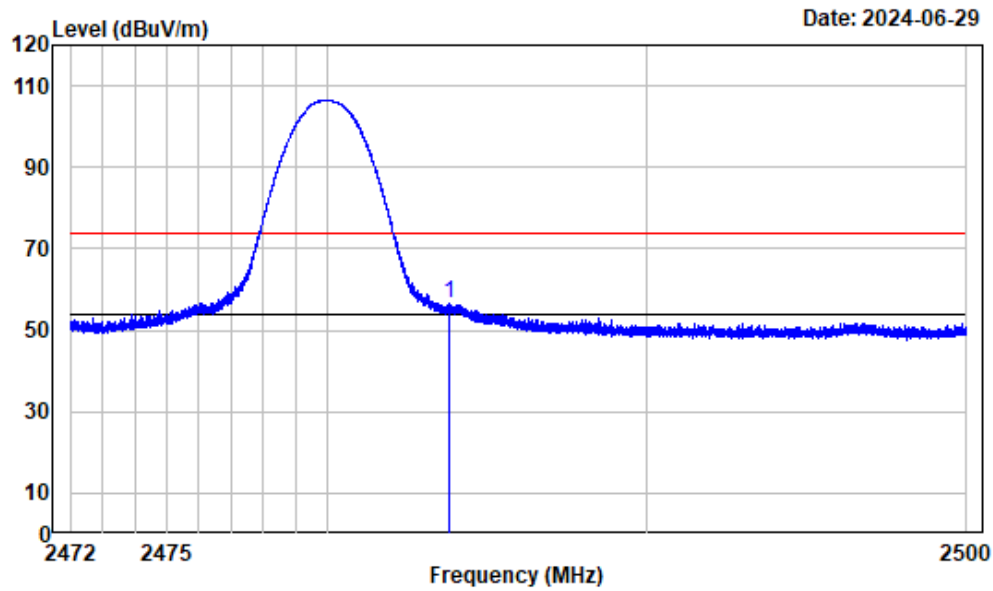


Condition : Horizontal
Project No.: 2401T59982E-RF
Tester : Sadow Tan
Note : BT_2480

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.784	-3.17	59.64	56.47	74.00	-17.53	peak

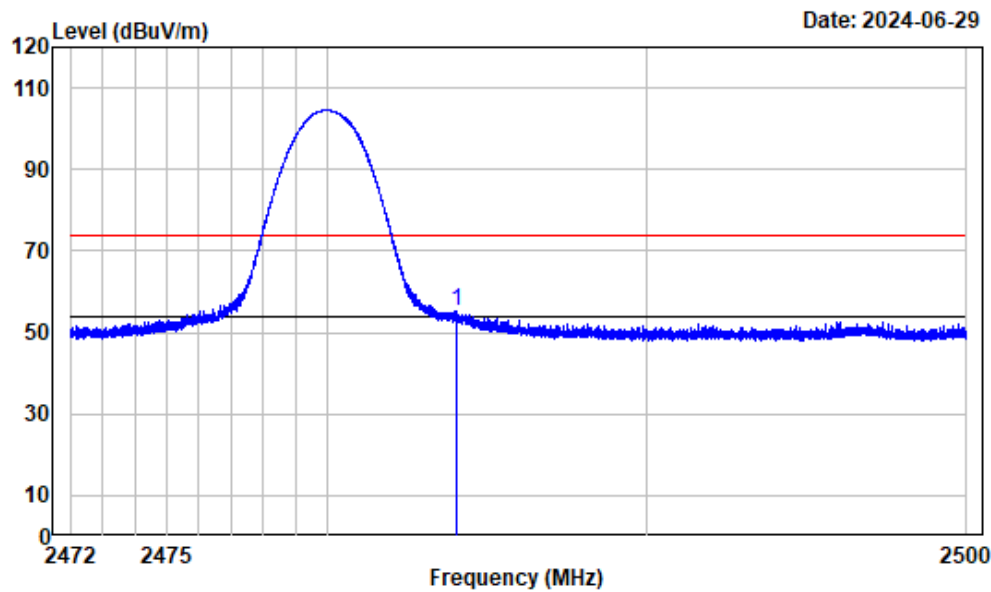


Condition : Vertical
Project No.: 2401T59982E-RF
Tester : Sadow Tan
Note : BT_2480

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2484.026	-3.17	58.47	55.30	74.00	-18.70	peak

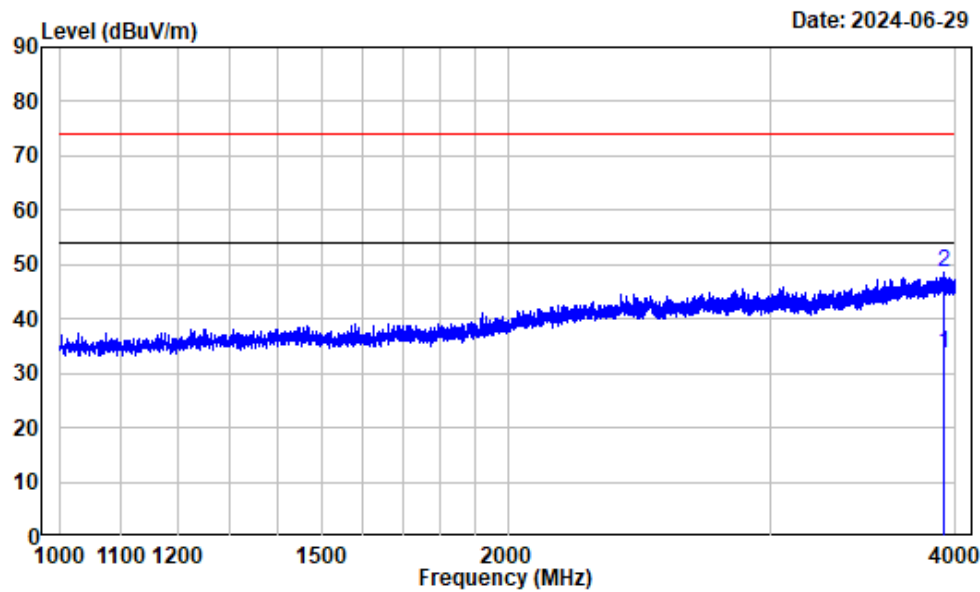


Condition : Horizontal
Project No.: 2401T59982E-RF
Tester : Sadow Tan
Note : BT_2480

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3932.125	-0.30	33.76	33.46	54.00	-20.54	Average
2	3932.125	-0.30	48.83	48.53	74.00	-25.47	Peak

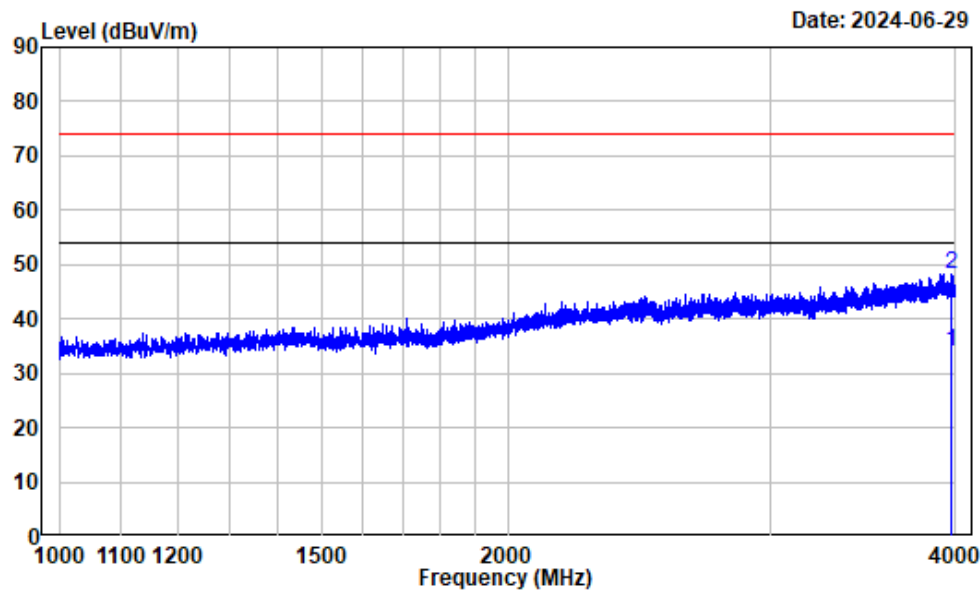


Condition : Vertical
Project No.: 2401T59982E-RF
Tester : Sadow Tan
Note : BT_2480

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3970.375	-0.19	34.19	34.00	54.00	-20.00	Average
2	3970.375	-0.19	48.52	48.33	74.00	-25.67	Peak

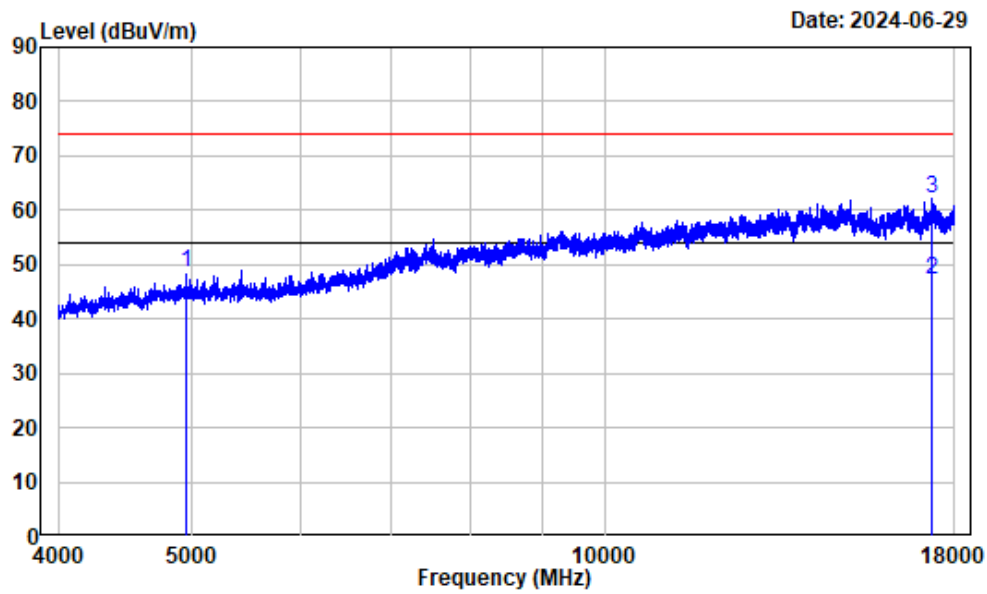


Condition : Horizontal
Project No.: 2401T59982E-RF
Tester : Sadow Tan
Note : BT_2480

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4960.000	2.77	45.88	48.65	74.00	-25.35	Peak
2	17342.000	19.56	27.53	47.09	54.00	-6.91	Average
3	17342.000	19.56	42.51	62.07	74.00	-11.93	Peak

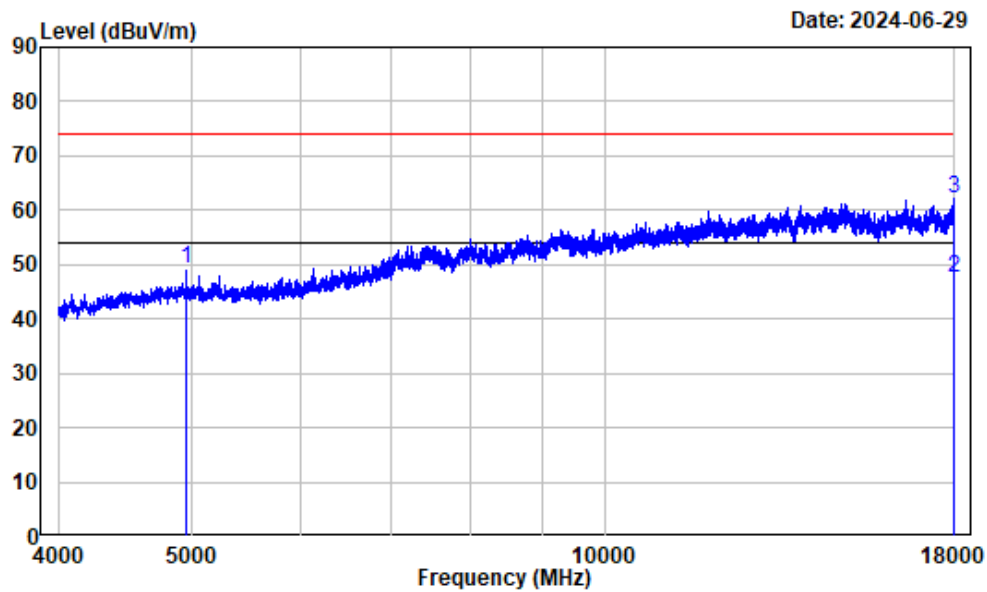


Condition : Vertical
Project No.: 2401T59982E-RF
Tester : Sadow Tan
Note : BT_2480

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4960.000	2.77	46.60	49.37	74.00	-24.63	Peak
2	17998.250	24.61	22.87	47.48	54.00	-6.52	Average
3	17998.250	24.61	37.56	62.17	74.00	-11.83	Peak

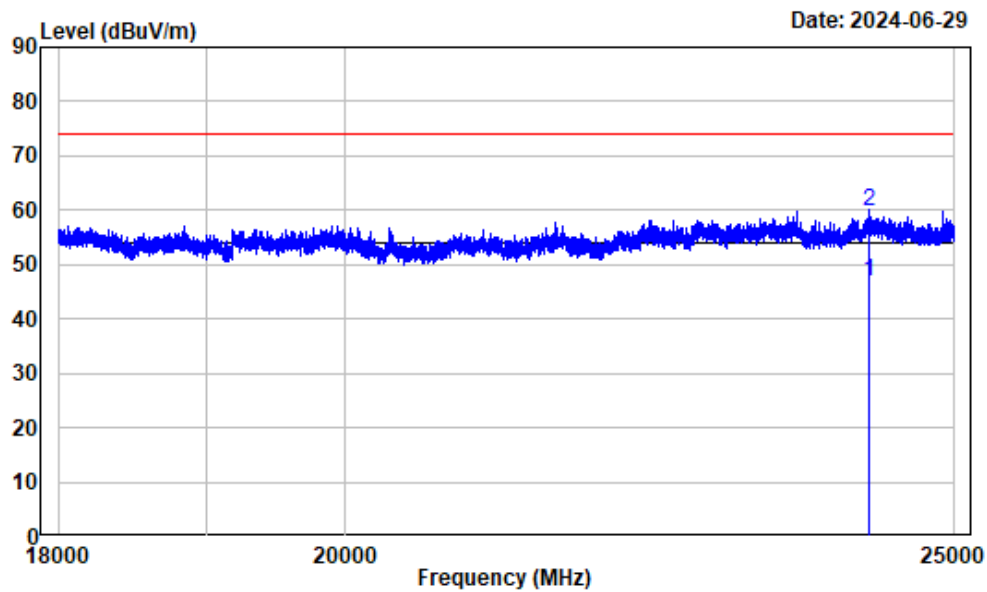

Condition : Horizontal
Project No.: 2401T59982E-RF
Tester : Sadow Tan
Note : BT_2480

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	24223.000	18.34	28.54	46.88	54.00	-7.12	Average
2	24223.000	18.34	41.58	59.92	74.00	-14.08	peak

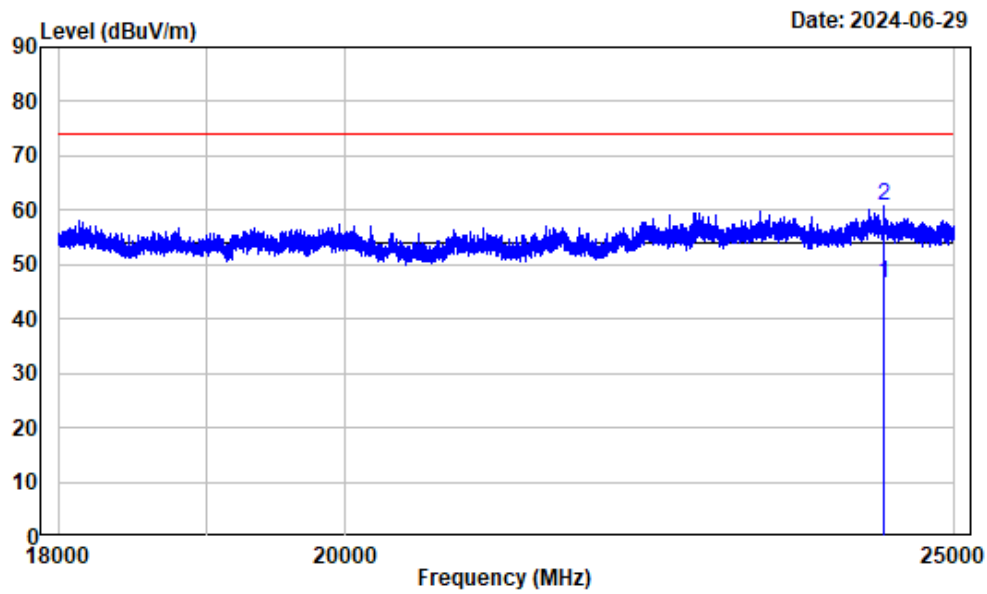

Condition : Vertical
Project No.: 2401T59982E-RF
Tester : Sadow Tan
Note : BT_2480

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	24367.380	18.69	27.68	46.37	54.00	-7.63	Average
2	24367.380	18.69	42.12	60.81	74.00	-13.19	peak

20 dB Emission Bandwidth

Test Information:

Serial No.:	2M4C-1	Test Date:	2024/06/17
Test Site:	RF	Test Mode:	Transmitting
Tester:	Cheeb Huang	Test Result:	N/A

Environmental Conditions:

Temperature: (°C):	25.9	Relative Humidity: (%)	57	ATM Pressure: (kPa)	101
-----------------------	------	------------------------------	----	------------------------	-----

BDR


Mode	Value (MHz)
GFSK_Low	0.899
GFSK_Middle	0.903
GFSK_High	0.899

EDR

Mode	Value (MHz)
$\pi/4$ -DQPSK_Low	1.217
$\pi/4$ -DQPSK_Middle	1.221
$\pi/4$ -DQPSK_High	1.232
8DPSK_Low	1.247
8DPSK_Middle	1.243
8DPSK_High	1.243


BDR

GFSK_Low 0.899MHz

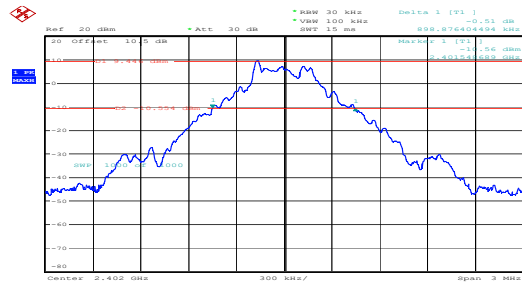

ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17,208,2024 15:59:48


GFSK_Middle 0.903MHz

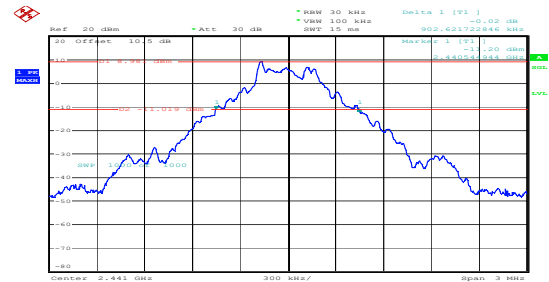

ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17,208,2024 15:01:03


EDR

GFSK_High 0.899MHz

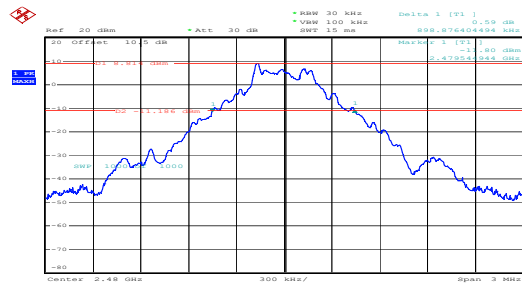


ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17,208,2024 15:01:59

$\pi/4$ -DQPSK_Low 1.217MHz

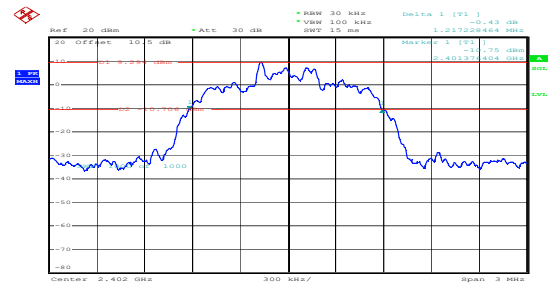


ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17,208,2024 15:00:16

$\pi/4$ -DQPSK_Middle 1.221MHz

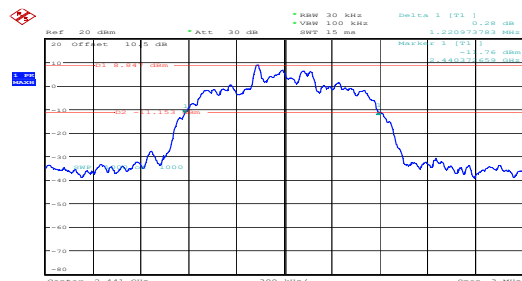


ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17,208,2024 15:04:10

$\pi/4$ -DQPSK_High 1.232MHz

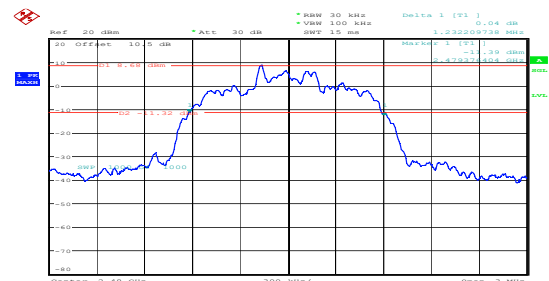


ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17,208,2024 15:04:59

8DPSK_Low 1.247MHz

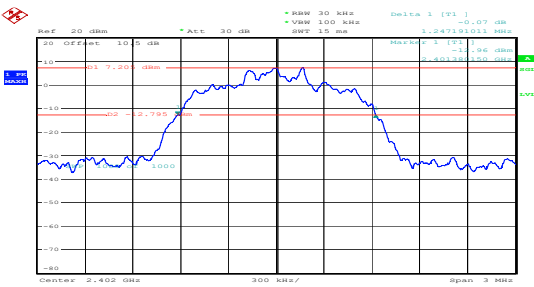


ProjectNo.:2401T59982E-RF Tester:Cheeb Huang
Date: 17.08.2024 15:05:18

8DPSK_Middle 1.243MHz

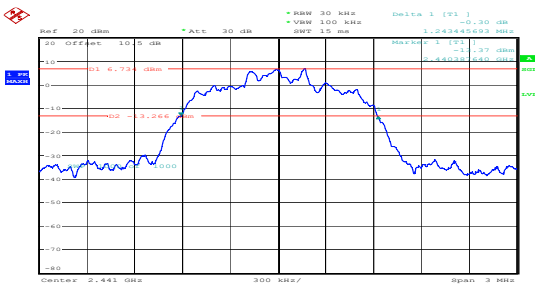

ProjectNo.:2401T59982E-RF Tester:Cheeb Huang
Date: 17.08.2024 15:06:18

8DPSK_High 1.243MHz

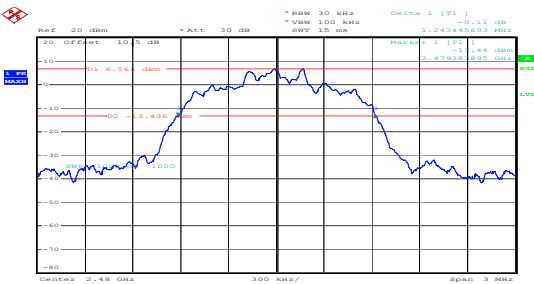

ProjectNo.:2401T59982E-RF Tester:Cheeb Huang
Date: 17.08.2024 15:07:39

Channel Separation

Test Information:

Serial No.:	2M4C-1	Test Date:	2024/06/17
Test Site:	RF	Test Mode:	Transmitting
Tester:	Cheeb Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C):	25.9	Relative Humidity: (%)	57	ATM Pressure: (kPa)	101
-----------------------	------	------------------------------	----	------------------------	-----

BDR


Mode	Value (MHz)	Limit (MHz)	Result
GFSK_Low	1.004	0.599	Pass
GFSK_Middle	1.004	0.602	Pass
GFSK_High	0.996	0.599	Pass

EDR

Mode	Value (MHz)	Limit (MHz)	Result
$\pi/4$ -DQPSK_Low	1.007	0.811	Pass
$\pi/4$ -DQPSK_Middle	1.004	0.814	Pass
$\pi/4$ -DQPSK_High	0.996	0.821	Pass
8DPSK_Low	1.007	0.831	Pass
8DPSK_Middle	1.007	0.829	Pass
8DPSK_High	1.000	0.829	Pass


BDR

GFSK_Low 1.004MHz

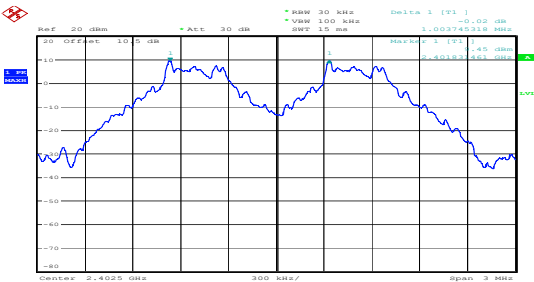

ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17.008.2024 15:09:09


GFSK_Middle 1.004MHz

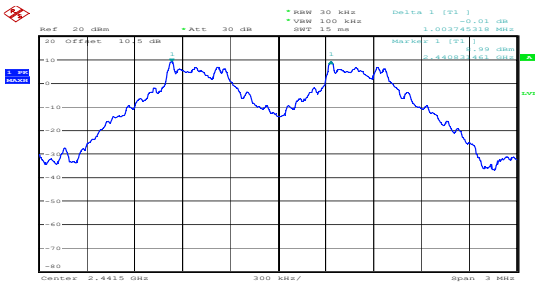

ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17.008.2024 15:10:07


EDR

GFSK_High 0.996MHz

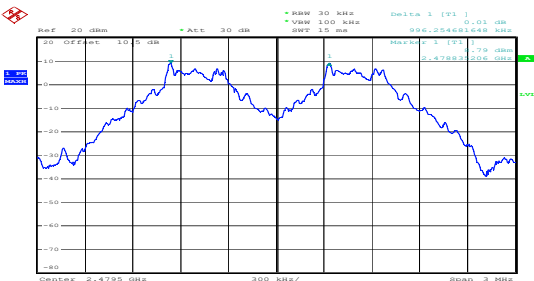


ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17.008.2024 15:10:41

$\pi/4$ -DQPSK_Low 1.007MHz

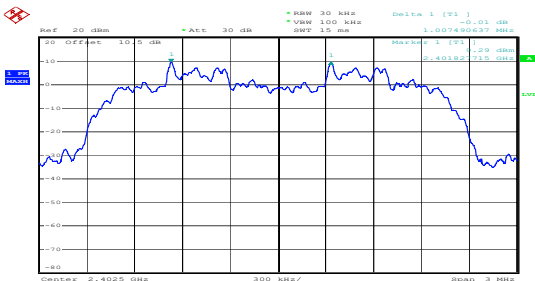


ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17.008.2024 15:10:41

$\pi/4$ -DQPSK_Middle 1.004MHz

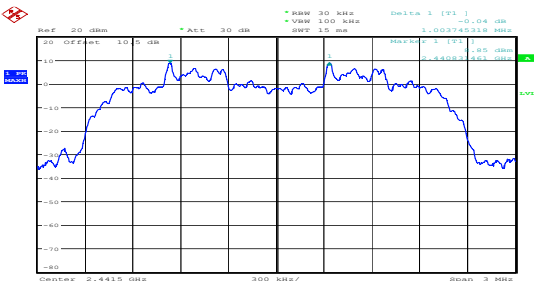


ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17.008.2024 15:12:30

$\pi/4$ -DQPSK_High 0.996MHz

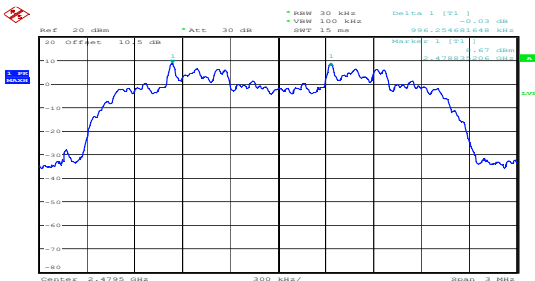


ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17.008.2024 15:13:23

8DPSK_Low 1.007MHz

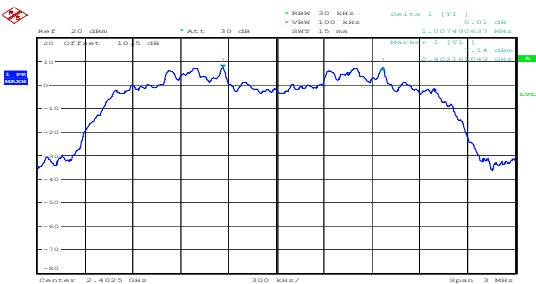


ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17.08.2024 15:14:09

8DPSK_Middle 1.007MHz

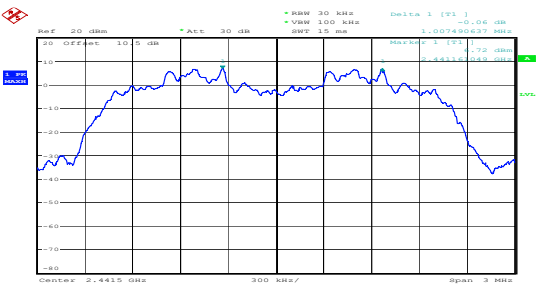

ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17.08.2024 15:14:17

8DPSK_High 1.000MHz

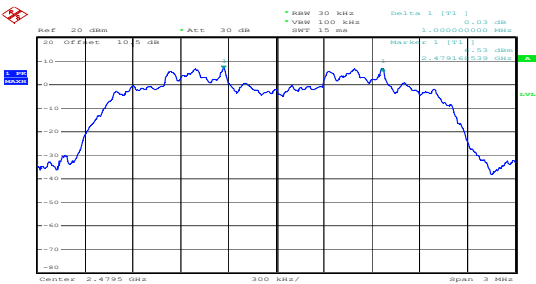

ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17.08.2024 15:15:11

Number of Hopping Frequency

Test Information:

Serial No.:	2M4C-1	Test Date:	2024/06/17
Test Site:	RF	Test Mode:	Transmitting
Tester:	Cheeb Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C):	25.9	Relative Humidity: (%)	57	ATM Pressure: (kPa)	101
-----------------------	------	------------------------------	----	------------------------	-----

BDR


Mode	Value	Limit	Result
GFSK_Hopping	79	15	Pass

EDR

Mode	Value	Limit	Result
$\pi/4$ -DQPSK_Hopping	79	15	Pass
8DPSK_Hopping	79	15	Pass

BDR


GFSK_Hopping 79

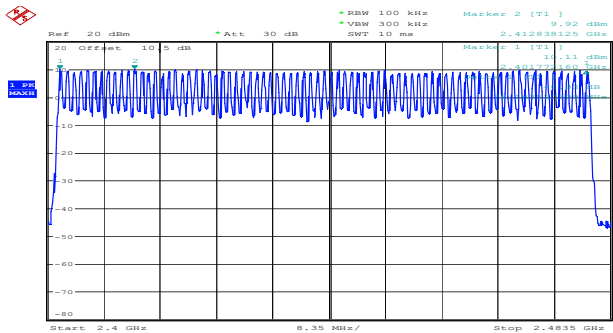

ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17.JUN.2024 14:05:52


EDR

$\pi/4$ -DQPSK_Hopping 79

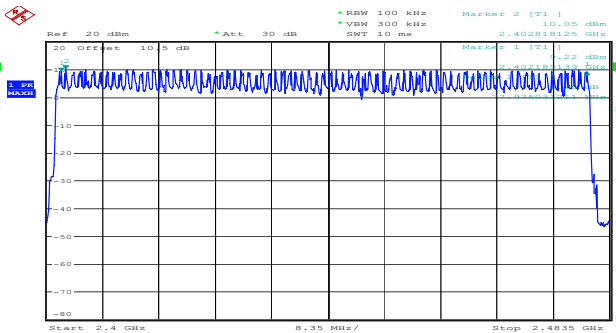

ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17.JUN.2024 14:26:26

8DPSK_Hopping 79

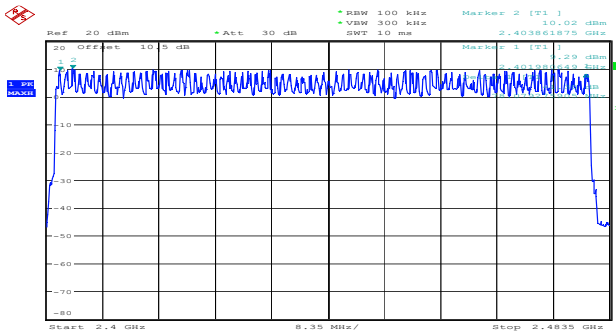

ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17.JUN.2024 14:28:21

Time of Occupancy (dwell time)

Test Information:

Serial No.:	2M4C-1	Test Date:	2024/06/17
Test Site:	RF	Test Mode:	Transmitting
Tester:	Cheeb Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C):	25.9	Relative Humidity: (%)	57	ATM Pressure: (kPa)	101
-----------------------	------	------------------------------	----	------------------------	-----

BDR

Mode	Pulse time (ms)	Dwell time (s)	Limit (s)	Result
GFSK_Hopping_DH1	0.436	0.140	0.400	Pass
GFSK_Hopping_DH3	1.704	0.273	0.400	Pass
GFSK_Hopping_DH5	2.971	0.317	0.400	Pass

EDR

Mode	Pulse time (ms)	Dwell time (s)	Limit (s)	Result
$\pi/4$ -DQPSK_Hopping_2DH1	0.431	0.138	0.400	Pass
$\pi/4$ -DQPSK_Hopping_2DH3	1.693	0.271	0.400	Pass
$\pi/4$ -DQPSK_Hopping_2DH5	2.959	0.316	0.400	Pass
8DPSK_Hopping_3DH1	0.432	0.138	0.400	Pass
8DPSK_Hopping_3DH3	1.693	0.271	0.400	Pass
8DPSK_Hopping_3DH5	2.965	0.316	0.400	Pass

Note:

DH1: Dwell time = Pulse time (ms) $\times$ (1600/2/79) $\times$ 31.6 s

DH3: Dwell time = Pulse time (ms) $\times$ (1600/4/79) $\times$ 31.6 s

DH5: Dwell time = Pulse time (ms) $\times$ (1600/6/79) $\times$ 31.6 s

2DH1: Dwell time = Pulse time (ms) $\times$ (1600/2/79) $\times$ 31.6 s


2DH3: Dwell time = Pulse time (ms) $\times$ (1600/4/79) $\times$ 31.6 s

2DH5: Dwell time = Pulse time (ms) $\times$ (1600/6/79) $\times$ 31.6 s


3DH1: Dwell time = Pulse time (ms) $\times$ (1600/2/79) $\times$ 31.6 s

3DH3: Dwell time = Pulse time (ms) $\times$ (1600/4/79) $\times$ 31.6 s


3DH5: Dwell time = Pulse time (ms) $\times$ (1600/6/79) $\times$ 31.6 s

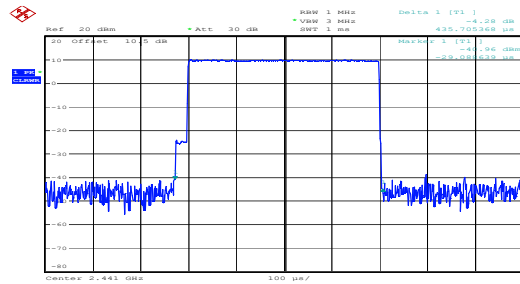BDR**GFSK_Hopping_DH1 0.436ms**


ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17.08.2024 14:32:19

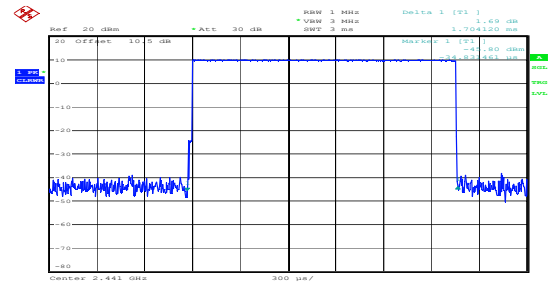GFSK_Hopping_DH3 1.704ms


ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17.08.2024 14:32:46

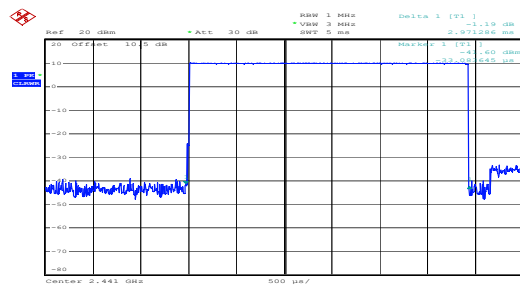EDR**GFSK_Hopping_DH5 2.971ms**


ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17.08.2024 14:33:09

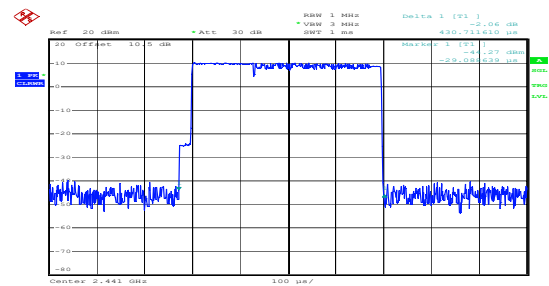 $\pi/4$ -DQPSK_Hopping_2DH1 0.431ms

ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17.08.2024 14:34:24

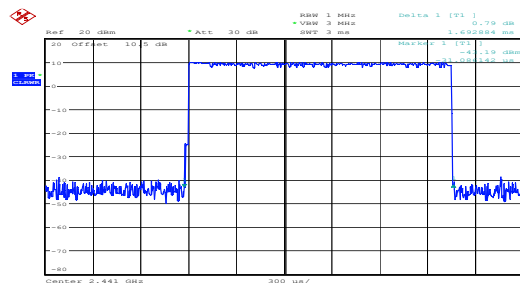
 $\pi/4$ -DQPSK_Hopping_2DH3 1.693ms

ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17.08.2024 14:34:48

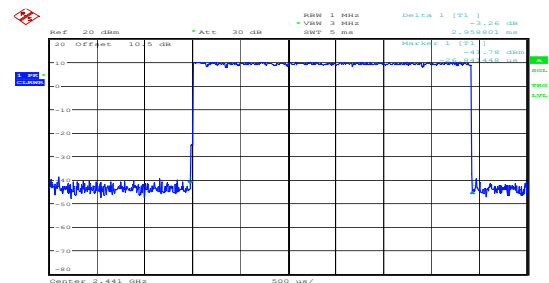
 $\pi/4$ -DQPSK_Hopping_2DH5 2.959ms

ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17.08.2024 14:35:08


8DPSK_Hopping_3DH1 0.432ms

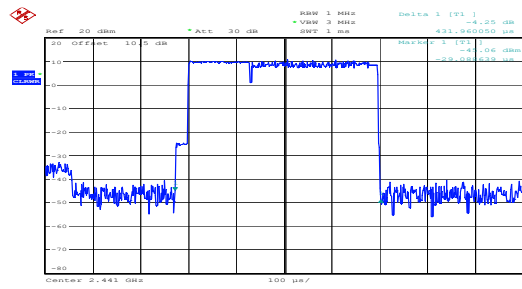

8DPSK_Hopping_3DH3 1.693ms

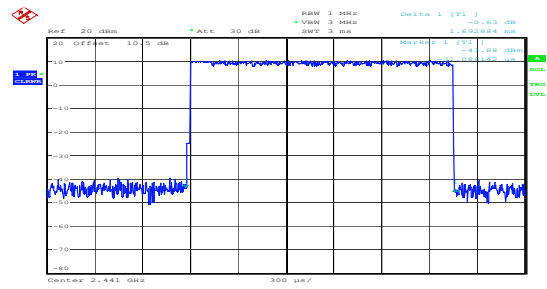

8DPSK_Hopping_3DH5 2.965ms

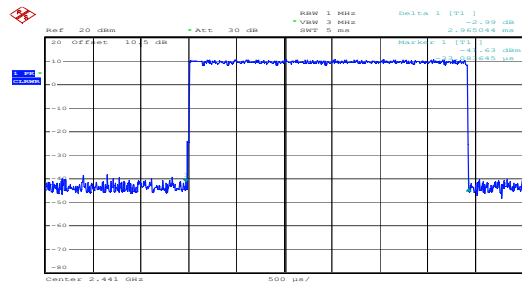

Maximum Conducted Output Power

Test Information:

Serial No.:	2M4C-1	Test Date:	2024/06/17
Test Site:	RF	Test Mode:	Transmitting
Tester:	Cheeb Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C):	25.9	Relative Humidity: (%)	57	ATM Pressure: (kPa)	101
-----------------------	------	------------------------------	----	------------------------	-----

BDR


Mode	Value (dBm)	Limit (dBm)	EIRP (dBm)	Limit (dBm)	Result
GFSK_Low	10.60	21.00	7.19	36	Pass
GFSK_Middle	10.16	21.00	6.75	36	Pass
GFSK_High	10.13	21.00	6.72	36	Pass

EDR

Mode	Value (dBm)	Limit (dBm)	EIRP (dBm)	Limit (dBm)	Result
$\pi/4$ -DQPSK_Low	10.93	21.00	7.52	36	Pass
$\pi/4$ -DQPSK_Middle	10.53	21.00	7.12	36	Pass
$\pi/4$ -DQPSK_High	10.54	21.00	7.13	36	Pass
8DPSK_Low	11.47	21.00	8.06	36	Pass
8DPSK_Middle	10.68	21.00	7.27	36	Pass
8DPSK_High	11.25	21.00	7.84	36	Pass


BDR

GFSK_Low 10.60dBm

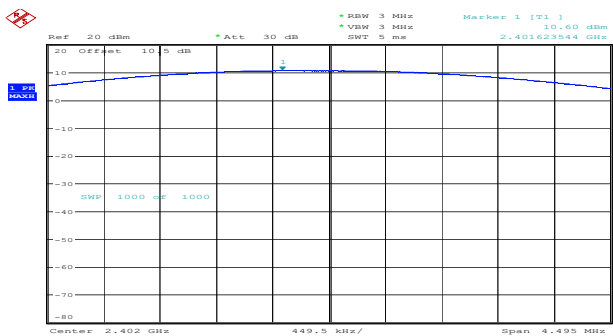

ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17.JUN.2024 15:18:15


GFSK_Middle 10.16dBm

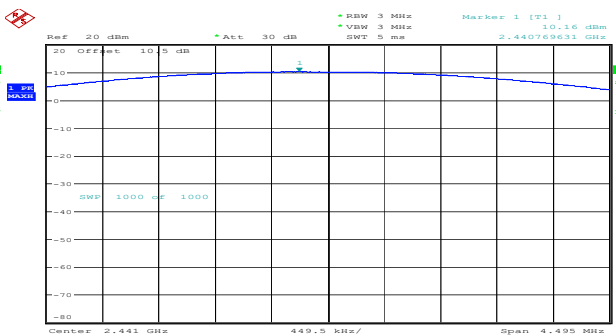

ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17.JUN.2024 15:18:57


EDR

GFSK_High 10.13dBm

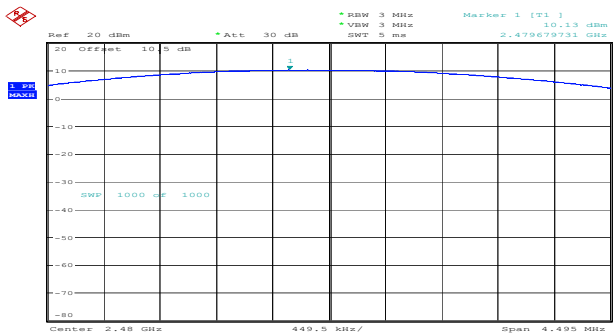


ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17.JUN.2024 15:19:34

$\pi/4$ -DQPSK_Low 10.93dBm

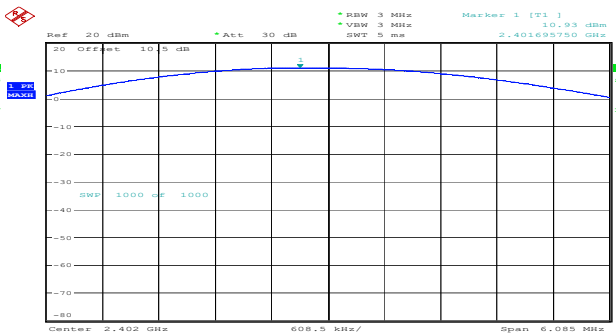


ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17.JUN.2024 15:20:15

$\pi/4$ -DQPSK_Middle 10.53dBm

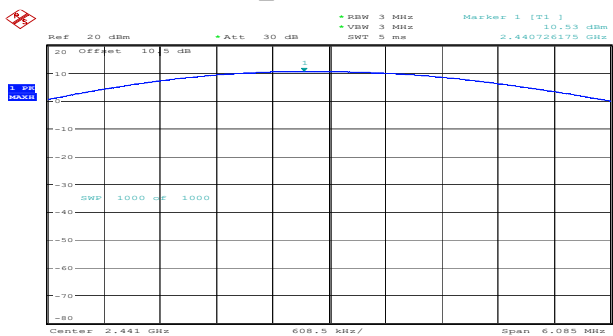


ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17.JUN.2024 15:20:48

$\pi/4$ -DQPSK_High 10.54dBm

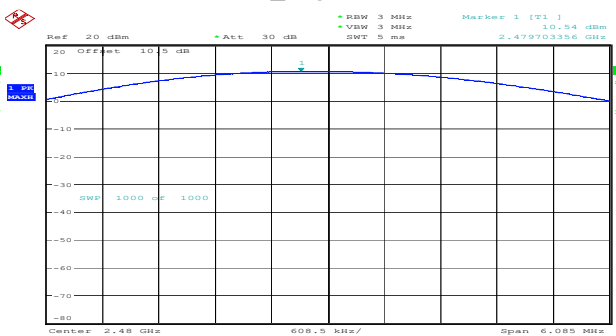


ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17.JUN.2024 15:21:25

8DPSK_Low 11.47dBm

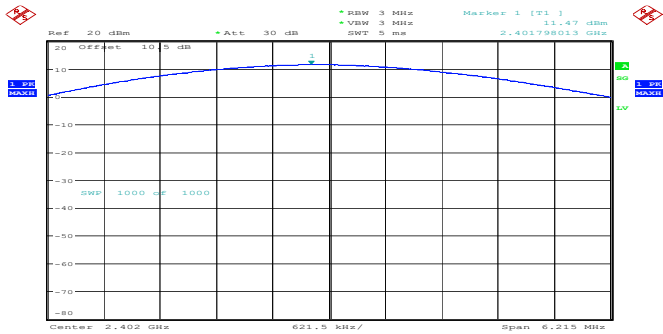


ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17.JUN.2024 15:22:03

8DPSK_Middle 10.68dBm

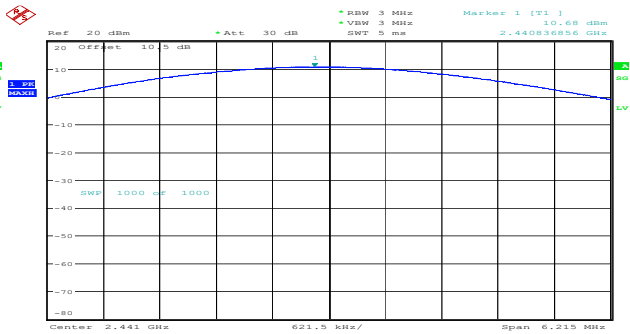

ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17.JUN.2024 15:22:38

8DPSK_High 11.25dBm

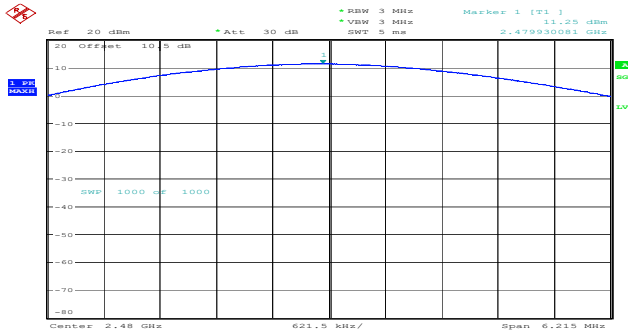

ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17.JUN.2024 15:23:17

100 kHz Bandwidth of Frequency Band Edge

Test Information:


Serial No.:	2M4C-1	Test Date:	2024/06/17
Test Site:	RF	Test Mode:	Transmitting
Tester:	Cheeb Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C):	25.9	Relative Humidity: (%)	57	ATM Pressure: (kPa)	101
-----------------------	------	------------------------------	----	------------------------	-----


BDR

GFSK_Low

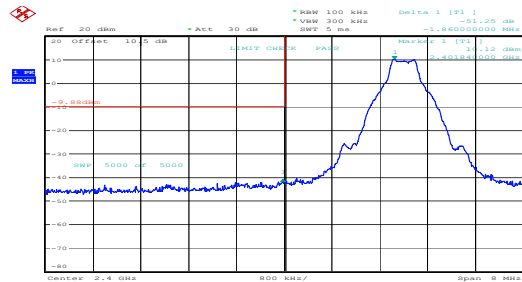


ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
 Date: 17, JUN, 2024 15:30:49

GFSK_High

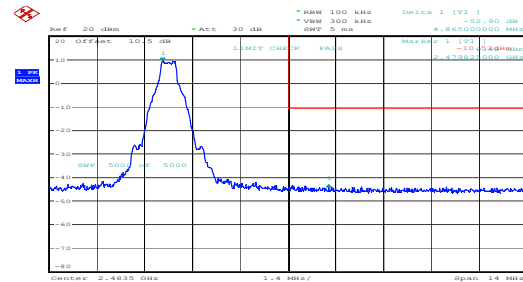


ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
 Date: 17, JUN, 2024 15:42:16

GFSK_Hopping_Lower

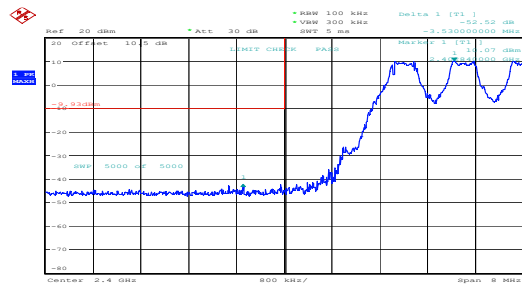

ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
 Date: 17, JUN, 2024 15:33:24


GFSK_Hopping_Upper

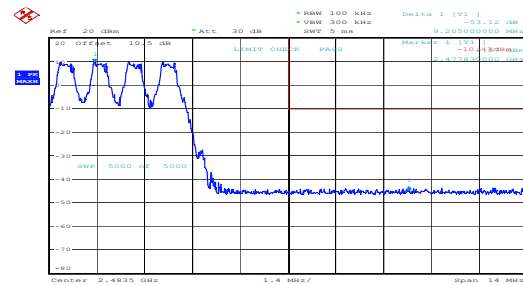

ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
 Date: 17, JUN, 2024 15:38:31


EDR

$\pi/4$ -DQPSK_Low

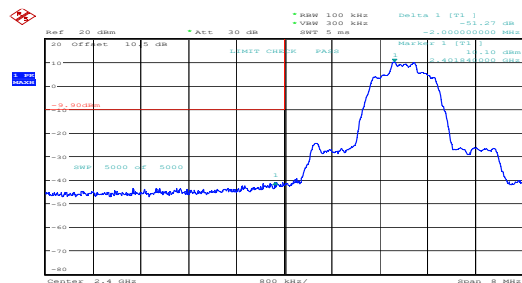


ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
 Date: 17, JUN, 2024 15:45:47

$\pi/4$ -DQPSK_High

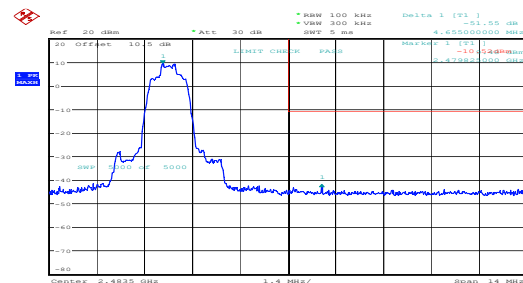


ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
 Date: 17, JUN, 2024 15:57:07


$\pi/4$ -DQPSK_Hopping_Lower

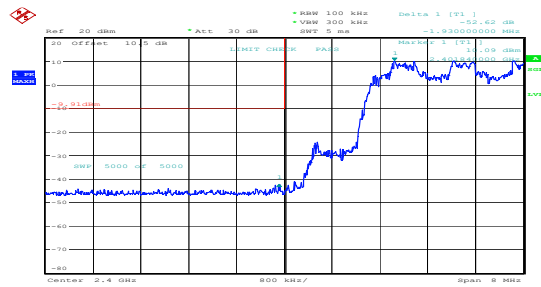


$\pi/4$ -DQPSK_Hopping_Upper

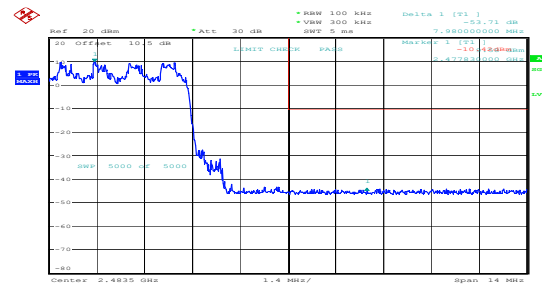


8DPSK_Low

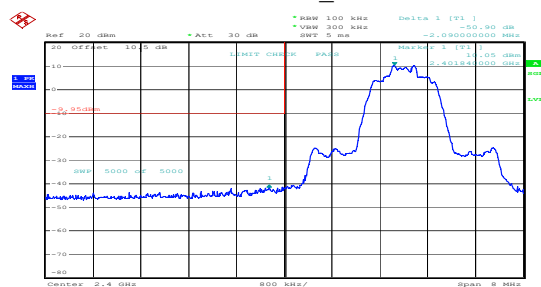


8DPSK_High

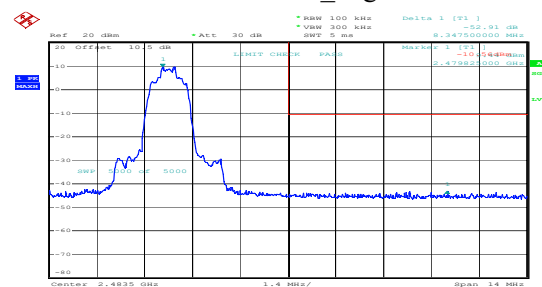

8DPSK_Hopping_Lower

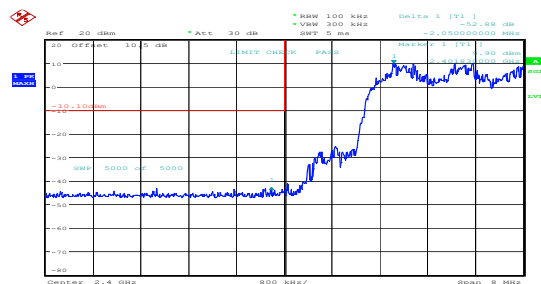

8DPSK_Hopping_Upper

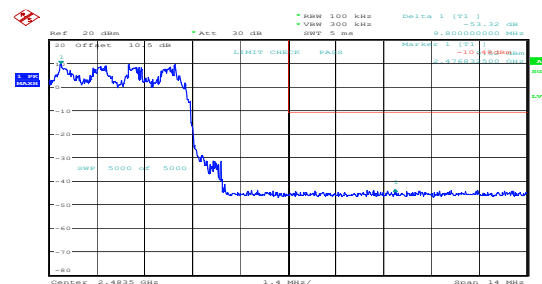

OBW

Test Information:

Serial No.:	2M4C-1	Test Date:	2024/06/17
Test Site:	RF	Test Mode:	Transmitting
Tester:	Cheeb Huang	Test Result:	N/A

Environmental Conditions:

Temperature: (°C):	25.9	Relative Humidity: (%)	57	ATM Pressure: (kPa)	101
-----------------------	------	------------------------------	----	------------------------	-----

BDR


Mode	Value (dB)
GFSK_Low	0.855
GFSK_Middle	0.855
GFSK_High	0.851

EDR

Mode	Value (dB)
$\pi/4$ -DQPSK_Low	1.140
$\pi/4$ -DQPSK_Middle	1.140
$\pi/4$ -DQPSK_High	1.140
8DPSK_Low	1.136
8DPSK_Middle	1.136
8DPSK_High	1.136


BDR

GFSK_Low

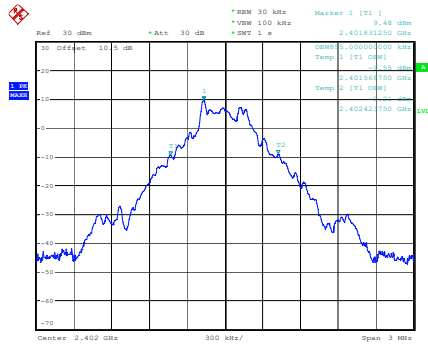

ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17.JUN.2024 16:25:57


GFSK_Middle

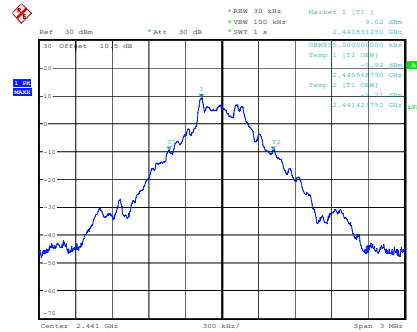

ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17.JUN.2024 16:26:38


EDR

GFSK_High

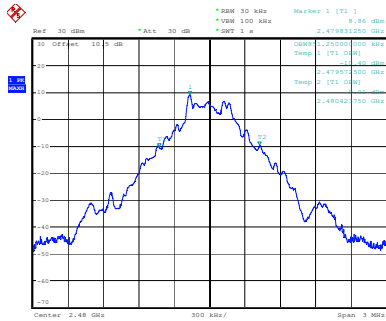


ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17.JUN.2024 16:27:13

$\pi/4$ -DQPSK_Low

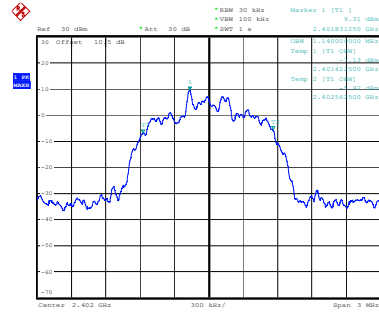


ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17.JUN.2024 16:30:27

$\pi/4$ -DQPSK_Middle

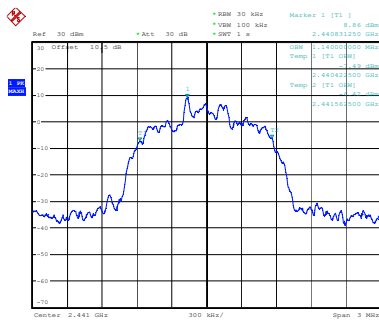


ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17.JUN.2024 16:31:16

$\pi/4$ -DQPSK_High

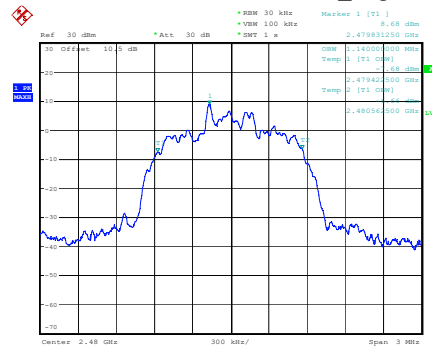


ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17.JUN.2024 16:31:58

8DPSK_Low

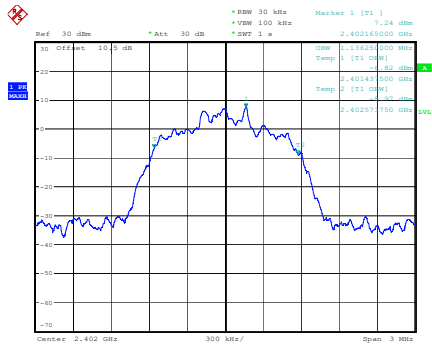


ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17_JUN.2024 16:32:40

8DPSK_Middle

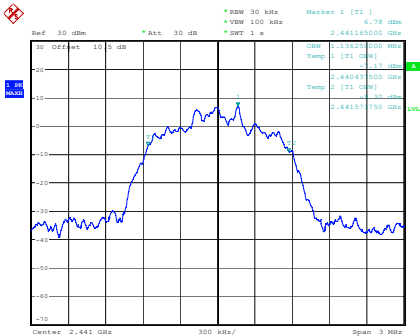

ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17_JUN.2024 16:33:06

8DPSK_High

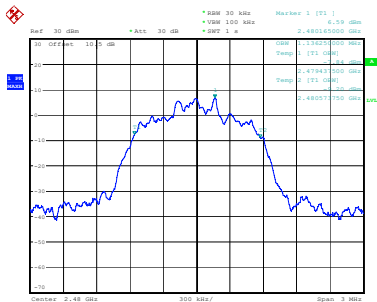

ProjectNo.:2401T59982E-RF Tester:Cheeb Ruang
Date: 17_JUN.2024 16:33:38

RF EXPOSURE EVALUATION

FCC §15.247 (i) & §1.1307 (b) (3) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 Interim General RF Exposure Guidance

MPE-Based Exemption:

General frequency and separation-distance dependent MPE-based effective radiated power(ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(3)(i)(C)] to support an exemption from further evaluation from 300 kHz through 100 GHz.

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$
1.34-30	$3,450 R^2/f^2$
30-300	$3.83 R^2$
300-1,500	$0.0128 R^2f$
1,500-100,000	$19.2R^2$

R is the minimum separation distance in meters

f = frequency in MHz

Result

Mode	Frequency (MHz)	Tune up conducted power [#] (dBm)	Antenna Gain [#]		ERP		Evaluation Distance (m)	ERP Limit (W)
			(dBi)	(dBd)	(dBm)	(W)		
BT	2402-2480	11.5	-3.41	-5.56	5.94	0.004	0.2	0.768

Note: The tune up conducted power and antenna gain was declared by the applicant.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant

RSS-102 § 2.5.2 - EXEMPTION LIMITS FOR ROUTINE EVALUATION-RF EXPOSURE EVALUATION**Applicable Standard**

According to RSS-102 § (2.5.2):

RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:

- below 20 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 1 W (adjusted for tune-up tolerance);
- at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $4.49/f^{0.5}$ W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance);
- at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $1.31 \times 10^{-2} f^{0.6834}$ W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 5 W (adjusted for tune-up tolerance). In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the e.i.r.p. was derived.

Calculated Data:

The max tune-up conducted output power is 11.5dBm, antenna gain is -3.41dBi.

Time-averaged maximum e.i.r.p. of the device is $11.5\text{dBm} + (-3.41)\text{dBi} = 8.09\text{dBm} = 0.006\text{ W}$

The worst case is $f = 2402\text{ MHz}$:

The limit is $1.31 \times 10^{-2} f^{0.6834}\text{ W} = 2.68\text{ W}$

$0.006\text{ W} < 2.68\text{ W}$

So the RF Exposure evaluation can be exempted.

EUT PHOTOGRAPHS

Please refer to the attachment 2401T59982E-RF External photo and 2401T59982E-RF Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2401T59982E-RF Test Setup photo.

******* END OF REPORT *******