

TEST REPORT

Applicant Name: YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD.
Address: No.666 Hu'an Rd. Huli District Xiamen City, Fujian, P.R. China
Report Number: 2401A63093E-RFD
FCC ID: T2C-MB65C
IC: 10741A-MB65C

Test Standard (s)

FCC PART 15.407;
RSS-GEN ISSUE 5, FEBRUARY 2021 AMENDMENT 2; RSS-247 ISSUE 3, AUGUST 2023

Sample Description

Product Type: Collaboration Board
Model No.: MeetingBoard 65C
Multiple Model(s) No.: N/A
Trade Mark: **Yealink**
Date Received: 2024-12-06
Issue Date: 2025-06-06

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Bruce Lin

Bruce Lin
RF Engineer

Approved By:

Nancy Wang

Nancy Wang
RF Supervisor

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	3
GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
REQUIREMENTS AND TEST PROCEDURES	13
CONDUCTED EMISSIONS	13
UNDESIRABLE EMISSION & RESTRICTED BANDS	16
EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH	22
TRANSMITTER OUTPUT POWER.....	25
POWER SPECTRAL DENSITY	27
DUTY CYCLE	31
FREQUENCY STABILITY	32
ANTENNA REQUIREMENT	34
TEST DATA AND RESULTS.....	36
CONDUCTED EMISSIONS	36
UNDESIRABLE EMISSION.....	39
RF CONDUCTED DATA	242
RF EXPOSURE EVALUATION	243
EUT PHOTOGRAPHS.....	247
TEST SETUP PHOTOGRAPHS	248

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2401A63093E-RFD	Original Report	2025-06-06

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

HVIN	MeetingBoard 65C
FVIN	MeetingBoard 65C
Frequency Range	Module YL43752: 5150-5250MHz; 5725-5850MHz
Mode	Module YL43752: 802.11a/n20/n40/ac20/ac40/ac80/ax20/ax40/ax80
Device Type	Module YL43752: Indoor AP
Maximum Conducted Average Output Power	Module YL43752: 5150-5250MHz: 12.41dBm; 5725-5850MHz: 11.20dBm
Modulation Technique	Module YL43752: OFDM, OFDMA
Antenna Specification[#]	Module YL43752: ANT1: 4.49dBi ANT2: 4.49dBi (provided by the applicant)
Voltage Range	AC 100-240V, 50/60Hz
Sample serial number	2VNH-1 for Conducted and Radiated Emissions Test 2VNH-6 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	N/A

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions rules and RSS-GEN Issue 5, February 2021 Amendment 2 and RSS-247 Issue 3, August 2023 of the Innovation, Science and Economic Development Canada rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and RSS-GEN Issue 5, February 2021 Amendment 2 and RSS-247 Issue 3, August 2023.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		109.2kHz(k=2, 95% level of confidence)
RF Frequency		56.6Hz(k=2, 95% level of confidence)
RF output power, conducted		0.86dB(k=2, 95% level of confidence)
Unwanted Emission, conducted		1.60dB(k=2, 95% level of confidence)
Power Spectral Density		0.90dB(k=2, 95% level of confidence)
AC Power Lines Conducted Emissions	9kHz-150kHz	3.63dB(k=2, 95% level of confidence)
	150kHz-30MHz	3.66dB(k=2, 95% level of confidence)
Radiated Emissions	9kHz - 30MHz	3.60dB(k=2, 95% level of confidence)
	30MHz~200MHz (Horizontal)	5.32dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	5.43dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	5.77dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.73dB(k=2, 95% level of confidence)
	1GHz - 6GHz	5.34dB(k=2, 95% level of confidence)
	6GHz - 18GHz	5.40dB(k=2, 95% level of confidence)
	18GHz - 40GHz	5.64dB(k=2, 95% level of confidence)
Temperature		±1°C
Humidity		±1%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0023.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer.

For 5150-5250MHz Band, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240
42	5210	/	/

For 802.11a/ac20/ax20 mode: channel 36, 40, 48 were tested;

For 802.11ac40/ax40 mode: channel 38, 46 were tested;

For 802.11ac80/ax80 mode, channel 42 was tested.

For 5725-5850MHz Band, 8 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785
151	5755	159	5795
153	5765	161	5805
155	5775	165	5825

For 802.11a/ac20/ax20 mode: channel 149, 157, 165 were tested;

For 802.11ac40/ax40 mode: channel 151, 159 were tested;

For 802.11ac80/ax80 mode, channel 155 was tested.

EUT Exercise Software

Exercise Software [#]	AuthenticationTool.exe			
5150-5250 MHz Band				
Mode	Test Channels	Data rate	Power Level [#]	
			ANT1	ANT 2
802.11a	Low	6Mbps	14	13
	Middle	6Mbps	14	13
	High	6Mbps	14	13
802.11ac-VHT20	Low	MCS0	14	13
	Middle	MCS0	14	13
	High	MCS0	14	13
802.11ac-VHT40	Low	MCS0	14	14
	High	MCS0	14	14
802.11ac-VHT80	Middle	MCS0	14	14
802.11ax-HE20	Low	MCS0	14	14
	Middle	MCS0	14	14
	High	MCS0	14	14
802.11ax-HE40	Low	MCS0	14	13
	High	MCS0	14	13
802.11ax-HE80	Middle	MCS0	14	12

5725-5850 MHz Band				
Mode	Test Channels	Data rate	Power Level [#]	
			ANT1	ANT 2
802.11a	Low	6Mbps	14	14
	Middle	6Mbps	14	14
	High	6Mbps	14	14
802.11ac-VHT20	Low	MCS0	14	14
	Middle	MCS0	14	14
	High	MCS0	14	14
802.11ac-VHT40	Low	MCS0	14	14
	High	MCS0	14	14
802.11ac-VHT80	Middle	MCS0	14	14
802.11ax-HE20	Low	MCS0	14	14
	Middle	MCS0	14	14
	High	MCS0	14	14
802.11ax-HE40	Low	MCS0	14	14
	High	MCS0	14	14
802.11ax-HE80	Middle	MCS0	14	14
Note: 1. The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the power and PSD across all data rates bandwidths, and modulations. 2. For 802.11a/ n/ac/ax modes, the device supports SISO only. 3. The n20/n40 mode was reduced test as identical parameter with ac20/ac40 mode. 4. For 802.11 ax modes, the device not support partial RU mode.				

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Grand stream	Router	GWN7665	C074AD251F0A
Redmi	Monitor	A22FAB-RA	47366/206100029128
Redmi	Adapter	AD-0241200200CN-1	Unknown
Yealink	Microphone	VCM34	8707323120000961
DELL	PC	DESKTOP-1630AQ3	B0CB5M2
Kingston	USB Disk	Unknown	DTSE9G3
Kingston	USB Disk	Unknown	OSXM0J2
Netac	USB Disk	U197	Unknown
YISHI	Earphone	V6	N/A
OUPU	Receptacle	PDU-OP1606K	6971041358020

External I/O Cable


Cable Description	Length (m)	From Port	To
Un-shielded Un-detachable AC cable	1.6	Receptacle	AC Mains
Un-shielded Detachable AC cable	1.8	EUT	LISN1/Receptacle
Un-shielded Detachable RJ45 cable	8.0	EUT	Router
Unshielded Detachable RJ45 Cable	1.8	EUT	VCM34
Shielded Detachable USB Cable	1.6	EUT	PC
Shielded Detachable HDMI Cable	1.6	EUT	PC
Shielded Detachable HDMI cable	1.6	EUT	Monitor
Un-shielded Un-detachable DC cable	1.6	Adapter	Monitor
Un-shielded Un-detachable Audio cable	1.0	EUT	Earphone

Block Diagram of Test Setup


For Conducted Emissions:

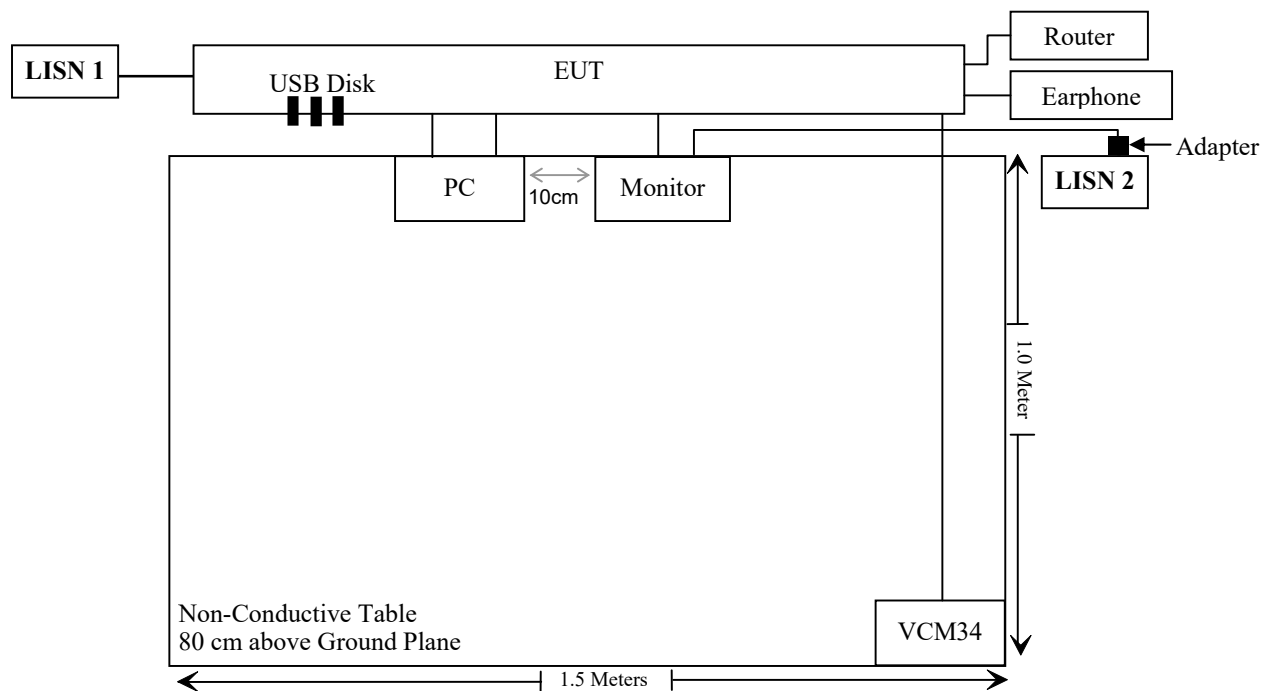

For Radiated Emissions below 1GHz:

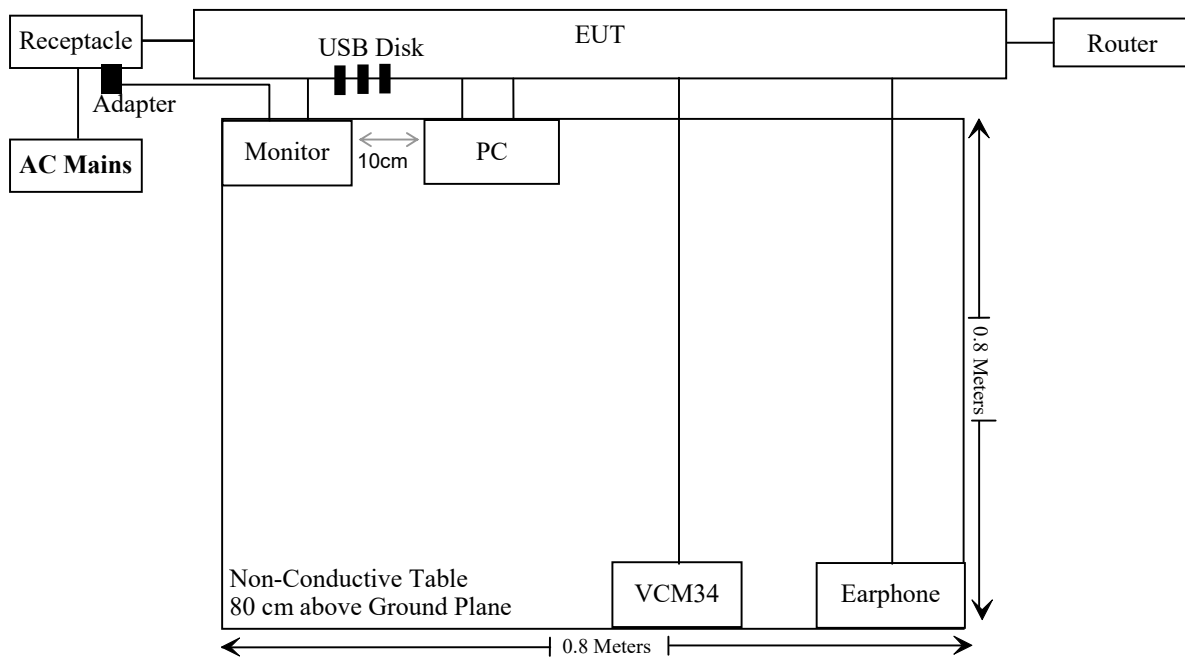

For Radiated Emissions above 1GHz:

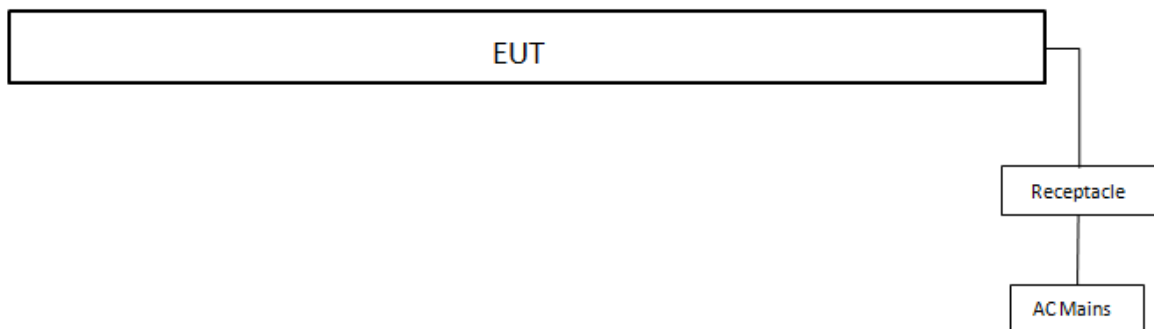

SUMMARY OF TEST RESULTS

FCC Rules	RSS-247 & RSS-Gen & RSS-102 Rules	Description of Test	Result
FCC §1.1307 (b) & §2.1091	/	MPE-Based Exemption	Compliant
/	RSS-102 § 6.6	Field reference level exposure exemption limits	Compliant
FCC §15.203	RSS-Gen §6.8	Antenna Requirement	Compliant
FCC §15.207(a)	RSS-Gen §8.8	Conducted Emissions	Compliant
FCC §15.205& §15.209 & §15.407(b)	RSS-Gen §8.10& RSS-247 §6.2	Undesirable Emission& Restricted Bands	Compliant
FCC §15.407(a) (e)	RSS- Gen §6.7, RSS-247 § 6.2	Emission Bandwidth & 99% Bandwidth	Compliant
FCC §15.407(a)	RSS-247 §6.2	Conducted Transmitter Output Power	Compliant
FCC §15.407 (a)	RSS-247 §6.2	Power Spectral Density	Compliant
FCC §15.407 (h)	RSS-247 §6.2	Transmit Power Control (TPC)	Not Applicable
FCC §15.407 (h)	RSS-247 §6.3	Dynamic Frequency Selection (DFS)	Not Applicable
/	RSS-247 §6.4	Additional requirement	Compliant
C63.10 §11.6	C63.10 §11.6	Duty Cycle	/
/	RSS-Gen clause 6.11	Frequency Stability	Compliant

Not Applicable: For Module YL43752, the device only supports 5150-5250MHz and 5725-5850MHz.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/12/04	2025/12/03
Rohde & Schwarz	LISN	ENV216	101613	2024/12/04	2025/12/03
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2024/05/21	2025/05/20
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2024/05/21	2025/05/20
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
Radiated Emission Test_ Below 1GHz					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2024/12/04	2025/12/03
Sonoma instrument	Pre-amplifier	310N	186238	2024/05/21	2025/05/20
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Cable	Chamber Cable 1	F-03-EM236	2024/12/04	2025/12/03
Unknown	Cable	XH500C	J-10M-A	2024/12/04	2025/12/03
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13
Unknown	Cable	2Y194	0735	2024/12/04	2025/12/03
Unknown	Cable	PNG214	1354	2024/12/04	2025/12/03
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
Radiated Emission Test_ Above 1GHz					
Rohde&Schwarz	Spectrum Analyzer	FSV40	101605	2024/03/27	2025/03/26
Rohde&Schwarz	Spectrum Analyzer	FSV40	101605	2025/03/26	2026/03/25
A.H.System	Preamplifier	PAM-0118P	489	2024/11/15	2025/11/14
Schwarzbeck	Horn Antenna	BBHA9120D (1201)	1143	2023/07/26	2026/07/25
Unknown	RF Cable	KMSE	0735	2024/12/06	2025/12/05
Unknown	RF Cable	UFA147	219661	2024/12/06	2025/12/05
Unknown	RF Cable	XH750A-N	J-10M	2024/12/06	2025/12/05
JD	Filter Switch Unit	DT7220FSU	DS79906	2024/09/09	2025/09/08
JD	Multiplex Switch Test Control Set	DT7220SCU	DS79903	2024/09/09	2025/09/08
A.H.System	Pre-amplifier	PAM-1840VH	190	2024/06/18	2025/06/17
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17
UTIFLEX	RF Cable	NO. 13	232308-001	2024/12/18	2025/12/17
Audix	EMI Test software	E3	191218(V9)	NCR	NCR

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde&Schwarz	Spectrum Analyzer	FSV40-N	102259	2024/12/04	2025/12/03
ANRITSU	Microwave peak power sensor	MA24418A	12622	2024/05/21	2025/05/20
ANRITSU	Microwave peak power sensor	MA24418A	12622	2025/04/29	2026/04/28
Unknown	10dB Attenuator	Unknown	F-03-EM065	2024/06/27	2025/06/26
BACL	Temperature & Humidity Chamber	BTH-150-40	30145	2024/12/06	2025/12/05
Fluke	Digital Multimeter	287	19000011	2024/05/21	2025/05/20
HELLVIAO	Contact voltage regulator	TDGC2-5KVA	Unknown	NCR	NCR

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

REQUIREMENTS AND TEST PROCEDURES

Conducted Emissions

Applicable Standard

FCC §15.207 & RSS-Gen §8.8

Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in table 4, as measured using a 50 μ H / 50 Ω line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.

For an EUT that connects to the AC power lines indirectly, through another device, the requirement for compliance with the limits in table 4 shall apply at the terminals of the AC power-line mains cable of a representative support device, while it provides power to the EUT. The lower limit applies at the boundary between the frequency ranges. The device used to power the EUT shall be representative of typical applications.


Table 4 - AC Power Lines Conducted Emission Limits		
Frequency range (MHz)	Conducted limit (dB μ V)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56 ¹	56 to 46 ¹
0.5 – 5	56	46
5 – 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

For an EUT with a permanent or detachable antenna operating between 150 kHz and 30 MHz, the AC power-line conducted emissions must be measured using the following configurations:

- Perform the AC power-line conducted emissions test with the antenna connected to determine compliance with the limits of table 4 outside the transmitter's fundamental emission band.
- Retest with a dummy load instead of the antenna to determine compliance with the limits of table 4 within the transmitter's fundamental emission band. For a detachable antenna, remove the antenna and connect a suitable dummy load to the antenna connector. For a permanent antenna, remove the antenna and terminate the RF output with a dummy load or network that simulates the antenna in the fundamental frequency band.

EUT Setup

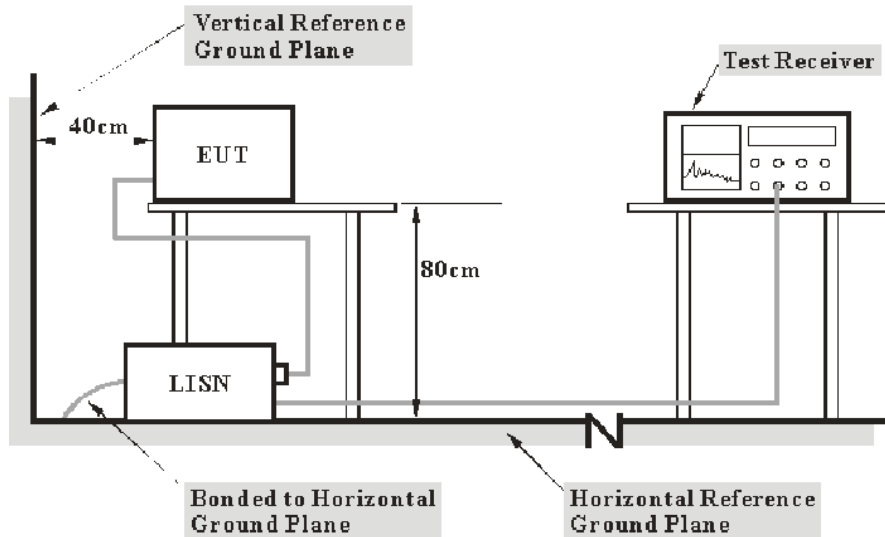

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.207 & RSS-247/RSS-Gen limits.

The spacing between the peripherals was 10 cm.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN; the other related equipments were connected to the other LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and Average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

Undesirable Emission & Restricted Bands

Applicable Standard

FCC §15.407 (b); §15.209; §15.205;

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

According to RSS-247§6.2

Frequency band 5150-5250 MHz

6.2.1.2 Unwanted emission limits

For transmitters with operating frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. Any unwanted emissions that fall into the band 5250-5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth (i.e. 99% bandwidth), above 5250 MHz. The 26 dB bandwidth may fall into the 5250-5350 MHz band; however, if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing dynamic frequency selection (DFS) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band.

Frequency band 5250-5350 MHz

6.2.2.2 Unwanted emission limits

Devices shall comply with the following:

- a. All emissions outside the band 5250-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.; or
- b. All emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. and its power shall comply with the spectral power density for operation within the band 5150-5250 MHz. The device, except devices installed in vehicles, shall be labelled or include in the user manual the following text “for indoor use only.”

Frequency band 5470-5600 MHz and 5650-5725 MHz

6.2.3.2 Unwanted emission limits

Emissions outside the band 5470-5725 MHz shall not exceed -27 dBm/MHz e.i.r.p. However, devices with bandwidth overlapping the band edge of 5725 MHz can meet the emission limit of -27 dBm/MHz e.i.r.p. at 5850 MHz instead of 5725 MHz.

Frequency band 5725-5850 MHz

6.2.4.3 Unwanted emission limits

Devices operating in the band 5725-5850 MHz shall have e.i.r.p. of unwanted emissions comply with the following:

- a. 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 Bm/MHz at 5 MHz above or below the band edges;
- b. 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;
- c. 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and
- d. -27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

According to RSS-Gen §8.10

Restricted frequency bands, identified in table 7, are designated primarily for safety-of-life services (distress calling and certain aeronautical activities), certain satellite downlinks, radio astronomy and some government uses. Except where otherwise indicated, the following conditions related to the restricted frequency bands apply:

- a. The transmit frequency, including fundamental components of modulation, of license-exempt radio apparatus shall not fall within the restricted frequency bands listed in table 7 except for apparatus compliant with RSS-287.
- b. Unwanted emissions that fall into restricted frequency bands listed in table 7 shall comply with the limits specified in table 5 and table 6.
- c. Unwanted emissions that do not fall within the restricted frequency bands listed in table 7 shall comply either with the limits specified in the applicable RSS or with those specified in table 5 and table 6.


Table 5 - General field strength limits at frequencies above 30 MHz	
Frequency (MHz)	Field strength (µV/m at 3 m)
30 - 88	100
88 - 216	150
216 - 960	200
Above 960	500

Table 6 - General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (µA/m)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30


Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.


EUT Setup

9 kHz-30MHz:

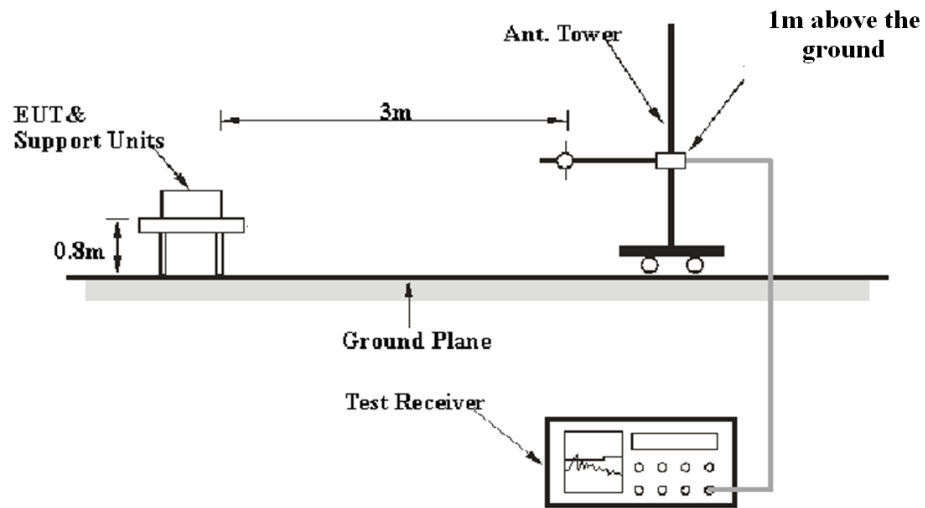


30MHz-1GHz:

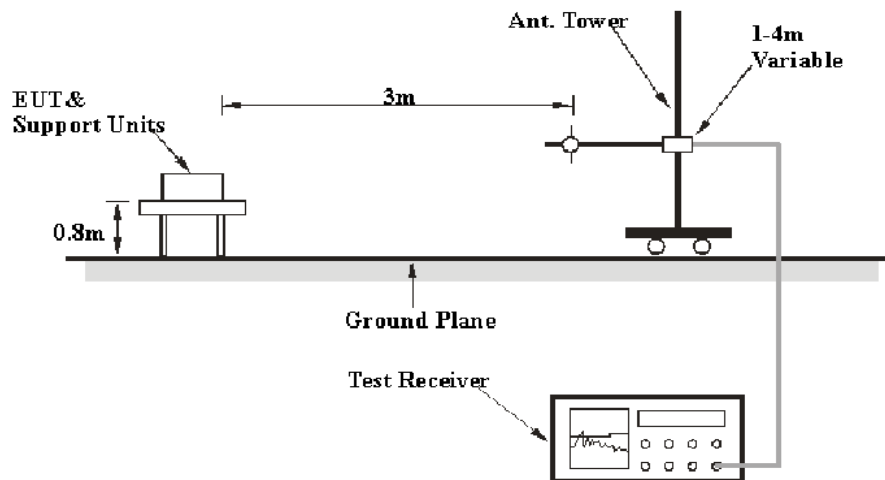

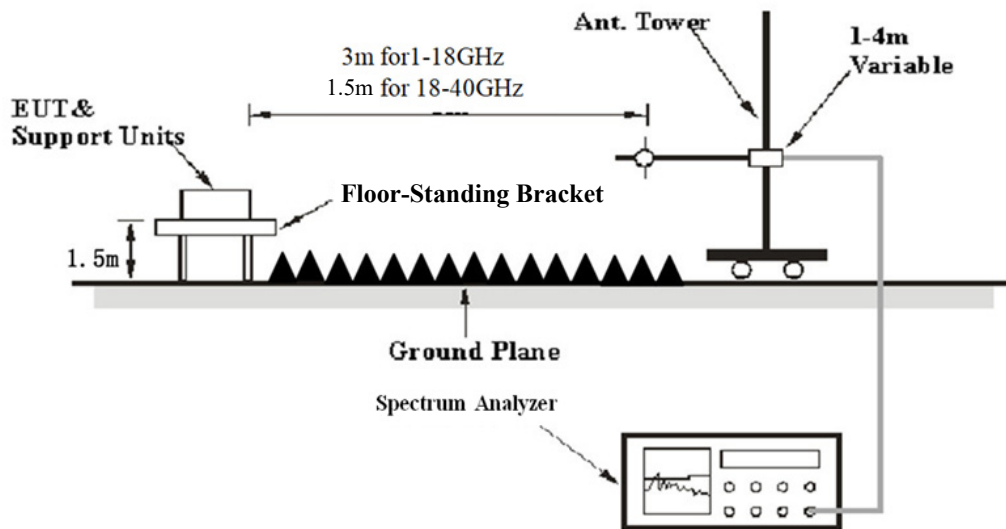Above 1 GHz:

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC 15.209, FCC 15.407, RSS-247 and RSS-Gen limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

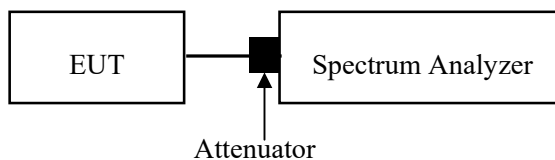Unwanted emissions fall into the band 5250-5350 MHz:**EMI Test Receiver & Spectrum Analyzer Setup**

The system was investigated from 9 kHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-1GHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement	Detector
9 kHz – 150 kHz	/	/	200 Hz	QP	QP
	300 Hz	1 kHz	/	PK	Peak
150 kHz – 30 MHz	/	/	9 kHz	QP	QP
	10 kHz	30 kHz	/	PK	Peak
30 MHz – 1000 MHz	/	/	120 kHz	QP	QP
	100 kHz	300 kHz	/	PK	Peak

1-40GHz:

Pre-scan

Measurement	Duty cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3 MHz	Peak
AV	>98%	1MHz	1 kHz	Peak
	<98%	1MHz	≥1/Ton	Peak

Final measurement for emission identified during pre-scan

Measurement	Duty cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3 MHz	Peak
AV	>98%	1MHz	10 Hz	Peak
	<98%	1MHz	≥1/Ton	Peak

Note: Ton is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Unwanted emissions fall into the band 5250-5350 MHz:

Frequency Range	RBW	Video B/W	Measurement
5250-5350 MHz	(1%-5%)* 99% Bandwidth	3*RBW	Peak

Note: The limit was calculated by attenuated below the channel power by at least 26 dB per RSS-247 §6.2.1.2

Test Procedure

Radiated Spurious Emission

During the radiated emission test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all the installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

According to ANSI C63.10-2020,9.2.1: For field strength measurements made at other than the distance specified by the limit, extrapolate the measured field strength to the field strength at the distance specified by the limit using an inverse distance correction factor (20 dB/decade of distance)

$$E_{\text{SpecLimit}} = E_{\text{Meas}} + 20 \log \left(\frac{d_{\text{Meas}}}{d_{\text{SpecLimit}}} \right)$$

where

$E_{\text{SpecLimit}}$	is the field strength of the emission at the distance specified by the limit, in dB μ V/m
E_{Meas}	is the field strength of the emission at the measurement distance, in dB μ V/m
d_{Meas}	is the measurement distance, in m
$d_{\text{SpecLimit}}$	is the distance specified by the limit, in m

So the extrapolation factor of 1m is $20 \cdot \log(1.5/3) = -6.0$ dB, for 18-40GHz range, the limit of 1.5m distance was added by 6.0dB from limit of 3m to compared with the result measurement at 1.5m distance.

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit} &= \text{Level} - \text{Limit}; \text{Margin} = \text{Limit} - \text{Corrected Amplitude} \\ \text{Level / Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Emission Bandwidth & 99% Occupied Bandwidth

Applicable Standard

According to FCC §15.407(a) (13), the maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

According to FCC §15.407(e), Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

According to RSS-247 § 6.2.4.2, For equipment operating in the band 5725-5850 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

According to RSS-Gen § 6.7, the occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “x dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated x dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

The following conditions shall be observed for measuring the occupied bandwidth and x dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

Test Procedure

According to ANSI C63.10-2020 Section 12.5.1 & 12.5.2 & 12.5.3

12.5.1 Emission bandwidth for the band 5.725 GHz to 5.85 GHz

The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max-hold.
- e) Sweep = No faster than coupled (auto) time.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

12.5.2 Emission bandwidth for all other bands

The procedure for this method is as follows:

- a) Set RBW = shall be in the range of 1% to 5% of the emission bandwidth.
- b) Set the VBW $>$ RBW.
- c) Detector = peak.
- d) Trace mode = max-hold.
- e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is in the range of 1% to 5%.

12.5.3 Occupied bandwidth

See 6.9.3 for the measurement procedure for OBW.


The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be at least three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.6.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max-hold mode (until the trace stabilizes) shall be used.

f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.

g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.

h) The occupied bandwidth shall be reported by providing spectral plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

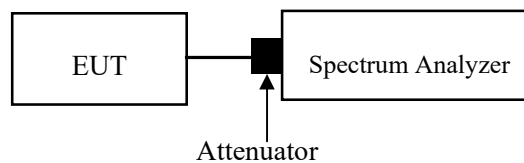

Transmitter Output Power

Applicable Standard

According to FCC §15.407(a)

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

According to RSS-247 §6.2:

Frequency band 5150-5250 MHz

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log 10B$, dBm, whichever is less. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log 10B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

Frequency band 5250-5350 MHz

6.2.2.1(a) The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;

6.2.2.1(b) The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

Frequency band 5470-5600 MHz and 5650-5725MHz

6.2.3.1 The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.


Frequency band 5725-5850 MHz

6.2.4.2 The maximum conducted output power shall not exceed 1 W. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipointFootnote3 systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

Test Procedure

According to ANSI C63.10-2020 Section 12.4.3.2 Method PM-G

- a. Place the EUT on a bench and set it in transmitting mode.
- b. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.

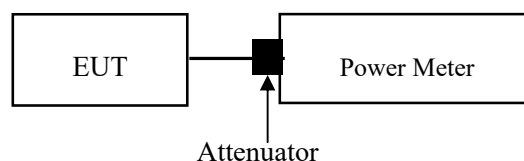

Note: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was added with offset into test equipment, the total offset consists of attenuator and/or RF cable and/or power splitter loss

Power Spectral Density

According to FCC §15.407(a)

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

According to RSS-247 §6.2:

Frequency band 5150-5250 MHz

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log 10B$, dBm, whichever is less. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log 10B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

Frequency band 5250-5350 MHz

6.2.2.1(a) The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log 10B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;

6.2.2.2(b) All emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. and its power shall comply with the spectral power density for operation within the band 5150-5250 MHz. The device, except devices installed in vehicles, shall be labelled or include in the user manual the following text “for indoor use only.”

Frequency band 5470-5600 MHz and 5650-5725MHz


6.2.3.1 The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

Frequency band 5725-5850 MHz

6.2.4.2 The maximum conducted output power shall not exceed 1 W. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipointFootnote3 systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

Test Procedure

According to ANSI C63.10-2020 Clause 12.6 Method SA-2 should be applied

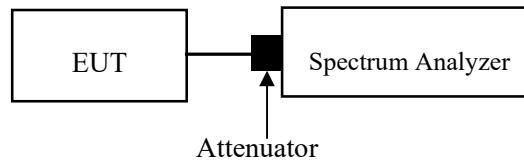

Note: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was add with offset into test equipment, the total offset consists of attenuator and/or RF cable and/or power splitter loss

Additional requirements

Applicable Standard

According to RSS-247 Clause 6.4 Additional requirement

The following requirements shall apply:

- a. The device shall automatically discontinue transmission in cases of absence of information to transmit, or operational failure. A description on how this is done shall accompany the application for equipment certification. Note that this is not intended to prohibit transmission of control or signalling information or the use of repetitive codes where required by the technology.
- b. All LE-LAN devices must contain security features to protect against modification of software by unauthorized parties.

Manufacturers must implement security features in any digitally modulated devices capable of operating in any of the frequency ranges within the 5 GHz band, so that third parties are not able to reprogram the device to operate outside the parameters for which the device was certified. The software must prevent the user from operating the transmitter with operating frequencies, output power, modulation types or other radio frequency parameters outside those that were approved for the device. Manufacturers may use various means, including the use of a private network that allows only authenticated users to download software, electronic signatures in software or coding in hardware that is decoded by software to verify that new software can be legally loaded into a device to meet these requirements and must describe the methods in their application for equipment certification.

Manufacturers must take steps to ensure that DFS functionality cannot be disabled by the operator of the LE-LAN device.

- c. The user manual for LE-LAN devices shall contain instructions related to the restrictions mentioned in the above sections, namely that:
 - i. the device for operation in the band 5150–5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems;
 - ii. for devices with detachable antenna(s), the maximum antenna gain permitted for devices in the bands 5250-5350 MHz and 5470-5725 MHz shall be such that the equipment still complies with the e.i.r.p. limit;
 - iii. for devices with detachable antenna(s), the maximum antenna gain permitted for devices in the band 5725-5850 MHz shall be such that the equipment still complies with the e.i.r.p. limits as appropriate; and
 - iv. where applicable, antenna type(s), antenna models(s), and worst-case tilt angle(s) necessary to remain compliant with the e.i.r.p. elevation mask requirement set forth in section 6.2.2.3 shall be clearly indicated.

Result**Pass**

RSS-247 Clause 6.4 a):

The device shall automatically discontinue transmission in cases of absence of information to transmit, or operation failure. Please refer to declaration.

RSS-247 Clause 6.4 b):

The device must contain security features to protect against modification of software by unauthorized parties. Please refer to declaration.

RSS-247 Clause 6.4 c):

1. Compliant, please refer to the User Manual.
2. Compliant, The device con not operates on 5250-5350MHz/5470-5600MHz&5650-5725MHz.
3. Compliant, The device operates on 5725-5850MHz, the EIRP meet the requirement.
4. Compliant, The device con not operates on 5250-5350MHz.


Duty Cycle

Test Procedure

According to ANSI C63.10-2020 Section 12.2

Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

- a) A diode detector and an oscilloscope that together have a sufficiently short response time to permit accurate measurements of the ON and OFF times of the transmitted signal.
- b) The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:
 - 1) Set the center frequency of the instrument to the center frequency of the transmission.
 - 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
 - 3) Set $VBW \geq RBW$. Set detector = peak or average.
 - 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

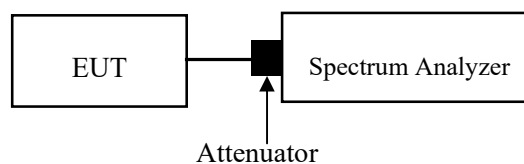

Frequency stability

Applicable Standard

According to RSS-GEN Clause 6.11

Frequency stability is a measure of frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at an appropriate reference temperature and the rated supply voltage.

When the measurement method of transmitter frequency stability is not stated in the applicable RSS or reference standards, the following conditions apply:

- a. The reference temperature for radio transmitters is +20°C (+68°F).
- b. A hand-held device that is only capable of operating using internal batteries shall be tested at the battery's nominal voltage, and again at the battery's operating end-point voltage, which shall be specified by the equipment manufacturer. For this test, either a battery or an external power supply can be used.
- c. The operating carrier frequency shall be set up in accordance with the manufacturer's published operation and instruction manual prior to the commencement of these tests. No adjustment of any frequency-determining circuit element shall be made subsequent to this initial set-up.

With the transmitter installed in an environmental test chamber, the unmodulated carrier frequency and frequency stability shall be measured under the conditions specified below for licensed and licence-exempt devices, unless specified otherwise in the applicable RSS. A sufficient stabilization period at each temperature shall be used prior to each frequency measurement.

For licensed devices, the following measurement conditions apply:

- a. at the temperatures of -30°C (-22°F), +20°C (+68°F) and +50°C (+122°F), and at the manufacturer's rated supply voltage
- b. at the temperature of +20°C (+68°F) and at ±15% of the manufacturer's rated supply voltage

For licence-exempt devices, the following conditions apply:


- a. at the temperatures of -20°C (-4°F), +20°C (+68°F) and +50°C (+122°F), and at the manufacturer's rated supply voltage
- b. at the temperature of +20°C (+68°F) and at ±15% of the manufacturer's rated supply voltage

If the frequency stability limits are only met within a temperature range that is smaller than the range specified in (a) for licensed or licence-exempt devices, the frequency stability requirement will be deemed to be met if the transmitter is automatically prevented from operating outside this smaller temperature range and if the published operating characteristics for the equipment are revised to reflect this restricted temperature range.

If the device contains both licence and licence-exempt transmitter modules, the device's frequency stability shall be measured under the most stringent condition specified in the applicable RSS of the transmitter module.

In addition, if an unmodulated carrier is not available, the method used to measure frequency stability shall be described in the test report.

Test Procedure

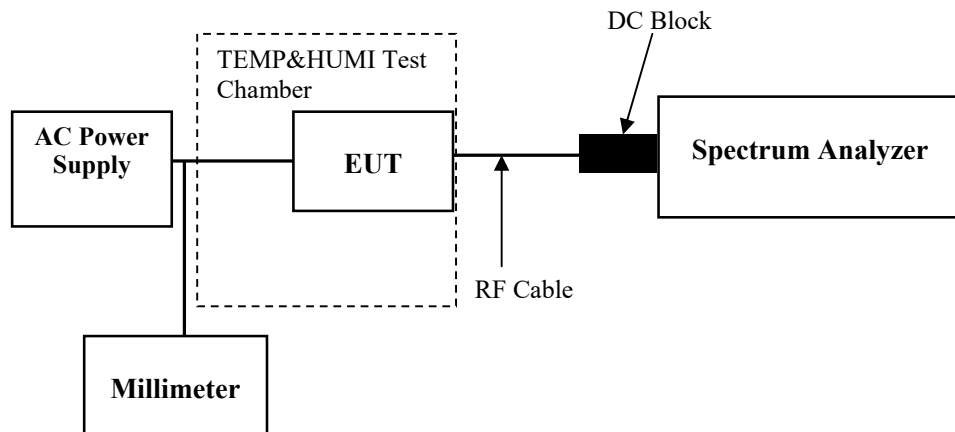

ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Connector Construction

The EUT has two external antennas with unique antenna connector and the maximum antenna gain[#] is 4.49dBi for ANT1 & ANT 2, fulfill the requirement of this section. Please refer to the EUT photos.

Antenna	Antenna Type	Antenna Gain [#]	Impedance	Frequency Range
ANT1	External	4.49	50Ω	5150-5850MHz
ANT2	External	4.49	50Ω	5150-5850MHz


Result: Compliant

TEST DATA AND RESULTS

Conducted Emissions

Temperature (°C)	25.2	Relative Humidity (%)	37
ATM Pressure (kPa)	101	Test engineer	Macy.shi
Test date	2025.1.9		
EUT operation mode	Transmitting (Maximum output power mode, ANT1 802.11ax20 5180MHz)		

AC 120V 60 Hz, Line

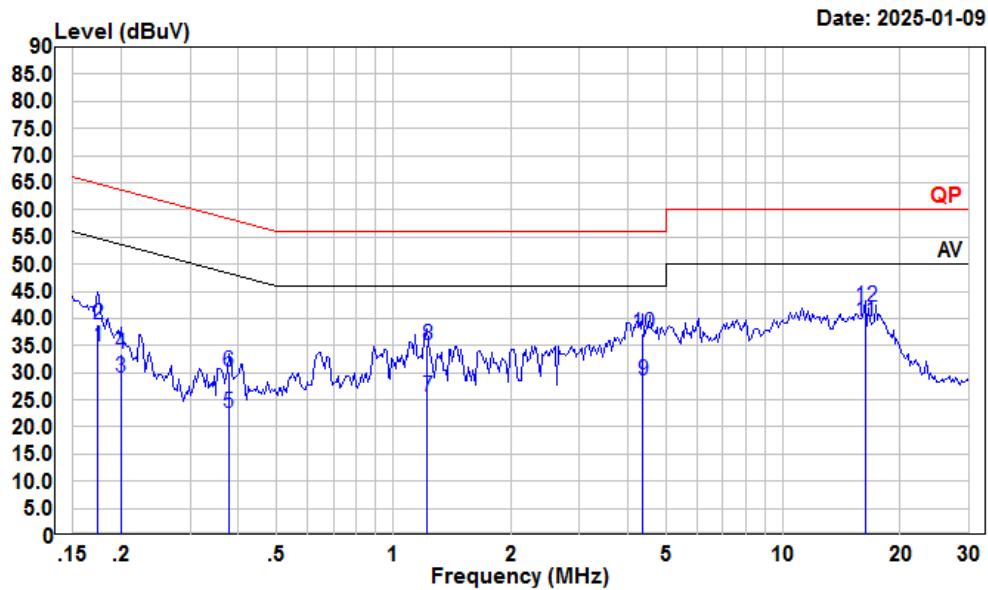

Condition: Line


Project : 2401A63093E-RF

tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz VBW:Auto SWT:Auto

		Read		LISN	Cable	Limit	Over	
	Freq	Level	Level	Factor	Loss	Line	Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.174	14.59	34.74	10.05	10.10	54.77	-20.03	Average
2	0.174	18.71	38.86	10.05	10.10	64.77	-25.91	QP
3	0.200	9.09	29.08	9.90	10.09	53.62	-24.54	Average
4	0.200	13.53	33.52	9.90	10.09	63.62	-30.10	QP
5	0.377	2.13	22.56	10.32	10.11	48.34	-25.78	Average
6	0.377	9.76	30.19	10.32	10.11	58.34	-28.15	QP
7	1.223	5.00	25.65	10.51	10.14	46.00	-20.35	Average
8	1.223	14.32	34.97	10.51	10.14	56.00	-21.03	QP
9	4.361	8.29	28.58	10.09	10.20	46.00	-17.42	Average
10	4.361	16.89	37.18	10.09	10.20	56.00	-18.82	QP
11	16.226	18.94	39.40	10.25	10.21	50.00	-10.60	Average
12	16.226	21.83	42.29	10.25	10.21	60.00	-17.71	QP

AC 120V 60 Hz, Neutral

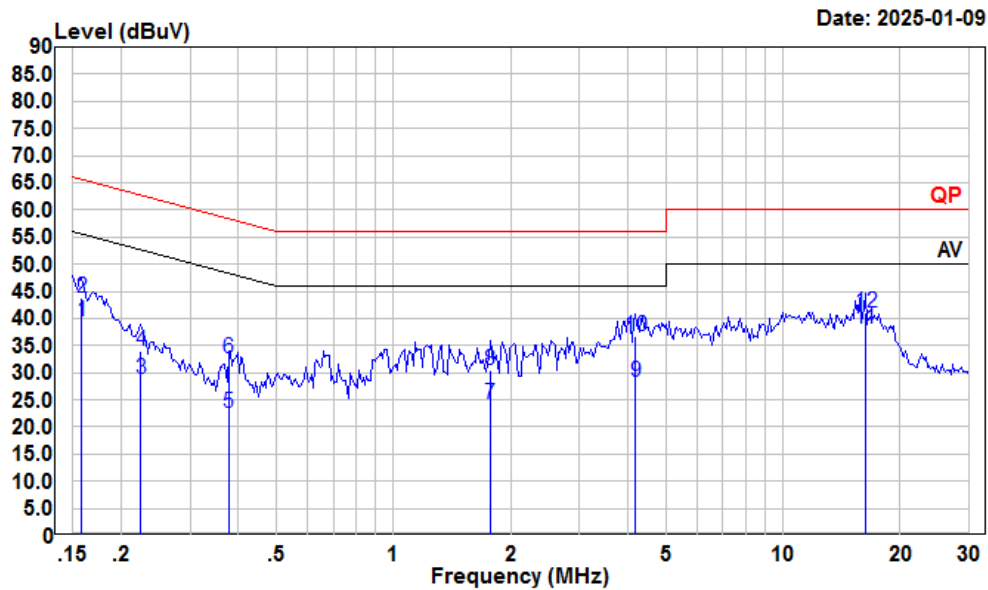

Condition: Neutral

Project : 2401A63093E-RF

tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz VBW:Auto SWT:Auto

		Read		LISN	Cable	Limit	Over	
	Freq	Level	Level	Factor	Loss	Line	Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.158	18.95	39.33	10.26	10.12	55.56	-16.23	Average
2	0.158	23.28	43.66	10.26	10.12	65.56	-21.90	QP
3	0.224	8.57	28.82	10.16	10.09	52.66	-23.84	Average
4	0.224	13.74	33.99	10.16	10.09	62.66	-28.67	QP
5	0.377	2.09	22.65	10.45	10.11	48.34	-25.69	Average
6	0.377	11.99	32.55	10.45	10.11	58.34	-25.79	QP
7	1.772	3.54	24.09	10.37	10.18	46.00	-21.91	Average
8	1.772	9.88	30.43	10.37	10.18	56.00	-25.57	QP
9	4.180	7.96	28.30	10.14	10.20	46.00	-17.70	Average
10	4.180	16.28	36.62	10.14	10.20	56.00	-19.38	QP
11	16.226	17.79	38.13	10.13	10.21	50.00	-11.87	Average
12	16.226	20.82	41.16	10.13	10.21	60.00	-18.84	QP


Undesirable Emission

Temperature (°C)	22.8~23.5	Relative Humidity (%)	48~50.1
ATM Pressure (kPa):	101.2	Test engineer:	Anson Su & Zenos Qiao
Test date:	Below 1GHz: 2025.4.7 Above 1GHz: 2025.3.14~2025.3.30		
EUT operation mode:	Below 1GHz: Transmitting Above 1GHz: Transmitting		
Note:	1. For the radiated spurious emission below 30MHz, only the worst case (parallel) was recorded. 2. When the test result of peak was less than the limit of QP/Average more than 6dB, just peak value were recorded. 3. The spurious emission from 9 kHz-30MHz of IC RSS-GEN standard, the unit of final result on the test plots are dBμV/m, so the limit should be added by 51,5 dB from dBμA/m to dBμV/m.		

Below 1GHz:

ANT 1: (Maximum output power mode, 802.11ax20 5180MHz)


9kHz-150kHz

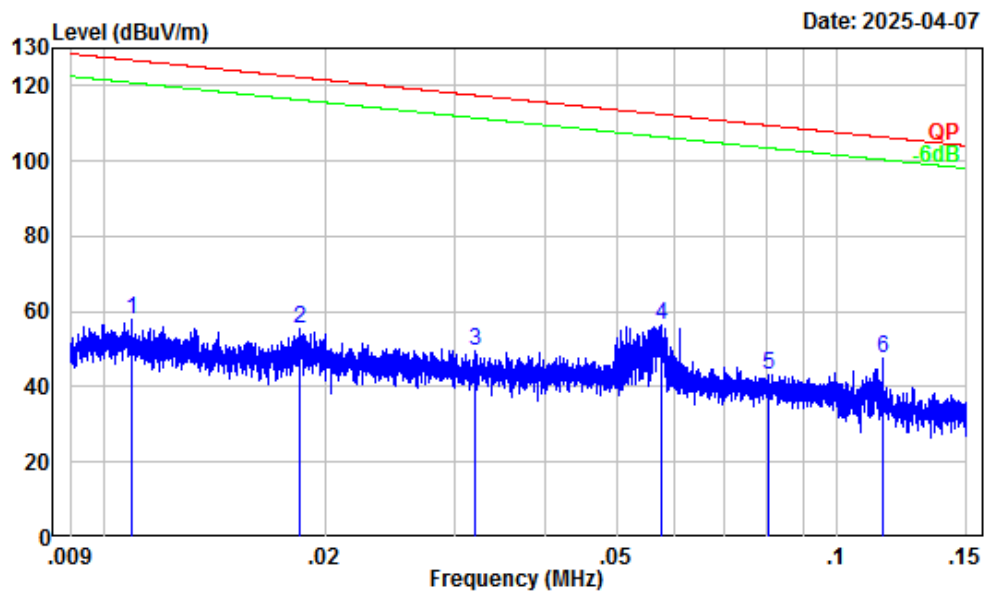

Site : Chamber A
Condition : 3m
Project Number : 2401A63093E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.01	32.13	25.84	57.97	126.86	-68.89	Peak
2	0.02	30.68	24.58	55.26	122.26	-67.00	Peak
3	0.03	28.27	21.28	49.55	117.46	-67.91	Peak
4	0.06	25.65	30.53	56.18	112.41	-56.23	Peak
5	0.08	23.35	19.81	43.16	109.47	-66.31	Peak
6	0.12	21.10	26.31	47.41	106.37	-58.96	Peak


150kHz-30MHz

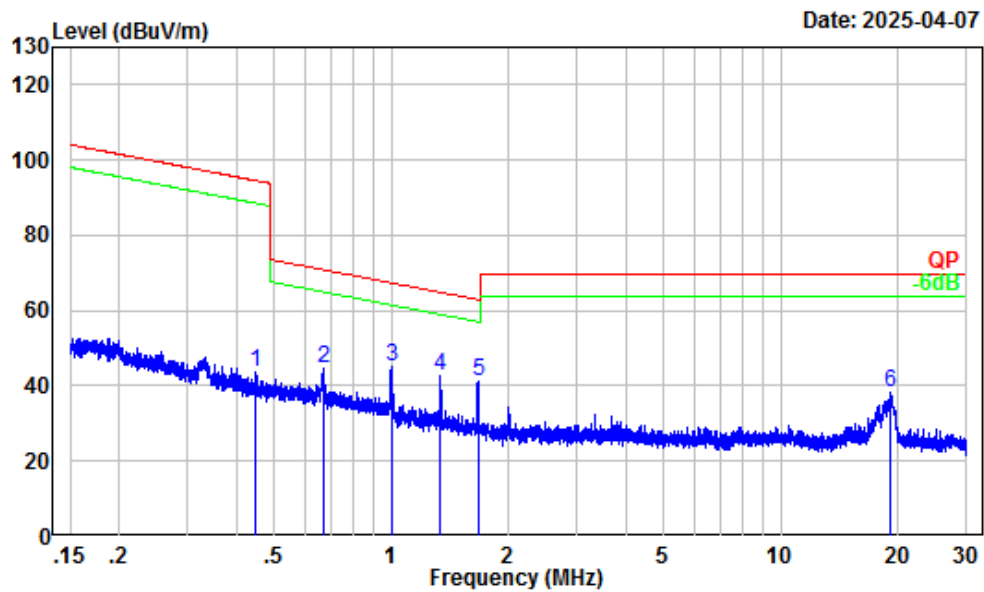

Site : Chamber A
Condition : 3m
Project Number : 2401A63093E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 10/30kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.45	7.40	36.08	43.48	94.59	-51.11	Peak
2	0.67	4.31	40.29	44.60	71.04	-26.44	Peak
3	1.00	1.19	44.09	45.28	67.45	-22.17	Peak
4	1.34	0.26	42.60	42.86	64.90	-22.04	Peak
5	1.67	-0.68	41.99	41.31	62.92	-21.61	Peak
6	19.08	-3.01	41.32	38.31	69.54	-31.23	Peak


30MHz-1GHz_Horizontal

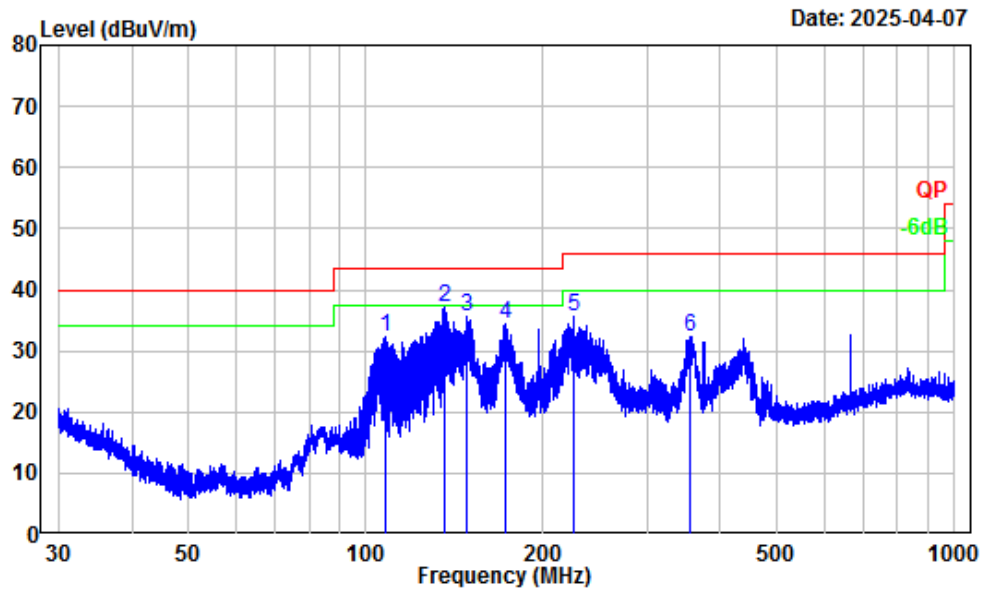

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2401A63093E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	107.89	-13.63	45.87	32.24	43.50	-11.26	Peak
2	136.40	-11.60	48.60	37.00	43.50	-6.50	Peak
3	148.57	-12.36	48.05	35.69	43.50	-7.81	Peak
4	173.13	-13.30	47.58	34.28	43.50	-9.22	Peak
5	225.01	-14.07	49.68	35.61	46.00	-10.39	Peak
6	356.05	-10.00	42.22	32.22	46.00	-13.78	Peak

30MHz-1GHz_Vertical

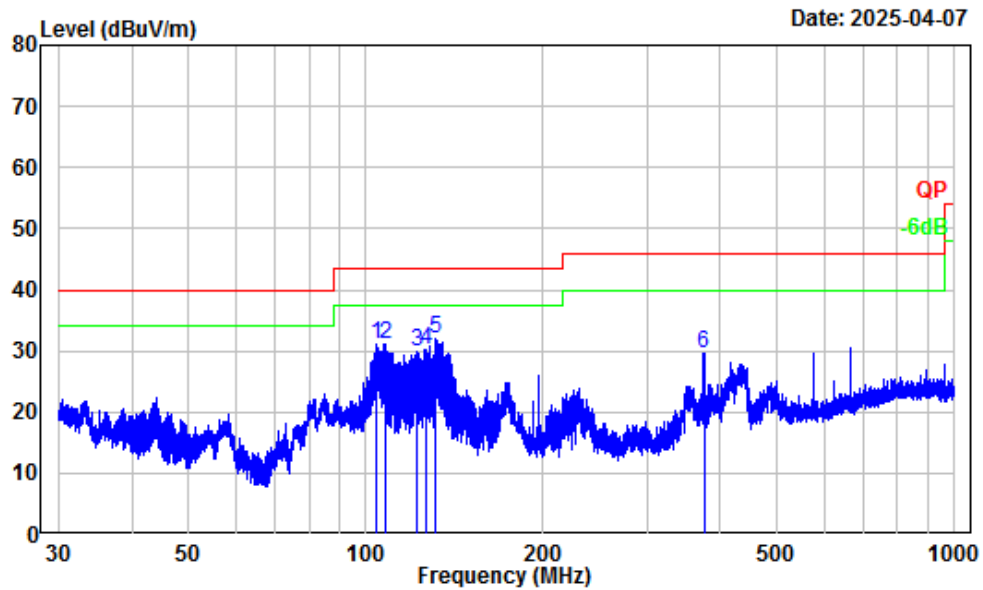


Site : Chamber A
Condition : 3m Vertical
Project Number : 2401A63093E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	104.31	-14.59	45.69	31.10	43.50	-12.40	Peak
2	107.60	-13.69	44.92	31.23	43.50	-12.27	Peak
3	122.08	-11.23	41.05	29.82	43.50	-13.68	Peak
4	126.22	-11.12	41.36	30.24	43.50	-13.26	Peak
5	131.30	-11.31	43.24	31.93	43.50	-11.57	Peak
6	375.12	-9.28	38.89	29.61	46.00	-16.39	Peak

ANT 2: (Maximum output power mode, 802.11a 5825MHz)


9kHz-150kHz

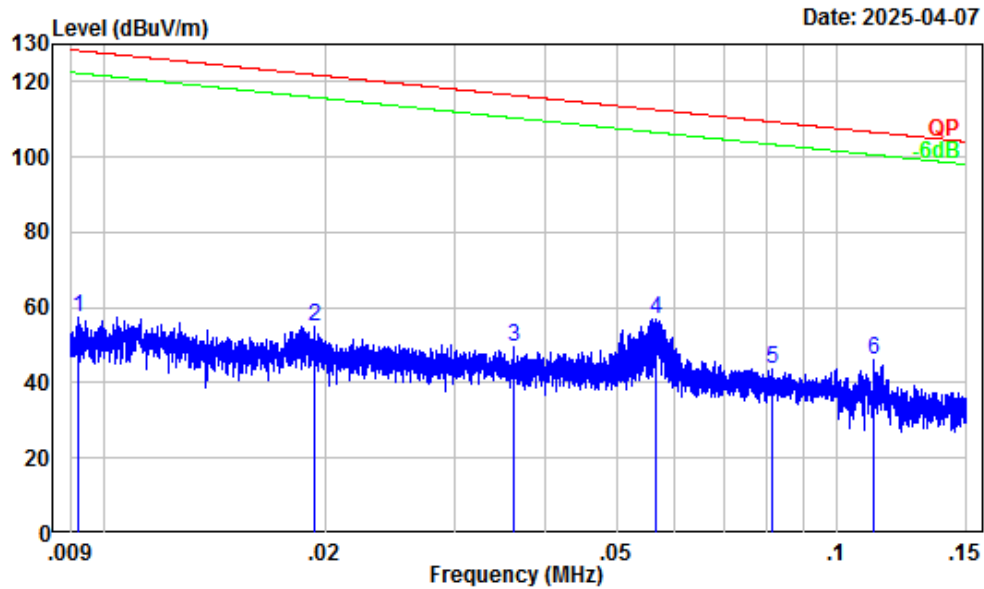

Site : Chamber A
Condition : 3m
Project Number : 2401A63093E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.01	32.45	25.11	57.56	128.30	-70.74	Peak
2	0.02	30.53	24.62	55.15	121.88	-66.73	Peak
3	0.04	27.84	21.77	49.61	116.41	-66.80	Peak
4	0.06	25.75	31.12	56.87	112.57	-55.70	Peak
5	0.08	23.28	20.59	43.87	109.36	-65.49	Peak
6	0.11	21.29	24.94	46.23	106.62	-60.39	Peak


150kHz-30MHz

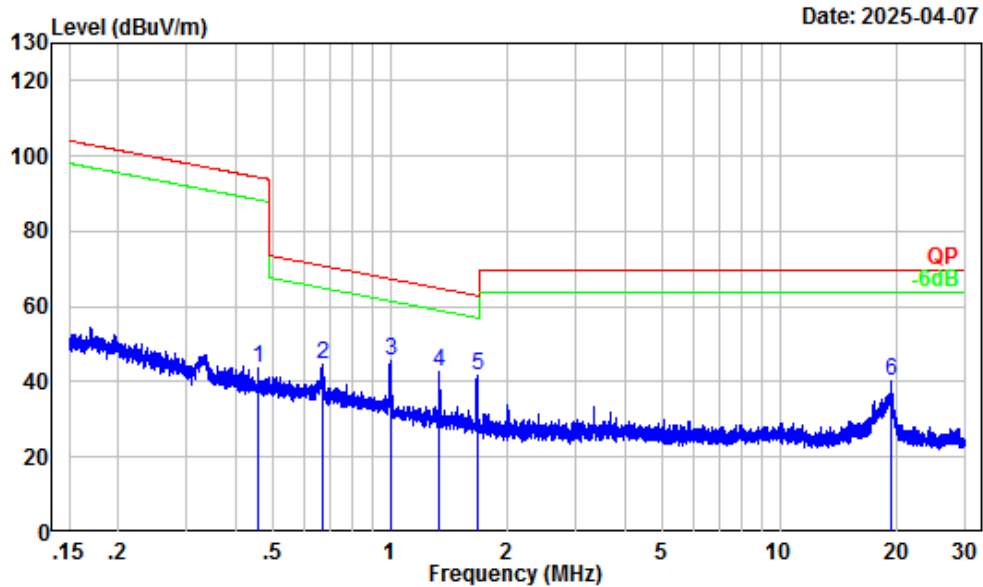

Site : Chamber A
Condition : 3m
Project Number : 2401A63093E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 10/30kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.46	7.17	36.34	43.51	94.35	-50.84	Peak
2	0.67	4.31	40.29	44.60	71.04	-26.44	Peak
3	1.00	1.20	44.43	45.63	67.46	-21.83	Peak
4	1.34	0.26	42.64	42.90	64.91	-22.01	Peak
5	1.67	-0.68	42.21	41.53	62.92	-21.39	Peak
6	19.33	-3.03	43.17	40.14	69.54	-29.40	Peak


30MHz-1GHz_Horizontal

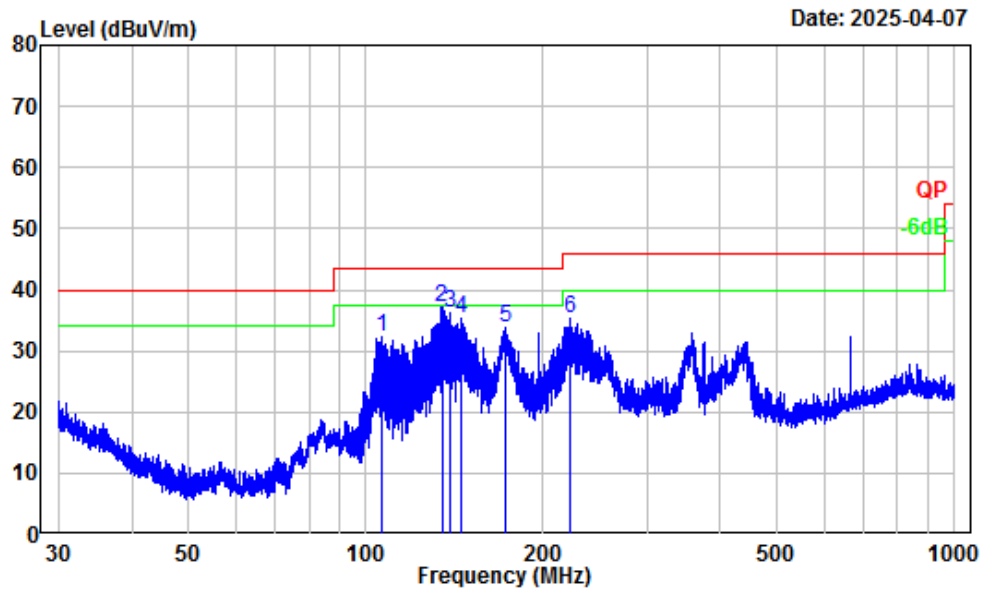

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2401A63093E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Anson Su

	Freq		Read		Limit	Over	Remark
	Factor		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	106.11	-14.09	46.46	32.37	43.50	-11.13	Peak
2	134.56	-11.46	48.65	37.19	43.50	-6.31	Peak
3	139.06	-11.80	48.00	36.20	43.50	-7.30	Peak
4	145.54	-12.22	47.42	35.20	43.50	-8.30	Peak
5	172.52	-13.24	47.06	33.82	43.50	-9.68	Peak
6	221.78	-14.15	49.36	35.21	46.00	-10.79	Peak

30MHz-1GHz_Vertical

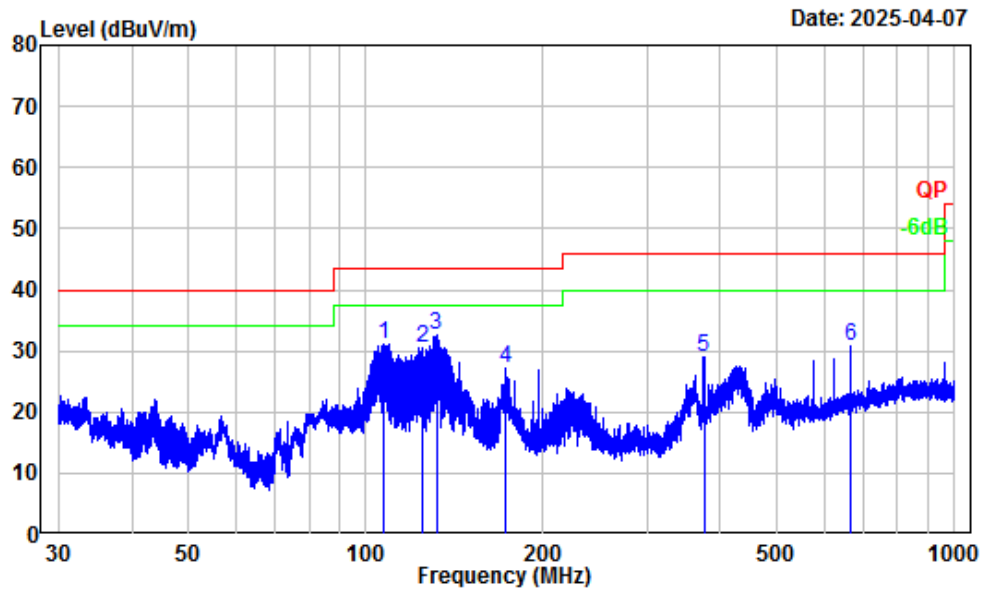

Site : Chamber A
Condition : 3m Vertical
Project Number : 2401A63093E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Anson Su

	Freq		Read		Limit	Over	Remark
	MHz	Factor	Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	107.04	-13.81	44.90	31.09	43.50	-12.41	Peak
2	124.79	-11.14	41.59	30.45	43.50	-13.05	Peak
3	131.64	-11.31	43.77	32.46	43.50	-11.04	Peak
4	172.15	-13.20	40.25	27.05	43.50	-16.45	Peak
5	375.12	-9.28	38.26	28.98	46.00	-17.02	Peak
6	666.10	-3.87	34.63	30.76	46.00	-15.24	Peak

Above 1GHz
ANT 1:
5150-5250 MHz

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11a							
Low Channel							
10360	52.64	PK	H	2.53	55.17	68.2	-13.03
10360	52.87	PK	V	2.53	55.4	68.2	-12.8
Middle Channel							
10400	52.32	PK	H	2.55	54.87	68.2	-13.33
10400	52.55	PK	V	2.55	55.1	68.2	-13.1
High Channel							
10480	52.01	PK	H	2.25	54.26	68.2	-13.94
10480	52.26	PK	V	2.25	54.51	68.2	-13.69
802.11ac20							
Low Channel							
10360	52.53	PK	H	2.53	55.06	68.2	-13.14
10360	52.75	PK	V	2.53	55.28	68.2	-12.92
Middle Channel							
10400	52.2	PK	H	2.55	54.75	68.2	-13.45
10400	52.42	PK	V	2.55	54.97	68.2	-13.23
High Channel							
10480	51.89	PK	H	2.25	54.14	68.2	-14.06
10480	52.13	PK	V	2.25	54.38	68.2	-13.82
802.11ac40							
Low Channel							
10380	52.45	PK	H	2.54	54.99	68.2	-13.21
10380	52.68	PK	V	2.54	55.22	68.2	-12.98
High Channel							
10460	51.96	PK	H	2.32	54.28	68.2	-13.92
10460	52.19	PK	V	2.32	54.51	68.2	-13.69
802.11ac80							
Middle Channel							
10420	51.72	PK	H	2.48	54.2	68.2	-14
10420	51.93	PK	V	2.48	54.41	68.2	-13.79

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ax20							
Low Channel							
10360	52.9	PK	H	2.53	55.43	68.2	-12.77
10360	53.11	PK	V	2.53	55.64	68.2	-12.56
Middle Channel							
10400	52.56	PK	H	2.55	55.11	68.2	-13.09
10400	52.78	PK	V	2.55	55.33	68.2	-12.87
High Channel							
10480	52.22	PK	H	2.25	54.47	68.2	-13.73
10480	52.45	PK	V	2.25	54.7	68.2	-13.5
802.11ax40							
Low Channel							
10380	52.27	PK	H	2.54	54.81	68.2	-13.39
10380	52.49	PK	V	2.54	55.03	68.2	-13.17
High Channel							
10460	51.84	PK	H	2.32	54.16	68.2	-14.04
10460	52.08	PK	V	2.32	54.4	68.2	-13.8
802.11ax80							
Middle Channel							
10420	51.53	PK	H	2.48	54.01	68.2	-14.19
10420	51.75	PK	V	2.48	54.23	68.2	-13.97

5725-5850MHz

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11a							
Low Channel							
11490	50.76	PK	H	3.54	54.3	74	-19.7
11490	37.21	AV	H	3.54	40.75	54	-13.25
11490	51.04	PK	V	3.54	54.58	74	-19.42
11490	37.39	AV	V	3.54	40.93	54	-13.07
Middle Channel							
11570	51.55	PK	H	3.3	54.85	74	-19.15
11570	37.86	AV	H	3.3	41.16	54	-12.84
11570	51.93	PK	V	3.3	55.23	74	-18.77
11570	38.04	AV	V	3.3	41.34	54	-12.66
High Channel							
11650	52.37	PK	H	3.42	55.79	74	-18.21
11650	38.52	AV	H	3.42	41.94	54	-12.06
11650	52.69	PK	V	3.42	56.11	74	-17.89
11650	38.73	AV	V	3.42	42.15	54	-11.85
802.11ac20							
Low Channel							
11490	50.46	PK	H	3.54	54	74	-20
11490	37.14	AV	H	3.54	40.68	54	-13.32
11490	50.82	PK	V	3.54	54.36	74	-19.64
11490	37.32	AV	V	3.54	40.86	54	-13.14
Middle Channel							
11570	51.25	PK	H	3.3	54.55	74	-19.45
11570	37.74	AV	H	3.3	41.04	54	-12.96
11570	51.63	PK	V	3.3	54.93	74	-19.07
11570	37.91	AV	V	3.3	41.21	54	-12.79
High Channel							
11650	52.13	PK	H	3.42	55.55	74	-18.45
11650	38.46	AV	H	3.42	41.88	54	-12.12
11650	52.51	PK	V	3.42	55.93	74	-18.07
11650	38.65	AV	V	3.42	42.07	54	-11.93

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ac40							
Low Channel							
11510	51.35	PK	H	3.53	54.88	74	-19.12
11510	38.36	AV	H	3.53	41.89	54	-12.11
11510	51.72	PK	V	3.53	55.25	74	-18.75
11510	38.54	AV	V	3.53	42.07	54	-11.93
High Channel							
11590	51.68	PK	H	3.21	54.89	74	-19.11
11590	38.77	AV	H	3.21	41.98	54	-12.02
11590	52.04	PK	V	3.21	55.25	74	-18.75
11590	38.95	AV	V	3.21	42.16	54	-11.84
802.11ac80							
Middle Channel							
11550	51.55	PK	H	3.37	54.92	74	-19.08
11550	39.67	AV	H	3.37	43.04	54	-10.96
11550	51.92	PK	V	3.37	55.29	74	-18.71
11550	39.86	AV	V	3.37	43.23	54	-10.77
802.11ax20							
Low Channel							
11490	50.54	PK	H	3.54	54.08	74	-19.92
11490	37.15	AV	H	3.54	40.69	54	-13.31
11490	50.91	PK	V	3.54	54.45	74	-19.55
11490	37.33	AV	V	3.54	40.87	54	-13.13
Middle Channel							
11570	51.36	PK	H	3.3	54.66	74	-19.34
11570	37.8	AV	H	3.3	41.1	54	-12.9
11570	51.75	PK	V	3.3	55.05	74	-18.95
11570	37.98	AV	V	3.3	41.28	54	-12.72
High Channel							
11650	52.29	PK	H	3.42	55.71	74	-18.29
11650	38.58	AV	H	3.42	42	54	-12
11650	52.65	PK	V	3.42	56.07	74	-17.93
11650	38.76	AV	V	3.42	42.18	54	-11.82

Frequency (MHz)	Reading (dB μ V)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
802.11ax40							
Low Channel							
11510	51.52	PK	H	3.53	55.05	74	-18.95
11510	38.44	AV	H	3.53	41.97	54	-12.03
11510	51.89	PK	V	3.53	55.42	74	-18.58
11510	38.61	AV	V	3.53	42.14	54	-11.86
High Channel							
11590	51.97	PK	H	3.21	55.18	74	-18.82
11590	38.86	AV	H	3.21	42.07	54	-11.93
11590	52.32	PK	V	3.21	55.53	74	-18.47
11590	39.04	AV	V	3.21	42.25	54	-11.75
802.11ax80							
Middle Channel							
11550	51.42	PK	H	3.37	54.79	74	-19.21
11550	39.53	AV	H	3.37	42.9	54	-11.1
11550	51.81	PK	V	3.37	55.18	74	-18.82
11550	39.79	AV	V	3.37	43.16	54	-10.84

ANT2**5150-5250 MHz**

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11a							
Low Channel							
10360	52.86	PK	H	2.53	55.39	68.2	-12.81
10360	53.09	PK	V	2.53	55.62	68.2	-12.58
Middle Channel							
10400	52.54	PK	H	2.55	55.09	68.2	-13.11
10400	52.78	PK	V	2.55	55.33	68.2	-12.87
High Channel							
10480	52.25	PK	H	2.25	54.5	68.2	-13.7
10480	52.47	PK	V	2.25	54.72	68.2	-13.48
802.11ac20							
Low Channel							
10360	52.61	PK	H	2.53	55.14	68.2	-13.06
10360	52.85	PK	V	2.53	55.38	68.2	-12.82
Middle Channel							
10400	52.3	PK	H	2.55	54.85	68.2	-13.35
10400	52.52	PK	V	2.55	55.07	68.2	-13.13
High Channel							
10480	51.98	PK	H	2.25	54.23	68.2	-13.97
10480	52.19	PK	V	2.25	54.44	68.2	-13.76
802.11ac40							
Low Channel							
10380	52.31	PK	H	2.54	54.85	68.2	-13.35
10380	52.53	PK	V	2.54	55.07	68.2	-13.13
High Channel							
10460	51.78	PK	H	2.32	54.1	68.2	-14.1
10460	52.02	PK	V	2.32	54.34	68.2	-13.86
802.11ac80							
Middle Channel							
10420	51.83	PK	H	2.48	54.31	68.2	-13.89
10420	52.05	PK	V	2.48	54.53	68.2	-13.67

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ax20							
Low Channel							
10360	52.53	PK	H	2.53	55.06	68.2	-13.14
10360	52.76	PK	V	2.53	55.29	68.2	-12.91
Middle Channel							
10400	52.21	PK	H	2.55	54.76	68.2	-13.44
10400	52.43	PK	V	2.55	54.98	68.2	-13.22
High Channel							
10480	51.89	PK	H	2.25	54.14	68.2	-14.06
10480	52.11	PK	V	2.25	54.36	68.2	-13.84
802.11ax40							
Low Channel							
10380	52.19	PK	H	2.54	54.73	68.2	-13.47
10380	52.4	PK	V	2.54	54.94	68.2	-13.26
High Channel							
10460	51.74	PK	H	2.32	54.06	68.2	-14.14
10460	51.97	PK	V	2.32	54.29	68.2	-13.91
802.11ax80							
Middle Channel							
10420	51.67	PK	H	2.48	54.15	68.2	-14.05
10420	51.89	PK	V	2.48	54.37	68.2	-13.83

5725-5850MHz:

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11a							
Low Channel							
11490	51.02	PK	H	3.54	54.56	74	-19.44
11490	37.24	AV	H	3.54	40.78	54	-13.22
11490	51.37	PK	V	3.54	54.91	74	-19.09
11490	37.45	AV	V	3.54	40.99	54	-13.01
Middle Channel							
11570	51.74	PK	H	3.3	55.04	74	-18.96
11570	38.01	AV	H	3.3	41.31	54	-12.69
11570	52.08	PK	V	3.3	55.38	74	-18.62
11570	38.2	AV	V	3.3	41.5	54	-12.5
High Channel							
11650	52.55	PK	H	3.42	55.97	74	-18.03
11650	38.76	AV	H	3.42	42.18	54	-11.82
11650	52.89	PK	V	3.42	56.31	74	-17.69
11650	38.94	AV	V	3.42	42.36	54	-11.64
802.11ac20							
Low Channel							
11490	50.89	PK	H	3.54	54.43	74	-19.57
11490	37.17	AV	H	3.54	40.71	54	-13.29
11490	51.22	PK	V	3.54	54.76	74	-19.24
11490	37.36	AV	V	3.54	40.9	54	-13.1
Middle Channel							
11570	51.58	PK	H	3.3	54.88	74	-19.12
11570	37.86	AV	H	3.3	41.16	54	-12.84
11570	51.93	PK	V	3.3	55.23	74	-18.77
11570	38.04	AV	V	3.3	41.34	54	-12.66
High Channel							
11650	52.43	PK	H	3.42	55.85	74	-18.15
11650	38.65	AV	H	3.42	42.07	54	-11.93
11650	52.78	PK	V	3.42	56.2	74	-17.8
11650	38.87	AV	V	3.42	42.29	54	-11.71

Frequency (MHz)	Reading (dB μ V)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
802.11ac40							
Low Channel							
11510	51.72	PK	H	3.53	55.25	74	-18.75
11510	38.43	AV	H	3.53	41.96	54	-12.04
11510	52.06	PK	V	3.53	55.59	74	-18.41
11510	38.65	AV	V	3.53	42.18	54	-11.82
High Channel							
11590	52.25	PK	H	3.21	55.46	74	-18.54
11590	38.87	AV	H	3.21	42.08	54	-11.92
11590	52.61	PK	V	3.21	55.82	74	-18.18
11590	39.08	AV	V	3.21	42.29	54	-11.71
802.11ac80							
Middle Channel							
11550	51.75	PK	H	3.37	55.12	74	-18.88
11550	39.5	AV	H	3.37	42.87	54	-11.13
11550	52.12	PK	V	3.37	55.49	74	-18.51
11550	39.69	AV	V	3.37	43.06	54	-10.94
802.11ax20							
Low Channel							
11490	51.15	PK	H	3.54	54.69	74	-19.31
11490	37.21	AV	H	3.54	40.75	54	-13.25
11490	51.52	PK	V	3.54	55.06	74	-18.94
11490	37.4	AV	V	3.54	40.94	54	-13.06
Middle Channel							
11570	51.83	PK	H	3.3	55.13	74	-18.87
11570	37.94	AV	H	3.3	41.24	54	-12.76
11570	52.18	PK	V	3.3	55.48	74	-18.52
11570	38.15	AV	V	3.3	41.45	54	-12.55
High Channel							
11650	52.54	PK	H	3.42	55.96	74	-18.04
11650	38.66	AV	H	3.42	42.08	54	-11.92
11650	52.9	PK	V	3.42	56.32	74	-17.68
11650	38.87	AV	V	3.42	42.29	54	-11.71

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ax40							
Low Channel							
11510	51.58	PK	H	3.53	55.11	74	-18.89
11510	38.34	AV	H	3.53	41.87	54	-12.13
11510	51.95	PK	V	3.53	55.48	74	-18.52
11510	38.53	AV	V	3.53	42.06	54	-11.94
High Channel							
11590	52.12	PK	H	3.21	55.33	74	-18.67
11590	38.79	AV	H	3.21	42	54	-12
11590	52.47	PK	V	3.21	55.68	74	-18.32
11590	39.01	AV	V	3.21	42.22	54	-11.78
802.11ax80							
Middle Channel							
11550	51.96	PK	H	3.37	55.33	74	-18.67
11550	39.57	AV	H	3.37	42.94	54	-11.06
11550	52.31	PK	V	3.37	55.68	74	-18.32
11550	39.74	AV	V	3.37	43.11	54	-10.89

Note:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Factor + Reading


Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.

Band Edge Test plots:

5150-5250 MHz_ ANT1:


Left Band edge_Horizontal_Peak

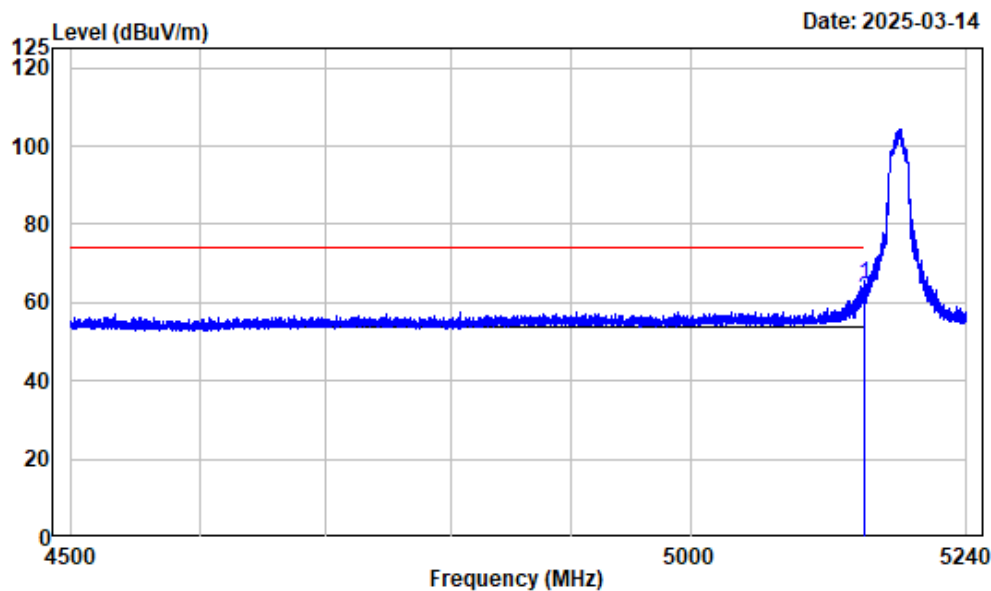

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.246	-7.46	72.19	64.73	74.00	-9.27	Peak
2	5150.000	-7.46	68.31	60.85	74.00	-13.15	Peak


Left Band edge_Horizontal_Average

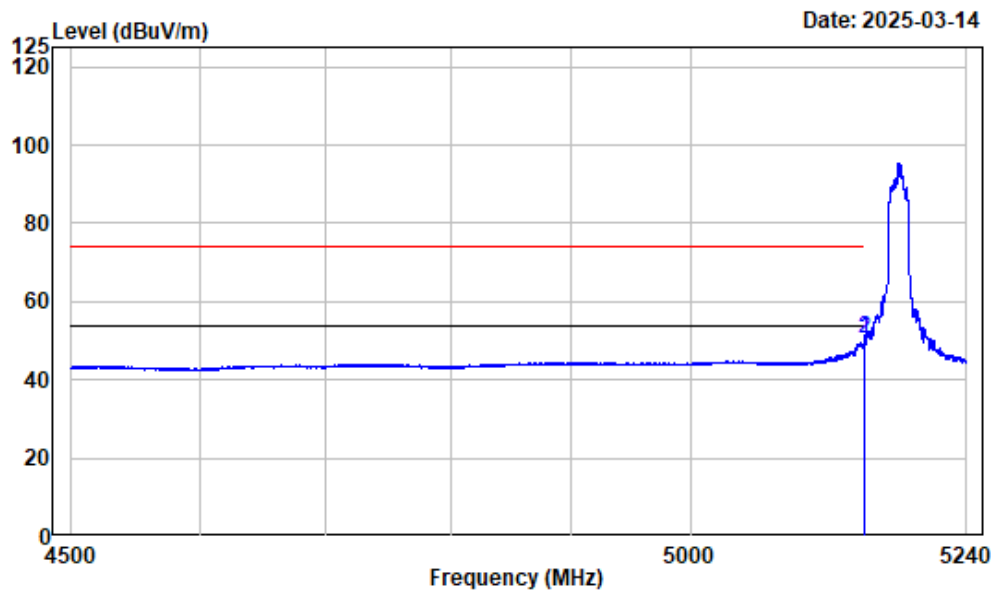

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.886	-7.46	58.03	50.57	54.00	-3.43 Average
2	5150.000	-7.46	57.91	50.45	54.00	-3.55 Average


Left Band edge_Vertical_Peak

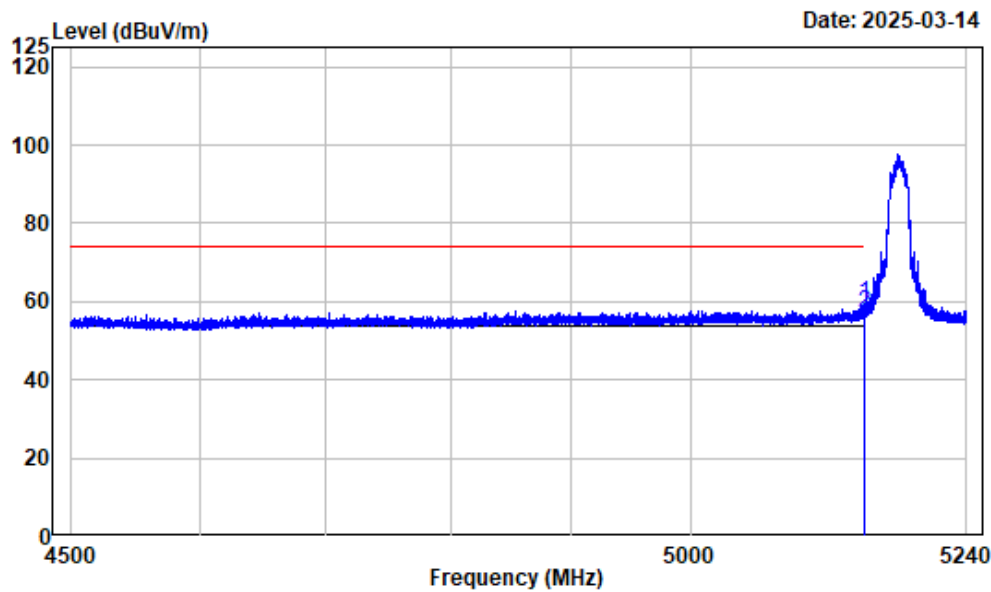

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.524	-7.46	67.02	59.56	74.00	-14.44 Peak
2	5150.000	-7.46	64.57	57.11	74.00	-16.89 Peak


Left Band edge_Vertical_Average

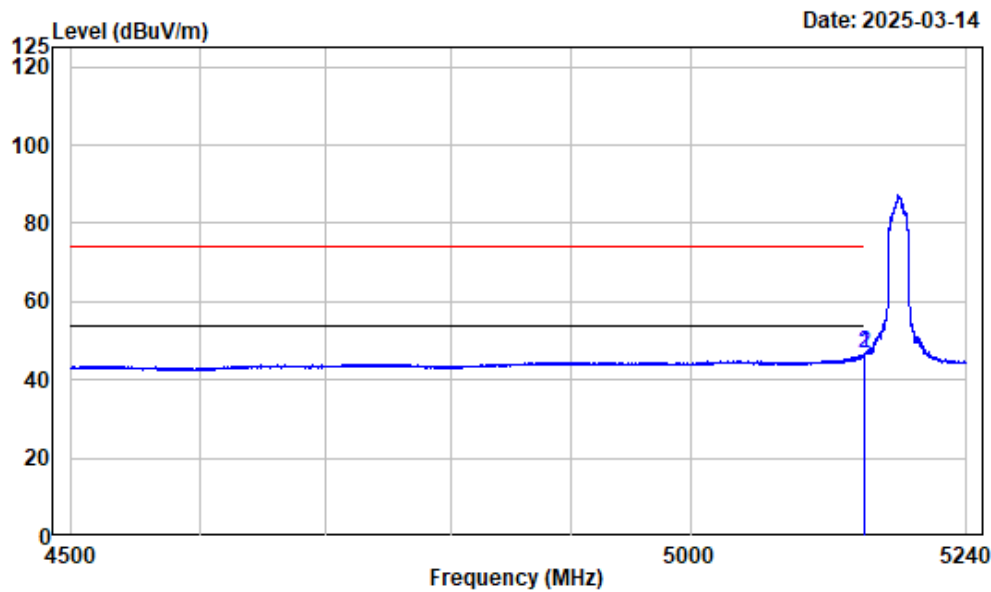

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.801	-7.46	54.09	46.63	54.00	-7.37 Average
2	5150.000	-7.46	53.98	46.52	54.00	-7.48 Average


Right Band edge_Horizontal_Peak

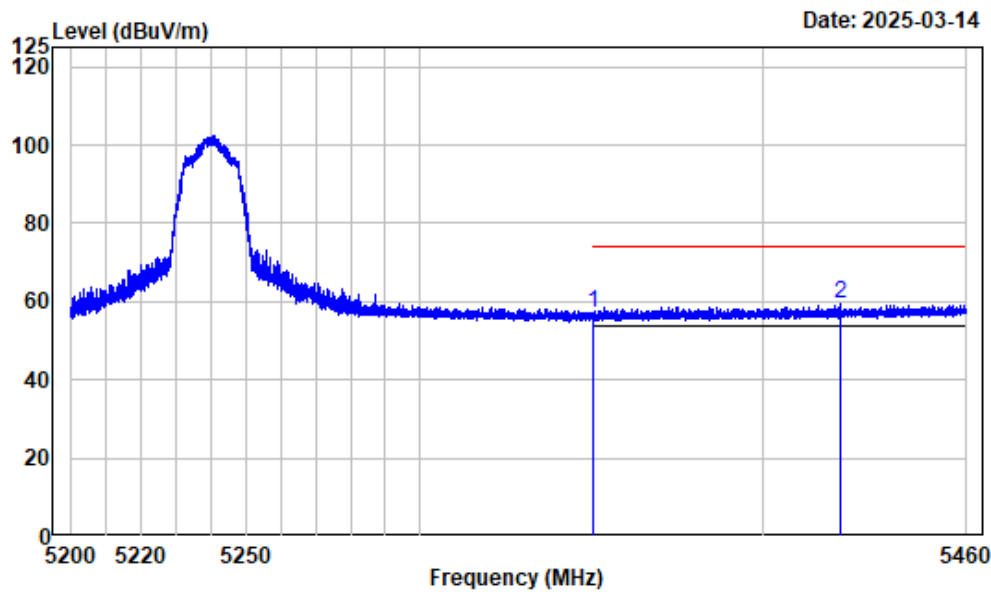

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	63.83	57.09	74.00	-16.91	Peak
2 5422.718	-6.46	65.82	59.36	74.00	-14.64	Peak


Right Band edge_Horizontal_Average

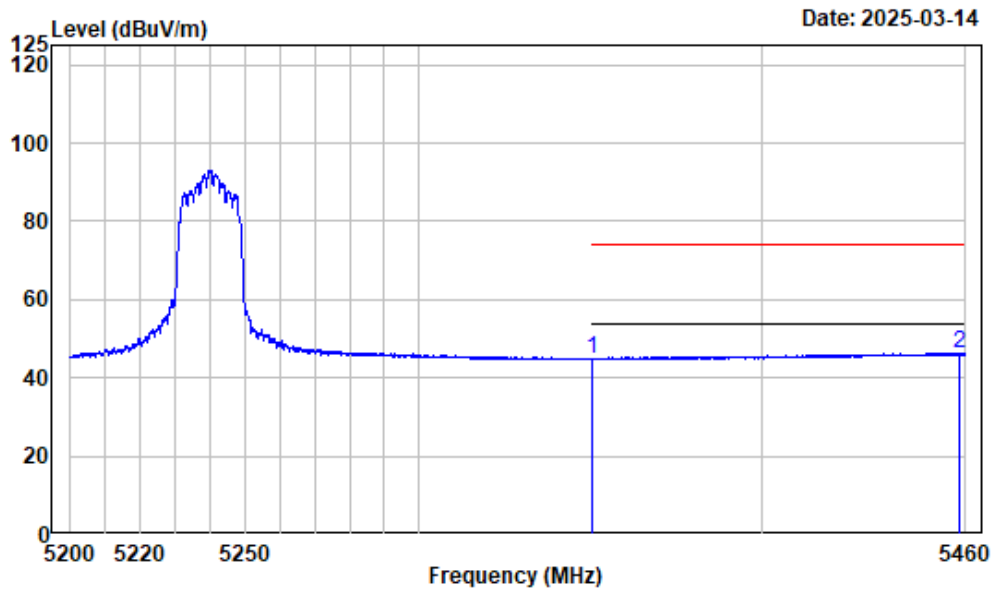

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	51.43	44.69	54.00	-9.31	Average
2 5458.212	-6.29	52.60	46.31	54.00	-7.69	Average


Right Band edge_Vertical_Peak

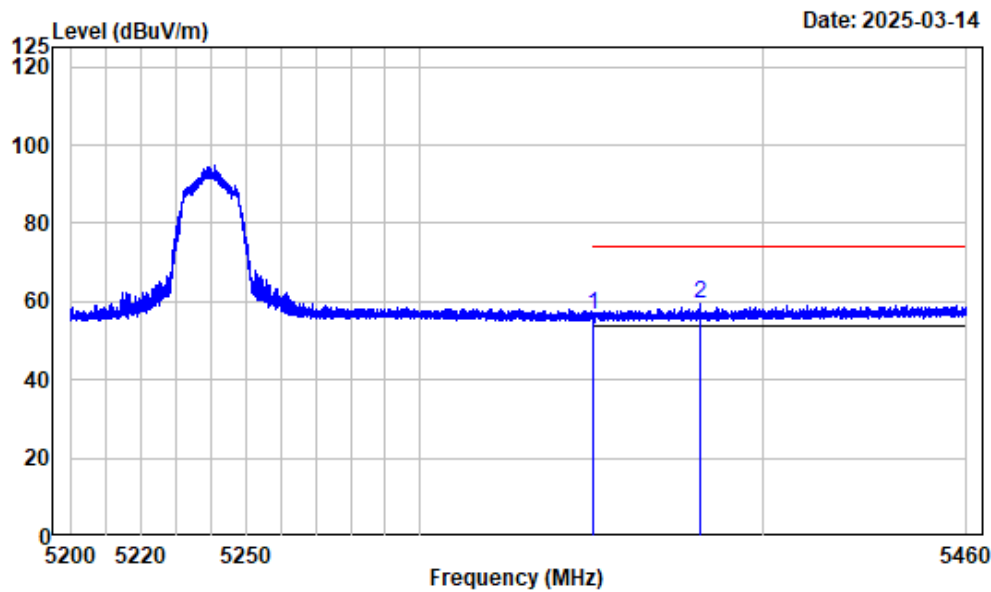

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	63.16	56.42	74.00	-17.58	Peak
2 5381.470	-6.64	65.91	59.27	74.00	-14.73	Peak


Right Band edge_Vertical_Average

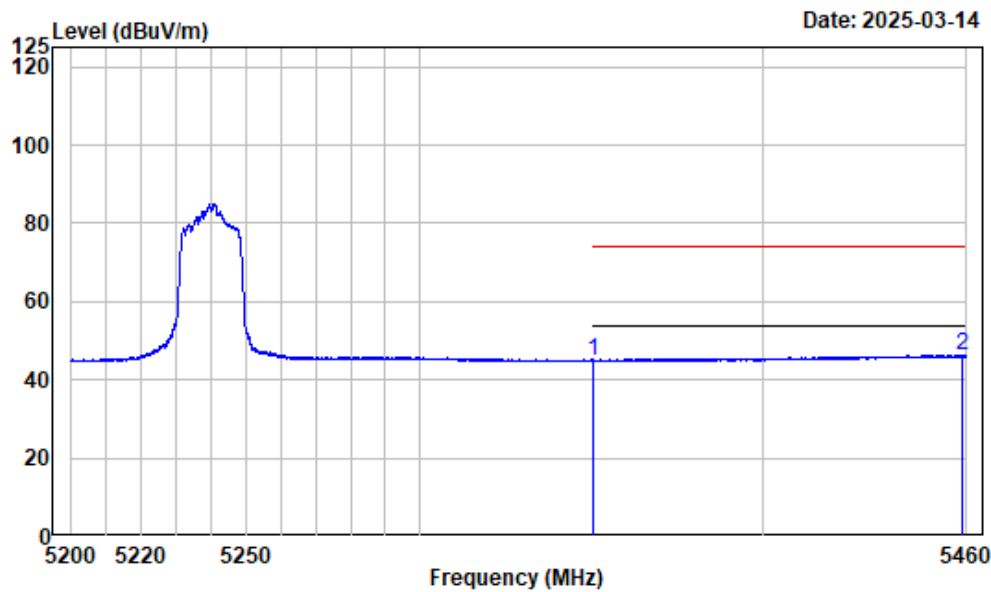

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	51.61	44.87	54.00	-9.13	Average
2 5458.570	-6.29	52.45	46.16	54.00	-7.84	Average


Left Band edge_Horizontal_Peak

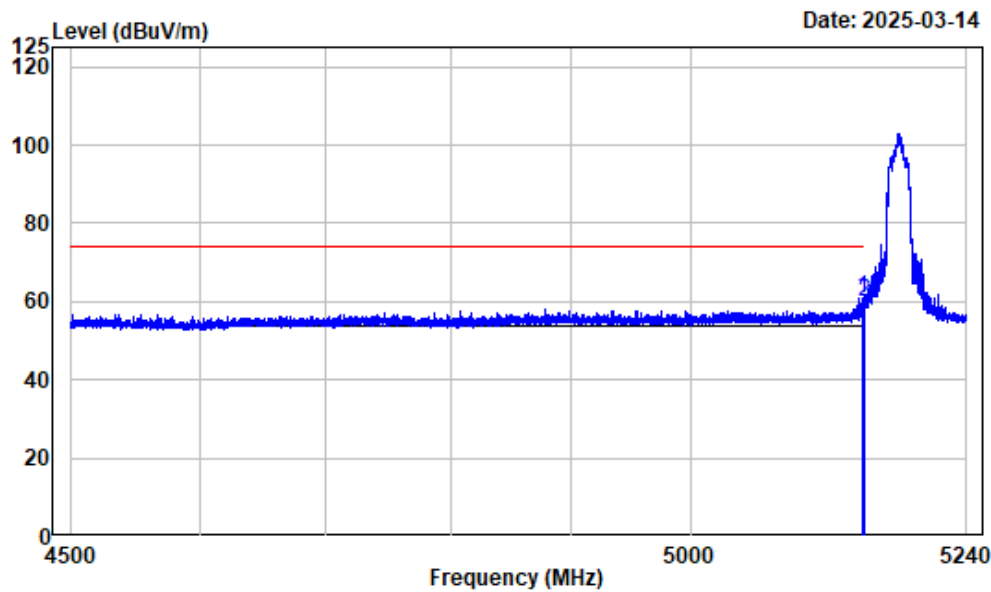

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5180

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.876	-7.46	68.40	60.94	74.00	-13.06 Peak
2	5150.000	-7.46	67.38	59.92	74.00	-14.08 Peak


Left Band edge_Horizontal_Average

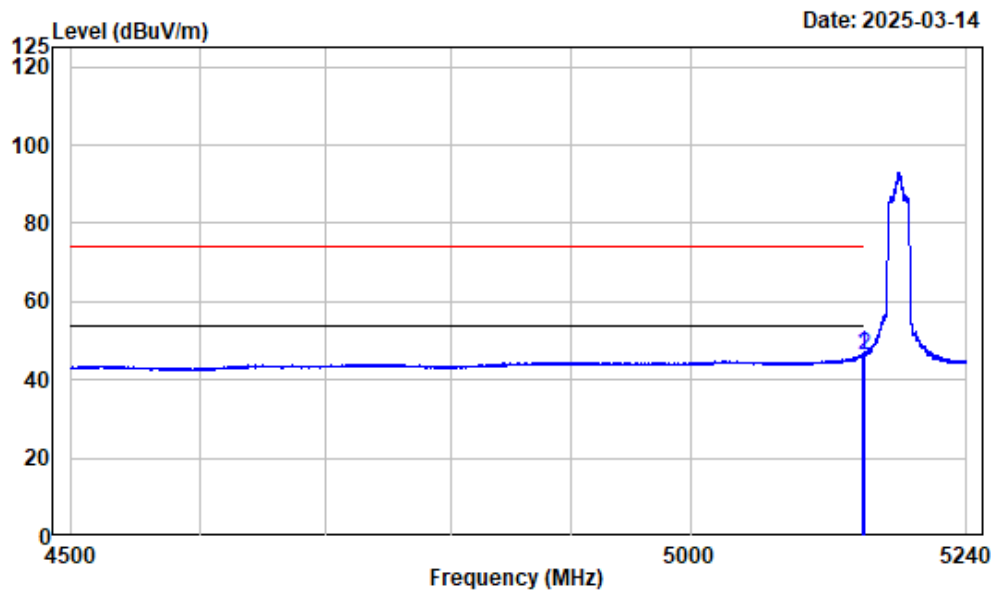

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.061	-7.46	54.01	46.55	54.00	-7.45 Average
2	5150.000	-7.46	53.85	46.39	54.00	-7.61 Average


Left Band edge_Vertical_Peak

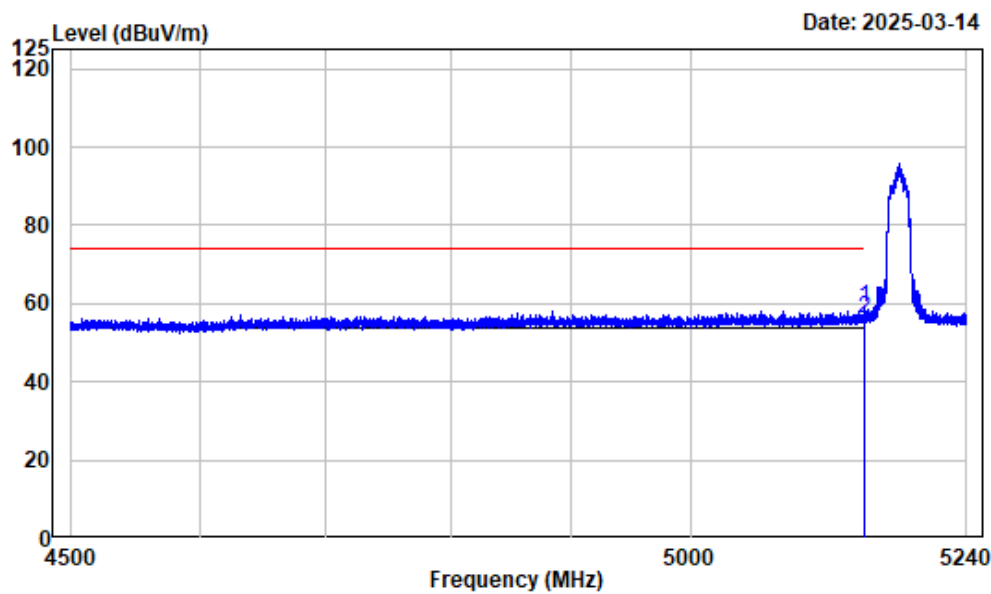

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5149.801	-7.46	66.34	58.88	74.00	-15.12	Peak
2 5150.000	-7.46	63.53	56.07	74.00	-17.93	Peak


Left Band edge_Vertical_Average

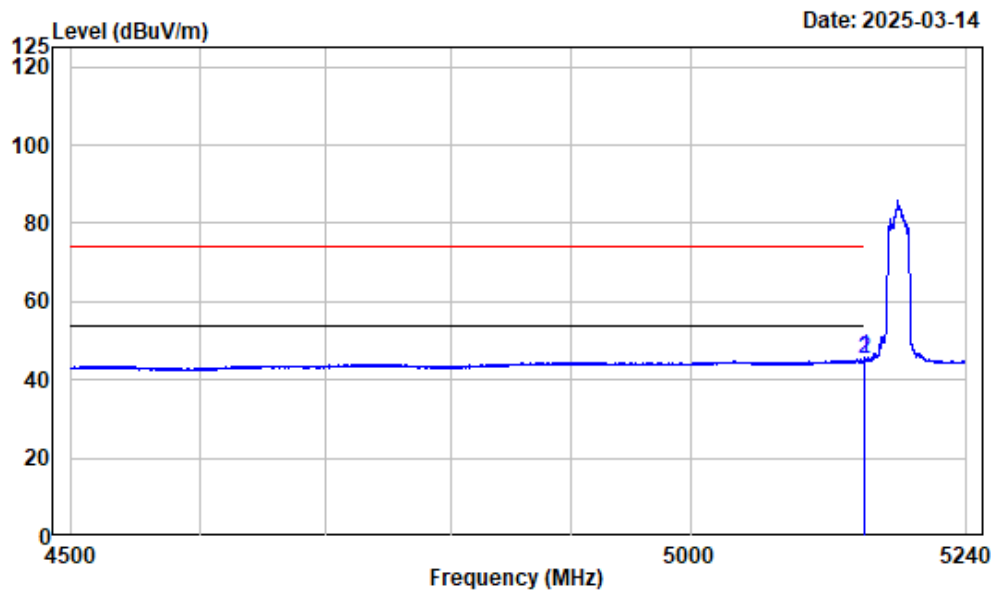

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.339	-7.46	53.00	45.54	54.00	-8.46 Average
2	5150.000	-7.46	52.65	45.19	54.00	-8.81 Average


Right Band edge_Horizontal_Peak

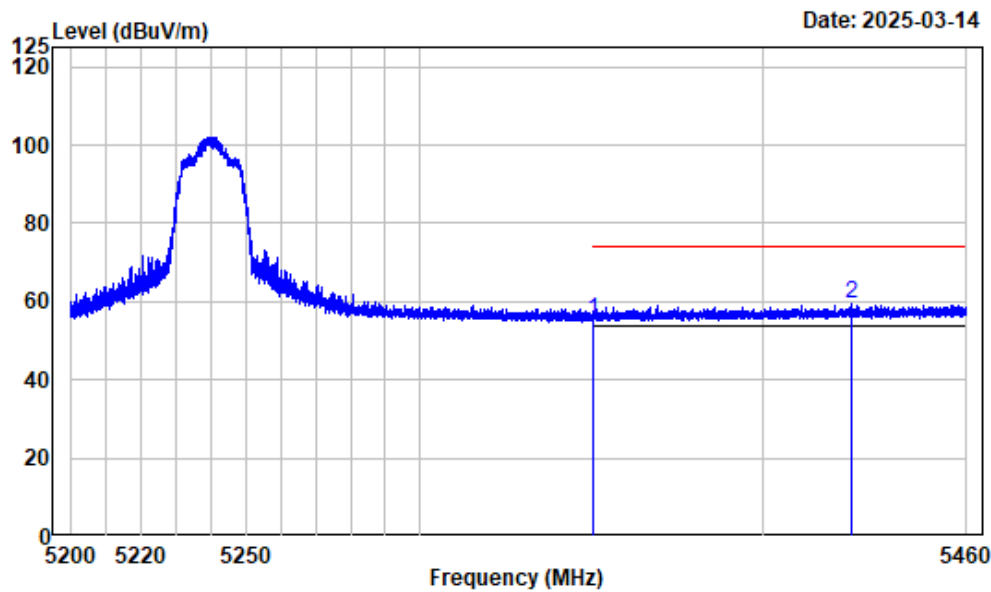

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	61.99	55.25	74.00	-18.75 Peak
2	5425.838	-6.46	65.88	59.42	74.00	-14.58 Peak


Right Band edge_Horizontal_Average

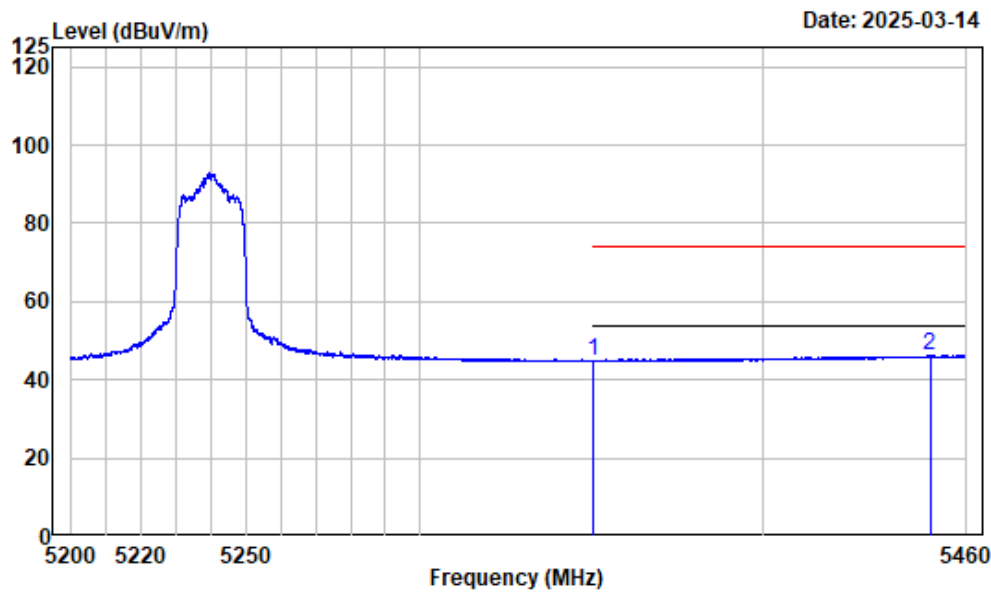

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	51.45	44.71	54.00	-9.29 Average
2	5449.176	-6.33	52.56	46.23	54.00	-7.77 Average


Right Band edge_Vertical_Peak

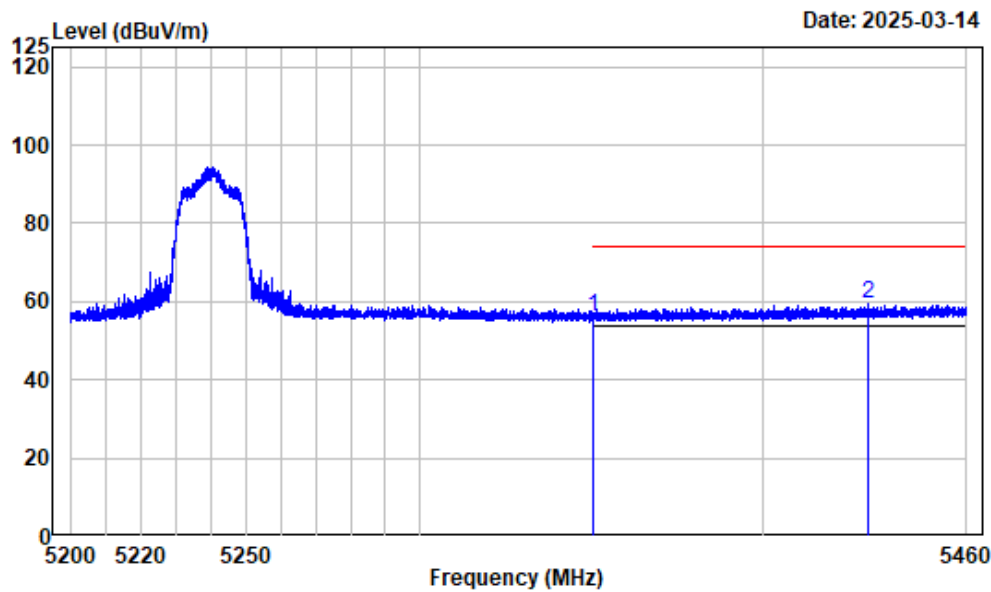

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	62.86	56.12	74.00	-17.88	Peak
2 5431.006	-6.43	65.78	59.35	74.00	-14.65	Peak


Right Band edge_Vertical_Average

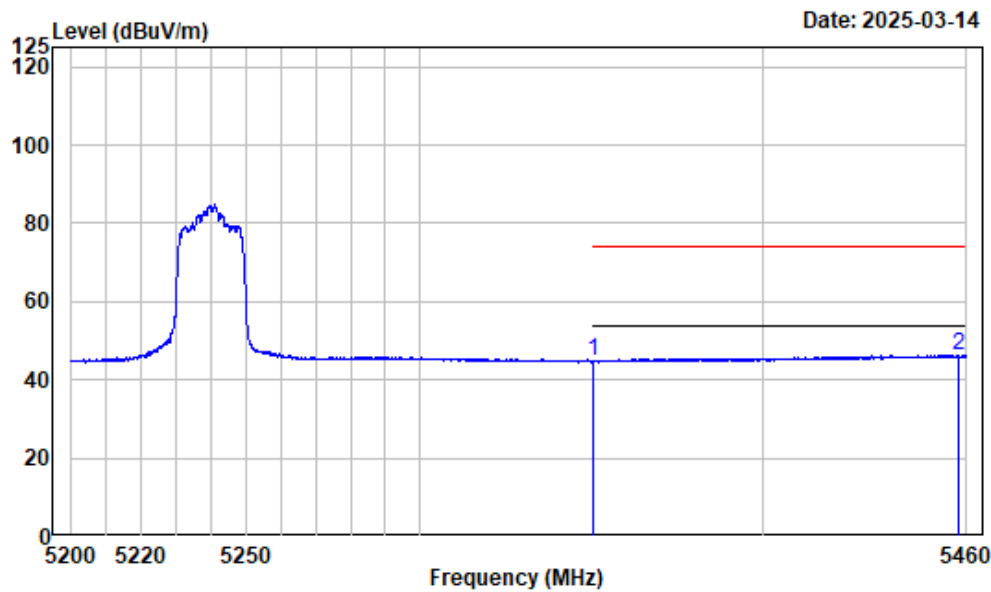

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	51.46	44.72	54.00	-9.28	Average
2 5457.692	-6.30	52.55	46.25	54.00	-7.75	Average


Left Band edge_Horizontal_Peak

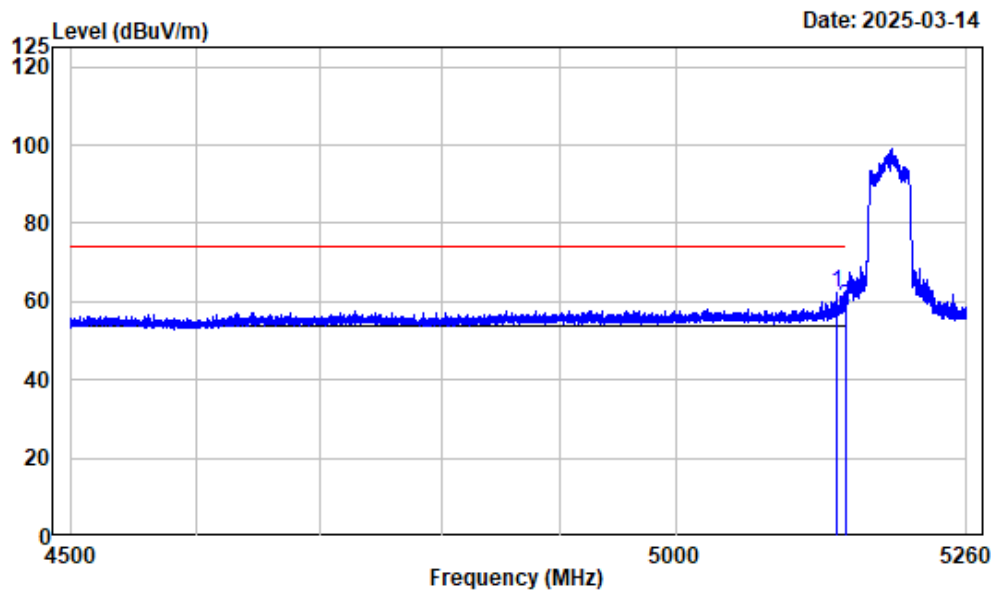

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5190

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5142.660	-7.46	69.94	62.48	74.00	-11.52	Peak
2 5150.000	-7.46	66.01	58.55	74.00	-15.45	Peak


Left Band edge_Horizontal_Average

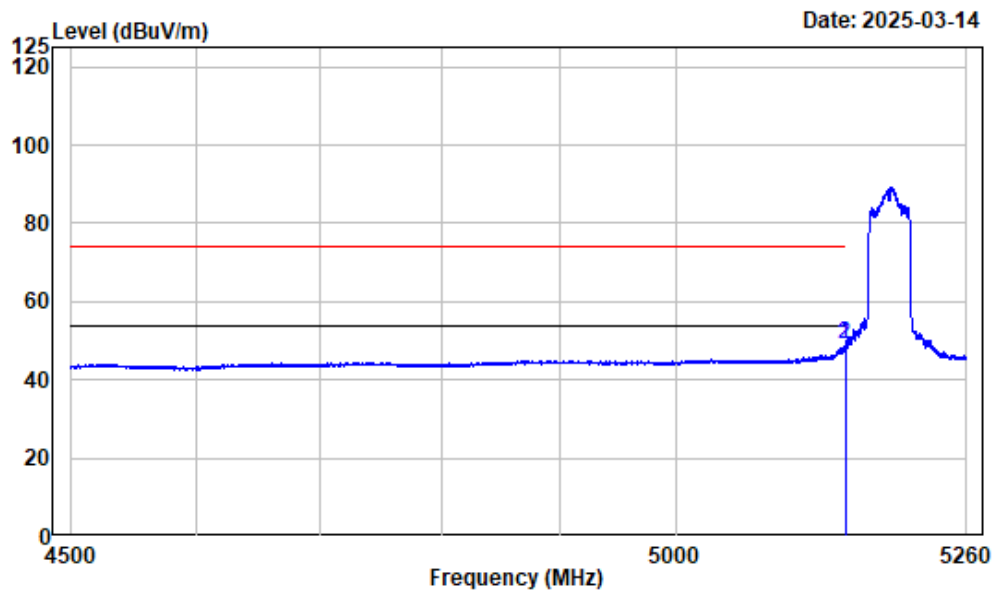

Condition : Horizontal
 Project No. : 2401A63093E-RF
 Tester : Zenos Qiao
 Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
 Note : 5GWiFi-Band1-AC40-5190

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.976	-7.46	56.45	48.99	54.00	-5.01	Average
2	5150.000	-7.46	56.36	48.90	54.00	-5.10	Average


Left Band edge_Vertical_Peak

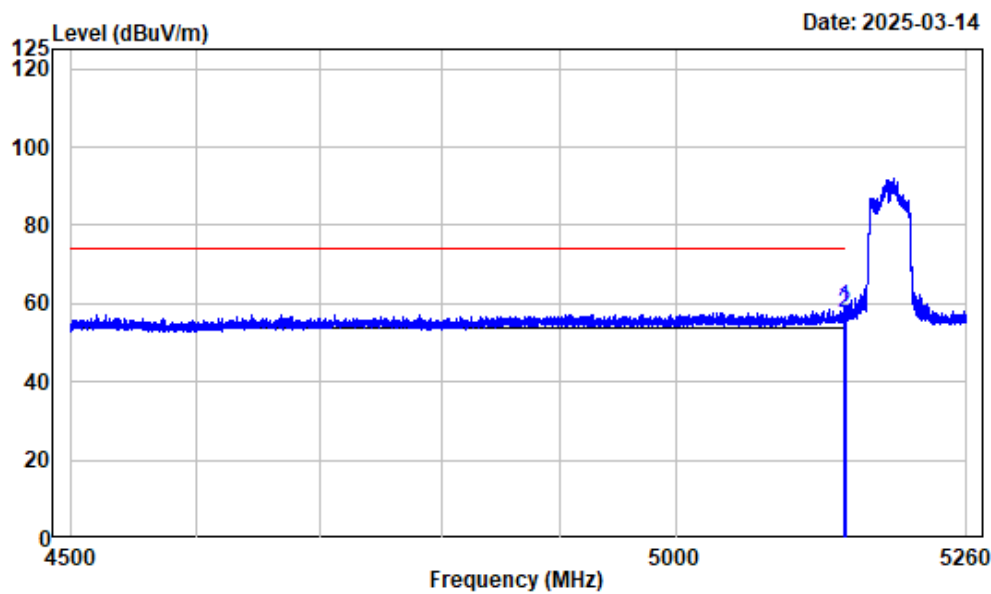

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5190

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.026	-7.46	66.35	58.89	74.00	-15.11 Peak
2	5150.000	-7.46	64.96	57.50	74.00	-16.50 Peak


Left Band edge_Vertical_Average

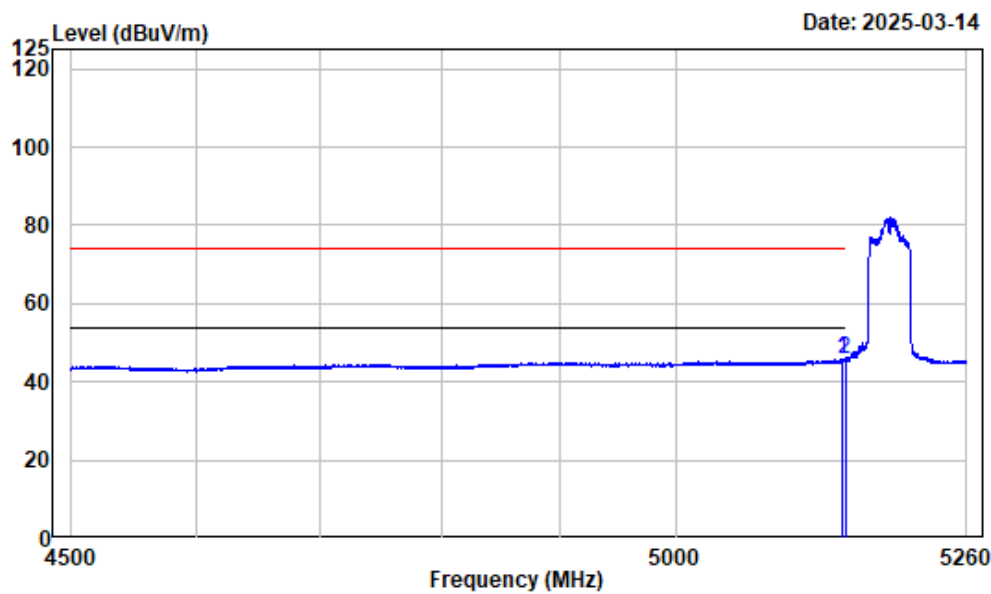

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5190

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5147.221	-7.46	53.26	45.80	54.00	-8.20 Average
2	5150.000	-7.46	53.01	45.55	54.00	-8.45 Average


Right Band edge_Horizontal_Peak

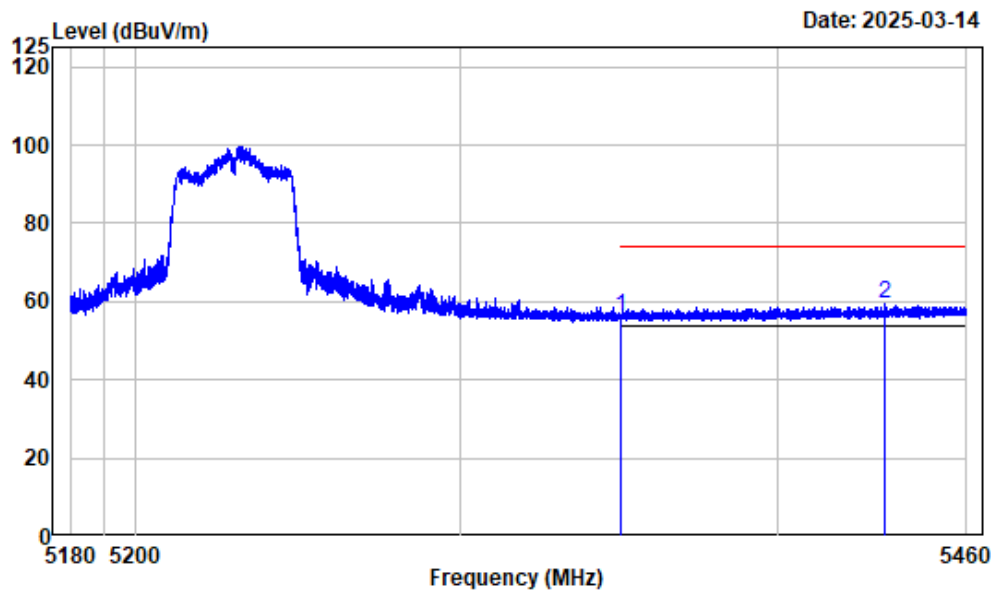

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	62.67	55.93	74.00	-18.07 Peak
2	5434.132	-6.41	65.68	59.27	74.00	-14.73 Peak


Right Band edge_Horizontal_Average

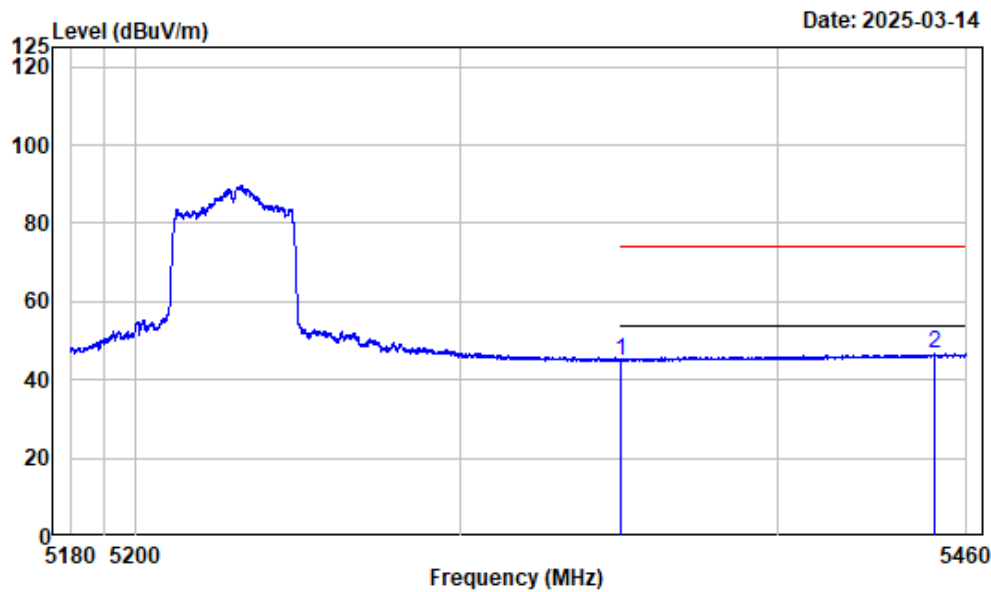

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	51.74	45.00	54.00	-9.00 Average
2	5449.708	-6.33	52.98	46.65	54.00	-7.35 Average


Right Band edge_Vertical_Peak

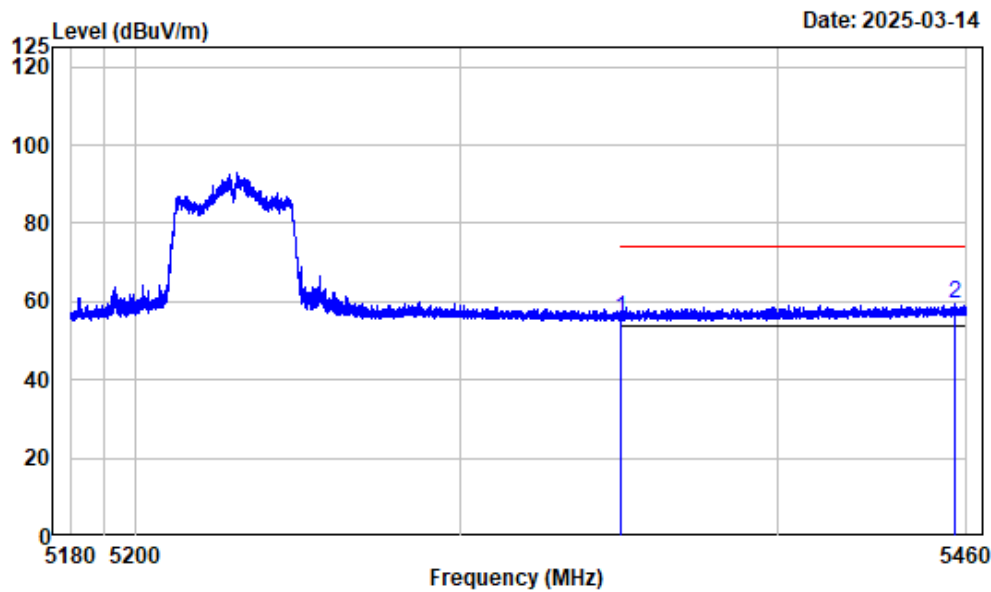

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	62.48	55.74	74.00	-18.26	Peak
2 5456.535	-6.31	65.74	59.43	74.00	-14.57	Peak


Right Band edge_Vertical_Average

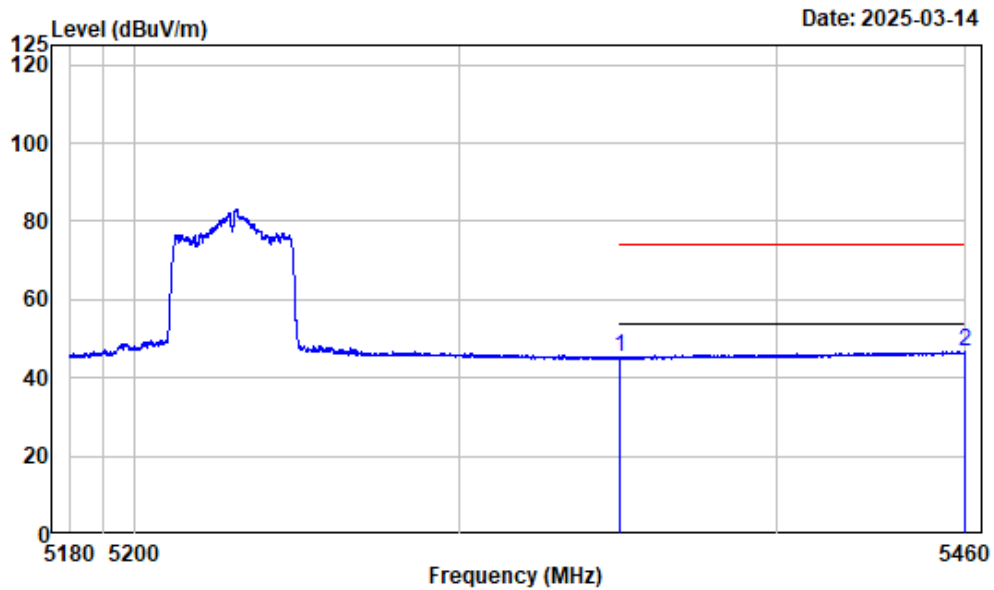

Condition : Vertical
 Project No. : 2401A63093E-RF
 Tester : Zenos Qiao
 Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
 Note : 5GWiFi-Band1-AC40-5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	51.99	45.25	54.00	-8.75	Average
2	5459.720	-6.29	53.01	46.72	54.00	-7.28	Average


Left Band edge_Horizontal_Peak

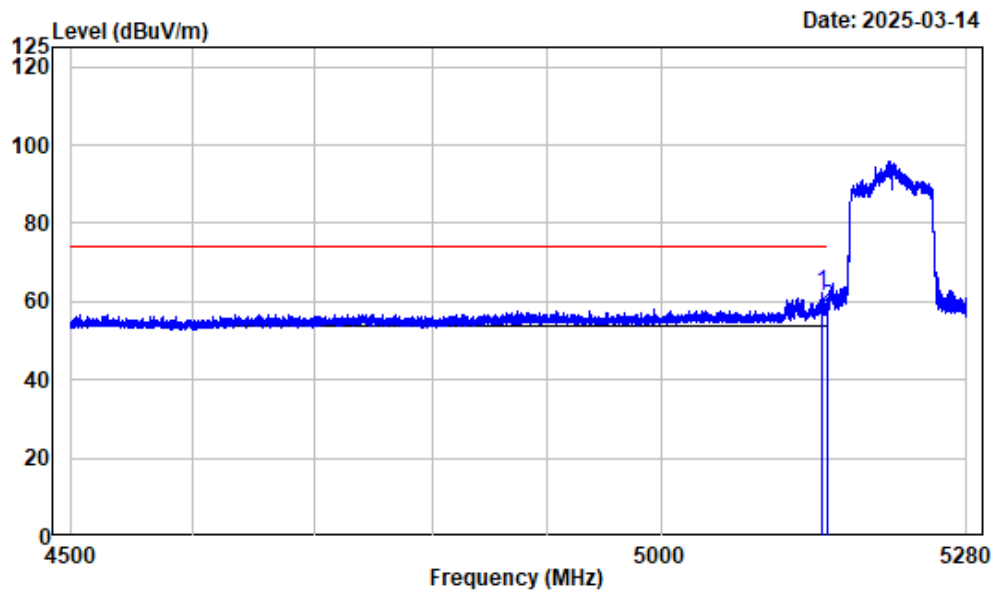

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5146.311	-7.46	69.73	62.27	74.00	-11.73 Peak
2	5150.000	-7.46	65.90	58.44	74.00	-15.56 Peak


Left Band edge_Horizontal_Average

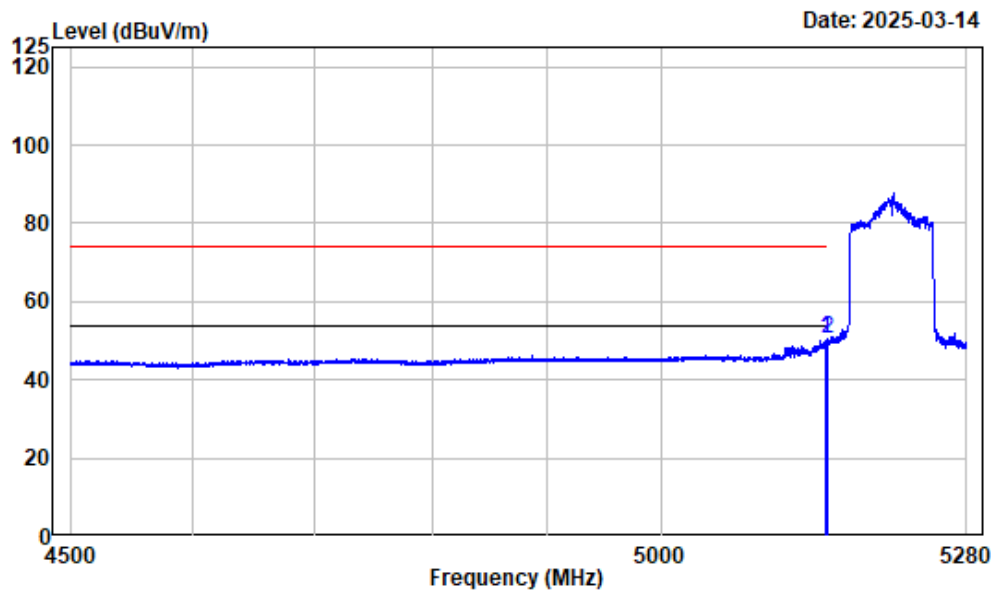

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.897	-7.46	58.02	50.56	54.00	-3.44 Average
2	5150.000	-7.46	57.93	50.47	54.00	-3.53 Average


Left Band edge_Vertical_Peak

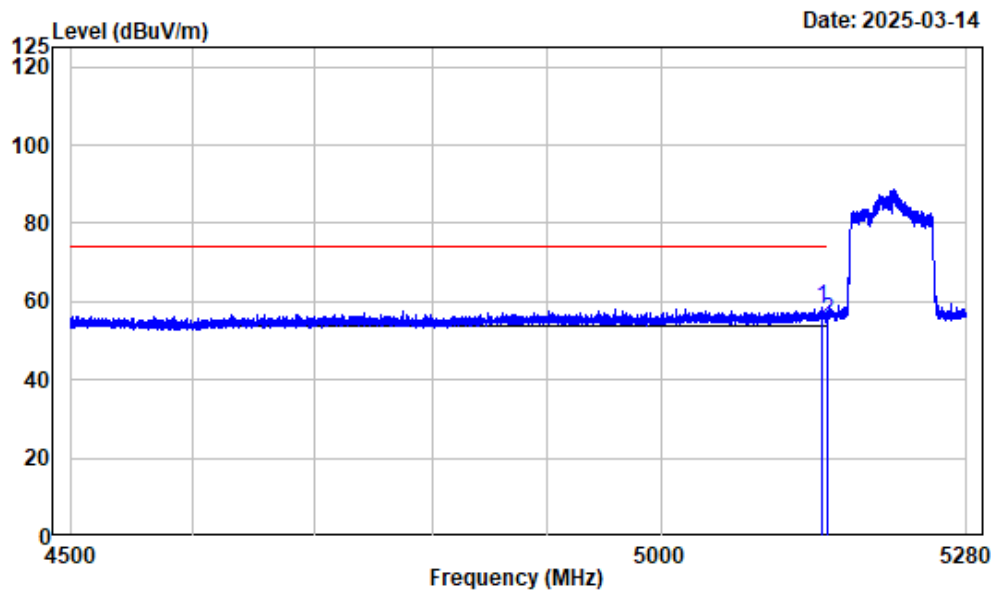

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5146.506	-7.46	65.97	58.51	74.00	-15.49 Peak
2	5150.000	-7.46	62.88	55.42	74.00	-18.58 Peak


Left Band edge_Vertical_Average

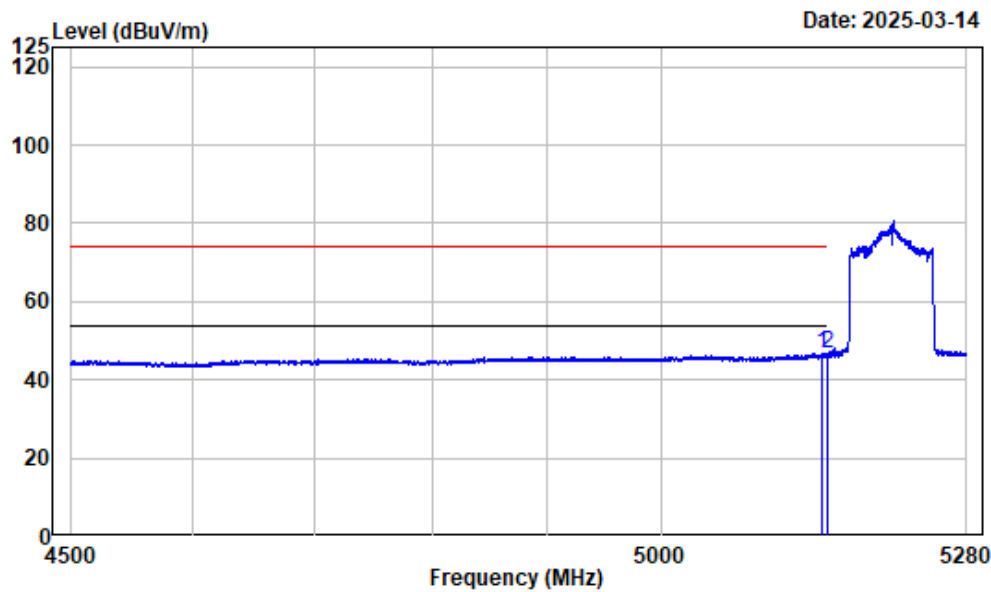

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5145.433	-7.46	54.19	46.73	54.00	-7.27 Average
2	5150.000	-7.46	54.04	46.58	54.00	-7.42 Average


Right Band edge_Horizontal_Peak

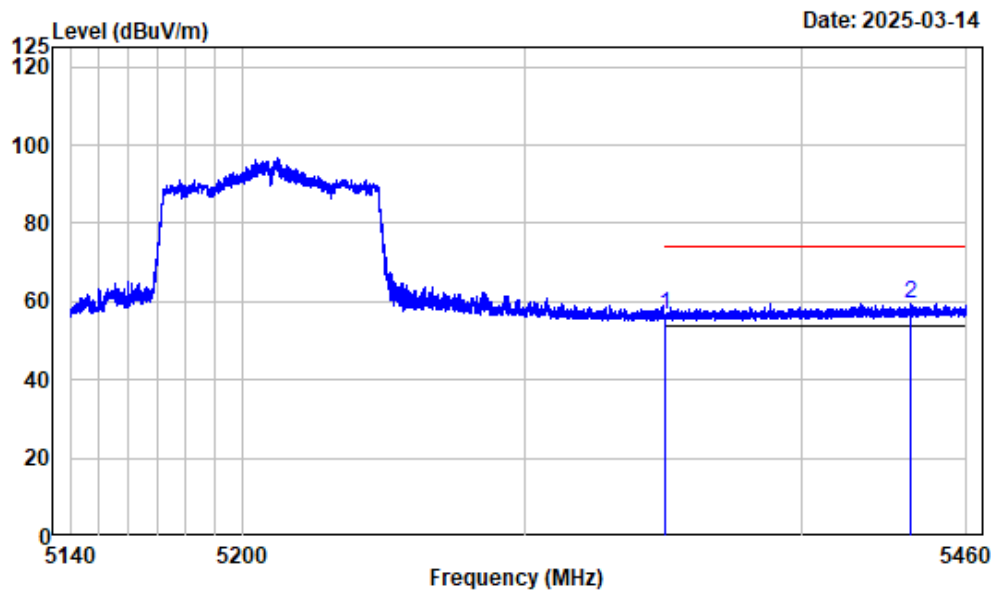

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	63.18	56.44	74.00	-17.56 Peak
2	5439.518	-6.38	66.00	59.62	74.00	-14.38 Peak


Right Band edge_Horizontal_Average

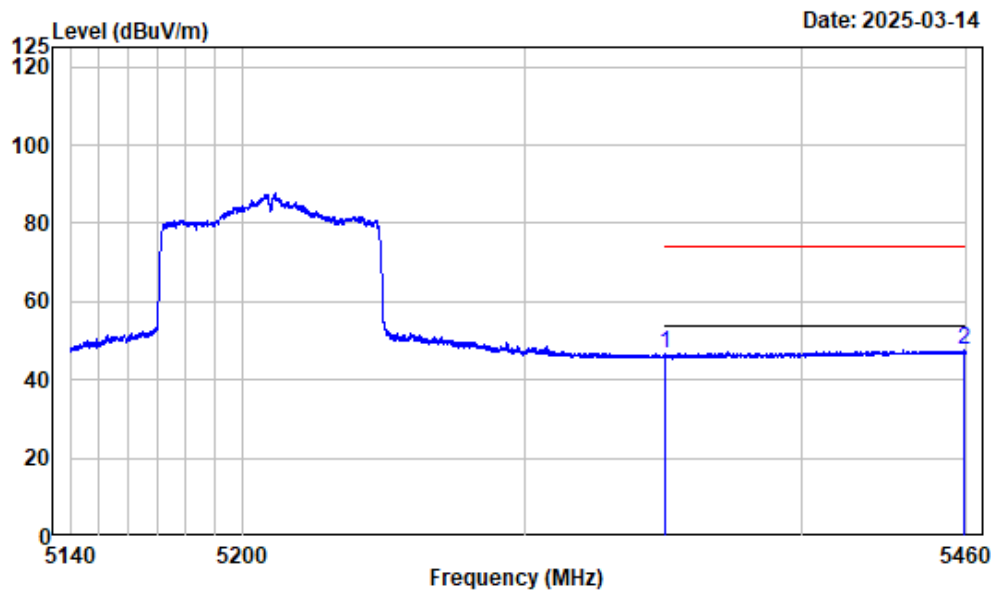

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	53.38	46.64	54.00	-7.36	Average
2 5458.840	-6.29	53.83	47.54	54.00	-6.46	Average


Right Band edge_Vertical_Peak

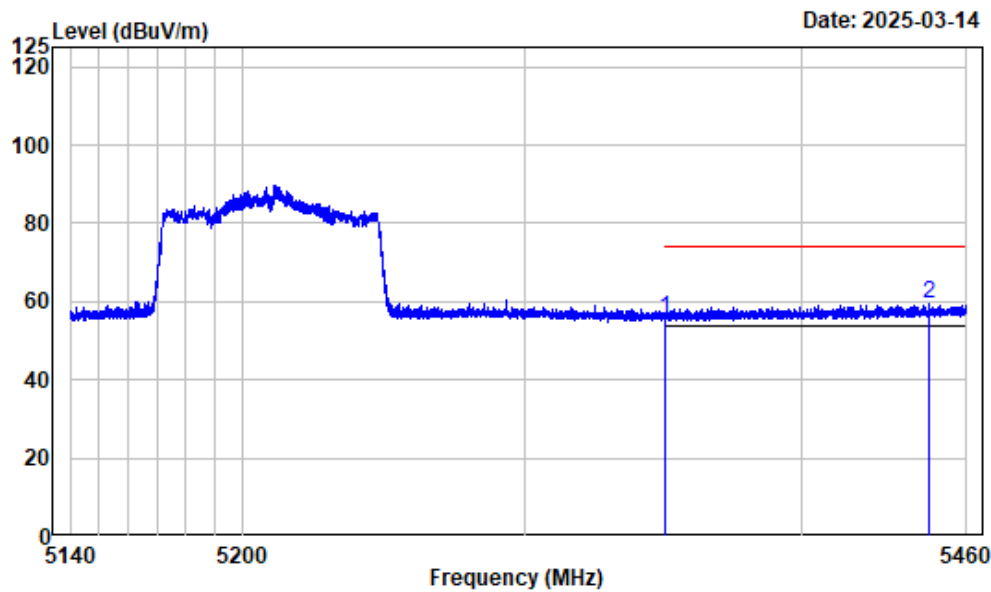

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	62.31	55.57	74.00	-18.43	Peak
2 5446.558	-6.35	65.75	59.40	74.00	-14.60	Peak


Right Band edge_Vertical_Average

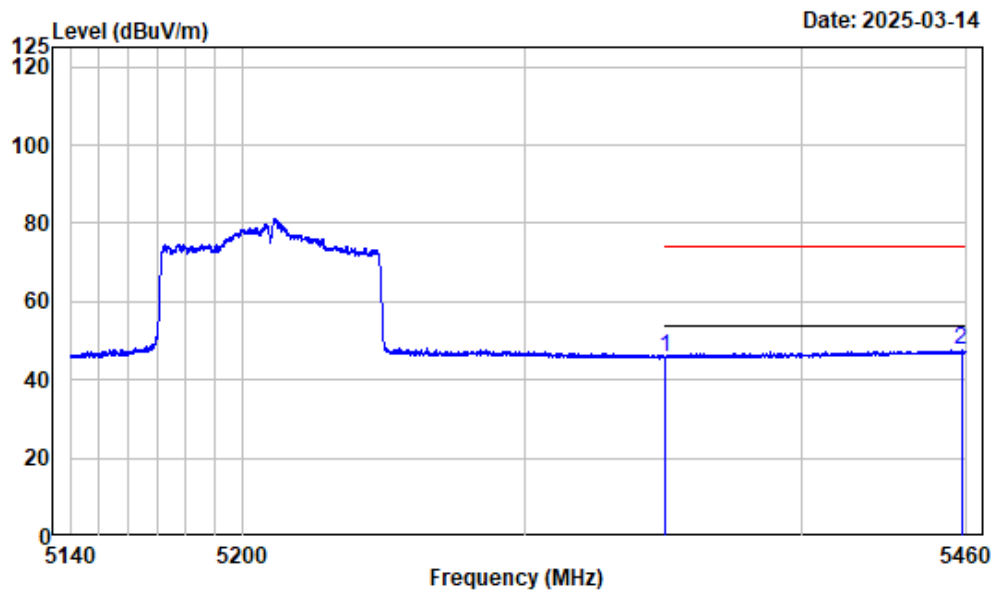

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	52.39	45.65	54.00	-8.35	Average
2 5458.120	-6.29	53.72	47.43	54.00	-6.57	Average


Left Band edge_Horizontal_Peak

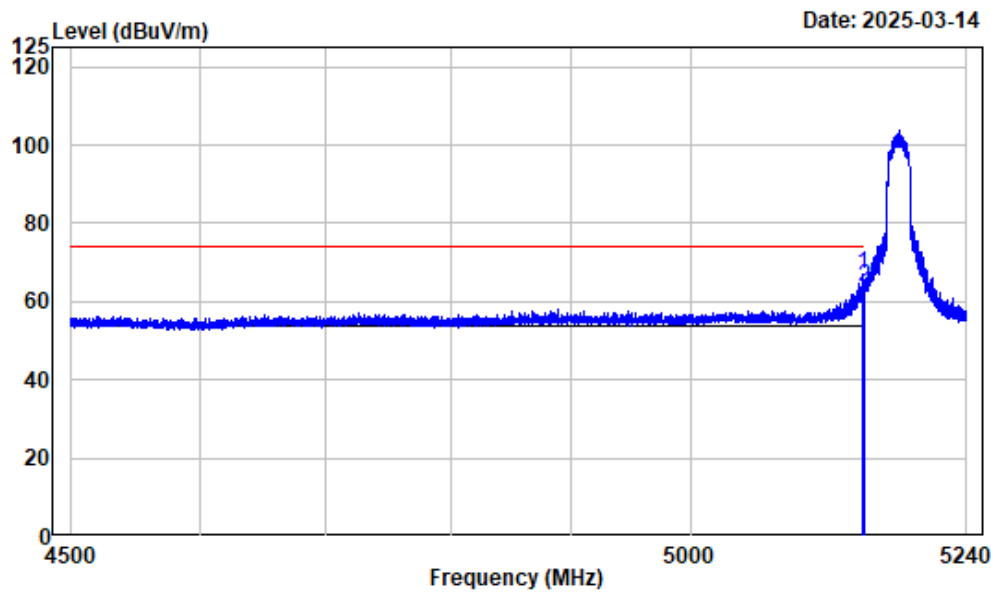

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.061	-7.46	74.54	67.08	74.00	-6.92 Peak
2	5150.000	-7.46	71.20	63.74	74.00	-10.26 Peak


Left Band edge_Horizontal_Average

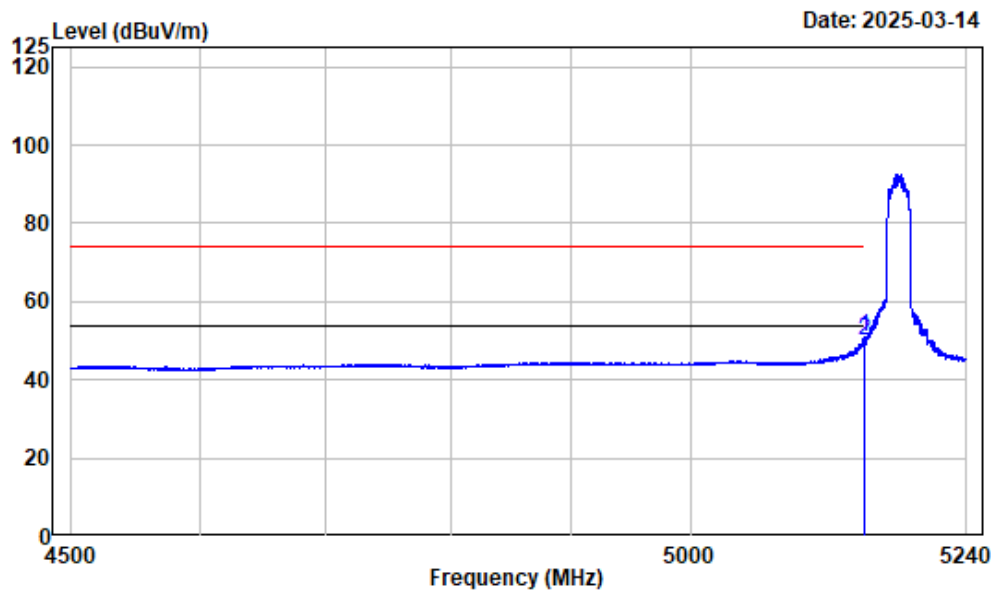

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.246	-7.46	58.43	50.97	54.00	-3.03 Average
2	5150.000	-7.46	57.60	50.14	54.00	-3.86 Average


Left Band edge_Vertical_Peak

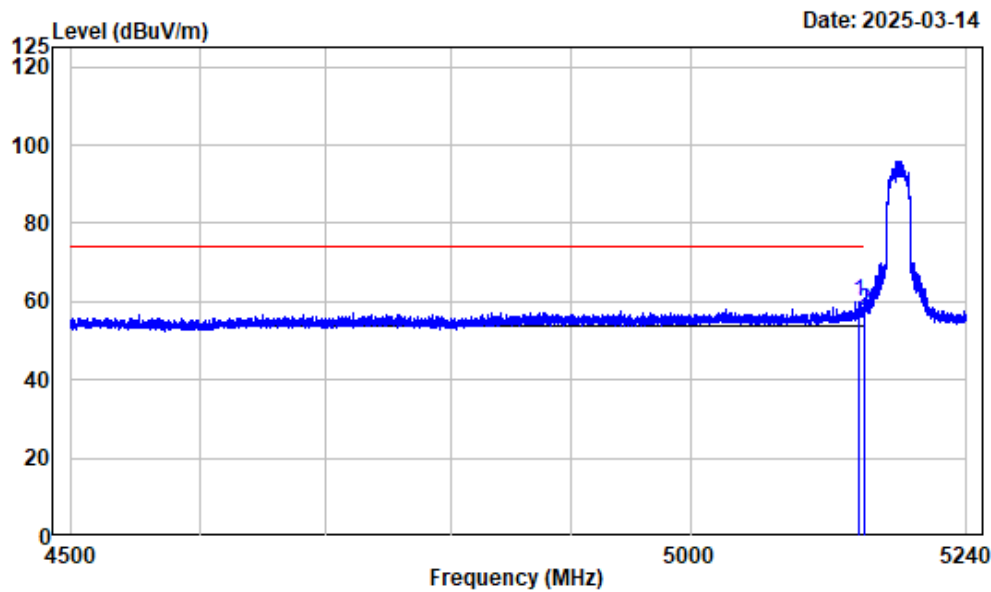

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5144.898	-7.46	67.37	59.91	74.00	-14.09 Peak
2	5150.000	-7.46	65.02	57.56	74.00	-16.44 Peak


Left Band edge_Vertical_Average

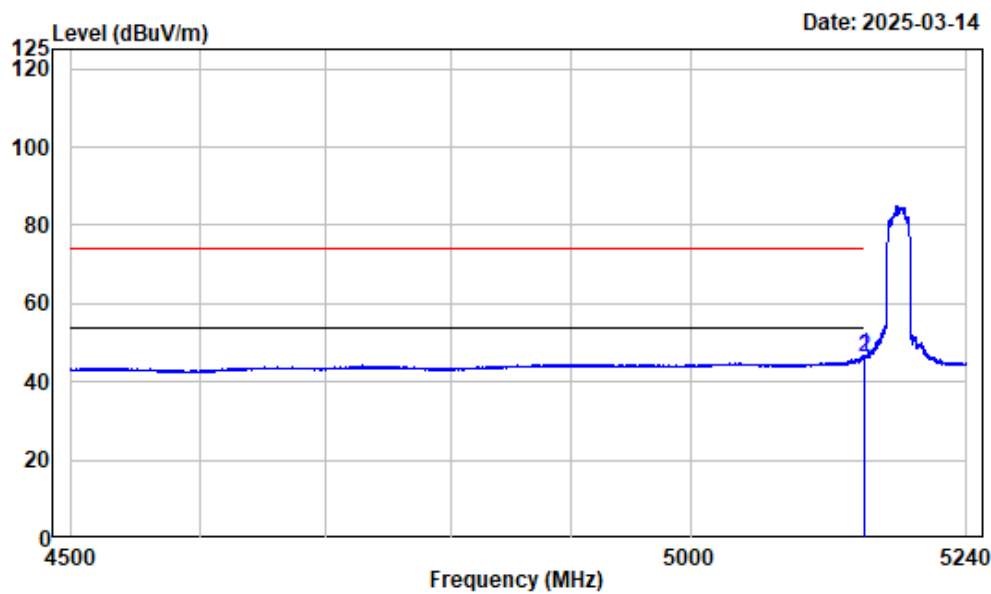

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.708	-7.46	54.28	46.82	54.00	-7.18 Average
2	5150.000	-7.46	53.88	46.42	54.00	-7.58 Average


Right Band edge_Horizontal_Peak

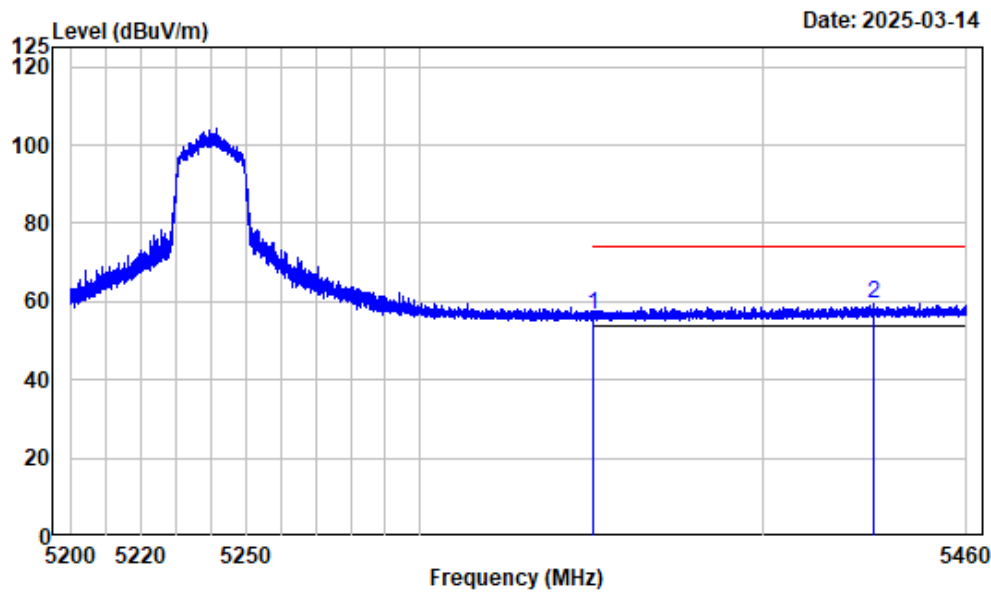

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	63.30	56.56	74.00	-17.44 Peak
2	5432.437	-6.43	65.79	59.36	74.00	-14.64 Peak


Right Band edge_Horizontal_Average

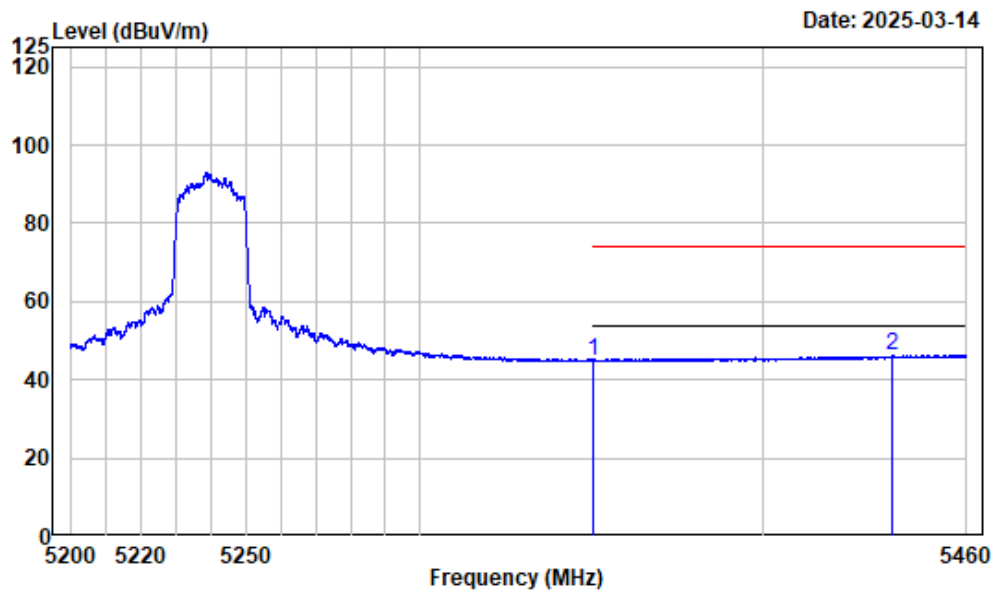

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	51.68	44.94	54.00	-9.06	Average
2 5437.995	-6.38	52.60	46.22	54.00	-7.78	Average


Right Band edge_Vertical_Peak

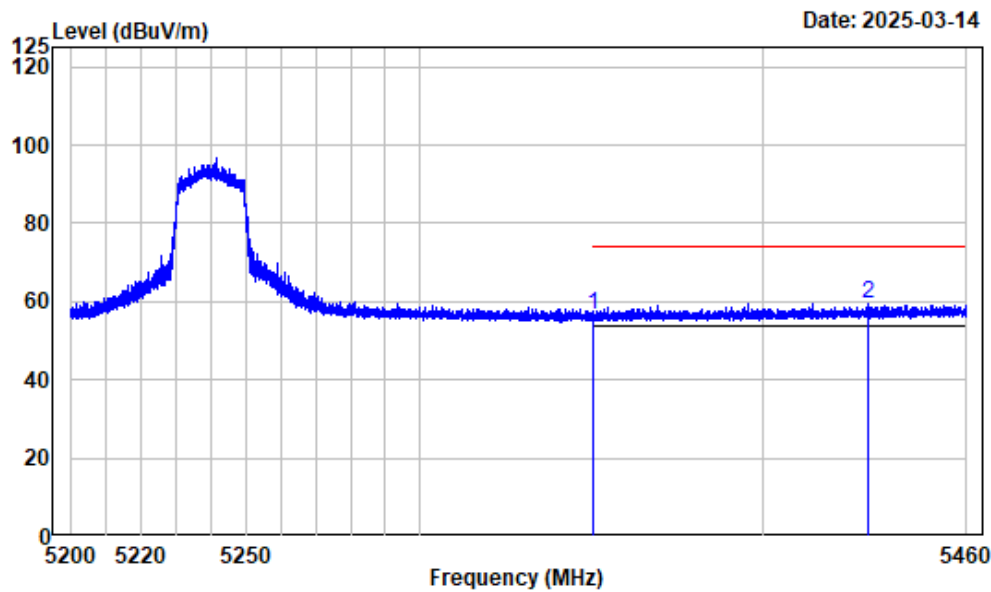

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	63.38	56.64	74.00	-17.36	Peak
2 5430.747	-6.43	65.87	59.44	74.00	-14.56	Peak


Right Band edge_Vertical_Average

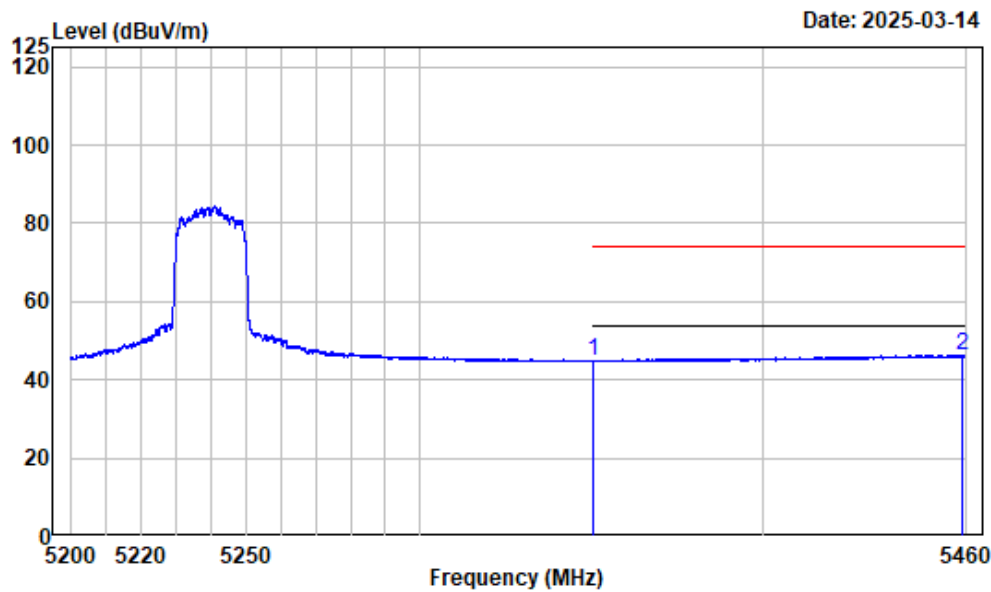

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5240

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	51.61	44.87	54.00	-9.13	Average
2 5458.570	-6.29	52.57	46.28	54.00	-7.72	Average


Left Band edge_Horizontal_Peak

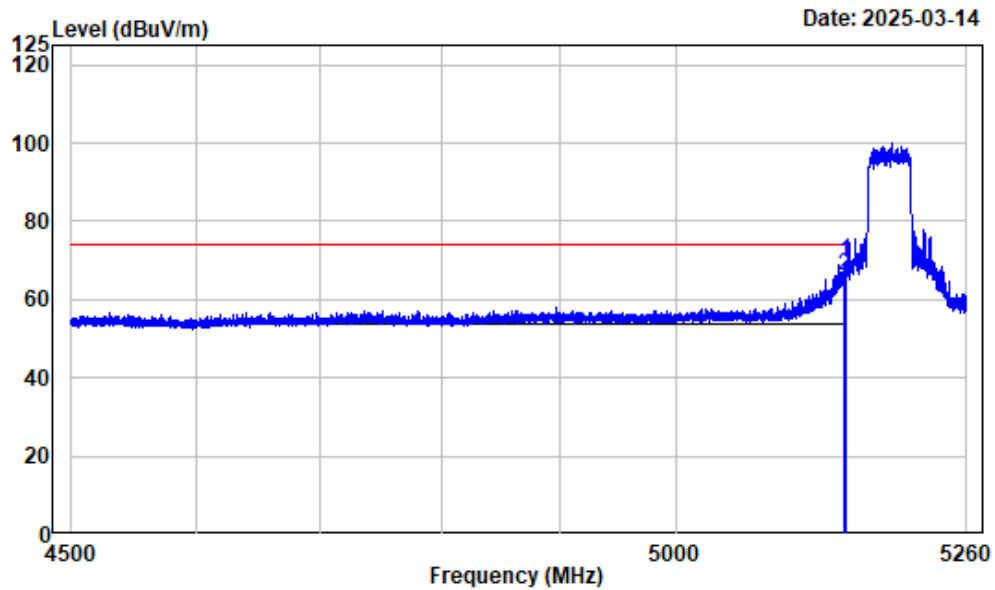

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5190

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.501	-7.46	76.64	69.18	74.00	-4.82	Peak
2	5150.000	-7.46	73.49	66.03	74.00	-7.97	Peak


Left Band edge_Horizontal_Average

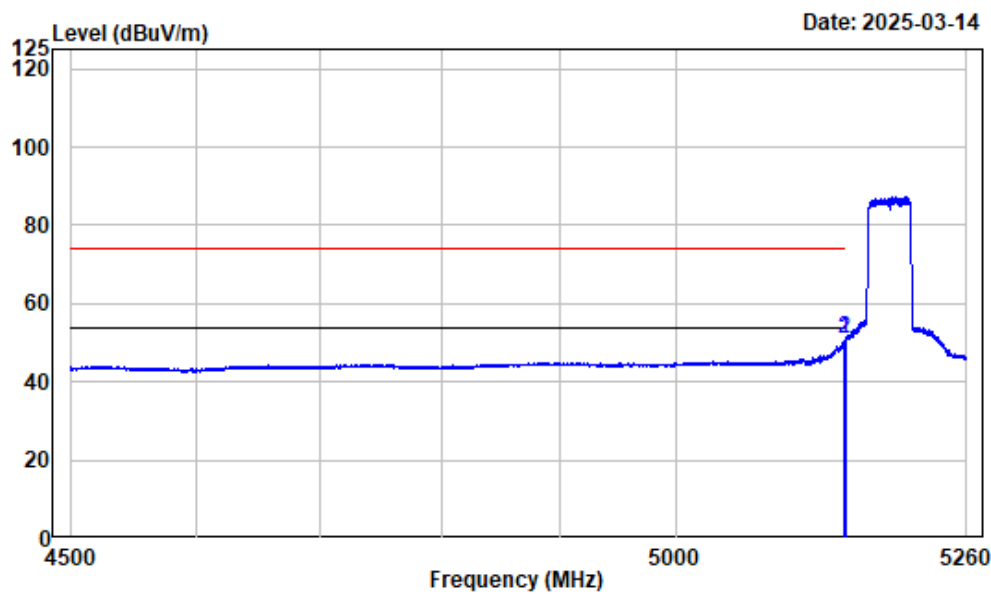

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5190

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.881	-7.46	58.42	50.96	54.00	-3.04 Average
2	5150.000	-7.46	58.36	50.90	54.00	-3.10 Average


Left Band edge_Vertical_Peak

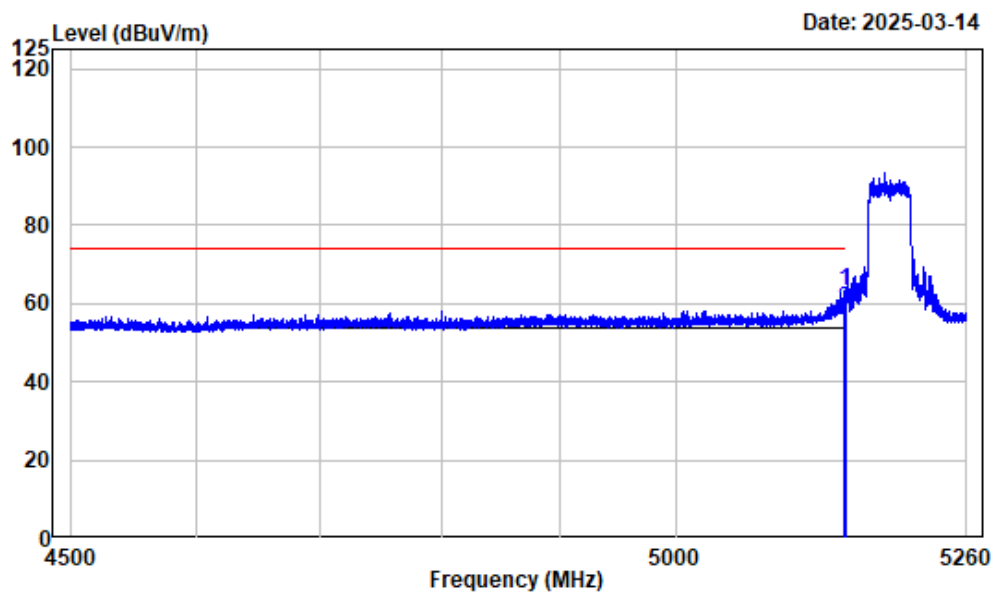

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5190

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.121	-7.46	70.87	63.41	74.00	-10.59 Peak
2	5150.000	-7.46	66.18	58.72	74.00	-15.28 Peak


Left Band edge_Vertical_Average

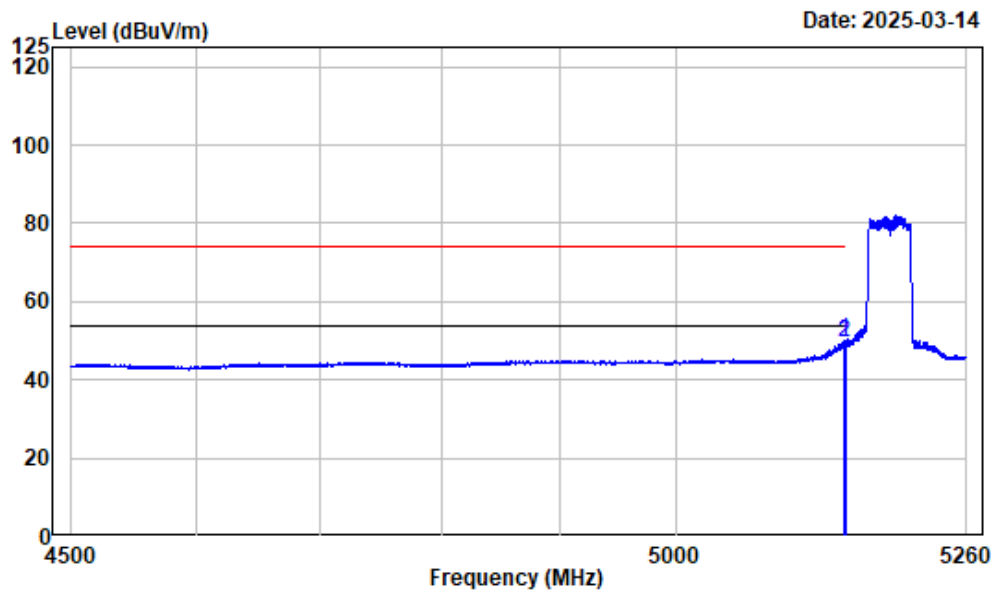

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5190

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.881	-7.46	57.34	49.88	54.00	-4.12 Average
2	5150.000	-7.46	57.17	49.71	54.00	-4.29 Average


Right Band edge_Horizontal_Peak

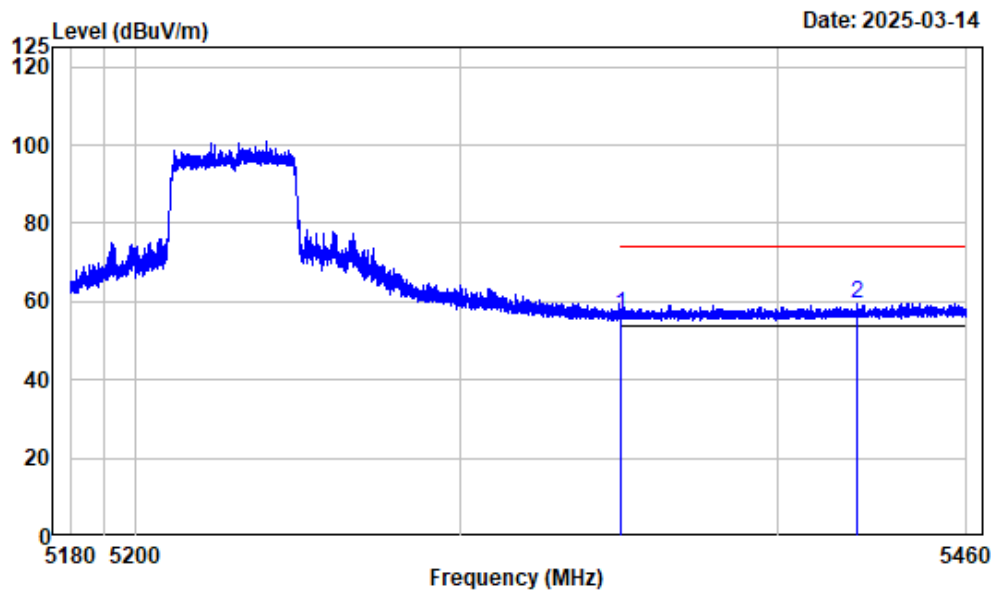

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5230

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	63.29	56.55	74.00	-17.45	Peak
2 5424.996	-6.46	66.10	59.64	74.00	-14.36	Peak


Right Band edge_Horizontal_Average

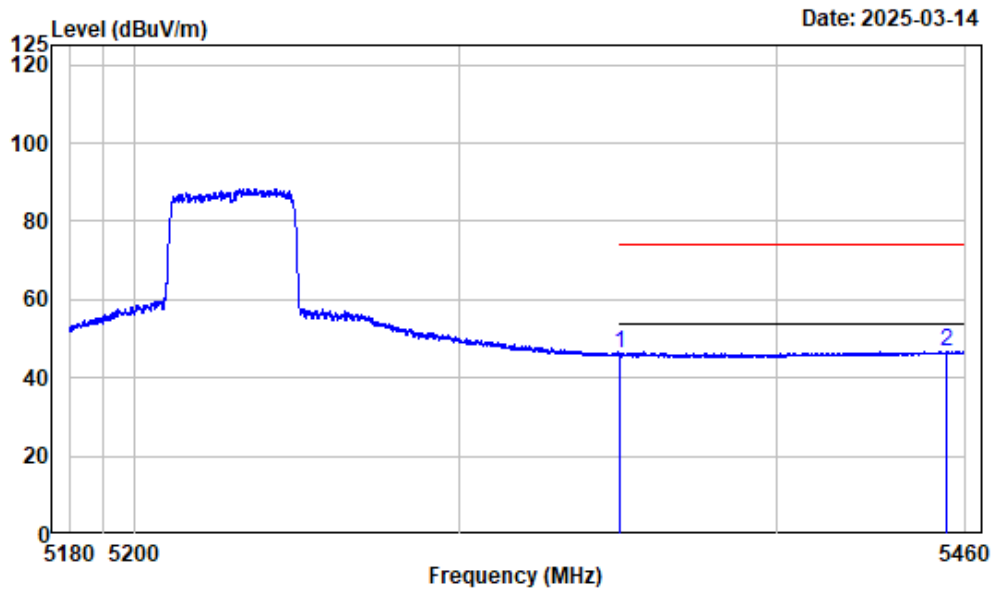

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5230

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	52.97	46.23	54.00	-7.77	Average
2 5453.874	-6.31	53.03	46.72	54.00	-7.28	Average


Right Band edge_Vertical_Peak

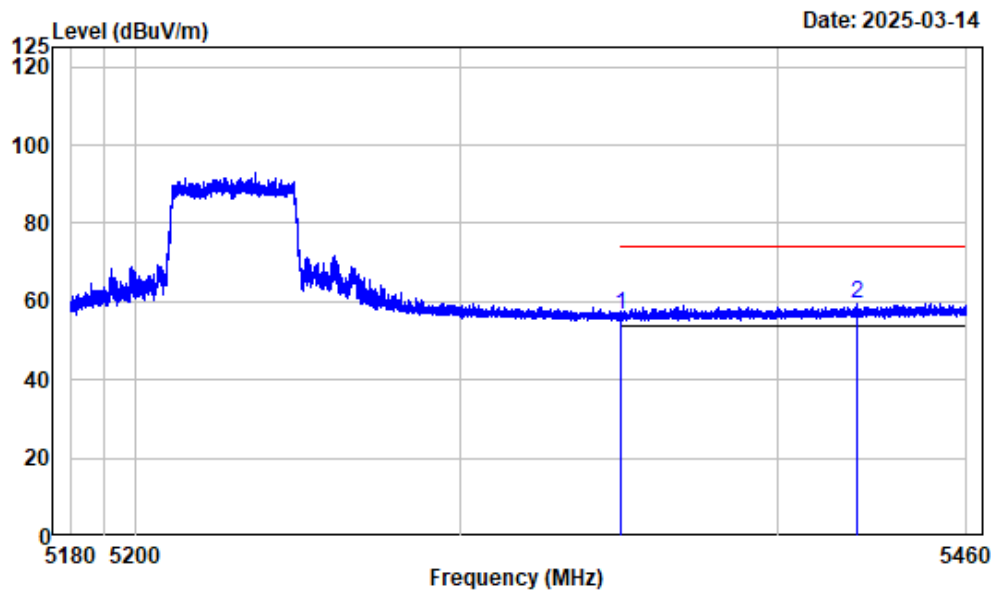

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5230

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	63.47	56.73	74.00	-17.27	Peak
2 5425.065	-6.46	66.08	59.62	74.00	-14.38	Peak


Right Band edge_Vertical_Average

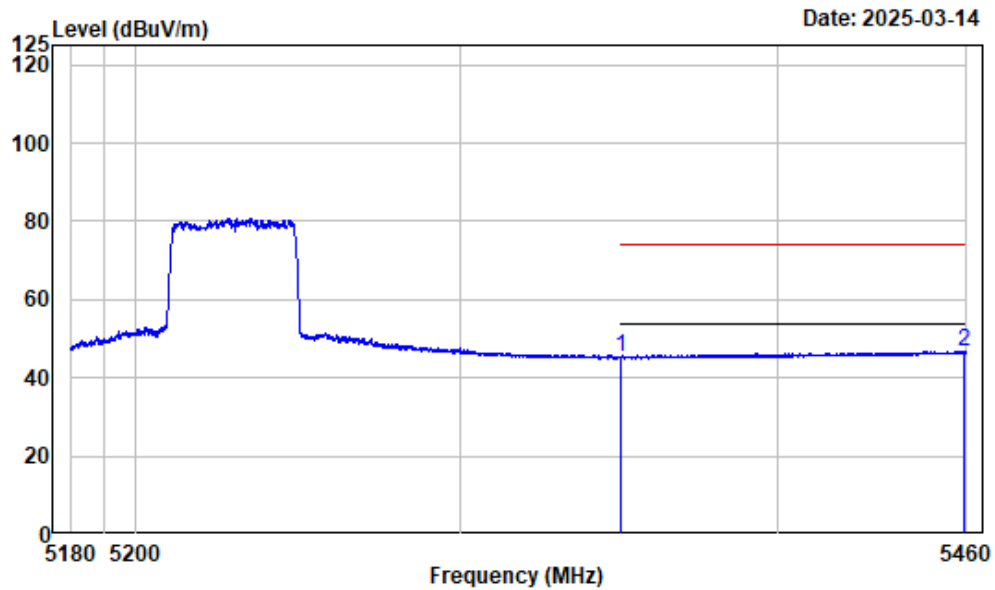

Condition : Vertical
 Project No. : 2401A63093E-RF
 Tester : Zenos Qiao
 Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
 Note : 5GWiFi-Band1-AX40-5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	51.87	45.13	54.00	-8.87	Average
2	5459.335	-6.29	52.90	46.61	54.00	-7.39	Average


Left Band edge_Horizontal_Peak

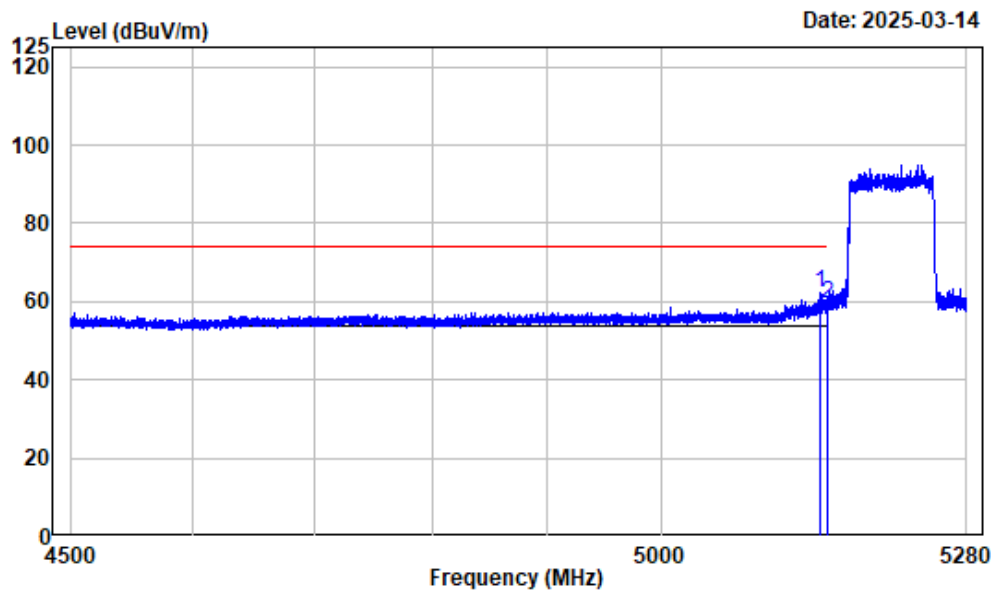

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX80-5210

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5144.166	-7.46	69.53	62.07	74.00	-11.93 Peak
2	5150.000	-7.46	67.13	59.67	74.00	-14.33 Peak


Left Band edge_Horizontal_Average

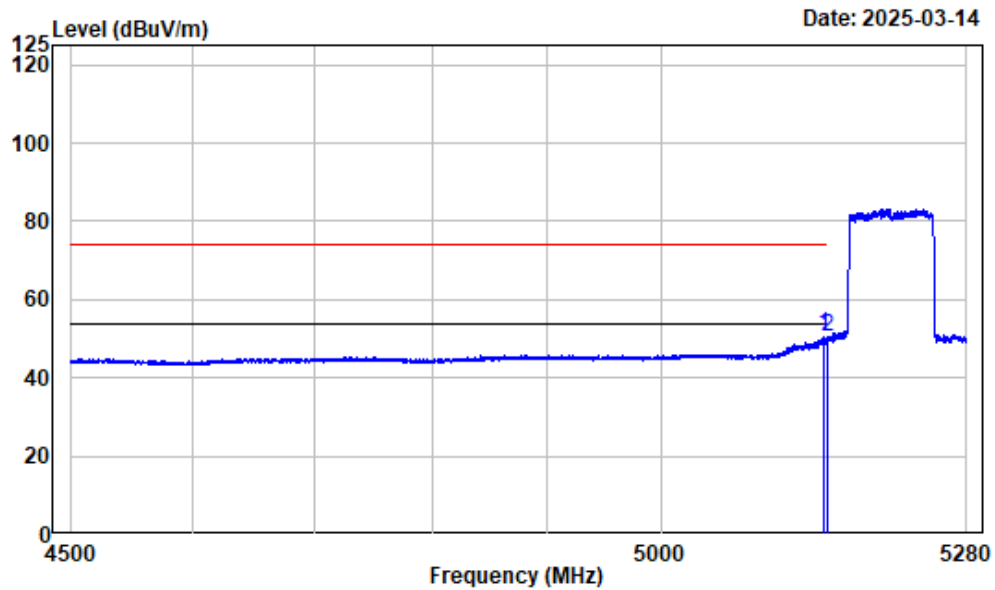

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AX80-5210

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5147.579	-7.46	58.36	50.90	54.00	-3.10 Average
2	5150.000	-7.46	57.89	50.43	54.00	-3.57 Average


Left Band edge_Vertical_Peak

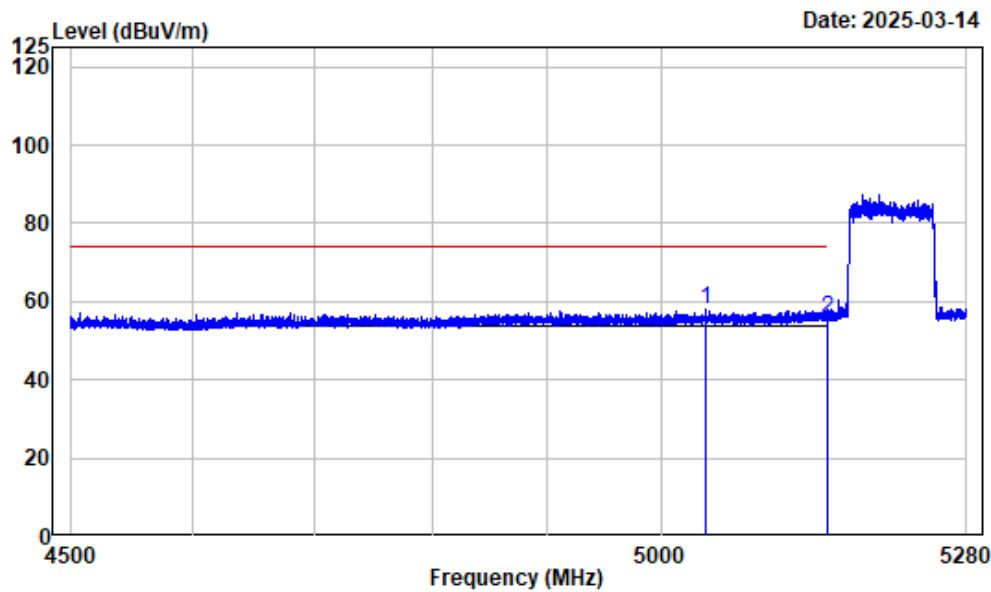

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX80-5210

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5039.925	-7.32	65.54	58.22	74.00	-15.78	Peak
2 5150.000	-7.46	63.08	55.62	74.00	-18.38	Peak


Left Band edge_Vertical_Average

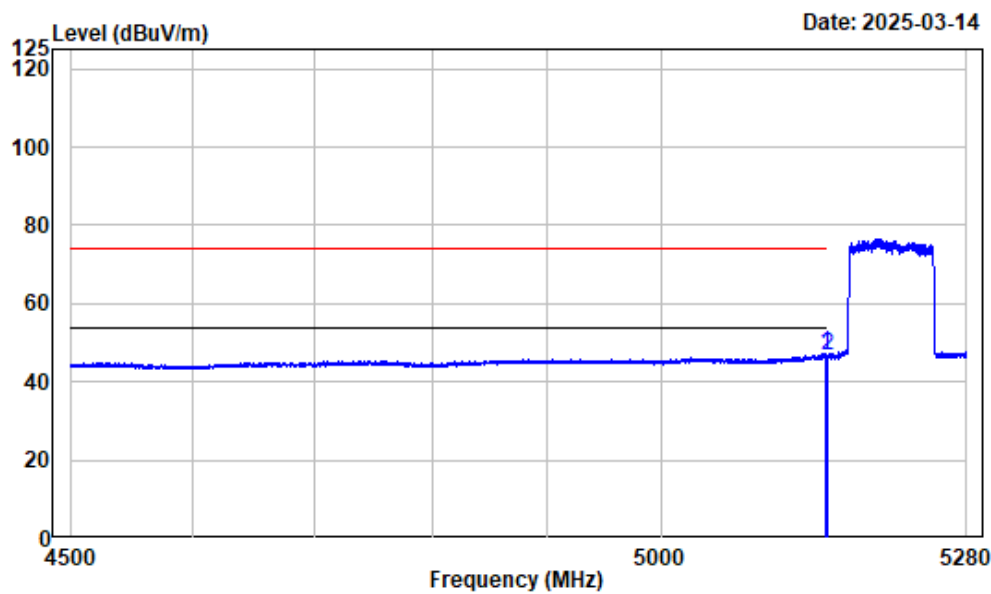

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AX80-5210

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.358	-7.46	54.84	47.38	54.00	-6.62 Average
2	5150.000	-7.46	54.13	46.67	54.00	-7.33 Average


Right Band edge_Horizontal_Peak

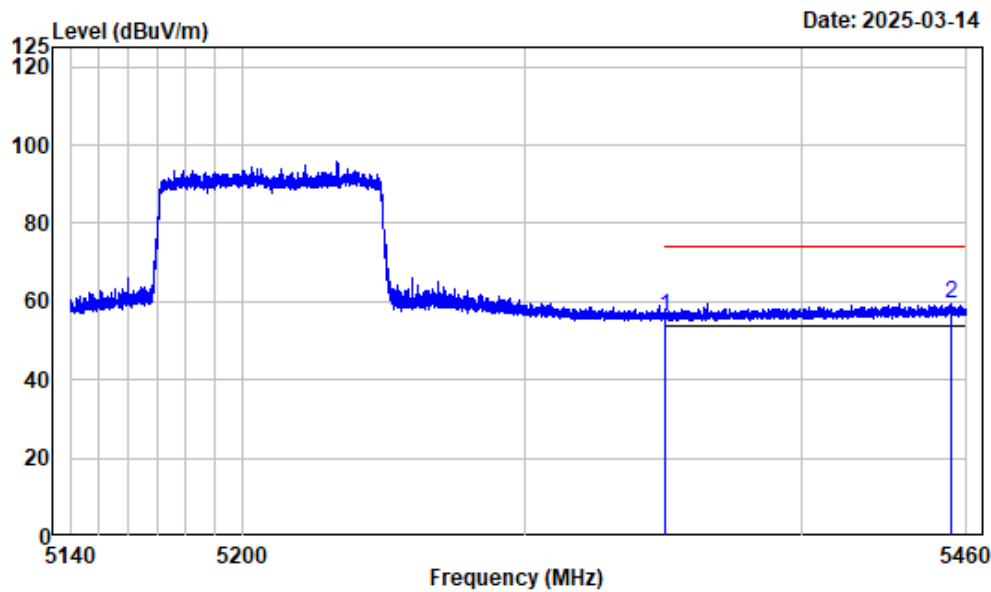

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX80-5210

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	62.84	56.10	74.00	-17.90	Peak
2 5454.559	-6.31	65.81	59.50	74.00	-14.50	Peak


Right Band edge_Horizontal_Average

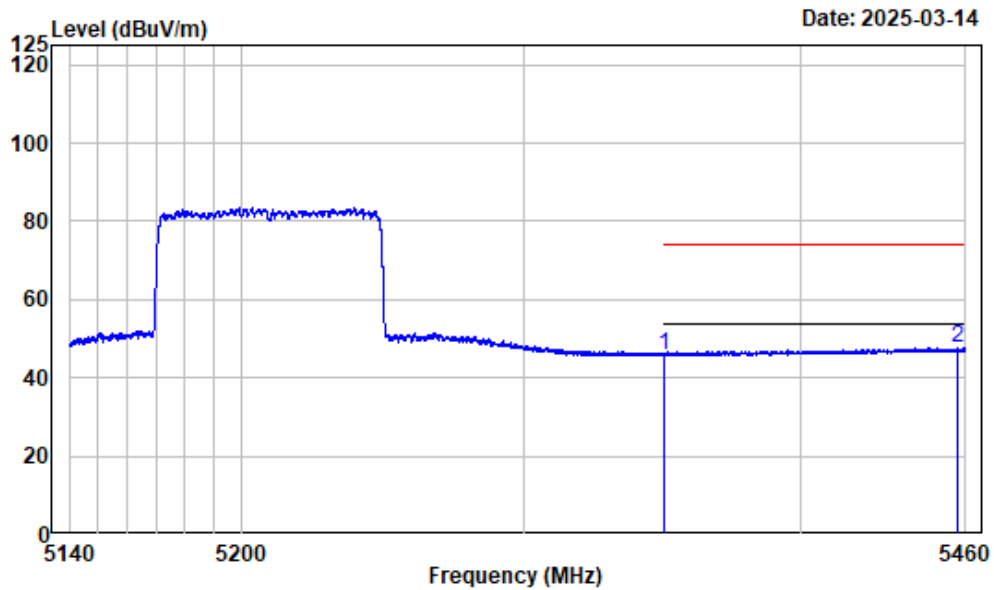

Condition : Horizontal
 Project No. : 2401A63093E-RF
 Tester : Zenos Qiao
 Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
 Note : 5GWiFi-Band1-AX80-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	52.58	45.84	54.00	-8.16	Average
2	5457.120	-6.31	54.04	47.73	54.00	-6.27	Average


Right Band edge_Vertical_Peak

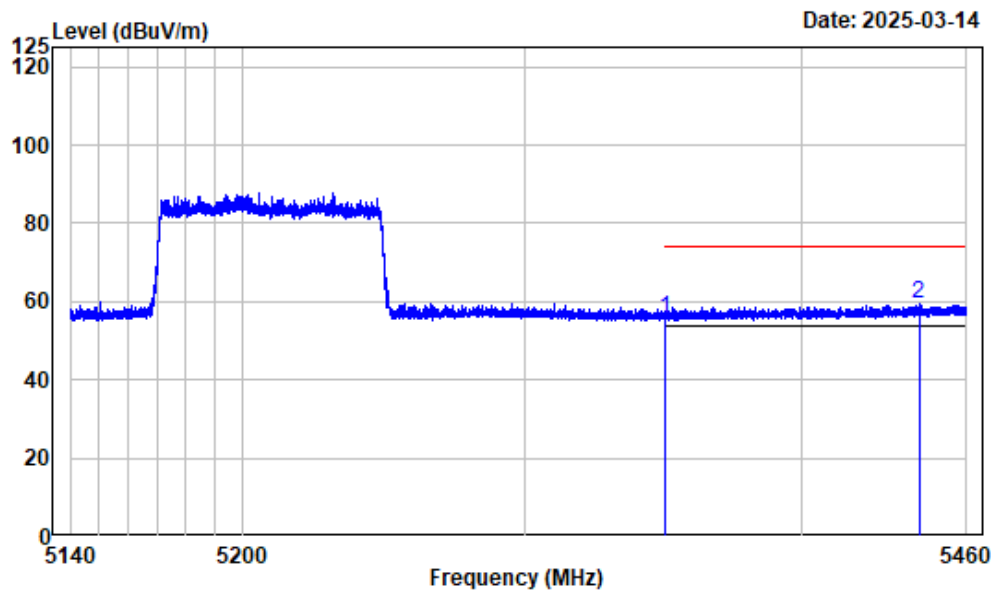

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX80-5210

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	62.59	55.85	74.00	-18.15 Peak
2	5442.518	-6.35	65.76	59.41	74.00	-14.59 Peak

Right Band edge_Vertical_Average

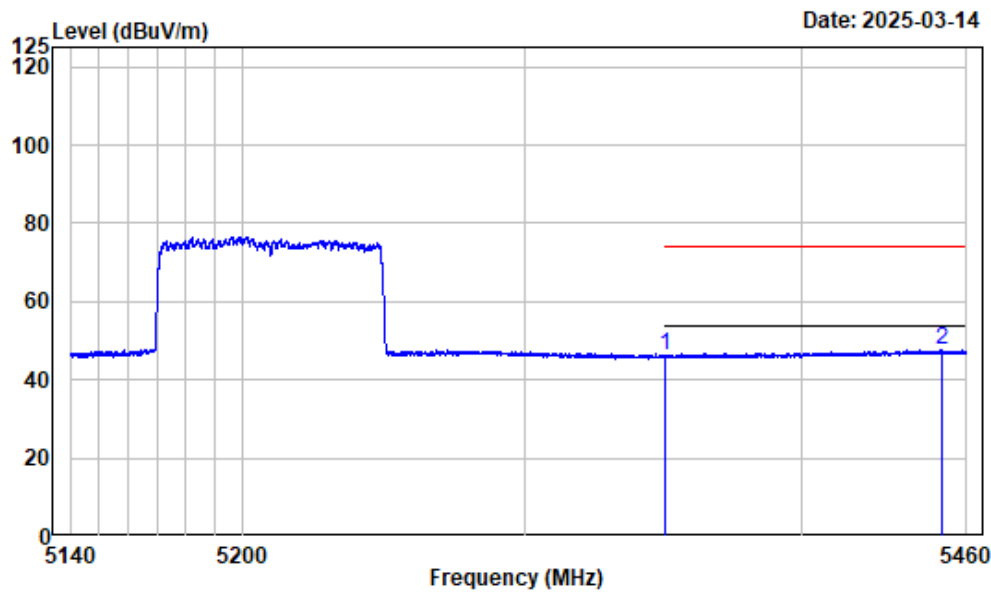


Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AX80-5210

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	52.79	46.05	54.00	-7.95 Average
2	5450.759	-6.32	53.83	47.51	54.00	-6.49 Average

5725-5850MHz_ ANT1:


Left Band edge_Horizontal_Peak

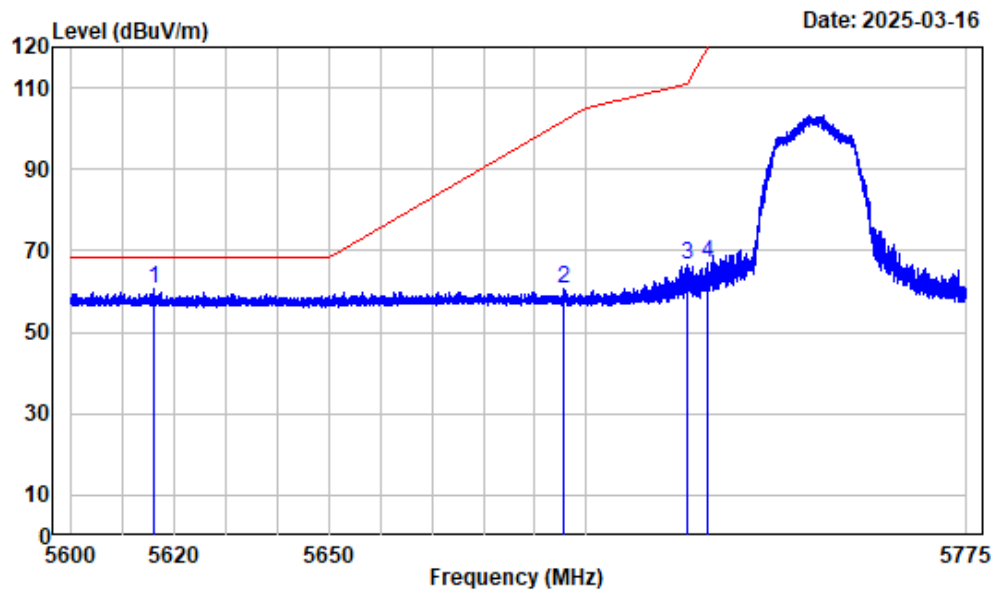

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5745

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5616.146	-6.10	66.60	60.50	68.20	-7.70	Peak
2	5695.693	-5.73	66.48	60.75	102.03	-41.28	Peak
3	5719.978	-5.53	72.04	66.51	110.79	-44.28	Peak
4	5723.740	-5.49	72.73	67.24	119.33	-52.09	Peak


Left Band edge_Vertical_Peak

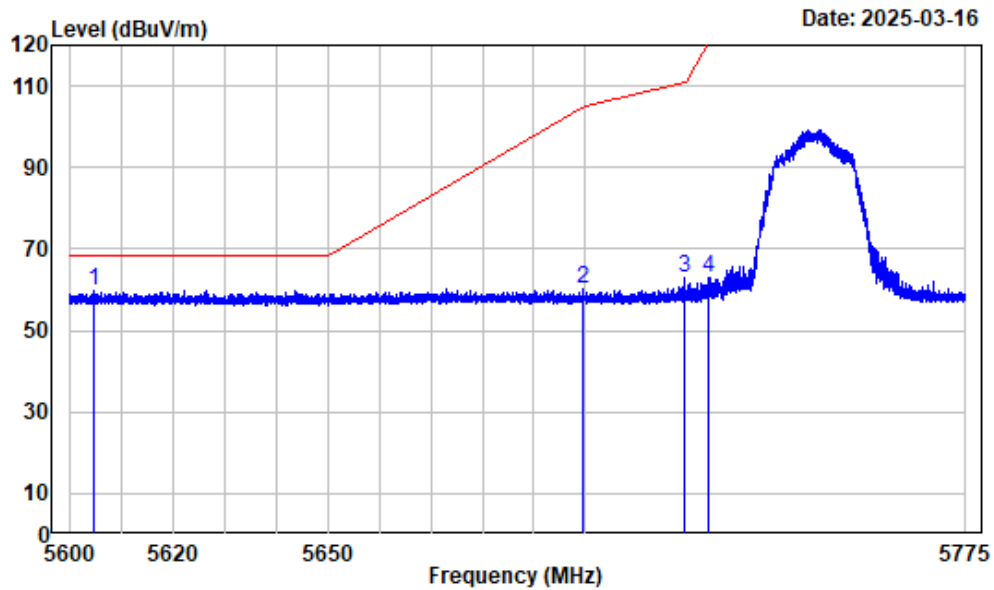

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5604.748	-6.18	66.03	59.85	68.20	-8.35	Peak
2	5699.675	-5.71	66.16	60.45	104.96	-44.51	Peak
3	5719.583	-5.54	68.29	62.75	110.68	-47.93	Peak
4	5724.090	-5.49	68.34	62.85	120.13	-57.28	Peak


Right Band edge_Horizontal_Peak

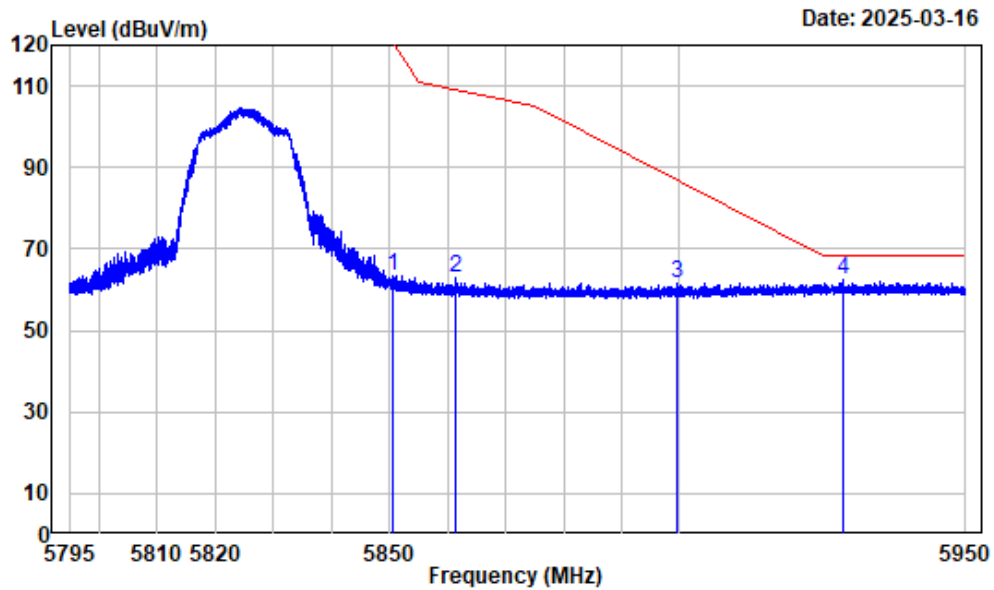

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.594	-4.68	68.29	63.61	120.84	-57.23 Peak
2	5861.232	-4.63	67.39	62.76	109.05	-46.29 Peak
3	5899.735	-4.46	66.18	61.72	86.86	-25.14 Peak
4	5928.491	-4.45	66.96	62.51	68.20	-5.69 Peak


Right Band edge_Vertical_Peak

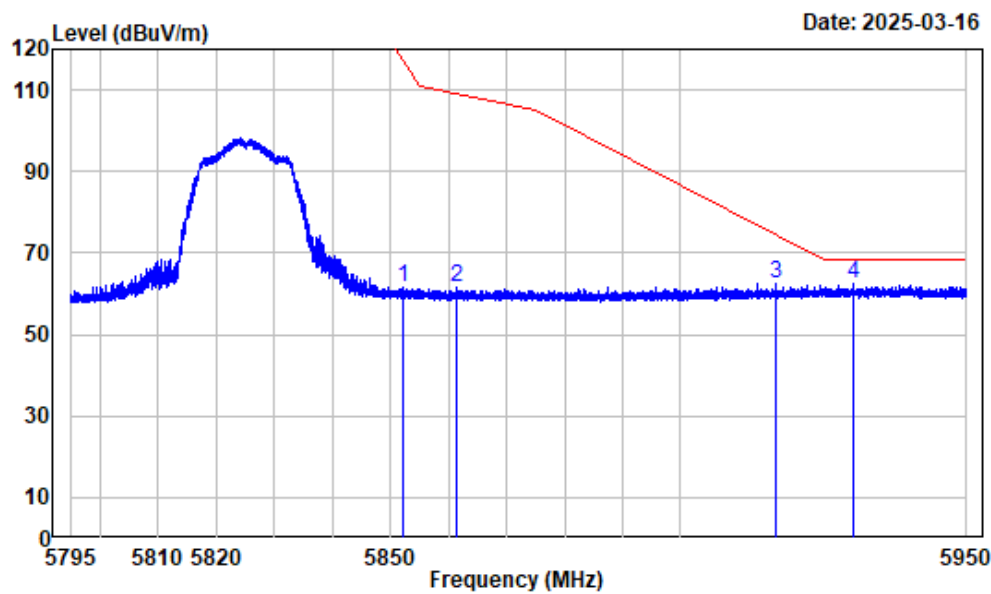

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5851.989	-4.66	66.25	61.59	117.66	-56.07	Peak
2 5861.387	-4.62	66.07	61.45	109.01	-47.56	Peak
3 5916.768	-4.44	66.91	62.47	74.27	-11.80	Peak
4 5930.119	-4.45	66.94	62.49	68.20	-5.71	Peak


Left Band edge_Horizontal_Peak

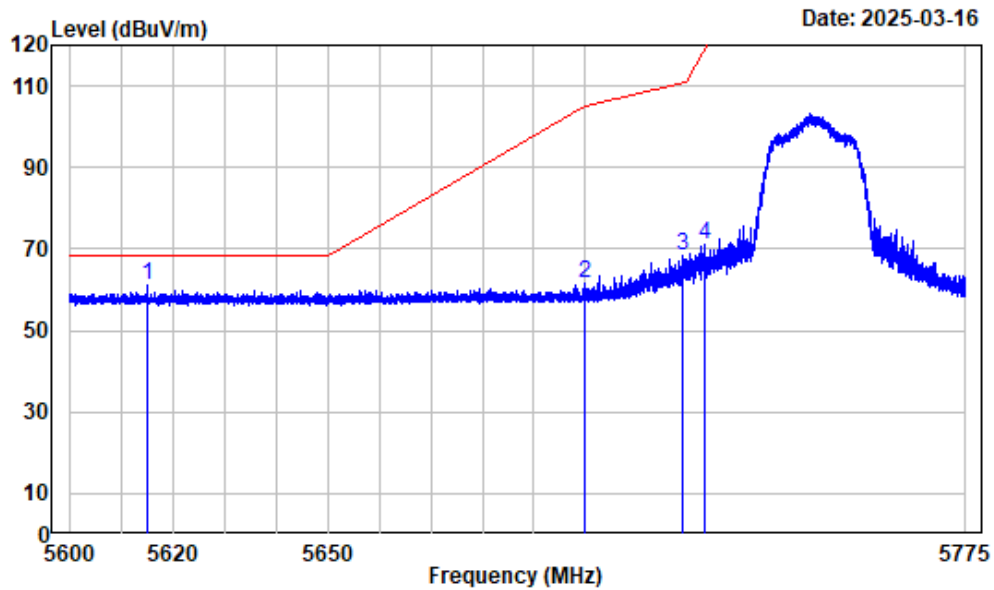

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5745

		Read		Limit	Over	Remark
Freq		Level	Level	Line	Limit	
MHz	Factor	dBuV	dBuV/m	dBuV/m	dB	
1	5614.877	-6.11	67.40	61.29	68.20	-6.91 Peak
2	5699.959	-5.71	67.33	61.62	105.17	-43.55 Peak
3	5719.015	-5.54	73.89	68.35	110.52	-42.17 Peak
4	5723.391	-5.49	76.65	71.16	118.53	-47.37 Peak


Left Band edge_Vertical_Peak

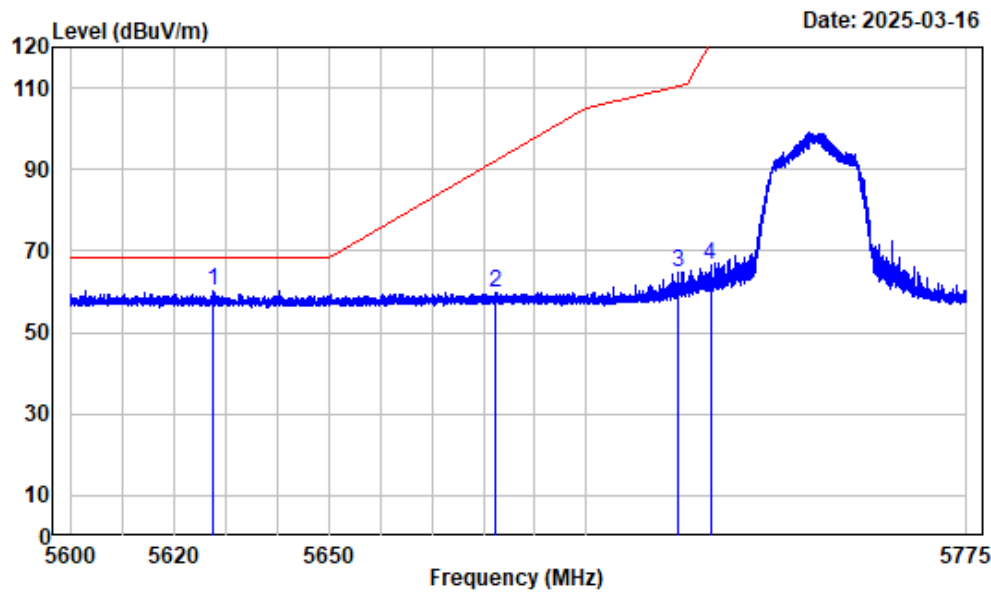

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5745

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5627.479	-6.02	66.15	60.13	68.20	-8.07 Peak
2	5682.173	-5.77	65.68	59.91	92.05	-32.14 Peak
3	5718.008	-5.55	70.37	64.82	110.24	-45.42 Peak
4	5724.440	-5.49	72.23	66.74	120.92	-54.18 Peak


Right Band edge_Horizontal_Peak

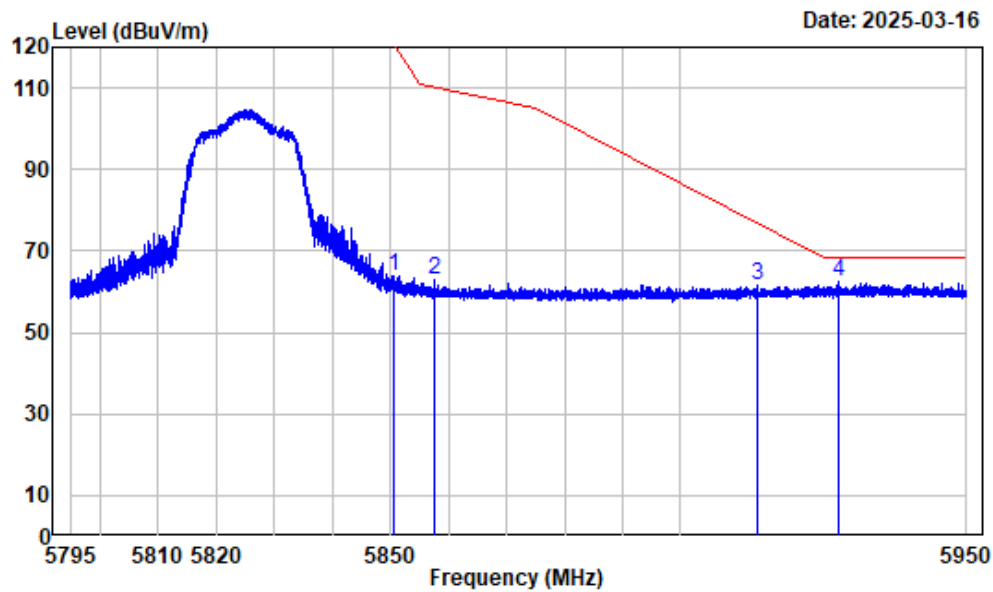

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5825

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5850.400	-4.68	68.75	64.07	121.29	-57.22	Peak
2 5857.454	-4.65	67.67	63.02	110.11	-47.09	Peak
3 5913.338	-4.46	66.10	61.64	76.80	-15.16	Peak
4 5927.677	-4.46	66.75	62.29	68.20	-5.91	Peak


Right Band edge_Vertical_Peak

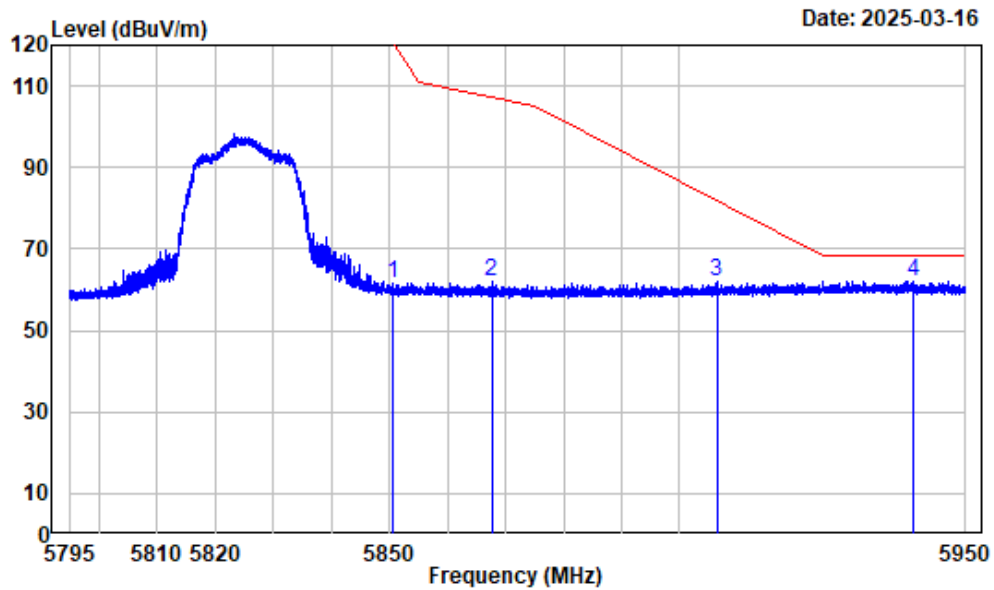

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5825

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5850.419	-4.68	66.19	61.51	121.24	-59.73	Peak
2 5867.530	-4.60	66.61	62.01	107.29	-45.28	Peak
3 5906.575	-4.45	66.57	62.12	81.80	-19.68	Peak
4 5940.718	-4.44	66.63	62.19	68.20	-6.01	Peak


Left Band edge_Horizontal_Peak

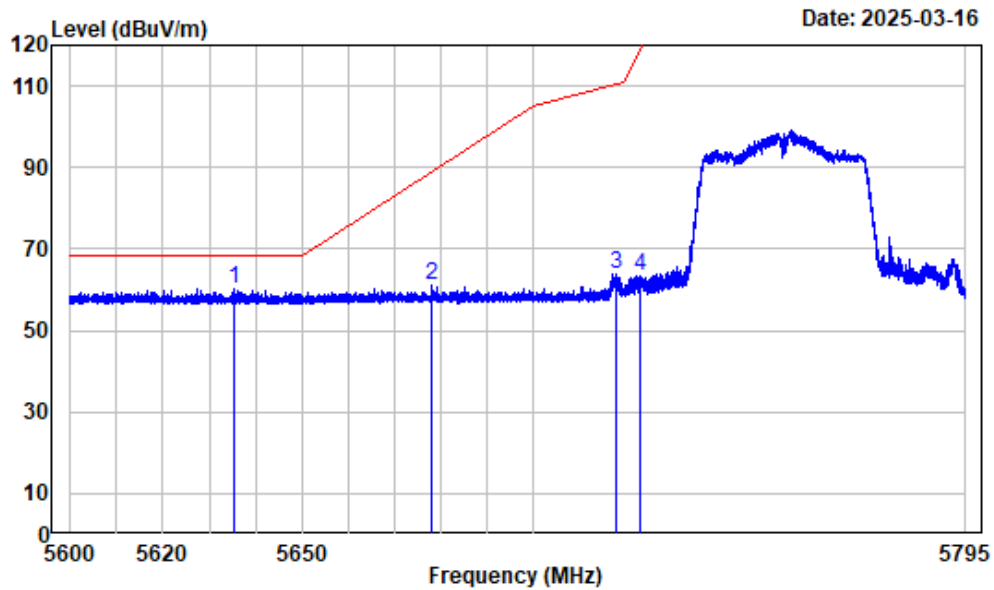

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5755

	Freq	Factor	Read	Limit	Over	Remark
			Level	Level	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5635.324	-5.96	66.16	60.20	68.20	-8.00 Peak
2	5677.961	-5.78	66.75	60.97	88.93	-27.96 Peak
3	5718.185	-5.54	69.41	63.87	110.29	-46.42 Peak
4	5723.329	-5.49	68.73	63.24	118.39	-55.15 Peak


Left Band edge_Vertical_Peak

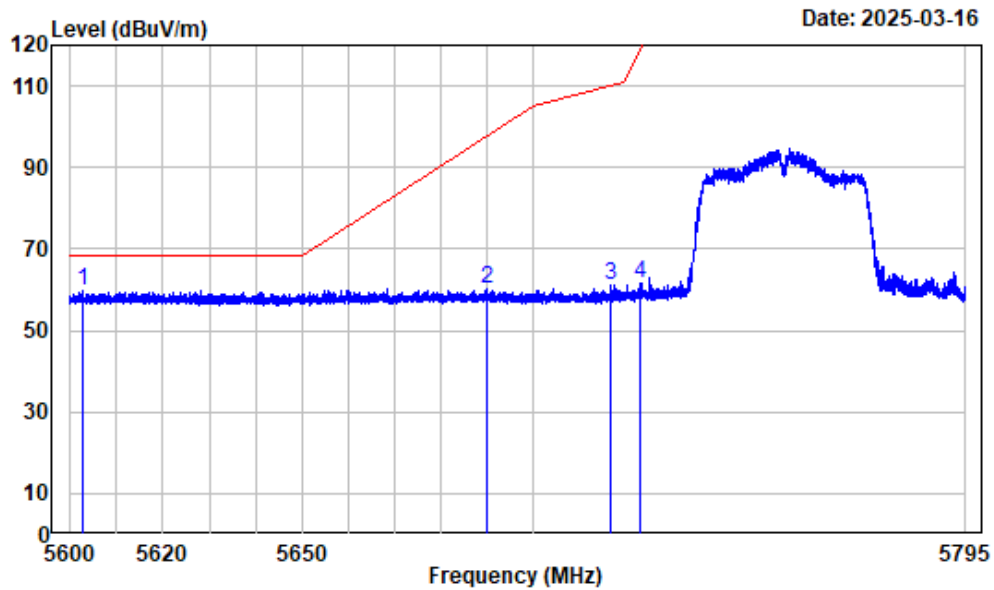

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5602.901	-6.20	65.88	59.68	68.20	-8.52	Peak
2	5690.053	-5.75	65.89	60.14	97.86	-37.72	Peak
3	5717.161	-5.56	66.89	61.33	110.01	-48.68	Peak
4	5723.426	-5.49	67.26	61.77	118.61	-56.84	Peak


Right Band edge_Horizontal_Peak

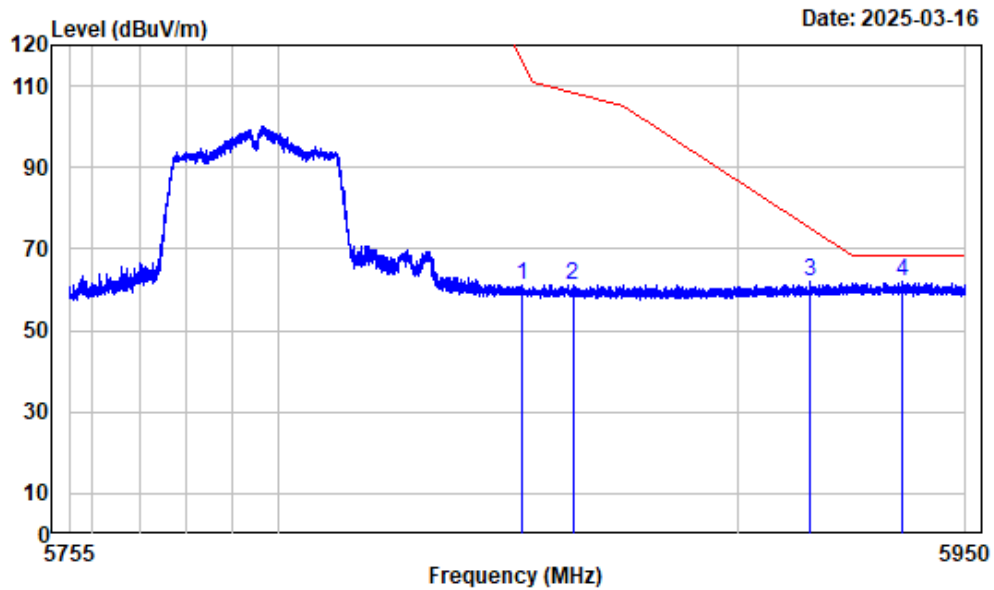

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5795

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5852.585	-4.66	65.57	60.91	116.30	-55.39	Peak
2	5863.750	-4.62	65.89	61.27	108.35	-47.08	Peak
3	5915.797	-4.46	66.44	61.98	74.99	-13.01	Peak
4	5936.153	-4.45	66.44	61.99	68.20	-6.21	Peak


Right Band edge_Vertical_Peak

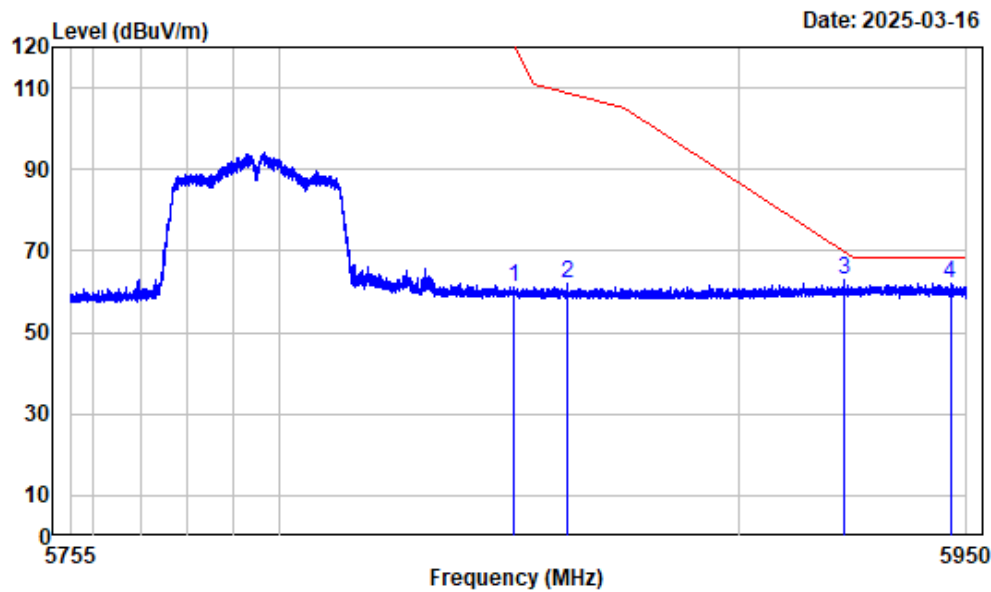

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5795

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.732	-4.68	65.91	61.23	120.53	-59.30	Peak
2	5862.190	-4.62	66.74	62.12	108.78	-46.66	Peak
3	5922.892	-4.46	67.59	63.13	69.75	-6.62	Peak
4	5946.417	-4.44	66.58	62.14	68.20	-6.06	Peak


Left Band edge_Horizontal_Peak

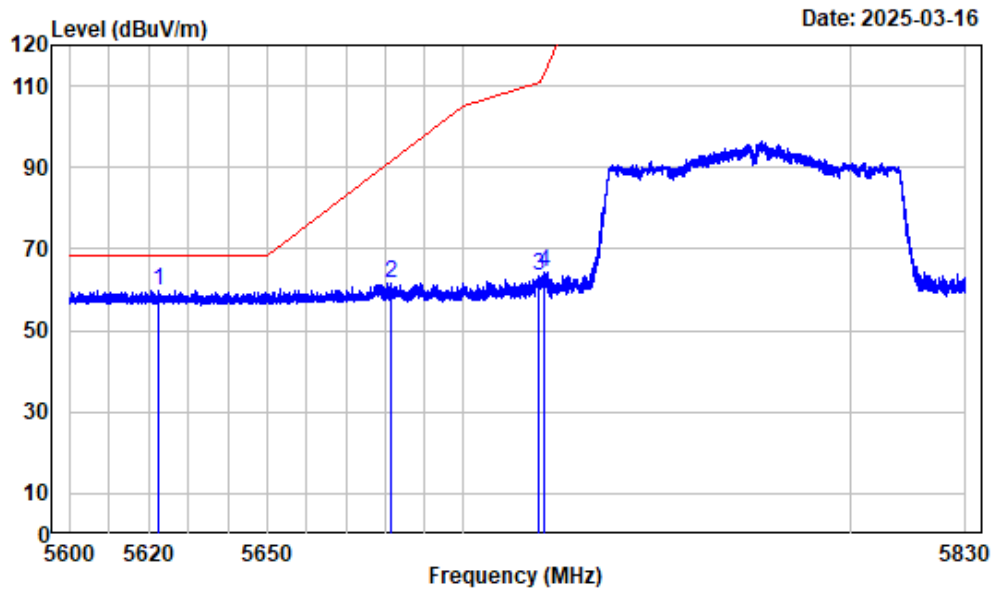

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5622.543	-6.05	66.01	59.96	68.20	-8.24	Peak
2	5681.373	-5.77	67.49	61.72	91.45	-29.73	Peak
3	5719.328	-5.54	68.97	63.43	110.61	-47.18	Peak
4	5720.909	-5.53	69.82	64.29	112.87	-48.58	Peak


Left Band edge_Vertical_Peak

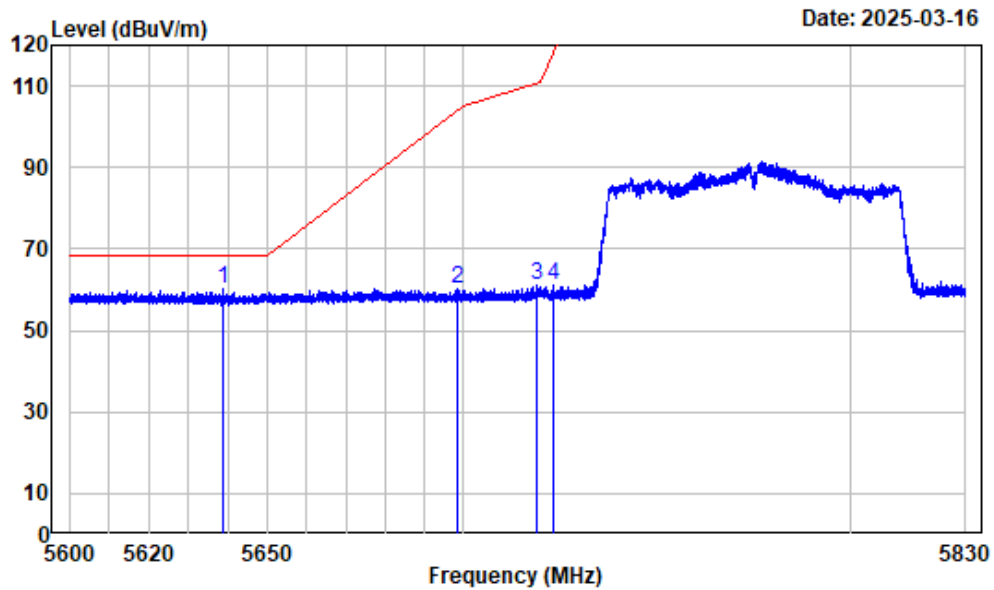

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80-5775

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5639.019	-5.94	66.29	60.35	68.20	-7.85 Peak
2	5698.423	-5.73	66.11	60.38	104.04	-43.66 Peak
3	5718.838	-5.54	66.75	61.21	110.48	-49.27 Peak
4	5723.152	-5.50	66.60	61.10	117.99	-56.89 Peak


Right Band edge_Horizontal_Peak

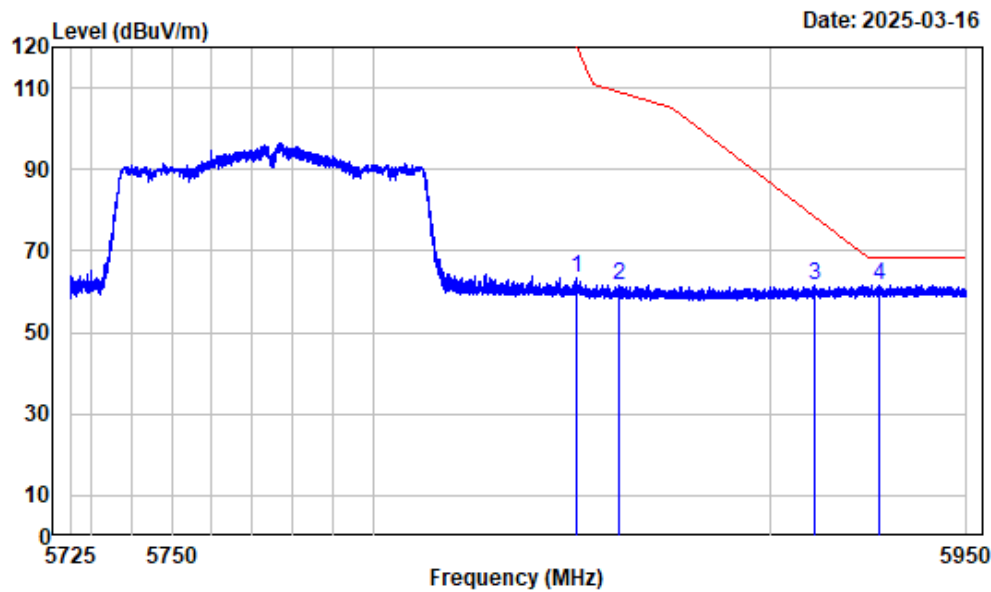

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80-5775

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.931	-4.68	68.26	63.58	120.08	-56.50 Peak
2	5861.817	-4.62	66.33	61.71	108.89	-47.18 Peak
3	5911.267	-4.45	66.16	61.71	78.33	-16.62 Peak
4	5927.891	-4.45	65.98	61.53	68.20	-6.67 Peak


Right Band edge_Vertical_Peak

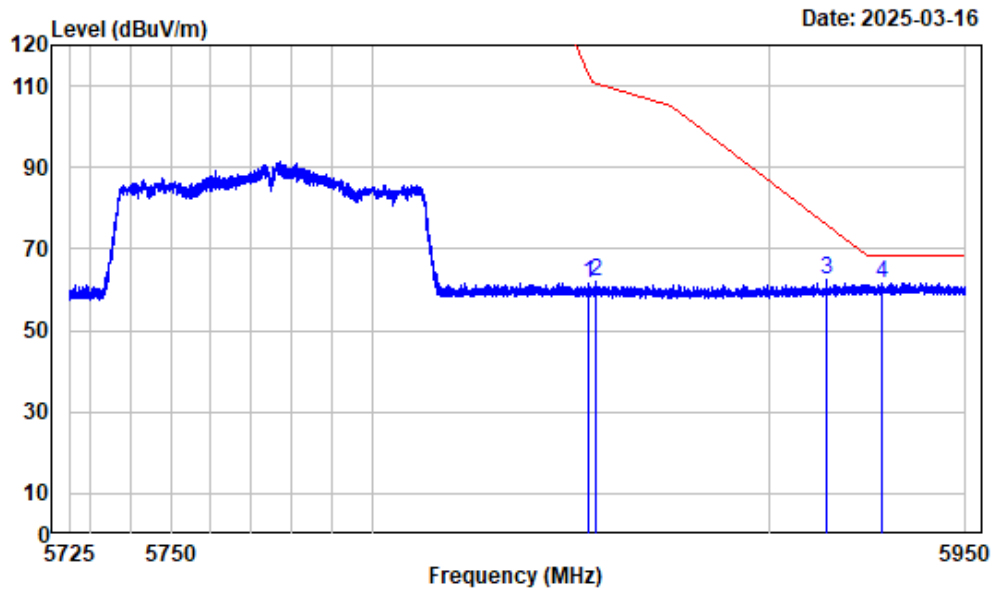

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80-5775

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5854.194	-4.65	66.15	61.50	112.64	-51.14	Peak
2	5856.163	-4.66	66.65	61.99	110.47	-48.48	Peak
3	5914.643	-4.46	67.03	62.57	75.84	-13.27	Peak
4	5928.735	-4.45	66.23	61.78	68.20	-6.42	Peak


Left Band edge_Horizontal_Peak

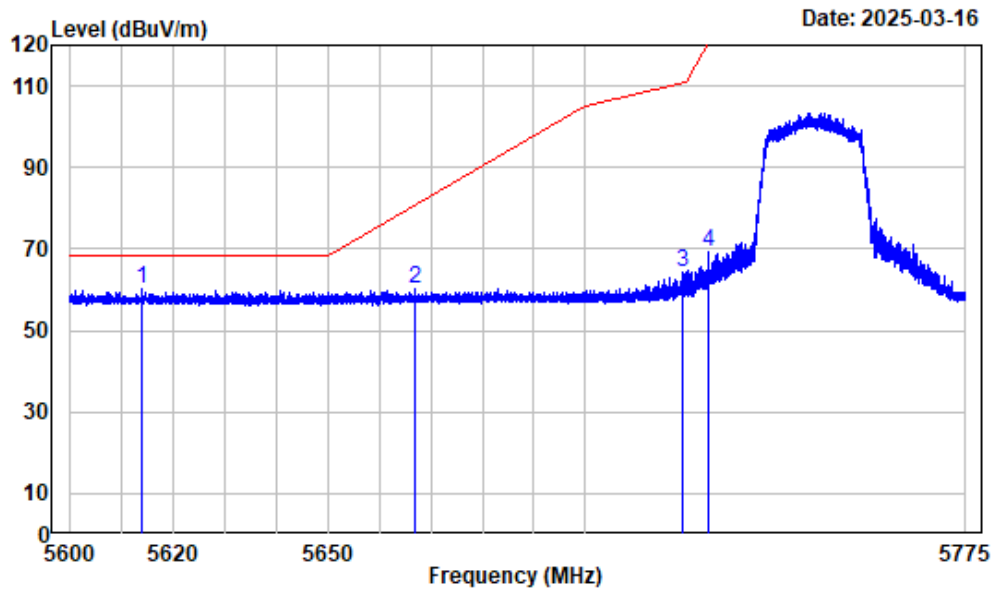

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX20-5745

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5613.936	-6.11	66.43	60.32	68.20	-7.88	Peak
2	5666.902	-5.81	66.10	60.29	80.74	-20.45	Peak
3	5719.343	-5.54	69.80	64.26	110.62	-46.36	Peak
4	5724.331	-5.49	74.68	69.19	120.68	-51.49	Peak


Left Band edge_Vertical_Peak

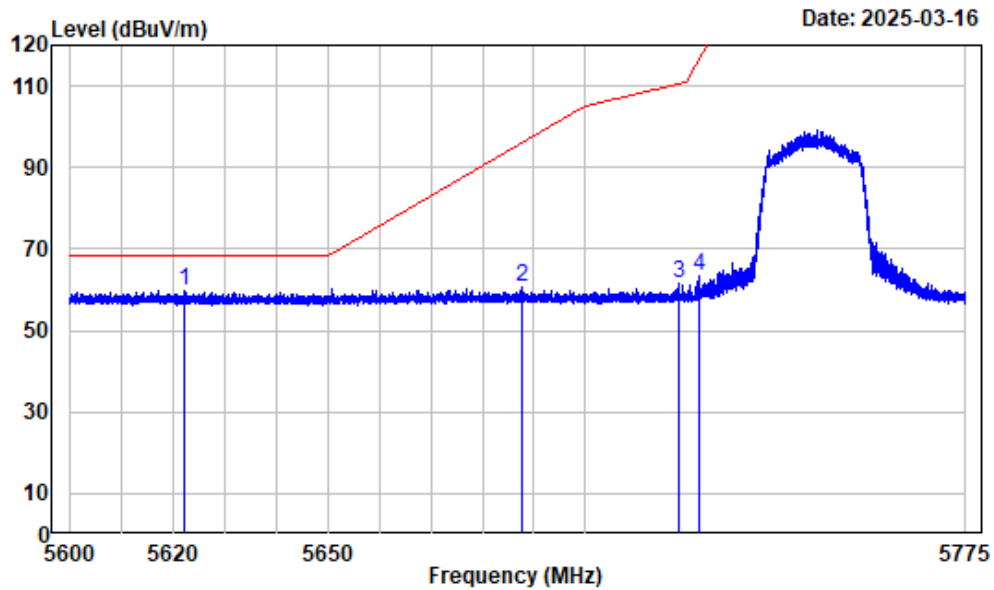

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX20-5745

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5622.293	-6.05	65.78	59.73	68.20	-8.47	Peak
2	5687.729	-5.75	66.54	60.79	96.15	-35.36	Peak
3	5718.424	-5.54	67.35	61.81	110.36	-48.55	Peak
4	5722.362	-5.51	68.76	63.25	116.19	-52.94	Peak


Right Band edge_Horizontal_Peak

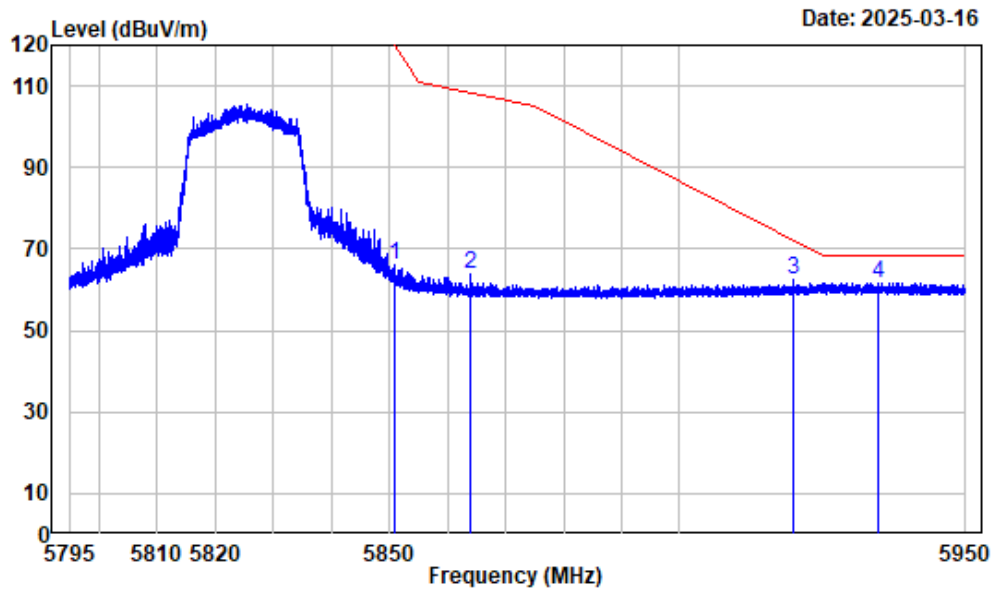

Condition : Horizontal
 Project No. : 2401A63093E-RF
 Tester : Zenos Qiao
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : 5GWiFi-Band4-AX20-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.923	-4.68	70.58	65.90	120.09	-54.19	Peak
2	5863.906	-4.61	68.63	64.02	108.30	-44.28	Peak
3	5919.830	-4.45	66.82	62.37	72.01	-9.64	Peak
4	5934.828	-4.45	66.17	61.72	68.20	-6.48	Peak


Right Band edge_Vertical_Peak

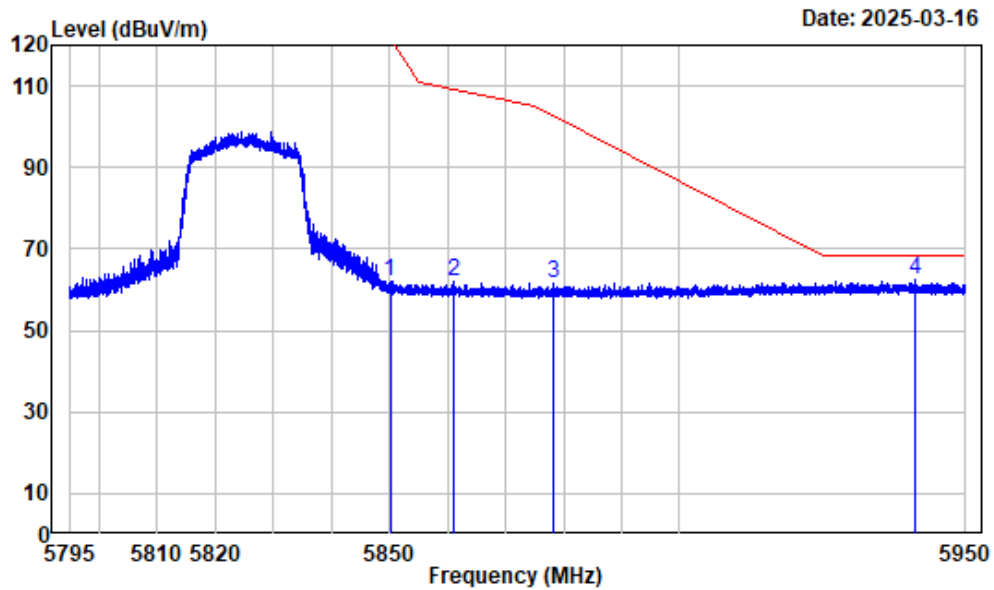

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX20-5825

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5850.019	-4.68	66.81	62.13	122.16	-60.03	Peak
2 5860.936	-4.63	66.45	61.82	109.14	-47.32	Peak
3 5878.241	-4.56	66.36	61.80	102.79	-40.99	Peak
4 5941.162	-4.44	66.86	62.42	68.20	-5.78	Peak


Left Band edge_Horizontal_Peak

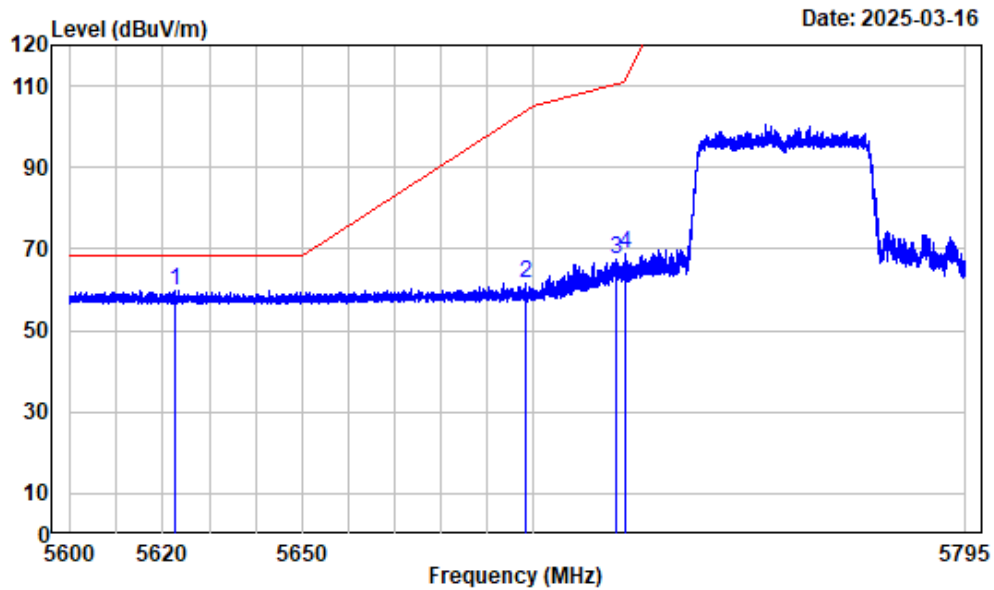

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX40-5755

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5622.550	-6.05	66.01	59.96	68.20	-8.24 Peak
2	5698.487	-5.73	67.30	61.57	104.09	-42.52 Peak
3	5718.355	-5.54	72.94	67.40	110.34	-42.94 Peak
4	5720.257	-5.53	74.32	68.79	111.39	-42.60 Peak


Left Band edge_Vertical_Peak

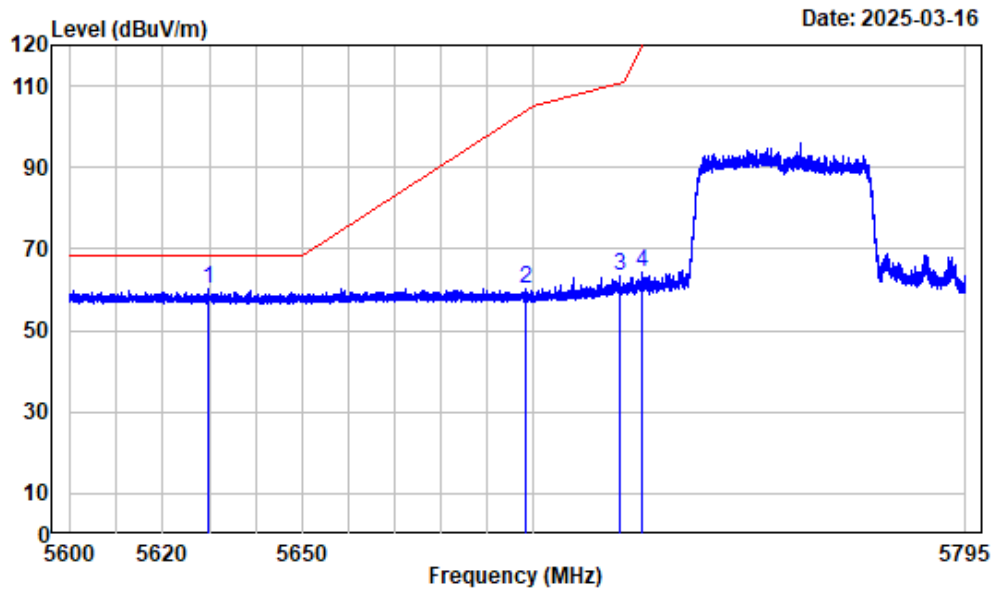

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX40-5755

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5629.912	-6.00	66.01	60.01	68.20	-8.19	Peak
2	5698.292	-5.73	66.03	60.30	103.94	-43.64	Peak
3	5719.136	-5.54	68.91	63.37	110.56	-47.19	Peak
4	5723.914	-5.49	69.85	64.36	119.72	-55.36	Peak


Right Band edge_Horizontal_Peak

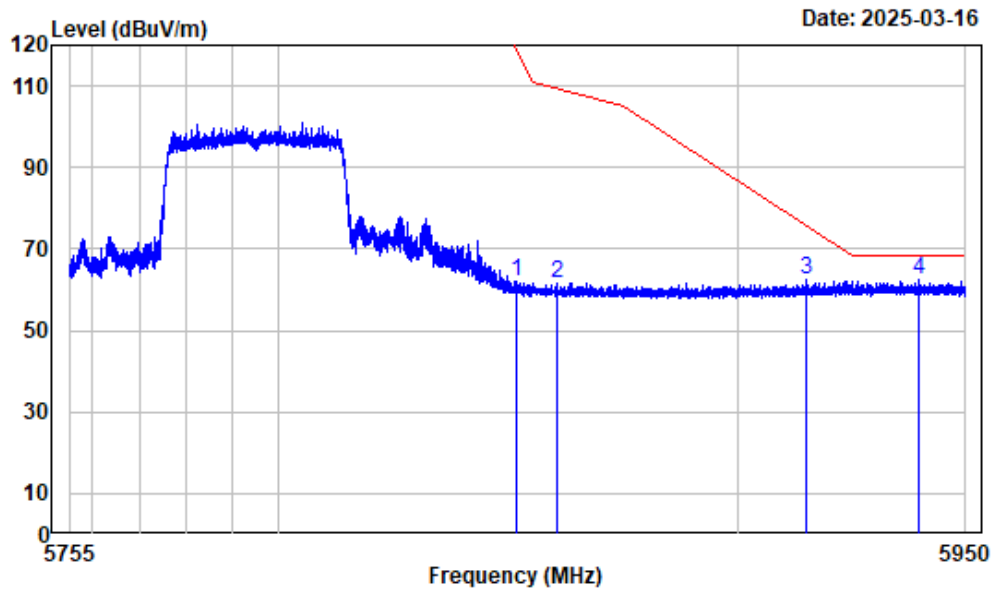

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX40-5795

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5851.659	-4.66	66.60	61.94	118.42	-56.48 Peak
2	5860.337	-4.63	66.33	61.70	109.30	-47.60 Peak
3	5914.896	-4.46	66.89	62.43	75.65	-13.22 Peak
4	5939.542	-4.44	67.09	62.65	68.20	-5.55 Peak


Right Band edge_Vertical_Peak

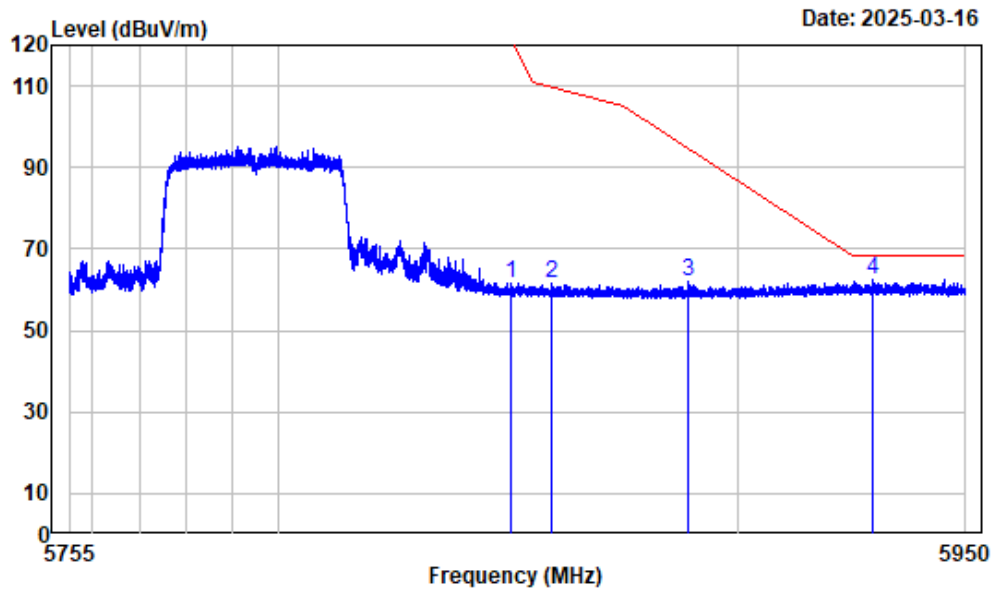

Condition : Vertical
 Project No. : 2401A63093E-RF
 Tester : Zenos Qiao
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : 5GWiFi-Band4-AX40-5795

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.343	-4.68	66.18	61.50	121.42	-59.92	Peak
2	5859.094	-4.63	66.04	61.41	109.65	-48.24	Peak
3	5889.128	-4.50	66.59	62.09	94.71	-32.62	Peak
4	5929.376	-4.45	67.11	62.66	68.20	-5.54	Peak


Left Band edge_Horizontal_Peak

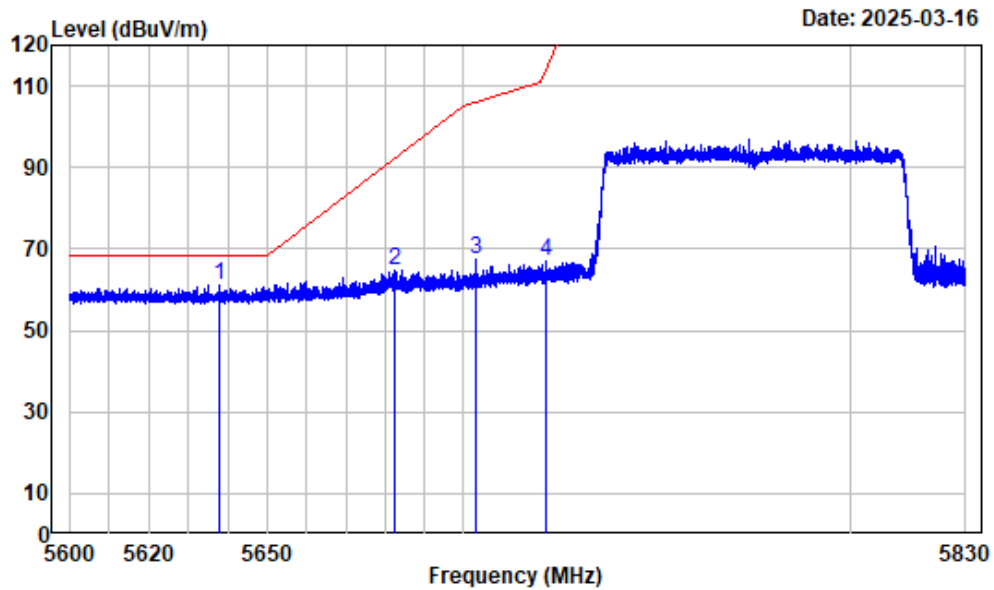

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX80-5775

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5637.696	-5.95	67.20	61.25	68.20	-6.95 Peak
2	5682.581	-5.77	70.61	64.84	92.35	-27.51 Peak
3	5702.996	-5.68	72.96	67.28	106.04	-38.76 Peak
4	5721.053	-5.52	72.64	67.12	113.20	-46.08 Peak


Left Band edge_Vertical_Peak

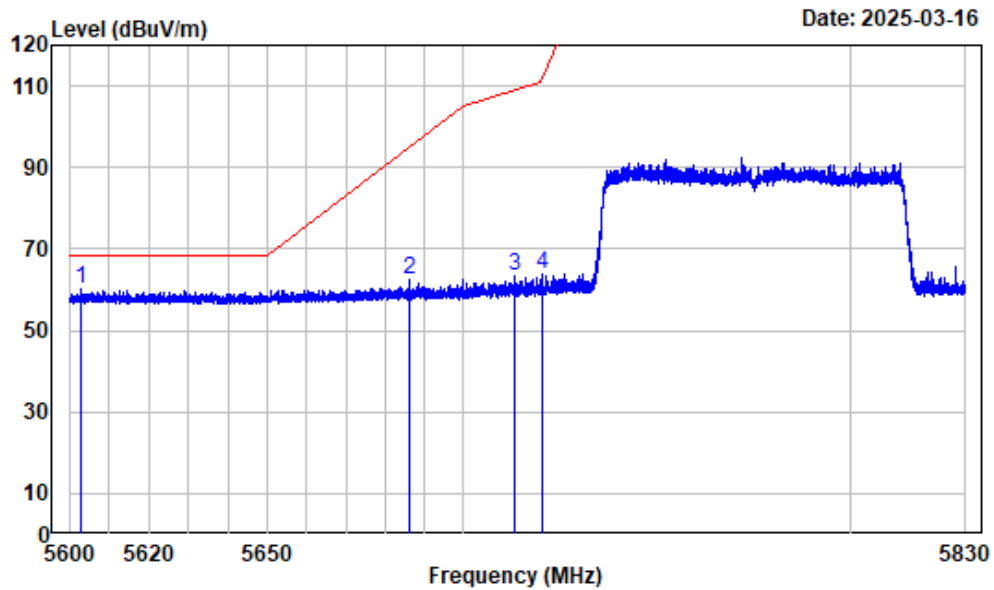

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5602.789	-6.20	66.29	60.09	68.20	-8.11	Peak
2	5686.405	-5.75	68.24	62.49	95.17	-32.68	Peak
3	5713.030	-5.59	68.79	63.20	108.85	-45.65	Peak
4	5720.104	-5.53	69.57	64.04	111.04	-47.00	Peak


Right Band edge_Horizontal_Peak

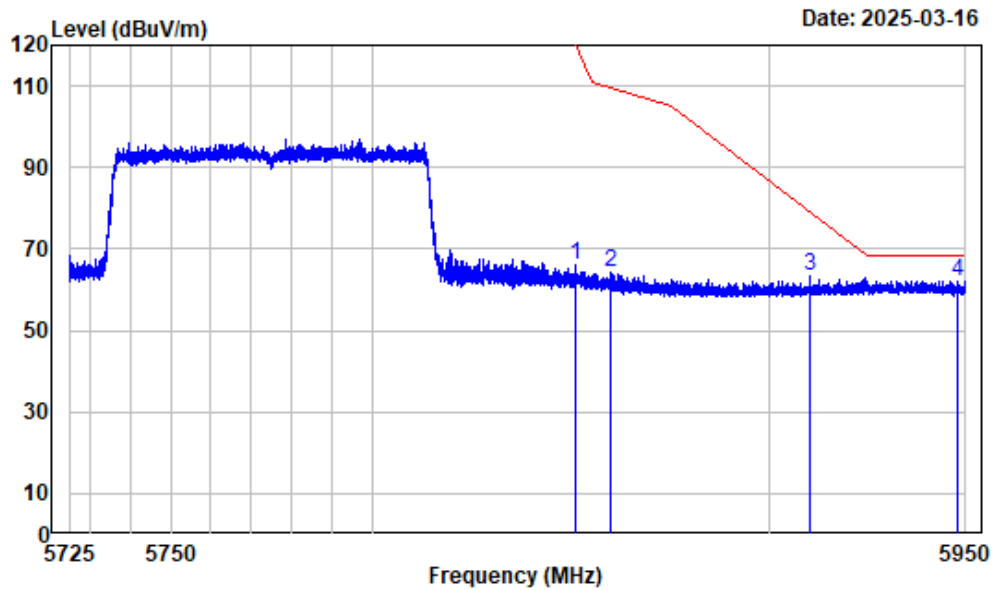

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX80-5775

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5851.100	-4.68	70.58	65.90	119.69	-53.79	Peak
2	5860.073	-4.63	68.82	64.19	109.38	-45.19	Peak
3	5910.339	-4.45	67.81	63.36	79.02	-15.66	Peak
4	5947.975	-4.45	66.65	62.20	68.20	-6.00	Peak

Right Band edge_Veritical_Peak

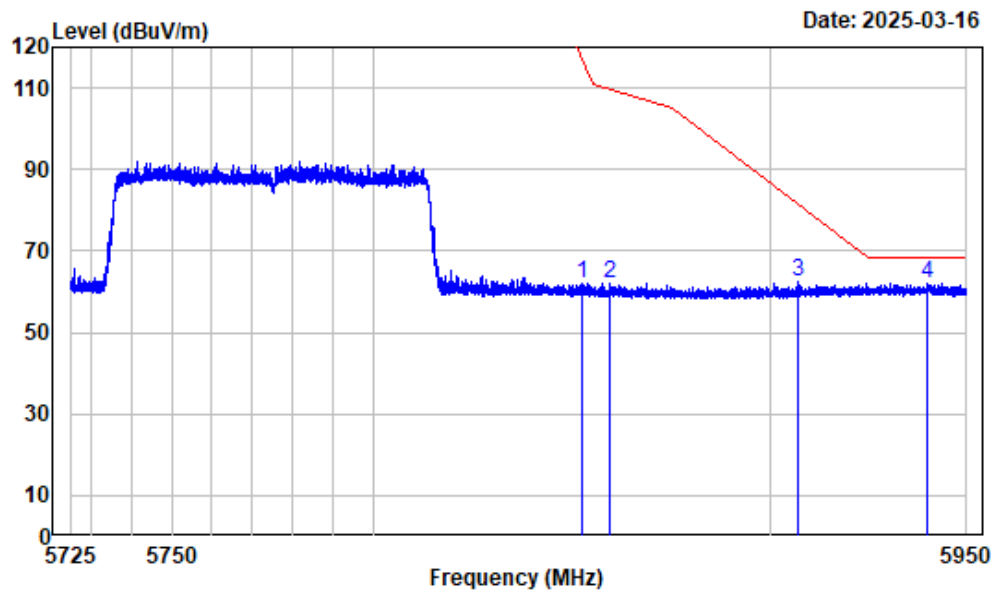


Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX80-5775

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5852.591	-4.66	66.92	62.26	116.29	-54.03	Peak
2	5859.454	-4.63	66.82	62.19	109.55	-47.36	Peak
3	5907.132	-4.45	66.97	62.52	81.39	-18.87	Peak
4	5940.042	-4.44	66.59	62.15	68.20	-6.05	Peak

5150-5250MHz_ ANT2:


Left Band edge_Horizontal_Peak

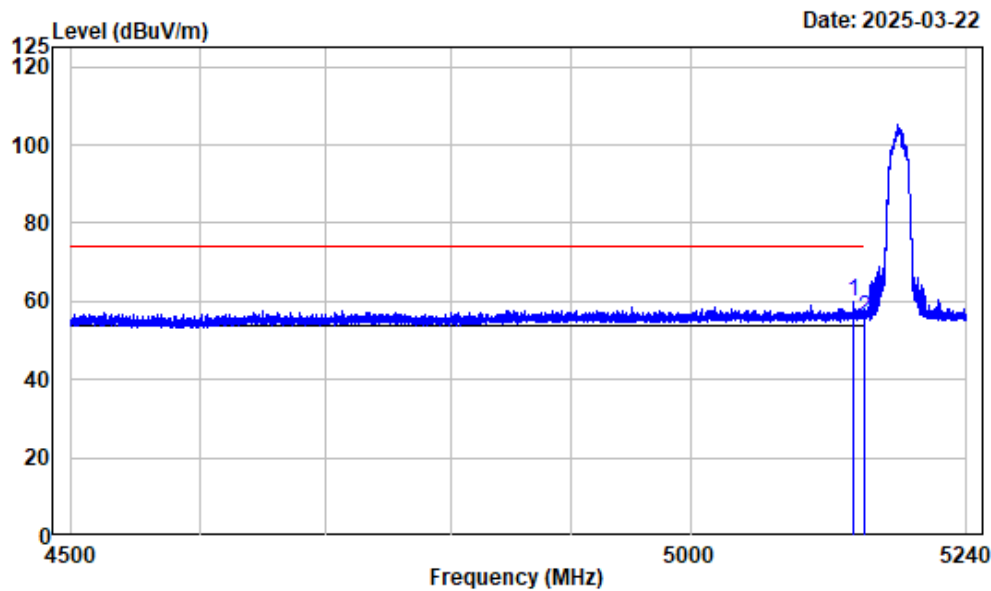

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5141.013	-7.47	67.52	60.05	74.00	-13.95	Peak
2	5150.000	-7.46	63.32	55.86	74.00	-18.14	Peak


Left Band edge_Horizontal_Average

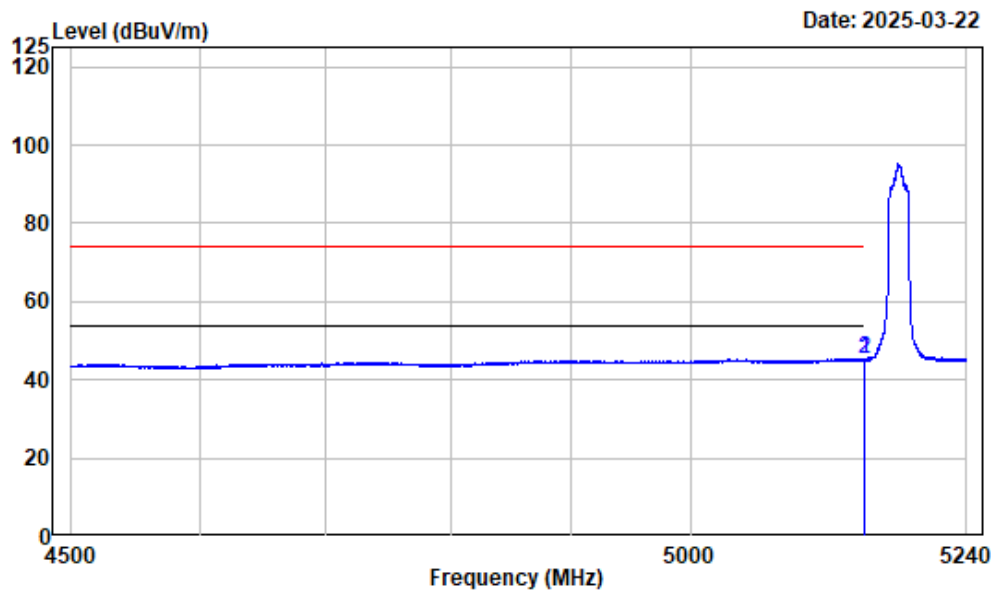

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.431	-7.46	52.79	45.33	54.00	-8.67 Average
2	5150.000	-7.46	52.54	45.08	54.00	-8.92 Average


Left Band edge_Vertical_Peak

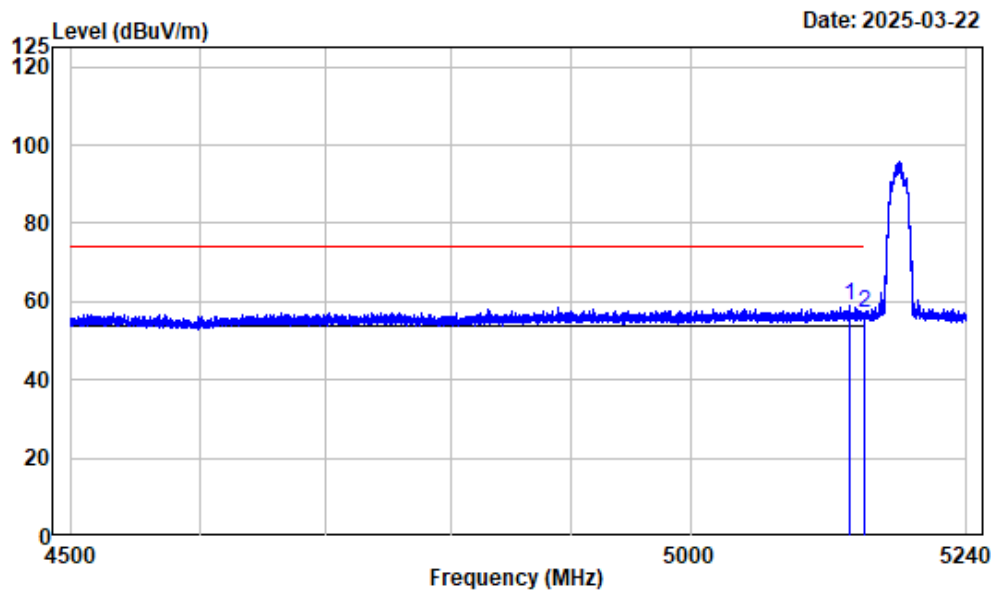

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5137.682	-7.46	66.22	58.76	74.00	-15.24 Peak
2	5150.000	-7.46	64.70	57.24	74.00	-16.76 Peak


Left Band edge_Vertical_Average

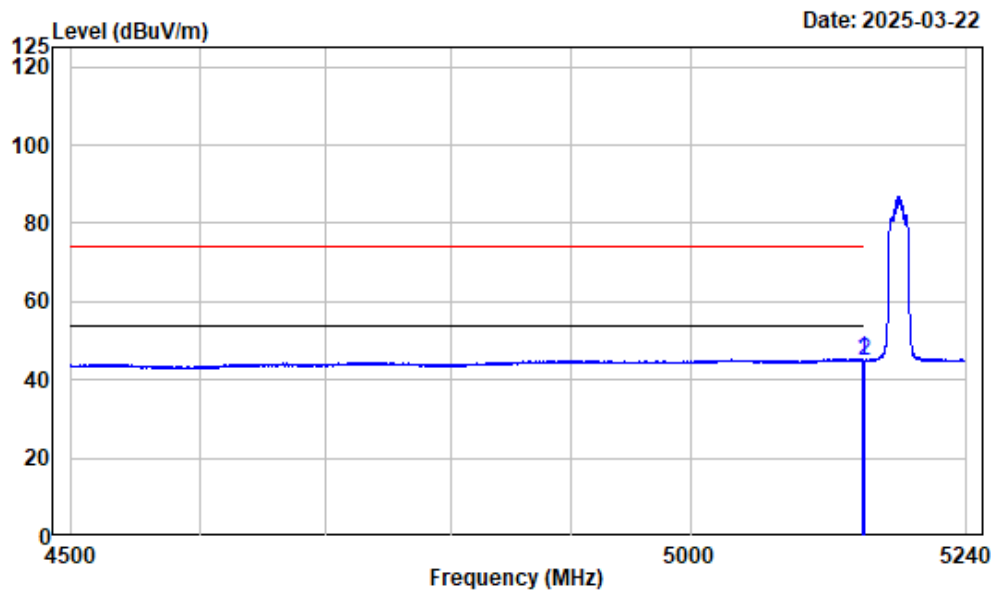

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5147.766	-7.46	52.76	45.30	54.00	-8.70 Average
2	5150.000	-7.46	52.39	44.93	54.00	-9.07 Average


Right Band edge_Horizontal_Peak

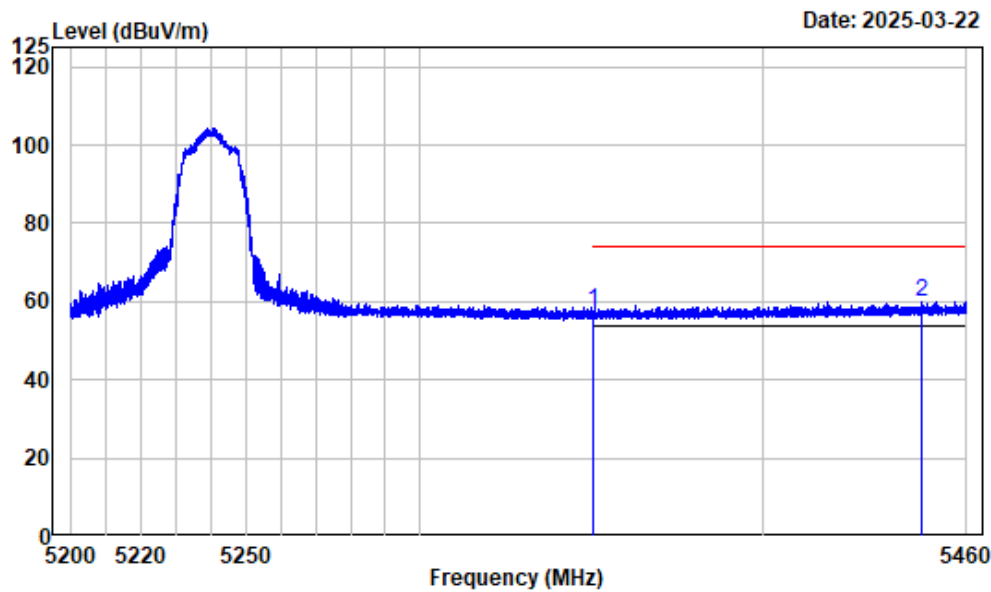

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	64.32	57.58	74.00	-16.42 Peak
2	5446.446	-6.35	66.45	60.10	74.00	-13.90 Peak


Right Band edge_Horizontal_Average

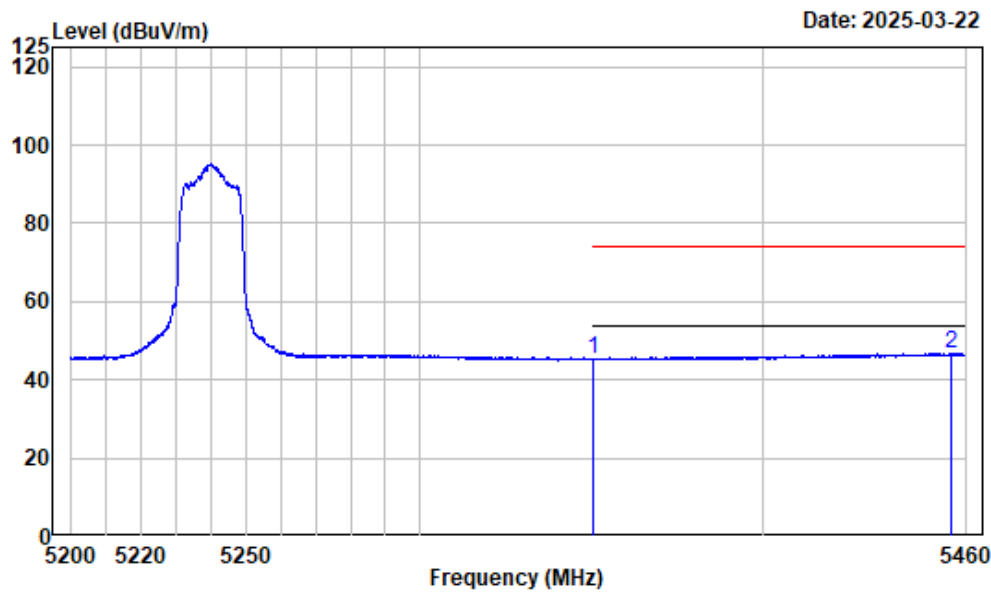

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	52.04	45.30	54.00	-8.70 Average
2	5455.645	-6.31	53.01	46.70	54.00	-7.30 Average


Right Band edge_Vertical_Peak

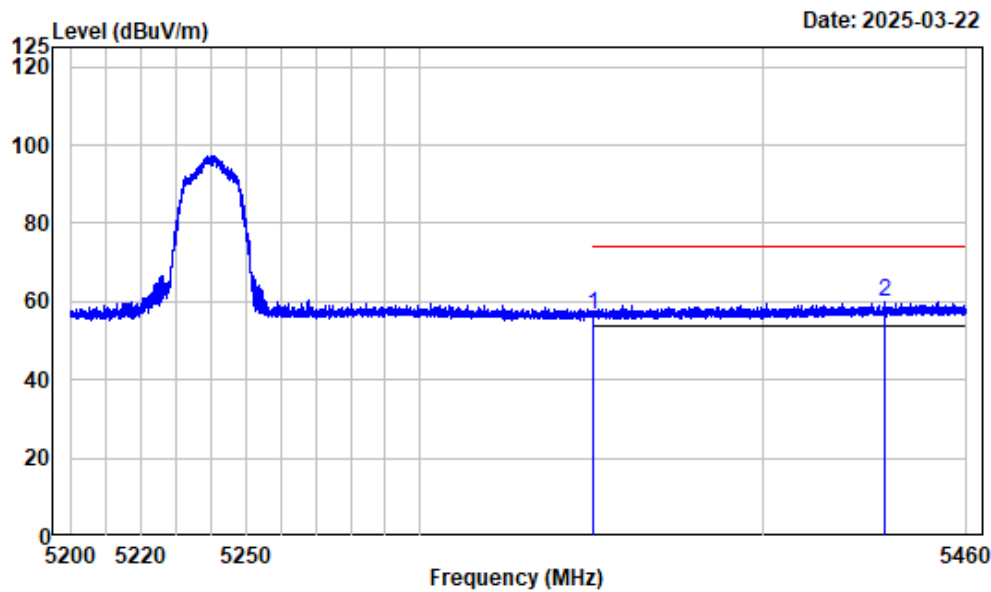

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	63.20	56.46	74.00	-17.54	Peak
2 5436.012	-6.40	66.34	59.94	74.00	-14.06	Peak


Right Band edge_Vertical_Average

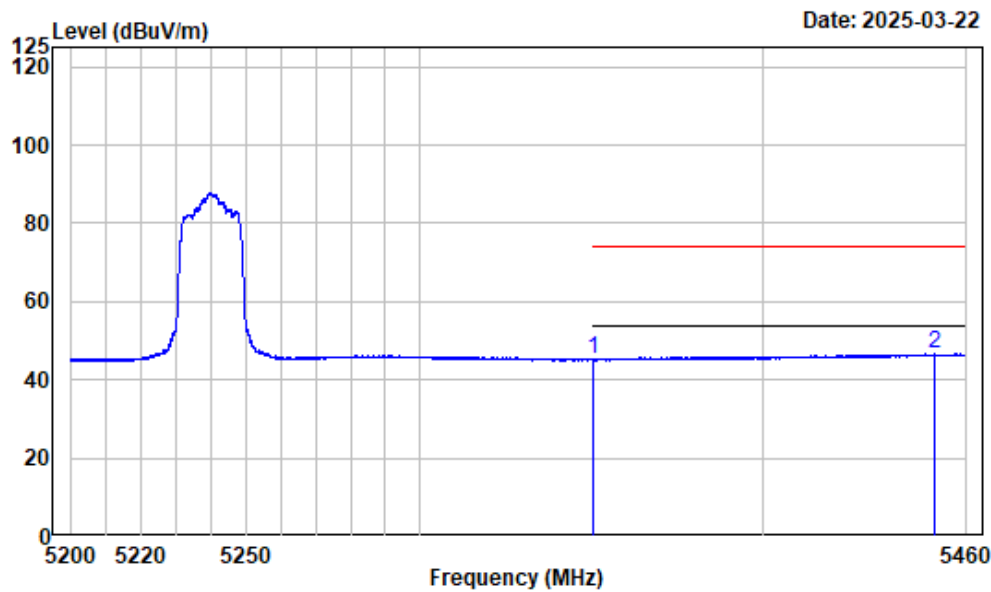

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	51.91	45.17	54.00	-8.83 Average
2	5450.346	-6.32	52.97	46.65	54.00	-7.35 Average


Left Band edge_Horizontal_Peak

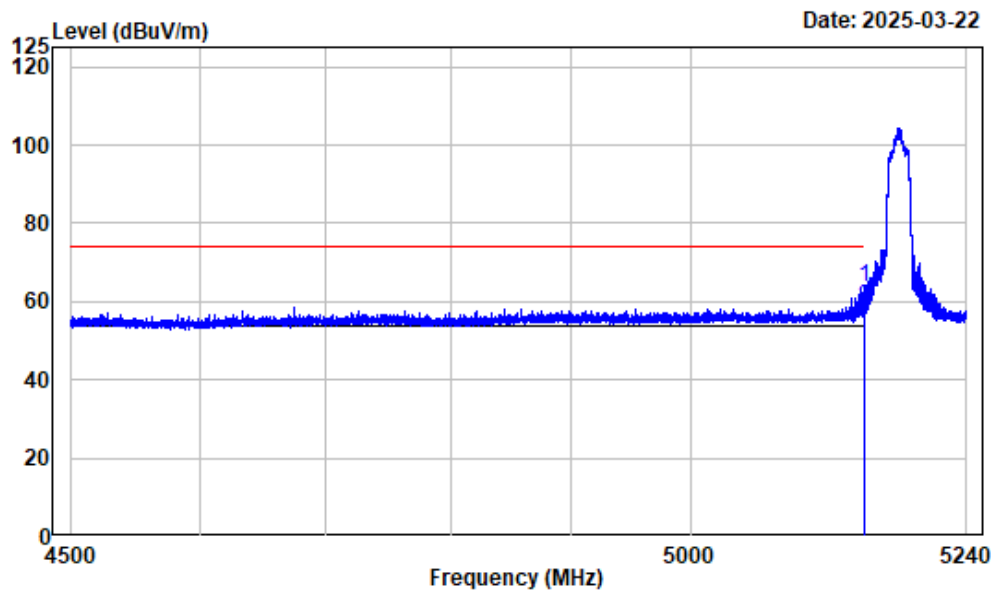

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.431	-7.46	71.15	63.69	74.00	-10.31 Peak
2	5150.000	-7.46	65.95	58.49	74.00	-15.51 Peak


Left Band edge_Horizontal_Average

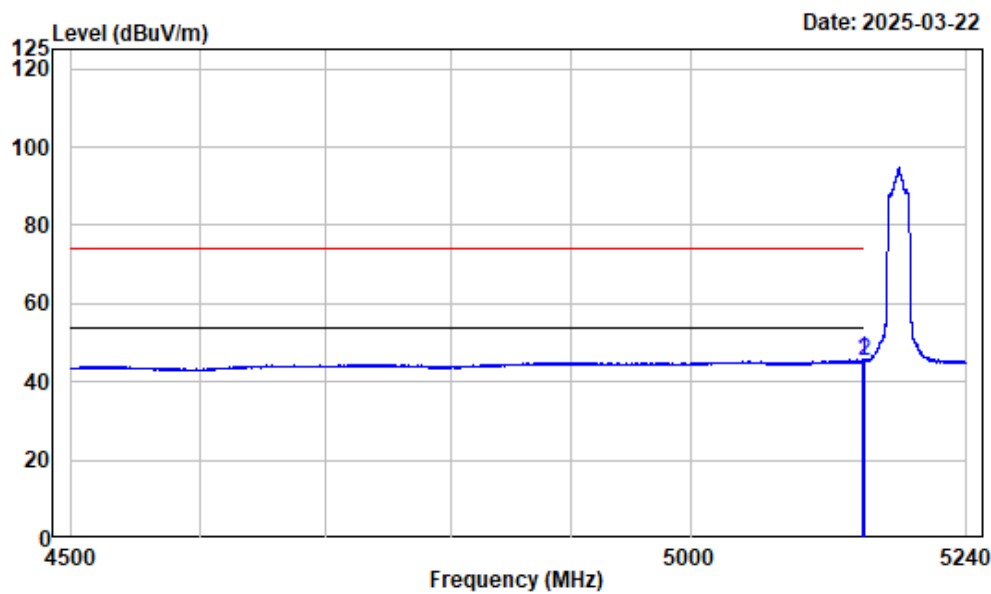

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5147.673	-7.46	53.14	45.68	54.00	-8.32 Average
2	5150.000	-7.46	52.77	45.31	54.00	-8.69 Average


Left Band edge_Vertical_Peak

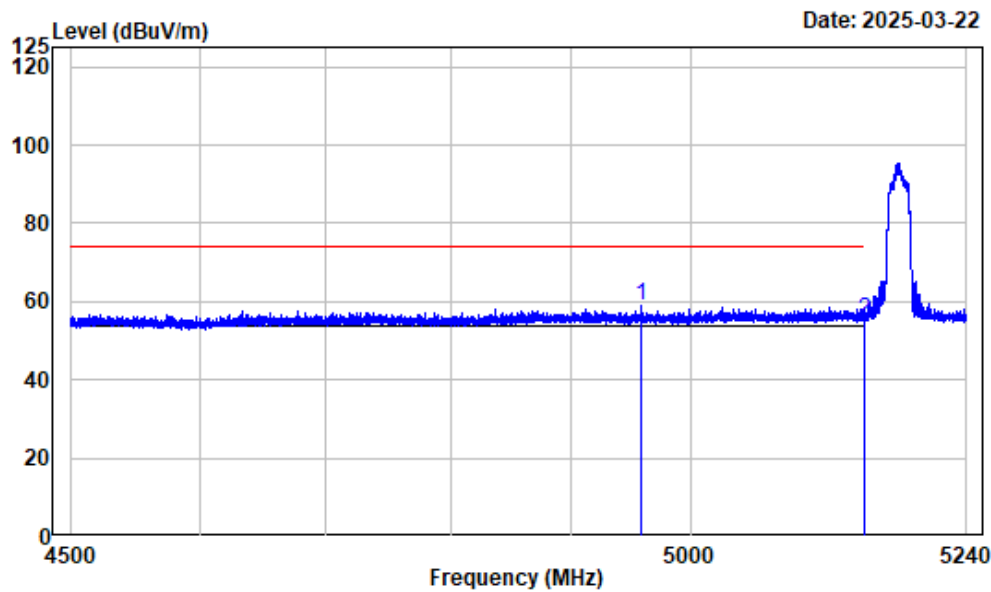

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4958.210	-7.58	66.68	59.10	74.00	-14.90 Peak
2	5150.000	-7.46	62.77	55.31	74.00	-18.69 Peak


Left Band edge_Vertical_Average

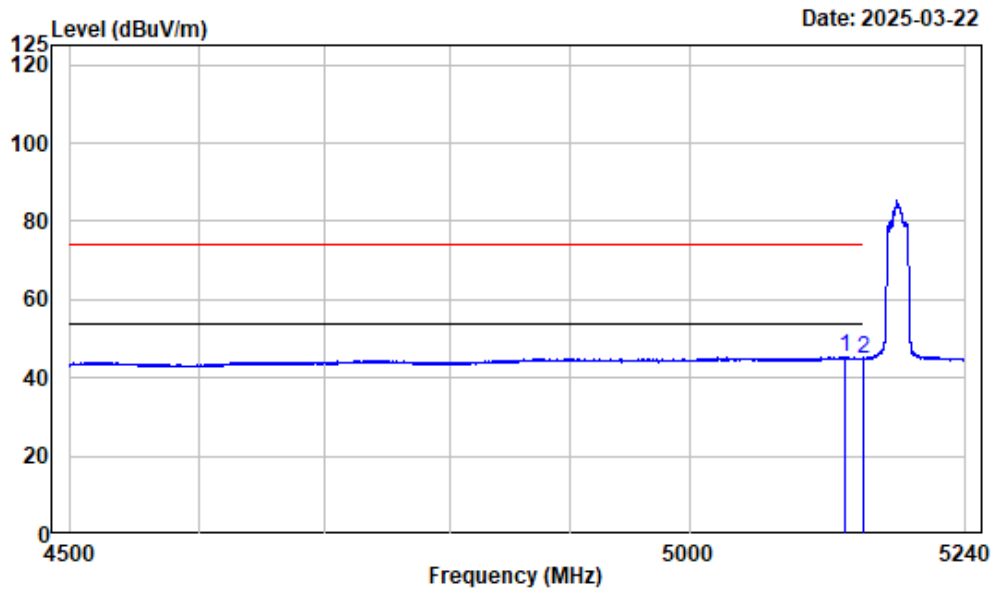

Condition : Vertical
 Project No. : 2401A63093E-RF
 Tester : Zenos Qiao
 Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
 Note : 5GWiFi-Band1-AC20-5180

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5133.982	-7.47	52.73	45.26	54.00	-8.74	Average
2	5150.000	-7.46	52.33	44.87	54.00	-9.13	Average


Right Band edge_Horizontal_Peak

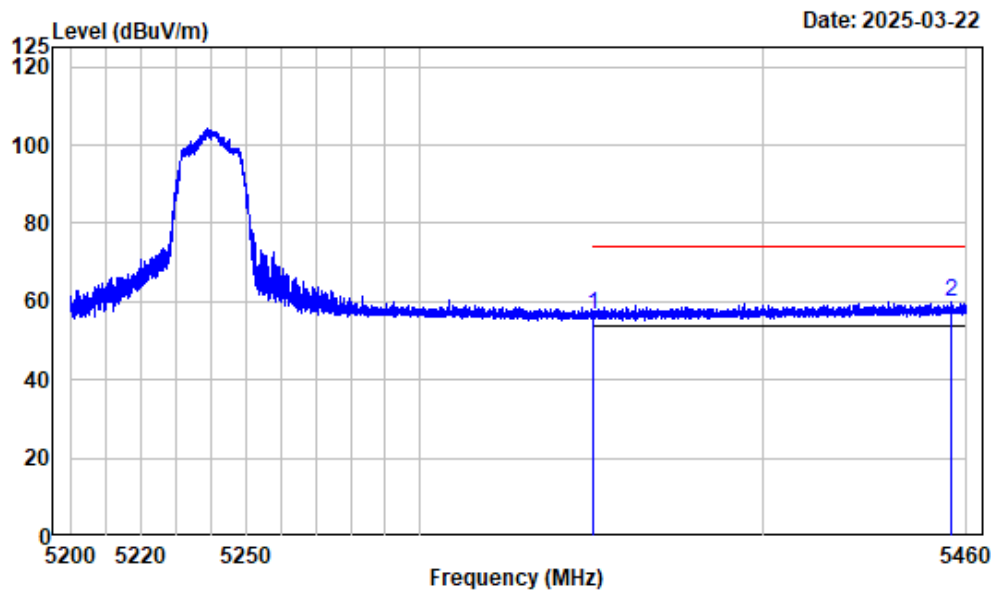

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	63.34	56.60	74.00	-17.40	Peak
2 5455.709	-6.31	66.17	59.86	74.00	-14.14	Peak


Right Band edge_Horizontal_Average

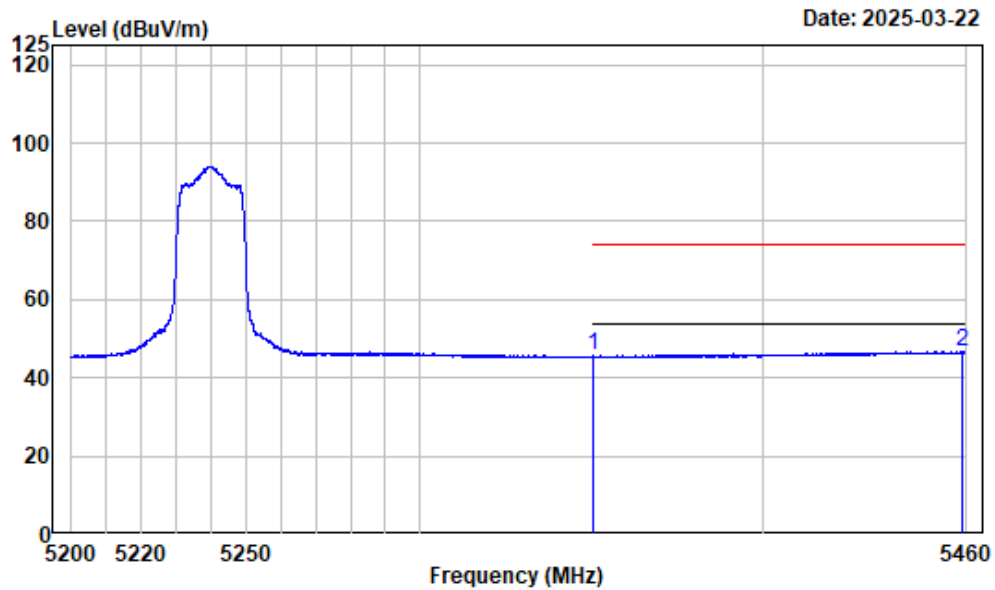

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	52.30	45.56	54.00	-8.44	Average
2 5458.635	-6.29	52.93	46.64	54.00	-7.36	Average


Right Band edge_Vertical_Peak

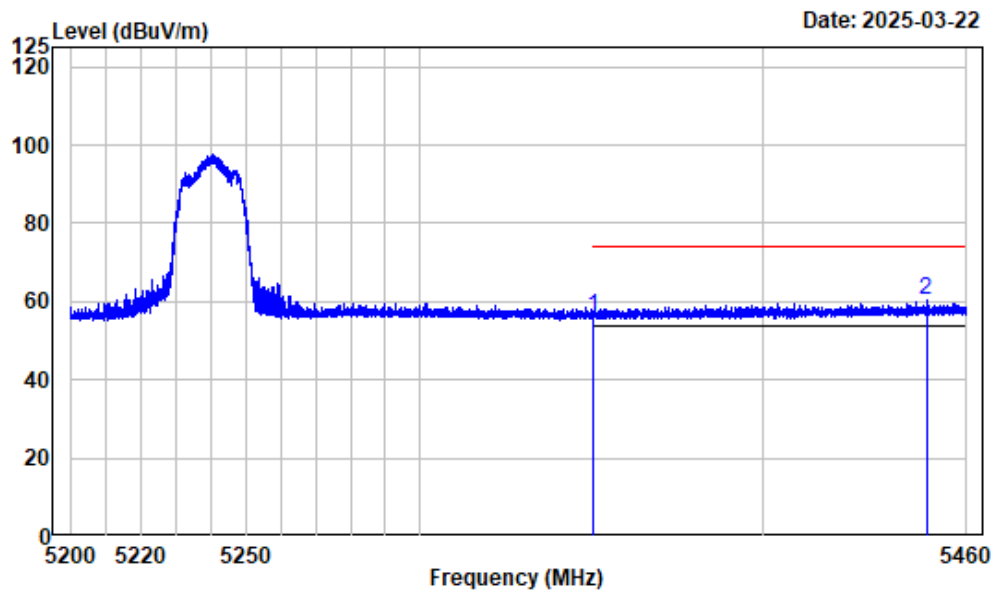

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	63.04	56.30	74.00	-17.70	Peak
2 5448.071	-6.33	66.67	60.34	74.00	-13.66	Peak


Right Band edge_Vertical_Average

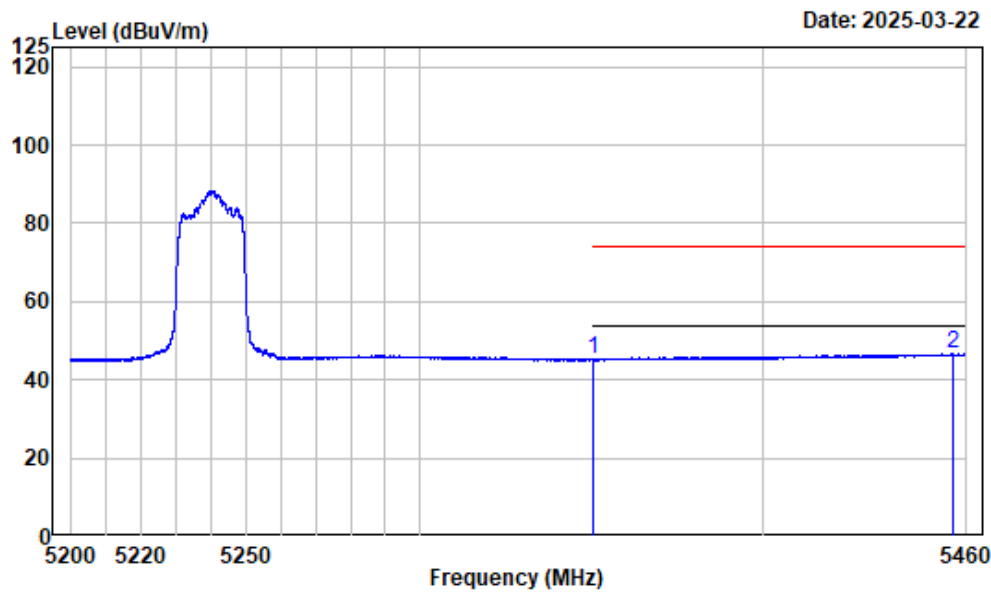

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	51.83	45.09	54.00	-8.91	Average
2 5455.937	-6.31	52.98	46.67	54.00	-7.33	Average


Left Band edge_Horizontal_Peak

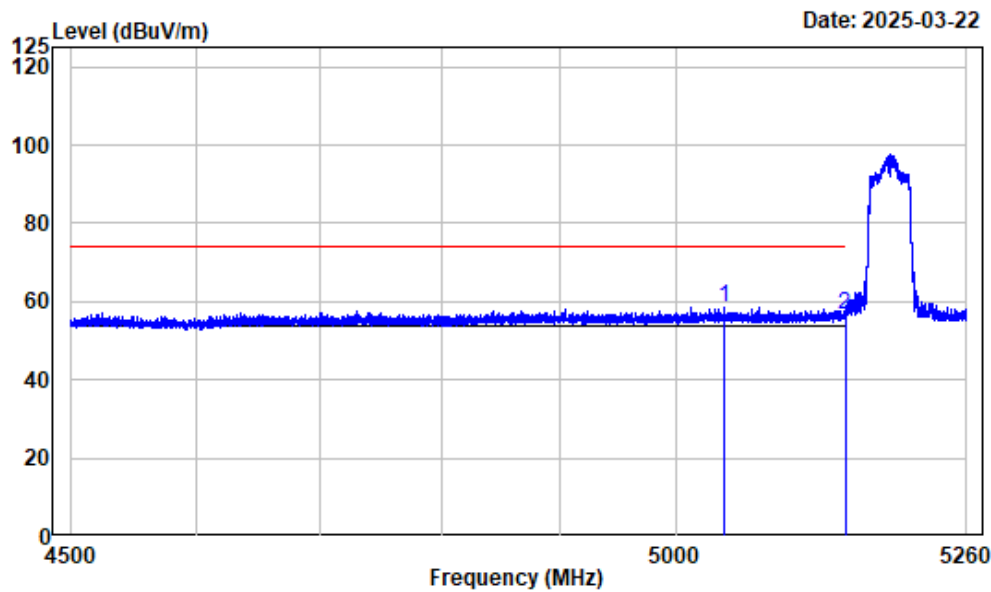

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5190

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5042.518	-7.31	65.73	58.42	74.00	-15.58	Peak
2 5150.000	-7.46	64.29	56.83	74.00	-17.17	Peak


Left Band edge_Horizontal_Average

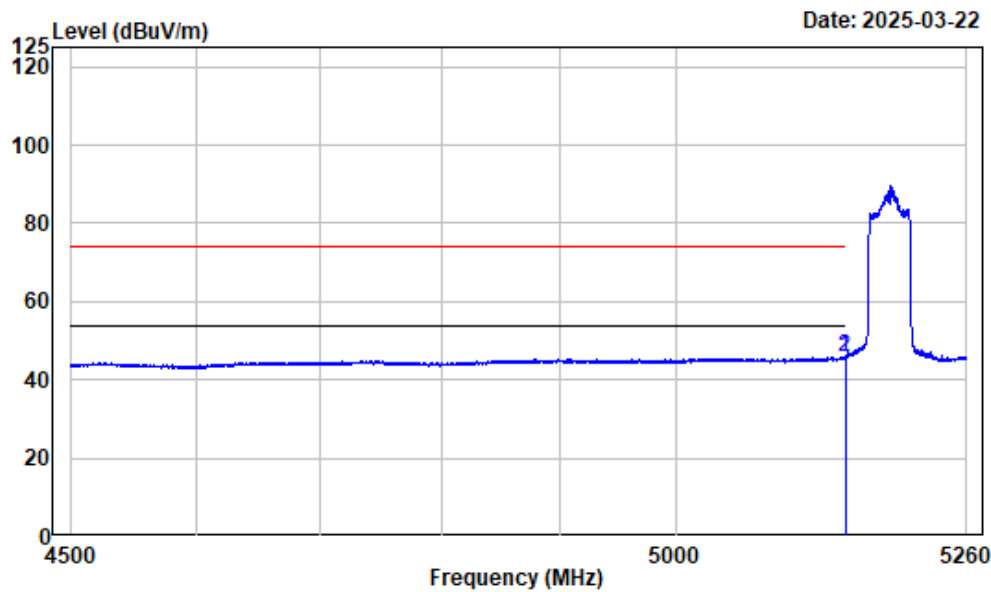

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5190

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.976	-7.46	53.27	45.81	54.00	-8.19 Average
2	5150.000	-7.46	53.20	45.74	54.00	-8.26 Average


Left Band edge_Vertical_Peak

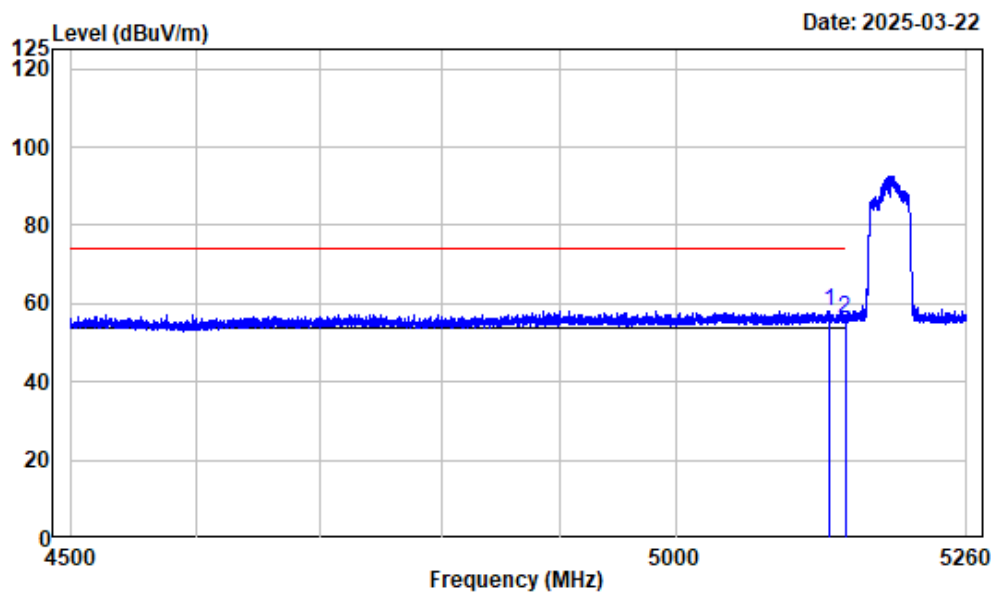

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5190

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5136.104	-7.46	65.56	58.10	74.00	-15.90 Peak
2	5150.000	-7.46	63.45	55.99	74.00	-18.01 Peak


Left Band edge_Vertical_Average

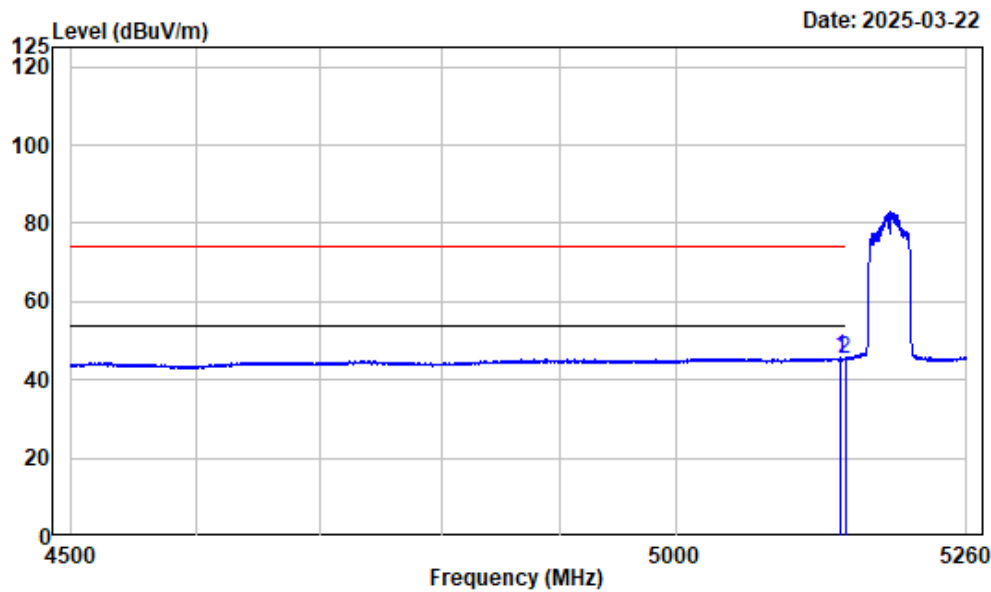

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5190

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5145.796	-7.46	53.02	45.56	54.00	-8.44 Average
2	5150.000	-7.46	52.65	45.19	54.00	-8.81 Average


Right Band edge_Horizontal_Peak

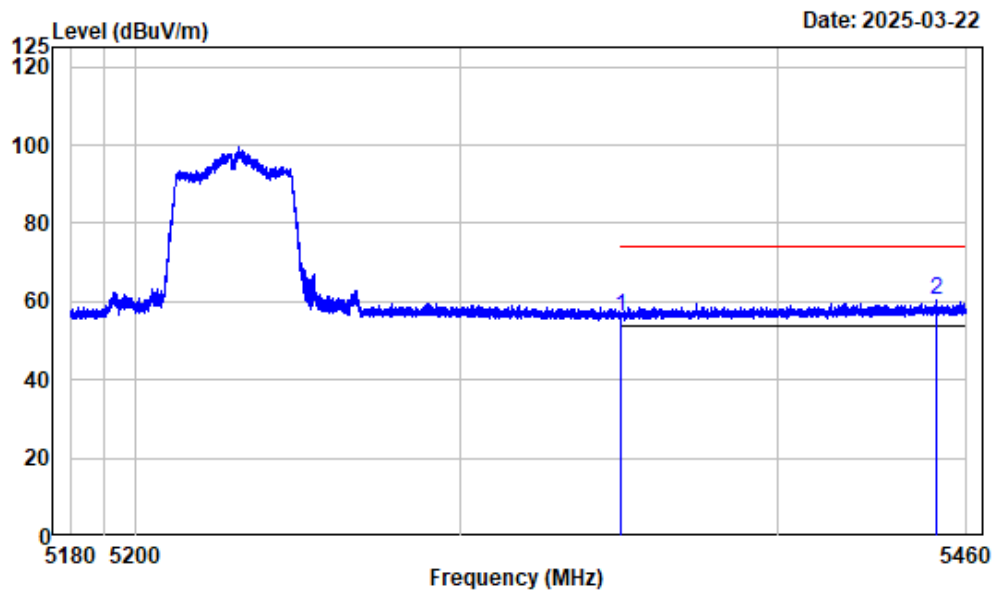

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	63.05	56.31	74.00	-17.69	Peak
2 5450.654	-6.32	66.71	60.39	74.00	-13.61	Peak


Right Band edge_Horizontal_Average

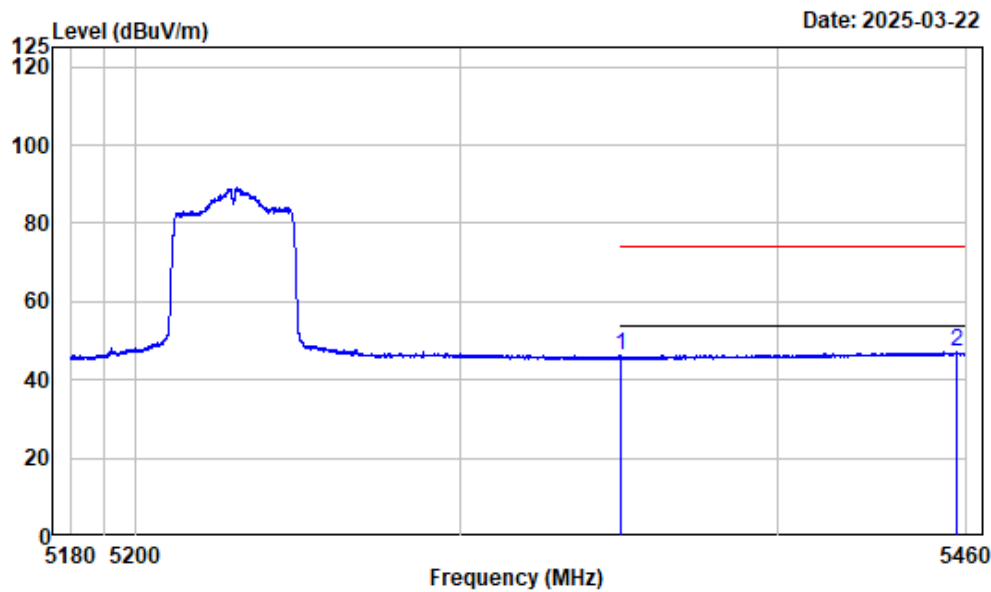

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	52.94	46.20	54.00	-7.80 Average
2	5456.814	-6.31	53.41	47.10	54.00	-6.90 Average


Right Band edge_Vertical_Peak

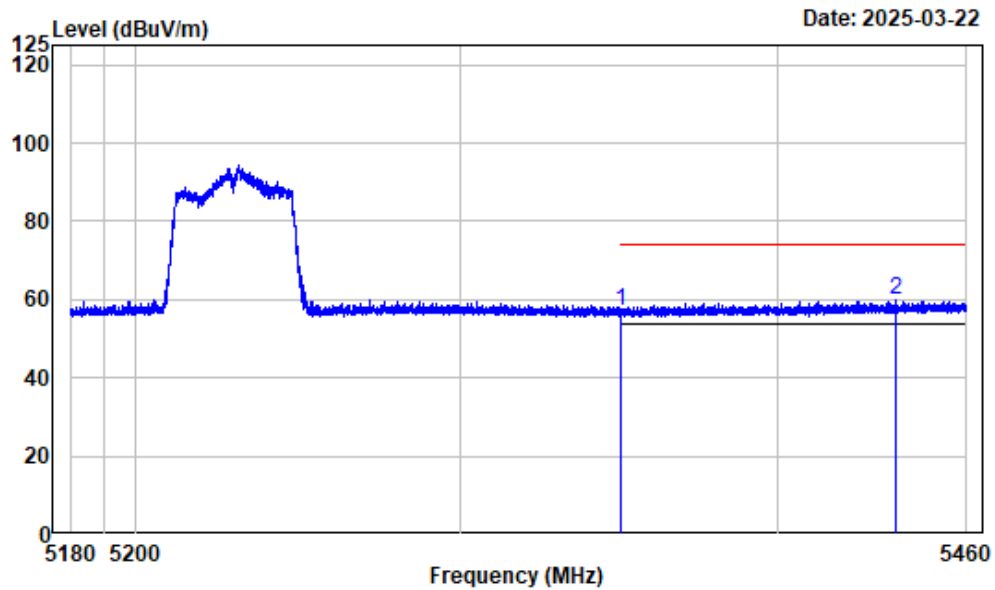

Condition : Vertical
 Project No. : 2401A63093E-RF
 Tester : Zenos Qiao
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : 5GWiFi-Band1-AC40-5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	63.65	56.91	74.00	-17.09	Peak
2	5437.422	-6.40	66.19	59.79	74.00	-14.21	Peak


Right Band edge_Vertical_Average

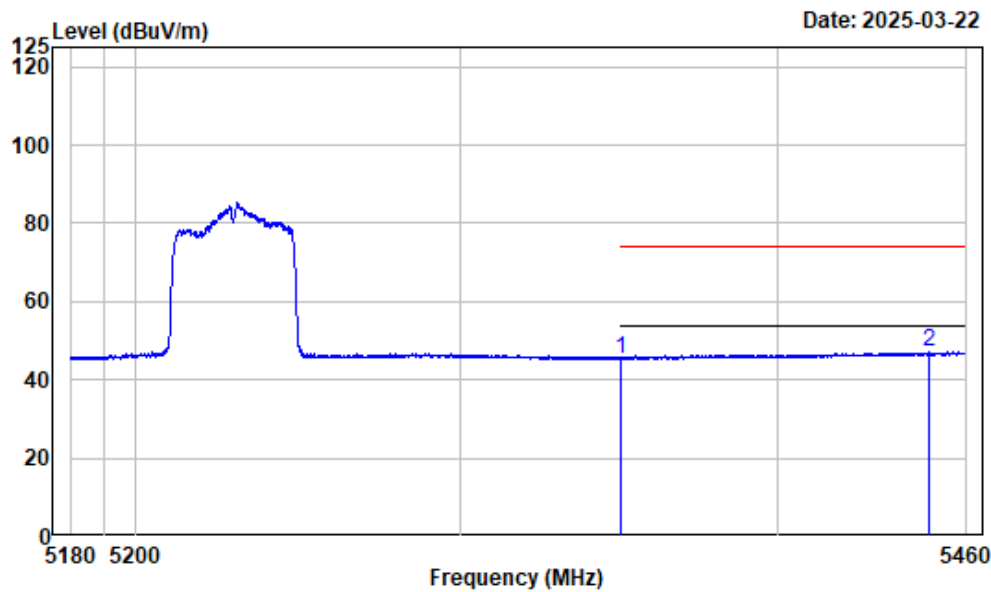

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	52.09	45.35	54.00	-8.65	Average
2 5448.028	-6.33	53.36	47.03	54.00	-6.97	Average


Left Band edge_Horizontal_Peak

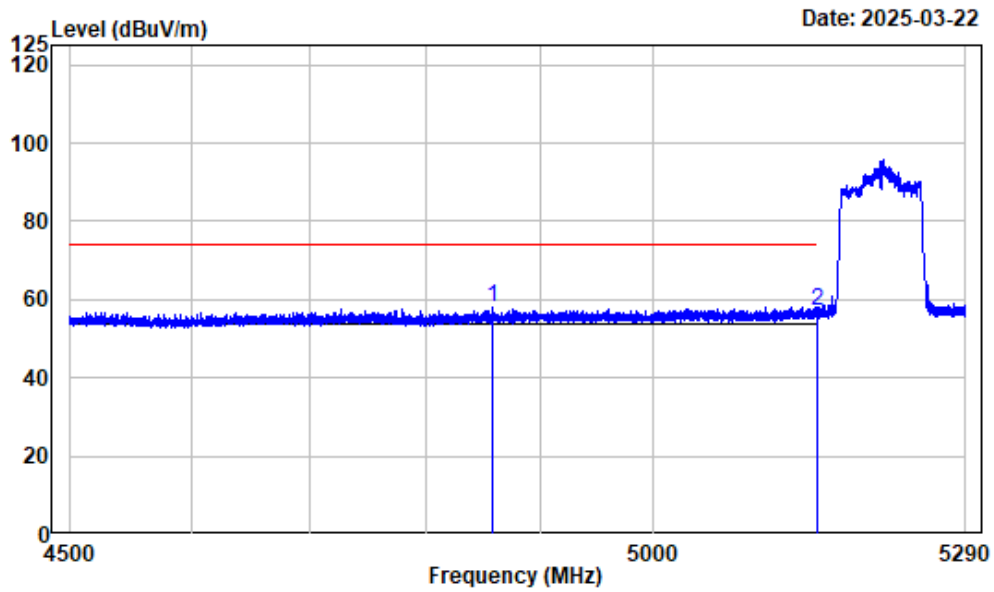

Condition : Horizontal
 Project No. : 2401A63093E-RF
 Tester : Zenos Qiao
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : 5GWiFi-Band1-AC80-5210

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4857.619	-7.68	65.78	58.10	74.00	-15.90	Peak
2 5150.000	-7.46	64.44	56.98	74.00	-17.02	Peak


Left Band edge_Horizontal_Average

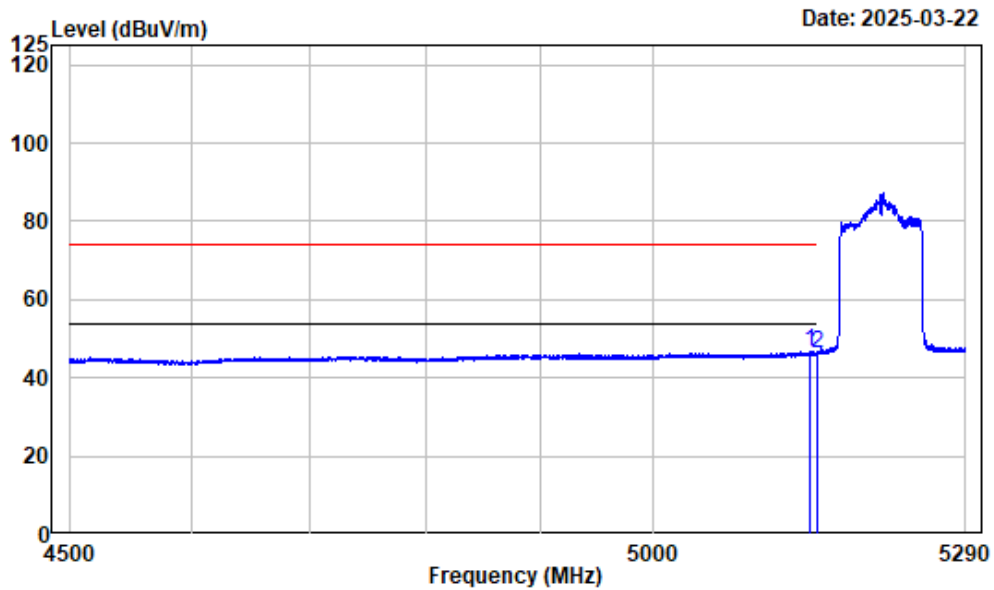

Condition : Horizontal
 Project No. : 2401A63093E-RF
 Tester : Zenos Qiao
 Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
 Note : 5GWiFi-Band1-AC80-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5143.338	-7.46	54.07	46.61	54.00	-7.39	Average
2	5150.000	-7.46	53.48	46.02	54.00	-7.98	Average


Left Band edge_Vertical_Peak

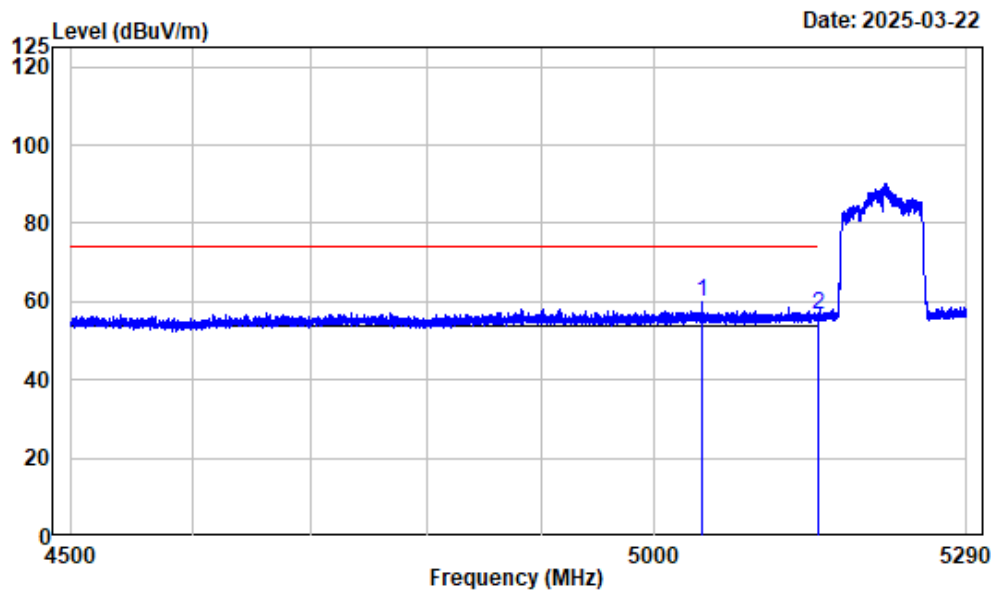

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5043.983	-7.31	67.15	59.84	74.00	-14.16	Peak
2 5150.000	-7.46	64.05	56.59	74.00	-17.41	Peak


Left Band edge_Vertical_Average

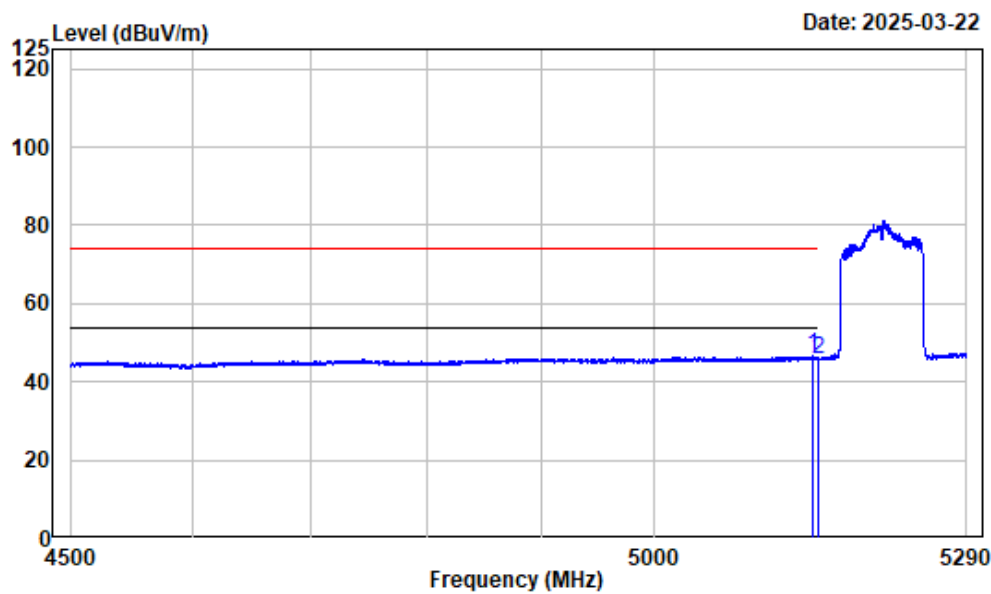

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5145.313	-7.46	53.96	46.50	54.00	-7.50 Average
2	5150.000	-7.46	53.35	45.89	54.00	-8.11 Average


Right Band edge_Horizontal_Peak

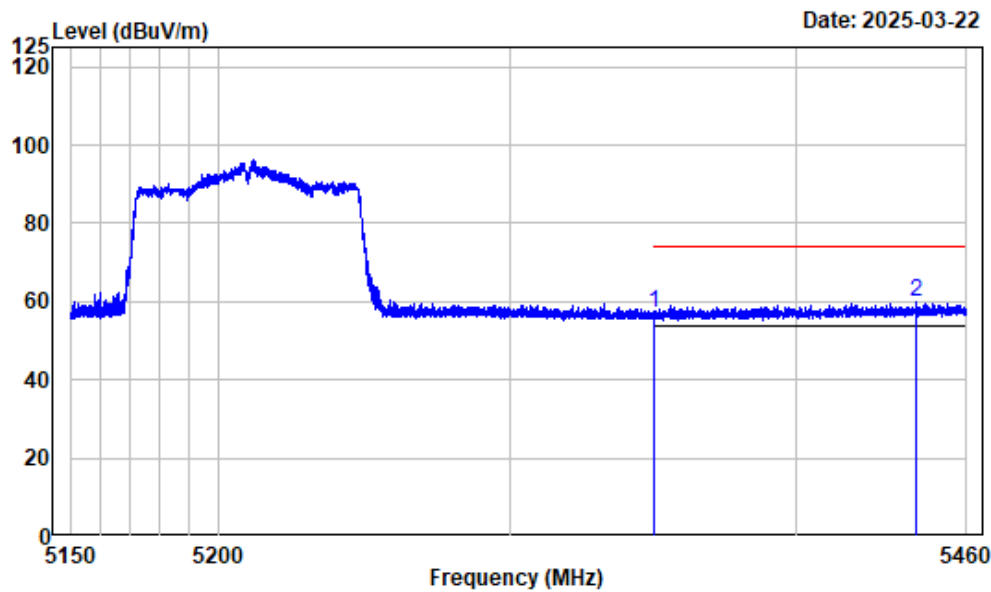

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	63.96	57.22	74.00	-16.78	Peak
2 5442.211	-6.38	66.33	59.95	74.00	-14.05	Peak


Right Band edge_Horizontal_Average

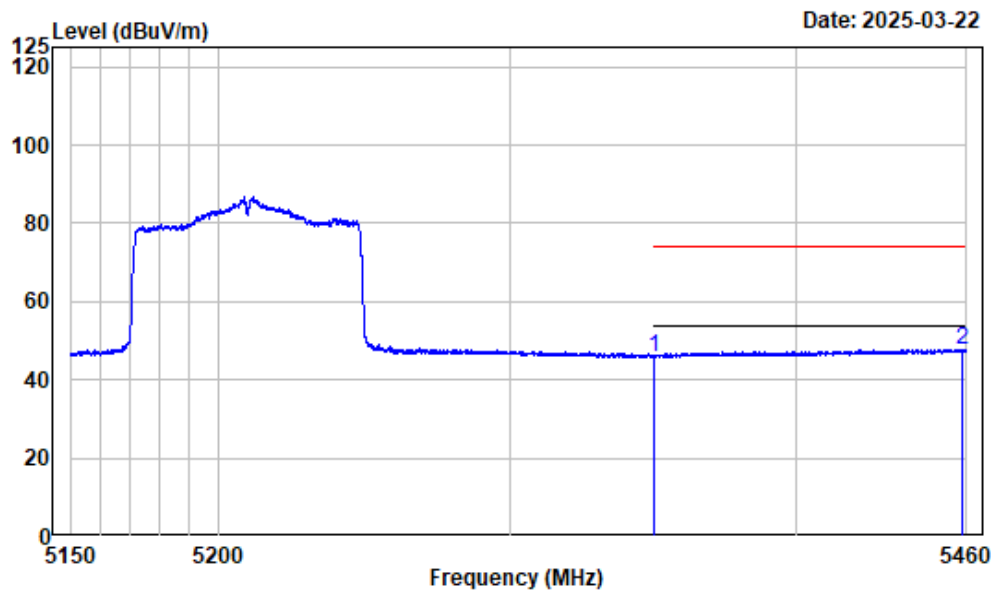

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	52.64	45.90	54.00	-8.10	Average
2 5458.411	-6.29	54.06	47.77	54.00	-6.23	Average


Right Band edge_Vertical_Peak

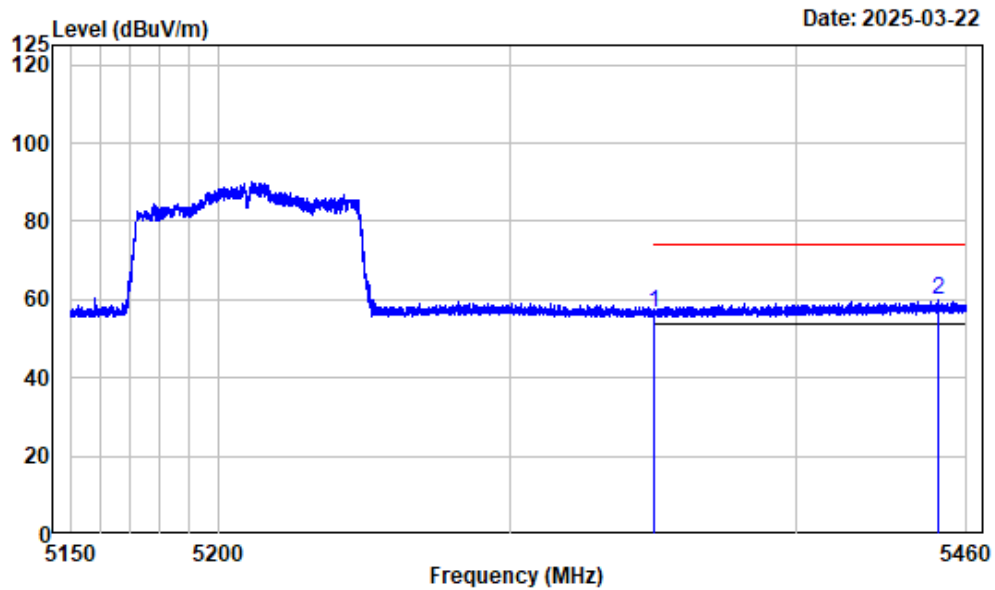

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	63.15	56.41	74.00	-17.59 Peak
2	5449.808	-6.33	66.16	59.83	74.00	-14.17 Peak


Right Band edge_Veritical_Average

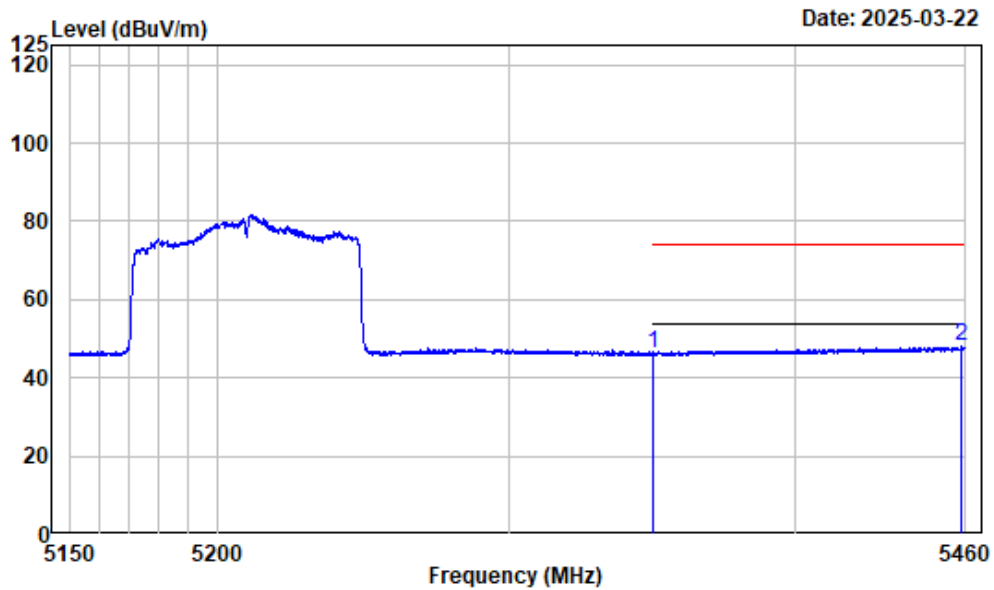

Condition : Vertical
 Project No. : 2401A63093E-RF
 Tester : Zenos Qiao
 Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
 Note : 5GWiFi-Band1-AC80-5210

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	52.79	46.05	54.00	-7.95	Average
2 5458.527	-6.29	54.18	47.89	54.00	-6.11	Average


Left Band edge_Horizontal_Peak

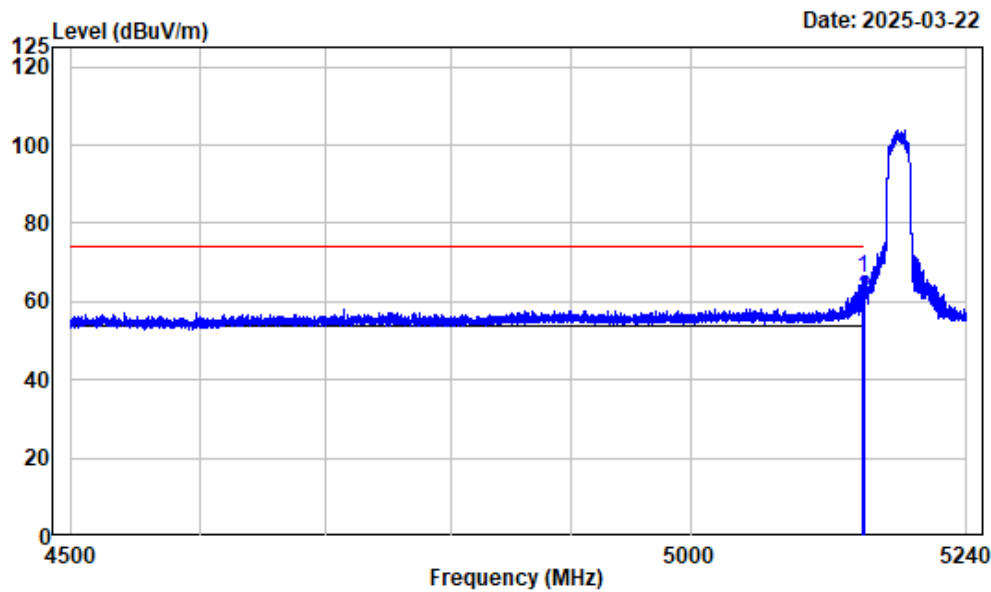

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.043	-7.46	73.40	65.94	74.00	-8.06 Peak
2	5150.000	-7.46	68.45	60.99	74.00	-13.01 Peak


Left Band edge_Horizontal_Average

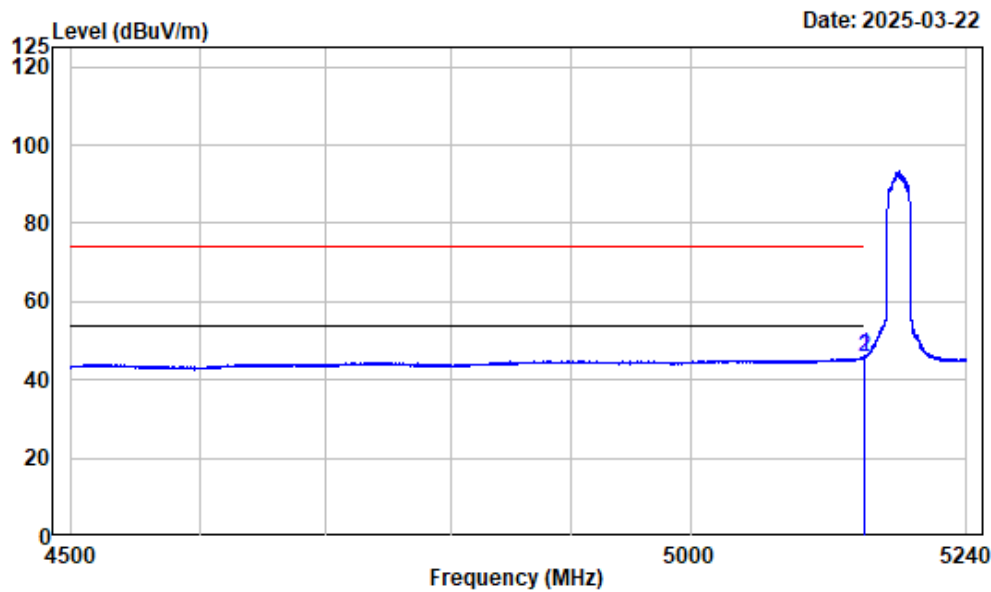

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.708	-7.46	53.70	46.24	54.00	-7.76 Average
2	5150.000	-7.46	53.40	45.94	54.00	-8.06 Average


Left Band edge_Vertical_Peak

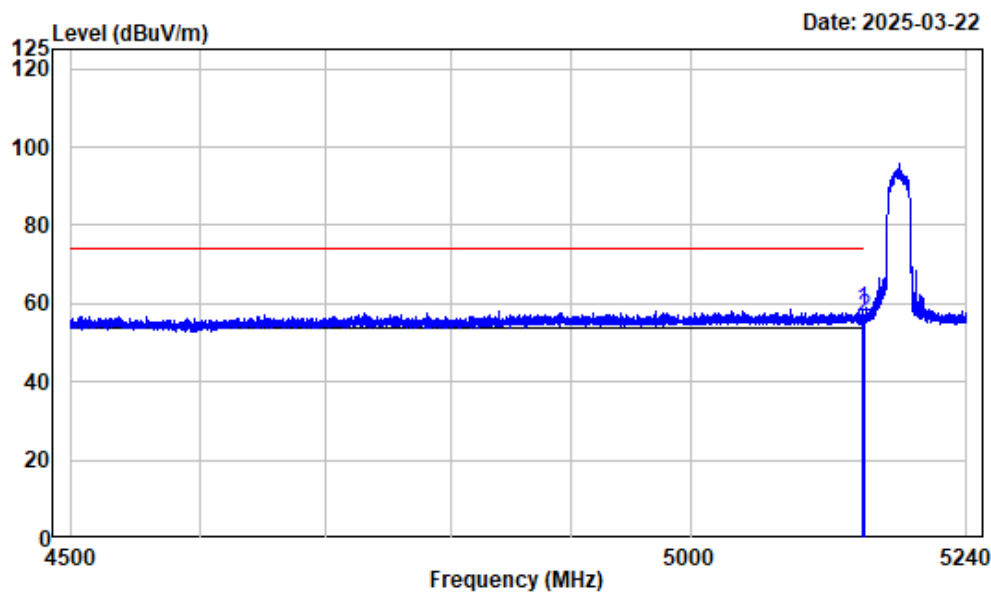

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.784	-7.46	66.01	58.55	74.00	-15.45 Peak
2	5150.000	-7.46	64.00	56.54	74.00	-17.46 Peak


Left Band edge_Vertical_Average

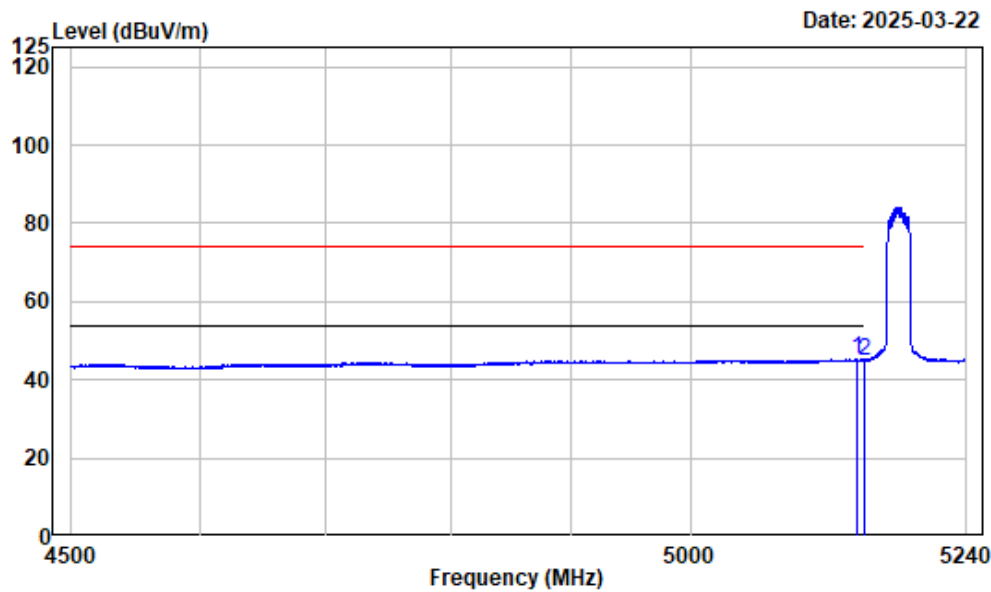

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5143.880	-7.46	52.68	45.22	54.00	-8.78 Average
2	5150.000	-7.46	52.39	44.93	54.00	-9.07 Average


Right Band edge_Horizontal_Peak

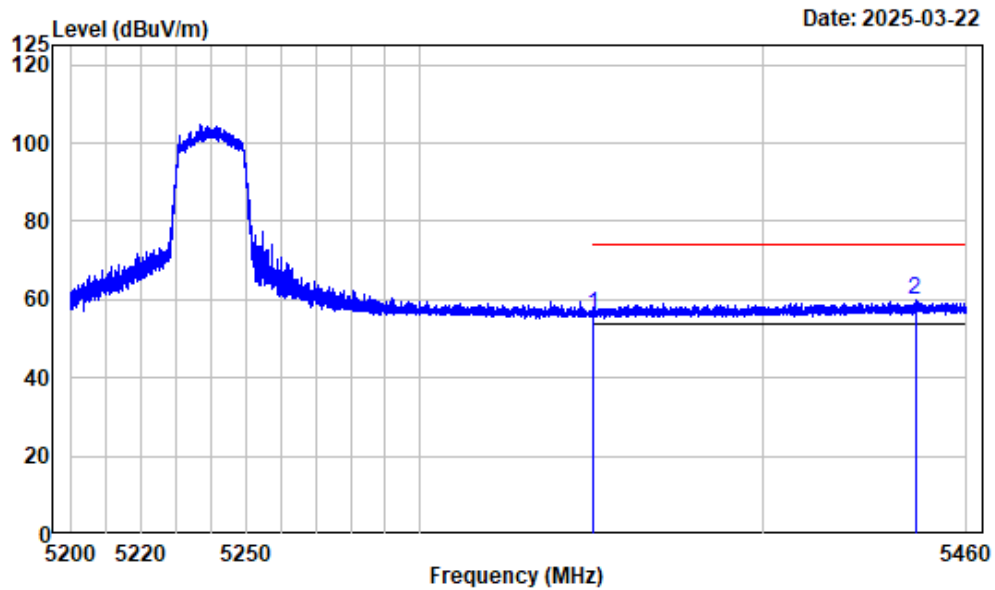

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	62.77	56.03	74.00	-17.97 Peak
2	5444.788	-6.35	66.33	59.98	74.00	-14.02 Peak


Right Band edge_Horizontal_Average

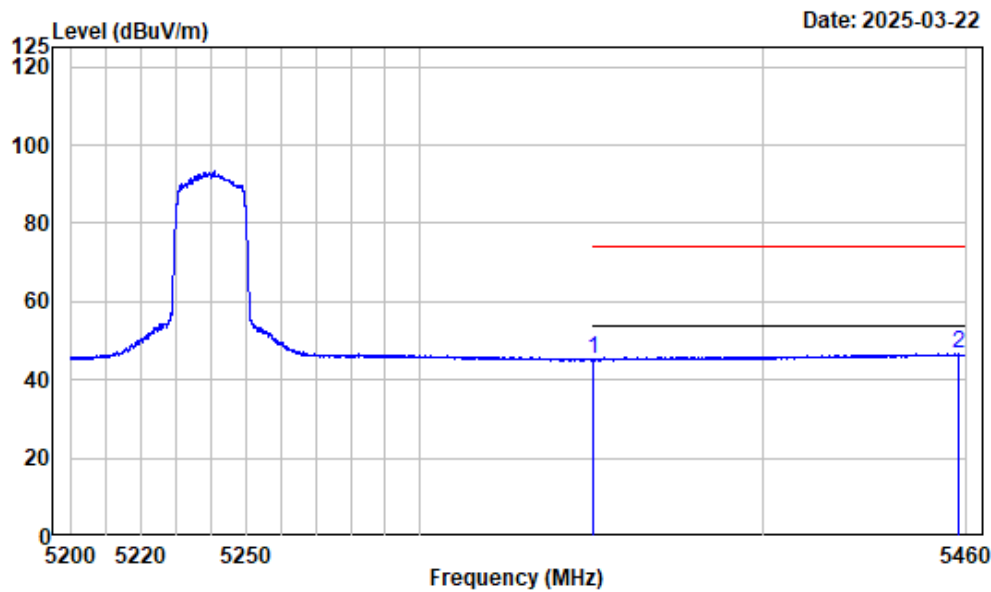

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	51.88	45.14	54.00	-8.86	Average
2 5457.497	-6.31	52.89	46.58	54.00	-7.42	Average


Right Band edge_Vertical_Peak

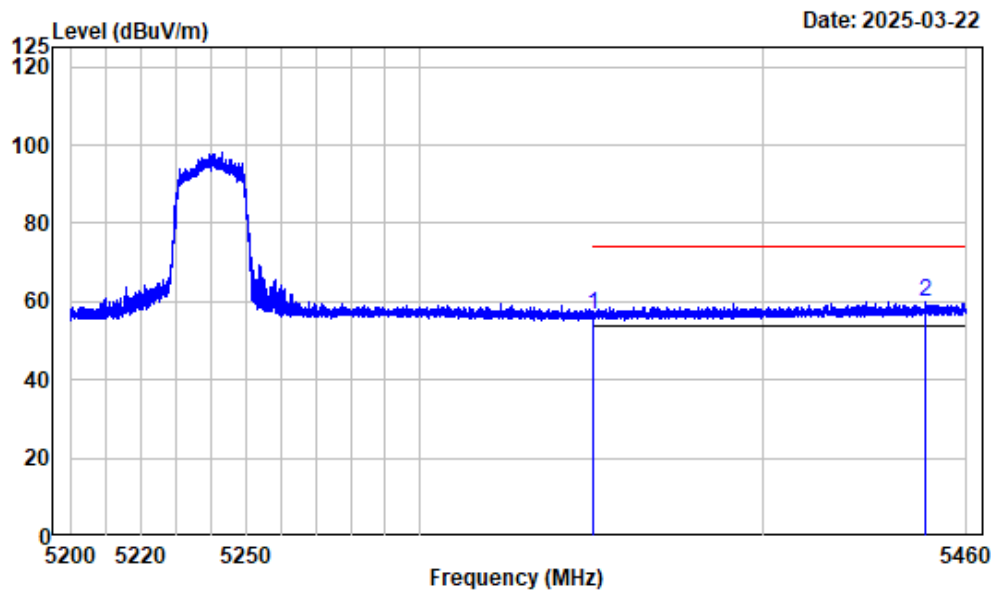

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5240

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	63.57	56.83	74.00	-17.17	Peak
2 5448.006	-6.33	66.40	60.07	74.00	-13.93	Peak


Right Band edge_Vertical_Average

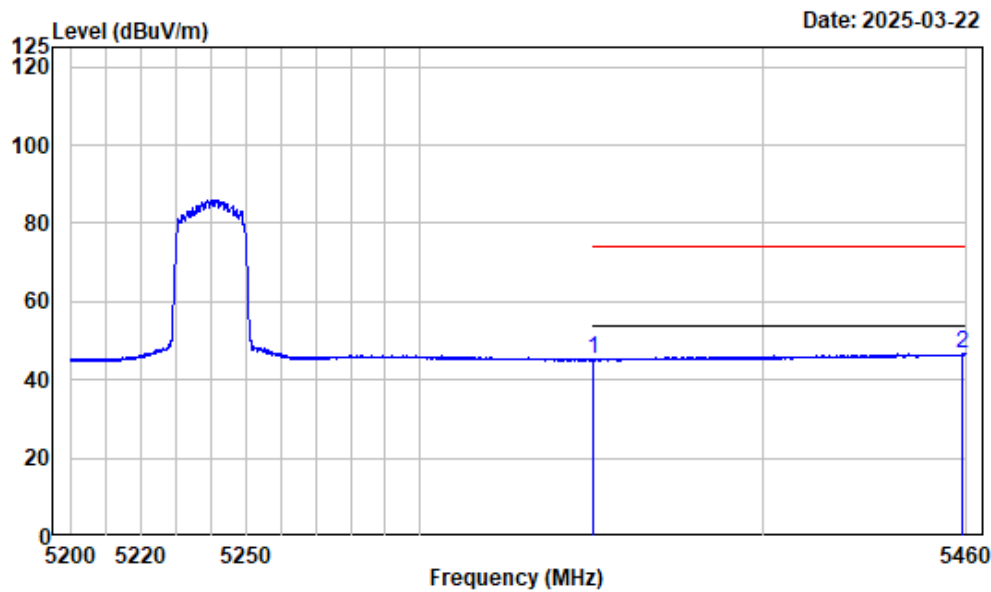

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	51.83	45.09	54.00	-8.91	Average
2 5458.765	-6.29	52.81	46.52	54.00	-7.48	Average


Left Band edge_Horizontal_Peak

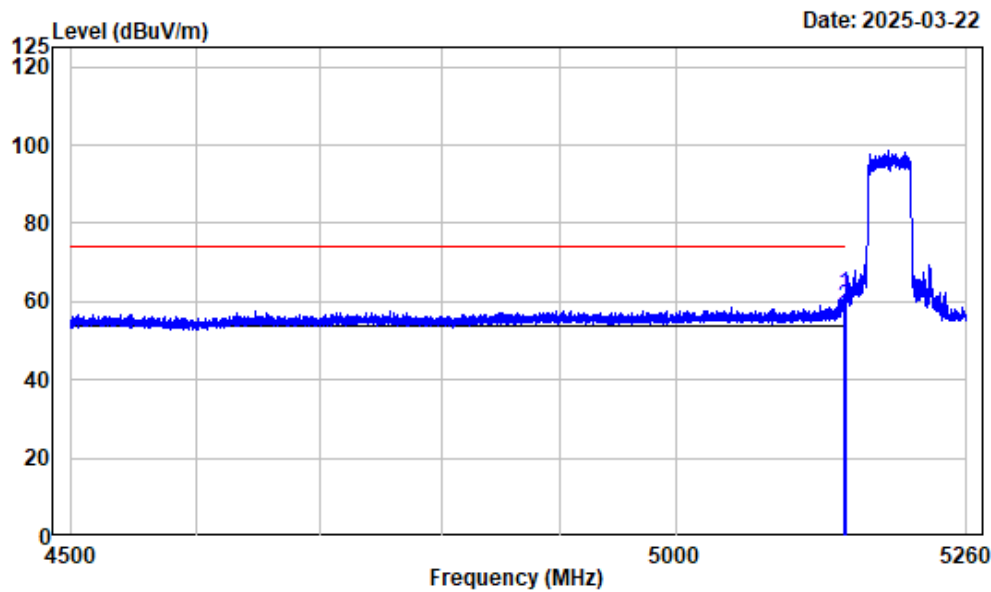

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5190

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.456	-7.46	69.32	61.86	74.00	-12.14 Peak
2	5150.000	-7.46	65.94	58.48	74.00	-15.52 Peak


Left Band edge_Horizontal_Average

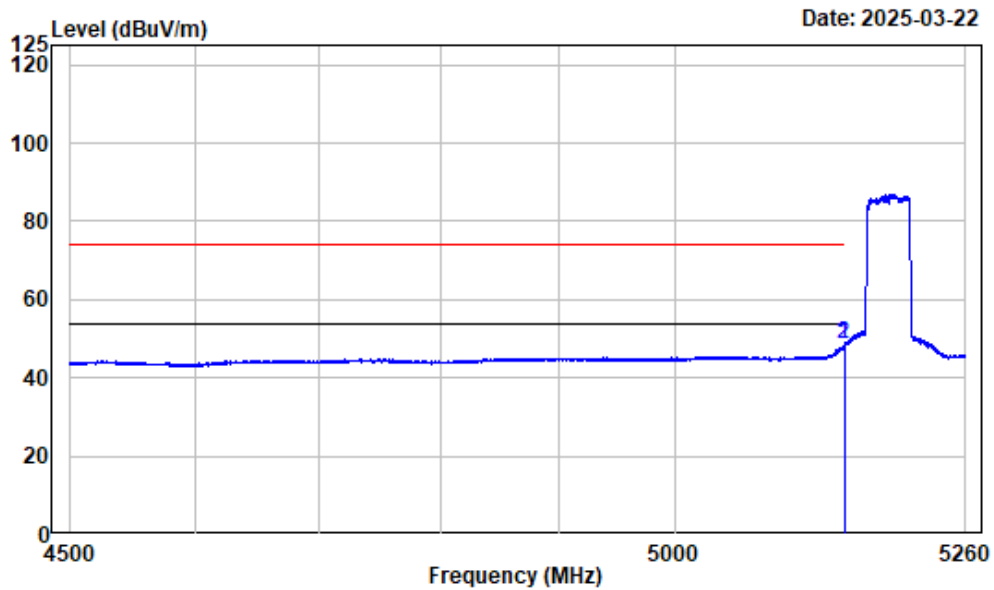

Condition : Horizontal
 Project No. : 2401A63093E-RF
 Tester : Zenos Qiao
 Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
 Note : 5GWiFi-Band1-AX40-5190

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.976	-7.46	56.00	48.54	54.00	-5.46	Average
2	5150.000	-7.46	55.91	48.45	54.00	-5.55	Average


Left Band edge_Vertical_Peak

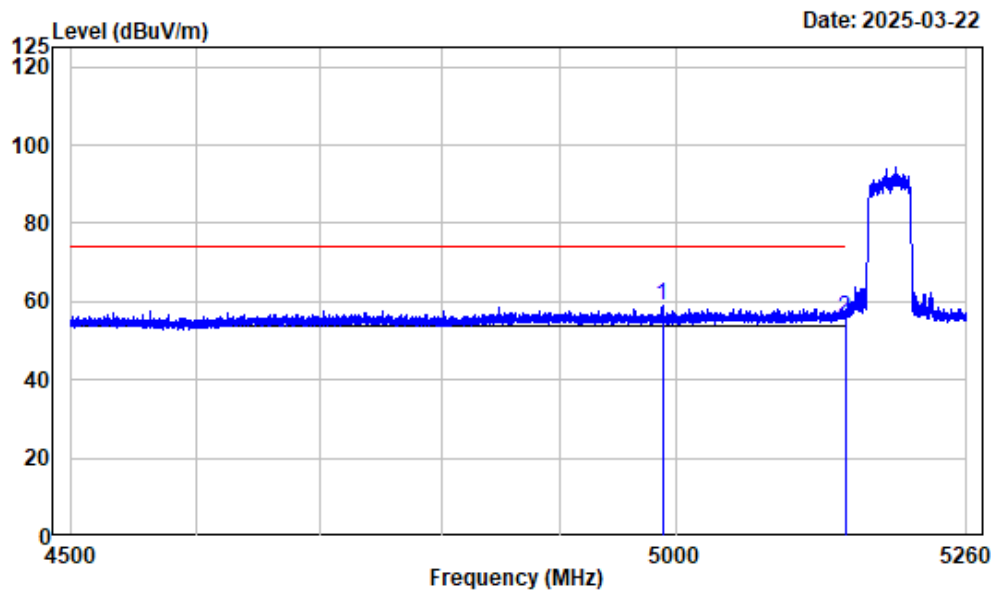

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5190

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4988.741	-7.41	66.15	58.74	74.00	-15.26 Peak
2	5150.000	-7.46	63.31	55.85	74.00	-18.15 Peak


Left Band edge_Vertical_Average

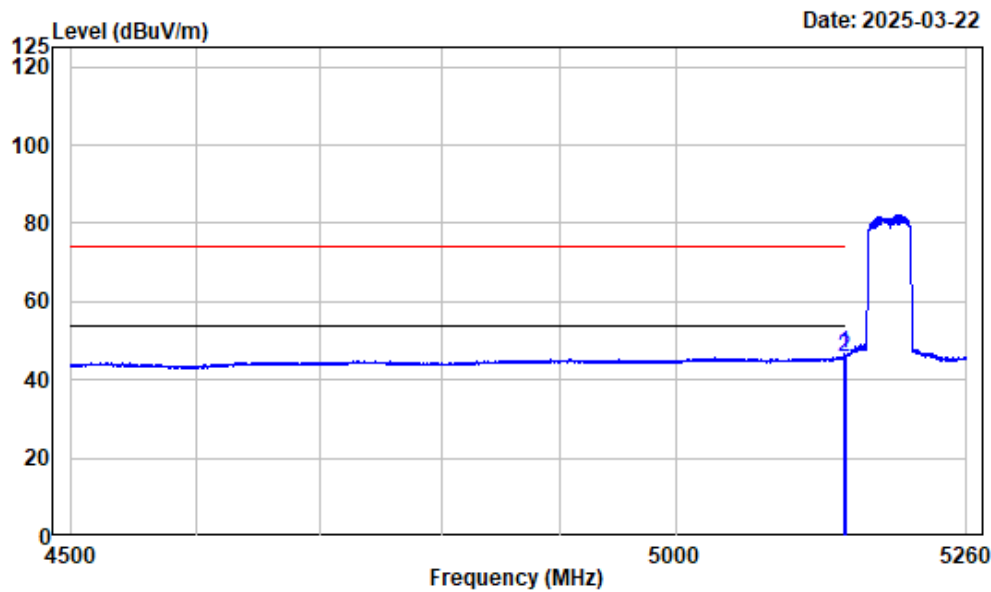

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5190

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.691	-7.46	53.94	46.48	54.00	-7.52 Average
2	5150.000	-7.46	53.19	45.73	54.00	-8.27 Average


Right Band edge_Horizontal_Peak

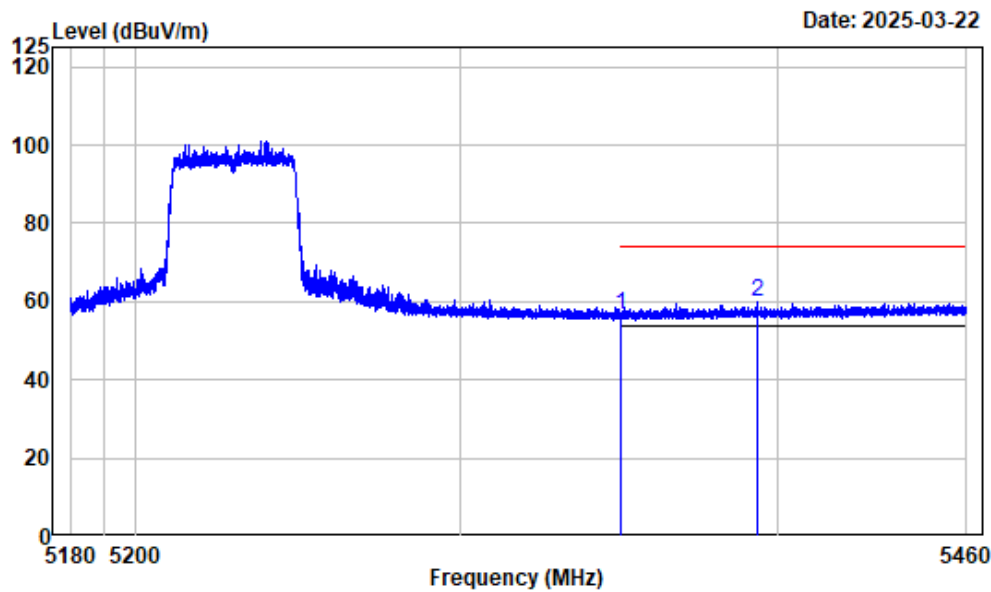

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5230

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	63.54	56.80	74.00	-17.20	Peak
2 5393.247	-6.61	66.41	59.80	74.00	-14.20	Peak


Right Band edge_Horizontal_Average

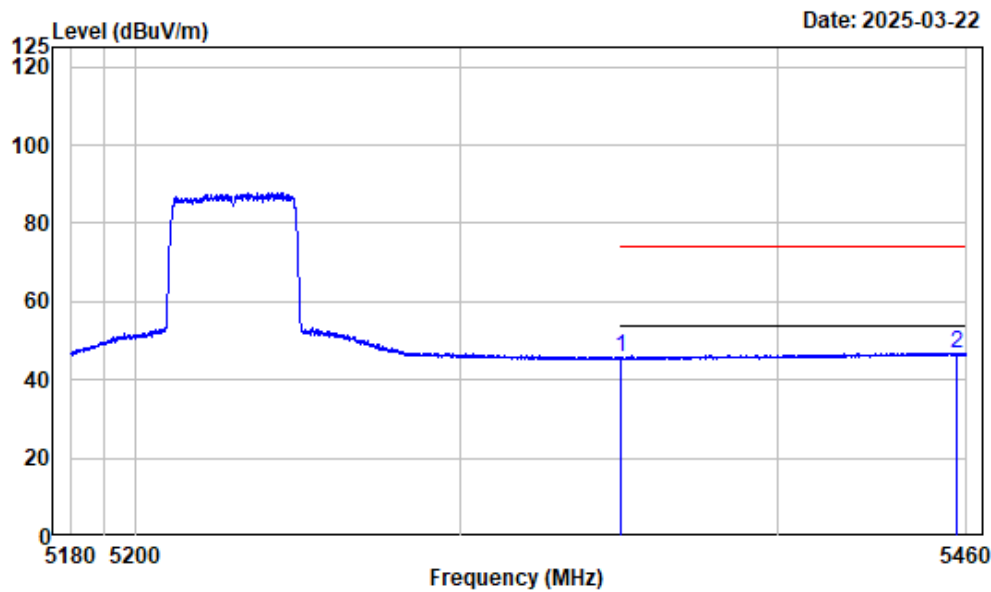

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5230

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	52.28	45.54	54.00	-8.46	Average
2 5456.675	-6.31	53.20	46.89	54.00	-7.11	Average


Right Band edge_Vertical_Peak

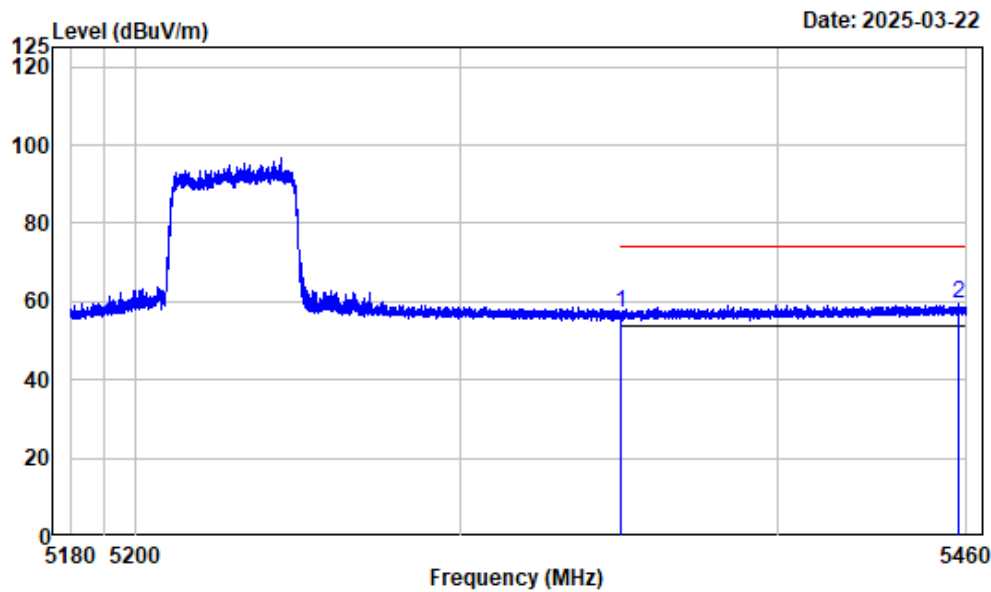

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5230

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	63.67	56.93	74.00	-17.07	Peak
2 5457.655	-6.30	65.60	59.30	74.00	-14.70	Peak


Right Band edge_Vertical_Average

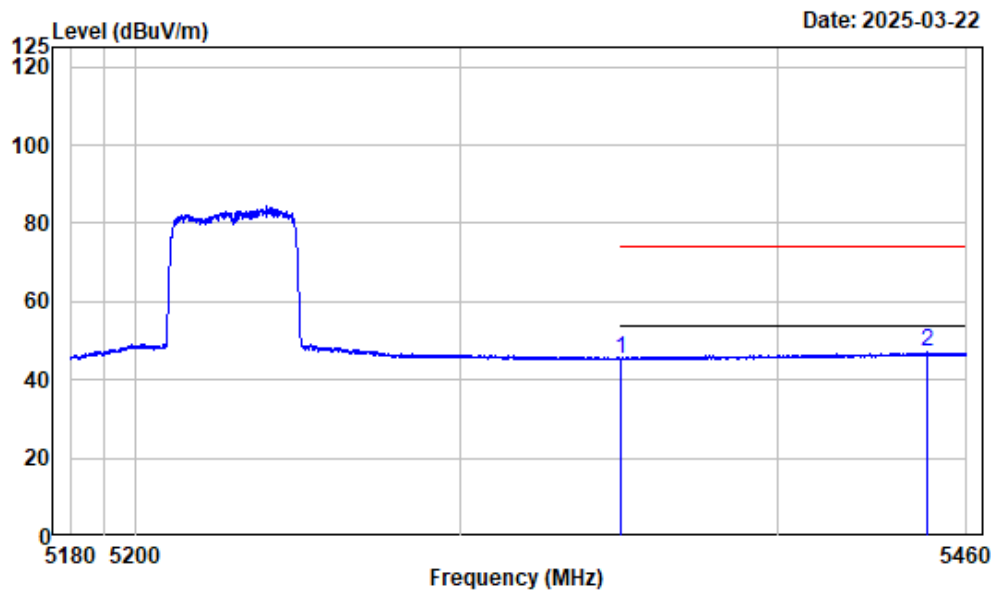

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5230

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	52.23	45.49	54.00	-8.51	Average
2 5447.434	-6.35	53.39	47.04	54.00	-6.96	Average


Left Band edge_Horizontal_Peak

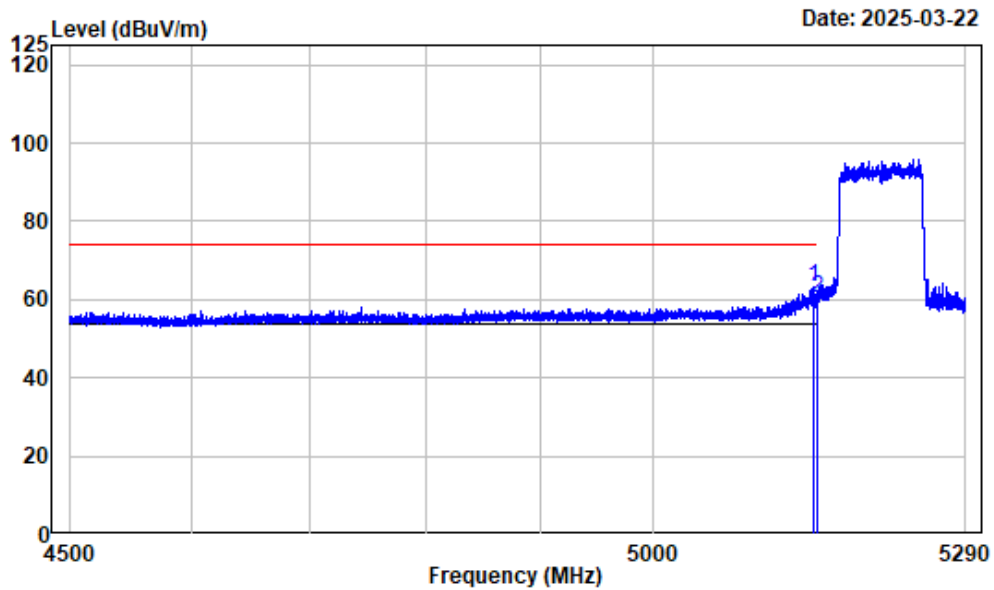

Condition : Horizontal
 Project No. : 2401A63093E-RF
 Tester : Zenos Qiao
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : 5GWiFi-Band1-AX80-5210

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5147.189	-7.46	70.90	63.44	74.00	-10.56	Peak
2 5150.000	-7.46	68.07	60.61	74.00	-13.39	Peak


Left Band edge_Horizontal_Average

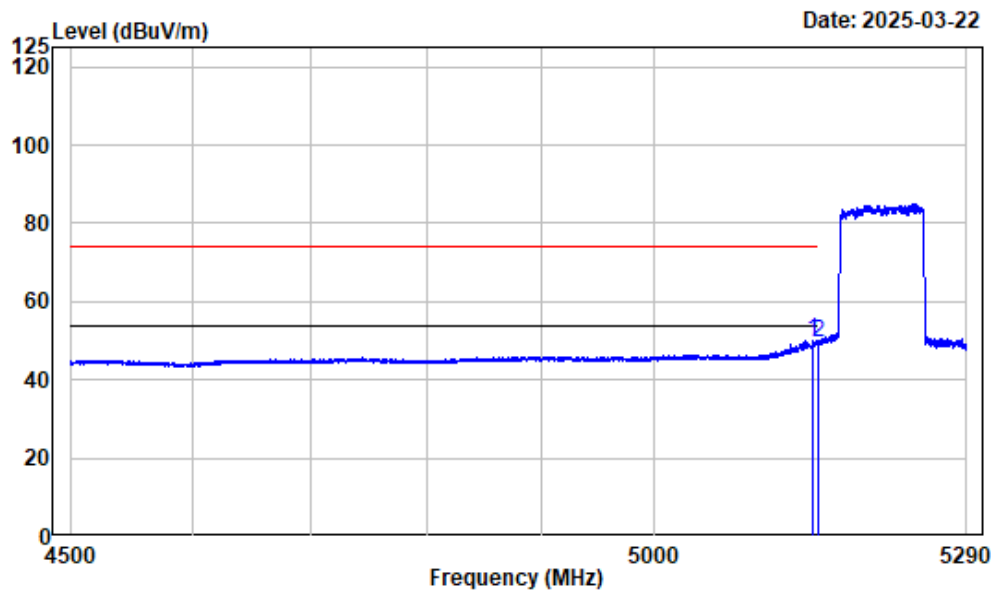

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AX80-5210

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5145.906	-7.46	57.63	50.17	54.00	-3.83	Average
2 5150.000	-7.46	57.14	49.68	54.00	-4.32	Average


Left Band edge_Vertical_Peak

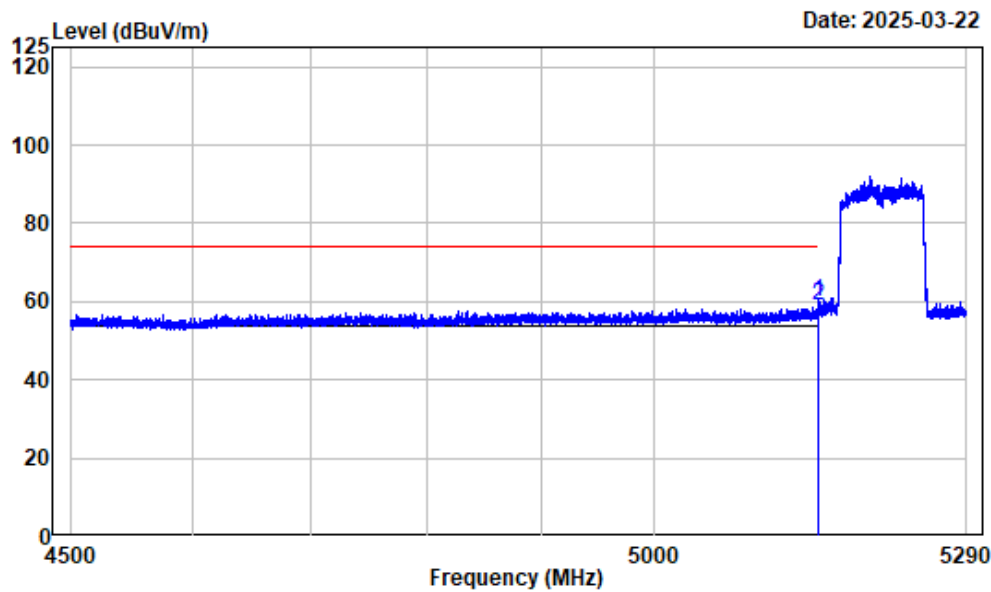

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX80-5210

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.755	-7.46	67.49	60.03	74.00	-13.97 Peak
2	5150.000	-7.46	66.54	59.08	74.00	-14.92 Peak


Left Band edge_Vertical_Average

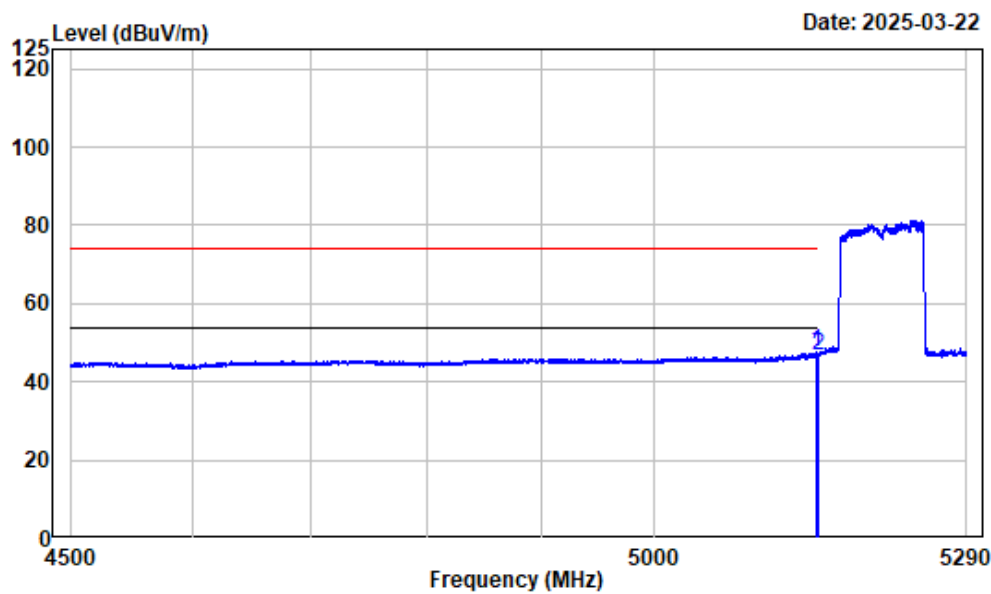

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AX80-5210

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.671	-7.46	54.93	47.47	54.00	-6.53 Average
2	5150.000	-7.46	54.07	46.61	54.00	-7.39 Average


Right Band edge_Horizontal_Peak

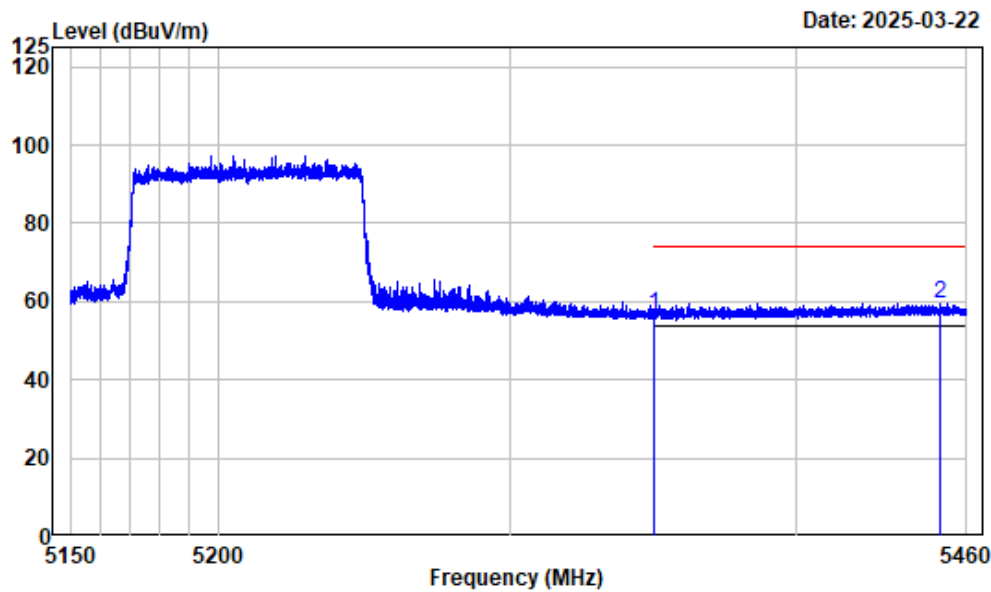

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX80-5210

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	63.31	56.57	74.00	-17.43	Peak
2 5450.738	-6.32	65.94	59.62	74.00	-14.38	Peak


Right Band edge_Horizontal_Average

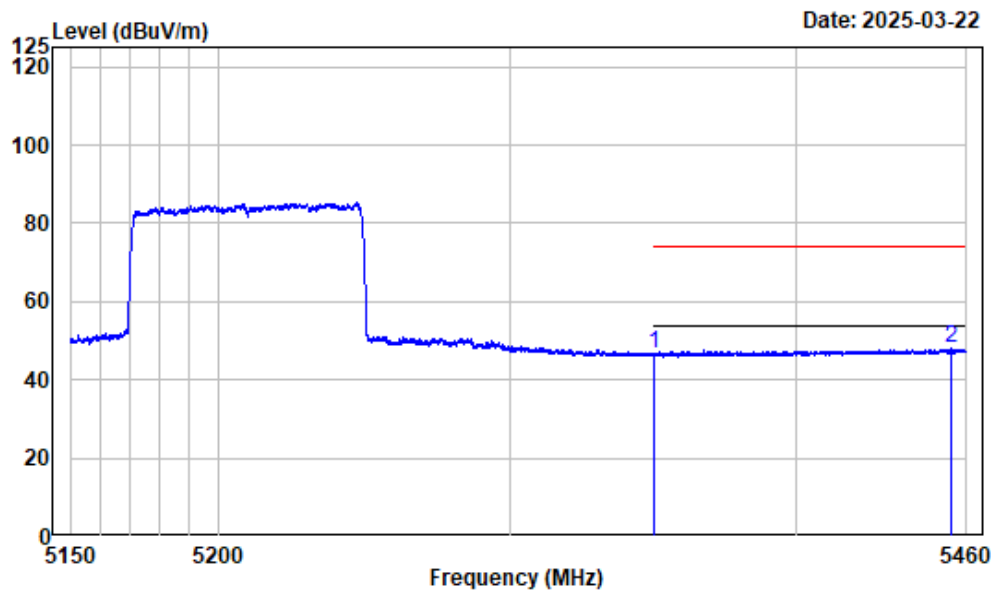

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AX80-5210

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	53.47	46.73	54.00	-7.27	Average
2 5454.380	-6.31	54.24	47.93	54.00	-6.07	Average


Right Band edge_Vertical_Peak

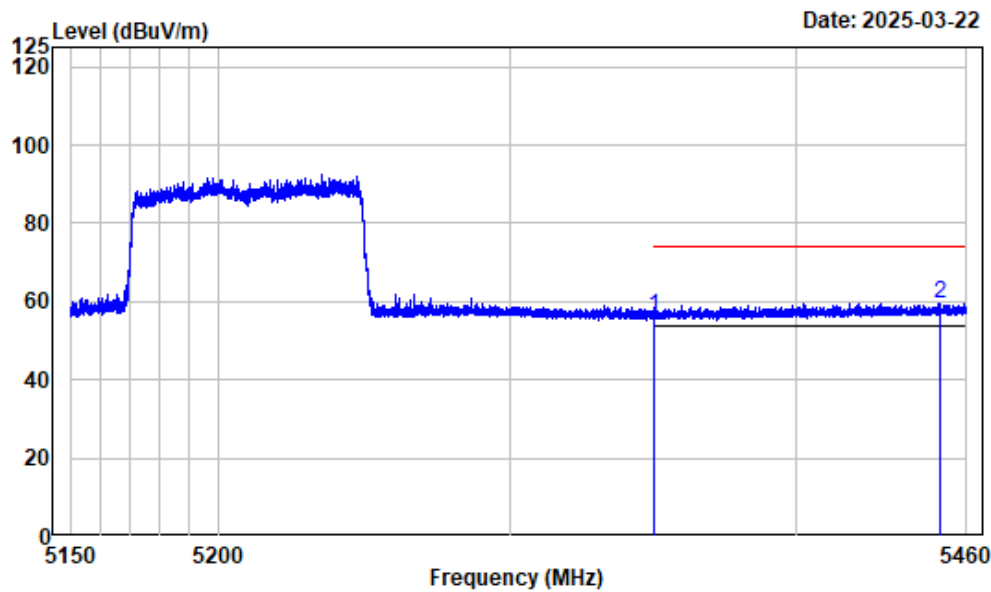

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX80-5210

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	62.97	56.23	74.00	-17.77	Peak
2 5450.544	-6.32	65.99	59.67	74.00	-14.33	Peak

Right Band edge_Vertical_Average

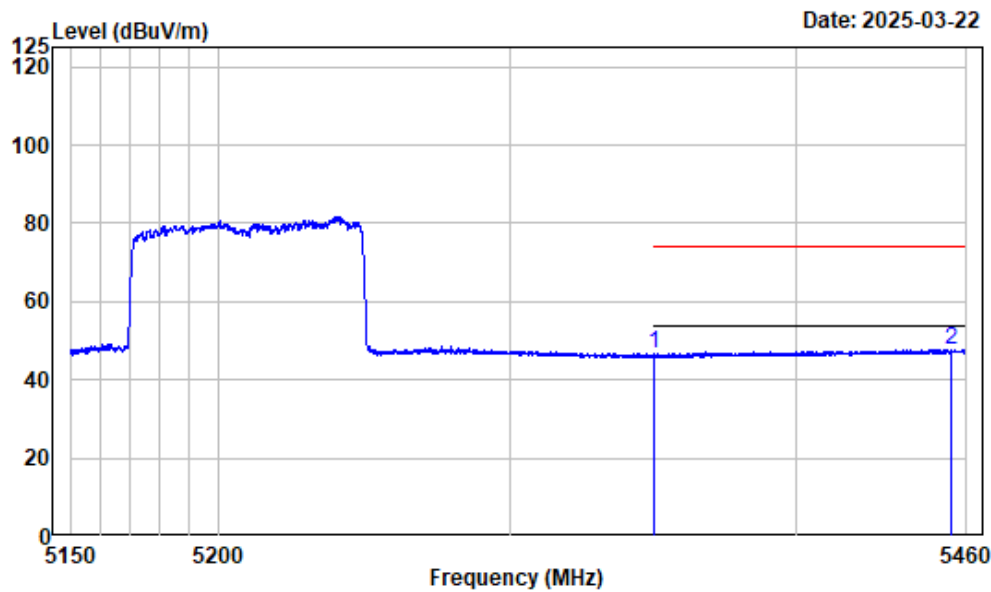


Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AX80-5210

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	53.40	46.66	54.00	-7.34	Average
2 5454.419	-6.31	54.14	47.83	54.00	-6.17	Average

5725-5850MHz_ ANT2:


Left Band edge_Horizontal_Peak

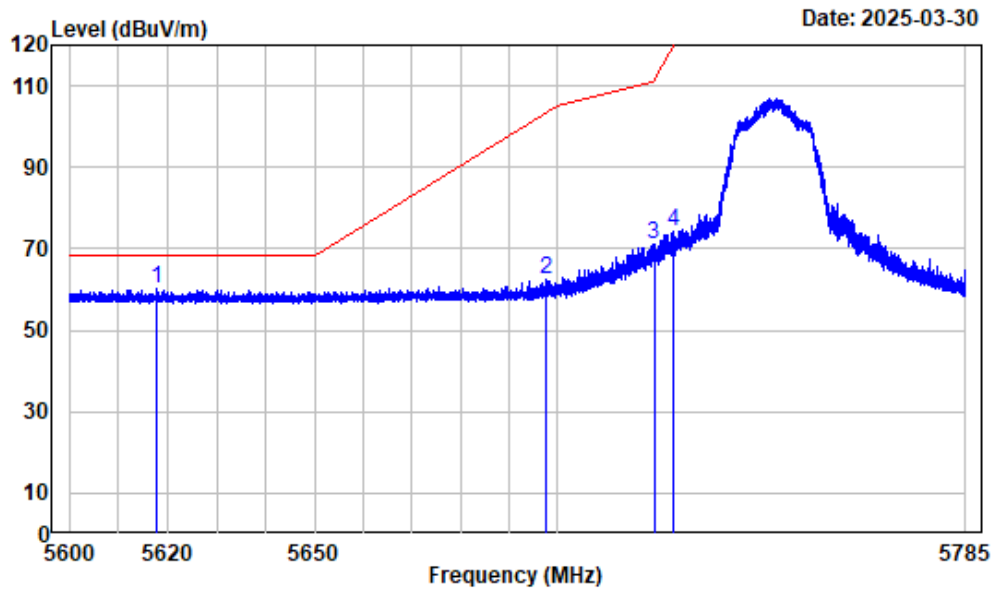

Condition : Horizontal
 Project No. : 2401A63093E-RF
 Tester : Zenos Qiao
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : 5GWiFi-Band4-A-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5617.646	-6.09	66.16	60.07	68.20	-8.13	Peak
2	5697.669	-5.72	68.15	62.43	103.48	-41.05	Peak
3	5720.011	-5.53	76.77	71.24	110.83	-39.59	Peak
4	5723.989	-5.49	79.71	74.22	119.90	-45.68	Peak


Left Band edge_Vertical_Peak

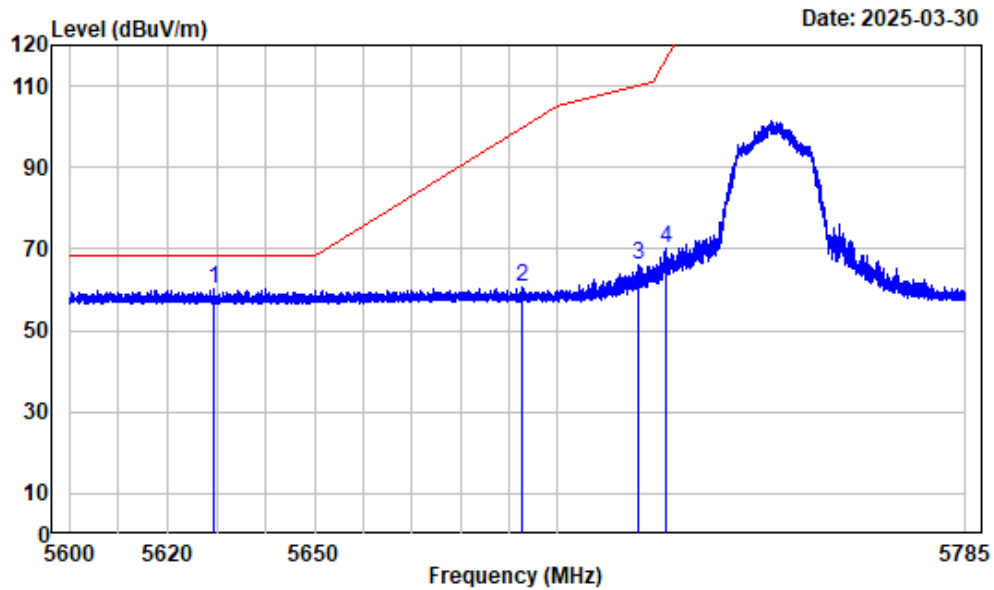

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5745

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5629.488	-6.00	66.41	60.41	68.20	-7.79	Peak
2	5692.789	-5.73	66.28	60.55	99.88	-39.33	Peak
3	5716.865	-5.56	71.86	66.30	109.92	-43.62	Peak
4	5722.462	-5.51	75.78	70.27	116.42	-46.15	Peak


Right Band edge_Horizontal_Peak

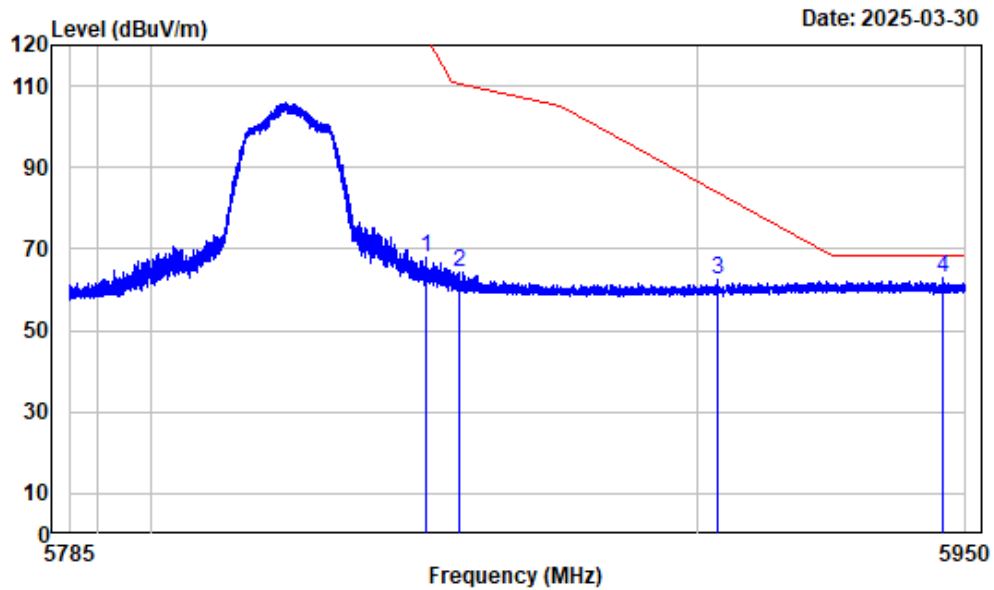

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.018	-4.68	72.79	68.11	122.16	-54.05	Peak
2	5856.248	-4.66	69.09	64.43	110.45	-46.02	Peak
3	5904.063	-4.46	67.11	62.65	83.66	-21.01	Peak
4	5945.895	-4.44	67.21	62.77	68.20	-5.43	Peak


Right Band edge_Vertical_Peak

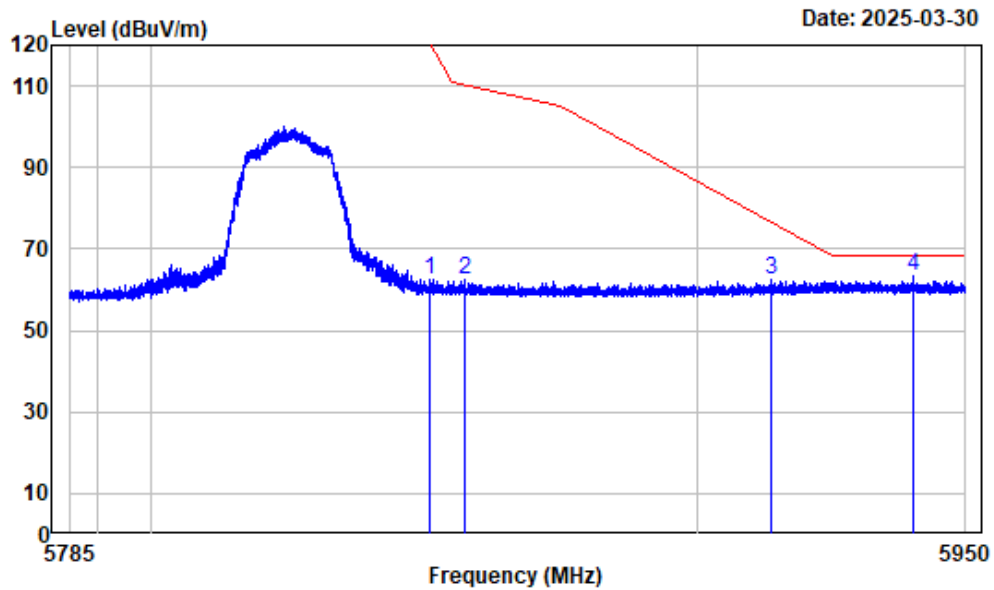

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.967	-4.68	67.17	62.49	119.99	-57.50	Peak
2	5857.361	-4.65	67.13	62.48	110.14	-47.66	Peak
3	5913.860	-4.46	66.93	62.47	76.42	-13.95	Peak
4	5940.140	-4.44	67.69	63.25	68.20	-4.95	Peak


Left Band edge_Horizontal_Peak

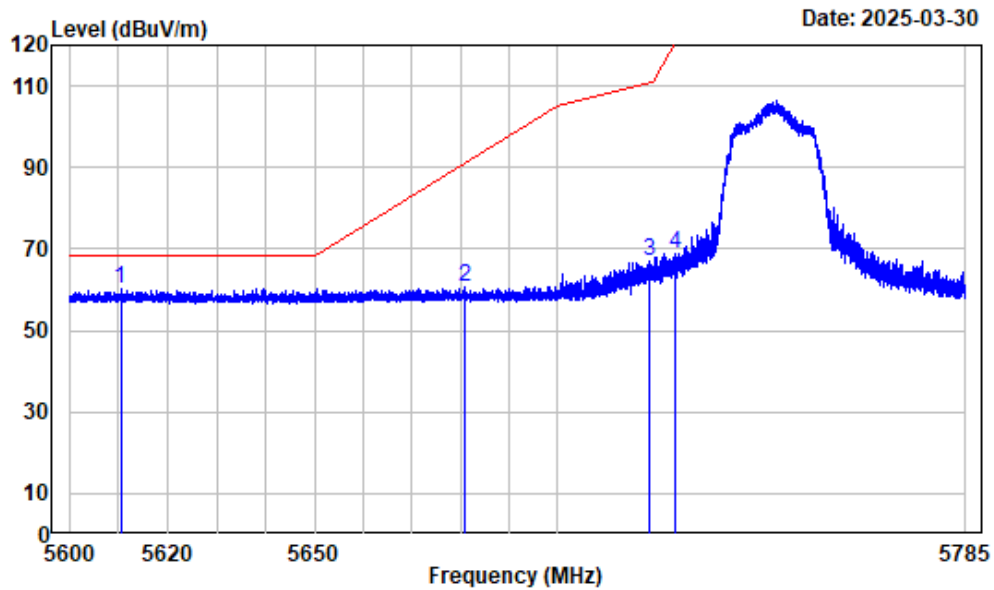

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5610.431	-6.15	66.53	60.38	68.20	-7.82	Peak
2	5681.040	-5.77	66.65	60.88	91.21	-30.33	Peak
3	5719.039	-5.54	72.51	66.97	110.53	-43.56	Peak
4	5724.451	-5.49	74.55	69.06	120.95	-51.89	Peak


Left Band edge_Vertical_Peak

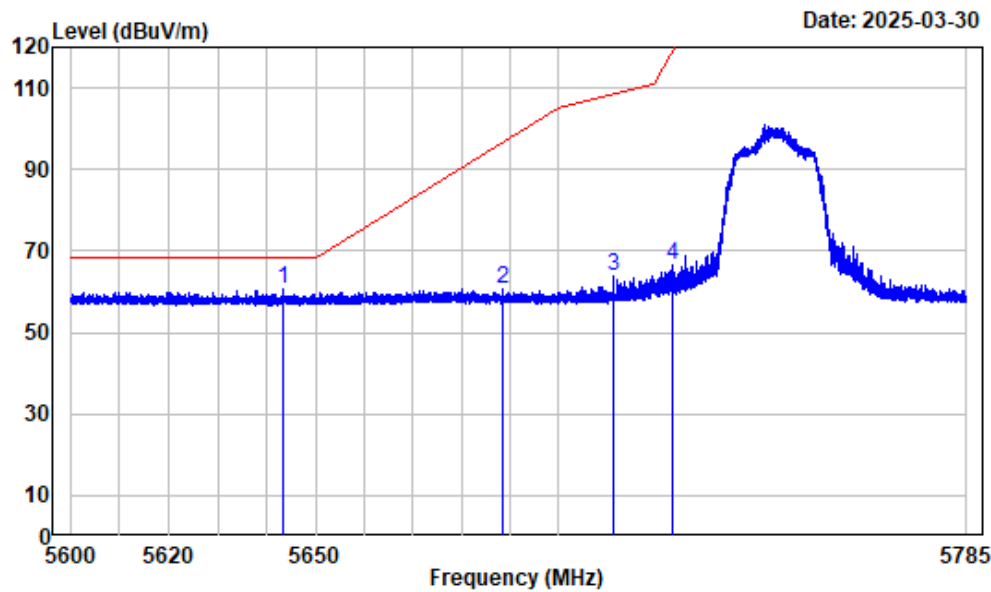

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5745

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5643.365	-5.90	66.39	60.49	68.20	-7.71 Peak
2	5688.580	-5.75	66.59	60.84	96.78	-35.94 Peak
3	5711.292	-5.61	69.67	64.06	108.36	-44.30 Peak
4	5723.804	-5.49	72.08	66.59	119.47	-52.88 Peak


Right Band edge_Horizontal_Peak

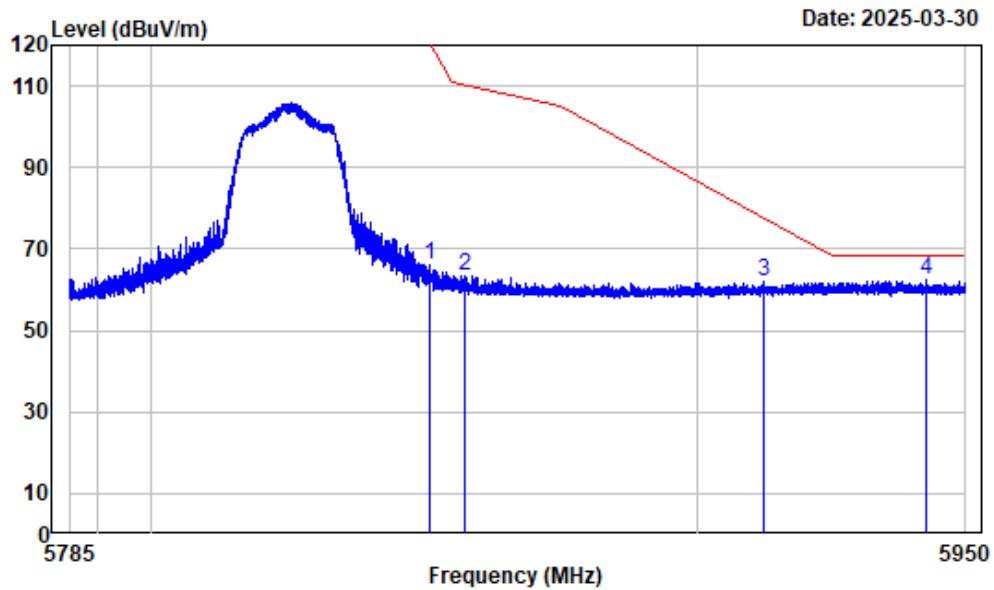

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5825

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.781	-4.68	71.01	66.33	120.42	-54.09 Peak
2	5857.093	-4.65	68.13	63.48	110.21	-46.73 Peak
3	5912.582	-4.46	66.28	61.82	77.36	-15.54 Peak
4	5942.533	-4.45	66.77	62.32	68.20	-5.88 Peak


Right Band edge_Vertical_Peak

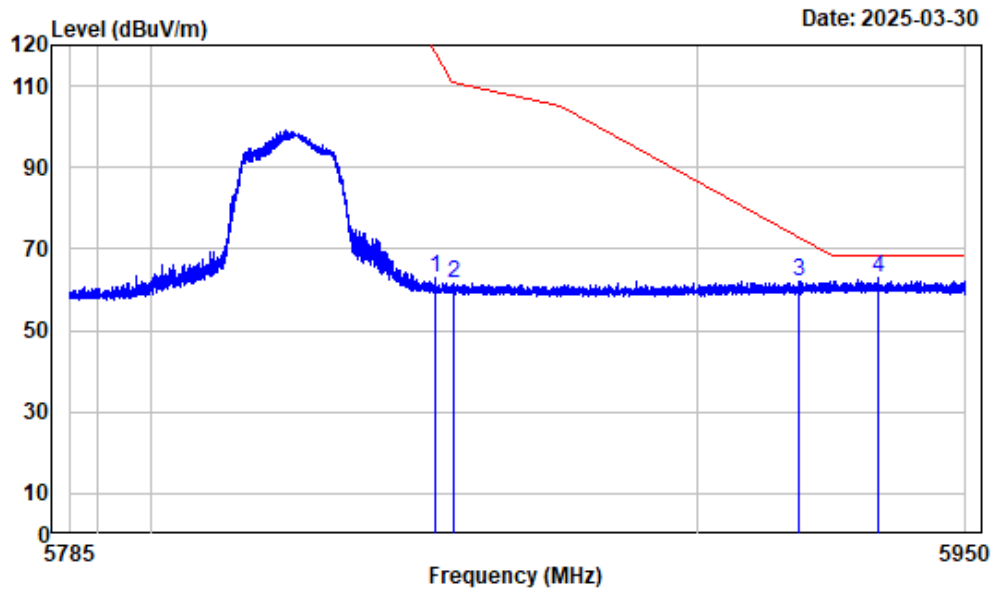

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5851.668	-4.66	67.73	63.07	118.39	-55.32	Peak
2	5855.278	-4.66	66.46	61.80	110.72	-48.92	Peak
3	5918.873	-4.45	66.59	62.14	72.72	-10.58	Peak
4	5933.746	-4.45	67.24	62.79	68.20	-5.41	Peak


Left Band edge_Horizontal_Peak

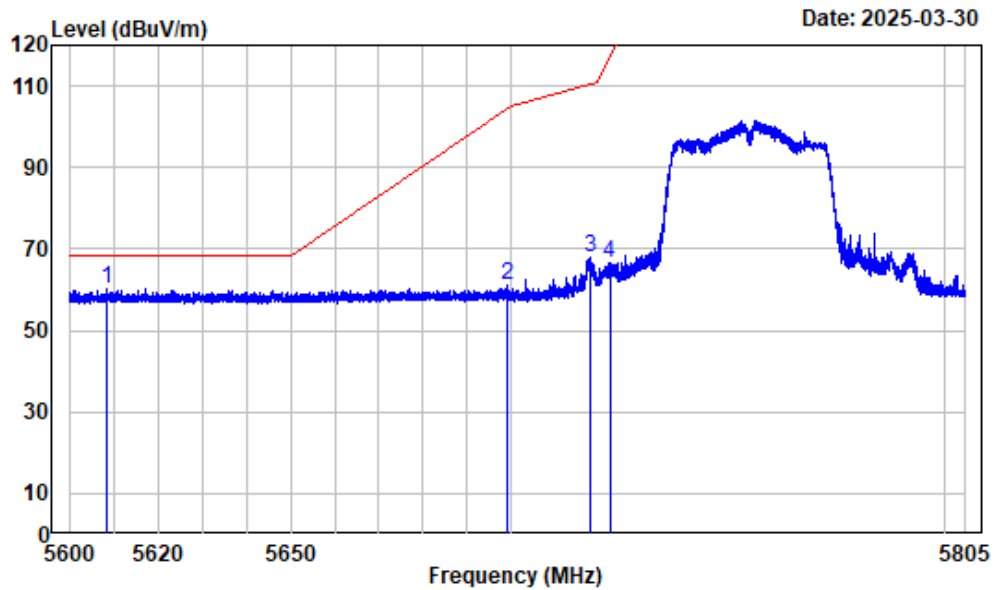

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5608.483	-6.15	66.46	60.31	68.20	-7.89	Peak
2	5699.258	-5.72	67.07	61.35	104.65	-43.30	Peak
3	5718.197	-5.54	73.40	67.86	110.30	-42.44	Peak
4	5722.733	-5.50	72.23	66.73	117.03	-50.30	Peak


Left Band edge_Vertical_Peak

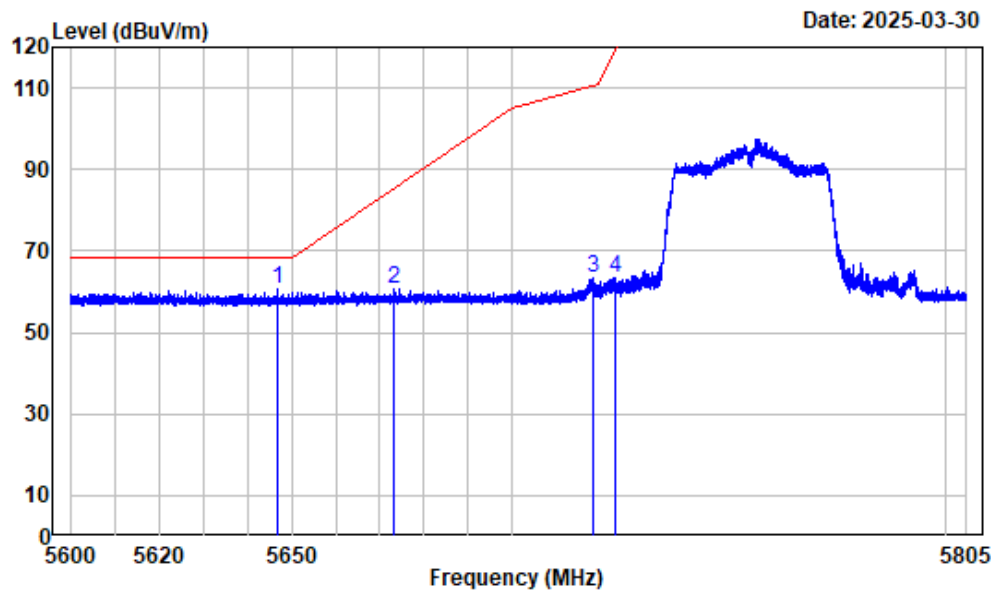

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5646.823	-5.89	66.42	60.53	68.20	-7.67	Peak
2	5673.168	-5.80	66.48	60.68	85.39	-24.71	Peak
3	5718.556	-5.54	69.09	63.55	110.40	-46.85	Peak
4	5723.630	-5.49	68.74	63.25	119.08	-55.83	Peak


Right Band edge_Horizontal_Peak

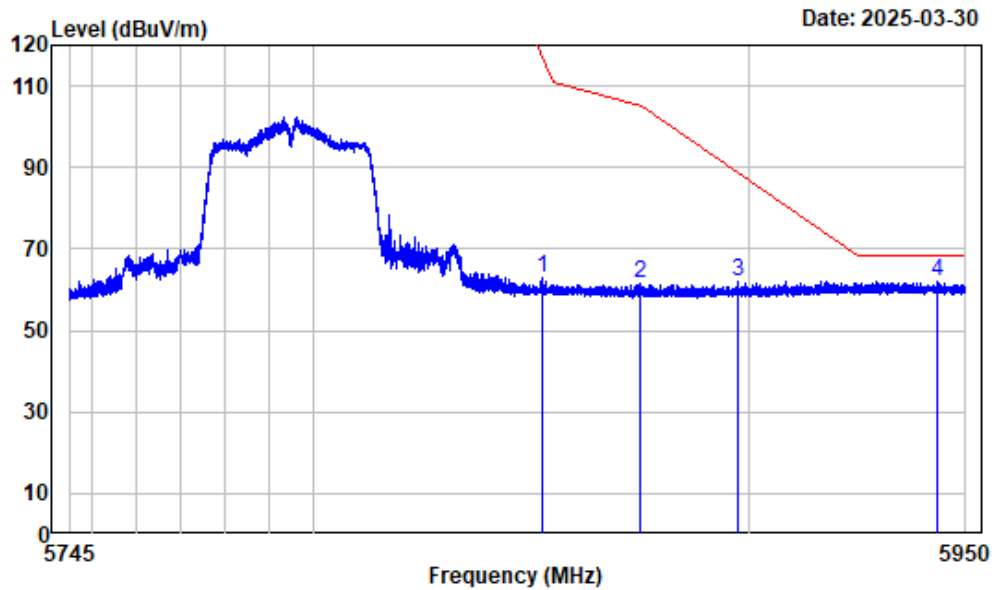

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5795

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5852.510	-4.66	67.67	63.01	116.48	-53.47	Peak
2	5874.833	-4.56	66.34	61.78	105.25	-43.47	Peak
3	5897.078	-4.47	66.54	62.07	88.82	-26.75	Peak
4	5943.593	-4.45	66.42	61.97	68.20	-6.23	Peak


Right Band edge_Vertical_Peak

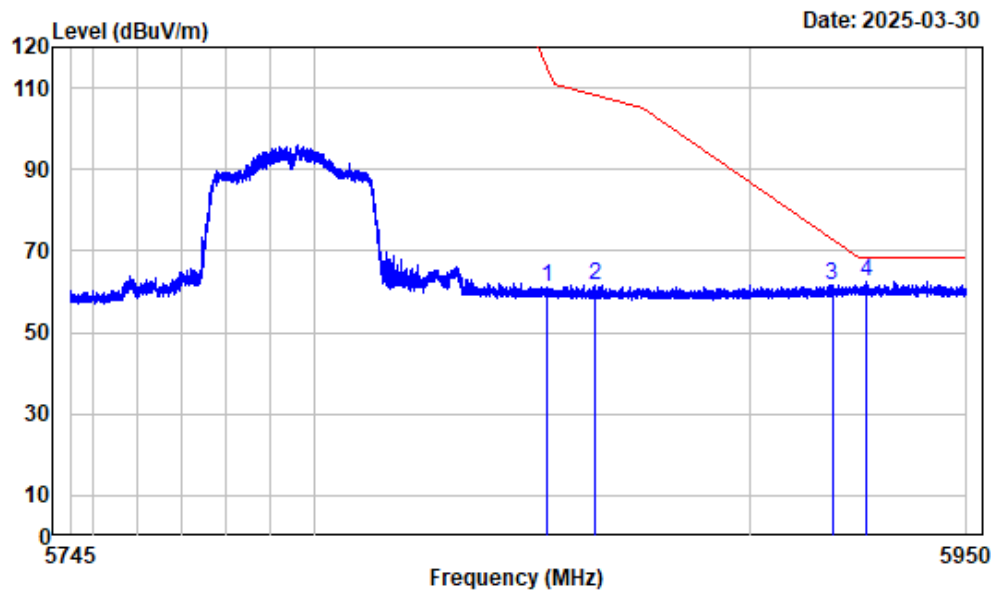

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5795

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5853.279	-4.66	65.79	61.13	114.72	-53.59	Peak
2	5864.197	-4.61	66.41	61.80	108.22	-46.42	Peak
3	5918.811	-4.45	66.10	61.65	72.76	-11.11	Peak
4	5926.755	-4.45	66.88	62.43	68.20	-5.77	Peak


Left Band edge_Horizontal_Peak

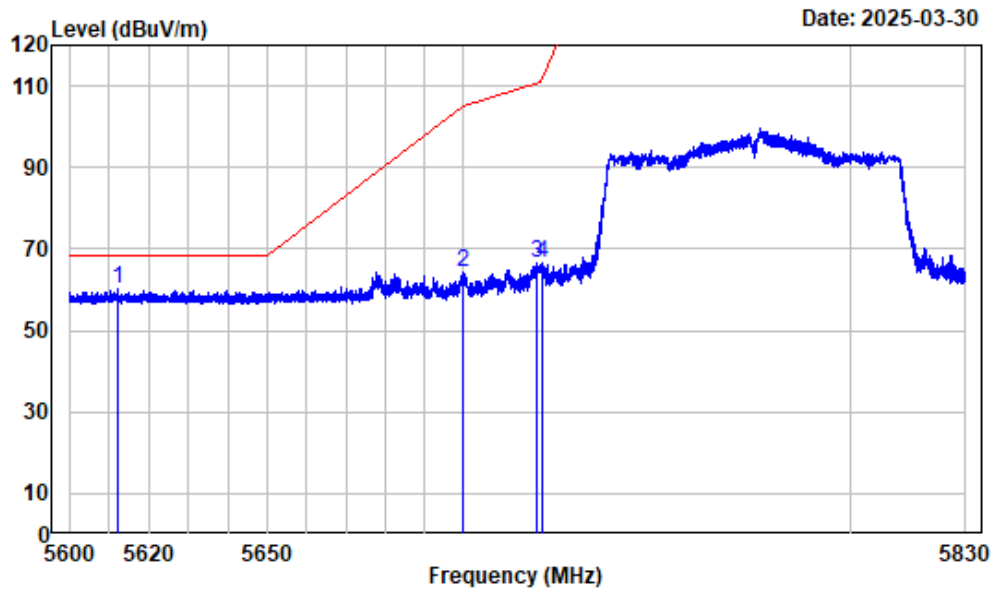

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80-5775

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5612.307	-6.13	66.26	60.13	68.20	-8.07 Peak
2	5699.775	-5.71	69.91	64.20	105.03	-40.83 Peak
3	5718.925	-5.54	72.19	66.65	110.50	-43.85 Peak
4	5720.248	-5.53	71.88	66.35	111.36	-45.01 Peak


Left Band edge_Vertical_Peak

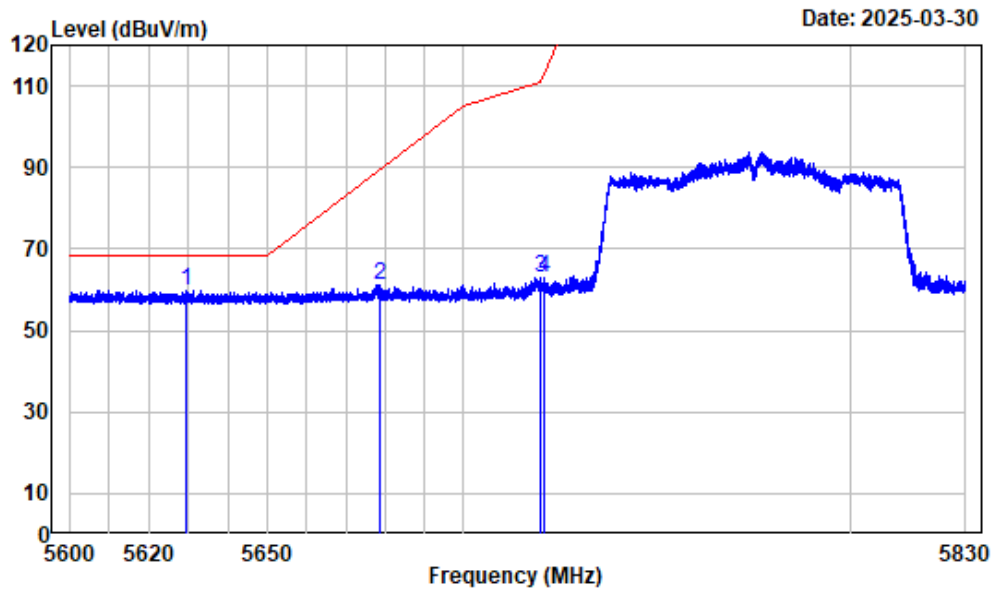

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5629.674	-6.00	65.98	59.98	68.20	-8.22	Peak
2	5678.526	-5.78	66.99	61.21	89.35	-28.14	Peak
3	5719.615	-5.54	68.40	62.86	110.69	-47.83	Peak
4	5720.880	-5.53	68.33	62.80	112.81	-50.01	Peak


Right Band edge_Horizontal_Peak

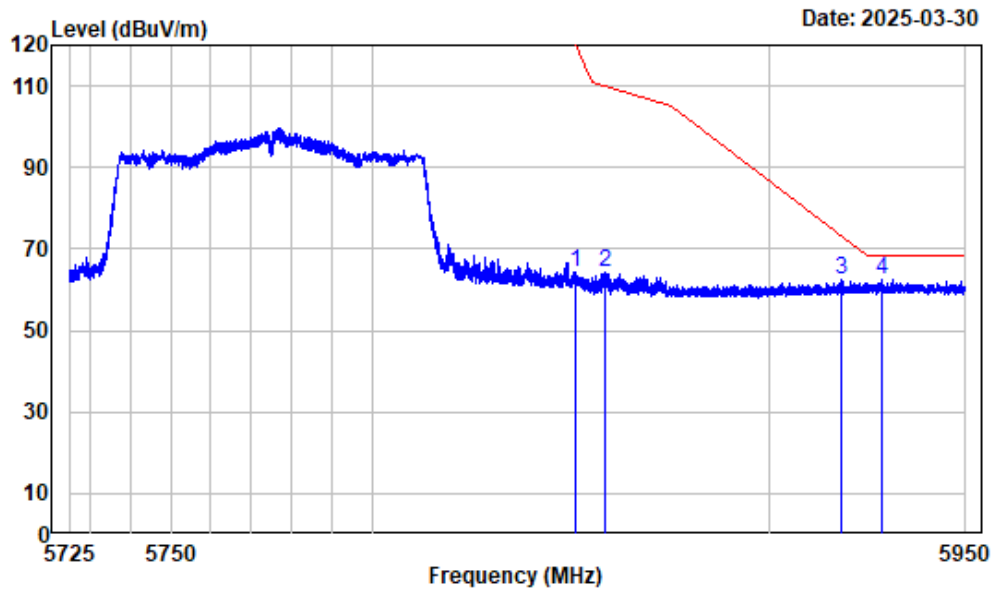

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.819	-4.68	68.98	64.30	120.33	-56.03	Peak
2	5858.639	-4.65	68.83	64.18	109.78	-45.60	Peak
3	5918.130	-4.45	67.04	62.59	73.26	-10.67	Peak
4	5928.481	-4.45	66.86	62.41	68.20	-5.79	Peak


Right Band edge_Vertical_Peak

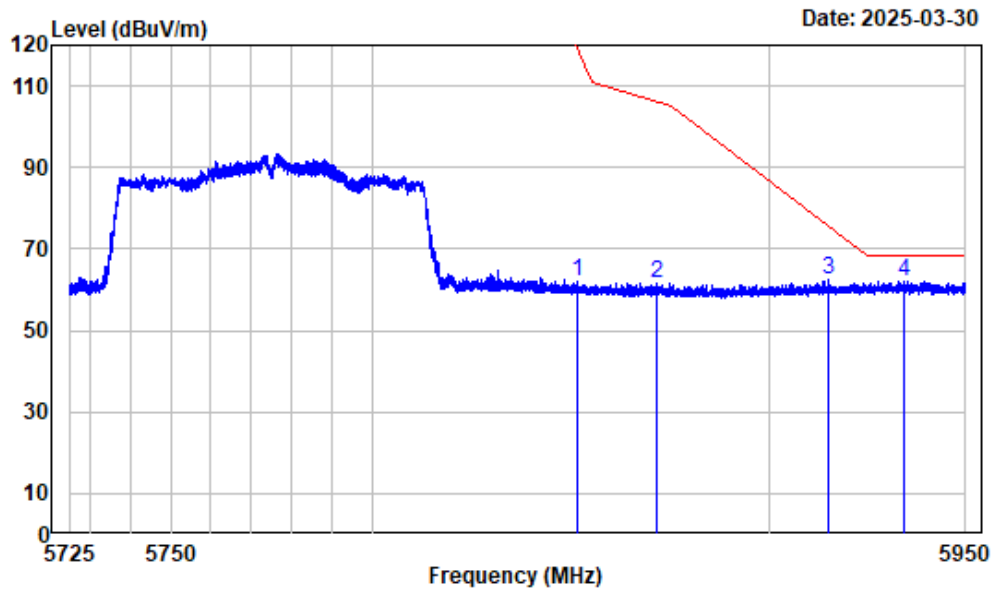

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5851.381	-4.67	66.54	61.87	119.05	-57.18	Peak
2	5871.718	-4.58	66.26	61.68	106.12	-44.44	Peak
3	5915.121	-4.46	66.91	62.45	75.49	-13.04	Peak
4	5934.248	-4.45	66.70	62.25	68.20	-5.95	Peak


Left Band edge_Horizontal_Peak

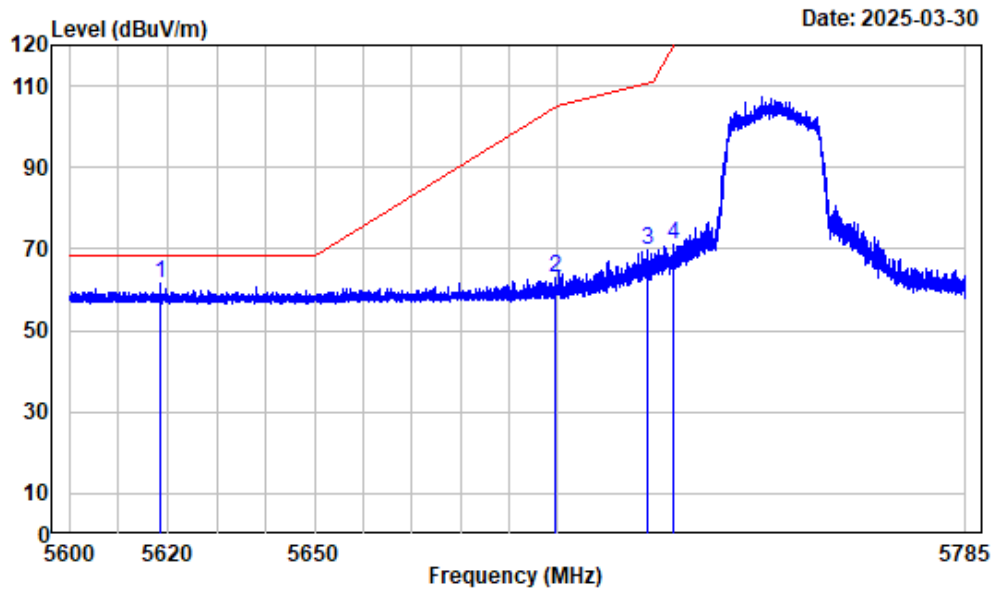

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX20-5745

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5618.410	-6.08	67.45	61.37	68.20	-6.83 Peak
2	5699.658	-5.71	68.79	63.08	104.95	-41.87 Peak
3	5718.854	-5.54	75.13	69.59	110.48	-40.89 Peak
4	5723.942	-5.49	76.44	70.95	119.79	-48.84 Peak


Left Band edge_Vertical_Peak

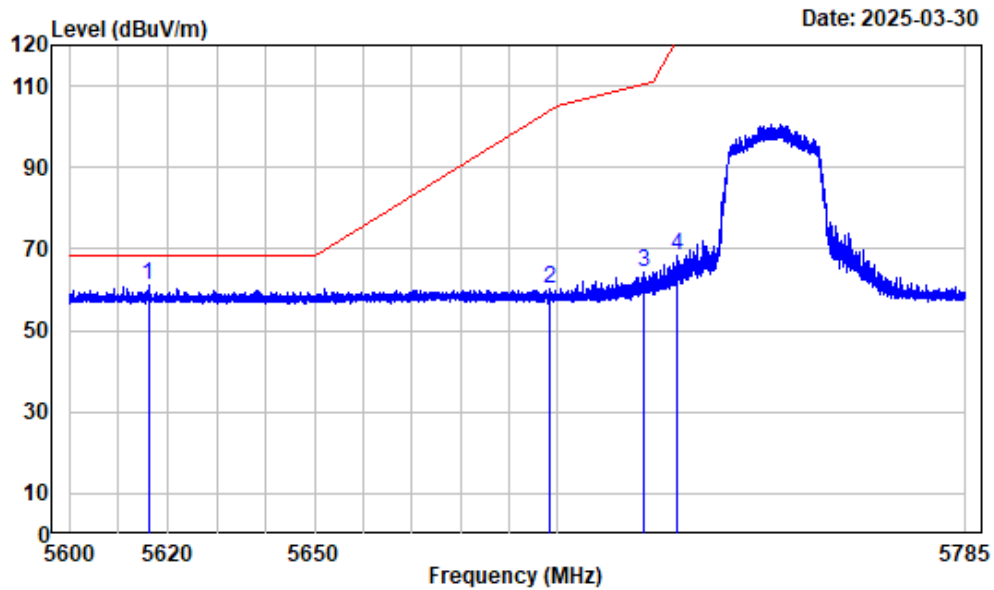

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX20-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5616.074	-6.10	67.10	61.00	68.20	-7.20	Peak
2	5698.479	-5.73	65.96	60.23	104.08	-43.85	Peak
3	5717.906	-5.55	69.82	64.27	110.21	-45.94	Peak
4	5724.729	-5.49	73.68	68.19	121.58	-53.39	Peak


Right Band edge_Horizontal_Peak

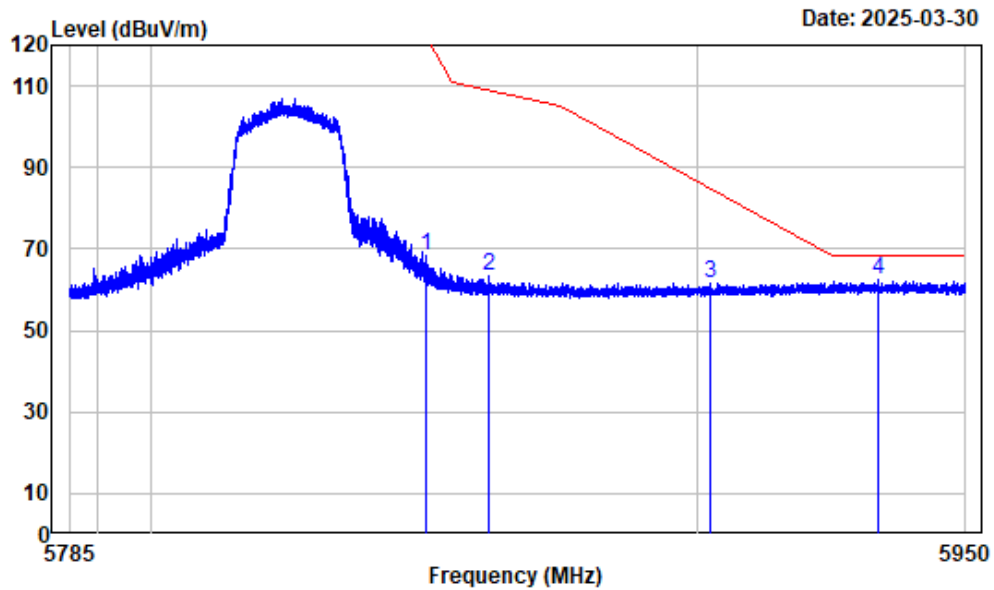

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX20-5825

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.183	-4.68	73.04	68.36	121.78	-53.42	Peak
2	5861.776	-4.62	68.06	63.44	108.90	-45.46	Peak
3	5902.557	-4.46	66.22	61.76	84.77	-23.01	Peak
4	5933.746	-4.45	66.97	62.52	68.20	-5.68	Peak


Right Band edge_Vertical_Peak

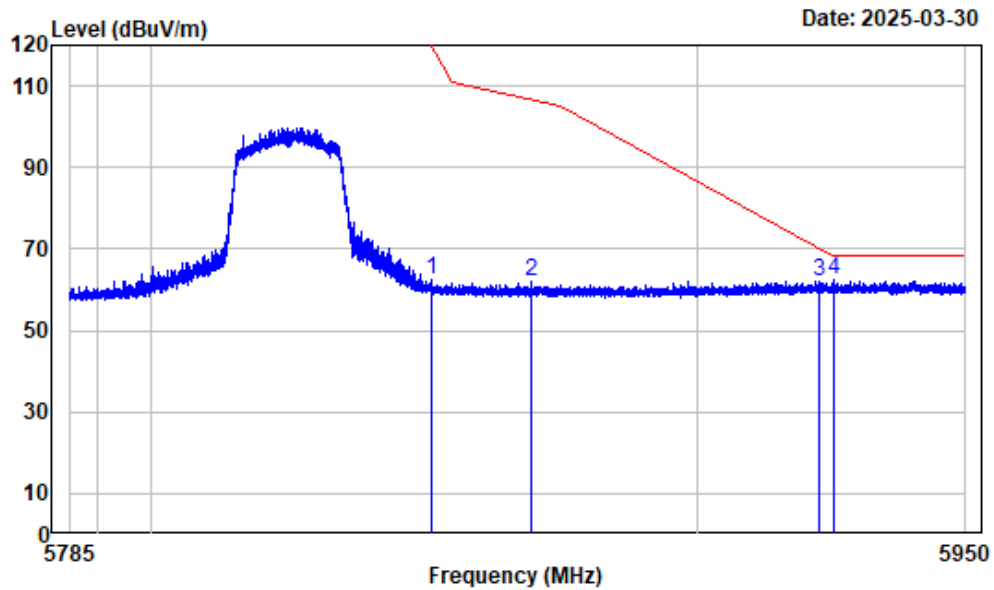

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX20-5825

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5851.235	-4.68	67.06	62.38	119.38	-57.00 Peak
2	5869.594	-4.59	66.43	61.84	106.71	-44.87 Peak
3	5922.730	-4.46	66.51	62.05	69.87	-7.82 Peak
4	5925.371	-4.45	66.94	62.49	68.20	-5.71 Peak


Left Band edge_Horizontal_Peak

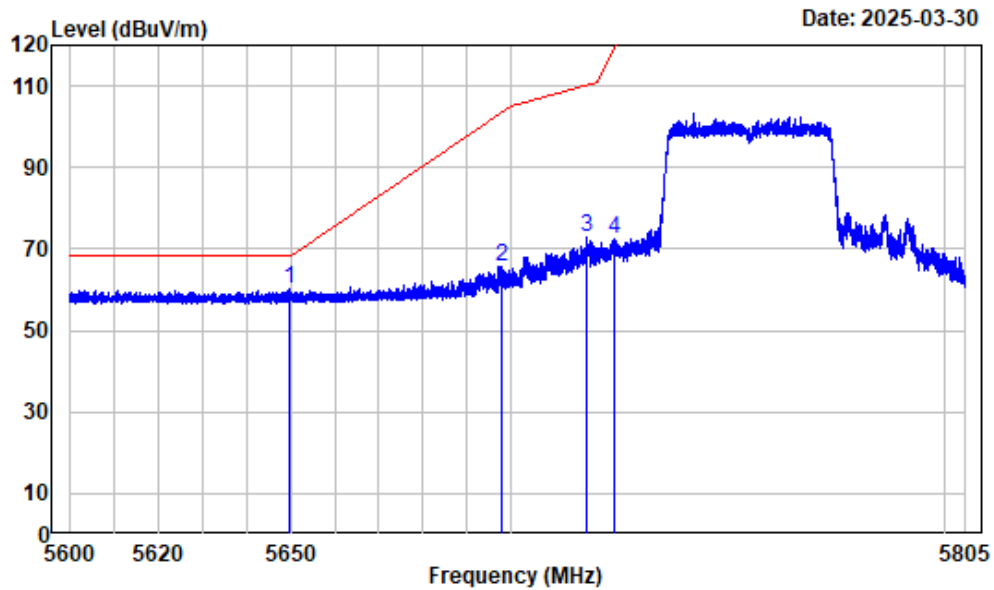

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX40-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5649.540	-5.86	66.02	60.16	68.20	-8.04	Peak
2	5698.054	-5.73	71.45	65.72	103.77	-38.05	Peak
3	5717.403	-5.56	78.37	72.81	110.07	-37.26	Peak
4	5723.887	-5.49	77.75	72.26	119.66	-47.40	Peak


Left Band edge_Vertical_Peak

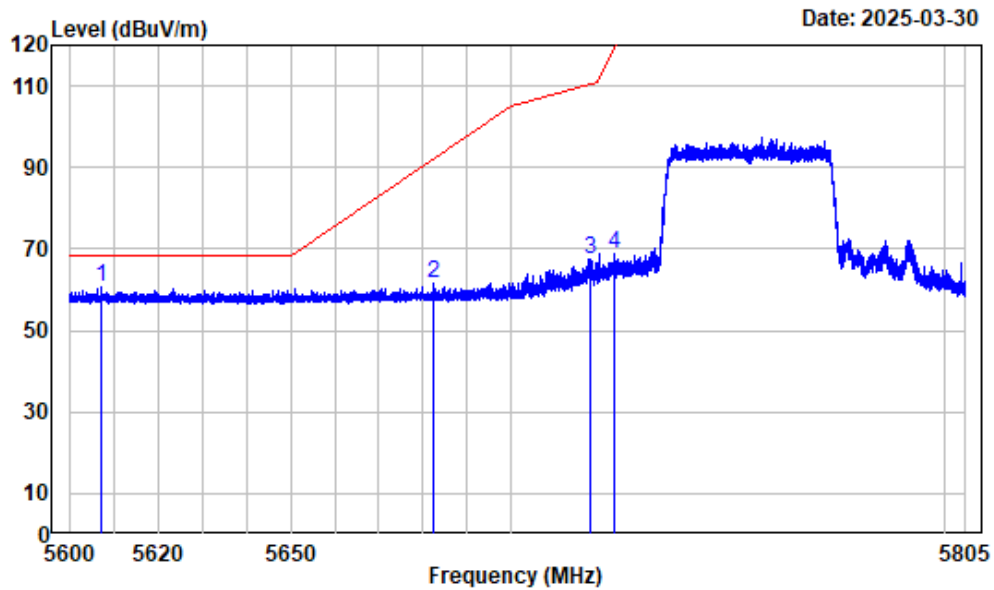

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX40-5755

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5607.330	-6.16	66.83	60.67	68.20	-7.53	Peak
2	5682.343	-5.77	67.57	61.80	92.17	-30.37	Peak
3	5718.428	-5.54	72.94	67.40	110.36	-42.96	Peak
4	5723.733	-5.49	74.29	68.80	119.31	-50.51	Peak


Right Band edge_Horizontal_Peak

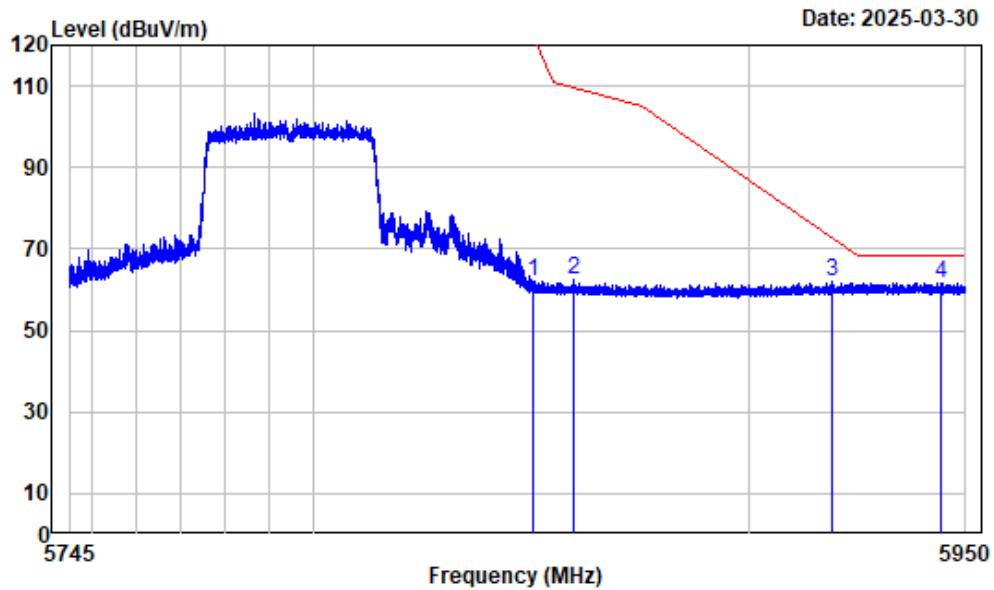

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX40-5795

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.383	-4.68	66.91	62.23	121.33	-59.10	Peak
2	5859.328	-4.63	67.16	62.53	109.59	-47.06	Peak
3	5919.041	-4.45	66.34	61.89	72.59	-10.70	Peak
4	5944.259	-4.45	66.21	61.76	68.20	-6.44	Peak


Right Band edge_Vertical_Peak

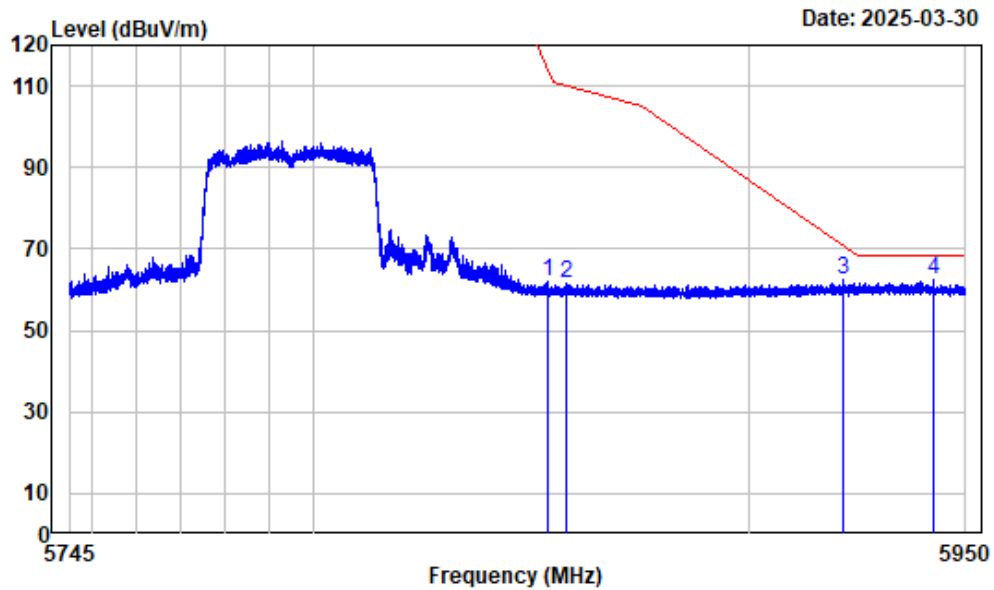

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX40-5795

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5853.766	-4.65	66.58	61.93	113.61	-51.68	Peak
2	5857.790	-4.65	66.08	61.43	110.02	-48.59	Peak
3	5921.578	-4.45	67.04	62.59	70.72	-8.13	Peak
4	5942.568	-4.45	67.16	62.71	68.20	-5.49	Peak


Left Band edge_Horizontal_Peak

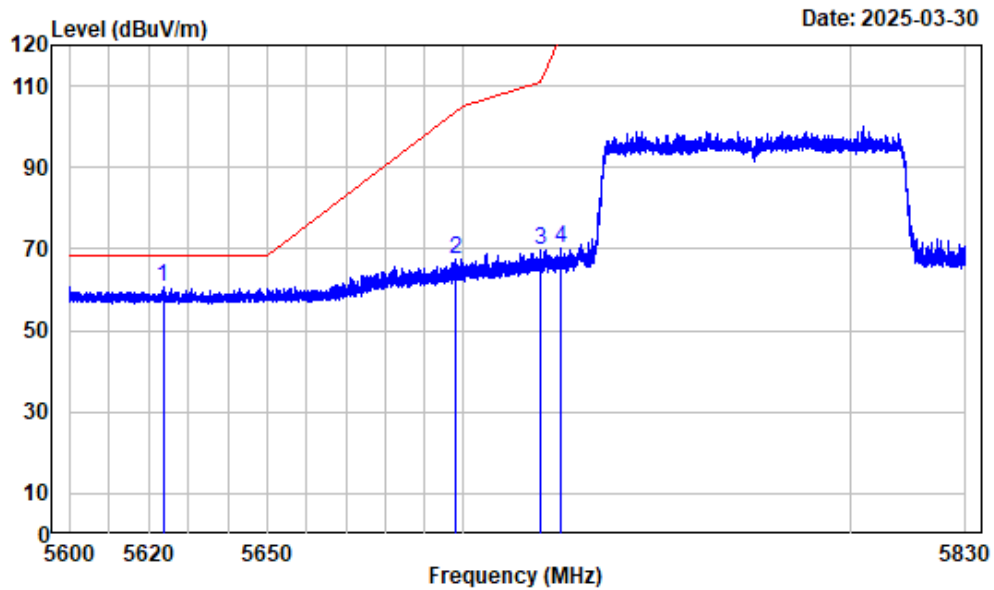

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5623.635	-6.05	66.72	60.67	68.20	-7.53	Peak
2	5698.107	-5.73	73.20	67.47	103.81	-36.34	Peak
3	5719.730	-5.54	75.12	69.58	110.72	-41.14	Peak
4	5724.992	-5.49	75.64	70.15	122.18	-52.03	Peak


Left Band edge_Vertical_Peak

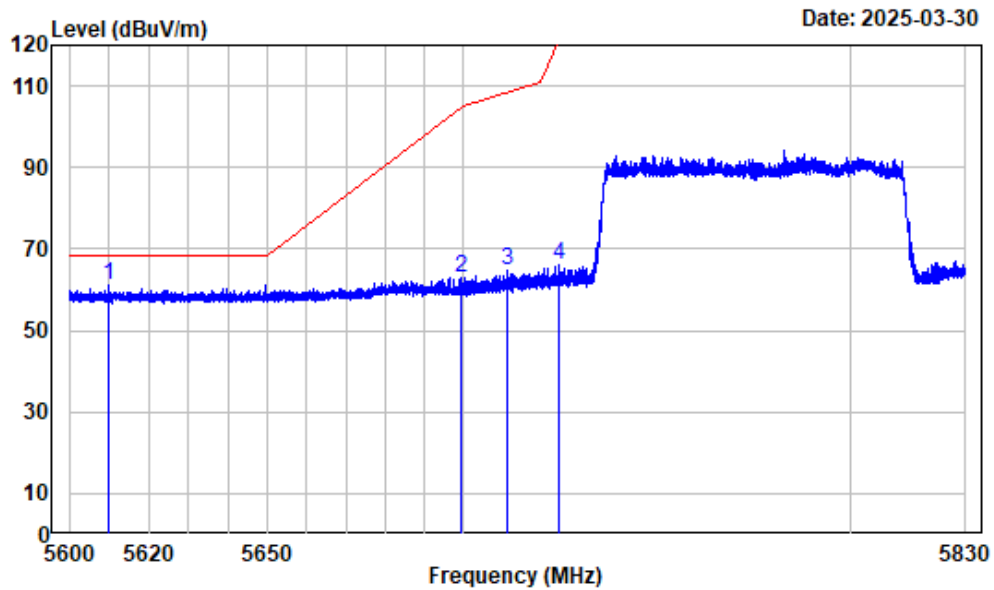

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX80-5775

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5609.920	-6.14	67.07	60.93	68.20	-7.27 Peak
2	5699.458	-5.71	68.87	63.16	104.80	-41.64 Peak
3	5711.276	-5.61	70.18	64.57	108.36	-43.79 Peak
4	5724.618	-5.49	71.49	66.00	121.33	-55.33 Peak


Right Band edge_Horizontal_Peak

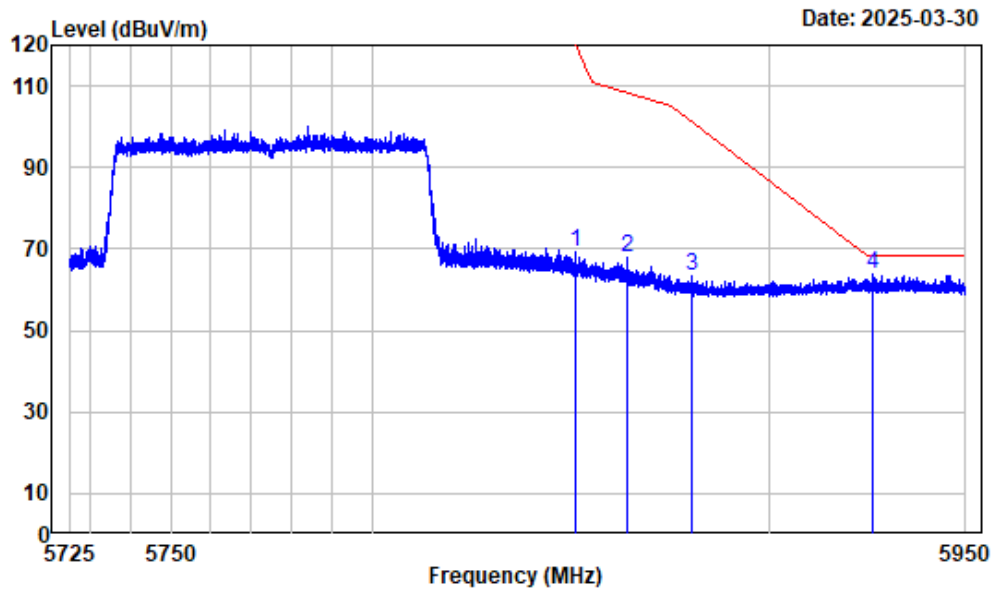

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX80-5775

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.959	-4.68	73.92	69.24	120.01	-50.77 Peak
2	5863.927	-4.61	72.35	67.74	108.30	-40.56 Peak
3	5880.551	-4.54	68.03	63.49	101.08	-37.59 Peak
4	5926.513	-4.45	68.41	63.96	68.20	-4.24 Peak

Right Band edge_Vertical_Peak

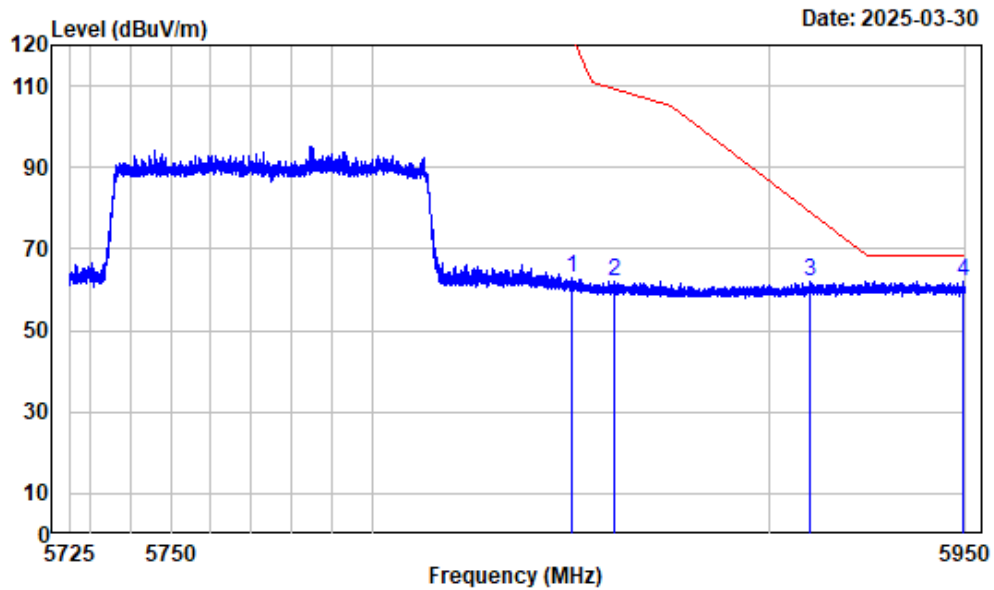


Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX80-5775

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.200	-4.68	67.73	63.05	121.74	-58.69	Peak
2	5860.861	-4.63	66.81	62.18	109.16	-46.98	Peak
3	5910.142	-4.45	66.65	62.20	79.16	-16.96	Peak
4	5949.381	-4.45	66.64	62.19	68.20	-6.01	Peak

Listed with the worst harmonic margin test plot

ANT1:


1-7GHz_Horizontal

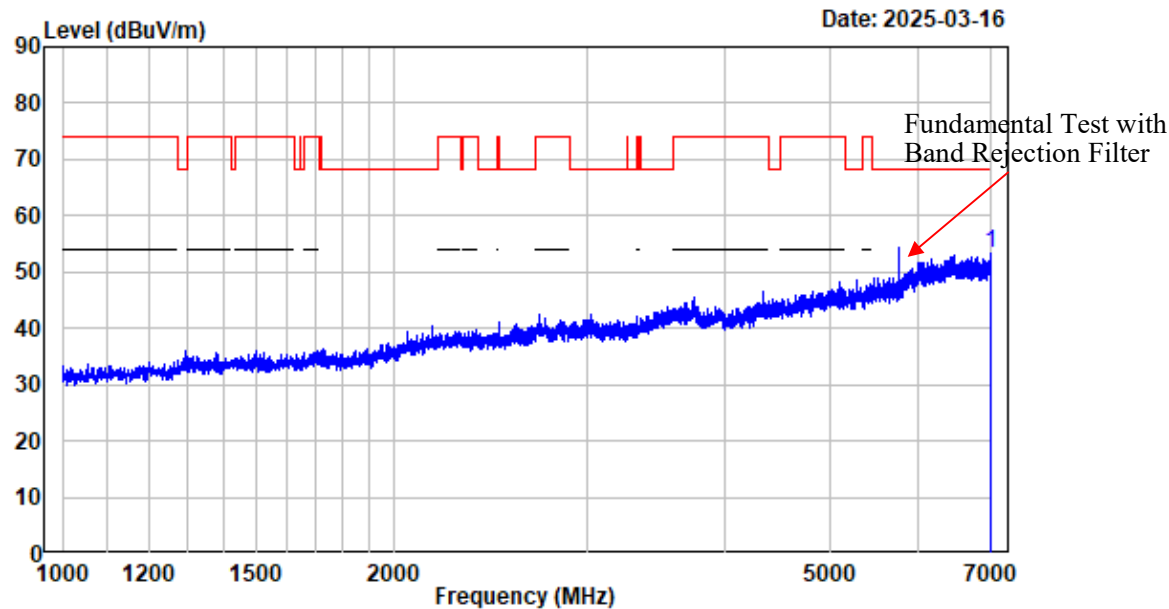

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6984.998	-2.87	56.18	53.31	68.20	-14.89	Peak


1-7GHz_Vertical

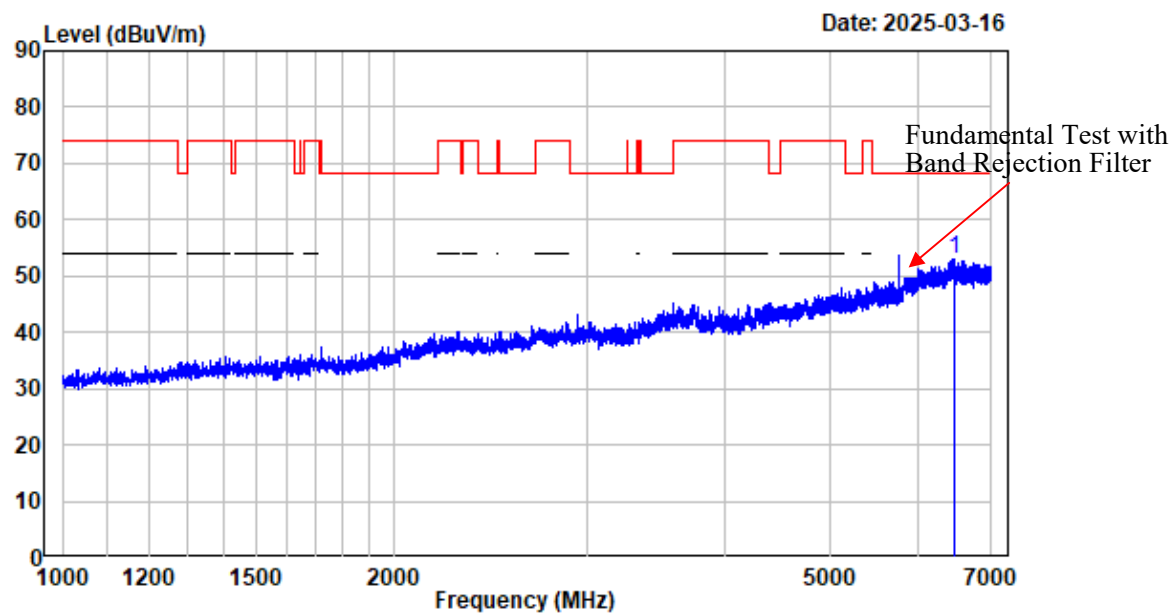

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6474.935	-2.91	56.03	53.12	68.20	-15.08	Peak


7-18GHz_Horizontal_Peak

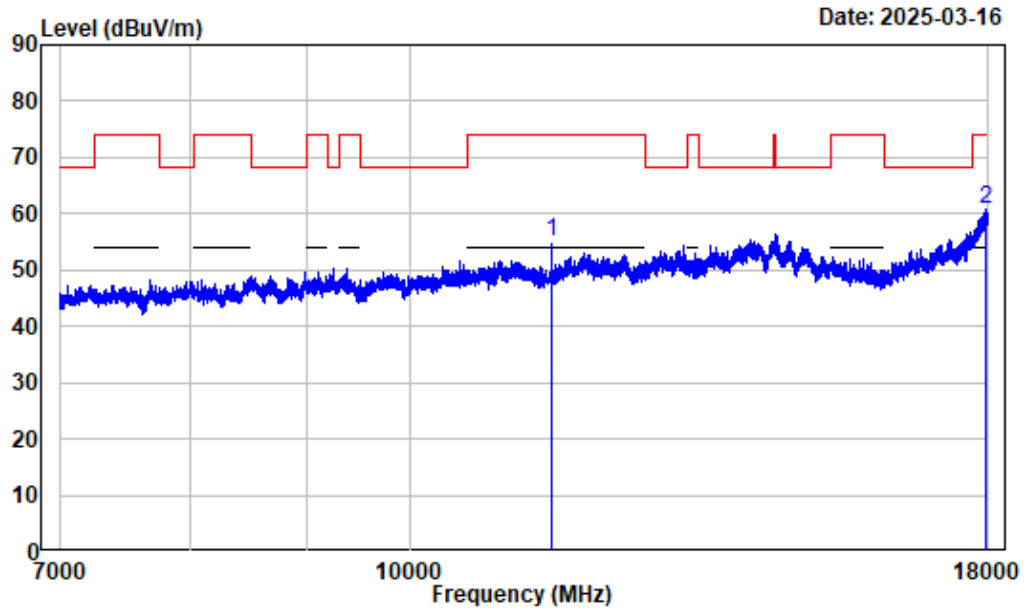

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80-5775

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11550.000	3.37	51.55	54.92	74.00	-19.08	Peak
2	17951.870	12.96	47.75	60.71	74.00	-13.29	Peak


7-18GHz_Horizontal_Average

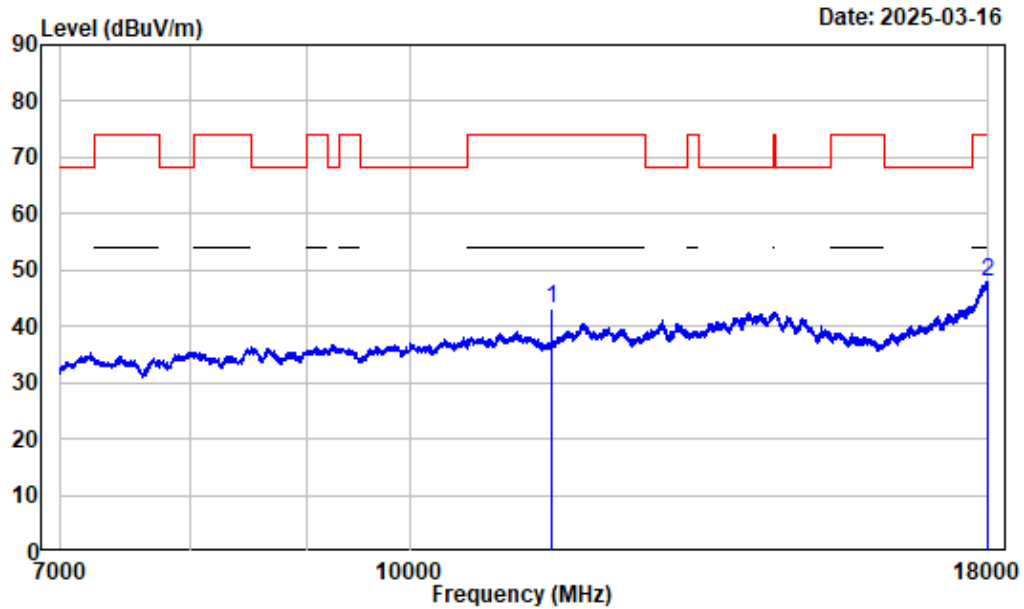

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band4-AC80-5775

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11550.000	3.37	39.67	43.04	54.00	-10.96	Average
2	17976.620	13.09	34.64	47.73	54.00	-6.27	Average


7-18GHz_Vertical_Peak

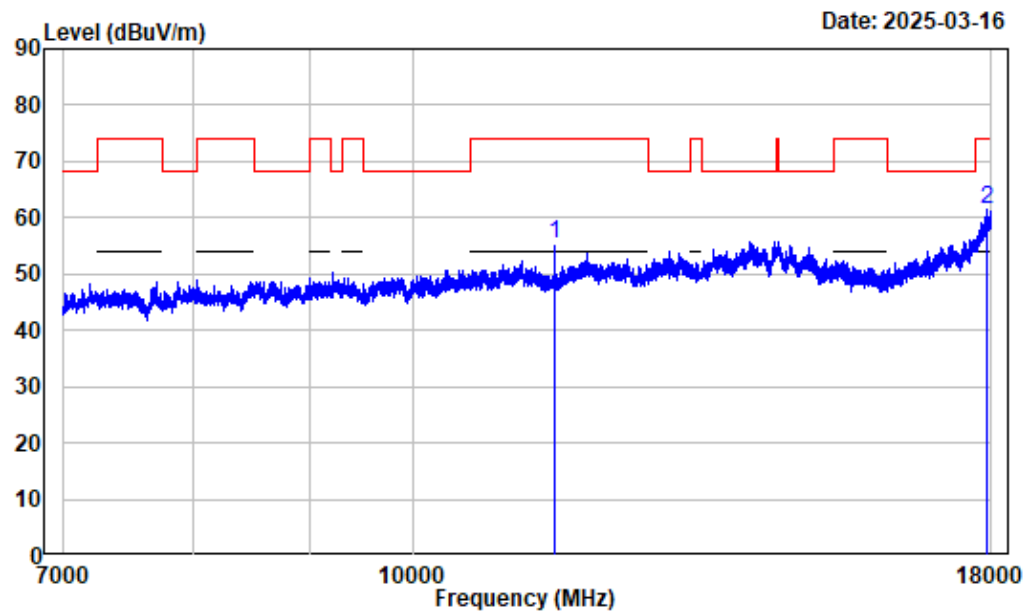

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80-5775

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11550.000	3.37	51.92	55.29	74.00	-18.71	Peak
2	17925.740	12.84	48.62	61.46	74.00	-12.54	Peak


7-18GHz_Vertical_Average

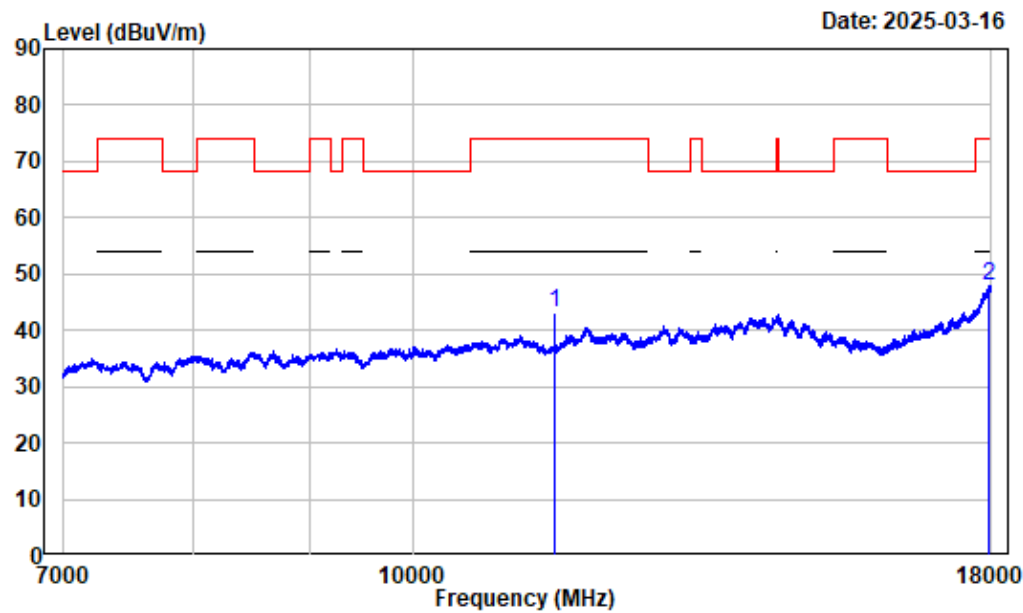

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band4-AC80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11550.000	3.37	39.86	43.23	54.00	-10.77	Average
2	17964.250	13.02	34.86	47.88	54.00	-6.12	Average


18-40GHz_Horizontal

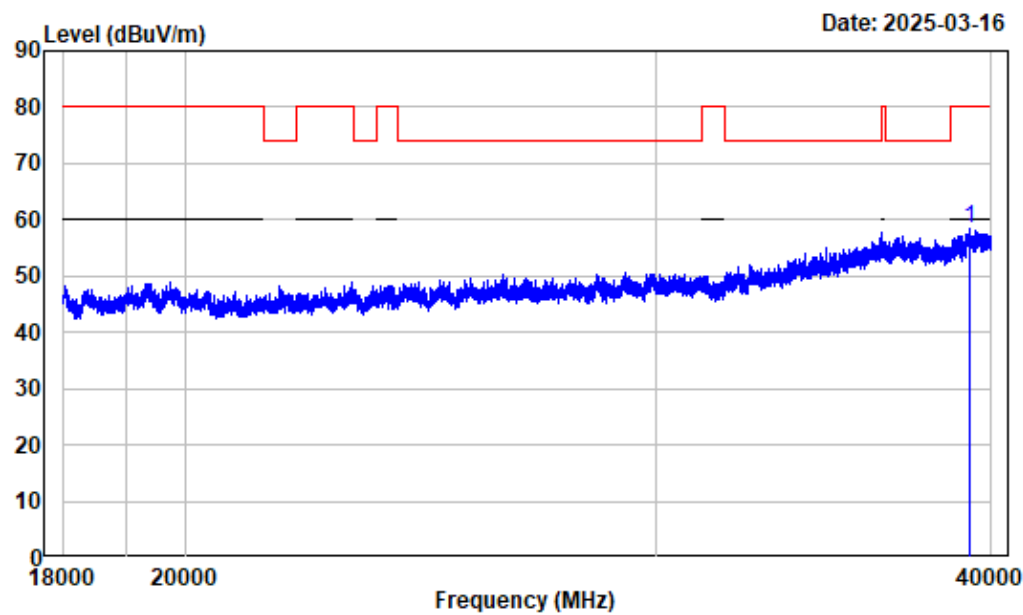

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	39246.410	22.82	35.51	58.33	80.00	-21.67	Peak

18-40GHz_Vertical

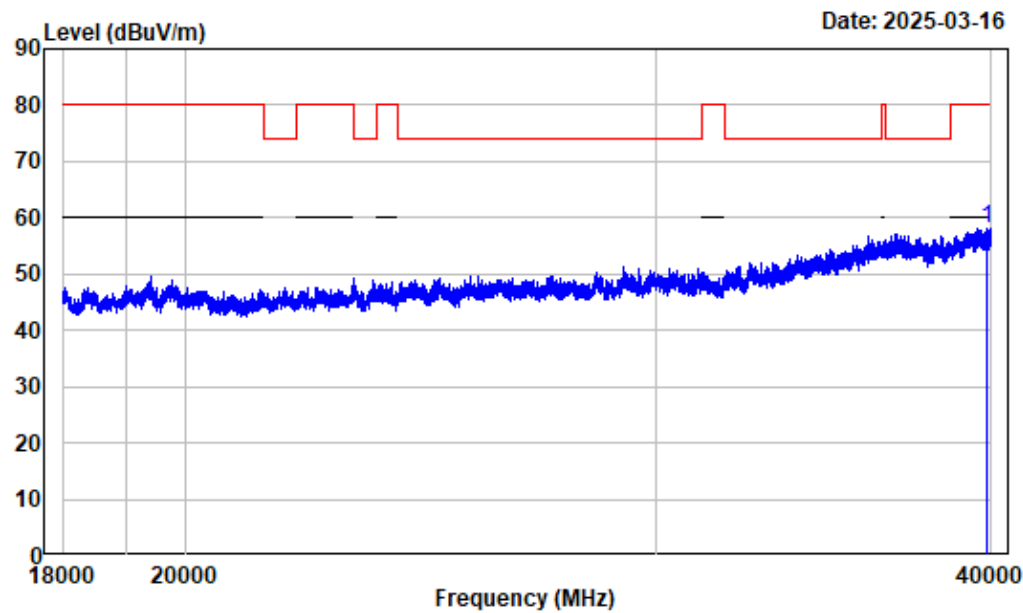


Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80-5775

Freq Factor		Read Level	Level	Limit	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 39845.980	22.51	35.53	58.04	80.00	-21.96	Peak

ANT2:


1-7GHz_Horizontal

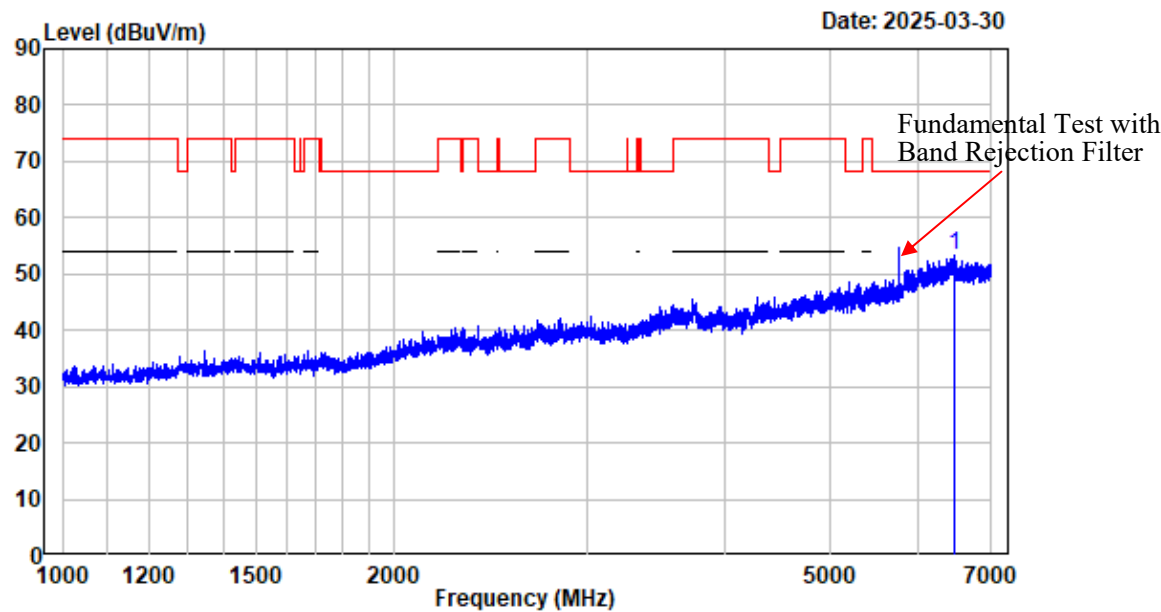

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX80-5775

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6471.184	-2.90	56.18	53.28	68.20	-14.92	Peak


1-7GHz_Vertical

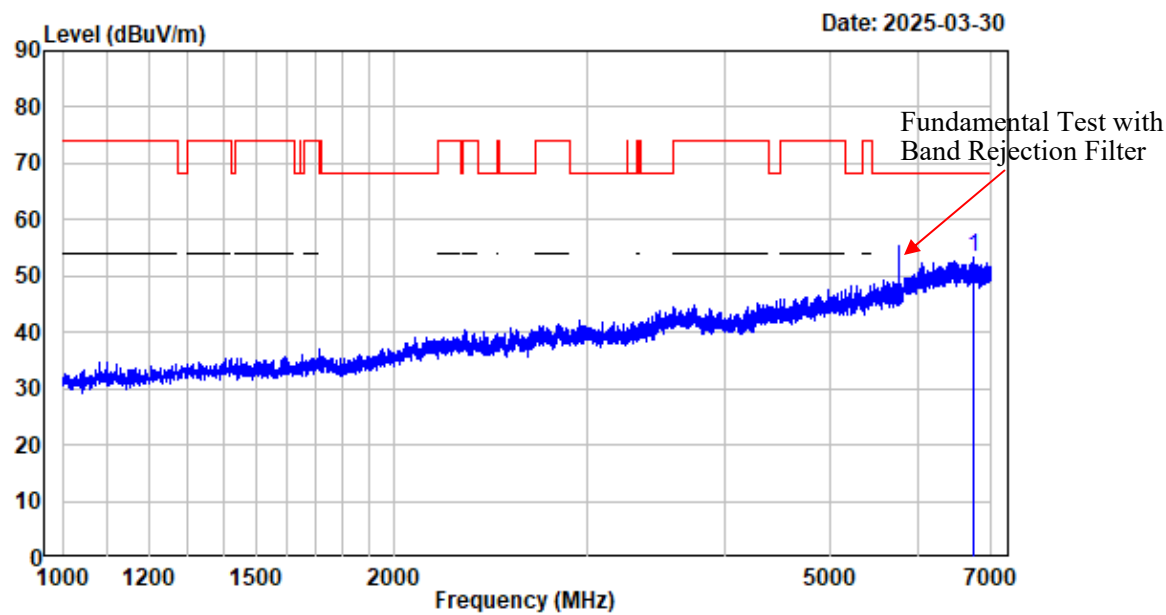

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX80-5775

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6756.220	-3.22	56.47	53.25	68.20	-14.95	Peak


7-18GHz_Horizontal_Peak

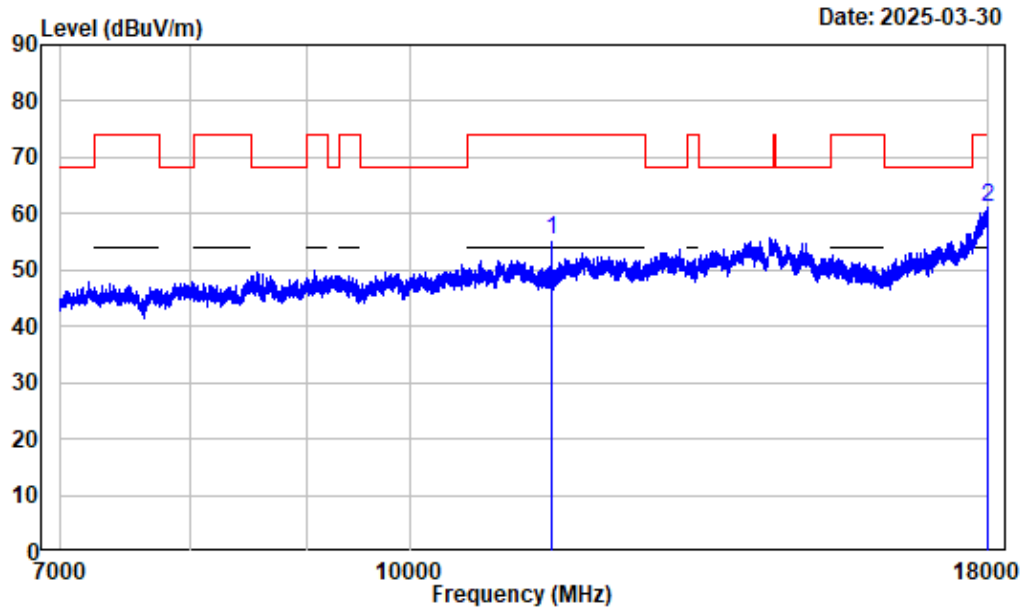

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX80-5775

Freq	Factor	Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11550.000	3.37	51.96	55.33	74.00	-18.67	Peak
2 17982.120	13.10	48.07	61.17	74.00	-12.83	Peak


7-18GHz_Horizontal_Average

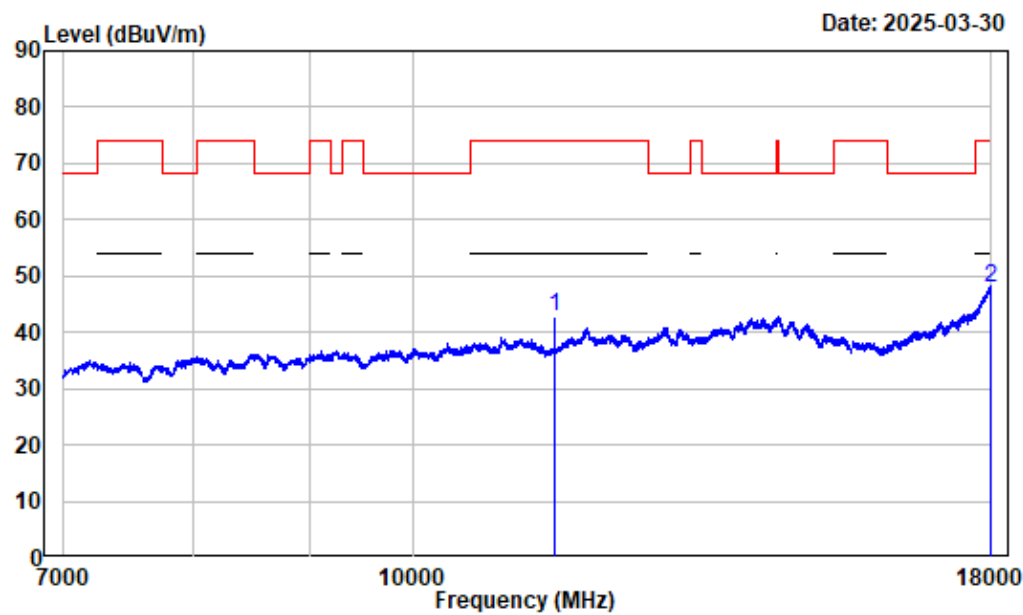

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band4-AX80-5775

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11550.000	3.37	39.57	42.94	54.00	-11.06	Average
2 17993.130	13.17	34.64	47.81	54.00	-6.19	Average


7-18GHz_Vertical_Peak

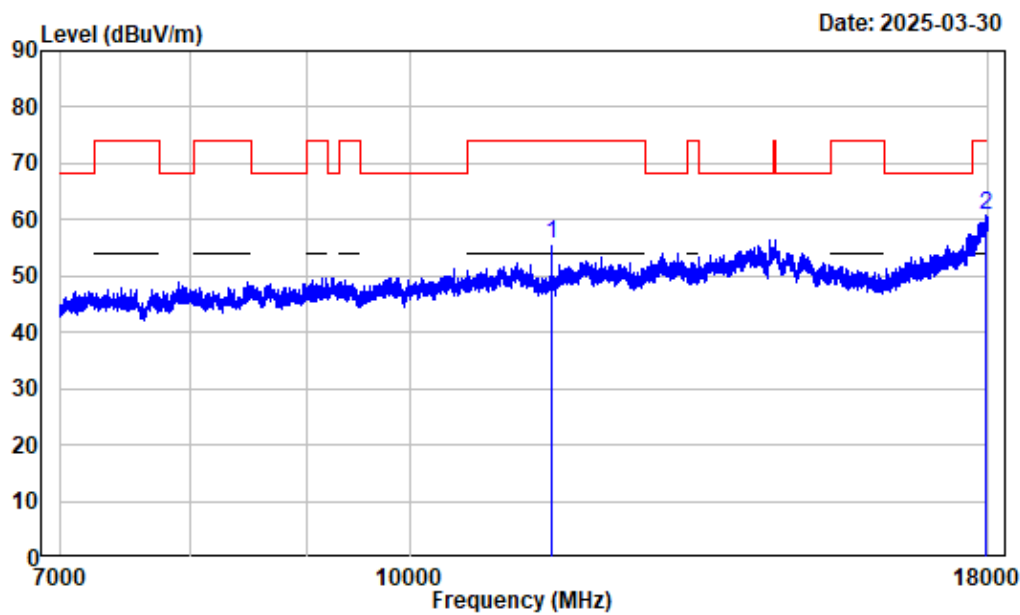

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11550.000	3.37	52.31	55.68	74.00	-18.32	Peak
2	17971.120	13.06	47.67	60.73	74.00	-13.27	Peak


4-18GHz_Vertical_Average

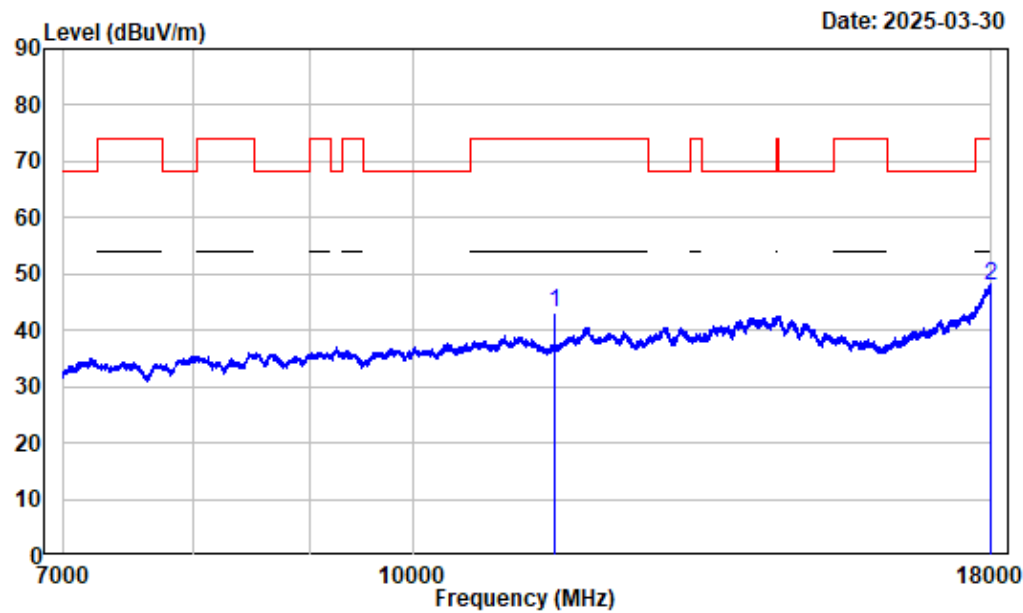

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band4-AX80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11550.000	3.37	39.74	43.11	54.00	-10.89	Average
2	17986.250	13.12	34.83	47.95	54.00	-6.05	Average


18-40GHz_Horizontal

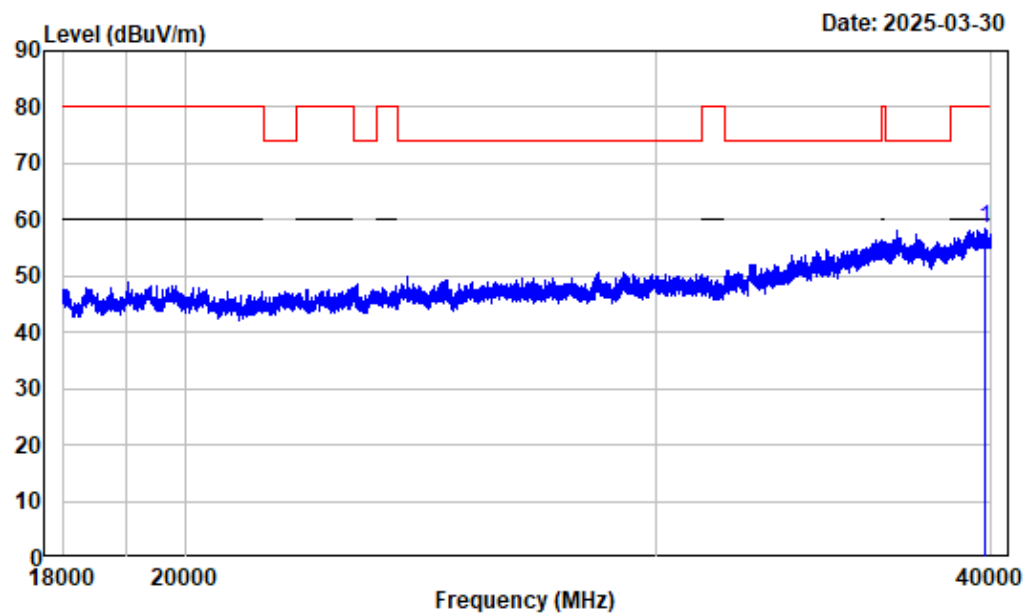

Condition : Horizontal
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX80-5775

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 39807.480	22.50	35.97	58.47	80.00	-21.53	Peak

18-40GHz_Vertical

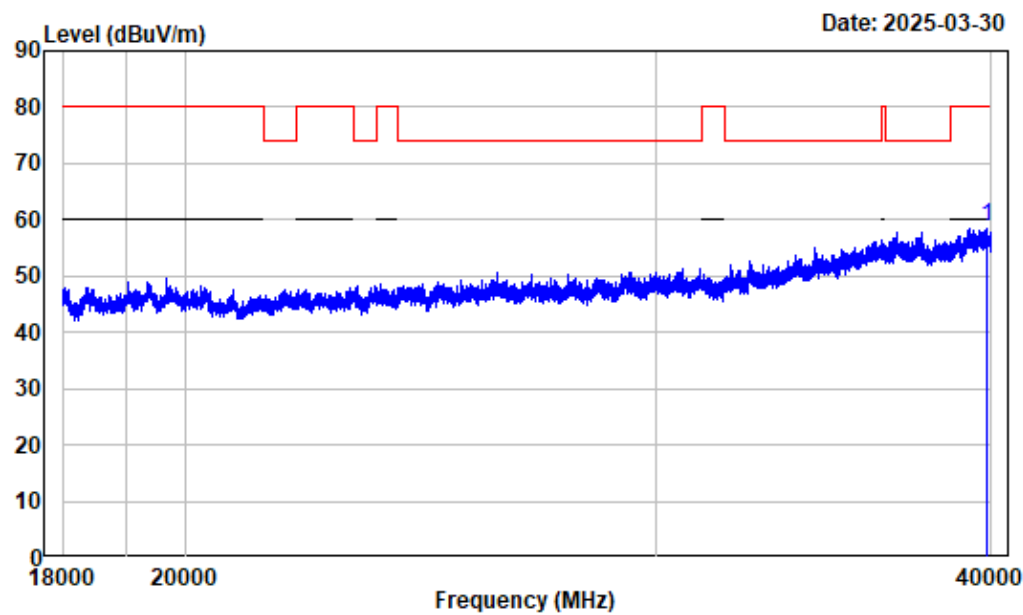

Condition : Vertical
Project No. : 2401A63093E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	39854.230	22.52	36.22	58.74	80.00	-21.26	Peak

RF Conducted data

Please refer to Annex "Appendix B1&B2" for detail test data.

RF EXPOSURE EVALUATION

MPE-Based Exemption

Applicable Standard

According to subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 v01 Interim General RF Exposure Guidance

MPE-Based Exemption:

General frequency and separation-distance dependent MPE-based effective radiated power(ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(3)(i)(C)] to support an exemption from further evaluation from 300 kHz through 100 GHz.

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2 f$.
1,500-100,000	$19.2 R^2$.

R is the minimum separation distance in meters

f = frequency in MHz

For multiple RF sources: Multiple RF sources are exempt if:

in the case of fixed RF sources operating in the same time-averaging period, or of multiple mobile or portable RF sources within a device operating in the same time averaging period, if the sum of the fractional contributions to the applicable thresholds is less than or equal to 1 as indicated in the following equation:

$$\sum_{i=1}^a \frac{P_i}{P_{th,i}} + \sum_{j=1}^b \frac{ERP_j}{ERP_{th,j}} + \sum_{k=1}^c \frac{Evaluated_k}{Exposure Limit_k} \leq 1$$

Result

Mode	Frequency (MHz)	Tune up conducted power [#] (dBm)	Antenna Gain [#]		ERP		Evaluation Distance (m)	ERP Limit (mW)
			(dBi)	(dBd)	(dBm)	(mW)		
For module YL43752								
BLE	2402-2480	5.5	4.49	2.34	7.84	6.08	0.2	768
2.4G Wi-Fi	2412-2462	22.0	4.49	2.34	24.34	271.64	0.2	768
5.2G Wi-Fi	5180-5240	12.5	4.49	2.34	14.84	30.48	0.2	768
5.8G Wi-Fi	5745-5825	12.0	4.49	2.34	14.34	27.16	0.2	768
For module YL43456								
2.4G Wi-Fi	2412-2462	18.0	4.49	2.34	20.34	108.14	0.2	768
5.2G Wi-Fi	5180-5240	15.5	4.49	2.34	17.84	60.81	0.2	768
5.3G Wi-Fi	5260-5320	15.0	4.49	2.34	17.34	54.20	0.2	768
5.6G Wi-Fi	5500-5720	13.0	4.49	2.34	15.34	34.20	0.2	768
5.8G Wi-Fi	5745-5825	16.5	4.49	2.34	18.84	76.56	0.2	768

- Note: 1. The tune up conducted power and antenna gain was declared by the applicant.
 2. 0dBd=2.15dBi
 3. The BLE and Wi-Fi can transmit at same time, the 2.4G and 5G Wi-Fi cannot transmit at same time.
 4. The two Wi-Fi modules can transmit as same time.

Simultaneous transmitting consideration (worst case):

$$\text{The ratio} = \text{ERP}_{\text{BLE}} / \text{limit} + \text{ERP}_{\text{2.4G Wi-Fi}} / \text{limit} + \text{ERP}_{\text{5G}} / \text{limit} = 6.08/768 + 271.64/768 + 76.56/768 = 0.461 < 1.0$$

So simultaneous exposure is compliant.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant

Field reference level exposure exemption limits**Applicable Standard**

According to RSS-102 Issue 6§6.6:

Field reference level (FRL) exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm (i.e. mobile devices), except when the device operates as follows:

- below 20 MHz and the source-based, time-averaged maximum EIRP of the device is equal to or less than 1 W (adjusted for tune-up tolerance)
- at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum EIRP of the device is equal to or less than $4.49/f^{0.5}$ W (adjusted for tune-up tolerance), where f is in MHz
- at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum EIRP of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance)
- at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum EIRP of the device is equal to or less than $1.31 \times 10^{-2} f^{0.6834}$ W (adjusted for tune-up tolerance), where f is in MHz
- at or above 6 GHz and the source-based, time-averaged maximum EIRP of the device is equal to or less than 5 W (adjusted for tune-up tolerance) In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the EIRP was derived.

Calculated Data:

Mode	Frequency (MHz)	Maximum tune-up conducted power [#] (dBm)	Antenna Gain [#]	Maximum tune-up EIRP		Evaluation Distance (m)	Limit (mW)
			(dBi)	(dBm)	(mW)		
For module YL43752							
BLE	2402-2480	5.5	4.49	9.99	9.98	0.2	2676
2.4G Wi-Fi	2412-2462	22.0	4.49	26.49	445.66	0.2	2684
5.2G Wi-Fi	5180-5240	12.5	4.49	16.99	50.00	0.2	4525
5.8G Wi-Fi	5745-5825	12.0	4.49	16.49	44.57	0.2	4857
For module YL43456							
2.4G Wi-Fi	2412-2462	18.0	4.49	22.49	177.42	0.2	2684
5.2G Wi-Fi	5180-5240	15.5	4.49	19.99	99.77	0.2	4525
5.3G Wi-Fi	5260-5320	15.0	4.49	19.49	88.92	0.2	4573
5.6G Wi-Fi	5500-5720	13.0	4.49	17.49	56.10	0.2	4714
5.8G Wi-Fi	5745-5825	16.5	4.49	20.99	125.60	0.2	4857

Note:

1. The tune up conducted power[#] and antenna gain[#] was declared by the applicant.
2. The BLE and Wi-Fi can transmit at same time, the 2.4G and 5G Wi-Fi cannot transmit at same time.
3. The two Wi-Fi modules can transmit as same time.

Simultaneous transmitting consideration (worst case):

The ratio= $EIRP_{BLE} / \text{limit} + EIRP_{2.4G\ Wi-Fi} / \text{limit} + EIRP_{5G} / \text{limit} = 9.98/2676 + 445.66/2684 + 125.60/4857 = 0.196 < 1.0$

So simultaneous exposure is compliant.

Result: Compliant

Note: To maintain compliance with the RF exposure guidelines, place the equipment at least 20cm from nearby persons.

EUT PHOTOGRAPHS

Please refer to the attachment 2401A63093E-RF External photo and 2401A63093E-RF Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2401A63093E-RFB Test Setup photo.

***** **END OF REPORT** *****