

Antenna Specification

Specifications Summary

ITEM	SPEC.	
Center Frequency	2402 MHz	3.11 dBi
	2442 MHz	2.94dBi
	2484 MHz	2.77dBi
MAX. GAIN	3.11 dBi	

ITEM	SPEC.	
Center Frequency	5150 MHz	-0.17 dBi
	5300 MHz	0.06 dBi
	5500 MHz	1.02dBi
	5800 MHz	0.88dBi
MAX. GAIN	1.02 dBi	

Antenna Photo & Length

天线类型/
ANT Type:

PCB


天线型号/
ANT Model:

SIP-T73W BT

制造商/
Manufactory:



YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD.
No.666 Hu'an Rd,Huli District Xiamen City, Fujian, P.R. China

天线尺寸/ANT Size


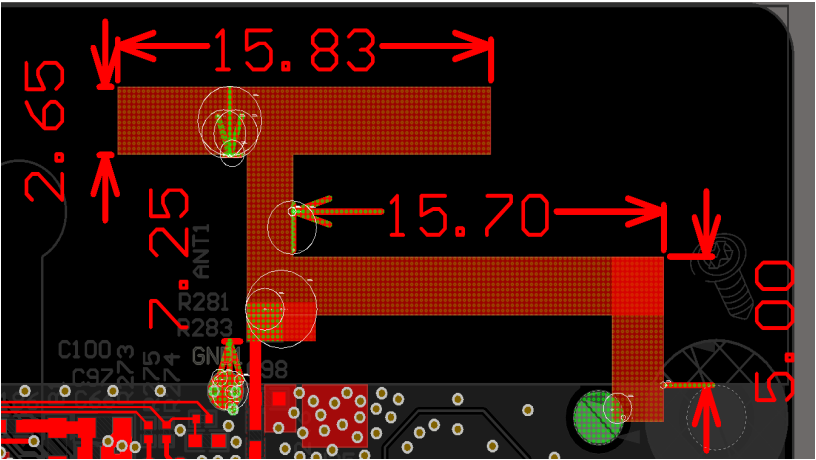


2402MHz

3D Antenna pattern

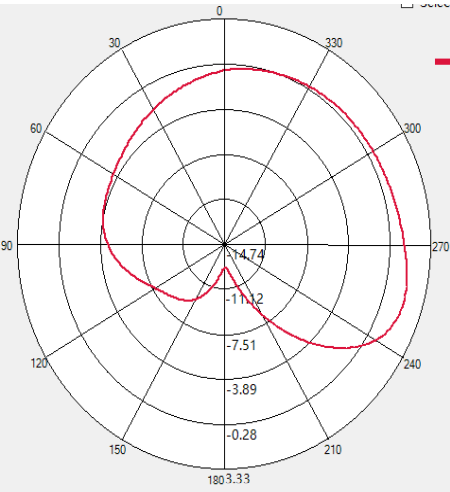
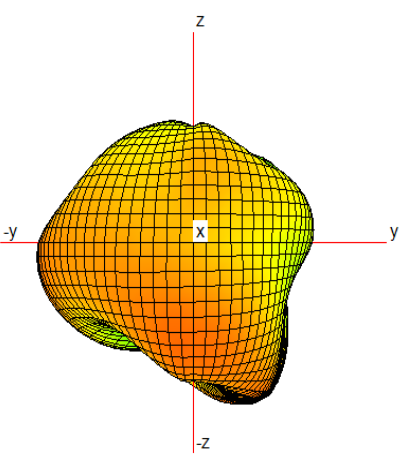


2D Antenna pattern (X->Y;X->Z;Y->Z)

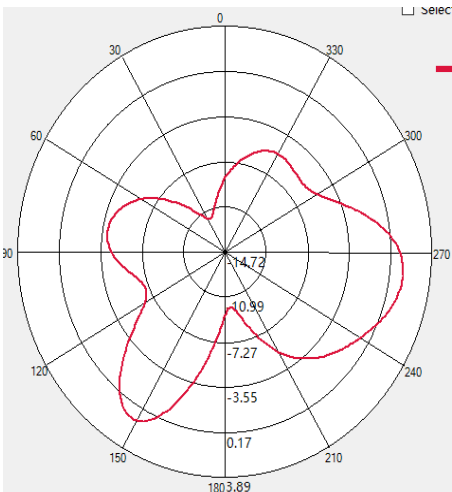
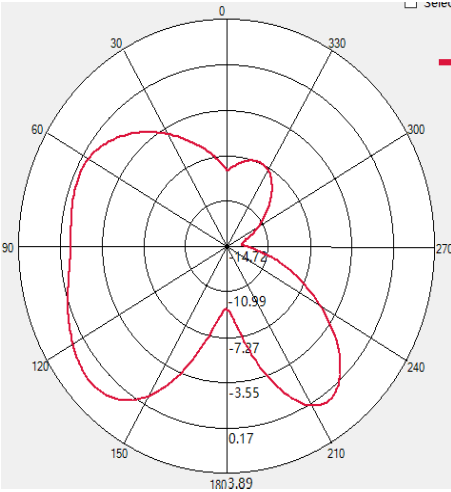


2442MHz

3D Antenna pattern

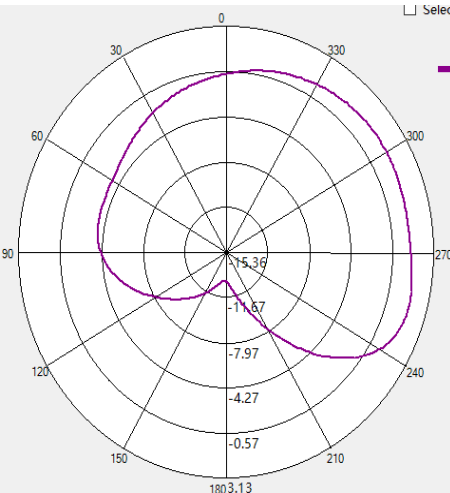
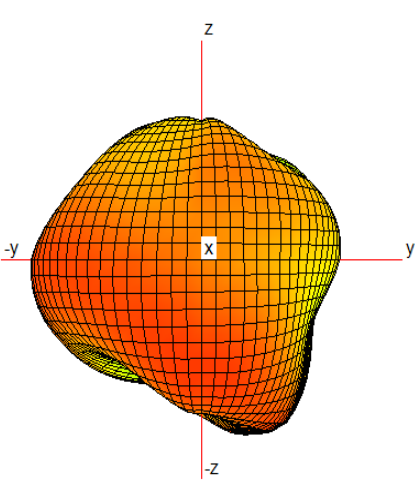


2D Antenna pattern (X->Y;X->Z;Y->Z)

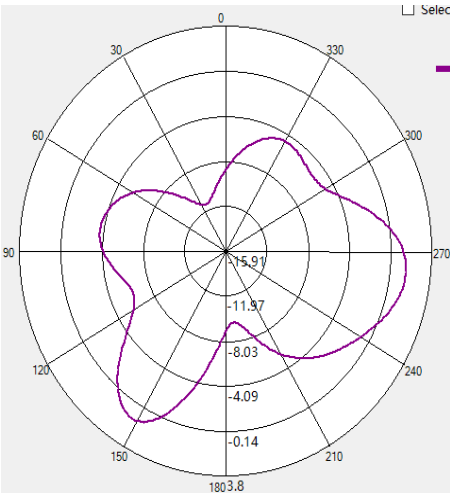
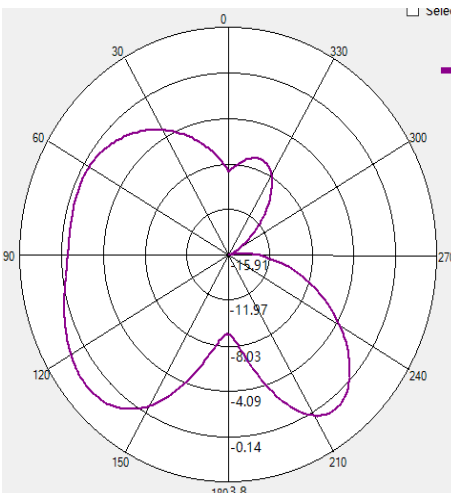


2484MHz

3D Antenna pattern

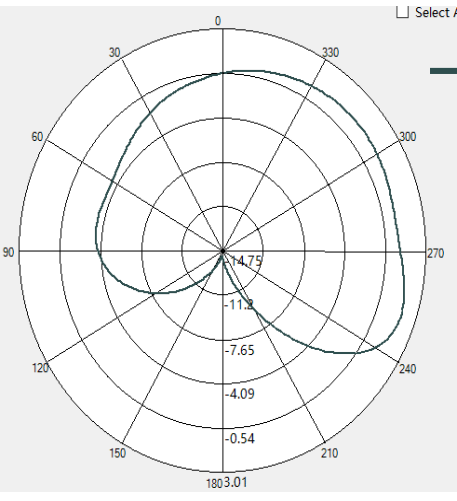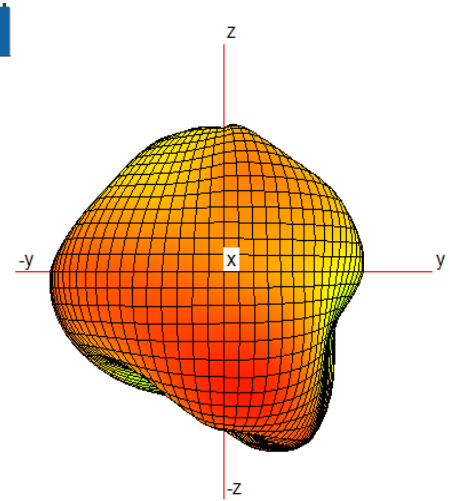



2D Antenna pattern (X->Y;X->Z;Y->Z)

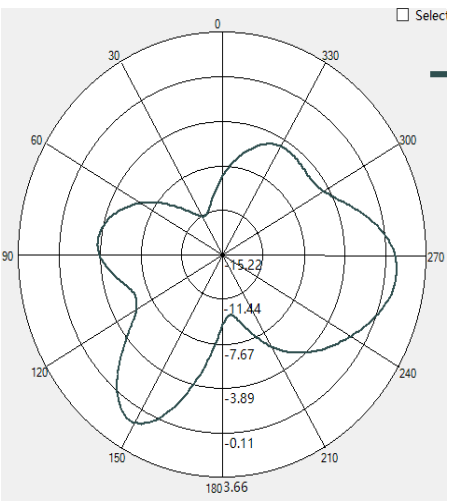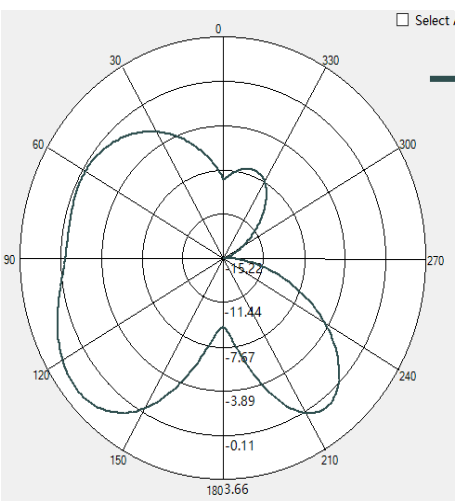



Point Values	Minimum Gain (dBi)	Maximum Gain (dBi)	Average Gain (dBi)
Frequency (MHz)			
2402	-14.4128	3.11445	-2.55217
2442	-15.2893	2.94383	-2.46984
2484	-14.1102	2.77332	-2.44883

5150MHz

3D Antenna pattern

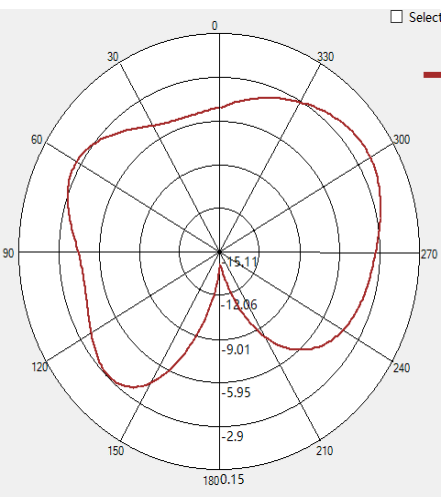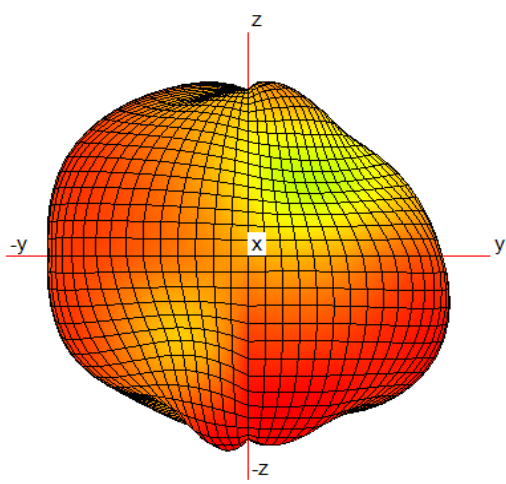


2D Antenna pattern (X->Y;X->Z;Y->Z)


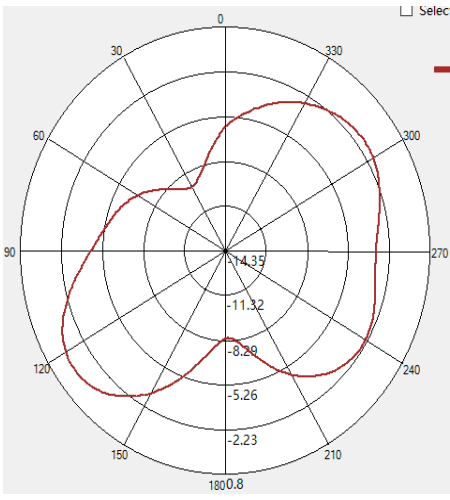
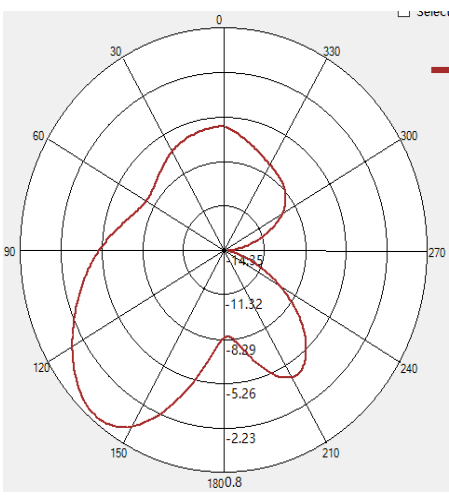


5300MHz

3D Antenna pattern

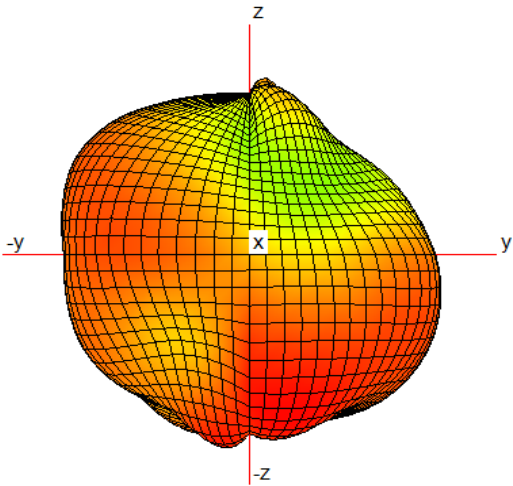


2D Antenna pattern (X->Y;X->Z;Y->Z)

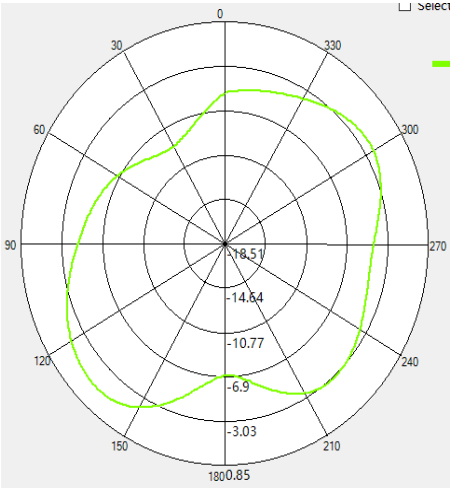
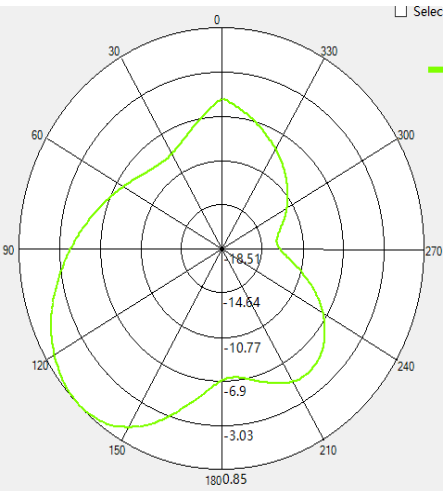
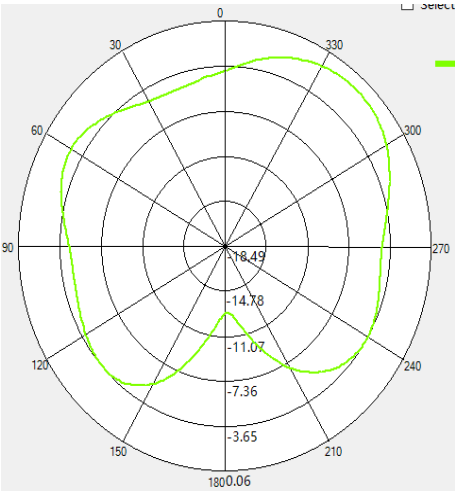


5500MHz

3D Antenna pattern


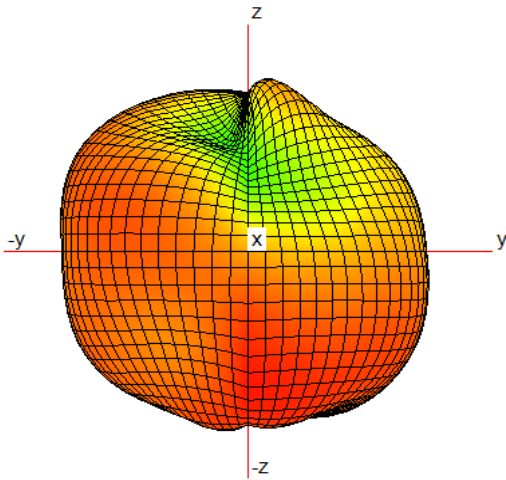


2D Antenna pattern (X->Y;X->Z;Y->Z)

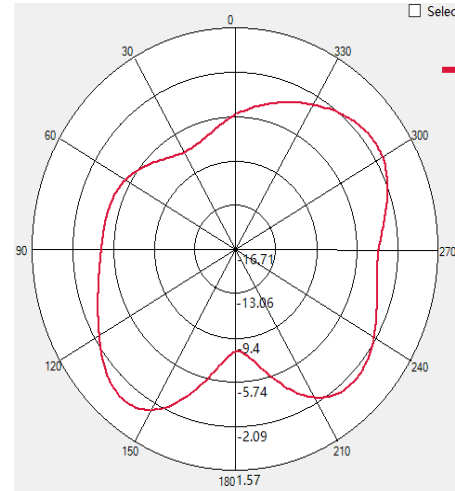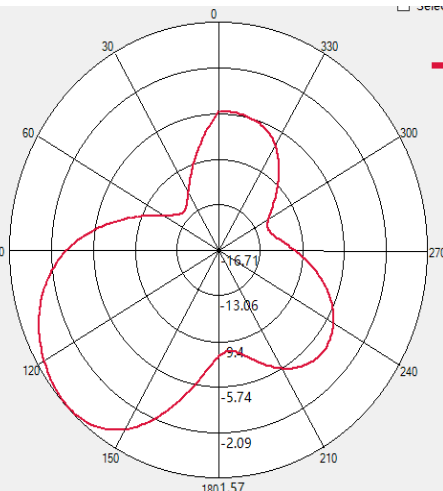
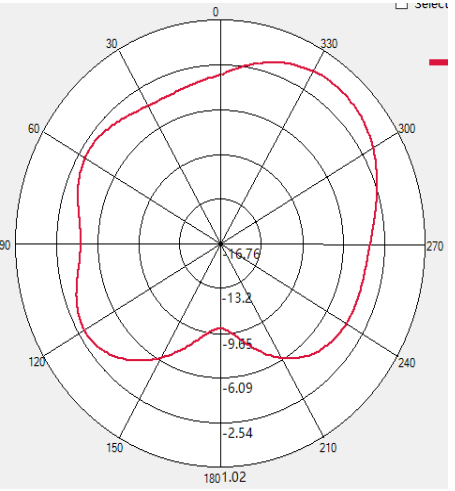


5800MHz

3D Antenna pattern

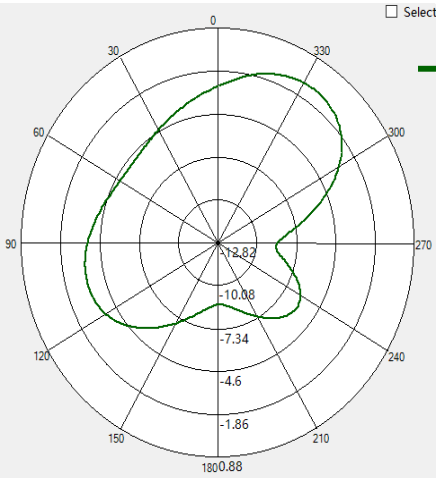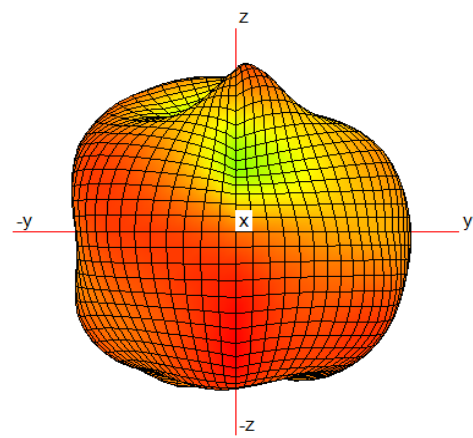

2D Antenna pattern (X->Y;X->Z;Y->Z)

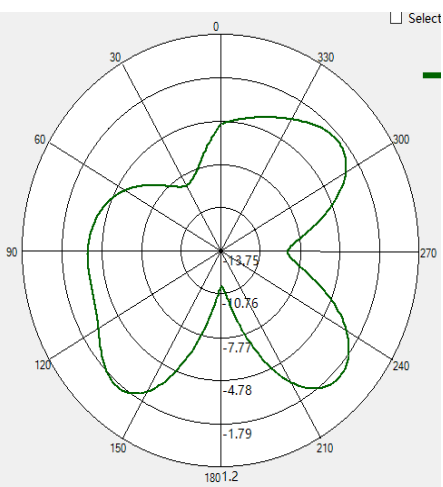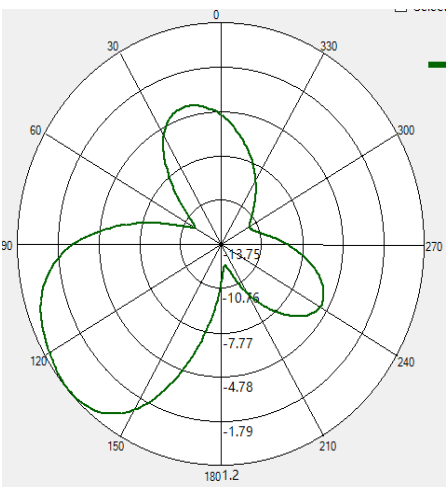

Point Values	Minimum Gain (dBi)	Maximum Gain (dBi)	Average Gain (dBi)
Frequency (MHz)			
5150	-14.2705	-0.17291	-4.38165
5300	-18.4759	0.06184	-4.17280
5500	-16.7033	1.01790	-3.81766
5800	-12.4761	0.88425	-4.46531