

TEST REPORT

Applicant Name: YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD.
Address: No.666 Hu'an Rd. Huli District Xiamen City, Fujian, P.R. China
Report Number: 2401Y41479E-RF-00
FCC ID: T2C-T74W

Test Standard (s)

FCC PART 15.407

Sample Description

Product Type: Ultra Business Phone
Model No.: SIP-T74W
Multiple Model(s) No.: N/A
Trade Mark: **Yealink**
Date Received: 2024-10-15
Issue Date: 2025-05-28

Test Result:

Pass▲

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Wills Yu

Wills Yu
RF Engineer

Approved By:

Nancy Wang

Nancy Wang
RF Supervisor

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	3
GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
SUMMARY OF TEST RESULTS	12
TEST EQUIPMENT LIST	13
REQUIREMENTS AND TEST PROCEDURES	15
CONDUCTED EMISSIONS	15
UNDESIRABLE EMISSION.....	17
26 dB & 6dB EMISSION BANDWIDTH	21
CONDUCTED TRANSMITTER OUTPUT POWER.....	23
POWER SPECTRAL DENSITY	24
DUTY CYCLE	25
ANTENNA REQUIREMENT	26
TEST DATA AND RESULTS.....	27
CONDUCTED EMISSIONS	27
UNDESIRABLE EMISSION.....	36
RF CONDUCTED DATA	305
RF EXPOSURE EVALUATION	306
EUT PHOTOGRAPHS.....	308
TEST SETUP PHOTOGRAPHS	309

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2401Y41479E-RF-00	Original Report	2025-05-28

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Frequency Range	5150-5250MHz; 5250-5350MHz; 5470-5600MHz&5650-5725MHz; 5725-5850MHz
Mode	802.11a/n20/n40/ac20/ac40/ax20/ax40
Device Type	Client Device
Maximum Conducted Average Output Power	5150-5250MHz: 14.44dBm; 5250-5350MHz: 16.25dBm 5470-5725MHz: 16.99dBm; 5725-5850MHz: 17.45dBm
Modulation Technique	OFDM, OFDMA
Antenna Specification[#]	5150-5250MHz: 0.75dBi, 5250-5350MHz: 1.53dBi 5470-5725MHz: 3.12dBi, 5725-5850MHz: 1.77dBi (provided by the applicant)
Voltage Range	DC 5V from adapter or DC 48V from POE
Sample serial number	2SV1-1 for Conducted and Radiated Emissions Test 2SV1-8 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	Adapter 1 Model:YLPS052000B1-US Input: AC 100-240V, 50/60Hz 0.5A Output: DC 5V, 2A Adapter 2 Model:YLPS052000C1-US Input: AC 100-240V, 50/60Hz 0.5A Output: DC 5V, 2.0A Adapter 3 Model:YLPS052000E1-US Input: AC 100-240V, 50/60Hz 0.5A Output: DC 5.0V, 2.0A

Note: The EUT powered by three adapters or POE, the worst case adapter 1 was selected to test for radiated emission below 1GHz according to BT report test result.

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB789033 D02 General U-NII Test Procedures New Rules v02r01.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		109.2kHz(k=2, 95% level of confidence)
RF Frequency		56.6Hz(k=2, 95% level of confidence)
RF output power, conducted		0.86dB(k=2, 95% level of confidence)
Unwanted Emission, conducted		1.60dB(k=2, 95% level of confidence)
Power Spectral Density		0.90dB(k=2, 95% level of confidence)
AC Power Lines Conducted Emissions	9kHz-150kHz	3.63dB(k=2, 95% level of confidence)
	150kHz-30MHz	3.66dB(k=2, 95% level of confidence)
Radiated Emissions	9kHz - 30MHz	3.60dB(k=2, 95% level of confidence)
	30MHz~200MHz (Horizontal)	5.32dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	5.43dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	5.77dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.73dB(k=2, 95% level of confidence)
	1GHz - 6GHz	5.34dB(k=2, 95% level of confidence)
	6GHz - 18GHz	5.40dB(k=2, 95% level of confidence)
	18GHz - 40GHz	5.64dB(k=2, 95% level of confidence)
Temperature		±1°C
Humidity		±1%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer.

For 5150-5250MHz Band, 6channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240

For 802.11a/ac20/ax20 mode: channel 36, 40, 48 were tested;

For 802.11ac40/ax40 mode: channel 38, 46 were tested.

For 5250-5350MHz Band, 6 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	60	5300
54	5270	62	5310
56	5280	64	5320

For 802.11a/ac20/ax20 mode: channel 52, 56, 64 were tested;

For 802.11ac40/ax40 mode: channel 54, 62 were tested.

For 5470-5725MHz Band, 13 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	132	5660
102	5510	134	5670
104	5520	136	5680
108	5540	140	5700
110	5550	142	5710
112	5560	144	5720
116	5580	/	/

For 802.11a/ac20/ax20 mode: channel 100, 116, 140, 144 were tested;

For 802.11ac40/ax40 mode: channel 102, 110, 134, 142 were tested.

For 5725-5850MHz Band, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	159	5795
151	5755	161	5805
153	5765	165	5825
157	5785	/	

For 802.11a/ac20/ax20 mode: channel 149, 157, 165 were tested;

For 802.11ac40/ax40 mode: channel 151, 159 were tested.

EUT Exercise Software

Exercise Software [#]	AuthenticationTool.exe			
5150-5250 MHz Band				
Mode	Test Channels	Test Frequency(MHz)	Data rate	Power Level [#]
802.11a	Low	5180	6Mbps	16
	Middle	5200	6Mbps	16
	High	5240	6Mbps	16
802.11ac-VHT20	Low	5180	MCS0	16
	Middle	5200	MCS0	16
	High	5240	MCS0	16
802.11ac-VHT40	Low	5190	MCS0	16
	High	5230	MCS0	16
802.11ax-HE20	Low	5180	MCS0	16
	Middle	5200	MCS0	16
	High	5240	MCS0	16
802.11ax-HE40	Low	5190	MCS0	16
	High	5230	MCS0	16
5250-5350 MHz Band				
Mode	Test Channels	Test Frequency(MHz)	Data rate	Power Level [#]
802.11a	Low	5260	6Mbps	16
	Middle	5280	6Mbps	16
	High	5320	6Mbps	16
802.11ac-VHT20	Low	5260	MCS0	16
	Middle	5280	MCS0	16
	High	5320	MCS0	16
802.11ac-VHT40	Low	5270	MCS0	16
	High	5310	MCS0	16
802.11ax-HE20	Low	5260	MCS0	16
	Middle	5280	MCS0	16
	High	5320	MCS0	16
802.11ax-HE40	Low	5270	MCS0	16
	High	5310	MCS0	16

5470-5725 MHz Band				
Mode	Test Channels	Test Frequency(MHz)	Data rate	Power Level[#]
802.11a	Low	5500	6Mbps	16
	Middle	5580	6Mbps	16
	High	5700	6Mbps	16
	Cross	5720	6Mbps	16
802.11ac-VHT20	Low	5500	MCS0	16
	Middle	5580	MCS0	16
	High	5700	MCS0	16
	Cross	5720	MCS0	16
802.11ac-VHT40	Low	5510	MCS0	16
	Middle	5550	MCS0	16
	High	5670	MCS0	16
	Cross	5710	MCS0	16
802.11ax-HE20	Low	5500	MCS0	16
	Middle	5580	MCS0	16
	High	5700	MCS0	16
	Cross	5720	MCS0	16
802.11ax-HE40	Low	5510	MCS0	16
	Middle	5550	MCS0	16
	High	5670	MCS0	16
	Cross	5710	MCS0	16
5725-5850 MHz Band				
Mode	Test Channels	Test Frequency(MHz)	Data rate	Power Level[#]
802.11a	Low	5745	6Mbps	16
	Middle	5785	6Mbps	16
	High	5825	6Mbps	16
802.11ac-VHT20	Low	5745	MCS0	16
	Middle	5785	MCS0	16
	High	5825	MCS0	16
802.11ac-VHT40	Low	5755	MCS0	16
	High	5795	MCS0	16
802.11ax-HE20	Low	5745	MCS0	16
	Middle	5785	MCS0	16
	High	5825	MCS0	16
802.11ax-HE40	Low	5755	MCS0	16
	High	5795	MCS0	16
Note: 1. The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the average power and PSD across all data rates bandwidths, and modulations. 2. The n20/n40 mode was reduced test as identical parameter with ac20/ac40 mode. 3. For 802.11 ax modes, the device not support partial RU mode.				

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	PC	DESKTOP-1630AQ3	JG3NLV1
Grandstream	Router	GWN7665	C074AD251F0A
TPLINK	POE	TL-POE4824G	Unknown
YEALINK	Earphone	Unknown	Unknown
Kingston	USB DRIVE	Unknown	DTSE9G3


External I/O Cable

Cable Description	Length (m)	From Port	To
Unshielded Un-detachable AC Cable	1.2	Receptacle	LISN/AC Mains
Unshielded Un-detachable DC Cable	1.5	EUT	Adapter
Unshielded Detachable RJ45 Cable	8.0	EUT	PC
Unshielded Detachable RJ45 Cable	8.0	EUT/POE	Router
Unshielded Un-detachable RJ11 Cable	1.0	EUT	Earphone
Unshielded Detachable RJ45 Cable	1.0	EUT	POE
Unshielded Detachable AC cable	0.5	Receptacle	POE


Block Diagram of Test Setup

For Conducted Emissions:


Power by adapter

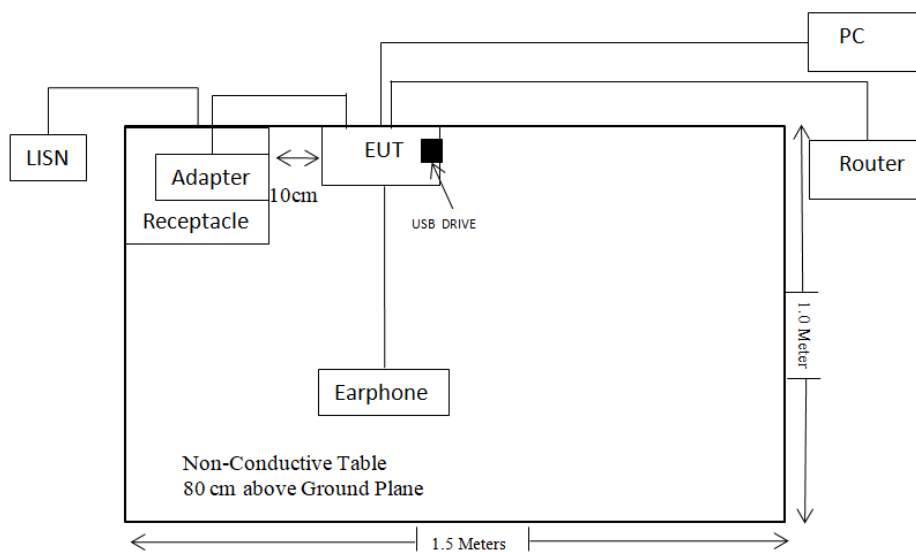


Power by POE

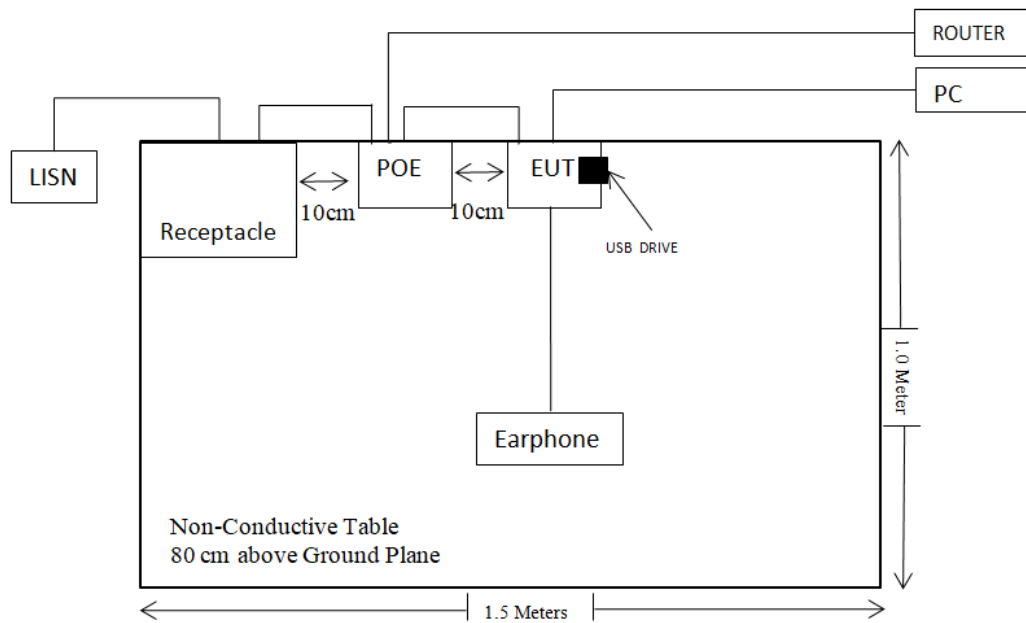

For Radiated Emissions below 1GHz:

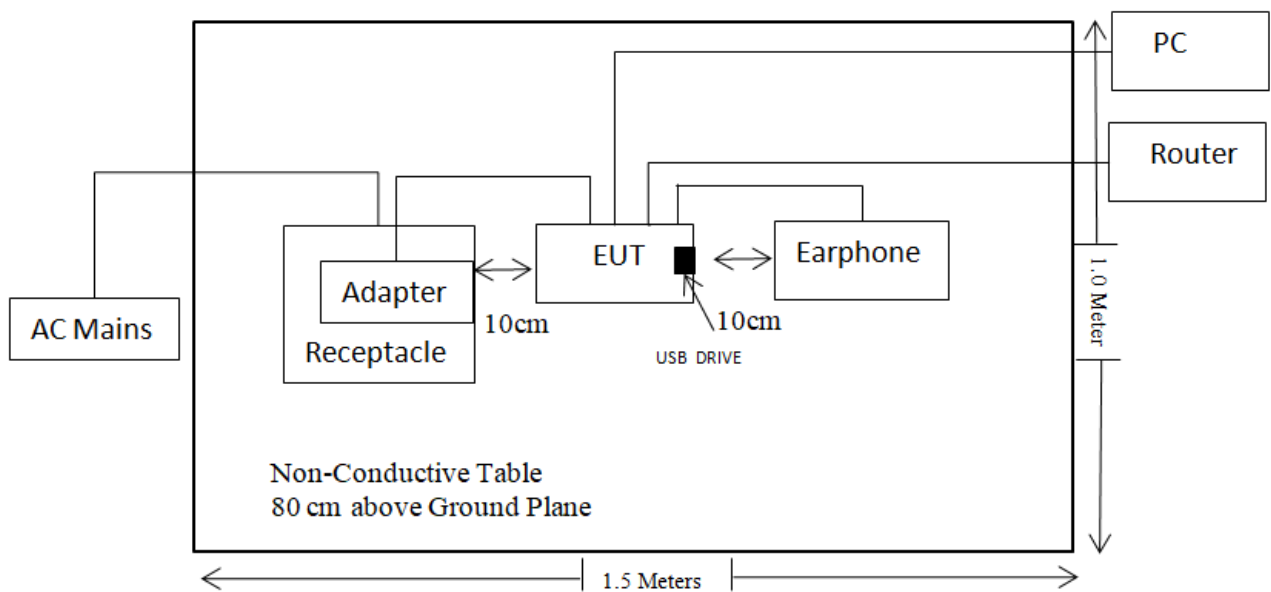

For Radiated Emissions above 1GHz:

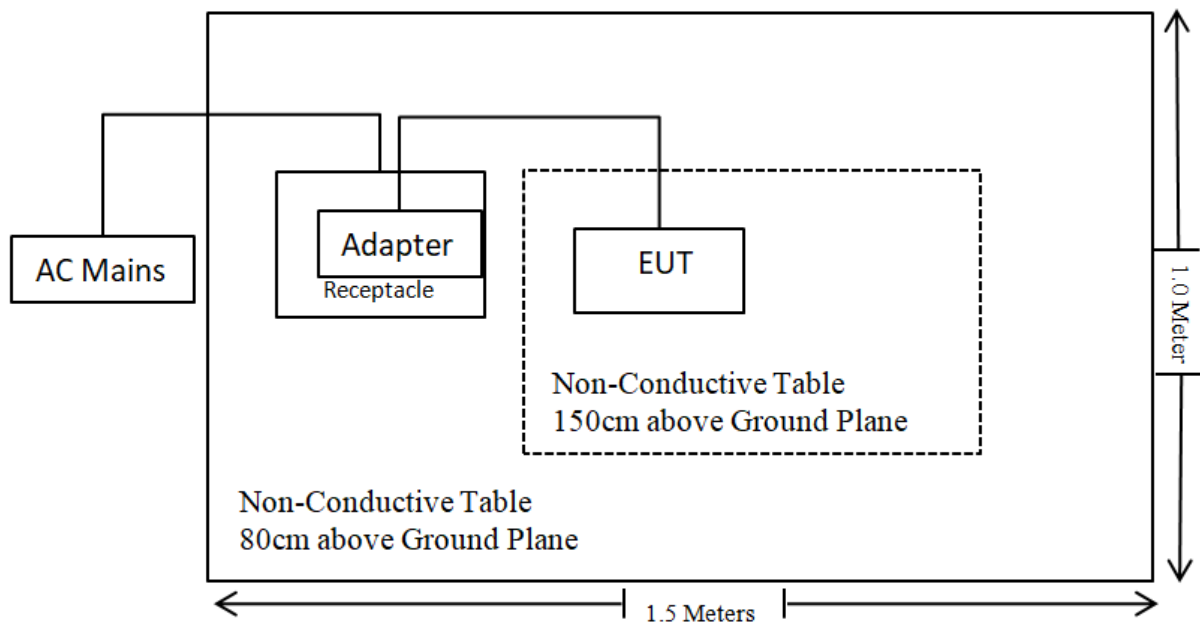

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307 (b) & §2.1091	MPE-Based Exemption	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	Conducted Emissions	Compliant
§15.205& §15.209 &§15.407(b)	Undesirable Emission& Restricted Bands	Compliant
§15.407(a) (e)	26 dB Emission Bandwidth & 6dB Bandwidth	Compliant
§15.407(a)	Conducted Transmitter Output Power	Compliant
§15.407 (a)	Power Spectral Density	Compliant
§15.407 (h)	Transmit Power Control (TPC)	Not Applicable
§15.407 (h)	Dynamic Frequency Selection (DFS)	Compliant*
C63.10 §11.6	Duty Cycle	/

Compliant*: Please refer to the DFS report 2401Y41479E-RFE.

Not Applicable: For 5250-5350MHz/5470-5725MHz, the maximum EIRP is 20.11dBm<27dBm (500mW).

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/01/16	2025/01/15
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/12/04	2025/12/03
Rohde & Schwarz	LISN	ENV216	101613	2024/01/16	2025/01/15
Rohde & Schwarz	LISN	ENV216	101613	2024/12/04	2025/12/03
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2024/05/21	2025/05/20
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2024/05/21	2025/05/20
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
Radiated Emission Test_ Below 1GHz					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2024/12/04	2025/12/03
Sonoma instrument	Pre-amplifier	310N	186238	2024/05/21	2025/05/20
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Cable	XH500C	J-10M-A	2024/06/18	2025/06/17
Unknown	Cable	Chamber Cable 1	F-03-EM236	2024/06/18	2025/06/17
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13
Unknown	Cable	PNG214	1354	2024/12/04	2025/12/03
Unknown	Cable	2Y194	0735	2024/12/04	2025/12/03
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
Radiated Emission Test_ Above 1GHz					
Rohde&Schwarz	Spectrum Analyzer	FSV40	101605	2025/03/26	2026/03/25
A.H.System	Preamplifier	PAM-0118P	489	2024/11/15	2025/11/14
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2026/07/25
Unknown	RF Cable	KMSE	0735	2024/12/06	2025/12/05
Unknown	RF Cable	UFA147	219661	2024/12/06	2025/12/05
JD	Filter Switch Unit	DT7220FSU	DS79906	2024/09/09	2025/09/08
JD	Multiplex Switch Test Control Set	DT7220SCU	DS79903	2024/09/09	2025/09/08
A.H.System	Pre-amplifier	PAM-1840VH	190	2024/06/18	2025/06/17
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17
UTIFLEX	RF Cable	NO. 13	232308-001	2024/12/18	2025/12/17
Audix	EMI Test software	E3	191218(V9)	NCR	NCR

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
R&S	Spectrum Analyzer	FSV40	101942	2024/09/20	2025/09/19
ANRITSU	Microwave peak power sensor	MA24418A	12622	2024/05/21	2025/05/20
Unknown	10dB Attenuator	Unknown	F-03-EM190	2024/06/27	2025/06/26
Rohde & Schwarz	Spectrum Analyze	FSU26	200982	2024/09/20	2025/09/19

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).


REQUIREMENTS AND TEST PROCEDURES

Conducted Emissions

Applicable Standard

FCC §15.207

EUT Setup

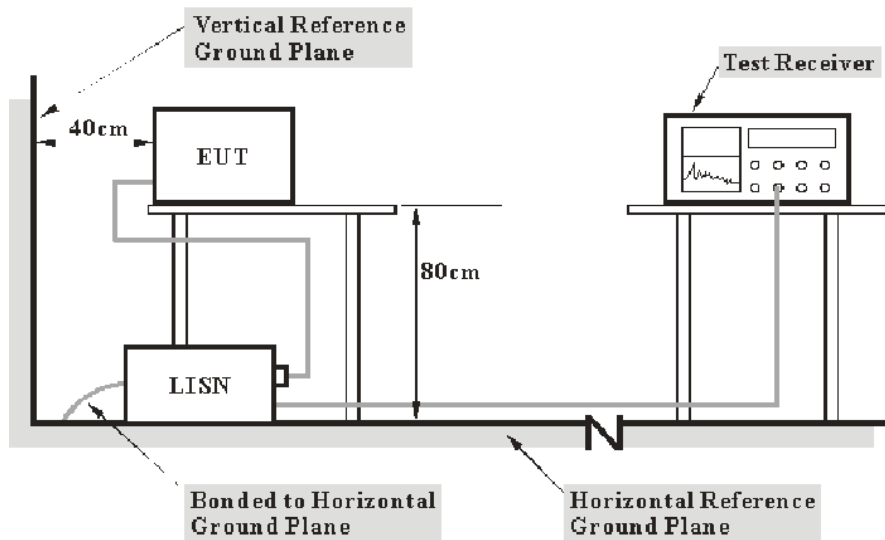

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and Average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

Undesirable Emission

Applicable Standard

FCC §15.407 (b); §15.209; §15.205;


(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:



- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

EUT Setup

9 kHz-30MHz:

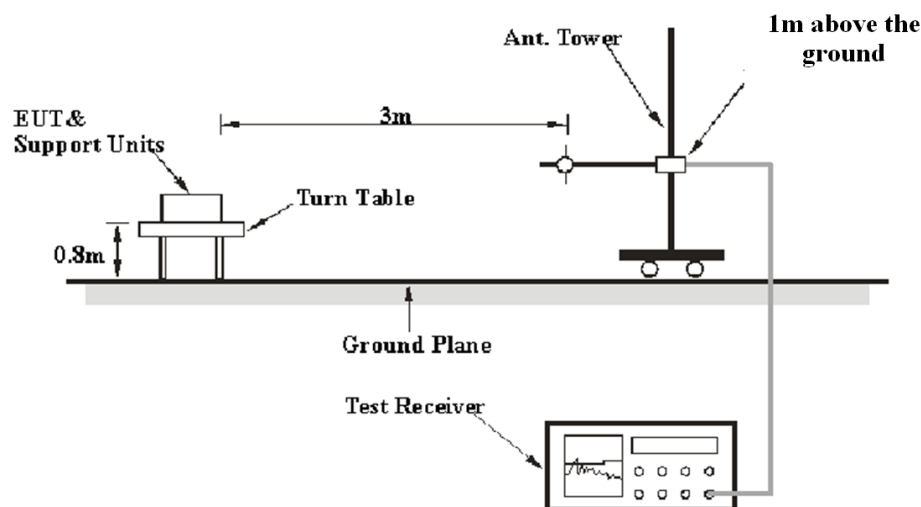

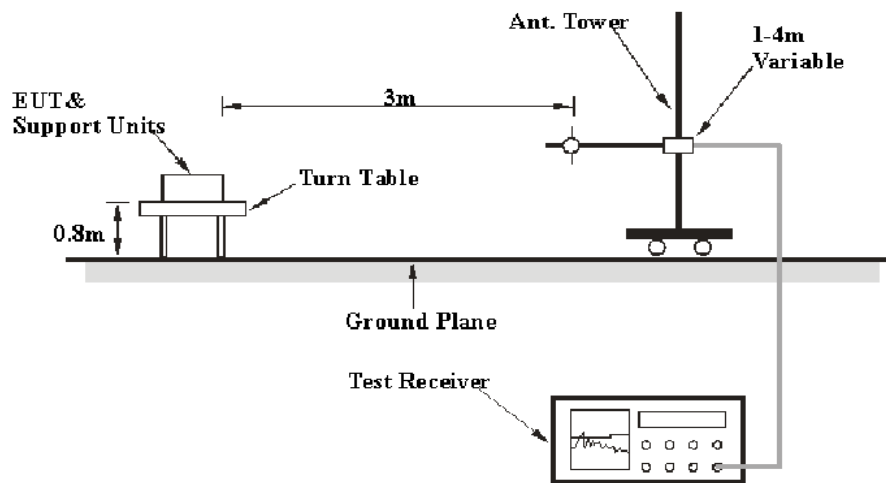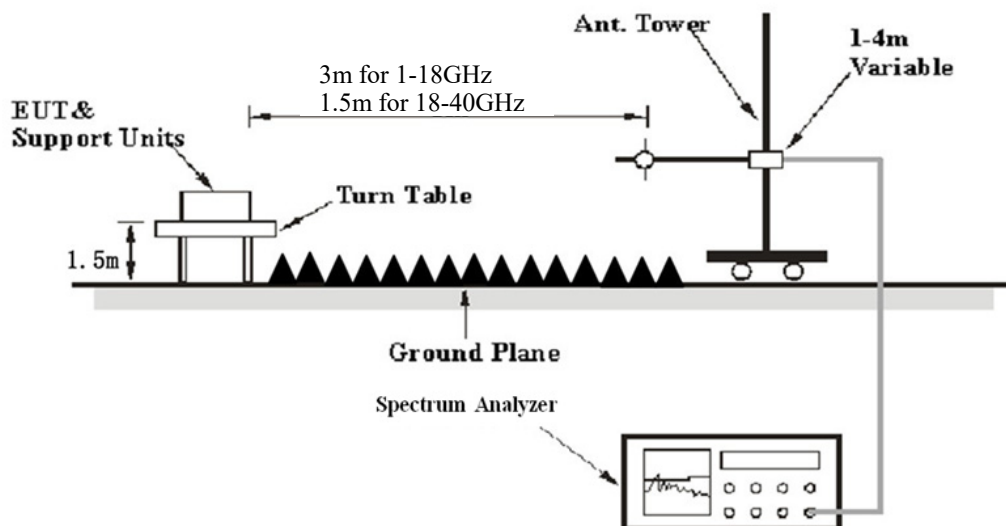30MHz-1GHz:**Above 1 GHz:**

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC 15.209 and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-1GHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement	Detector
9 kHz – 150 kHz	/	/	200 Hz	QP	QP
	300 Hz	1 kHz	/	PK	Peak
150 kHz – 30 MHz	/	/	9 kHz	QP	QP
	10 kHz	30 kHz	/	PK	Peak
30 MHz – 1000 MHz	/	/	120 kHz	QP	QP
	100 kHz	300 kHz	/	PK	Peak

1-40GHz:

Pre-scan

Measurement	Duty cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3 MHz	Peak
AV	>98%	1MHz	1 kHz	Peak
	<98%	1MHz	≥1/Ton	Peak

Final measurement for emission identified during pre-scan

Measurement	Duty cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3 MHz	Peak
AV	>98%	1MHz	10 Hz	Peak
	<98%	1MHz	≥1/Ton	Peak

Note: Ton is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Radiated Spurious Emission

During the radiated emission test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all the installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

According to ANSI C63.10-2020,9.2.1: For field strength measurements made at other than the distance specified by the limit, extrapolate the measured field strength to the field strength at the distance specified by the limit using an inverse distance correction factor (20 dB/decade of distance)

$$E_{\text{SpecLimit}} = E_{\text{Meas}} + 20 \log \left(\frac{d_{\text{Meas}}}{d_{\text{SpecLimit}}} \right)$$

where

$E_{\text{SpecLimit}}$	is the field strength of the emission at the distance specified by the limit, in dB μ V/m
E_{Meas}	is the field strength of the emission at the measurement distance, in dB μ V/m
d_{Meas}	is the measurement distance, in m
$d_{\text{SpecLimit}}$	is the distance specified by the limit, in m

So the extrapolation factor of 1m is $20 \cdot \log(1.5/3) = -6.0$ dB, for 18-40GHz range, the limit of 1.5m distance was added by 6.0dB from limit of 3m to compared with the result measurement at 1.5m distance.

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit} &= \text{Level} - \text{Limit}; \text{Margin} = \text{Limit} - \text{Corrected Amplitude} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

26 dB & 6dB Emission Bandwidth

Applicable Standard

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2020 Section 12.5.1 & 12.5.2 & 12.5.3

12.5.1 Emission bandwidth for the band 5.725 GHz to 5.85 GHz

The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max-hold.
- e) Sweep = No faster than coupled (auto) time.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

12.5.2 Emission bandwidth for all other bands

The procedure for this method is as follows:


- a) Set RBW = shall be in the range of 1% to 5% of the emission bandwidth.
- b) Set the VBW $>$ RBW.
- c) Detector = peak.
- d) Trace mode = max-hold.
- e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is in the range of 1% to 5%.

12.5.3 Occupied bandwidth

See 6.9.3 for the measurement procedure for OBW.

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be at least three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.6.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max-hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing spectral plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

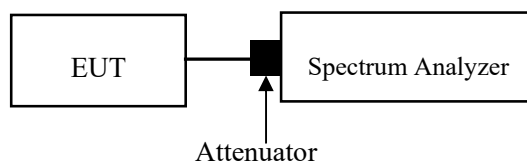

Conducted Transmitter Output Power

Applicable Standard

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

According to ANSI C63.10-2020 Section 12.4.3.2 Method PM-G

- a. Place the EUT on a bench and set it in transmitting mode.
- b. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.

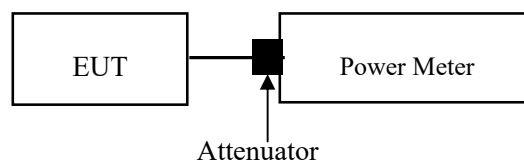

Note: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was added with offset into test equipment, the total offset consists of attenuator and/or RF cable and/or power splitter loss

Power Spectral Density


For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

According to ANSI C63.10-2020 Clause 12.6 Method SA-2 should be applied

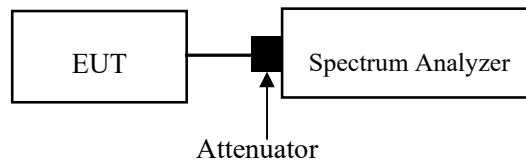

Note: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was added with offset into test equipment, the total offset consists of attenuator and/or RF cable and/or power splitter loss


Duty Cycle

Test Procedure

According to ANSI C63.10-2020 Section 12.2

Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

- a) A diode detector and an oscilloscope that together have a sufficiently short response time to permit accurate measurements of the ON and OFF times of the transmitted signal.
- b) The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:
 - 1) Set the center frequency of the instrument to the center frequency of the transmission.
 - 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
 - 3) Set $VBW \geq RBW$. Set detector = peak or average.
 - 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

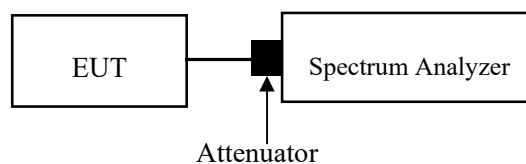

ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Antenna Connector Construction

The EUT has one internal antenna which was permanently attached, fulfill the requirement of this section. Please refer to the EUT photos.

Type	Antenna Gain [#]	Impedance	Frequency Range
PCB	0.75dBi	50Ω	5150-5250MHz
PCB	1.53dBi	50Ω	5250-5350MHz
PCB	3.12dBi	50Ω	5470-5725MHz
PCB	1.77dBi	50Ω	5725-5850MHz

Result: Compliant


TEST DATA AND RESULTS

Conducted Emissions

Temperature (°C)	23.1-24.3	Relative Humidity (%)	51-55
ATM Pressure (kPa)	101.1	Test engineer	Macy.shi
Test date	2024.11.26~2025.05.12		
EUT operation mode	Transmitting(Maximum output power mode 802.11ax40 5755MHz)		

Power by Adapter 1

AC120V 60 Hz, Line

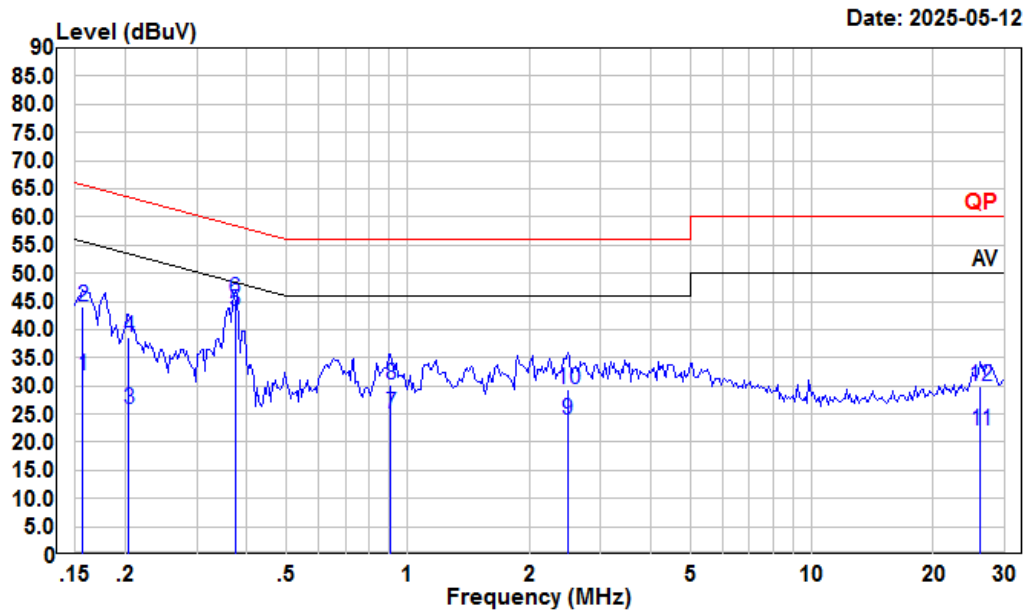

Condition: Line


Project : 2401Y41479E-RF

tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.156	11.36	31.92	10.44	10.12	55.65	-23.73	Average
2	0.156	23.52	44.08	10.44	10.12	65.65	-21.57	QP
3	0.204	5.11	25.90	10.70	10.09	53.45	-27.55	Average
4	0.204	17.83	38.62	10.70	10.09	63.45	-24.83	QP
5	0.373	22.48	43.15	10.56	10.11	48.43	-5.28	Average
6	0.373	24.66	45.33	10.56	10.11	58.43	-13.10	QP
7	0.909	4.34	25.12	10.68	10.10	46.00	-20.88	Average
8	0.909	9.38	30.16	10.68	10.10	56.00	-25.84	QP
9	2.487	2.78	23.99	11.04	10.17	46.00	-22.01	Average
10	2.487	8.06	29.27	11.04	10.17	56.00	-26.73	QP
11	26.139	1.18	22.05	10.67	10.20	50.00	-27.95	Average
12	26.139	9.02	29.89	10.67	10.20	60.00	-30.11	QP

AC120V 60 Hz, Neutral

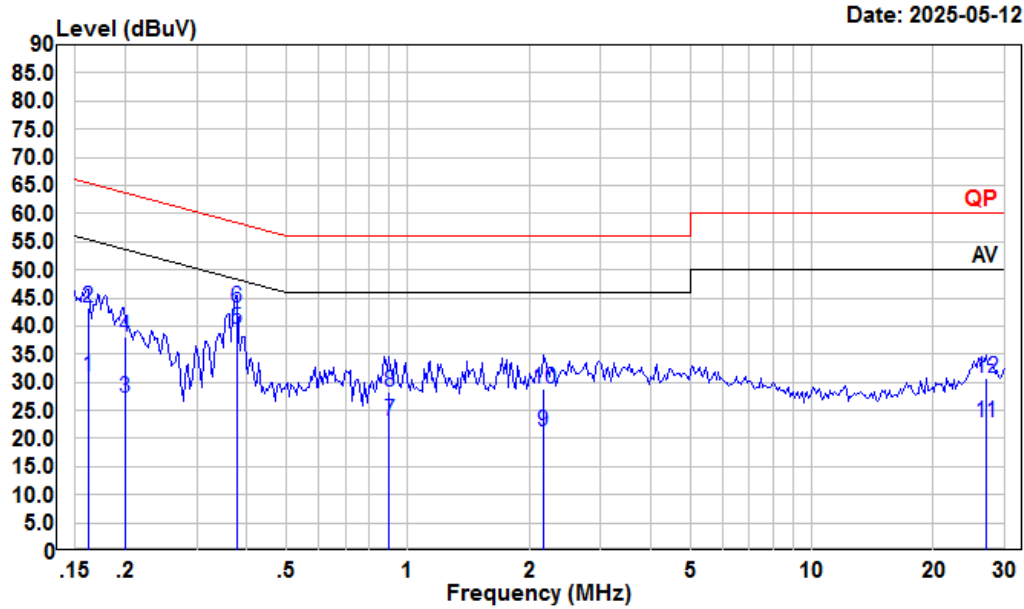

Condition: Neutral

Project : 2401Y41479E-RF


tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz

	Freq	Read Level	LISN Level	Cable Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.162	10.46	31.07	10.50	10.11	55.38	-24.31	Average
2	0.162	22.76	43.37	10.50	10.11	65.38	-22.01	QP
3	0.200	6.33	27.22	10.80	10.09	53.62	-26.40	Average
4	0.200	17.25	38.14	10.80	10.09	63.62	-25.48	QP
5	0.377	18.62	39.32	10.59	10.11	48.34	-9.02	Average
6	0.377	22.47	43.17	10.59	10.11	58.34	-15.17	QP
7	0.899	2.17	23.01	10.74	10.10	46.00	-22.99	Average
8	0.899	7.36	28.20	10.74	10.10	56.00	-27.80	QP
9	2.167	0.32	21.23	10.73	10.18	46.00	-24.77	Average
10	2.167	8.01	28.92	10.73	10.18	56.00	-27.08	QP
11	26.984	1.90	22.90	10.80	10.20	50.00	-27.10	Average
12	26.984	9.84	30.84	10.80	10.20	60.00	-29.16	QP

Power by Adapter 2

AC120V 60 Hz, Line

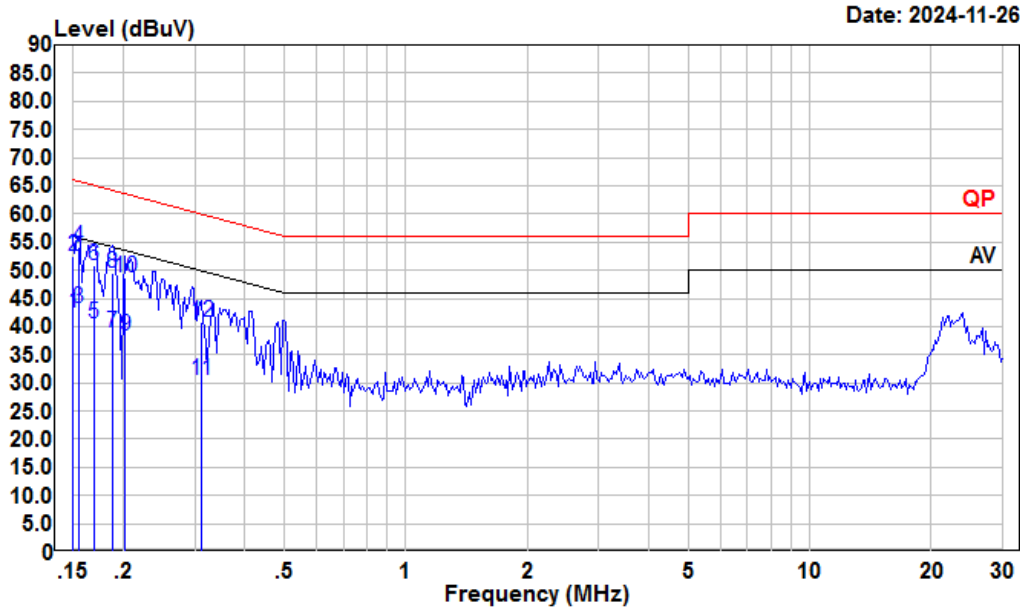

Condition: Line


Project : 2401Y41479E-RF

tester : Macy.shi Note:Transmitting

Setting : RBW:9KHz

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.150	21.30	42.33	10.90	10.13	56.00	-13.67	Average
2	0.150	31.50	52.53	10.90	10.13	66.00	-13.47	QP
3	0.155	22.30	43.31	10.89	10.12	55.74	-12.43	Average
4	0.155	33.03	54.04	10.89	10.12	65.74	-11.70	QP
5	0.169	19.50	40.46	10.86	10.10	55.03	-14.57	Average
6	0.169	29.90	50.86	10.86	10.10	65.03	-14.17	QP
7	0.187	17.91	38.82	10.82	10.09	54.15	-15.33	Average
8	0.187	28.51	49.42	10.82	10.09	64.15	-14.73	QP
9	0.202	17.54	38.43	10.80	10.09	53.54	-15.11	Average
10	0.202	27.85	48.74	10.80	10.09	63.54	-14.80	QP
11	0.312	9.72	30.48	10.65	10.11	49.93	-19.45	Average
12	0.312	20.02	40.78	10.65	10.11	59.93	-19.15	QP

AC120V 60 Hz, Neutral

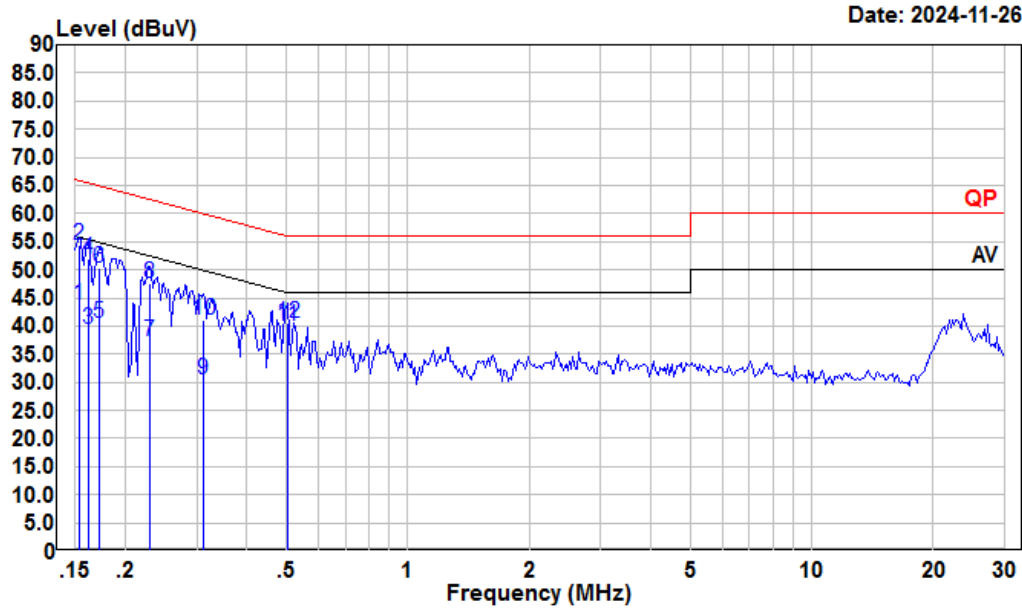

Condition: Neutral

Project : 2401Y41479E-RF


tester : Macy.shi Note:Transmitting

Setting : RBW:9KHz

	Freq	Read Level	LISN Level	Cable Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.153	23.04	43.76	10.59	10.13	55.82	-12.06	Average
2	0.153	33.60	54.32	10.59	10.13	65.82	-11.50	QP
3	0.162	18.90	39.56	10.55	10.11	55.38	-15.82	Average
4	0.162	31.30	51.96	10.55	10.11	65.38	-13.42	QP
5	0.172	19.90	40.50	10.50	10.10	54.86	-14.36	Average
6	0.172	29.70	50.30	10.50	10.10	64.86	-14.56	QP
7	0.229	16.78	37.30	10.44	10.08	52.48	-15.18	Average
8	0.229	27.21	47.73	10.44	10.08	62.48	-14.75	QP
9	0.312	9.90	30.56	10.55	10.11	49.93	-19.37	Average
10	0.312	20.29	40.95	10.55	10.11	59.93	-18.98	QP
11	0.502	19.05	39.89	10.70	10.14	46.00	-6.11	Average
12	0.502	19.78	40.62	10.70	10.14	56.00	-15.38	QP

Power by Adapter 3

AC120V 60 Hz, Line

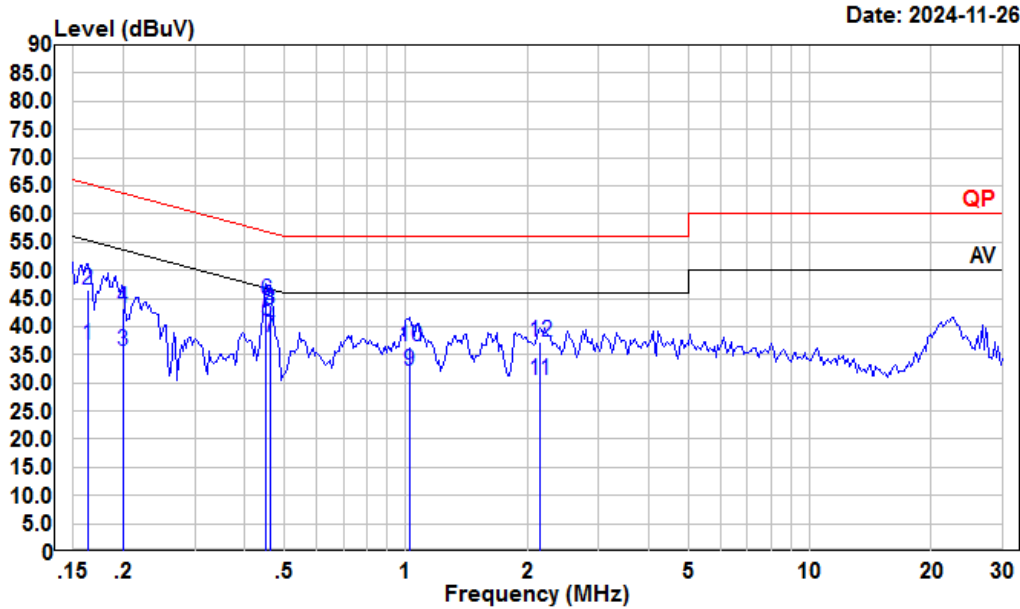

Condition: Line


Project : 2401Y41479E-RF

tester : Macy.shi Note:Transmitting

Setting : RBW:9KHz

		Read		LISN	Cable	Limit	Over	
	Freq	Level	Level	Factor	Loss	Line	Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.163	15.73	36.71	10.87	10.11	55.30	-18.59	Average
2	0.163	25.52	46.50	10.87	10.11	65.30	-18.80	QP
3	0.200	14.68	35.57	10.80	10.09	53.62	-18.05	Average
4	0.200	22.48	43.37	10.80	10.09	63.62	-20.25	QP
5	0.452	20.31	40.96	10.53	10.12	46.85	-5.89	Average
6	0.452	23.97	44.62	10.53	10.12	56.85	-12.23	QP
7	0.461	17.30	37.95	10.53	10.12	46.67	-8.72	Average
8	0.461	22.40	43.05	10.53	10.12	56.67	-13.62	QP
9	1.021	11.60	32.12	10.41	10.11	46.00	-13.88	Average
10	1.021	15.87	36.39	10.41	10.11	56.00	-19.61	QP
11	2.144	9.69	30.44	10.57	10.18	46.00	-15.56	Average
12	2.144	16.50	37.25	10.57	10.18	56.00	-18.75	QP

AC120V 60 Hz, Neutral

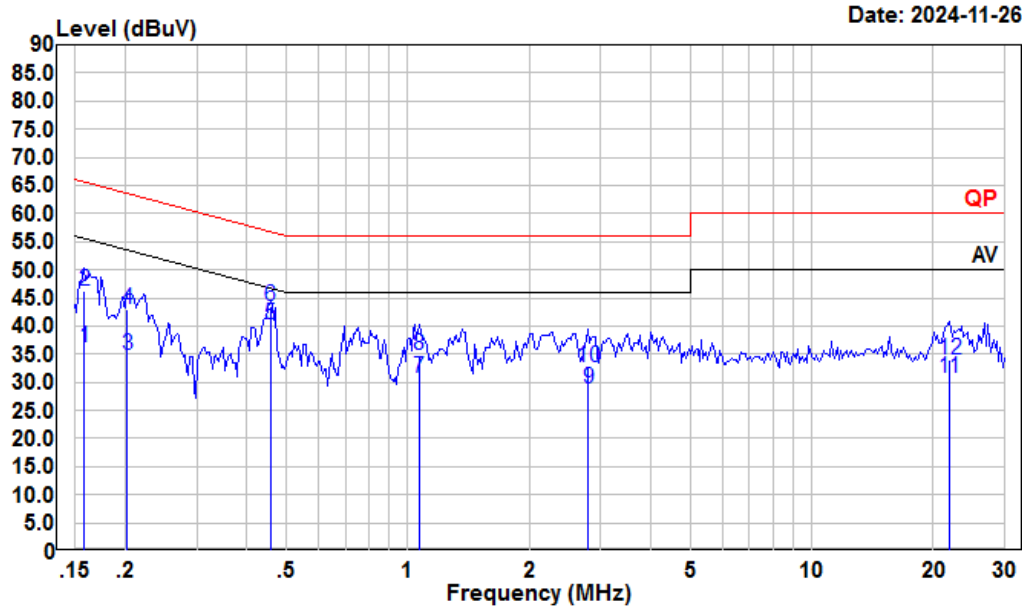

Condition: Neutral

Project : 2401Y41479E-RF


tester : Macy.shi Note:Transmitting

Setting : RBW:9KHz

	Freq	Read Level	LISN Level	Cable Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.158	15.54	36.22	10.56	10.12	55.56	-19.34	Average
2	0.158	25.60	46.28	10.56	10.12	65.56	-19.28	QP
3	0.202	14.25	34.74	10.40	10.09	53.54	-18.80	Average
4	0.202	22.43	42.92	10.40	10.09	63.54	-20.62	QP
5	0.456	19.37	40.16	10.67	10.12	46.76	-6.60	Average
6	0.456	22.78	43.57	10.67	10.12	56.76	-13.19	QP
7	1.065	9.79	30.76	10.85	10.12	46.00	-15.24	Average
8	1.065	13.81	34.78	10.85	10.12	56.00	-21.22	QP
9	2.794	8.34	28.92	10.40	10.18	46.00	-17.08	Average
10	2.794	12.12	32.70	10.40	10.18	56.00	-23.30	QP
11	21.830	9.88	30.72	10.66	10.18	50.00	-19.28	Average
12	21.830	13.09	33.93	10.66	10.18	60.00	-26.07	QP

Power by POE

AC120V 60 Hz, Line

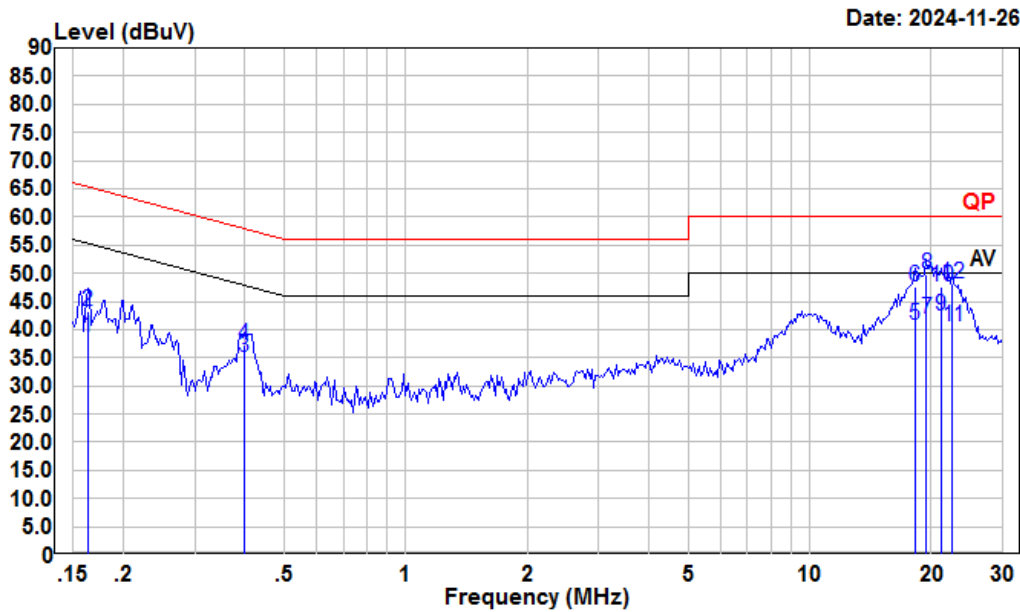

Condition: Line


Project : 2401Y41479E-RF

tester : Macy.shi Note:Transmitting

Setting : RBW:9KHz

	Freq	Read Level	LISN Level	Cable Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.163	17.75	38.73	10.87	10.11	55.30	-16.57	Average
2	0.163	22.22	43.20	10.87	10.11	65.30	-22.10	QP
3	0.398	14.32	35.00	10.58	10.10	47.90	-12.90	Average
4	0.398	16.45	37.13	10.58	10.10	57.90	-20.77	QP
5	18.232	19.70	40.69	10.80	10.19	50.00	-9.31	Average
6	18.232	26.60	47.59	10.80	10.19	60.00	-12.41	QP
7	19.428	20.94	41.99	10.87	10.18	50.00	-8.01	Average
8	19.428	28.80	49.85	10.87	10.18	60.00	-10.15	QP
9	21.147	21.31	42.32	10.84	10.17	50.00	-7.68	Average
10	21.147	26.71	47.72	10.84	10.17	60.00	-12.28	QP
11	22.535	19.60	40.56	10.78	10.18	50.00	-9.44	Average
12	22.535	27.30	48.26	10.78	10.18	60.00	-11.74	QP

AC120V 60 Hz, Neutral

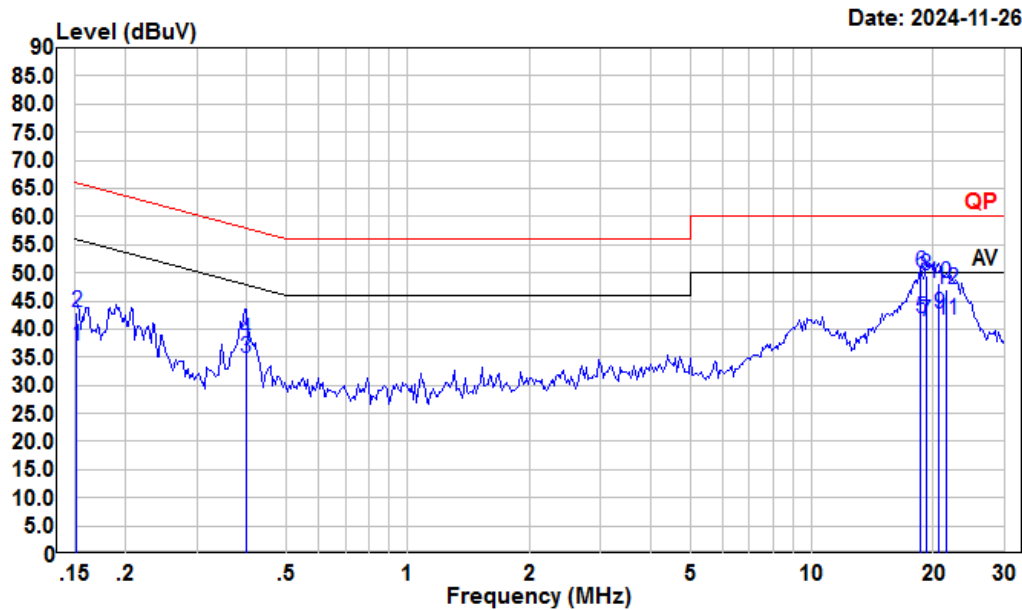

Condition: Neutral

Project : 2401Y41479E-RF

tester : Macy.shi Note:Transmitting

Setting : RBW:9KHz


	Freq	Read Level	LISN Level	Cable Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.152	16.15	36.87	10.59	10.13	55.91	-19.04	Average
2	0.152	22.22	42.94	10.59	10.13	65.91	-22.97	QP
3	0.398	14.21	34.93	10.62	10.10	47.90	-12.97	Average
4	0.398	17.35	38.07	10.62	10.10	57.90	-19.83	QP
5	18.622	21.11	42.01	10.72	10.18	50.00	-7.99	Average
6	18.622	29.21	50.11	10.72	10.18	60.00	-9.89	QP
7	19.224	20.46	41.35	10.71	10.18	50.00	-8.65	Average
8	19.224	28.64	49.53	10.71	10.18	60.00	-10.47	QP
9	20.704	21.91	42.76	10.68	10.17	50.00	-7.24	Average
10	20.704	27.21	48.06	10.68	10.17	60.00	-11.94	QP
11	21.600	20.90	41.74	10.66	10.18	50.00	-8.26	Average
12	21.600	26.10	46.94	10.66	10.18	60.00	-13.06	QP

Undesirable Emission

Temperature (°C)	23.8&25.5	Relative Humidity (%)	41&50.2
ATM Pressure (kPa):	101.2	Test engineer:	Alen Yan&Zenos Qiao
Test date:	Below 1GHz: 2025.03.24 Above 1GHz: 2025.04.26~2025-04.28		
EUT operation mode:	Below 1GHz: Transmitting (Maximum output power mode 802.11ax40 5755MHz) Above 1GHz: Transmitting		
Note:	1. For the radiated spurious emission below 30MHz, only the worst case (parallel) was recorded. 2. When the test result of peak was less than the limit of QP/Average more than 6dB, just peak value were recorded.		

Below 1GHz:


9kHz-150kHz

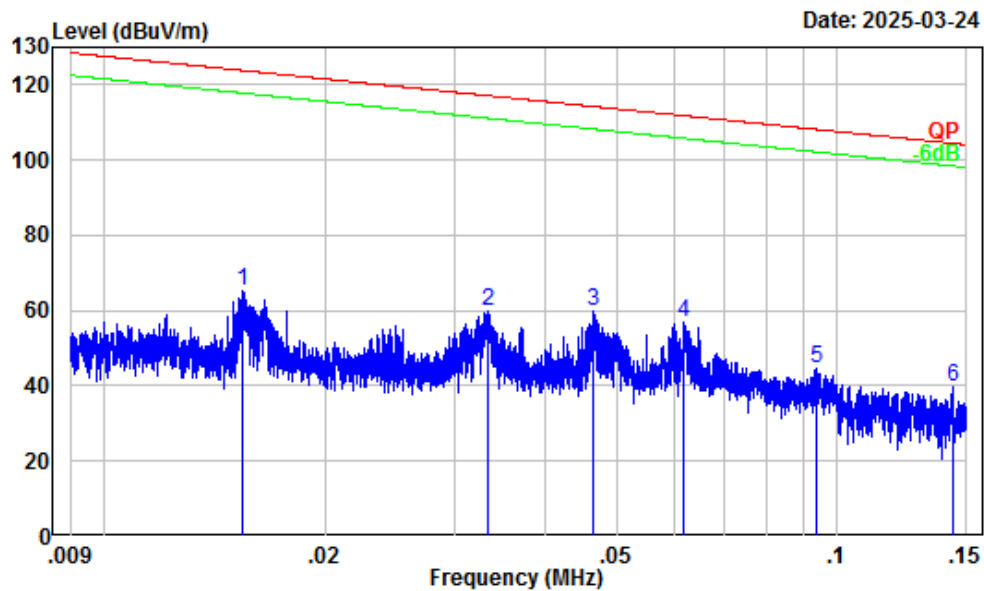

Site : Chamber A
Condition : 3m
Project Number : 2401Y41479E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Alex Yan

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.02	31.27	33.77	65.04	123.83	-58.79	Peak
2	0.03	28.14	31.64	59.78	117.12	-57.34	Peak
3	0.05	26.77	33.24	60.01	114.26	-54.25	Peak
4	0.06	25.22	31.59	56.81	111.78	-54.97	Peak
5	0.09	22.44	22.23	44.67	108.17	-63.50	Peak
6	0.14	19.40	20.18	39.58	104.44	-64.86	Peak


150kHz-30MHz

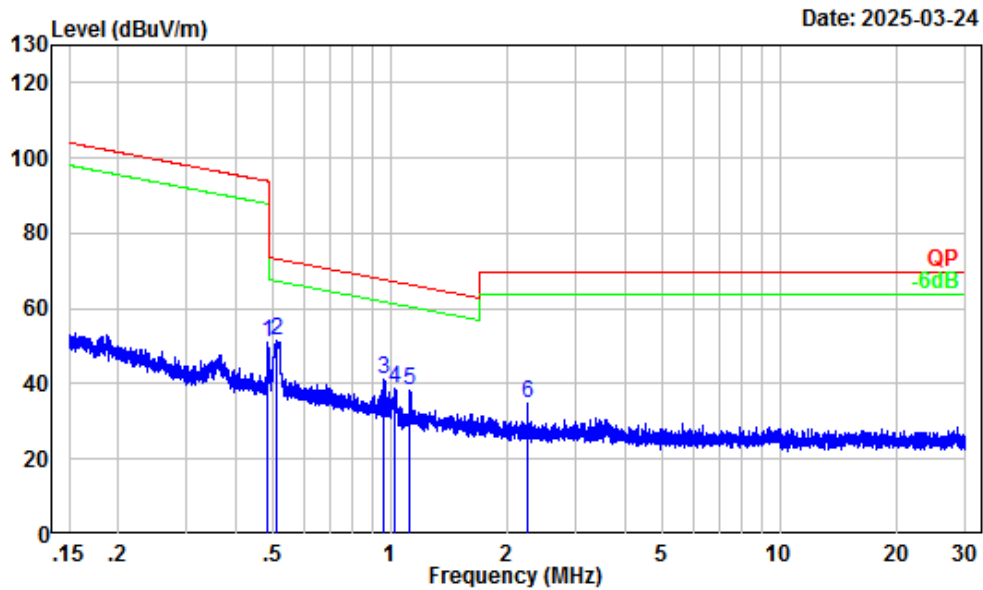

Site : Chamber A
Condition : 3m
Project Number : 2401Y41479E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 10/30kHz
Tester : Alex Yan

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.48	6.69	44.45	51.14	93.89	-42.75	Peak
2	0.51	6.27	45.16	51.43	73.44	-22.01	Peak
3	0.97	1.45	39.71	41.16	67.78	-26.62	Peak
4	1.03	1.11	37.89	39.00	67.19	-28.19	Peak
5	1.12	0.85	37.21	38.06	66.44	-28.38	Peak
6	2.26	-1.74	36.79	35.05	69.54	-34.49	Peak


30MHz-1GHz_Horizontal

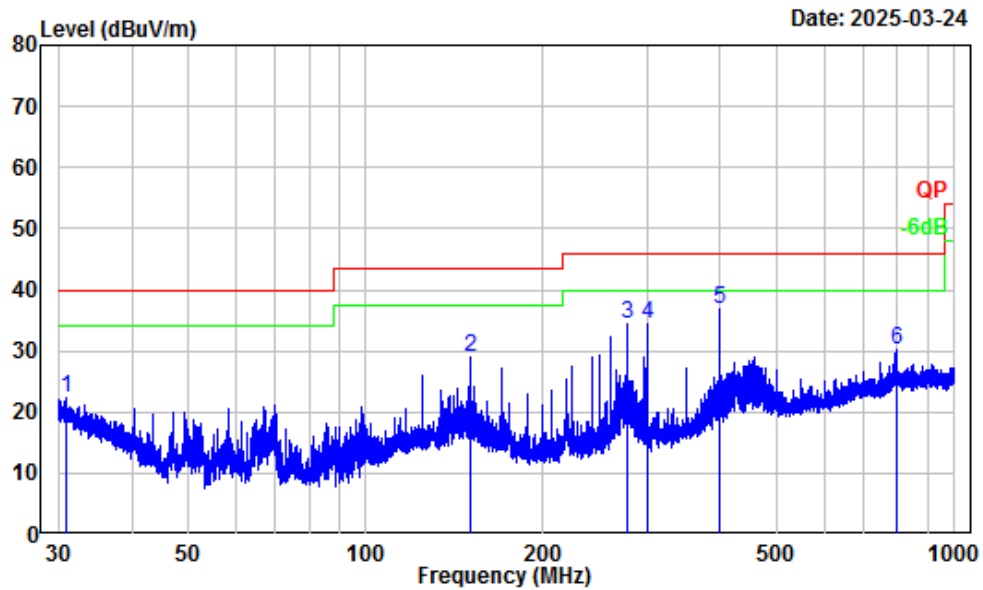

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2401Y41479E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Alex Yan

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.89	-6.42	28.66	22.24	40.00	-17.76	Peak
2	150.01	-12.46	41.54	29.08	43.50	-14.42	Peak
3	277.95	-11.28	45.77	34.49	46.00	-11.51	Peak
4	299.97	-11.20	45.67	34.47	46.00	-11.53	Peak
5	400.08	-8.41	45.14	36.73	46.00	-9.27	Peak
6	800.03	-2.14	32.22	30.08	46.00	-15.92	Peak

30MHz-1GHz_Vertical

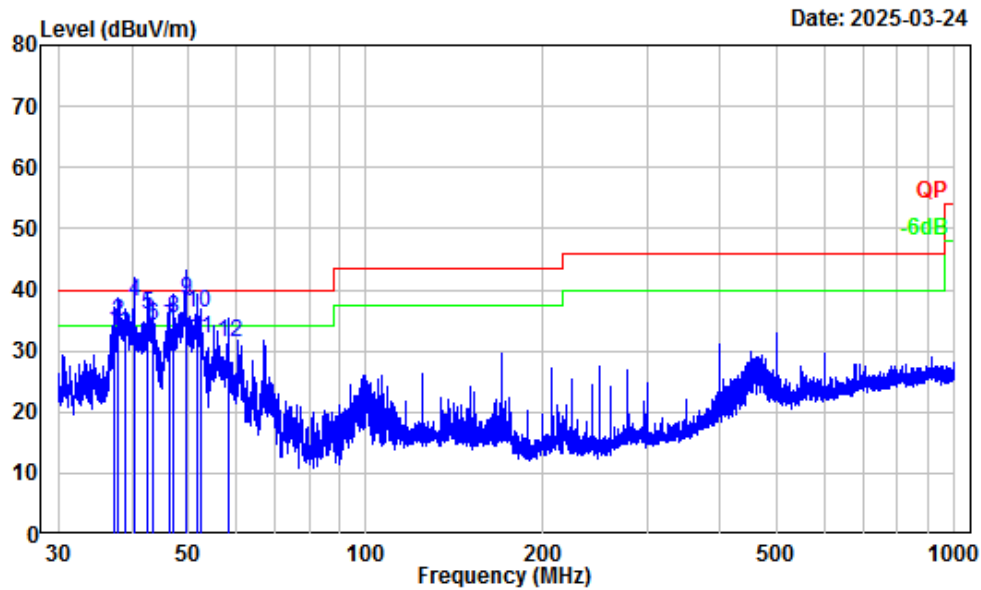

Site : Chamber A
 Condition : 3m Vertical
 Project Number : 2401Y41479E-RF
 Test Mode : 5G WIFI Transmitting
 Detector: Peak RBW/VBW: 100/300kHz
 Tester : Alex Yan

	Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	37.30	-10.48	43.57	33.09	40.00	-6.91	QP
2	37.98	-10.96	45.57	34.61	40.00	-5.39	QP
3	39.13	-11.76	44.49	32.73	40.00	-7.27	QP
4	40.35	-12.61	50.67	38.06	40.00	-1.94	QP
5	42.66	-14.34	50.21	35.87	40.00	-4.13	QP
6	43.39	-14.80	48.94	34.14	40.00	-5.86	QP
7	46.22	-16.57	50.31	33.74	40.00	-6.26	QP
8	46.97	-16.94	52.20	35.26	40.00	-4.74	QP
9	49.34	-17.80	56.11	38.31	40.00	-1.69	QP
10	51.57	-18.18	54.26	36.08	40.00	-3.92	QP
11	52.41	-18.25	50.20	31.95	40.00	-8.05	QP
12	58.25	-18.22	49.48	31.26	40.00	-8.74	QP

Above 1GHz:**5150-5250 MHz**

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11a							
Low Channel							
10360	58.7	PK	H	2.53	61.23	68.2	-6.97
10360	59.22	PK	V	2.53	61.75	68.2	-6.45
Middle Channel							
10400	59.03	PK	H	2.55	61.58	68.2	-6.62
10400	59.56	PK	V	2.55	62.11	68.2	-6.09
High Channel							
10480	59.35	PK	H	2.25	61.6	68.2	-6.6
10480	59.89	PK	V	2.25	62.14	68.2	-6.06
802.11ac20							
Low Channel							
10360	58.23	PK	H	2.53	60.76	68.2	-7.44
10360	58.75	PK	V	2.53	61.28	68.2	-6.92
Middle Channel							
10400	58.56	PK	H	2.55	61.11	68.2	-7.09
10400	59.09	PK	V	2.55	61.64	68.2	-6.56
High Channel							
10480	58.88	PK	H	2.25	61.13	68.2	-7.07
10480	59.41	PK	V	2.25	61.66	68.2	-6.54
802.11ac40							
Low Channel							
10380	56.12	PK	H	2.54	58.66	68.2	-9.54
10380	56.65	PK	V	2.54	59.19	68.2	-9.01
High Channel							
10460	56.64	PK	H	2.32	58.96	68.2	-9.24
10460	57.18	PK	V	2.32	59.5	68.2	-8.7

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ax20							
Low Channel							
10360	58.01	PK	H	2.53	60.54	68.2	-7.66
10360	58.53	PK	V	2.53	61.06	68.2	-7.14
Middle Channel							
10400	58.34	PK	H	2.55	60.89	68.2	-7.31
10400	58.87	PK	V	2.55	61.42	68.2	-6.78
High Channel							
10480	58.65	PK	H	2.25	60.9	68.2	-7.3
10480	59.19	PK	V	2.25	61.44	68.2	-6.76
802.11ax40							
Low Channel							
10380	55.94	PK	H	2.54	58.48	68.2	-9.72
10380	56.46	PK	V	2.54	59	68.2	-9.2
High Channel							
10460	56.45	PK	H	2.32	58.77	68.2	-9.43
10460	56.99	PK	V	2.32	59.31	68.2	-8.89

5250-5350MHz

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11a							
Low Channel							
10520	59.17	PK	H	2.18	61.35	68.2	-6.85
10520	60.01	PK	V	2.18	62.19	68.2	-6.01
Middle Channel							
10560	59.52	PK	H	2.18	61.7	68.2	-6.5
10560	60.34	PK	V	2.18	62.52	68.2	-5.68
High Channel							
10640	59.79	PK	H	2.59	62.38	74	-11.62
10640	47.32	AV	H	2.59	49.91	54	-4.09
10640	60.68	PK	V	2.59	63.27	74	-10.73
10640	47.83	AV	V	2.59	50.42	54	-3.58
802.11ac20							
Low Channel							
10520	58.9	PK	H	2.18	61.08	68.2	-7.12
10520	59.72	PK	V	2.18	61.9	68.2	-6.3
Middle Channel							
10560	59.23	PK	H	2.18	61.41	68.2	-6.79
10560	60.06	PK	V	2.18	62.24	68.2	-5.96
High Channel							
10640	59.61	PK	H	2.59	62.2	74	-11.8
10640	47.07	AV	H	2.59	49.66	54	-4.34
10640	60.45	PK	V	2.59	63.04	74	-10.96
10640	47.59	AV	V	2.59	50.18	54	-3.82
802.11ac40							
Low Channel							
10540	57.86	PK	H	2.18	60.04	68.2	-8.16
10540	58.69	PK	V	2.18	60.87	68.2	-7.33
High Channel							
10620	58.47	PK	H	2.37	60.84	74	-13.16
10620	44.84	AV	H	2.37	47.21	54	-6.79
10620	59.28	PK	V	2.37	61.65	74	-12.35
10620	45.36	AV	V	2.37	47.73	54	-6.27

Frequency (MHz)	Reading (dB μ V)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
802.11ax20							
Low Channel							
10520	58.67	PK	H	2.18	60.85	68.2	-7.35
10520	59.5	PK	V	2.18	61.68	68.2	-6.52
Middle Channel							
10560	59.01	PK	H	2.18	61.19	68.2	-7.01
10560	59.84	PK	V	2.18	62.02	68.2	-6.18
High Channel							
10640	59.36	PK	H	2.59	61.95	74	-12.05
10640	47.09	AV	H	2.59	49.68	54	-4.32
10640	60.18	PK	V	2.59	62.77	74	-11.23
10640	47.65	AV	V	2.59	50.24	54	-3.76
802.11ax40							
Low Channel							
10540	57.6	PK	H	2.18	59.78	68.2	-8.42
10540	58.42	PK	V	2.18	60.6	68.2	-7.6
High Channel							
10620	58.22	PK	H	2.37	60.59	74	-13.41
10620	44.63	AV	H	2.37	47	54	-7
10620	59.05	PK	V	2.37	61.42	74	-12.58
10620	45.17	AV	V	2.37	47.54	54	-6.46

5470-5725MHz

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11a							
Low Channel							
11000	52.31	PK	H	4.29	56.6	74	-17.4
11000	39.26	AV	H	4.29	43.55	54	-10.45
11000	52.84	PK	V	4.29	57.13	74	-16.87
11000	39.55	AV	V	4.29	43.84	54	-10.16
Middle Channel							
11160	52.96	PK	H	3.5	56.46	74	-17.54
11160	40.39	AV	H	3.5	43.89	54	-10.11
11160	53.48	PK	V	3.5	56.98	74	-17.02
11160	40.63	AV	V	3.5	44.13	54	-9.87
High Channel							
11400	53.65	PK	H	3.32	56.97	74	-17.03
11400	41.3	AV	H	3.32	44.62	54	-9.38
11400	54.19	PK	V	3.32	57.51	74	-16.49
11400	41.58	AV	V	3.32	44.9	54	-9.1
Cross Channel							
11440	52.57	PK	H	3.42	55.99	74	-18.01
11440	39.98	AV	H	3.42	43.4	54	-10.6
11440	53.12	PK	V	3.42	56.54	74	-17.46
11440	40.24	AV	V	3.42	43.66	54	-10.34

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ac20							
Low Channel							
11000	52.2	PK	H	4.29	56.49	74	-17.51
11000	38.99	AV	H	4.29	43.28	54	-10.72
11000	52.74	PK	V	4.29	57.03	74	-16.97
11000	39.41	AV	V	4.29	43.7	54	-10.3
Middle Channel							
11160	52.83	PK	H	3.5	56.33	74	-17.67
11160	40.05	AV	H	3.5	43.55	54	-10.45
11160	53.36	PK	V	3.5	56.86	74	-17.14
11160	40.27	AV	V	3.5	43.77	54	-10.23
High Channel							
11400	53.45	PK	H	3.32	56.77	74	-17.23
11400	41.16	AV	H	3.32	44.48	54	-9.52
11400	54.03	PK	V	3.32	57.35	74	-16.65
11400	41.39	AV	V	3.32	44.71	54	-9.29
Cross Channel							
11440	52.36	PK	H	3.42	55.78	74	-18.22
11440	39.75	AV	H	3.42	43.17	54	-10.83
11440	52.89	PK	V	3.42	56.31	74	-17.69
11440	39.97	AV	V	3.42	43.39	54	-10.61

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ac40							
Low Channel							
11020	51.72	PK	H	4.1	55.82	74	-18.18
11020	38.95	AV	H	4.1	43.05	54	-10.95
11020	52.23	PK	V	4.1	56.33	74	-17.67
11020	39.18	AV	V	4.1	43.28	54	-10.72
Middle Channel							
11100	52.34	PK	H	3.34	55.68	74	-18.32
11100	39.78	AV	H	3.34	43.12	54	-10.88
11100	52.89	PK	V	3.34	56.23	74	-17.77
11100	40.03	AV	V	3.34	43.37	54	-10.63
High Channel							
11340	53.02	PK	H	3.46	56.48	74	-17.52
11340	40.74	AV	H	3.46	44.2	54	-9.8
11340	53.55	PK	V	3.46	57.01	74	-16.99
11340	40.97	AV	V	3.46	44.43	54	-9.57
Cross Channel							
11420	52.07	PK	H	3.37	55.44	74	-18.56
11420	39.56	AV	H	3.37	42.93	54	-11.07
11420	52.62	PK	V	3.37	55.99	74	-18.01
11420	39.8	AV	V	3.37	43.17	54	-10.83

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ax20							
Low Channel							
11000	52.61	PK	H	4.29	56.9	74	-17.1
11000	39.32	AV	H	4.29	43.61	54	-10.39
11000	53.14	PK	V	4.29	57.43	74	-16.57
11000	39.56	AV	V	4.29	43.85	54	-10.15
Middle Channel							
11160	53.23	PK	H	3.5	56.73	74	-17.27
11160	40.18	AV	H	3.5	43.68	54	-10.32
11160	53.76	PK	V	3.5	57.26	74	-16.74
11160	40.41	AV	V	3.5	43.91	54	-10.09
High Channel							
11400	53.85	PK	H	3.32	57.17	74	-16.83
11400	41.24	AV	H	3.32	44.56	54	-9.44
11400	54.47	PK	V	3.32	57.79	74	-16.21
11400	41.49	AV	V	3.32	44.81	54	-9.19
Cross Channel							
11440	52.82	PK	H	3.42	56.24	74	-17.76
11440	39.9	AV	H	3.42	43.32	54	-10.68
11440	53.36	PK	V	3.42	56.78	74	-17.22
11440	40.13	AV	V	3.42	43.55	54	-10.45

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ax40							
Low Channel							
11020	51.54	PK	H	4.1	55.64	74	-18.36
11020	38.81	AV	H	4.1	42.91	54	-11.09
11020	52.08	PK	V	4.1	56.18	74	-17.82
11020	39.06	AV	V	4.1	43.16	54	-10.84
Middle Channel							
11100	52.21	PK	H	3.34	55.55	74	-18.45
11100	39.59	AV	H	3.34	42.93	54	-11.07
11100	52.75	PK	V	3.34	56.09	74	-17.91
11100	39.83	AV	V	3.34	43.17	54	-10.83
High Channel							
11340	52.89	PK	H	3.46	56.35	74	-17.65
11340	40.62	AV	H	3.46	44.08	54	-9.92
11340	53.41	PK	V	3.46	56.87	74	-17.13
11340	40.85	AV	V	3.46	44.31	54	-9.69
Cross Channel							
11420	51.98	PK	H	3.37	55.35	74	-18.65
11420	39.41	AV	H	3.37	42.78	54	-11.22
11420	52.52	PK	V	3.37	55.89	74	-18.11
11420	39.64	AV	V	3.37	43.01	54	-10.99

5725-5850MHz

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
802.11a							
Low Channel							
11490	52.12	PK	H	3.54	55.66	74	-18.34
11490	39.27	AV	H	3.54	42.81	54	-11.19
11490	52.65	PK	V	3.54	56.19	74	-17.81
11490	39.49	AV	V	3.54	43.03	54	-10.97
Middle Channel							
11570	53.35	PK	H	3.3	56.65	74	-17.35
11570	40.14	AV	H	3.3	43.44	54	-10.56
11570	53.89	PK	V	3.3	57.19	74	-16.81
11570	40.37	AV	V	3.3	43.67	54	-10.33
High Channel							
11650	54.46	PK	H	3.42	57.88	74	-16.12
11650	40.98	AV	H	3.42	44.4	54	-9.6
11650	55.02	PK	V	3.42	58.44	74	-15.56
11650	41.23	AV	V	3.42	44.65	54	-9.35
802.11ac20							
Low Channel							
11490	51.91	PK	H	3.54	55.45	74	-18.55
11490	39.07	AV	H	3.54	42.61	54	-11.39
11490	52.46	PK	V	3.54	56	74	-18
11490	39.33	AV	V	3.54	42.87	54	-11.13
Middle Channel							
11570	53.04	PK	H	3.3	56.34	74	-17.66
11570	39.96	AV	H	3.3	43.26	54	-10.74
11570	53.59	PK	V	3.3	56.89	74	-17.11
11570	40.18	AV	V	3.3	43.48	54	-10.52
High Channel							
11650	54.19	PK	H	3.42	57.61	74	-16.39
11650	40.94	AV	H	3.42	44.36	54	-9.64
11650	54.75	PK	V	3.42	58.17	74	-15.83
11650	41.21	AV	V	3.42	44.63	54	-9.37

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ac40							
Low Channel							
11510	51.82	PK	H	3.53	55.35	74	-18.65
11510	39.25	AV	H	3.53	42.78	54	-11.22
11510	52.34	PK	V	3.53	55.87	74	-18.13
11510	39.49	AV	V	3.53	43.02	54	-10.98
High Channel							
11590	52.47	PK	H	3.21	55.68	74	-18.32
11590	39.68	AV	H	3.21	42.89	54	-11.11
11590	53.03	PK	V	3.21	56.24	74	-17.76
11590	39.91	AV	V	3.21	43.12	54	-10.88
802.11ax20							
Low Channel							
11490	52.19	PK	H	3.54	55.73	74	-18.27
11490	39.26	AV	H	3.54	42.8	54	-11.2
11490	52.72	PK	V	3.54	56.26	74	-17.74
11490	39.51	AV	V	3.54	43.05	54	-10.95
Middle Channel							
11570	53.02	PK	H	3.3	56.32	74	-17.68
11570	40.03	AV	H	3.3	43.33	54	-10.67
11570	53.56	PK	V	3.3	56.86	74	-17.14
11570	41.25	AV	V	3.3	44.55	54	-9.45
High Channel							
11650	53.95	PK	H	3.42	57.37	74	-16.63
11650	40.88	AV	H	3.42	44.3	54	-9.7
11650	54.47	PK	V	3.42	57.89	74	-16.11
11650	41.13	AV	V	3.42	44.55	54	-9.45

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ax40							
Low Channel							
11510	51.91	PK	H	3.53	55.44	74	-18.56
11510	39.12	AV	H	3.53	42.65	54	-11.35
11510	52.45	PK	V	3.53	55.98	74	-18.02
11510	39.35	AV	V	3.53	42.88	54	-11.12
High Channel							
11590	52.63	PK	H	3.21	55.84	74	-18.16
11590	39.54	AV	H	3.21	42.75	54	-11.25
11590	53.25	PK	V	3.21	56.46	74	-17.54
11590	39.79	AV	V	3.21	43	54	-11

Note:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Factor + Reading

Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.

Test plots:


Left Band edge_Horizontal_Peak 5GWi-Fi-Band1-A-5180MHz

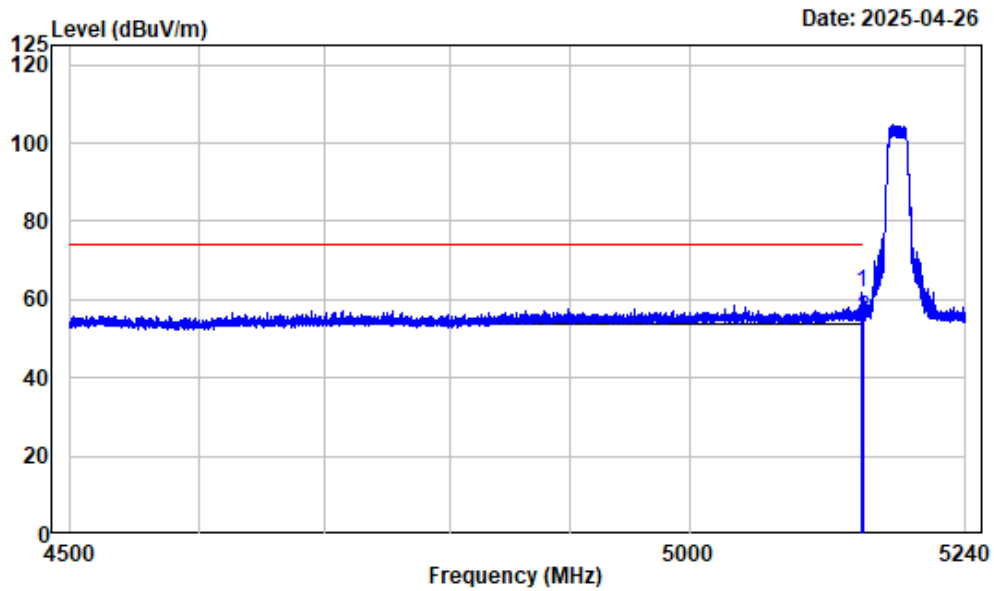

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

	Freq		Read		Limit	Over	Remark
	Factor		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.969	-7.46	69.31	61.85	74.00	-12.15	Peak
2	5150.000	-7.46	62.60	55.14	74.00	-18.86	Peak


Left Band edge_Horizontal_Average 5GWi-Fi-Band1-A-5180MHz

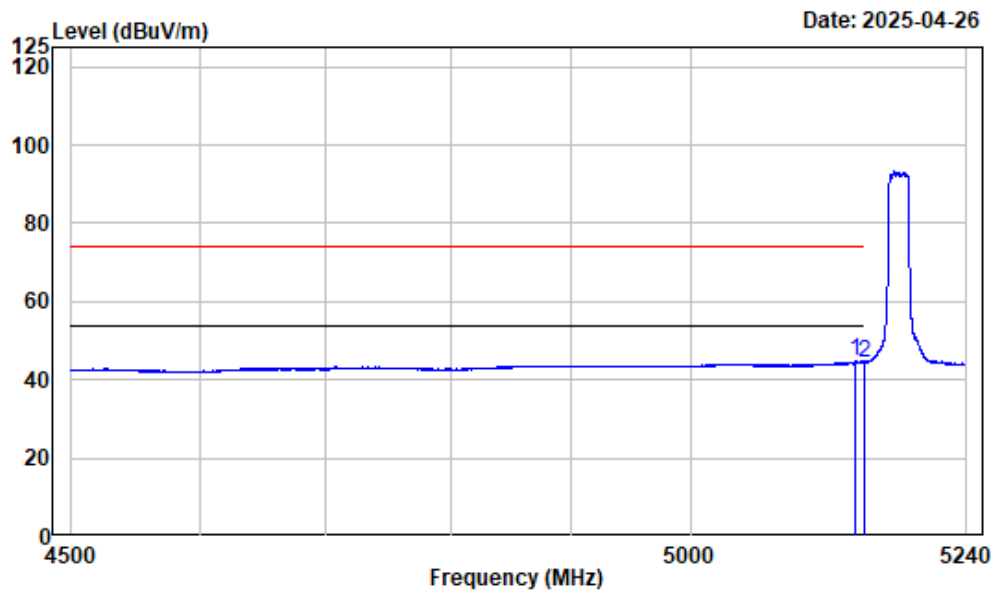

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:200Hz Detector:Peak
Note : 5GWiFi-Band1-A-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5142.400	-7.46	52.30	44.84	54.00	-9.16 Average
2	5150.000	-7.46	51.94	44.48	54.00	-9.52 Average


Left Band edge_Vertical_Peak 5GWi-Fi-Band1-A-5180MHz

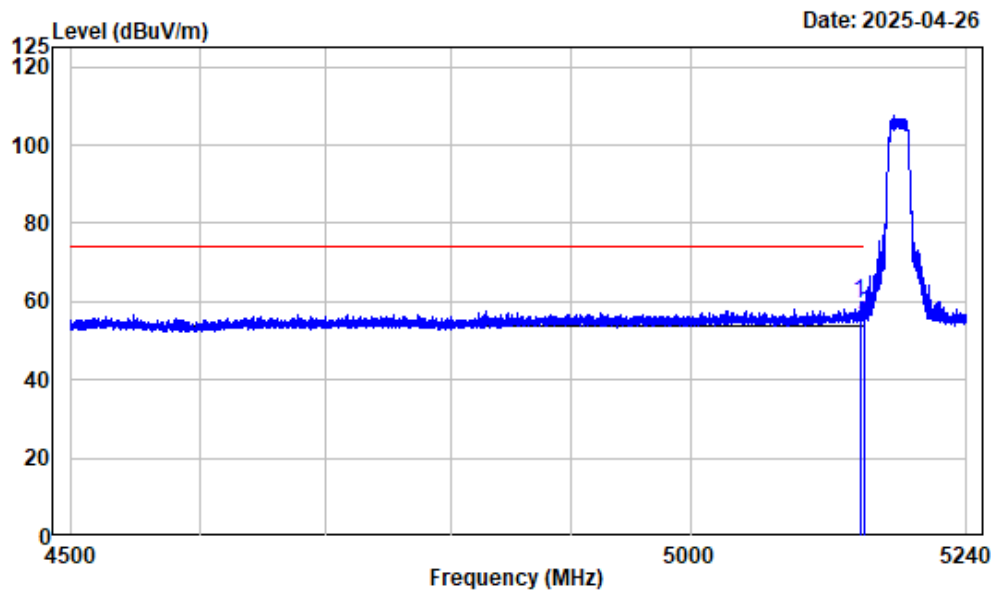

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5145.916	-7.46	67.44	59.98	74.00	-14.02 Peak
2	5150.000	-7.46	63.83	56.37	74.00	-17.63 Peak


Left Band edge_Vertical_Average 5GWi-Fi-Band1-A-5180MHz

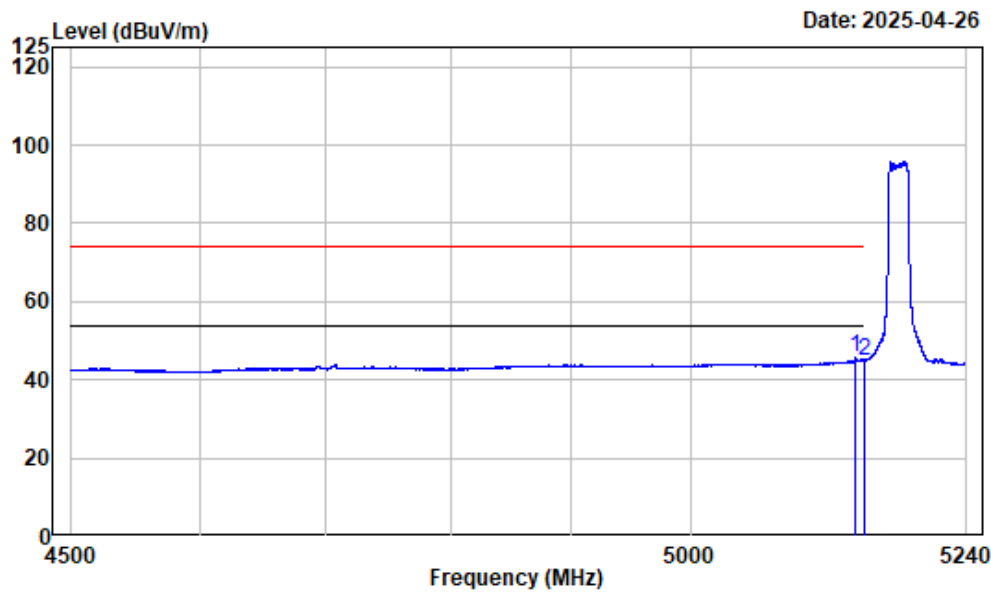

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:200Hz Detector:Peak
Note : 5GWiFi-Band1-A-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5141.753	-7.47	53.13	45.66	54.00	-8.34 Average
2	5150.000	-7.46	52.33	44.87	54.00	-9.13 Average


Right Band edge_Horizontal_Peak 5GWi-Fi-Band1-A-5240MHz

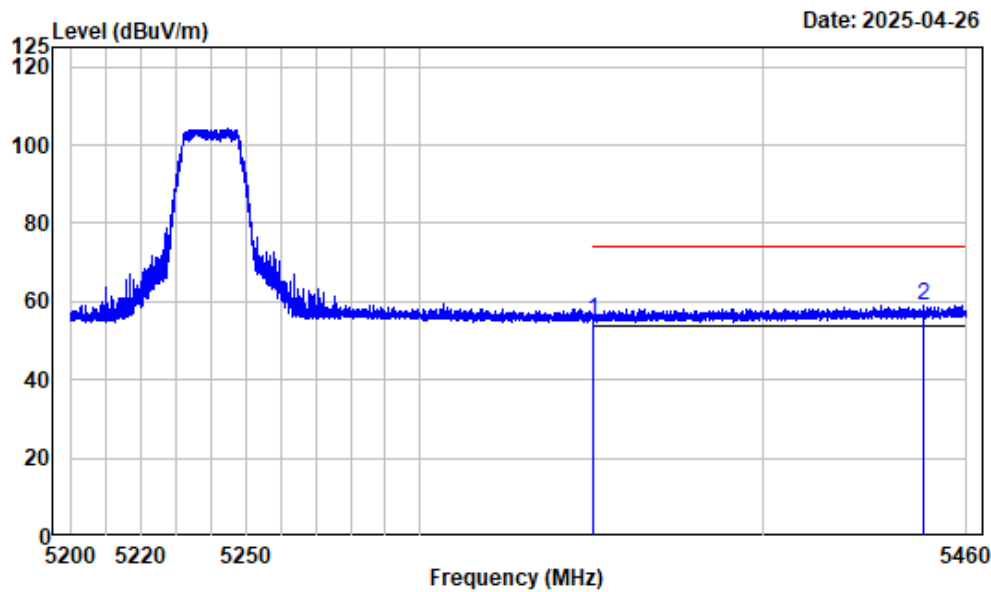

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	61.95	55.21	74.00	-18.79	Peak
2 5447.291	-6.35	65.21	58.86	74.00	-15.14	Peak


Right Band edge_Horizontal_Average 5GWi-Fi-Band1-A-5240MHz

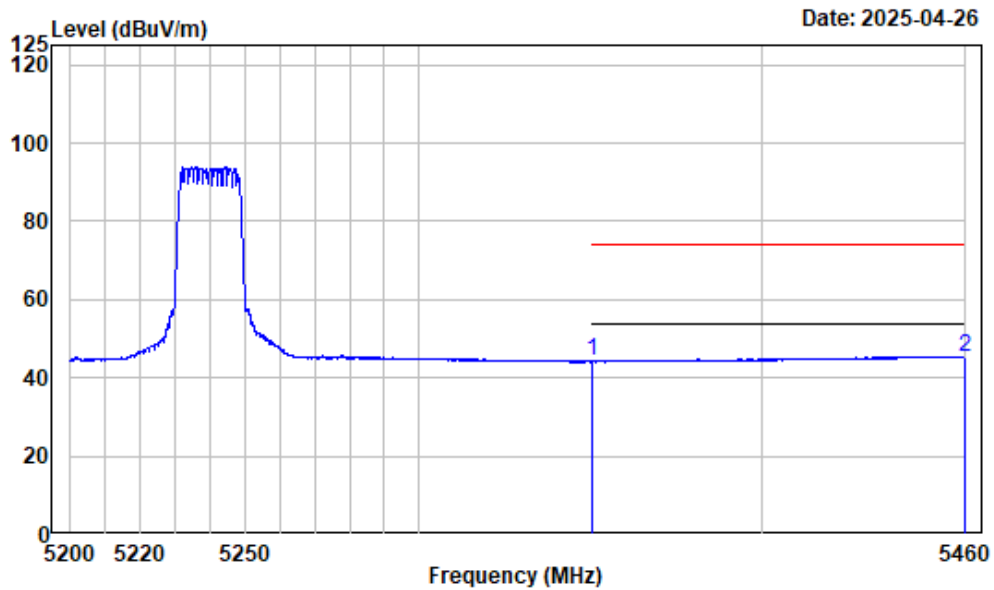

Condition : Horizontal
 Project No. : 2401Y41479E-RF
 Tester : Zenos Qiao
 Spectrum setting: Average reading:RBW:1MHz VBW:200Hz Detector:Peak
 Note : 5GWiFi-Band1-A-5240

	Freq	Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	50.93	44.19	54.00	-9.81	Average
2	5459.935	-6.29	51.76	45.47	54.00	-8.53	Average


Right Band edge_Vertical_Peak 5GWi-Fi-Band1-A-5240MHz

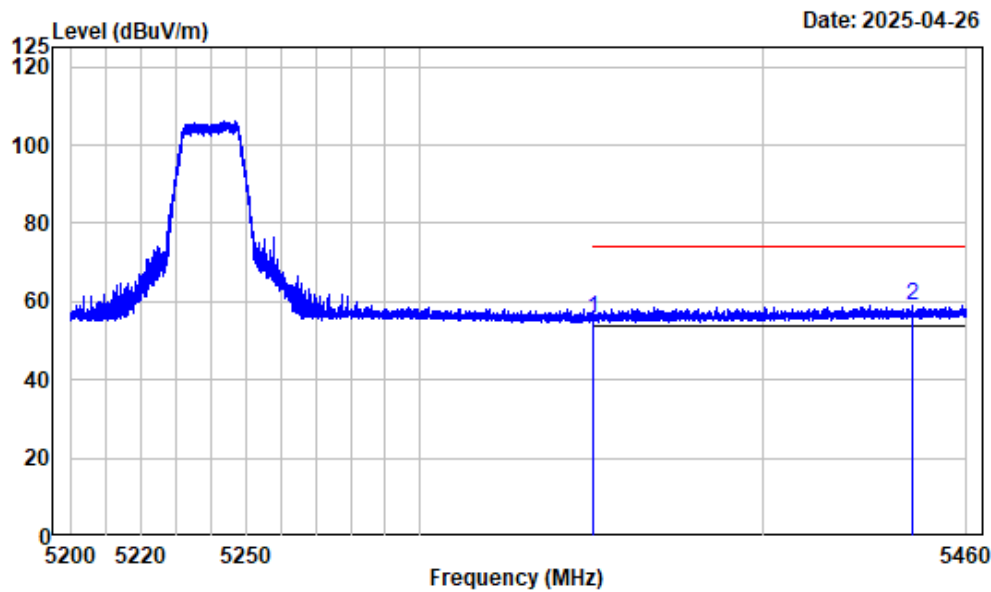

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	62.19	55.45	74.00	-18.55	Peak
2 5443.780	-6.35	65.27	58.92	74.00	-15.08	Peak


Right Band edge_Vertical_Average 5GWi-Fi-Band1-A-5240MHz

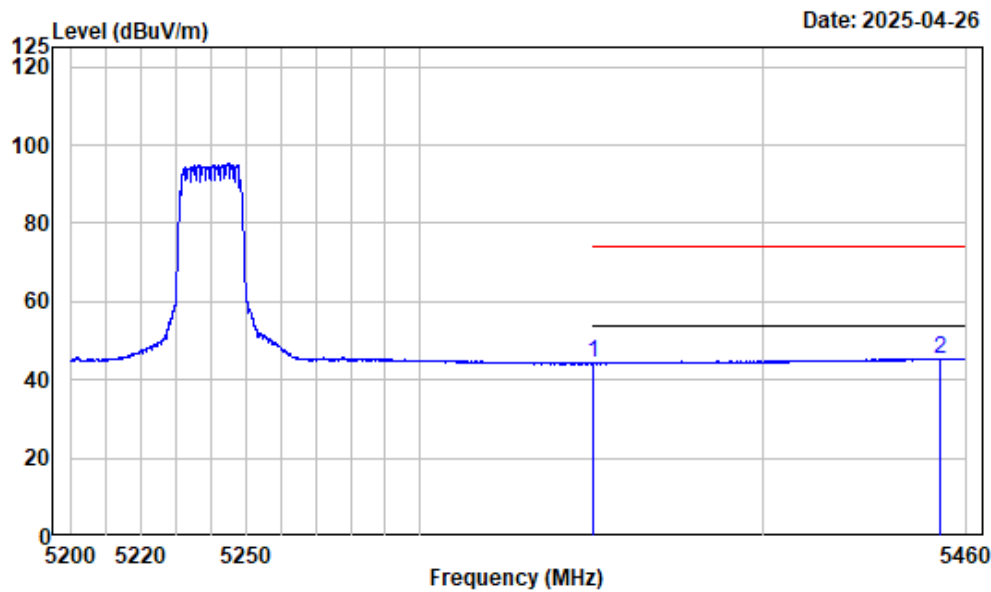

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:200Hz Detector:Peak
Note : 5GWiFi-Band1-A-5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	50.85	44.11	54.00	-9.89 Average
2	5452.102	-6.32	51.75	45.43	54.00	-8.57 Average


Left Band edge_Horizontal_Peak 5GWi-Fi-Band1-AC20-5180MHz

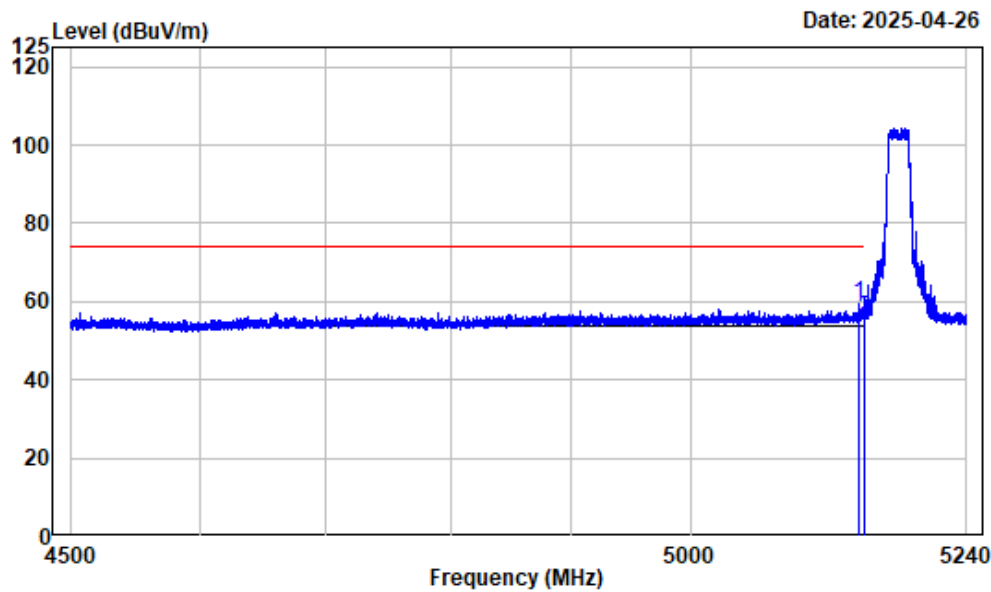

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5145.546	-7.46	66.75	59.29	74.00	-14.71 Peak
2	5150.000	-7.46	63.21	55.75	74.00	-18.25 Peak


Left Band edge_Horizontal_Average 5GWi-Fi-Band1-AC20-5180MHz

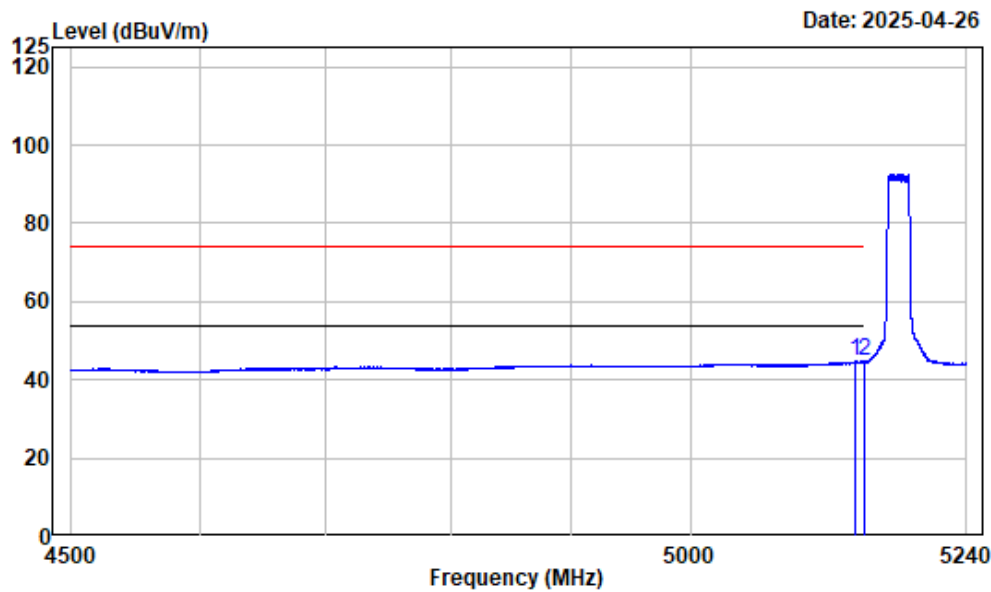

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:200Hz Detector:Peak
Note : 5GWiFi-Band1-AC20-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5141.938	-7.47	52.30	44.83	54.00	-9.17 Average
2	5150.000	-7.46	52.18	44.72	54.00	-9.28 Average


Left Band edge_Vertical_Peak 5GWi-Fi-Band1-AC20-5180MHz

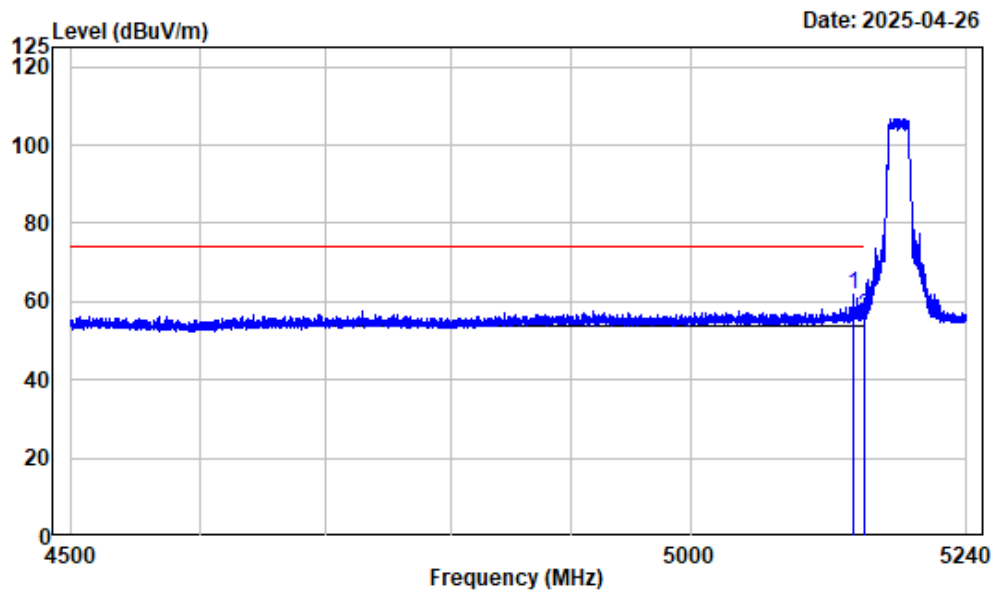

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5140.180	-7.47	69.09	61.62	74.00	-12.38	Peak
2 5150.000	-7.46	63.51	56.05	74.00	-17.95	Peak


Left Band edge_Vertical_Average 5GWi-Fi-Band1-AC20-5180MHz

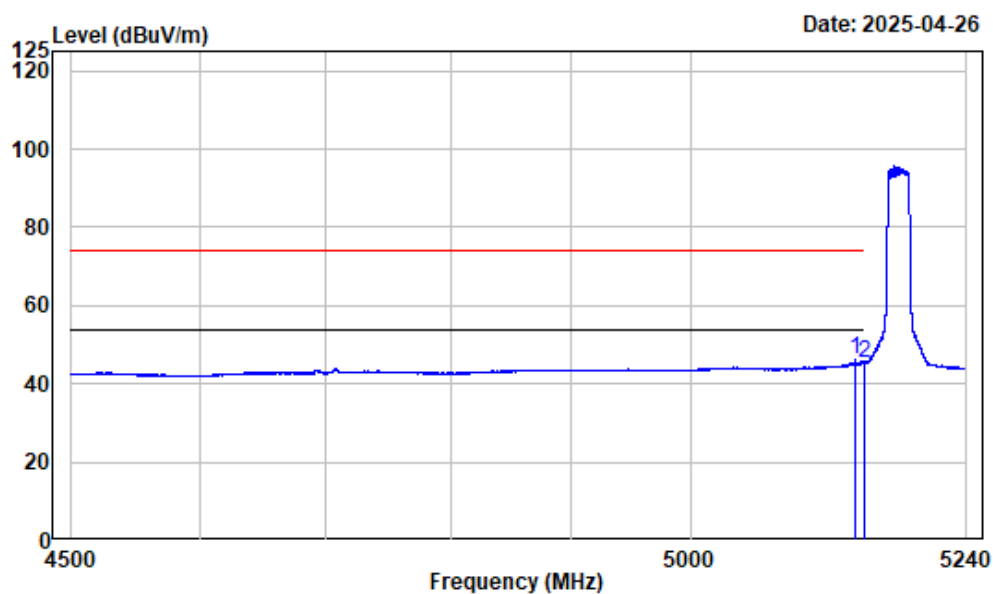

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:200Hz Detector:Peak
Note : 5GWiFi-Band1-AC20-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5142.215	-7.47	53.52	46.05	54.00	-7.95 Average
2	5150.000	-7.46	52.86	45.40	54.00	-8.60 Average


Right Band edge_Horizontal_Peak 5GWi-Fi-Band1-AC20-5240MHz

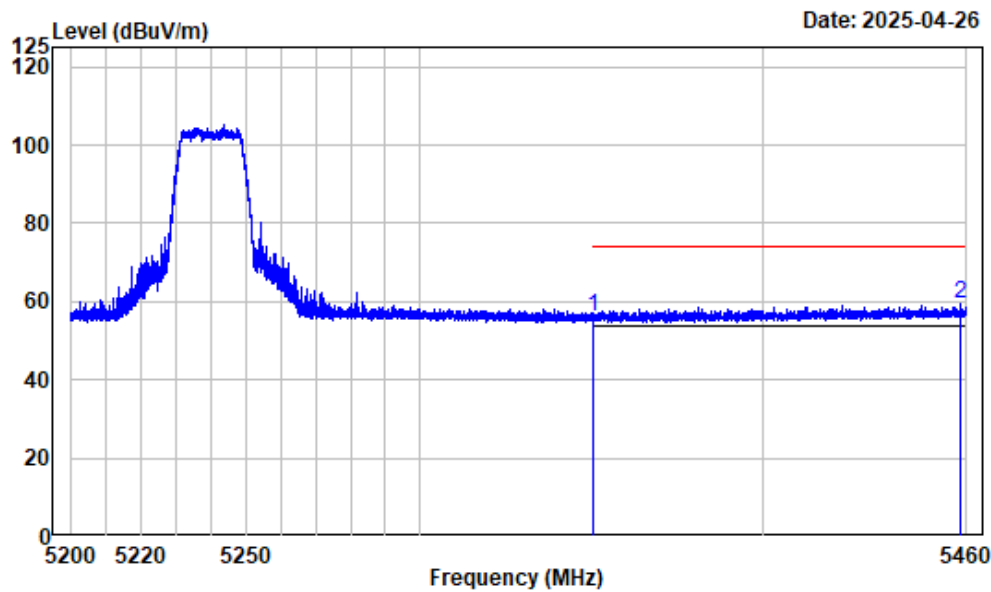

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	62.93	56.19	74.00	-17.81	Peak
2 5458.115	-6.29	65.59	59.30	74.00	-14.70	Peak


Right Band edge_Horizontal_Average 5GWi-Fi-Band1-AC20-5240MHz

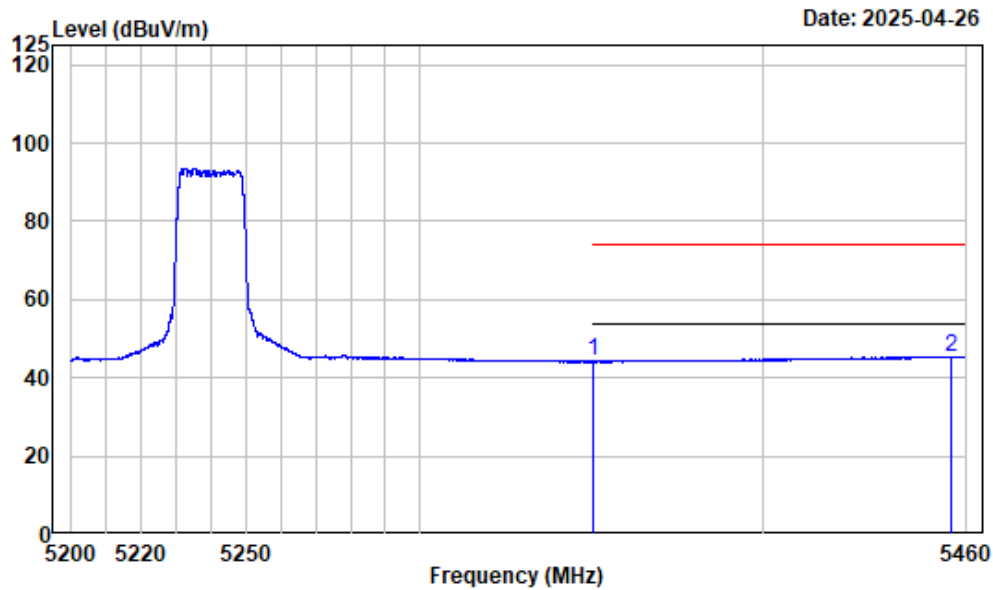

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:200Hz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	50.89	44.15	54.00	-9.85	Average
2 5455.612	-6.31	51.70	45.39	54.00	-8.61	Average


Right Band edge_Vertical_Peak 5GWi-Fi-Band1-AC20-5240MHz

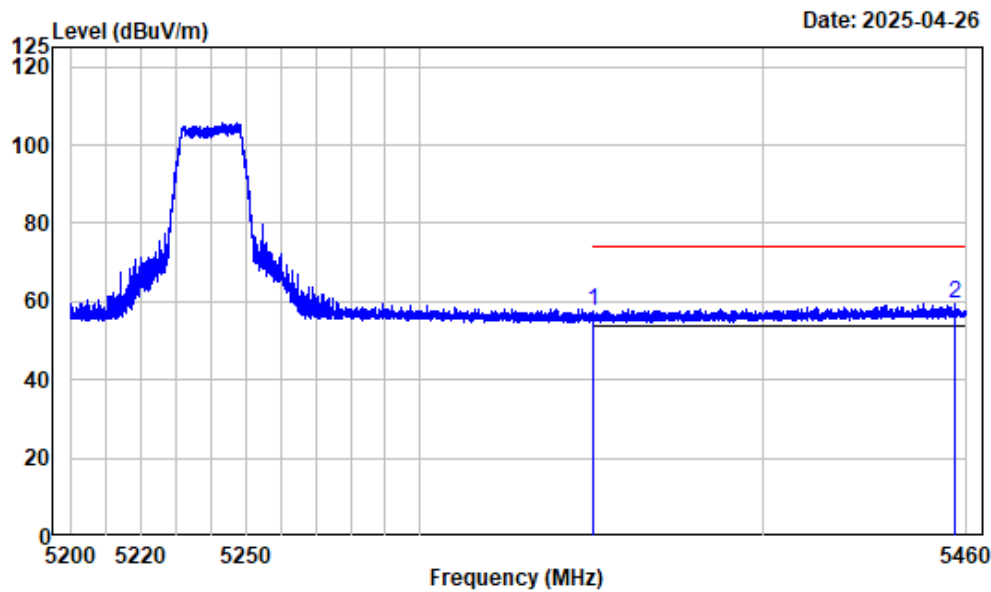

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	64.18	57.44	74.00	-16.56	Peak
2 5456.359	-6.31	65.85	59.54	74.00	-14.46	Peak


Right Band edge_Vertical_Average5GWi-Fi-Band1-AC20-5240MHz

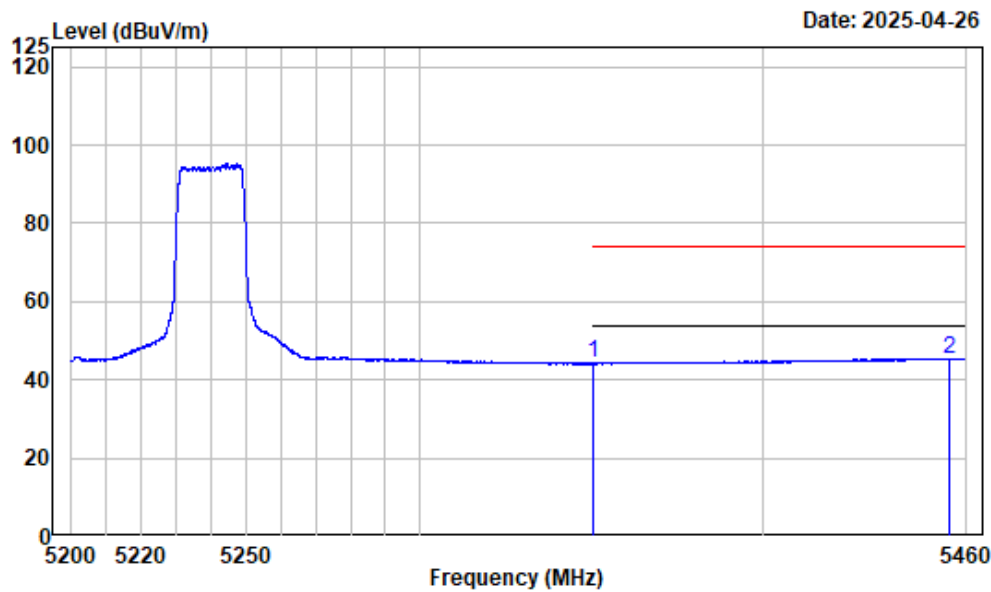

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:200Hz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	50.87	44.13	54.00	-9.87	Average
2	5454.799	-6.31	51.71	45.40	54.00	-8.60	Average


Left Band edge_Horizontal_Peak 5GWi-Fi-Band1-AC40-5190MHz

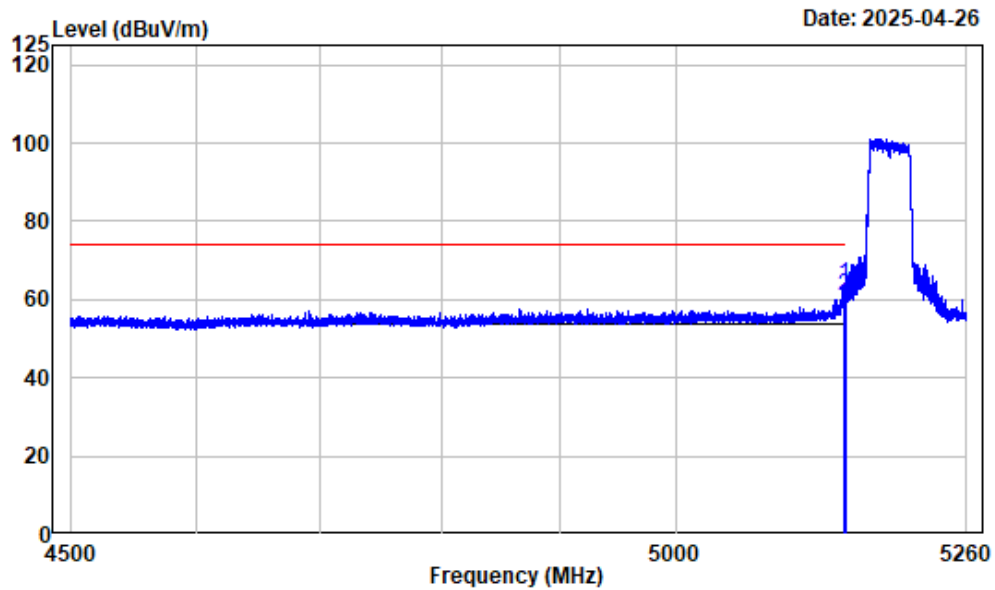

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5190

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.026	-7.46	70.95	63.49	74.00	-10.51 Peak
2	5150.000	-7.46	68.23	60.77	74.00	-13.23 Peak


Left Band edge_Horizontal_Average 5GWi-Fi-Band1-AC40-5190MHz

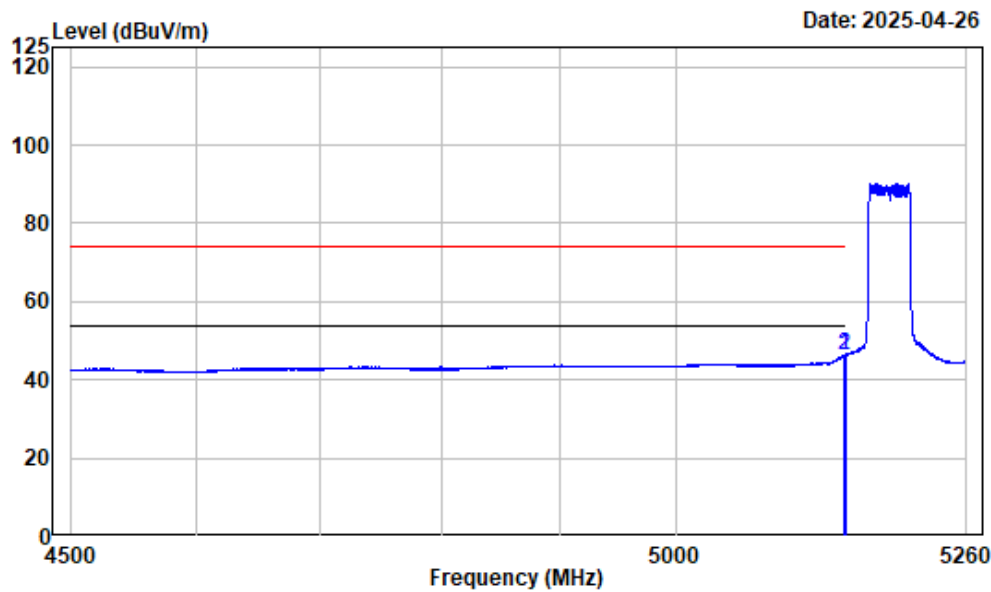

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:200Hz Detector:Peak
Note : 5GWiFi-Band1-AC40-5190

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.121	-7.46	53.79	46.33	54.00	-7.67 Average
2	5150.000	-7.46	53.67	46.21	54.00	-7.79 Average


Left Band edge_Vertical_Peak 5GWi-Fi-Band1-AC40-5190MHz

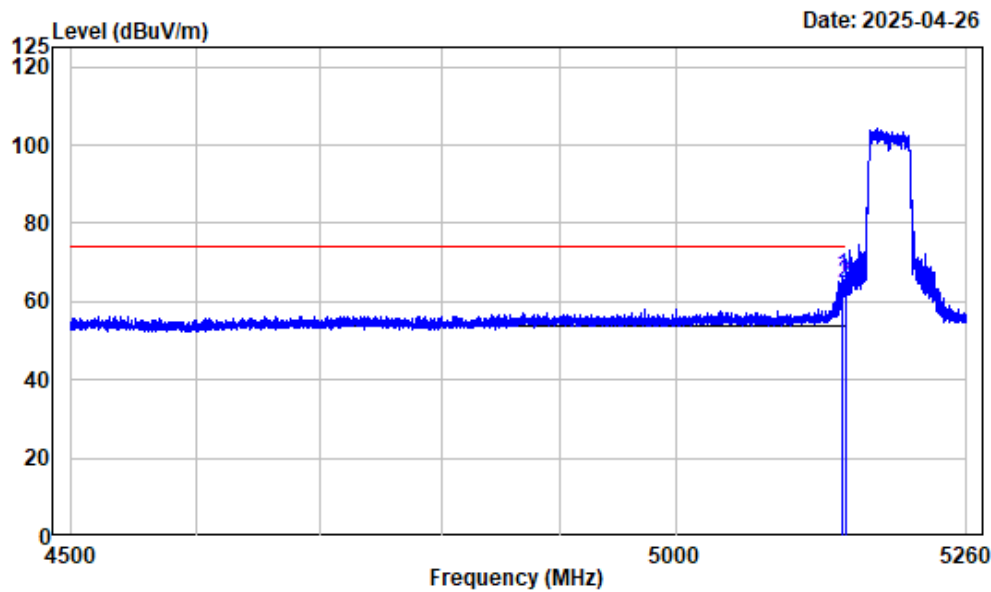

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5190

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5147.316	-7.46	74.18	66.72	74.00	-7.28 Peak
2	5150.000	-7.46	72.24	64.78	74.00	-9.22 Peak


Left Band edge_Vertical_Average 5GWi-Fi-Band1-AC40-5190MHz

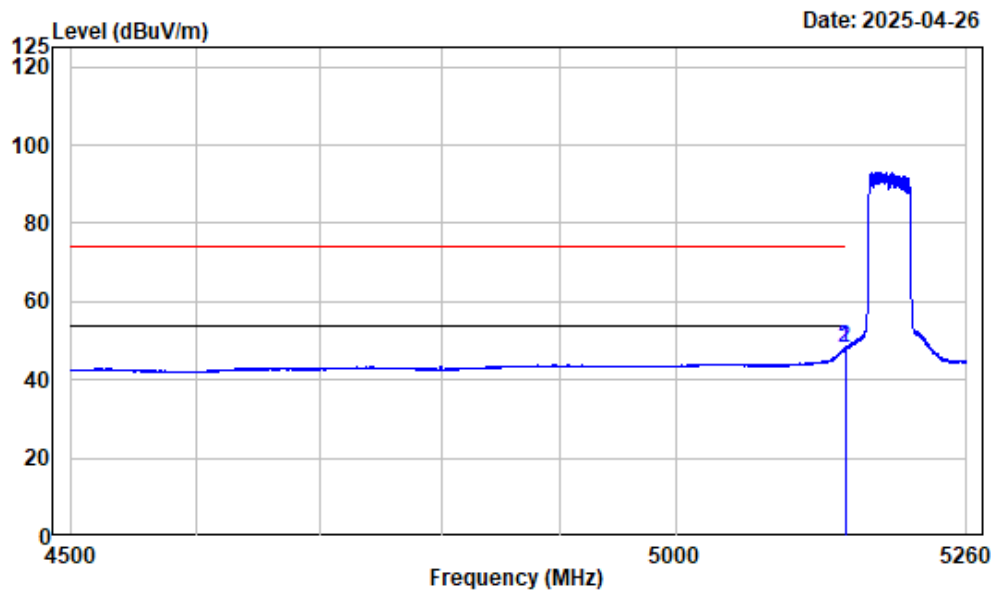

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:200Hz Detector:Peak
Note : 5GWiFi-Band1-AC40-5190

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.976	-7.46	55.74	48.28	54.00	-5.72 Average
2	5150.000	-7.46	55.61	48.15	54.00	-5.85 Average


Right Band edge_Horizontal_Peak 5GWi-Fi-Band1-AC40-5230MHz

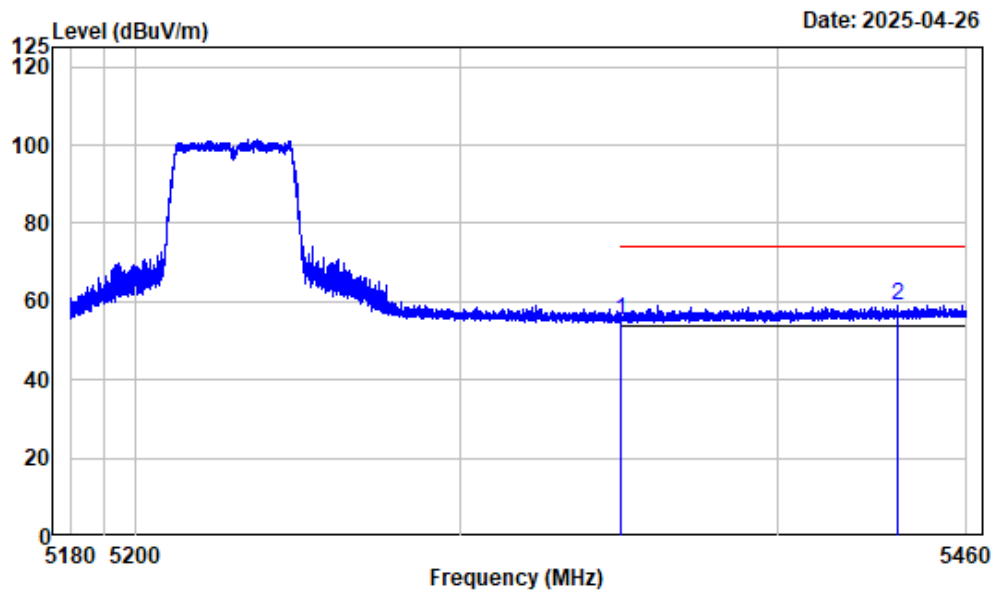

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	62.12	55.38	74.00	-18.62	Peak
2 5438.157	-6.38	65.32	58.94	74.00	-15.06	Peak


Right Band edge_Horizontal_Average 5GWi-Fi-Band1-AC40-5230MHz

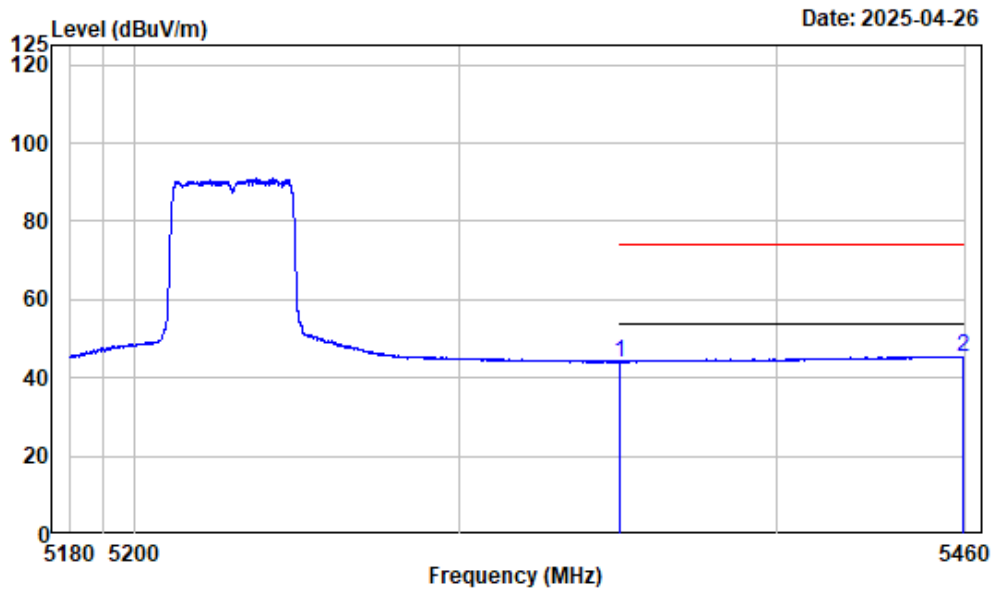

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:200Hz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	50.83	44.09	54.00	-9.91	Average
2 5459.265	-6.29	51.74	45.45	54.00	-8.55	Average


Right Band edge_Vertical_Peak 5GWi-Fi-Band1-AC40-5230MHz

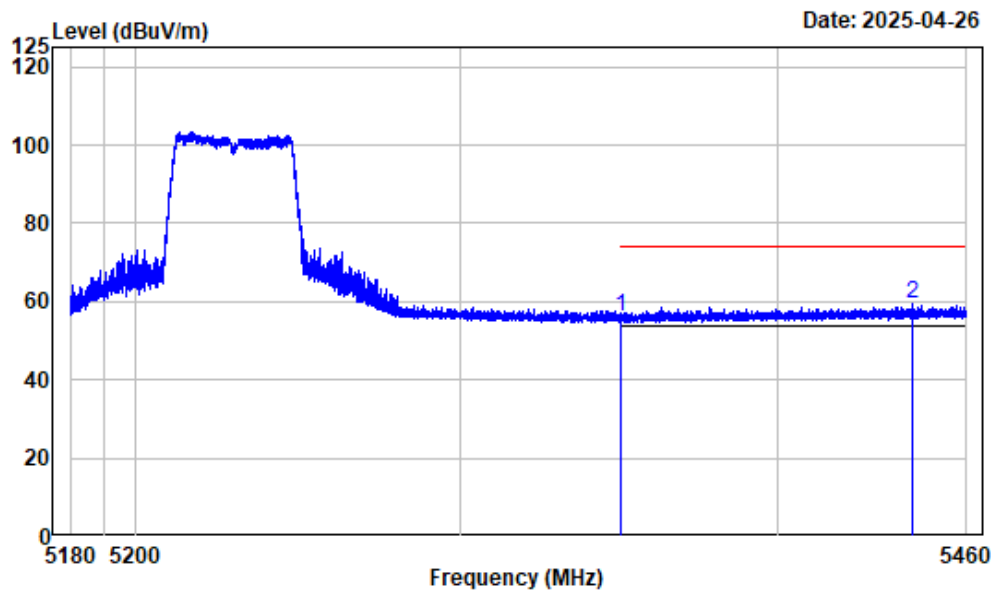

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	62.94	56.20	74.00	-17.80	Peak
2 5442.568	-6.35	65.89	59.54	74.00	-14.46	Peak


Right Band edge_Vertical_Average 5GWi-Fi-Band1-AC40-5230MHz

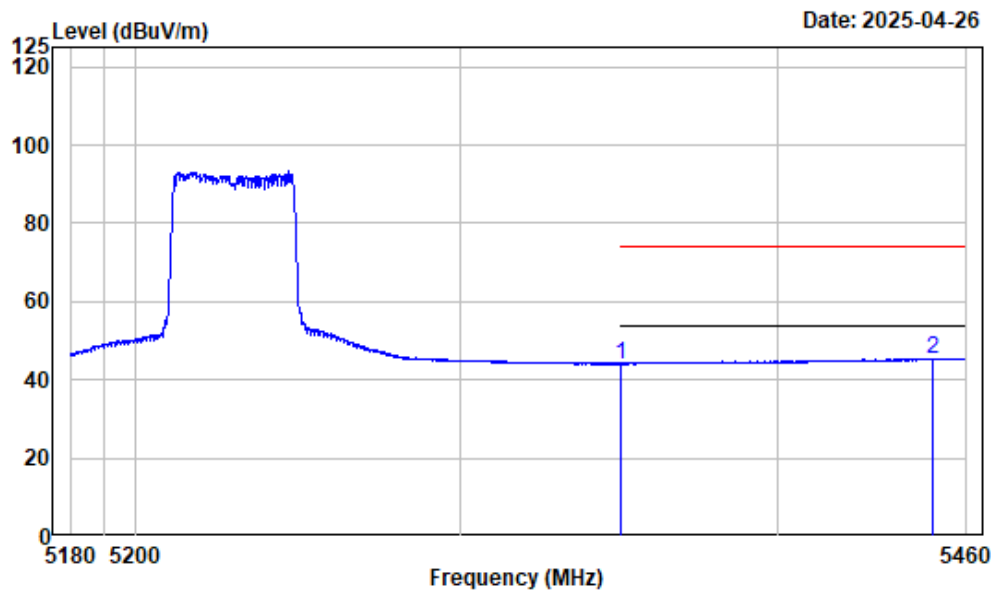

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:200Hz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	50.82	44.08	54.00	-9.92	Average
2 5449.009	-6.33	51.72	45.39	54.00	-8.61	Average


Left Band edge_Horizontal_Peak 5GWi-Fi-Band1-AX20-5180MHz

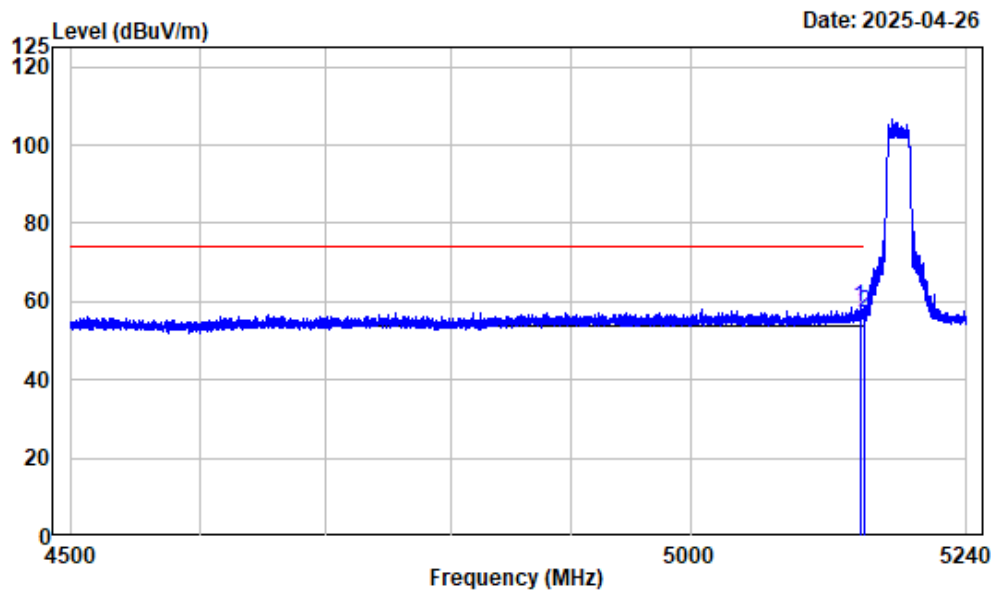

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5145.916	-7.46	65.76	58.30	74.00	-15.70 Peak
2	5150.000	-7.46	64.66	57.20	74.00	-16.80 Peak


Left Band edge_Horizontal_Average 5GWi-Fi-Band1-AX20-5180MHz

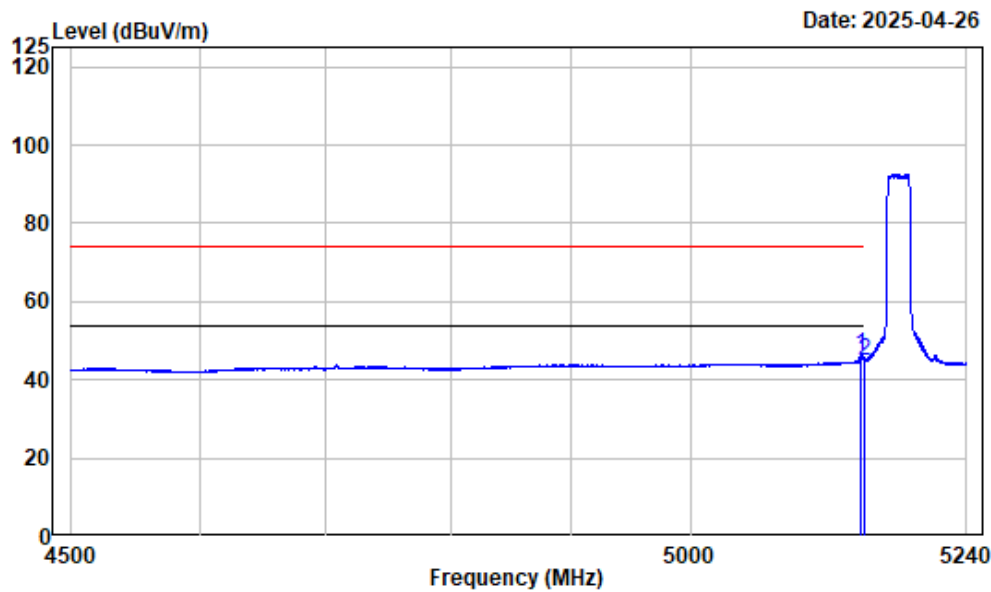

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:300Hz Detector:Peak
Note : 5GWiFi-Band1-AX20-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5147.488	-7.46	53.64	46.18	54.00	-7.82 Average
2	5150.000	-7.46	52.50	45.04	54.00	-8.96 Average


Left Band edge_Vertical_Peak 5GWi-Fi-Band1-AX20-5180MHz

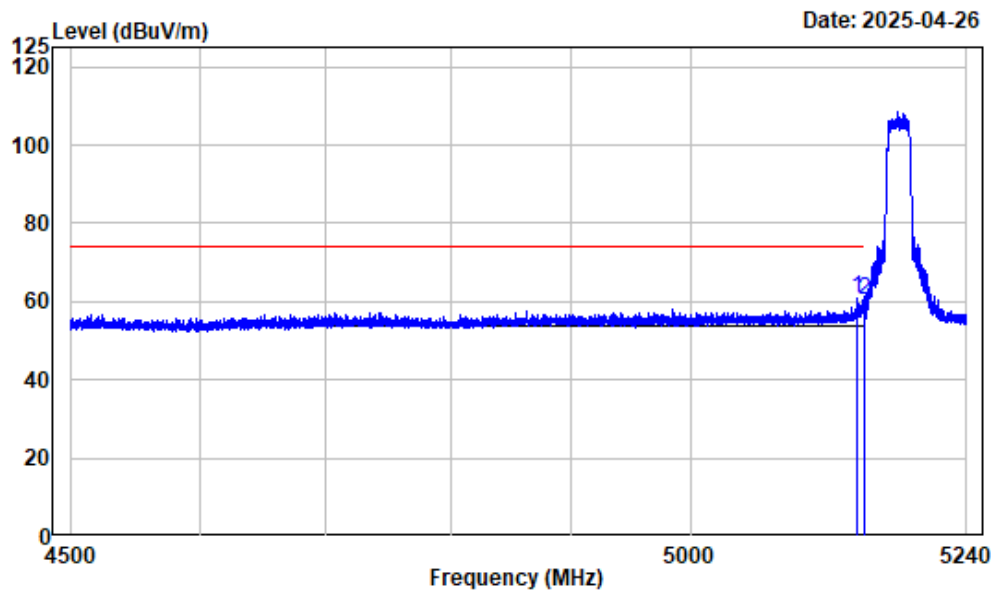

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5143.233	-7.46	68.22	60.76	74.00	-13.24 Peak
2	5150.000	-7.46	67.65	60.19	74.00	-13.81 Peak


Left Band edge_Vertical_Average 5GWi-Fi-Band1-AX20-5180MHz

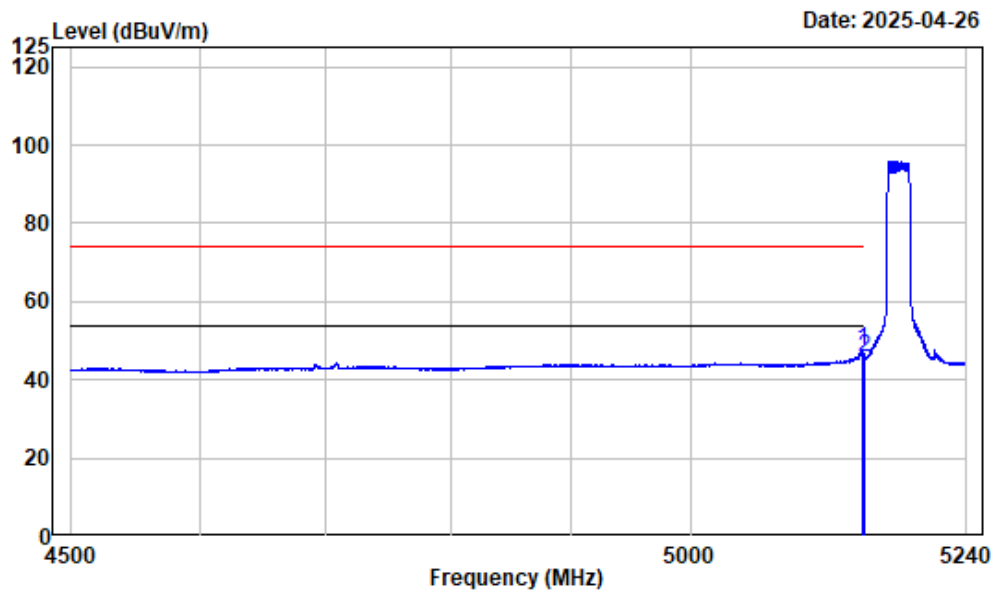

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:300Hz Detector:Peak
Note : 5GWiFi-Band1-AX20-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5147.766	-7.46	54.89	47.43	54.00	-6.57 Average
2	5150.000	-7.46	53.35	45.89	54.00	-8.11 Average


Right Band edge_Horizontal_Peak 5GWi-Fi-Band1-AX20-5240MHz

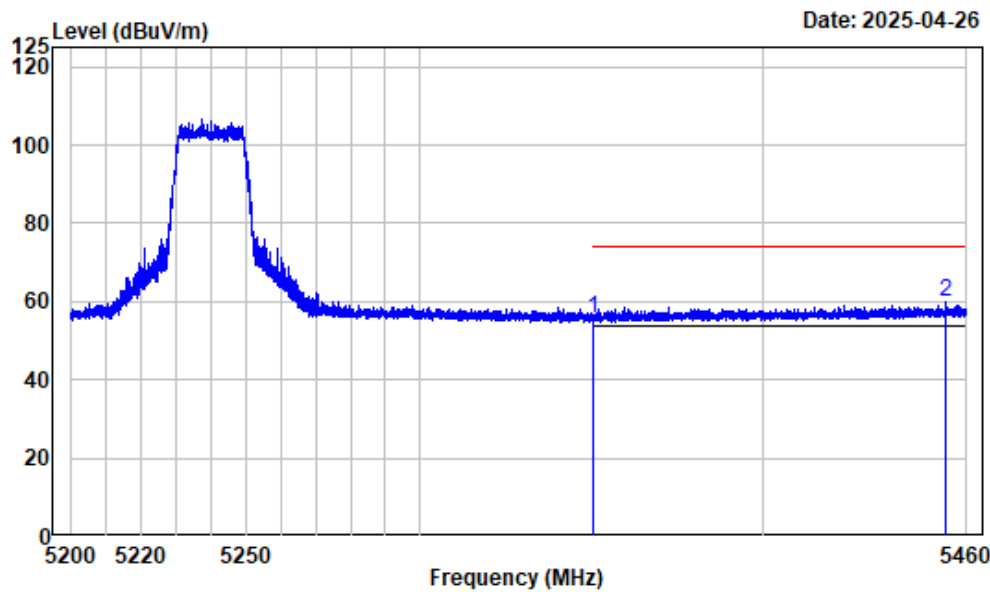

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	62.59	55.85	74.00	-18.15	Peak
2 5453.759	-6.31	66.03	59.72	74.00	-14.28	Peak


Right Band edge_Horizontal_Average 5GWi-Fi-Band1-AX20-5240MHz

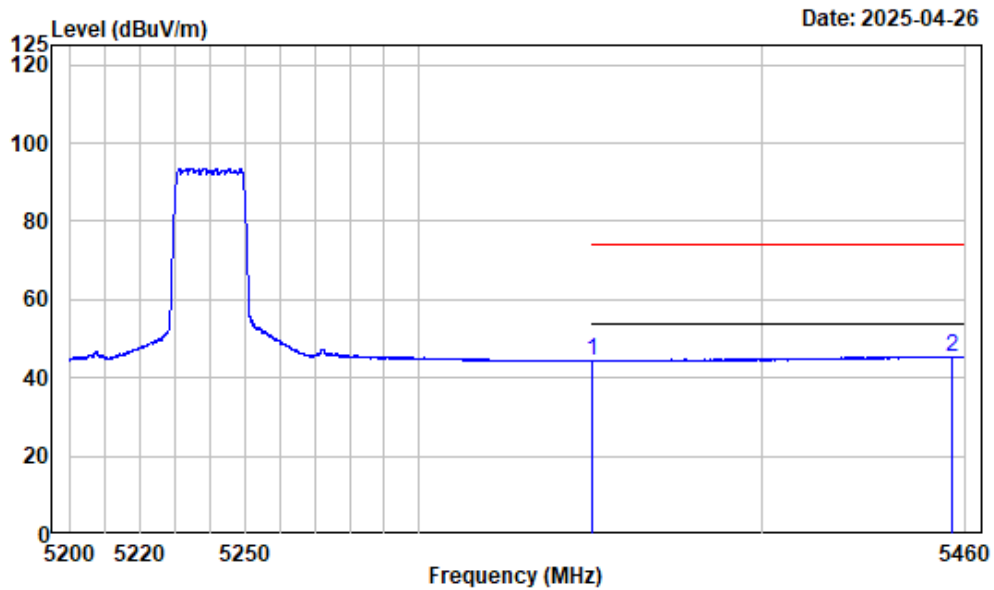

Condition : Horizontal
 Project No. : 2401Y41479E-RF
 Tester : Zenos Qiao
 Spectrum setting: Average reading:RBW:1MHz VBW:300Hz Detector:Peak
 Note : 5GWiFi-Band1-AX20-5240

	Freq	Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	50.87	44.13	54.00	-9.87	Average
2	5455.807	-6.31	51.79	45.48	54.00	-8.52	Average


Right Band edge_Vertical_Peak 5GWi-Fi-Band1-AX20-5240MHz

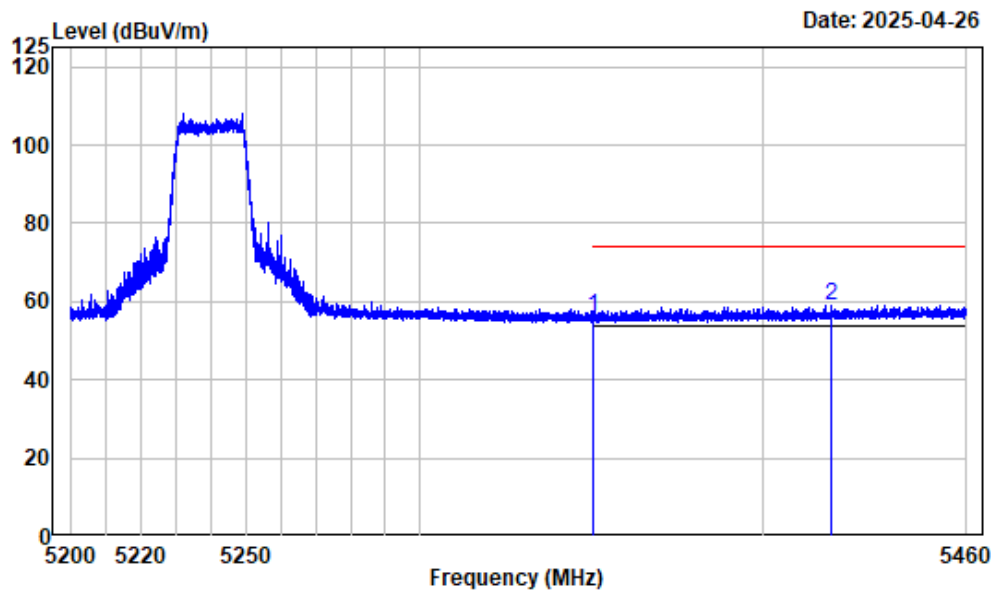

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	63.00	56.26	74.00	-17.74	Peak
2 5419.728	-6.48	65.35	58.87	74.00	-15.13	Peak


Right Band edge_Vertical_Average 5GWi-Fi-Band1-AX20-5240MHz

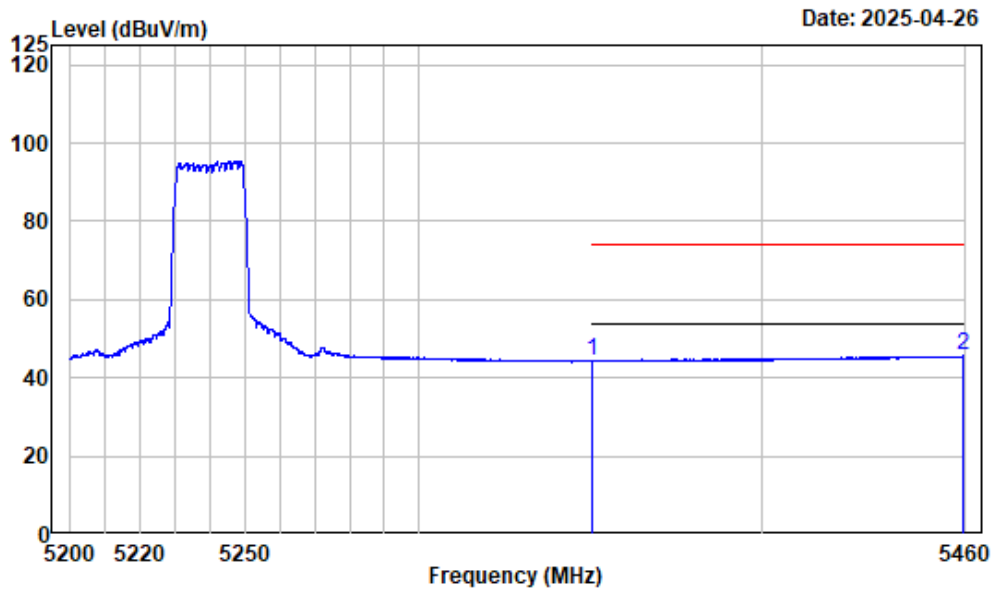

Condition : Vertical
 Project No. : 2401Y41479E-RF
 Tester : Zenos Qiao
 Spectrum setting: Average reading:RBW:1MHz VBW:300Hz Detector:Peak
 Note : 5GWiFi-Band1-AX20-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	50.94	44.20	54.00	-9.80	Average
2	5459.415	-6.29	51.84	45.55	54.00	-8.45	Average


Left Band edge_Horizontal_Peak 5GWi-Fi-Band1-AX40-5190MHz

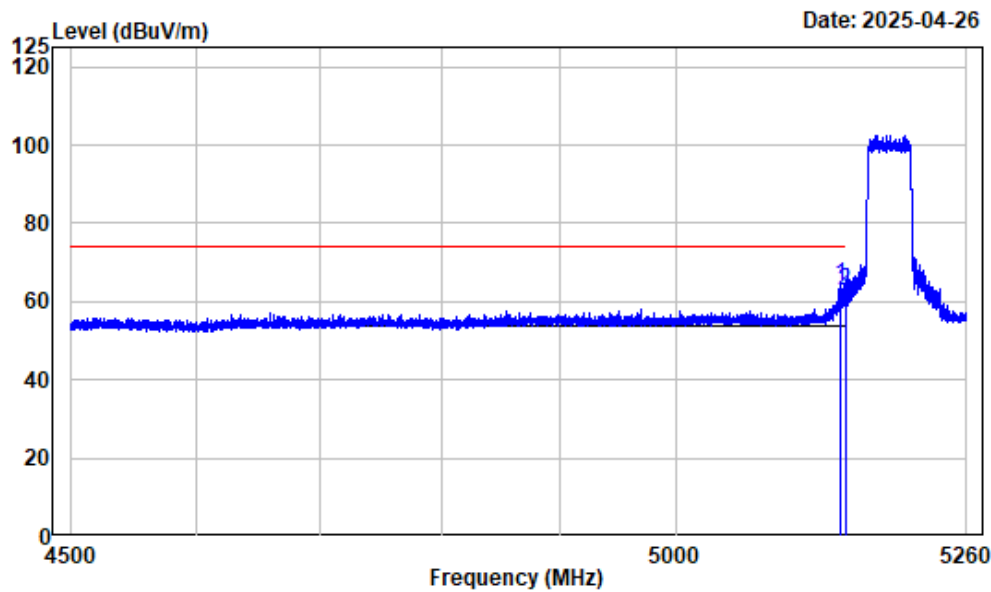

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5190

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5146.461	-7.46	71.69	64.23	74.00	-9.77 Peak
2	5150.000	-7.46	70.14	62.68	74.00	-11.32 Peak


Left Band edge_Horizontal_Average 5GWi-Fi-Band1-AX40-5190MHz

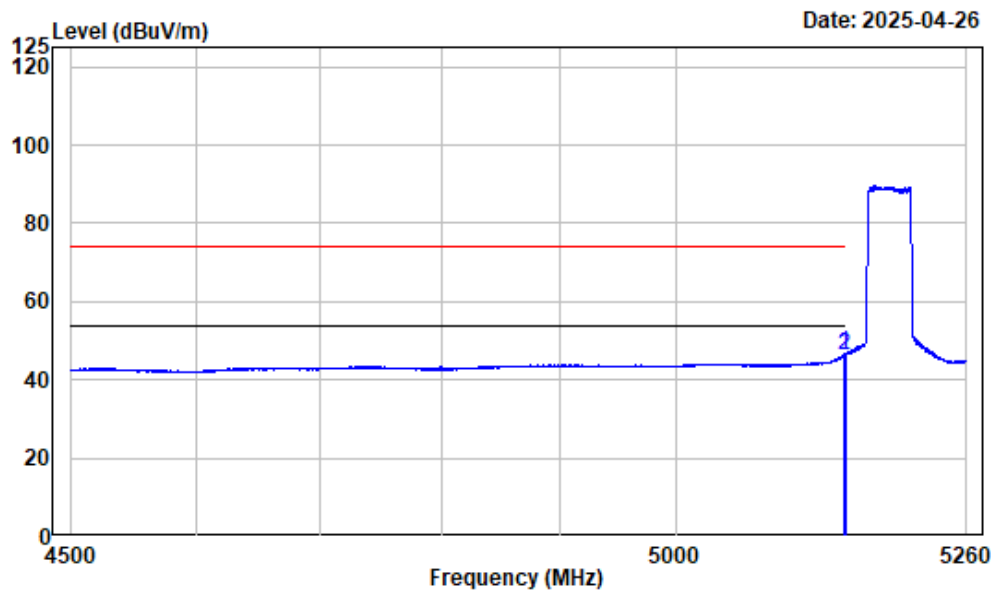

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:300Hz Detector:Peak
Note : 5GWiFi-Band1-AX40-5190

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.216	-7.46	54.13	46.67	54.00	-7.33 Average
2	5150.000	-7.46	53.92	46.46	54.00	-7.54 Average


Left Band edge_Vertical_Peak 5GWi-Fi-Band1-AX40-5190MHz

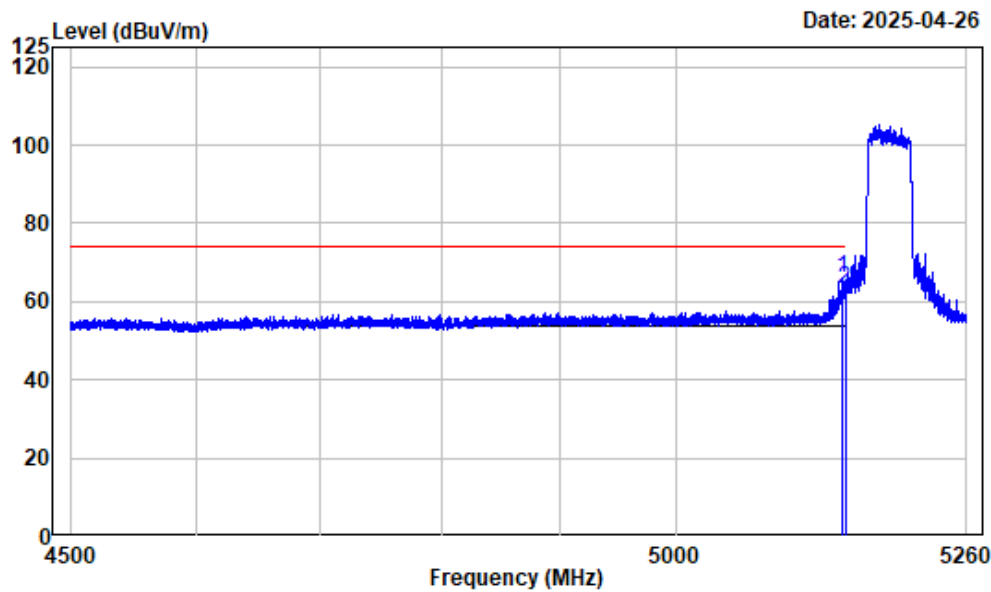

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5190

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5148.266	-7.46	73.62	66.16	74.00	-7.84	Peak
2 5150.000	-7.46	70.72	63.26	74.00	-10.74	Peak


Left Band edge_Vertical_Average 5GWi-Fi-Band1-AX40-5190MHz

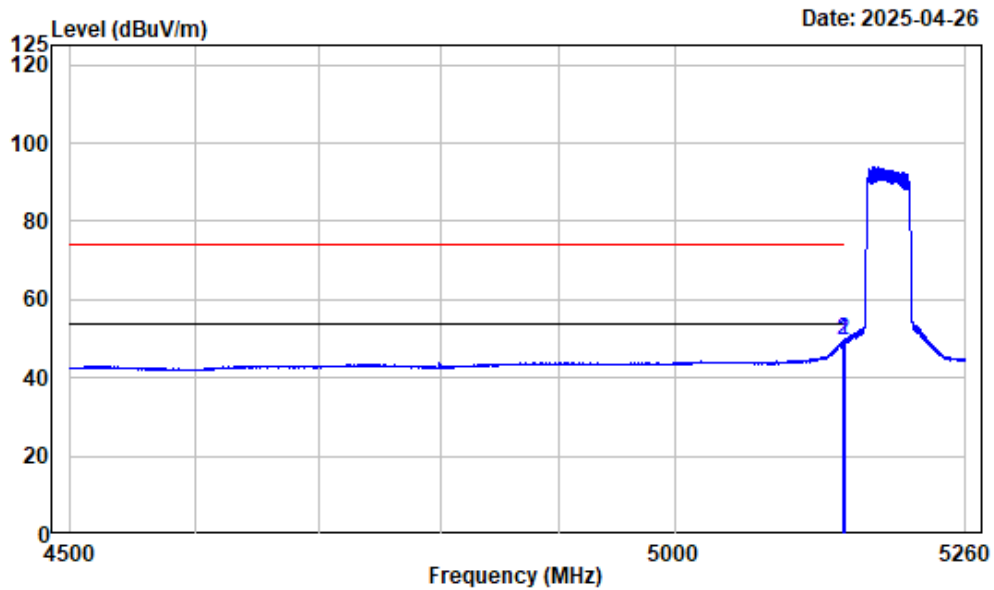

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:300Hz Detector:Peak
Note : 5GWiFi-Band1-AX40-5190

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.691	-7.46	57.13	49.67	54.00	-4.33 Average
2	5150.000	-7.46	56.94	49.48	54.00	-4.52 Average


Right Band edge_Horizontal_Peak 5GWi-Fi-Band1-AX40-5230MHz

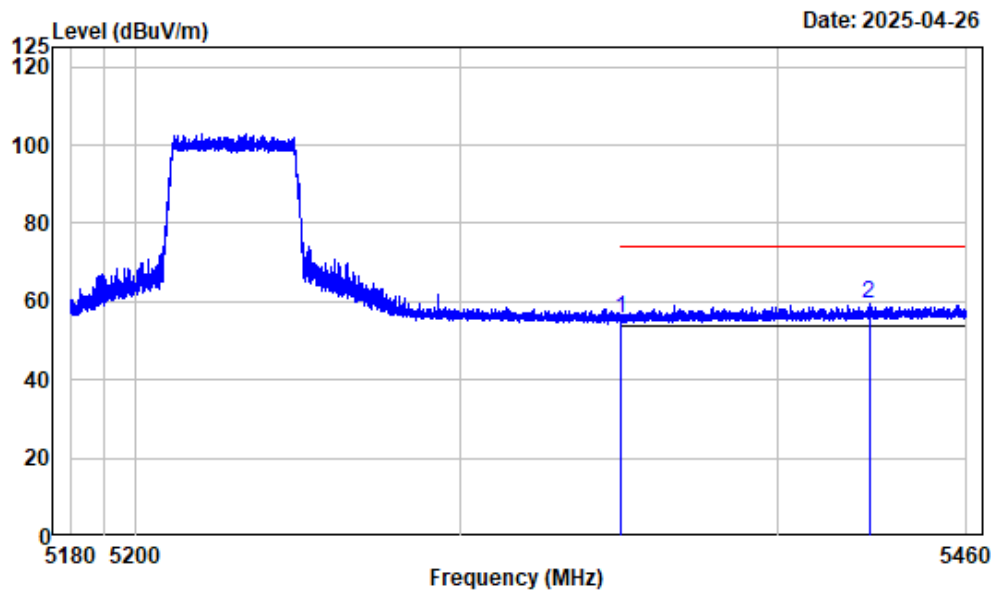

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5230

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	62.43	55.69	74.00	-18.31	Peak
2 5428.846	-6.43	65.90	59.47	74.00	-14.53	Peak


Right Band edge_Horizontal_Average 5GWi-Fi-Band1-AX40-5230MHz

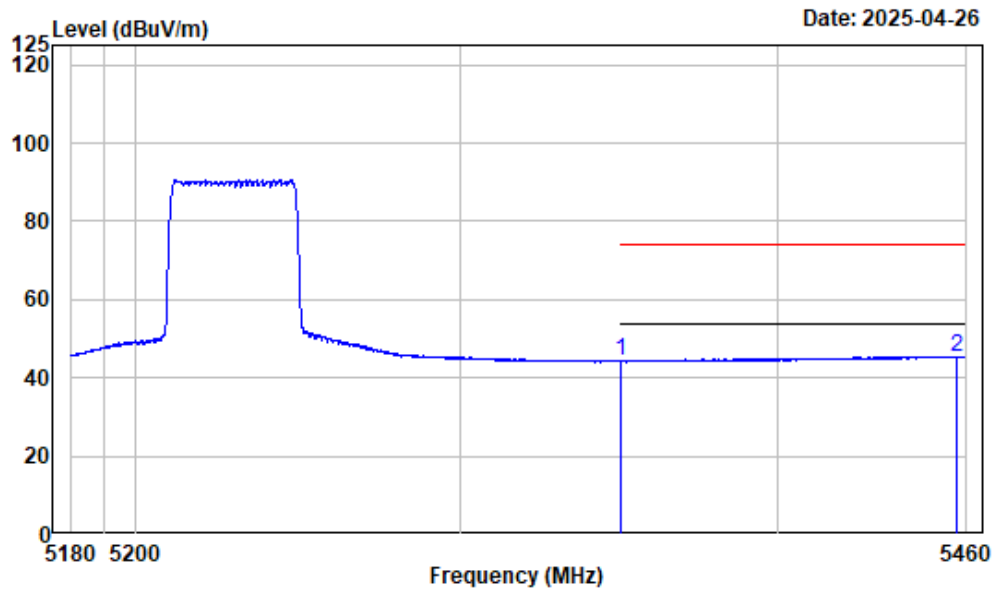

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:300Hz Detector:Peak
Note : 5GWiFi-Band1-AX40-5230

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	50.91	44.17	54.00	-9.83	Average
2 5456.675	-6.31	51.78	45.47	54.00	-8.53	Average


Right Band edge_Vertical_Peak 5GWi-Fi-Band1-AX40-5230MHz

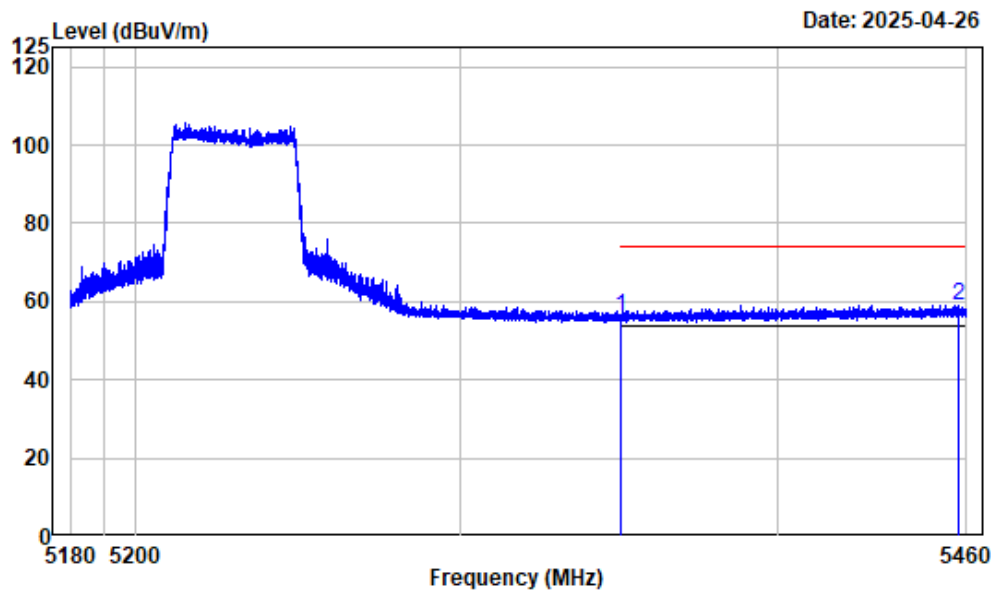

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5230

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	63.02	56.28	74.00	-17.72	Peak
2 5457.690	-6.30	65.42	59.12	74.00	-14.88	Peak


Right Band edge_Vertical_Average 5GWi-Fi-Band1-AX40-5230MHz

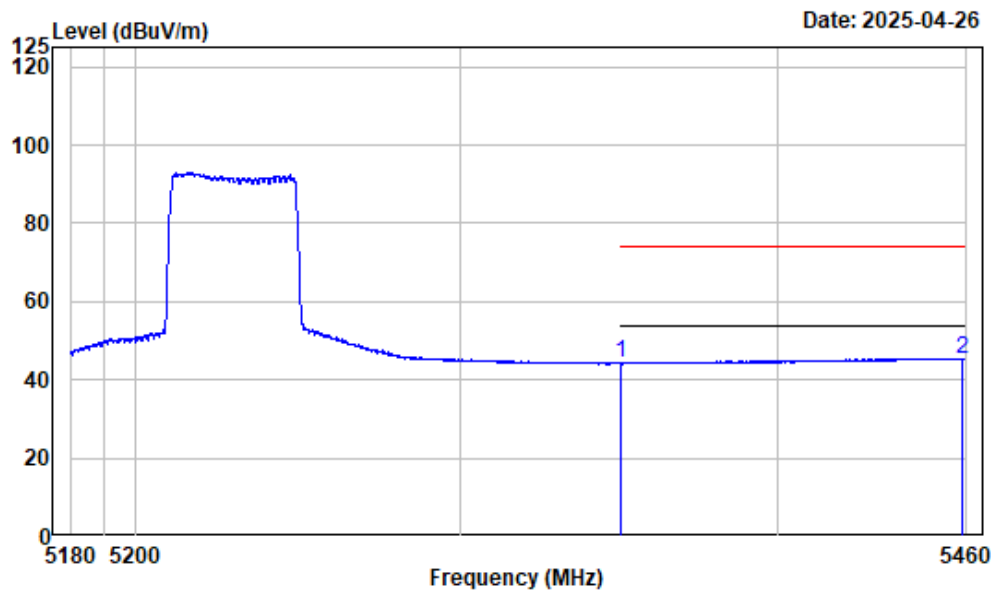

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:300Hz Detector:Peak
Note : 5GWiFi-Band1-AX40-5230

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	51.06	44.32	54.00	-9.68	Average
2 5458.705	-6.29	51.79	45.50	54.00	-8.50	Average


Left Band edge_Horizontal_Peak 5GWi-Fi-Band2-A-5260MHz

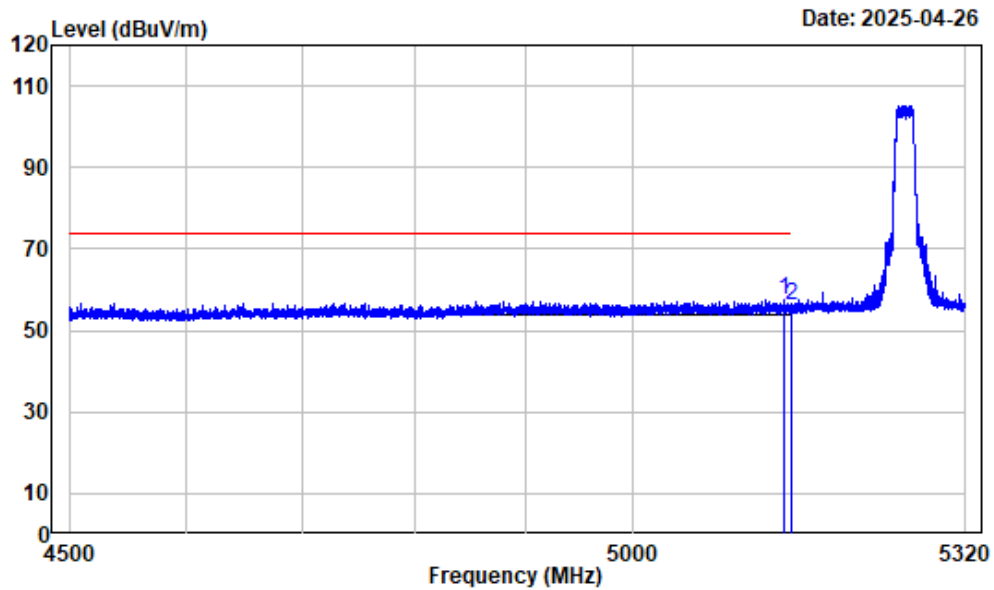

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5260

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5142.448	-7.46	65.09	57.63	74.00	-16.37 Peak
2	5150.000	-7.46	63.45	55.99	74.00	-18.01 Peak


Left Band edge_Horizontal_Average 5GWi-Fi-Band2-A-5260MHz

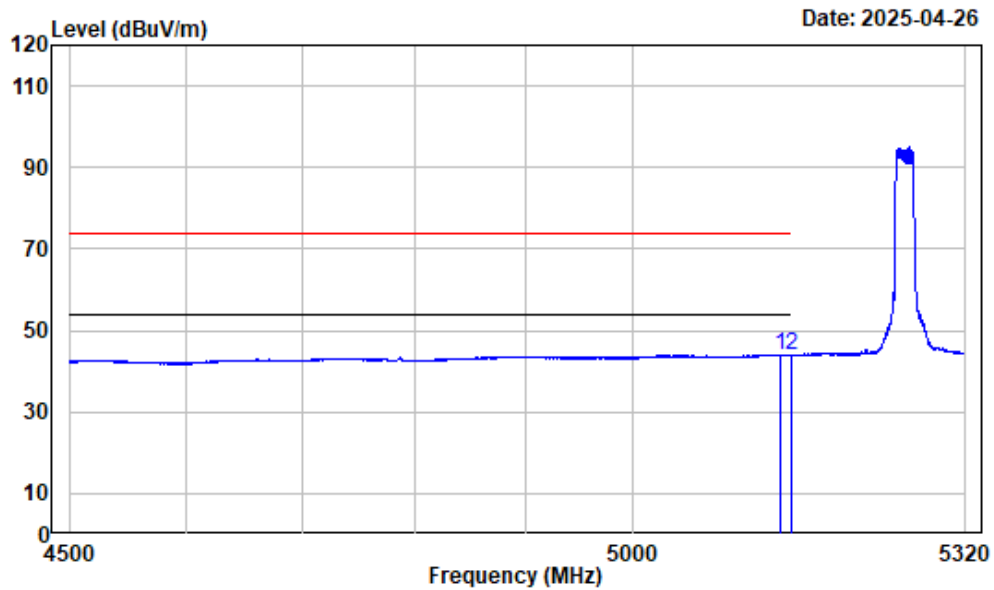

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:200Hz Detector:Peak
Note : 5GWiFi-Band2-A-5260

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5138.450	-7.46	51.48	44.02	54.00	-9.98	Average
2	5150.000	-7.46	51.37	43.91	54.00	-10.09	Average


Left Band edge_Vertical_Peak 5GWi-Fi-Band2-A-5260MHz

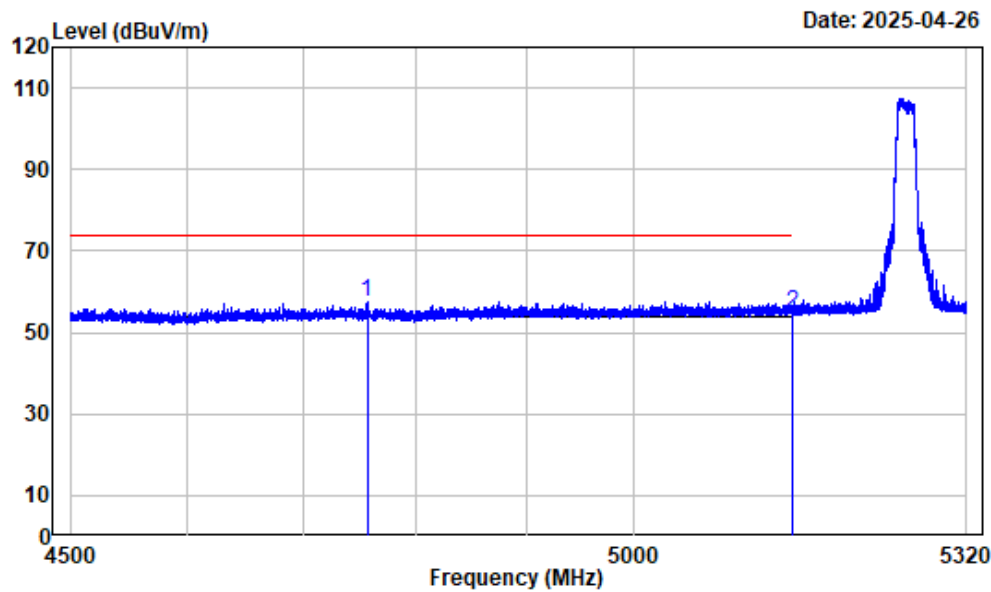

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5260

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4756.487	-7.63	65.18	57.55	74.00	-16.45	Peak
2 5150.000	-7.46	62.41	54.95	74.00	-19.05	Peak


Left Band edge_Vertical_Average 5GWi-Fi-Band2-A-5260MHz

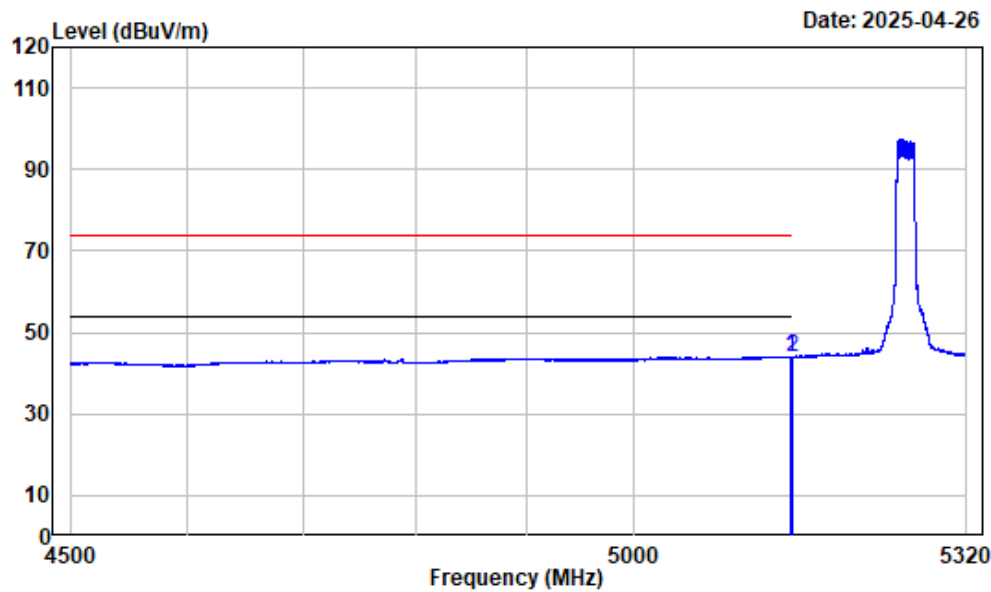

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:200Hz Detector:Peak
Note : 5GWiFi-Band2-A-5260

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5147.573	-7.46	51.58	44.12	54.00	-9.88 Average
2	5150.000	-7.46	51.35	43.89	54.00	-10.11 Average


Right Band edge_Horizontal_Peak 5GWi-Fi-Band2-A-5320MHz

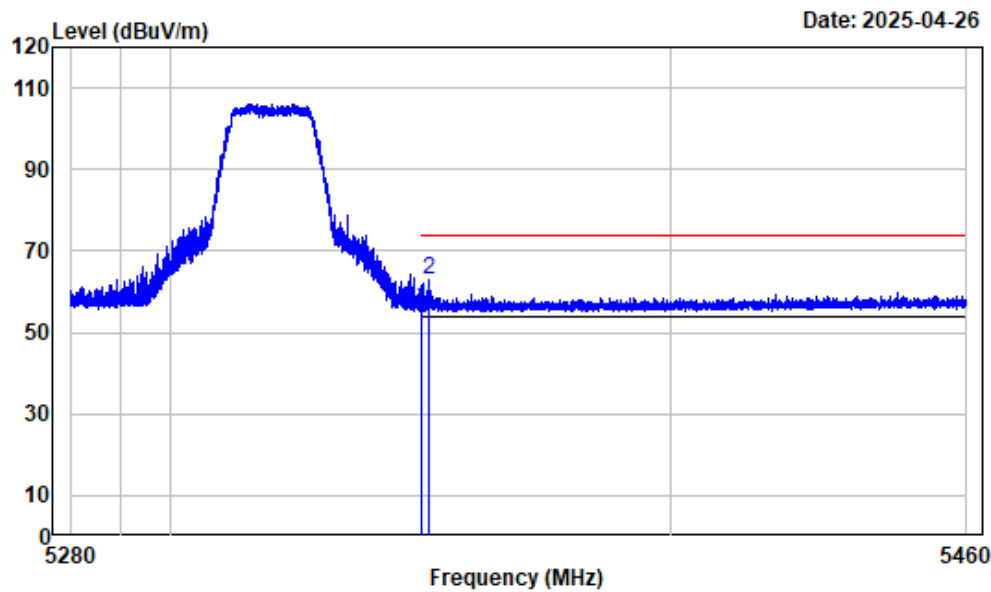

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	63.02	56.28	74.00	-17.72 Peak
2	5351.312	-6.74	69.61	62.87	74.00	-11.13 Peak


Right Band edge_Horizontal_Average 5GWi-Fi-Band2-A-5320MHz

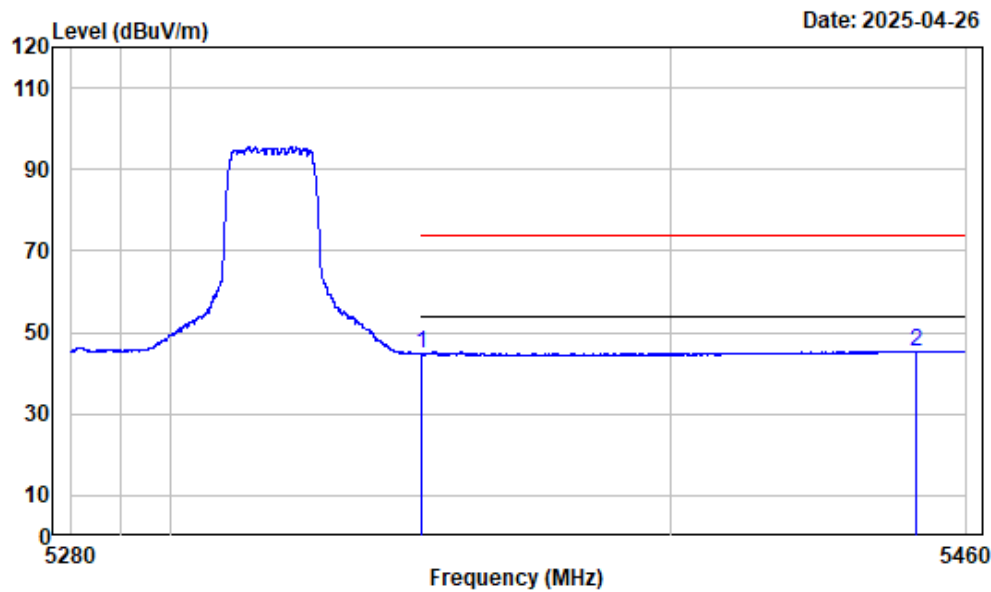

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:200Hz Detector:Peak
Note : 5GWiFi-Band2-A-5320

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	51.44	44.70	54.00	-9.30	Average
2 5449.806	-6.33	51.76	45.43	54.00	-8.57	Average


Right Band edge_Vertical_Peak 5GWi-Fi-Band2-A-5320MHz

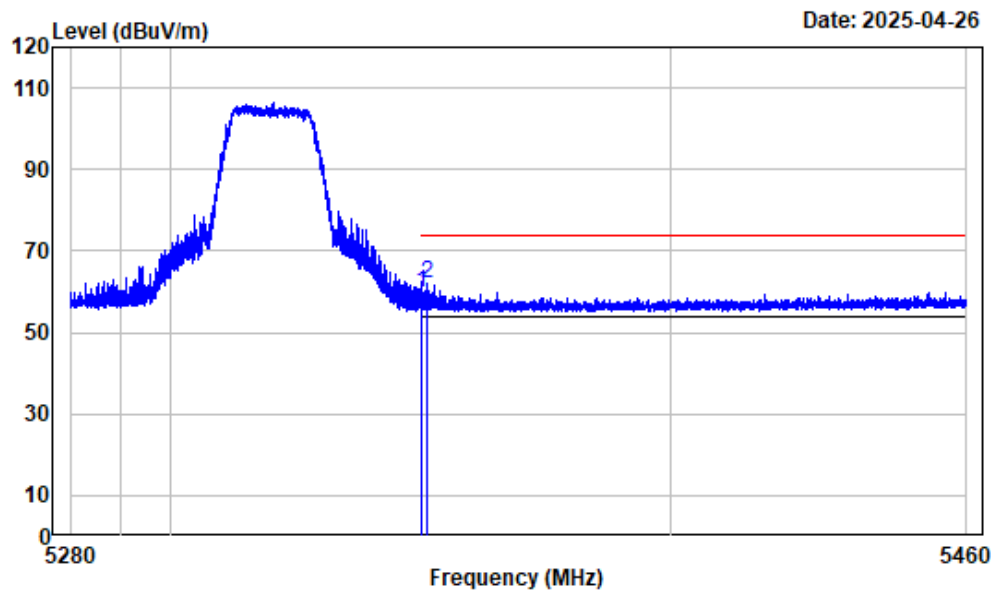

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	66.66	59.92	74.00	-14.08 Peak
2	5350.839	-6.74	68.79	62.05	74.00	-11.95 Peak


Right Band edge_Vertical_Average 5GWi-Fi-Band2-A-5320MHz

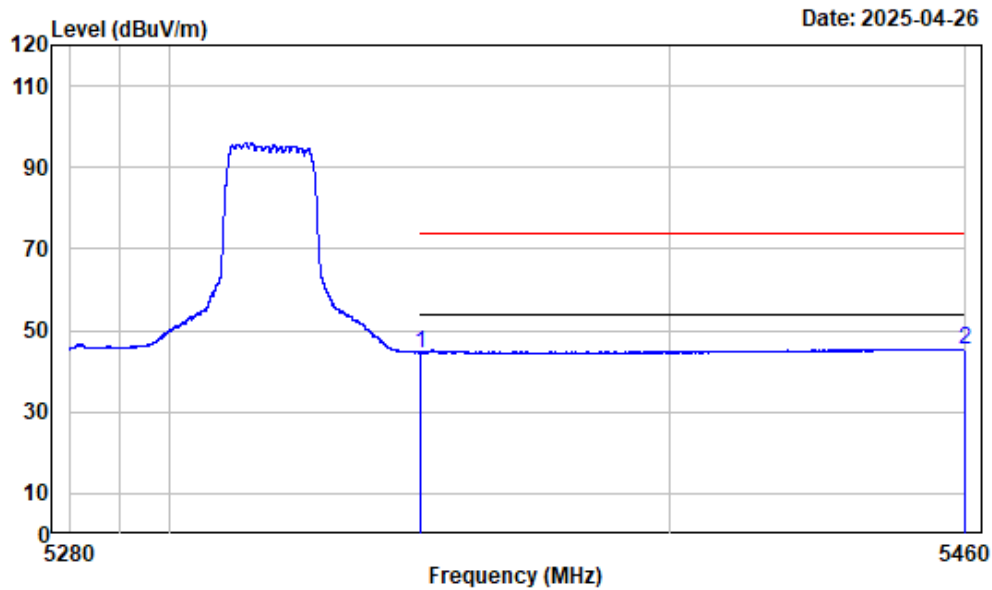

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:200Hz Detector:Peak
Note : 5GWiFi-Band2-A-5320

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	51.31	44.57	54.00	-9.43	Average
2 5459.752	-6.29	51.71	45.42	54.00	-8.58	Average


Left Band edge_Horizontal_Peak 5GWi-Fi-Band2-AC20-5260MHz

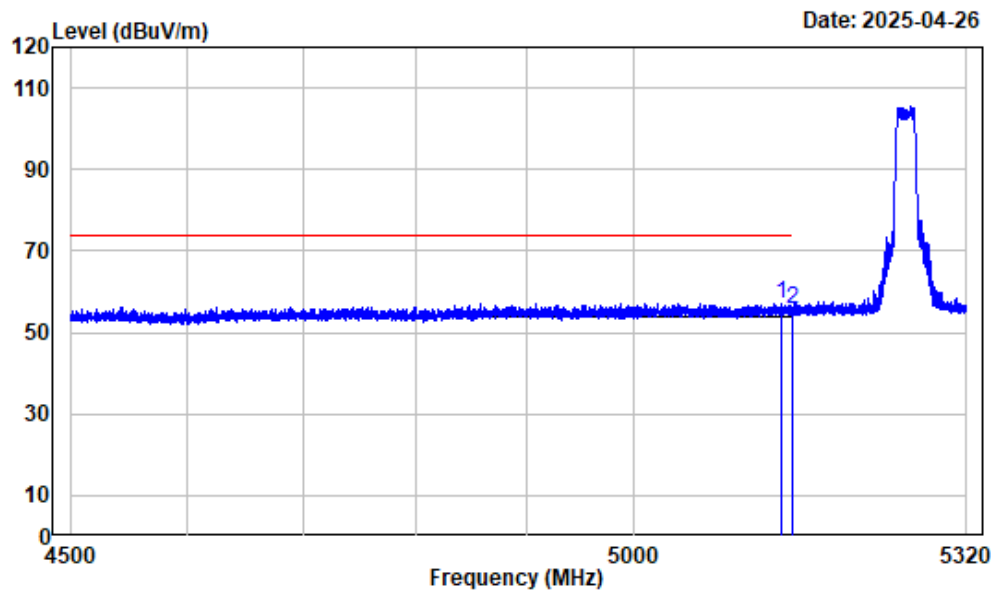

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5260

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5138.655	-7.46	64.73	57.27	74.00	-16.73 Peak
2	5150.000	-7.46	63.29	55.83	74.00	-18.17 Peak


Left Band edge_Horizontal_Average 5GWi-Fi-Band2-AC20-5260MHz

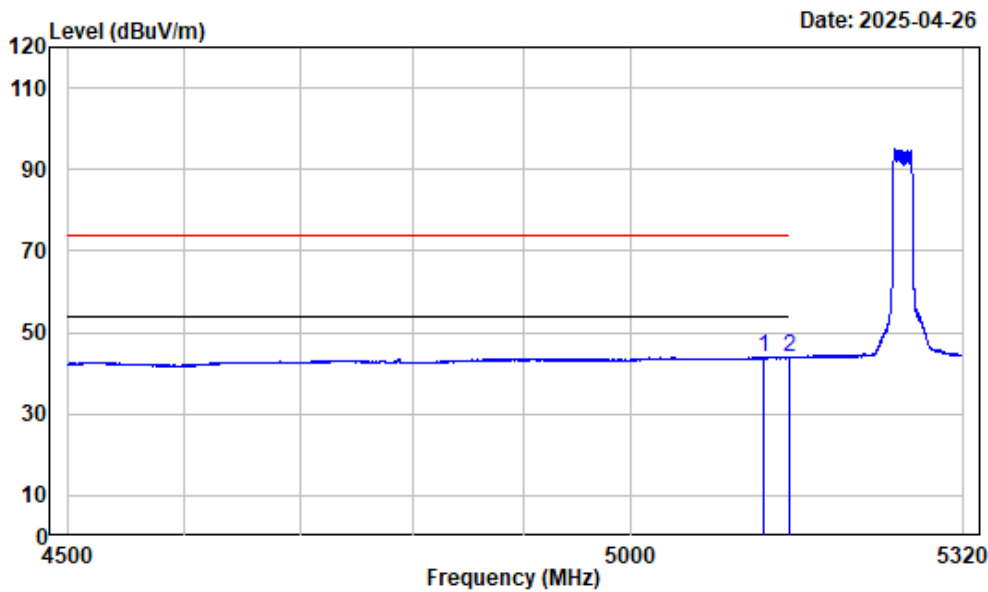

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:200Hz Detector:Peak
Note : 5GWiFi-Band2-AC20-5260

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5125.533	-7.47	51.41	43.94	54.00	-10.06 Average
2	5150.000	-7.46	51.24	43.78	54.00	-10.22 Average


Left Band edge_Vertical_Peak 5GWi-Fi-Band2-AC20-5260MHz

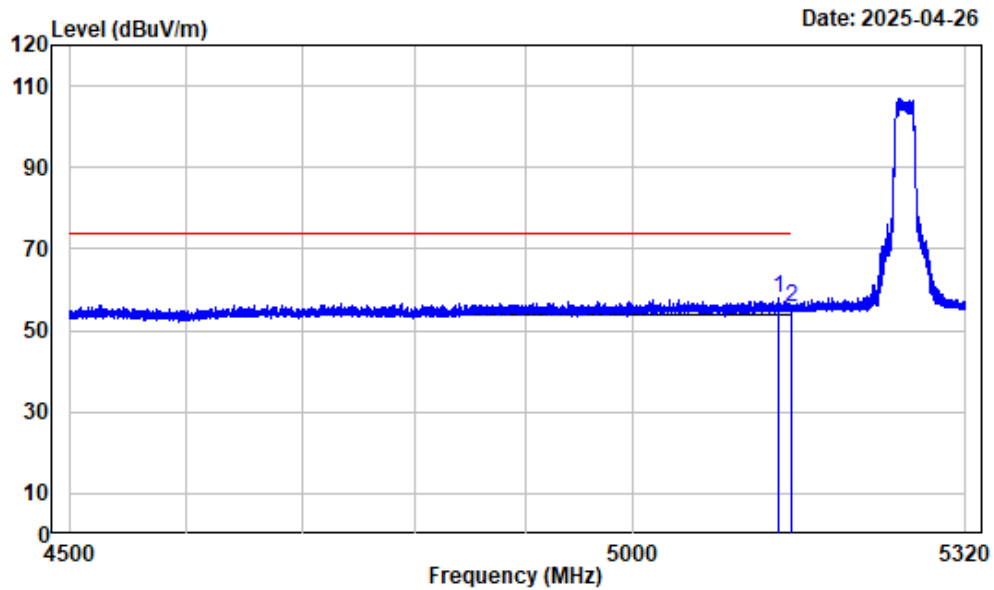

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5260

		Read		Limit	Over	Remark
Freq		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5136.810	-7.46	65.29	57.83	74.00	-16.17	Peak
2 5150.000	-7.46	63.22	55.76	74.00	-18.24	Peak


Left Band edge_Vertical_Average 5GWi-Fi-Band2-AC20-5260MHz

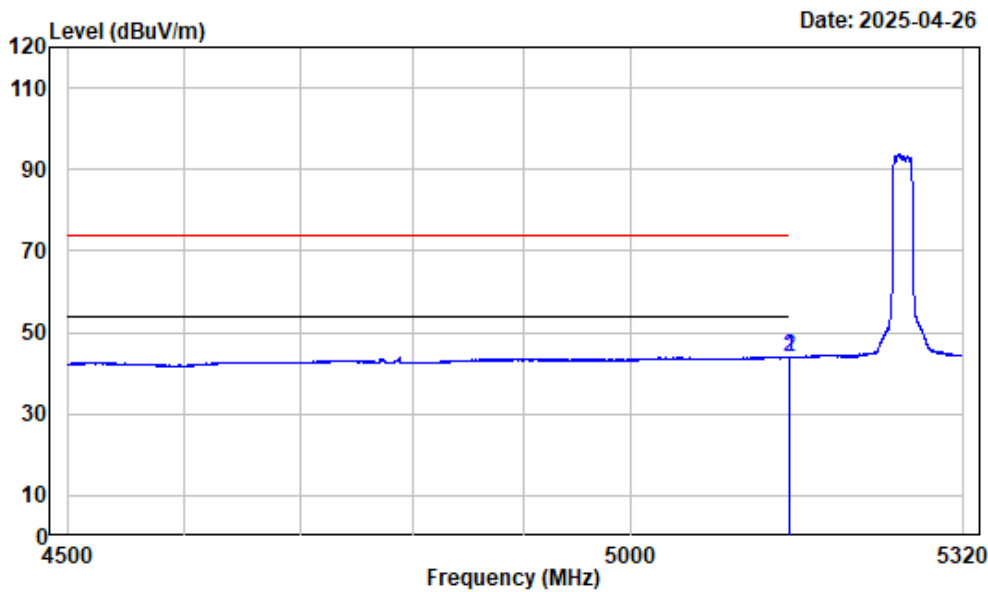

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:200Hz Detector:Peak
Note : 5GWiFi-Band2-AC20-5260

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.829	-7.46	51.47	44.01	54.00	-9.99 Average
2	5150.000	-7.46	51.27	43.81	54.00	-10.19 Average


Right Band edge_Horizontal_Peak 5GWi-Fi-Band2-AC20-5320MHz

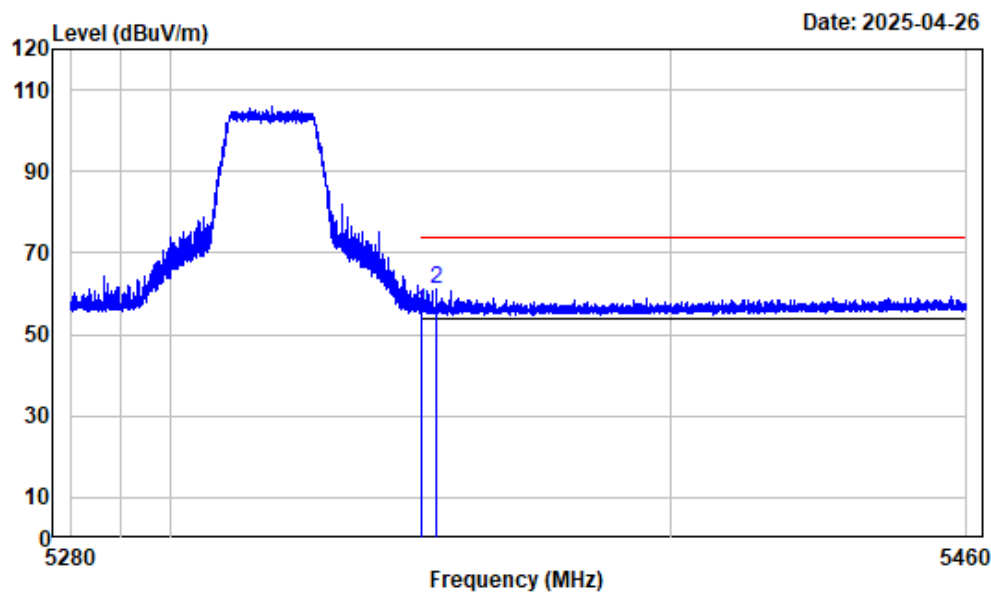

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	62.39	55.65	74.00	-18.35 Peak
2	5352.887	-6.73	67.86	61.13	74.00	-12.87 Peak


Right Band edge_Horizontal_Average 5GWi-Fi-Band2-AC20-5320MHz

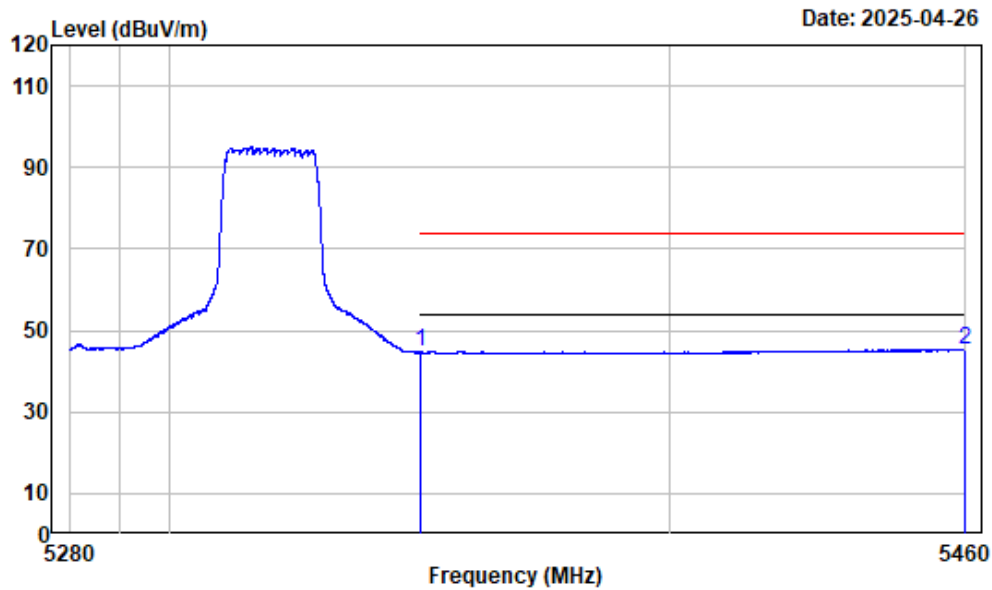

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:200Hz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	51.39	44.65	54.00	-9.35	Average
2 5459.775	-6.29	51.58	45.29	54.00	-8.71	Average


Right Band edge_Vertical_Peak 5GWi-Fi-Band2-AC20-5320MHz

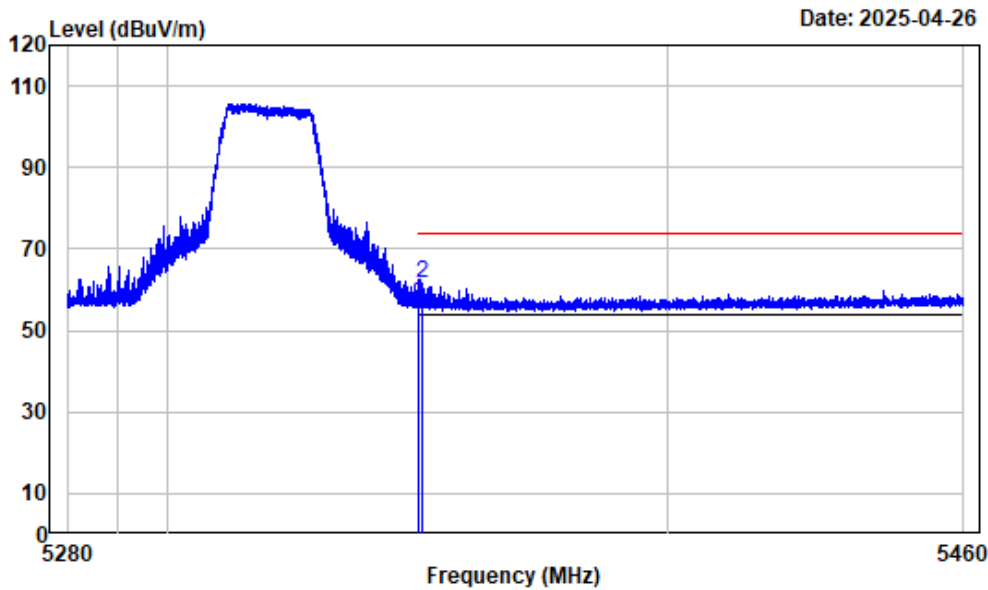

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	63.70	56.96	74.00	-17.04 Peak
2	5350.591	-6.74	68.26	61.52	74.00	-12.48 Peak


Right Band edge_Vertical_Average 5GWi-Fi-Band2-AC20-5320MHz

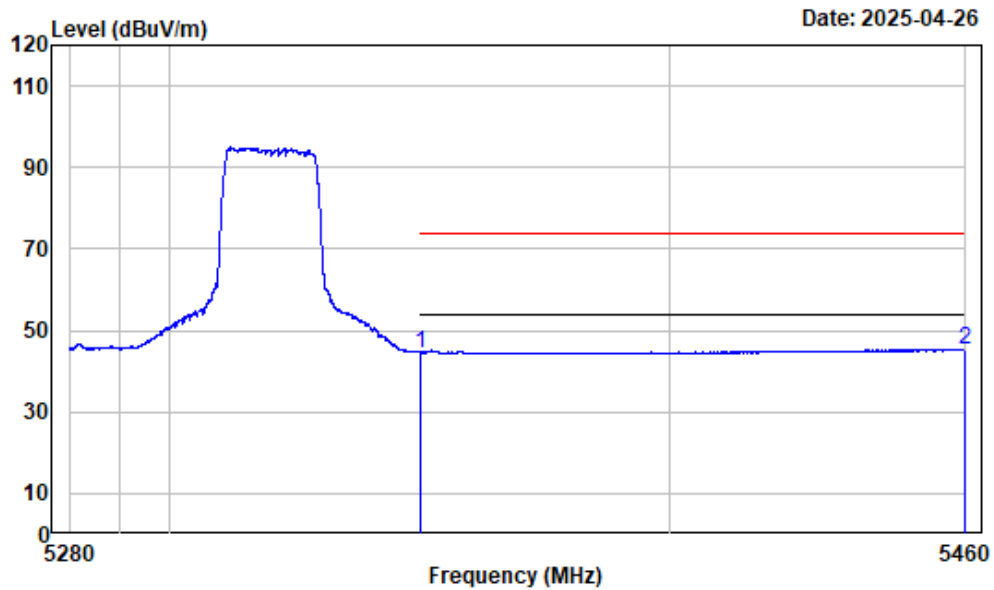

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:200Hz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	51.29	44.55	54.00	-9.45	Average
2 5459.752	-6.29	51.59	45.30	54.00	-8.70	Average


Left Band edge_Horizontal_Peak 5GWi-Fi-Band2-AC40-5270MHz

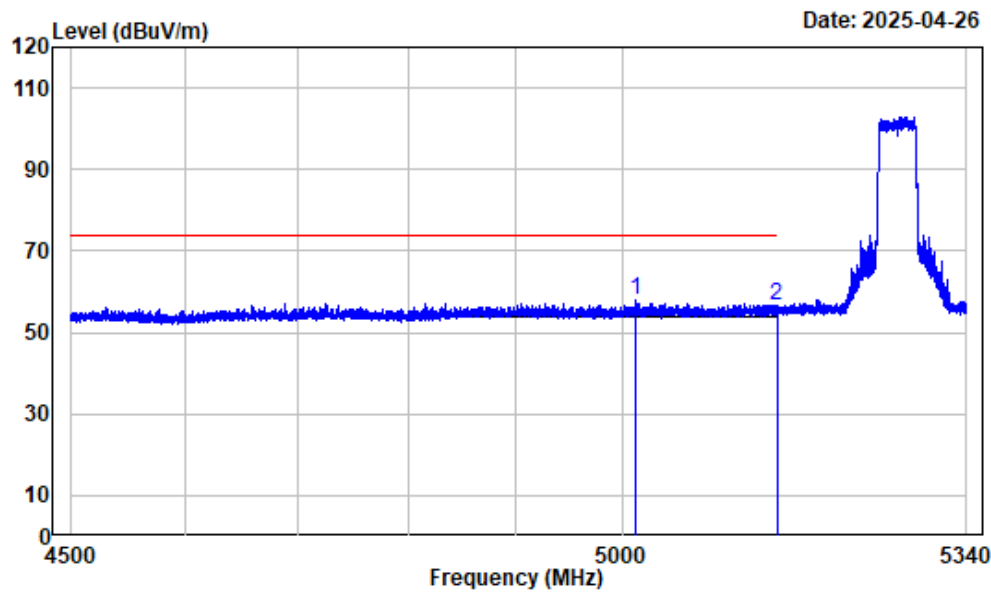

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5270

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5013.199	-7.33	65.13	57.80	74.00	-16.20	Peak
2 5150.000	-7.46	63.91	56.45	74.00	-17.55	Peak


Left Band edge_Horizontal_Average 5GWi-Fi-Band2-AC40-5270MHz

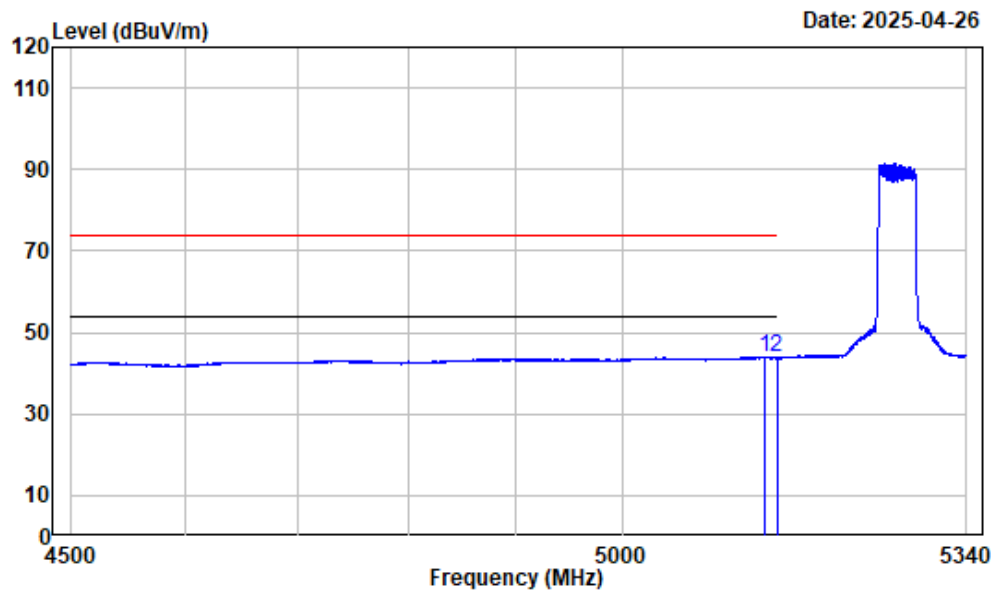

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:200Hz Detector:Peak
Note : 5GWiFi-Band2-AC40-5270

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5137.535	-7.46	51.40	43.94	54.00	-10.06	Average
2 5150.000	-7.46	51.18	43.72	54.00	-10.28	Average


Left Band edge_Vertical_Peak 5GWi-Fi-Band2-AC40-5270MHz

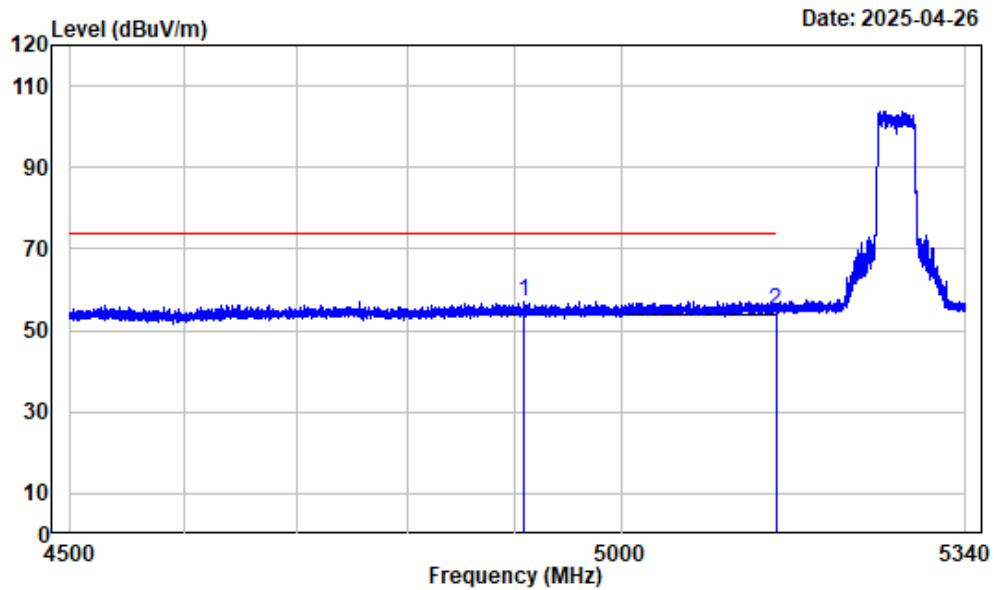

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5270

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4908.921	-7.54	64.76	57.22	74.00	-16.78 Peak
2	5150.000	-7.46	62.34	54.88	74.00	-19.12 Peak


Left Band edge_Vertical_Average 5GWi-Fi-Band2-AC40-5270MHz

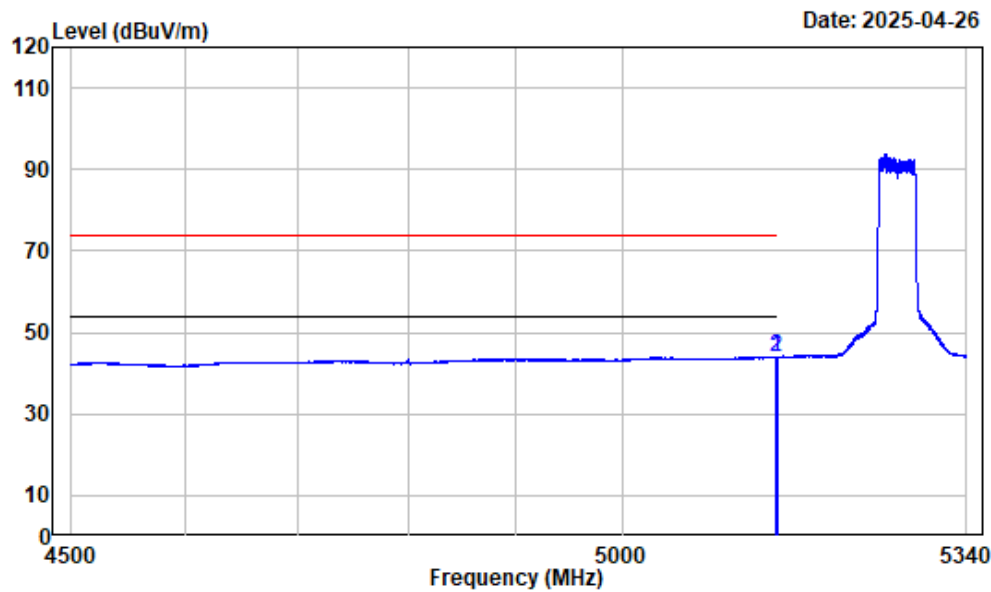

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:200Hz Detector:Peak
Note : 5GWiFi-Band2-AC40-5270

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.191	-7.46	51.47	44.01	54.00	-9.99 Average
2	5150.000	-7.46	51.28	43.82	54.00	-10.18 Average


Right Band edge_Horizontal_Peak 5GWi-Fi-Band2-AC40-5310MHz

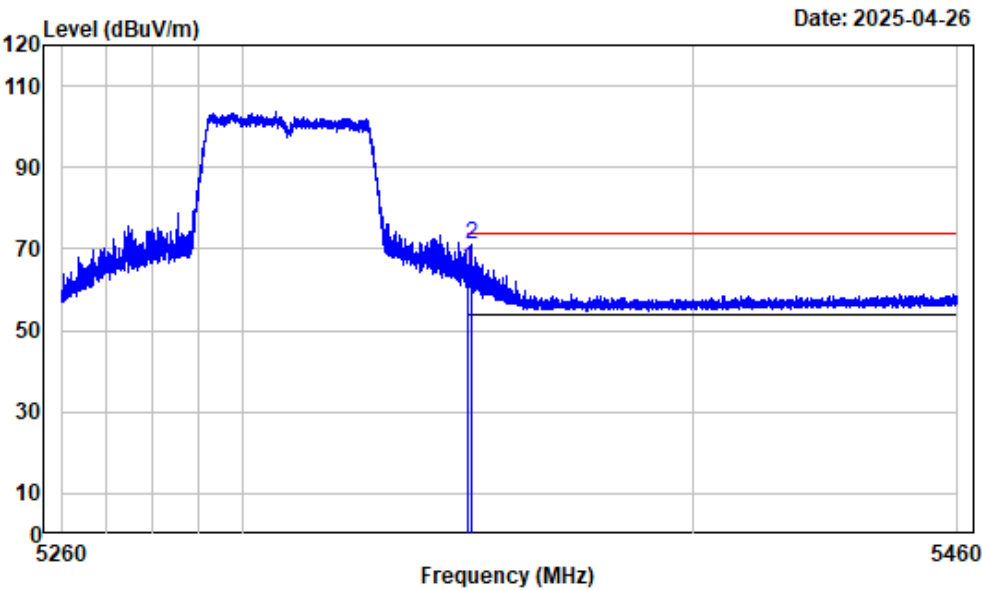

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5310

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	71.97	65.23	74.00	-8.77	Peak
2 5350.536	-6.74	77.69	70.95	74.00	-3.05	Peak


Right Band edge_Horizontal_Average 5GWi-Fi-Band2-AC40-5310MHz

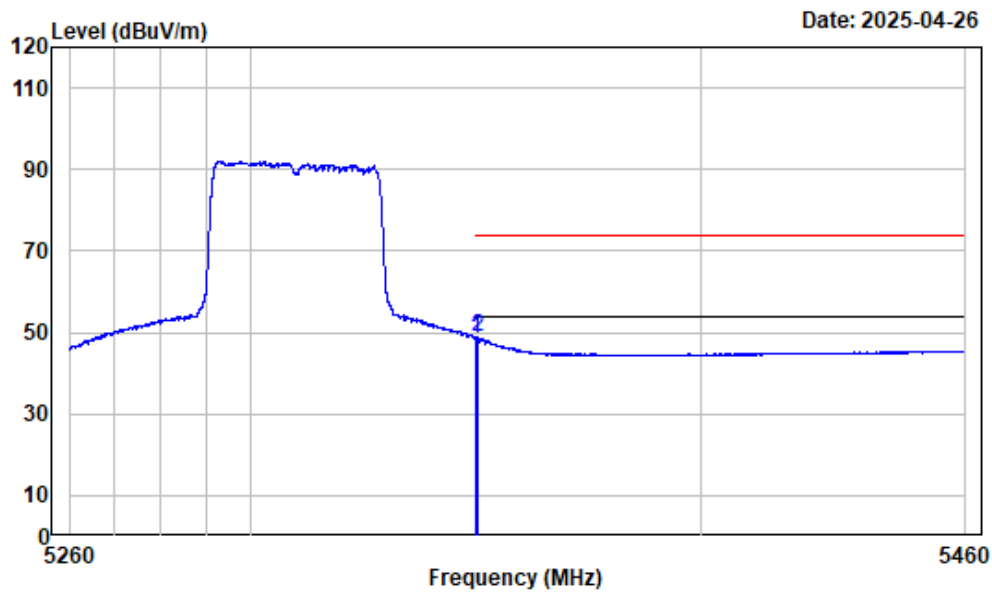

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:200Hz Detector:Peak
Note : 5GWiFi-Band2-AC40-5310

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	55.39	48.65	54.00	-5.35	Average
2 5350.211	-6.74	55.49	48.75	54.00	-5.25	Average


Right Band edge_Vertical_Peak 5GWi-Fi-Band2-AC40-5310MHz

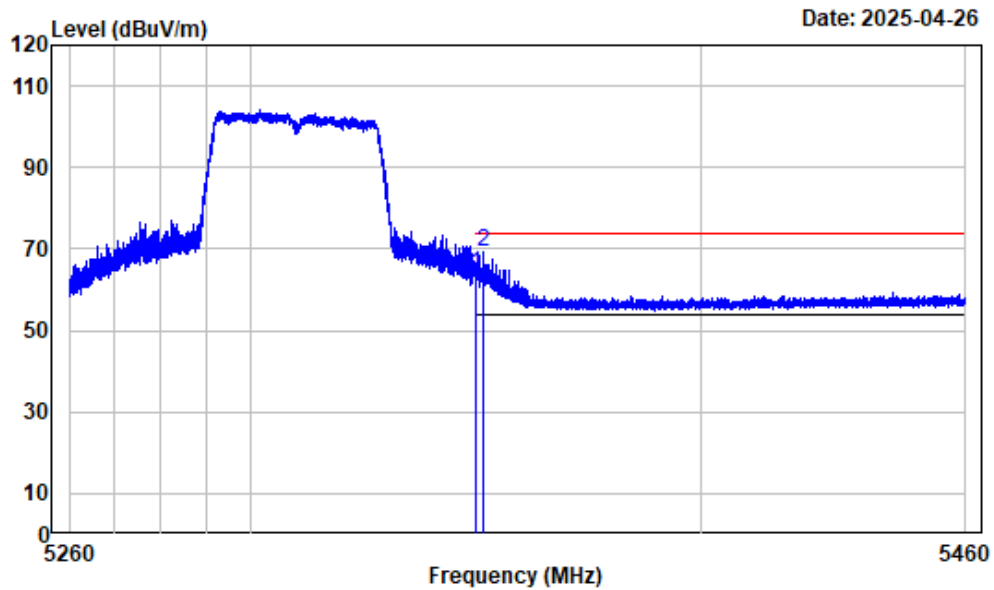

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5310

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	70.62	63.88	74.00	-10.12 Peak
2	5351.386	-6.74	76.11	69.37	74.00	-4.63 Peak


Right Band edge_Vertical_Average 5GWi-Fi-Band2-AC40-5310MHz

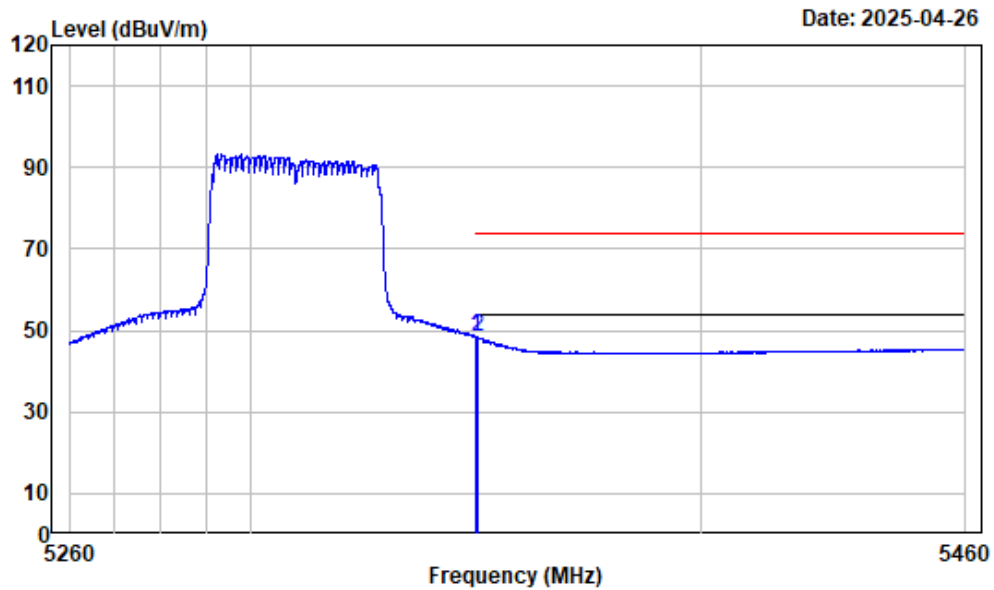

Condition : Vertical
 Project No. : 2401Y41479E-RF
 Tester : Zenos Qiao
 Spectrum setting: Average reading:RBW:1MHz VBW:200Hz Detector:Peak
 Note : 5GWiFi-Band2-AC40-5310

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	55.15	48.41	54.00	-5.59	Average
2	5350.086	-6.74	55.27	48.53	54.00	-5.47	Average


Left Band edge_Horizontal_Peak 5GWi-Fi-Band2-AX20-5260MHz

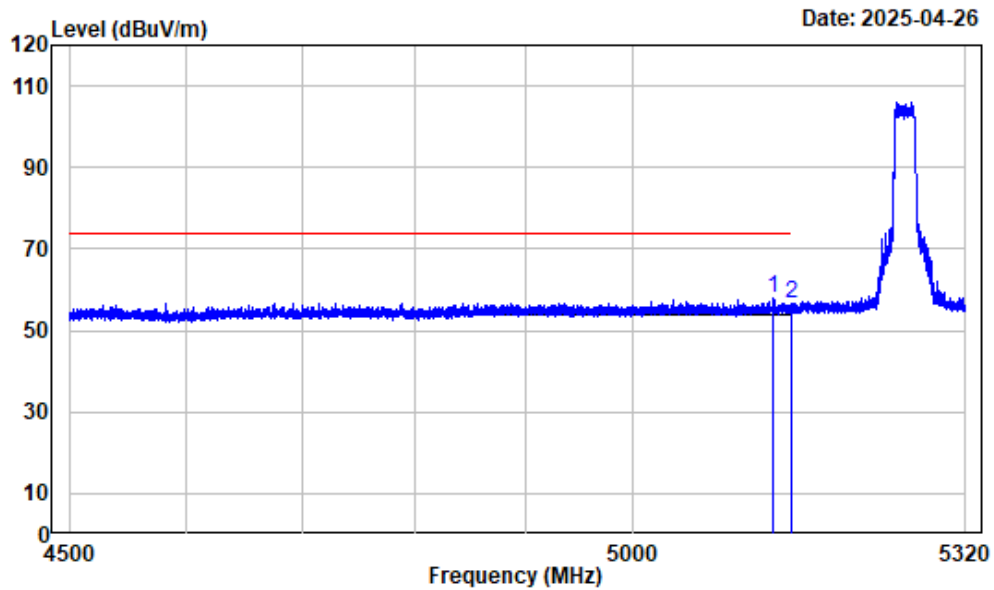

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX20-5260

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5133.017	-7.47	65.42	57.95	74.00	-16.05 Peak
2	5150.000	-7.46	64.02	56.56	74.00	-17.44 Peak


Left Band edge_Horizontal_Average 5GWi-Fi-Band2-AX20-5260MHz

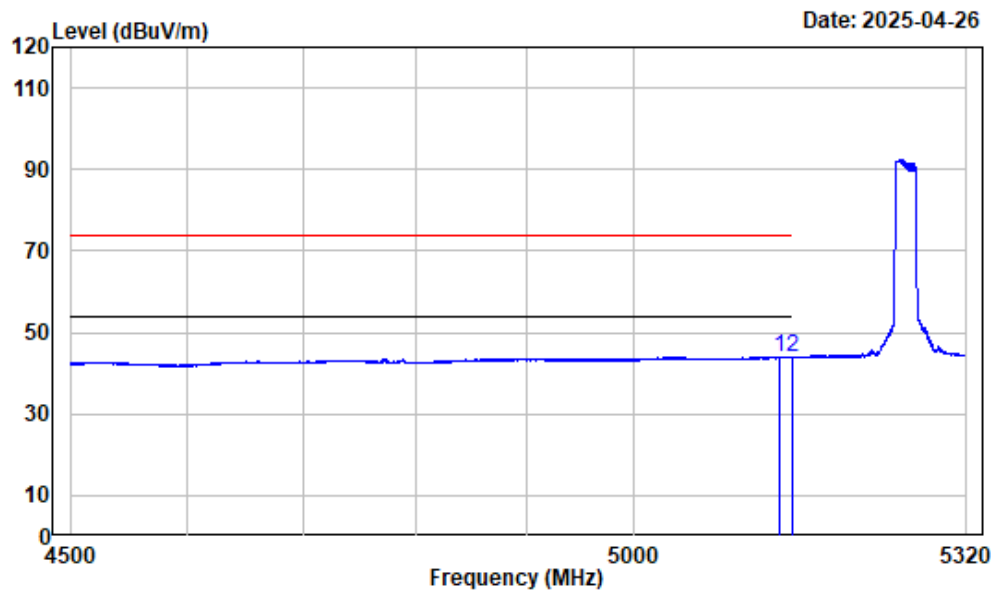

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:300Hz Detector:Peak
Note : 5GWiFi-Band2-AX20-5260

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5137.220	-7.46	51.54	44.08	54.00	-9.92	Average
2 5150.000	-7.46	51.32	43.86	54.00	-10.14	Average


Left Band edge_Vertical_Peak 5GWi-Fi-Band2-AX20-5260MHz

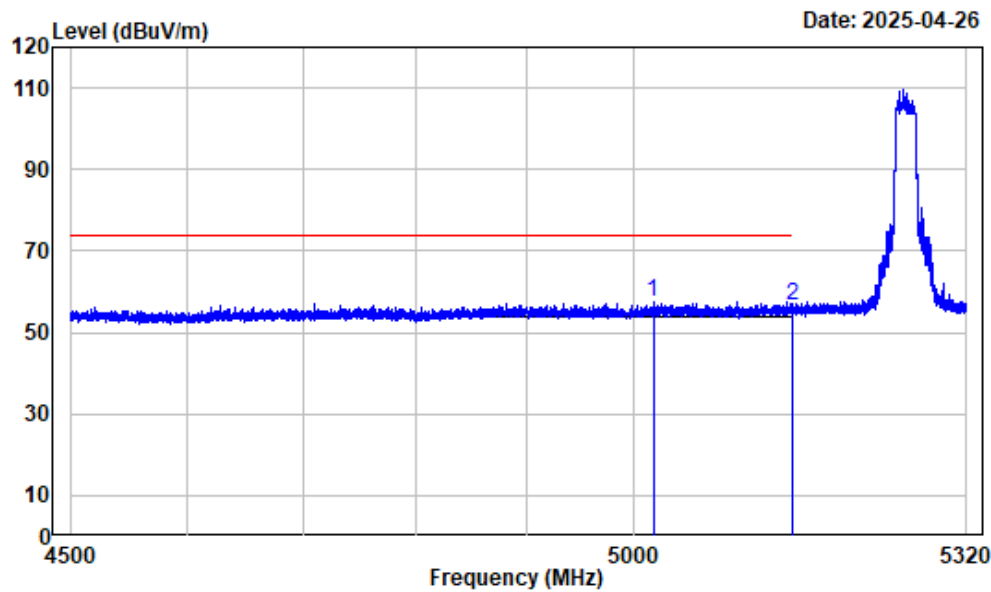

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX20-5260

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5017.587	-7.33	65.04	57.71	74.00	-16.29 Peak
2	5150.000	-7.46	64.23	56.77	74.00	-17.23 Peak


Left Band edge_Vertical_Average 5GWi-Fi-Band2-AX20-5260MHz

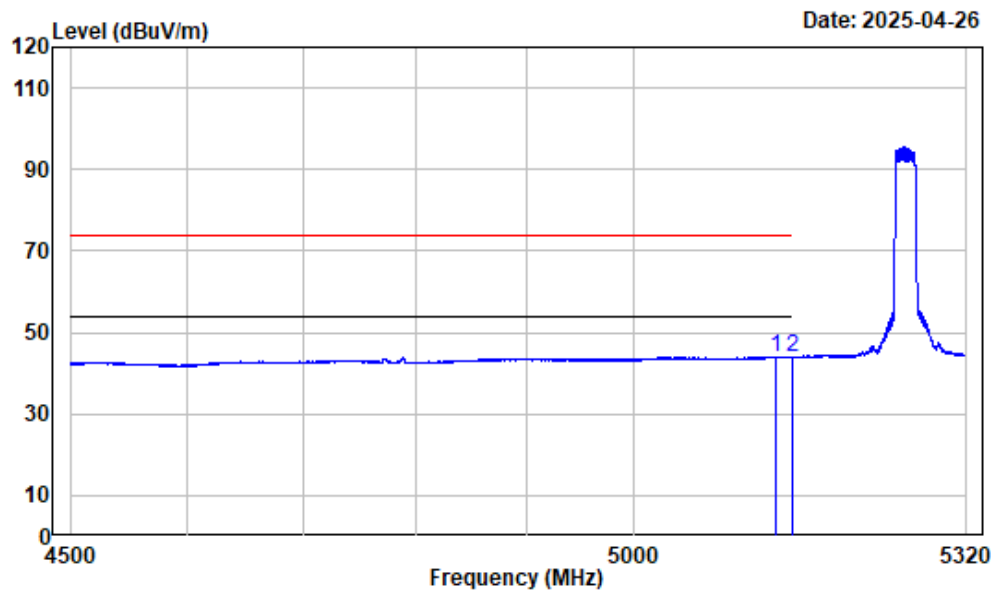

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:300Hz Detector:Peak
Note : 5GWiFi-Band2-AX20-5260

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5133.939	-7.47	51.61	44.14	54.00	-9.86 Average
2	5150.000	-7.46	51.38	43.92	54.00	-10.08 Average


Right Band edge_Horizontal_Peak 5GWi-Fi-Band2-AX20-5320MHz

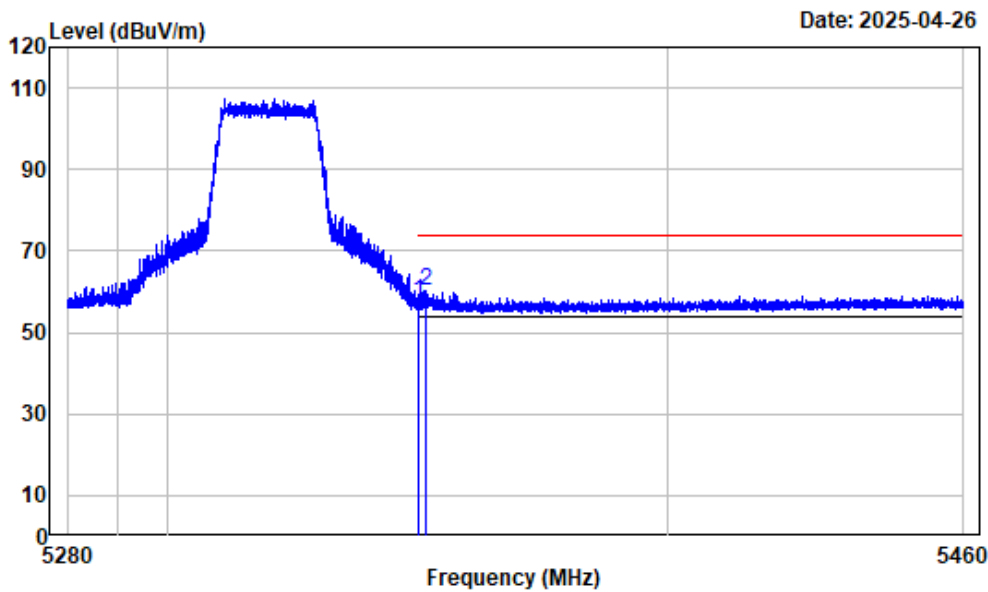

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX20-5320

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	64.38	57.64	74.00	-16.36 Peak
2	5351.154	-6.74	66.82	60.08	74.00	-13.92 Peak


Right Band edge_Horizontal_Average 5GWi-Fi-Band2-AX20-5320MHz

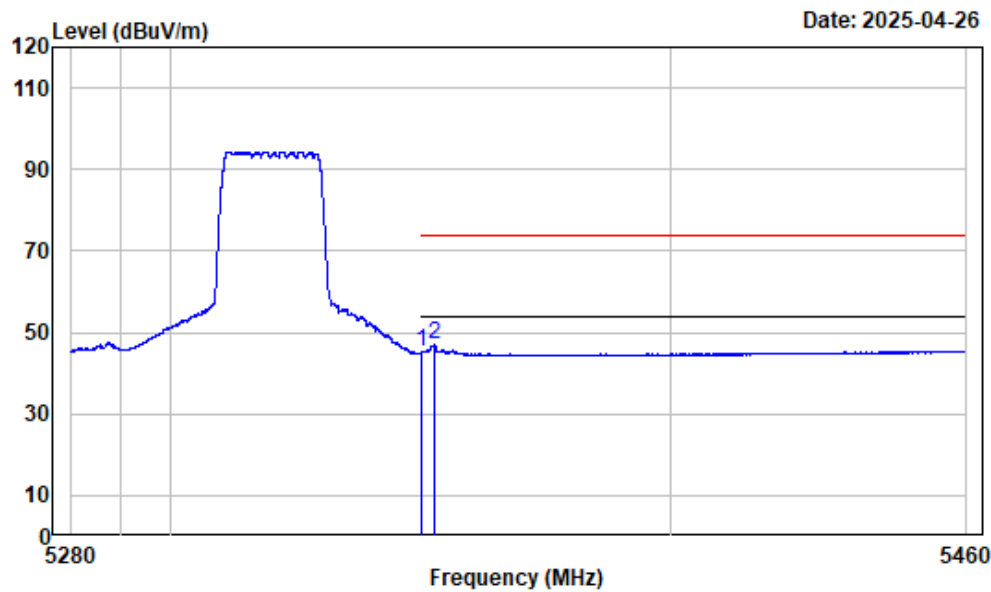

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:300Hz Detector:Peak
Note : 5GWiFi-Band2-AX20-5320

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	52.18	45.44	54.00	-8.56	Average
2 5352.302	-6.74	53.66	46.92	54.00	-7.08	Average


Right Band edge_Vertical_Peak 5GWi-Fi-Band2-AX20-5320MHz

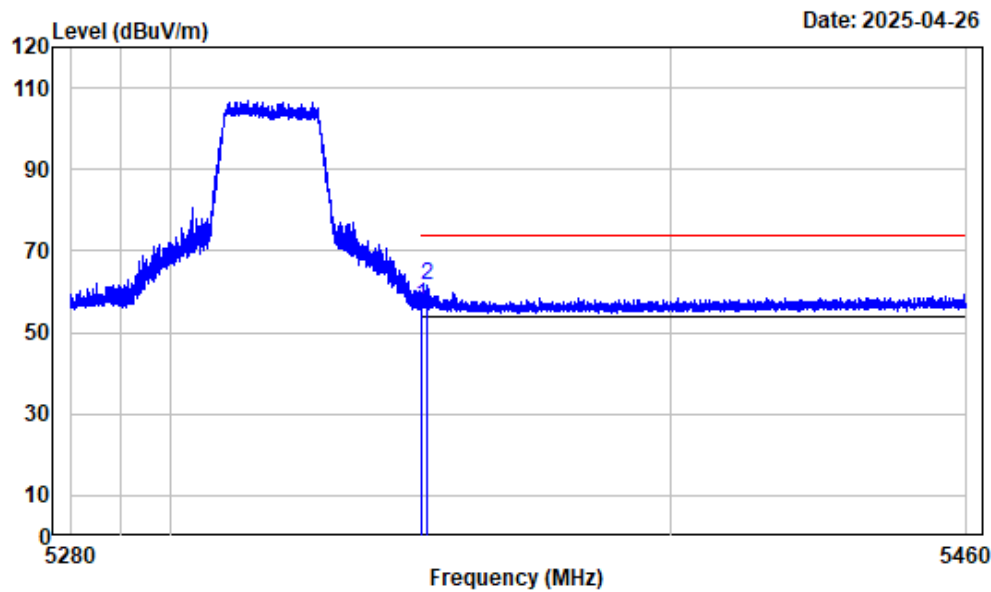

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX20-5320

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	63.35	56.61	74.00	-17.39	Peak
2 5350.929	-6.74	68.11	61.37	74.00	-12.63	Peak


Right Band edge_Vertical_Average 5GWi-Fi-Band2-AX20-5320MHz

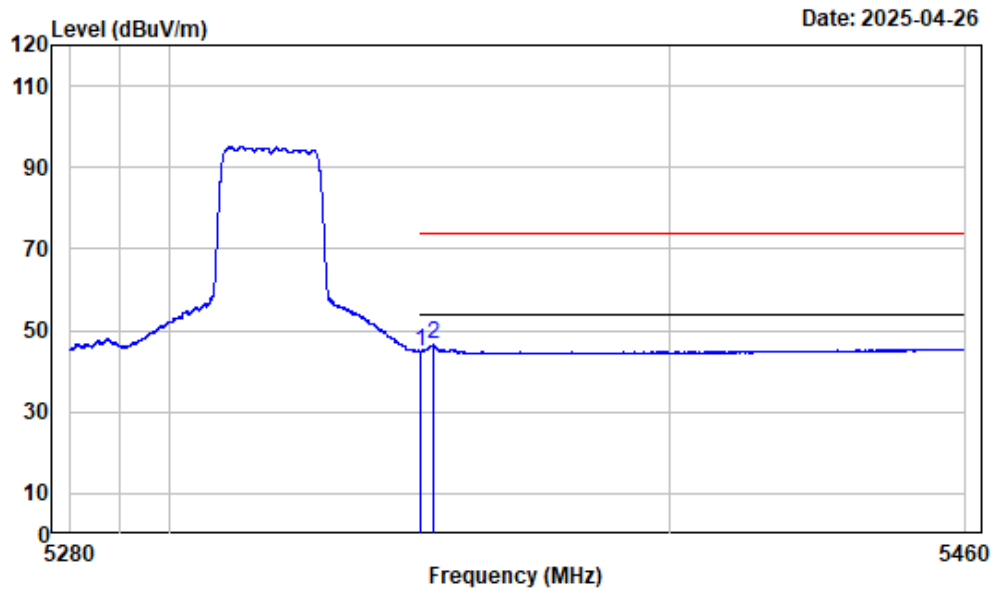

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:300Hz Detector:Peak
Note : 5GWiFi-Band2-AX20-5320

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	51.67	44.93	54.00	-9.07	Average
2 5352.414	-6.74	53.34	46.60	54.00	-7.40	Average


Left Band edge_Horizontal_Peak 5GWi-Fi-Band2-AX40-5270MHz

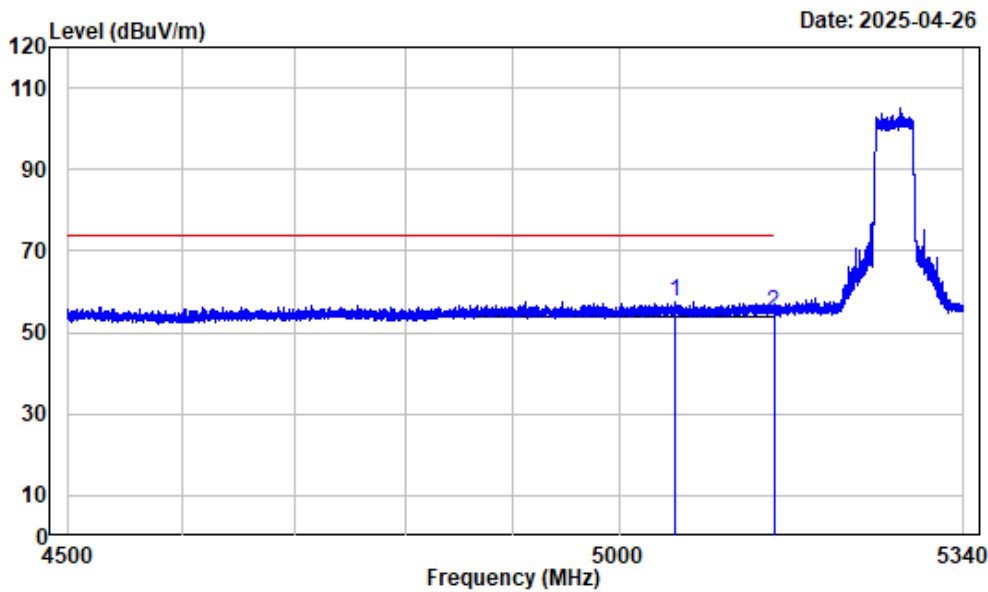

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX40-5270

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5054.259	-7.33	64.89	57.56	74.00	-16.44 Peak
2	5150.000	-7.46	62.47	55.01	74.00	-18.99 Peak


Left Band edge_Horizontal_Average 5GWi-Fi-Band2-AX40-5270MHz

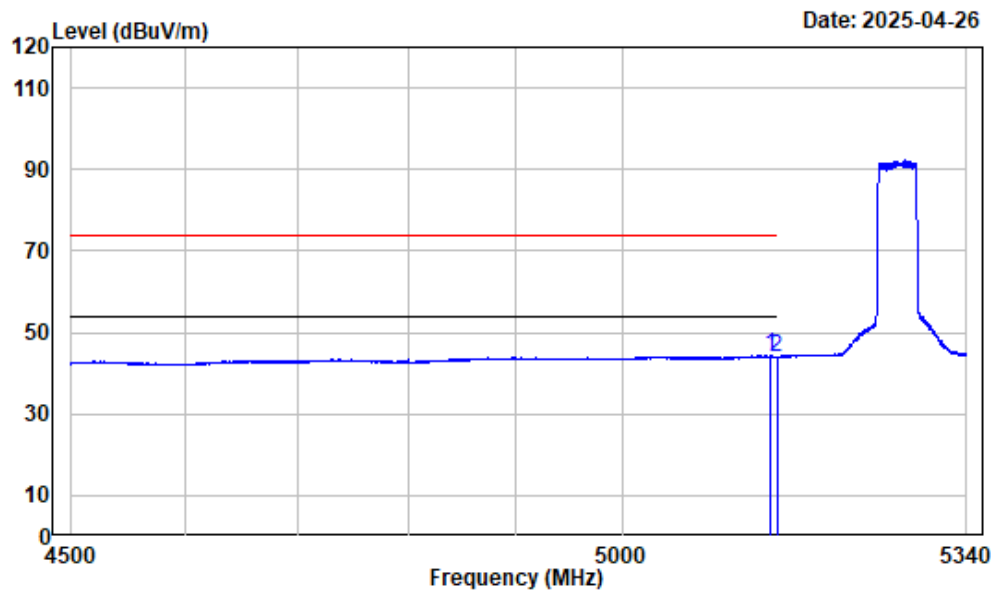

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:300Hz Detector:Peak
Note : 5GWiFi-Band2-AX40-5270

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5143.101	-7.46	51.71	44.25	54.00	-9.75 Average
2	5150.000	-7.46	51.46	44.00	54.00	-10.00 Average


Left Band edge_Vertical_Peak 5GWi-Fi-Band2-AX40-5270MHz

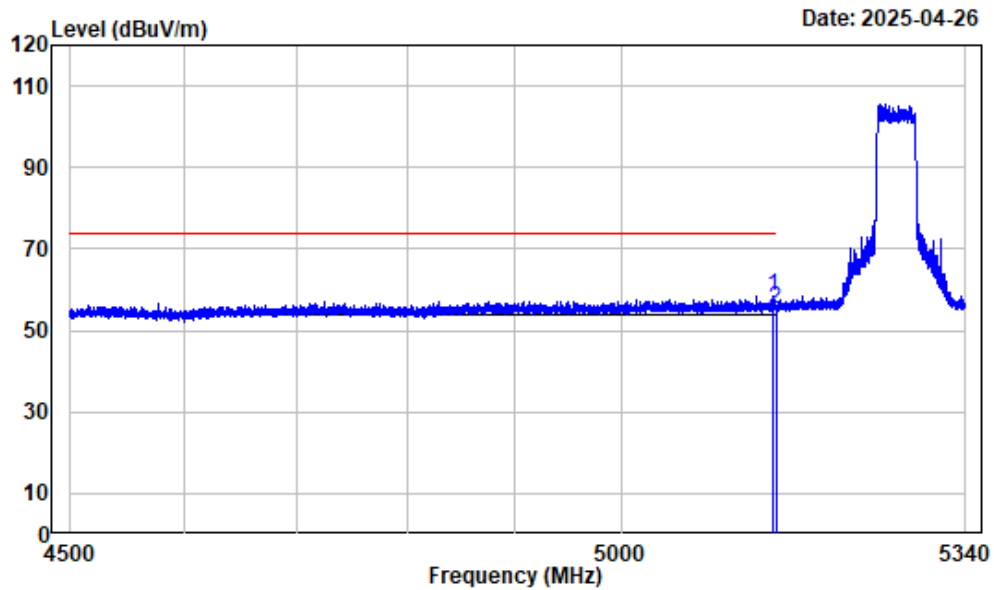

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX40-5270

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5147.301	-7.46	65.87	58.41	74.00	-15.59 Peak
2	5150.000	-7.46	62.84	55.38	74.00	-18.62 Peak


Left Band edge_Vertical_Average 5GWi-Fi-Band2-AX40-5270MHz

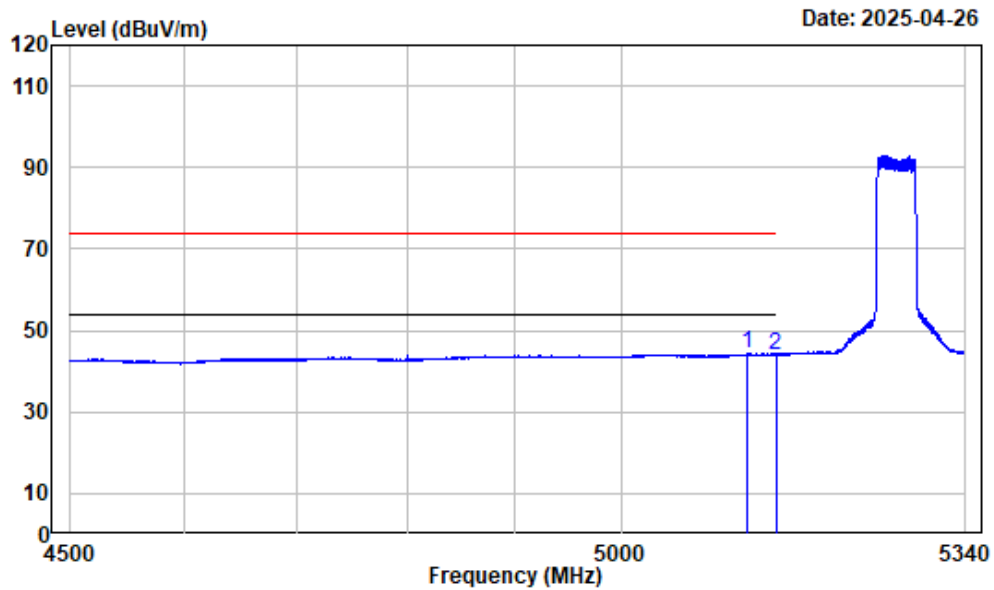

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:300Hz Detector:Peak
Note : 5GWiFi-Band2-AX40-5270

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5122.833	-7.47	51.82	44.35	54.00	-9.65 Average
2	5150.000	-7.46	51.59	44.13	54.00	-9.87 Average


Right Band edge_Horizontal_Peak 5GWi-Fi-Band2-AX40-5310MHz

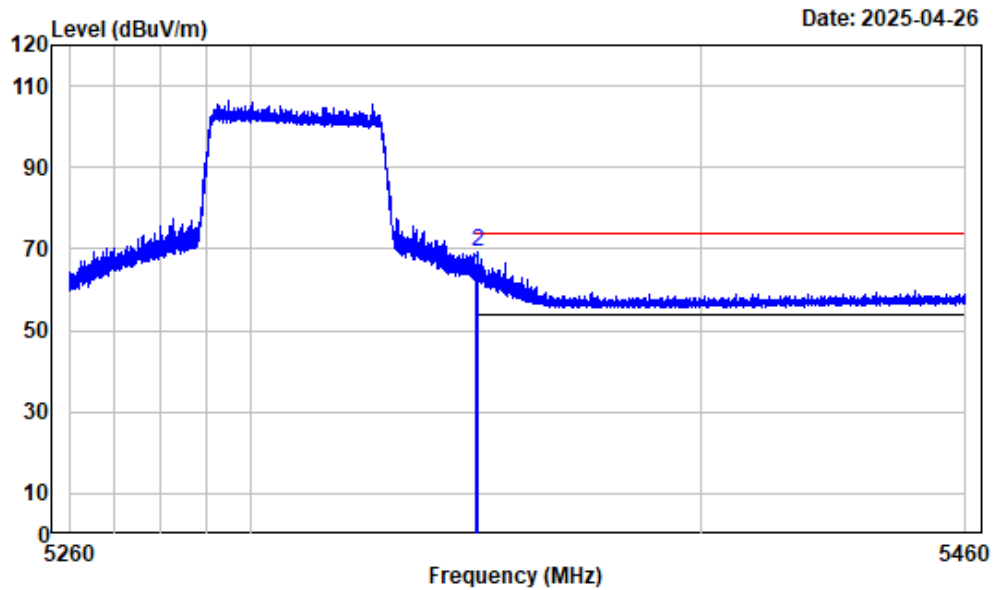

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX40-5310

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	70.15	63.41	74.00	-10.59 Peak
2	5350.111	-6.74	76.10	69.36	74.00	-4.64 Peak


Right Band edge_Horizontal_Average 5GWi-Fi-Band2-AX40-5310MHz

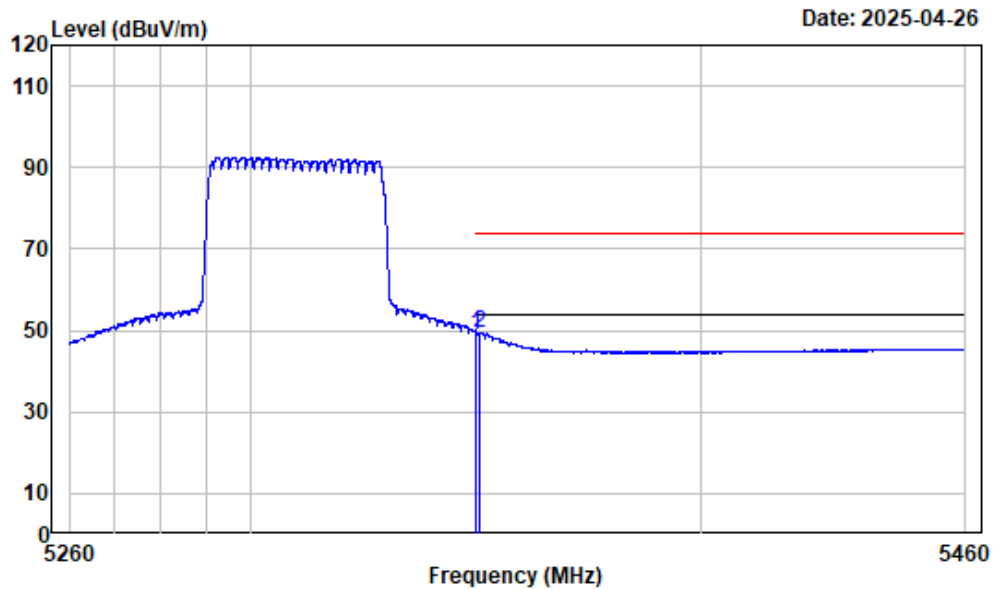

Condition : Horizontal
 Project No. : 2401Y41479E-RF
 Tester : Zenos Qiao
 Spectrum setting: Average reading:RBW:1MHz VBW:300Hz Detector:Peak
 Note : 5GWiFi-Band2-AX40-5310

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	55.61	48.87	54.00	-5.13	Average
2	5350.511	-6.74	56.29	49.55	54.00	-4.45	Average


Right Band edge_Vertical_Peak 5GWi-Fi-Band2-AX40-5310MHz

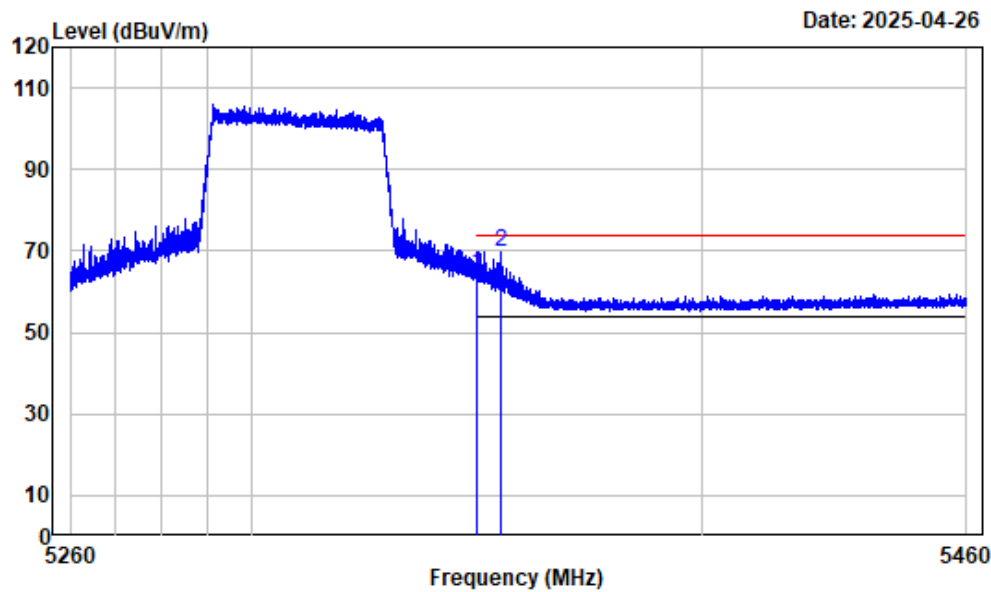

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX40-5310

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	70.82	64.08	74.00	-9.92 Peak
2	5355.337	-6.73	76.42	69.69	74.00	-4.31 Peak


Right Band edge_Vertical_Average 5GWi-Fi-Band2-AX40-5310MHz

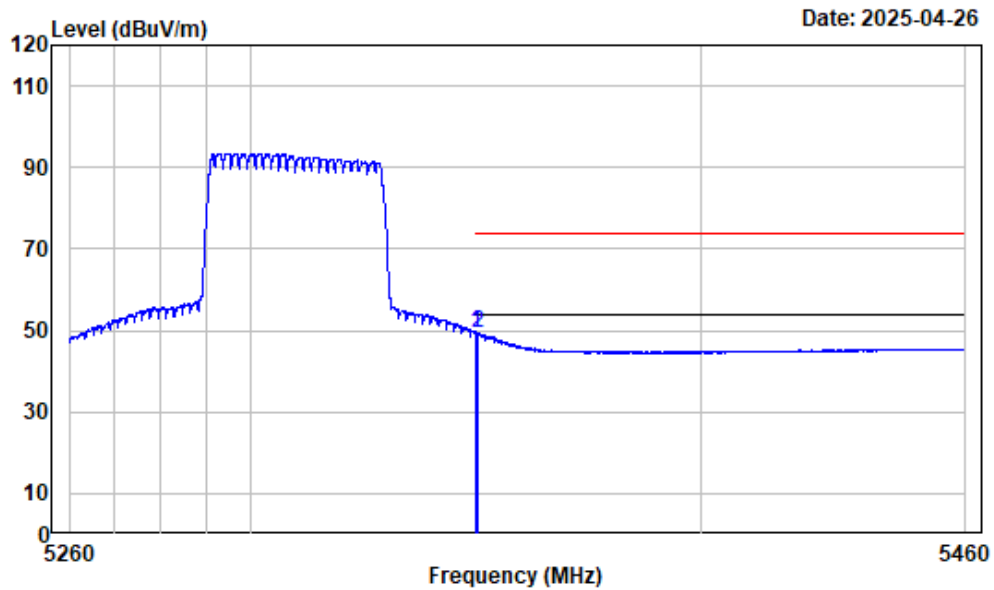

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:300Hz Detector:Peak
Note : 5GWiFi-Band2-AX40-5310

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	55.88	49.14	54.00	-4.86 Average
2	5350.061	-6.74	56.02	49.28	54.00	-4.72 Average


Left Band edge_Horizontal_Peak 5GWi-Fi-Band3-A-5500MHz

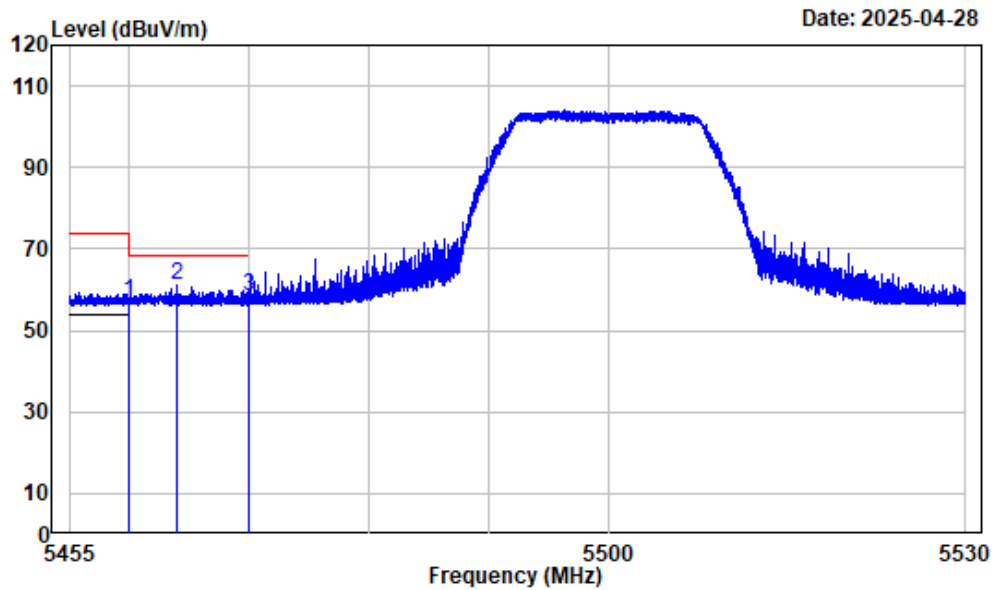

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5500

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5460.000	-6.29	63.37	57.08	74.00	-16.92	Peak
2 5463.907	-6.28	67.27	60.99	68.20	-7.21	Peak
3 5470.000	-6.26	64.46	58.20	68.20	-10.00	Peak


Left Band edge_Horizontal_Average 5GWi-Fi-Band3-A-5500MHz

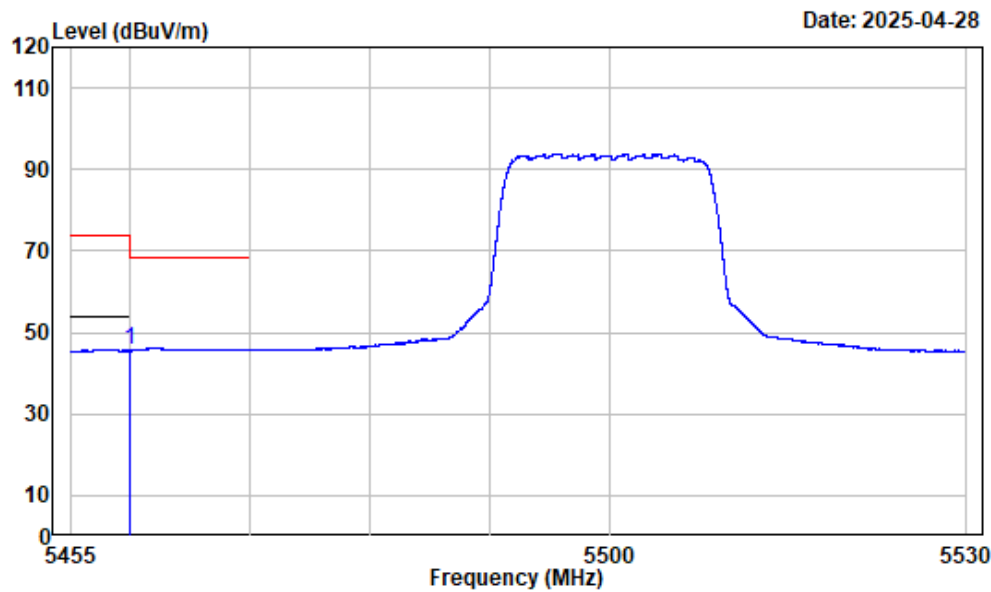

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:200Hz Detector:Peak
Note : 5GWiFi-Band3-A-5500

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.29	51.89	45.60	54.00	-8.40	Average


Left Band edge_Vertical_Peak 5GWi-Fi-Band3-A-5500MHz

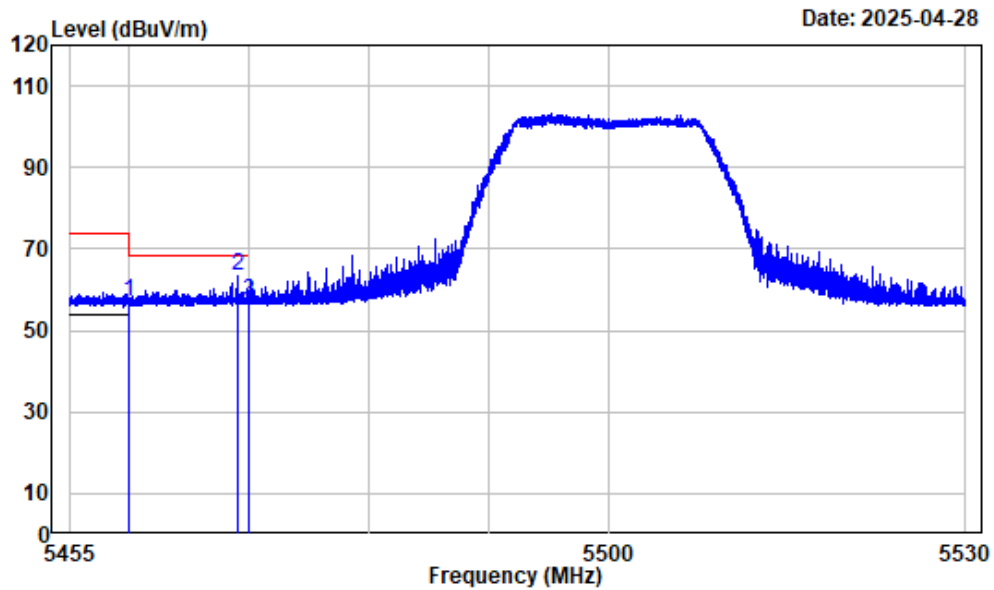

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5500

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.29	63.28	56.99	74.00	-17.01	Peak
2	5468.980	-6.26	69.44	63.18	68.20	-5.02	Peak
3	5470.000	-6.26	63.19	56.93	68.20	-11.27	Peak


Left Band edge_Vertical_Average 5GWi-Fi-Band3-A-5500MHz

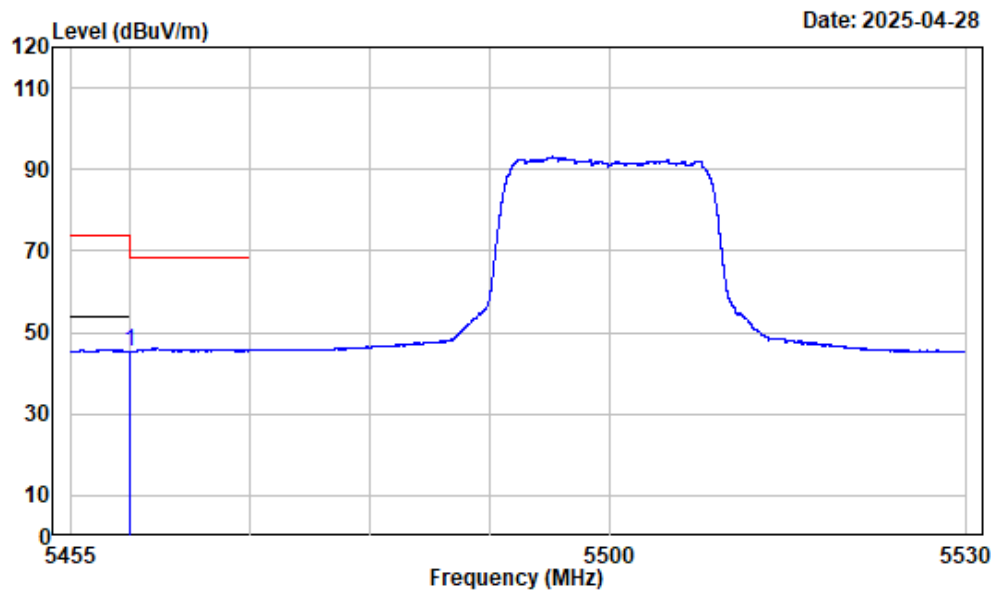

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:200Hz Detector:Peak
Note : 5GWiFi-Band3-A-5500

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.29	51.65	45.36	54.00	-8.64	Average


Right Band edge_Horizontal_Peak 5GWi-Fi-Band3-A-5700MHz

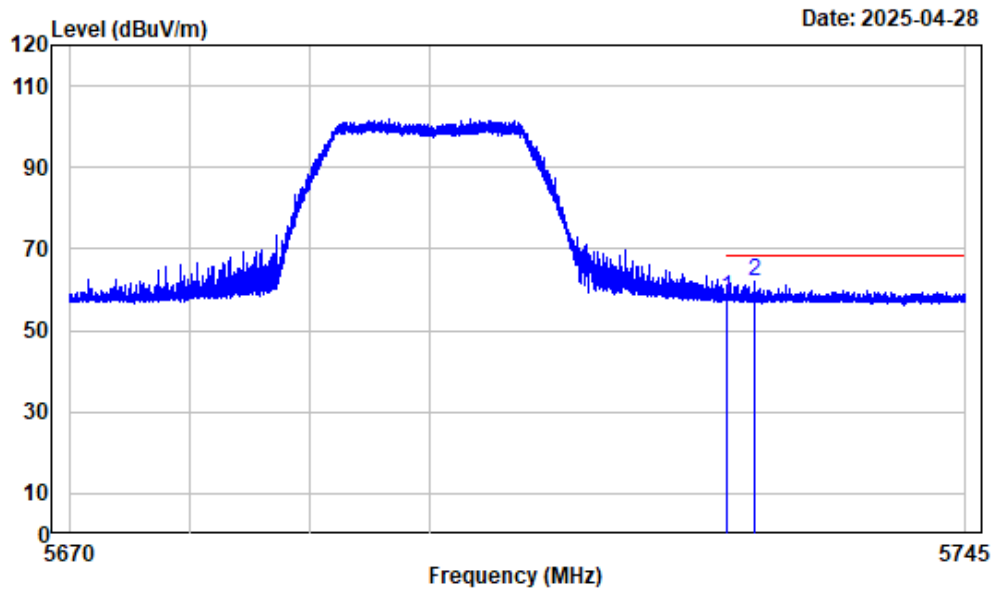

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5700

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5725.000	-5.48	63.47	57.99	68.20	-10.21	Peak
2 5727.335	-5.47	67.42	61.95	68.20	-6.25	Peak


Right Band edge_Vertical_Peak 5GWi-Fi-Band3-A-5700MHz

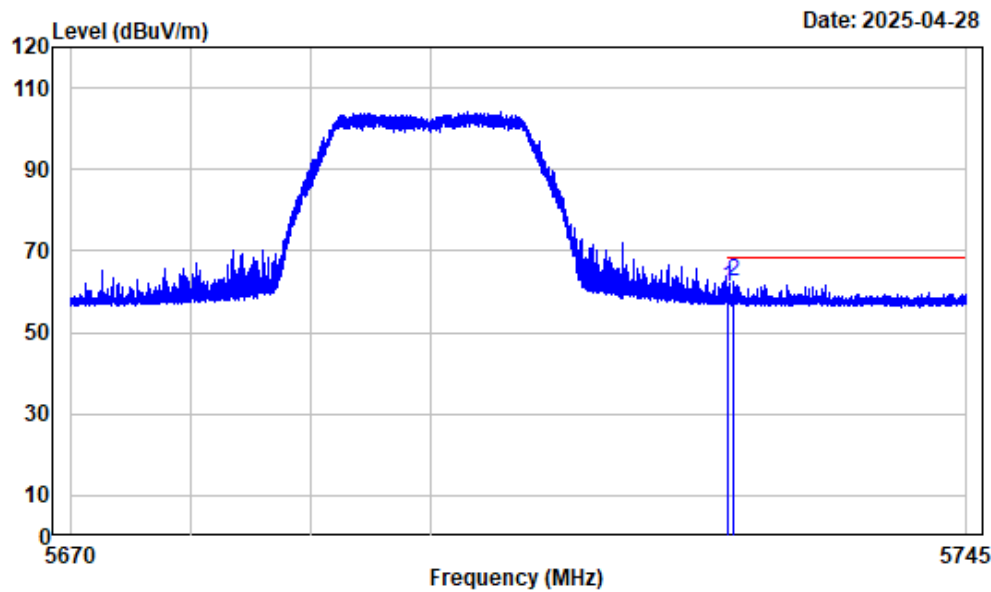

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5700

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5725.000	-5.48	66.44	60.96	68.20	-7.24	Peak
2 5725.385	-5.48	67.94	62.46	68.20	-5.74	Peak


Left Band edge_Horizontal_Peak 5GWi-Fi-Band3-AC20-5500MHz

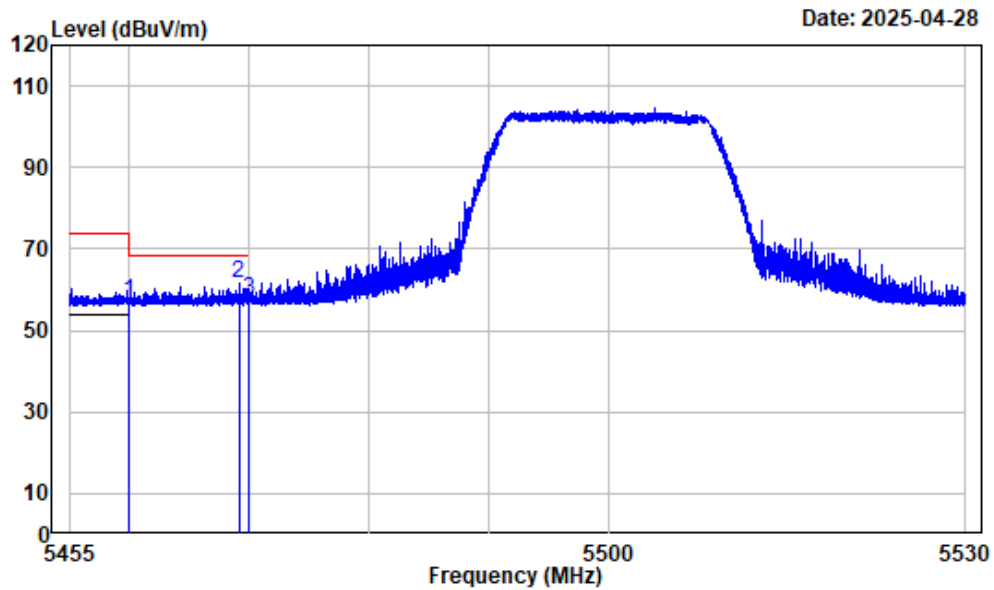

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5500

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.29	63.12	56.83	74.00	-17.17	Peak
2	5469.102	-6.26	67.84	61.58	68.20	-6.62	Peak
3	5470.000	-6.26	63.76	57.50	68.20	-10.70	Peak


Left Band edge_Horizontal_Average 5GWi-Fi-Band3-AC20-5500MHz

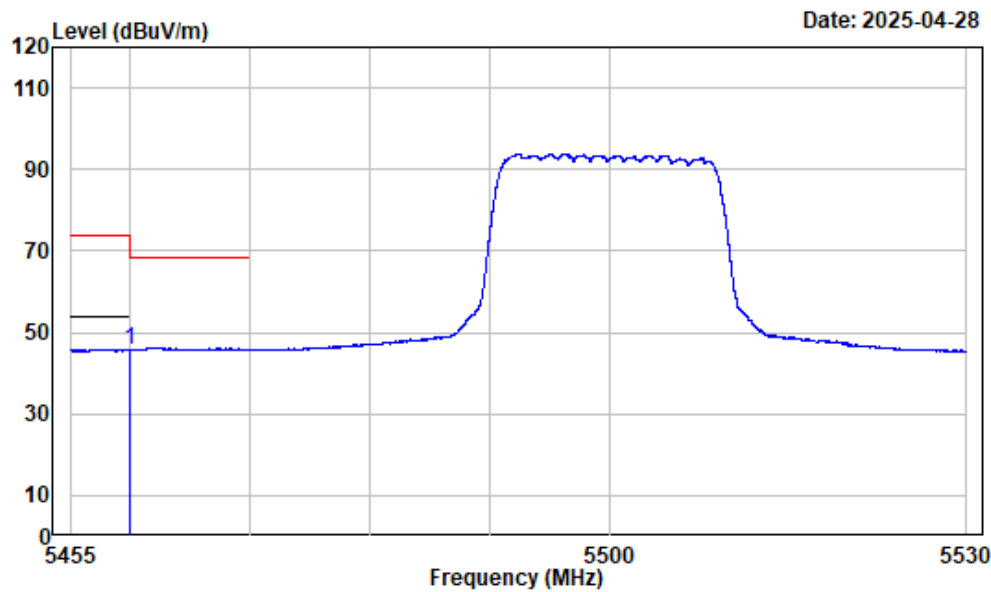

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:200Hz Detector:Peak
Note : 5GWiFi-Band3-AC20-5500

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.29	51.92	45.63	54.00	-8.37	Average


Left Band edge_Vertical_Peak 5GWi-Fi-Band3-AC20-5500MHz

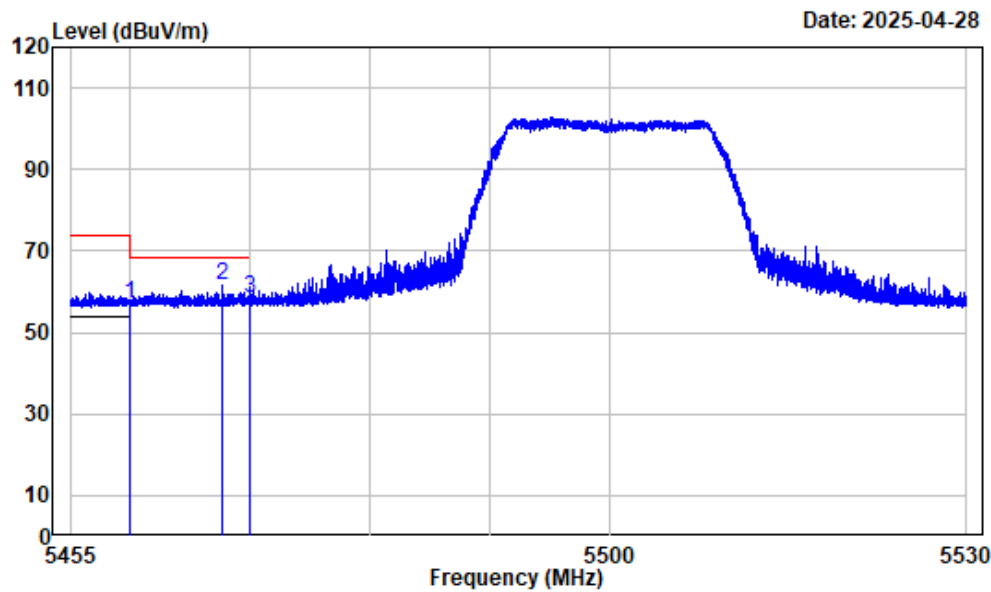

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5500

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5460.000	-6.29	63.16	56.87	74.00	-17.13	Peak
2 5467.648	-6.26	67.76	61.50	68.20	-6.70	Peak
3 5470.000	-6.26	64.56	58.30	68.20	-9.90	Peak


Left Band edge_Vertical_Average 5GWi-Fi-Band3-AC20-5500MHz

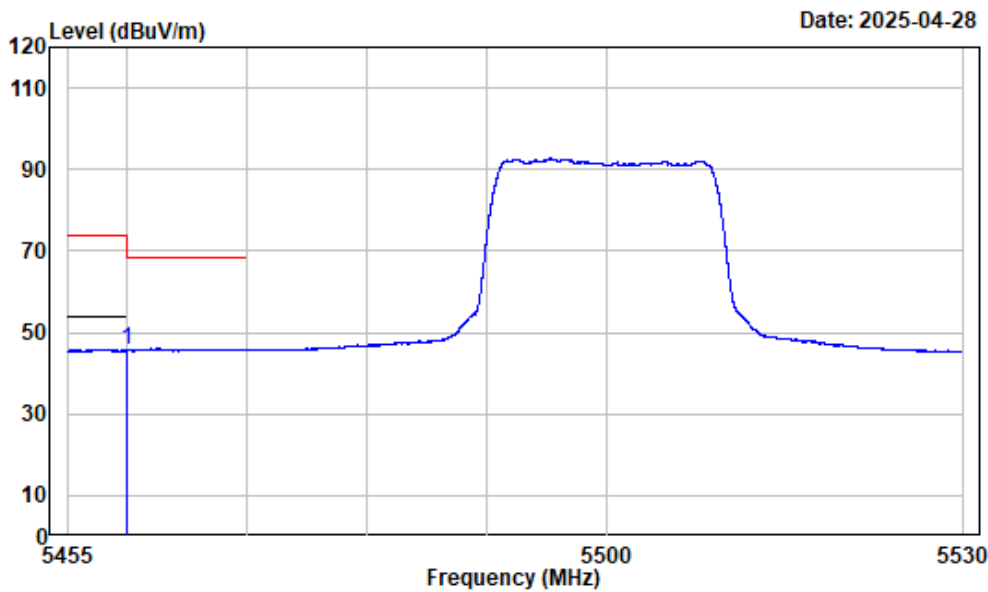

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:200Hz Detector:Peak
Note : 5GWiFi-Band3-AC20-5500

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5460.000	-6.29	51.83	45.54	54.00	-8.46	Average


Right Band edge_Horizontal_Peak 5GWi-Fi-Band3-AC20-5700MHz

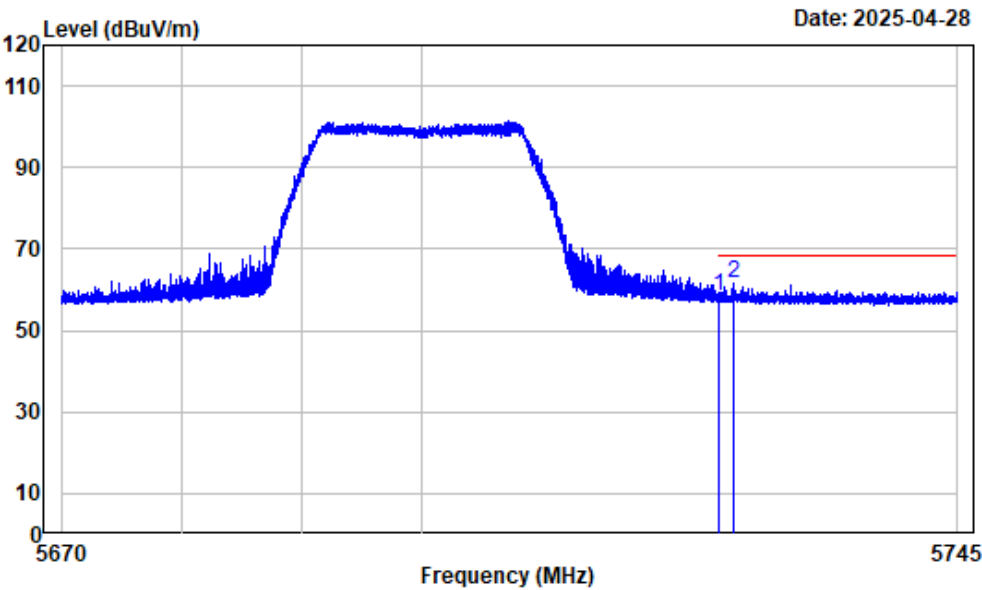

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5700

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5725.000	-5.48	63.70	58.22	68.20	-9.98	Peak
2 5726.145	-5.48	66.87	61.39	68.20	-6.81	Peak


Right Band edge_Vertical_Peak 5GWi-Fi-Band3-AC20-5700MHz

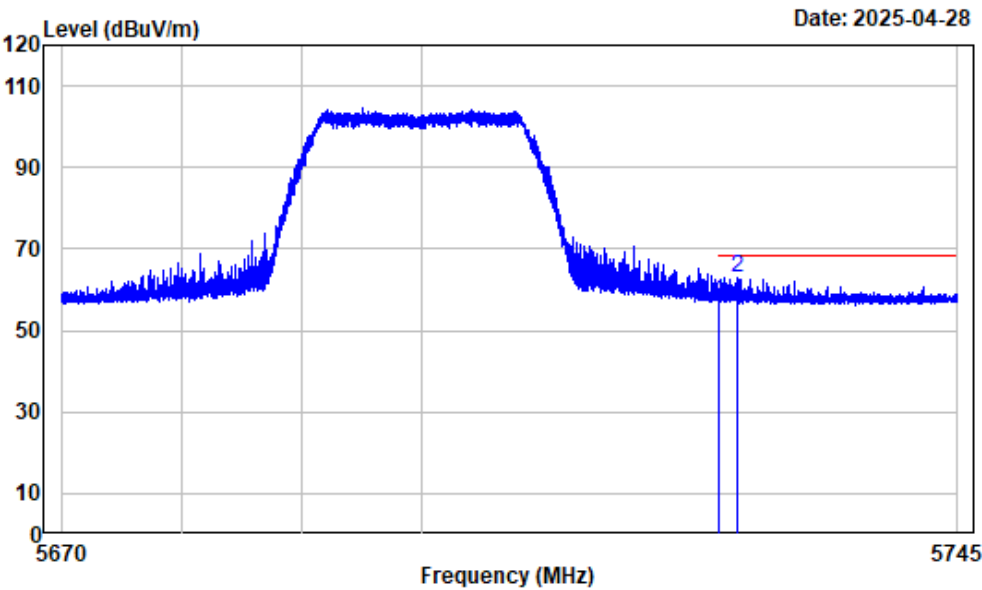

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5700

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-5.48	62.48	57.00	68.20	-11.20 Peak
2	5726.557	-5.48	68.47	62.99	68.20	-5.21 Peak


Left Band edge_Horizontal_Peak 5GWi-Fi-Band3-AC40-5510MHz

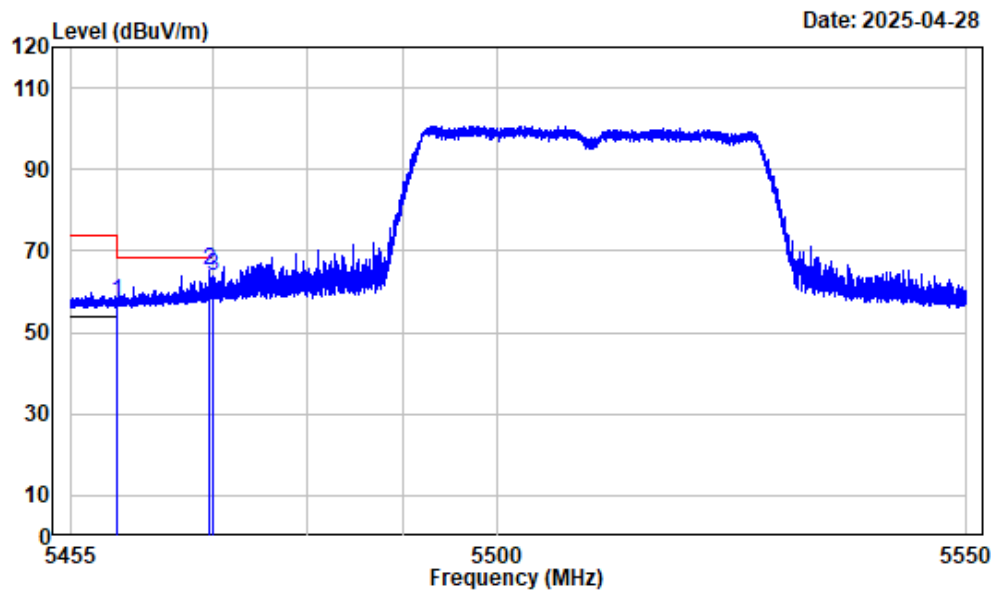

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5510

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5460.000	-6.29	63.60	57.31	74.00	-16.69	Peak
2 5469.715	-6.26	71.42	65.16	68.20	-3.04	Peak
3 5470.000	-6.26	70.13	63.87	68.20	-4.33	Peak


Left Band edge_Horizontal_Average 5GWi-Fi-Band3-AC40-5510MHz

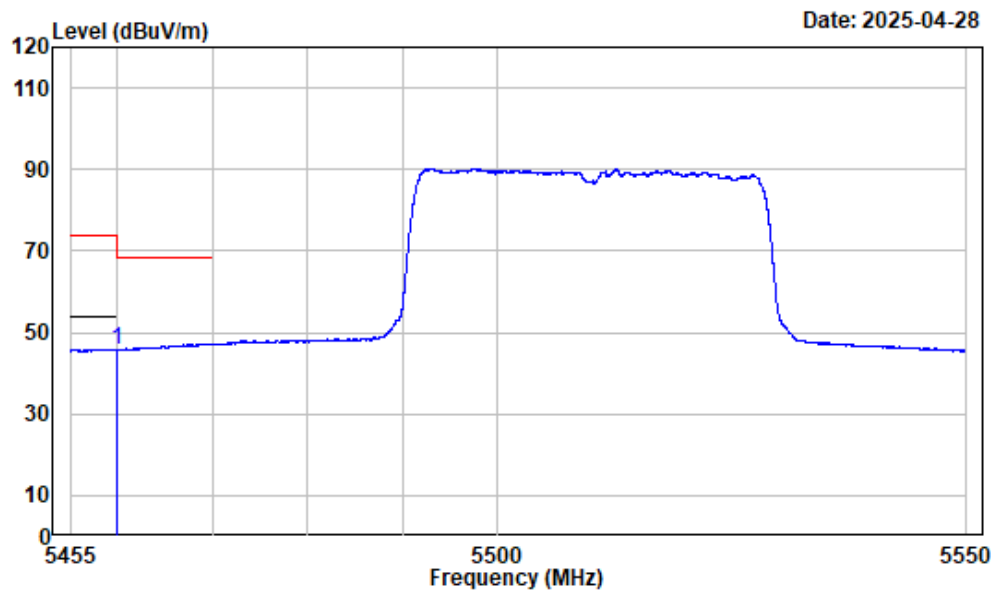

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:200Hz Detector:Peak
Note : 5GWiFi-Band3-AC40-5510

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.29	52.13	45.84	54.00	-8.16	Average


Left Band edge_Vertical_Peak 5GWi-Fi-Band3-AC40-5510MHz

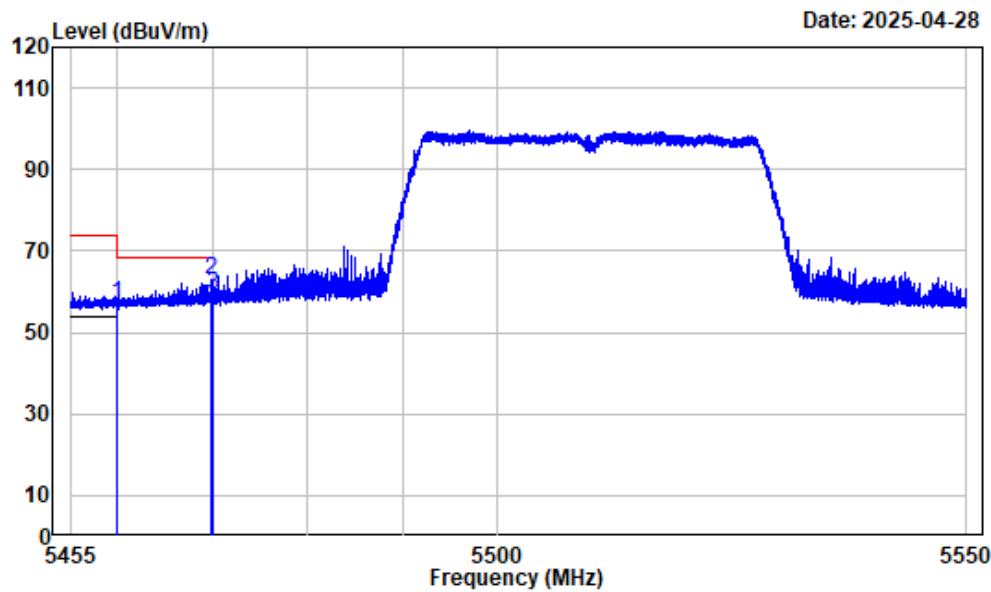

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5510

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5460.000	-6.29	63.43	57.14	74.00	-16.86	Peak
2 5469.905	-6.26	69.14	62.88	68.20	-5.32	Peak
3 5470.000	-6.26	65.73	59.47	68.20	-8.73	Peak


Left Band edge_Vertical_Average 5GWi-Fi-Band3-AC40-5510MHz

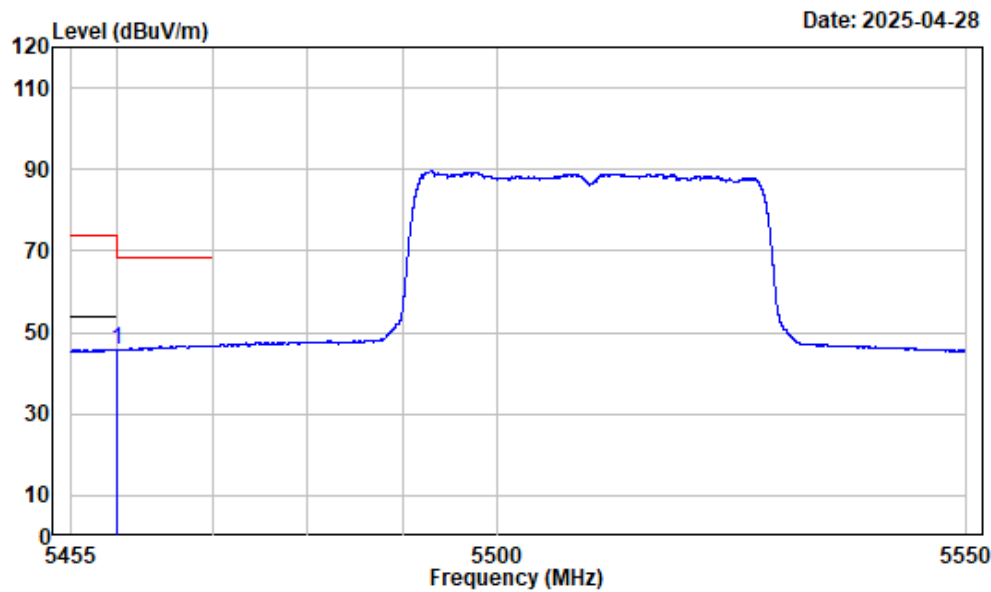

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:200Hz Detector:Peak
Note : 5GWiFi-Band3-AC40-5510

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.29	51.90	45.61	54.00	-8.39	Average


Right Band edge_Horizontal_Peak 5GWi-Fi-Band3-AC40-5670MHz

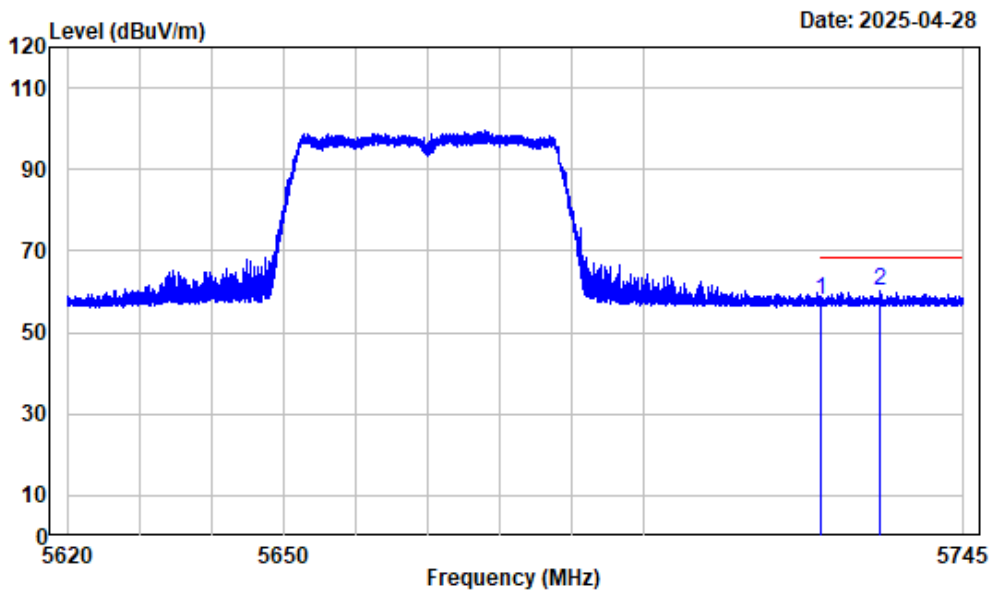

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5670

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5725.000	-5.48	63.29	57.81	68.20	-10.39	Peak
2 5733.155	-5.41	65.61	60.20	68.20	-8.00	Peak


Right Band edge_Vertical_Peak 5GWi-Fi-Band3-AC40-5670MHz

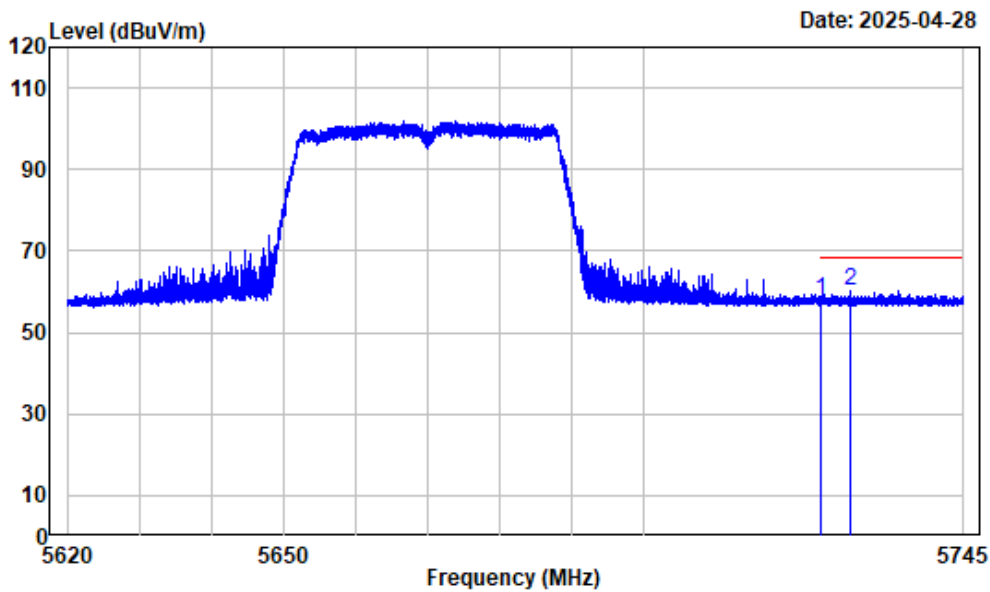

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5670

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5725.000	-5.48	63.31	57.83	68.20	-10.37	Peak
2 5729.092	-5.44	65.67	60.23	68.20	-7.97	Peak


Left Band edge_Horizontal_Peak 5GWi-Fi-Band3-AX20-5500MHz

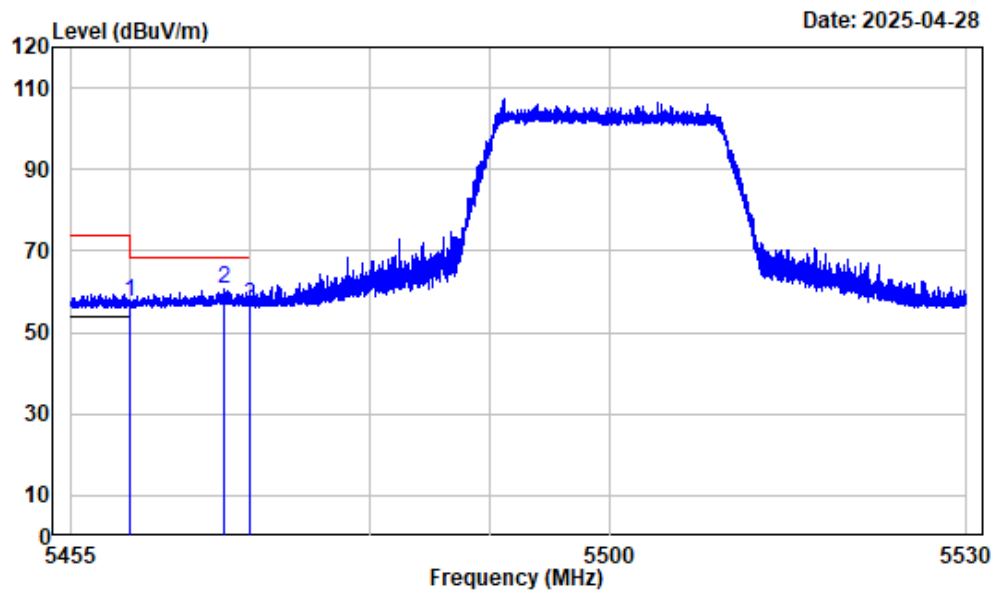

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX20-5500

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5460.000	-6.29	63.73	57.44	74.00	-16.56	Peak
2 5467.827	-6.26	67.08	60.82	68.20	-7.38	Peak
3 5470.000	-6.26	63.02	56.76	68.20	-11.44	Peak


Left Band edge_Horizontal_Average 5GWi-Fi-Band3-AX20-5500MHz

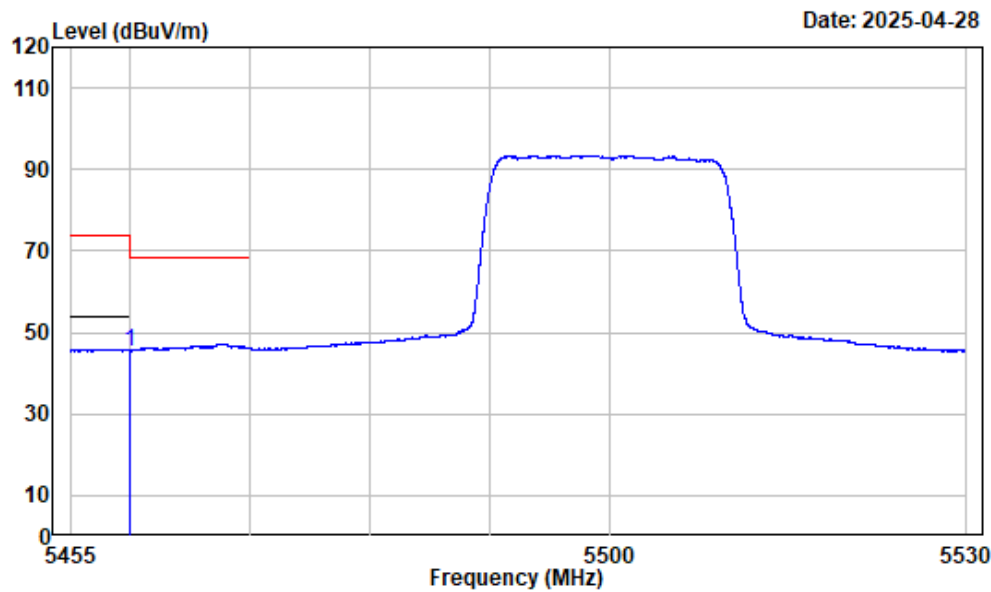

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:300Hz Detector:Peak
Note : 5GWiFi-Band3-AX20-5500

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5460.000	-6.29	51.80	45.51	54.00	-8.49	Average


Left Band edge_Vertical_Peak 5GWi-Fi-Band3-AX20-5500MHz

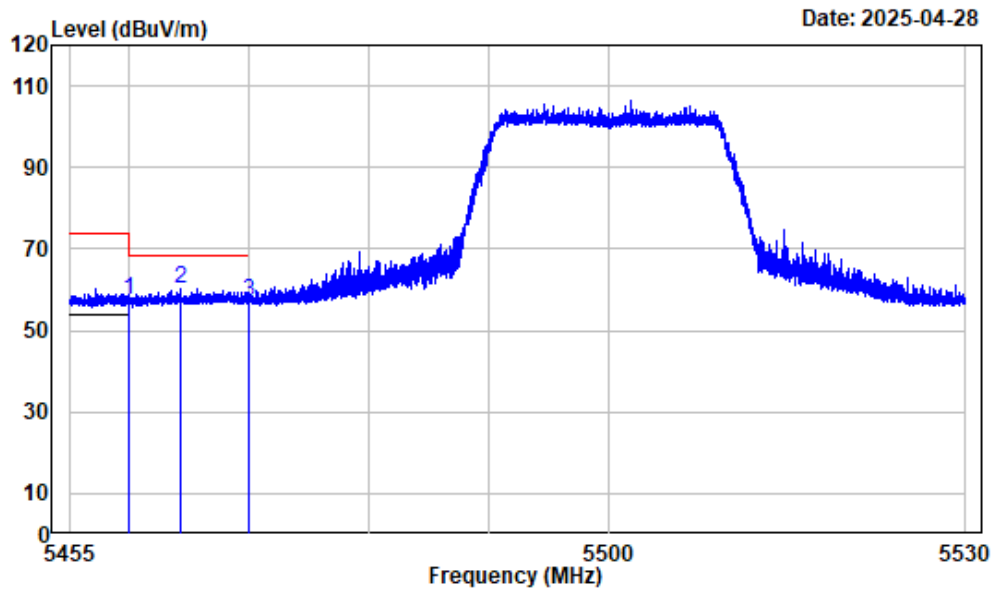

Condition : Vertical
 Project No. : 2401Y41479E-RF
 Tester : Zenos Qiao
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : 5GWiFi-Band3-AX20-5500

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.29	63.96	57.67	74.00	-16.33	Peak
2	5464.217	-6.28	66.46	60.18	68.20	-8.02	Peak
3	5470.000	-6.26	63.51	57.25	68.20	-10.95	Peak


Left Band edge_Vertical_Average 5GWi-Fi-Band3-AX20-5500MHz

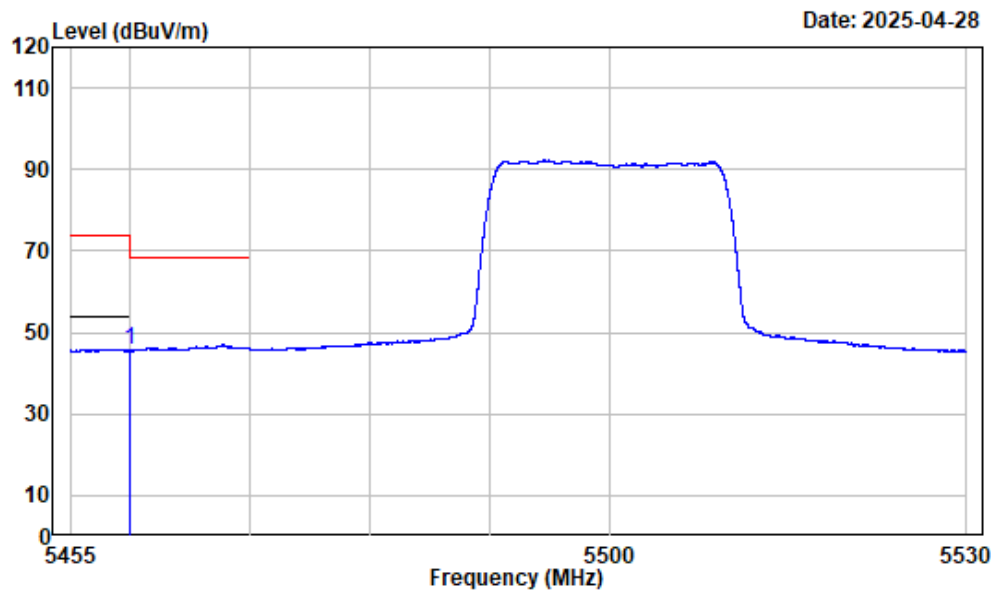

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:300Hz Detector:Peak
Note : 5GWiFi-Band3-AX20-5500

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.29	51.81	45.52	54.00	-8.48	Average


Right Band edge_Horizontal_Peak 5GWi-Fi-Band3-AX20-5700MHz

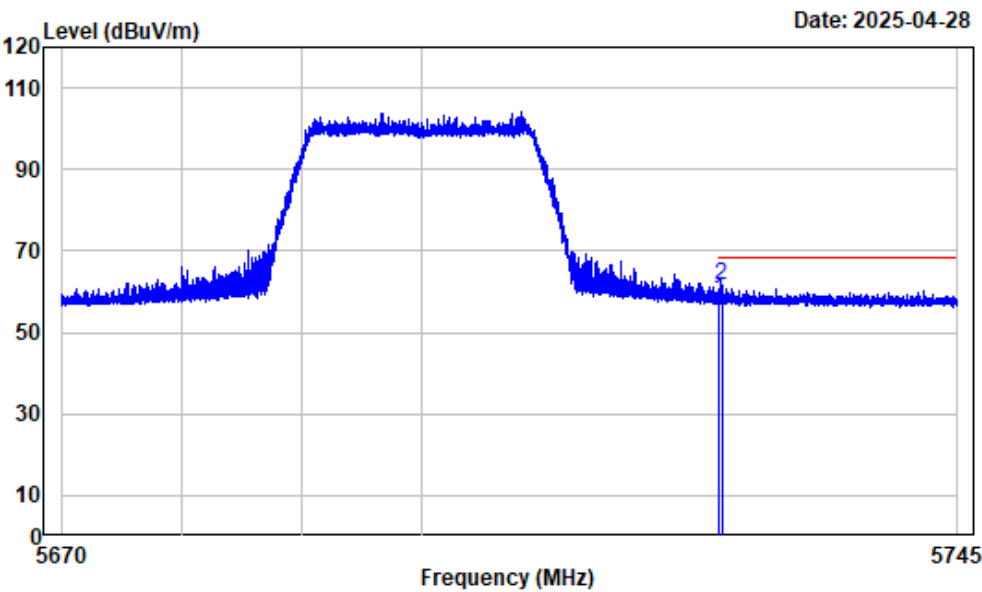

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX20-5700

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5725.000	-5.48	63.28	57.80	68.20	-10.40	Peak
2 5725.169	-5.48	66.97	61.49	68.20	-6.71	Peak


Right Band edge_Vertical_Peak 5GWi-Fi-Band3-AX20-5700MHz

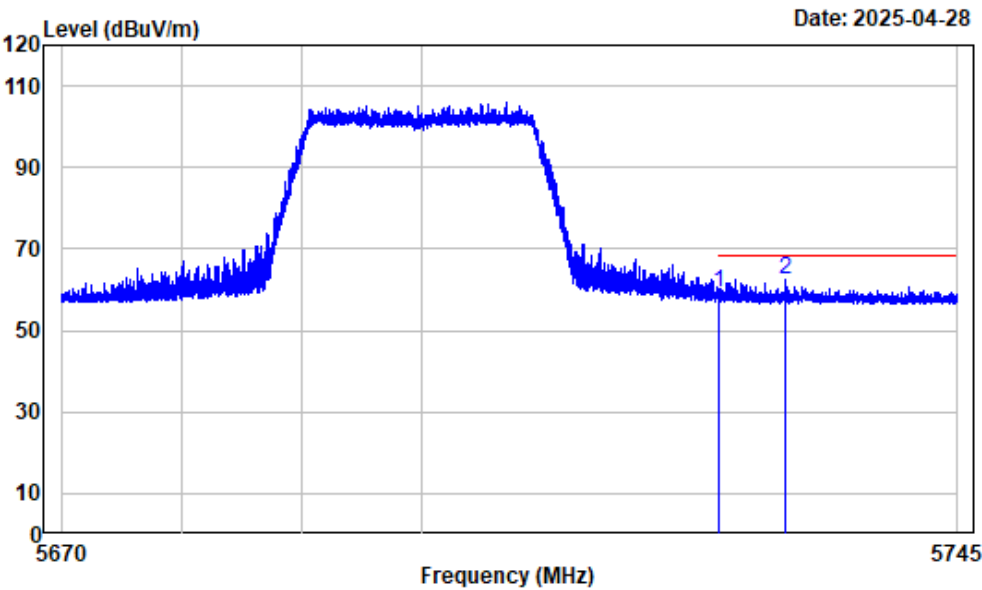

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX20-5700

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-5.48	64.62	59.14	68.20	-9.06 Peak
2	5730.542	-5.43	67.91	62.48	68.20	-5.72 Peak


Left Band edge_Horizontal_Peak 5GWi-Fi-Band3-AX40-5510MHz

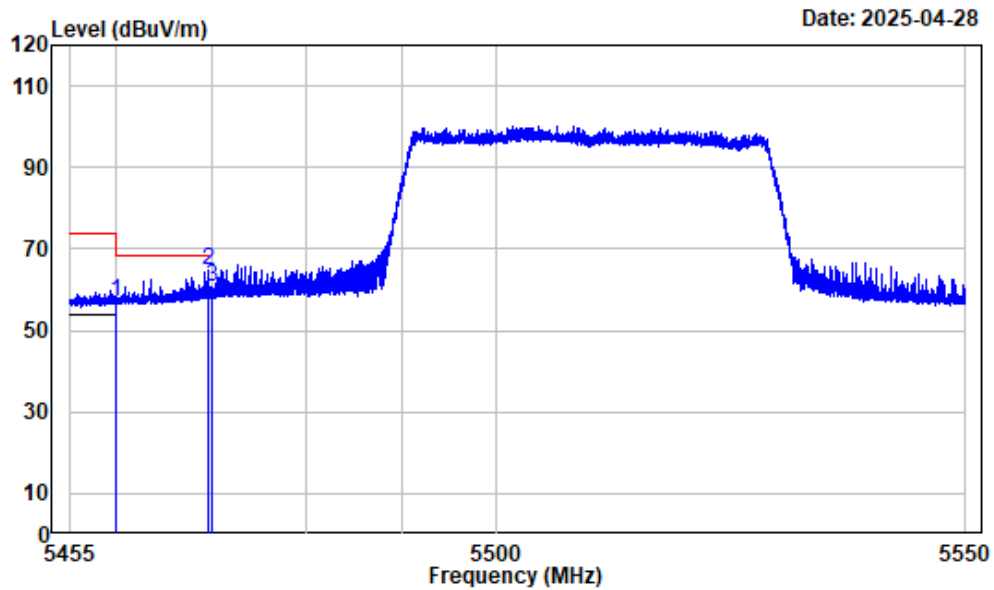

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX40-5510

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5460.000	-6.29	63.50	57.21	74.00	-16.79	Peak
2 5469.561	-6.26	71.07	64.81	68.20	-3.39	Peak
3 5470.000	-6.26	66.87	60.61	68.20	-7.59	Peak


Left Band edge_Horizontal_Average 5GWi-Fi-Band3-AX40-5510MHz

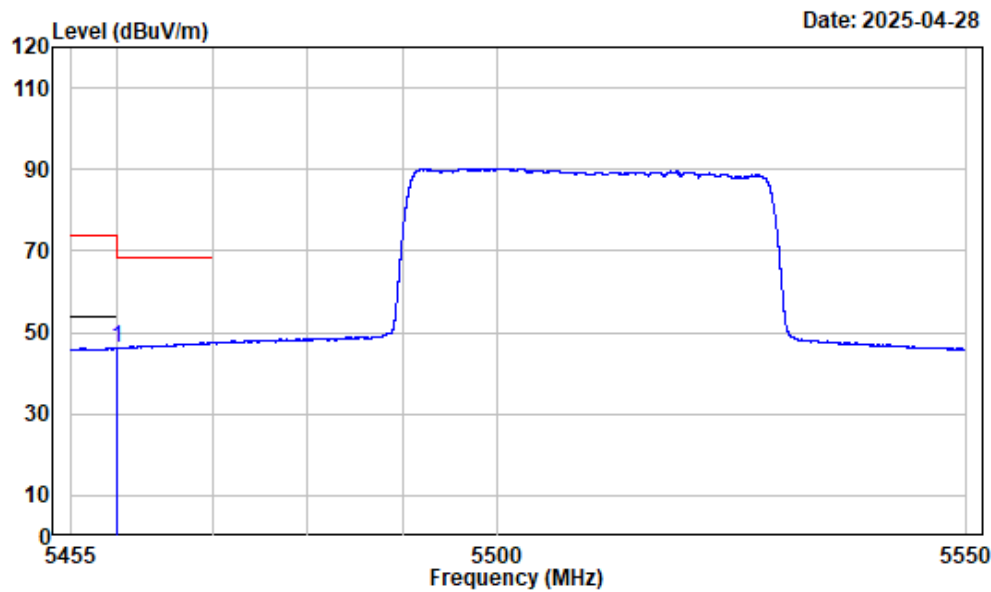

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:300Hz Detector:Peak
Note : 5GWiFi-Band3-AX40-5510

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.29	52.40	46.11	54.00	-7.89	Average


Left Band edge_Vertical_Peak 5GWi-Fi-Band3-AX40-5510MHz

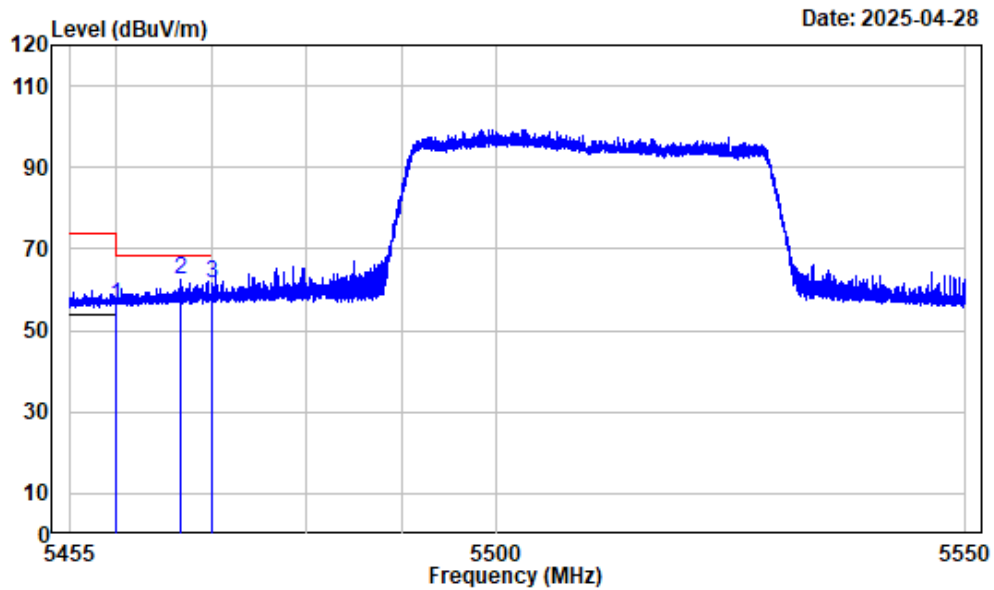

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX40-5510

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.29	62.64	56.35	74.00	-17.65	Peak
2	5466.758	-6.27	68.55	62.28	68.20	-5.92	Peak
3	5470.000	-6.26	67.81	61.55	68.20	-6.65	Peak


Left Band edge_Vertical_Average 5GWi-Fi-Band3-AX40-5510MHz

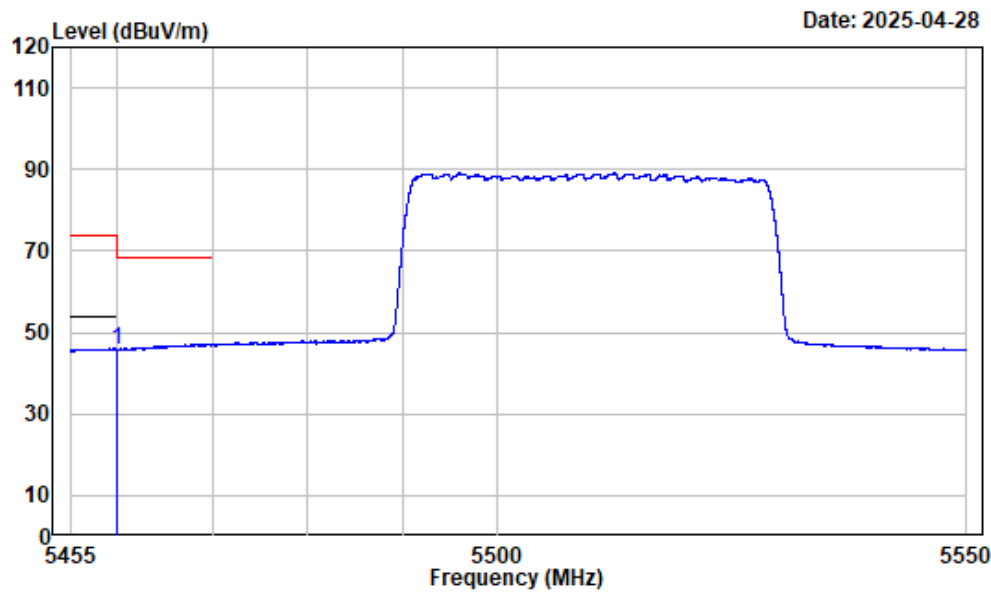

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:300Hz Detector:Peak
Note : 5GWiFi-Band3-AX40-5510

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.29	52.07	45.78	54.00	-8.22	Average


Right Band edge_Horizontal_Peak 5GWi-Fi-Band3-AX40-5670MHz

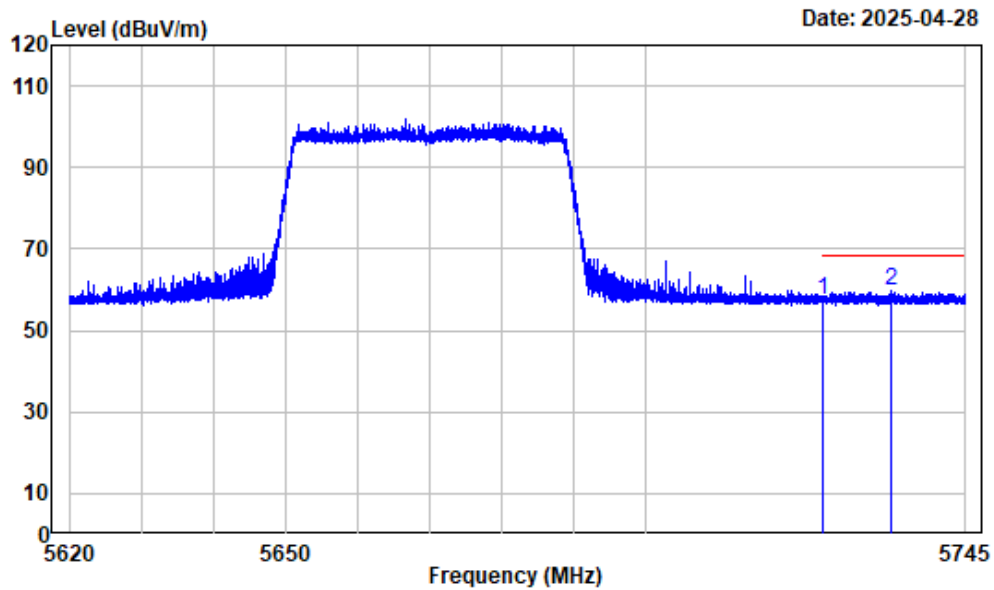

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX40-5670

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5725.000	-5.48	62.97	57.49	68.20	-10.71	Peak
2 5734.467	-5.40	65.19	59.79	68.20	-8.41	Peak


Right Band edge_Vertical_Peak 5GWi-Fi-Band3-AX40-5670MHz

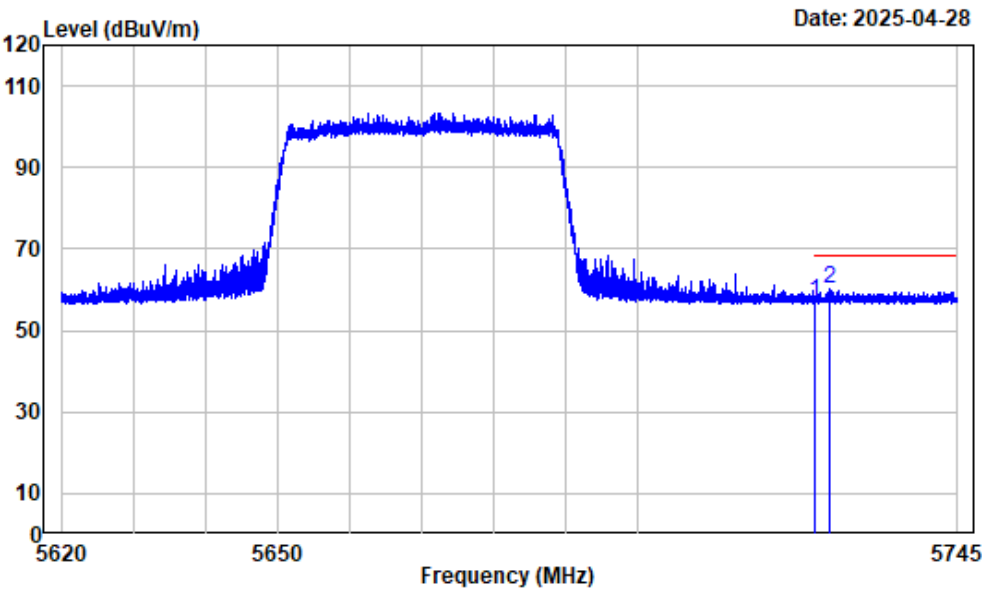

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX40-5670

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5725.000	-5.48	62.51	57.03	68.20	-11.17	Peak
2 5727.123	-5.47	65.50	60.03	68.20	-8.17	Peak


Left Band edge_Horizontal_Peak 5GWi-Fi-Band4-A-5745MHz

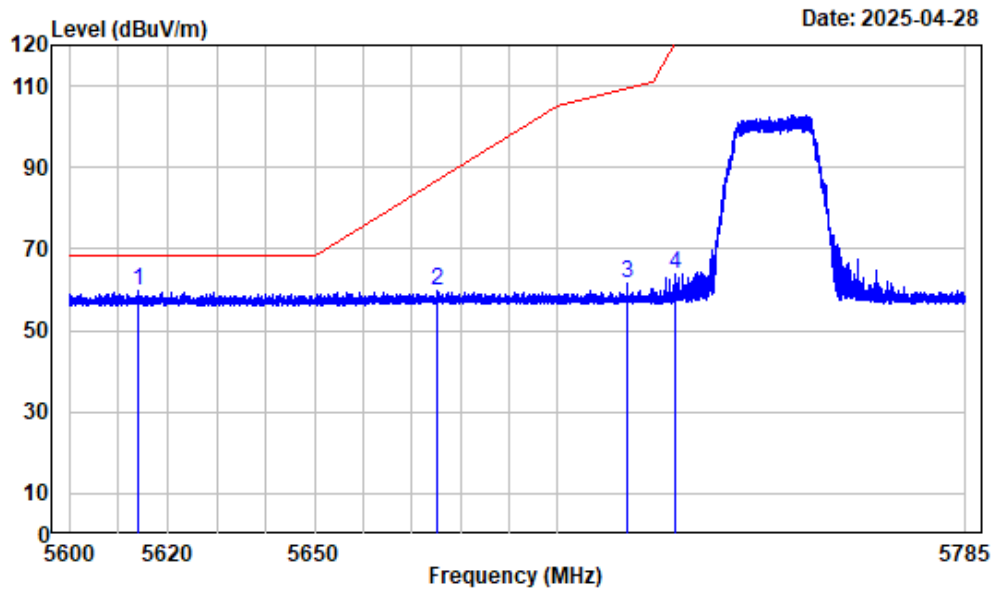

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5745

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5613.854	-6.11	66.01	59.90	68.20	-8.30	Peak
2	5675.328	-5.79	65.48	59.69	86.98	-27.29	Peak
3	5714.576	-5.58	67.12	61.54	109.28	-47.74	Peak
4	5724.590	-5.49	69.38	63.89	121.27	-57.38	Peak


Left Band edge_Vertical_Peak 5GWi-Fi-Band4-A-5745MHz

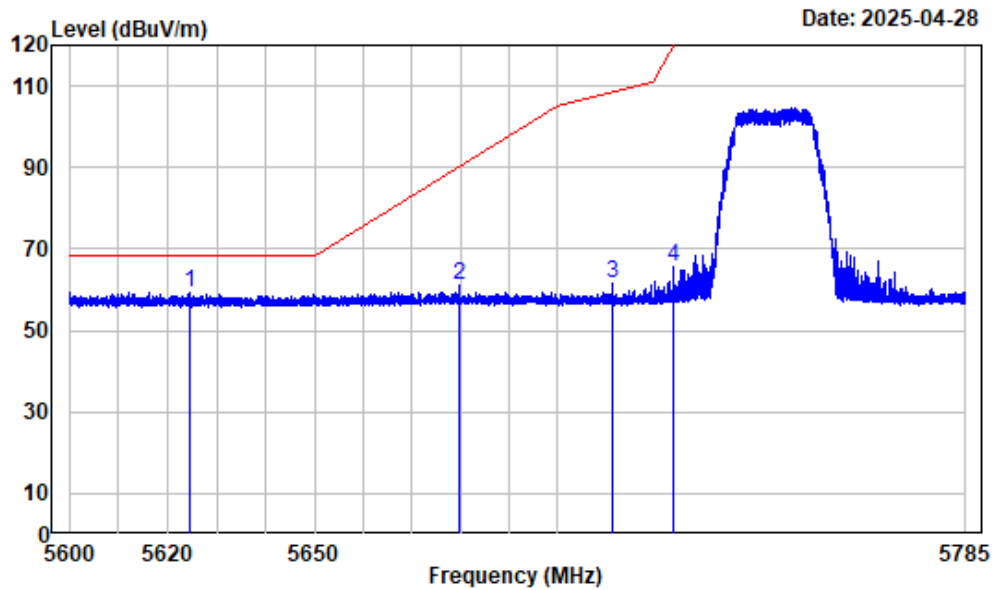

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5624.631	-6.04	65.35	59.31	68.20	-8.89	Peak
2	5679.768	-5.77	66.73	60.96	90.27	-29.31	Peak
3	5711.292	-5.61	67.37	61.76	108.36	-46.60	Peak
4	5724.174	-5.49	70.98	65.49	120.32	-54.83	Peak


Right Band edge_Horizontal_Peak 5GWi-Fi-Band4-A-5825MHz

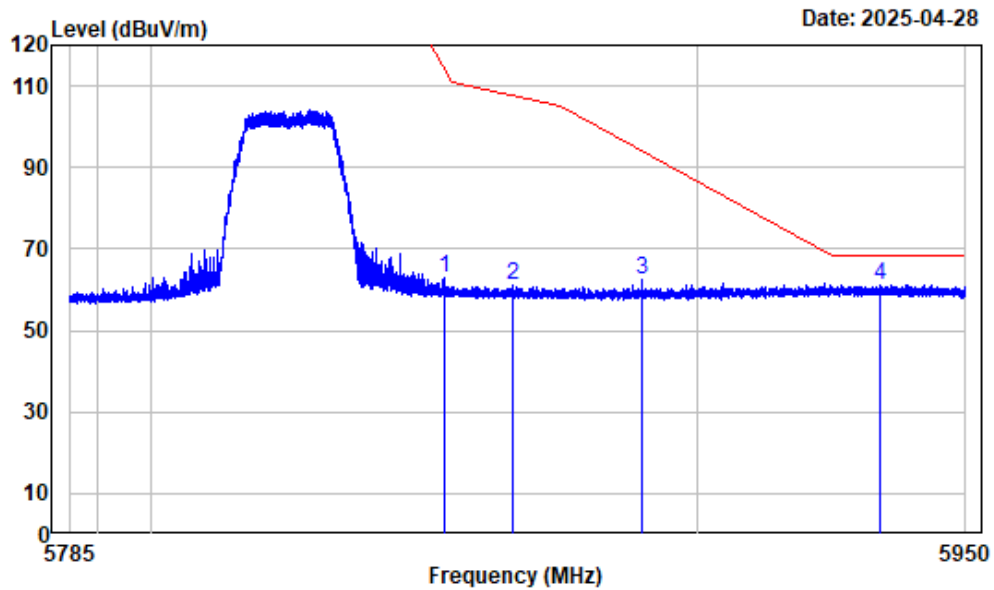

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5853.360	-4.66	67.66	63.00	114.54	-51.54	Peak
2	5866.128	-4.61	65.91	61.30	107.68	-46.38	Peak
3	5889.871	-4.50	66.78	62.28	94.16	-31.88	Peak
4	5934.179	-4.45	65.78	61.33	68.20	-6.87	Peak


Right Band edge_Vertical_Peak 5GWi-Fi-Band4-A-5825MHz

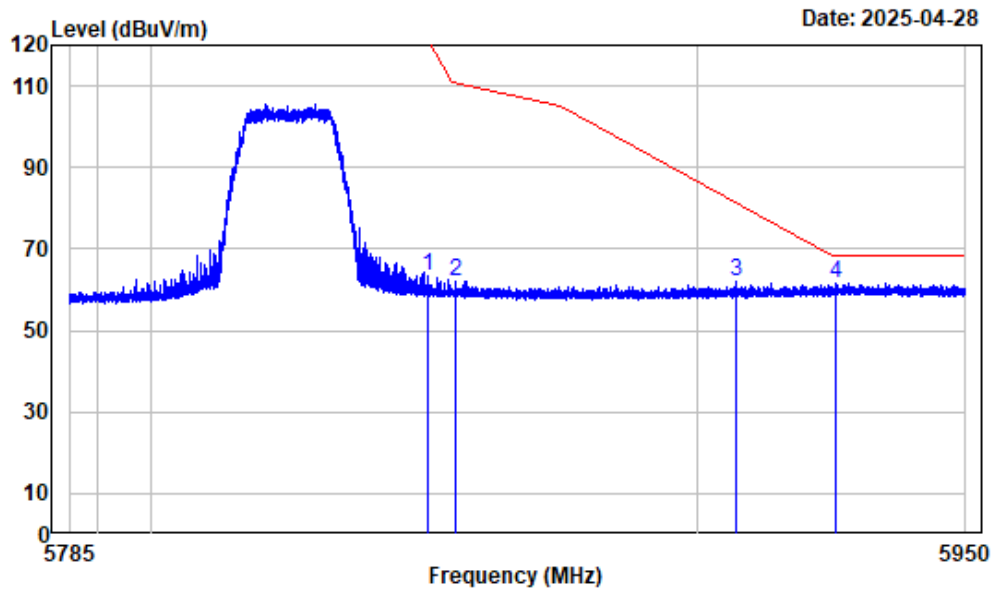

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.555	-4.68	68.14	63.46	120.93	-57.47	Peak
2	5855.546	-4.66	66.71	62.05	110.65	-48.60	Peak
3	5907.322	-4.45	66.36	61.91	81.25	-19.34	Peak
4	5925.928	-4.45	66.17	61.72	68.20	-6.48	Peak


Left Band edge_Horizontal_Peak 5GWi-Fi-Band4-AC20-5745MHz

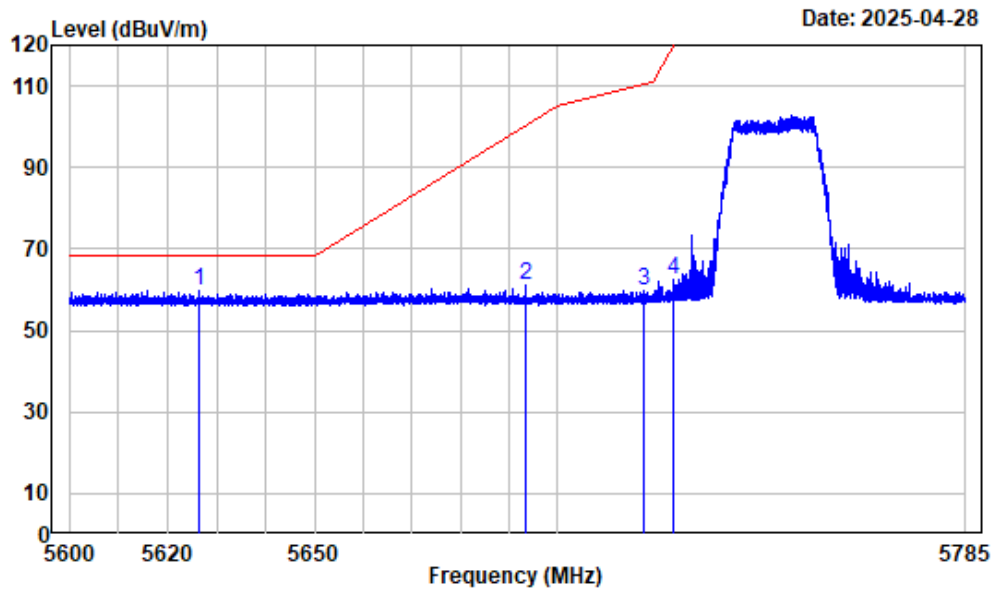

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5626.319	-6.03	65.92	59.89	68.20	-8.31	Peak
2	5693.506	-5.73	66.75	61.02	100.41	-39.39	Peak
3	5718.068	-5.55	65.19	59.64	110.26	-50.62	Peak
4	5724.035	-5.49	67.99	62.50	120.00	-57.50	Peak


Left Band edge_Vertical_Peak 5GWi-Fi-Band4-AC20-5745MHz

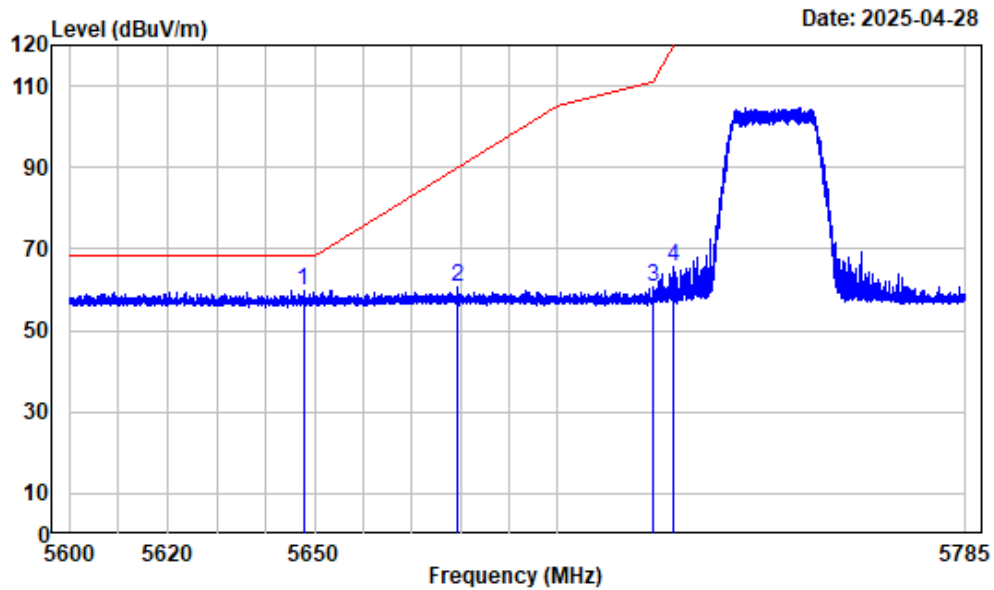

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5647.736	-5.88	65.74	59.86	68.20	-8.34	Peak
2	5679.329	-5.77	66.52	60.75	89.94	-29.19	Peak
3	5719.664	-5.54	66.23	60.69	110.71	-50.02	Peak
4	5724.035	-5.49	71.36	65.87	120.00	-54.13	Peak


Right Band edge_Horizontal_Peak 5GWi-Fi-Band4-AC20-5825MHz

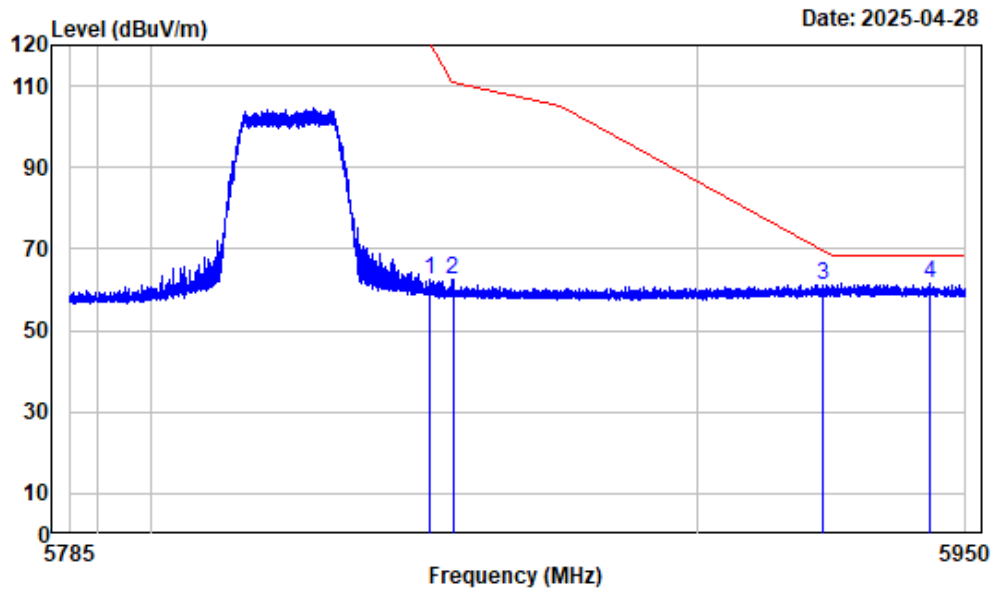

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.946	-4.68	67.10	62.42	120.04	-57.62	Peak
2	5855.051	-4.66	67.11	62.45	110.79	-48.34	Peak
3	5923.370	-4.46	65.52	61.06	69.40	-8.34	Peak
4	5943.317	-4.45	66.14	61.69	68.20	-6.51	Peak


Right Band edge_Vertical_Peak 5GWi-Fi-Band4-AC20-5825MHz

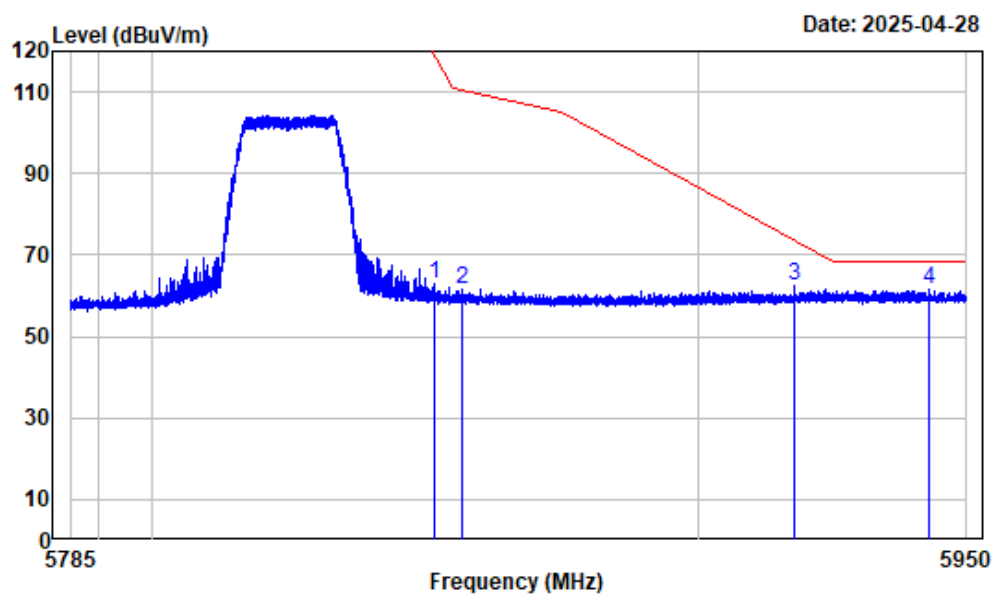

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5825

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5851.586	-4.66	67.42	62.76	118.58	-55.82	Peak
2	5856.557	-4.65	66.24	61.59	110.36	-48.77	Peak
3	5918.048	-4.45	66.73	62.28	73.33	-11.05	Peak
4	5943.090	-4.45	65.97	61.52	68.20	-6.68	Peak


Left Band edge_Horizontal_Peak 5GWi-Fi-Band4-AC40-5755MHz

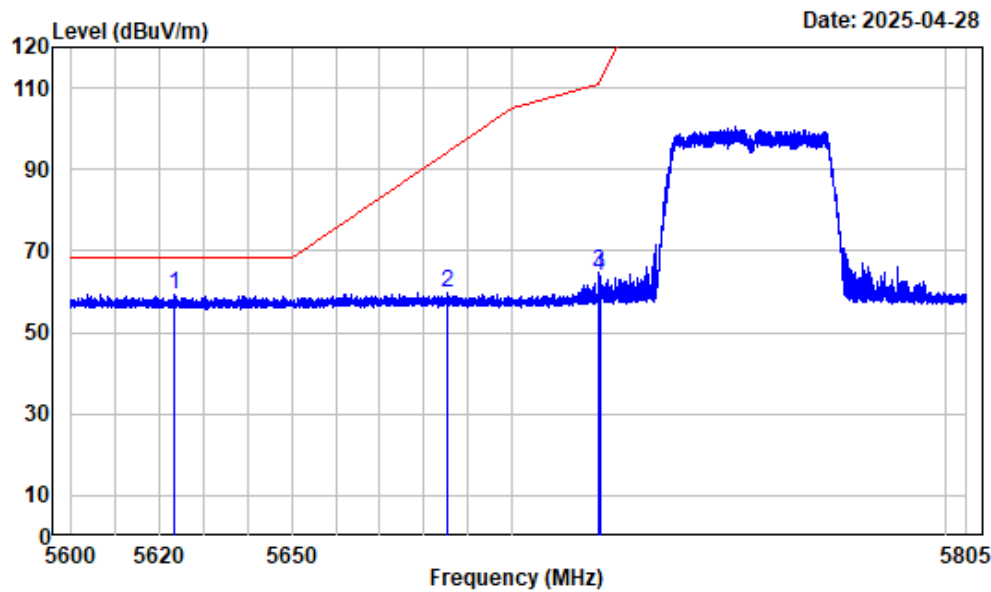

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5755

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5623.373	-6.05	65.29	59.24	68.20	-8.96 Peak
2	5685.291	-5.75	65.46	59.71	94.35	-34.64 Peak
3	5719.940	-5.53	70.41	64.88	110.78	-45.90 Peak
4	5720.196	-5.53	69.43	63.90	111.25	-47.35 Peak


Left Band edge_Vertical_Peak 5GWi-Fi-Band4-AC40-5755MHz

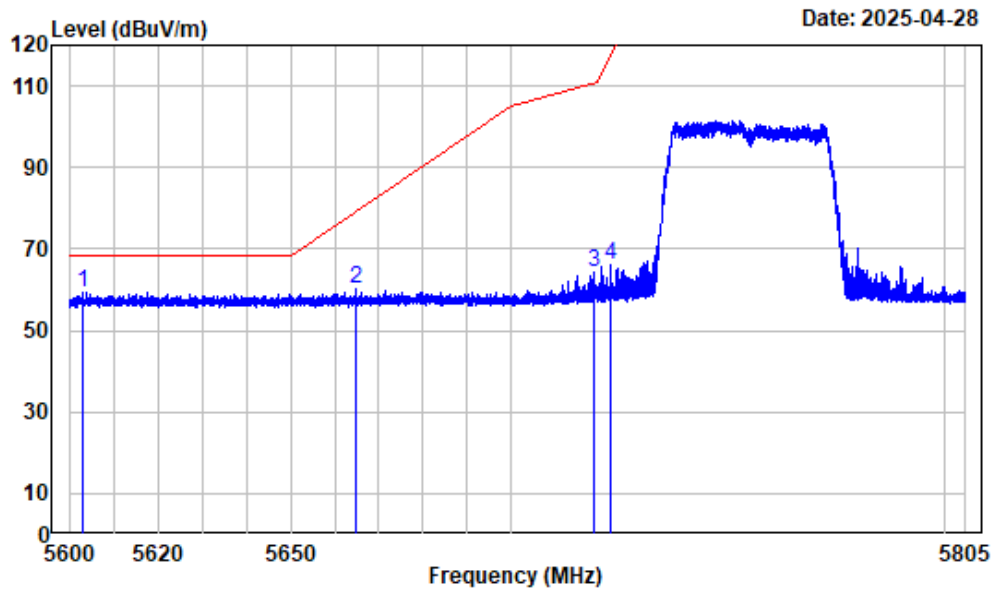

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5603.126	-6.19	65.65	59.46	68.20	-8.74	Peak
2	5664.711	-5.82	66.27	60.45	79.12	-18.67	Peak
3	5719.043	-5.54	69.67	64.13	110.53	-46.40	Peak
4	5723.041	-5.50	71.56	66.06	117.73	-51.67	Peak


Right Band edge_Horizontal_Peak 5GWi-Fi-Band4-AC40-5795MHz

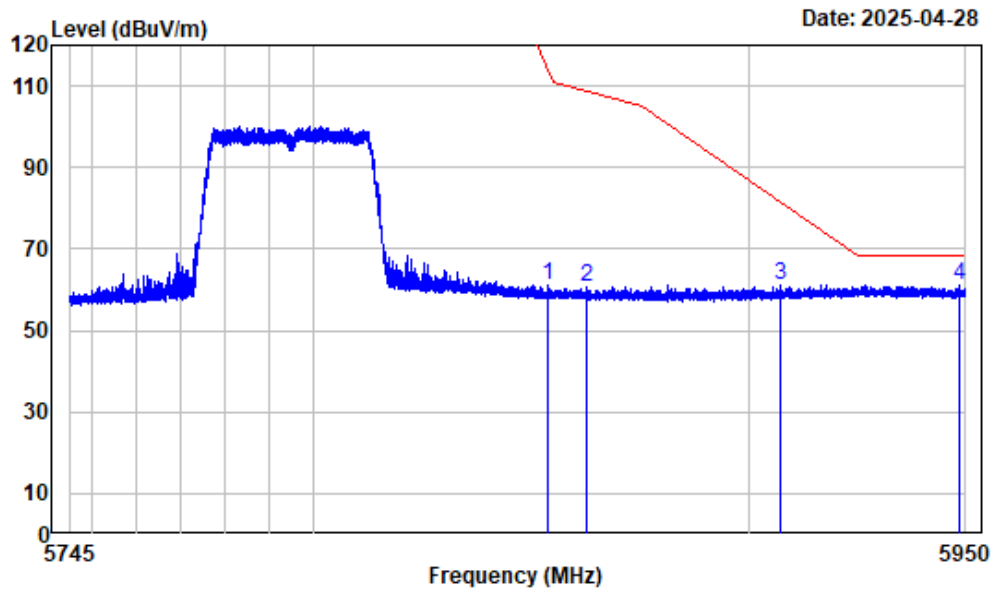

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5795

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5853.638	-4.66	65.85	61.19	113.90	-52.71	Peak
2	5862.300	-4.62	65.42	60.80	108.75	-47.95	Peak
3	5907.252	-4.45	65.43	60.98	81.30	-20.32	Peak
4	5948.693	-4.45	65.64	61.19	68.20	-7.01	Peak


Right Band edge_Vertical_Peak 5GWi-Fi-Band4-AC40-5795MHz

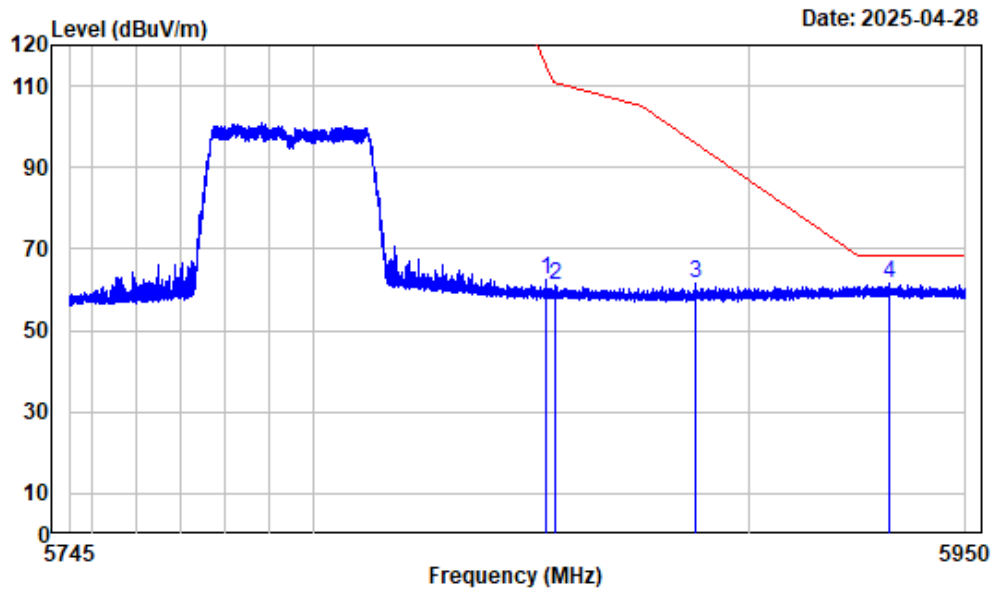

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5795

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5853.100	-4.66	66.93	62.27	115.13	-52.86	Peak
2	5855.304	-4.66	65.78	61.12	110.71	-49.59	Peak
3	5887.672	-4.52	66.31	61.79	95.79	-34.00	Peak
4	5932.163	-4.44	65.80	61.36	68.20	-6.84	Peak


Left Band edge_Horizontal_Peak 5GWi-Fi-Band4-AX20-5745MHz

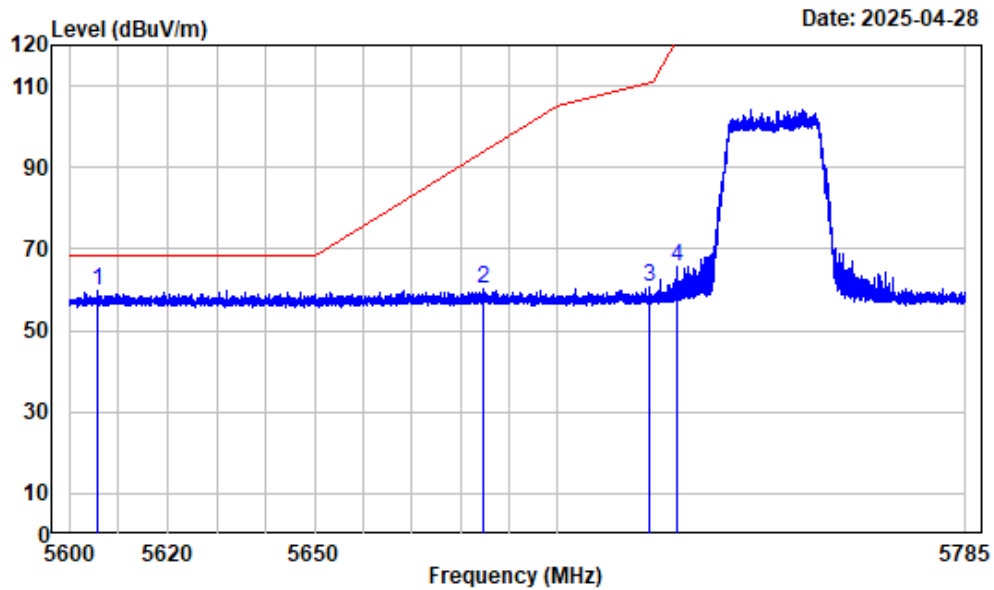

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX20-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5605.828	-6.16	66.09	59.93	68.20	-8.27	Peak
2	5684.810	-5.75	65.85	60.10	93.99	-33.89	Peak
3	5719.063	-5.54	66.05	60.51	110.54	-50.03	Peak
4	5724.983	-5.49	70.96	65.47	122.16	-56.69	Peak


Left Band edge_Vertical_Peak 5GWi-Fi-Band4-AX20-5745MHz

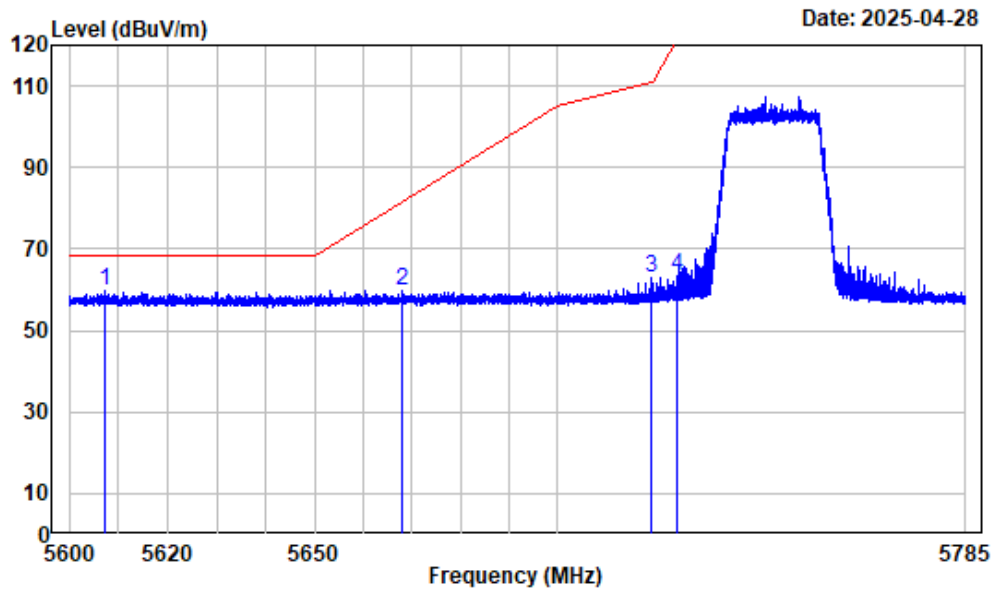

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX20-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5607.262	-6.16	65.79	59.63	68.20	-8.57	Peak
2	5667.834	-5.81	65.55	59.74	81.43	-21.69	Peak
3	5719.386	-5.54	68.52	62.98	110.63	-47.65	Peak
4	5724.983	-5.49	68.98	63.49	122.16	-58.67	Peak


Right Band edge_Horizontal_Peak 5GWi-Fi-Band4-AX20-5825MHz

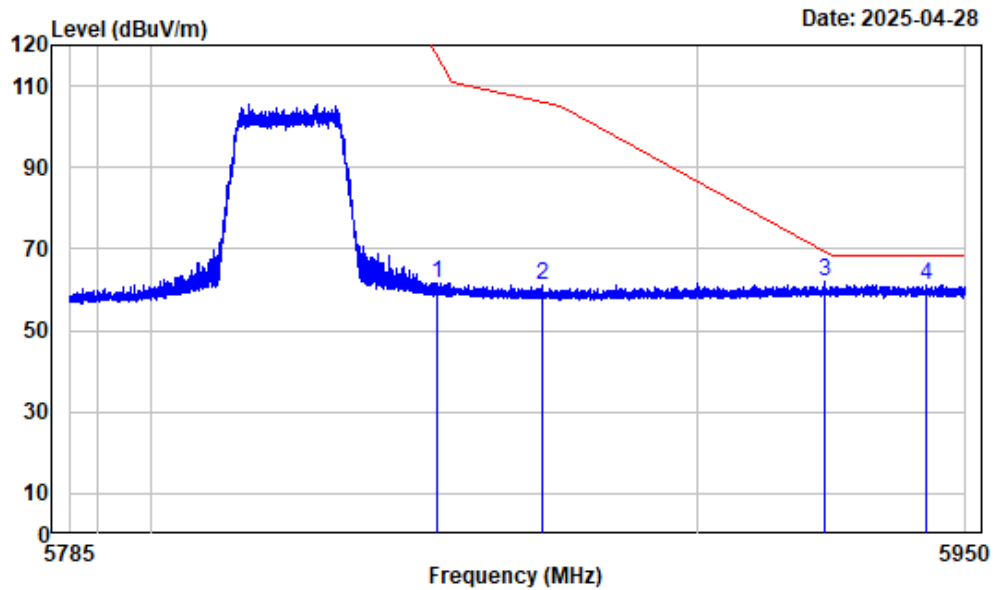

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX20-5825

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5852.040	-4.66	66.44	61.78	117.55	-55.77	Peak
2 5871.553	-4.58	65.80	61.22	106.16	-44.94	Peak
3 5923.617	-4.46	66.40	61.94	69.22	-7.28	Peak
4 5942.574	-4.45	65.76	61.31	68.20	-6.89	Peak


Right Band edge_Vertical_Peak 5GWi-Fi-Band4-AX20-5825MHz

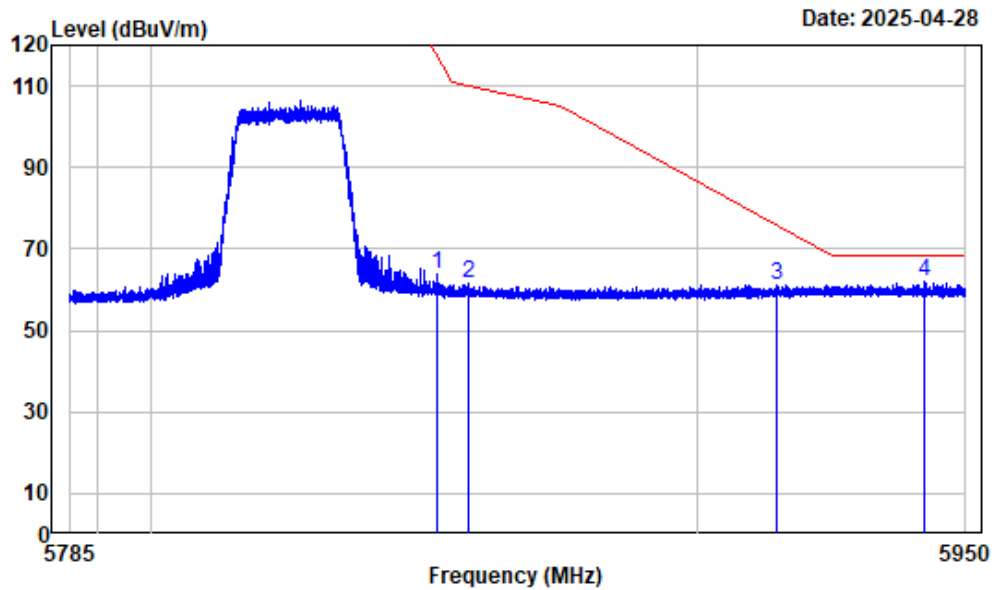

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX20-5825

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5852.060	-4.66	68.72	64.06	117.50	-53.44	Peak
2	5857.774	-4.65	66.23	61.58	110.02	-48.44	Peak
3	5915.016	-4.46	65.56	61.10	75.56	-14.46	Peak
4	5942.368	-4.44	66.60	62.16	68.20	-6.04	Peak


Left Band edge_Horizontal_Peak 5GWi-Fi-Band4-AX40-5755MHz

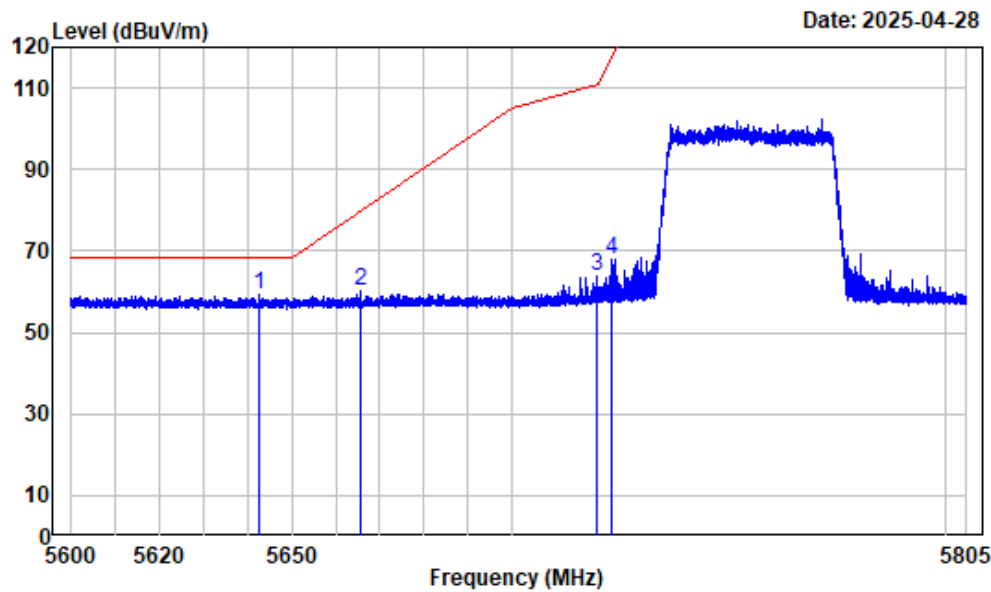

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX40-5755

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5642.773	-5.91	65.36	59.45	68.20	-8.75	Peak
2 5665.608	-5.82	65.95	60.13	79.79	-19.66	Peak
3 5719.479	-5.54	69.19	63.65	110.65	-47.00	Peak
4 5723.144	-5.50	73.42	67.92	117.97	-50.05	Peak


Left Band edge_Vertical_Peak 5GWi-Fi-Band4-AX40-5755MHz

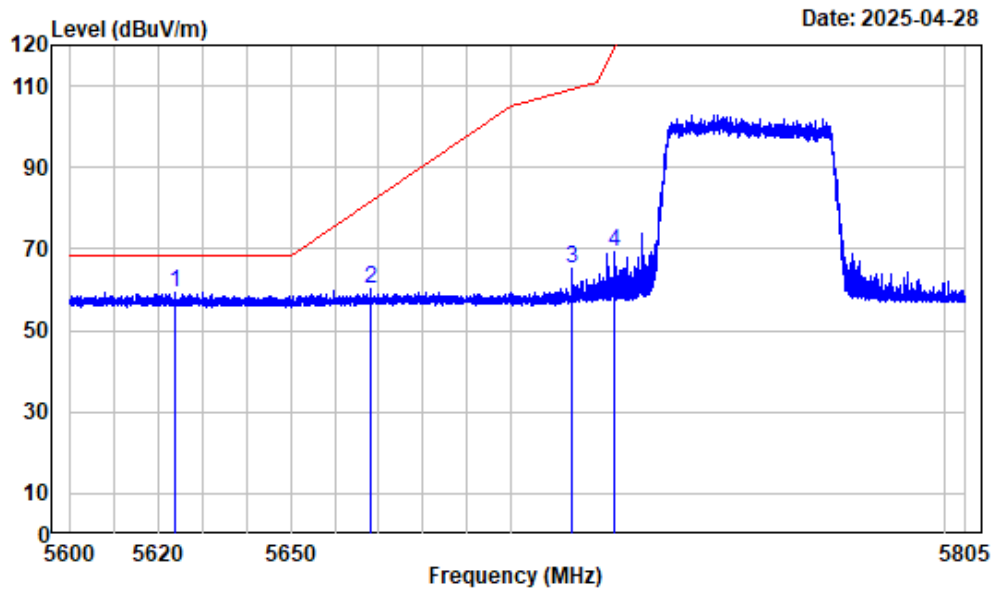

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX40-5755

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5623.988	-6.05	65.20	59.15	68.20	-9.05 Peak
2	5668.120	-5.81	65.97	60.16	81.65	-21.49 Peak
3	5714.225	-5.58	70.88	65.30	109.19	-43.89 Peak
4	5723.989	-5.49	74.94	69.45	119.90	-50.45 Peak


Right Band edge_Horizontal_Peak 5GWi-Fi-Band4-AX40-5795MHz

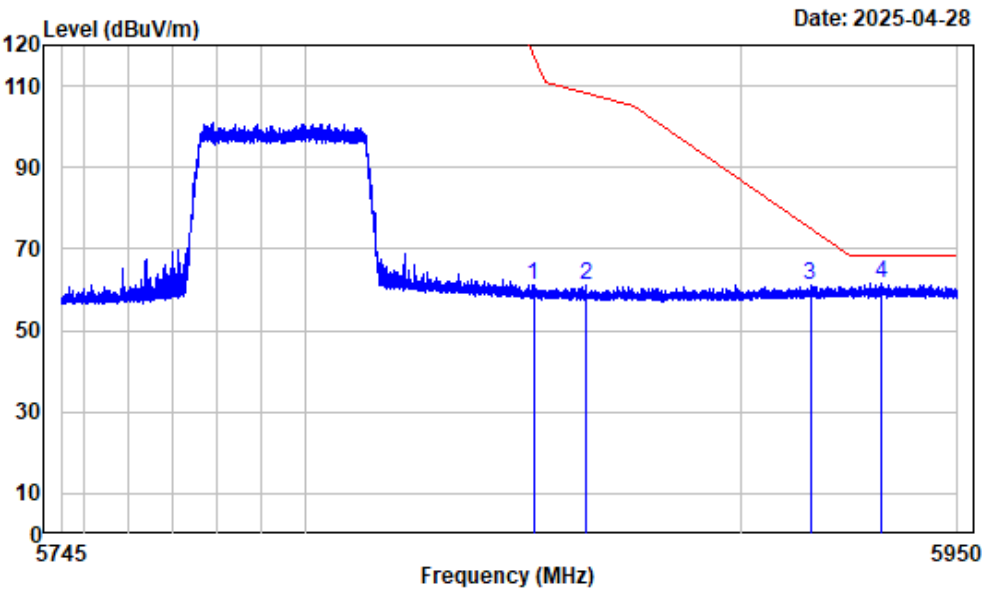

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX40-5795

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5852.100	-4.66	66.01	61.35	117.41	-56.06 Peak
2	5864.171	-4.61	65.75	61.14	108.23	-47.09 Peak
3	5915.837	-4.46	65.39	60.93	74.96	-14.03 Peak
4	5932.445	-4.44	65.84	61.40	68.20	-6.80 Peak

Right Band edge_Vertical_Peak 5GWi-Fi-Band4-AX40-5795MHz

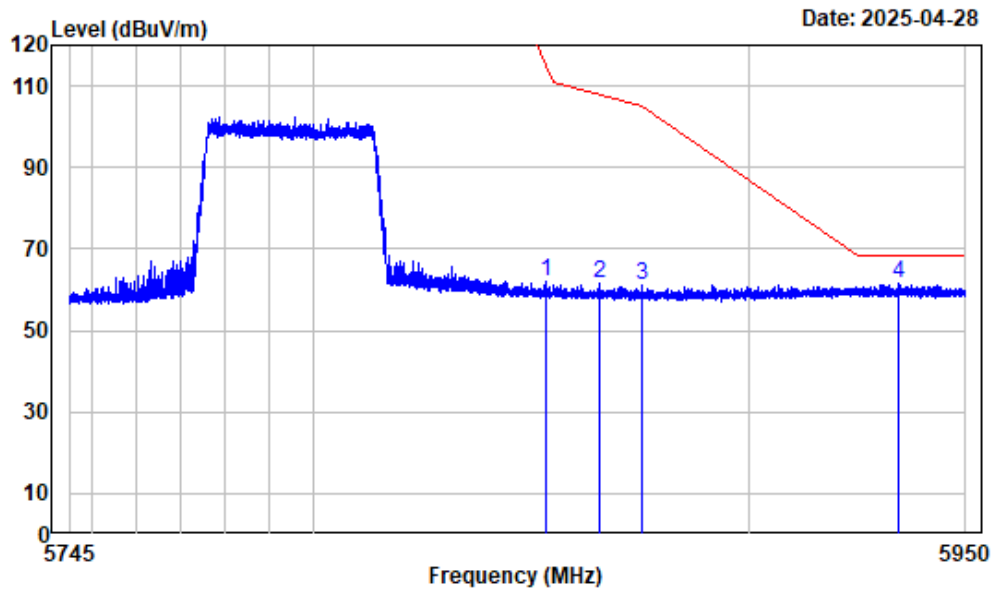


Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX40-5795

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5853.279	-4.66	66.62	61.96	114.72	-52.76	Peak
2	5865.427	-4.62	66.40	61.78	107.88	-46.10	Peak
3	5875.140	-4.57	65.85	61.28	105.10	-43.82	Peak
4	5934.290	-4.45	65.90	61.45	68.20	-6.75	Peak

1-18GHz (Listed with the worst harmonic margin test plot)


1-7GHz_Horizontal_Peak 5GWi-Fi-Band1-A-5240MHz

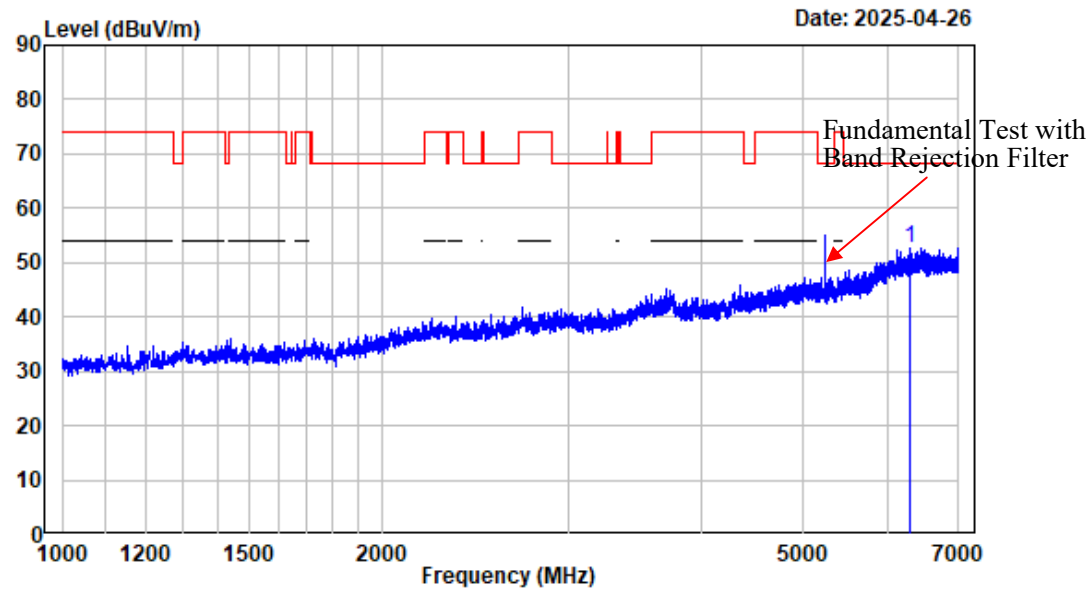

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6309.164	-3.51	56.30	52.79	68.20	-15.41 Peak


1-7GHz_Vertical_Peak 5GWi-Fi-Band1-A-5240MHz

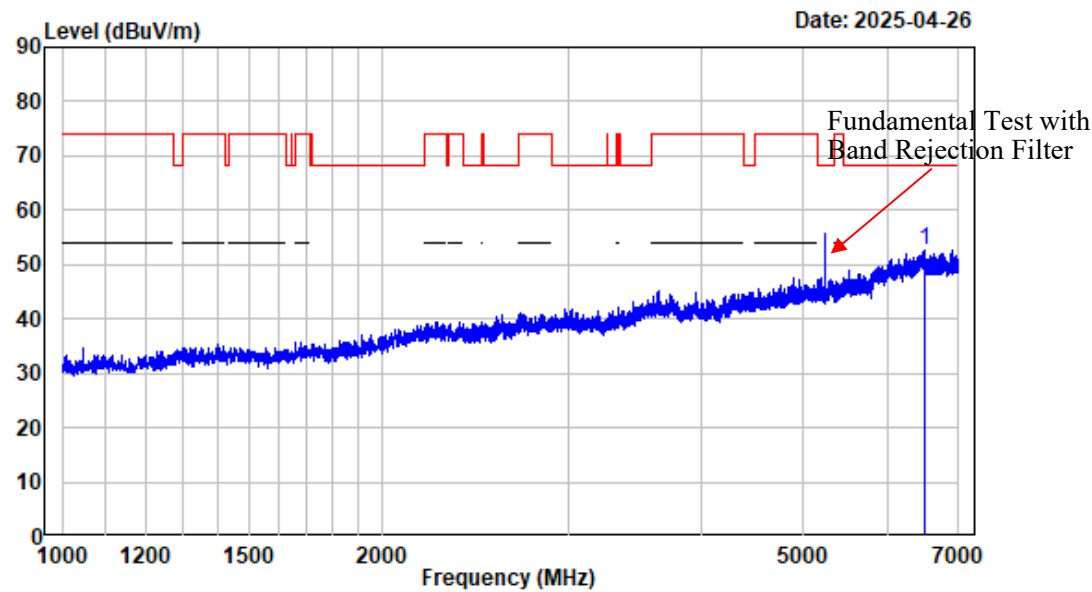

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6510.189	-2.97	55.73	52.76	68.20	-15.44	Peak


7-18GHz_Horizontal_Peak 5GWi-Fi-Band1-A-5240MHz

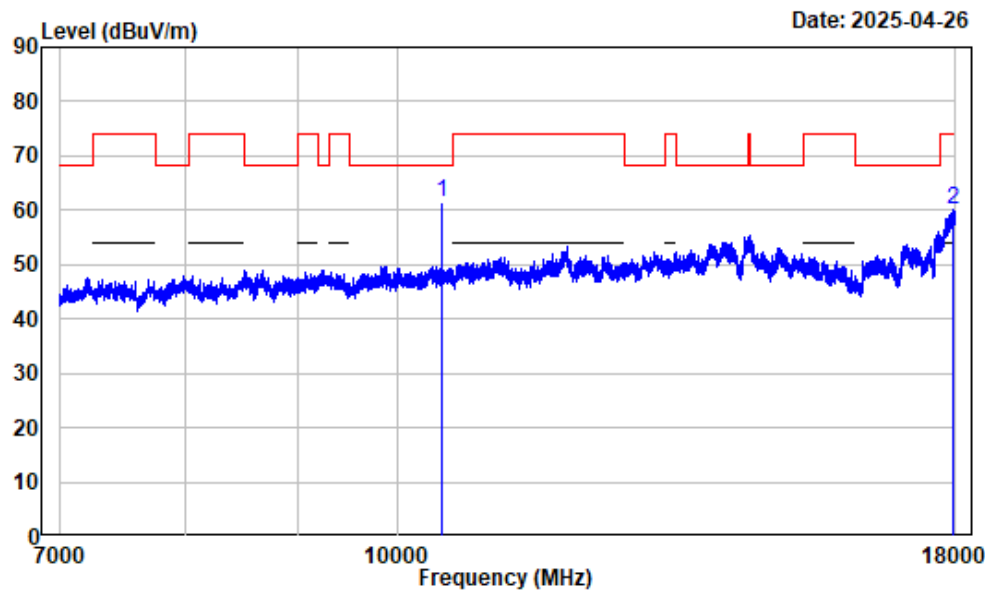

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10480.000	2.25	59.35	61.60	68.20	-6.60	Peak
2	17964.250	13.02	46.97	59.99	74.00	-14.01	Peak


7-18GHz_Horizontal_Average 5GWi-Fi-Band1-A-5240MHz

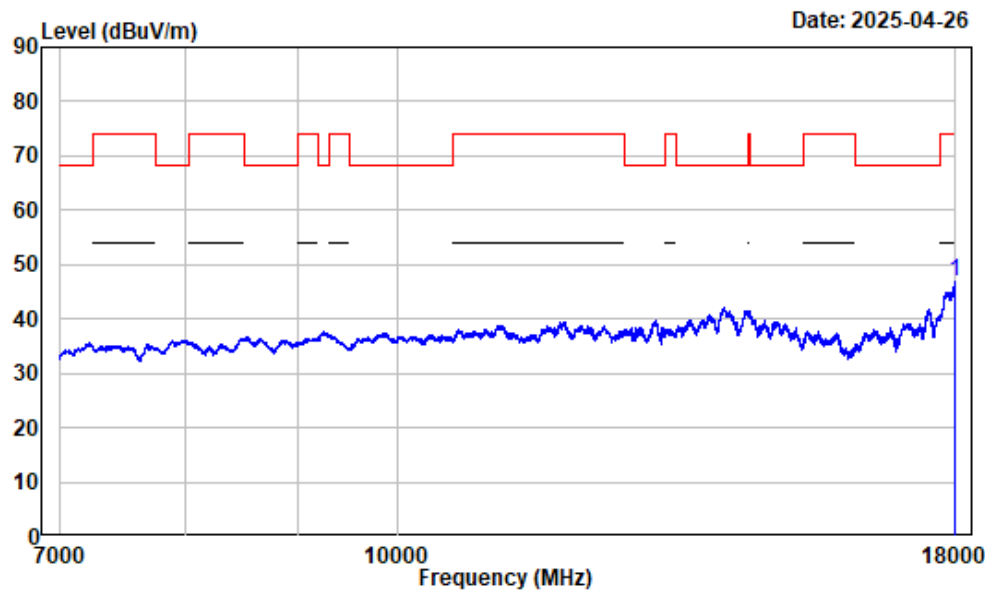

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17991.750	13.16	33.62	46.78	54.00	-7.22	Average


7-18GHz_Vertical_Peak 5GWi-Fi-Band1-A-5240MHz

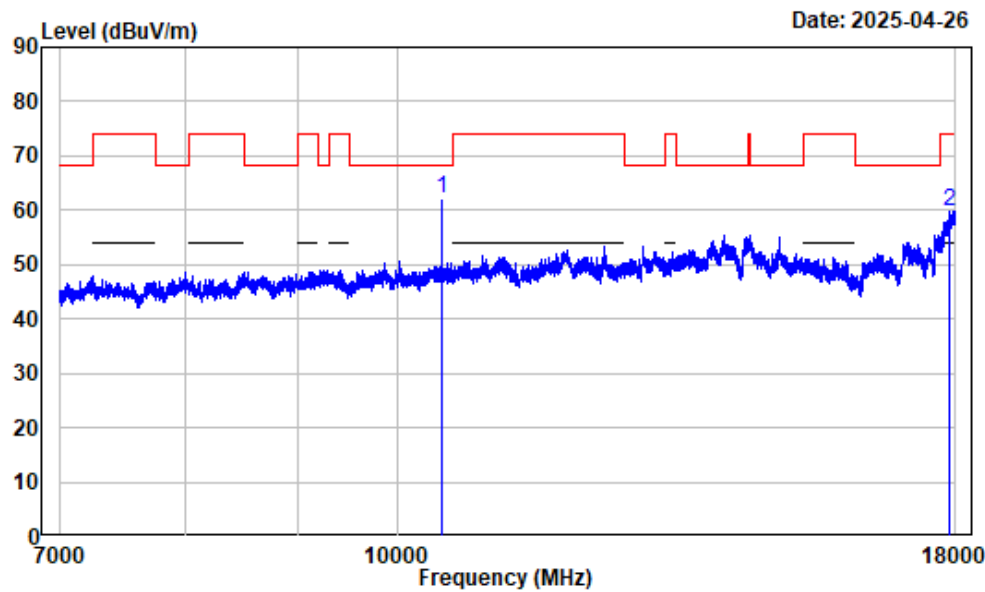

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10480.000	2.25	59.89	62.14	68.20	-6.06	Peak
2 17888.610	12.50	47.41	59.91	74.00	-14.09	Peak


7-18GHz_Vertical_Average 5GWi-Fi-Band1-A-5240MHz

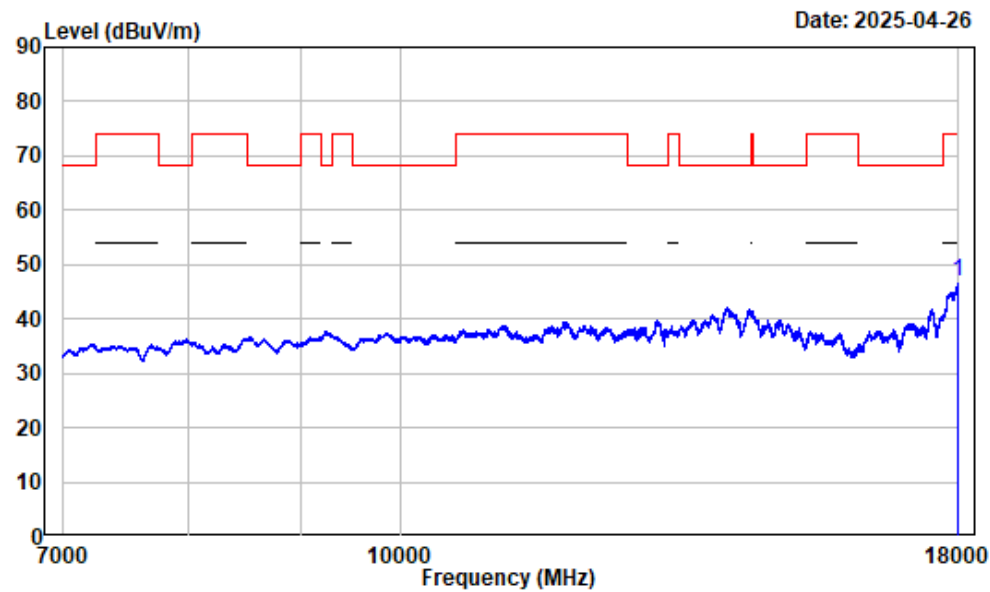

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17989.000	13.14	33.83	46.97	54.00	-7.03	Average


1-7GHz_Horizontal_Peak 5GWi-Fi-Band1-AC20-5240MHz

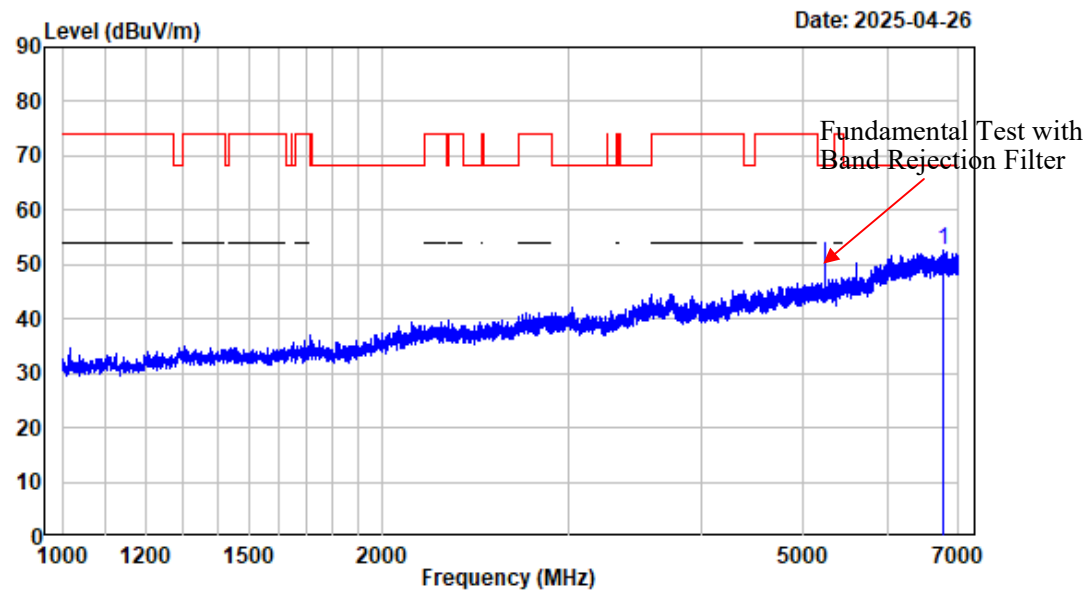

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6773.472	-3.29	55.96	52.67	68.20	-15.53	Peak


1-7GHz_Vertical_Peak 5GWi-Fi-Band1-AC20-5240MHz

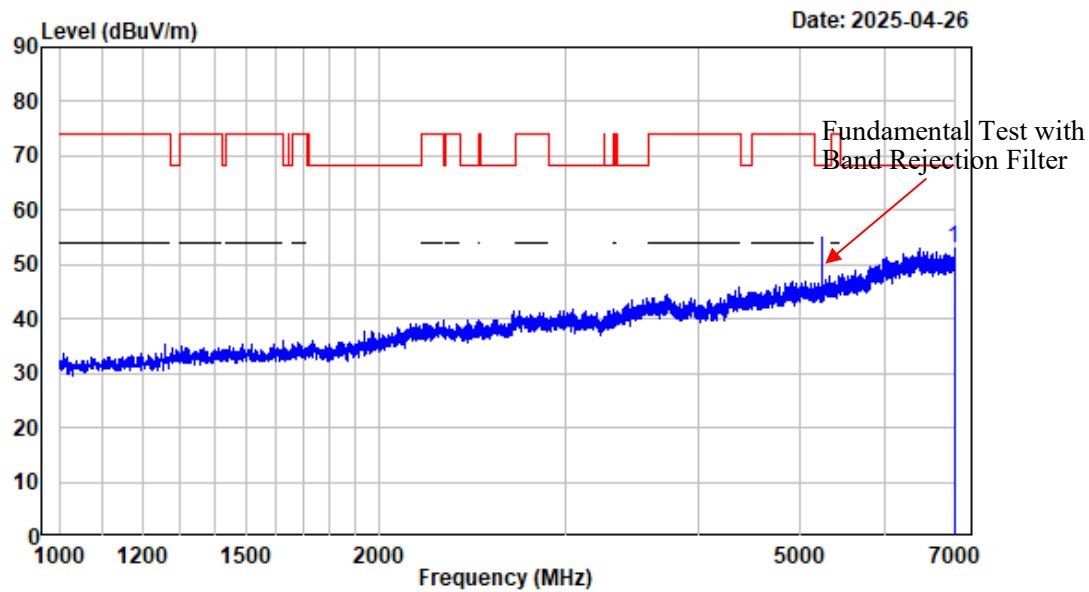

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6978.998	-2.84	55.69	52.85	68.20	-15.35	Peak


7-18GHz_Horizontal_Peak 5GWi-Fi-Band1-AC20-5240MHz

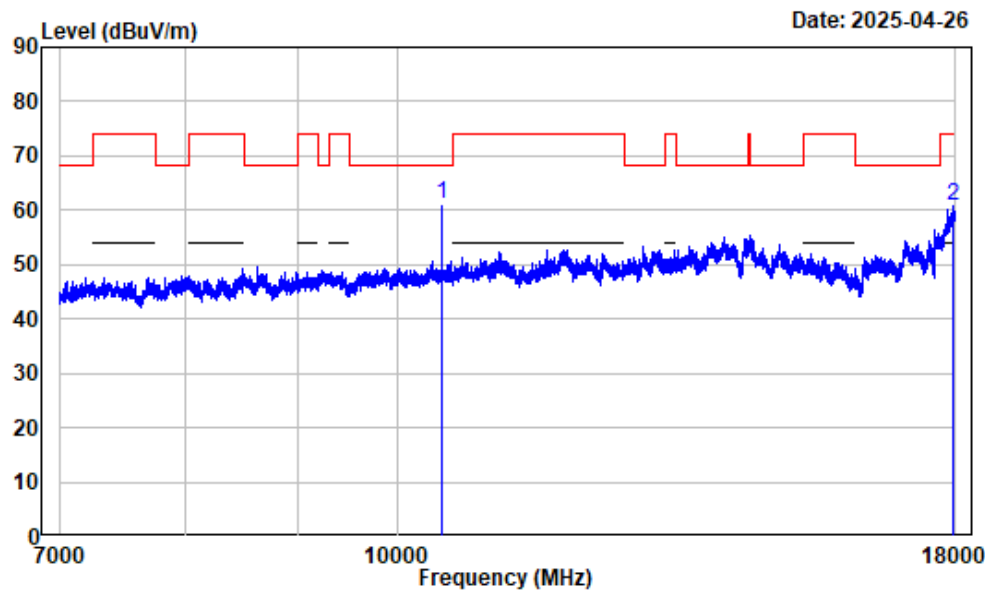

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10480.000	2.25	58.88	61.13	68.20	-7.07	Peak
2 17968.370	13.05	47.82	60.87	74.00	-13.13	Peak


7-18GHz_Horizontal_Average 5GWi-Fi-Band1-AC20-5240MHz

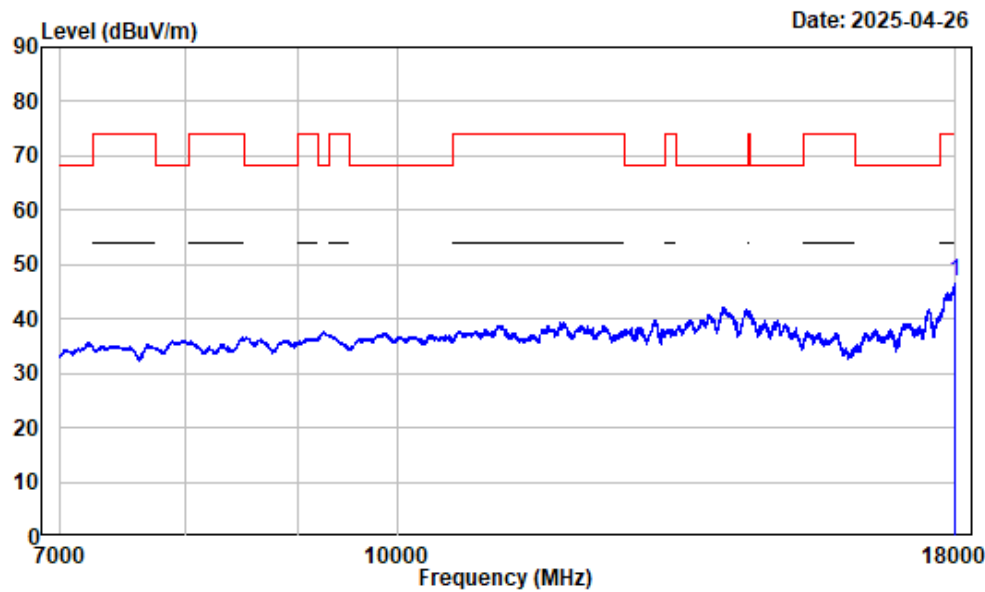

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17998.630	13.19	33.63	46.82	54.00	-7.18	Average


7-18GHz_Vertical_Peak 5GWi-Fi-Band1-AC20-5240MHz

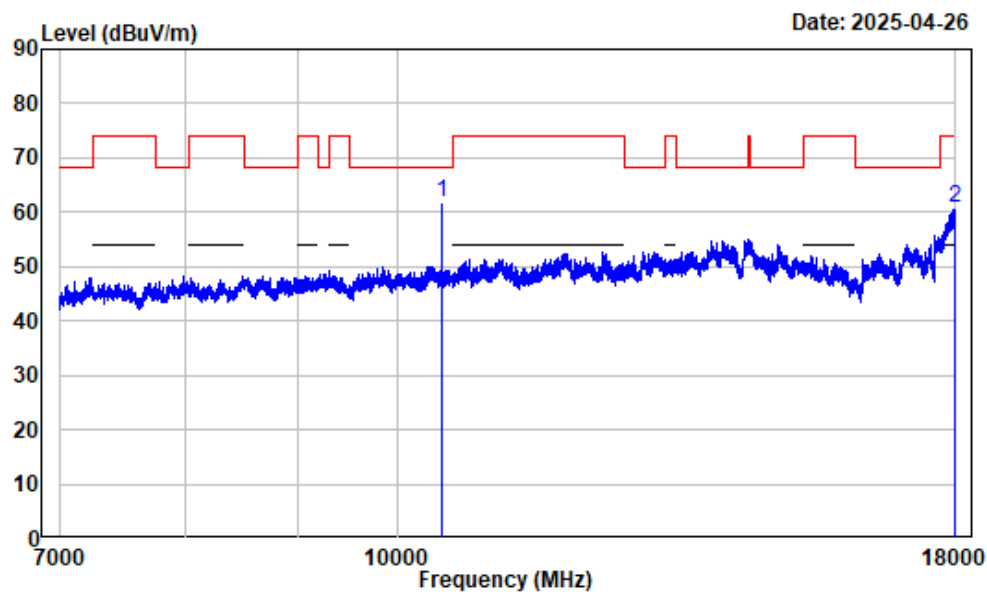

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

Freq		Factor	Read Level	Level	Limit	Over	Remark
					Line	Limit	
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10480.000	2.25	59.41	61.66	68.20	-6.54	Peak
2	17997.750	13.20	47.46	60.66	74.00	-13.34	Peak


7-18GHz_Vertical_Average 5GWi-Fi-Band1-AC20-5240MHz

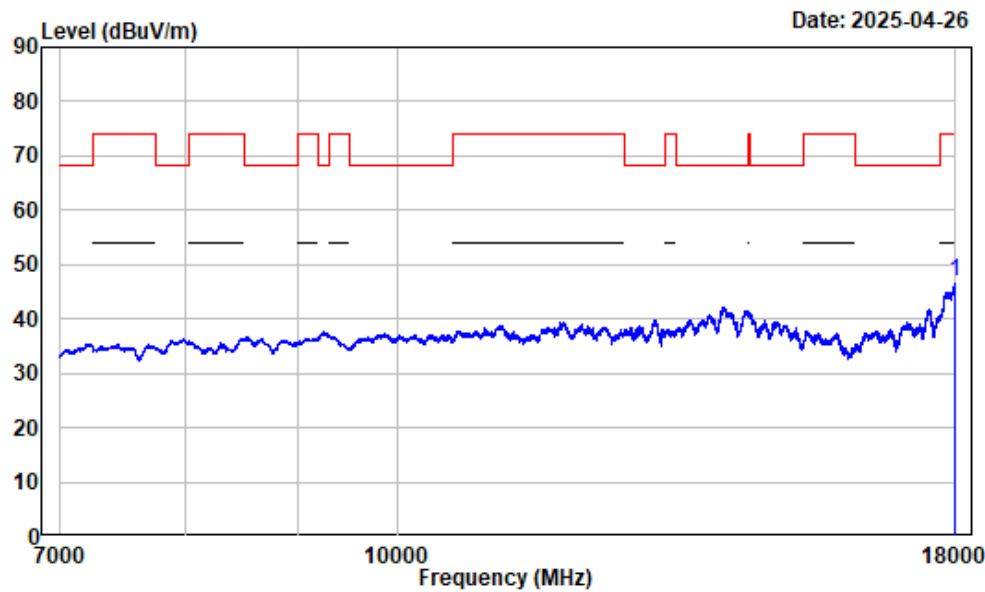

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17995.880	13.18	33.81	46.99	54.00	-7.01	Average


1-7GHz_Horizontal_Peak 5GWi-Fi-Band1-AC40-5230MHz

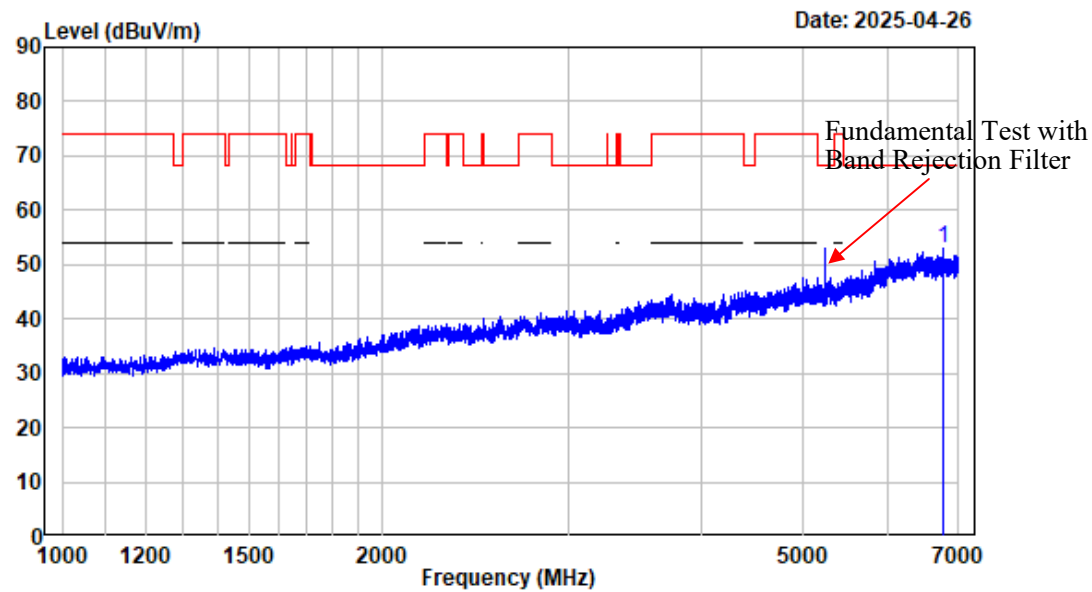

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

Freq		Factor	Read Level	Level	Limit	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6773.472	-3.29	56.43	53.14	68.20	-15.06	Peak


1-7GHz_Vertical_Peak 5GWi-Fi-Band1-AC40-5230MHz

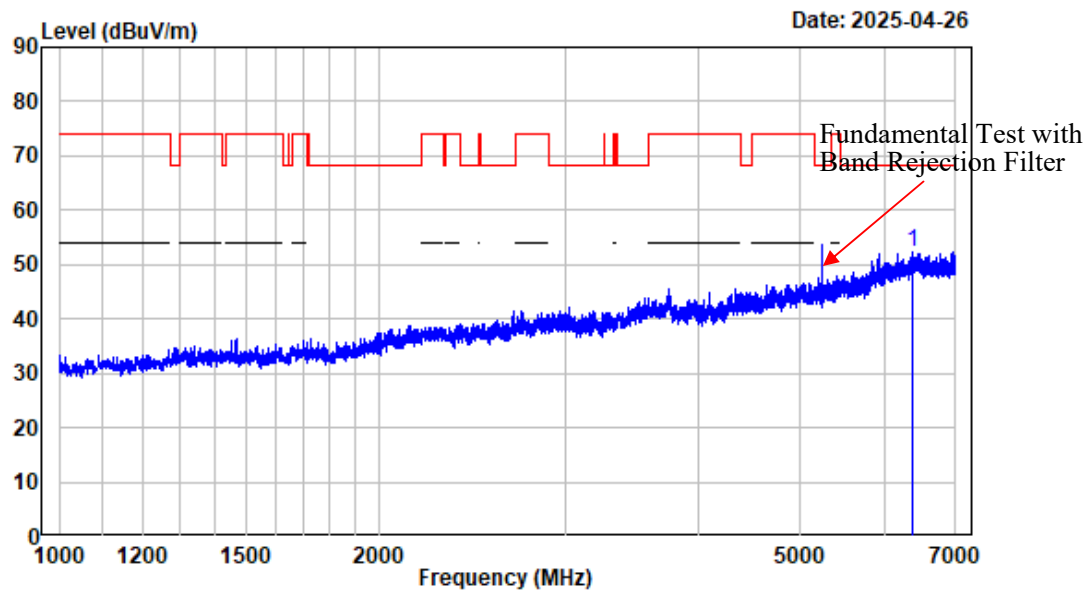

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6365.421	-3.22	55.65	52.43	68.20	-15.77	Peak


7-18GHz_Horizontal_Peak 5GWi-Fi-Band1-AC40-5230MHz

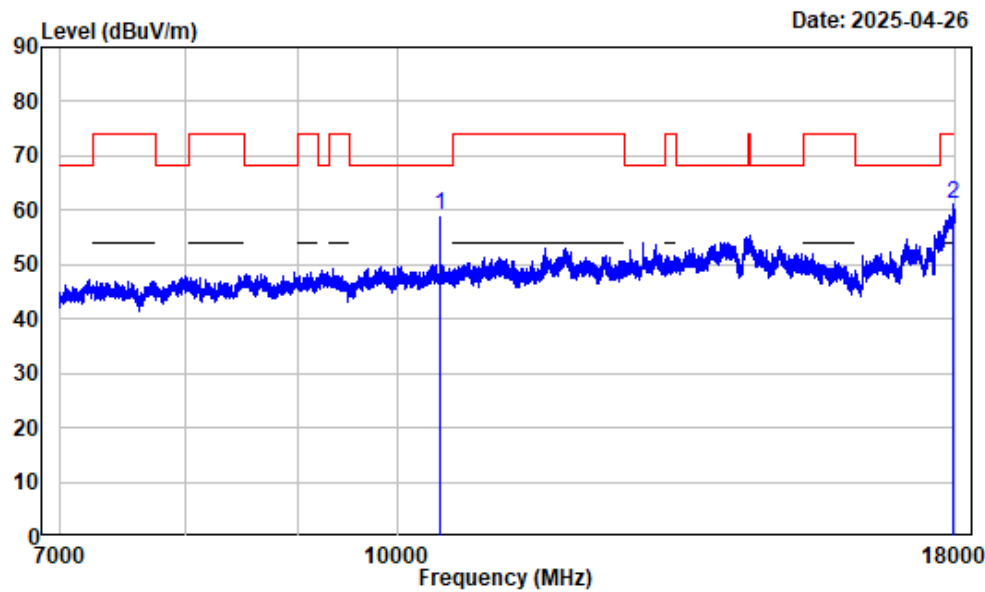

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10460.000	2.32	56.64	58.96	68.20	-9.24	Peak
2 17942.240	12.91	48.07	60.98	74.00	-13.02	Peak


7-18GHz_Horizontal_Average 5GWi-Fi-Band1-AC40-5230MHz

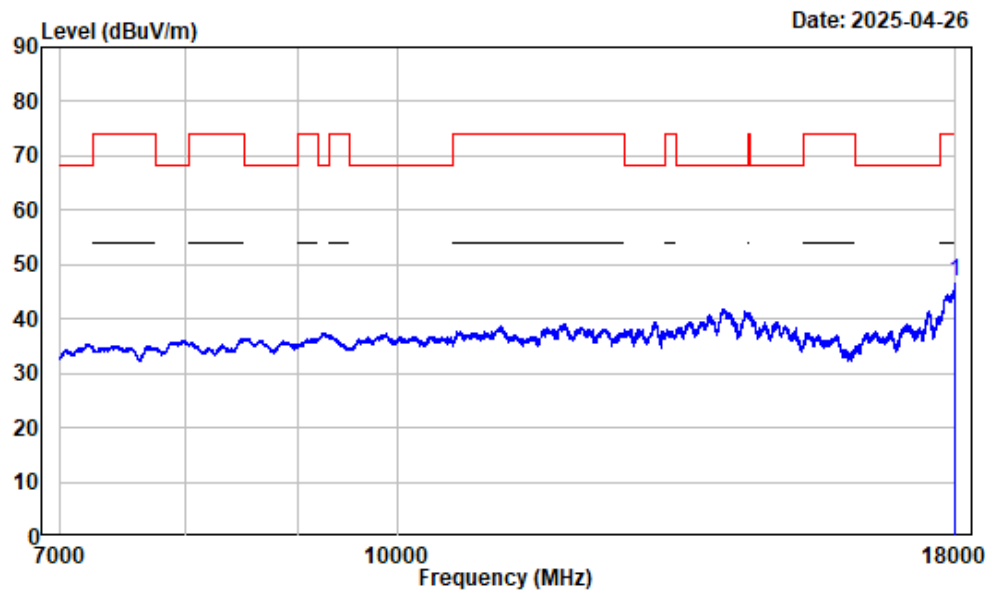

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17995.880	13.18	33.67	46.85	54.00	-7.15	Average


7-18GHz_Vertical_Peak 5GWi-Fi-Band1-AC40-5230MHz

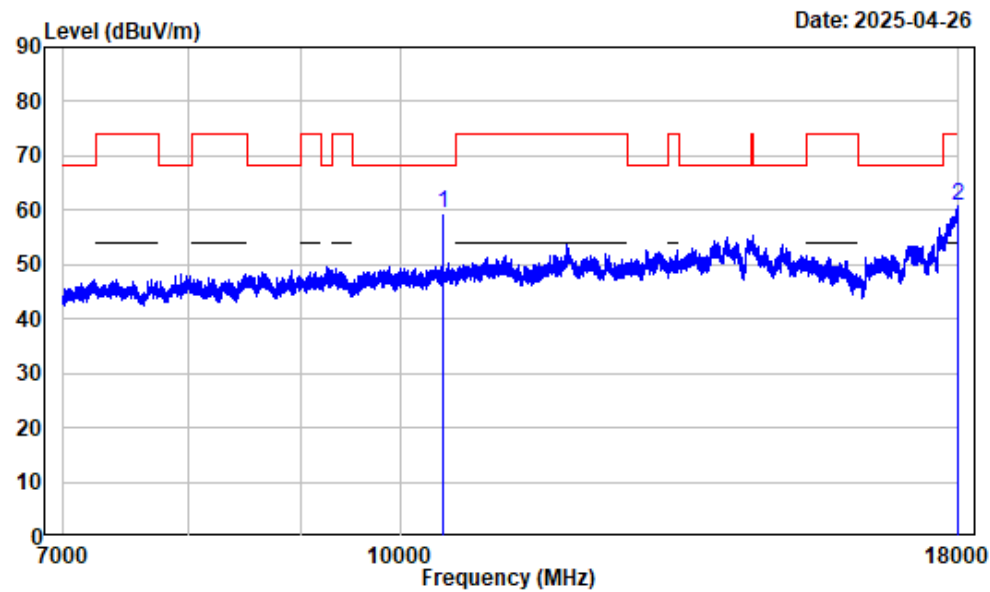

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10460.000	2.32	57.18	59.50	68.20	-8.70	Peak
2	17991.750	13.16	47.47	60.63	74.00	-13.37	Peak


7-18GHz_Vertical_Average 5GWi-Fi-Band1-AC40-5230MHz

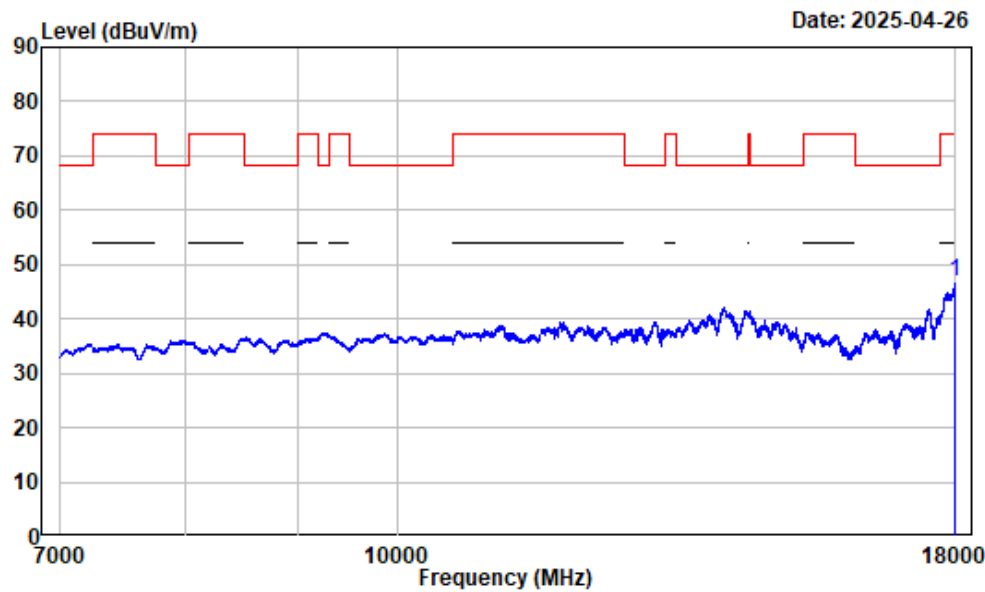

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17989.000	13.14	33.82	46.96	54.00	-7.04	Average


1-7GHz_Horizontal_Peak 5GWi-Fi-Band1-AX20-5240MHz

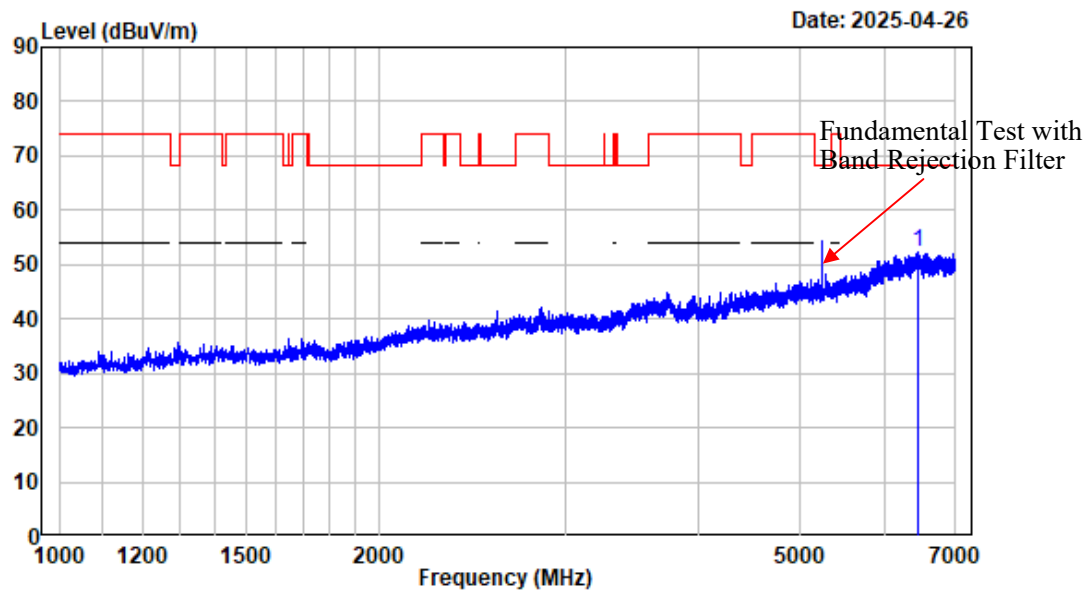

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5240

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6455.432	-2.88	55.28	52.40	68.20	-15.80	Peak


1-7GHz_Vertical_Peak 5GWi-Fi-Band1-AX20-5240MHz

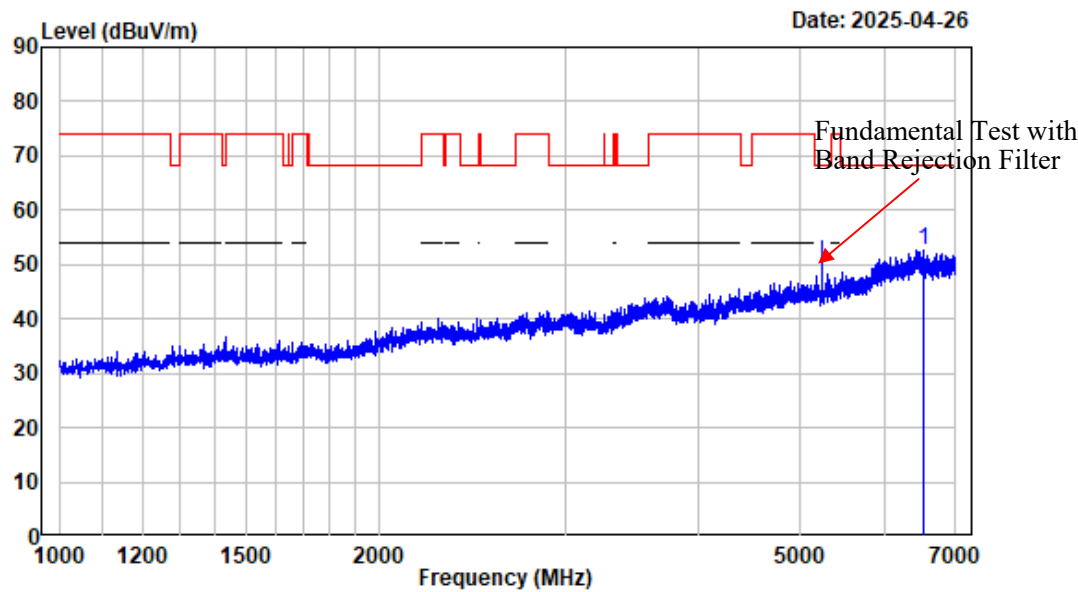

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5240

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6540.942	-3.03	55.62	52.59	68.20	-15.61	Peak


7-18GHz_Horizontal_Peak5GWi-Fi-Band1-AX20-5240MHz

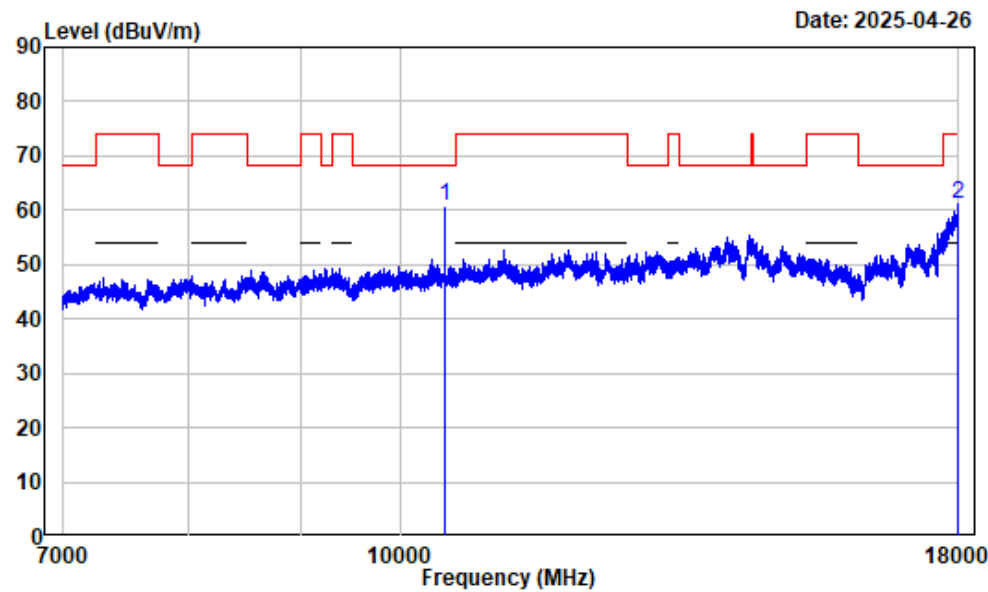

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10480.000	2.25	58.65	60.90	68.20	-7.30	Peak
2 17984.870	13.12	48.09	61.21	74.00	-12.79	Peak


7-18GHz_Horizontal_Average 5GWi-Fi-Band1-AX20-5240MHz

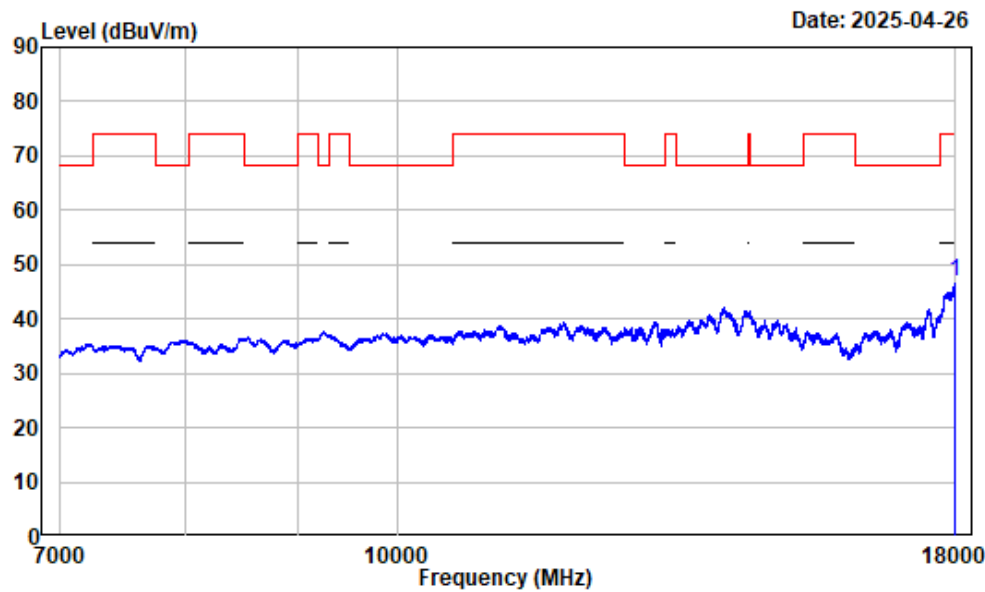

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5240

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17991.750		13.16	33.65	46.81	54.00	-7.19	Average


7-18GHz_Vertical_Peak 5GWi-Fi-Band1-AX20-5240MHz

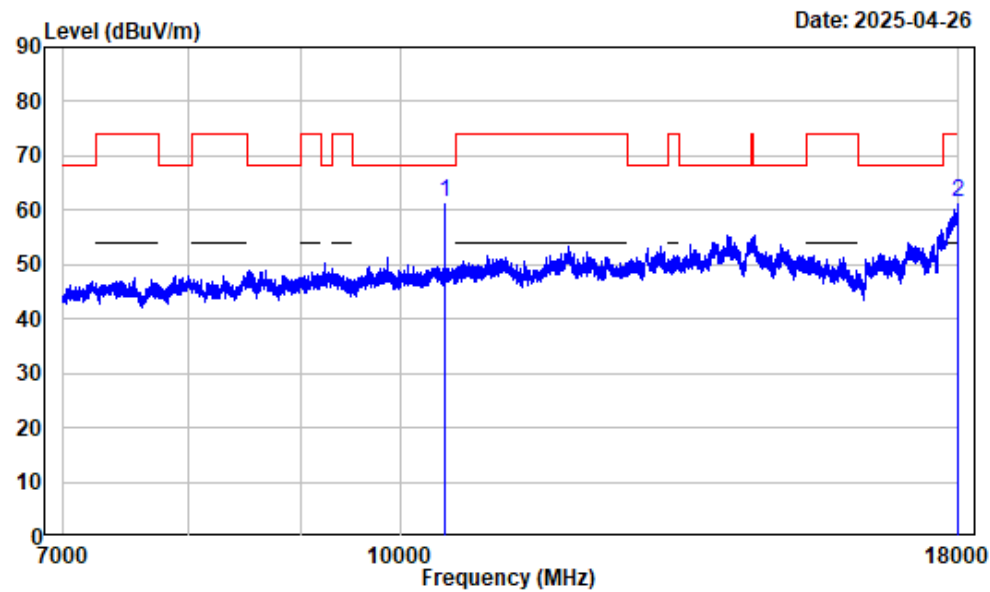

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5240

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10480.000	2.25	59.19	61.44	68.20	-6.76	Peak
2	17998.630	13.20	48.42	61.62	74.00	-12.38	Peak


7-18GHz_Vertical_Average 5GWi-Fi-Band1-AX20-5240MHz

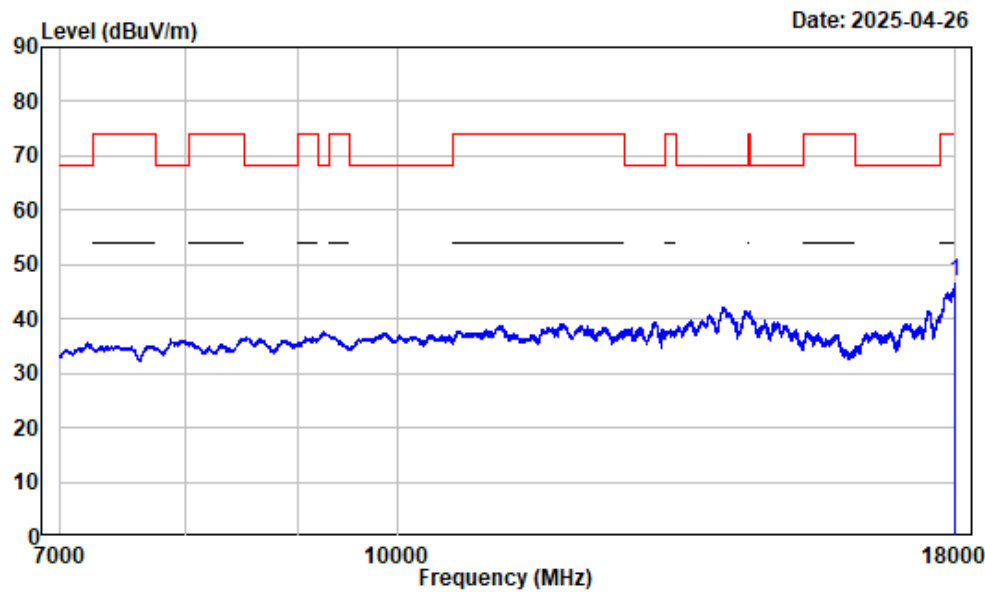

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5240

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17995.880	13.18	33.80	46.98	54.00	-7.02	Average


1-7GHz_Horizontal_Peak 5GWi-Fi-Band1-AX40-5230MHz

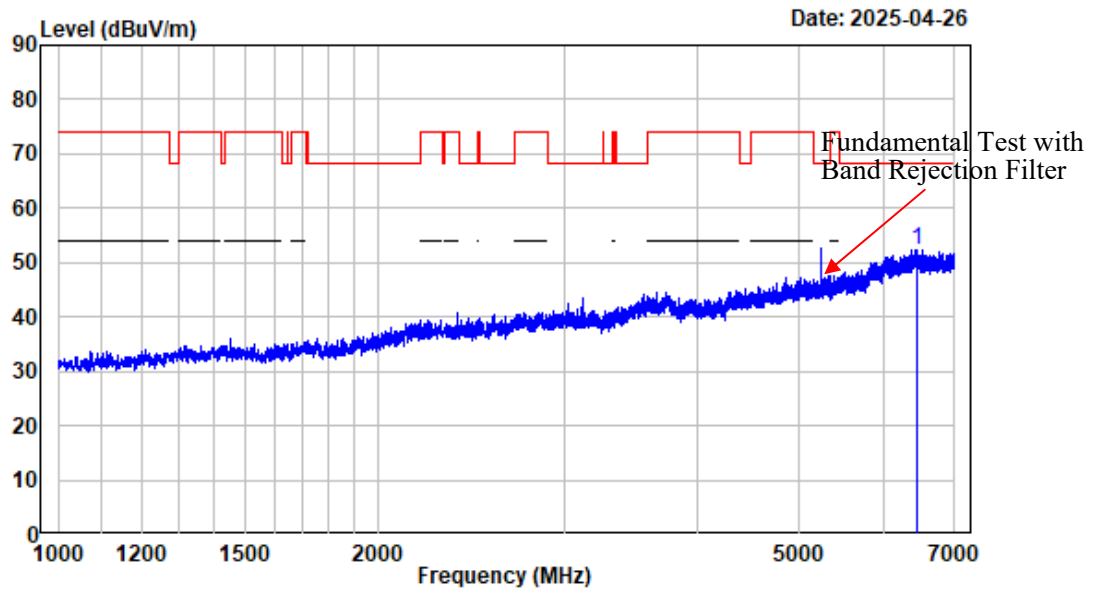

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5230

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6449.431	-2.88	55.22	52.34	68.20	-15.86	Peak


1-7GHz_Vertical_Peak 5GWi-Fi-Band1-AX40-5230MHz

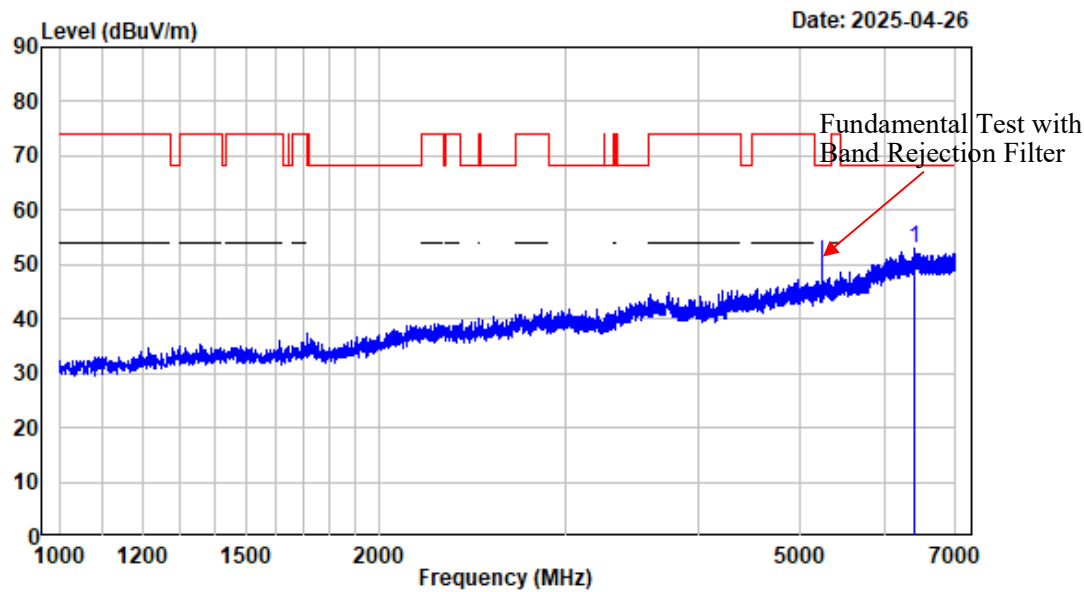

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5230

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6412.677	-2.89	55.76	52.87	68.20	-15.33	Peak


7-18GHz_Horizontal_Peak 5GWi-Fi-Band1-AX40-5230MHz

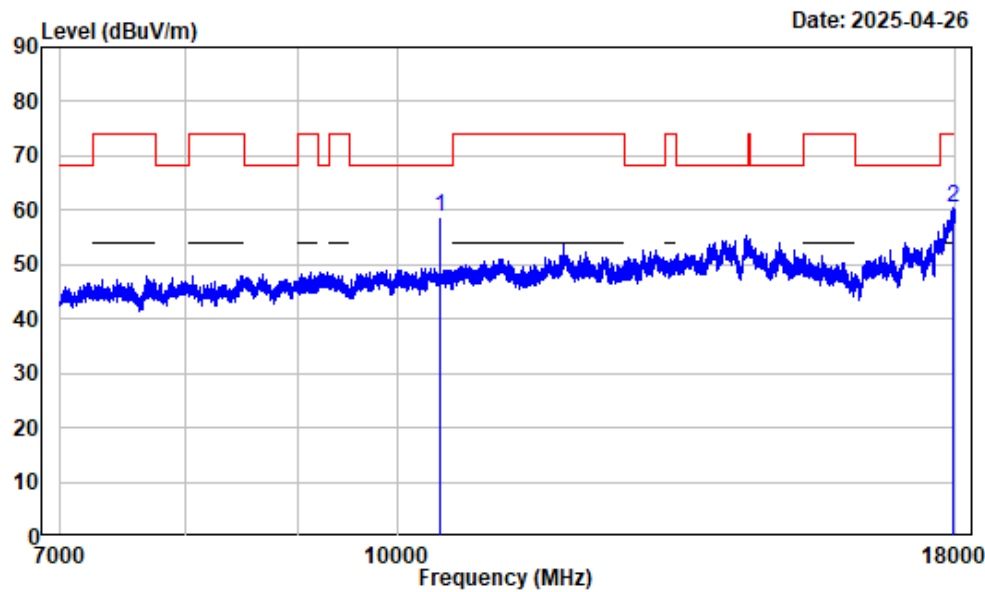

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5230

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10460.000	2.32	56.45	58.77	68.20	-9.43	Peak
2 17962.870	13.01	47.34	60.35	74.00	-13.65	Peak


7-18GHz_Horizontal_Average 5GWi-Fi-Band1-AX40-5230MHz

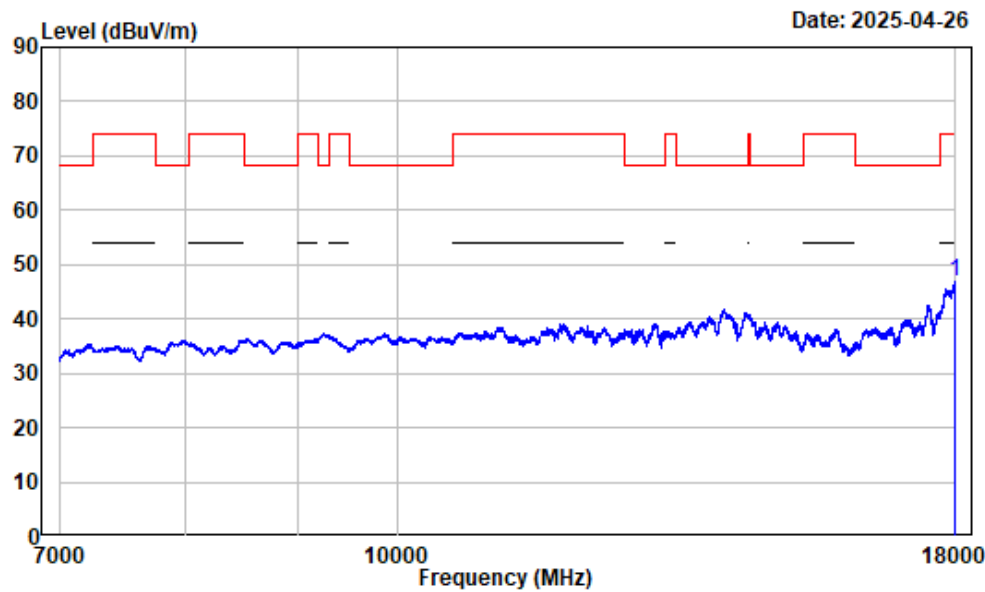

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5230

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17991.750	13.16	33.72	46.88	54.00	-7.12	Average


7-18GHz_Vertical_Peak 5GWi-Fi-Band1-AX40-5230MHz

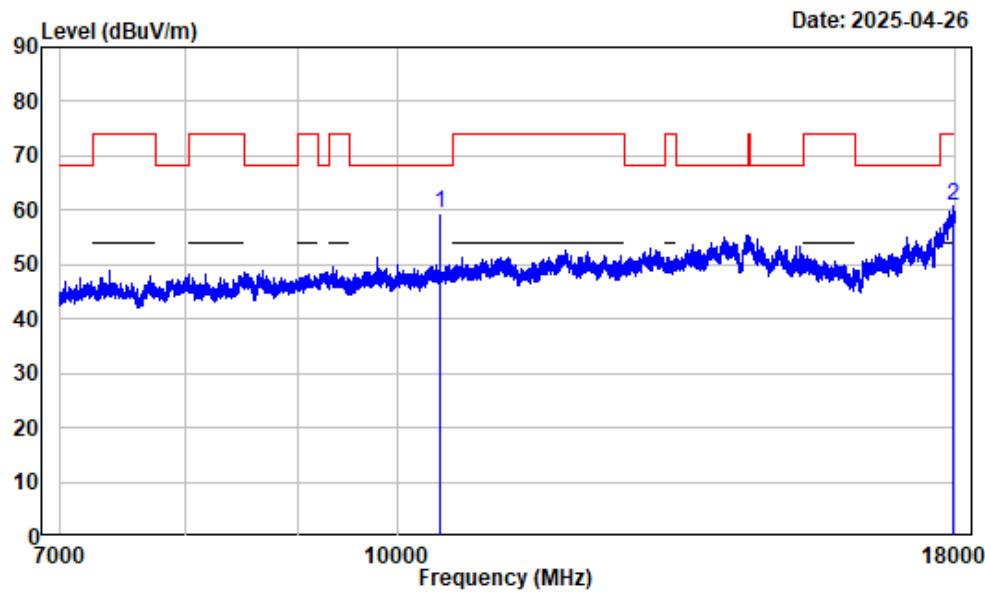

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5230

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10460.000	2.32	56.99	59.31	68.20	-8.89	Peak
2	17955.990	12.98	47.68	60.66	74.00	-13.34	Peak


7-18GHz_Vertical_Average 5GWi-Fi-Band1-AX40-5230MHz

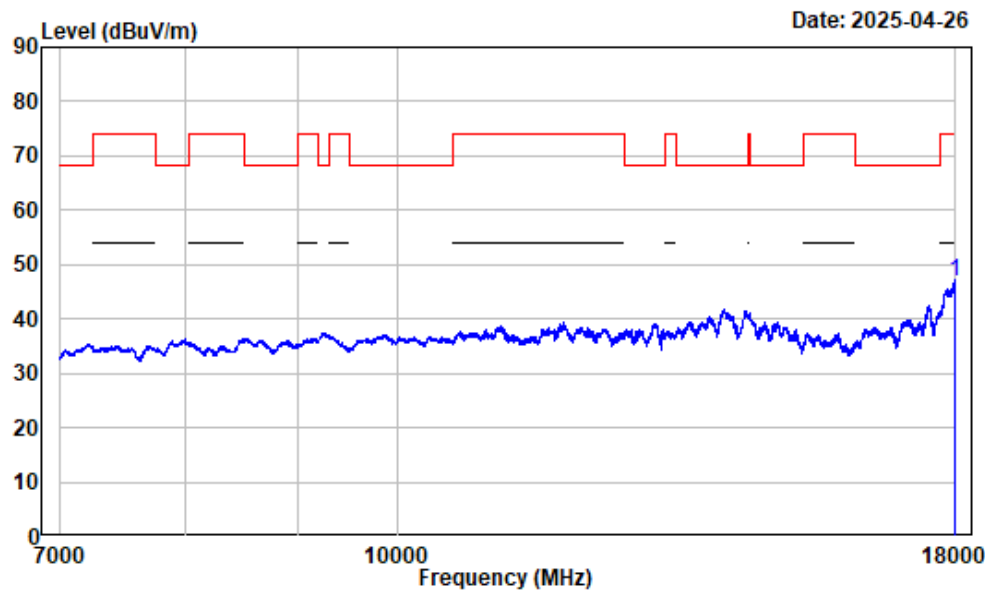

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5230

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17998.630	13.19	33.81	47.00	54.00	-7.00	Average


1-7GHz_Horizontal_Peak 5GWi-Fi-Band2-A-5320MHz

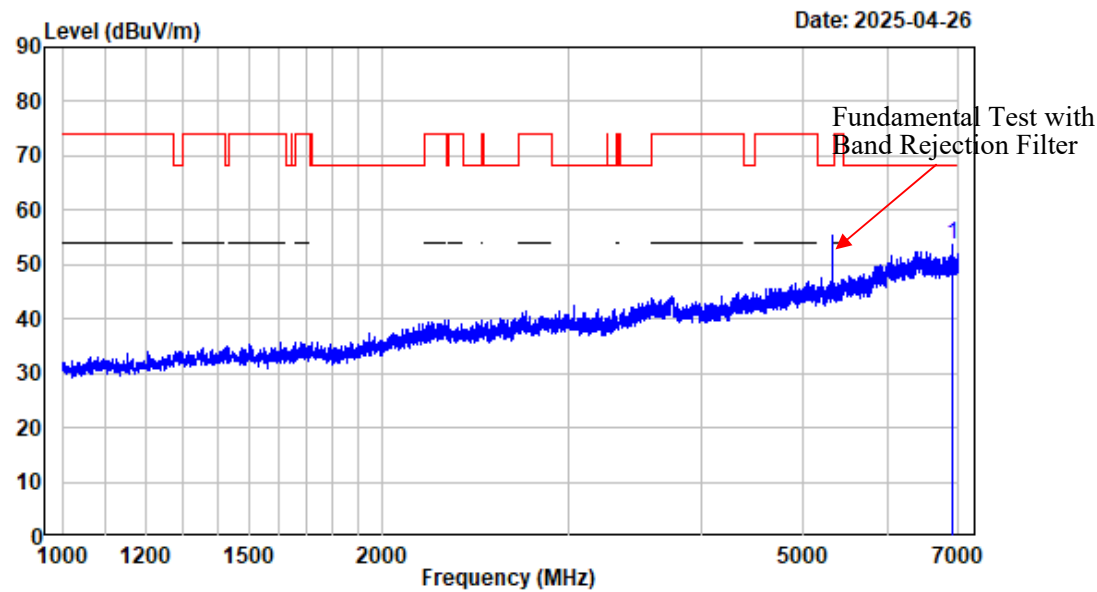

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6906.238	-3.08	56.57	53.49	68.20	-14.71	Peak


1-7GHz_Vertical_Peak 5GWi-Fi-Band2-A-5320MHz

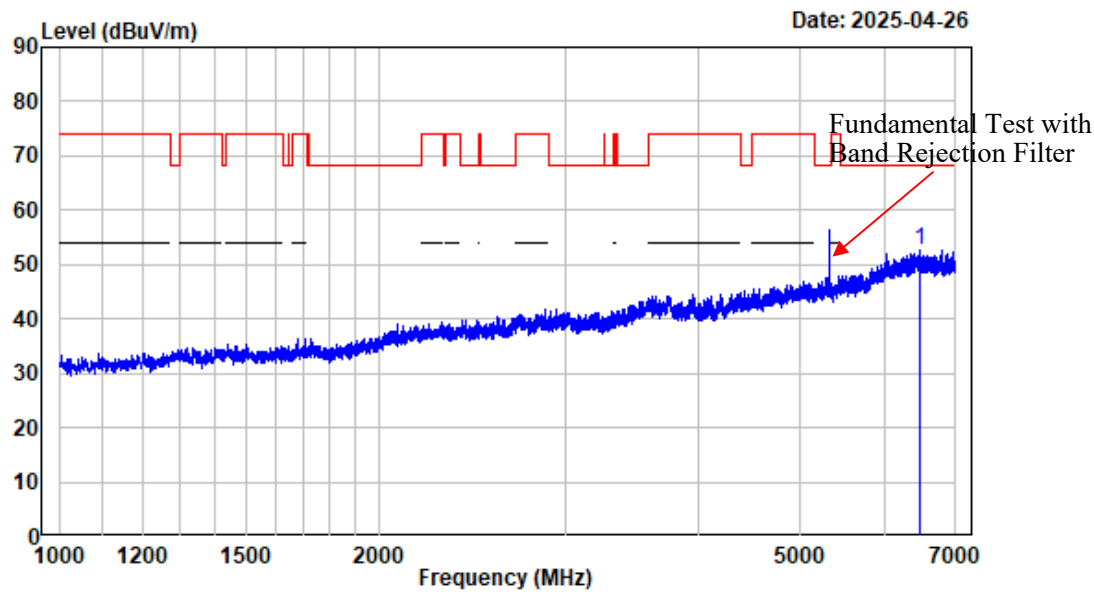

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6486.186	-2.92	55.45	52.53	68.20	-15.67	Peak


7-18GHz_Horizontal_Peak 5GWi-Fi-Band2-A-5320MHz

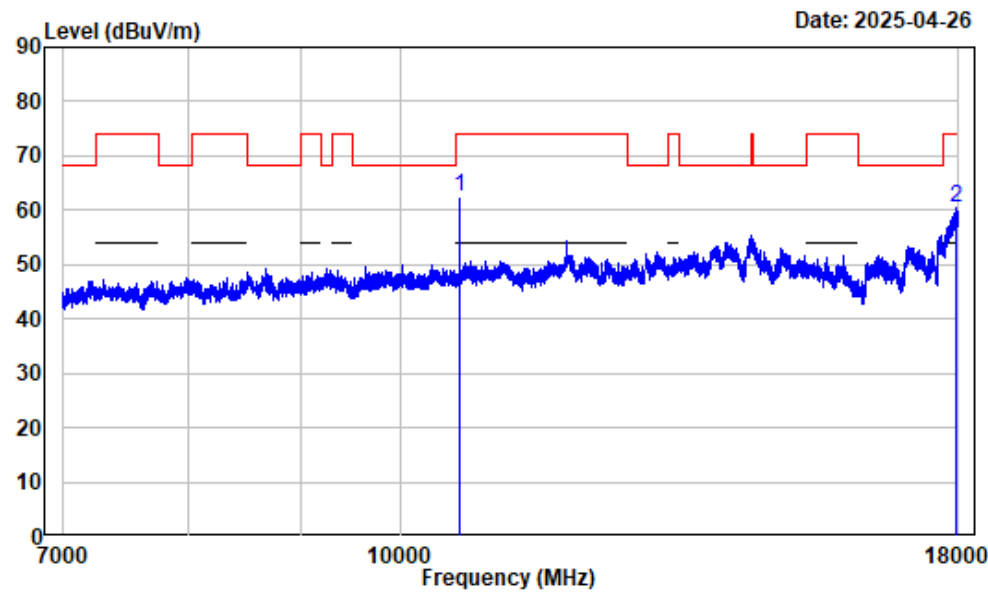

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10640.000	2.59	59.79	62.38	74.00	-11.62	Peak
2 17955.990	12.98	47.49	60.47	74.00	-13.53	Peak


7-18GHz_Horizontal_Average 5GWi-Fi-Band2-A-5320MHz

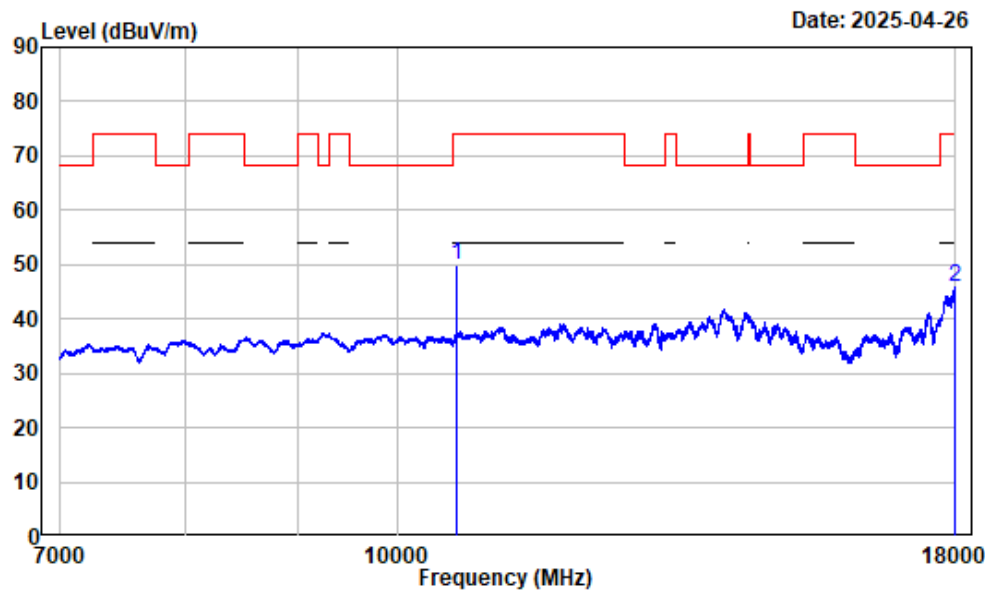

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10640.000	2.59	47.32	49.91	54.00	-4.09	Average
2 17998.630	13.19	32.49	45.68	54.00	-8.32	Average


7-18GHz_Vertical_Peak 5GWi-Fi-Band2-A-5320MHz

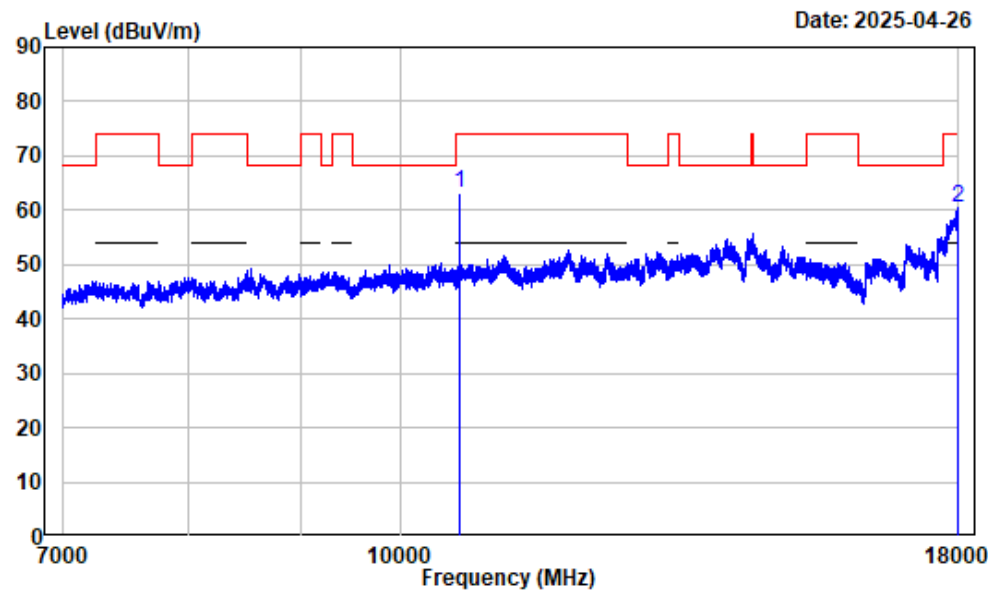

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10640.000	2.59	60.68	63.27	74.00	-10.73	Peak
2 17976.620	13.09	47.45	60.54	74.00	-13.46	Peak


7-18GHz_Vertical_Average 5GWi-Fi-Band2-A-5320MHz

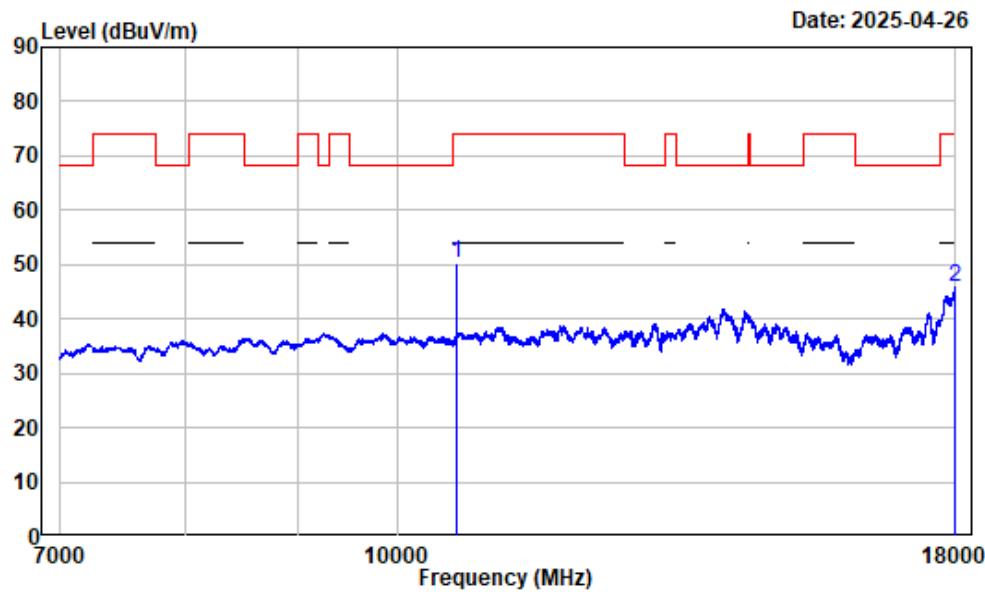

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10640.000	2.59	47.83	50.42	54.00	-3.58	Average
2 17998.630	13.19	32.64	45.83	54.00	-8.17	Average


1-7GHz_Horizontal_Peak 5GWi-Fi-Band2-AC20-5320MHz

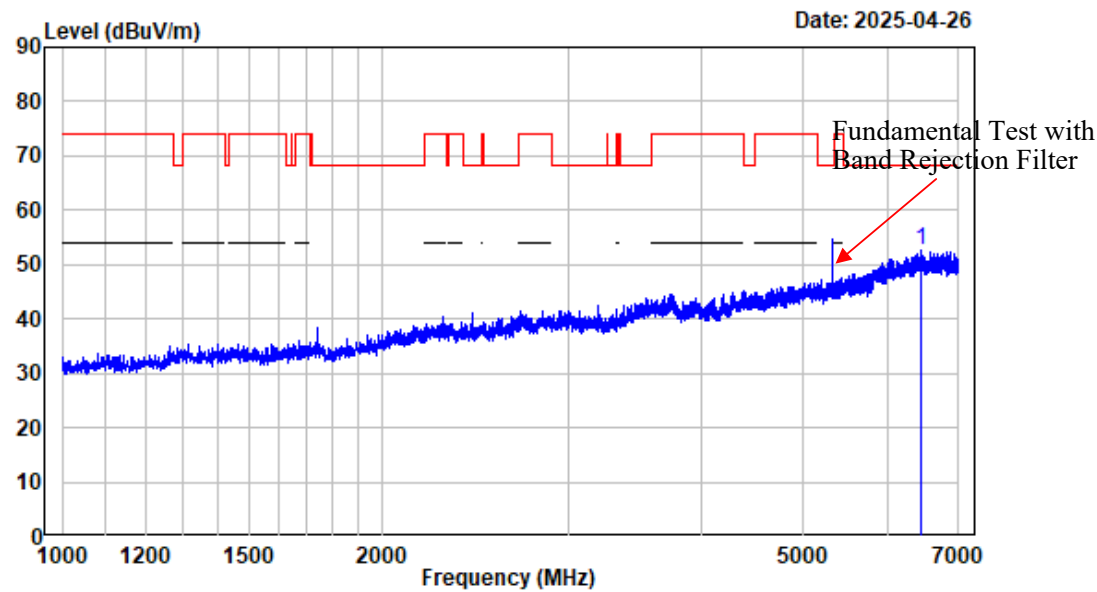

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6449.431	-2.88	55.42	52.54	68.20	-15.66	Peak


1-7GHz_Vertical_Peak 5GWi-Fi-Band2-AC20-5320MHz

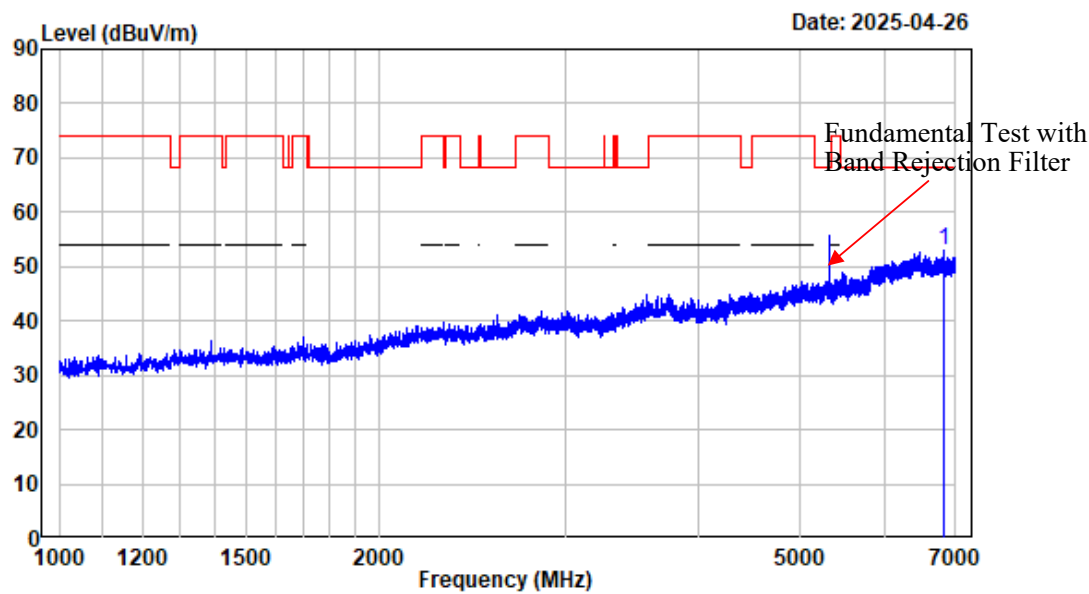

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6818.478	-3.26	56.10	52.84	68.20	-15.36	Peak


7-18GHz_Horizontal_Peak 5GWi-Fi-Band2-AC20-5320MHz

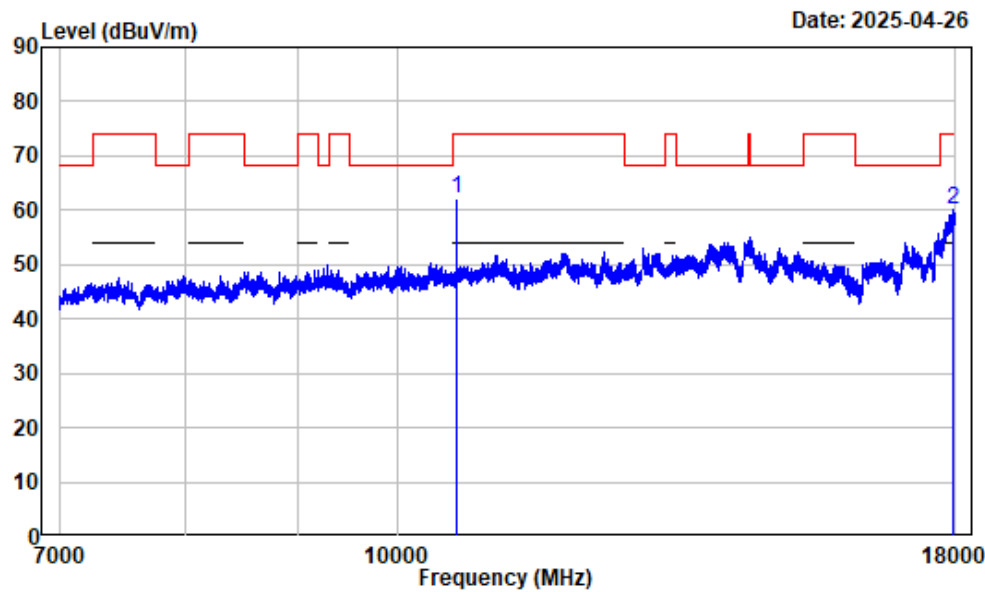

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10640.000	2.59	59.61	62.20	74.00	-11.80	Peak
2 17958.740	12.99	47.12	60.11	74.00	-13.89	Peak


7-18GHz_Horizontal_Average 5GWi-Fi-Band2-AC20-5320MHz

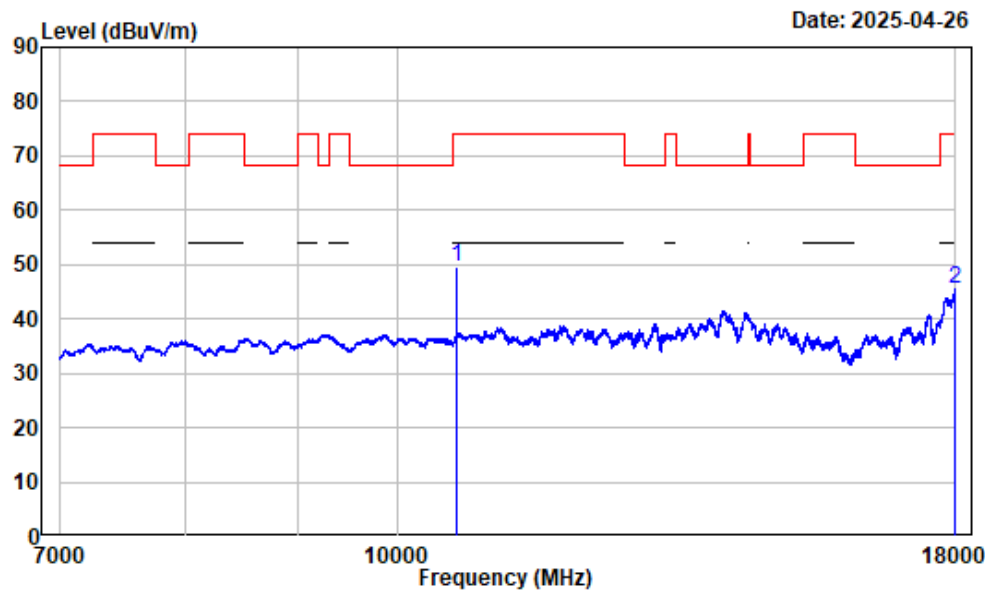

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10640.000	2.59	47.07	49.66	54.00	-4.34	Average
2 17994.500	13.17	32.49	45.66	54.00	-8.34	Average


7-18GHz_Vertical_Peak 5GWi-Fi-Band2-AC20-5320MHz

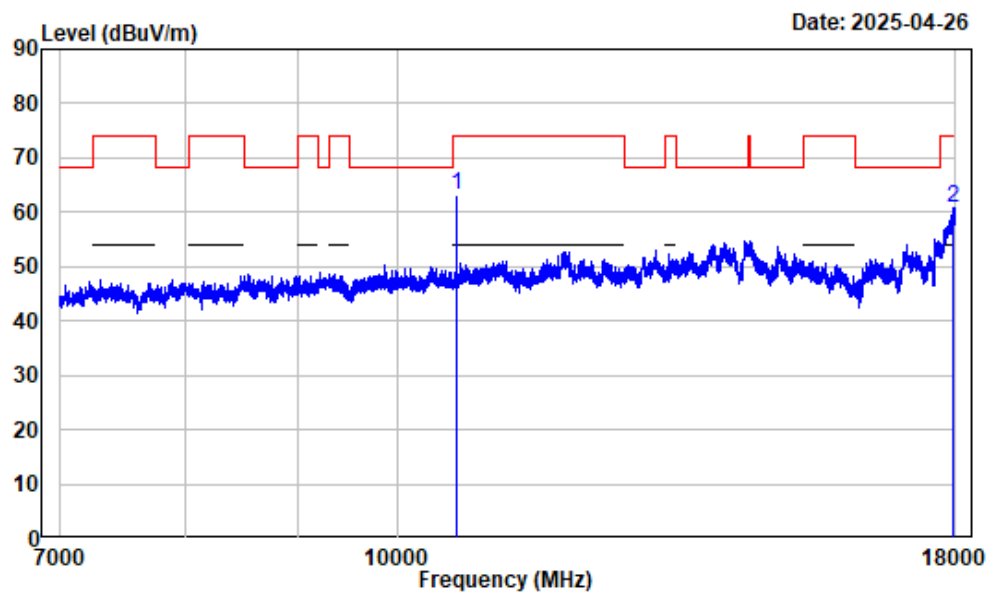

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10640.000	2.59	60.45	63.04	74.00	-10.96	Peak
2 17955.990	12.98	47.88	60.86	74.00	-13.14	Peak


7-18GHz_Vertical_Average 5GWi-Fi-Band2-AC20-5320MHz

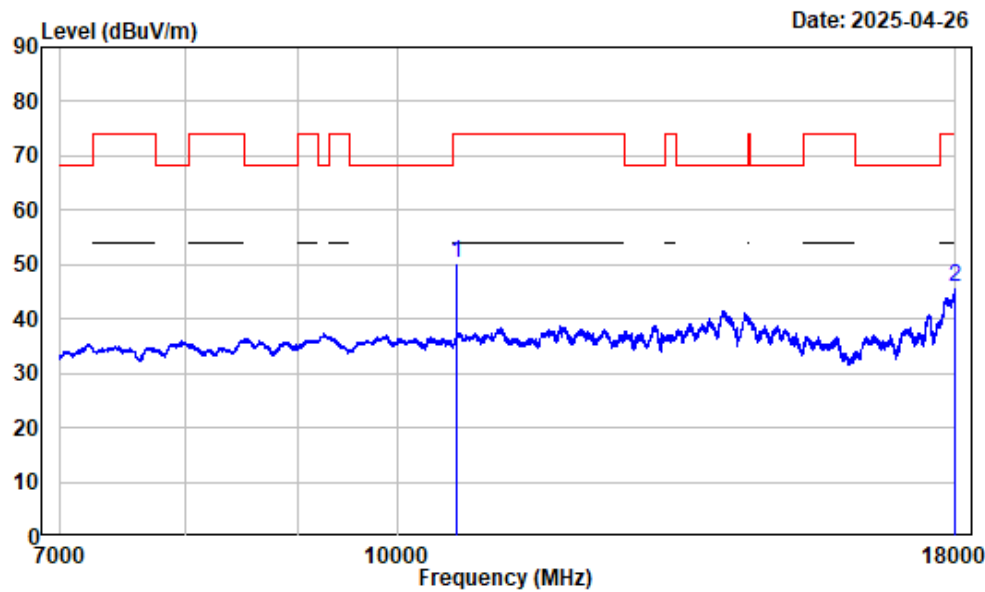

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10640.000	2.59	47.59	50.18	54.00	-3.82	Average
2 17991.750	13.16	32.65	45.81	54.00	-8.19	Average


1-7GHz_Horizontal_Peak 5GWi-Fi-Band2-AC40-5310MHz

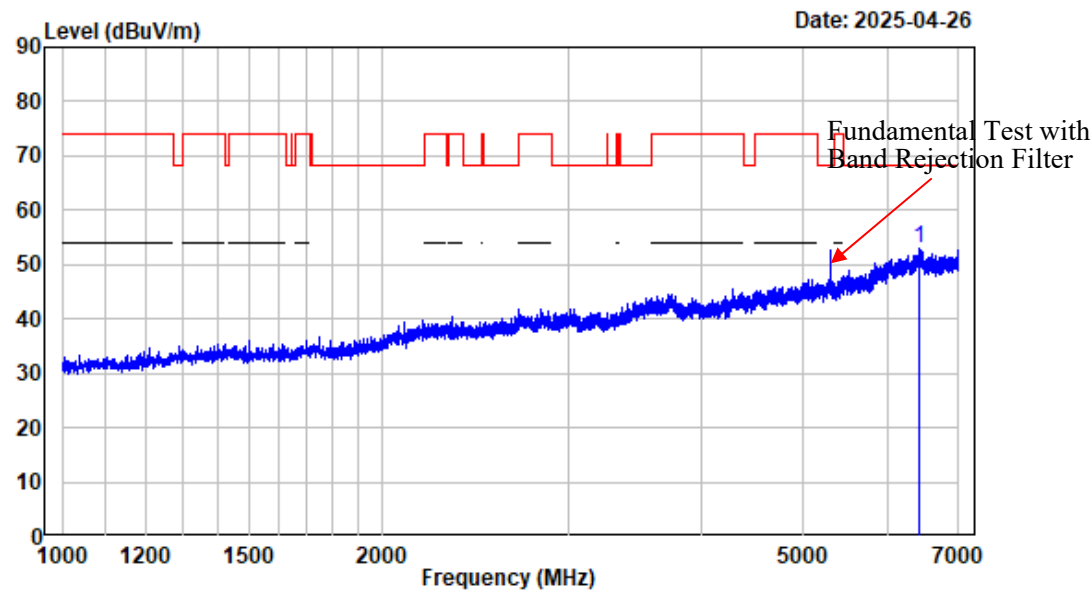

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5310

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6426.928	-2.88	56.01	53.13	68.20	-15.07	Peak


1-7GHz_Vertical_Peak 5GWi-Fi-Band2-AC40-5310MHz

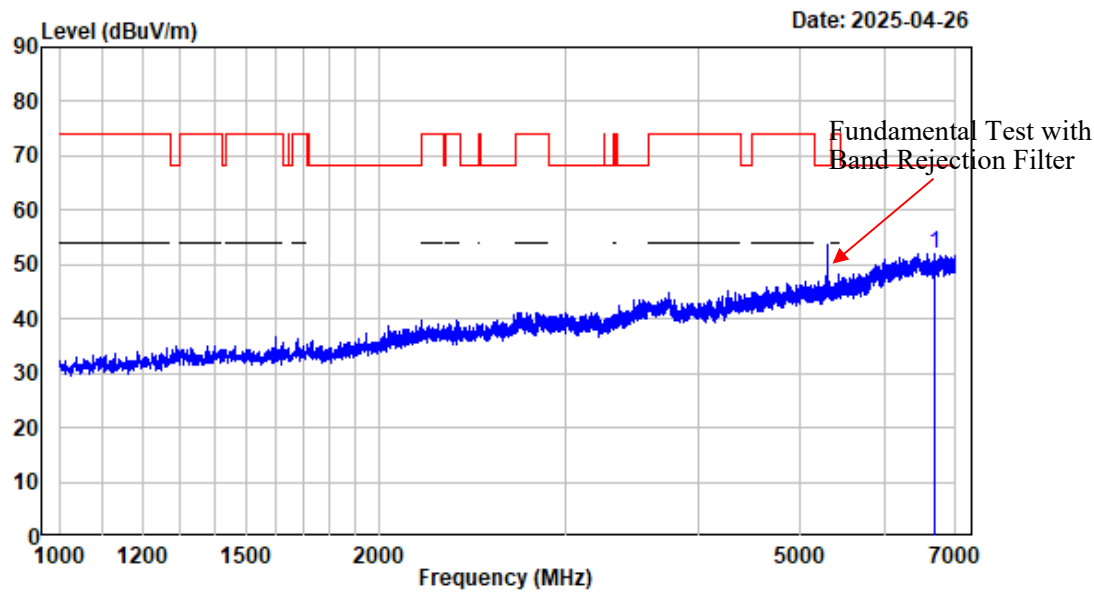

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5310

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6685.711	-3.24	55.32	52.08	68.20	-16.12	Peak


7-18GHz_Horizontal_Peak 5GWi-Fi-Band2-AC40-5310MHz

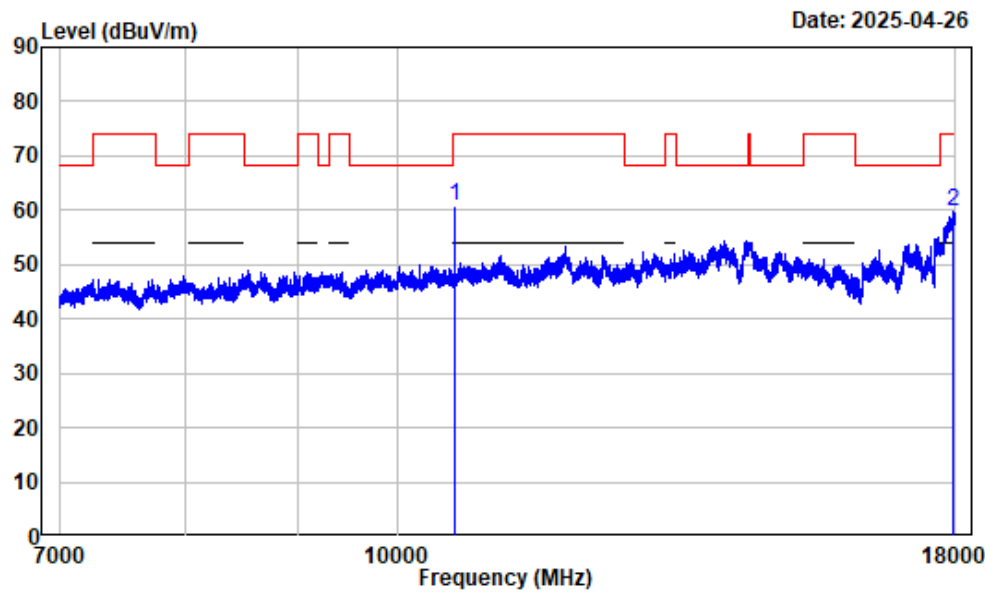

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5310

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10620.000	2.37	58.47	60.84	74.00	-13.16	Peak
2 17958.740	12.99	46.90	59.89	74.00	-14.11	Peak


7-18GHz_Horizontal_Average 5GWi-Fi-Band2-AC40-5310MHz

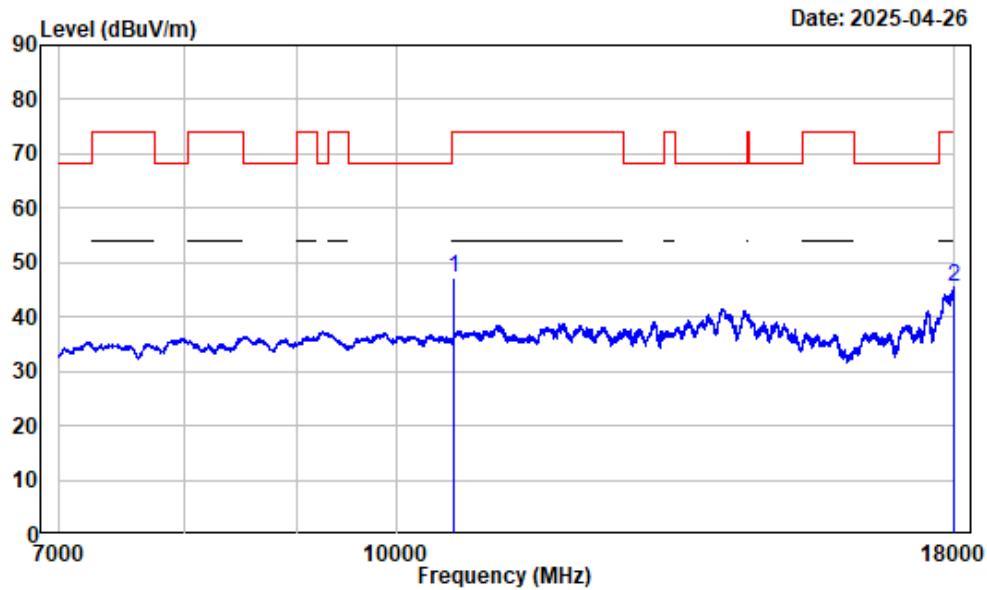

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5310

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10620.000	2.37	44.84	47.21	54.00	-6.79	Average
2 17998.630	13.19	32.31	45.50	54.00	-8.50	Average


7-18GHz_Vertical_Peak 5GWi-Fi-Band2-AC40-5310MHz

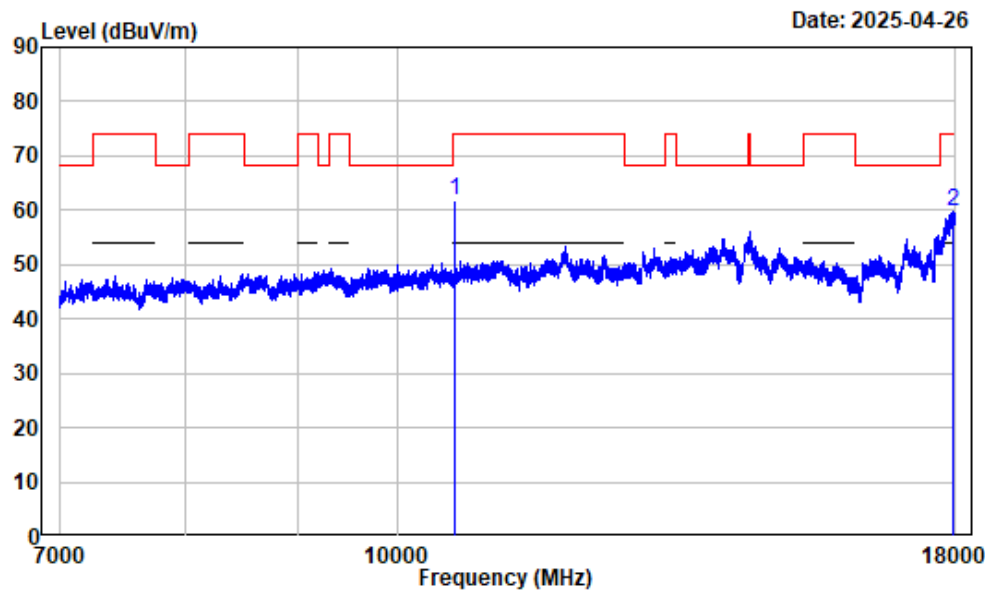

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5310

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10620.000	2.37	59.28	61.65	74.00	-12.35	Peak
2	17964.250	13.02	46.88	59.90	74.00	-14.10	Peak


7-18GHz_Vertical_Average 5GWi-Fi-Band2-AC40-5310MHz

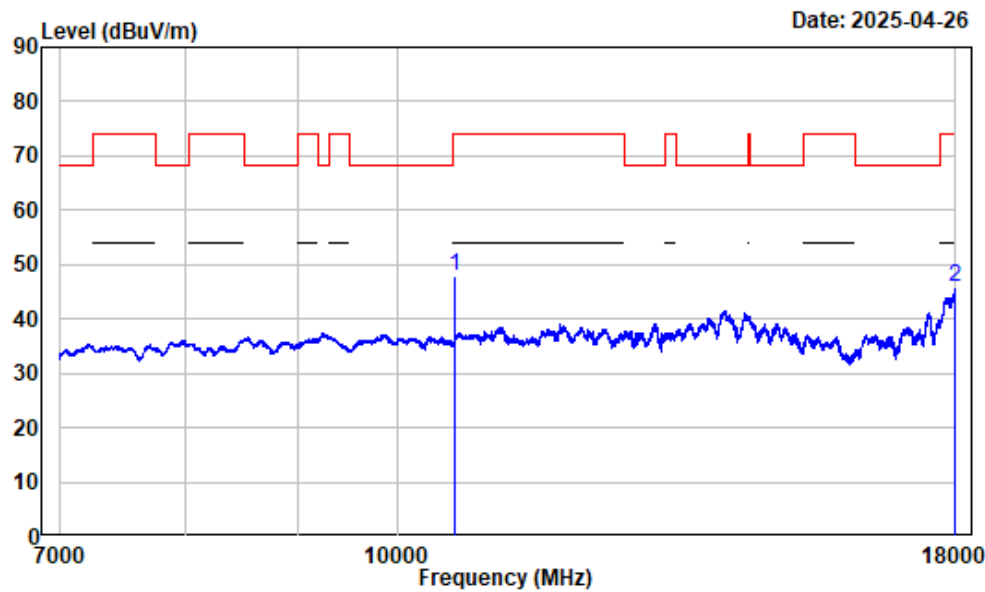

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5310

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10620.000	2.37	45.36	47.73	54.00	-6.27	Average
2 17995.880	13.18	32.53	45.71	54.00	-8.29	Average


1-7GHz_Horizontal_Peak 5GWi-Fi-Band2-AX20-5320MHz

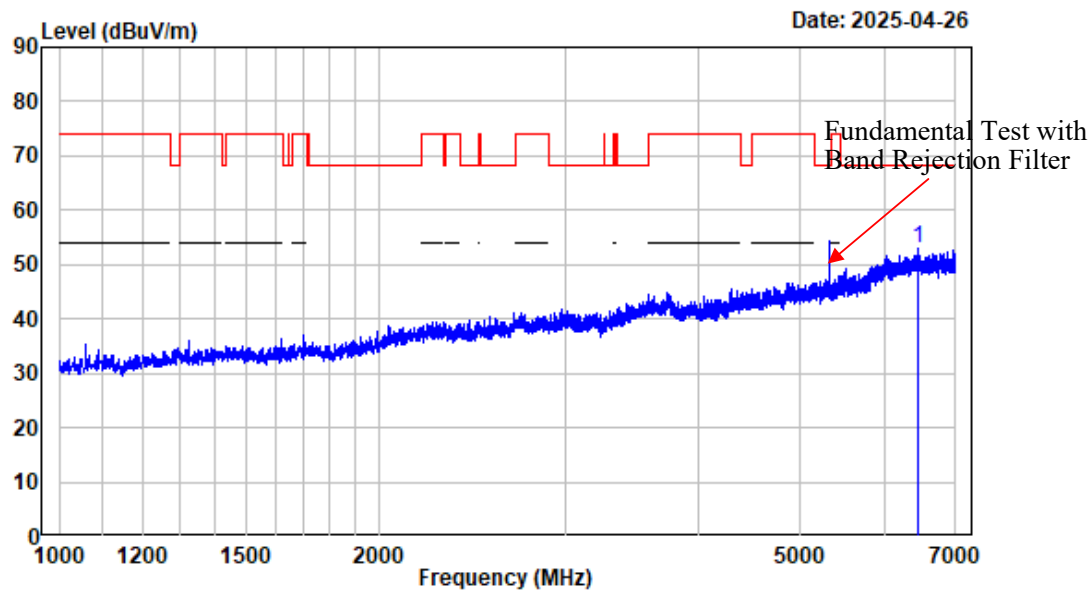

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX20-5320

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6459.933	-2.89	55.95	53.06	68.20	-15.14 Peak


1-7GHz_Vertical_Peak 5GWi-Fi-Band2-AX20-5320MHz

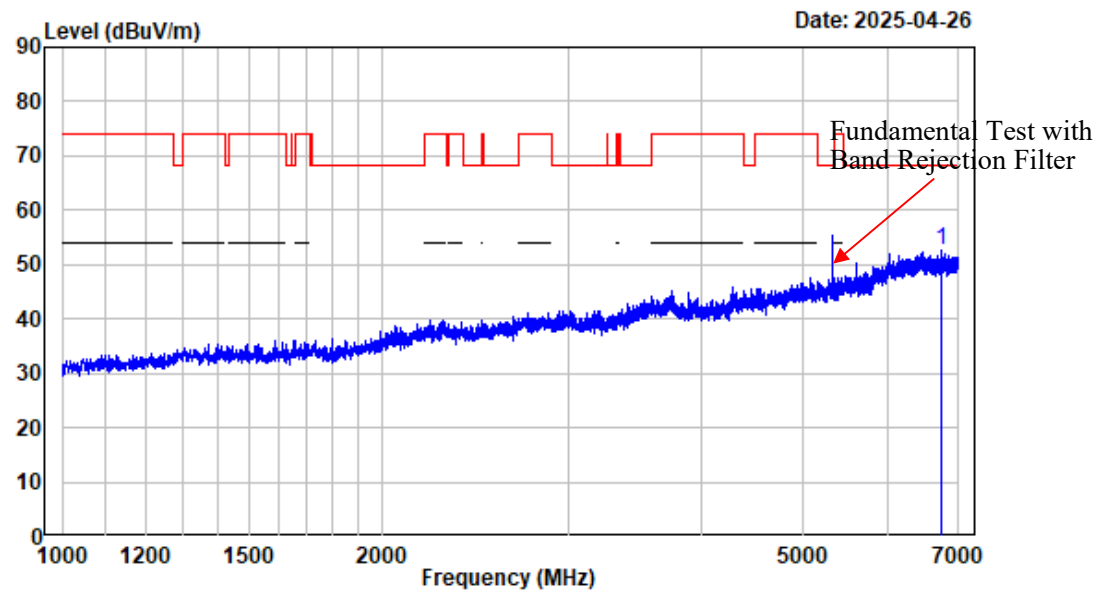

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX20-5320

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6741.968	-3.23	55.77	52.54	68.20	-15.66	Peak


7-18GHz_Horizontal_Peak 5GWi-Fi-Band2-AX20-5320MHz

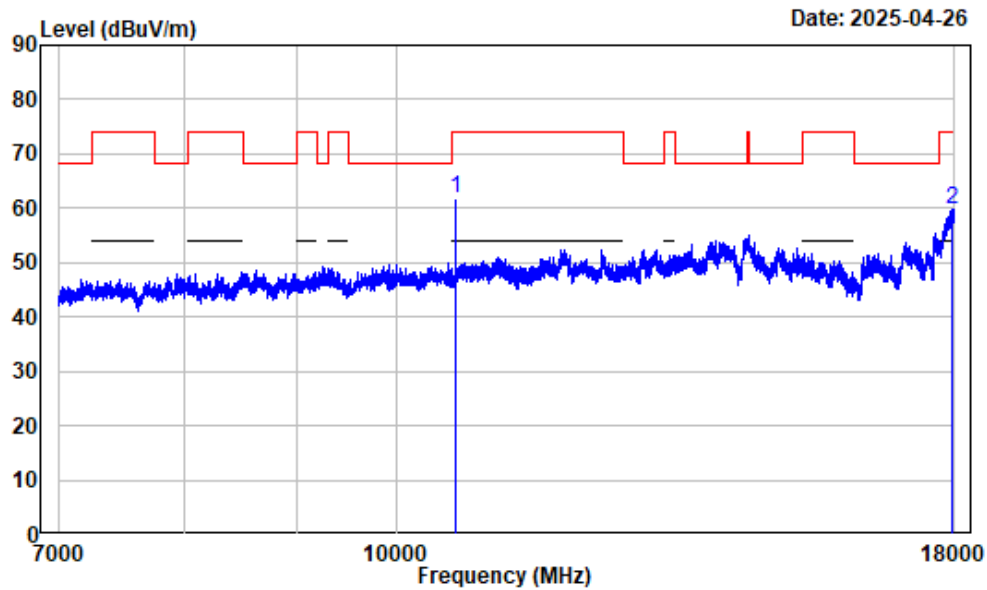

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX20-5320

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10640.000	2.59	59.36	61.95	74.00	-12.05	Peak
2 17968.370	13.05	46.79	59.84	74.00	-14.16	Peak


7-18GHz_Horizontal_Average 5GWi-Fi-Band2-AX20-5320MHz

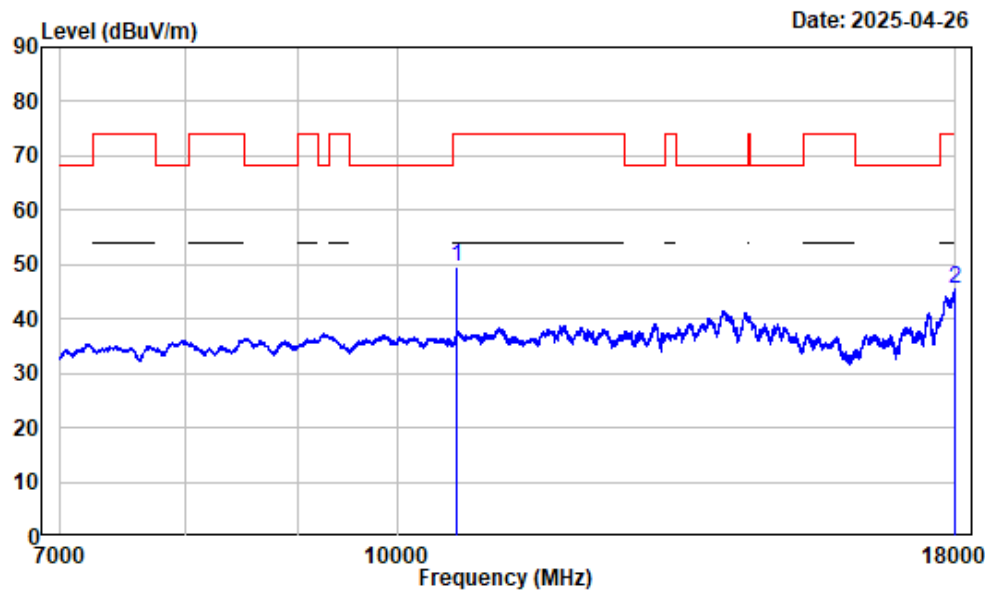

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-AX20-5320

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10640.000	2.59	47.09	49.68	54.00	-4.32	Average
2 17998.630	13.19	32.44	45.63	54.00	-8.37	Average


7-18GHz_Vertical_Peak 5GWi-Fi-Band2-AX20-5320MHz

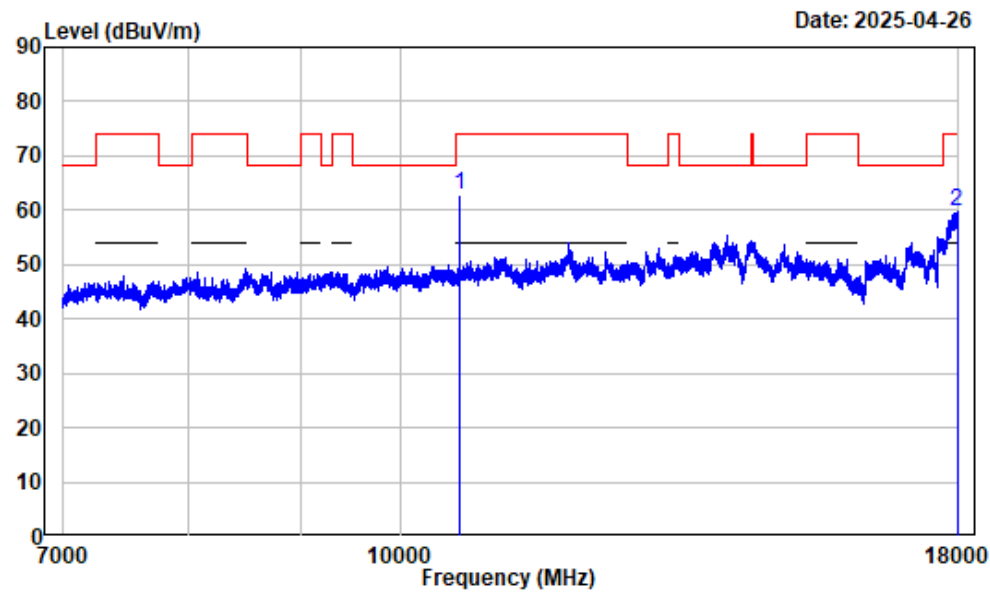

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX20-5320

Freq		Factor	Read Level	Level	Limit	Over	Remark
					Line	Limit	
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10640.000		2.59	60.18	62.77	74.00	-11.23	Peak
2 17973.870		13.08	46.61	59.69	74.00	-14.31	Peak


7-18GHz_Vertical_Average 5GWi-Fi-Band2-AX20-5320MHz

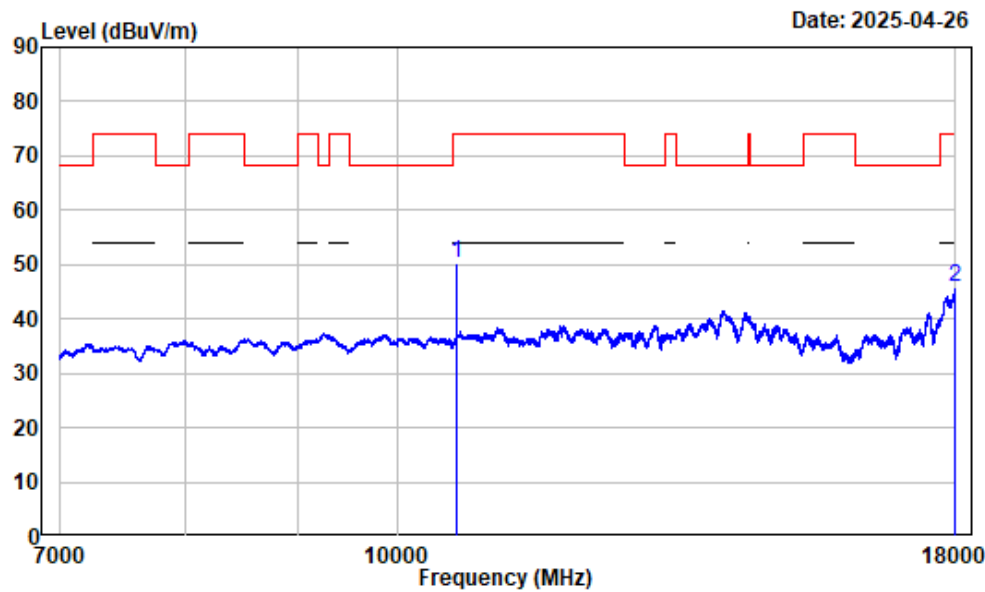

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-AX20-5320

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10640.000	2.59	47.65	50.24	54.00	-3.76	Average
2 17998.630	13.19	32.66	45.85	54.00	-8.15	Average


1-7GHz_Horizontal_Peak 5GWi-Fi-Band2-AX40-5310MHz

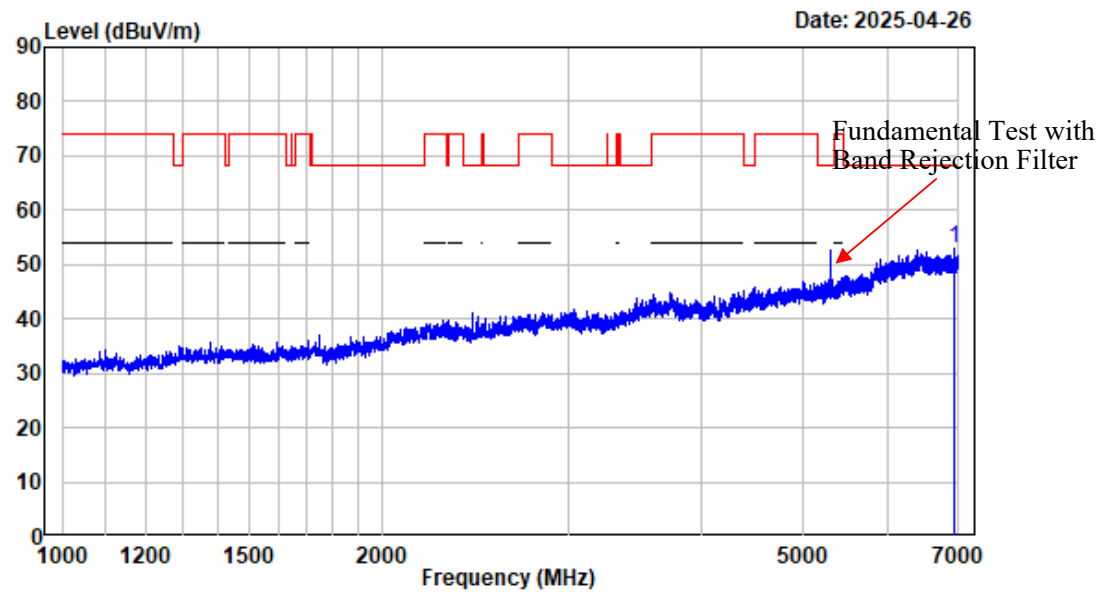

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX40-5310

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6924.991	-2.91	55.84	52.93	68.20	-15.27	Peak


1-7GHz_Vertical_Peak 5GWi-Fi-Band2-AX40-5310MHz

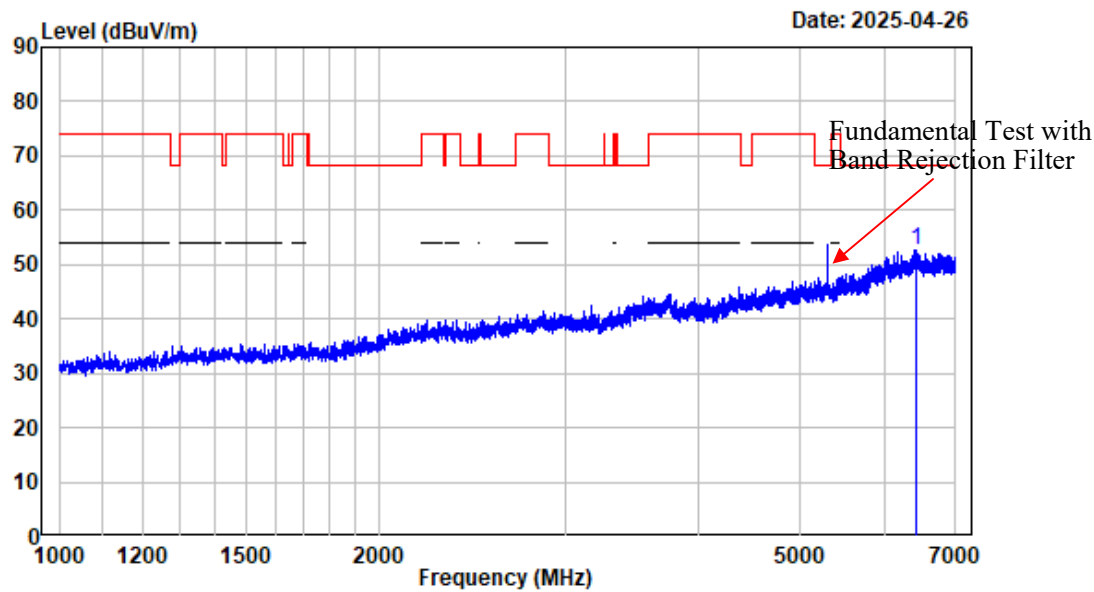

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX40-5310

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6432.929	-2.88	55.65	52.77	68.20	-15.43	Peak


7-18GHz_Horizontal_Peak 5GWi-Fi-Band2-AX40-5310MHz

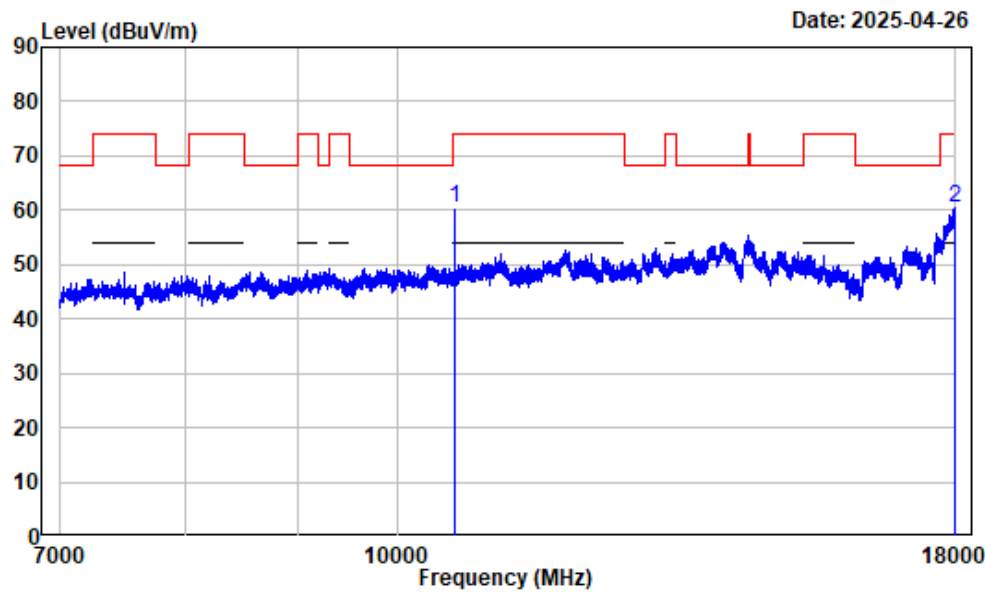

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX40-5310

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10620.000	2.37	58.22	60.59	74.00	-13.41	Peak
2 17976.620	13.09	47.22	60.31	74.00	-13.69	Peak


7-18GHz_Horizontal_Average 5GWi-Fi-Band2-AX40-5310MHz

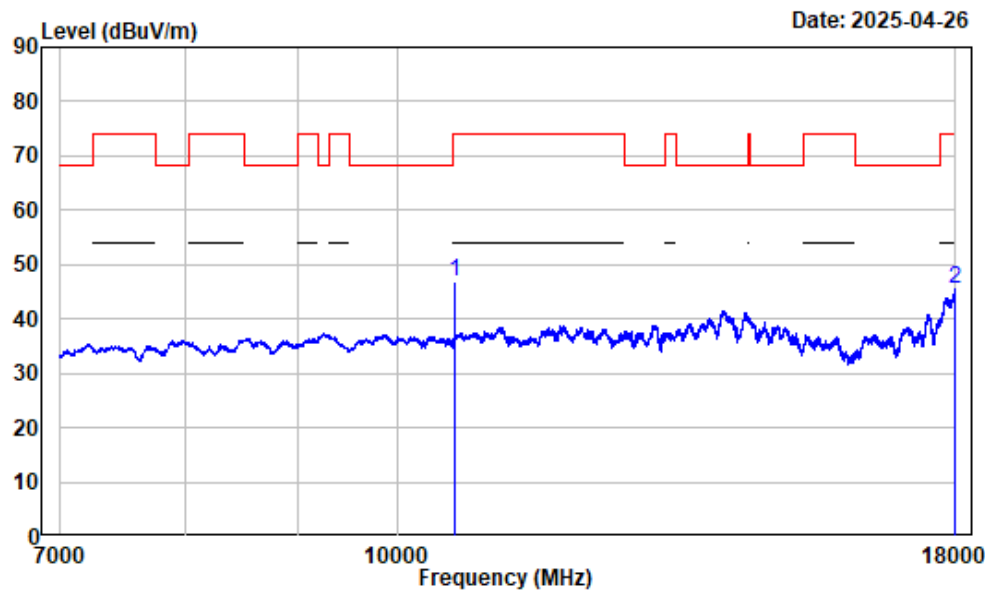

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-AX40-5310

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10620.000	2.37	44.63	47.00	54.00	-7.00	Average
2 17997.550	13.20	32.29	45.49	54.00	-8.51	Average


7-18GHz_Vertical_Peak 5GWi-Fi-Band2-AX40-5310MHz

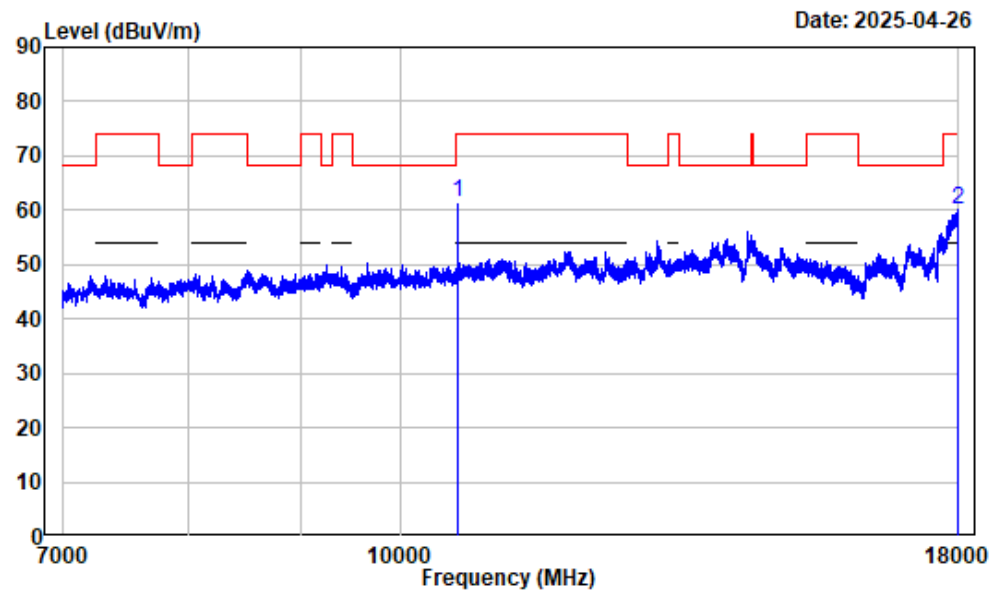

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX40-5310

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10620.000	2.37	59.05	61.42	74.00	-12.58	Peak
2	17998.630	13.20	47.06	60.26	74.00	-13.74	Peak


7-18GHz_Vertical_Average5GWi-Fi-Band2-AX40-5310MHz

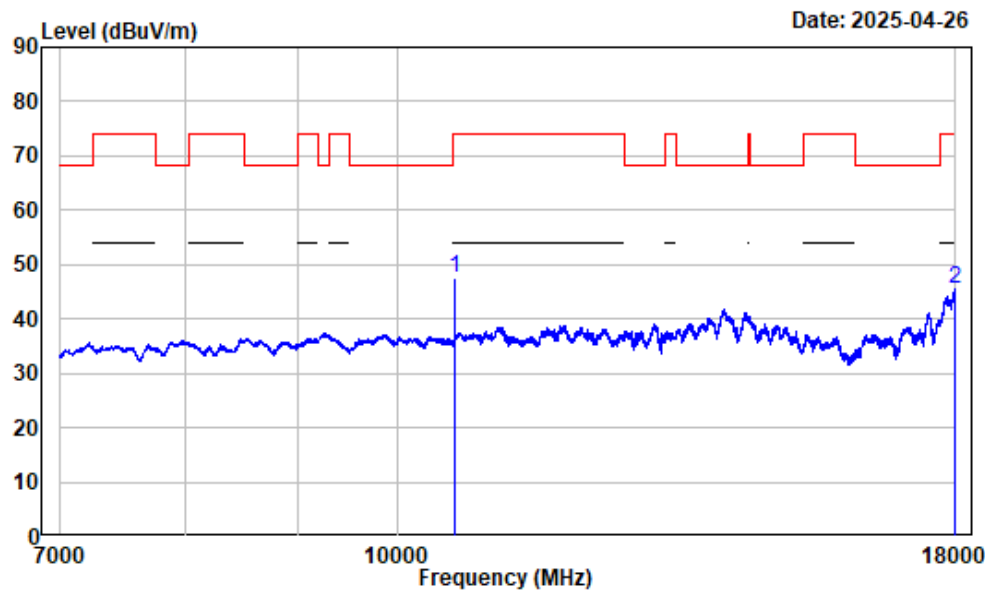

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-AX40-5310

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10620.000	2.37	45.17	47.54	54.00	-6.46	Average
2 17998.630	13.19	32.44	45.63	54.00	-8.37	Average


1-7GHz_Horizontal_Peak 5GWi-Fi-Band3-A-5700MHz

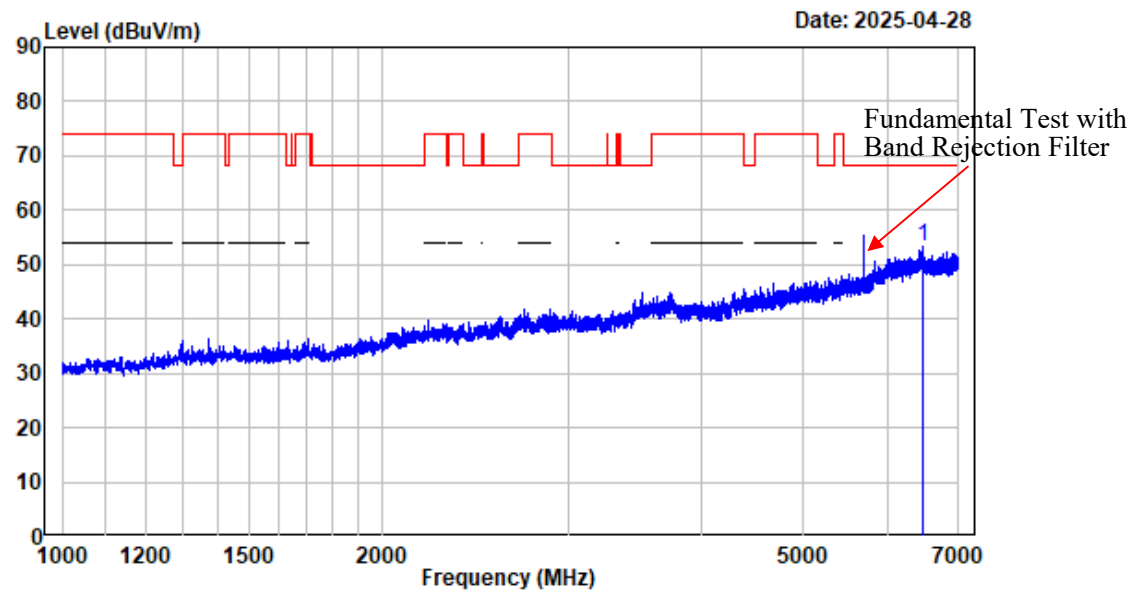

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5700

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6480.185	-2.92	56.22	53.30	68.20	-14.90	Peak


1-7GHz_Vertical_Peak 5GWi-Fi-Band3-A-5700MHz

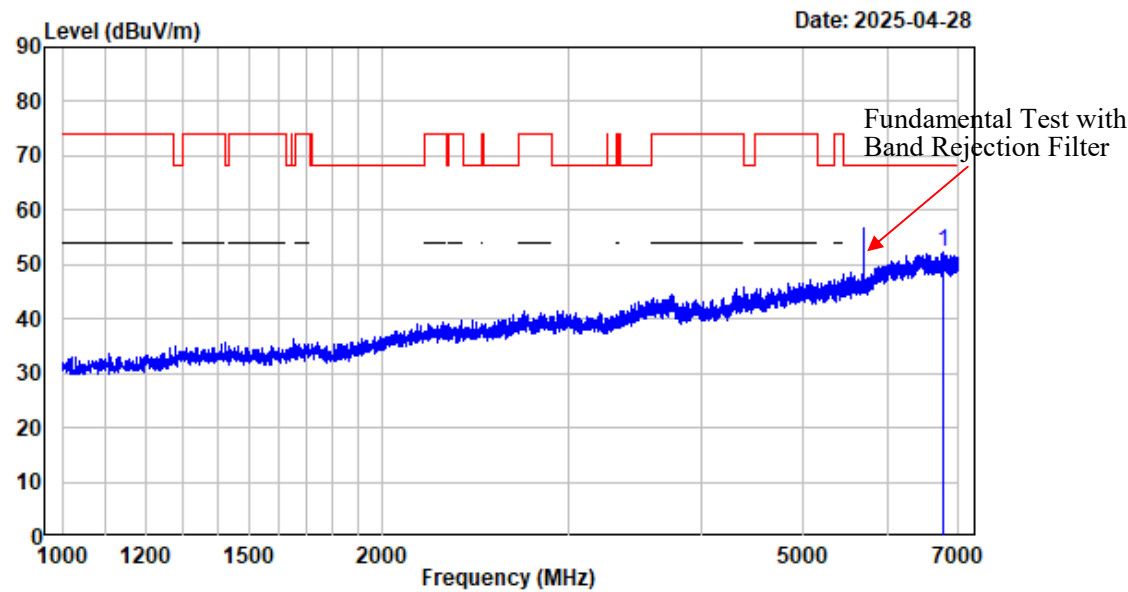

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5700

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6770.471	-3.27	55.45	52.18	68.20	-16.02	Peak


7-18GHz_Horizontal_Peak 5GWi-Fi-Band3-A-5700MHz

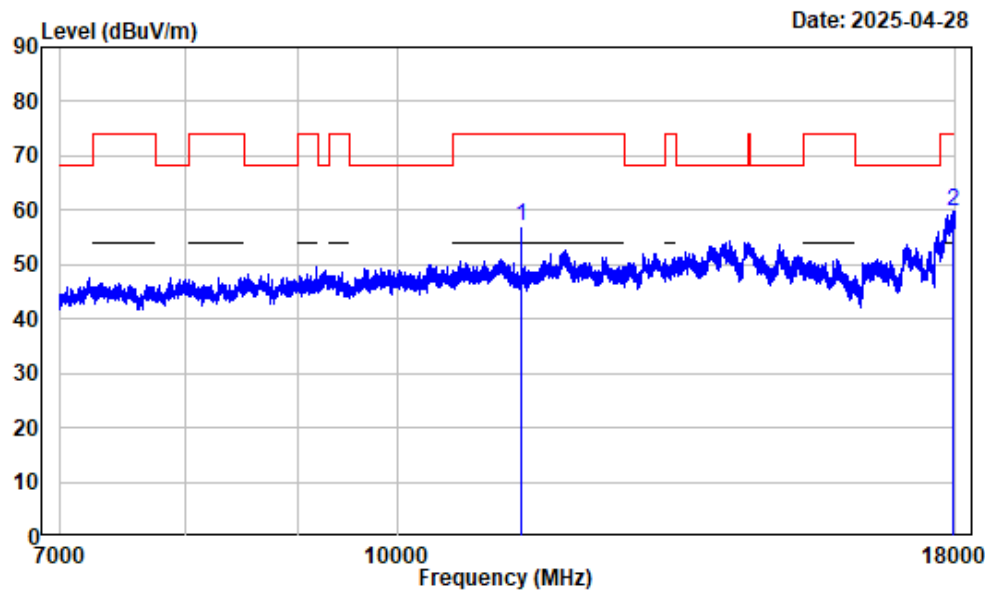

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5700

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11400.000	3.32	53.65	56.97	74.00	-17.03	Peak
2	17964.250	13.02	46.77	59.79	74.00	-14.21	Peak


7-18GHz_Horizontal_Average5GWi-Fi-Band3-A-5700MHz

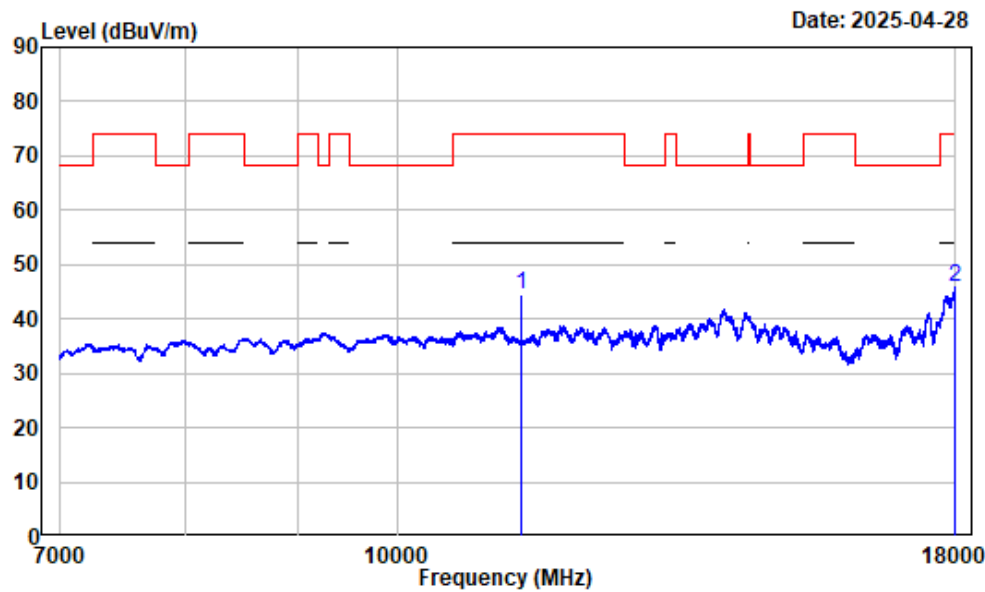

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-A-5700

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11400.000	3.32	41.30	44.62	54.00	-9.38	Average
2 17998.630	13.19	32.50	45.69	54.00	-8.31	Average


7-18GHz_Vertical_Peak 5GWi-Fi-Band3-A-5700MHz

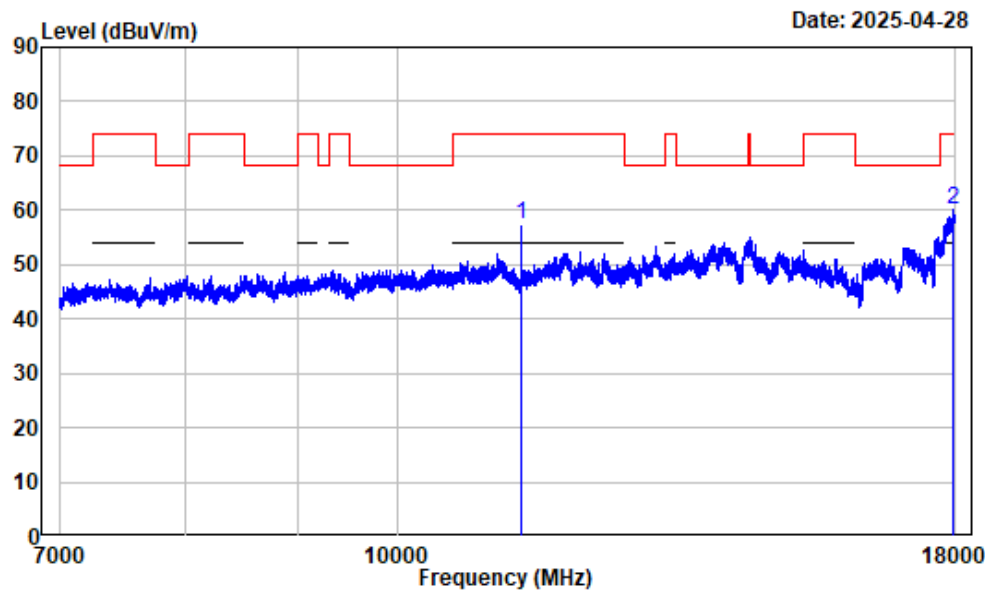

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5700

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11400.000	3.32	54.19	57.51	74.00	-16.49	Peak
2	17944.990	12.92	47.04	59.96	74.00	-14.04	Peak


7-18GHz_Vertical_Average 5GWi-Fi-Band3-A-5700MHz

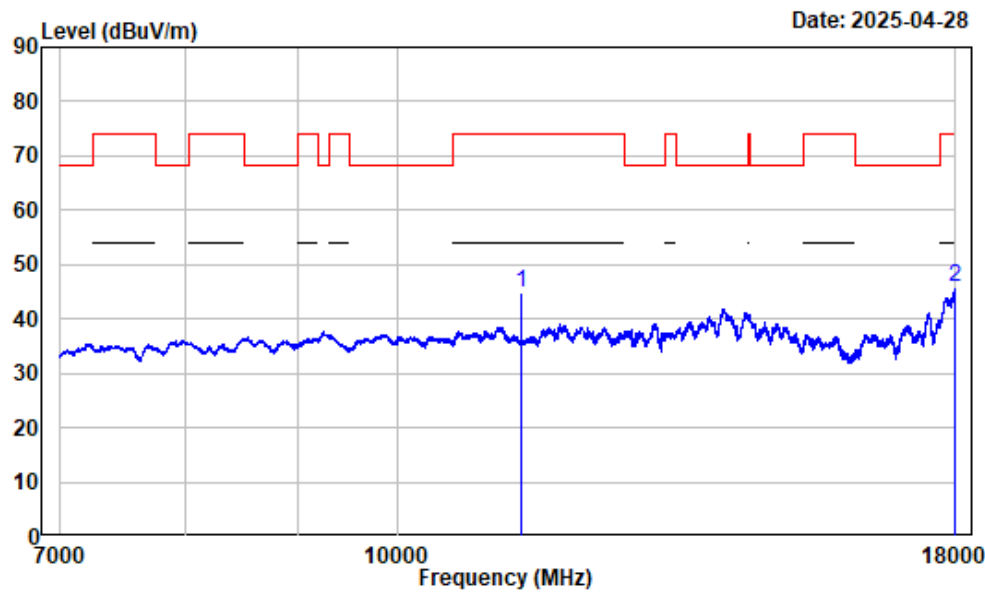

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-A-5700

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11400.000	3.32	41.58	44.90	54.00	-9.10	Average
2	17998.630	13.19	32.65	45.84	54.00	-8.16	Average


1-7GHz_Horizontal_Peak 5GWi-Fi-Band3-AC20-5700MHz

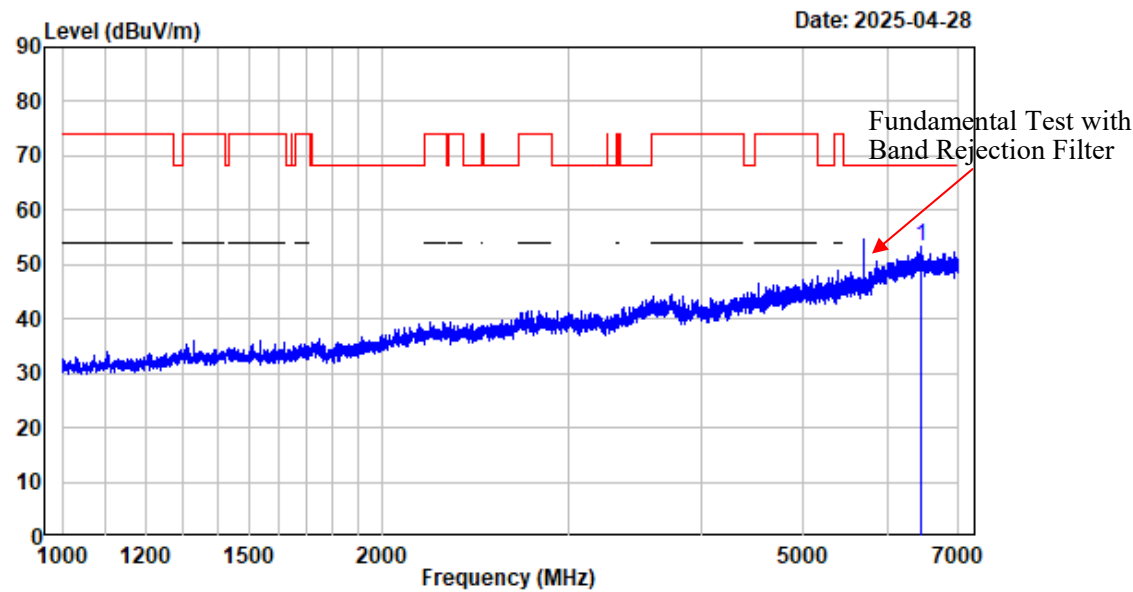

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5700

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6453.182	-2.88	56.10	53.22	68.20	-14.98	Peak


1-7GHz_Vertical_Peak 5GWi-Fi-Band3-AC20-5700MHz

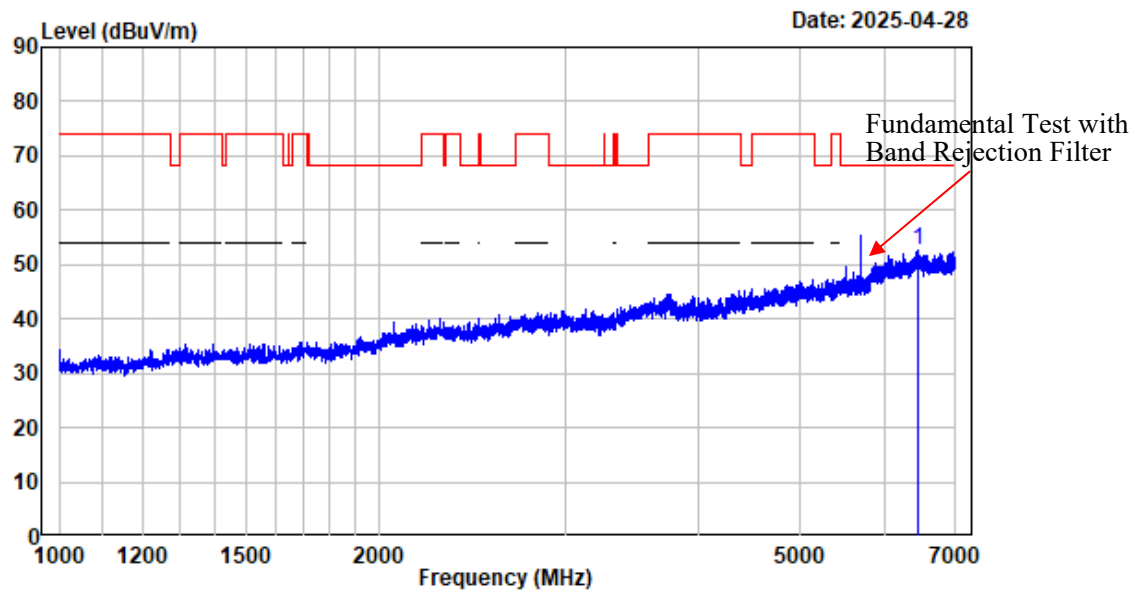

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5700

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6456.182	-2.88	55.37	52.49	68.20	-15.71	Peak


7-18GHz_Horizontal_Peak 5GWi-Fi-Band3-AC20-5700MHz

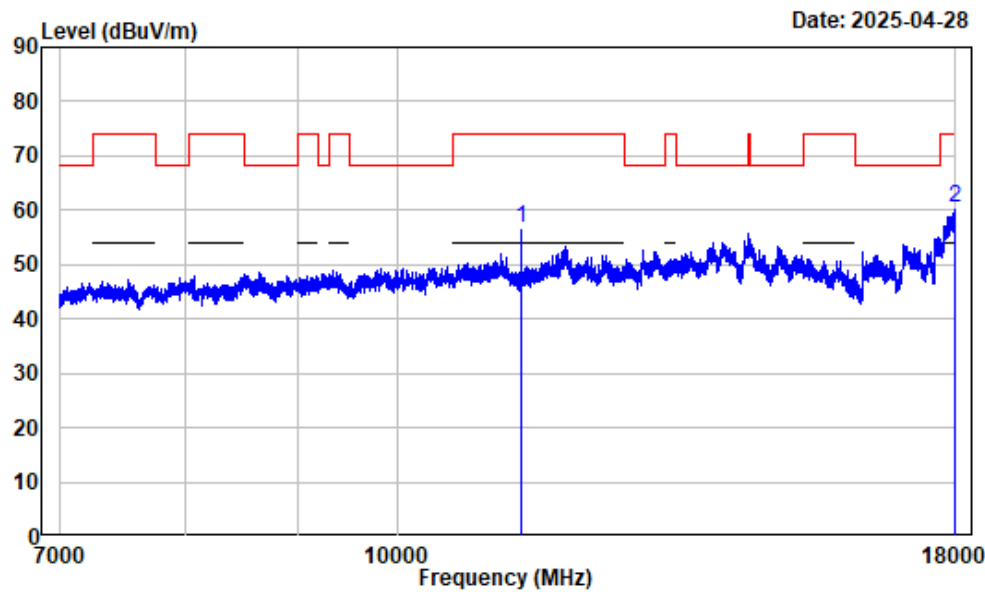

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5700

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11400.000	3.32	53.45	56.77	74.00	-17.23	Peak
2	17998.630	13.20	47.31	60.51	74.00	-13.49	Peak


7-18GHz_Horizontal_Average 5GWi-Fi-Band3-AC20-5700MHz

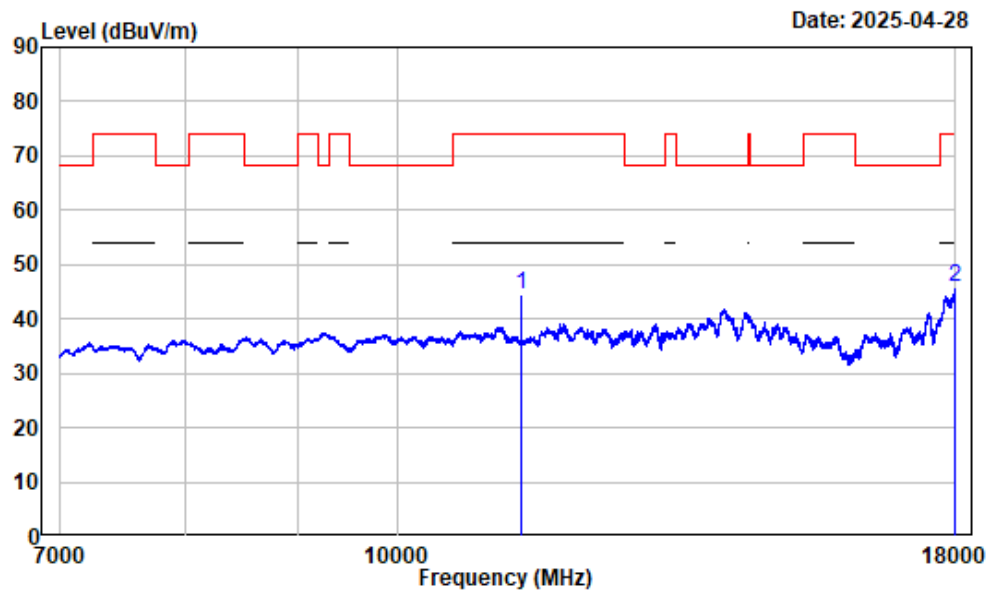

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5700

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11400.000	3.32	41.16	44.48	54.00	-9.52	Average
2 17998.630	13.19	32.52	45.71	54.00	-8.29	Average


7-18GHz_Vertical_Peak 5GWi-Fi-Band3-AC20-5700MHz

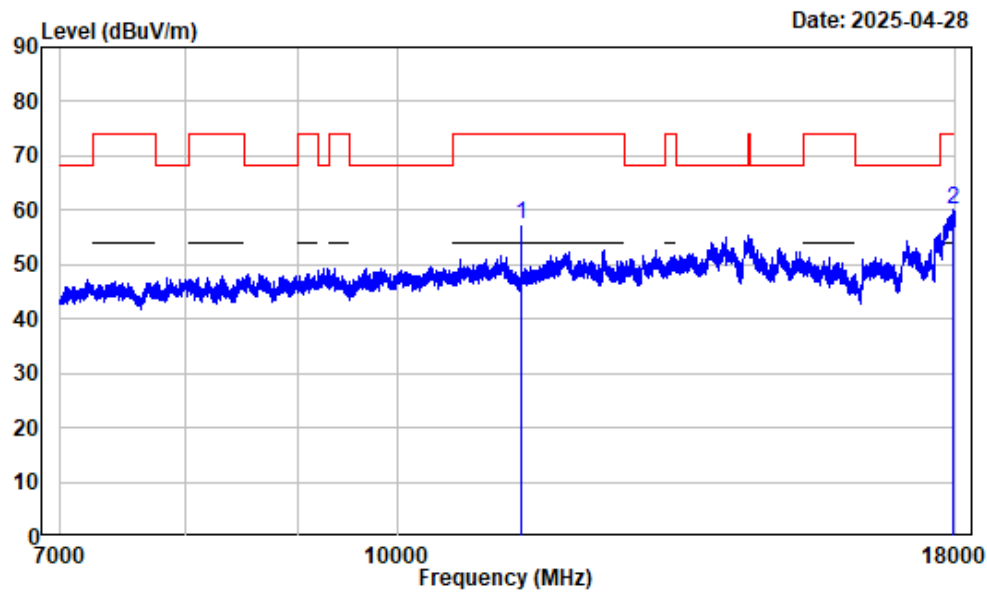

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5700

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11400.000	3.32	54.03	57.35	74.00	-16.65	Peak
2	17968.370	13.05	46.92	59.97	74.00	-14.03	Peak


7-18GHz_Vertical_Average 5GWi-Fi-Band3-AC20-5700MHz

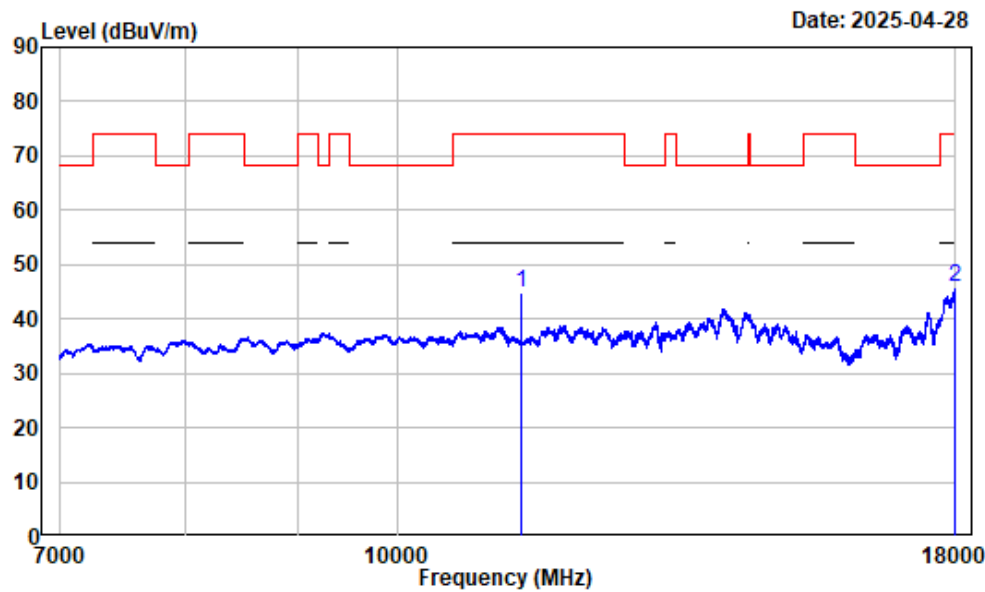

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5700

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11400.000	3.32	41.39	44.71	54.00	-9.29	Average
2 17995.880	13.18	32.69	45.87	54.00	-8.13	Average


1-7GHz_Horizontal_Peak 5GWi-Fi-Band3-AC40-5670MHz

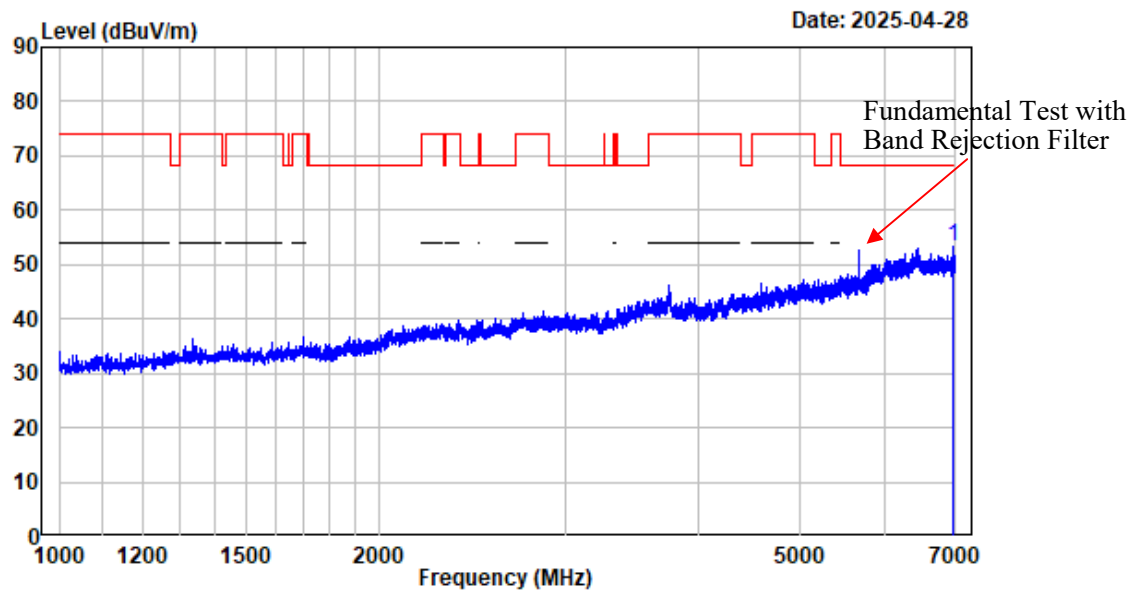

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5670

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6954.994	-2.72	56.15	53.43	68.20	-14.77	Peak


1-7GHz_Vertical_Peak5GWi-Fi-Band3-AC40-5670MHz

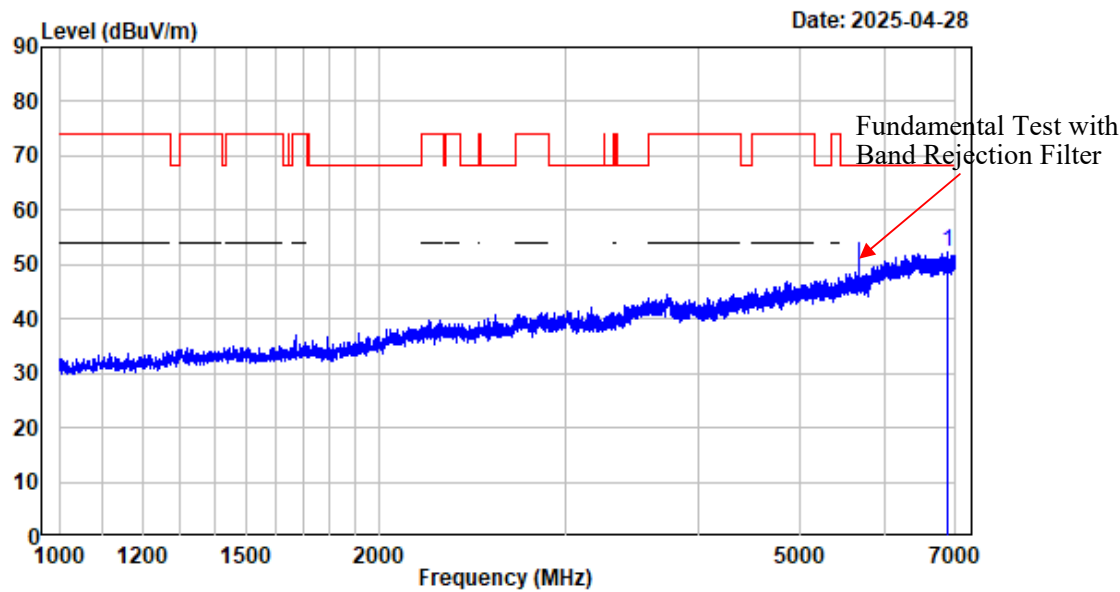

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5670

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6883.735	-3.12	55.49	52.37	68.20	-15.83	Peak


7-18GHz_Horizontal_Peak 5GWi-Fi-Band3-AC40-5670MHz

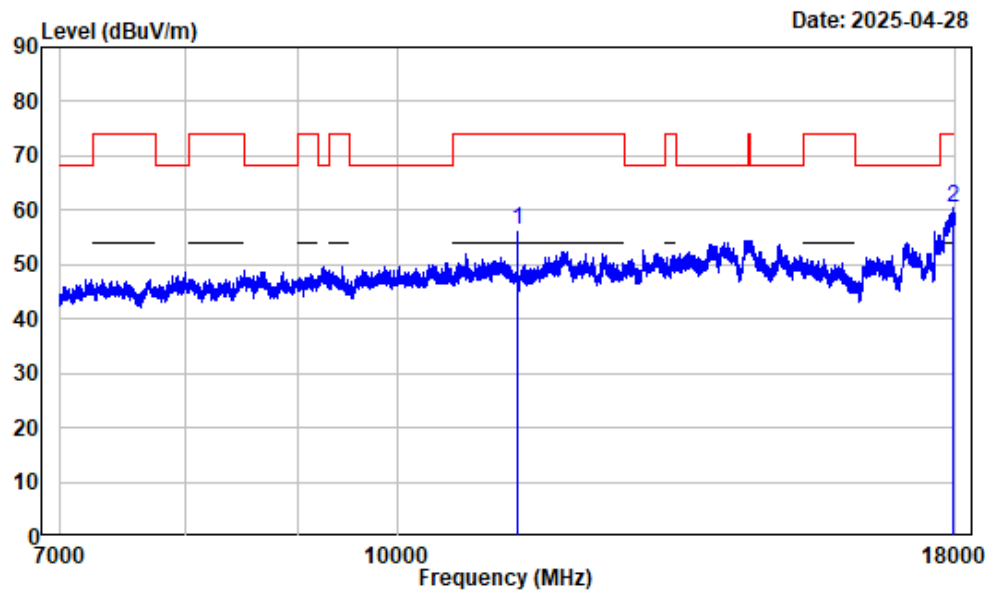

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5670

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11340.000	3.46	53.02	56.48	74.00	-17.52	Peak
2 17951.870	12.96	47.45	60.41	74.00	-13.59	Peak


7-18GHz_Horizontal_Average 5GWi-Fi-Band3-AC40-5670MHz

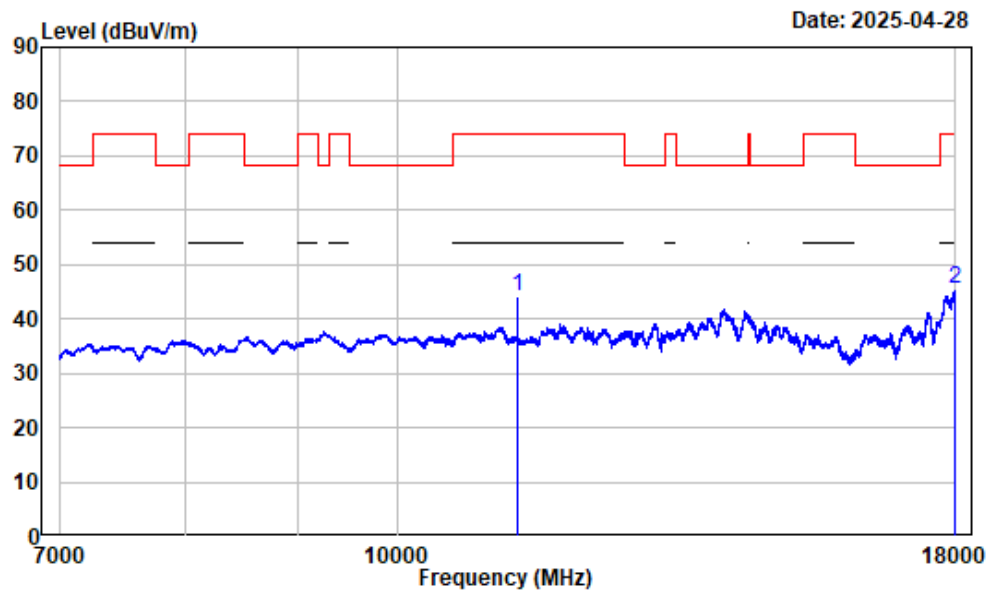

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5670

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11340.000	3.46	40.74	44.20	54.00	-9.80	Average
2 17997.250	13.20	32.46	45.66	54.00	-8.34	Average


7-18GHz_Vertical_Peak 5GWi-Fi-Band3-AC40-5670MHz

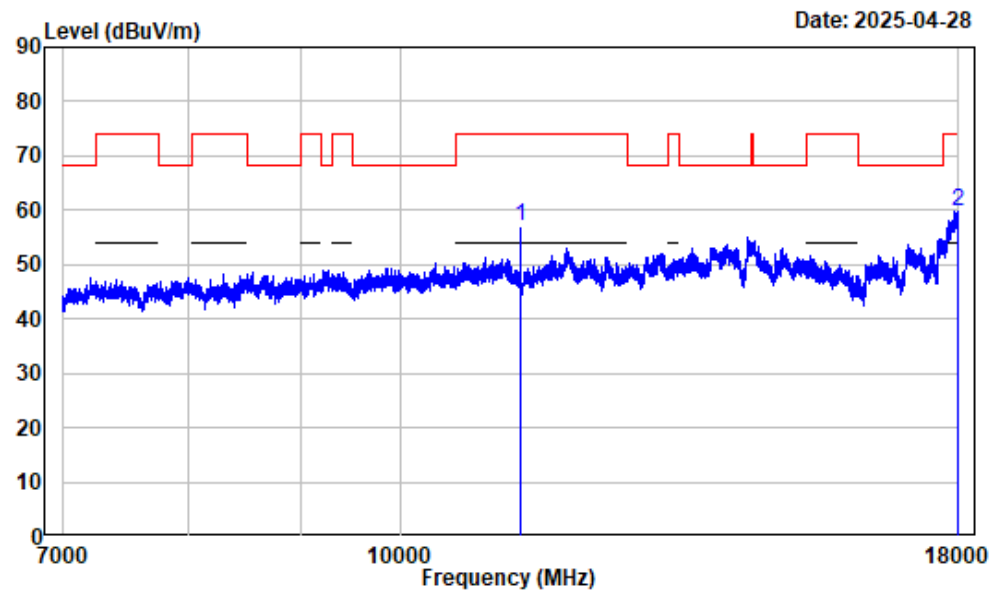

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5670

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11340.000	3.46	53.55	57.01	74.00	-16.99	Peak
2	17998.630	13.19	46.48	59.67	74.00	-14.33	Peak


7-18GHz_Vertical_Average5GWi-Fi-Band3-AC40-5670MHz

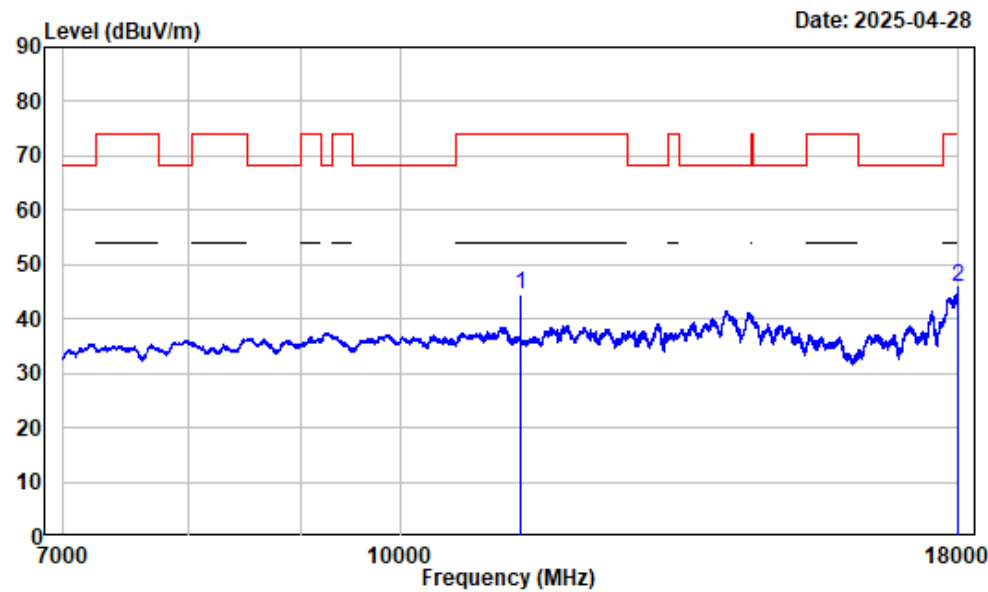

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5670

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11340.000	3.46	40.97	44.43	54.00	-9.57	Average
2 17995.880	13.18	32.65	45.83	54.00	-8.17	Average


1-7GHz_Horizontal_Peak 5GWi-Fi-Band3-AX20-5700MHz

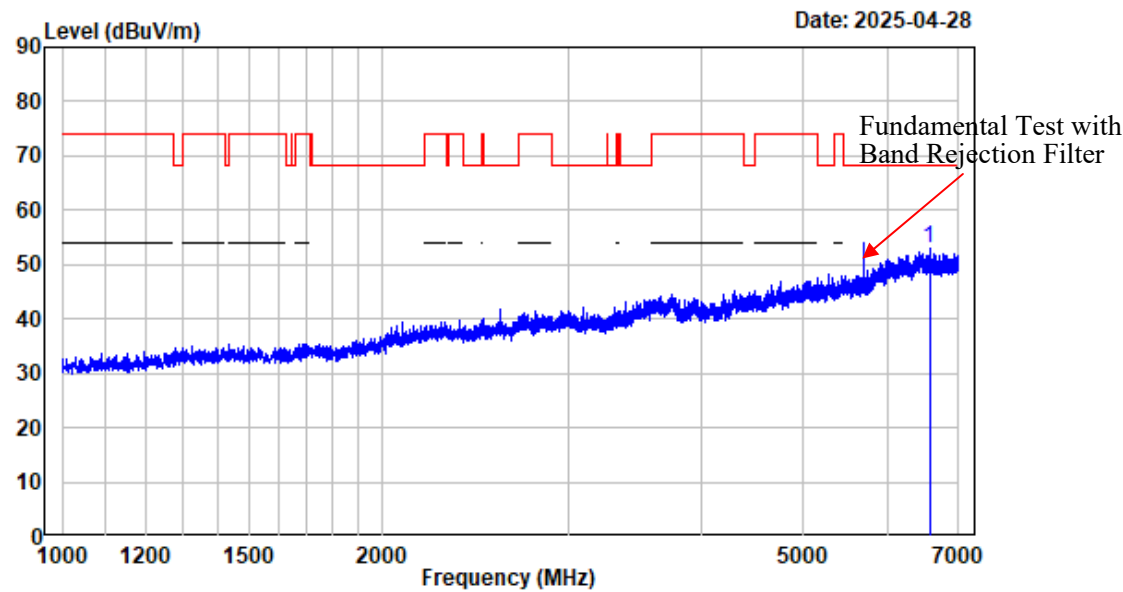

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX20-5700

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6571.696	-3.08	56.11	53.03	68.20	-15.17	Peak


1-7GHz_Vertical_Peak 5GWi-Fi-Band3-AX20-5700MHz

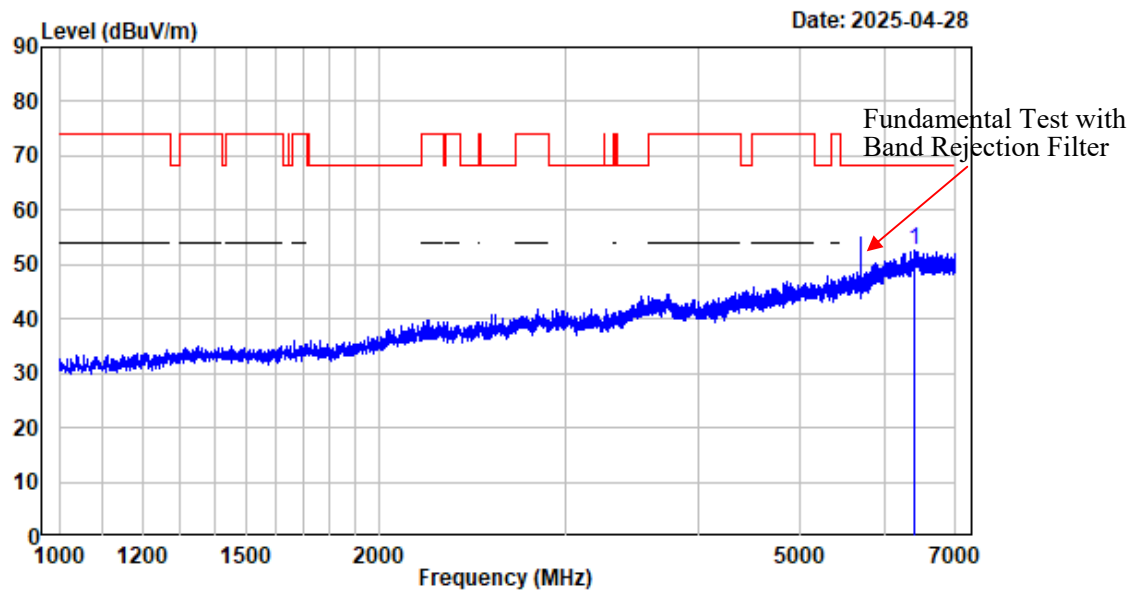

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX20-5700

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6411.176	-2.89	55.67	52.78	68.20	-15.42 Peak


7-18GHz_Horizontal_Peak 5GWi-Fi-Band3-AX20-5700MHz

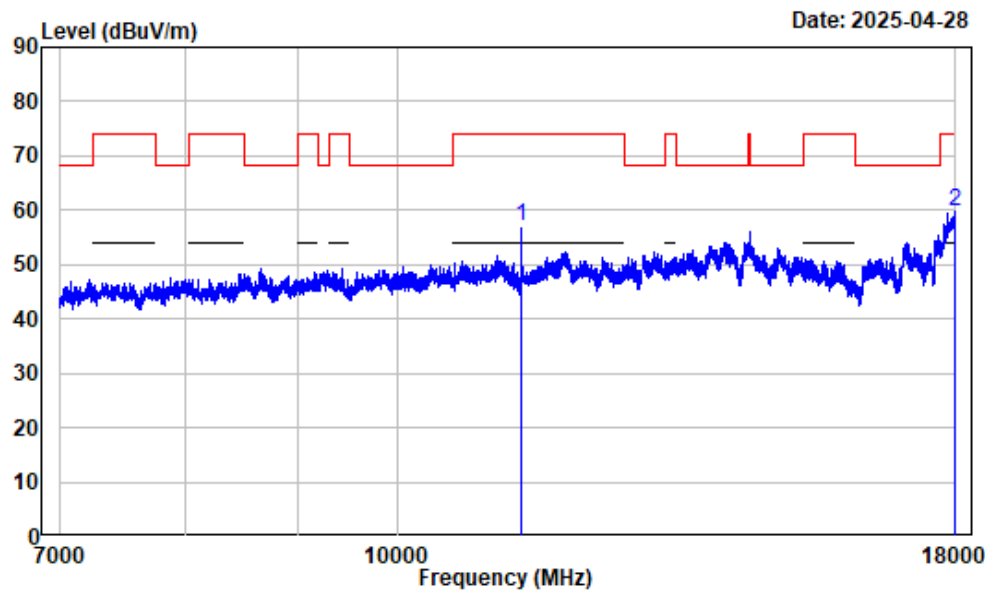

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX20-5700

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11400.000	3.32	53.85	57.17	74.00	-16.83	Peak
2	17997.250	13.19	46.67	59.86	74.00	-14.14	Peak


7-18GHz_Horizontal_Average 5GWi-Fi-Band3-AX20-5700MHz

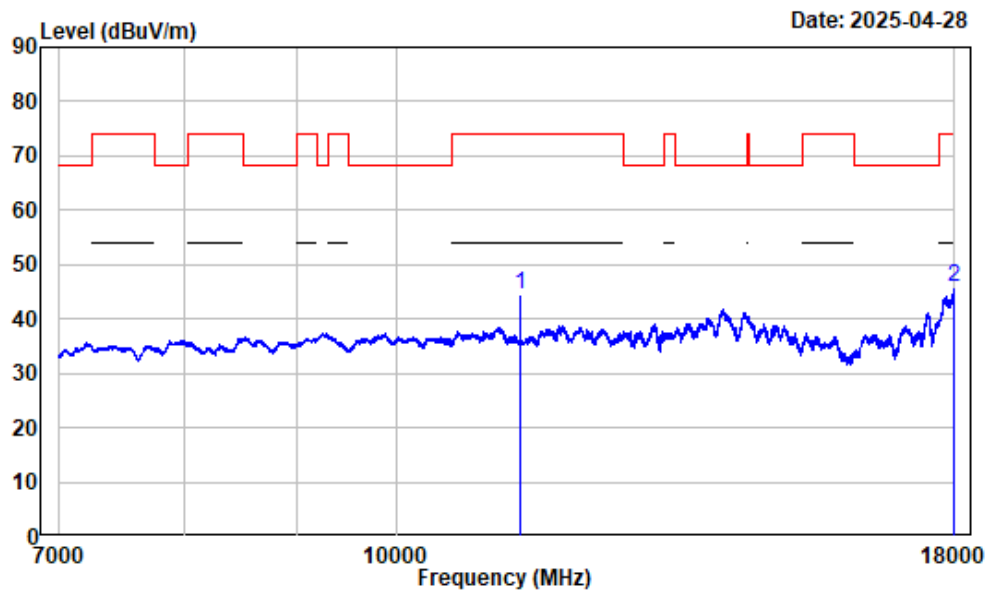

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-AX20-5700

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11400.000	3.32	41.24	44.56	54.00	-9.44	Average
2 17998.630	13.19	32.57	45.76	54.00	-8.24	Average


7-18GHz_Vertical_Peak 5GWi-Fi-Band3-AX20-5700MHz

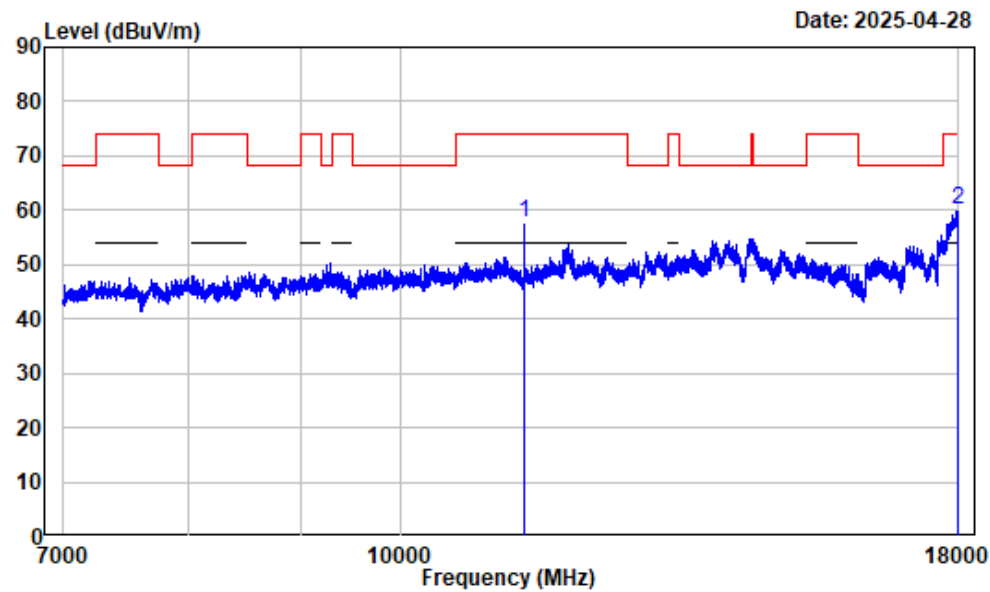

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX20-5700

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11400.000	3.32	54.47	57.79	74.00	-16.21	Peak
2	17997.750	13.20	46.75	59.95	74.00	-14.05	Peak


7-18GHz_Vertical_Average 5GWi-Fi-Band3-AX20-5700MHz

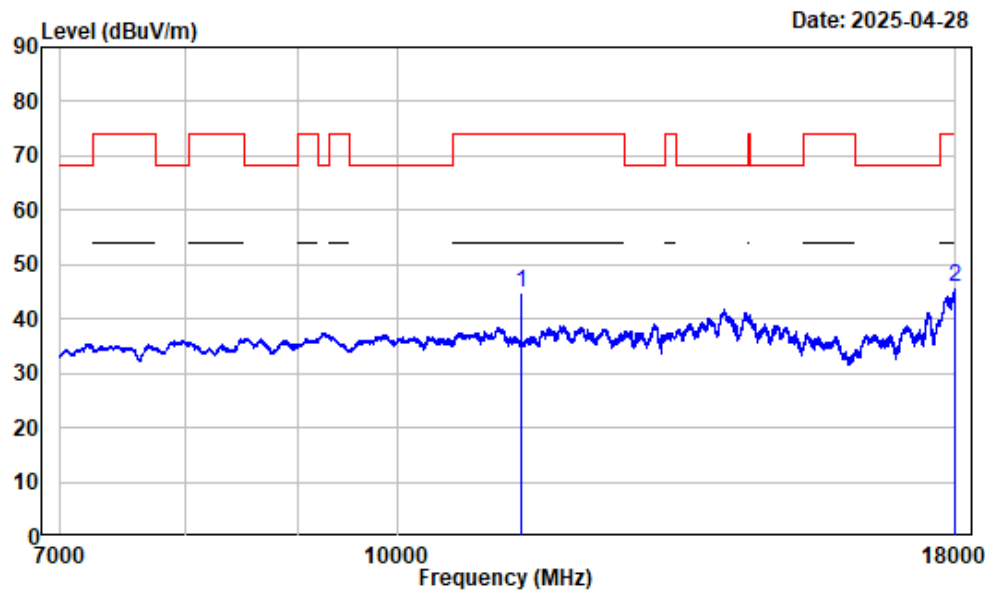

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-AX20-5700

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11400.000	3.32	41.49	44.81	54.00	-9.19	Average
2	17993.130	13.17	32.67	45.84	54.00	-8.16	Average


1-7GHz_Horizontal_Peak 5GWi-Fi-Band3-AX40-5670MHz

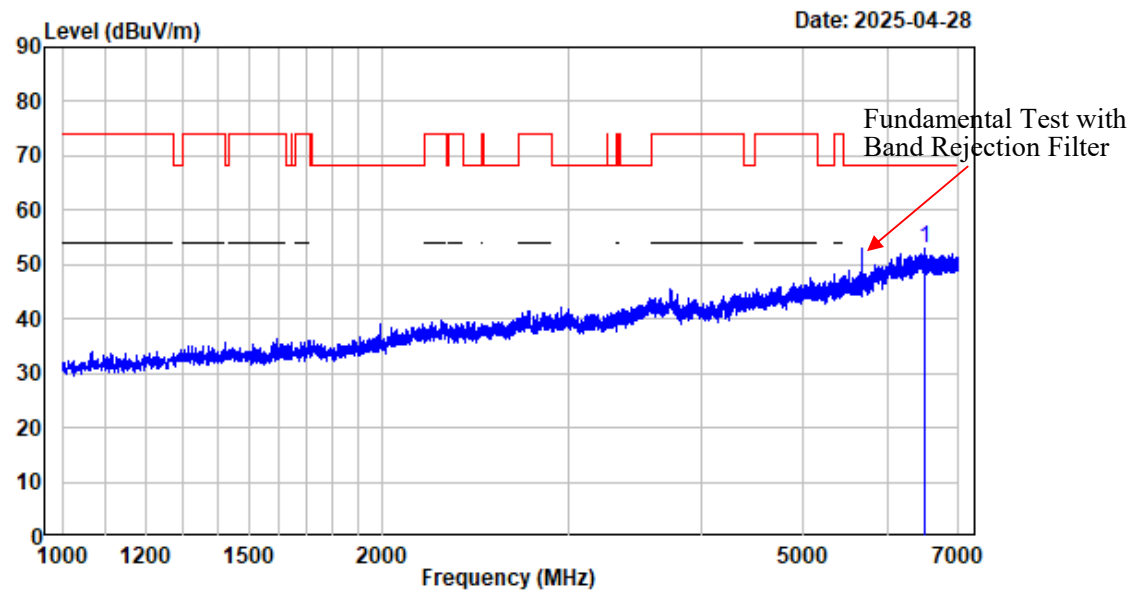

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX40-5670

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6502.688	-2.95	55.95	53.00	68.20	-15.20	Peak


1-7GHz_Vertical_Peak 5GWi-Fi-Band3-AX40-5670MHz

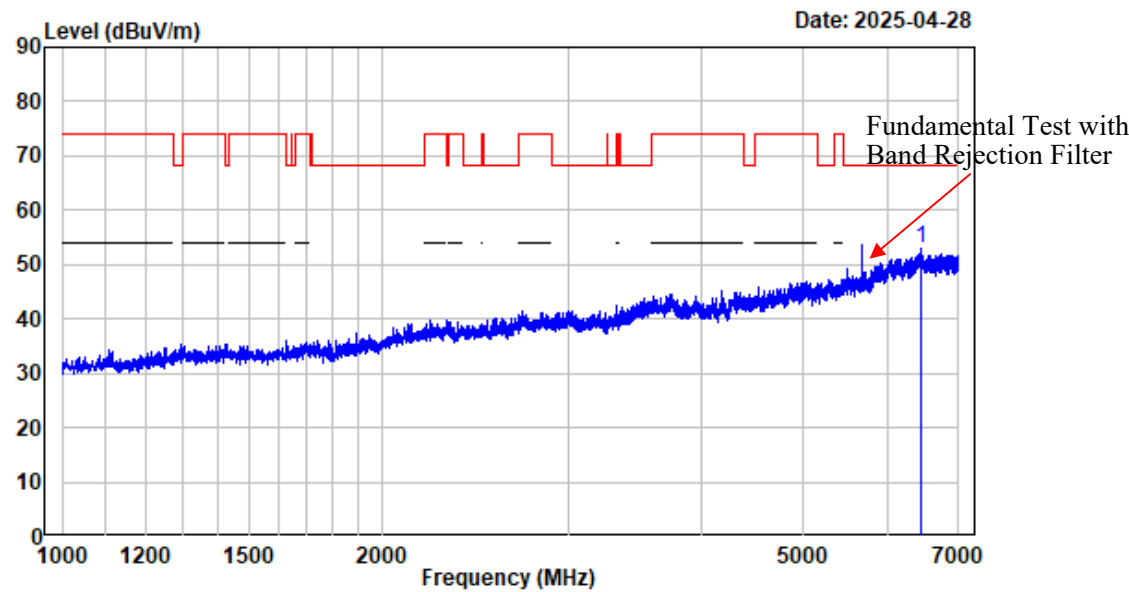

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX40-5670

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6445.681	-2.88	55.86	52.98	68.20	-15.22	Peak


7-18GHz_Horizontal_Peak 5GWi-Fi-Band3-AX40-5670MHz

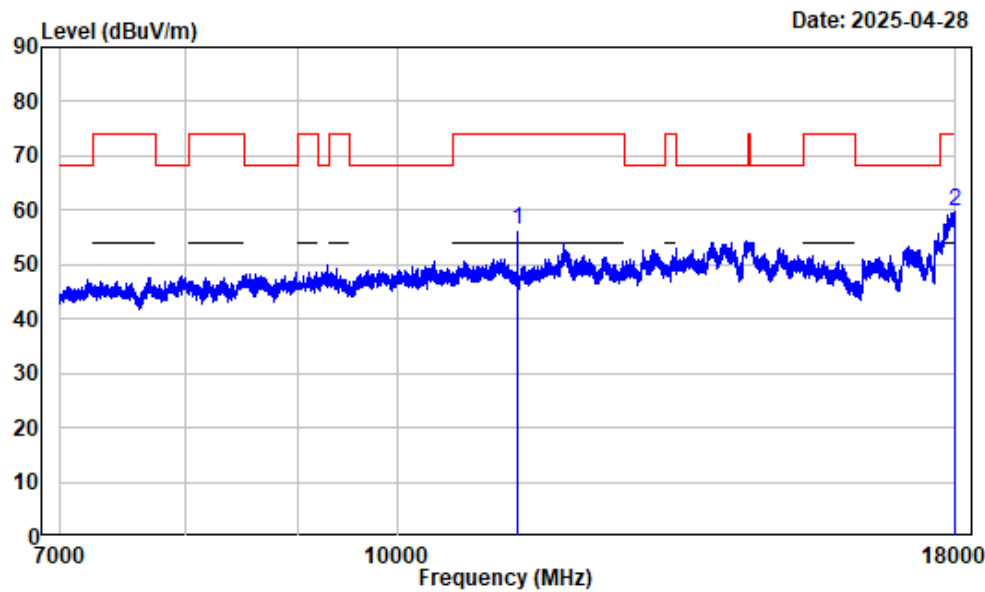

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX40-5670

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11340.000	3.46	52.89	56.35	74.00	-17.65	Peak
2	17995.880	13.18	46.45	59.63	74.00	-14.37	Peak


7-18GHz_Horizontal_Average 5GWi-Fi-Band3-AX40-5670MHz

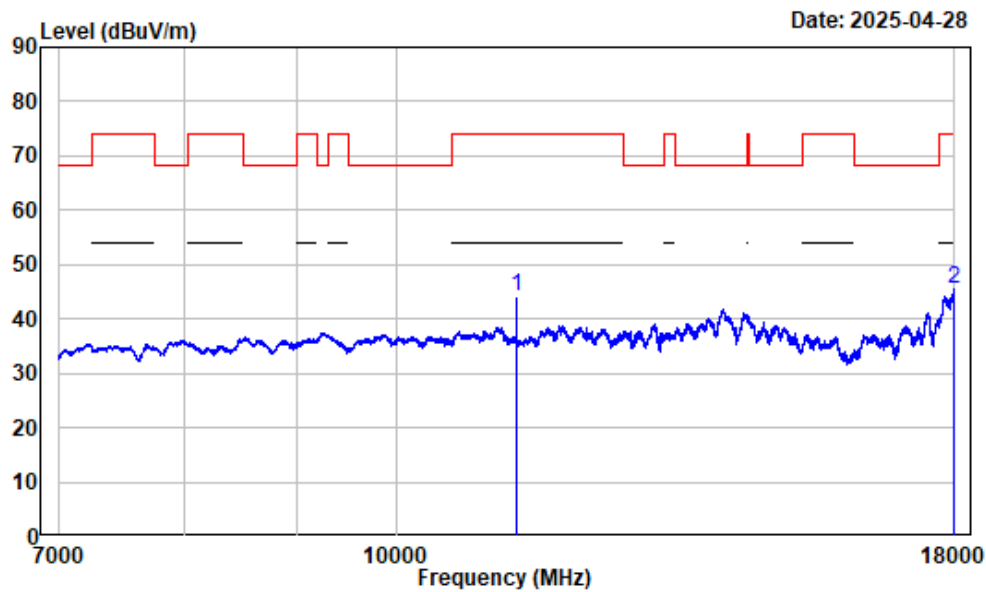

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-AX40-5670

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11340.000	3.46	40.62	44.08	54.00	-9.92	Average
2 17993.130	13.17	32.46	45.63	54.00	-8.37	Average


7-18GHz_Vertical_Peak 5GWi-Fi-Band3-AX40-5670MHz

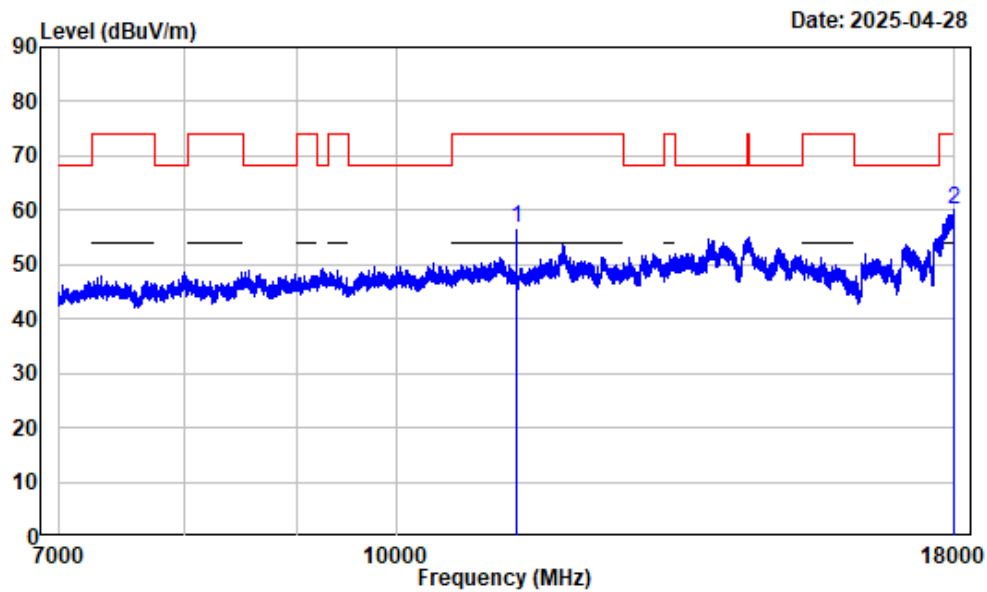

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX40-5670

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11340.000	3.46	53.41	56.87	74.00	-17.13	Peak
2	17982.120	13.10	46.94	60.04	74.00	-13.96	Peak


7-18GHz_Vertical_Average 5GWi-Fi-Band3-AX40-5670MHz

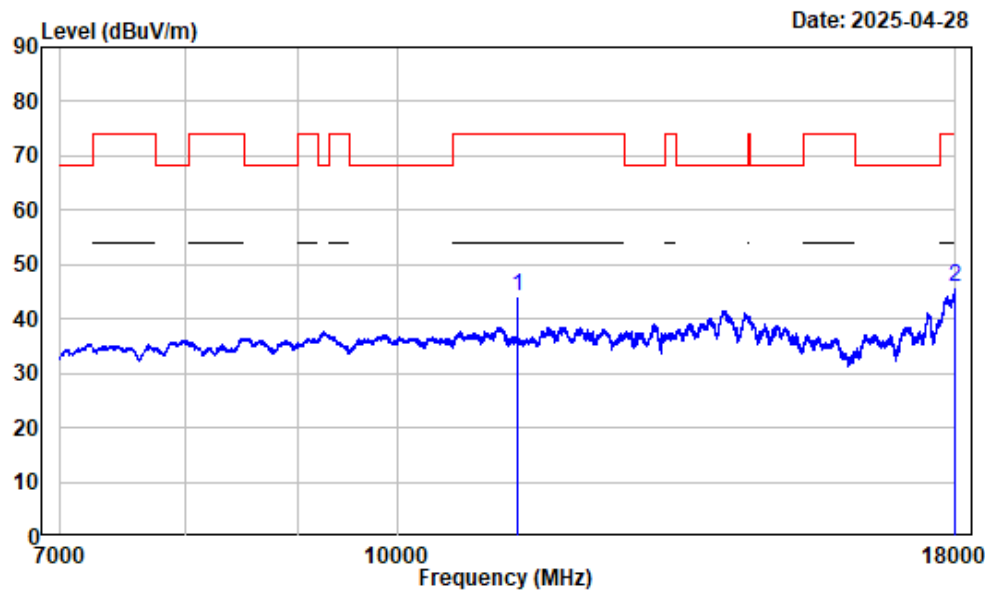

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-AX40-5670

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11340.000	3.46	40.85	44.31	54.00	-9.69	Average
2	17998.630	13.19	32.58	45.77	54.00	-8.23	Average


1-7GHz_Horizontal_Peak 5GWi-Fi-Band4-A-5825MHz

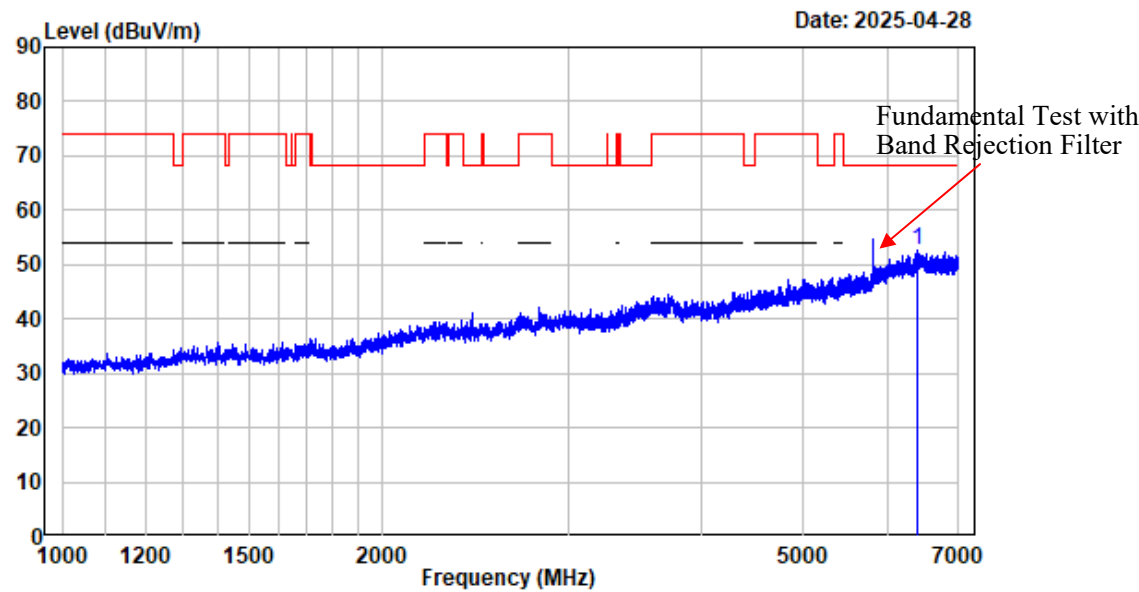

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6402.925	-2.90	55.49	52.59	68.20	-15.61 Peak


1-7GHz_Vertical_Peak 5GWi-Fi-Band4-A-5825MHz

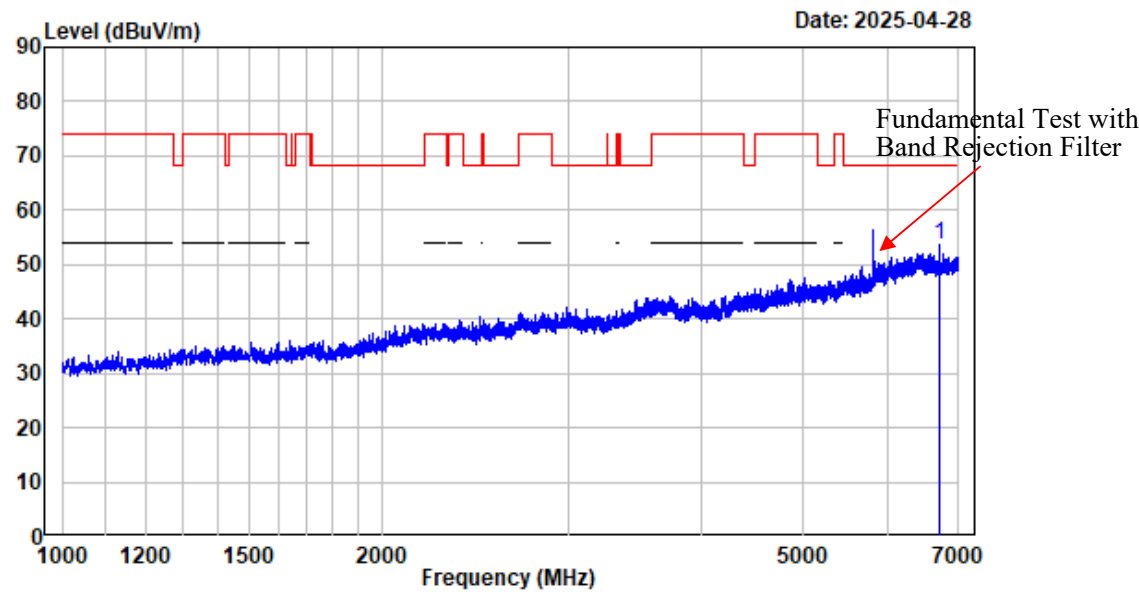

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6705.963	-3.35	57.11	53.76	68.20	-14.44	Peak


7-18GHz_Horizontal_Peak 5GWi-Fi-Band4-A-5825MHz

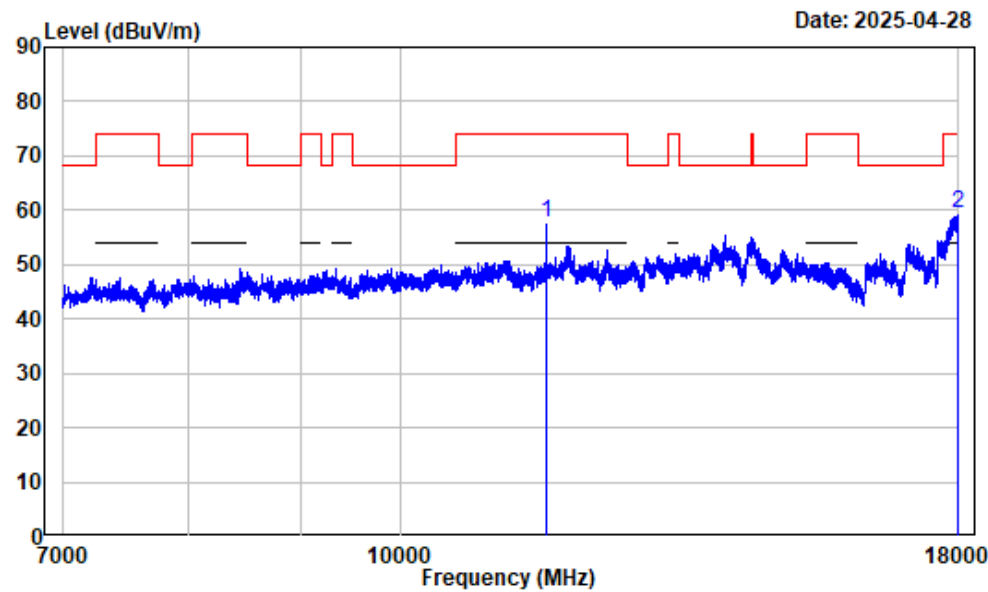

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	3.42	54.46	57.88	74.00	-16.12	Peak
2	17998.630	13.19	46.32	59.51	74.00	-14.49	Peak


7-18GHz_Horizontal_Average 5GWi-Fi-Band4-A-5825MHz

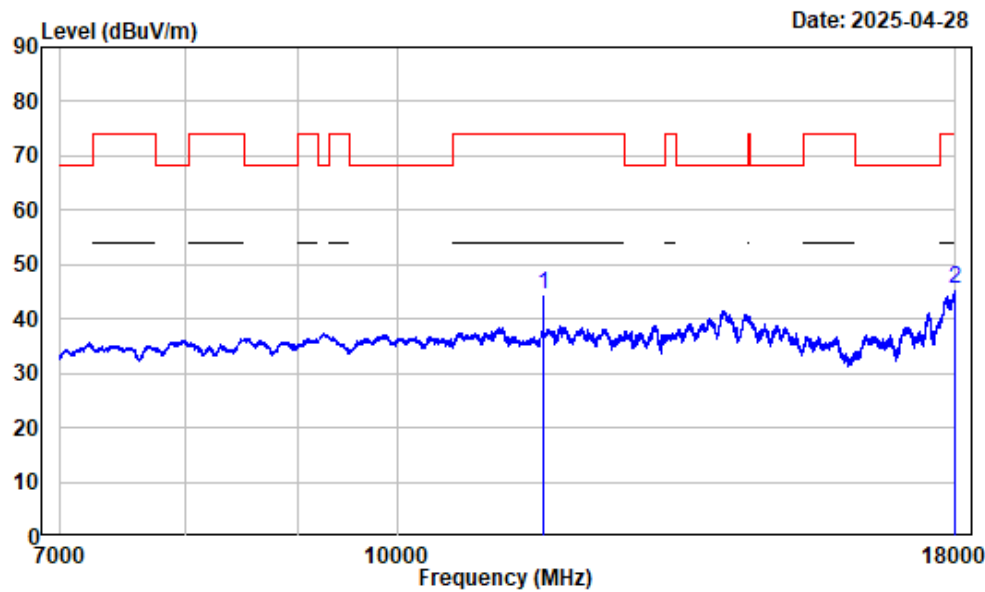

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	3.42	40.98	44.40	54.00	-9.60	Average
2	17998.630	13.19	32.46	45.65	54.00	-8.35	Average


7-18GHz_Vertical_Peak 5GWi-Fi-Band4-A-5825MHz

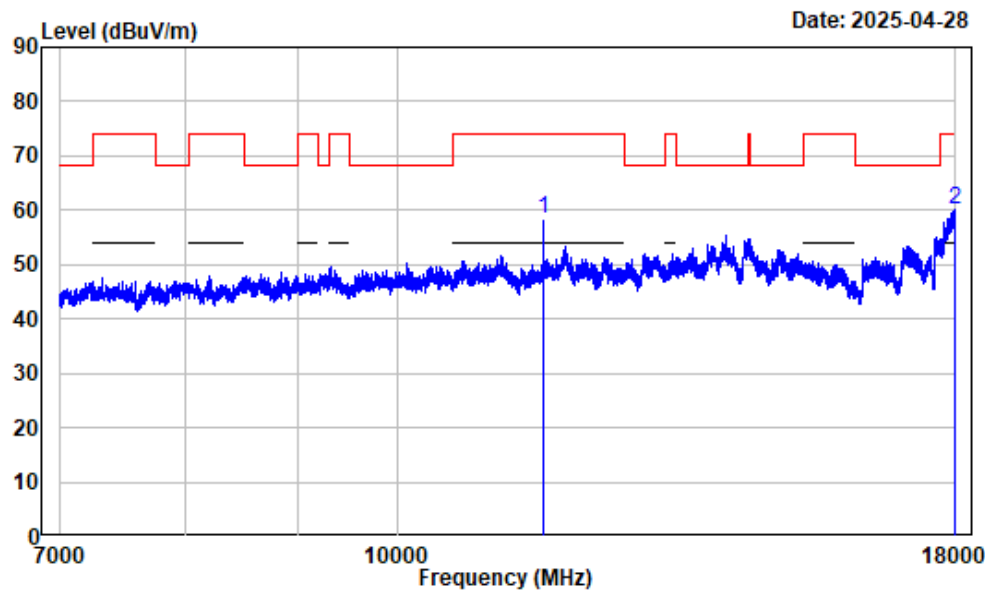

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	3.42	55.02	58.44	74.00	-15.56	Peak
2	17994.500	13.17	46.99	60.16	74.00	-13.84	Peak


7-18GHz_Vertical_Average 5GWi-Fi-Band4-A-5825MHz

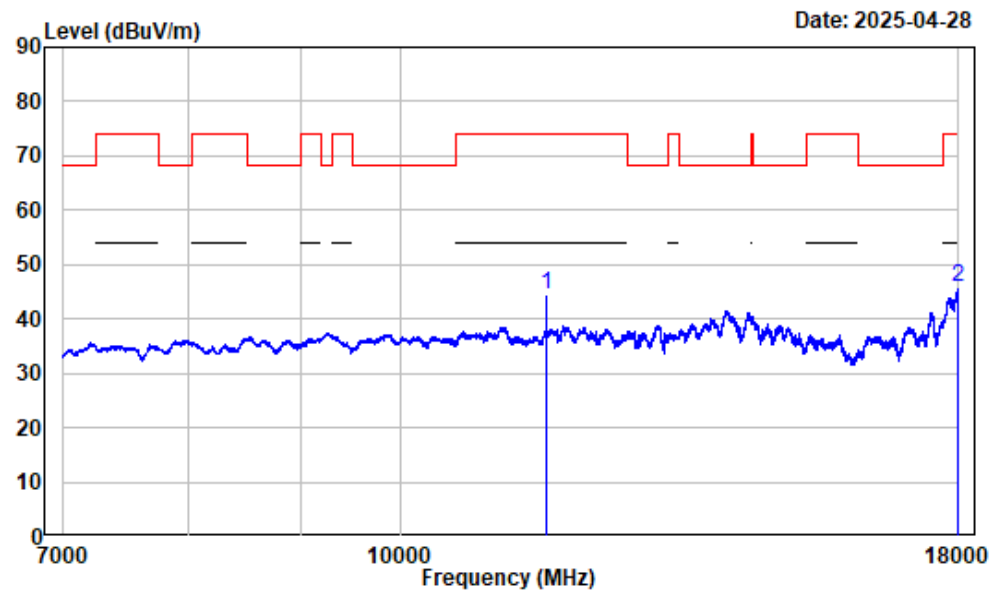

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	3.42	41.23	44.65	54.00	-9.35	Average
2	17998.630	13.19	32.65	45.84	54.00	-8.16	Average


1-7GHz_Horizontal_Peak 5GWi-Fi-Band4-AC20-5825MHz

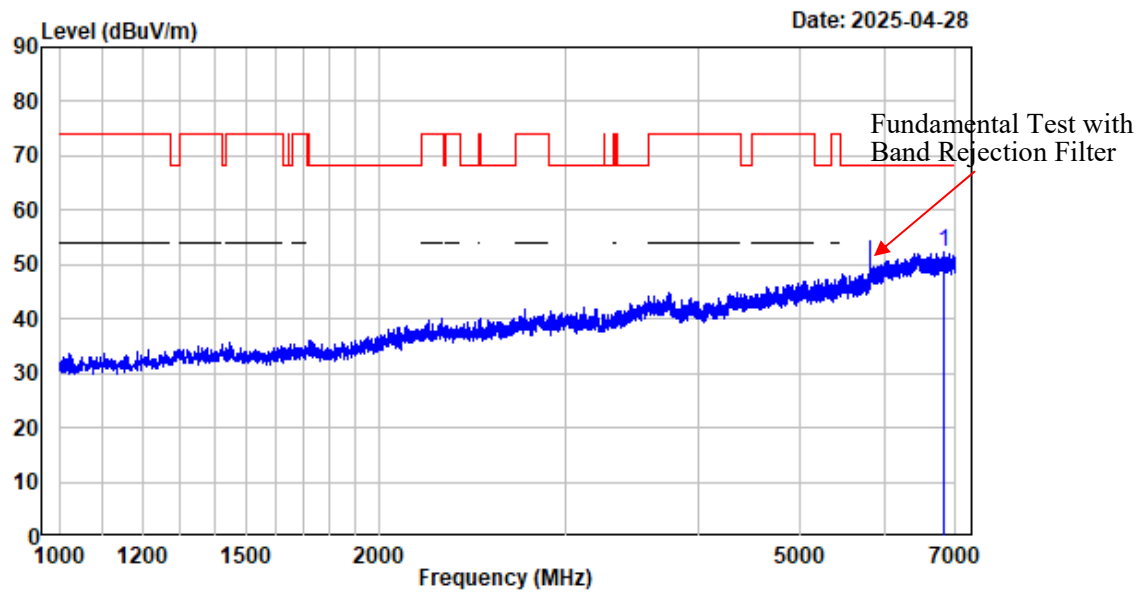

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5825

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6819.978	-3.25	55.39	52.14	68.20	-16.06	Peak


1-7GHz_Vertical_Peak5GWi-Fi-Band4-AC20-5825MHz

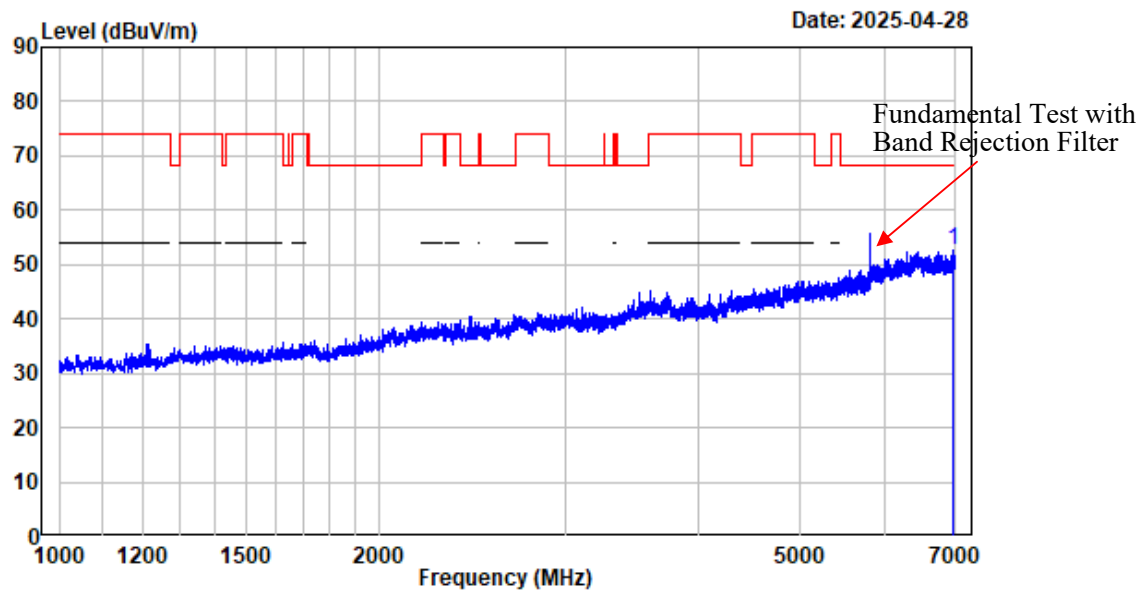

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5825

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6976.747	-2.83	55.49	52.66	68.20	-15.54 Peak


7-18GHz_Horizontal_Peak 5GWi-Fi-Band4-AC20-5825MHz

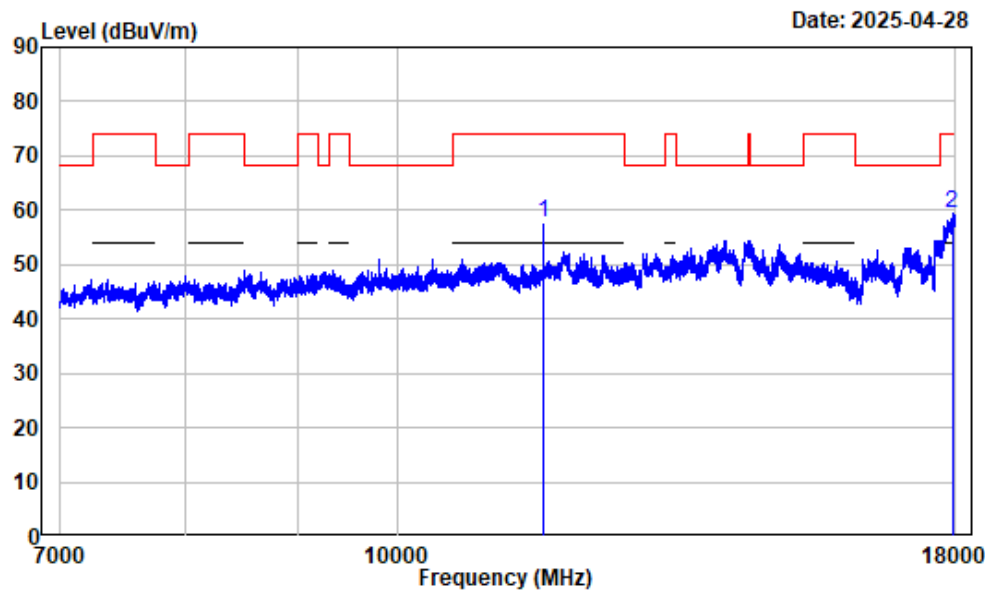

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5825

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	3.42	54.19	57.61	74.00	-16.39	Peak
2	17938.120	12.89	46.38	59.27	74.00	-14.73	Peak


7-18GHz_Horizontal_Average 5GWi-Fi-Band4-AC20-5825MHz

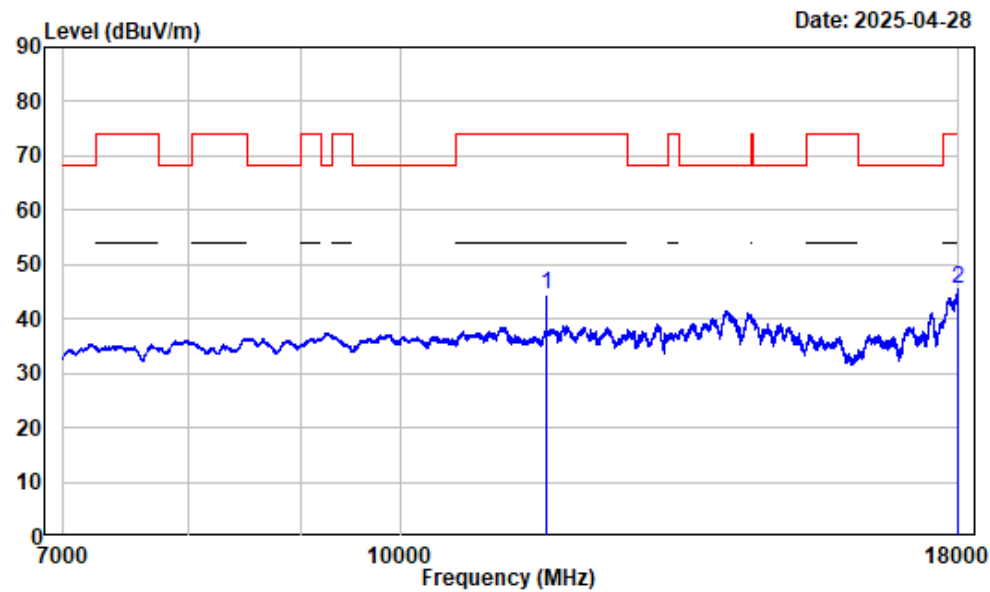

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5825

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	3.42	40.94	44.36	54.00	-9.64	Average
2	17998.630	13.19	32.48	45.67	54.00	-8.33	Average


7-18GHz_Vertical_Peak 5GWi-Fi-Band4-AC20-5825MHz

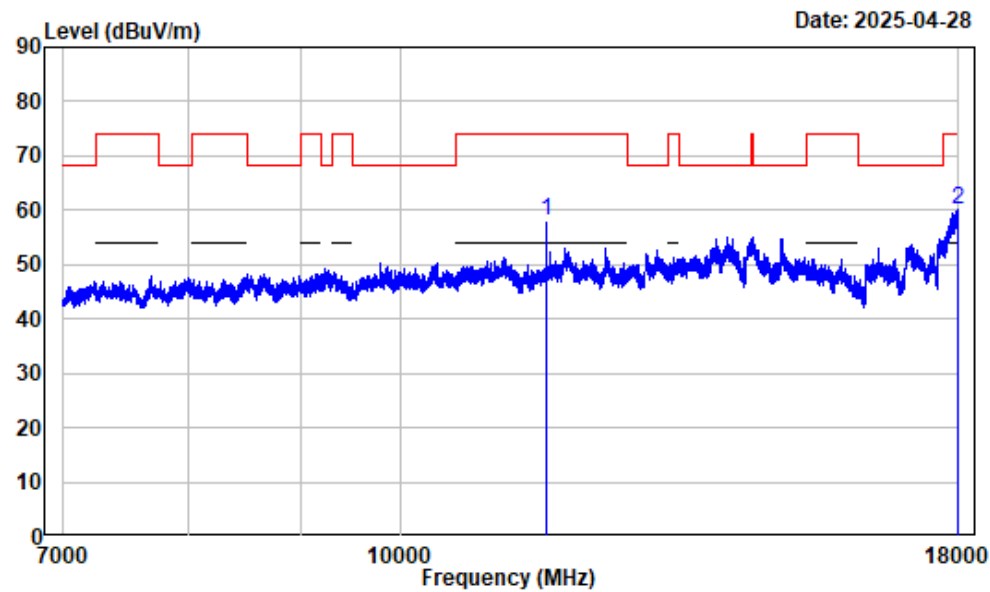

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5825

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11650.000	3.42	54.75	58.17	74.00	-15.83	Peak
2 17987.620	13.13	46.96	60.09	74.00	-13.91	Peak


7-18GHz_Vertical_Average 5GWi-Fi-Band4-AC20-5825MHz

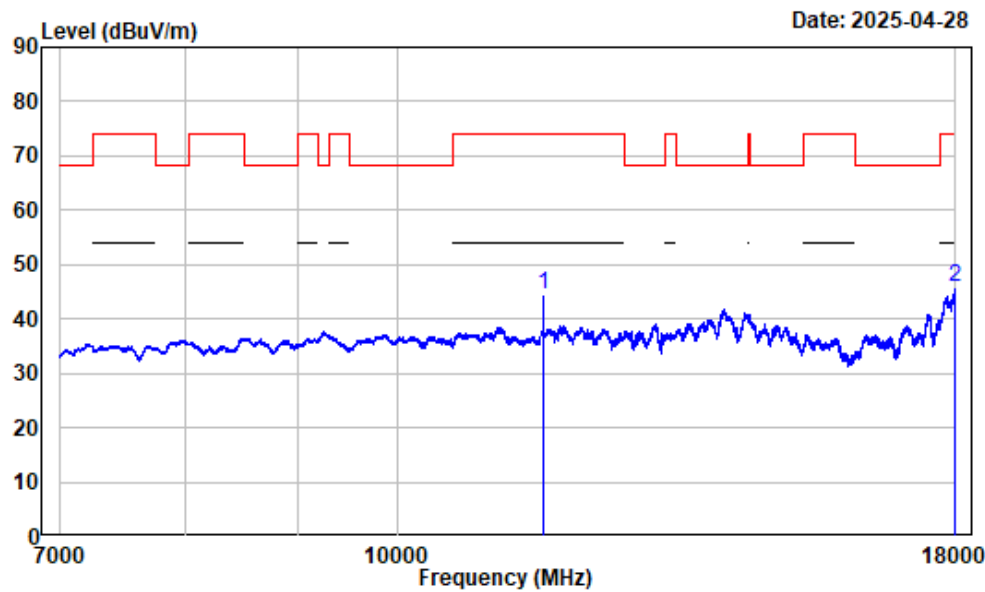

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5825

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	3.42	41.21	44.63	54.00	-9.37	Average
2	17995.880	13.18	32.68	45.86	54.00	-8.14	Average


1-7GHz_Horizontal_Peak 5GWi-Fi-Band4-AC40-5795MHz

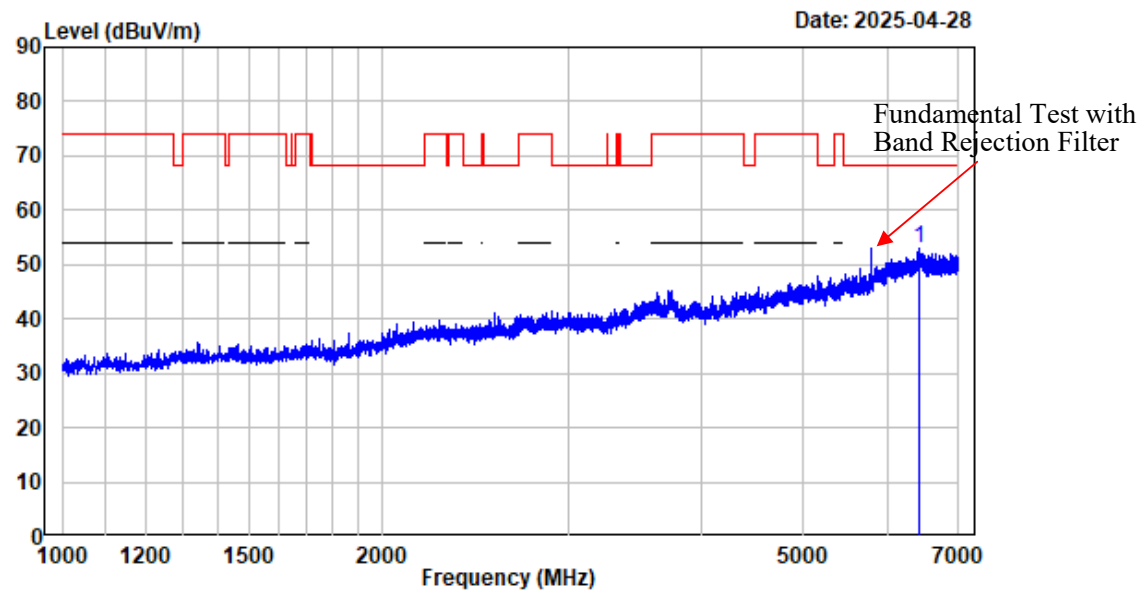

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5795

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6429.929	-2.88	55.78	52.90	68.20	-15.30	Peak


1-7GHz_Vertical_Peak 5GWi-Fi-Band4-AC40-5795MHz

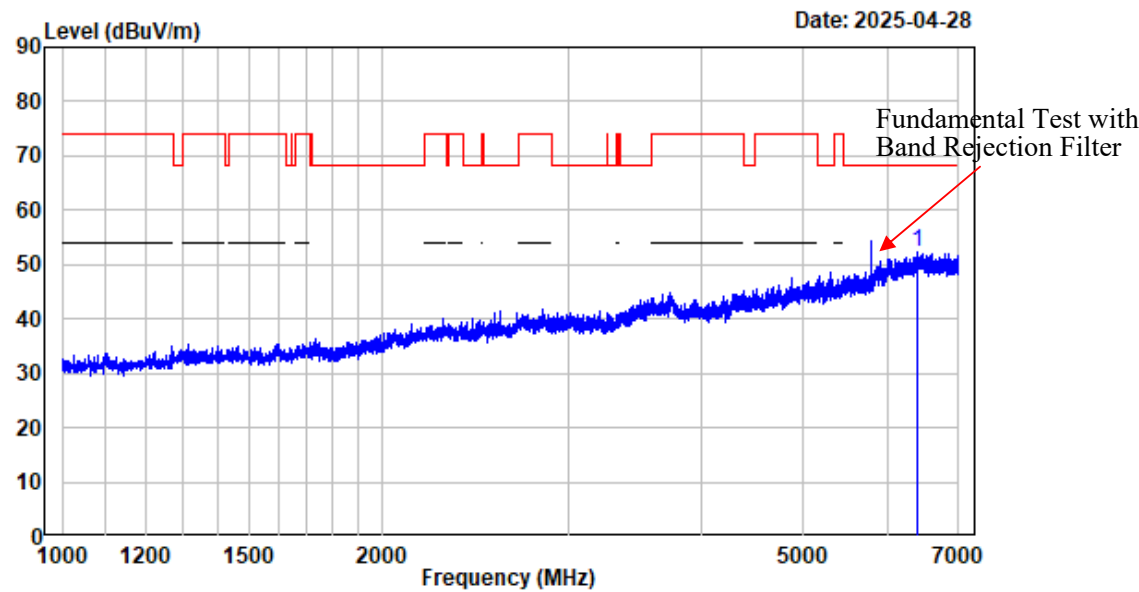

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5795

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6390.924	-2.98	55.21	52.23	68.20	-15.97	Peak


7-18GHz_Horizontal_Peak 5GWi-Fi-Band4-AC40-5795MHz

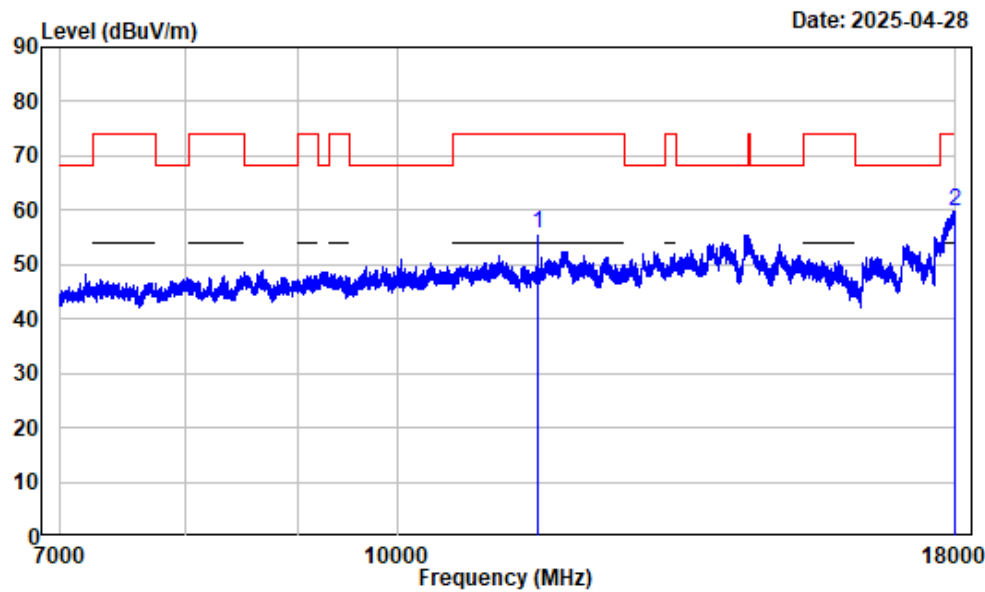

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5795

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11590.000	3.21	52.47	55.68	74.00	-18.32	Peak
2 17998.630	13.20	46.72	59.92	74.00	-14.08	Peak


7-18GHz_Horizontal_Average 5GWi-Fi-Band4-AC40-5795MHz

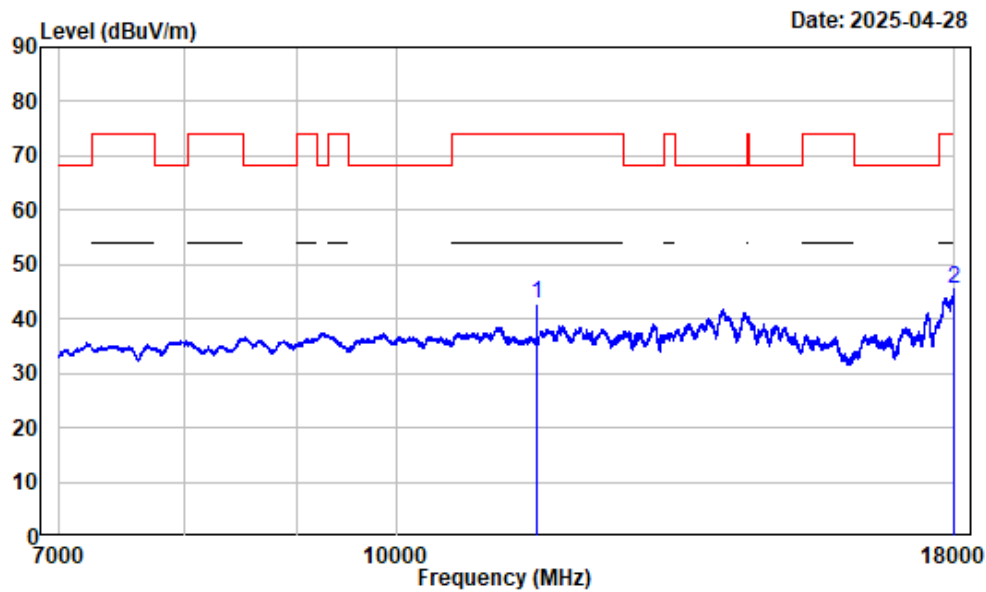

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5795

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11590.000	3.21	39.68	42.89	54.00	-11.11	Average
2 17998.630	13.19	32.40	45.59	54.00	-8.41	Average


7-18GHz_Vertical_Peak 5GWi-Fi-Band4-AC40-5795MHz

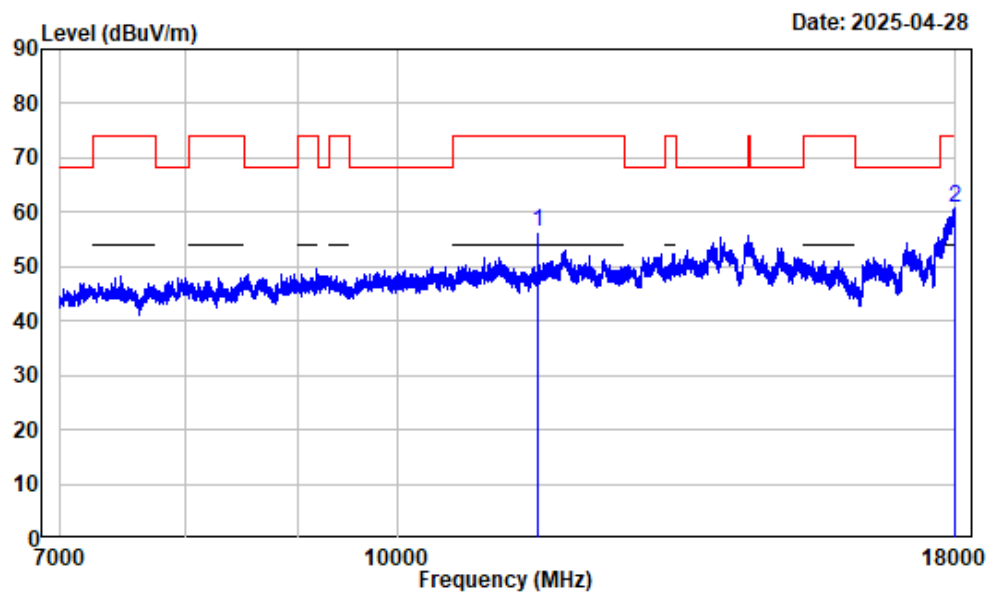

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5795

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11590.000	3.21	53.03	56.24	74.00	-17.76	Peak
2	17997.250	13.19	47.76	60.95	74.00	-13.05	Peak


7-18GHz_Vertical_Average 5GWi-Fi-Band4-AC40-5795MHz

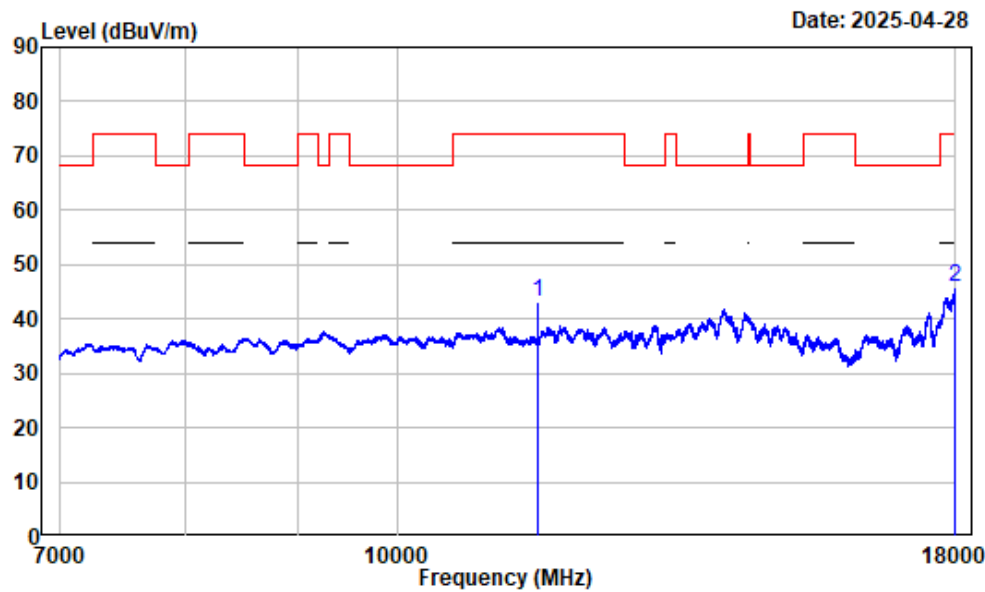

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5795

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11590.000	3.21	39.91	43.12	54.00	-10.88	Average
2 17998.630	13.19	32.61	45.80	54.00	-8.20	Average


1-7GHz_Horizontal_Peak 5GWi-Fi-Band4-AX20-5825MHz

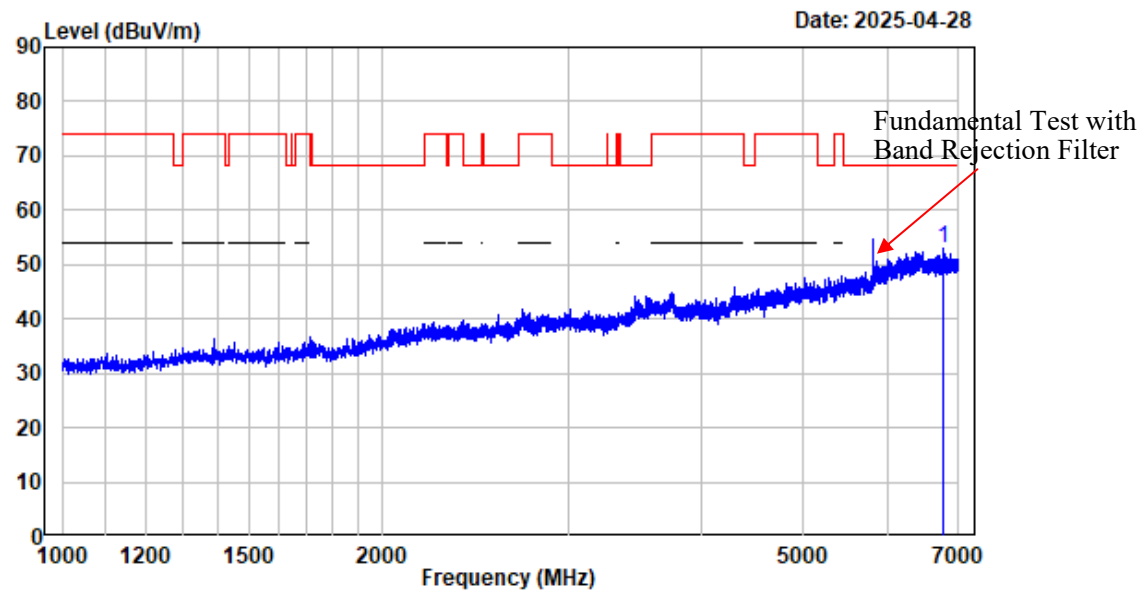

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX20-5825

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6775.722	-3.28	56.38	53.10	68.20	-15.10	Peak


1-7GHz_Vertical_Peak 5GWi-Fi-Band4-AX20-5825MHz

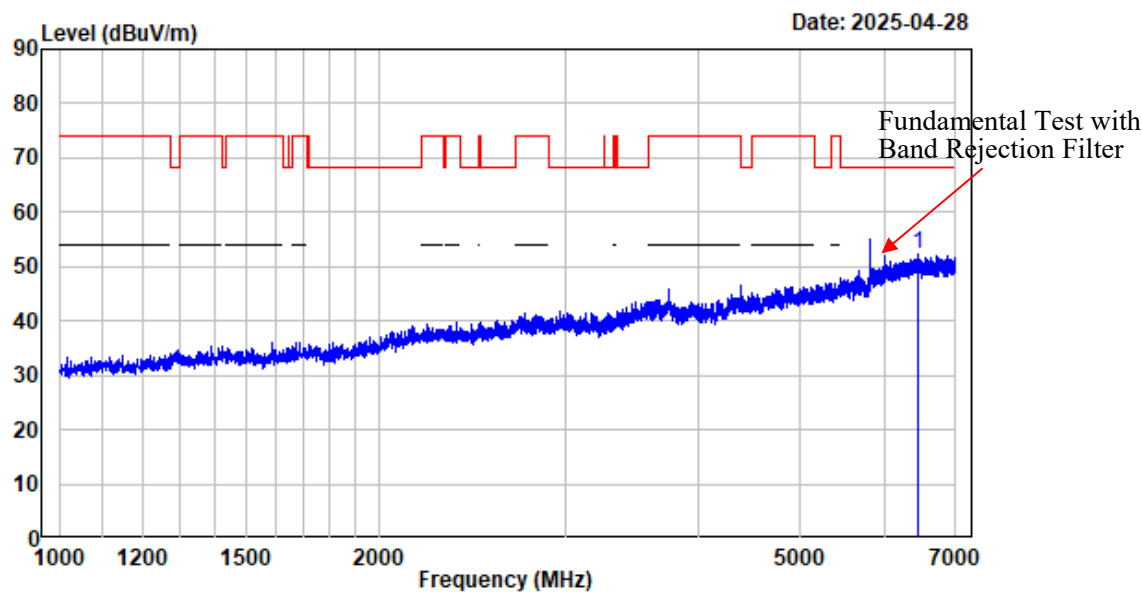

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX20-5825

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6459.183	-2.89	55.23	52.34	68.20	-15.86	Peak


7-18GHz_Horizontal_Peak 5GWi-Fi-Band4-AX20-5825MHz

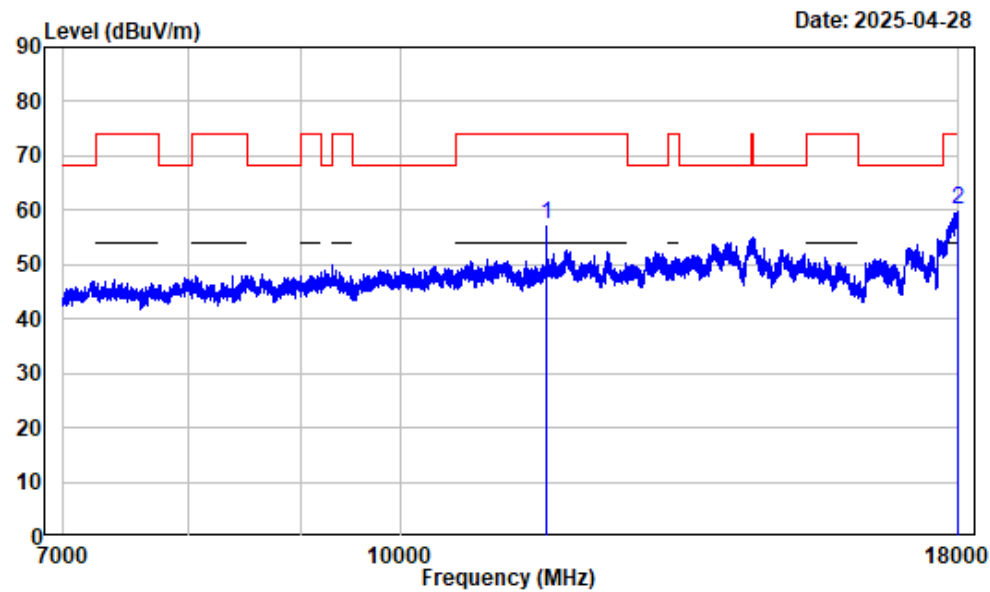

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX20-5825

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	3.42	53.95	57.37	74.00	-16.63	Peak
2	17998.630	13.20	47.02	60.22	74.00	-13.78	Peak


7-18GHz_Horizontal_Average 5GWi-Fi-Band4-AX20-5825MHz

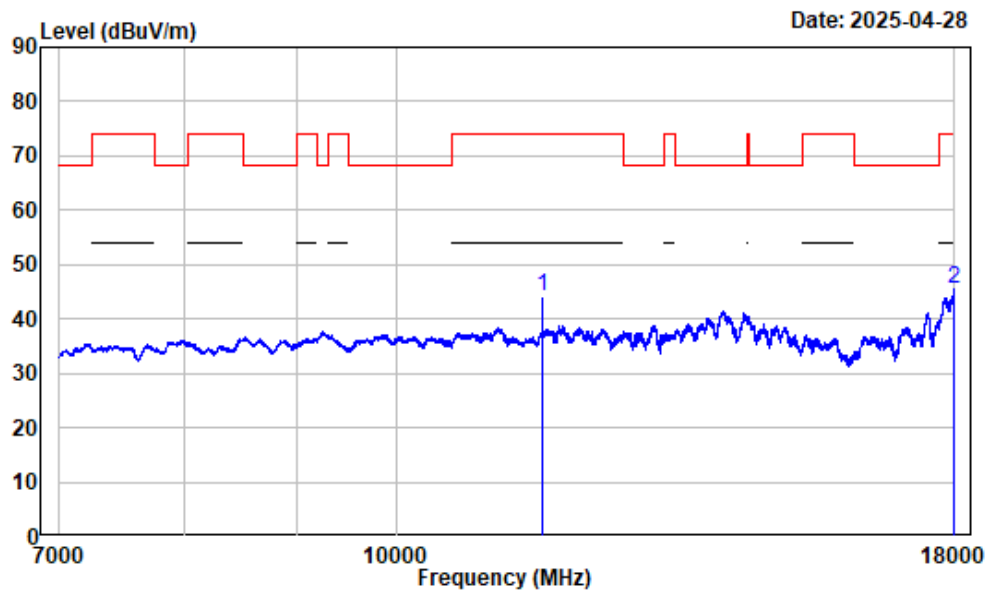

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-AX20-5825

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11650.000	3.42	40.88	44.30	54.00	-9.70	Average
2 17991.750	13.16	32.47	45.63	54.00	-8.37	Average


7-18GHz_Vertical_Peak 5GWi-Fi-Band4-AX20-5825MHz

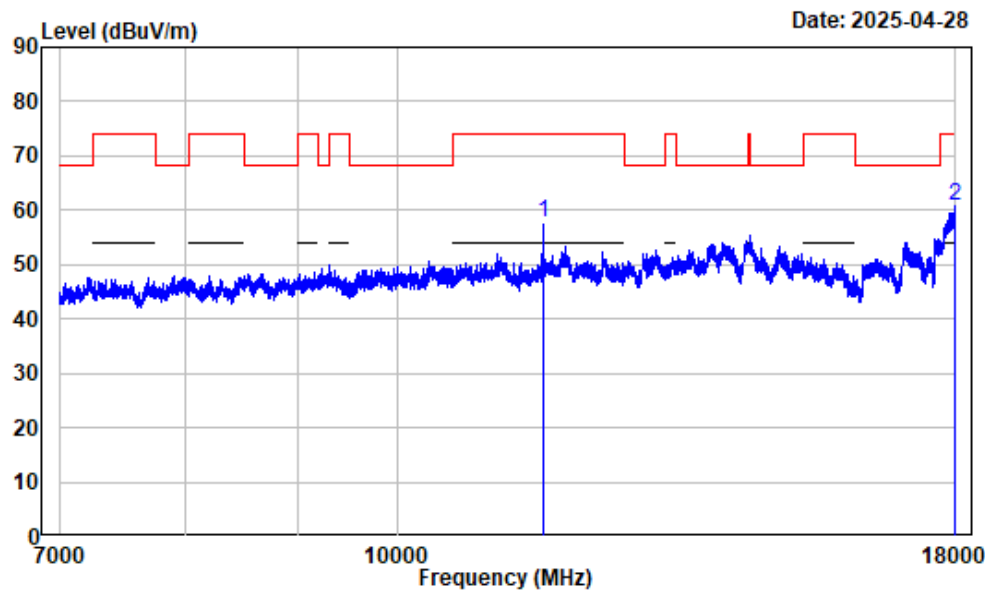

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX20-5825

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11650.000	3.42	54.47	57.89	74.00	-16.11	Peak
2 17975.250	13.08	47.57	60.65	74.00	-13.35	Peak


7-18GHz_Vertical_Average 5GWi-Fi-Band4-AX20-5825MHz

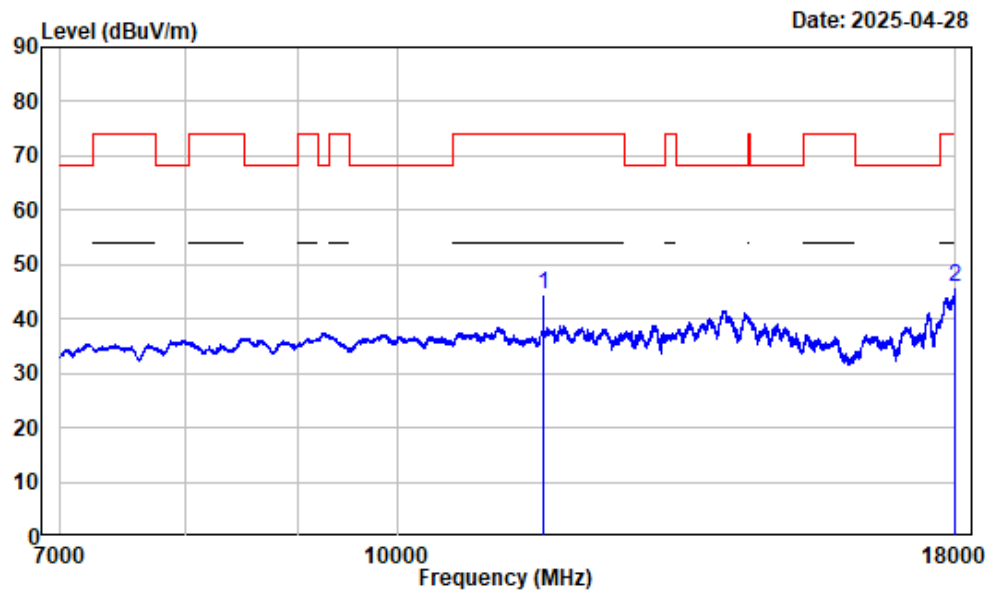

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-AX20-5825

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11650.000	3.42	41.13	44.55	54.00	-9.45	Average
2 17995.880	13.18	32.70	45.88	54.00	-8.12	Average


1-7GHz_Horizontal_Peak 5GWi-Fi-Band4-AX40-5795MHz

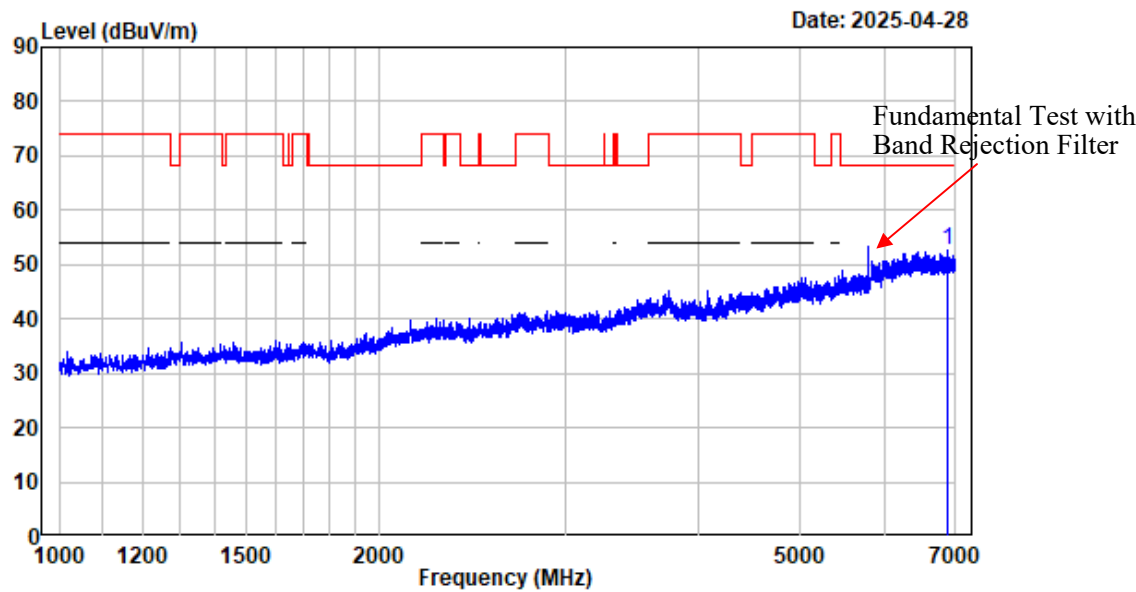

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX40-5795

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6869.484	-3.11	55.91	52.80	68.20	-15.40	Peak


1-7GHz_Vertical_Peak 5GWi-Fi-Band4-AX40-5795MHz

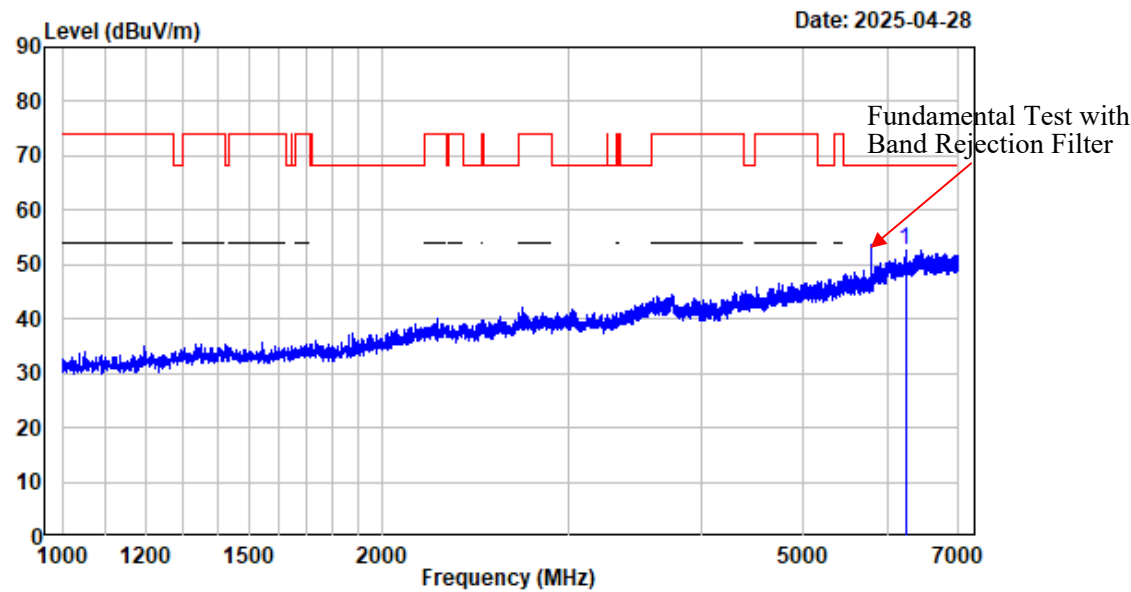

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX40-5795

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6237.905	-3.97	56.60	52.63	68.20	-15.57	Peak


7-18GHz_Horizontal_Peak 5GWi-Fi-Band4-AX40-5795MHz

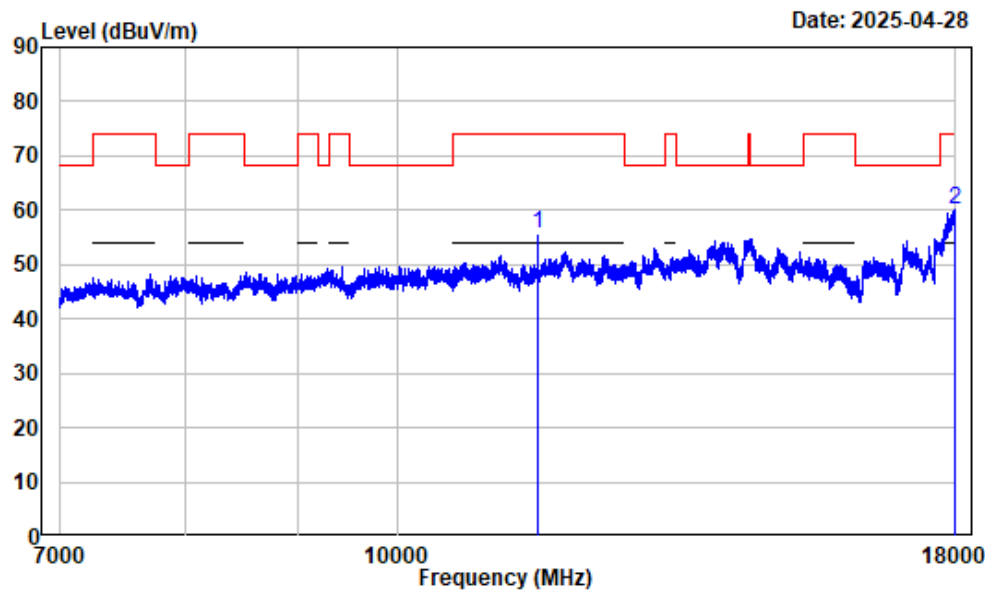

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX40-5795

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11590.000	3.21	52.63	55.84	74.00	-18.16	Peak
2 17978.000	13.10	47.10	60.20	74.00	-13.80	Peak


7-18GHz_Horizontal_Average 5GWi-Fi-Band4-AX40-5795MHz

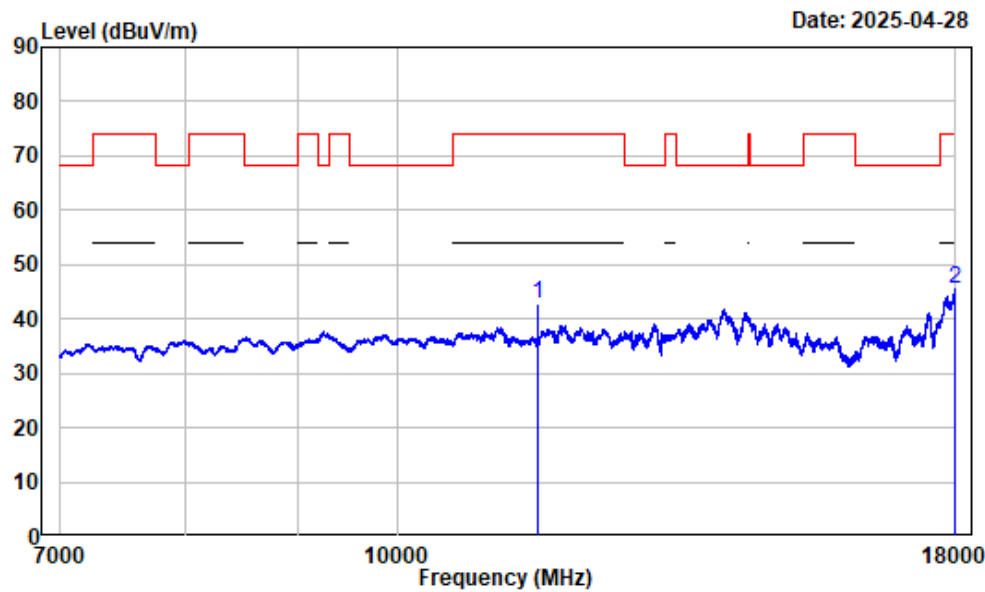

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-AX40-5795

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11590.000	3.21	39.54	42.75	54.00	-11.25	Average
2 17989.000	13.14	32.47	45.61	54.00	-8.39	Average


7-18GHz_Vertical_Peak 5GWi-Fi-Band4-AX40-5795MHz

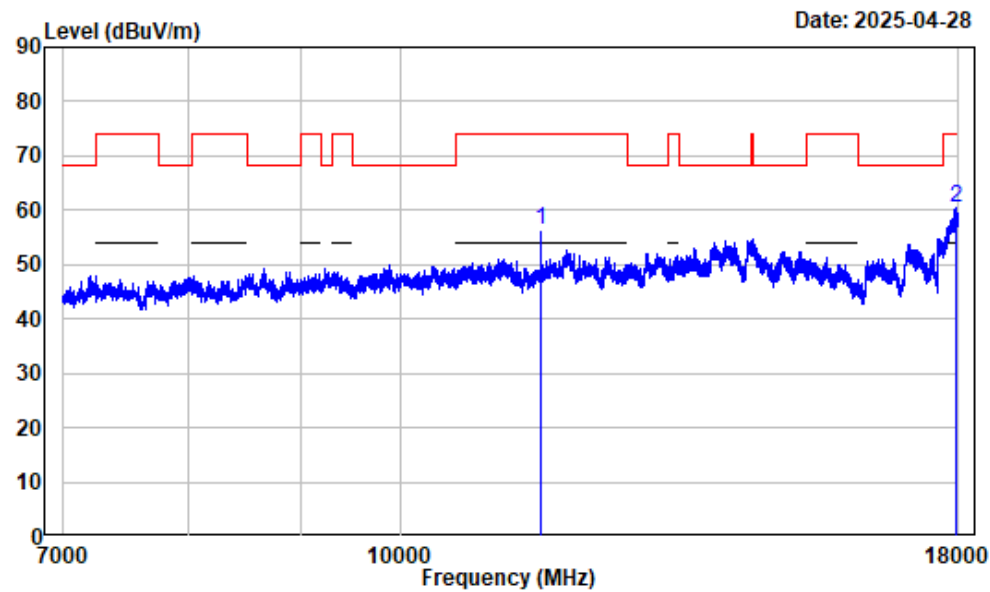

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX40-5795

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11590.000	3.21	53.25	56.46	74.00	-17.54	Peak
2 17968.370	13.05	47.41	60.46	74.00	-13.54	Peak

7-18GHz_Vertical_Average 5GWi-Fi-Band4-AX40-5795MHz

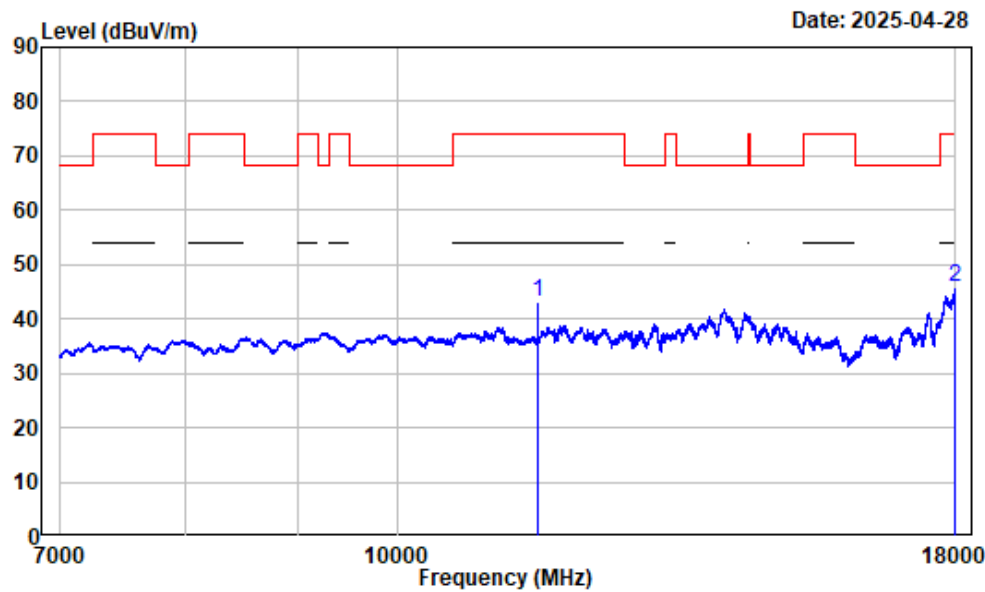


Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-AX40-5795

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11590.000	3.21	39.79	43.00	54.00	-11.00	Average
2 17998.630	13.19	32.58	45.77	54.00	-8.23	Average

18-40GHz (Only with worst case margin mode plot):


18-40GHz_Horizontal_Peak 5GWi-Fi-Band2-A-5320MHz

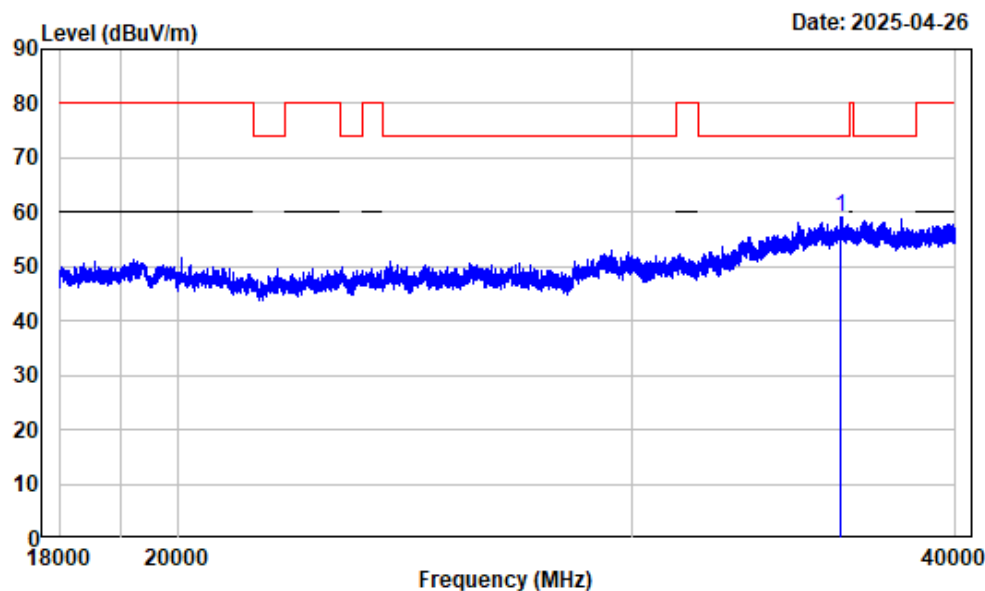

Condition : Horizontal
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	36086.260	23.51	35.74	59.25	74.20	-14.95	peak

18-40GHz_Vertical_Peak 5GWi-Fi-Band2-A-5320MHz

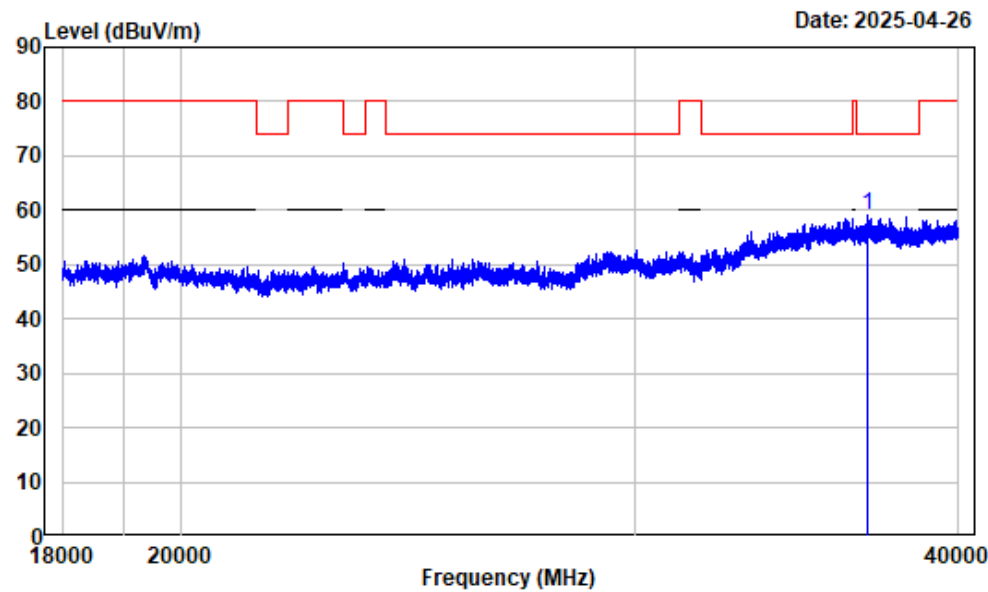

Condition : Vertical
Project No. : 2401Y41479E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

1	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	36903.110	22.80	36.23	59.03	74.20	-15.17	peak

RF Conducted data

Please refer to Annex "Appendix A" for detail test data.

RF EXPOSURE EVALUATION

MPE-Based Exemption

Applicable Standard

According to subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 v01 Interim General RF Exposure Guidance

MPE-Based Exemption:

General frequency and separation-distance dependent MPE-based effective radiated power(ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(3)(i)(C)] to support an exemption from further evaluation from 300 kHz through 100 GHz.

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2 f$.
1,500-100,000	$19.2 R^2$.

R is the minimum separation distance in meters

f = frequency in MHz

For multiple RF sources: Multiple RF sources are exempt if:

in the case of fixed RF sources operating in the same time-averaging period, or of multiple mobile or portable RF sources within a device operating in the same time averaging period, if the sum of the fractional contributions to the applicable thresholds is less than or equal to 1 as indicated in the following equation:

$$\sum_{i=1}^a \frac{P_i}{P_{th,i}} + \sum_{j=1}^b \frac{ERP_j}{ERP_{th,j}} + \sum_{k=1}^c \frac{Evaluated_k}{Exposure Limit_k} \leq 1$$

Result

Mode	Frequency (MHz)	Tune up conducted power [#] (dBm)	Antenna Gain [#]		ERP		Evaluation Distance (m)	ERP Limit (mW)
			(dBi)	(dBd)	(dBm)	(mW)		
BT	2402-2480	7.0	1.43	-0.72	6.28	4.25	0.2	768
BLE	2402-2480	4.0	1.43	-0.72	3.28	2.13	0.2	768
2.4G Wi-Fi	2412-2462	25.0	1.43	-0.72	24.28	267.92	0.2	768
5.2G Wi-Fi	5180-5240	14.5	0.75	-1.40	13.10	20.42	0.2	768
5.3G Wi-Fi	5260-5320	16.5	1.53	-0.62	15.88	38.73	0.2	768
5.6G Wi-Fi	5500-5720	17.0	3.12	0.97	17.97	62.66	0.2	768
5.8G Wi-Fi	5745-5825	17.5	1.77	-0.38	17.12	51.52	0.2	768

Note: 1. The tune up conducted power and antenna gain was declared by the applicant.

2. 0dBd=2.15dBi

3. The BT and 5G Wi-Fi can transmit at same time, the BT/5G and 2.4G Wi-Fi cannot transmit at same time.

Simultaneous transmitting consideration (worst case):

The ratio= $ERP_{BT}/limit + ERP_{5G}/limit = 4.25/768 + 62.66/768 = 0.087 < 1.0$

So simultaneous exposure is compliant.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant

EUT PHOTOGRAPHS

Please refer to the attachment 2401Y41479E-RF External photo and 2401Y41479E-RF Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2401Y41479E-RFC Test Setup photo.

******* END OF REPORT *******