

FCC PART 15.247 TEST REPORT

For

YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD.

309, 3rd Floor, No.16, Yun Ding North Road, Huli District, Xiamen City, Fujian, China

FCC ID: T2C-WHB660

Report Type: Original Report	Product Type: DECT Wireless Headset
Report Number: RSZ200819004-00B	
Report Date: 2020-12-31	
Reviewed By: RF Engineer	Nancy Wang 
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS.....	8
TEST EQUIPMENT LIST	9
FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	10
APPLICABLE STANDARD	10
RESULT	10
FCC §15.203 – ANTENNA REQUIREMENT	12
APPLICABLE STANDARD	12
ANTENNA CONNECTOR CONSTRUCTION	12
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	13
APPLICABLE STANDARD	13
EUT SETUP.....	13
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE	13
CORRECTED FACTOR & MARGIN CALCULATION	14
TEST DATA	14
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	19
APPLICABLE STANDARD	19
EUT SETUP	19
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	20
TEST PROCEDURE	20
CORRECTED AMPLITUDE & MARGIN CALCULATION	20
TEST DATA	20
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	28
APPLICABLE STANDARD	28
TEST PROCEDURE	28
TEST DATA	28

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....	29
APPLICABLE STANDARD	29
TEST PROCEDURE	29
TEST DATA	29
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	30
APPLICABLE STANDARD	30
TEST PROCEDURE	30
TEST DATA	30
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	31
APPLICABLE STANDARD	31
TEST PROCEDURE	31
TEST DATA	31
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	32
APPLICABLE STANDARD	32
TEST PROCEDURE	32
TEST DATA	32
FCC §15.247(d) - BAND EDGES TESTING	33
APPLICABLE STANDARD	33
TEST PROCEDURE	33
TEST DATA	33
APPENDIX	34
APPENDIX A: 20dB EMISSION BANDWIDTH.....	34
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	38
APPENDIX C: MAXIMUM CONDUCTED PEAK OUTPUT POWER.....	42
APPENDIX D: CARRIER FREQUENCY SEPARATION	46
APPENDIX E: TIME OF OCCUPANCY	48
APPENDIX F: NUMBER OF HOPPING CHANNELS	55
APPENDIX G: BAND EDGE MEASUREMENTS	57

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	DECT Wireless Headset
Tested Model	WHB660
Frequency Range	Bluetooth: 2402-2480MHz
Maximum Conducted Peak Output Power	Bluetooth: 2.70dBm
Modulation Technique	Bluetooth: GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Specification*	3dBi (It is provided by the applicant)
Voltage Range	DC 12.0V from adapter
Date of Test	2020-08-23 to 2020-09-30
Sample serial number	RSZ200819004-RF-S1 (Assigned by BACL, Shenzhen)
Received date	2020-08-19
Sample/EUT Status	Good condition
Adapter 1 information	Model: YLPS122000B1-US Input: AC 100-240V, 50/60Hz, 0.65A Output: DC 12.0V, 2A
Adapter 2 information	Model: YLPS122000C1-US Input: AC 100-240V, 50/60Hz, 1.0A Output: DC 12.0V, 2.0A

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

For Radiated Emissions testing, please refer to DA 00-705 Released March 30, 2000, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF Output Power with Power meter		±0.73dB
RF conducted test with spectrum		±1.6dB
AC Power Lines Conducted Emissions		±1.95dB
Emissions, Radiated	Below 1GHz	±4.75dB
	Above 1GHz	±4.88dB
Temperature		±1 °C
Humidity		±6%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

EUT Exercise Software

“Bluetest3”* software was made to the EUT tested and the power level is 63, 63*. The software and power level was provided by the applicant.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
BULL	Socket	GN-415K	5503290068073
DELL	PC	Inspiron 15-3543	30064495430
DELL	PC	Latitude E5430	26913588529
YEALINK	Base	WHB620	WHB620-1
YEALINK	Headset 1#	WHB622	WHB622-1
YEALINK	Headset 2#	WHB622	WHB622-2
YEALINK	Wireless charger	WHC60	Wireless charger
Bacl	Wireless Load	01131727	01131727
HIKVISION	Router	DS-3WR03-E	10021642429
Bacl	Resistor *3	023	023

External I/O Cable

Cable Description	Length (m)	From Port	To
Un-shielded un-detachable AC cable	1.2	Socket	LISN
Un-shielded un-detachable DC cable	0.8	Adapter	EUT
Un-Shielded Un-detachable DC cable*3	0.5	EUT	Resistor
Un-Shielded detachable USB cable	1.0	EUT	Laptop 1#
Un-shielded detachable USB cable	1.0	Base	Laptop 2#
Un-shielded detachable RJ45 cable	8.0	Laptop 1#	Router
Un-shielded detachable RJ45 cable	1.0	Laptop 2#	Router

Block Diagram of Test Setup

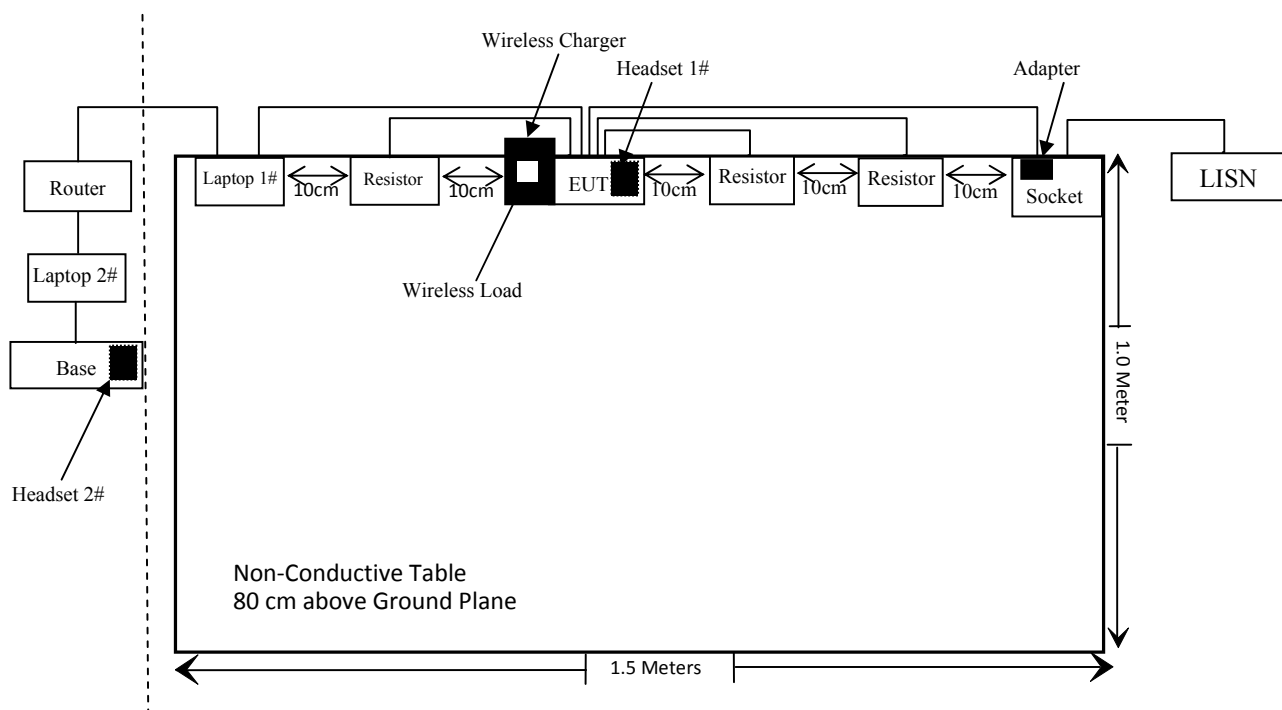

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §2.1091	MAXIMUM PERMISSIBLE EXPOSURE (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2020/08/04	2021/08/03
Rohde & Schwarz	LISN	ENV216	101613	2020/08/04	2021/08/03
Rohde & Schwarz	Transient Limitor	ESH3Z2	DE25985	2019/11/29	2020/11/28
Unknown	CE Cable	CE Cable	UF A210B-1-0720-504504	2019/11/29	2020/11/28
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
Radiated Emission Test					
R&S	EMI Test Receiver	ESR3	102455	2020/08/04	2021/08/03
Sonoma instrument	Pre-amplifier	310 N	186238	2020/08/04	2021/08/03
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017/12/22	2020/12/21
Unknown	Cable 2	RF Cable 2	F-03-EM197	2019/11/29	2020/11/28
Unknown	Cable	Chamber Cable 1	F-03-EM236	2019/11/29	2020/11/28
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40-N	102259	2020/08/04	2021/08/03
COM-POWER	Pre-amplifier	PA-122	181919	2019/11/29	2020/11/28
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2019/11/29	2020/11/28
Sunol Sciences	Horn Antenna	DRH-118	A052604	2017/12/22	2020/12/21
Insulated Wire Inc.	RF Cable	SPS-2503-3150	02222010	2019/11/29	2020/11/28
Unknown	RF Cable	W1101-EQ1 OUT	F-19-EM005	2019/11/29	2020/11/28
SNSD	Band Reject filter	BSF2402-2480MN-0898-001	2.4G filter	2020/04/20	2021/04/20
Ducommun Technologies	Horn antenna	ARH-4223-02	1007726-021304	2017/12/06	2020/12/05
RF Conducted Test					
Tonscend Corporation	RF control Unit	JS0806-2	19D8060154	2020/08/04	2021/08/03
Rohde & Schwarz	Signal and Spectrum Analyzer	FSV40	101473	2020/08/04	2021/08/03
Unknown	RF Cable	Unknown	2301 276	2019/11/29	2020/11/28

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Result

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Mode	Frequency (MHz)	Antenna Gain		Tune up conducted power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
Bluetooth	2402-2480	3	2	3.0	2.0	20	0.001	1.0
DECT	1921.536 - 1928.448	0	1	20.5	112.2	20	0.022	1.0

Note: The Bluetooth and DECT can transmit simultaneously for this device.

So the worst simultaneous transmitting consideration:

The ratio= $MPE_{BT}/limit + MPE_{DECT}/limit = 0.001/1.0 + 0.022/1.0 = 0.023 < 1.0$

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Pass

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna arrangement, which was permanently attached and the antenna gain is 3 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Pass

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

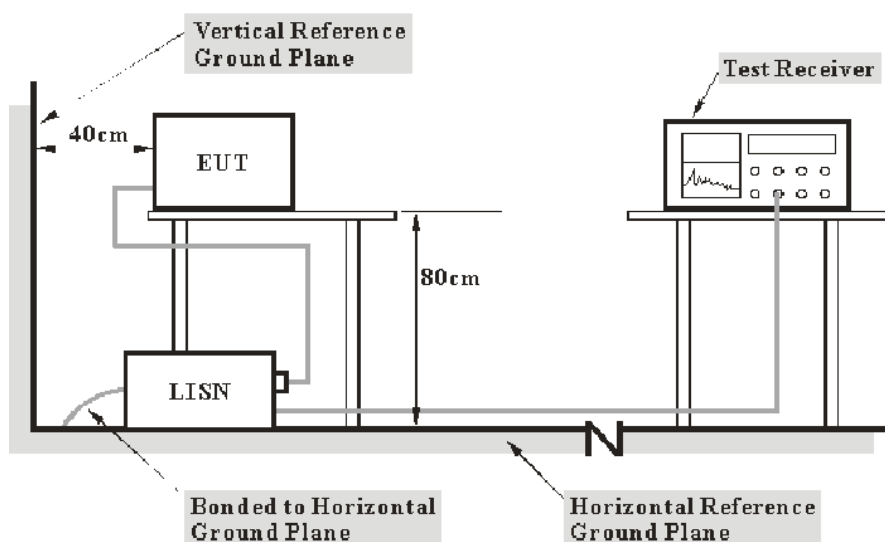

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the device was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$


Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	65 %
ATM Pressure:	101.0 kPa

The testing was performed by Haiguo Li on 2020-09-12.


EUT operation mode: Transmitting (the worst case is GFSK Mode, High channel)

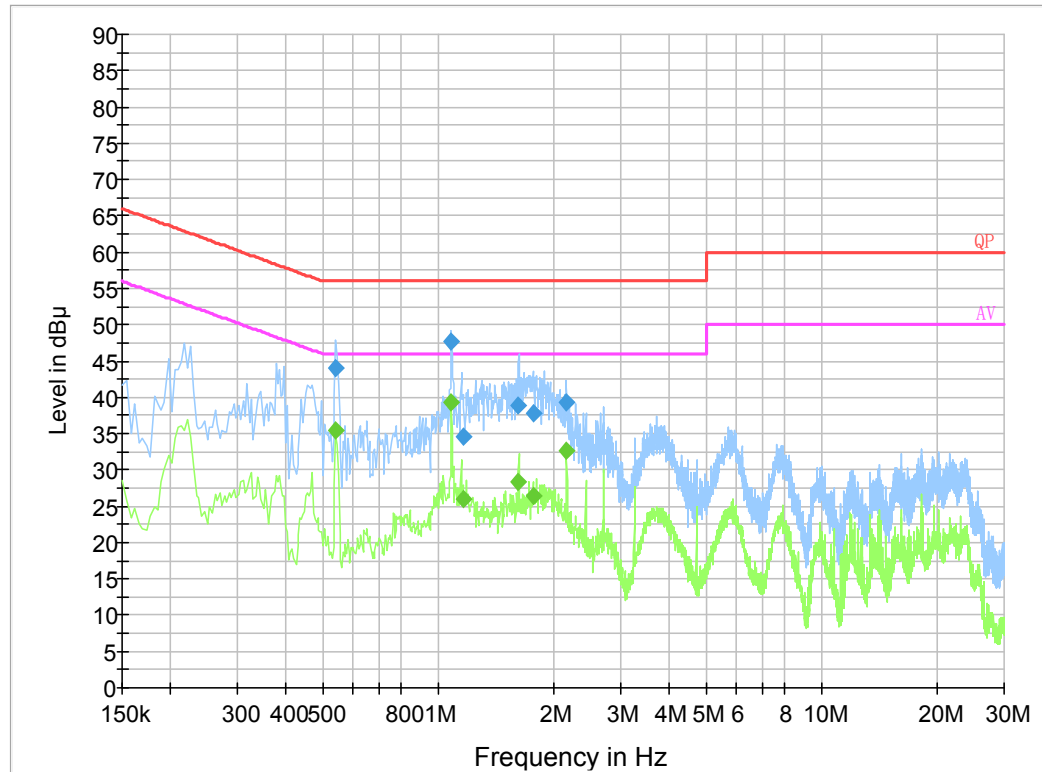Adapter 1 (Model: YLPS122000B1-US)**AC 120V/60 Hz, Line****Final Result 1**

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.541870	44.1	9.000	L1	19.8	11.9	56.0
1.085710	47.8	9.000	L1	19.9	8.2	56.0
1.164690	34.7	9.000	L1	19.8	21.3	56.0
1.621610	39.0	9.000	L1	19.9	17.0	56.0
1.783450	37.9	9.000	L1	19.9	18.1	56.0
2.169510	39.3	9.000	L1	19.9	16.7	56.0

Final Result 2


Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.541870	35.4	9.000	L1	19.8	10.6	46.0
1.085710	39.4	9.000	L1	19.9	6.6	46.0
1.164690	25.9	9.000	L1	19.8	20.1	46.0
1.621610	28.3	9.000	L1	19.9	17.7	46.0
1.783450	26.5	9.000	L1	19.9	19.5	46.0
2.169510	32.6	9.000	L1	19.9	13.4	46.0

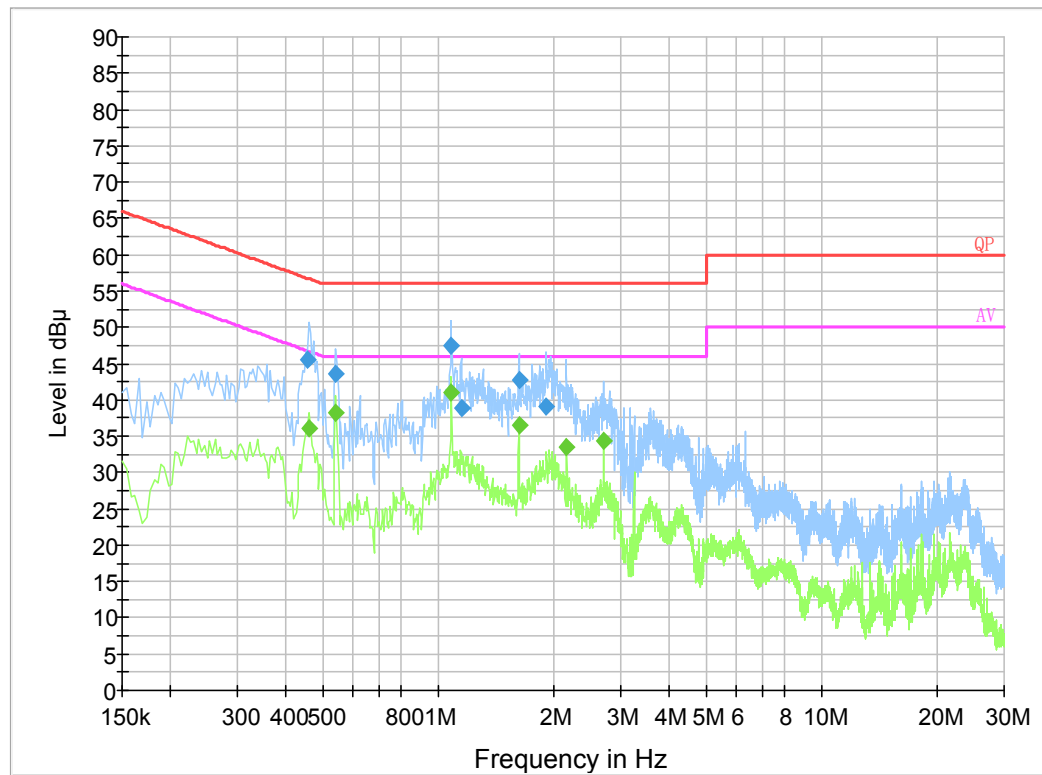AC 120V/60 Hz, Neutral**Final Result 1**

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.459070	45.5	9.000	N	19.8	11.2	56.7
0.541870	43.6	9.000	N	19.8	12.4	56.0
1.085770	47.4	9.000	N	19.8	8.6	56.0
1.156750	39.0	9.000	N	19.8	17.0	56.0
1.625610	42.7	9.000	N	19.8	13.3	56.0
1.917170	39.2	9.000	N	19.9	16.8	56.0

Final Result 2


Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.462000	36.1	9.000	N	19.8	10.6	46.7
0.542000	38.3	9.000	N	19.8	7.7	46.0
1.082000	41.0	9.000	N	19.8	5.0	46.0
1.626000	36.6	9.000	N	19.8	9.4	46.0
2.166000	33.5	9.000	N	19.9	12.5	46.0
2.710000	34.3	9.000	N	19.8	11.7	46.0

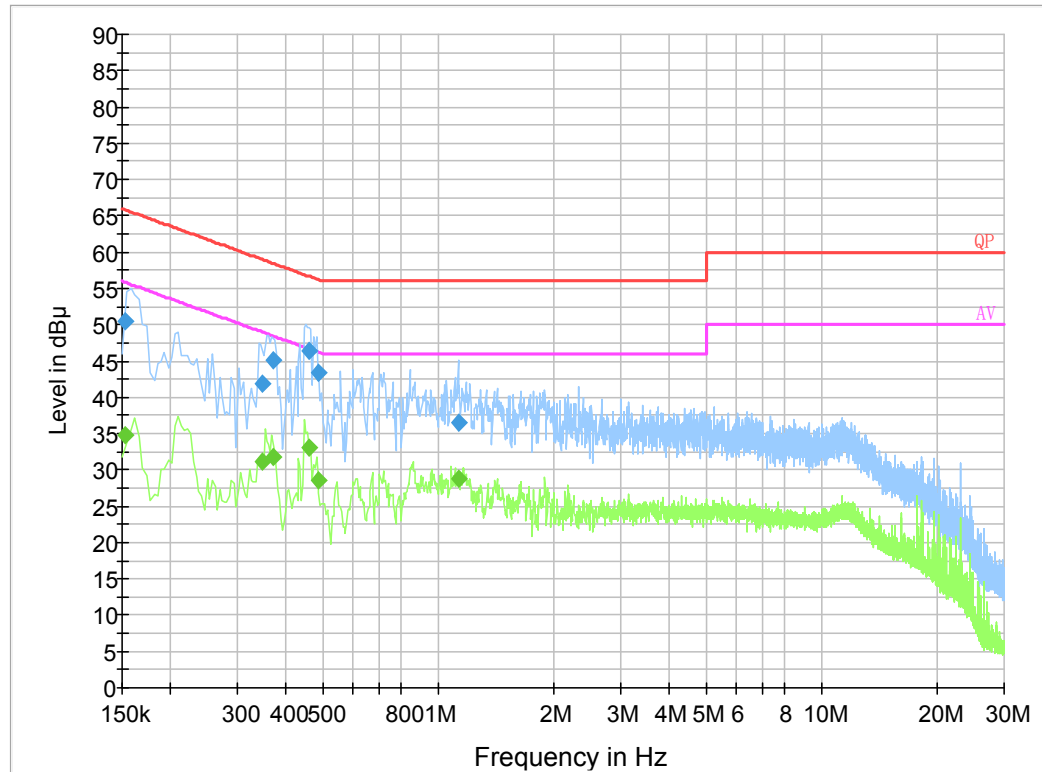Adapter 2 (Model: YLPS122000C1-US)**AC 120V/60 Hz, Line****Final Result 1**

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.153500	50.5	9.000	L1	19.8	15.3	65.8
0.347130	41.9	9.000	L1	19.9	17.1	59.0
0.372450	45.2	9.000	L1	19.9	13.2	58.4
0.460810	46.4	9.000	L1	19.8	10.3	56.7
0.486770	43.3	9.000	L1	19.8	12.9	56.2
1.137050	36.6	9.000	L1	19.8	19.4	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.153500	34.9	9.000	L1	19.8	20.9	55.8
0.347130	31.2	9.000	L1	19.9	17.8	49.0
0.372450	31.8	9.000	L1	19.9	16.6	48.4
0.460810	33.1	9.000	L1	19.8	13.6	46.7
0.486770	28.5	9.000	L1	19.8	17.7	46.2
1.137050	28.9	9.000	L1	19.8	17.1	46.0

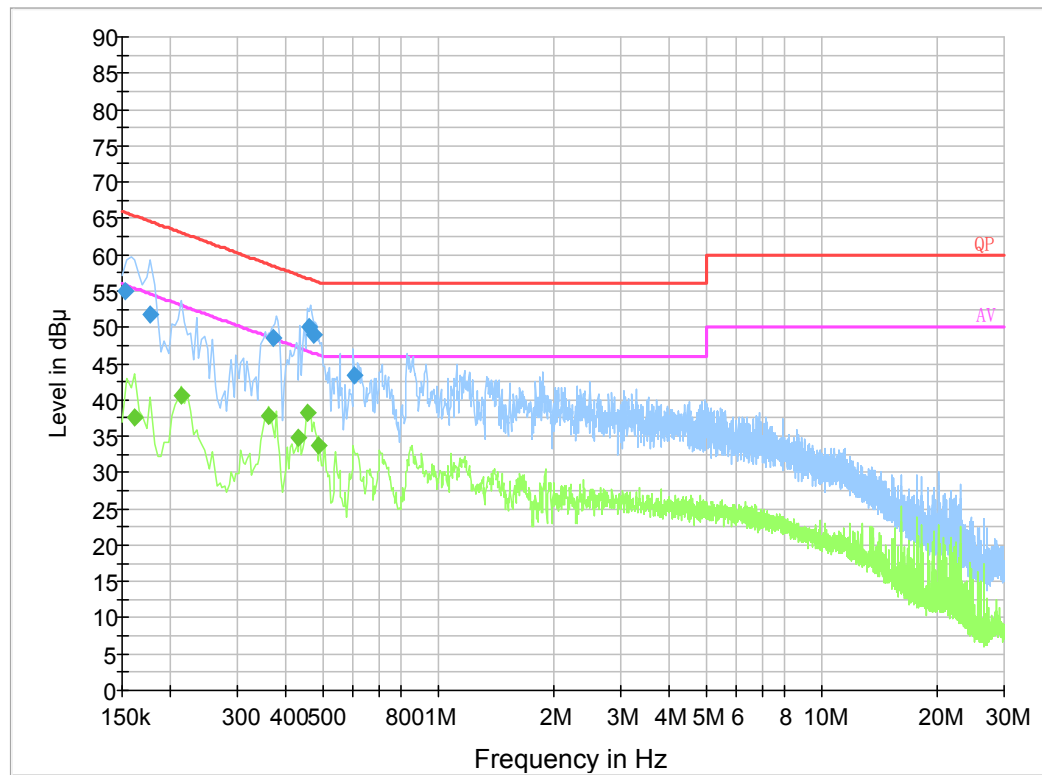AC 120V/60 Hz, Neutral**Final Result 1**



Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.153500	54.9	9.000	N	19.8	10.9	65.8
0.177500	51.7	9.000	N	19.8	12.9	64.6
0.372330	48.6	9.000	N	19.8	9.8	58.4
0.463010	50.1	9.000	N	19.8	6.5	56.6
0.474770	48.9	9.000	N	19.8	7.5	56.4
0.604970	43.5	9.000	N	19.8	12.5	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.162000	37.5	9.000	N	19.8	17.9	55.4
0.214000	40.5	9.000	N	19.8	12.5	53.0
0.362000	37.9	9.000	N	19.9	10.8	48.7
0.430000	34.8	9.000	N	19.8	12.5	47.3
0.458000	38.3	9.000	N	19.8	8.4	46.7
0.490000	33.7	9.000	N	19.8	12.5	46.2

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS**Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

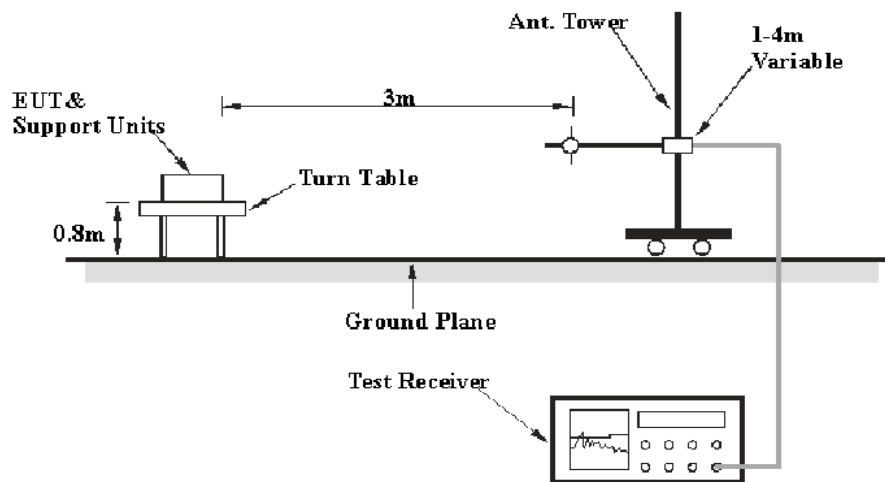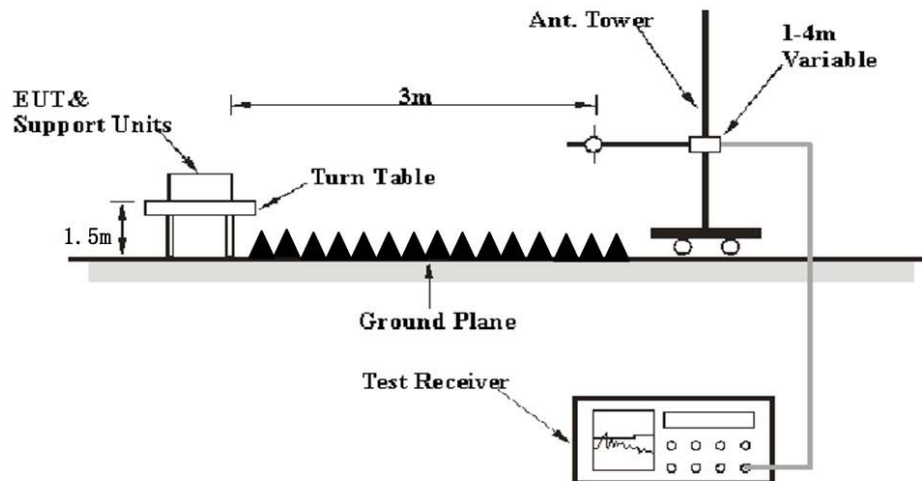EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, according to the DA 00-705 Released March 30, 2000, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Average

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$


Test Data

Environmental Conditions


Temperature:	29.7~30.2 °C
Relative Humidity:	50~56 %
ATM Pressure:	100.9~101.0 kPa

The testing was performed by Holland Yang on 2020-09-10 and 2020-09-30 for below 1GHz and by Leven Gan on 2020-09-28 for above 1GHz.

EUT operation mode: Transmitting

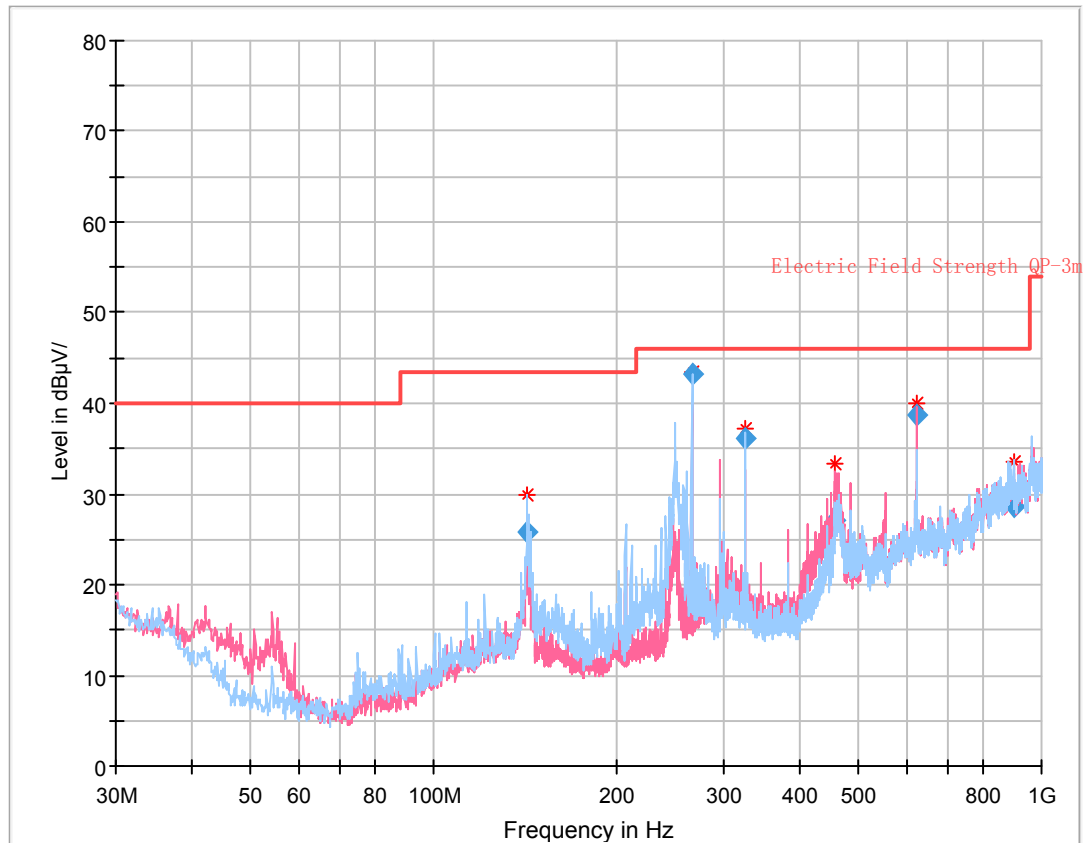Adapter 1 (Model: YLPS122000B1-US)**30 MHz~1 GHz:** (the worst case is GFSK Mode, High channel)**Final Result**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
142.798875	25.76	43.50	17.74	180.0	H	23.0	-14.2
265.905500	43.20	46.00	2.80	111.0	H	219.0	-13.0
324.984125	36.16	46.00	9.84	111.0	H	123.0	-10.7
457.646875	27.19	46.00	18.81	109.0	V	136.0	-7.8
622.081750	38.65	46.00	7.35	109.0	V	71.0	-1.6
898.545125	28.65	46.00	17.35	331.0	H	166.0	4.2

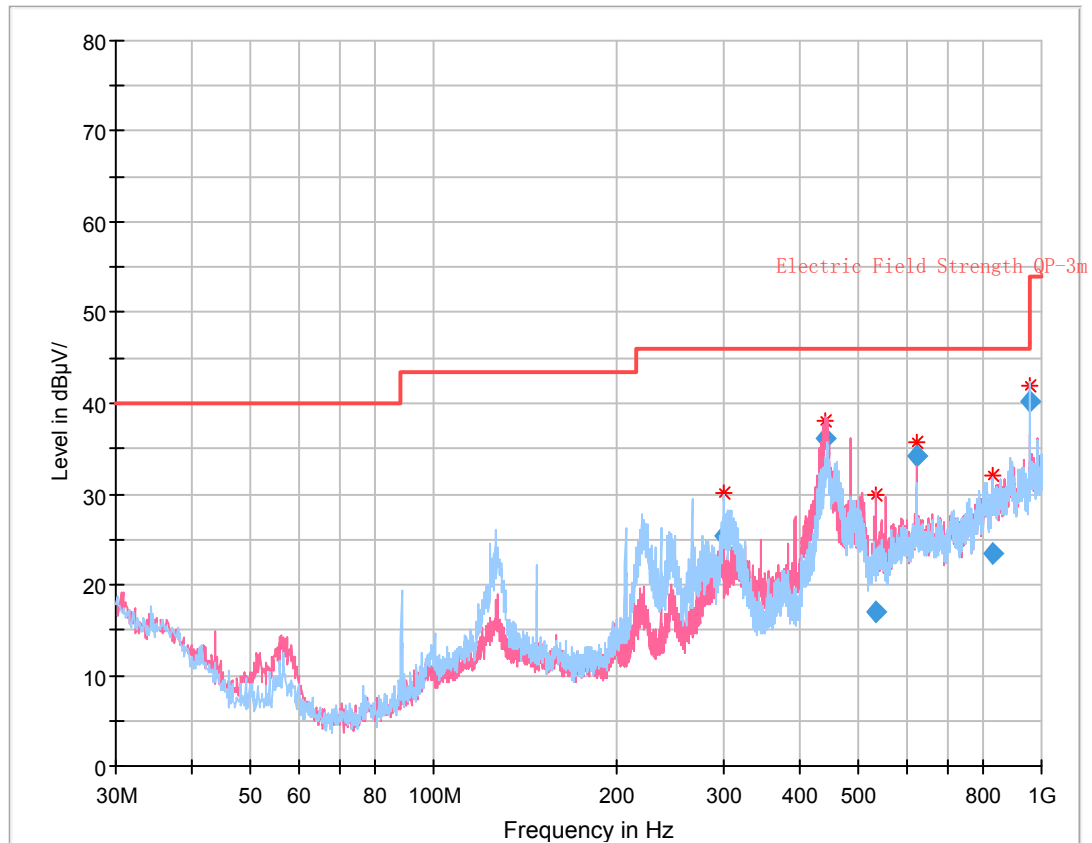Adapter 2 (Model: YLPS122000C1-US)**30 MHz~1 GHz:** (the worst case is GFSK Mode, High channel)**Final Result**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
300.720875	25.29	46.00	20.71	103.0	H	294.0	-10.6
441.679500	36.09	46.00	9.91	114.0	V	232.0	-8.6
535.046375	16.99	46.00	29.01	109.0	V	48.0	-4.5
622.070250	34.15	46.00	11.85	109.0	V	252.0	-1.6
829.686250	23.36	46.00	22.64	172.0	H	0.0	2.6
959.030375	40.21	46.00	5.79	125.0	H	339.0	5.3

1 GHz - 25 GHz: (Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK mode, the worst case is GFSK Mode)

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2402 MHz)									
2388.41	28.41	PK	91	1.1	H	31.87	60.28	74	13.72
2388.41	13.67	Ave.	91	1.1	H	31.87	45.54	54	8.46
2484.56	28.27	PK	79	2.2	H	32.13	60.40	74	13.60
2484.56	13.65	Ave.	79	2.2	H	32.13	45.78	54	8.22
4804.00	50.63	PK	275	1.2	H	6.28	56.91	74	17.09
4804.00	42.74	Ave.	275	1.2	H	6.28	49.02	54	4.98
Middle Channel (2441 MHz)									
4882.00	51.94	PK	239	2.0	H	6.76	58.70	74	15.30
4882.00	43.08	Ave.	239	2.0	H	6.76	49.84	54	4.16
High Channel (2480 MHz)									
2387.78	28.53	PK	331	2.1	H	31.87	60.40	74	13.60
2387.78	13.67	Ave.	331	2.1	H	31.87	45.54	54	8.46
2484.53	32.09	PK	292	2.3	H	32.13	64.22	74	9.78
2484.53	13.72	Ave.	292	2.3	H	32.13	45.85	54	8.15
4960.00	52.32	PK	146	2.3	H	6.80	59.12	74	14.88
4960.00	44.10	Ave.	146	2.3	H	6.80	50.90	54	3.10

Note:



Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading



Margin = Limit - Corrected. Amplitude

The other spurious emission which is 20dB to the limit was not recorded.



Pre-scan with High channel Peak Horizontal

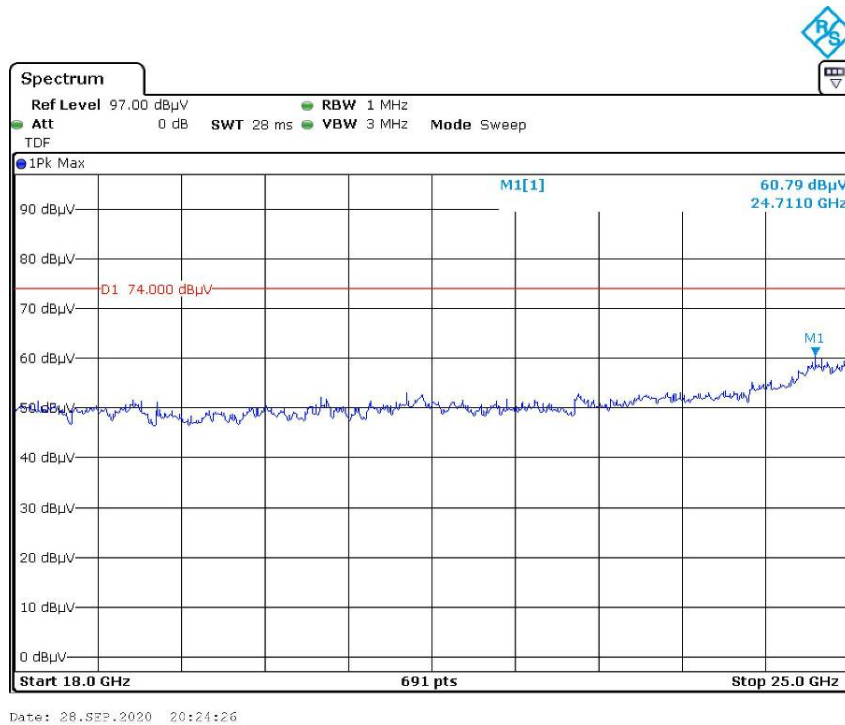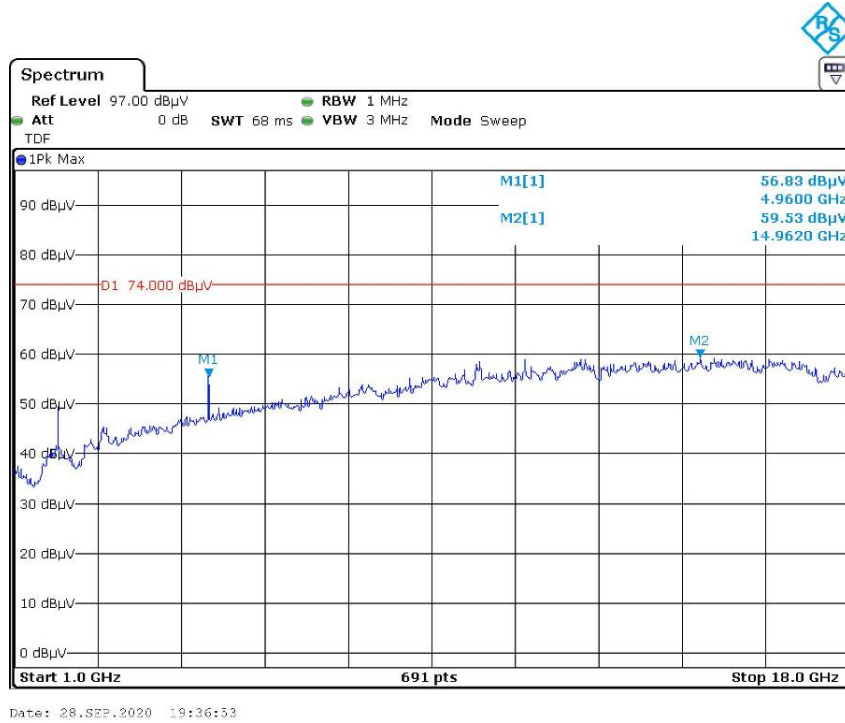



Vertical

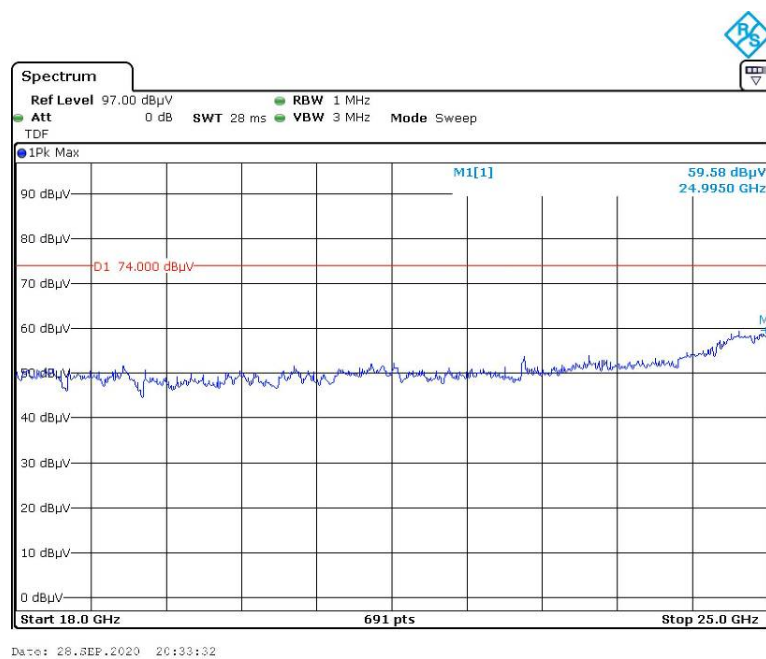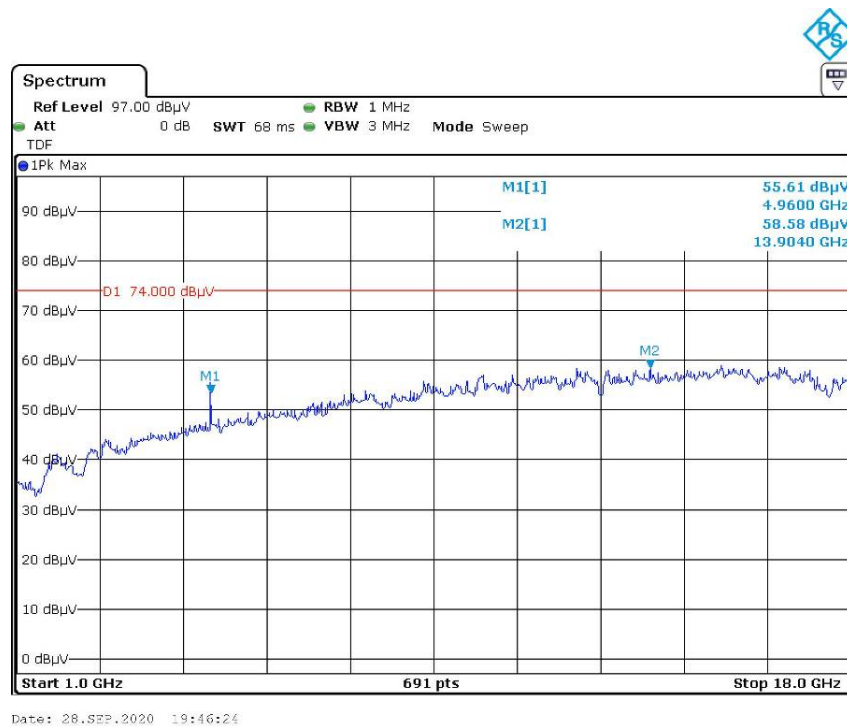

Average Horizontal

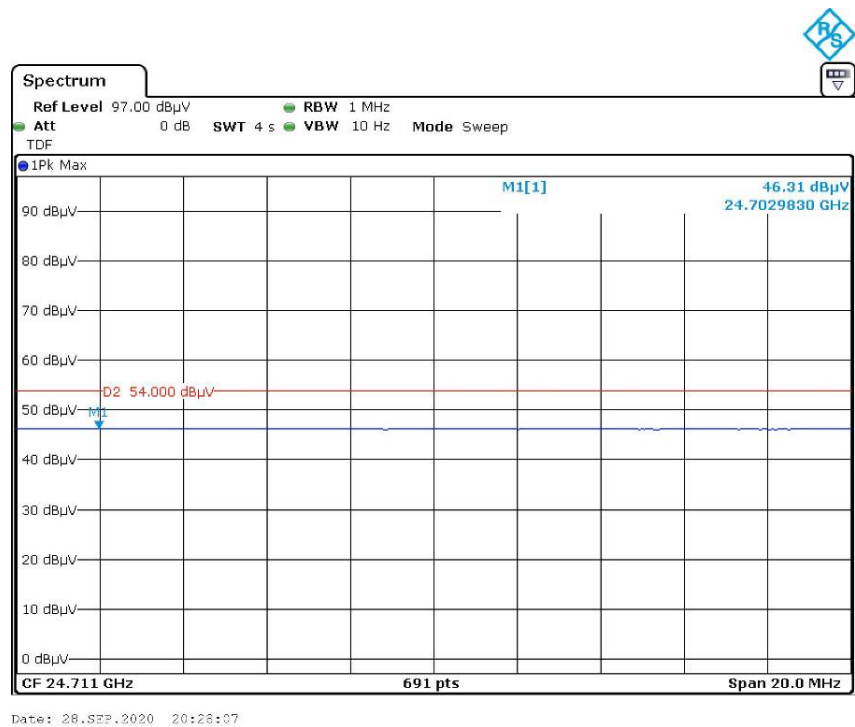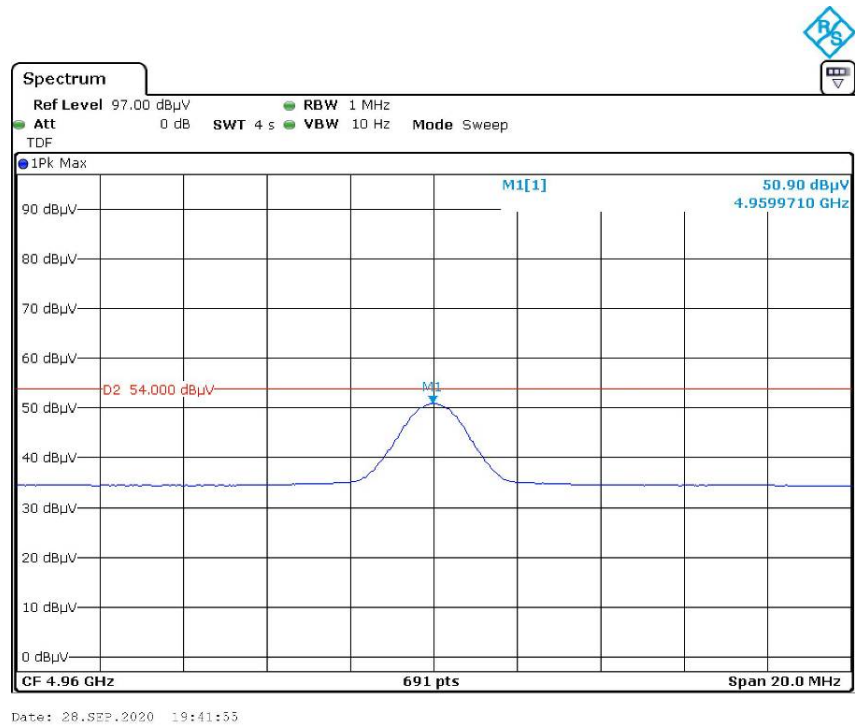

Vertical

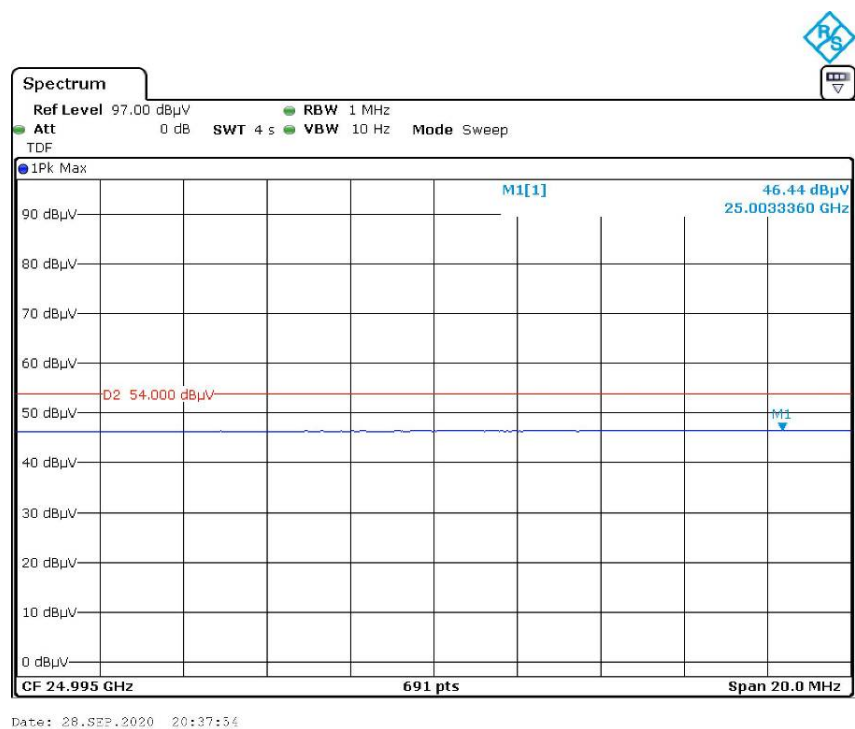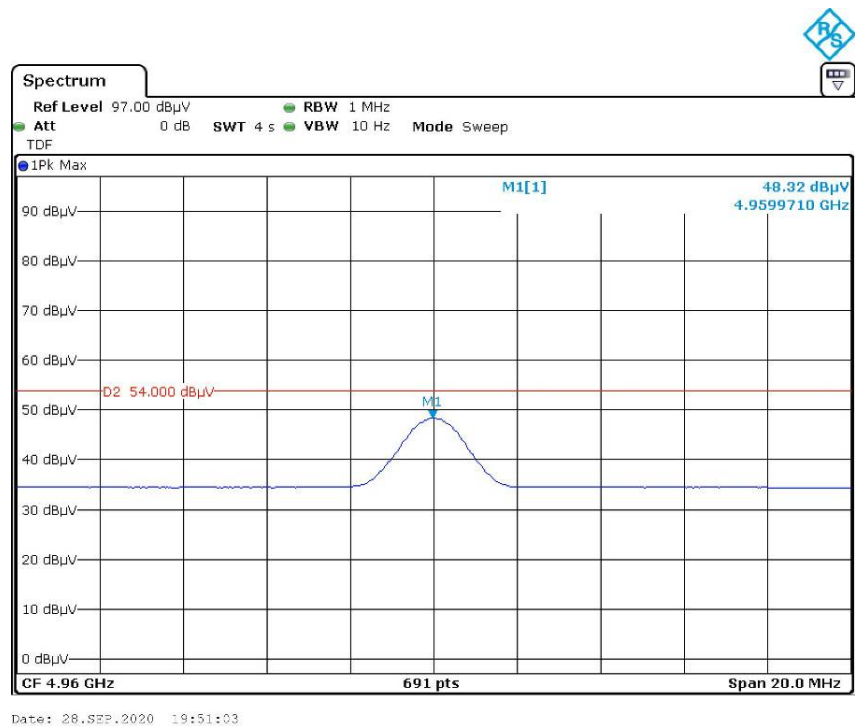

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	54 %
ATM Pressure:	101.0 kPa

The testing was performed by Black Chen on 2020-08-23.

EUT operation mode: Transmitting

Test Result: Pass

Please refer to the Appendix.

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH**Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	54 %
ATM Pressure:	101.0 kPa

The testing was performed by Black Chen on 2020-08-23.

EUT operation mode: Transmitting

Test Result: Pass

Please refer to the Appendix.

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	54 %
ATM Pressure:	101.0 kPa

The testing was performed by Black Chen on 2020-08-23.

EUT operation mode: Transmitting

Test Result: Pass

Please refer to the Appendix.

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	54 %
ATM Pressure:	101.0 kPa

The testing was performed by Black Chen on 2020-08-23.

EUT operation mode: Transmitting

Test Result: Pass

Please refer to the Appendix.

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	54 %
ATM Pressure:	101.0 kPa

The testing was performed by Black Chen on 2020-08-23.

EUT operation mode: Transmitting

Test Result: Pass

Please refer to the Appendix.

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	54 %
ATM Pressure:	101.0 kPa

The testing was performed by Black Chen on 2020-08-23.

EUT operation mode: Transmitting

Test Result: Pass

Please refer to the Appendix.

APPENDIX


Appendix A: 20dB Emission Bandwidth

Test Result


Test Mode	Antenna	Channel	20db EBW[MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	0.966	---	PASS
		2441	0.966	---	PASS
		2480	0.957	---	PASS
2DH1	Ant1	2402	1.269	---	PASS
		2441	1.281	---	PASS
		2480	1.251	---	PASS
3DH1	Ant1	2402	1.257	---	PASS
		2441	1.272	---	PASS
		2480	1.254	---	PASS

Test Graphs


DH1_Ant1_2402

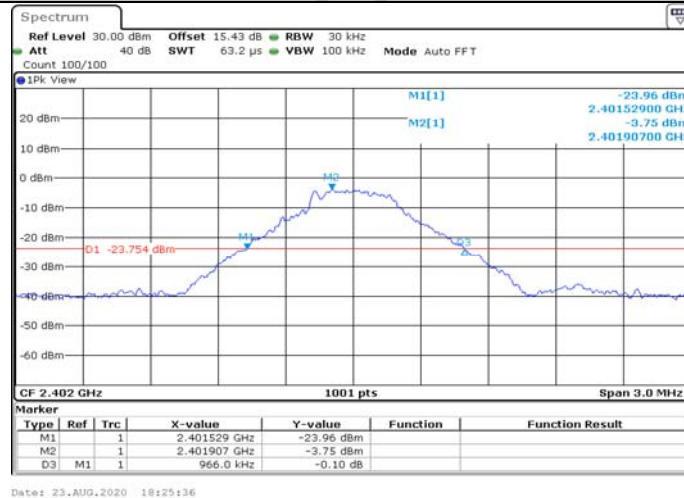


DH1_Ant1_2441

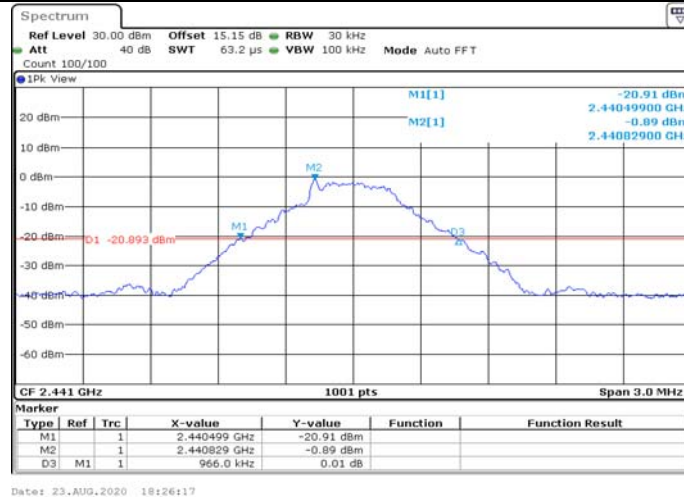

DH1_Ant1_2480

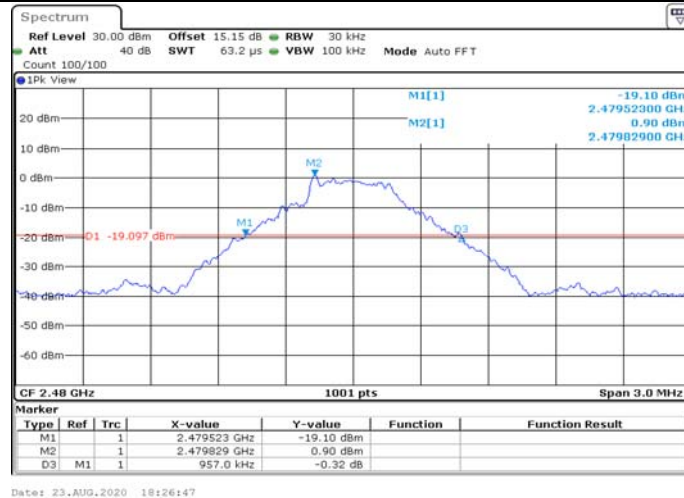


2DH1_Ant1_2402

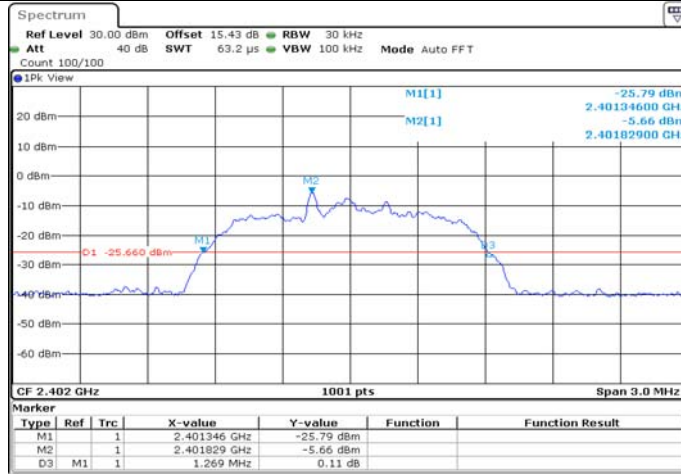


Date: 23.AUG.2020 18:27:28

2DH1_Ant1_2441

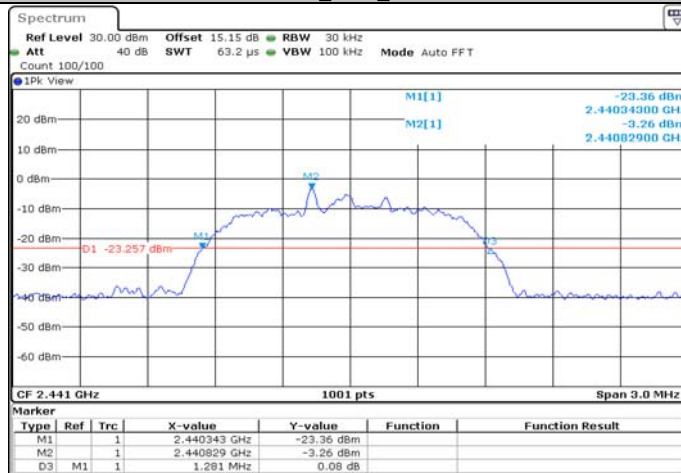


Date: 23.AUG.2020 18:28:09

2DH1_Ant1_2480

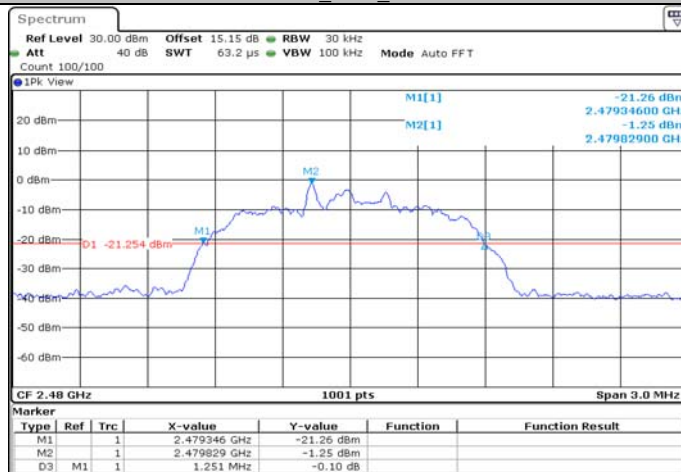


Date: 23.AUG.2020 18:28:40

3DH1_Ant1_2402

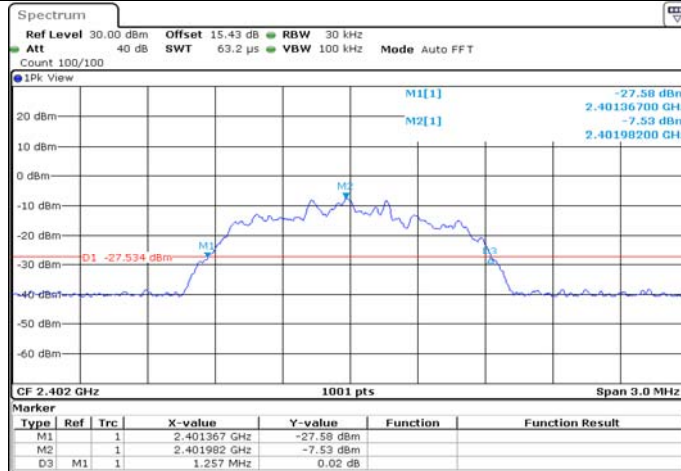


Date: 23.AUG.2020 18:34:51

3DH1_Ant1_2441

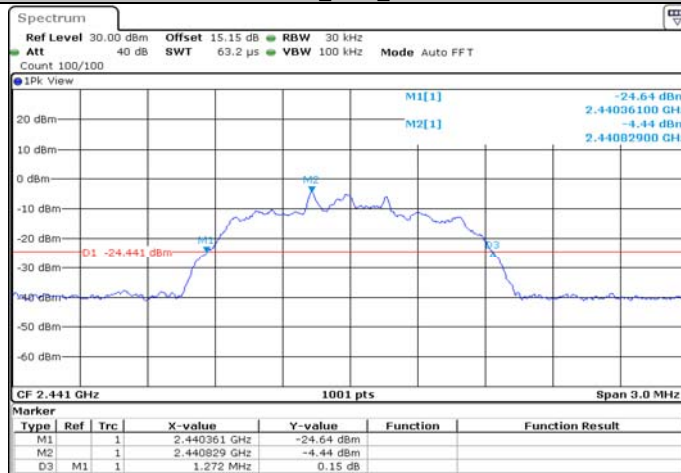

Date: 23.AUG.2020 18:36:29

3DH1_Ant1_2480

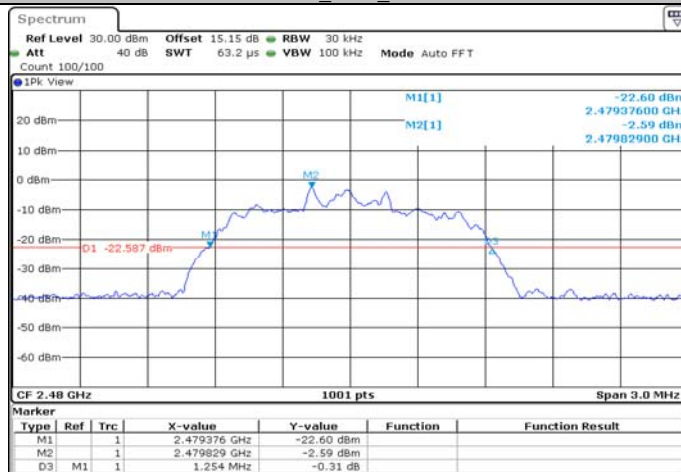


Date: 23.AUG.2020 18:37:36

Appendix B: Occupied Channel Bandwidth**Test Result**


Test Mode	Antenna	Channel	OCB [MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	0.89	---	PASS
		2441	0.899	---	PASS
		2480	0.881	---	PASS
2DH1	Ant1	2402	1.193	---	PASS
		2441	1.178	---	PASS
		2480	1.163	---	PASS
3DH1	Ant1	2402	1.175	---	PASS
		2441	1.169	---	PASS
		2480	1.166	---	PASS

Test Graphs

DH1_Ant1_2402

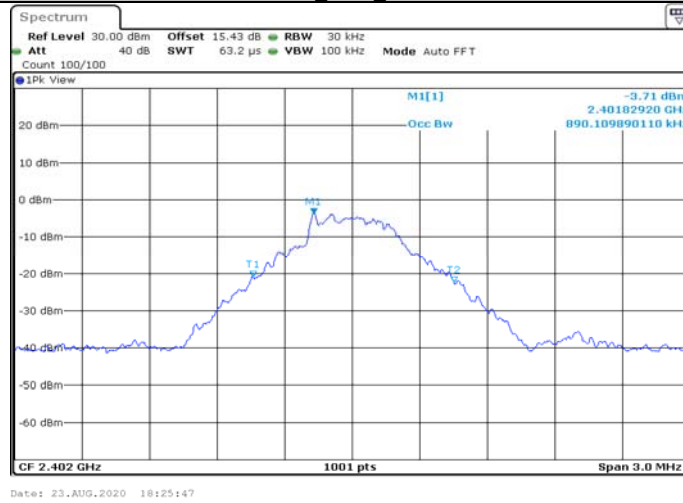


DH1_Ant1_2441

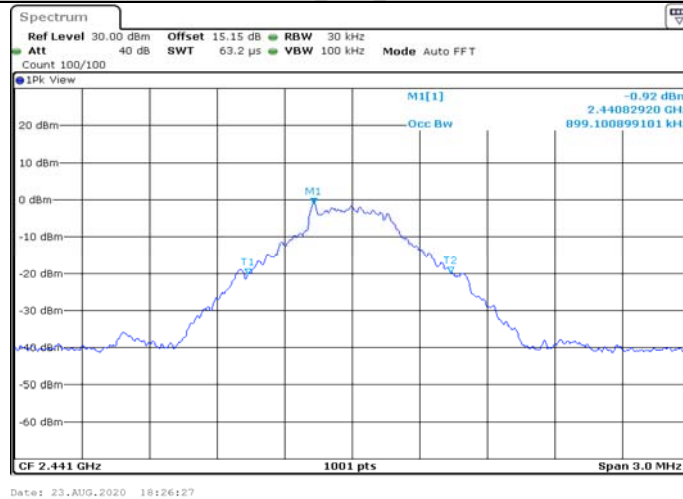


DH1_Ant1_2480



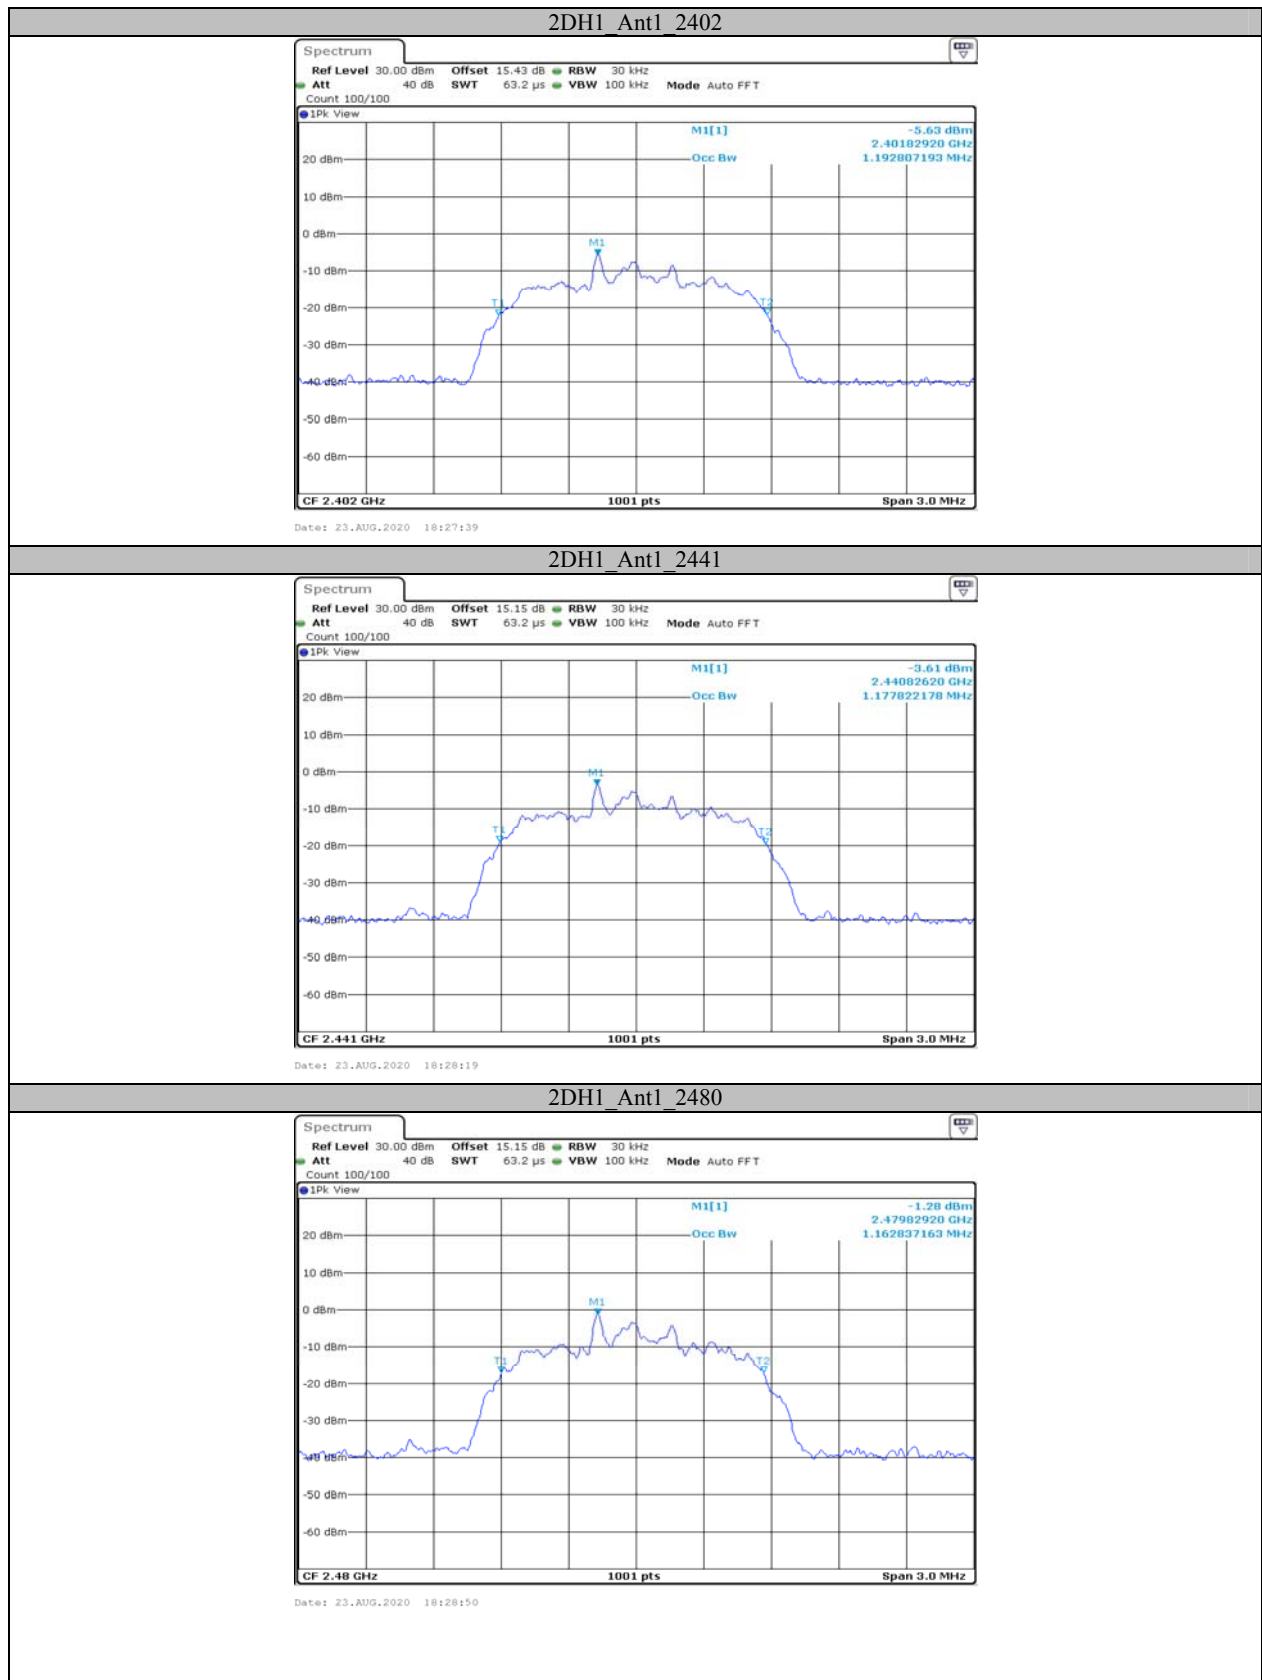


3DH1_Ant1_2402

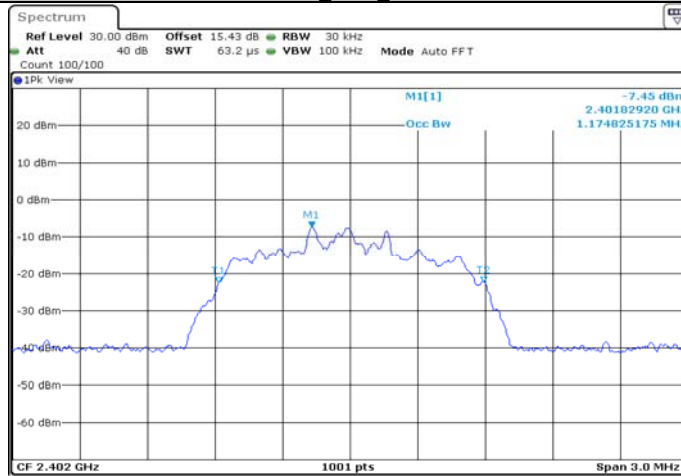


Date: 23.AUG.2020 18:35:23

3DH1_Ant1_2441

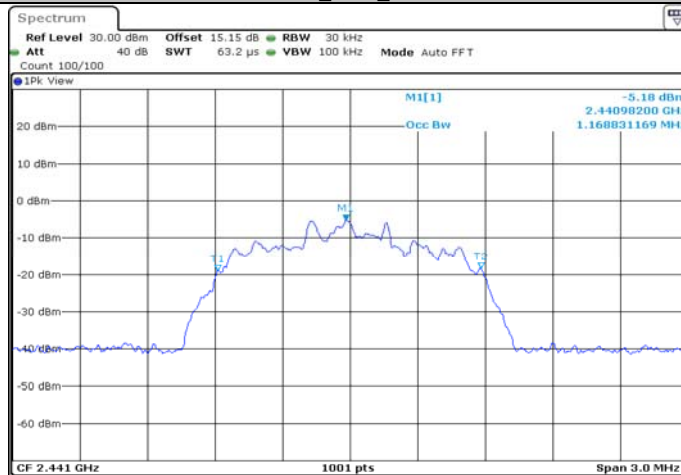

Date: 23.AUG.2020 18:36:58

3DH1_Ant1_2480

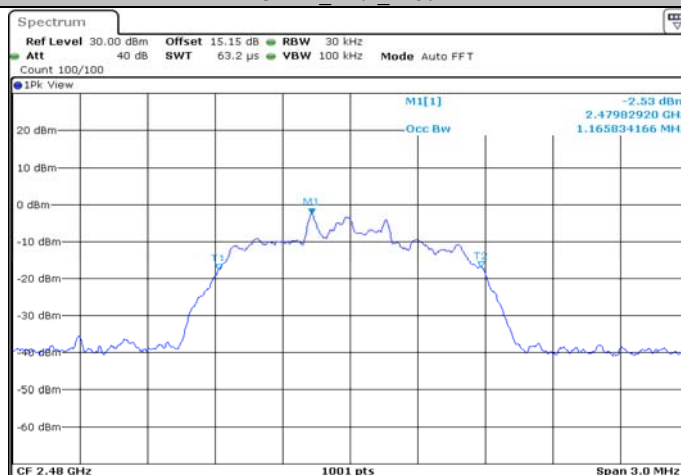


Date: 23.AUG.2020 18:38:05

Appendix C: Maximum conducted Peak output power**Test Result**

Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH1	Ant1	2402	-0.88	<=20.97	PASS
		2441	1.08	<=20.97	PASS
		2480	2.7	<=20.97	PASS
2DH1	Ant1	2402	-2.6	<=20.97	PASS
		2441	-0.51	<=20.97	PASS
		2480	1.32	<=20.97	PASS
3DH1	Ant1	2402	-2.35	<=20.97	PASS
		2441	-0.09	<=20.97	PASS
		2480	1.72	<=20.97	PASS

Test Graphs

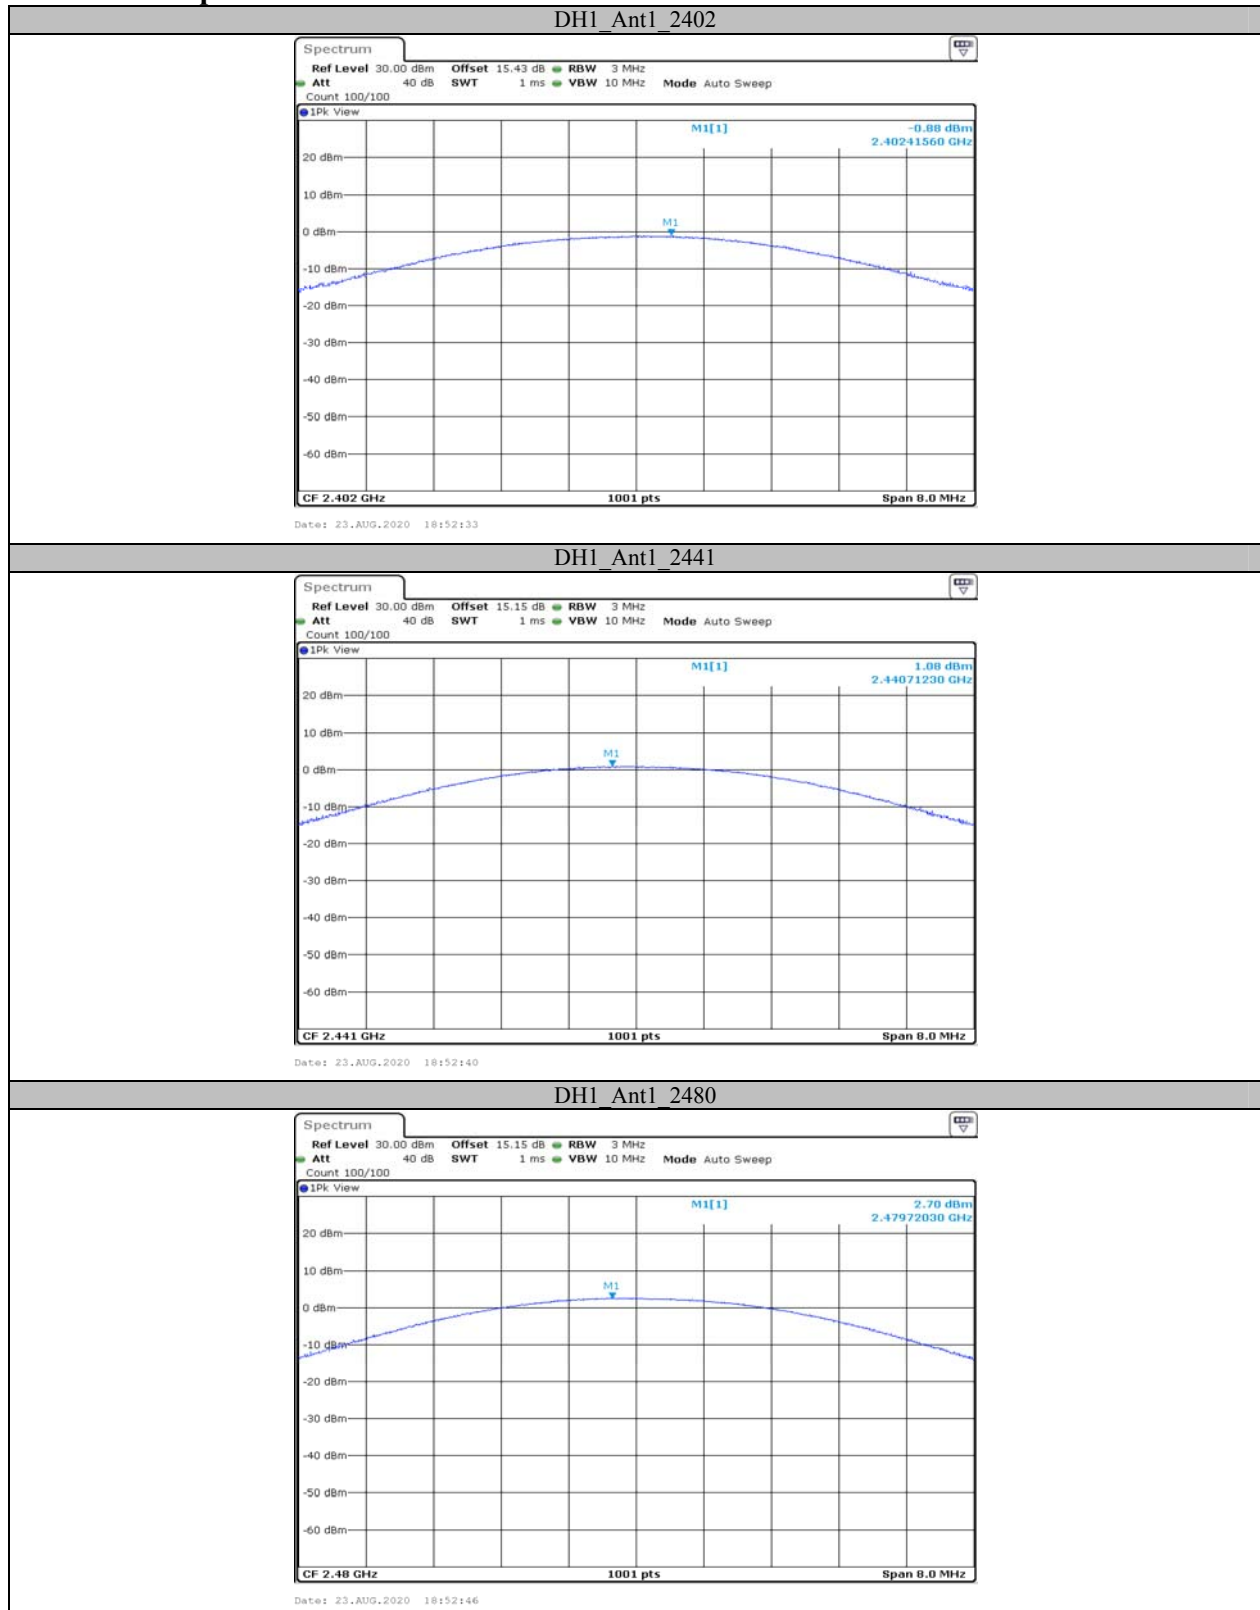


2DH1_Ant1_2402




Date: 23.AUG.2020 18:52:54

2DH1_Ant1_2441

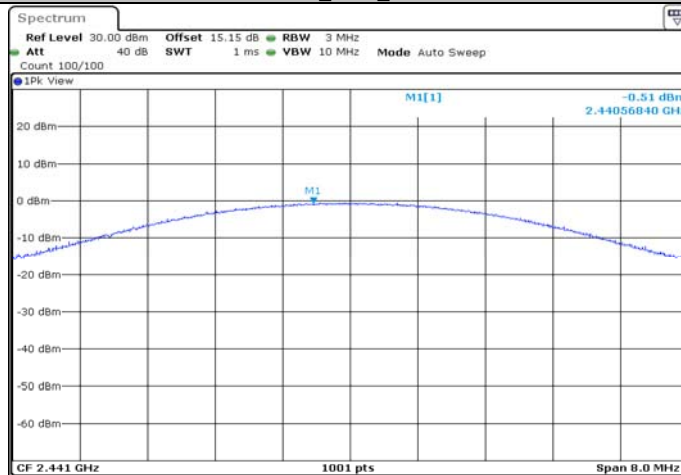


Date: 23.AUG.2020 18:53:01

2DH1_Ant1_2480

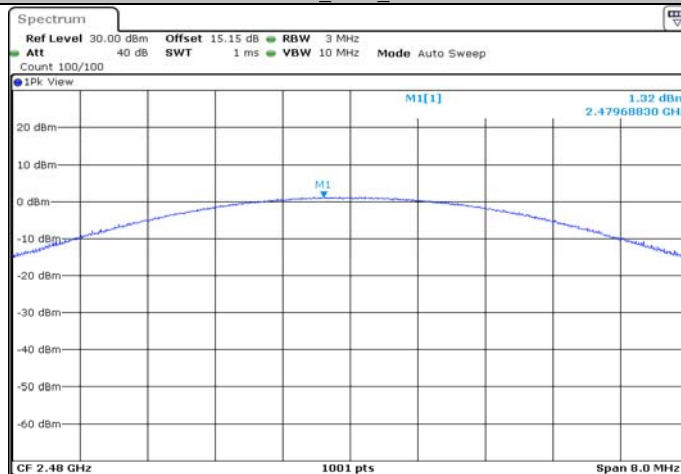


Date: 23.AUG.2020 18:53:07

3DH1_Ant1_2402

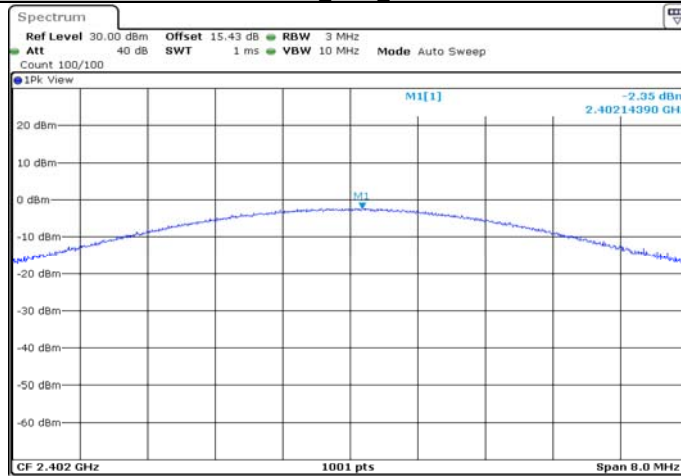


Date: 23.AUG.2020 18:53:14

3DH1_Ant1_2441

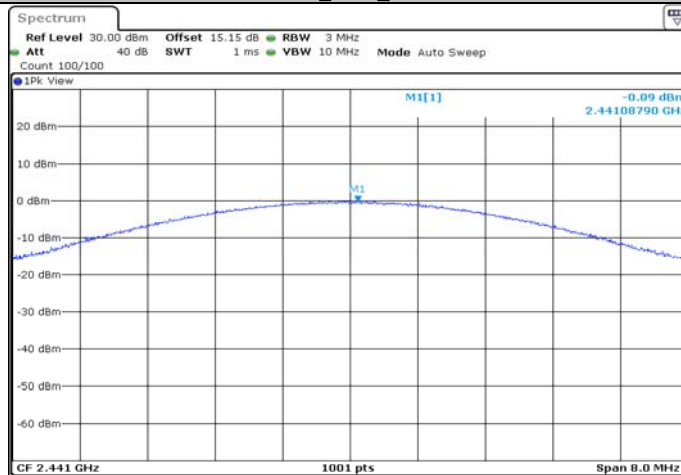

Date: 23.AUG.2020 18:53:21

3DH1_Ant1_2480

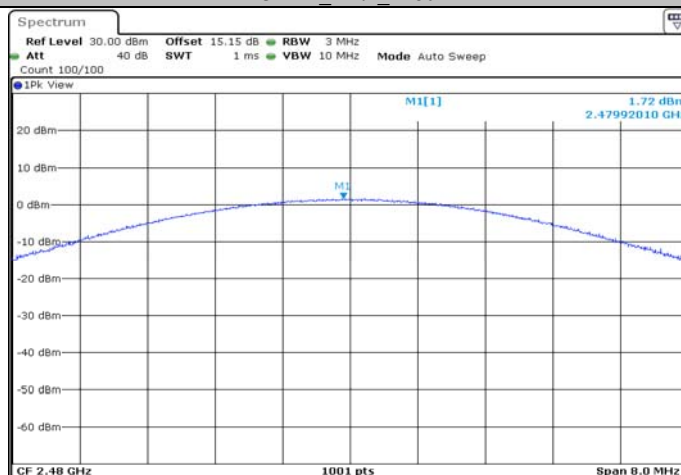


Date: 23.AUG.2020 18:53:28

Appendix D: Carrier frequency separation**Test Result**

Test Mode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH1	Ant1	Hop	1.006	≥ 0.644	PASS
2DH1	Ant1	Hop	1.003	≥ 0.854	PASS
3DH1	Ant1	Hop	1.006	≥ 0.848	PASS

Test Graphs

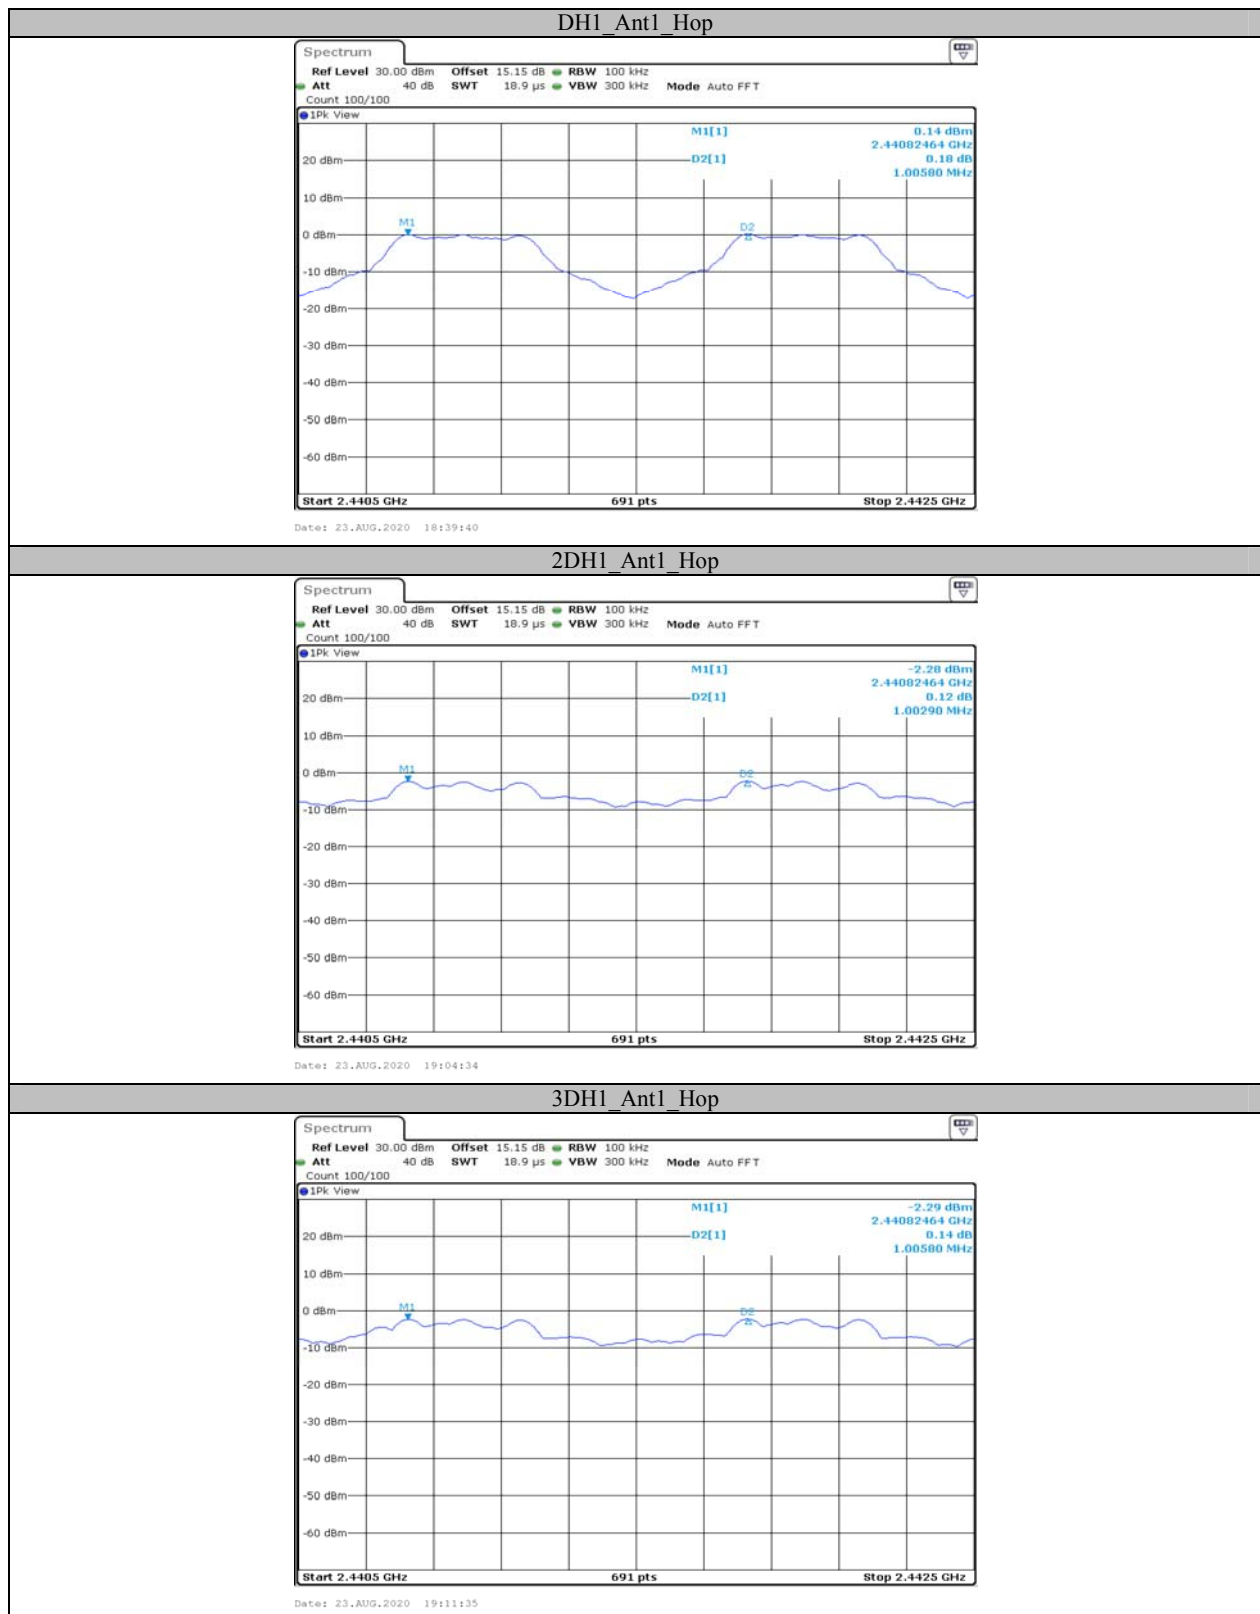

Appendix E: Time of occupancy**Test Result**


Test Mode	Antenna	Channel	Burst Width [ms]	Total Hops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.39	320	0.124	<=0.4	PASS
DH3	Ant1	Hop	1.64	110	0.180	<=0.4	PASS
DH5	Ant1	Hop	2.88	80	0.230	<=0.4	PASS
2DH1	Ant1	Hop	0.40	320	0.129	<=0.4	PASS
2DH3	Ant1	Hop	1.65	90	0.148	<=0.4	PASS
2DH5	Ant1	Hop	2.89	100	0.289	<=0.4	PASS
3DH1	Ant1	Hop	0.40	300	0.121	<=0.4	PASS
3DH3	Ant1	Hop	1.65	120	0.197	<=0.4	PASS
3DH5	Ant1	Hop	2.89	90	0.260	<=0.4	PASS


Note 1: A period time= $0.4 \times 79 = 31.6(S)$, Result=Burst Width*Total hops

Note 2: Total hops=Hopping Number in 3.16s*10



Note 3: Hopping Number in 3.16s=Total of highest signals in 3.16s (Second high signals were other channel)


Test Graphs

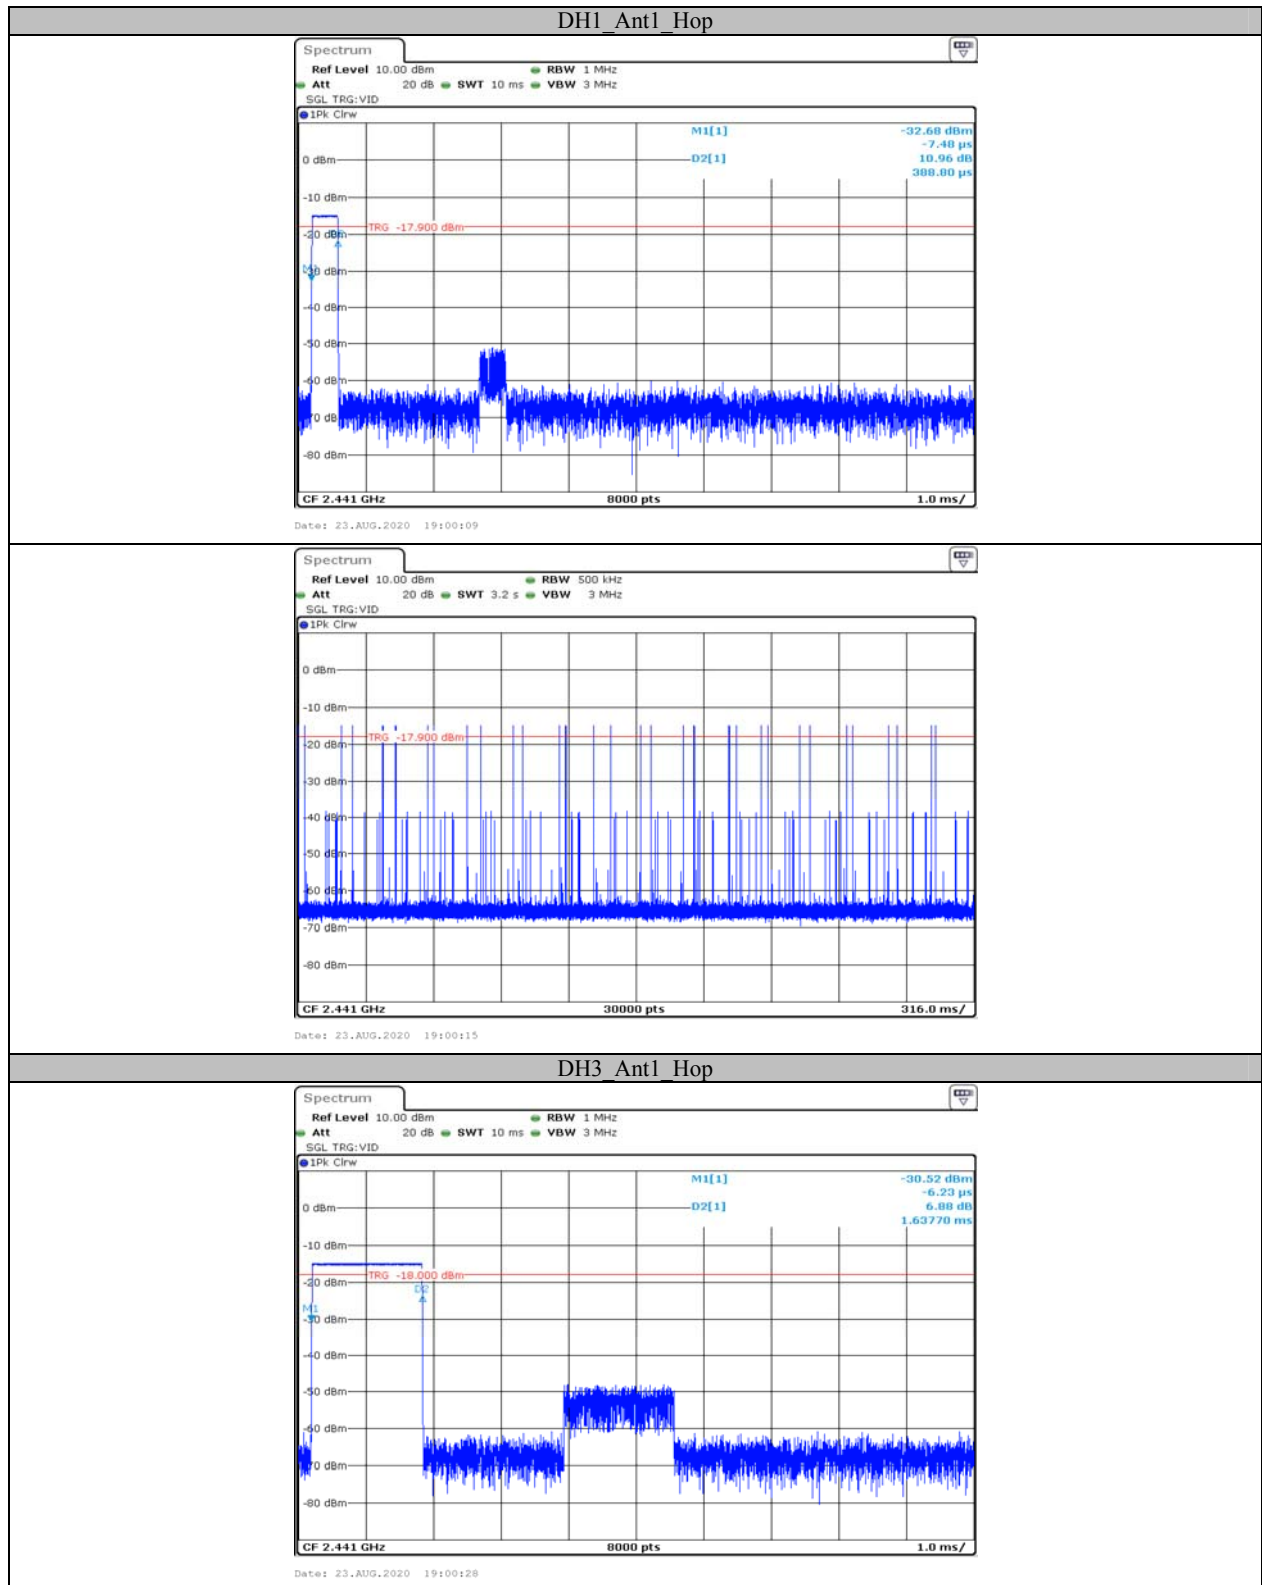


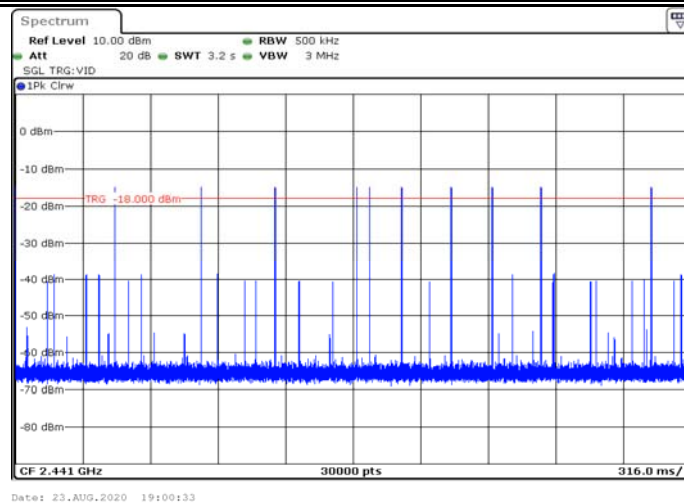



DH5 Ant1 Hop

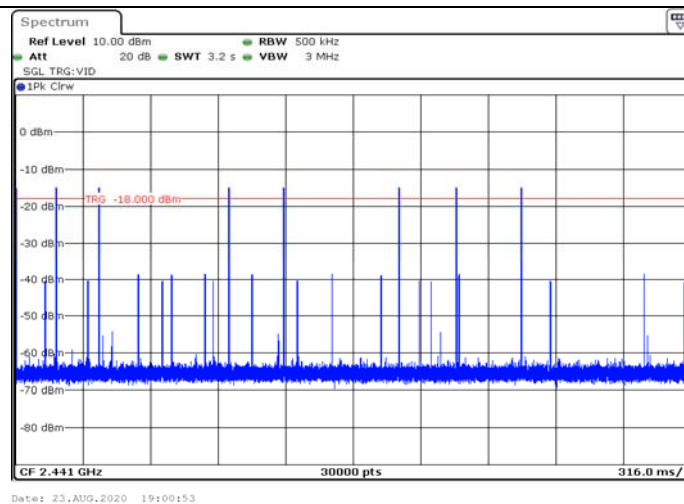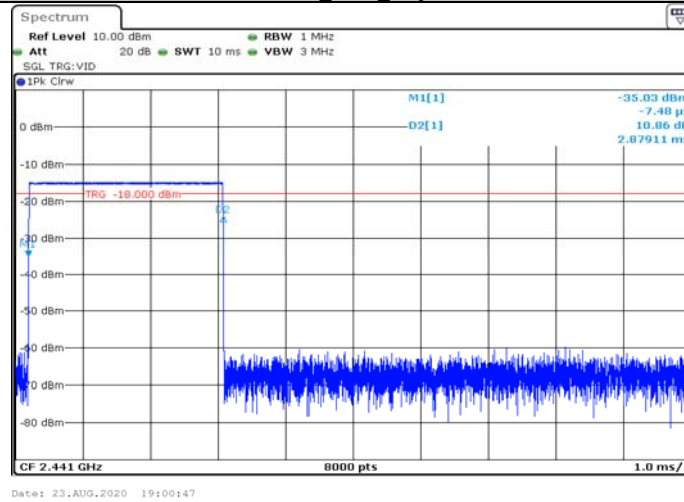


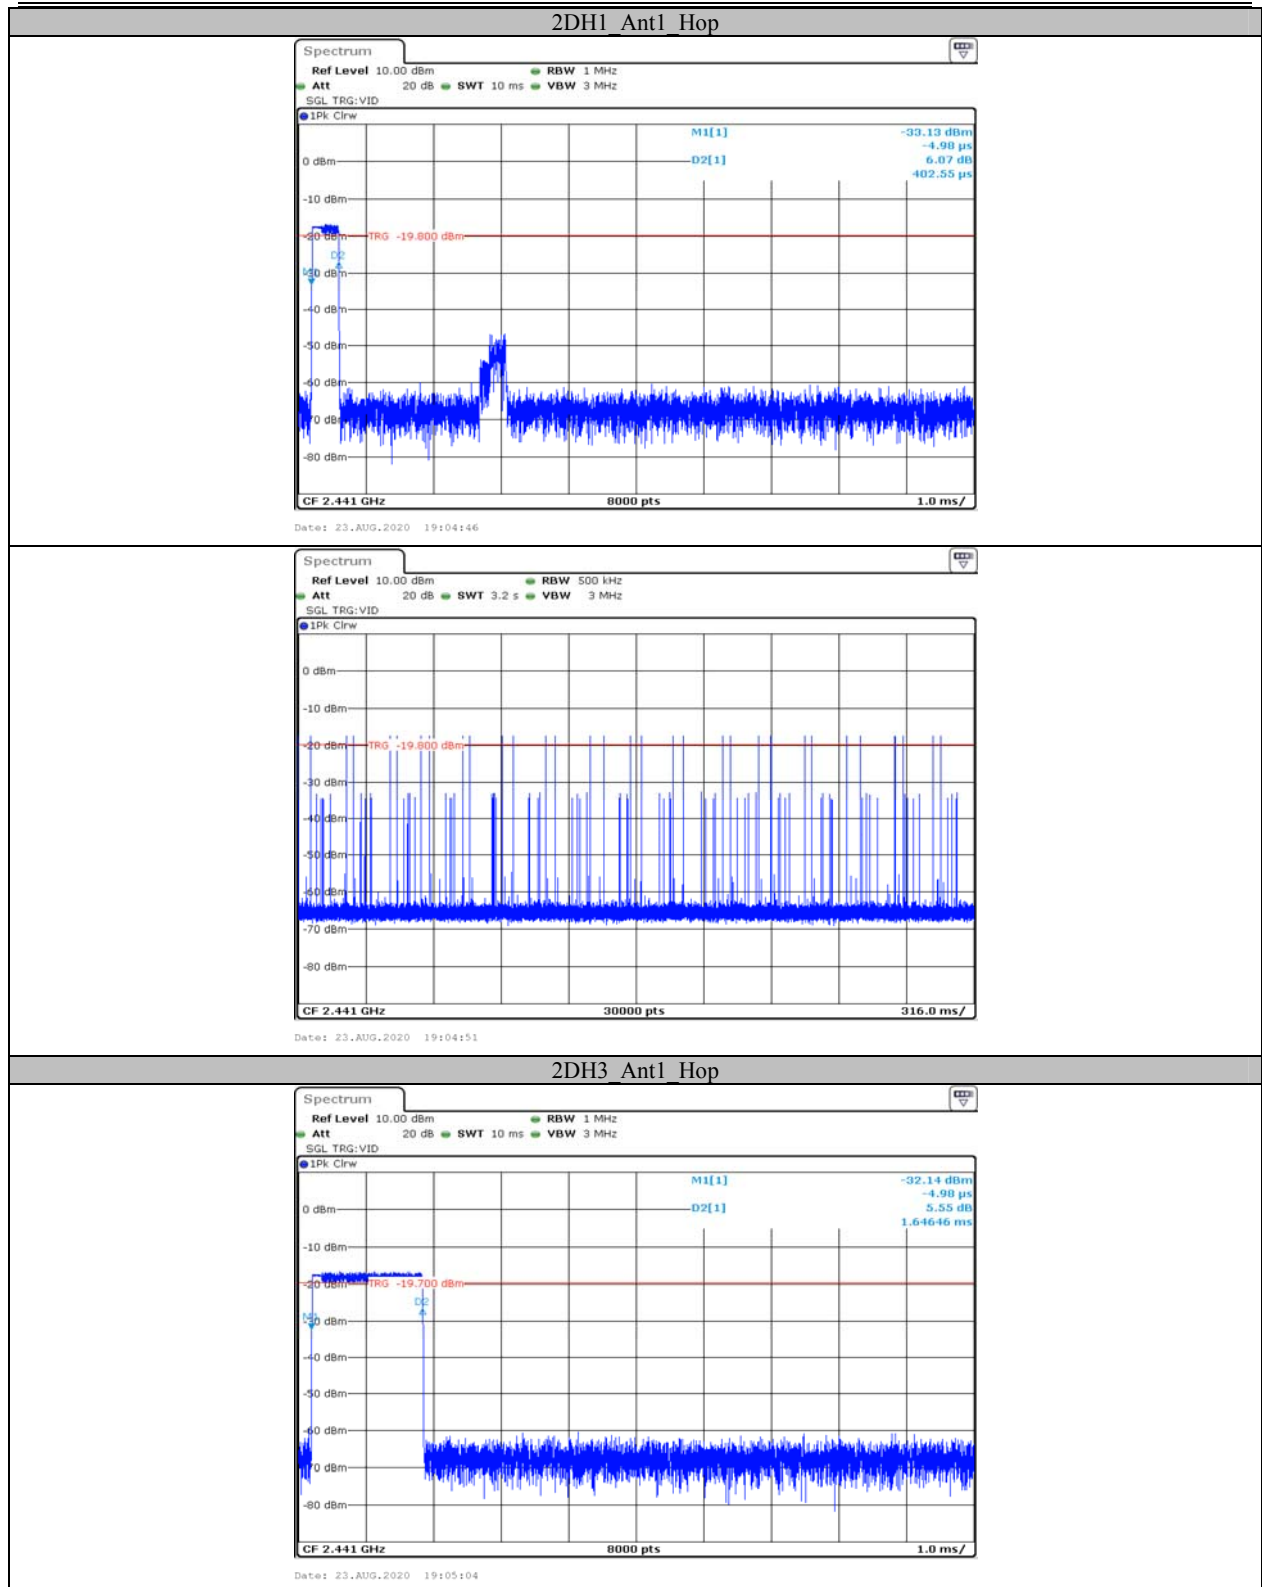


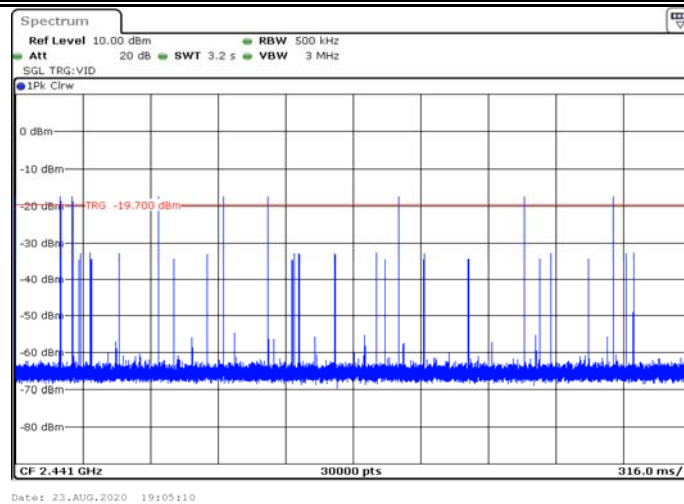



2DH5 Ant1 Hop

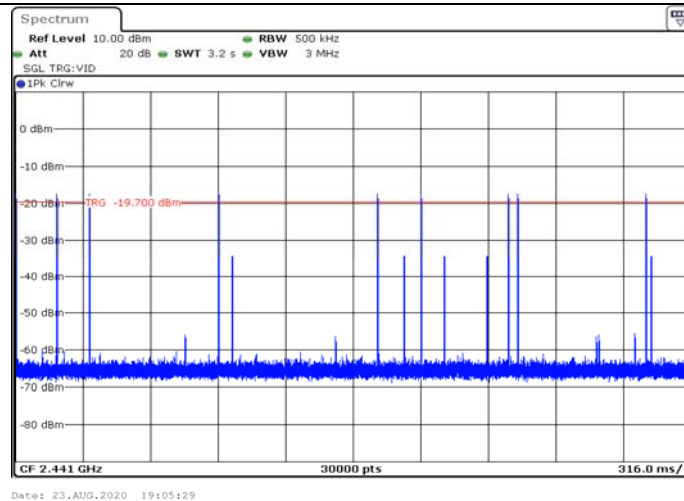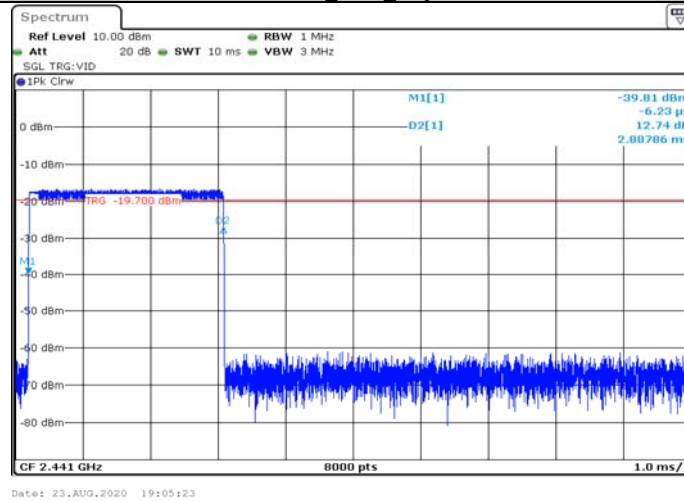

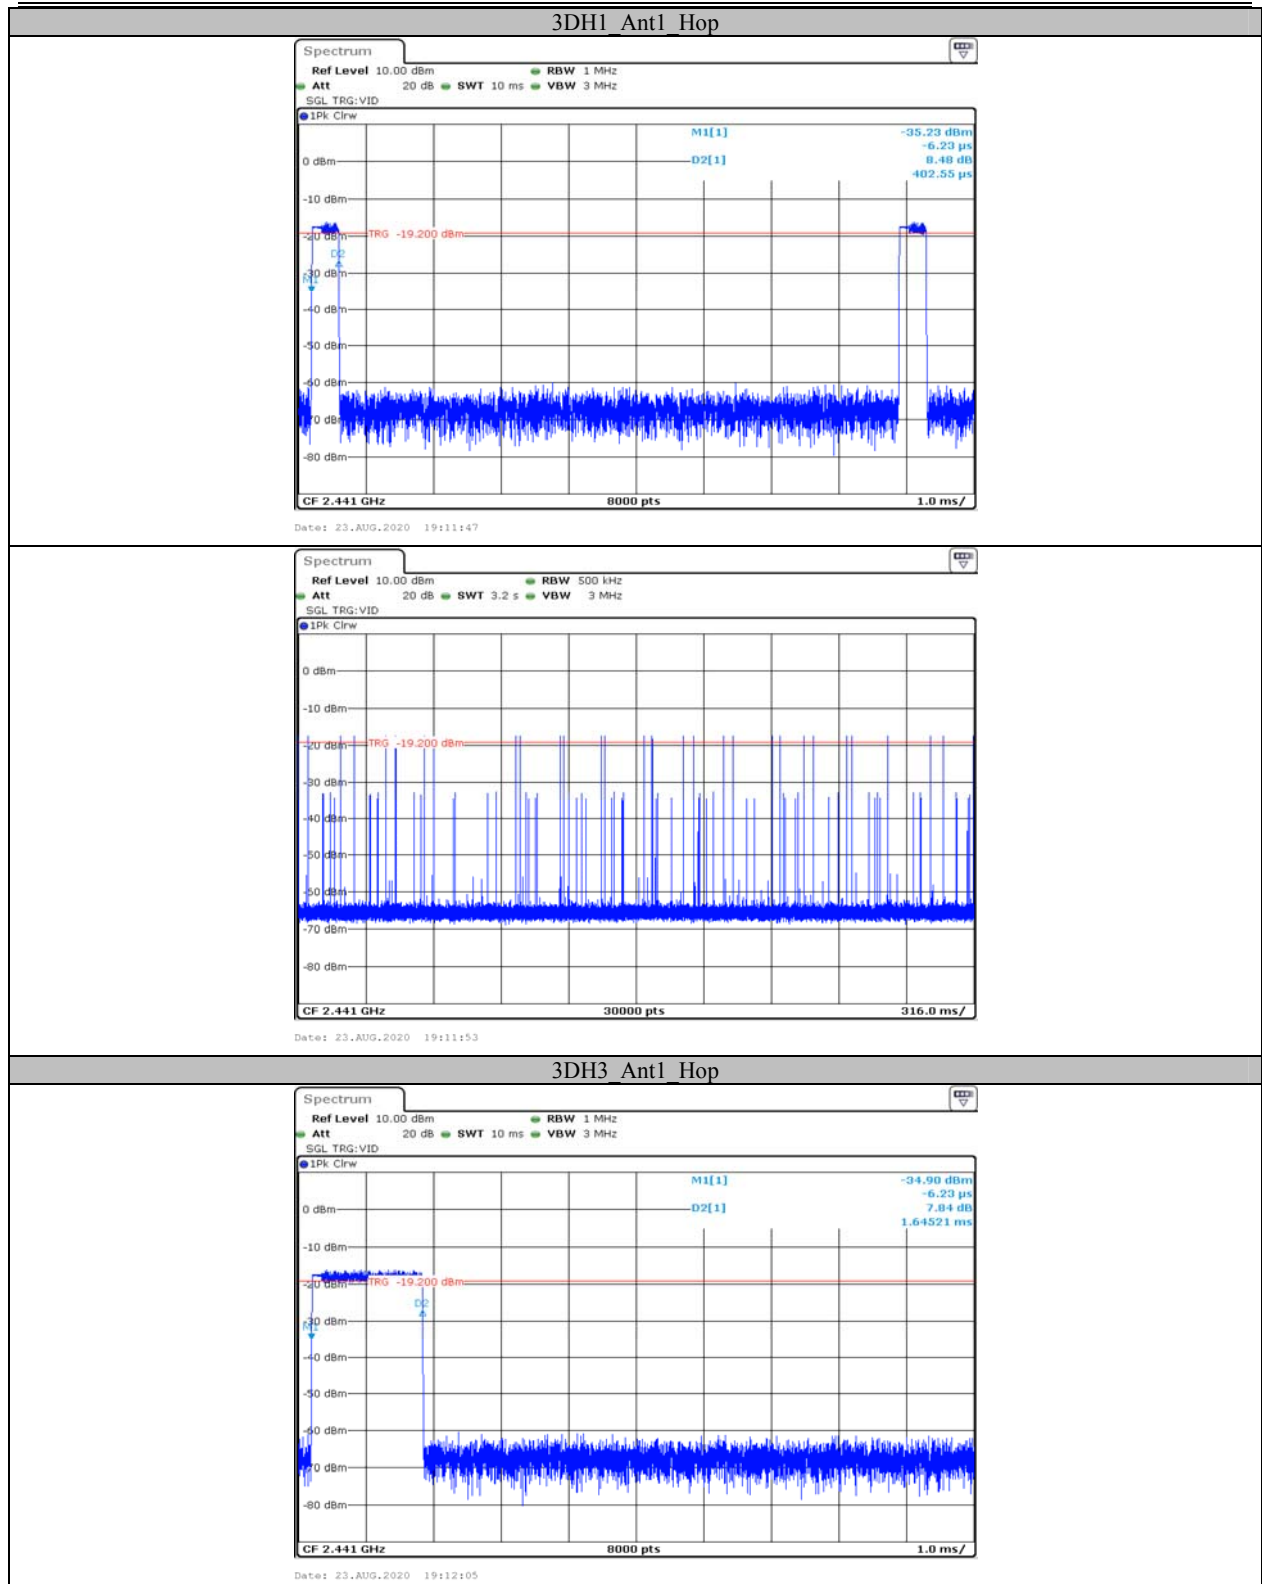

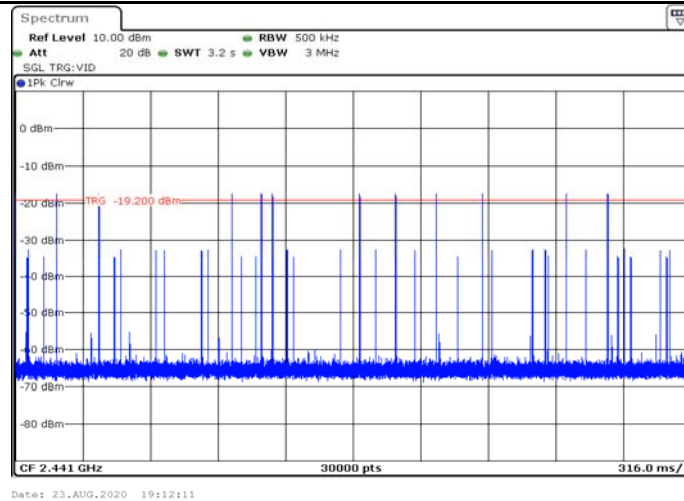

3DH5 Ant1 Hop

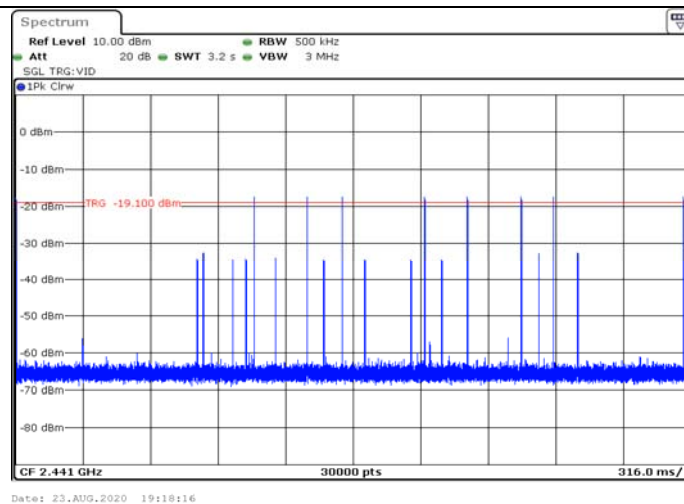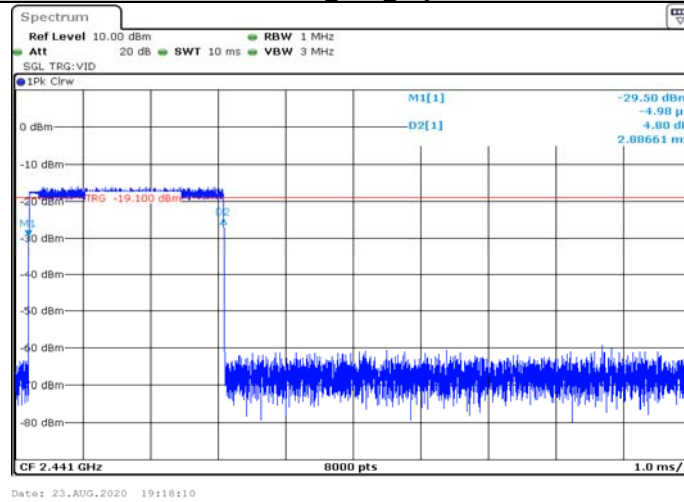


Appendix F: Number of hopping channels**Test Result**


Test Mode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH1	Ant1	Hop	79	≥ 15	PASS
2DH1	Ant1	Hop	79	≥ 15	PASS
3DH1	Ant1	Hop	79	≥ 15	PASS

Test Graphs

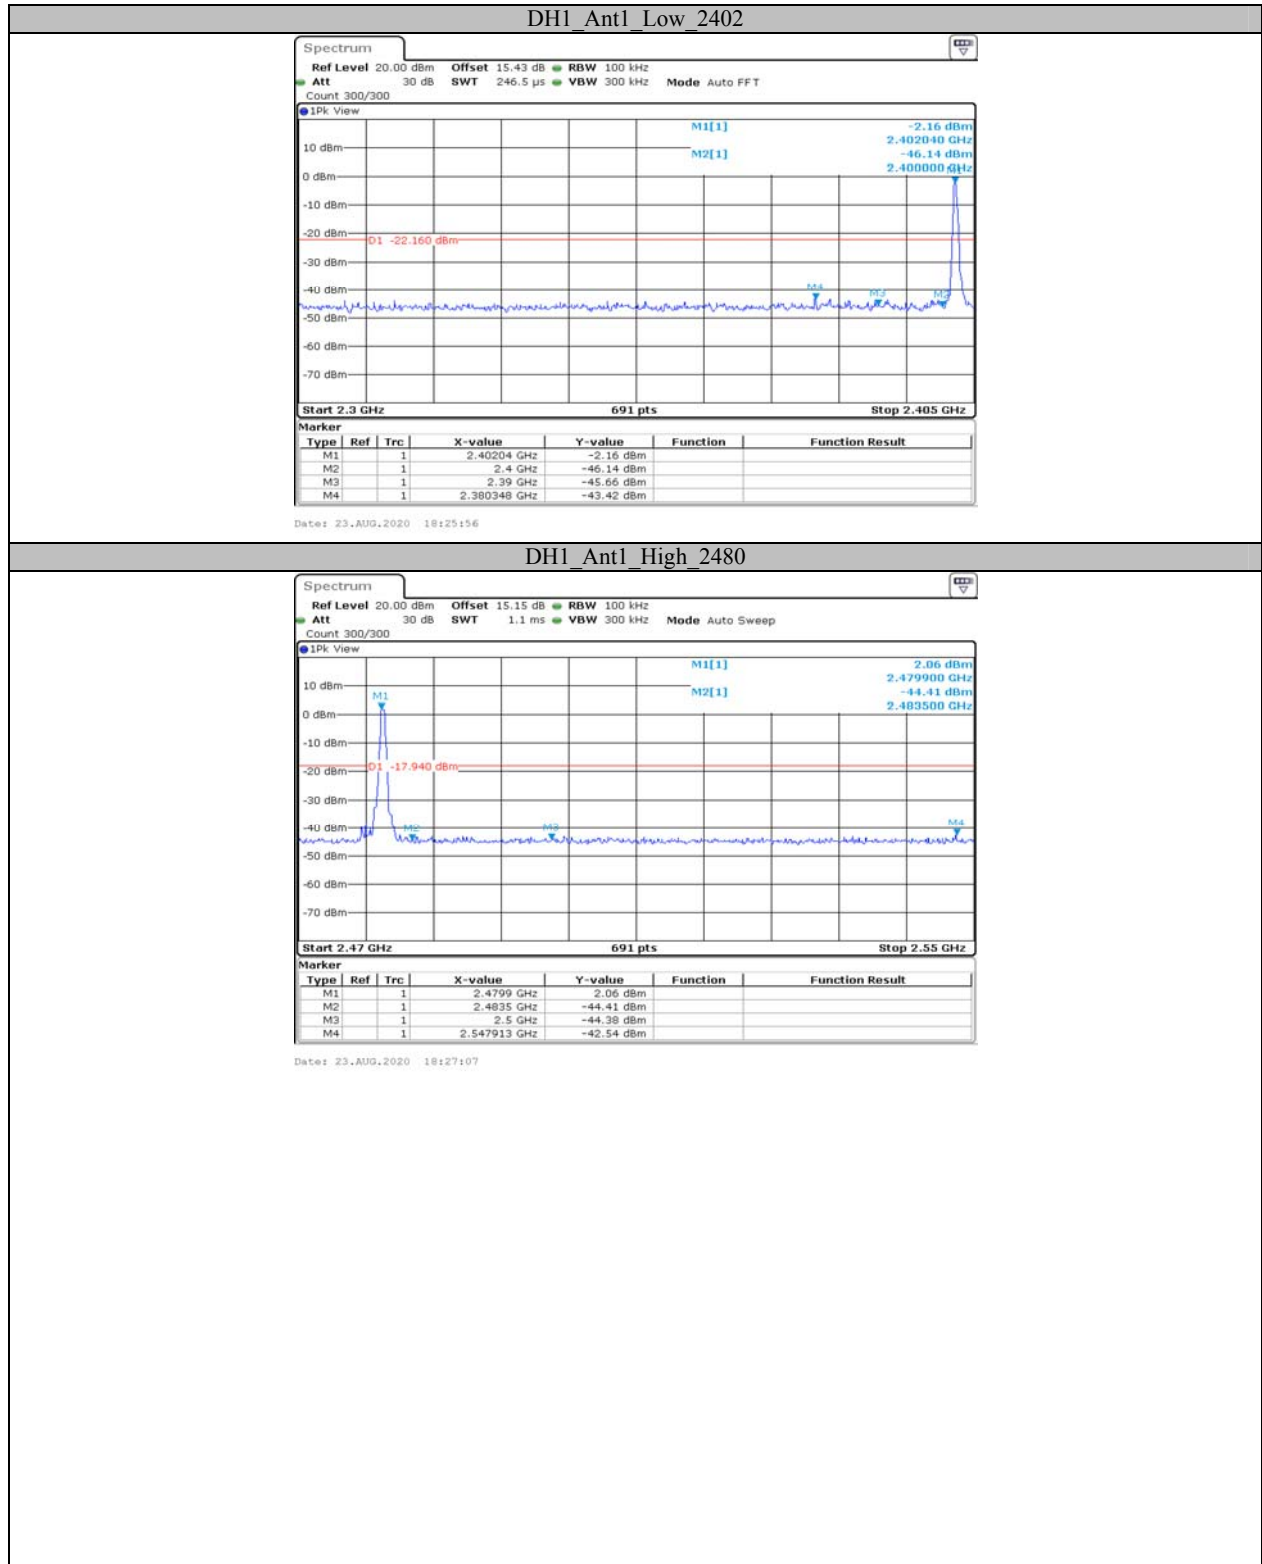


Appendix G: Band edge measurements**Test Graphs**

DH1 Ant1 Low Hop 2402

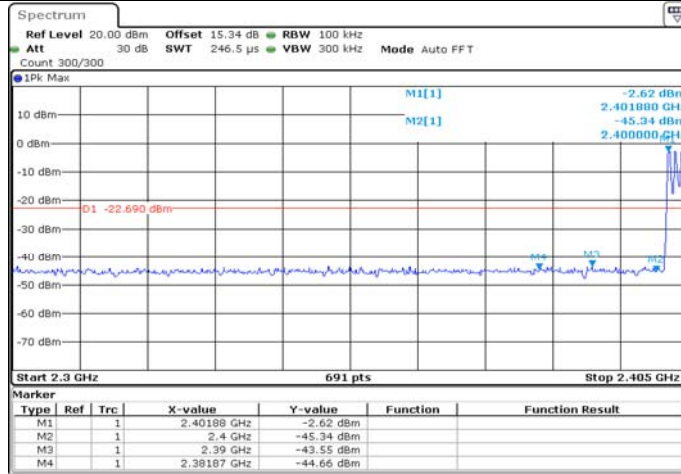


Date: 23.AUG.2020 18:59:57

DH1_Ant1_High_Hop_2480

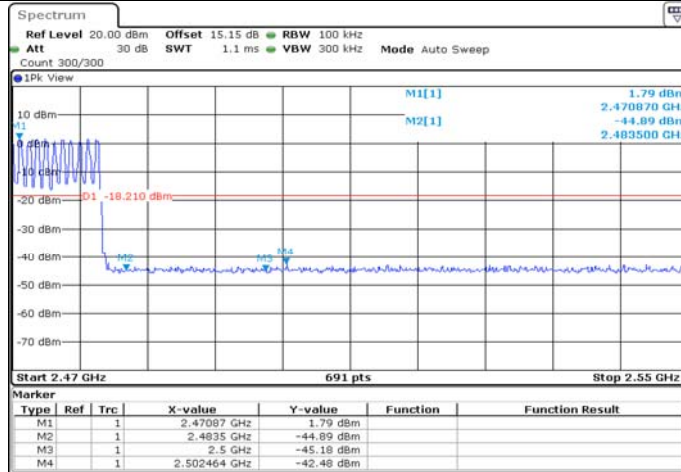


Date: 23.AUG.2020 19:01:02

2DH1 Ant1 Low 2402

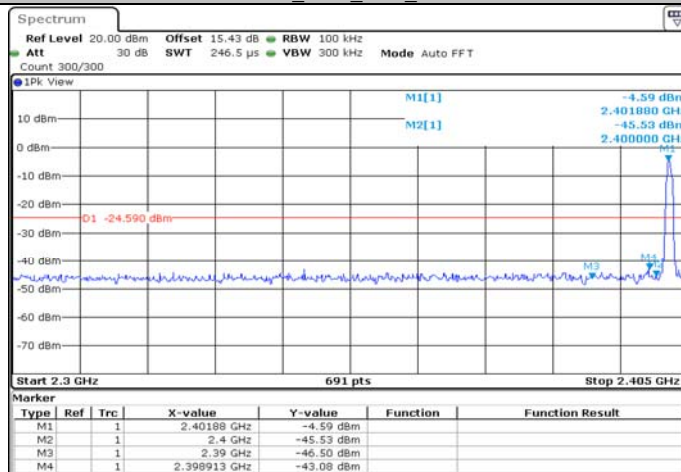


Date: 23.AUG.2020 18:27:48


2DH1 Ant1 High 2480

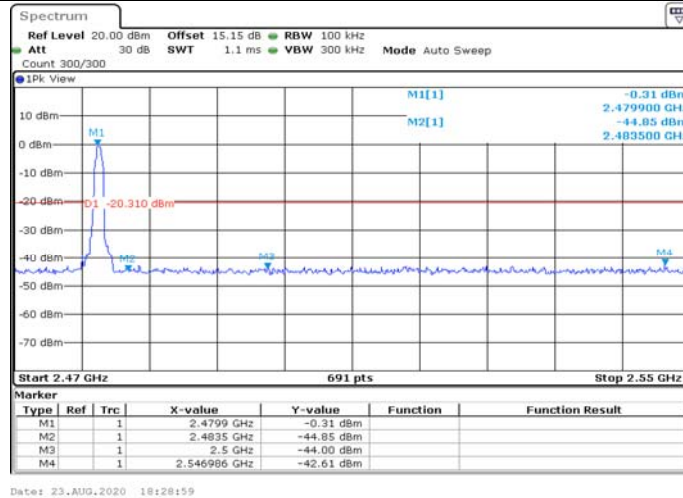


2DH1 Ant1 Low Hop 2402

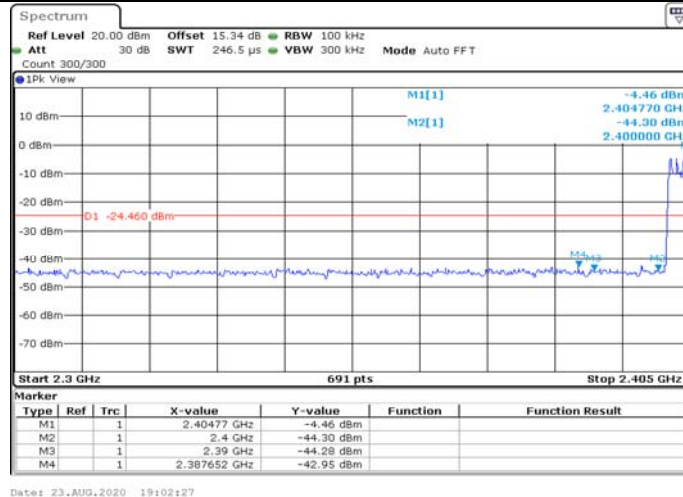

2DH1 Ant1 High Hop 2480

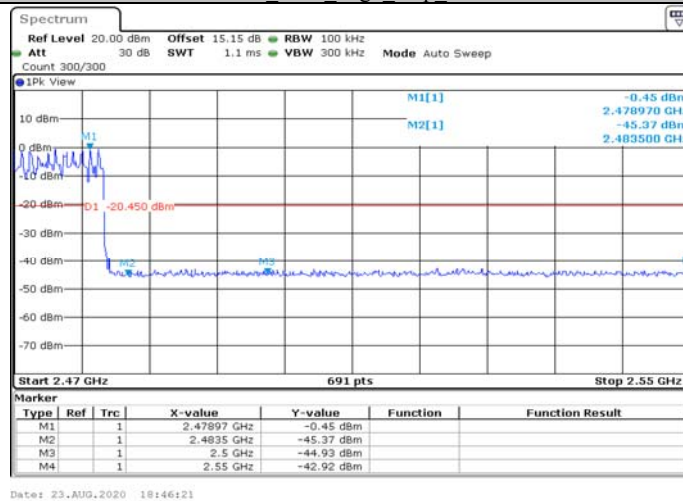


3DH1_Ant1_Low_2402

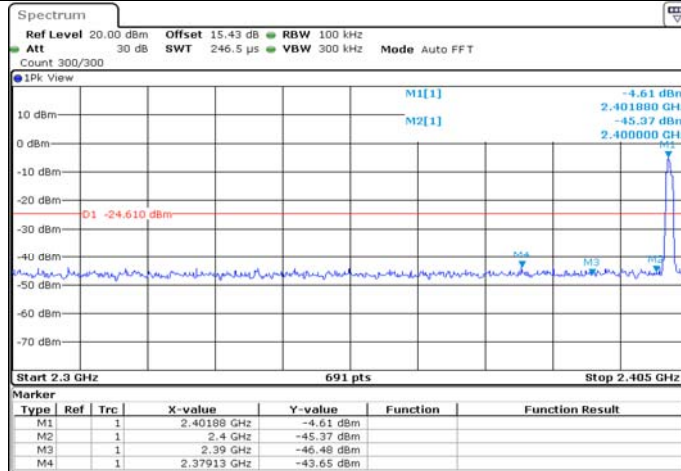

Date: 23.AUG.2020 18:35:50

3DH1_Ant1_High_2480

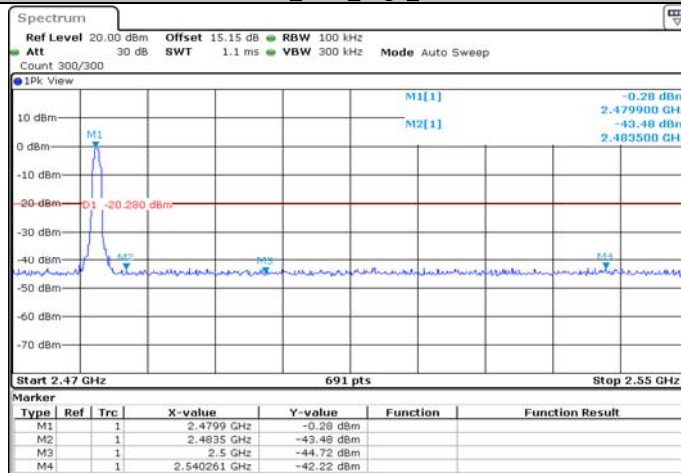


Date: 23.AUG.2020 18:57:27

3DH1_Ant1_Low_Hop_2402



Date: 23.AUG.2020 19:06:50

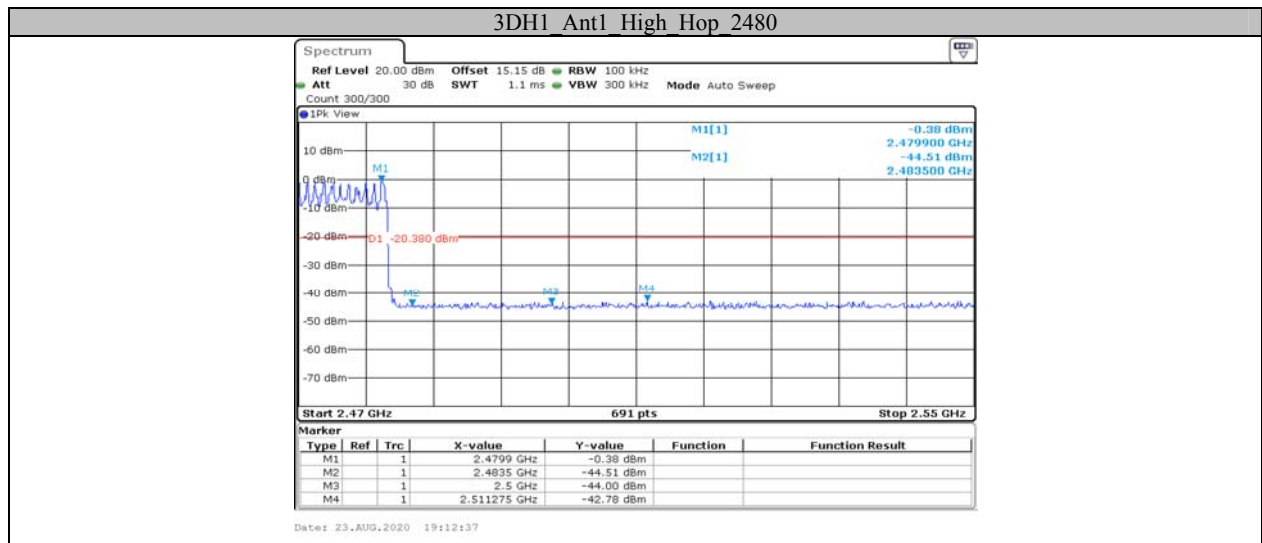

***** END OF REPORT *****