

ATC

TEST REPORT

Applicant Name :

YEALINK (XIAMEN) NETWORK TECHNOLOGY CO., LTD.

Address :

FCC: 309, 3rd Floor, No.16, Yun Ding North Road, Huli District, Xiamen City, Fujian, China

ISEDC: 309, 3rd Floor, No.16, Yun Ding North Road, Huli District Xiamen City Fujian 361008 China (Peoples Republic Of)

Report Number :

SZNS220428-17358E-RFBA1

FCC ID:

T2C-YL430132

IC:

10741A-YL430132

Test Standard (s)

FCC PART 15.247; RSS-GEN ISSUE 5, FEBRUARY 2021 AMENDMENT 2; RSS-247, ISSUE 2, FEBRUARY 2017

Sample Description

Product Type: Module

Model No.: YL430132

Multiple Model(s) No.: N/A

Trade Mark: YEALINK

Date Received: 2022/04/28

Report Date: 2022/06/16

Test Result: Pass*

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:**Approved By:**Andy Yu
EMC EngineerRobert Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk “**”. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
OBJECTIVE	3
TEST METHODOLOGY	3
MEASUREMENT UNCERTAINTY.....	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION	5
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
TEST EQUIPMENT LIST	9
FCC §15.247 (I) &§1.1307 (B) (3) - RF EXPOSURE EVALUATION.....	10
APPLICABLE STANDARD	10
RESULT	10
RSS-102 § 2.5.2 –EXEMPTION LIMITS FOR ROUTINE EVALUATION-RF EXPOSURE EVALUATION	11
APPLICABLE STANDARD	11
CALCULATED DATA:.....	11
§15.203 & RSS-GEN §6.8 ANTENNA REQUIREMENT.....	12
APPLICABLE STANDARD	12
ANTENNA CONNECTOR CONSTRUCTION	13
§15.207 (A) & RSS-GEN §8.8 AC LINE CONDUCTED EMISSIONS	14
APPLICABLE STANDARD	14
EUT SETUP.....	15
EMI TEST RECEIVER SETUP.....	15
TEST PROCEDURE	15
CORRECTED FACTOR & MARGIN CALCULATION	16
TEST DATA	16
§15.205, §15.209, §15.247(D) & RSS-GEN § 8.10 & RSS-247 § 5.5 SPURIOUS EMISSIONS.....	19
APPLICABLE STANDARD	19
EUT SETUP	19
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	20
TEST PROCEDURE	21
FACTOR & MARGIN CALCULATION	21
TEST DATA	21

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

HVIN	YL430132
FVIN	0.0.1.0
Frequency Range	BLE 1M: 2402-2480MHz Wi-Fi: 2412-2462MHz
Maximum Conducted Peak Output Power	BLE: 11.76dBm Wi-Fi: 17.02dBm(802.11b), 18.25dBm(802.11g) 18.26dBm(802.11n20)
Modulation Technique	BLE: GFSK Wi-Fi: DSSS, OFDM
Antenna Specification*	3.0dBi (It is provided by the manufacturer)
Voltage Range	DC 3.3V
Sample number	SZNS220428-17358E-RFA1-S1 (Assigned by ATC)
Sample/EUT Status	Good condition

Objective

This report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules and RSS-GEN Issue 5, February 2021 Amendment 2 and RSS-247, Issue 2, February 2017 of the Innovation, Science and Economic Development Canada rules.

This a Class II permissive change of the device, the differences between the original device and the current device are as follows:

(1) Adding a kind of antenna..

Based on above differences listed, the modifications will impact the test item of "RF Exposure Evaluation", "Antenna Requirement", "AC Line Conducted Emissions" and "Spurious Emissions", so in this report, we will updated those items and related photos, the other test data and photos please refer to the original report.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliant Testing of Unlicensed Wireless Devices and RSS-GEN Issue 5, February 2021 Amendment 2 and RSS-247, Issue 2, February 2017.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter	Uncertainty	
Occupied Channel Bandwidth	5%	
RF Frequency	0.082×10^{-7}	
RF output power, conducted	0.73dB	
Unwanted Emission, conducted	1.6dB	
AC Power Lines Conducted Emissions	2.72dB	
Emissions, Radiated	9kHz - 30MHz	2.66dB
	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
	26.5GHz - 40GHz	4.72dB
Temperature	1°C	
Humidity	6%	
Supply voltages	0.4%	

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 802.11b, 802.11g, 802.11n-HT20 mode, total 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	/	/
6	2437	/	/
7	2442	/	/

For 802.11b, 802.11g, 802.11n-HT20, EUT was tested with Channel 1, 6, 11.

For BLE 1M mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

“AuthenticTool”* exercise software was used. The software and power level was provided by the applicant.

The device was tested with the worst case was performed as below:

Mode	Data rate	Power Level*		
		Low Channel	Middle Channel	High Channel
802.11b	1Mbps	16	16	16
802.11g	6Mbps	11	11	11
802.11n-HT20	MCS0	11	11	11
BLE	1Mbps	Default	Default	Default

The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the average power, peak power and PSD across all data rates, bandwidths and modulations.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
YEALINK	Test fixer	Unknown	Unknown
YEALINK	POE	YLPOE30	SU10551


External I/O Cable

Cable Description	Length (m)	From Port	To
Un-shielding Un-Detachable RJ45 Cable	6.0	POE	Test fixer
Un-shielding Detachable AC Cable	1.5	LISN	POE


Block Diagram of Test Setup

For conducted emission

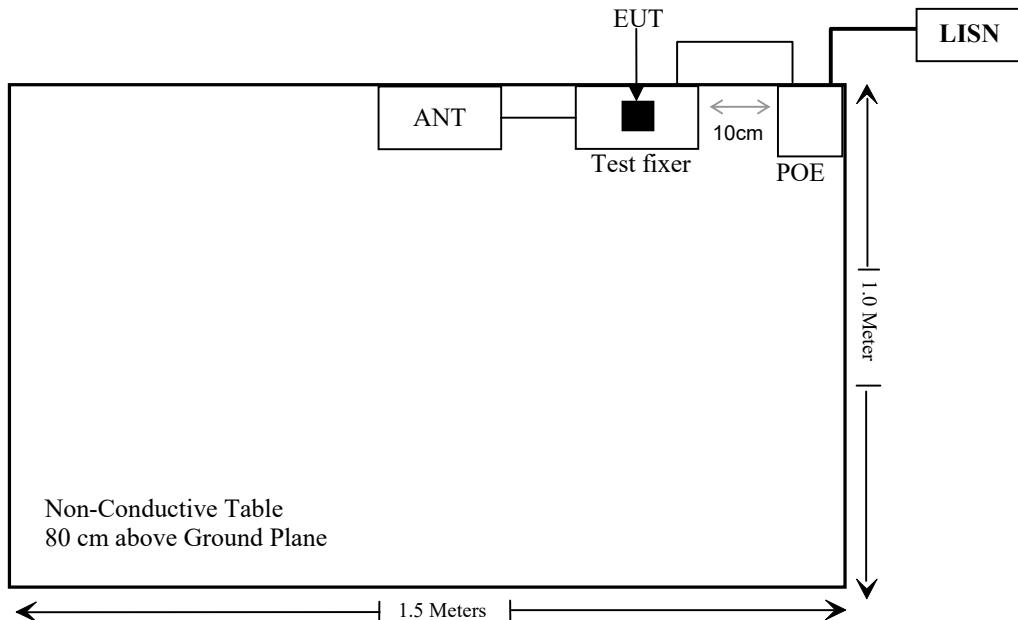For conducted emission



For Radiated Emissions:

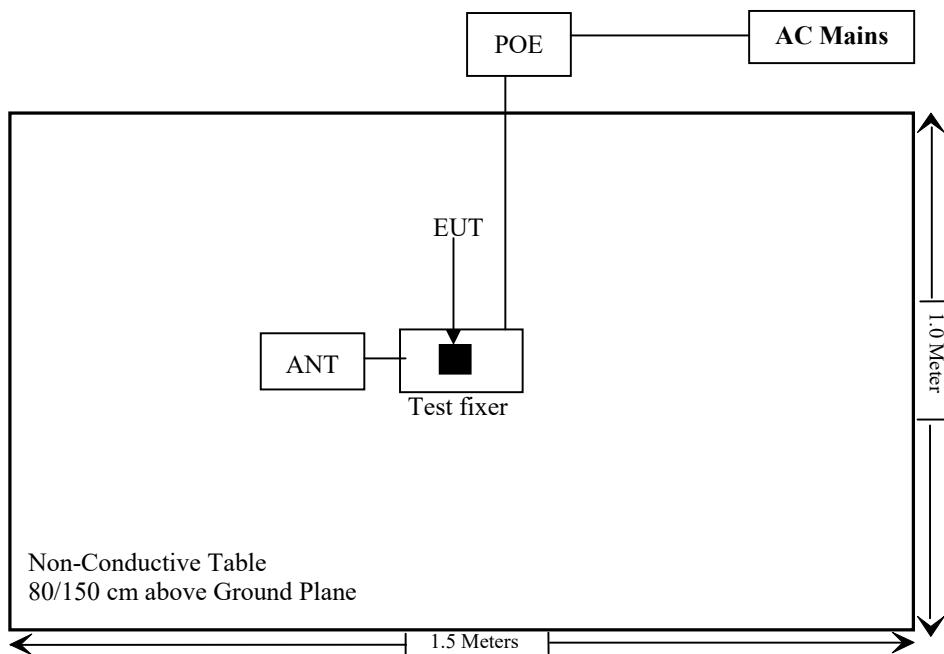

SUMMARY OF TEST RESULTS

FCC Rules	RSS Rules	Description of Test	Result
§15.247 (i) &§1.1307 (b) (3)	§ 2.5.2	RF Exposure Evaluation & Exemption Limits For Routine Evaluation-RF Exposure Evaluation	Compliant
§15.203	RSS-Gen §6.8	Antenna Requirement	Compliant
§15.207 (a)	RSS-Gen §8.8	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	RSS-GEN § 8.10 & RSS-247 § 5.5	Spurious Emissions	Compliant
§15.247 (a)(2)	RSS- Gen§6.7 RSS-247 § 5.2 (a)	99% Occupied Bandwidth & 6 dB Emission Bandwidth	Compliant*
§15.247(b)(3)	RSS-247 § 5.4(d)	Maximum Conducted Output Power	Compliant*
§15.247(d)	RSS-247 § 5.5	100 kHz Bandwidth of Frequency Band Edge	Compliant*
§15.247(e)	RSS-247 § 5.2 (b)	Power Spectral Density	Compliant*

Compliant*:For BLE: Please refer to the original report GZCR211002125802 with FCC ID: T2C-YL430132 and GZCR211002125902 with IC: 10741A-YL430132,which tested and granted by SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch.

For Wi-Fi: Please refer to the original report GZCR211002125803 with FCC ID: T2C-YL430132 and GZCR211002125903 with IC: 10741A-YL430132,which tested and granted by SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted emission test					
Rohde& Schwarz	EMI Test Receiver	ESCI	100784	2021/12/13	2022/12/12
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2021/12/13	2022/12/12
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2021/12/13	2022/12/12
Unknown	RF Coaxial Cable	No.17	N0350	2021/12/14	2022/12/13
Conducted Emission Test Software: e3 19821b (V9)					
Radiated emission					
Rohde& Schwarz	Test Receiver	ESR	102725	2021/12/13	2022/12/12
Rohde&Schwarz	Spectrum Analyzer	FSV40	101949	2021/12/13	2022/12/12
SONOMA INSTRUMENT	Amplifier	310 N	186131	2021/11/09	2022/11/08
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2021/11/09	2022/11/08
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2021/11/11	2022/11/10
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Radiated Emission Test Software: e3 19821b (V9)					
Unknown	RF Coaxial Cable	No.10	N050	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.11	N1000	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.12	N040	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.13	N300	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.14	N800	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.15	N600	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.16	N650	2021/12/14	2022/12/13
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2021/12/14	2022/12/13

*** Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) &§1.1307 (b) (3) - RF EXPOSURE EVALUATION

Applicable Standard

According to subpart 15.247 (i) and §1.1307(b) (3), systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 Interim General RF Exposure Guidance

SAR-Based Exemption:

SAR-based thresholds are derived based on frequency, power, and separation distance of the RF source. The formula defines the thresholds in general for either available maximum timeaveraged power or maximum time-averaged ERP, whichever is greater.

Per § 1.1307(b)(3)(i)(B), for single RF sources (i.e., any single fixed RF source, mobile device, or portable device, as defined in paragraph (b)(2) of this section): A single RF source is exempt if:

the available maximum time-averaged power or effective radiated power (ERP), whichever is greater, is less than or equal to the threshold P_{th} (mW) described in the following formula. This method shall only be used at separation distances (cm) from 0.5 centimeters to 40 centimeters and at frequencies from 0.3 GHz to 6 GHz (inclusive). P_{th} is given by:

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases}$$

Where

$$x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right) \text{ and } f \text{ is in GHz;}$$

and

$$ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases}$$

d = the separation distance (cm);

Result

Mode	Frequency (MHz)	P_{th}		Maximum tune-up conducted power	Maximum ERP	Exemption
		(mW)	(dBm)			
BLE	2402-2480	3060	34.86	12.0	12.85	Compliant
2.4G Wi-Fi	2412-2462	3060	34.86	18.5	19.35	Compliant

Note: 1. The tune up conducted power was declared by the applicant.
 2. The antenna gain is 3dBi(0.85dBd), so the ERP was used for evaluation.
 3. The Wi-Fi and Bluetooth can't transmit simultaneously.
 4. To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant.

RSS-102 § 2.5.2 –EXEMPTION LIMITS FOR ROUTINE EVALUATION-RF EXPOSURE EVALUATION

Applicable Standard

According to RSS-102 § (2.5.2):

2.5.2 Exemption Limits for Routine Evaluation — RF Exposure Evaluation

RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:

- below 20 MHz⁶ and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 1 W (adjusted for tune-up tolerance);
- at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $22.48/f^{0.5}$ W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance);
- at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $1.31 \times 10^{-2} f^{0.6834}$ W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 5 W (adjusted for tune-up tolerance).

In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the e.i.r.p. was derived.

Calculated Data:

For worst case:

Mode	Frequency (MHz)	Maximum tune-up conducted power	Antenna Gain (dBi)	Maximum tune-up EIRP		Evaluation Distance (cm)	Limit (W)
		(dBm)		(dBm)	(W)		
BLE	2402-2480	12.0	3	15.0	0.032	20	2.68
Wi-Fi	2412-2462	18.5	3	21.5	0.141	20	2.68

Note: The Wi-Fi and Bluetooth can't transmit simultaneously.

Result: The RF Exposure evaluation can be exempted.

§ 15.203 & RSS-Gen §6.8 ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Connector Construction

The EUT has one FPC antenna arrangement which was integrated on the main PCB use the MHF-Type connector and no consideration of replacement, fulfill the requirement of this section.

Antenna Type	Antenna Gain	Impedance	Frequency Range
FPC	3.0 dBi	50 Ω	2.4~2.5GHz

Result: Compliant

§ 15.207 (a) & RSS-GEN §8.8 AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC § 15.207 (a) & RSS-GEN §8.8

Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in table 4, as measured using a 50 μ H / 50 Ω line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.

For an EUT that connects to the AC power lines indirectly, through another device, the requirement for compliance with the limits in table 4 shall apply at the terminals of the AC power-line mains cable of a representative support device, while it provides power to the EUT. The lower limit applies at the boundary between the frequency ranges. The device used to power the EUT shall be representative of typical applications.

Table 4 - AC Power Lines Conducted Emission Limits


Frequency range (MHz)	Conducted limit (dB μ V)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56 ¹	56 to 46 ¹
0.5 – 5	56	46
5 – 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

For an EUT with a permanent or detachable antenna operating between 150 kHz and 30 MHz, the AC power-line conducted emissions must be measured using the following configurations:

- (a) Perform the AC power-line conducted emissions test with the antenna connected to determine compliance with the limits of table 4 outside the transmitter's fundamental emission band.
- (b) Retest with a dummy load instead of the antenna to determine compliance with the limits of table 4 within the transmitter's fundamental emission band. For a detachable antenna, remove the antenna and connect a suitable dummy load to the antenna connector. For a permanent antenna, remove the antenna and terminate the RF output with a dummy load or network that simulates the antenna in the fundamental frequency band.

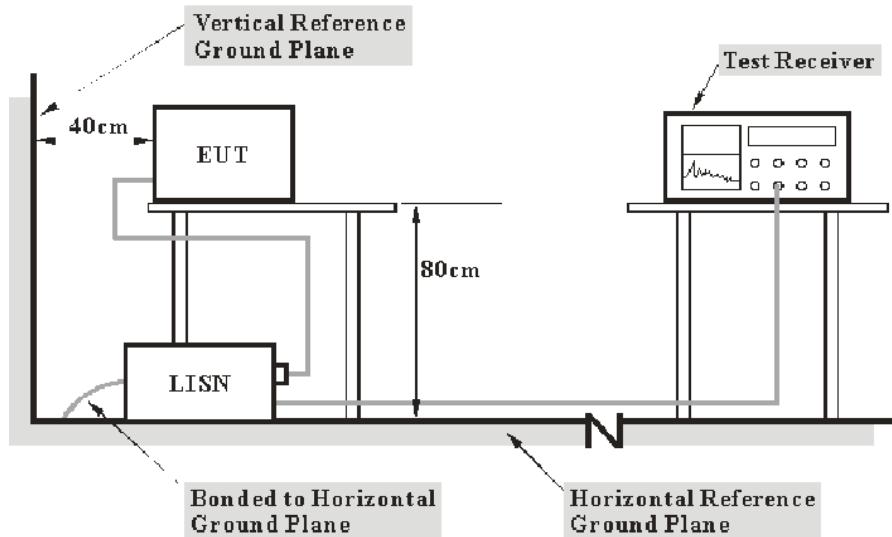EUT Setup



Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 & RSS-247/RSS-Gen limits.

The spacing between the peripherals was 10 cm.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “Over limit” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$


Test Data

Environmental Conditions

Temperature:	23 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Jason Liu on 2022-06-06.

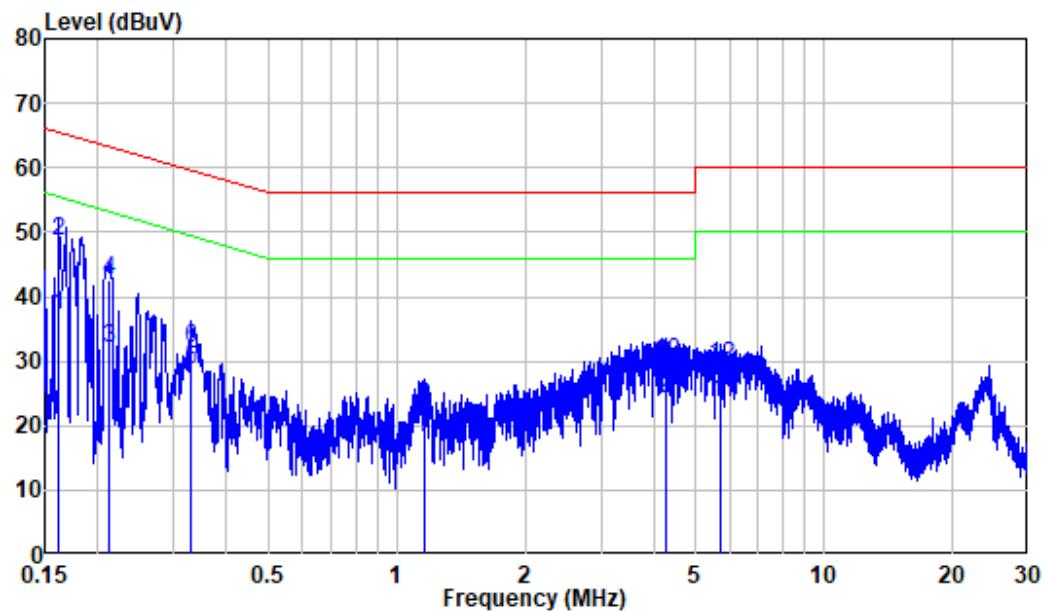EUT operation mode: Transmitting (worst case is 802.11n20 mode, high channel)

AC 120V/60 Hz, Line

Site : Shielding Room


Condition: Line

Mode : 2.4G WIFI

Model : YL430132

Power : AC 120V 60Hz

Freq	Factor	Read		Limit		Over Limit	Remark
		MHz	dB	dBuV	dBuV		
1	0.162	9.80	27.47	37.27	55.37	-18.10	Average
2	0.162	9.80	38.67	48.47	65.37	-16.90	QP
3	0.213	9.80	22.32	32.12	53.10	-20.98	Average
4	0.213	9.80	32.79	42.59	63.10	-20.51	QP
5	0.330	9.80	18.78	28.58	49.45	-20.87	Average
6	0.330	9.80	22.32	32.12	59.45	-27.33	QP
7	1.164	9.81	8.41	18.22	46.00	-27.78	Average
8	1.164	9.81	13.25	23.06	56.00	-32.94	QP
9	4.266	9.84	14.22	24.06	46.00	-21.94	Average
10	4.266	9.84	19.99	29.83	56.00	-26.17	QP
11	5.744	9.86	13.55	23.41	50.00	-26.59	Average
12	5.744	9.86	19.32	29.18	60.00	-30.82	QP

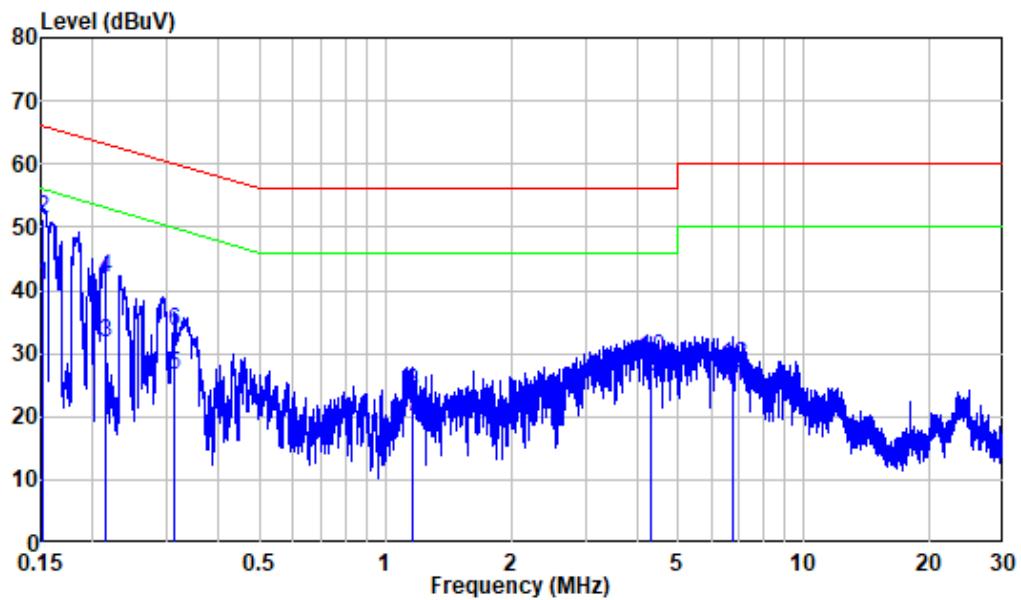AC 120V/60 Hz, Neutral

Site : Shielding Room

Condition: Neutral

Mode : 2.4G WIFI

Model : YL430132

Power : AC 120V 60Hz

	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
1	0.151	9.80	30.90	40.70	55.94	-15.24	Average
2	0.151	9.80	41.55	51.35	65.94	-14.59	QP
3	0.214	9.80	21.87	31.67	53.04	-21.37	Average
4	0.214	9.80	32.06	41.86	63.04	-21.18	QP
5	0.314	9.80	16.64	26.44	49.86	-23.42	Average
6	0.314	9.80	23.65	33.45	59.86	-26.41	QP
7	1.162	9.81	10.07	19.88	46.00	-26.12	Average
8	1.162	9.81	13.99	23.80	56.00	-32.20	QP
9	4.306	9.85	16.37	26.22	46.00	-19.78	Average
10	4.306	9.85	19.47	29.32	56.00	-26.68	QP
11	6.747	9.96	14.84	24.80	50.00	-25.20	Average
12	6.747	9.96	18.14	28.10	60.00	-31.90	QP

§15.205, §15.209, §15.247(d) & RSS-GEN § 8.10 & RSS-247 § 5.5 SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

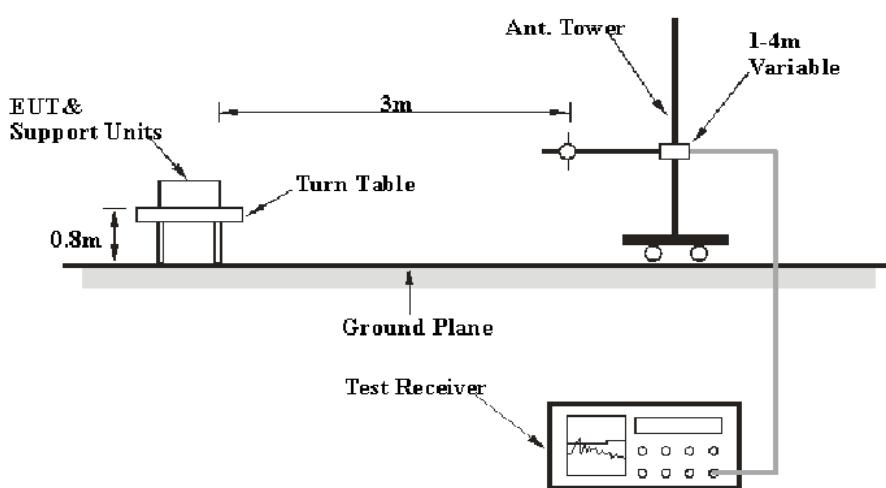
According to RSS-GEN § 8.10 & RSS-247 § 5.5

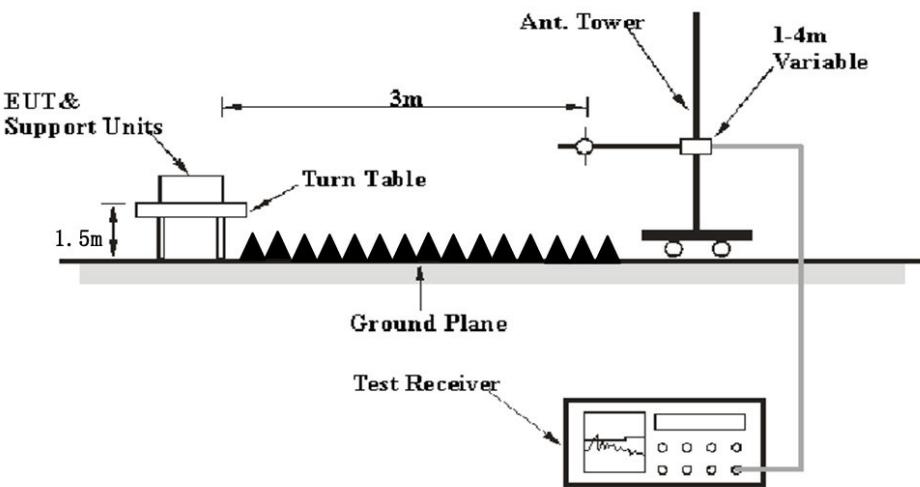
Restricted frequency bands, identified in table 7, are designated primarily for safety-of-life services (distress calling and certain aeronautical activities), certain satellite downlinks, radio astronomy and some government uses. Except where otherwise indicated, the following conditions related to the restricted frequency bands apply:(a) The transmit frequency, including fundamental components of modulation, of licence-exempt radio apparatus shall not fall within the restricted frequency bands listed in table 7 except for apparatus compliant with RSS-287, Emergency Position Indicating Radio Beacons (EPIRB), Emergency Locator Transmitters (ELT), Personal Locator Beacons (PLB), and Maritime Survivor Locator Devices (MSLD).(b) Unwanted emissions that fall into restricted frequency bands listed in table 7 shall comply with the limits specified in table 5 and table 6.(c) Unwanted emissions that do not fall within the restricted frequency bands listed in table 7 shall comply either with the limits specified in the applicable RSS or with those specified in table 5 and table 6.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

EUT Setup

Below 1 GHz:



Above 1GHz:

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013 & RSS-Gen. The specification used was the FCC 15.209, and FCC 15.247 & RSS-Gen limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	>1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.

Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.

Repeat above procedures until all measured frequencies were complete.

Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Over Limit/Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions


Temperature:	28~29 °C
Relative Humidity:	63~64 %
ATM Pressure:	101.0 kPa

The testing was performed by Level Li on 2022-06-01 for below 1GHz and on 2022-06-08 for above 1GHz.

EUT operation mode: Transmitting

30 MHz~1 GHz: (worst case is 802.11n20 mode, midle channel)

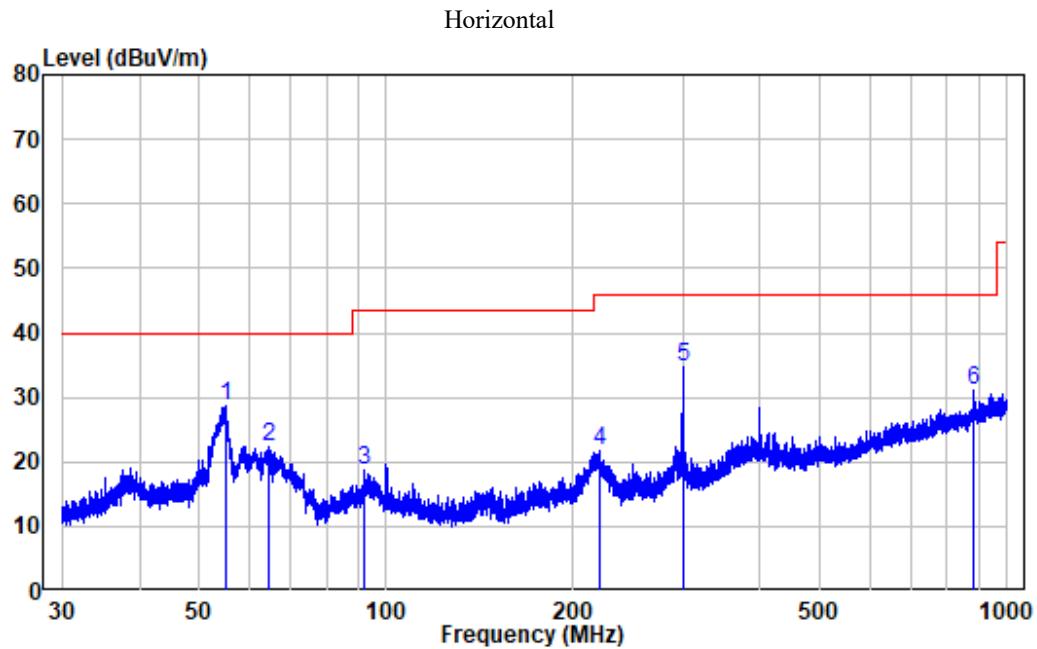Note: When the test result of peak was less than the limit of QP more than 6dB, just peak value were recorded.



Site : chamber


Condition: 3m HORIZONTAL

Job No. : SZNS220428-17358E-RFA1

Test Mode: 2.4G WIFI

Note : POE

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	54.979	-10.28	38.88	28.60	40.00	-11.40	Peak
2	64.574	-12.36	34.72	22.36	40.00	-17.64	Peak
3	92.139	-13.26	31.94	18.68	43.50	-24.82	Peak
4	220.907	-11.38	33.00	21.62	46.00	-24.38	Peak
5	299.973	-9.23	43.83	34.60	46.00	-11.40	Peak
6	884.891	1.04	30.09	31.13	46.00	-14.87	Peak

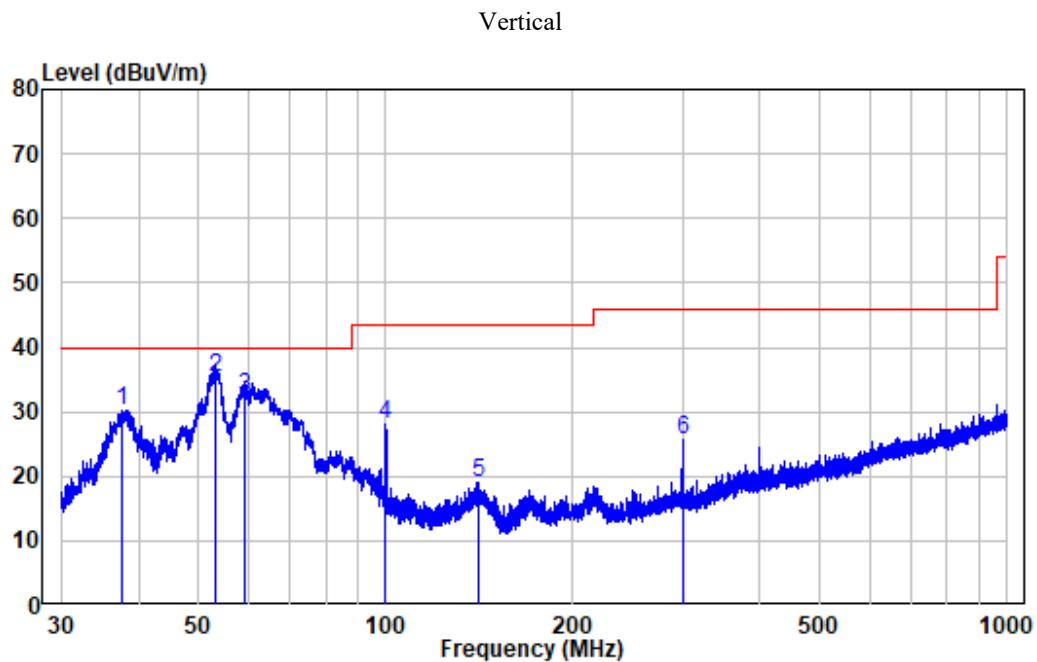

Site : chamber
Condition: 3m VERTICAL
Job No. : SZNS220428-17358E-RFA1
Test Mode: 2.4G WIFI
Note : POE

	Freq	Factor	Read Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	37.564	-10.90	41.22	30.32	40.00	-9.68	Peak
2	53.201	-10.20	45.37	35.17	40.00	-4.83	QP
3	59.362	-10.38	42.74	32.36	40.00	-7.64	QP
4	100.009	-11.80	39.88	28.08	43.50	-15.42	Peak
5	141.330	-15.51	34.40	18.89	43.50	-24.61	Peak
6	299.973	-9.23	34.95	25.72	46.00	-20.28	Peak

1 GHz-25 GHz:**Wi-Fi:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)					
	Reading (dB μ V)	PK/QP/Ave.		Height (m)	Polar (H/V)									
802.11b Mode														
Low Channel (2412 MHz)														
2310	68.63	PK	203	1.8	H	-7.24	61.39	74	-12.61					
2310	53.26	AV	203	1.8	H	-7.24	46.02	54	-7.98					
2310	67.91	PK	185	2.5	V	-7.24	60.67	74	-13.33					
2310	53.38	AV	185	2.5	V	-7.24	46.14	54	-7.86					
2390	71.07	PK	62	2.4	H	-7.22	63.85	74	-10.15					
2390	54.10	AV	62	2.4	H	-7.22	46.88	54	-7.12					
2390	70.19	PK	45	2.3	V	-7.22	62.97	74	-11.03					
2390	54.16	AV	45	2.3	V	-7.22	46.94	54	-7.06					
4824	57.01	PK	237	2.5	H	-3.53	53.48	74	-20.52					
4824	56.20	PK	295	2.2	V	-3.53	52.67	74	-21.33					
Middle Channel(2437MHz)														
4874	57.47	PK	272	1.9	H	-3.41	54.06	74	-19.94					
4874	50.31	AV	272	1.9	H	-3.41	46.9	54	-7.10					
4874	56.32	PK	94	1.9	V	-3.41	52.91	74	-21.09					
High Channel(2462 MHz)														
2483.5	69.76	PK	345	1.1	H	-7.2	62.56	74	-11.44					
2483.5	55.86	AV	345	1.1	H	-7.2	48.66	54	-5.34					
2483.5	69.81	PK	134	1.9	V	-7.2	62.61	74	-11.39					
2483.5	55.83	AV	134	1.9	V	-7.2	48.63	54	-5.37					
2500	68.46	PK	104	1.2	H	-7.18	61.28	74	-12.72					
2500	55.07	AV	104	1.2	H	-7.18	47.89	54	-6.11					
2500	68.82	PK	211	1.9	V	-7.18	61.64	74	-12.36					
2500	54.95	AV	211	1.9	V	-7.18	47.77	54	-6.23					
4924	60.17	PK	81	1.3	H	-3.16	57.01	74	-16.99					
4924	55.04	AV	81	1.3	H	-3.16	51.88	54	-2.12					
4924	58.41	PK	306	1.9	V	-3.16	55.25	74	-18.75					
4924	49.17	AV	306	1.9	V	-3.16	46.01	54	-7.99					

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)					
	Reading (dB μ V)	PK/QP/Ave.		Height (m)	Polar (H/V)									
802.11g Mode														
Low Channel (2412 MHz)														
2310	68.46	PK	317	1.6	H	-7.24	61.22	74	-12.78					
2310	54.21	AV	317	1.6	H	-7.24	46.97	54	-7.03					
2310	68.08	PK	283	1.6	V	-7.24	60.84	74	-13.16					
2310	54.36	AV	283	1.6	V	-7.24	47.12	54	-6.88					
2390	70.67	PK	146	2.4	H	-7.22	63.45	74	-10.55					
2390	56.74	AV	146	2.4	H	-7.22	49.52	54	-4.48					
2390	70.30	PK	252	2.2	V	-7.22	63.08	74	-10.92					
2390	56.61	AV	252	2.2	V	-7.22	49.39	54	-4.61					
4824	54.85	PK	128	1.3	H	-3.53	51.32	74	-22.68					
4824	54.10	PK	107	1	V	-3.53	50.57	74	-23.43					
Middle Channel(2437MHz)														
4874	55.5	PK	234	1.3	H	-3.41	52.09	74	-21.91					
4874	54.46	PK	301	2.4	V	-3.41	51.05	74	-22.95					
High Channel(2462 MHz)														
2483.5	69.82	PK	131	1.4	H	-7.2	62.62	74	-11.38					
2483.5	56.04	AV	131	1.4	H	-7.2	48.84	54	-5.16					
2483.5	69.52	PK	105	1.7	V	-7.2	62.32	74	-11.68					
2483.5	55.69	AV	105	1.7	V	-7.2	48.49	54	-5.51					
2500	69.01	PK	26	1.6	H	-7.18	61.83	74	-12.17					
2500	54.85	AV	26	1.6	H	-7.18	47.67	54	-6.33					
2500	68.39	PK	300	1.3	V	-7.18	61.21	74	-12.79					
2500	55.06	AV	300	1.3	V	-7.18	47.88	54	-6.12					
4924	55.26	PK	252	1.2	H	-3.16	52.10	74	-21.90					
4924	54.11	PK	295	1.1	V	-3.16	50.95	74	-23.05					

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)					
	Reading (dB μ V)	PK/QP/Ave.		Height (m)	Polar (H/V)									
802.11n20 Mode														
Low Channel (2412 MHz)														
2310	68.41	PK	125	1.6	H	-7.24	61.17	74	-12.83					
2310	54.44	AV	125	1.6	H	-7.24	47.20	54	-6.80					
2310	67.86	PK	102	1.2	V	-7.24	60.62	74	-13.38					
2310	54.23	AV	102	1.2	V	-7.24	46.99	54	-7.01					
2390	70.26	PK	267	2	H	-7.22	63.04	74	-10.96					
2390	56.64	AV	267	2	H	-7.22	49.42	54	-4.58					
2390	70.38	PK	194	2.4	V	-7.22	63.16	74	-10.84					
2390	56.70	AV	194	2.4	V	-7.22	49.48	54	-4.52					
4824	54.89	PK	352	1.4	H	-3.53	51.36	74	-22.64					
4824	54.20	PK	192	2.1	V	-3.53	50.67	74	-23.33					
Middle Channel(2437MHz)														
4874	55.5	PK	232	1.6	H	-3.41	52.09	74	-21.91					
4874	54.46	PK	311	1.1	V	-3.41	51.05	74	-22.95					
High Channel(2462 MHz)														
2483.5	69.54	PK	236	2.3	H	-7.2	62.34	74	-11.66					
2483.5	55.83	AV	236	2.3	H	-7.2	48.63	54	-5.37					
2483.5	69.96	PK	23	1.8	V	-7.2	62.76	74	-11.24					
2483.5	55.64	AV	23	1.8	V	-7.2	48.44	54	-5.56					
2500	68.67	PK	54	2.1	H	-7.18	61.49	74	-12.51					
2500	54.98	AV	54	2.1	H	-7.18	47.8	54	-6.20					
2500	68.68	PK	108	1.4	V	-7.18	61.5	74	-12.5					
2500	55.07	AV	108	1.4	V	-7.18	47.89	54	-6.11					
4924	55.06	PK	291	1.4	H	-3.16	51.90	74	-22.10					
4924	54.21	PK	134	1.2	V	-3.16	51.05	74	-22.95					

BLE 1M

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel									
2310	68.30	PK	140	1.8	H	-7.24	61.06	74	-12.94
2310	55.02	AV	140	1.8	H	-7.24	47.78	54	-6.22
2310	68.75	PK	328	2.3	V	-7.24	61.51	74	-12.49
2310	54.89	AV	328	2.3	V	-7.24	47.65	54	-6.35
2390	70.44	PK	141	1.9	H	-7.22	63.22	74	-10.78
2390	55.79	AV	141	1.9	H	-7.22	48.57	54	-5.43
2390	70.40	PK	255	1.5	V	-7.22	63.18	74	-10.82
2390	55.63	AV	255	1.5	V	-7.22	48.41	54	-5.59
4804	54.84	PK	80	1.3	H	-3.51	51.33	74	-22.67
4804	54.09	PK	249	2.4	V	-3.51	50.58	74	-23.42
Middle Channel									
4880	55.55	PK	187	2	H	-3.37	52.18	74	-21.82
4880	54.15	PK	121	1.2	V	-3.37	50.78	74	-23.22
High Channel									
2483.5	69.61	PK	20	2.2	H	-7.2	62.41	74	-11.59
2483.5	56.02	AV	20	2.2	H	-7.2	48.82	54	-5.18
2483.5	69.85	PK	271	1.4	V	-7.2	62.65	74	-11.35
2483.5	55.90	AV	271	1.4	V	-7.2	48.7	54	-5.30
2500	68.48	PK	294	2.2	H	-7.18	61.3	74	-12.7
2500	55.82	AV	294	2.2	H	-7.18	48.64	54	-5.36
2500	68.32	PK	86	2.1	V	-7.18	61.14	74	-12.86
2500	56.07	AV	86	2.1	V	-7.18	48.89	54	-5.11
4960	55.18	PK	337	1.9	H	-3.01	52.17	74	-21.83
4960	54.12	PK	59	1	V	-3.01	51.11	74	-22.89

Note:

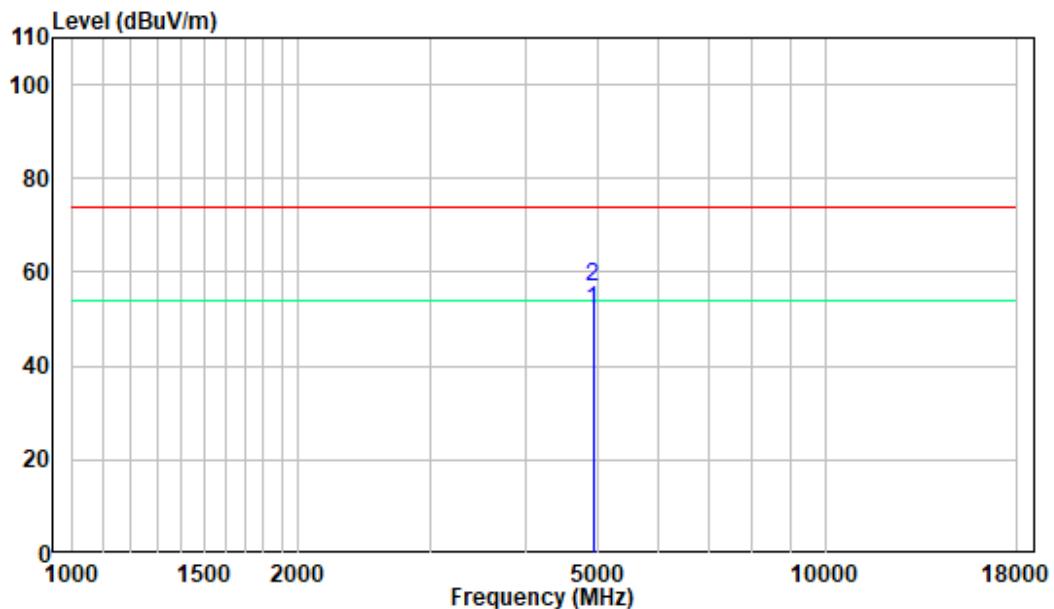
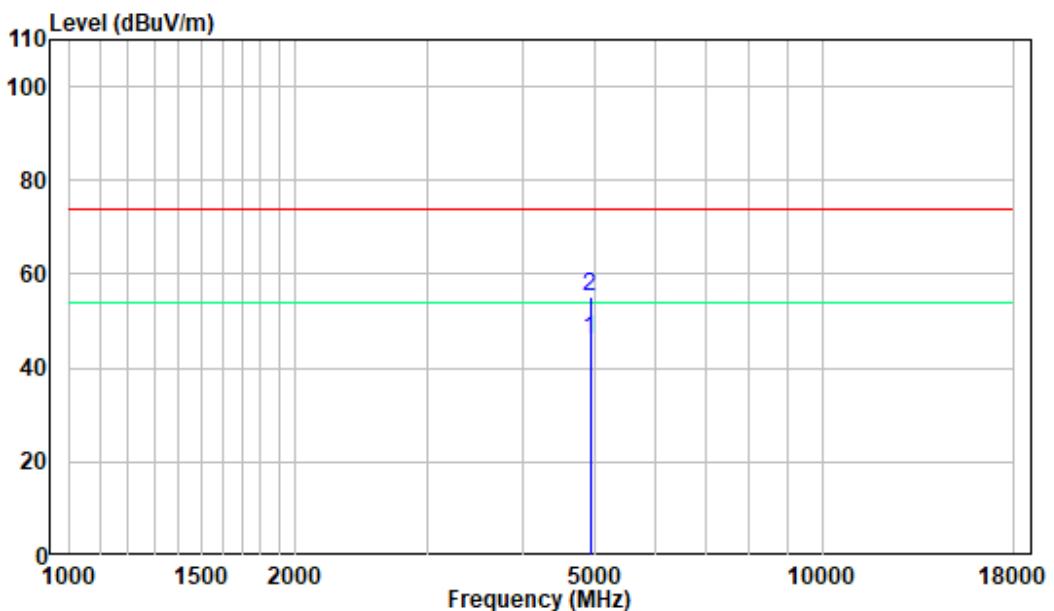
Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor



Corrected Amplitude = Corrected Factor + Reading

Margin = Corrected. Amplitude - Limit

The other spurious emission which is 20dB to the limit or in noise floor was not recorded.

When the test result of peak was less than the limit of average, just peak value were recorded.

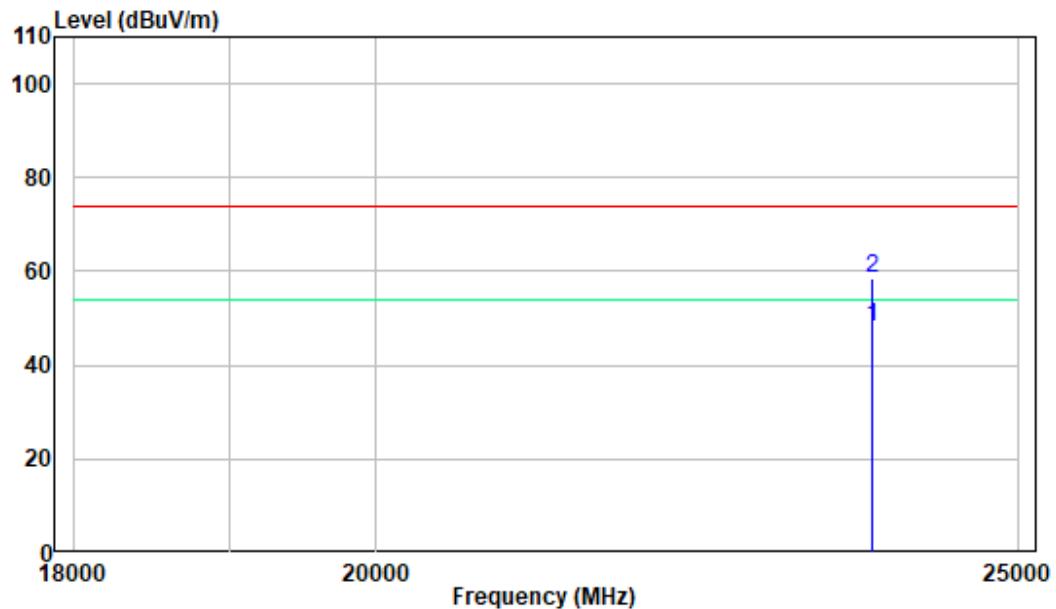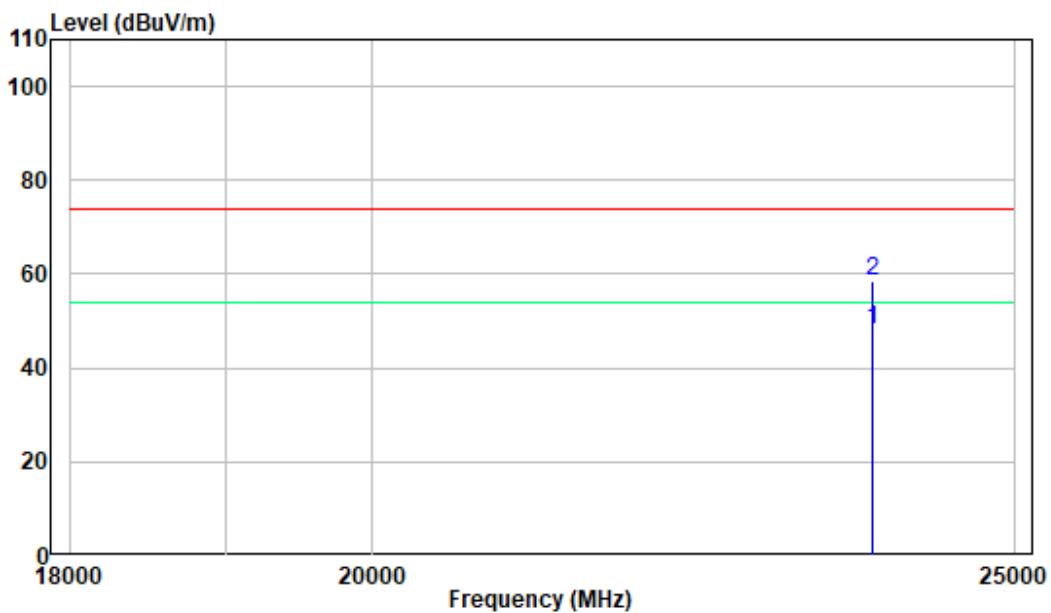1-18 GHz:**Pre-scan for 802.11b high Channel****Horizontal****Vertical**

18 -25GHz:**Pre-scan for 802.11b high Channel****Horizontal****Vertical********* END OF REPORT *******