

# FCC PART 18 EMI MEASUREMENT AND TEST REPORT


For

## XING NAN LIGHTING CO., LTD

Luowu Road, Luocun Town, Nanhai, Foshan, Guangdong, China

FCC ID: T34NHXN118

April 28, 2006

|                                                                                                                                                                                                                                                     |                               |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|
| <b>This Report Concerns:</b><br><input checked="" type="checkbox"/> Original Report                                                                                                                                                                 | <b>Equipment Type:</b><br>RLF |
| <b>Test Engineer:</b> Louise Lu                                                                                                                                 |                               |
| <b>Report Number:</b> RSZ06031481                                                                                                                                                                                                                   |                               |
| <b>Test Date:</b> April 26, 2006                                                                                                                                                                                                                    |                               |
| <b>Reviewed By:</b> Chris Zeng                                                                                                                                   |                               |
| <b>Prepared By:</b> Bay Area Compliance Lab Corp. (ShenZhen)<br>6/F, the 3rd Phase of WanLi Industrial Building, ShiHua<br>Road, FuTian Free Trade Zone, ShenZhen, GuangDong<br>518038, P.R.China<br>Tel: +86-755-33320018<br>Fax: +86-755-33320008 |                               |

**Note:** The test report is specially limited to the above company and this particular sample only.  
It may not be duplicated without prior written consent of Bay Area Compliance Lab Corp. (ShenZhen). This report **must not** be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the US Government.

**TABLE OF CONTENTS**

|                                                          |          |
|----------------------------------------------------------|----------|
| <b>GENERAL INFORMATION.....</b>                          | <b>3</b> |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) ..... | 3        |
| OBJECTIVE .....                                          | 3        |
| RELATED SUBMITTAL(S)/GRANT(S).....                       | 3        |
| TEST METHODOLOGY .....                                   | 3        |
| TEST FACILITY .....                                      | 3        |
| EXTERNAL I/O CABLE .....                                 | 4        |
| <b>SYSTEM TEST CONFIGURATION.....</b>                    | <b>5</b> |
| JUSTIFICATION .....                                      | 5        |
| EQUIPMENT MODIFICATIONS .....                            | 5        |
| CONFIGURATION OF TEST SETUP .....                        | 5        |
| BLOCK DIAGRAM OF TEST SETUP .....                        | 5        |
| <b>CONDUCTED EMISSION.....</b>                           | <b>6</b> |
| MEASUREMENT UNCERTAINTY.....                             | 6        |
| EUT SETUP.....                                           | 6        |
| EMI TEST RECEIVER SETUP .....                            | 7        |
| TEST EQUIPMENT LIST AND DETAILS.....                     | 7        |
| TEST PROCEDURE .....                                     | 7        |
| TEST RESULTS SUMMARY .....                               | 7        |
| TEST DATA .....                                          | 8        |
| PLOT(S) OF TEST DATA .....                               | 12       |

---

## GENERAL INFORMATION

---

### Product Description for Equipment Under Test (EUT)

The *XING NAN LIGHTING CO., LTD* 's model: *XN126, XNXXX, XN118, XN213, XN218, XN226, XN130, XN132, XN142*, or the "EUT" as referred to in this report is a RLF which measures approximately 11.6 cmL x 5.1 cmW x 2.0 cmH, rated input voltage: AC 120V/60Hz.

*\* The test data gathered are from production sample, serial number: 0603203 provided by the manufacturer, we received EUT on 2006-3-14.*

### Objective

The following test report is prepared on behalf of *XING NAN LIGHTING CO., LTD* in accordance with Part 2, Subpart J, and Part 18, Subparts A, B and C of the Federal Communication Commissions rules and regulations.

The objective of the manufacturer is to determine compliance with FCC Part 18 limits.

### Related Submittal(s)/Grant(s)

No related submittal(s).

### Test Methodology

All measurements contained in this report were conducted with MP-5, FCC Methods of Measurements of Radio Noise Emissions from ISM Equipment, February 1986. All measurement was performed at Bay Area Compliance Lab Corp. (ShenZhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### Test Facility

The Test site used by Bay Area Compliance Lab Corp. (ShenZhen) to collect radiated and conducted emission measurement data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone, ShenZhen, Guangdong 518038, P.R.China.

Test site at Bay Area Compliance Lab Corp. (ShenZhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 04, 2004. The facility also complies with the radiated and AC Live conducted test site criteria set forth in ANSI C63.4-2003 and FCC MP-5.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Lab Corp. (ShenZhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0). The current scope of accreditations can be found at <http://ts.nist.gov/ts/htdocs/210/214/scopes/2007070.htm>

**External I/O Cable**

| <b>Cable Description</b>            | <b>Length (M)</b> | <b>From/Port</b> | <b>To</b> |
|-------------------------------------|-------------------|------------------|-----------|
| Unshielded Undetachable Power Cable | 1.15              | EUT              | AC Mains  |

## SYSTEM TEST CONFIGURATION


### Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).


### Equipment Modifications

Bay Area Compliance Lab Corp. (ShenZhen) has not done any modification on the EUT.

### Configuration of Test Setup

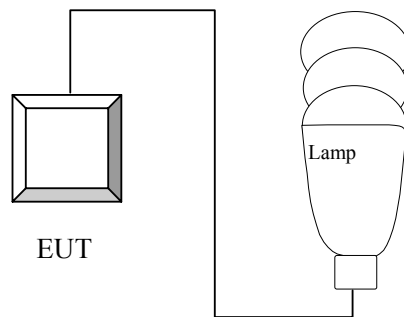

### Block Diagram of Test Setup

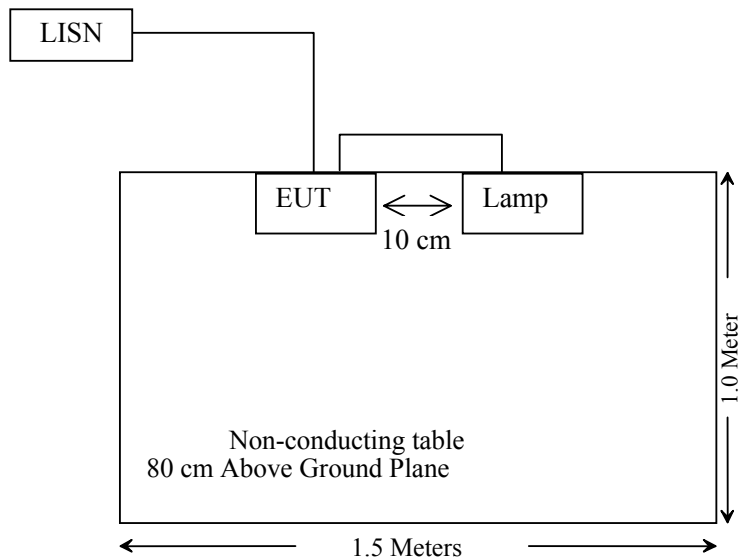


## CONDUCTED EMISSION

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Lab Corp. (ShenZhen) is  $\pm 2.4$  dB.

### EUT Setup

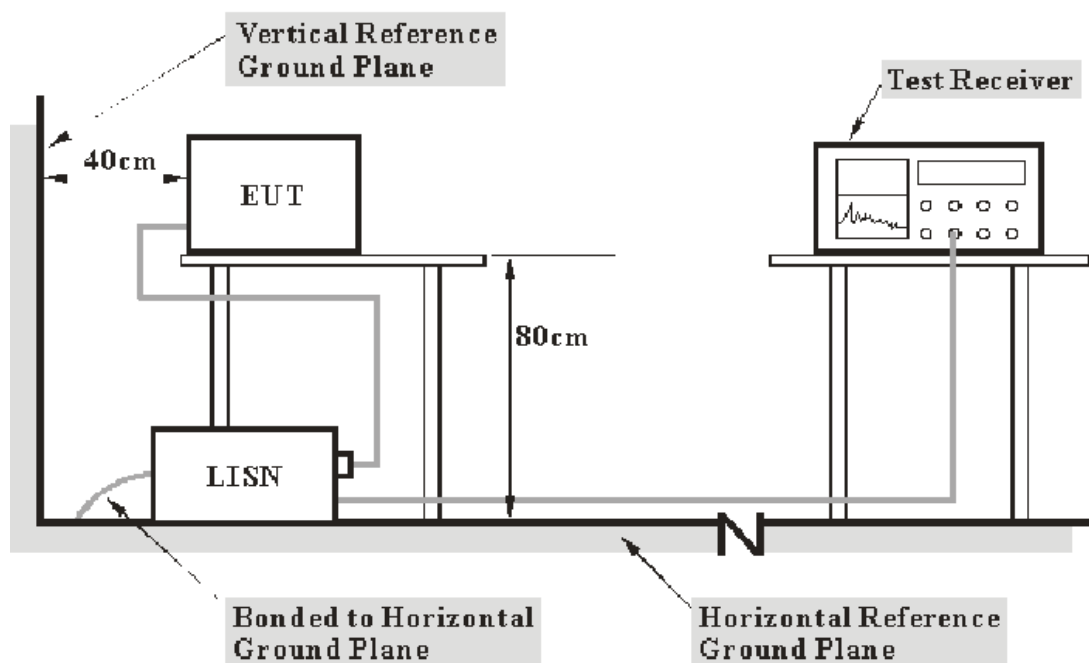

- Note:** 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with MP-5: 1986 measurement procedure. Specification used was with the FCC Part 18 limits.

The EUT was connected to a 120 VAC/ 60Hz power source.

## EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| <b><i>Frequency Range</i></b> | <b><i>IFBW</i></b> |
|-------------------------------|--------------------|
| 150 kHz – 30 MHz              | 9 kHz              |

## Test Equipment List and Details

| <b>Manufacturer</b> | <b>Description</b> | <b>Model</b> | <b>Serial Number</b> | <b>Calibration Date</b> | <b>Calibration Due Date</b> |
|---------------------|--------------------|--------------|----------------------|-------------------------|-----------------------------|
| Com-Power           | L.I.S.N.           | LI-200       | 12005                | N/A                     | N/A                         |
| Com-Power           | L.I.S.N.           | LI-200       | 12008                | N/A                     | N/A                         |
| Rohde & Schwarz     | EMI Test Receiver  | ESCI         | 100028               | 2005-8-17               | 2006-8-17                   |
| Rohde & Schwarz     | L.I.S.N.           | ESH2-Z5      | 892107/021           | 2006-2-28               | 2007-2-28                   |

\* Com-Power's LISN were used as the supporting equipment.

\* **Statement of Traceability:** Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

## Test Procedure

During the conducted emission test, the EUT power cord was connected to the outlet of the LISN.

Maximizing procedure were performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak detection mode.

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 18, with the worst margin reading of:

**XN126: -14.41 dB at 0.486 MHz in the Neutral conductor mode.**  
**XNXXX: -11.15 dB at 29.786 MHz in the Live conductor mode.**  
**XN118: -20.88 dB at 23.538 MHz in the Neutral conductor mode.**  
**XN213: -11.03 dB at 0.486 MHz in the Neutral conductor mode.**  
**XN218: -9.28 dB at 0.454 MHz in the Live conductor mode.**  
**XN226: -9.77 dB at 0.462 MHz in the Live conductor mode.**  
**XN130: -8.01 dB at 0.486 MHz in the Neutral conductor mode.**  
**XN132: -15.40 dB at 0.490 MHz in the Neutral conductor mode.**  
**XN142: -5.39 dB at 0.490 MHz in the Live conductor mode.**

**Test Data****Environmental Conditions**

|                    |         |
|--------------------|---------|
| Temperature:       | 26° C   |
| Relative Humidity: | 54%     |
| ATM Pressure:      | 940mbar |

Testing was performed by Louise Lu on 2006-4-26.

Test mode: On

Model: XN126

| LIVE CONDUCTED EMISSIONS |                   |                |                       | FCC Part 18   |              |
|--------------------------|-------------------|----------------|-----------------------|---------------|--------------|
| Frequency<br>MHz         | Amplitude<br>dBμV | Detector<br>QP | Phase<br>Neutral/Live | Limit<br>dBμV | Margin<br>dB |
| 0.486                    | 33.59             | QP             | Neutral               | 48.00         | -14.41       |
| 0.486                    | 31.64             | QP             | Live                  | 48.00         | -16.36       |
| 0.542                    | 29.68             | QP             | Live                  | 48.00         | -18.32       |
| 0.638                    | 28.07             | QP             | Neutral               | 48.00         | -19.93       |
| 19.682                   | 27.91             | QP             | Neutral               | 48.00         | -20.09       |
| 0.726                    | 26.86             | QP             | Live                  | 48.00         | -21.14       |
| 19.698                   | 26.74             | QP             | Live                  | 48.00         | -21.26       |
| 0.450                    | 26.12             | QP             | Live                  | 48.00         | -21.88       |
| 1.110                    | 24.60             | QP             | Neutral               | 48.00         | -23.40       |
| 0.610                    | 23.90             | QP             | Live                  | 48.00         | -24.10       |
| 4.034                    | 19.34             | QP             | Neutral               | 48.00         | -28.66       |
| 3.154                    | 15.67             | QP             | Neutral               | 48.00         | -32.33       |



*Model: XNXXX*

| LIVE CONDUCTED EMISSIONS |                   |                |                       | FCC Part 18   |              |
|--------------------------|-------------------|----------------|-----------------------|---------------|--------------|
| Frequency<br>MHz         | Amplitude<br>dBμV | Detector<br>QP | Phase<br>Neutral/Live | Limit<br>dBμV | Margin<br>dB |
| 29.786                   | 36.85             | QP             | Live                  | 48.00         | -11.15       |
| 29.938                   | 36.44             | QP             | Neutral               | 48.00         | -11.56       |
| 0.490                    | 36.44             | QP             | Live                  | 48.00         | -11.56       |
| 0.458                    | 33.70             | QP             | Neutral               | 48.00         | -14.30       |
| 0.518                    | 33.37             | QP             | Live                  | 48.00         | -14.63       |
| 19.726                   | 33.09             | QP             | Live                  | 48.00         | -14.91       |
| 19.662                   | 32.81             | QP             | Neutral               | 48.00         | -15.19       |
| 0.738                    | 32.59             | QP             | Live                  | 48.00         | -15.41       |
| 0.486                    | 31.68             | QP             | Neutral               | 48.00         | -16.32       |
| 0.570                    | 31.39             | QP             | Neutral               | 48.00         | -16.61       |
| 0.970                    | 30.34             | QP             | Live                  | 48.00         | -17.66       |
| 0.738                    | 30.24             | QP             | Neutral               | 48.00         | -17.76       |

*Model: XN118*

| LIVE CONDUCTED EMISSIONS |                   |                |                       | FCC Part 18   |              |
|--------------------------|-------------------|----------------|-----------------------|---------------|--------------|
| Frequency<br>MHz         | Amplitude<br>dBμV | Detector<br>QP | Phase<br>Neutral/Live | Limit<br>dBμV | Margin<br>dB |
| 23.538                   | 27.12             | QP             | Neutral               | 48.00         | -20.88       |
| 26.542                   | 25.76             | QP             | Live                  | 48.00         | -22.24       |
| 26.426                   | 25.73             | QP             | Live                  | 48.00         | -22.27       |
| 26.482                   | 25.68             | QP             | Live                  | 48.00         | -22.32       |
| 26.370                   | 25.59             | QP             | Live                  | 48.00         | -22.41       |
| 26.598                   | 25.54             | QP             | Live                  | 48.00         | -22.46       |
| 26.254                   | 25.46             | QP             | Live                  | 48.00         | -22.54       |
| 23.598                   | 13.70             | QP             | Neutral               | 48.00         | -34.30       |
| 23.862                   | 10.72             | QP             | Neutral               | 48.00         | -37.28       |
| 23.650                   | 10.23             | QP             | Neutral               | 48.00         | -37.77       |
| 23.754                   | 10.23             | QP             | Neutral               | 48.00         | -37.77       |
| 23.702                   | 10.12             | QP             | Neutral               | 48.00         | -37.88       |

*Model: XN213*

| LIVE CONDUCTED EMISSIONS |                   |                |                       | FCC Part 18   |              |
|--------------------------|-------------------|----------------|-----------------------|---------------|--------------|
| Frequency<br>MHz         | Amplitude<br>dBμV | Detector<br>QP | Phase<br>Neutral/Live | Limit<br>dBμV | Margin<br>dB |
| 0.486                    | 36.97             | QP             | Neutral               | 48.00         | -11.03       |
| 0.490                    | 36.76             | QP             | Live                  | 48.00         | -11.24       |
| 0.978                    | 26.31             | QP             | Neutral               | 48.00         | -21.69       |
| 0.986                    | 24.83             | QP             | Live                  | 48.00         | -23.17       |
| 1.118                    | 24.23             | QP             | Neutral               | 48.00         | -23.77       |
| 19.964                   | 24.22             | QP             | Live                  | 48.00         | -23.78       |
| 19.786                   | 23.09             | QP             | Neutral               | 48.00         | -24.91       |
| 7.986                    | 19.69             | QP             | Live                  | 48.00         | -28.31       |
| 8.094                    | 19.50             | QP             | Live                  | 48.00         | -28.50       |
| 10.854                   | 19.17             | QP             | Neutral               | 48.00         | -28.83       |
| 10.718                   | 19.11             | QP             | Live                  | 48.00         | -28.89       |
| 4.086                    | 19.10             | QP             | Neutral               | 48.00         | -28.90       |

*Model: XN218*

| LIVE CONDUCTED EMISSIONS |                   |                |                       | FCC Part 18   |              |
|--------------------------|-------------------|----------------|-----------------------|---------------|--------------|
| Frequency<br>MHz         | Amplitude<br>dBμV | Detector<br>QP | Phase<br>Neutral/Live | Limit<br>dBμV | Margin<br>dB |
| 0.454                    | 38.72             | QP             | Live                  | 48.00         | -9.28        |
| 0.682                    | 37.96             | QP             | Live                  | 48.00         | -10.04       |
| 0.454                    | 37.57             | QP             | Neutral               | 48.00         | -10.43       |
| 0.566                    | 37.00             | QP             | Live                  | 48.00         | -11.00       |
| 0.574                    | 36.99             | QP             | Neutral               | 48.00         | -11.01       |
| 0.738                    | 34.67             | QP             | Live                  | 48.00         | -13.33       |
| 19.730                   | 24.51             | QP             | Neutral               | 48.00         | -23.49       |
| 19.858                   | 23.89             | QP             | Live                  | 48.00         | -24.11       |
| 29.730                   | 20.68             | QP             | Live                  | 48.00         | -27.32       |
| 10.750                   | 20.29             | QP             | Neutral               | 48.00         | -27.71       |
| 7.850                    | 19.72             | QP             | Neutral               | 48.00         | -28.28       |
| 29.454                   | 19.52             | QP             | Neutral               | 48.00         | -28.48       |

*Model: XN226*

| LIVE CONDUCTED EMISSIONS |                   |                |                       | FCC Part 18   |              |
|--------------------------|-------------------|----------------|-----------------------|---------------|--------------|
| Frequency<br>MHz         | Amplitude<br>dBμV | Detector<br>QP | Phase<br>Neutral/Live | Limit<br>dBμV | Margin<br>dB |
| 0.462                    | 38.23             | QP             | Live                  | 48.00         | -9.77        |
| 0.586                    | 36.21             | QP             | Live                  | 48.00         | -11.79       |
| 0.586                    | 36.20             | QP             | Neutral               | 48.00         | -11.80       |
| 0.506                    | 35.58             | QP             | Live                  | 48.00         | -12.42       |
| 0.542                    | 35.27             | QP             | Neutral               | 48.00         | -12.73       |
| 0.502                    | 35.10             | QP             | Neutral               | 48.00         | -12.90       |
| 0.790                    | 35.01             | QP             | Live                  | 48.00         | -12.99       |
| 0.546                    | 34.65             | QP             | Live                  | 48.00         | -13.35       |
| 0.666                    | 34.40             | QP             | Neutral               | 48.00         | -13.60       |
| 0.706                    | 33.07             | QP             | Neutral               | 48.00         | -14.93       |
| 24.710                   | 19.92             | QP             | Neutral               | 48.00         | -28.08       |
| 24.726                   | 14.83             | QP             | Live                  | 48.00         | -33.17       |

*Model: XN130*

| LIVE CONDUCTED EMISSIONS |                   |                |                       | FCC Part 18   |              |
|--------------------------|-------------------|----------------|-----------------------|---------------|--------------|
| Frequency<br>MHz         | Amplitude<br>dBμV | Detector<br>QP | Phase<br>Neutral/Live | Limit<br>dBμV | Margin<br>dB |
| 0.486                    | 39.99             | QP             | Neutral               | 48.00         | -8.01        |
| 0.486                    | 39.75             | QP             | Live                  | 48.00         | -8.25        |
| 0.534                    | 37.46             | QP             | Neutral               | 48.00         | -10.54       |
| 0.618                    | 36.63             | QP             | Live                  | 48.00         | -11.37       |
| 0.534                    | 35.48             | QP             | Live                  | 48.00         | -12.52       |
| 0.758                    | 35.34             | QP             | Neutral               | 48.00         | -12.66       |
| 0.718                    | 35.14             | QP             | Live                  | 48.00         | -12.86       |
| 0.578                    | 34.42             | QP             | Neutral               | 48.00         | -13.58       |
| 0.718                    | 33.62             | QP             | Neutral               | 48.00         | -14.38       |
| 0.762                    | 33.45             | QP             | Live                  | 48.00         | -14.55       |
| 0.630                    | 32.53             | QP             | Neutral               | 48.00         | -15.47       |
| 0.582                    | 32.26             | QP             | Live                  | 48.00         | -15.74       |

*Model: XN132*


| LIVE CONDUCTED EMISSIONS |                         |                |                       | FCC Part 18         |              |
|--------------------------|-------------------------|----------------|-----------------------|---------------------|--------------|
| Frequency<br>MHz         | Amplitude<br>dB $\mu$ V | Detector<br>QP | Phase<br>Neutral/Live | Limit<br>dB $\mu$ V | Margin<br>dB |
| 0.490                    | 32.60                   | QP             | Neutral               | 48.00               | -15.40       |
| 0.490                    | 31.45                   | QP             | Live                  | 48.00               | -16.55       |
| 0.462                    | 30.39                   | QP             | Live                  | 48.00               | -17.61       |
| 0.522                    | 30.10                   | QP             | Neutral               | 48.00               | -17.90       |
| 0.518                    | 29.45                   | QP             | Live                  | 48.00               | -18.55       |
| 0.730                    | 28.76                   | QP             | Neutral               | 48.00               | -19.24       |
| 0.734                    | 27.58                   | QP             | Live                  | 48.00               | -20.42       |
| 1.106                    | 25.62                   | QP             | Live                  | 48.00               | -22.38       |
| 0.974                    | 25.33                   | QP             | Live                  | 48.00               | -22.67       |
| 1.106                    | 24.58                   | QP             | Neutral               | 48.00               | -23.42       |
| 0.590                    | 24.16                   | QP             | Neutral               | 48.00               | -23.84       |
| 0.970                    | 22.04                   | QP             | Neutral               | 48.00               | -25.96       |

*Model: XN142*

| LIVE CONDUCTED EMISSIONS |                         |                |                       | FCC Part 18         |              |
|--------------------------|-------------------------|----------------|-----------------------|---------------------|--------------|
| Frequency<br>MHz         | Amplitude<br>dB $\mu$ V | Detector<br>QP | Phase<br>Neutral/Live | Limit<br>dB $\mu$ V | Margin<br>dB |
| 0.490                    | 42.61                   | QP             | Live                  | 48.00               | -5.39        |
| 0.486                    | 42.34                   | QP             | Neutral               | 48.00               | -5.66        |
| 0.982                    | 41.52                   | QP             | Neutral               | 48.00               | -6.48        |
| 0.978                    | 40.23                   | QP             | Live                  | 48.00               | -7.77        |
| 0.542                    | 37.97                   | QP             | Neutral               | 48.00               | -10.03       |
| 0.602                    | 37.38                   | QP             | Neutral               | 48.00               | -10.62       |
| 0.734                    | 37.31                   | QP             | Neutral               | 48.00               | -10.69       |
| 0.734                    | 35.36                   | QP             | Live                  | 48.00               | -12.64       |
| 0.610                    | 35.26                   | QP             | Live                  | 48.00               | -12.74       |
| 0.458                    | 34.53                   | QP             | Neutral               | 48.00               | -13.47       |
| 1.106                    | 31.96                   | QP             | Live                  | 48.00               | -16.04       |
| 4.054                    | 18.18                   | QP             | Live                  | 48.00               | -29.82       |


**Plot(s) of Test Data**


Plot(s) of Test Data is presented hereinafter as reference.

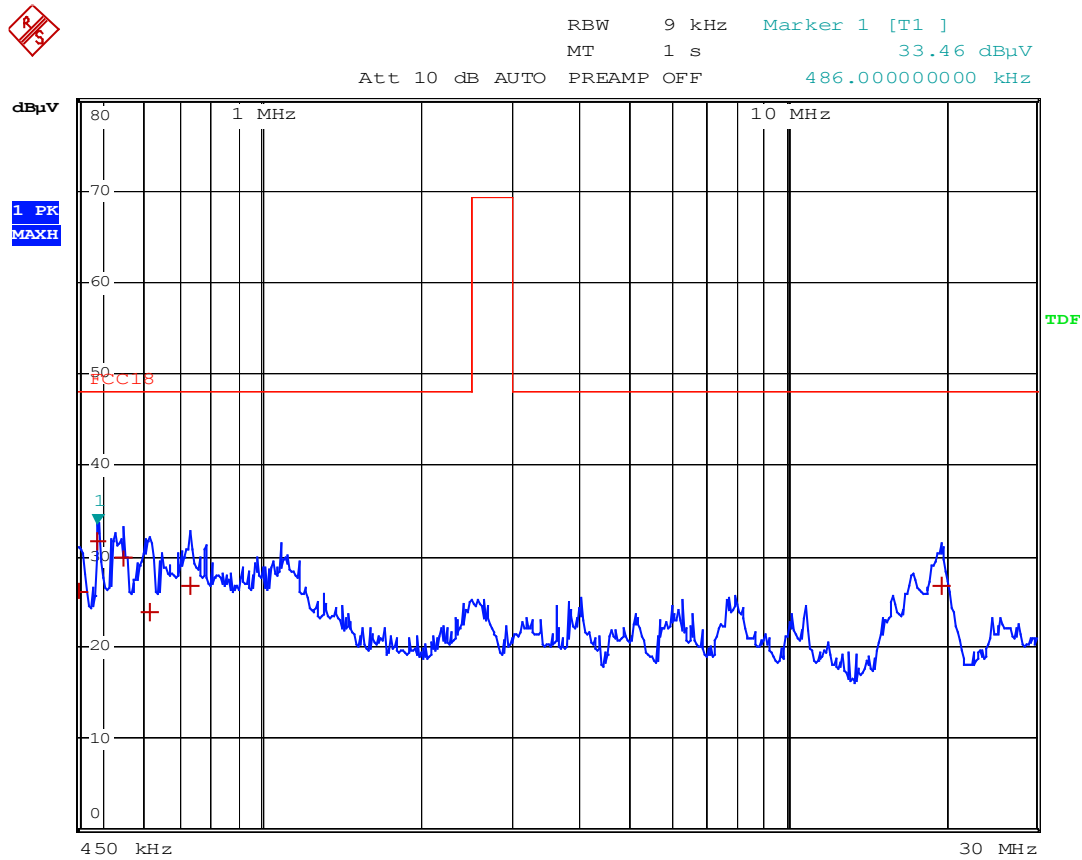

XING NAN RLF M/N: XN126 Running L


Date: 26.APR.2006 16:05:59



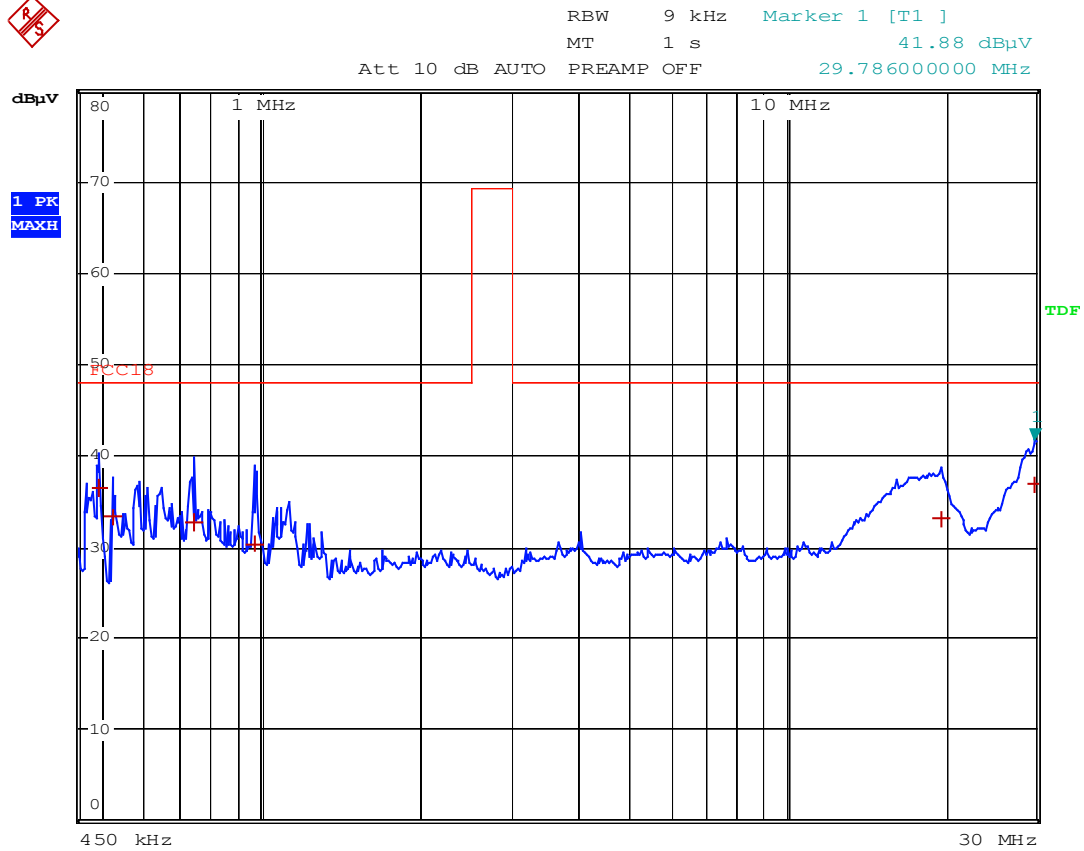

XING NAN RLF M/N: XNXXX Running L


Date: 25.APR.2006 12:51:58

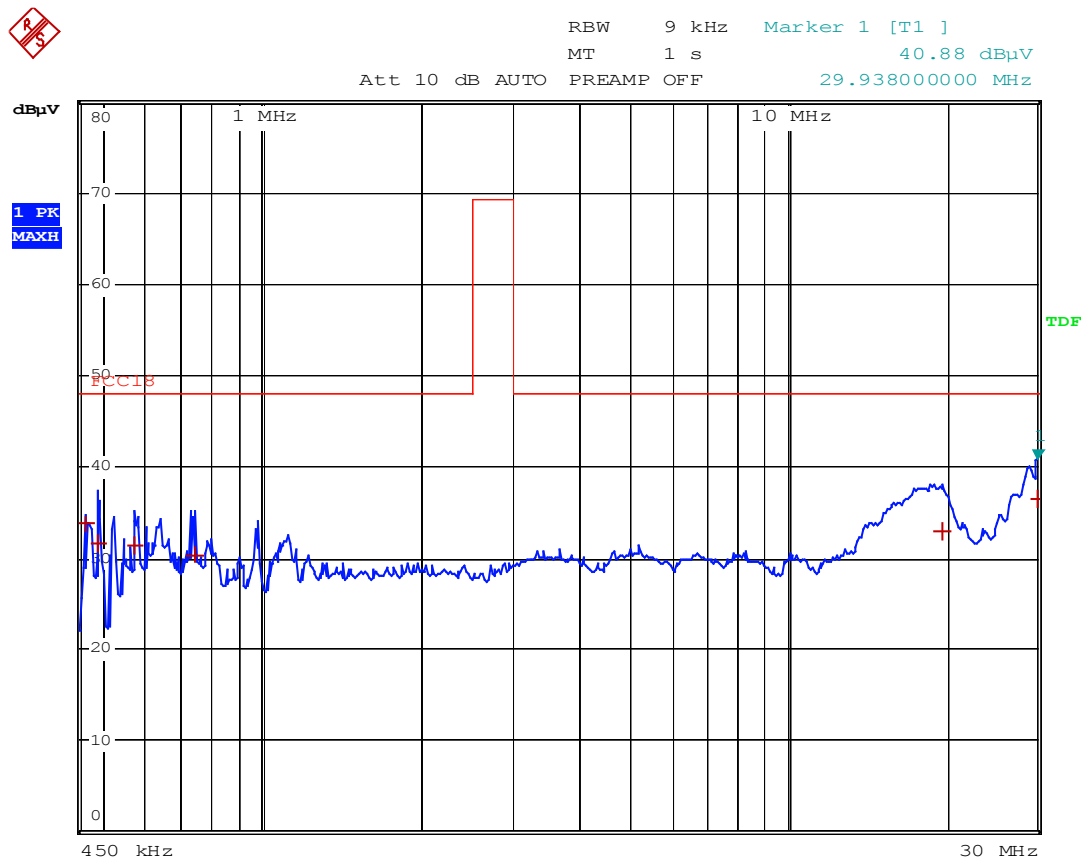

XING NAN RLF M/N: XNXXX Running N


Date: 25.APR.2006 12:58:55



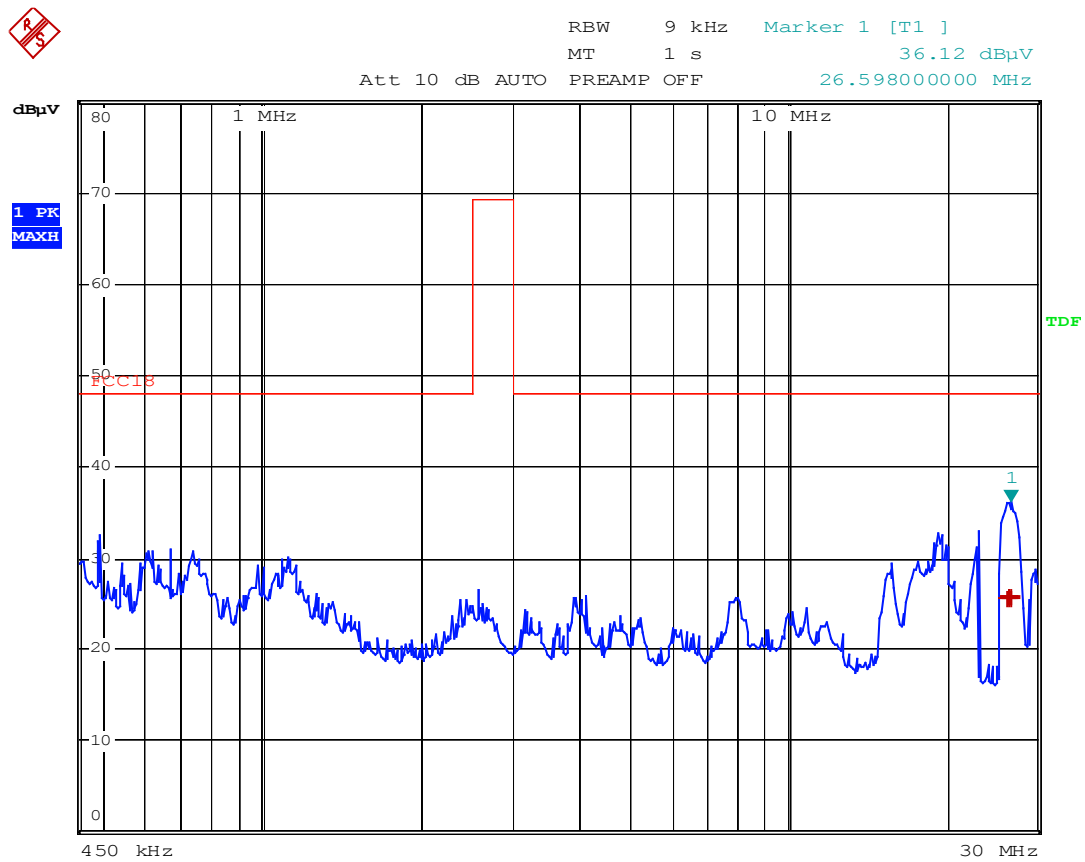


XING NAN RLF M/N: XN118 Running L

Date: 26.APR.2006 16:37:33

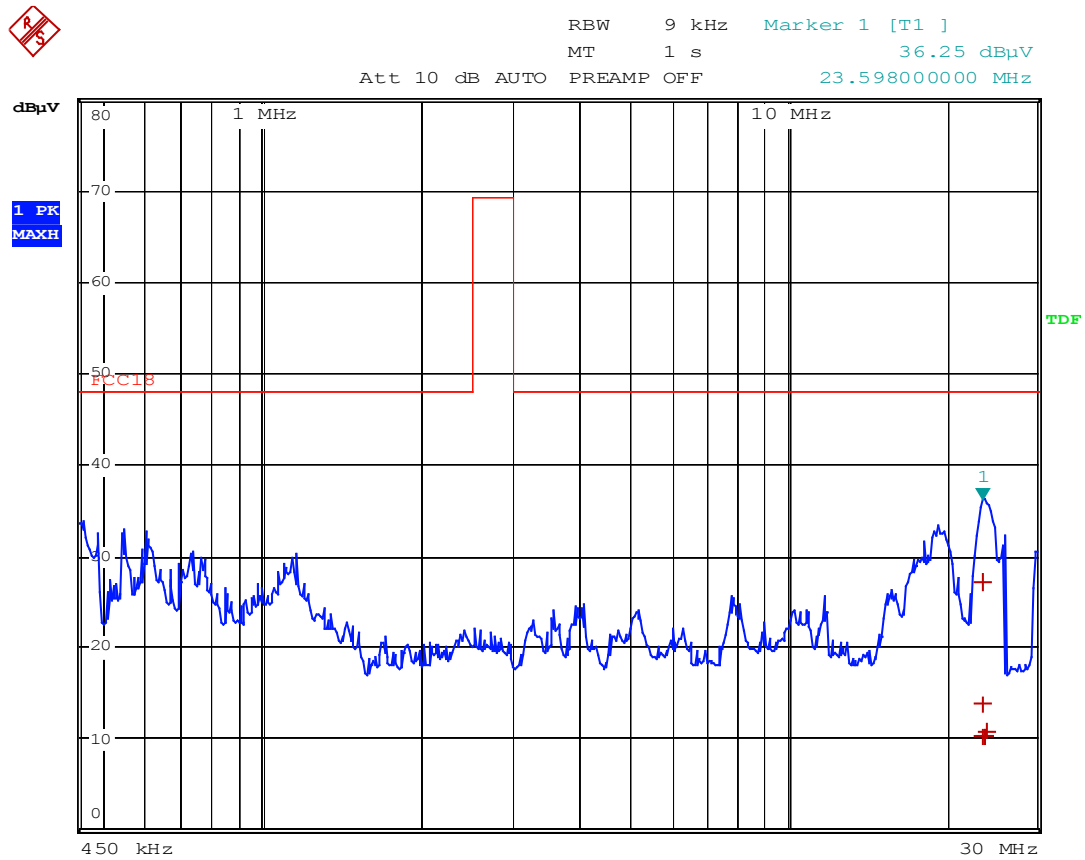


XING NAN RLF M/N: XN118 Running N

Date: 26.APR.2006 16:31:45

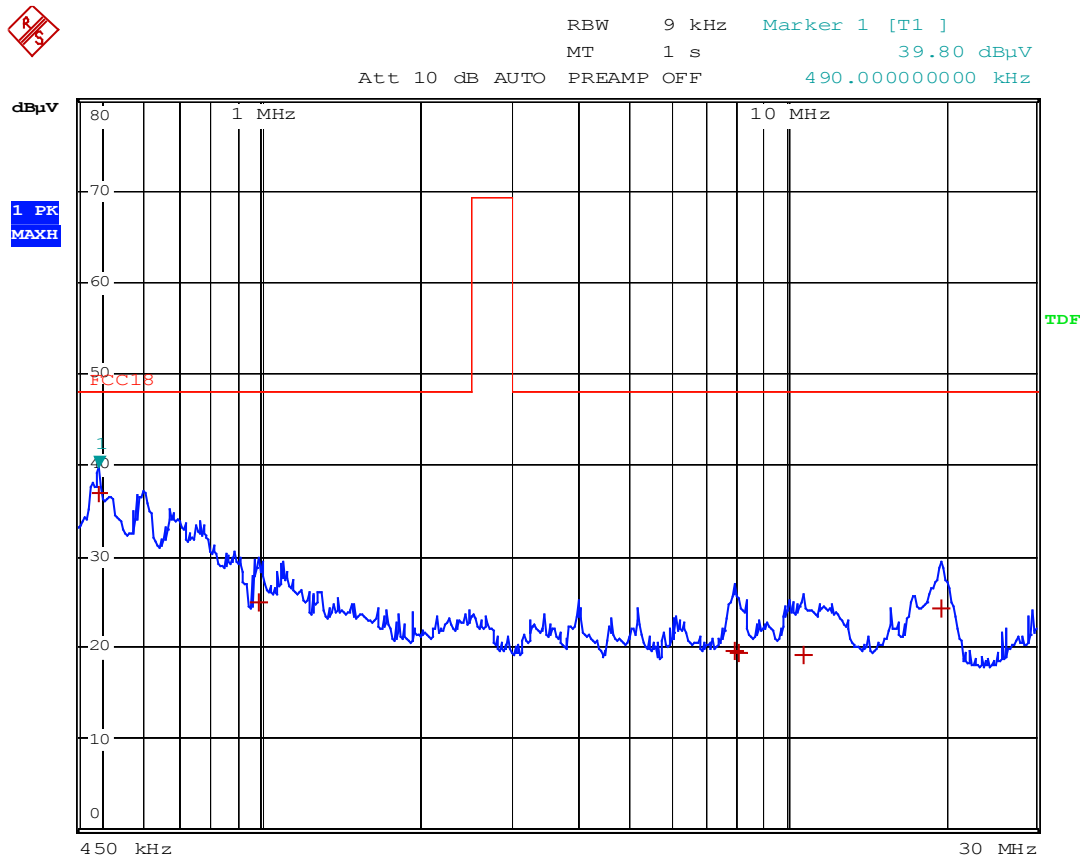


XING NAN RLF M/N: XN213 ON L

Date: 25.APR.2006 16:18:01

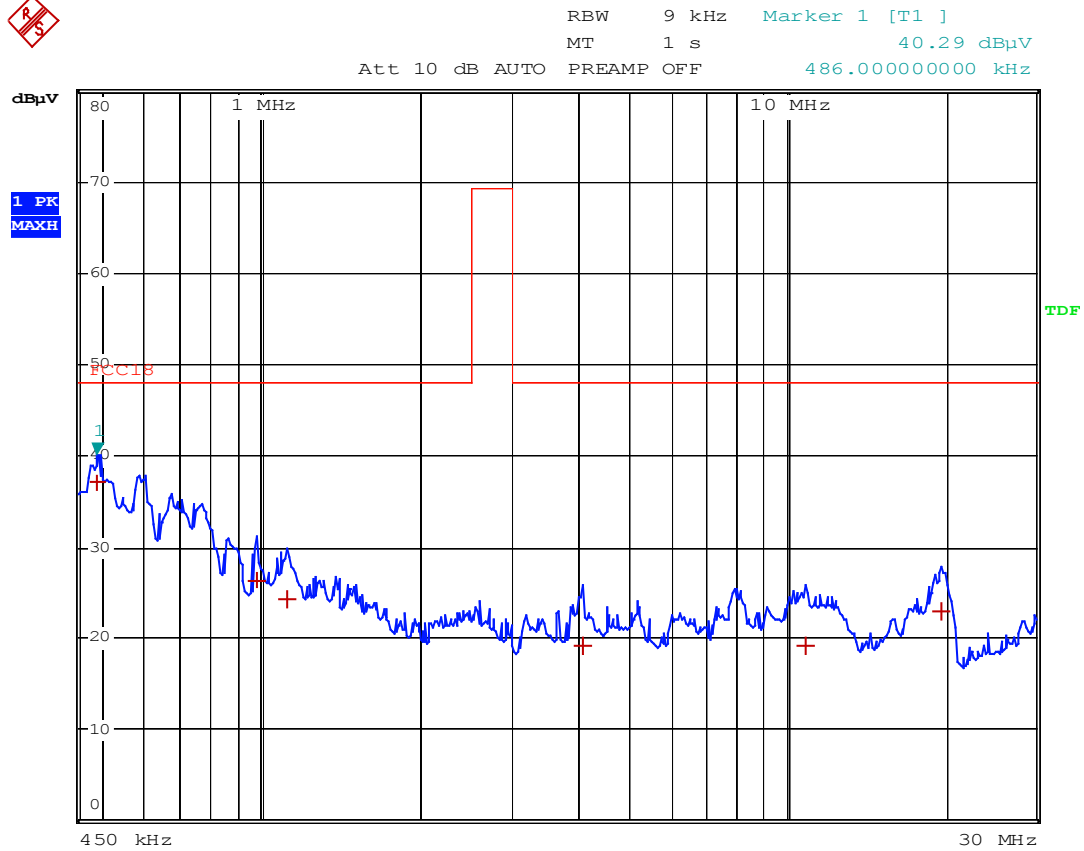


XING NAN RLF M/N: XN213 ON N

Date: 25.APR.2006 16:13:17

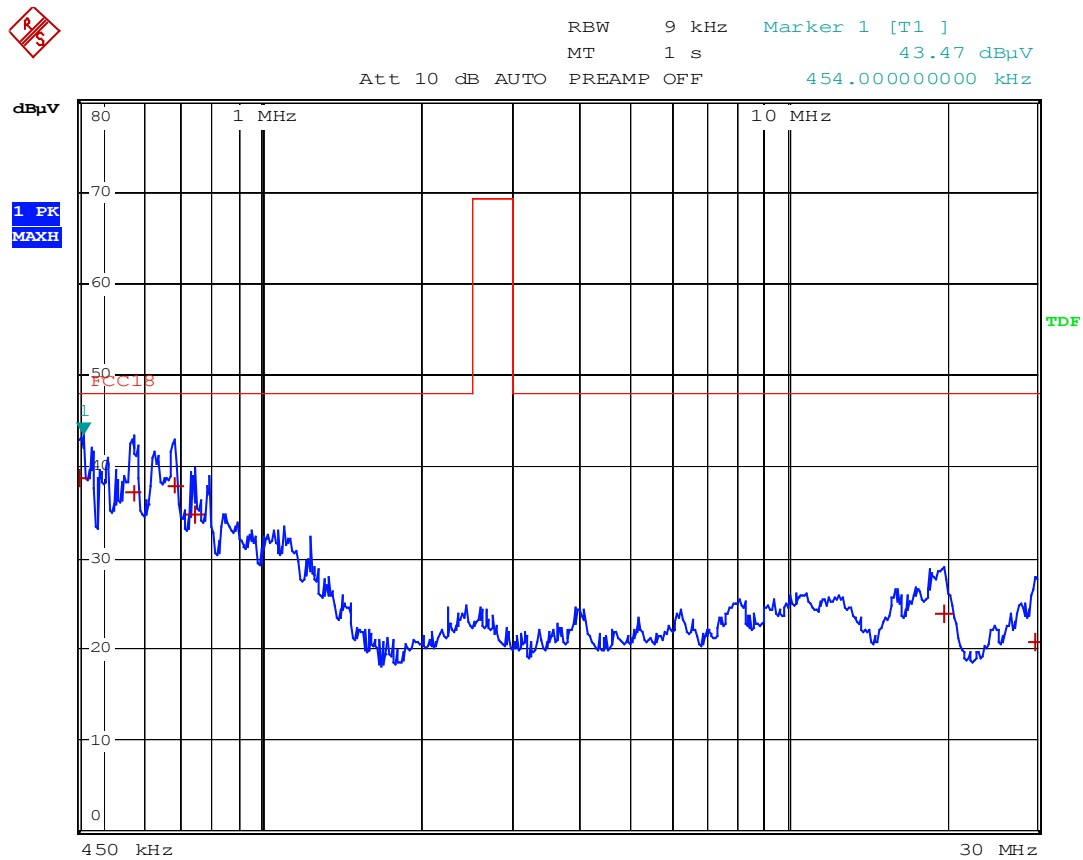


XING NAN RLF M/N: XN218 ON L

Date: 25.APR.2006 17:04:54

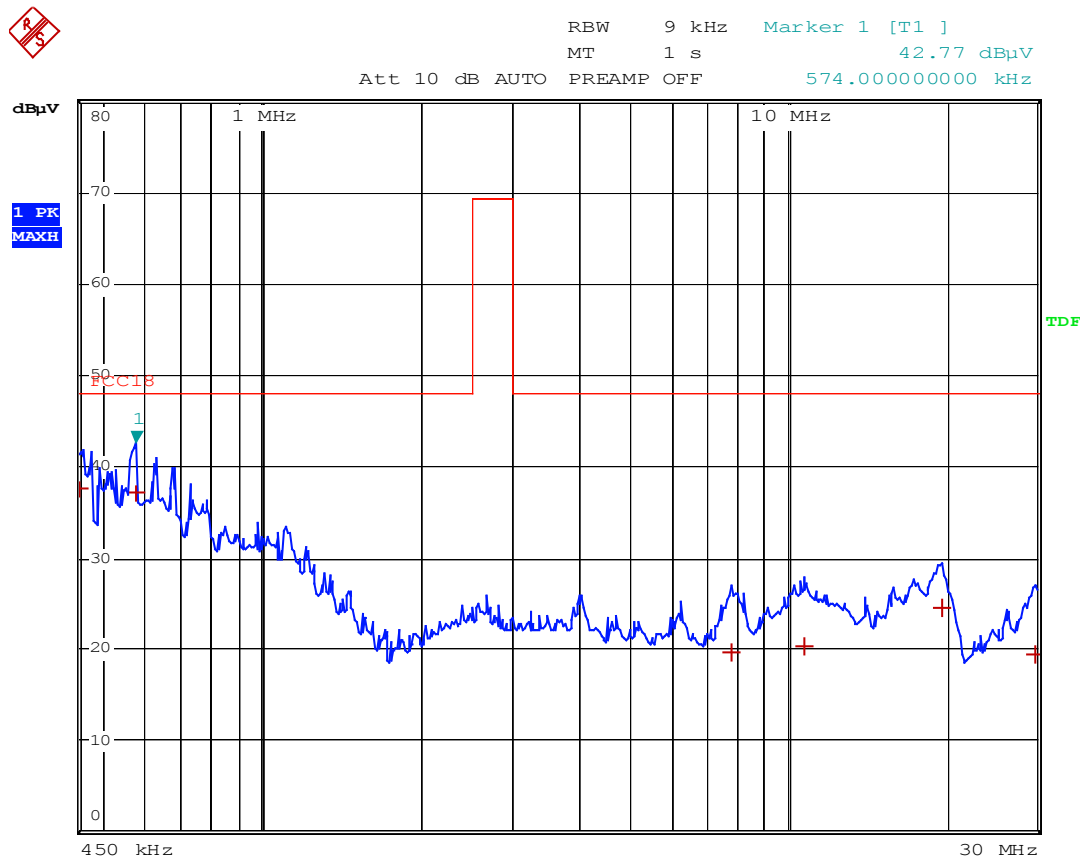


XING NAN RLF M/N: XN218 ON N

Date: 25.APR.2006 17:01:16

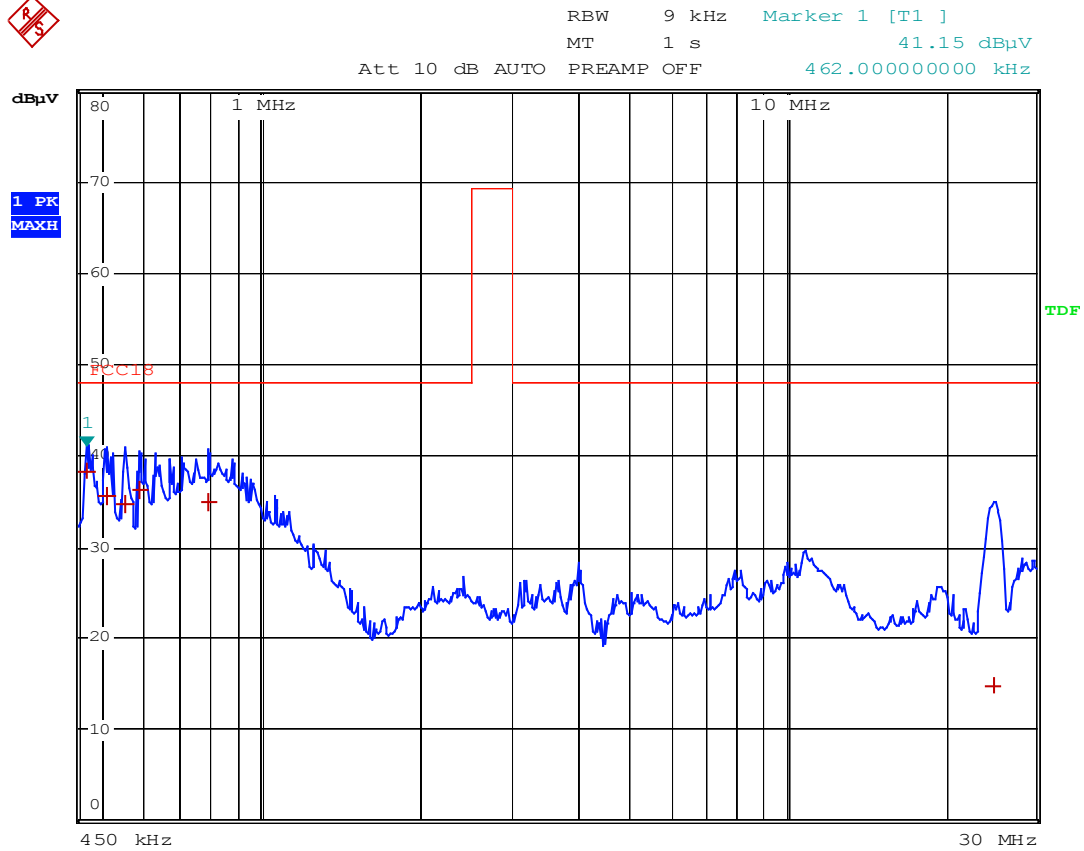

XING NAN RLF M/N: XN226 ON L


Date: 25.APR.2006 17:36:51

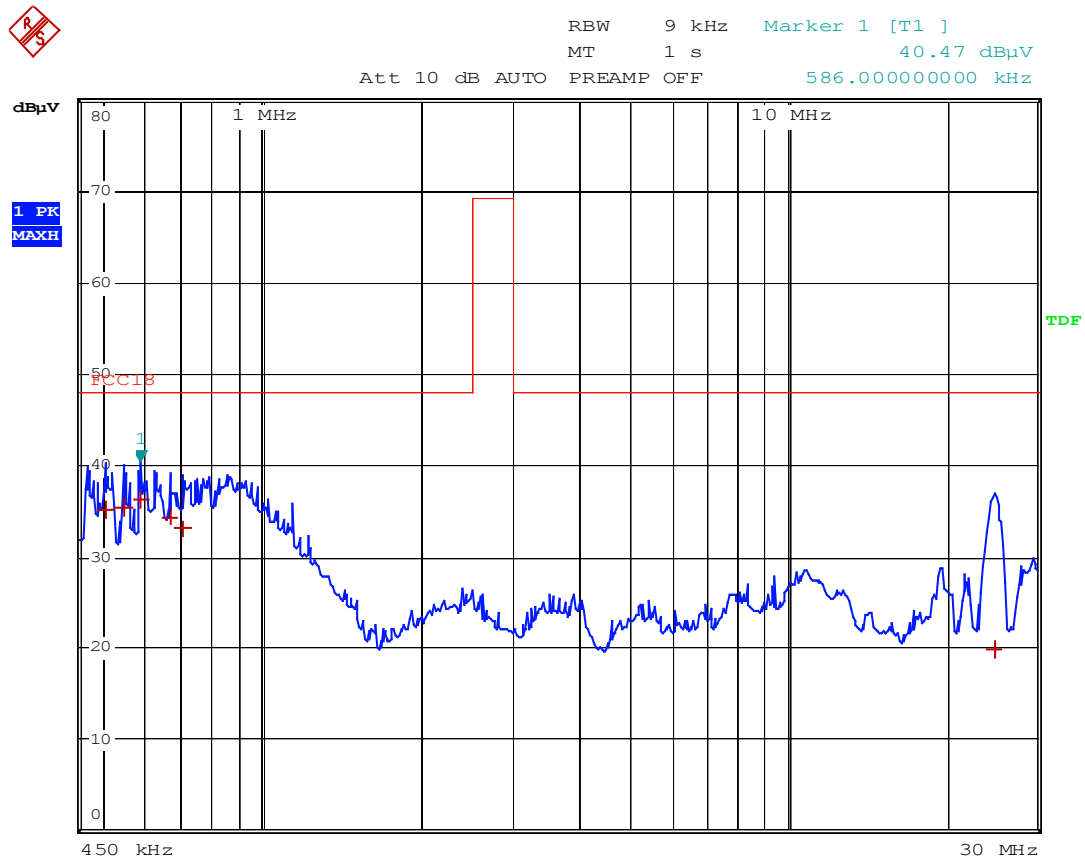

XING NAN RLF M/N: XN226 ON N


Date: 25.APR.2006 17:40:40



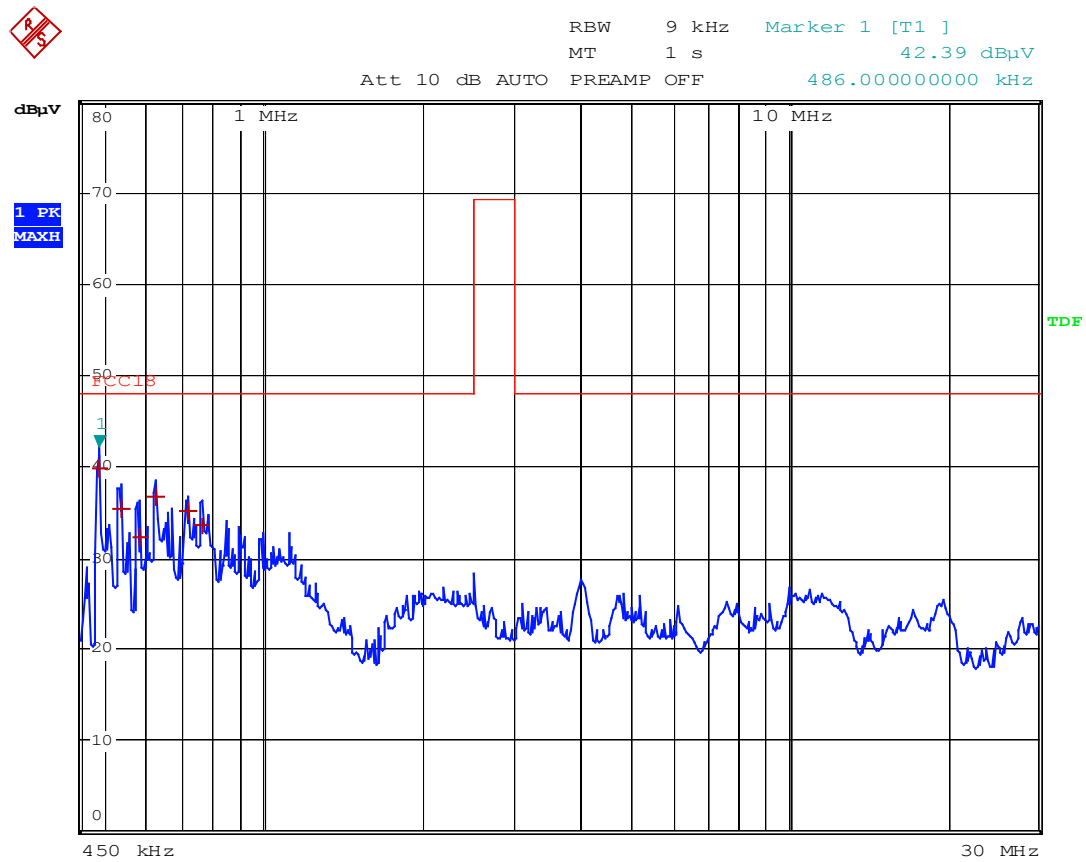

XING NAN RLF M/N: XN130 ON L

Date: 25.APR.2006 18:04:53

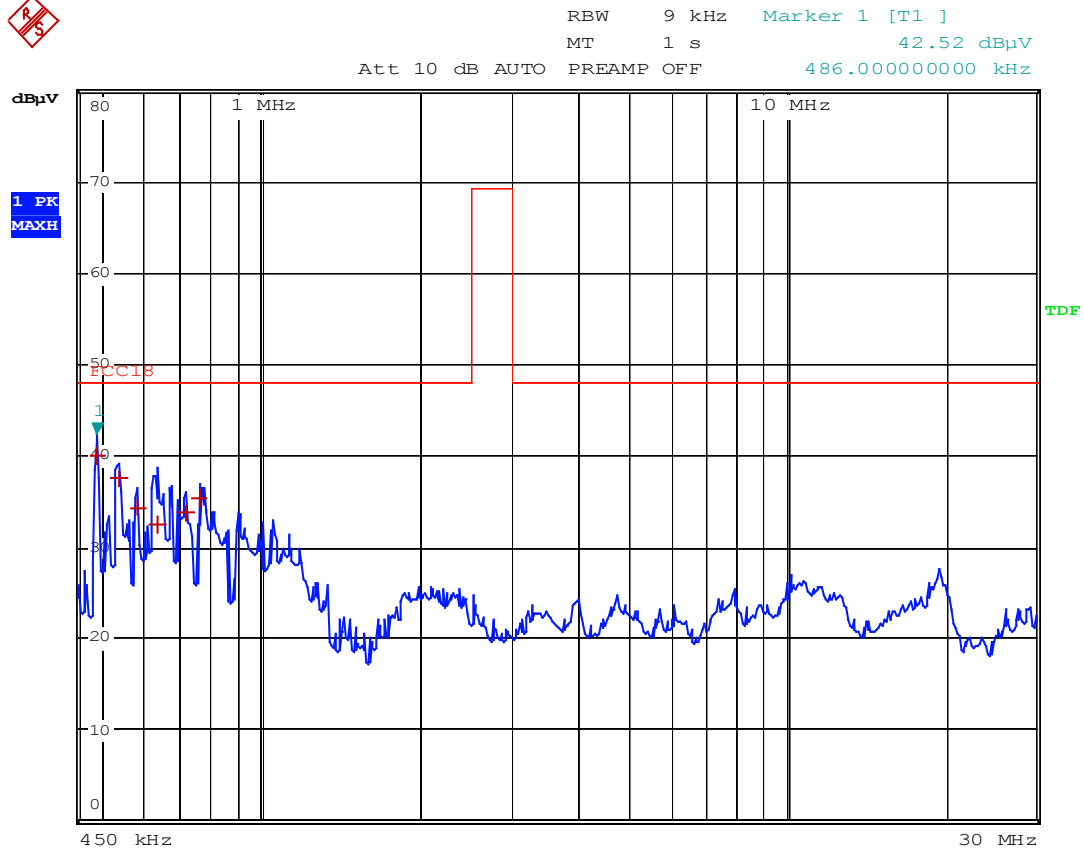


XING NAN RLF M/N: XN130 ON N

Date: 25.APR.2006 17:58:39




1 PK  
MAXH

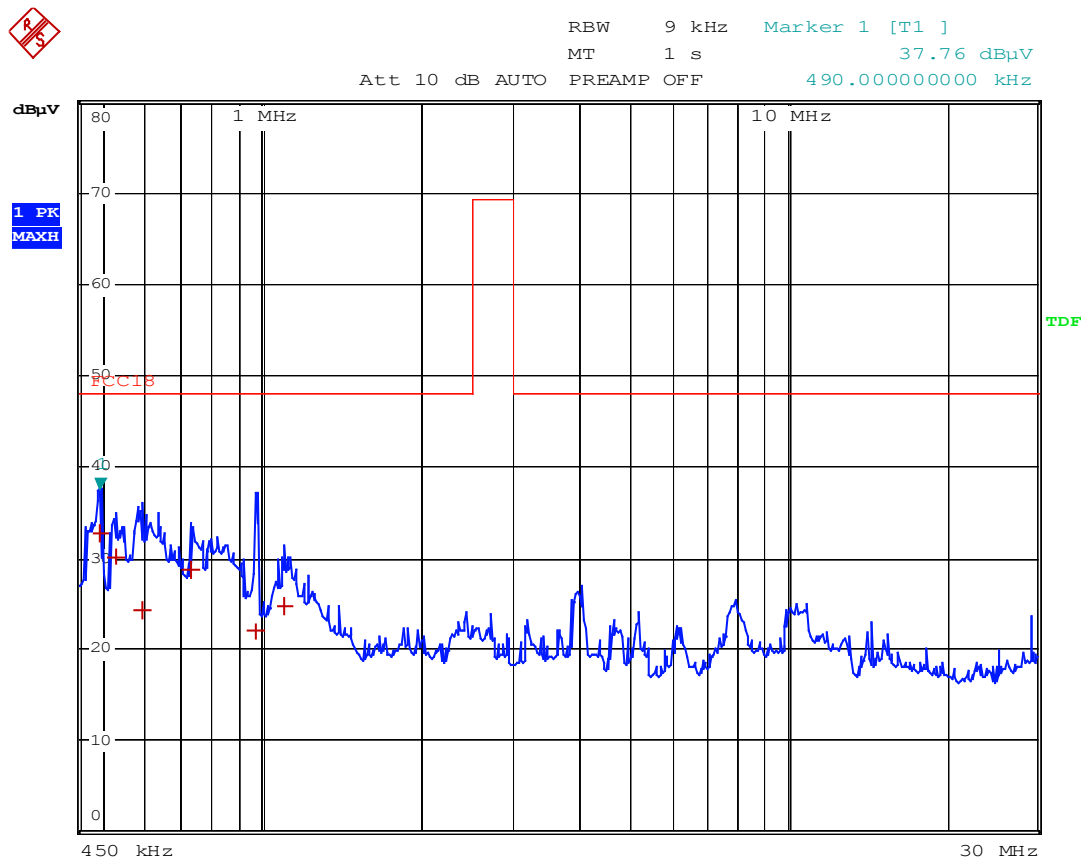


XING NAN RLF M/N: XN132 Running N

Date: 25.APR.2006 13:25:12

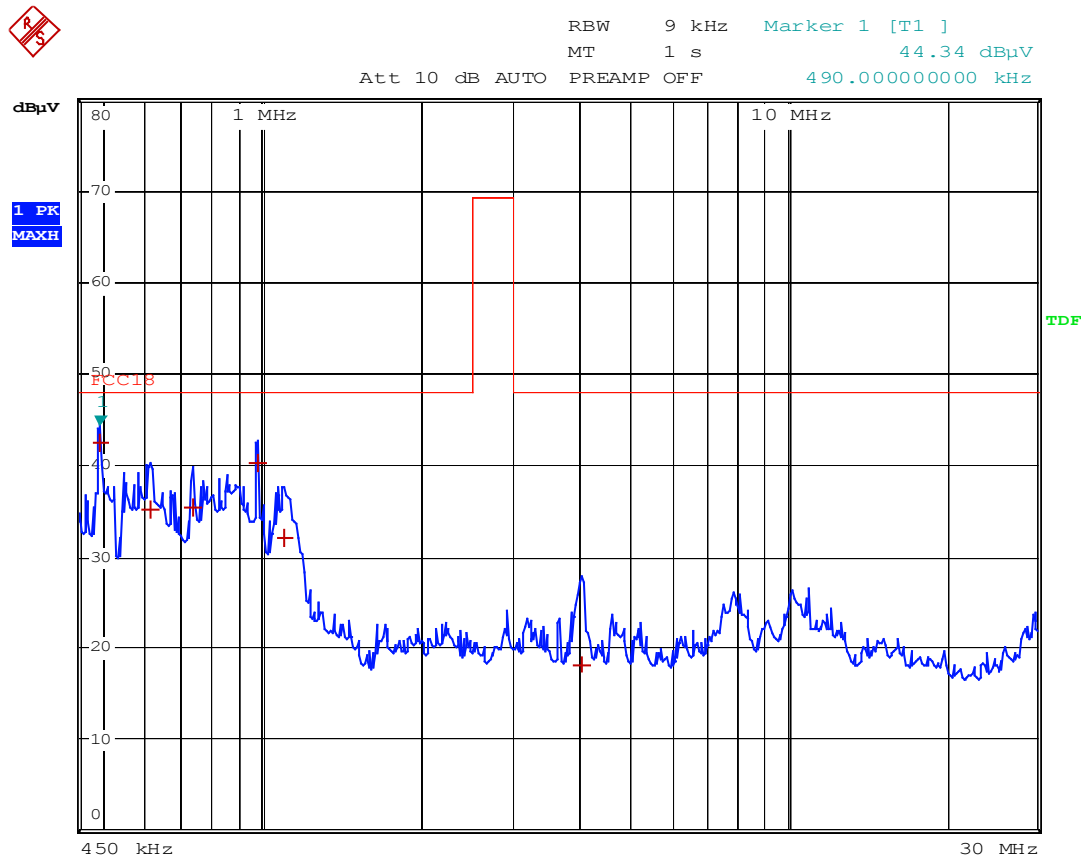

XING NAN RLF M/N: XN142 Running L

Date: 25.APR.2006 13:49:50

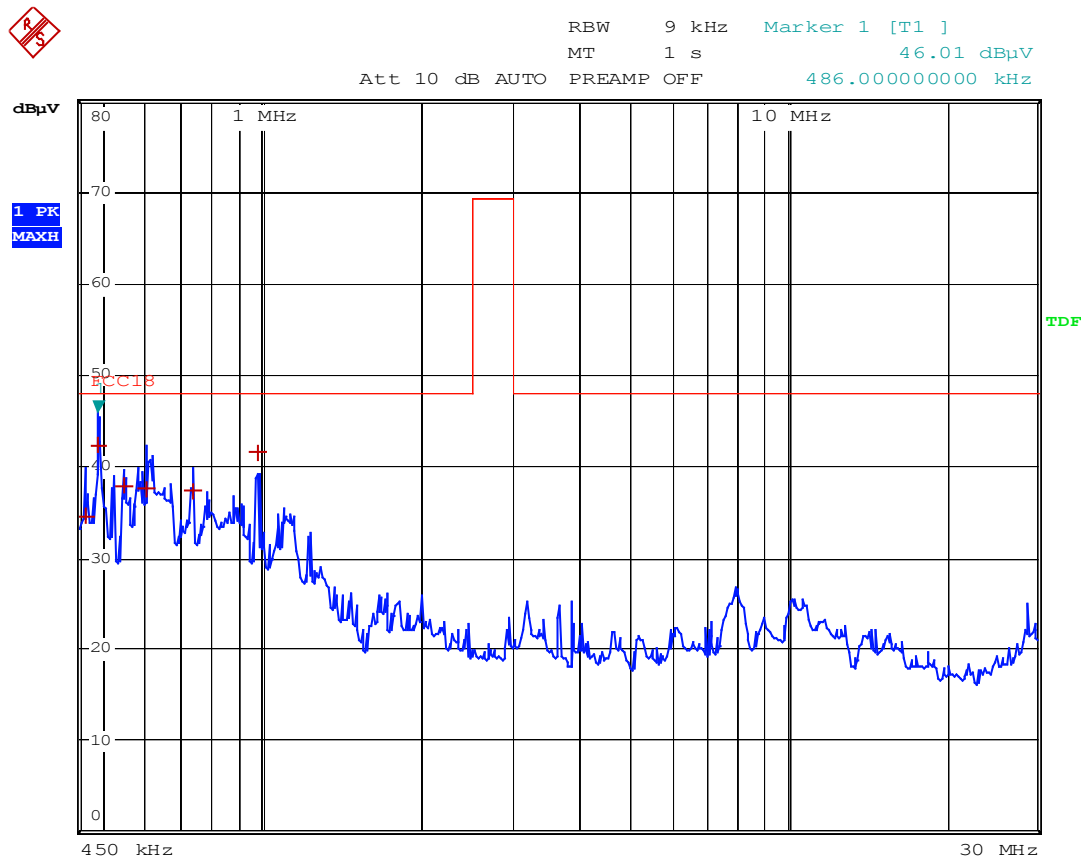

XING NAN RLF M/N: XN142 Running N

Date: 25.APR.2006 13:53:25