



849 NW State Road 45
Newberry, FL 32669 USA
Ph: 888.472.2424 or 352.472.5500
Fax: 352.472.2030
Email: info@timcoengr.com
Website: www.timcoengr.com

**FCC PART 15.249 AND IC RSS-210
TEST REPORT
UNLICENSED INTENTIONAL RADIATOR**

Applicant	HUNTERS SPECIALTIES, INC.	
Address	6000 HUNTINGTON COURT N.E.	
	CEDAR RAPIDS IOWA 52402 USA	
FCC ID	T35JS-2	
IC	8676A-JS2	
Model Number	JS-2	
Product Description	DIGITAL GAME CALLER - BLOODHOUND	
Date Sample Received	6/08/2012	
Date Tested	6/18/2012	
Tested By	Nam Nguyen	
Approved By	Mario R. de Aranzeta	
Report Number	1017AZUT12TestReport.doc	
Test Results	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**



Certificate #0955-01



TABLE OF CONTENT

GENERAL REMARKS.....	3
GENERAL INFORMATION.....	4
EMC EQUIPMENT LIST	5
TEST PROCEDURES	6
RADIATION INTERFERENCE.....	7
OCCUPIED BANDWIDTH.....	8
BAND EDGE COMPLIANCE.....	9
DUTY CYCLE.....	15
POWER LINE CONDUCTED INTERFERENCE	17

APPLICANT: HUNTERS SPECIALTIES, INC.

FCC ID: T35JS-2

IC: 8676A-JS2

REPORT #: O:\H\HUNTERS_T35\1017AZUT12\Extra1017AZUT12\1017AZUT12TestReport.doc



GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

Summary

The device under test does:

- fulfill the general approval requirements as identified in this test report
- not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.



Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669



Authorized Signatory Name:

Mario de Aranzeta C.E.T.
Compliance Engineer/ Lab. Supervisor

Date: June/18/2012

APPLICANT: HUNTERS SPECIALTIES, INC.

FCC ID: T35JS-2

IC: 8676A-JS2

REPORT #: O:\H\HUNTERS_T35\1017AZUT12\Extra1017AZUT12\1017AZUT12TestReport.doc



GENERAL INFORMATION

DUT Specification

The test results relate only to the items tested.					
Applicable Standard	Part 15.249				
DUT Description	DIGITAL GAME CALLER - BLOODHOUND				
FCC ID	T35JS-2				
IC	8676A-JS2				
Model Number	JS-2				
Operating Frequency	TX: 2439.80 MHz	RX: Same			
No. of Channels	1				
DUT Power Source	<input type="checkbox"/> 110–120Vac/50– 60Hz				
	<input type="checkbox"/> DC Power				
	<input checked="" type="checkbox"/> Battery Operated Exclusively				
Test Item	<input type="checkbox"/> Prototype	<input checked="" type="checkbox"/> Pre-Production	<input type="checkbox"/> Production		
Type of Equipment	<input type="checkbox"/> Fixed	<input type="checkbox"/> Mobile	<input checked="" type="checkbox"/> Portable		
AC Adaptor Charger (For USB port)	Model No: BLX-TC01 Input: 100 – 240 VAC, 50 – 60 Hz Output: 5 V, 500 mA				
Antenna Connector	FCC Rules require that the antenna connector be unique.				
Test Facility	Timco Engineering Inc. located at 849 NW State Road 45 Newberry, FL 32669 USA.				
Test Conditions	Temperature: 26°C Relative humidity: 50%				
Test Exercise	The DUT was placed in continuous transmit mode of operation.				
Modifications	none				

Test Supporting Equipment

Supporting Device	Manufacturer	Model / FCC ID	Serial Number
N/A			

APPLICANT: HUNTERS SPECIALTIES, INC.

FCC ID: T35JS-2

IC: 8676A-JS2

REPORT #: O:\H\HUNTERS_T35\1017AZUT12\Extra1017AZUT12\1017AZUT12TestReport.doc



EMC EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	Listed 5/10/10	5/10/12
AC Voltmeter	HP	400FL	2213A14499	CAL 6/12/11	6/12/13
Antenna: Active Loop	ETS-Lindgren	6502	00062529	CAL 9/23/10	9/23/12
Frequency Counter	HP	5385A	2730A03025	CAL 8/17/11	8/17/13
Hygro-Thermometer	Extech	445703	0602	CAL 6/15/11	6/15/13
Modulation Analyzer	HP	8901A	3435A06868	CAL 7/18/11	7/18/13
Digital Multimeter	Fluke	FLUKE-77	35053830	CAL 9/9/11	9/9/13
Power Meter	Boonton Electronics	4531	11793	CAL 11/12/2010	11/12/2012
EMI Receiver	Rohde & Schwarz	ESIB40	100274	CAL 3/16/2012	3/16/2014
Analyzer Tan Tower Preamplifier	HP	8449B-H02	3008A00372	CAL 10/28/11	10/28/13
Analyzer Tan Tower Quasi-Peak Adapter	HP	85650A	3303A01690	CAL 10/28/11	10/28/13
Analyzer Tan Tower RF Preselector	HP	85685A	3221A01400	CAL 10/28/11	10/28/13
Analyzer Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	CAL 10/28/11	10/28/13
Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 4/25/10	4/25/12
Antenna	ETS	3117	35923	12/7/2011	12/7/2013
Antenna	Electro metrics	LPA-25	1122	5/04/2011	5/04/2013
Antenna	Electro metrics	BIA-25	1096	5/04/2011	5/04/2013

APPLICANT: HUNTERS SPECIALTIES, INC.

FCC ID: T35JS-2

IC: 8676A-JS2

REPORT #: O:\H\HUNTERS_T35\1017AZUT12\Extra1017AZUT12\1017AZUT12TestReport.doc

TEST PROCEDURES

Radiation Interference: ANSI C63.4-2003 using a spectrum analyzer, a preselector, a quasi-peak adapter, and an appropriate antenna. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz with an appropriate sweep speed and the video bandwidth was 300 kHz up to 1 GHz and 1 MHz with a video BW of 3 MHz above 1 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The spectrum was searched to at least the tenth (10) harmonic of the fundamental.

Formula Of Conversion Factors: The field strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the preselector was accounted for in the spectrum analyzer meter reading.

Example:

$$\begin{array}{llll}
 \text{Freq (MHz)} & \text{Meter Reading} & + \text{ACF} & + \text{CL} = \text{FS} \\
 33 & 20 \text{ dBuV} & + 10.36 \text{ dB} & + 0.5 = 30.86 \text{ dB}\mu\text{V/m} @ 3\text{m}
 \end{array}$$

Power Line Conducted Interference: The procedure used was ANSI C63.4-2003 using a 50uH LISN. Both lines were observed. The bandwidth of the spectrum analyzer was 10kHz with an appropriate sweep speed. The spectrum was scanned from 0.15 to 30 MHz.

Occupied Bandwidth: A small sample of the transmitter output was fed into the spectrum analyzer and the attached plot was printed. The vertical scale is set to -10 dBm per division.

ANSI C63.4-2003 10.1 Measurement Procedures: The DUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The DUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes. Emissions attenuated more than 20 dB below the permissible value are not reported.

APPLICANT: HUNTERS SPECIALTIES, INC.

FCC ID: T35JS-2

IC: 8676A-JS2

REPORT: O:\H\HUNTERS_T35\1017AZUT12\Extra1017AZUT12\1017AZUT12TestReport.doc



RADIATION INTERFERENCE

Rules Part No.: 15.249, 15.209, RSS-210

Requirements:

Frequency	Limits
Part 15.209, RSS-210, RSS-GEN	
9 to 490 kHz	2400/F (kHz) μ V/m @ 300 meters
490 to 1705 kHz	24000/F (kHz) μ V/m @ 30 meters
1705 kHz to 30 MHz	29.54 dB μ V/m @ 30 meters
30 – 88	40.0 dB μ V/m @ 3 meters
80 – 216	43.5 dB μ V/m @ 3 meters
216 – 960	46.0 dB μ V/m @ 3 meters
Above 960	54.0 dB μ V/m @ 3 meters
Part 15.249, RSS-210, RSS-GEN	
Fundamental 902 – 928 MHz	94.0 dB μ V/m @ 3 meters
Fundamental 2.4 – 2.4835 MHz	94.0 dB μ V/m @ 3 meters
Harmonics	54.0 dB μ V/m @ 3 meters

Test Data: Emissions were measured from the lowest frequency generated or 9 kHz to the tenth harmonic.

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dB μ V	Ant. Polarity	Coax Loss dB	Correction Factor dB/m	Duty Cycle	Field Strength dB μ V/m	Margin dB
2,439.80	2,439.80	75.4	H	3.21	32.53	22.8	88.34	5.66
2,439.80	2,439.80	80.5	V	3.21	32.53	22.8	93.44	0.56
2,439.80	4,879.60	27.1	H	4.94	33.98	22.8	43.22	10.78
2,439.80	4,879.60	33.8	V	4.94	33.98	22.8	49.92	4.08
2,439.80	7,319.40	27.7	H	5.79	35.64	22.8	46.33	7.67
2,439.80	7,319.40	30.8	V	5.79	35.64	22.8	49.43	4.57
2,439.80	9,759.20	19.8	H	6.83	36.96	22.8	40.79	13.21
2,439.80	9,759.20	21	V	6.83	36.96	22.8	41.99	12.01

APPLICANT: HUNTERS SPECIALTIES, INC.

FCC ID: T35JS-2

IC: 8676A-JS2


REPORT: O:\H\HUNTERS_T35\1017AZUT12\Extra1017AZUT12\1017AZUT12TestReport.doc

OCCUPIED BANDWIDTH

Rules Part No.: 15.249 (d), RSS-210, RSS-GEN

Requirements: The field strength of any emissions appearing outside the bandedges and up to 10 kHz above and below the band edges shall be attenuated at least 50 dB below the level of the carrier or to the general limits of 15.249.

Test Data:

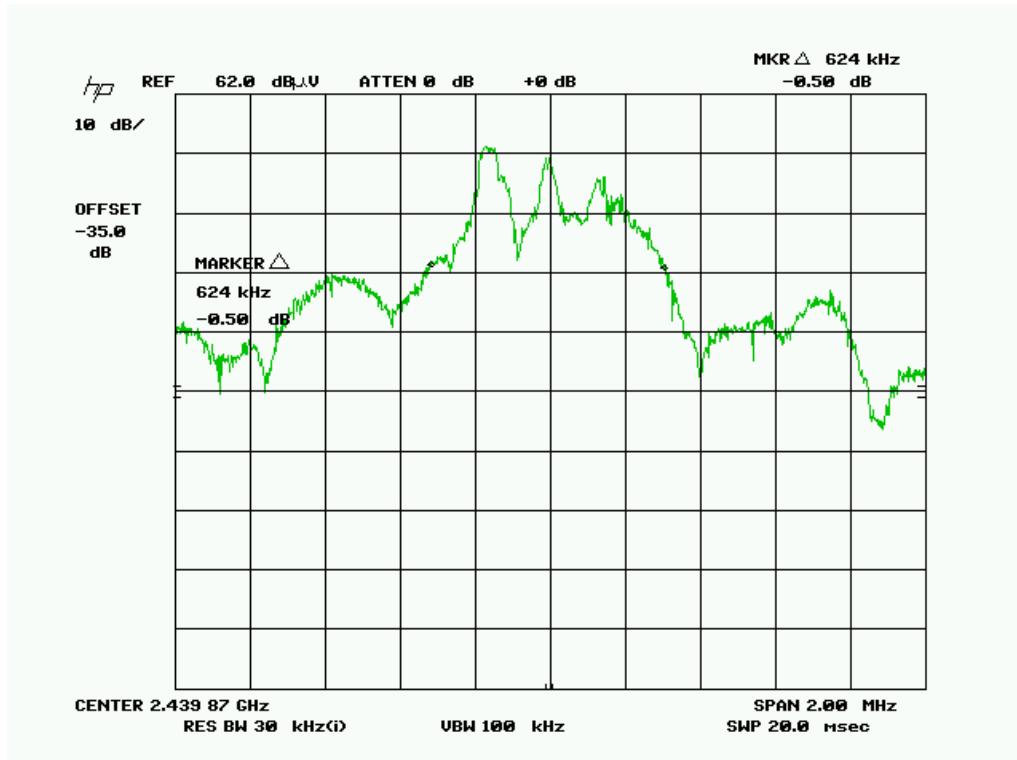

APPLICANT: HUNTERS SPECIALTIES, INC.

FCC ID: T35JS-2

IC: 8676A-JS2

REPORT: O:\H\HUNTERS_T35\1017AZUT12\Extra1017AZUT12\1017AZUT12TestReport.doc

BAND EDGE COMPLIANCE


Rules Part No.: 15.249 (d), RSS-210, RSS-GEN

Requirements: 40 dBc or in the case of restricted bands 54 dBuV/m.

Test Data:

Lower bandedge

Peak Plot

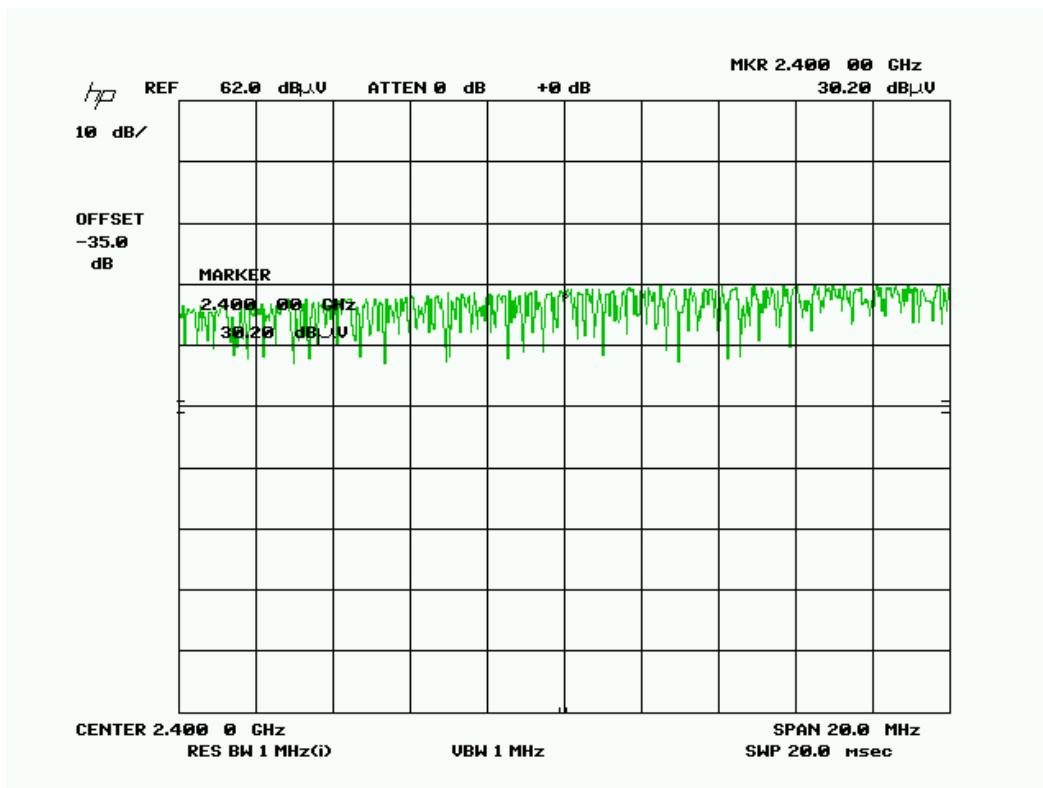


Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dB μ V	Ant. Polarity	Detector	Coax Loss dB	Correction Factor dB/m	Duty Cycle CF	Field Strength dB μ V/m	Margin dB
2,439.80	2,400.00	30.2	V	Peak	3.18	32.48	-22.8	43.06	10.94
2,439.80	2,400.00	-3.3	V	Avg	3.18	32.48	-22.8	9.56	44.44

APPLICANT: HUNTERS SPECIALTIES, INC.

FCC ID: T35JS-2

IC: 8676A-JS2

REPORT: O:\H\HUNTERS_T35\1017AZUT12\Extra1017AZUT12\1017AZUT12TestReport.doc

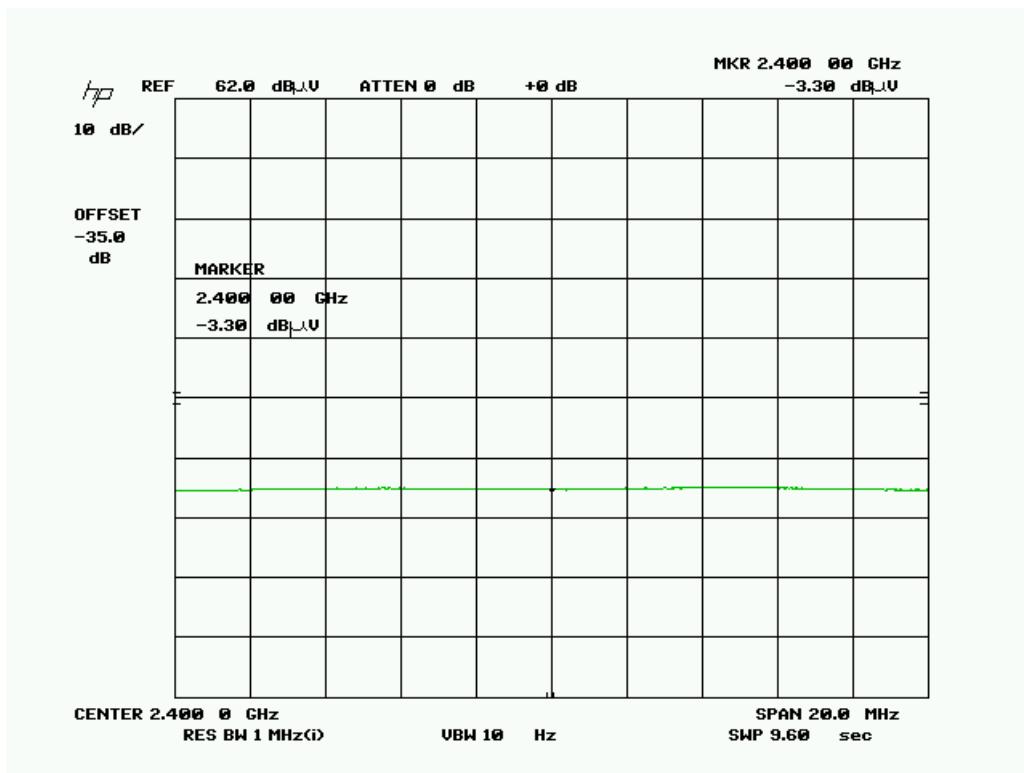

Average Plot

APPLICANT: HUNTERS SPECIALTIES, INC.


FCC ID: T35JS-2

IC: 8676A-JS2

REPORT: O:\H\HUNTERS_T35\1017AZUT12\Extra1017AZUT12\1017AZUT12TestReport.doc

Lower non-adjacent restricted band

Peak Plot

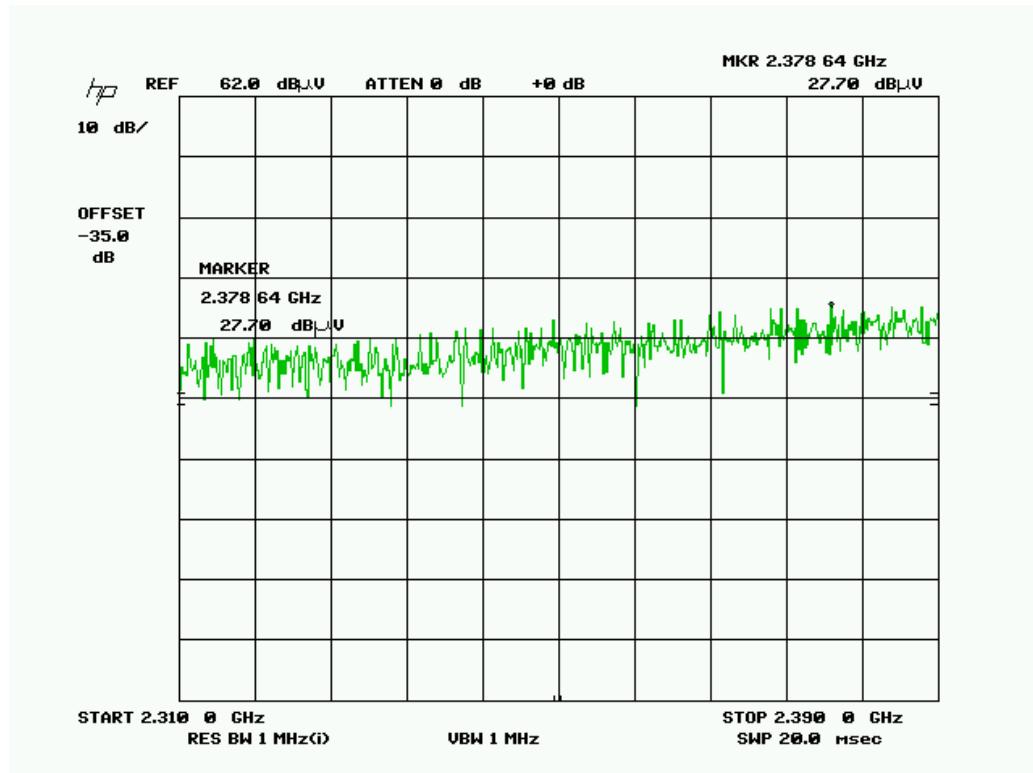

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dB μ V	Ant. Polarity	Detector	Coax Loss dB	Correction Factor dB/m	Duty Cycle CF	Field Strength dB μ V/m	Margin dB
2,439.80	2,378.64	27.7	V	Peak	3.17	32.45	-22.8	40.52	13.478
2,439.80	2,378.64	-3.7	V	Avg	3.17	32.45	-22.8	9.12	44.88


APPLICANT: HUNTERS SPECIALTIES, INC.

FCC ID: T35JS-2

IC: 8676A-JS2

REPORT: O:\H\HUNTERS_T35\1017AZUT12\Extra1017AZUT12\1017AZUT12TestReport.doc

Average Plot

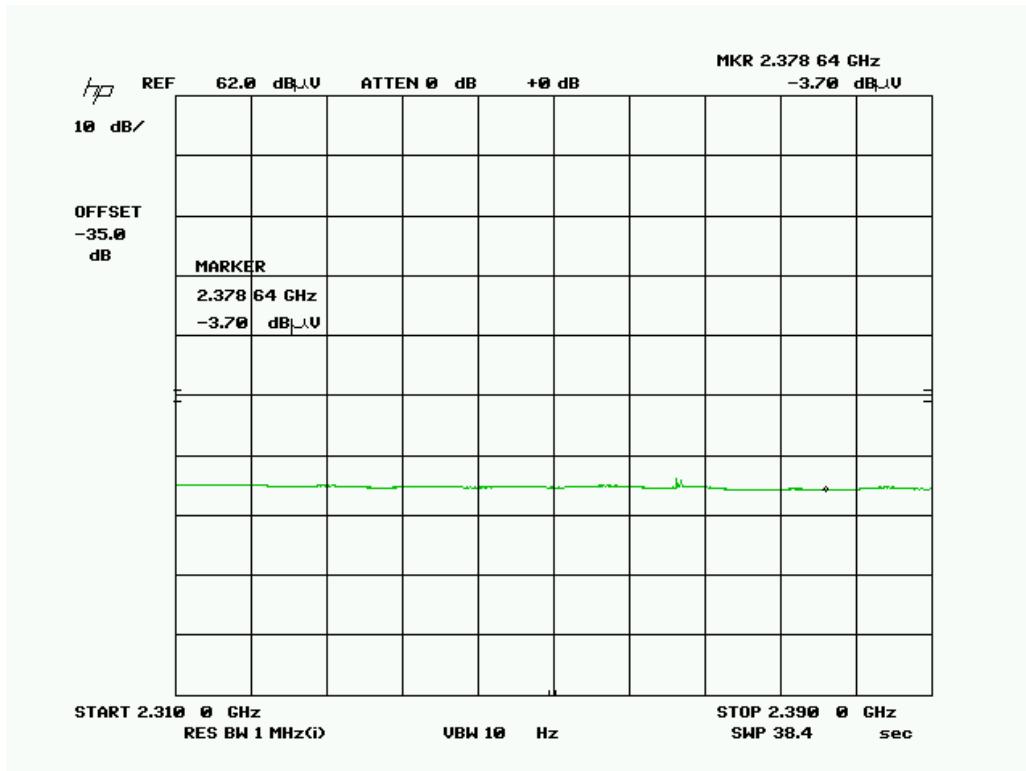

APPLICANT: HUNTERS SPECIALTIES, INC.


FCC ID: T35JS-2

IC: 8676A-JS2

REPORT: O:\H\HUNTERS_T35\1017AZUT12\Extra1017AZUT12\1017AZUT12TestReport.doc

Upper bandedge

Peak Plot

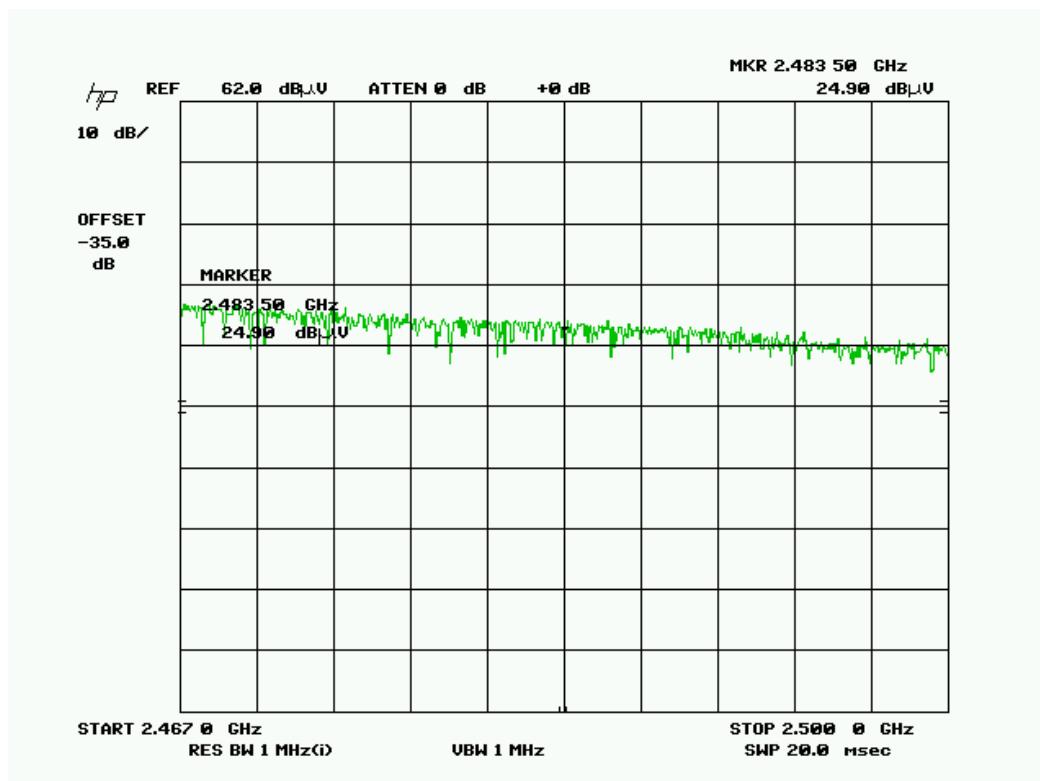

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dB μ V	Ant. Polarity	Detector	Coax Loss dB	Correction Factor dB/m	Duty Cycle CF dB	Field Strength dB μ V/m	Margin dB
2,439.80	2,483.50	24.9	V	Peak	3.24	32.58	-22.8	37.92	16.00
2,439.80	2,483.50	-3.4	V	Avg	3.24	32.58	-22.8	9.62	44.38


APPLICANT: HUNTERS SPECIALTIES, INC.

FCC ID: T35JS-2

IC: 8676A-JS2

REPORT: O:\H\HUNTERS_T35\1017AZUT12\Extra1017AZUT12\1017AZUT12TestReport.doc

Average Plot

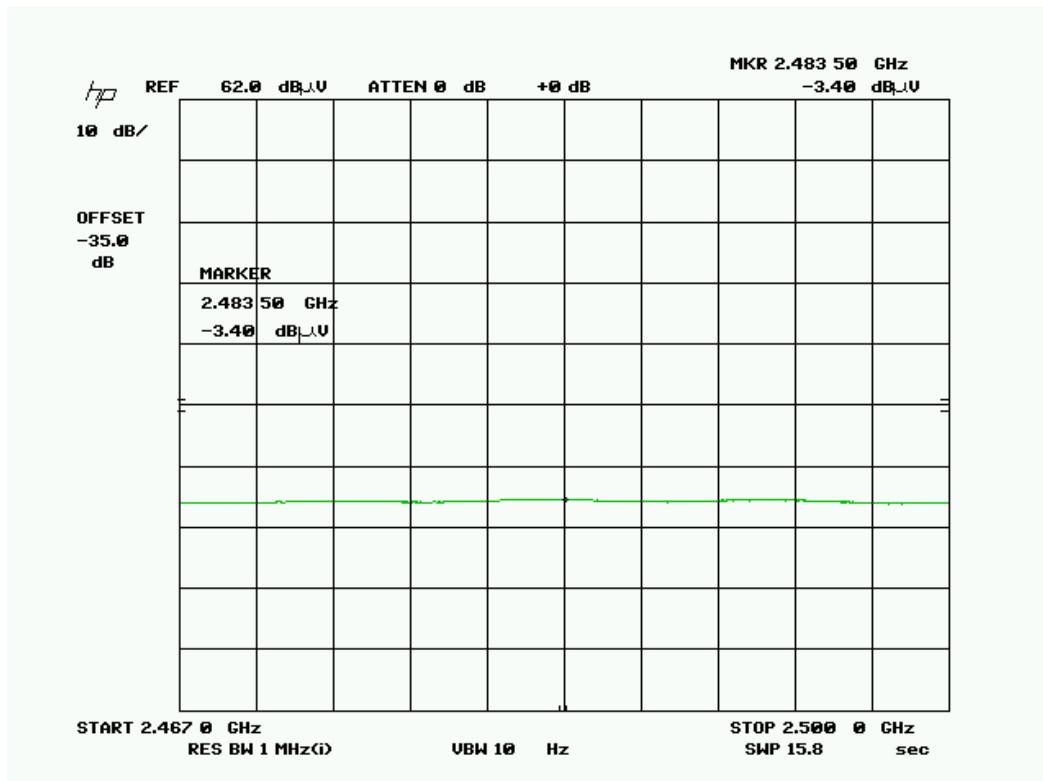


APPLICANT: HUNTERS SPECIALTIES, INC.

FCC ID: T35JS-2

IC: 8676A-JS2

REPORT: O:\H\HUNTERS_T35\1017AZUT12\Extra1017AZUT12\1017AZUT12TestReport.doc

DUTY CYCLE

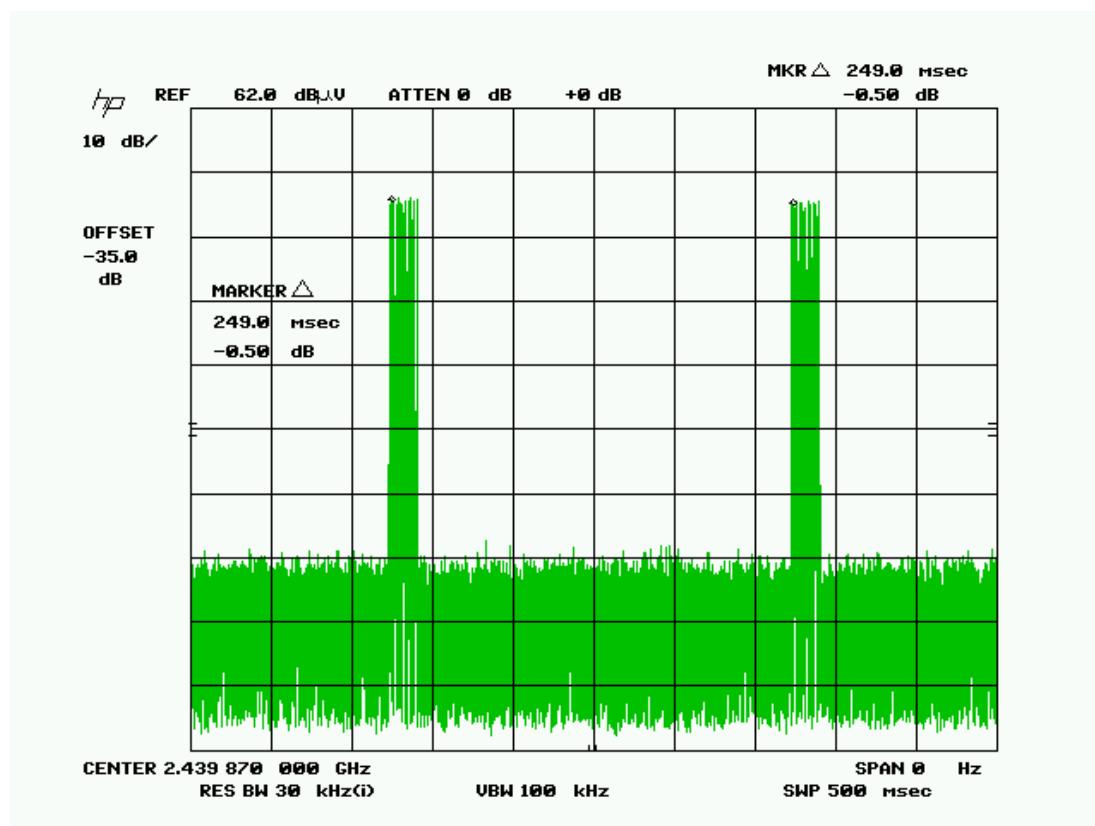


APPLICANT: HUNTERS SPECIALTIES, INC.

FCC ID: T35JS-2

IC: 8676A-JS2

REPORT: O:\H\HUNTERS_T35\1017AZUT12\Extra1017AZUT12\1017AZUT12TestReport.doc

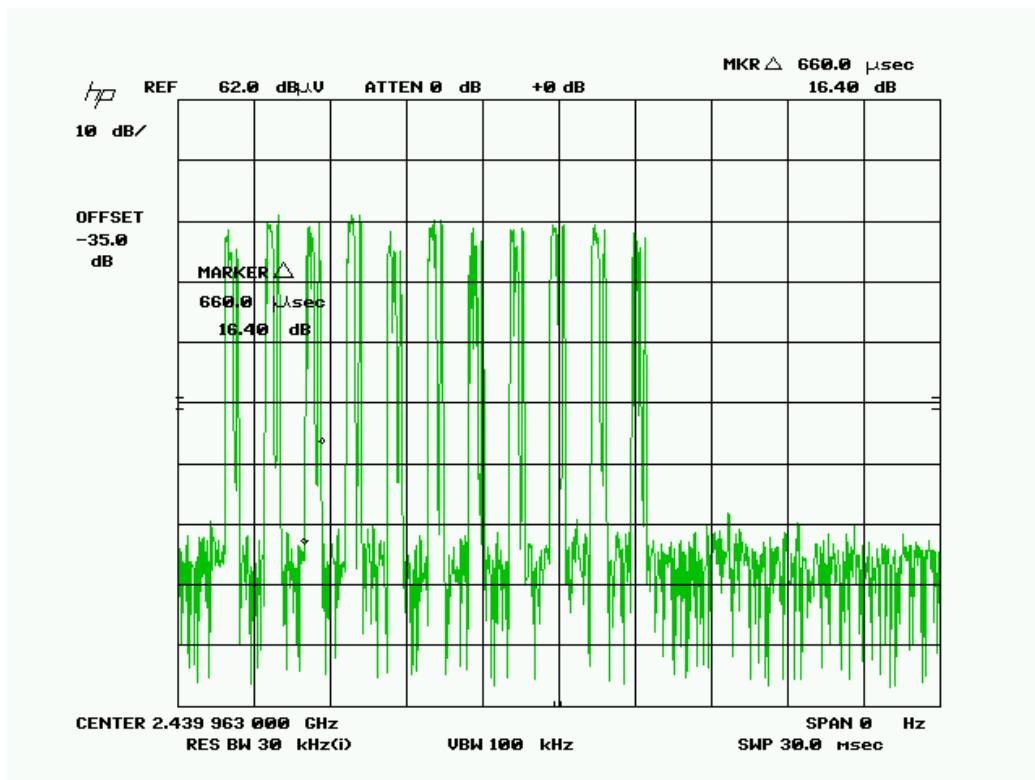

Total # of pulses: 11 in 100 ms

Duration of pulse: 0.66 ms maximum duration of pulse according to manufacturer.
 $20 \log ((11 * 0.66) / 100) = 20 \log (0.0726) = -22.8 \text{ dB}$

APPLICANT: HUNTERS SPECIALTIES, INC.

FCC ID: T35JS-2

IC: 8676A-JS2

REPORT: O:\H\HUNTERS_T35\1017AZUT12\Extra1017AZUT12\1017AZUT12TestReport.doc



POWER LINE CONDUCTED INTERFERENCE

Rules Part No.: 15.207, RSS-210, RSS-GEN,

Requirements:

Frequency (MHz)	Quasi Peak Limits (dB μ V)	Average Limits (dB μ V)
0.15 – 0.5	66 – 56	56 – 46
0.5 – 5.0	56	46
5.0 – 30	60	50

Test Data: The attached graphs represent the emissions read for power line conducted of the USB charger for this device. Both lines were observed.


APPLICANT: HUNTERS SPECIALTIES, INC.

FCC ID: T35JS-2

IC: 8676A-JS2

REPORT: O:\H\HUNTERS_T35\1017AZUT12\Extra1017AZUT12\1017AZUT12TestReport.doc

POWERLINE CONDUCTED EMISSIONS – LINE 1

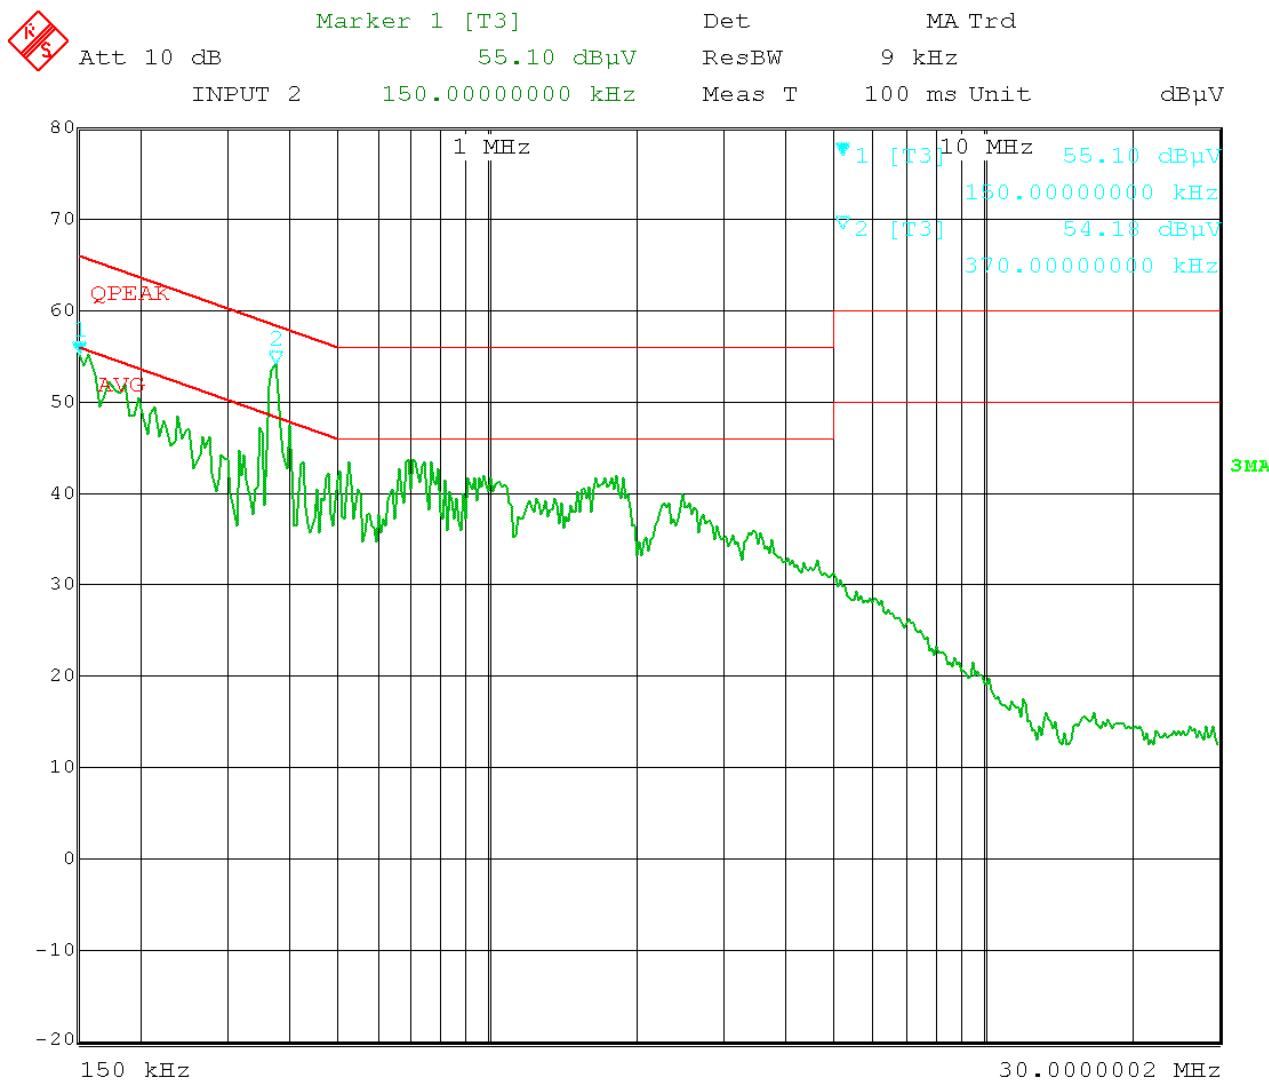

Date: 18.JUN.2012 08:25:03


APPLICANT: HUNTERS SPECIALTIES, INC.

FCC ID: T35JS-2

IC: 8676A-JS2

REPORT: O:\H\HUNTERS_T35\1017AZUT12\Extra1017AZUT12\1017AZUT12TestReport.doc

POWERLINE CONDUCTED EMISSIONS – LINE 1(QUASI PEAK AND AVERAGING)

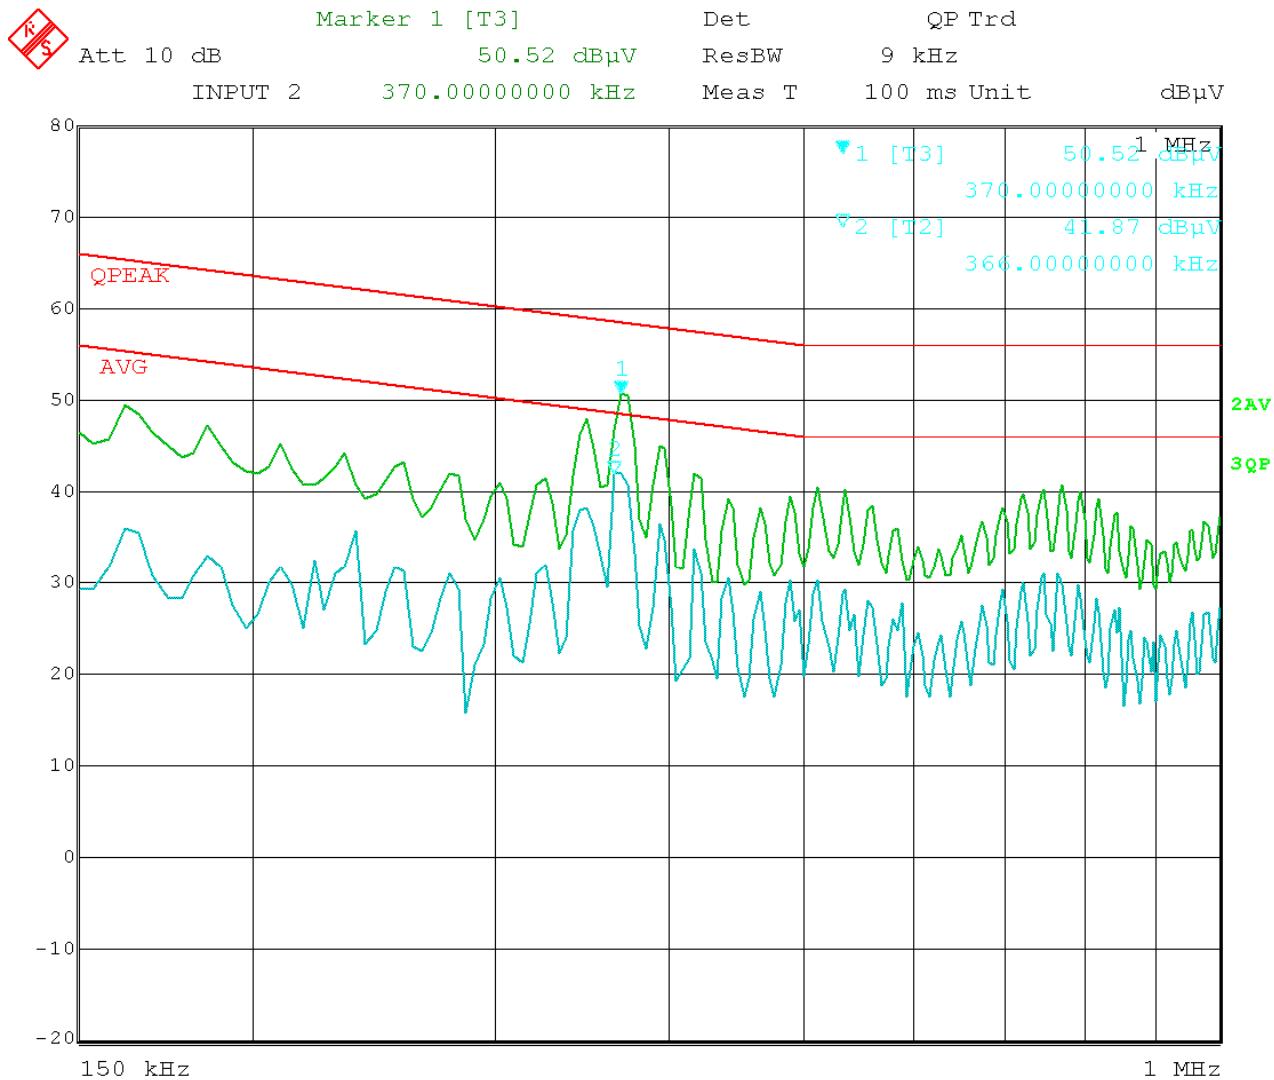


APPLICANT: HUNTERS SPECIALTIES, INC.

FCC ID: T35JS-2

IC: 8676A-JS2

REPORT: O:\H\HUNTERS_T35\1017AZUT12\Extra1017AZUT12\1017AZUT12TestReport.doc

POWERLINE CONDUCTED EMISSIONS – LINE 2

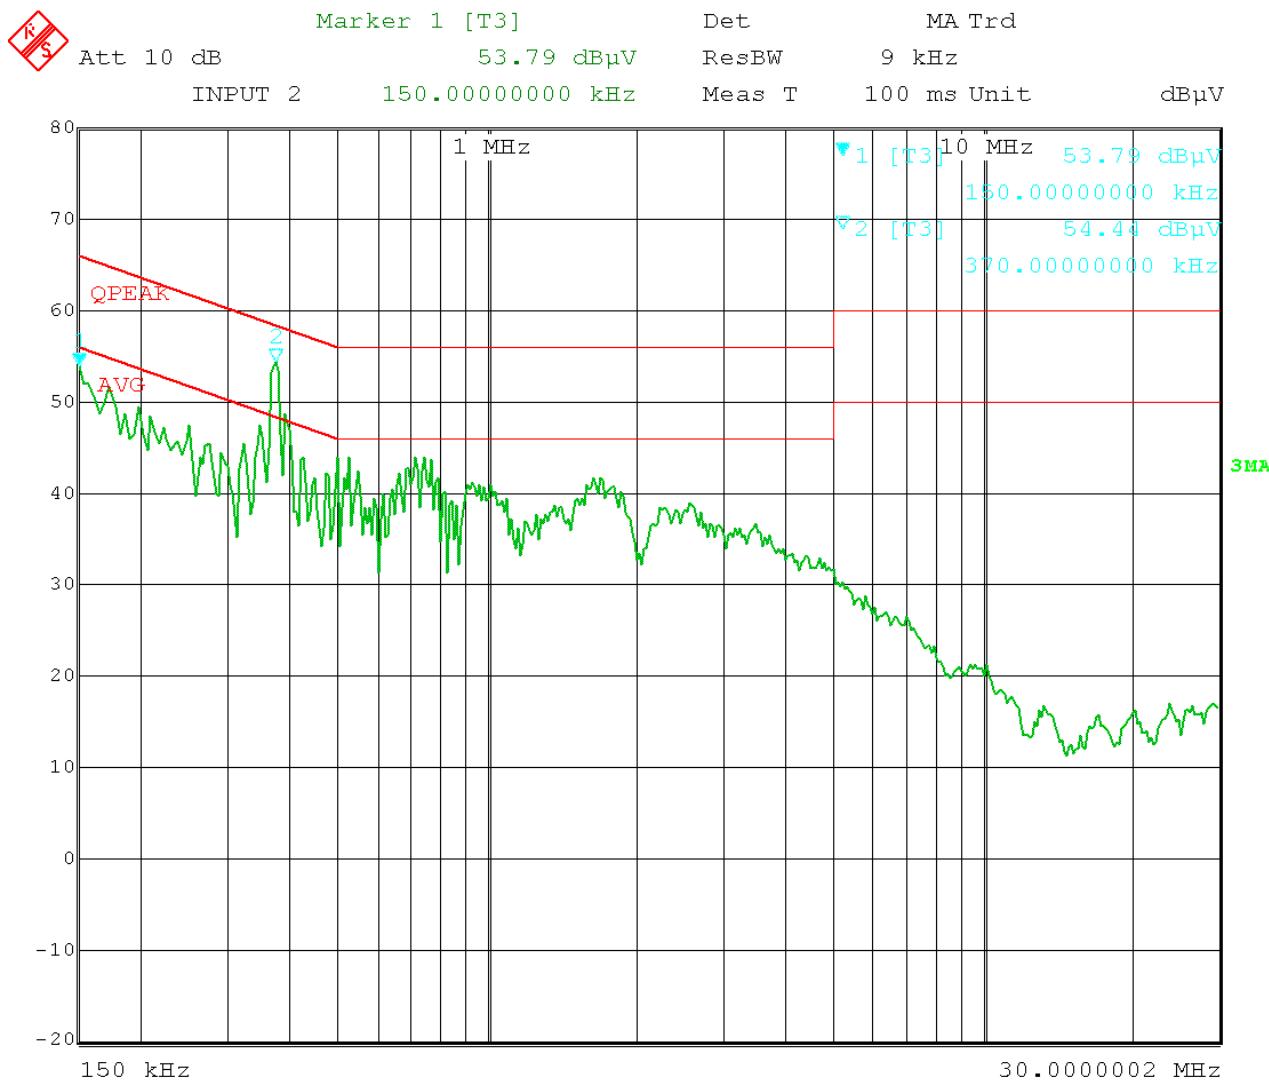

Date: 18.JUN.2012 08:28:36


APPLICANT: HUNTERS SPECIALTIES, INC.

FCC ID: T35JS-2

IC: 8676A-JS2

REPORT: O:\H\HUNTERS_T35\1017AZUT12\Extra1017AZUT12\1017AZUT12TestReport.doc

POWERLINE CONDUCTED EMISSIONS – LINE 2(QUASI PEAK AND AVERAGING)

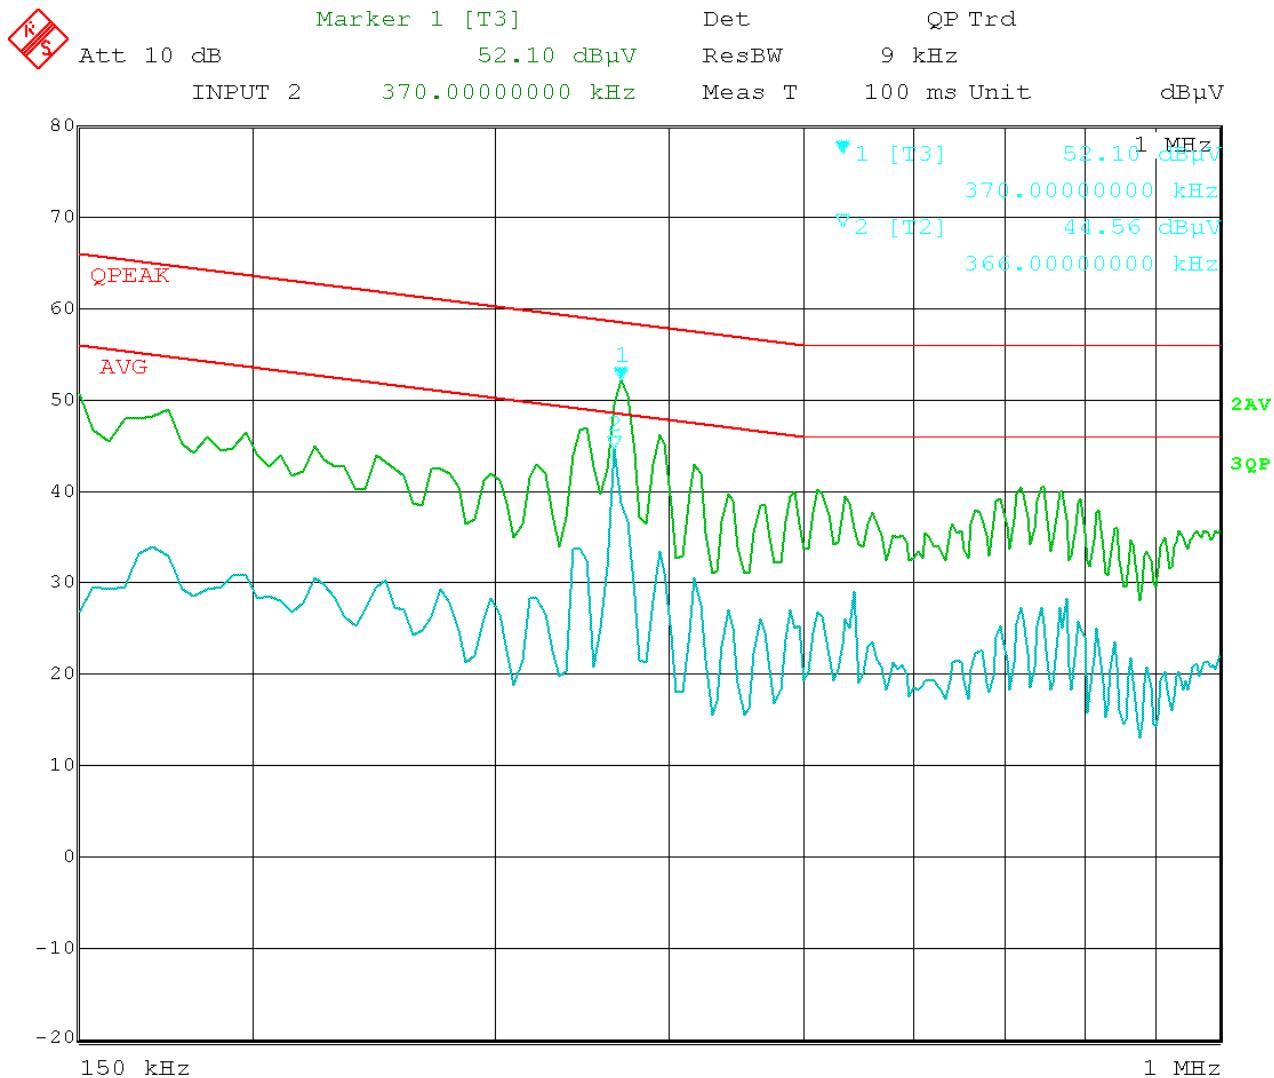

Date: 18.JUN.2012 08:41:24

APPLICANT: HUNTERS SPECIALTIES, INC.

FCC ID: T35JS-2

IC: 8676A-JS2

REPORT: O:\H\HUNTERS_T35\1017AZUT12\Extra1017AZUT12\1017AZUT12TestReport.doc