

Shenzhen Huatongwei International Inspection Co., Ltd.

Keji S,12th , Road, Hi-tech Industrial Park, Shenzhen, Guangdong, China

Phone:86-755-26748099

Fax:86-755-26748089

<http://www.szhtw.com.cn>



FCC TEST REPORT

47 CFR FCC Part 15 Subpart B

FCC ID.....: T37PL9660-Q1

Report Reference No.....: TRE12080097 R/C:49655

Compiled by

(position+printed name+signature)...: File administrators Tim Zhang

Tim. Zhang

Supervised by

(position+printed name+signature)...: Test Engineer Eric Zhang

Eric Zhang

Approved by

(position+printed name+signature)...: Manager Wenliang Li

Wenliang Li

Date of issue.....: Sep 13, 2012

Testing Laboratory Name: Shenzhen Huatongwei International Inspection Co., Ltd

Address: Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China

Applicant's name.....: ASOKA Shenzhen Limited.

Address: Room 1701,17/F., Fiyta Hi Tech Building, Gao-Xin Rd, South, Shenzhen , P R China

Test specification:

Standard: 47 CFR FCC Part 15 Subpart B - Unintentional Radiators

ANSI C63.4: 2009

TRF Originator: Shenzhen Huatongwei International Inspection CO., Ltd

Master TRF: Dated 2006-06

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: PlugLink HD AV Adapter

Trade Mark: /

Model/Type reference.....: PL9660-Q1

Operation Frequency.....: From 2MHz to 30MHz

Listed Models: /

Result.....: Positive

TEST REPORT

Test Report No. :	TRE12080097	Sep 13, 2012 Date of issue
-------------------	-------------	-------------------------------

Equipment under Test : PlugLink HD AV Adapter

Model /Type : PL9660-Q1

Listed Models : /

Applicant : ASOKA Shenzhen Limited.

Address : Room 1701,17/F., Fiyta Hi Tech Building, Gao-Xin Rd, South, Shenzhen , P R China

Manufacturer : Asoka USA Corporation

Address : 2620 Augustine Drive Suite 230,Santa Clara City,CA 95054

Test Result according to the standards on page 4:	Positive
--	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

<u>1.</u>	<u>TEST STANDARDS</u>	<u>4</u>
<u>2.</u>	<u>SUMMARY</u>	<u>5</u>
2.1.	General Remarks	5
2.2.	Equipment Under Test	5
2.3.	Short description of the Equipment under Test (EUT)	5
2.4.	EUT operation mode	5
2.5.	Related Submittal(s) / Grant (s)	5
2.6.	Modifications	5
2.7.	Configuration of Tested System	6
<u>3.</u>	<u>TEST ENVIRONMENT</u>	<u>7</u>
3.1.	Address of the test laboratory	7
3.2.	Test Facility	7
3.3.	Environmental conditions	8
3.4.	Statement of the measurement uncertainty	8
3.5.	Equipments Used during the Test	8
<u>4.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>10</u>
4.1.	Conducted Emissions Test	10
4.2.	Radiated Emission Test	14
<u>5.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>20</u>
<u>6.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>22</u>

1. TEST STANDARDS

The tests were performed according to following standards:

[**47 CFR FCC Part 15 Subpart B - Unintentional Radiators**](#)

[**ANSI C63.4: 2009**](#) – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Aug 24, 2012
Testing commenced on	:	Aug 24, 2012
Testing concluded on	:	Sep 13, 2012

2.2. Equipment Under Test

Power supply system utilised

Power supply voltage	:	<input checked="" type="radio"/> 120V / 60 Hz	<input type="radio"/> 115V / 60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input type="radio"/> Other (specified in blank below)	

/

2.3. Short description of the Equipment under Test (EUT)

The EUT PlugLink HD AV Adapter is an In-House BPL device.

For more details, refer to the user's manual of the EUT.

Sample Type: Prototype

2.4. EUT operation mode

The EUT has been tested under typical operating condition.

2.5. Related Submittal(s) / Grant (s)


This submittal(s) (test report) is intended for FCC ID: **T37PL9660-Q1** filing to comply with the FCC Part 15, Subpart B Rules.

2.6. Modifications

No modifications were implemented to meet testing criteria.

2.7. Configuration of Tested System

Configuration of Tested System

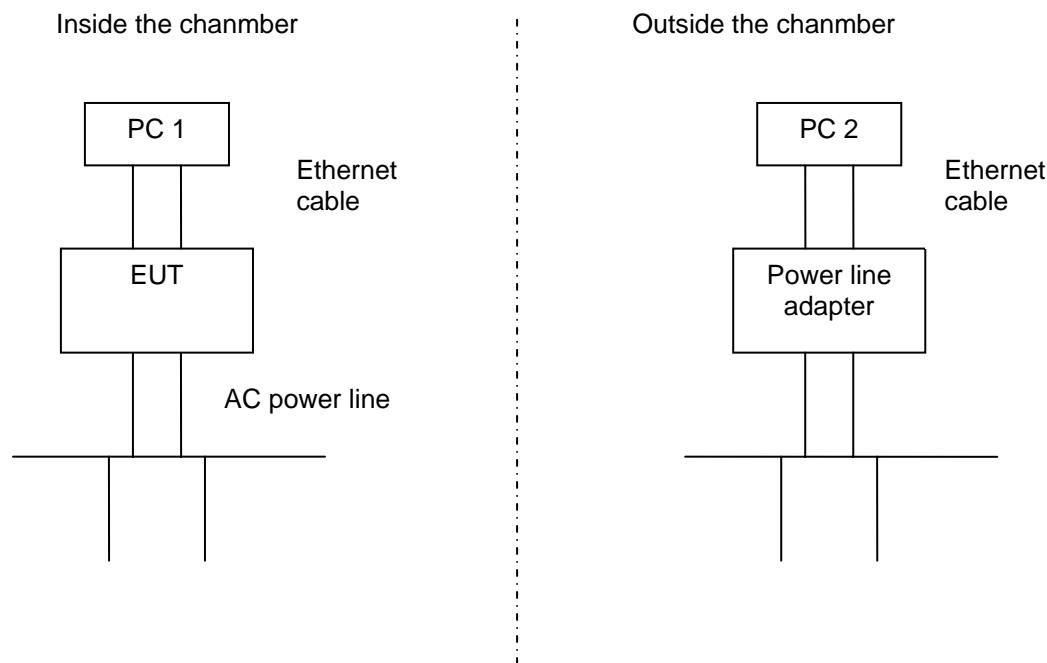

Equipment Used in Tested System

No.	Equipment	Manufacturer	Model No.	Serial No.	Notes
1	PC	DELL	DIMENSION E520	1RNN42X	
2	Notebook PC	DELL	D600	CN-0X2034-48643-428-1379	
3	PlugLink HD AV Adapter	ASOKA	PL9660-Q1	/	

2.8. Product Information

As the product operation frequency band from 2MHz to 30MHz.

Product:

Series Number:Y12086600144

Operation frequency:2MHz-30MHz;

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Huatongwei International Inspection Co., Ltd
Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China
Phone: 86-755-26715686 Fax: 86-755-26748089

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2009) and CISPR Publication 22.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: Mar. 01, 2009. Valid time is until Feb. 28, 2015.

A2LA-Lab Cert. No. 2243.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. Valid time is until Sep. 30, 2013.

FCC-Registration No.: 662850

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 662850, Renewal date Jun. 01, 2012, valid time is until Jun. 01, 2015.

IC-Registration No.: 5377A

The 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377A on Jan. 25, 2011, valid time is until Jan. 24, 2014.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

NEMKO-Aut. No.: ELA125

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed the quality assurance system, the testing facilities, qualifications and testing practices of the relevant parts of the organization. The quality assurance system of the Laboratory has been validated against ISO/IEC 17025 or equivalent. The laboratory also fulfills the conditions described in Nemko Document NLA-10, the authorization is valid through Jul. 07, 2013.

VCCI

The 3m Semi-anechoic chamber (12.2m×7.95m×6.7m) and Shielded Room (8m×4m×3m) of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-292. Date of Registration: Dec. 24, 2010. Valid time is until Dec. 23, 2013.

Main Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-2726. Date of Registration: Dec. 20, 2009. Valid time is until Dec. 19, 2012.

Telecommunication Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-1837. Date of Registration: May 07, 2010. Valid time is until May 06, 2013.

DNV

Shenzhen Huatongwei International Inspection Co., Ltd. has been found to comply with the requirements of DNV towards subcontractor of EMC and safety testing services in conjunction with the EMC and Low voltage Directives and in the voluntary field. The acceptance is based on a formal quality Audit and follow-ups according to relevant parts of ISO/IEC Guide 17025 (2005), in accordance with the requirements of the DNV Laboratory Quality Manual towards subcontractors. Valid time is until Aug. 24, 2013.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.24 dB	(1)
Radiated Emission	1~18GHz	5.16 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.39 dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.5. Equipments Used during the Test

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI TEST RECEIVER	Rohde & Schwarz	ESCI	100106	2011/10/24
2	ARTIFICIAL MAINS	Rohde & Schwarz	ESH2-Z5	100028	2011/10/24
3	PULSE LIMITER	Rohde & Schwarz	ESHSZ2	100044	2011/10/24
4	EMI TEST SOFTWARE	Rohde & Schwarz	ES-K1	N/A	2011/10/24
5	TWO-LINE V-NETWORK	Rohde & Schwarz	ESH3-Z5	100049	2011/10/24


Radiated Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	ULTRA-BROADBAND ANTENNA	Rohde & Schwarz	HL562	100015	2011/10/24
2	EMI TEST RECEIVER	Rohde & Schwarz	ESI 26	100009	2011/10/24
3	RF TEST PANEL	Rohde & Schwarz	TS / RSP	335015/ 0017	2011/10/24
4	TURNTABLE	ETS	2088	2149	2011/10/24
5	ANTENNA MAST	ETS	2075	2346	2011/10/24
6	EMI TEST OFTWARE	Rohde & Schwarz	ESK1	N/A	2011/10/24
7	HORN ANTENNA	Rohde & Schwarz	HF906	100039	2011/11/01
8	Amplifier	Sonoma	310N	E009-13	2011/10/24
9	JS amplifier	Rohde & Schwarz	JS4-00101800-28-5A	F201504	2011/10/24
10	High pass filter	Compliance Direction systems	BSU-6	34202	2011/10/24

The calibration interval was one year.

4. TEST CONDITIONS AND RESULTS

4.1. Conducted Emissions Test

TEST CONFIGURATION

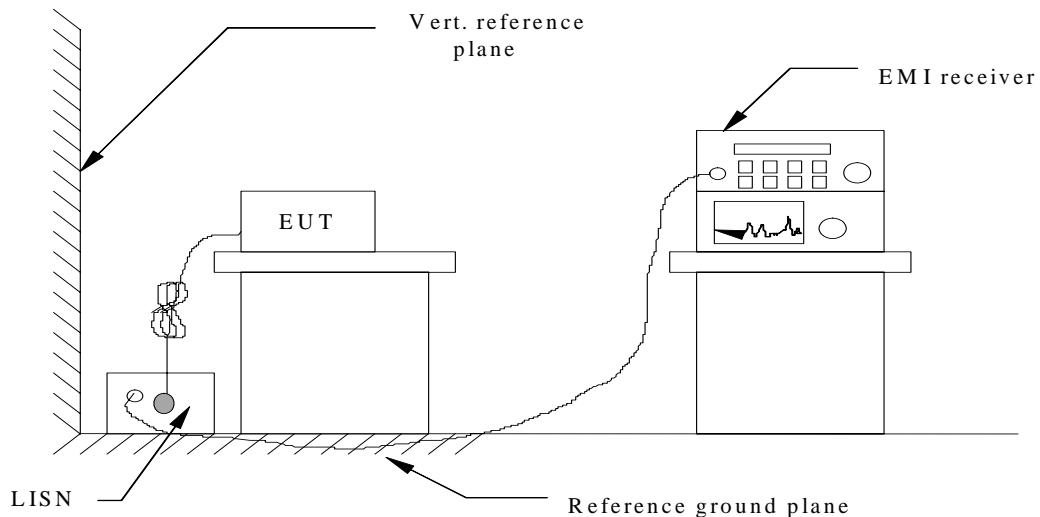

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4-2009.
- 2 Support equipment, if needed, was placed as per ANSI C63.4-2009.
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4-2009.
- 4 The EUT received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

CONDUCTED POWER LINE EMISSION LIMIT

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following :

Frequency (MHz)	Maximum RF Line Voltage (dB μ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

For unintentional device, according to § 15.107(c) Line Conducted Emission Limits is as following :

Frequency (KHz)	Maximum RF Line Voltage	
535-1705	1000 μ V	60dB μ V

For In-House BPL devices operating as unintentional radiators below 30 MHz, the conducted emissions shall be measured in the 535 – 1705 kHz band as specified in Section 15.107(c). For In- House BPL devices operating as unintentional radiators above 30 MHz, the conducted emissions shall be measured as specified in Section 15.107(a).


TEST CONDITION

The data rate was set at the maximum rate used by the EUT, and the operating frequency of the EUT as unintentional radiator was blow 30MHz.

TEST RESULTS

Operating frequency blow 30MHz


SCAN TABLE: "FCC-ASO (150K-30M) FIN"
 Short Description: 150K-30M Voltage

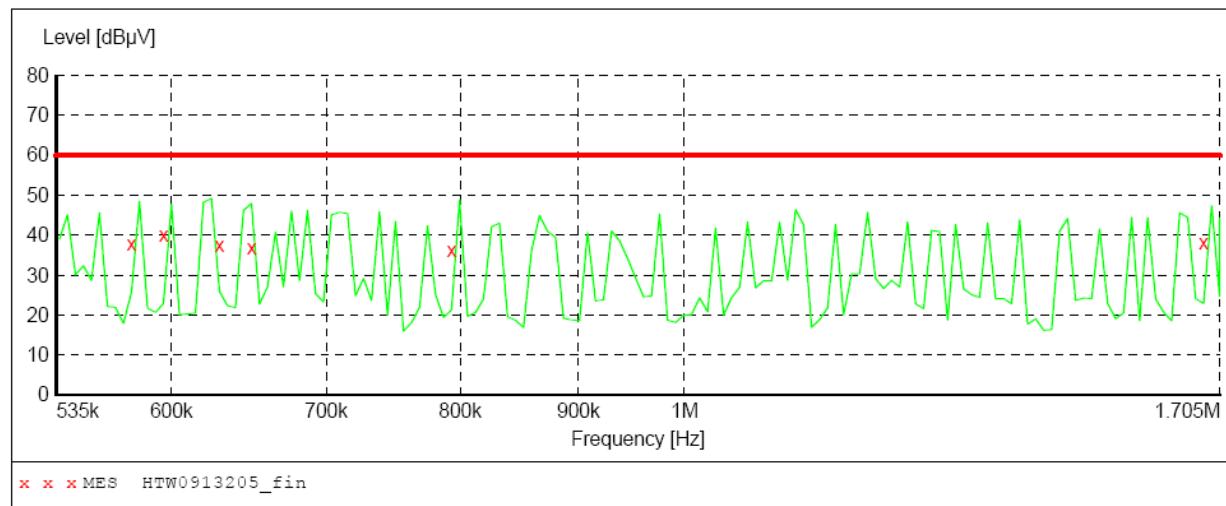**MEASUREMENT RESULT: "HTW0913205_fin"**

9/13/2012 9:46AM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.576660	37.70	9.8	60	22.3	QP	N	GND
0.595330	39.90	9.8	60	20.1	QP	N	GND
0.629480	37.60	9.8	60	22.4	QP	N	GND
0.649868	36.90	9.8	60	23.1	QP	N	GND
0.793120	36.10	9.8	60	23.9	QP	N	GND
1.677380	38.20	9.9	60	21.8	QP	N	GND

SCAN TABLE: "FCC-ASO (150K-30M) FIN"
 Short Description: 150K-30M Voltage

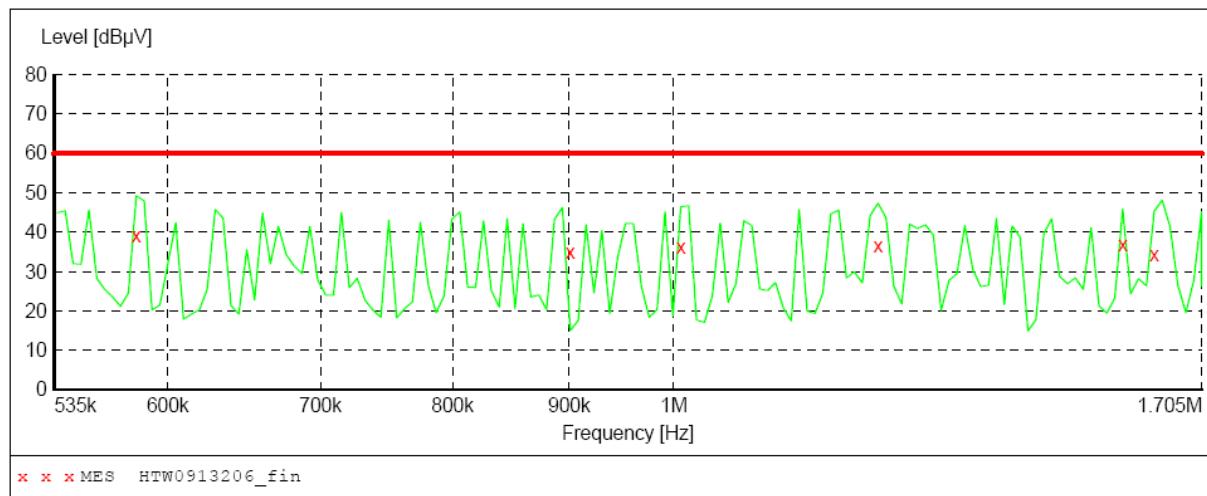

MEASUREMENT RESULT: "HTW0913206_fin"

9/13/2012 9:49AM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.581273	39.00	9.8	60	21.0	QP	L1	GND
0.900970	35.00	9.8	60	25.0	QP	L1	GND
1.007290	36.30	9.9	60	23.7	QP	L1	GND
1.229337	36.40	9.9	60	23.6	QP	L1	GND
1.573790	37.00	9.9	60	23.0	QP	L1	GND
1.624760	34.30	9.9	60	25.7	QP	L1	GND


Remark:

- (1) Measuring frequencies from 0.15 MHz to the 30 MHz.
- (2) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) The IF bandwidth of EMI Test Receiver was 9KHz for measuring from 0.15 MHz to 30MHz


4.2. Radiated Emission Test

TEST CONFIGURATION

a) Radiated Emission Test Set-Up, Frequency below 1000MHz

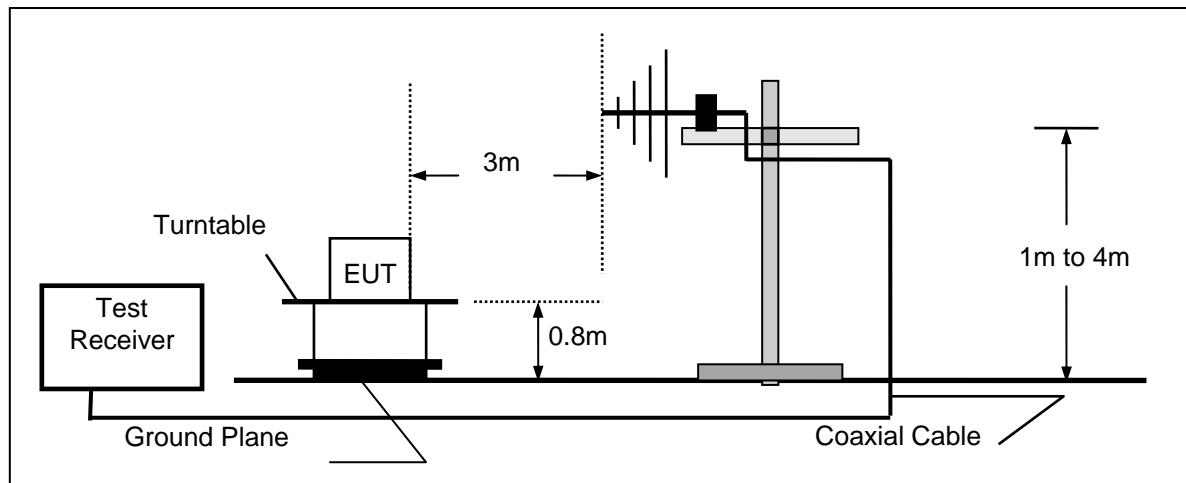

b) Radiated Emission Test Set-Up, Frequency above 1000MHz

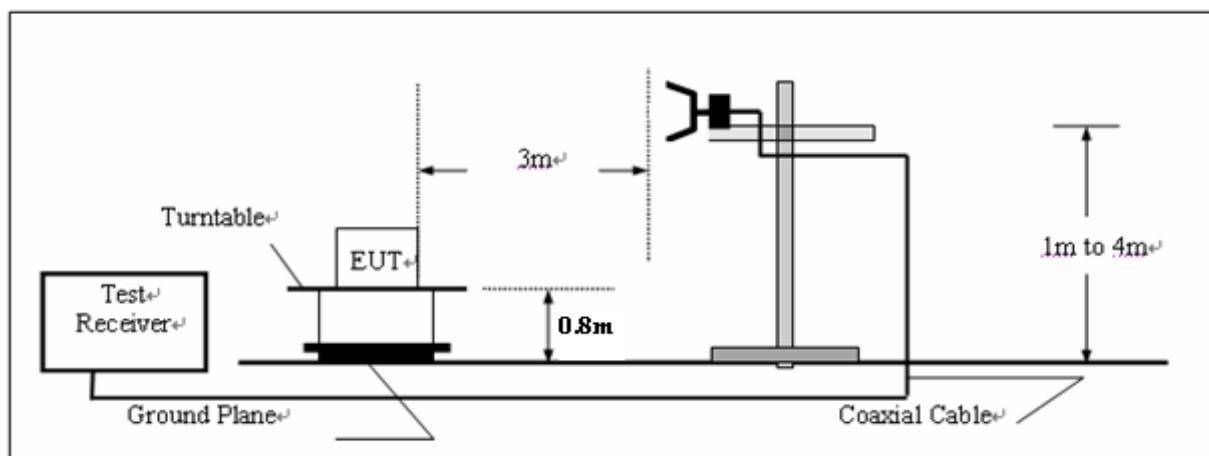

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF - CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

For example

Frequency (MHz)	FS (dB μ V/m)	RA (dB μ V/m)	AF (dB)	CL (dB)	AG (dB)	Transd (dB)
300.00	40	58.1	12.2	1.6	31.90	-18.1

$$Transd=AF + CL - AG$$

RADIATION LIMIT

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.


TEST CONDITION

The data rate was set at the maximum rate used by the EUT.

The highest fundamental frequency of the EUT is 166MHz, according to § 15.33(a), the radiated emission test was performed within the frequency band 9KHz – 2000MHz. The unintentional operating frequency range is 2MHz – 30MHz.

TEST RESULTS***SCAN TABLE: "test Field(30M-1G)QP"***

Short Description:			Field Strength(30M-1G)			
Start Frequency	Stop Frequency	Step Width	Detector	Meas.	IF Time	Transducer
30.0 MHz	1.0 GHz	60.0 kHz	QuasiPeak	1.0 s	120 kHz	HL562

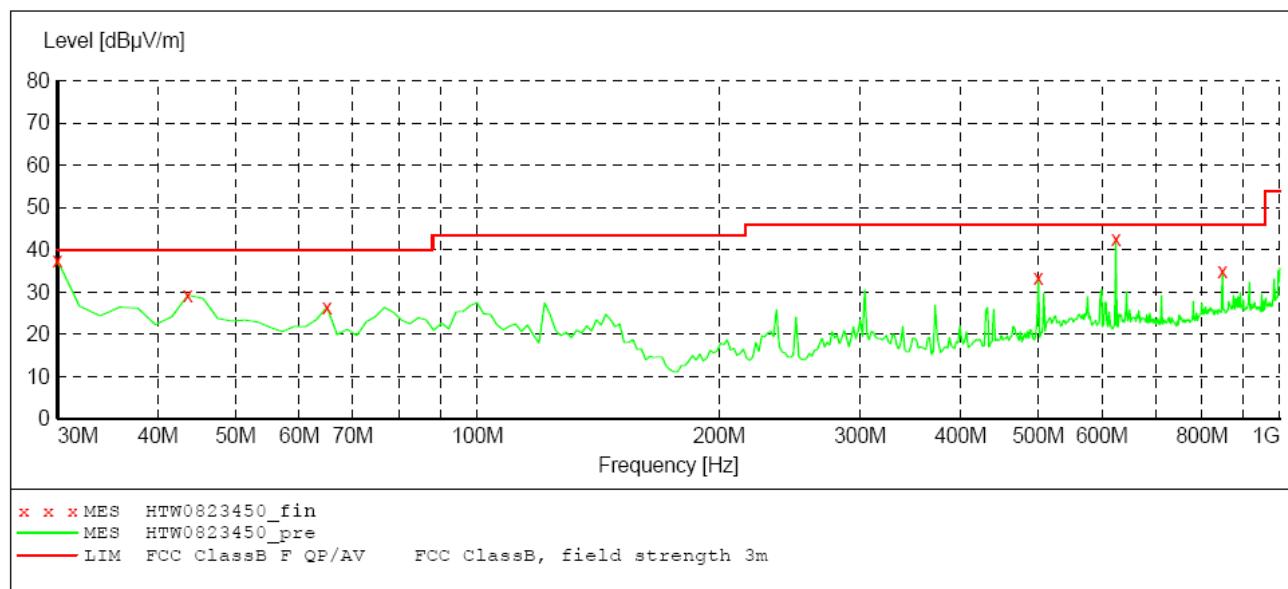
***MEASUREMENT RESULT: "HTW0823450_fin"***

8/23/2012 10:06PM

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Det. QP	Height cm	Azimuth deg	Polarization
30.000000	37.40	-11.1	40.0	2.6	QP	100.0	140.00	VERTICAL
43.607214	29.30	-18.4	40.0	10.7	QP	100.0	140.00	VERTICAL
64.989980	26.40	-23.8	40.0	13.6	QP	100.0	220.00	VERTICAL
500.420842	33.50	-13.5	46.0	12.5	QP	100.0	297.00	VERTICAL
624.829659	42.60	-11.5	46.0	3.4	QP	100.0	24.00	VERTICAL
848.376754	34.80	-7.4	46.0	11.2	QP	100.0	36.00	VERTICAL

SCAN TABLE: "test Field(30M-1G)QP"

Short Description: Field Strength(30M-1G)
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 30.0 MHz 1.0 GHz 60.0 kHz QuasiPeak 1.0 s 120 kHz HL562

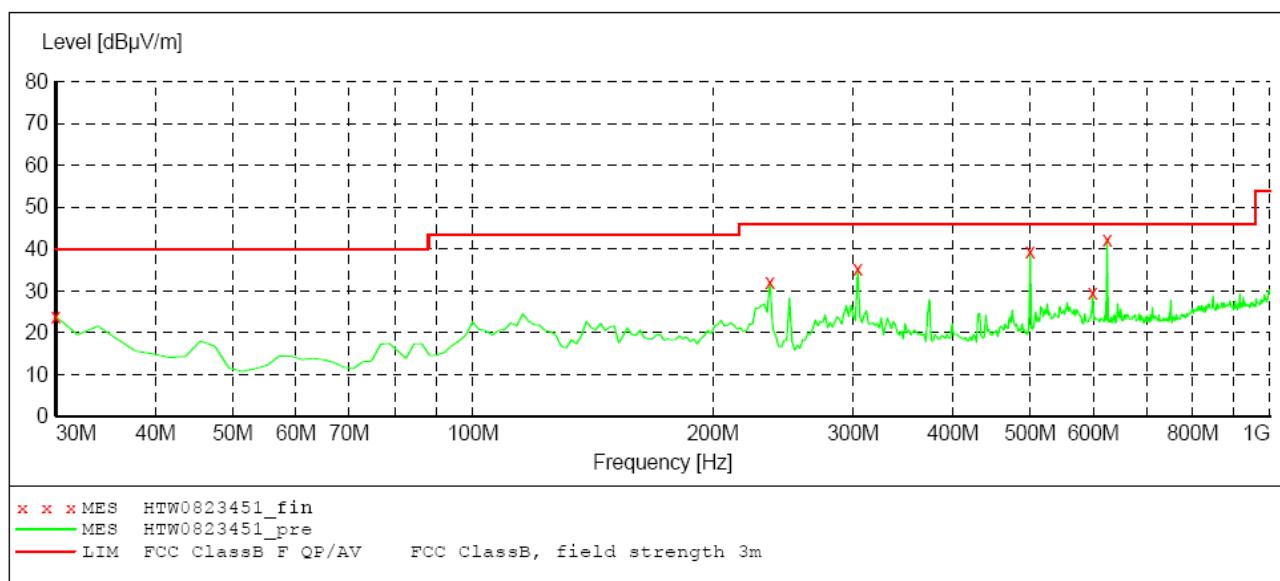

MEASUREMENT RESULT: "HTW0823451_fin"

8/23/2012 10:09PM


Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
30.000000	23.90	-11.1	40.0	16.1	QP	100.0	217.00	HORIZONTAL
236.052104	32.20	-19.2	46.0	13.8	QP	100.0	275.00	HORIZONTAL
304.088176	35.20	-16.9	46.0	10.8	QP	100.0	292.00	HORIZONTAL
500.420842	39.30	-13.5	46.0	6.7	QP	100.0	316.00	HORIZONTAL
599.559118	29.60	-13.0	46.0	16.4	QP	100.0	210.00	HORIZONTAL
624.829659	42.40	-11.5	46.0	3.6	QP	100.0	217.00	HORIZONTAL

Remark:

- (1) Measuring frequencies from 30 MHz to the 1 GHz.
- (2) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) The IF bandwidth of EMI Test Receiver was 120KHz for measuring from 30 MHz to 1 GHz and 1 MHz for measuring above 1 GHz

Sweep TABLE: "test Field(1G-2G)QP"

Short Description: Field Strength(1G-2G)
 Start Stop Detector IF Transducer
 Frequency Frequency Bandw.
 1.0 GHz 2.0 GHz MaxPeak 1 MHz HF906

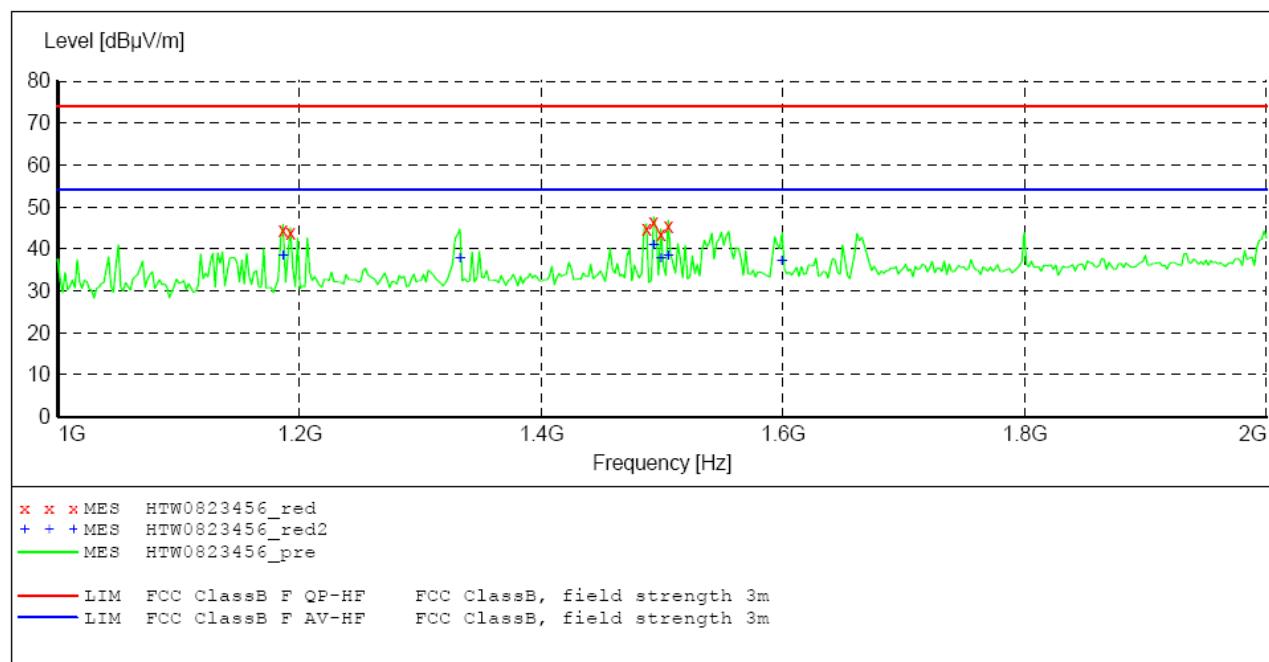

MEASUREMENT RESULT: "HTW0823456_red"

8/23/2012 10:21PM

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Det. PK	Height cm	Azimuth deg	Polarization
1186.372745	45.80	-11.3	74.0	28.2	PK	100.0	358.00	VERTICAL
1192.384770	45.10	-11.3	74.0	28.9	PK	100.0	360.00	VERTICAL
1486.973948	46.00	-10.1	74.0	28.0	PK	100.0	356.00	VERTICAL
1492.985972	47.60	-10.1	74.0	26.4	PK	100.0	0.00	VERTICAL
1498.997996	44.80	-10.1	74.0	29.2	PK	100.0	19.00	VERTICAL
1505.010020	46.80	-10.0	74.0	27.2	PK	100.0	358.00	VERTICAL


MEASUREMENT RESULT: "HTW0823456_red2"

8/23/2012 10:21PM

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Det. AV	Height cm	Azimuth deg	Polarization
1186.372745	39.60	-11.3	54.0	14.4	AV	100.0	358.00	VERTICAL
1332.665331	39.00	-10.7	54.0	15.0	AV	100.0	191.00	VERTICAL
1492.985972	42.40	-10.1	54.0	11.6	AV	100.0	0.00	VERTICAL
1498.997996	39.00	-10.1	54.0	15.0	AV	100.0	6.00	VERTICAL
1505.010020	39.70	-10.0	54.0	14.3	AV	100.0	3.00	VERTICAL
1599.198397	38.40	-9.3	54.0	15.6	AV	100.0	360.00	VERTICAL

Sweep TABLE: "test Field(1G-2G)QP"

Short Description: Field Strength(1G-2G)
 Start Stop Detector IF Transducer
 Frequency Frequency Bandw.
 1.0 GHz 2.0 GHz MaxPeak 1 MHz HF906

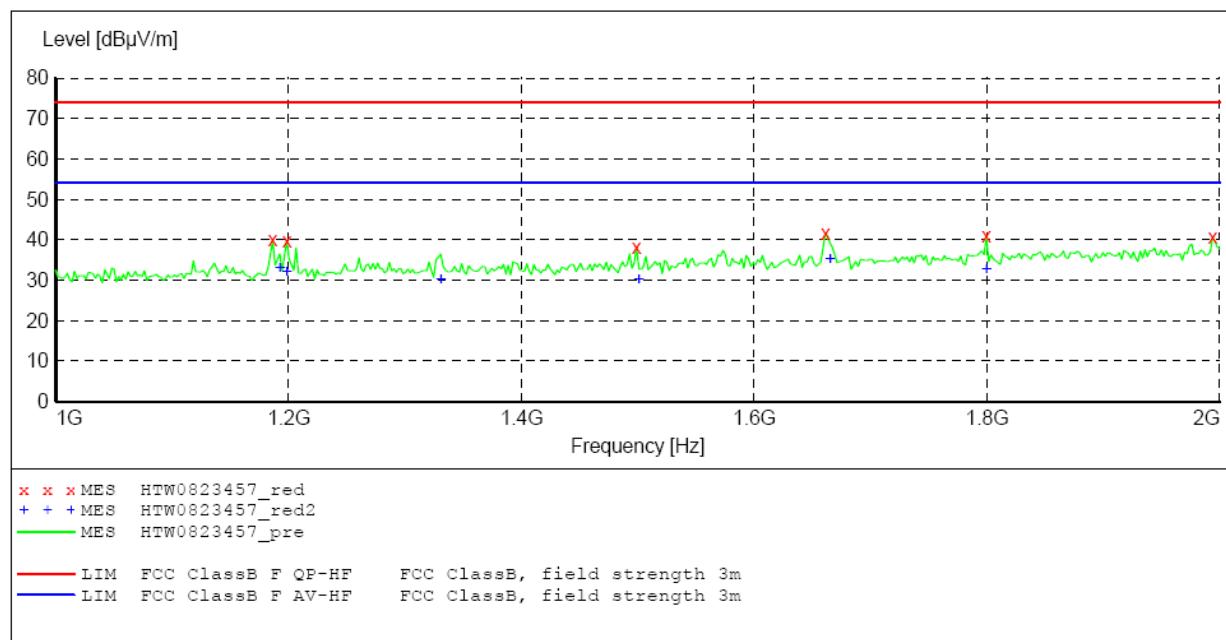

MEASUREMENT RESULT: "HTW0823457_red"

8/23/2012 10:22PM

Frequency	Level	Transd	Limit	Margin	Det.	Height	Azimuth	Polarization
MHz	dB μ V/m	dB	dB μ V/m	dB		cm	deg	
1186.372745	39.90	-11.3	74.0	34.1	PK	100.0	214.00	HORIZONTAL
1198.396794	39.80	-11.3	74.0	34.2	PK	100.0	201.00	HORIZONTAL
1498.997996	38.20	-10.1	74.0	35.8	PK	100.0	318.00	HORIZONTAL
1661.322645	41.70	-8.8	74.0	32.3	PK	100.0	149.00	HORIZONTAL
1799.599198	40.90	-7.9	74.0	33.1	PK	100.0	7.00	HORIZONTAL
1993.987976	40.70	-6.6	74.0	33.3	PK	100.0	214.00	HORIZONTAL

MEASUREMENT RESULT: "HTW0823457_red2"


8/23/2012 10:22PM


Frequency	Level	Transd	Limit	Margin	Det.	Height	Azimuth	Polarization
MHz	dB μ V/m	dB	dB μ V/m	dB		cm	deg	
1192.384770	33.20	-11.3	54.0	20.8	AV	100.0	136.00	HORIZONTAL
1198.396794	32.30	-11.3	54.0	21.7	AV	100.0	86.00	HORIZONTAL
1330.661323	30.20	-10.7	54.0	23.8	AV	100.0	294.00	HORIZONTAL
1501.002004	30.20	-10.0	54.0	23.8	AV	100.0	318.00	HORIZONTAL
1665.330661	35.20	-8.8	54.0	18.8	AV	100.0	33.00	HORIZONTAL
1799.599198	32.90	-7.9	54.0	21.1	AV	100.0	7.00	HORIZONTAL

Remark:

- (1) Measuring frequencies from 1 GHz to the 2 GHz.
- (2) Data of measurement within this frequency range shown "—" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) The RBW of EMI Test Receiver was 1MHz and the VBW was 3MHz for measuring from 1 GHz to 2 GHz.

5. Test Setup Photos of the EUT

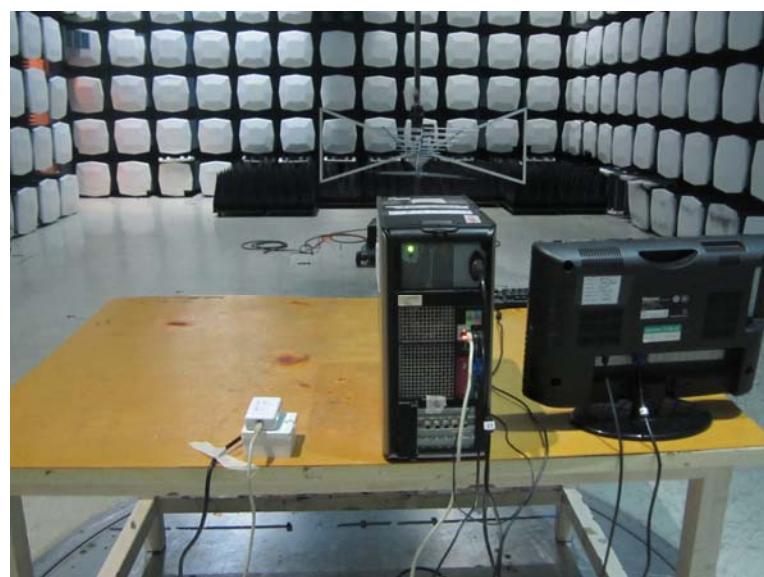


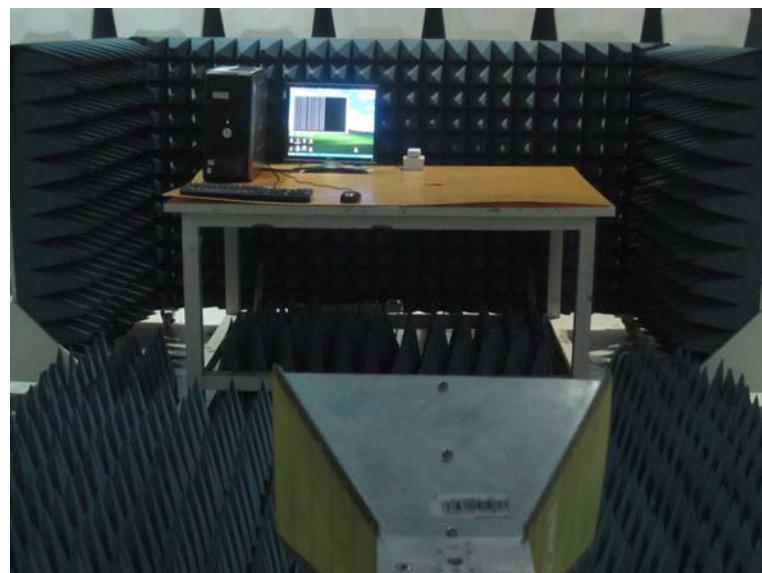


6. External and Internal Photos of the EUT

Internal Photos



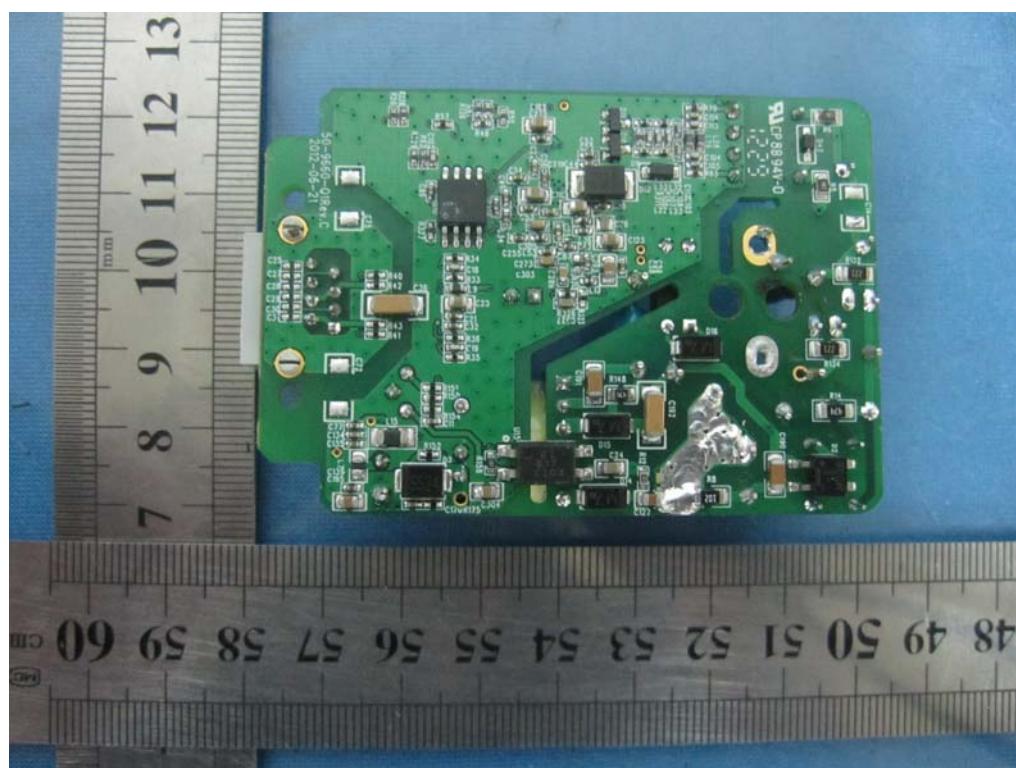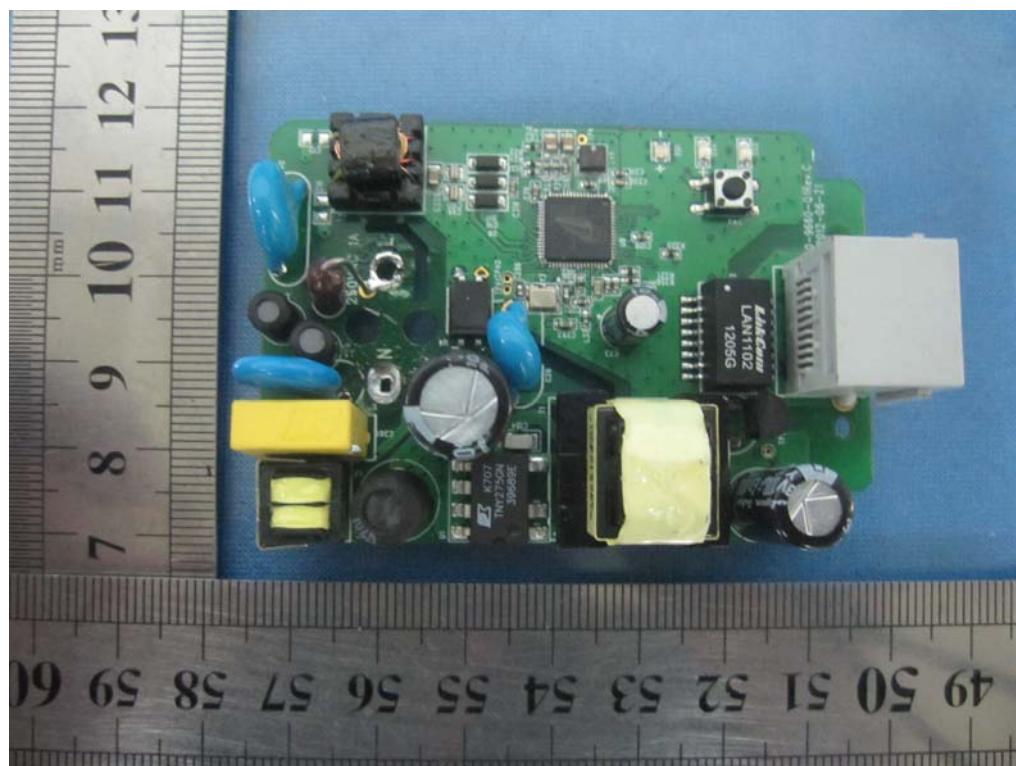

Internal Photos

.....End of Report.....