

FCC Test Report

FCC Part 15 Subpart C §15.247

Product Name : GSM 850/1900
GPRS\WIFI\BT Mobile Phone
Model No. : A1650
FCC ID : T38PCD1650

Prepared By: : Inventec Appliances(Pudong) Corporation
Address: : No.789 Pu Xing Road,Shanghai,PRC
Date of Receipt : 2012.06.29
Date of Test : 2012.07.02-2012.07.04
Report No. : 20120629FCC-C



Test Report Certification

Date of Issue : Jul.10.2012

Report No. : 20120629FCC-C

GSM 850/1900

Product Name : GPRS\WIFI\BT Mobile Phone

Model No. : A1650

Trade Name : Claro; PCD

Applicant : Cellon Communications Technology (Shenzhen) Co.,Ltd.
13/F, Skyworth C Building, Gaoxin S.Ave1, Hi-Tech Industrial Park,

Address : Nanshan District,

Standard : FCC Part 15 Subpart C §15.247

Classification : WiFi: Digital Transmission Systems (DTS)

TX/RX Frequency Range WLAN 802.11b/g (2400 MHz ~ 2483.5 MHz)

Test Result : Complied

The Test Results relate only to the samples tested.



The test report shall not be reproduced except in full without the written approval of
Inventec Appliances(Pudong) CorporationDocumented By :  , Jul.10.2012
Judy Ge/EngineerTested By :  , Jul.10.2012
Alice Lee/EngineerApproved By :  , Jul.10.2012
Jeff Huang/Director of Operations

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test.....	6
1.4 Applied Standards	7
2. Test Configuration of Equipment Under Test.....	8
2.1 RF Power	8
2.2 Test Modes.....	9
2.3 Connection Diagram of Test System	10
3. Test Result for WLAN Function	12
3.1 6dB and 99% Bandwidth Measurement	12
3.2 Output Power Measurement	21
3.3 Band Edges Measurement	22
3.4 Power Spectral Density Measurement.....	35
3.5 AC Conducted Emission Measurement.....	40
3.6 Radiated Emission Measurement	46
4. List of Measuring Equipment.....	76
5. Ancillary Equipment List	76
6. Uncertainty Evaluation	76

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	A8.2(a)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	Gen 4.4.1	99% Bandwidth	-	Pass	-
3.2	15.247(b)	A8.4	Output Power Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(d)	A8.5	Frequency Band Edges	$\leq 20\text{dBc}$	Pass	-
3.4	15.247(d)	A8.5	Spurious Emission	$< 20\text{ dBc}$	Pass	-
3.5	15.247(e)	A8.2(b)	Power Spectral Density	$\leq 8\text{dBm}$	Pass	-
3.6	15.207	Gen 7.2.2	AC Conducted Emission	Section 15.207(a)	Pass	-
3.7	15.247(d)	A8.5	Radiated Emission	FCC 47 CFR Part 15 Subpart C/ Section 15.209(a) & 15.247(d)	Pass	-
3.8	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-

1. GENERAL INFORMATION**1.1 Applicant**

Company Name: Cellon Communications Technology (Shenzhen) Co.,Ltd.

Address: 13/F, Skyworth C Building, Gaoxin S.Ave1, Hi-Tech Industrial Park, Nanshan District,

1.2 Manufacturer

Company Name: Cellon Communications Technology (Shenzhen) Co.,Ltd.

Address: 13/F, Skyworth C Building, Gaoxin S.Ave1, Hi-Tech Industrial Park, Nanshan District,

1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	GSM 850/1900 GPRS\WIFI\BT Mobile Phone
Brand Name	Claro; PCD
Model Name	A1650
FCC ID	T38PCD1650
Tx/Rx Frequency Range	WLAN 802.11b/g (2400 MHz ~ 2483.5 MHz)
Number of Channels	802.11b/g : CH01 CH06 CH11
Carrier Frequency of Each Channel	802.11b/g : 2412MHz 2437MHz 2462MHz
Channel Spacing	802.11b/g : 5MHz
Maximum Output Power to Antenna	802.11b : 15.82 (dBm) 802.11g : 12.45 (dBm)
Antenna Type	Fixed Internal Antenna
HW Version	P3
SW Version	A1650_02.04_6D0109_71021_ST_024_024
Type of Modulation	802.11 b type of modulation:DSSS 802.11g type of modulation:OFDM

Remark:

1. For other wireless features of this EUT, test report will be issued separately.
2. This test report recorded only product characteristics and test results of Digital Transmission System (DTS)
3. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description

1.4 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 58074 D01 DTS Measurement Guidance v01
- ANSI C63.4-2003

Remark:

- 1 All test items were verified and recorded according to the standards and without any deviation during the test.
- 2 This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2. Test Configuration of Equipment Under Test

2.1 RF Power

Preliminary tests were performed in different data rate and recorded the RF Output Power in the following table:

Channel	Frequency	2.4GHz 802.11b RF Power (dBm)			
		At DSSS Data Rate			
		1 Mbps	2 Mbps	5.5 Mbps	11 Mbps
CH 01	2412 MHz	14.97	14.96	14.98	14.85
CH 06	2437 MHz	15.23	15.20	15.42	15.53
CH 11	2462 MHz	15.60	15.62	15.82	15.76

Channel	Frequency	2.4GHz 802.11g RF Power (dBm)							
		At OFDM Data Rate							
		6	9	12	18	24	36	48	54
		Mbps	Mbps	Mbps	Mbps	Mbps	Mbps	Mbps	Mbps
CH01	2412MHz	12.29	12.25	12.28	12.32	12.18	11.97	11.99	11.98
CH06	2437MHz	12.11	12.15	12.15	12.40	12.32	12.26	12.32	12.29
CH11	2462MHz	12.45	12.40	12.43	12.41	12.15	12.12	12.14	12.06

Remark:

The EUT is programmed to transmit signal continuously for all testing.

2.2 Test Modes

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz), radiated emission (30 MHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).


Pre-scanned tests were conducted to determine the final configuration from all possible combinations. The following tables are showing the test modes as the worst cases and recorded in this report.

Test Item	802.11b (Modulation : DSSS)	802.11g (Modulation : OFDM)
Conducted TCs	Mode 1: 802.11b_CH01_2412 MHz Mode 2: 802.11b_CH06_2437 MHz Mode 3: 802.11b_CH11_2462 MHz	Mode 4: 802.11g_CH01_2412 MHz Mode 5: 802.11g_CH06_2437 MHz Mode 6: 802.11g_CH11_2462 MHz


Test Cases		
Radiated TCs	Mode 1: 802.11b_CH01_2412 MHz + Battery Mode 2: 802.11b_CH06_2437 MHz + Battery Mode 3: 802.11b_CH11_2462 MHz + Battery	Mode 4 : 802.11g_CH01_2412 MHz + Battery Mode 5 : 802.11g_CH06_2437 MHz + Battery Mode 6 : 802.11g_CH11_2462 MHz + Battery
AC Conducted Emission	Mode 1 : GSM 850 Idle + WLAN Link (2.4G) + Bluetooth Link+ Earphone + Adapter+ Battery Mode 2: GSM 1900 Idle + WLAN Link (2.4G) + Bluetooth Link + Earphone+ Adapter+ Battery	

2.3 Connection Diagram of Test System


30MHz~1GHz

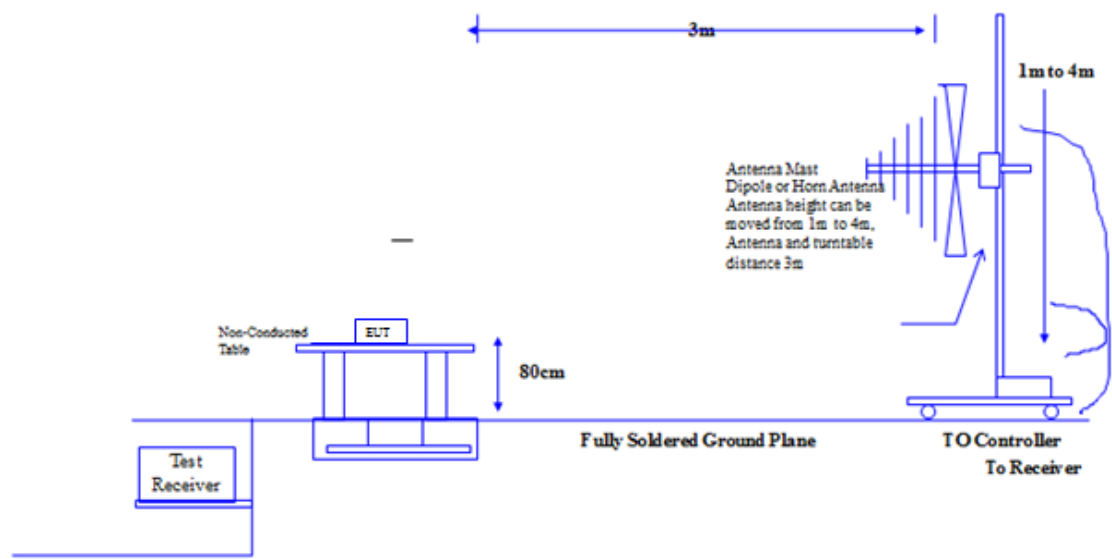

Above 1GHz

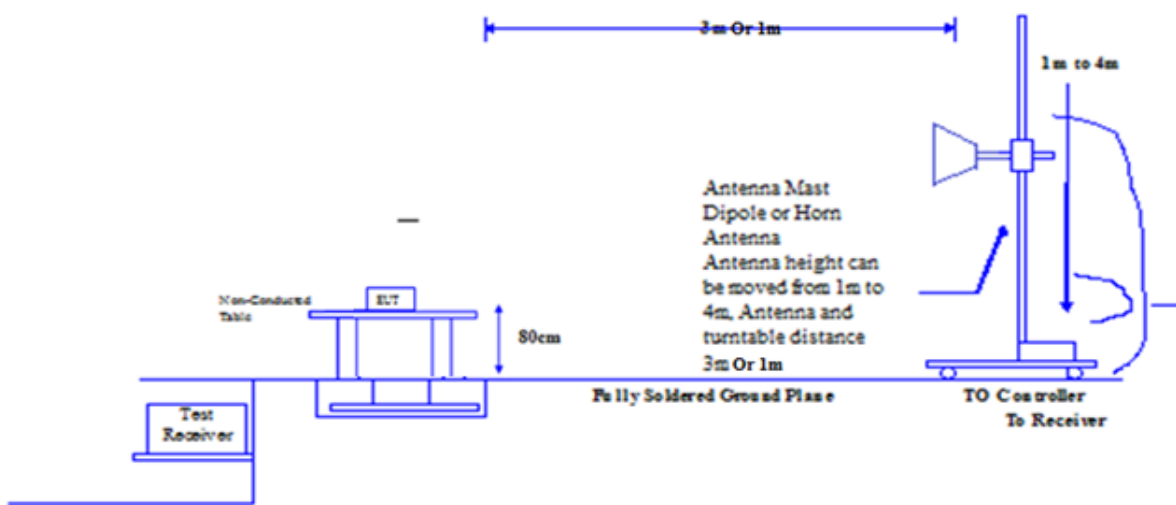

<Conduction Test>

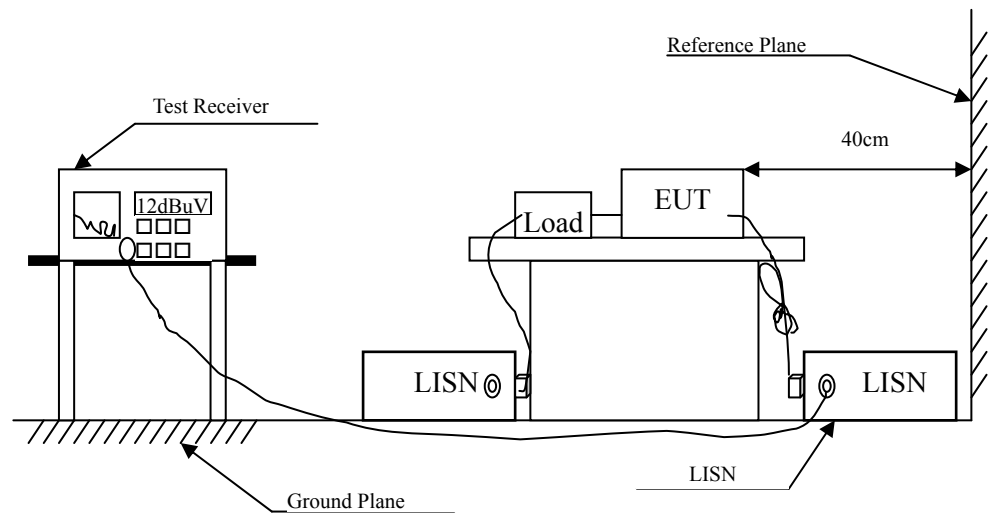

3. Test Result for WLAN Function

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Measurement Guidance v01.
2. Set resolution bandwidth (RBW) = 1-5 % of the emission bandwidth (EBW).
3. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. Compare the resultant bandwidth with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is 1-5 %.

3.1.4 Test Setup

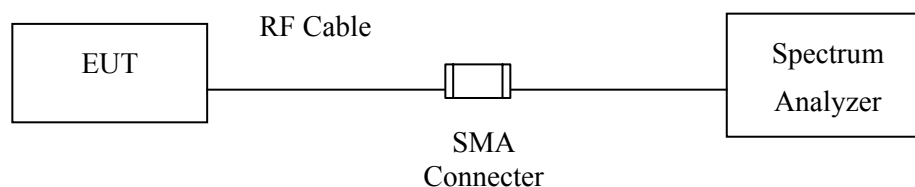


3.1.5 Test Result of 6dB Bandwidth


Test Mode :	Mode 1, 2, 3	Temperature :	23℃~26℃
Test Engineer :	Hogan He	Relative Humidity :	35%~60%

Channel	Frequency (MHz)	802.11b 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	10.28	0.5	Pass
06	2437	10.32	0.5	Pass
11	2462	10.32	0.5	Pass


Mode 1 : 6 dB Bandwidth Plot on 802.11b Channel 01

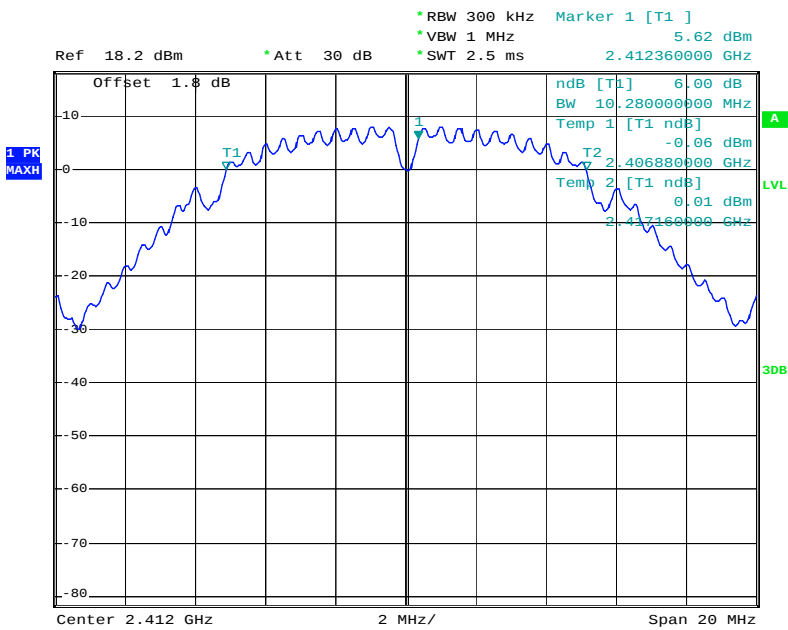

Mode 2 : 6 dB Bandwidth Plot on 802.11b Channel 06

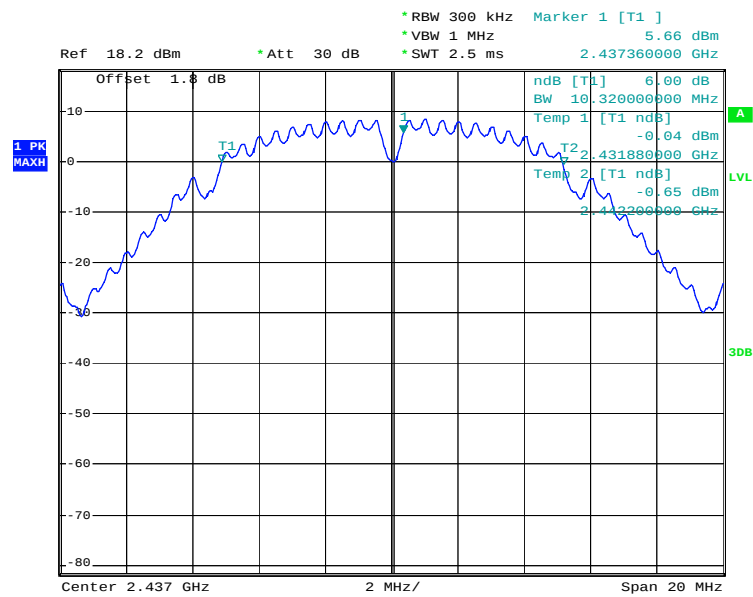


Mode 3 : 6 dB Bandwidth Plot on 802.11b Channel 11

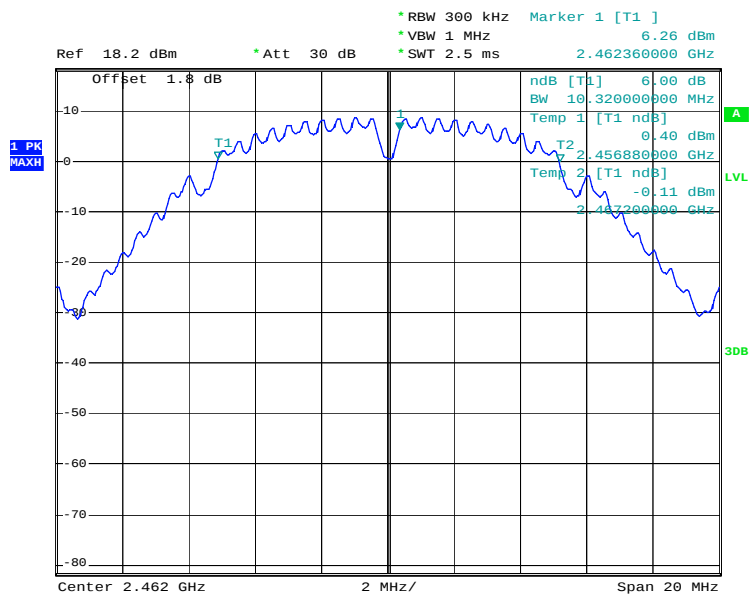


Test Mode :	Mode 4, 5, 6	Temperature :	23℃~26℃
Test Engineer :	Hogan He	Relative Humidity :	35%~60%

Channel	Frequency (MHz)	802.11g 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	16.80	0.5	Pass
06	2437	16.80	0.5	Pass
11	2462	16.96	0.5	Pass


Mode 4 : 6 dB Bandwidth Plot on 802.11g Channel 01

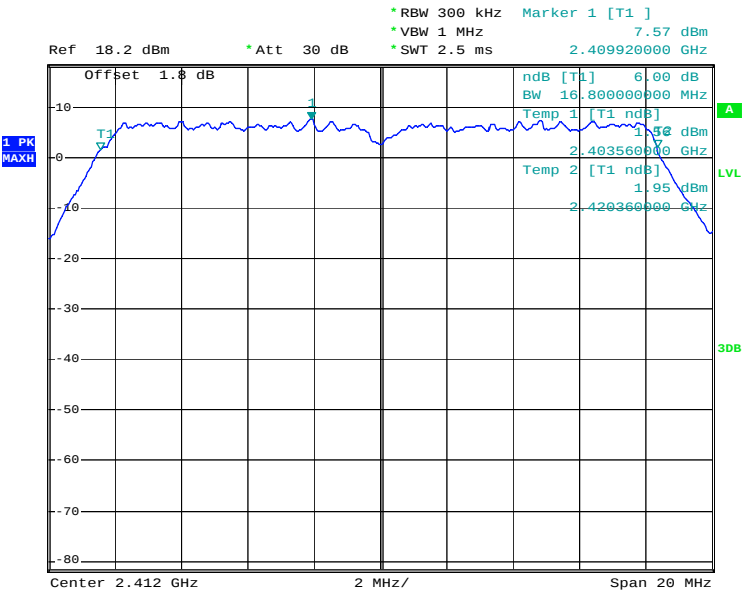

Mode 5 : 6 dB Bandwidth Plot on 802.11g Channel 06

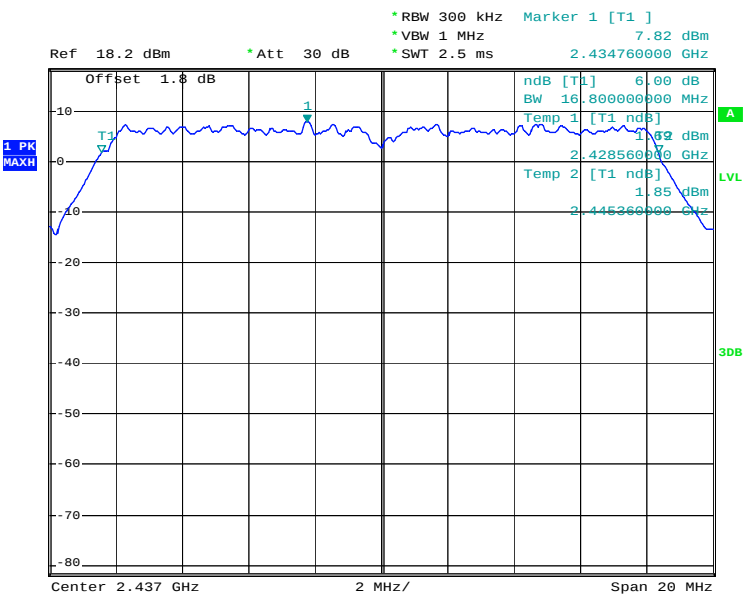

Mode 6 : 6 dB Bandwidth Plot on 802.11g Channel 11

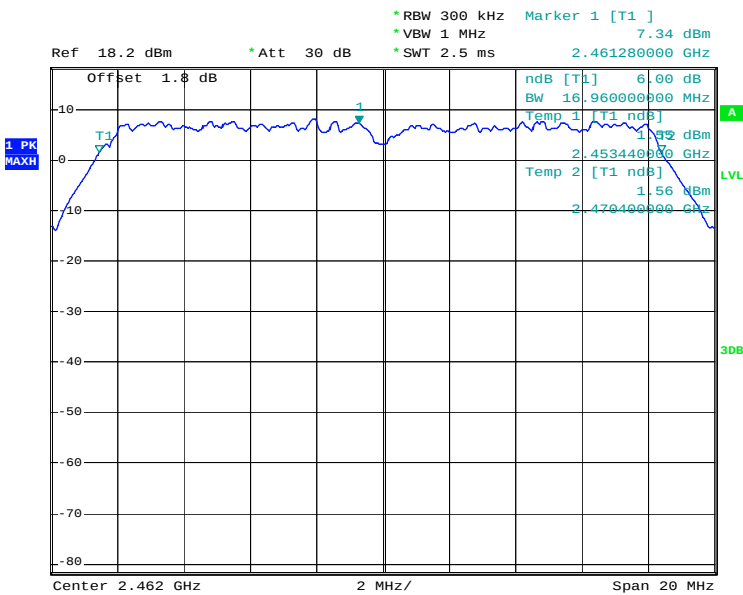


3.1.6 Test Result of 99% Occupied Bandwidth


Test Mode :	Mode 1, 2, 3	Temperature :	23℃~26℃
Test Engineer :	Hogan He	Relative Humidity :	35%~60%

Channel	Frequency (MHz)	802.11b 99% Occupied Bandwidth (MHz)	Pass/Fail
01	2412	12.48	Pass
06	2437	12.36	Pass
11	2462	12.24	Pass


Mode 1 : 99% Occupied Bandwidth Plot on 802.11b Channel 01

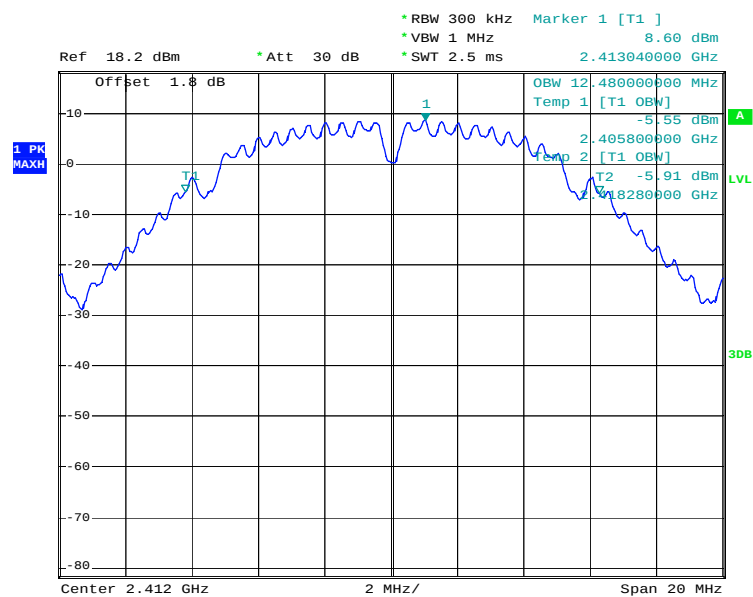

Mode 2 : 99% Occupied Bandwidth Plot on 802.11b Channel 06

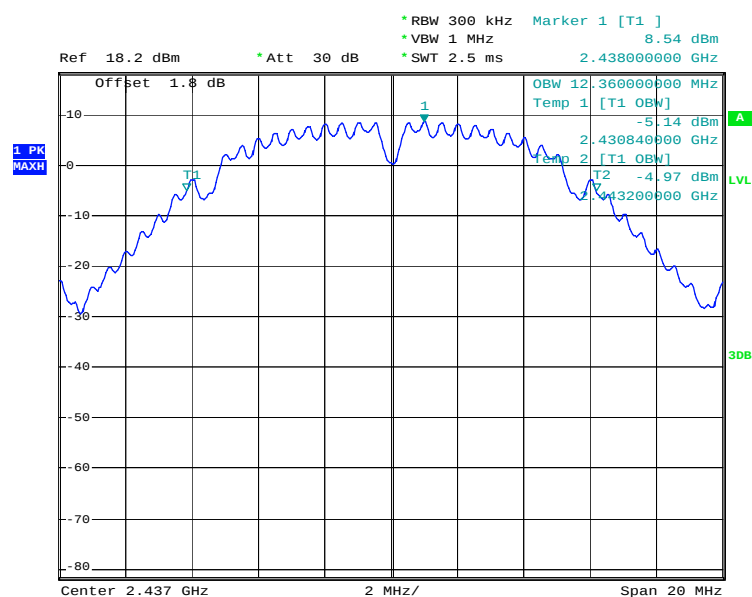


Mode 3 : 99% Occupied Bandwidth Plot on 802.11b Channel 11

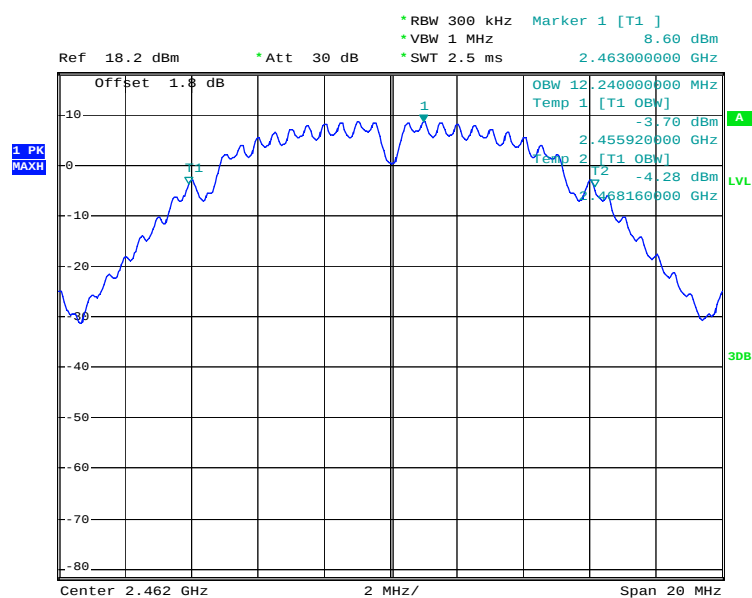


Test Mode :	Mode 4, 5, 6	Temperature :	23℃~26℃
Test Engineer :	Hogan He	Relative Humidity :	35%~60%

Channel	Frequency (MHz)	802.11g 99% Occupied Bandwidth (MHz)	Pass/Fail
01	2412	17.16	Pass
06	2437	17.16	Pass
11	2462	17.12	Pass


Mode 4 : 99% Occupied Bandwidth Plot on 802.11g Channel 01

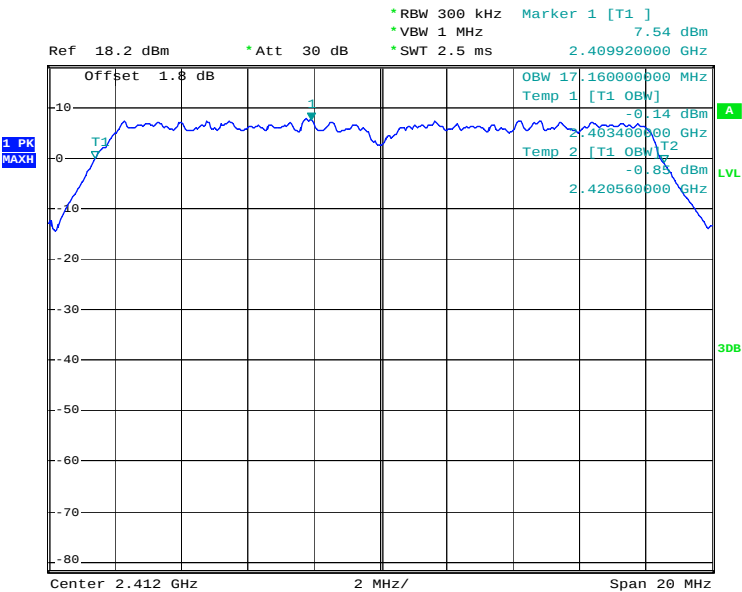

Mode 5 : 99% Occupied Bandwidth Plot on 802.11g Channel 06

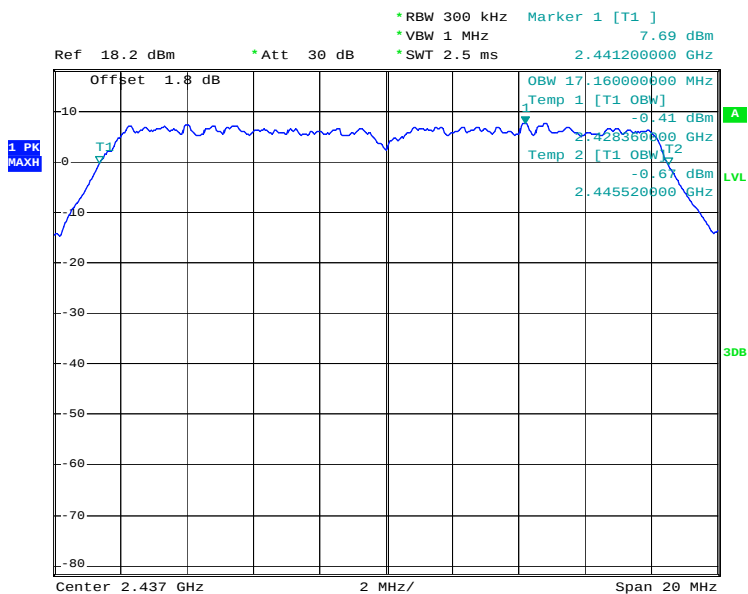

Mode 6 : 99% Occupied Bandwidth Plot on 802.11g Channel 11

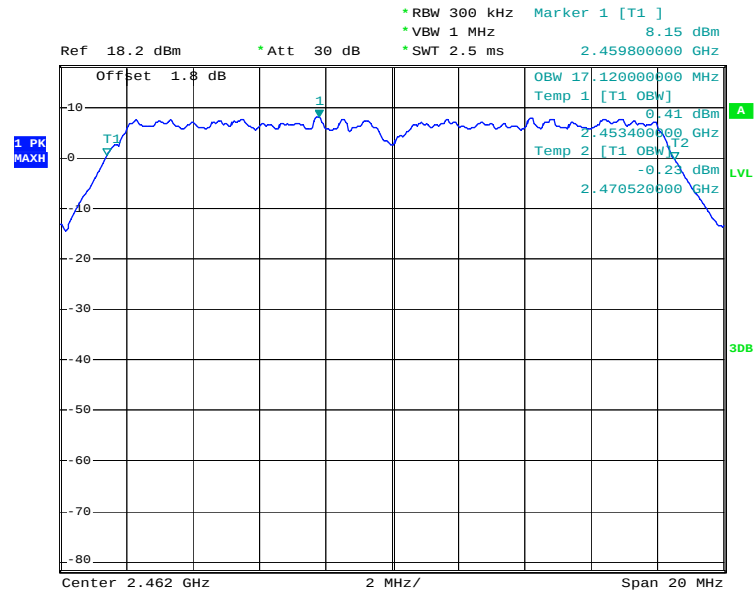

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz and 5725-5850MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Measurement Guidance v01.
2. The RF output of EUT was connected to the power meter by a low loss cable.
3. Measure the power by power meter with peak power sensor.

3.2.4 Test Setup

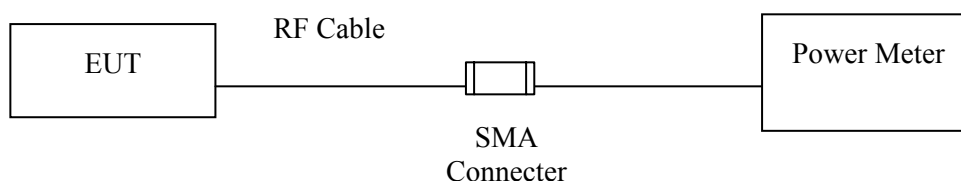

3.2.5 Test Result of Output Power

Channel	Frequency (MHz)	802.11b Measured Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	14.98	30	Pass
06	2437	15.42	30	Pass
11	2462	15.82	30	Pass

Channel	Frequency (MHz)	802.11g Measured Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	12.29	30	Pass
06	2437	12.11	30	Pass
11	2462	12.45	30	Pass

3.3 Band Edges Measurement

3.3.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. If the output power of this device was measured by power meter, the attenuation under this paragraph shall be 30 dB instead of 20 dB.

3.3.2 Measuring Instruments


See list of measuring instruments of this test report.

3.3.3 Test Procedures


1. The testing follows the guidelines in ANSI C63.4-2003 and FCC KDB Publication No. 558074 D01 DTS Measurement Guidance v01.
2. Conducted emission test: Set RBW = 100 kHz, Video bandwidth (VBW) $\geq$ 300 kHz. Band edge emissions must be at least 20 dB below the highest emission level within the authorized band as measured with a 100 kHz RBW. Note: If the output power of this device was measured by power meter, the attenuation under this paragraph shall be 30 dB instead of 20 dB.
3. §15.247(d) specifies that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to 15.247(b)(3) requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20dB relative to the maximum measured in-band peak PSD level.
4. Radiated emission test: Apply to band edge emissions that fall in the restricted bands listed in FCC Section 15.205. The maximum permitted average field strength is listed in FCC Section 15.209. A pre-amp is necessary for this measurement. For measurements peak radiated emission above 1 GHz, set RBW = 1MHz, VBW = 1MHz, Sweep=Auto. For measurements average radiated emission above 1 GHz, set RBW = 1MHz, VBW = 10Hz, Sweep=Auto. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation as in FCC Section 15.35(b) and (c)

3.3.4 Test Setup

Radiated Band Edge

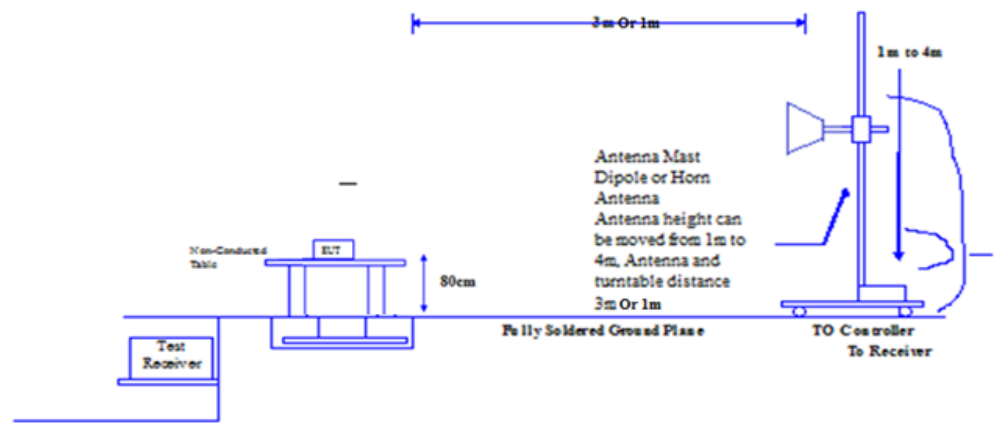

Conducted Band Edge

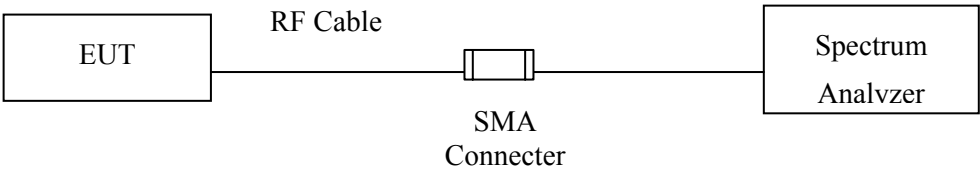

3.3.5 Test Result of Radiated Band Edges

Test Band :	802.11b
Test Channel	01

Frequency GHz	Level dBuv/m	Over Limit dB	Limit Line dBuv/m	Read Level dBuv	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Remark	Polarity
2.4(802.11b)	58.61	-15.39	74	48.12	27.5	6.99	24	Peak	Vertical
2.4(802.11b)	45.66	-8.34	54	35.17	27.5	6.99	24	Average	Vertical
2.4(802.11b)	59.52	-14.48	74	49.03	27.5	6.99	24	Peak	Horizontal
2.4(802.11b)	47.3	-6.7	54	36.81	27.5	6.99	24	Average	Horizontal

Test Band :	802.11b
Test Channel	11

Frequency GHz	Level dBuv/m	Over Limit dB	Limit Line dBuv/m	Read Level dBuv	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Remark	Polarity
2.4835(802.11b)	57.66	-16.34	74	46.38	27.6	7.68	24	Peak	Vertical
2.4835(802.12b)	46.16	-7.84	54	34.88	27.6	7.68	24	Average	Vertical
2.4835(802.13b)	57.12	-16.88	74	45.84	27.6	7.68	24	Peak	Horizontal
2.4835(802.14b)	47.56	-6.44	54	36.28	27.6	7.68	24	Average	Horizontal

Test Band :	802.11g
Test Channel	01

Frequency GHz	Level dBuv/m	Over Limit dB	Limit Line dBuv/m	Read Level dBuv	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Remark	Polarity
2.4(802.11g)	66.13	-7.87	74	55.64	27.5	6.99	24	Peak	Vertical
2.4(802.11g)	48.54	-5.46	54	38.05	27.5	6.99	24	Average	Vertical
2.4(802.12g)	69.38	-4.62	74	58.89	27.5	6.99	24	Peak	Horizontal
2.4(802.11g)	48.17	-5.83	54	37.68	27.5	6.99	24	Average	Horizontal

Test Band :	802.11g
Test Channel	11


Frequency GHz	Level dBuv/m	Over Limit dB	Limit Line dBuv/m	Read Level dBuv	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Remark	Polarity
2.4835(802.11g)	58.83	-15.17	74	47.55	27.6	7.68	24	Peak	Vertical
2.4835(802.12g)	46.86	-7.14	54	35.58	27.6	7.68	24	Average	Vertical
2.4835(802.13g)	62.55	-11.45	74	51.27	27.6	7.68	24	Peak	Horizontal
2.4835(802.14g)	47.93	-6.07	54	36.65	27.6	7.68	24	Average	Horizontal

Test Mode :	Mode 1 and 3	Temperature :	23℃~26℃
Test Band :	802.11b	Relative Humidity :	35%~60%
Test Channel :	01 and 11	Test Engineer :	Hogan He

Low Band Edge Plot on 802.11b Channel 01




High Band Edge Plot on 802.11b Channel 11

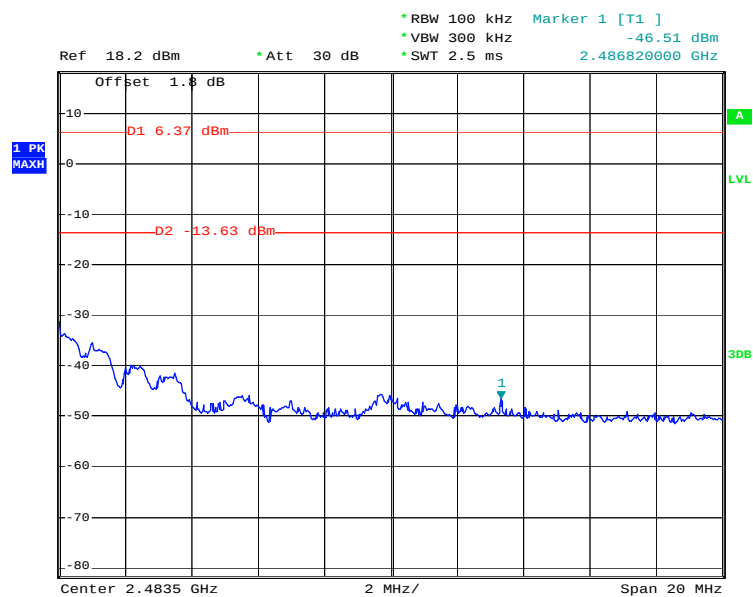


Test Mode :	Mode 4 and 6	Temperature :	23℃~26℃
Test Band :	802.11g	Relative Humidity :	35%~60%
Test Channel :	01 and 11	Test Engineer :	Hogan He

Low Band Edge Plot on 802.11g Channel 01

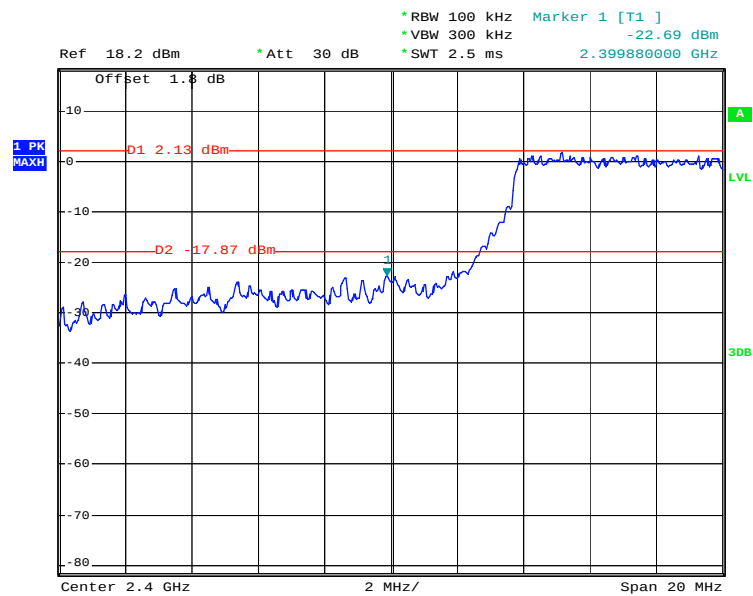

High Band Edge Plot on 802.11g Channel 11

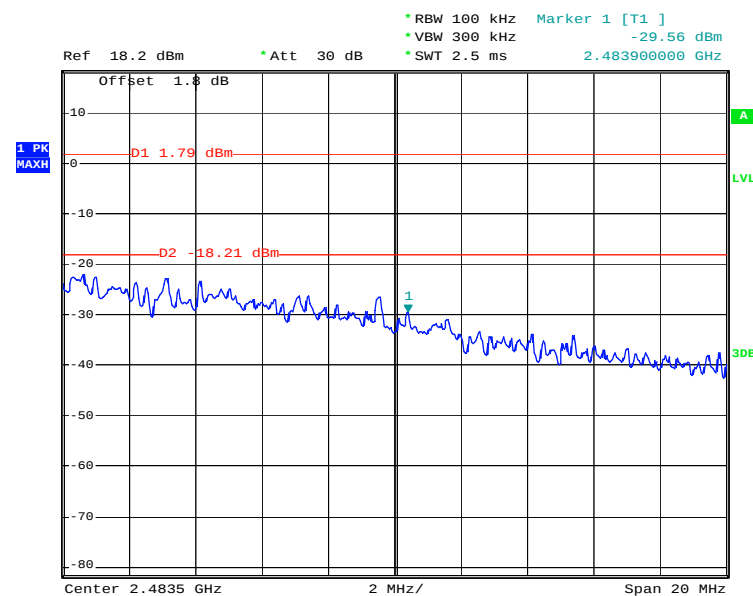

3.3.7 Spurious Emission Measurement

3.3.8 Limit of Spurious Emission Measurement

All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band.


3.3.9 Measuring Instruments

See list of measuring instruments of this test report.

3.3.10 Test Procedure

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set RBW = 100 kHz, Video bandwidth (VBW) $\geq$ RBW, scan up through 10th harmonic. All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.


3.3.11 Test Setup

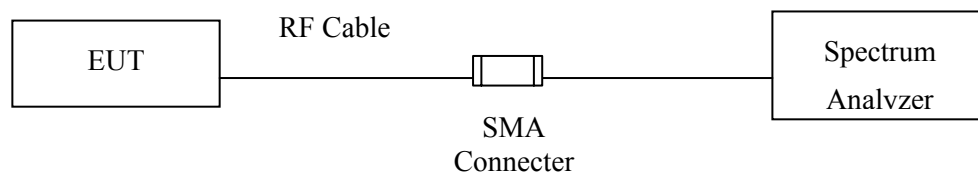


3.3.12 Test Result

Test Mode :	Mode 1	Temperature :	23℃~26℃
Test Band :	802.11b	Relative Humidity :	35%~60%
Test Channel :	01	Test Engineer :	Hogan He

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

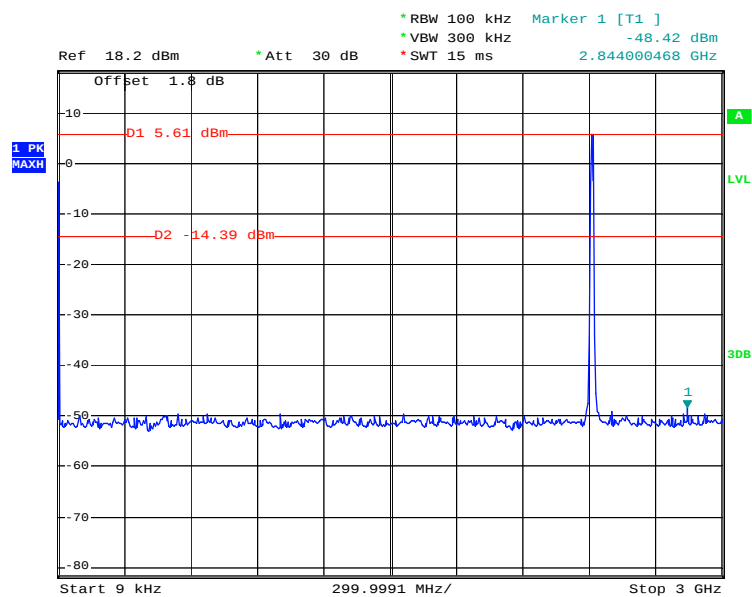


Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

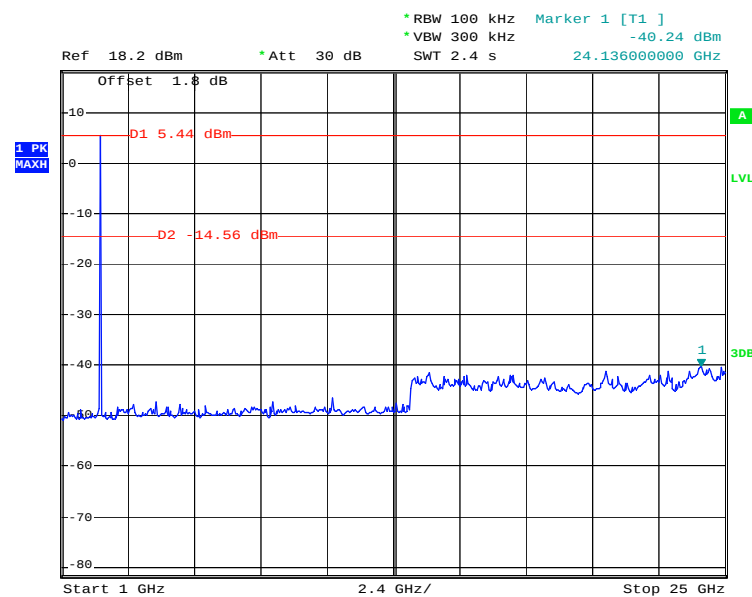


Test Mode :	Mode 2	Temperature :	23℃~26℃
Test Band :	802.11b	Relative Humidity :	35%~60%
Test Channel :	06	Test Engineer :	Hogan He

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

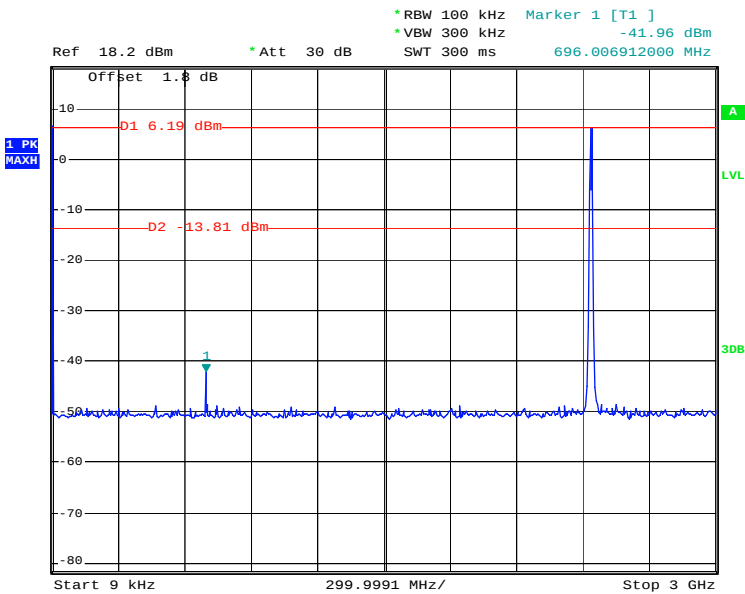


Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

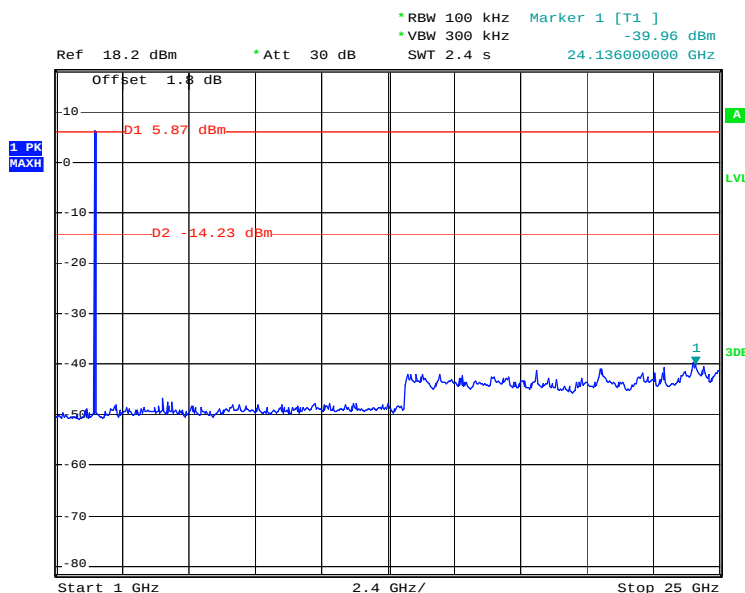


Test Mode :	Mode 3	Temperature :	23℃~26℃
Test Band :	802.11b	Relative Humidity :	35%~60%
Test Channel :	11	Test Engineer :	Hogan He

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

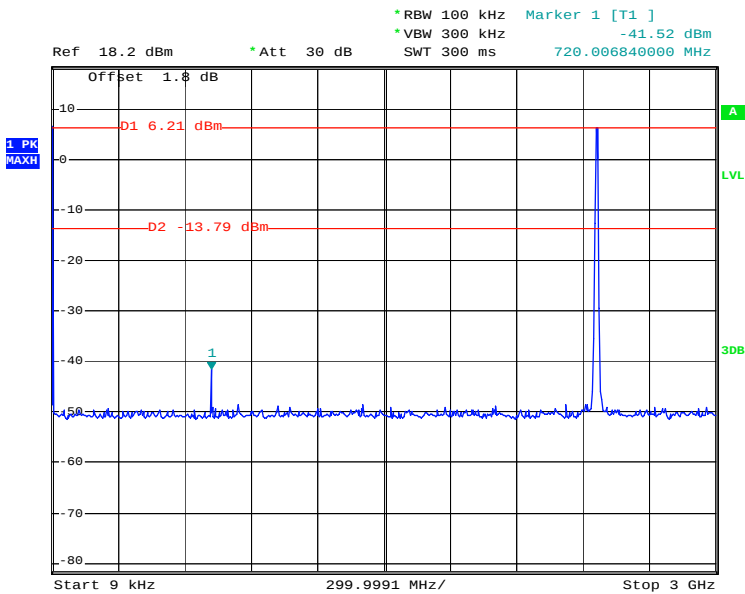


Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

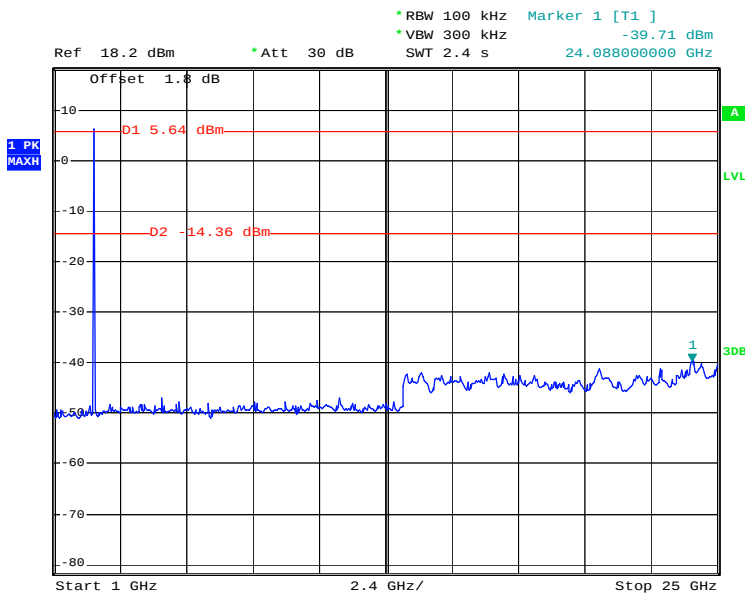


Test Mode :	Mode 4	Temperature :	23℃~26℃
Test Band :	802.11g	Relative Humidity :	35%~60%
Test Channel :	01	Test Engineer :	Hogan He

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

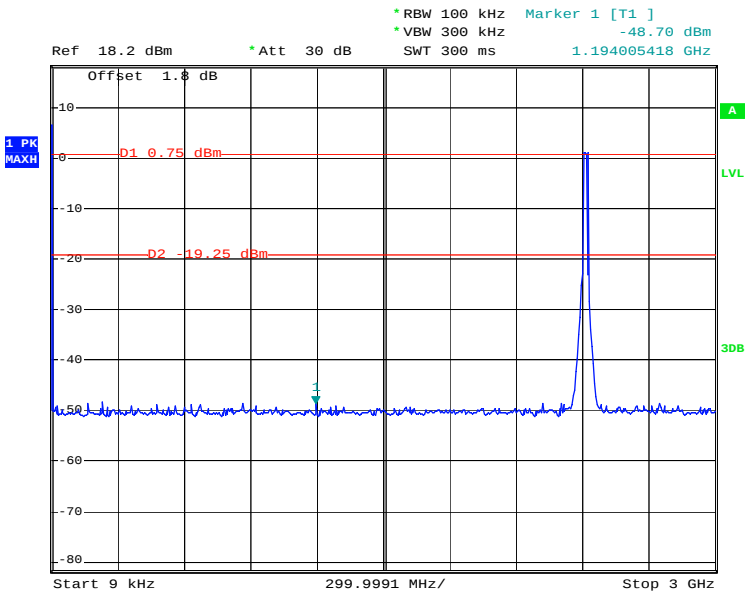


Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

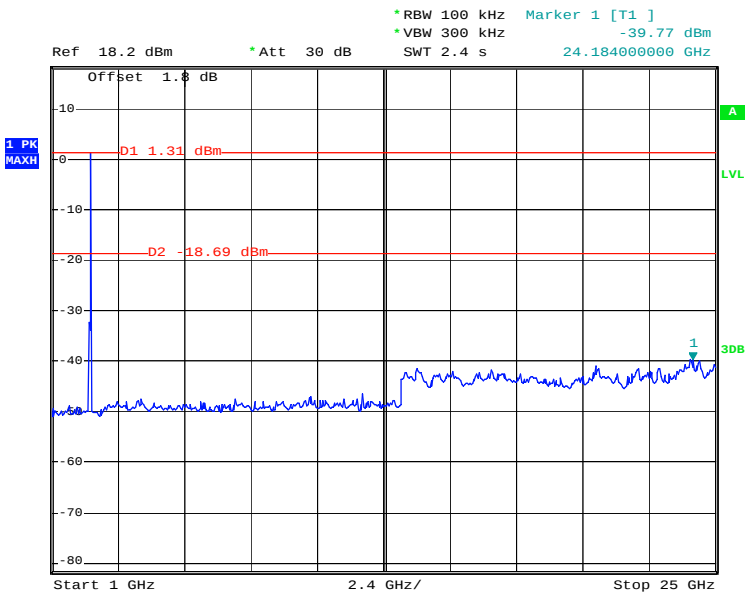


Test Mode :	Mode 5	Temperature :	23℃~26℃
Test Band :	802.11g	Relative Humidity :	35%~60%
Test Channel :	06	Test Engineer :	Hogan He

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

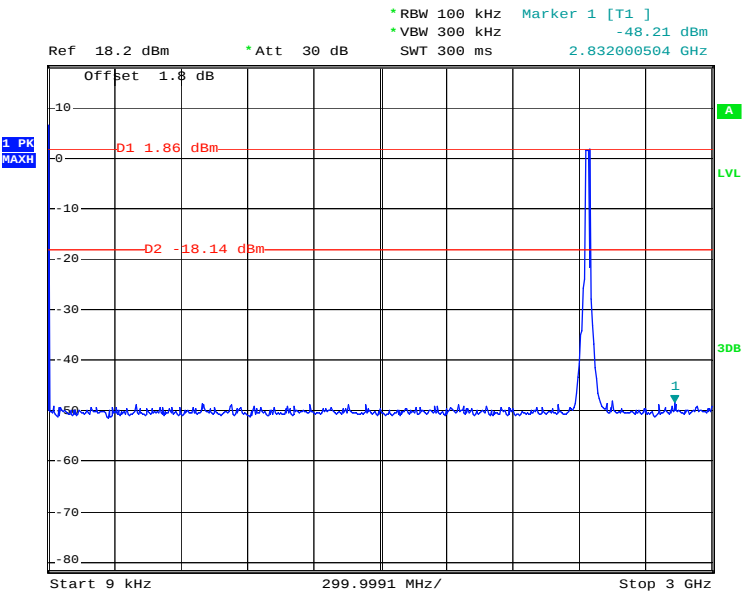


Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

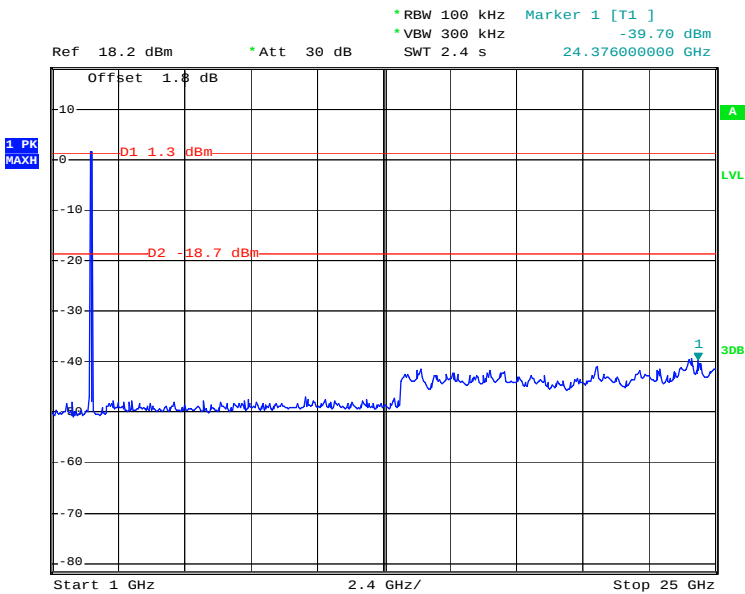


Test Mode :	Mode 6	Temperature :	23℃~26℃
Test Band :	802.11g	Relative Humidity :	35%~60%
Test Channel :	11	Test Engineer :	Hogan He

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

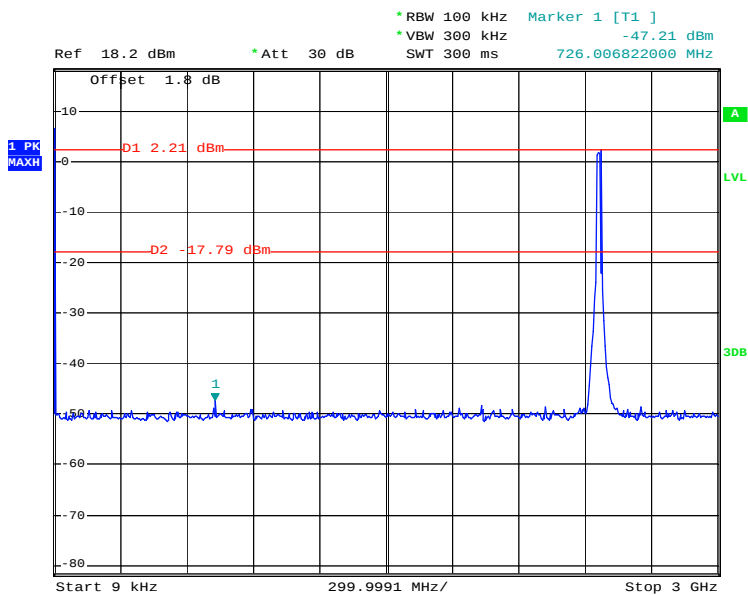

Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

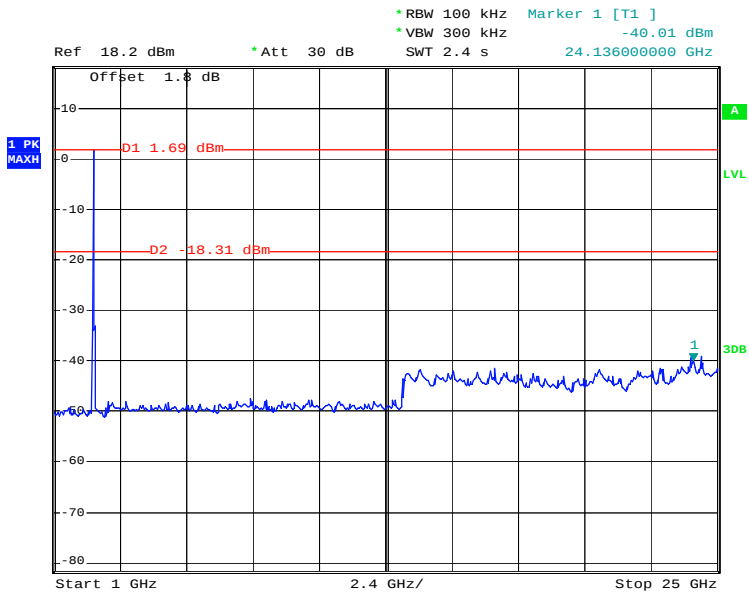

3.4 Power Spectral Density Measurement

3.4.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3 kHz band at any time interval of continuous transmission.


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The test follows FCC KDB Publication No. 558074 D01 DTA Measurement Guidance v01.
2. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
3. Set the RBW = 100 kHz.
4. Set the VBW $\geq$ 300 kHz.
5. Set the span to 5-30 % greater than the EBW.
6. Detector = peak.
7. Sweep time = auto couple
8. Trace mode = max hold.
9. Allow trace to fully stabilize.
10. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
11. Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(3\text{ kHz}/100\text{ kHz} = -15.2\text{ dB})$.
12. The resulting peak PSD level must be $\leq 8\text{ dBm}$.

3.4.4 Test Setup

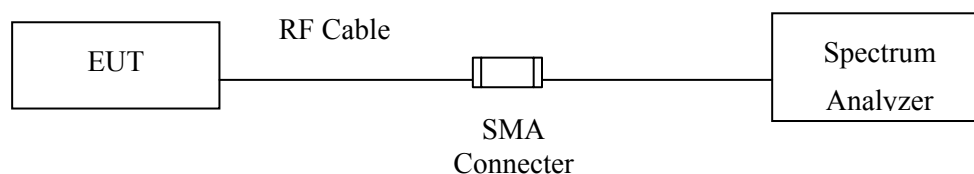


3.4.5 Test Result of Power Spectral Density


Test Mode :	Mode 1, 2, 3	Temperature :	23℃~26℃
Test Engineer :	Hogan He	Relative Humidity :	35%~60%

Channel	Frequency (MHz)	802.11b Measured PSD (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	-9.21	8	Pass
06	2437	-9.08	8	Pass
11	2462	-8.78	8	Pass


Mode 1 : PSD Plot on 802.11b Channel 01

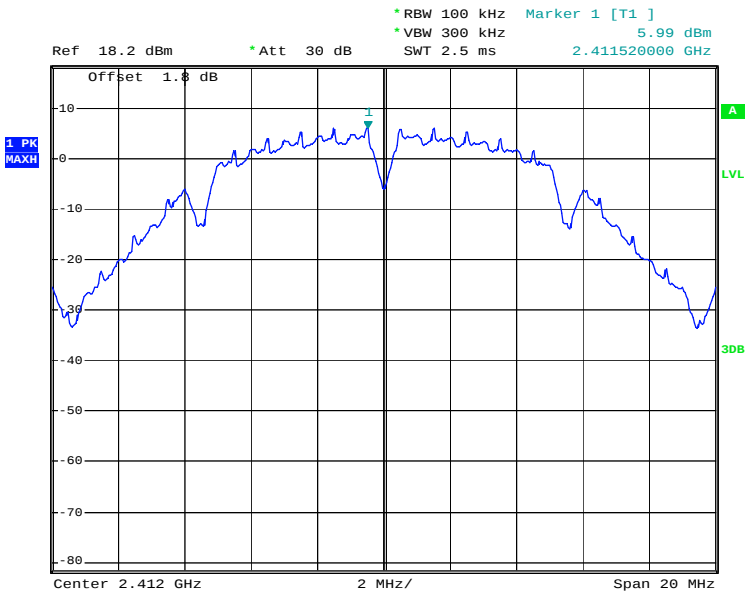

Mode 2 : PSD Plot on 802.11b Channel 06

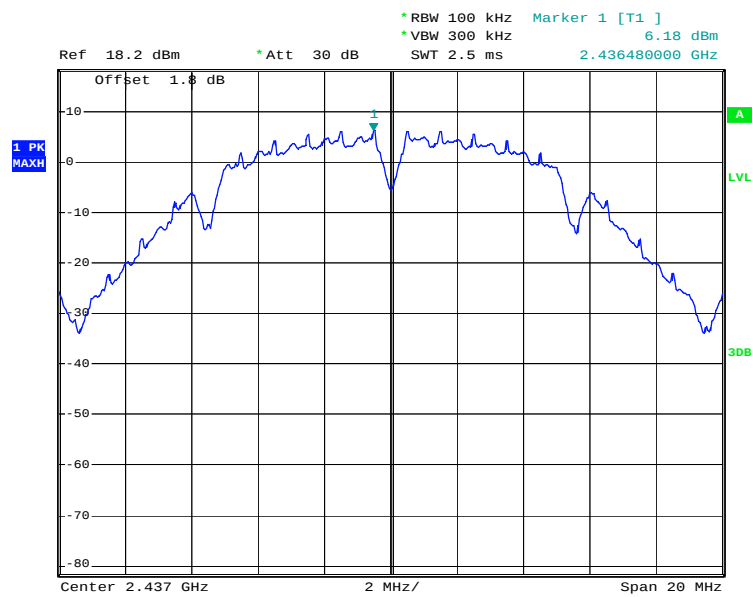


Mode 3 : PSD Plot on 802.11b Channel 11

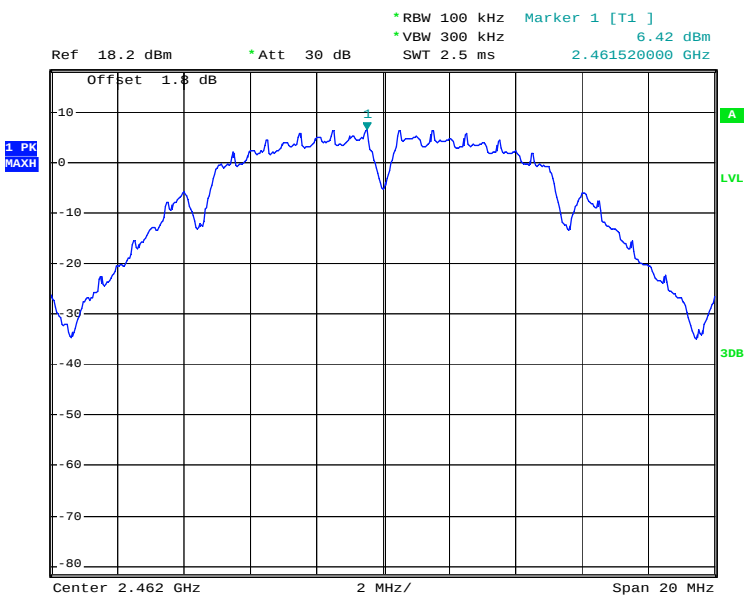


Test Mode :	Mode 4, 5, 6	Temperature :	23℃~26℃
Test Engineer :	Hogan He	Relative Humidity :	35%~60%

Channel	Frequency (MHz)	802.11g Measured PSD (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	-13.09	8	Pass
06	2437	-13.97	8	Pass
11	2462	-13.03	8	Pass


Mode 4 : PSD Plot on 802.11g Channel 01

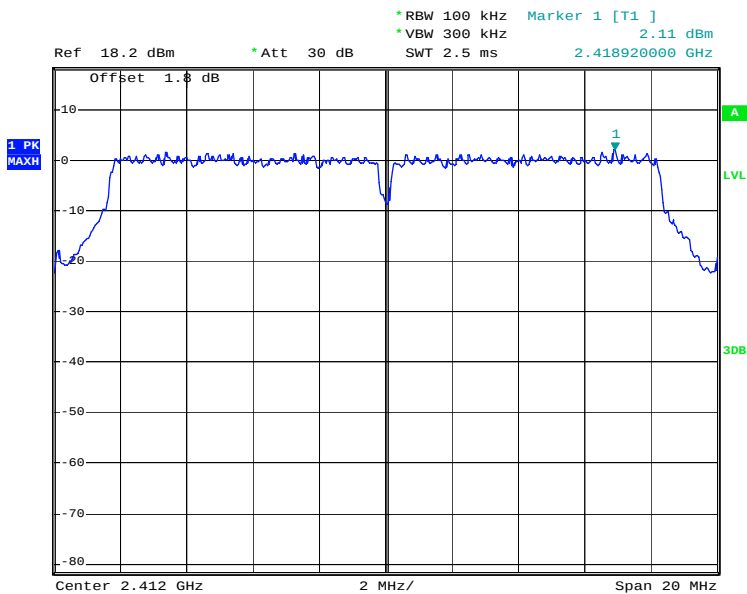

Mode 5 : PSD Plot on 802.11g Channel 06

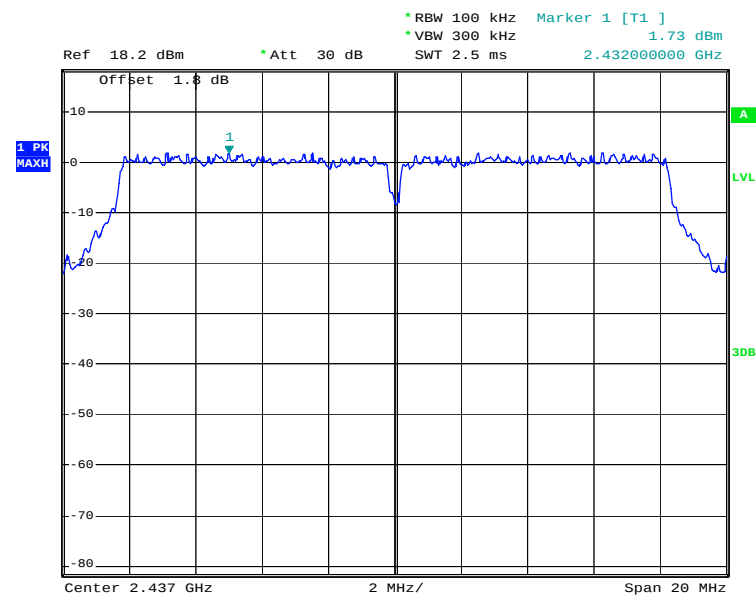

Mode 6 : PSD Plot on 802.11g Channel 11

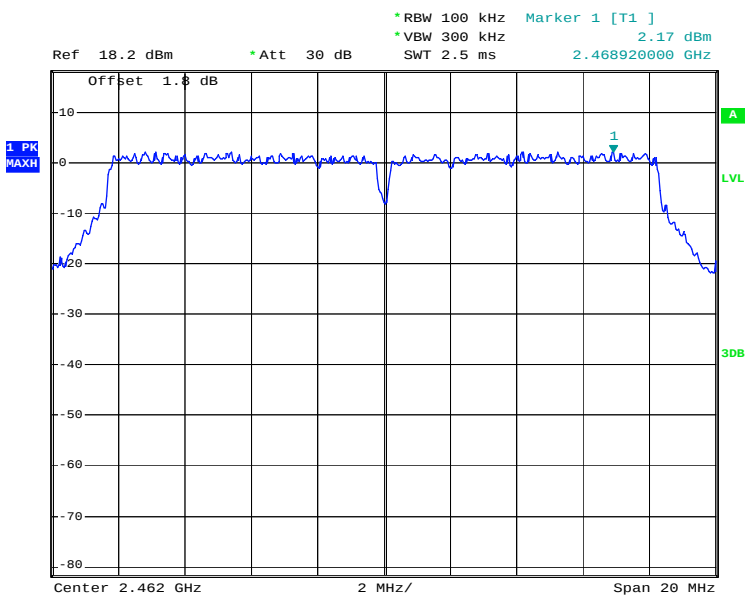

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The testing follows the guidelines in ANSI C63.4-2003.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth (RBW=9kHz and VBW=30kHz) with Maximum Hold Mode for QP limit measurement.
10. Set the test-receiver system to Average Detect Function and specified bandwidth (RBW=9kHz and VBW=30kHz) with Maximum Hold Mode for QP limit measurement.

3.5.4 Test Setup

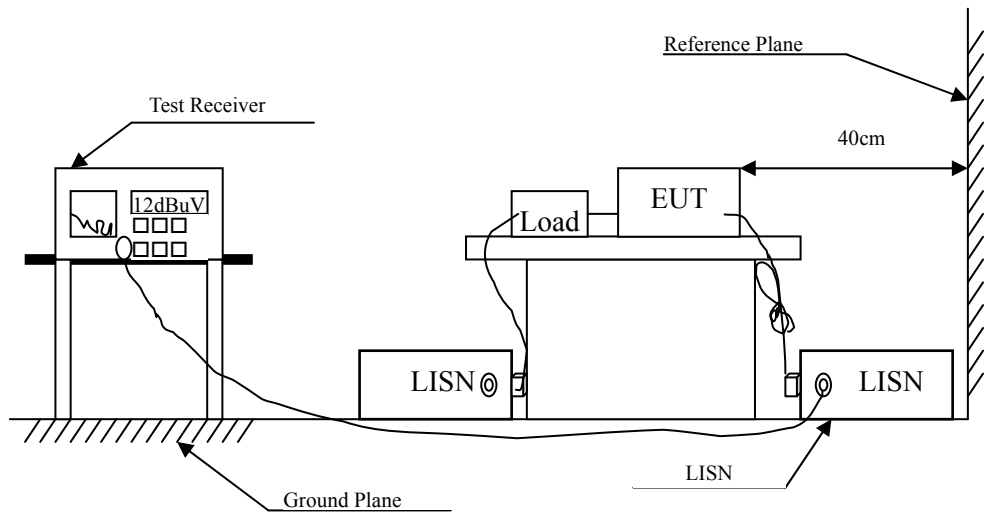


3.5.5 Test Result of AC Conducted Emission

Test Voltage:120V/60Hz

Test mode: GSM850 Idle +WLAN Link(2.4G)+Bluetooth Link+ Earphone +Adapter +Battery +Neutral

EMI Auto Test CISPR22

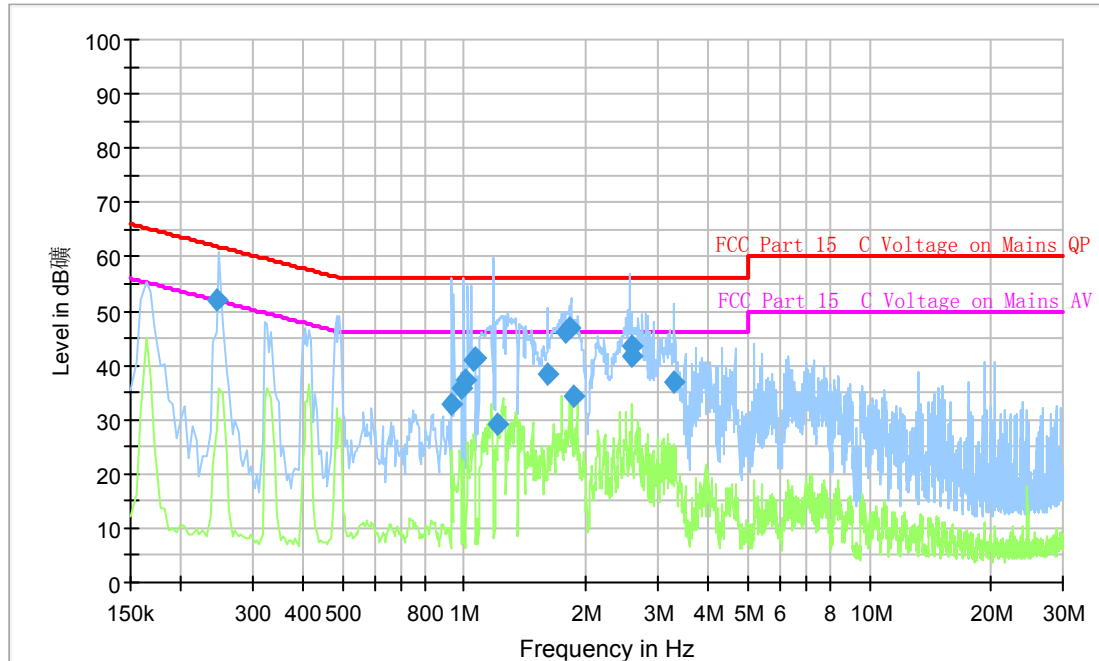


Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.244500	52.2	10.0	9.000	On	N	10.1	9.7	61.9
0.928500	32.8	10.0	9.000	On	N	9.7	23.2	56.0
0.978000	35.7	10.0	9.000	On	N	9.7	20.3	56.0
1.000500	37.2	10.0	9.000	On	N	9.7	18.8	56.0
1.054500	40.9	10.0	9.000	On	N	9.7	15.1	56.0
1.063500	41.2	10.0	9.000	On	N	9.7	14.8	56.0
1.207500	29.1	10.0	9.000	On	N	9.7	26.9	56.0
1.599000	38.3	10.0	9.000	On	N	9.6	17.7	56.0
1.788000	46.2	10.0	9.000	On	N	9.6	9.8	56.0
1.810500	47.0	10.0	9.000	On	N	9.6	9.0	56.0
1.864500	34.4	10.0	9.000	On	N	9.5	21.6	56.0
2.584500	43.4	10.0	9.000	On	N	9.6	12.6	56.0
2.602500	41.8	10.0	9.000	On	N	9.6	14.2	56.0
3.273000	36.8	10.0	9.000	On	N	9.7	19.2	56.0

Test mode: GSM850 Idle +WLAN Link(2.4G)+Bluetooth Link+ Earphone++Adapter +Battery+ Line

EMI Auto Test CISPR22

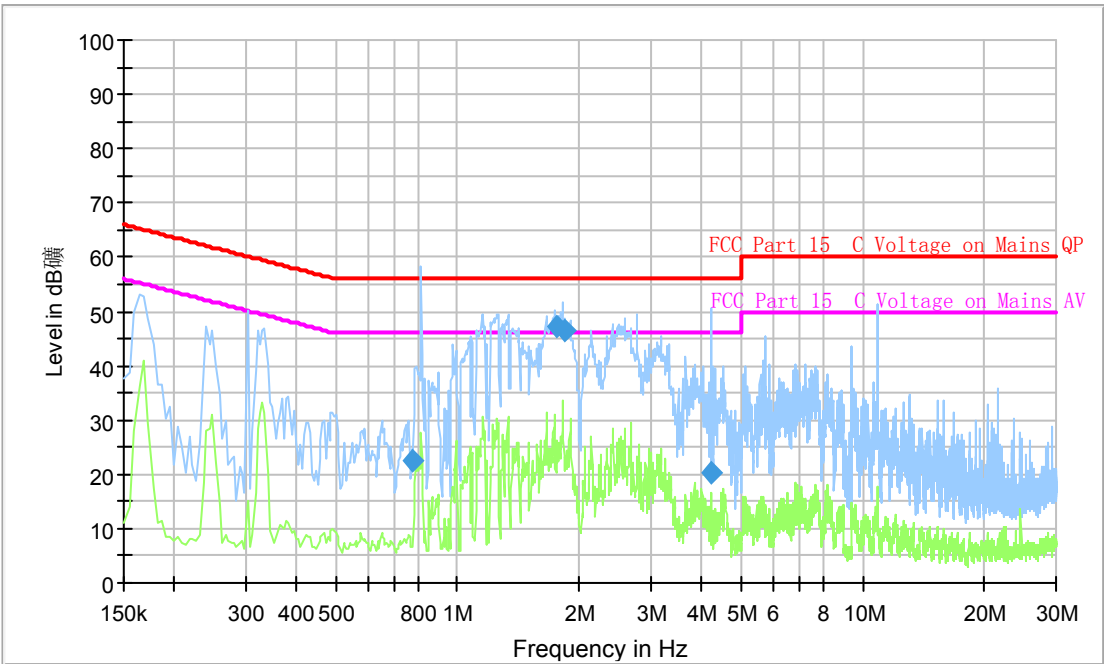


Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.343500	28.9	10.0	9.000	On	N	10.0	30.2	59.1
0.532500	41.1	10.0	9.000	On	N	9.8	14.9	56.0
0.564000	43.5	10.0	9.000	On	N	9.8	12.5	56.0
0.573000	44.1	10.0	9.000	On	N	9.8	11.9	56.0

Test mode: GSM1900 Idle +WLAN Link (2.4G)+Bluetooth Link +Earphone++Adapter + Battery
+ Neutral

EMI Auto Test CISPR22

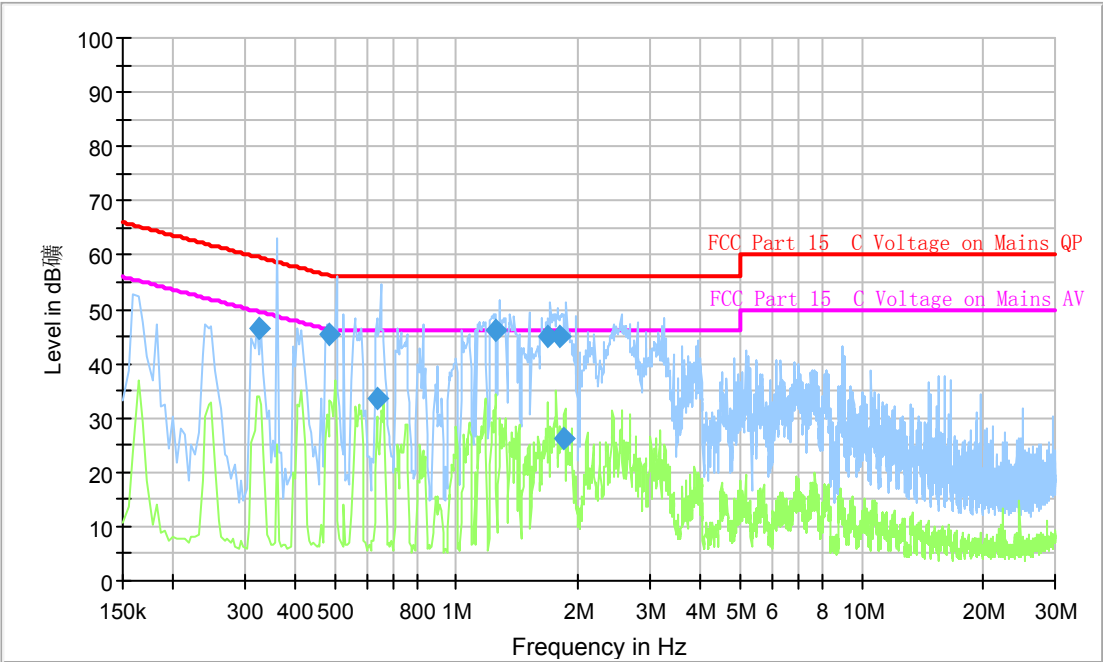


Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.325500	46.4	10.0	9.000	On	N	10.0	13.2	59.6
0.487500	45.3	10.0	9.000	On	N	9.8	10.9	56.2
0.640500	33.7	10.0	9.000	On	N	9.8	22.3	56.0
1.243500	46.3	10.0	9.000	On	N	9.6	9.7	56.0
1.671000	45.1	10.0	9.000	On	N	9.6	10.9	56.0
1.797000	45.0	10.0	9.000	On	N	9.6	11.0	56.0
1.846500	26.2	10.0	9.000	On	N	9.5	29.8	56.0

Test mode: GSM1900 Idle +WLAN Link(2.4G)+Bluetooth Link+Earphone+ Adapter +Battery+ Line

EMI Auto Test CISPR22

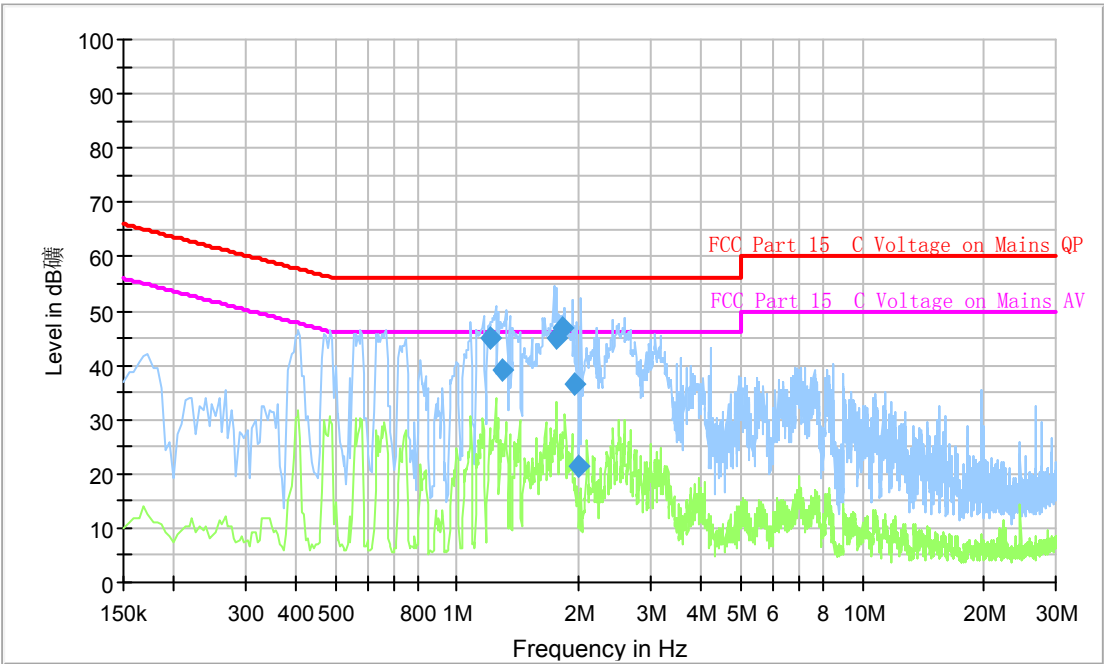

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
1.207500	45.1	10.0	9.000	On	L1	9.7	10.9	56.0
1.297500	39.3	10.0	9.000	On	L1	9.7	16.7	56.0
1.761000	45.1	10.0	9.000	On	L1	9.7	10.9	56.0
1.815000	46.8	10.0	9.000	On	L1	9.7	9.2	56.0
1.954500	36.4	10.0	9.000	On	L1	9.7	19.6	56.0
1.981500	21.5	10.0	9.000	On	L1	9.7	34.5	56.0

3.6 Radiated Emission Measurement

3.6.1 Limit of Radiated Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.6.2 Measuring Instruments


See list of measuring instruments of this test report.

3.6.3 Test Procedures


1. The testing follows the guidelines in FCC KDB Publication No.558074 D01 DTS Measurement Guidance v01.
2. Use the following spectrum analyzer settings:
 - (1) Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
 - (2) Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.
Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB)
3. Follow the guidelines in ANSI C63.4-2003 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.

3.6.4 Test Setup


9kHz~30MHz

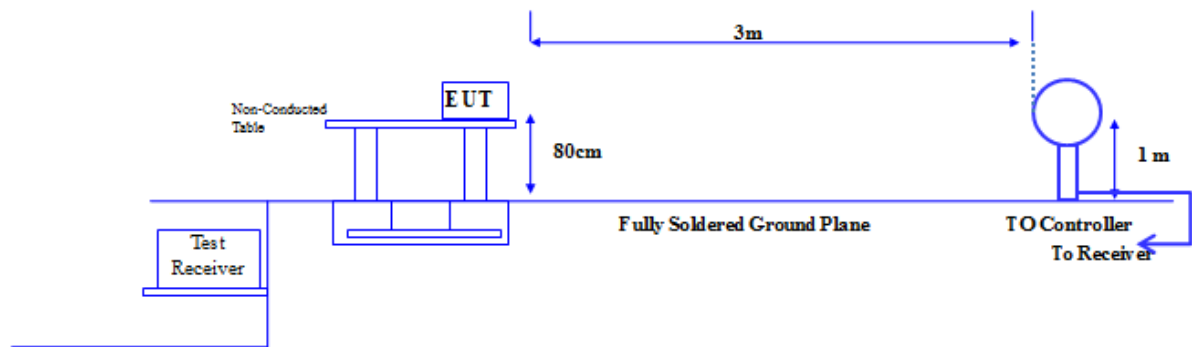

30MHz~1GHz

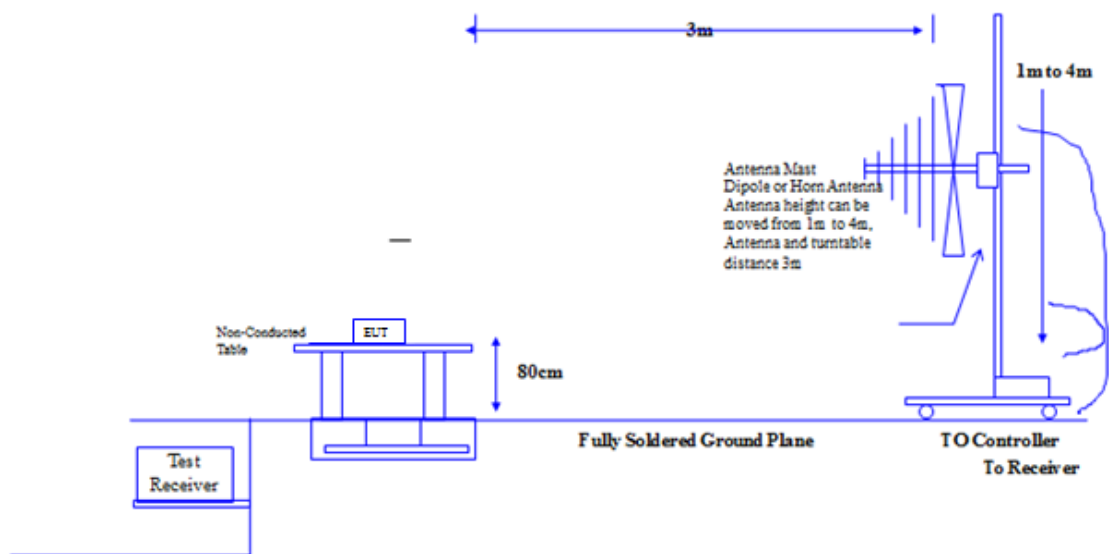

Above 1GHz

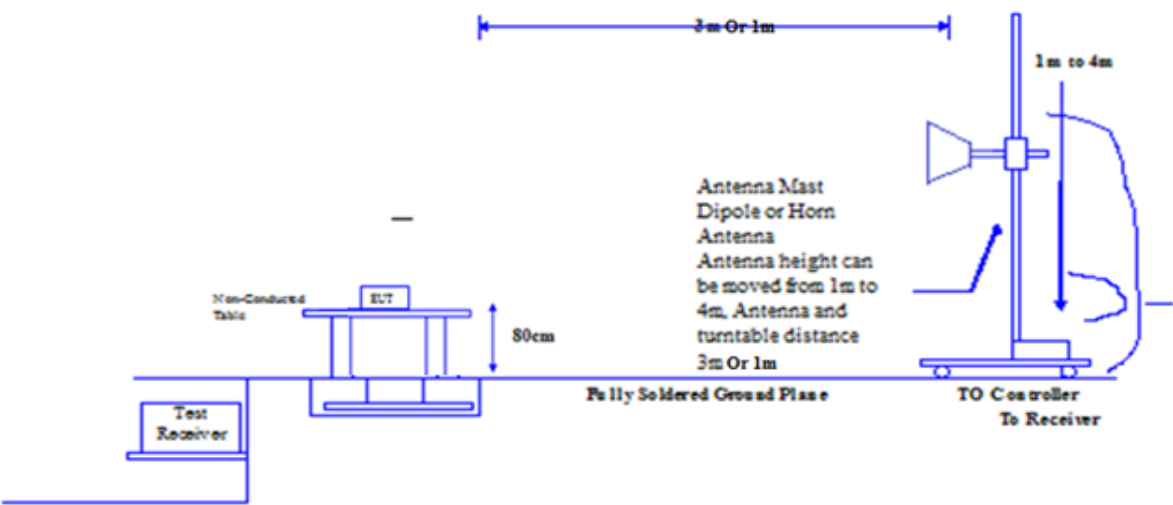

3.6.5 Radiated Emission Measurement Results (9kHz ~ 30MHz)

Test Engineer :	Hogan. He	Temperature :	23℃~26℃
		Relative Humidity :	35%~60%

Frequency (MHz)	Reading (dBu V/m)	Factor(dB) Corr.	Result (dBu V/m)	Limit (dBu V/m)	Margin (dB)	Polarization
1.075	26.67	14.89	41.56	62.97	-21.41	Horizontal
1.075	27.41	14.89	42.30	62.97	-20.67	Vertical

Notes:

1 , No emission found between lowest internal or generated frequency to 30MHz.

2 , Laboratory's Information :


Prepared By : Accurate Technology Co., Ltd

Address: F1, Bldg. A, Changyuan New Material Port, Keyuan Rd., Science & Industry Park
Nanshan District, Shenzhen 518057, P.R. China


Company Registration Number : 752051

Date of Receipt : 2012.07.09

Radiated Emission Plot between 9 kHz ~ 30MHz (Horizontal)

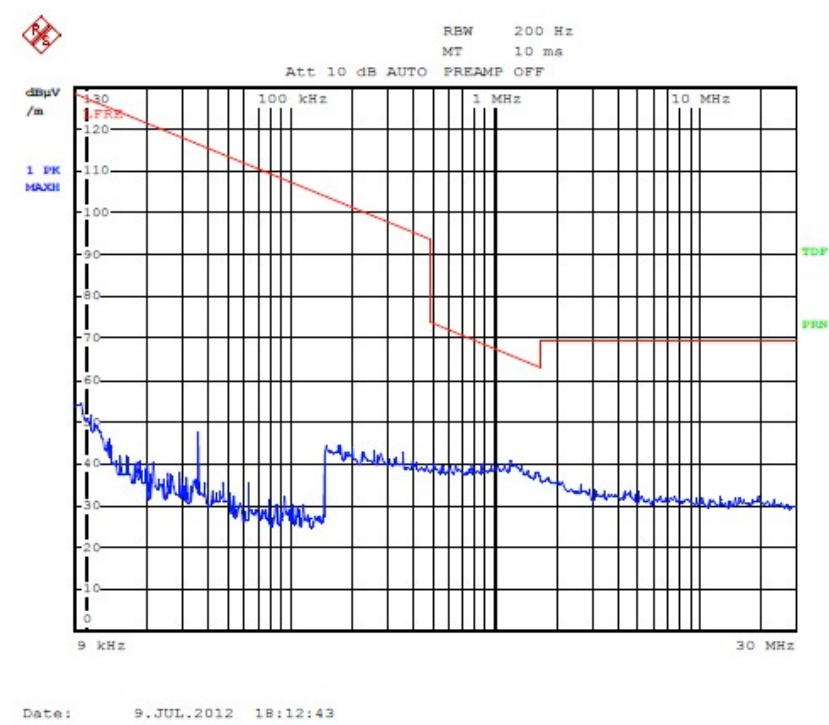


Radiated Emission Plot between 9 kHz ~ 30MHz (Vertical)

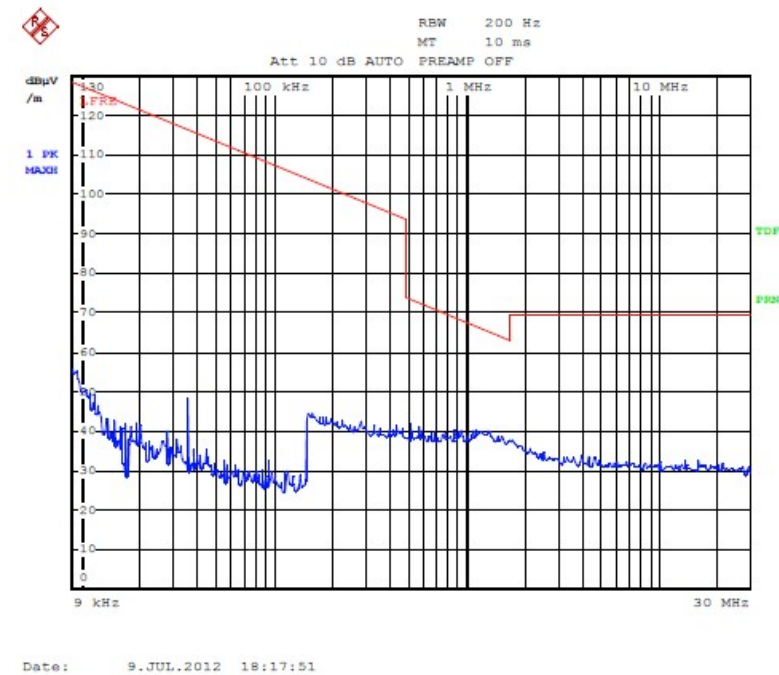

3.6.6 Radiated Emission Measurement Results (30MHz-18GHz)

Test Channel :	01	Test Mode	Mode 1
Test Band :	802.11b	Test Engineer :	Guo-Zheng Li
Remark:	2412MHz is Fundamental signal which can be ignored		


Radiated Emission 30MHz-1GHz Vertical

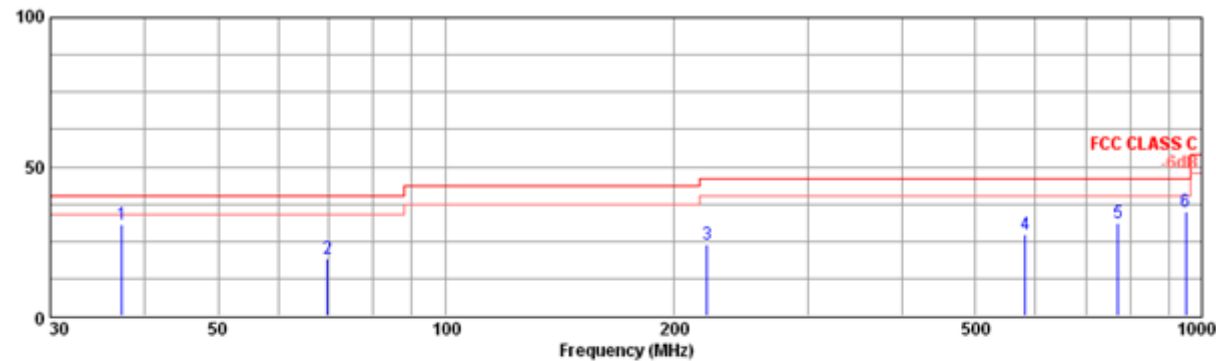

Site : site
Condition : FCC CLASS C 3m HL562 VERTICAL
RBW:120.000KHz VBW:300.000KHz SWT:Auto
eui : GSM MOBILE PHONE
mode : GSM+B-Channel1+Earphone
memo : A1650

	Freq	Remark	Level	Over	Limit	Antenna	Cable	Preamp	Aux	Read		
	MHz		dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV	dB/m	
1	37.27	Peak	30.67	-9.33	40.00	15.40	1.09	0.00	0.00	14.18	16.49	
2	69.77	Peak	18.93	-21.07	40.00	6.45	1.35	0.00	0.00	11.13	7.80	
3	221.09	Peak	23.70	-22.30	46.00	8.30	2.36	0.00	0.00	13.04	10.66	
4	581.45	Peak	27.38	-18.62	46.00	16.72	3.97	0.00	0.00	6.69	20.69	
5	771.57	Peak	30.89	-15.11	46.00	19.23	4.61	0.00	0.00	7.05	23.84	
6	948.59	Peak	34.91	-11.09	46.00	21.01	5.27	0.00	0.00	8.63	26.28	
3	162.50		40.08	49.59	14.47	2.78	26.76	43.50	-3.42	QP	100	360
4	162.61		40.03	49.54	14.47	2.78	26.76	43.50	-3.47	Peak		
5	227.69		35.34	47.01	11.59	3.23	26.49	46.00	-10.66	Peak		
6	293.08		34.49	43.73	13.47	3.65	26.36	46.00	-11.51	Peak		


Radiated Emission 1GHz-18GHz Vertical

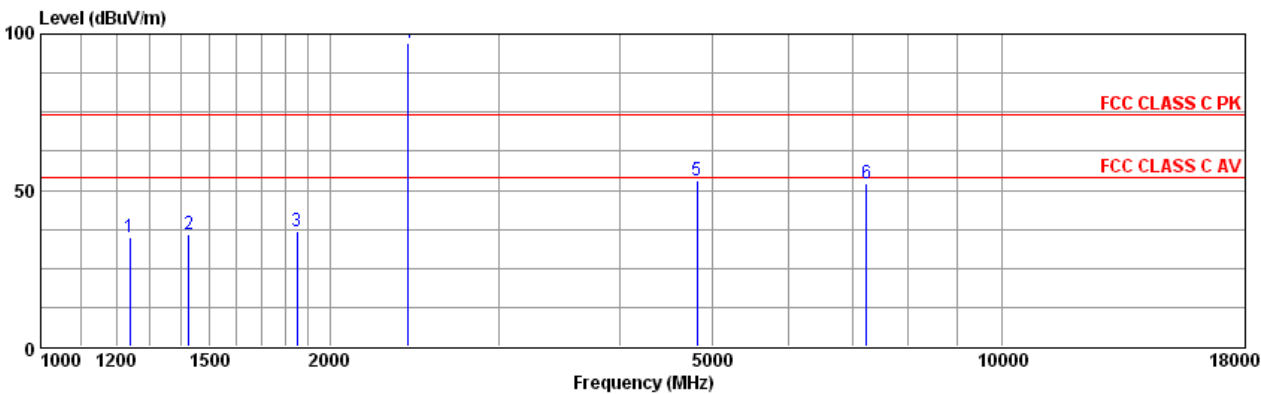

Site : site
Condition : FCC CLASS C PK 3m HF906 VERTICAL
: RBW:1000.000KHz VBW:1000.000KHz SWT:Auto
eut : GSM MOBILE PHONE
mode : GSM+B-Channel1+Earphone
memo : A1650

	Freq	Remark	Level	Over	Limit	Antenna	Cable	Preamp	Aux	Read	
	MHz		dBuV/m	Limit	Line	Factor	Loss	Factor	Factor	Level	Factor
				dB			dB	dB	dB	dBuV	dB/m
1	1238.00	Peak	34.88	-39.12	74.00	24.15	3.34	27.30	0.00	34.69	0.19
2	1425.00	Peak	35.77	-38.23	74.00	24.71	3.52	27.12	0.00	34.66	1.11
3	1850.00	Peak	36.81	-37.19	74.00	26.46	3.87	26.38	0.00	32.86	3.95
4	2412.00	Peak	97.24	23.24	74.00	27.60	4.42	25.30	0.00	90.52	6.72
5	4825.00	Peak	53.16	-20.84	74.00	32.31	6.73	26.97	0.00	41.09	12.07
6	7239.00	Peak	51.96	-22.04	74.00	35.33	8.42	27.29	0.00	35.50	16.46


Radiated Emission 30MHz-1GHz Horizontal

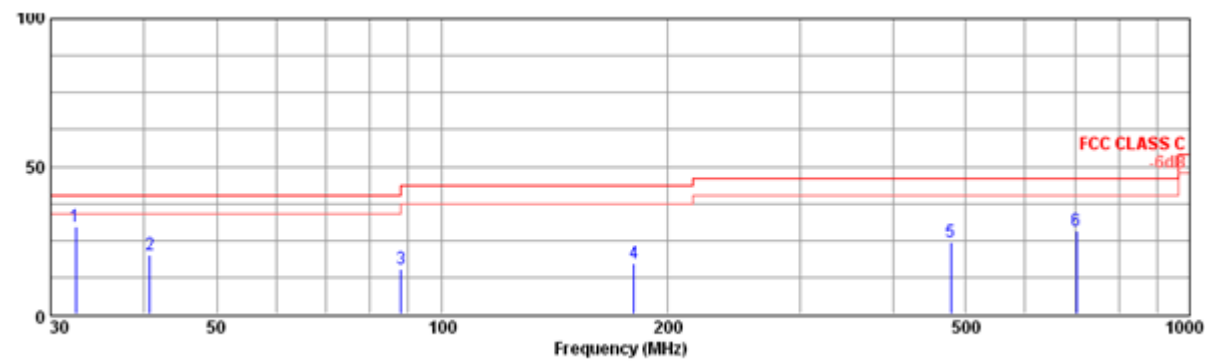

Site : 1
Condition : FCC CLASS C 3m HL562 HORIZONTAL
 : RBW:120.000KHz VBW:300.000KHz SWT:Auto
cut : GSM MOBILE PHONE
mode : GSM+B-Channel 1+Earphone
memo : A1650

	Freq	Remark	Level	Over	Limit	Antenna	Cable	Preamp	Aux	Read	
	MHz		dBuV/m	Limit		Line	Loss	Factor	Factor	Level	Factor
				dB			dB		dB	dBuV	dB/m
1	32.43	Peak	29.50	-10.50	40.00	17.84	1.36	0.00	0.00	10.30	19.20
2	40.67	Peak	20.01	-19.99	40.00	13.51	1.10	0.00	0.00	5.40	14.61
3	88.20	Peak	15.36	-28.14	43.50	8.59	1.74	0.00	0.00	5.03	10.33
4	180.35	Peak	17.28	-26.22	43.50	7.91	2.19	0.00	0.00	7.18	10.10
5	478.14	Peak	24.54	-21.46	46.00	15.07	3.47	0.00	0.00	6.00	18.54
6	702.20	Peak	28.35	-17.65	46.00	18.43	4.31	0.00	0.00	5.61	22.74

Radiated Emission 1GHz-18GHz Horizontal

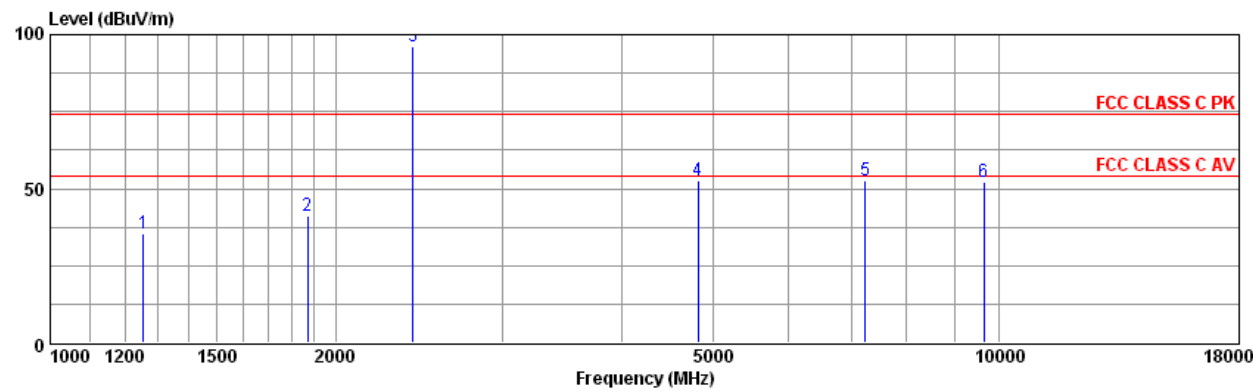


Condition : FCC CLASS C PK 3m HF906 HORIZONTAL
: RBW:1000.000KHz VBW:1000.000KHz SWT:Auto
cut : GSM MOBILE PHONE
mode : GSM+G-Channel 1+Earphone
memo : A1650

	Freq	Remark	Level	Over	Limit	Antenna	Cable	Preamp	Aux	Read	
	MHz		dBuV/m	Limit	Line	Factor	Loss	Factor	Factor	Level	Factor
				dB		dB/m	dB	dB	dB	dBuV	dB/m
1	1255.00	Peak	35.52	-38.48	74.00	24.20	3.39	27.31	0.00	35.24	0.28
2	1867.00	Peak	41.01	-32.99	74.00	26.53	3.88	26.39	0.00	36.99	4.02
3	2412.00	Peak	96.38	22.38	74.00	27.60	4.42	25.30	0.00	89.66	6.72
4	4825.00	Peak	52.83	-21.17	74.00	32.31	6.73	26.97	0.00	40.76	12.07
5	7239.00	Peak	52.48	-21.52	74.00	35.33	8.42	27.29	0.00	36.02	16.46
6	9653.00	Peak	51.96	-22.04	74.00	37.03	10.01	26.91	0.00	31.83	20.13

Test Channel :	06	Test Mode	Mode 2
Test Band :	802.11b	Test Engineer :	Guo-Zheng Li
Remark:	2437MHz is Fundamental signal which can be ignored		


Radiated Emission 30MHz-1GHz Vertical

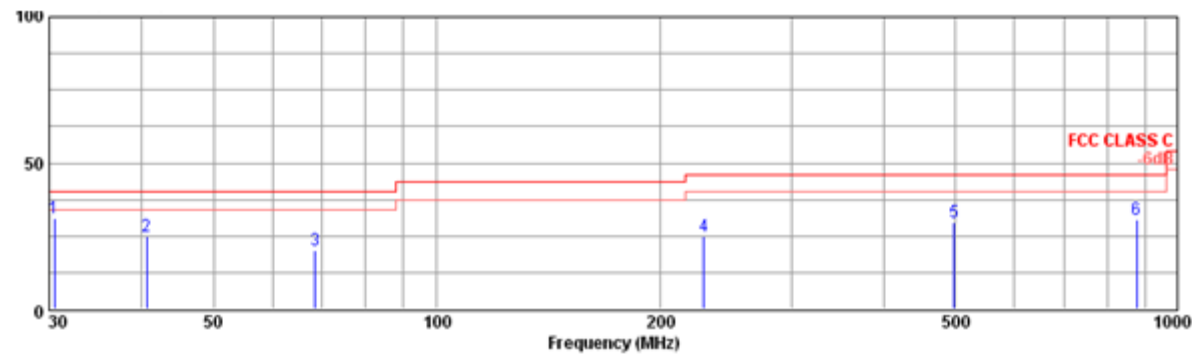

Condition : FCC CLASS C 3m HL562 VERTICAL
: RBW:120.000KHz VBW:300.000KHz SWT:Auto
eut : GSM MOBILE PHONE
mode : GSM+B-Channel 6+Earphone
memo : A1650

	Freq Remark		Level	Over	LimitAntenna		Cable	Preamp	Aux	Read	Factor
	MHz		dBμV/m	Limit	Line	Factor	Loss	Factor	Factor	Level	
				dB	dBμV/m	dB/m	dB	dB	dB	dBμV	dB/m
1	30.49	Peak	31.06	-8.94	40.00	18.88	1.09	0.00	0.00	11.09	19.97
2	40.59	Peak	24.79	-15.21	40.00	13.51	1.10	0.00	0.00	10.18	14.61
3	68.49	Peak	20.13	-19.87	40.00	6.01	1.31	0.00	0.00	12.81	7.32
4	228.70	Peak	24.90	-21.10	46.00	8.62	2.38	0.00	0.00	13.90	11.00
5	497.50	Peak	29.70	-16.30	46.00	15.46	3.58	0.00	0.00	10.66	19.04
6	876.40	Peak	30.60	-15.40	46.00	20.32	4.94	0.00	0.00	5.34	25.26


Radiated Emission 1GHz-18GHz Vertical

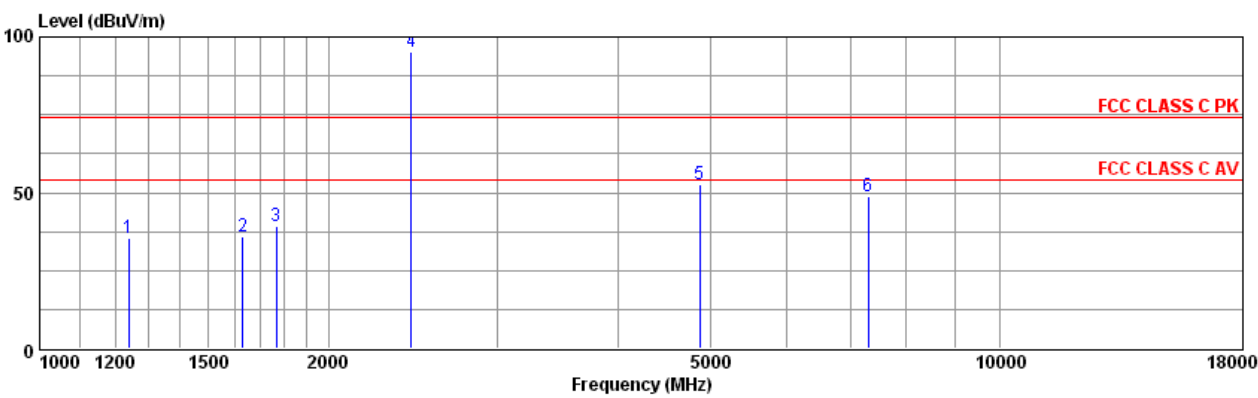

Condition : FCC CLASS C PK 3m HF906 VERTICAL
: RBW:1000.000KHz VBW:1000.000KHz SWT:Auto
eut : GSM MOBILE PHONE
mode : GSM+B-Channel6+Earphone
memo : A1630

	Freq	Remark	Level	Over	Limit	Antenna	Cable	Preamp	Aux	Read	
	MHz		dBuV/m	Limit	Line	Factor	Loss	Factor	Factor	Level	Factor
				dB		dB/m	dB	dB	dB	dBuV	dB/m
1	1238.00	Peak	35.17	-38.83	74.00	24.15	3.34	27.30	0.00	34.98	0.19
2	1629.00	Peak	35.78	-38.22	74.00	25.47	3.58	27.07	0.00	33.80	1.98
3	1764.00	Peak	39.42	-34.58	74.00	26.08	3.74	26.57	0.00	36.17	3.25
4	2437.00	Peak	95.40	21.40	74.00	27.64	4.46	25.32	0.00	88.62	6.78
5	4876.00	Peak	52.63	-21.37	74.00	32.43	6.50	26.98	0.00	40.68	11.95
6	7307.00	Peak	48.87	-25.13	74.00	35.41	8.12	26.95	0.00	32.29	16.58


Radiated Emission 30MHz-1GHz Horizontal

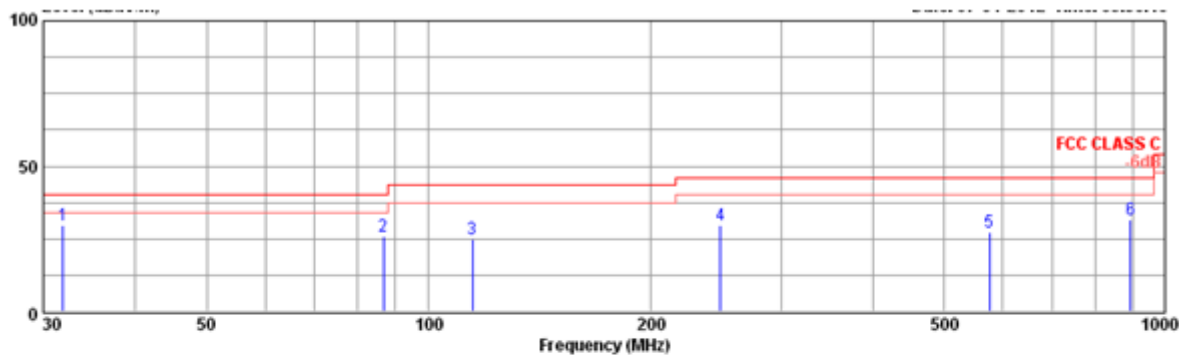

Site : I
Condition : FCC CLASS C 3m HL562 HORIZONTAL
: RBW:120.000KHz VBW:300.000KHz SWT:Auto
cut : GSM MOBILE PHONE
mode : GSM+B-Channel 6+Earphone
memo : A1630

	Freq	Remark	Level	Over	Limit	Antenna	Cable	Preamp	Aux	Read	
	MHz		dBuV/m	Limit	Line	Factor	Loss	Factor	Factor	Level	Factor
				dB	dBuV/m	dB/m	dB	dB	dB	dBuV	dB/m
1	31.89	Peak	29.76	-10.24	40.00	18.17	1.36	0.00	0.00	10.23	19.53
2	86.74	Peak	25.79	-14.21	40.00	8.57	1.74	0.00	0.00	15.48	10.31
3	114.50	Peak	24.76	-18.74	43.50	9.34	1.66	0.00	0.00	13.76	11.00
4	248.67	Peak	29.71	-16.29	46.00	9.36	2.67	0.00	0.00	17.68	12.03
5	576.20	Peak	27.19	-18.81	46.00	16.63	3.95	0.00	0.00	6.61	20.58
6	894.16	Peak	31.79	-14.21	46.00	20.49	4.93	0.00	0.00	6.37	25.42

Radiated Emission 1GHz-18GHz Horizontal

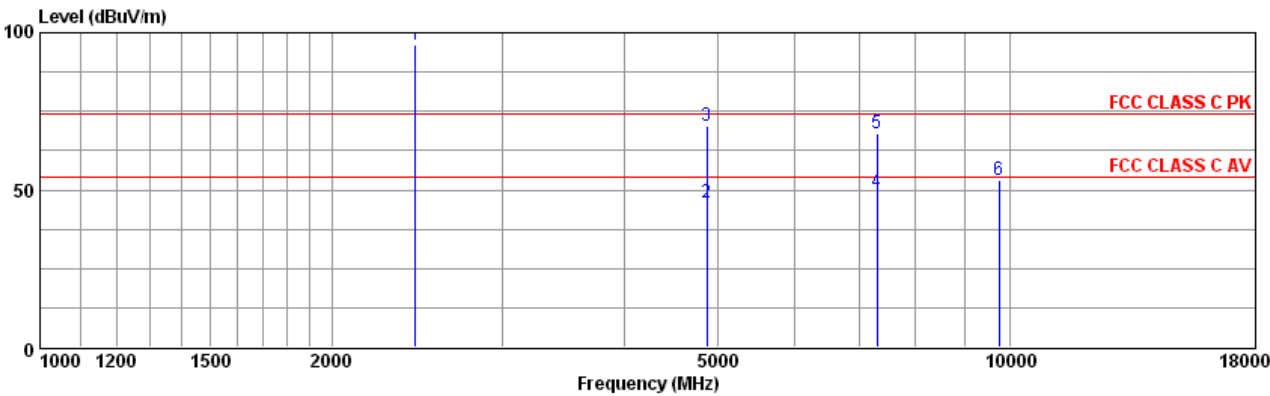


Condition : FCC CLASS C PK 3m HF906 HORIZONTAL
: RBW:1000.000KHz VBW:1000.000KHz SWT:Auto
cut : GSM MOBILE PHONE
mode : GSM+B-Channel 6+Earphone
memo : A1650

	Freq	Remark	Level	Over	Limit	Antenna	Cable	Preamp	Aux	Read	
	MHz		dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV	dB/m
1	2437.00	Peak	96.37	22.37	74.00	27.64	4.46	25.32	0.00	89.59	6.78
2	4876.00	Average	46.12	-27.88	74.00	32.43	6.50	26.98	0.00	34.17	11.95
3	4876.00	Peak	70.18	-3.82	74.00	32.43	6.50	26.98	0.00	58.23	11.95
4	7307.00	Average	49.43	-24.57	74.00	35.41	8.12	26.95	0.00	32.85	16.58
5	7307.00	Peak	68.08	-5.92	74.00	35.41	8.12	26.95	0.00	51.50	16.58
6	9755.00	Peak	53.19	-20.81	74.00	37.05	9.87	26.67	0.00	32.94	20.25

Test Channel :	11	Test Mode	Mode 3
Test Band :	802.11b	Test Engineer :	Guo-Zheng Li
Remark:	2462MHz is Fundamental signal which can be ignored		


Radiated Emission 30MHz-1GHz Vertical

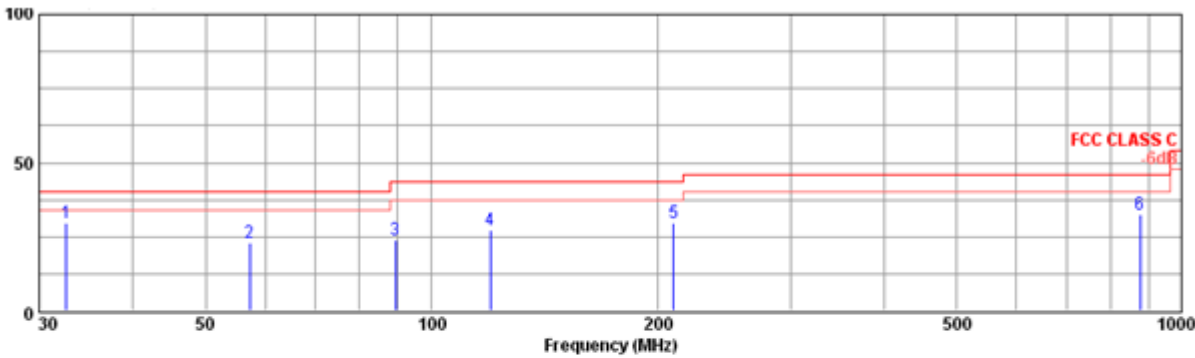

Site :!
Condition : FCC CLASS C 3m HL562 VERTICAL
: RBW:120.000KHz VBW:300.000KHz SWT:Auto
eui : GSM MOBILE PHONE
mode : GSM+B-Channel 11+Earphone
memo : A1650

	Freq	Remark	Level	Over	Limit	Antenna	Cable	Preamp	Aux	Read	Factor
			dBuV/m	Limit	Line	Factor	Loss	Factor	Factor	Level	
	MHz			dB			dB	dB	dB	dBuV	dB/m
1	32.64	Peak	29.73	-10.27	40.00	17.76	1.35	0.00	0.00	10.62	19.11
2	57.16	Peak	23.09	-16.91	40.00	4.20	1.32	0.00	0.00	17.57	5.52
3	89.44	Peak	23.96	-19.54	43.50	8.61	1.74	0.00	0.00	13.61	10.35
4	119.60	Peak	27.49	-16.01	43.50	9.60	1.71	0.00	0.00	16.18	11.31
5	209.78	Peak	29.46	-14.04	43.50	7.74	2.27	0.00	0.00	19.45	10.01
6	876.40	Peak	32.76	-13.24	46.00	20.32	4.94	0.00	0.00	7.50	25.26


Radiated Emission 1GHz-18GHz Vertical

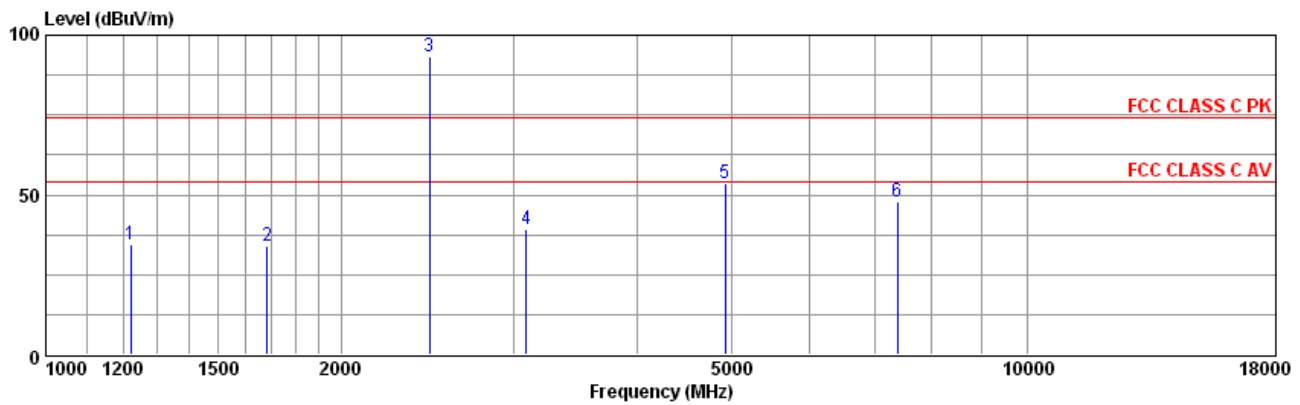

Condition : FCC CLASS C PK 3m HF906 VERTICAL
 : RBW:1000.000KHz VBW:1000.000KHz SWT:Auto
 eut : GSM MOBILE PHONE
 mode : GSM+B-Channel111+Earphone
 memo : A1630

	Freq	Remark	Level	Over	Limit	Antenna	Cable	Preamp	Aux	Read	
	MHz		dBuV/m	Limit	Line	Factor	Loss	Factor	Factor	Level	Factor
				dB			dB	dB	dB	dBuV	dB/m
1	1221.00	Peak	34.66	-39.34	74.00	24.09	3.24	27.36	0.00	34.69	-0.03
2	1680.00	Peak	34.12	-39.88	74.00	25.69	3.76	27.00	0.00	31.67	2.45
3	2462.00	Peak	93.42	19.42	74.00	27.66	4.49	25.40	0.00	86.67	6.75
4	3091.00	Peak	39.19	-34.81	74.00	29.37	5.13	27.36	0.00	32.05	7.14
5	4927.00	Peak	53.42	-20.58	74.00	32.55	6.43	27.12	0.00	41.56	11.86
6	7375.00	Peak	47.61	-26.39	74.00	35.48	7.93	26.99	0.00	31.19	16.42


Radiated Emission 30MHz-1GHz Horizontal

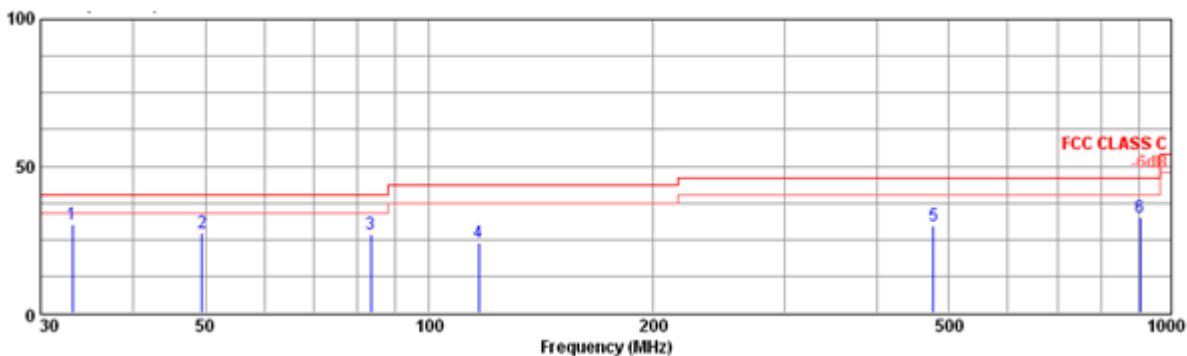

Site : site
Condition : FCC CLASS C 3m HL562 HORIZONTAL
: RBW:120.000KHz VBW:300.000KHz SWT:Auto
eut : GSM MOBILE PHONE
mode : GSM+B-Channel 11+Earphone
memo : A1650

	Freq	Remark	Level	Over	Limit	Antenna	Cable	Preamp	Aux	Read	
	MHz		dBuV/m	Limit	Line	Factor	Loss	Factor	Factor	Level	Factor
				dB		dB/m	dB	dB	dB	dBuV	dB/m
1	33.10	Peak	30.17	-9.83	40.00	17.53	1.31	0.00	0.00	11.33	18.84
2	49.42	Peak	27.41	-12.59	40.00	8.21	1.14	0.00	0.00	18.06	9.35
3	83.49	Peak	26.71	-13.29	40.00	8.41	1.62	0.00	0.00	16.68	10.03
4	116.47	Peak	23.94	-19.56	43.50	9.46	1.68	0.00	0.00	12.80	11.14
5	476.80	Peak	29.46	-16.54	46.00	15.07	3.46	0.00	0.00	10.93	18.53
6	903.40	Peak	32.71	-13.29	46.00	20.57	4.93	0.00	0.00	7.21	25.50

Radiated Emission 1GHz-18GHz Horizontal

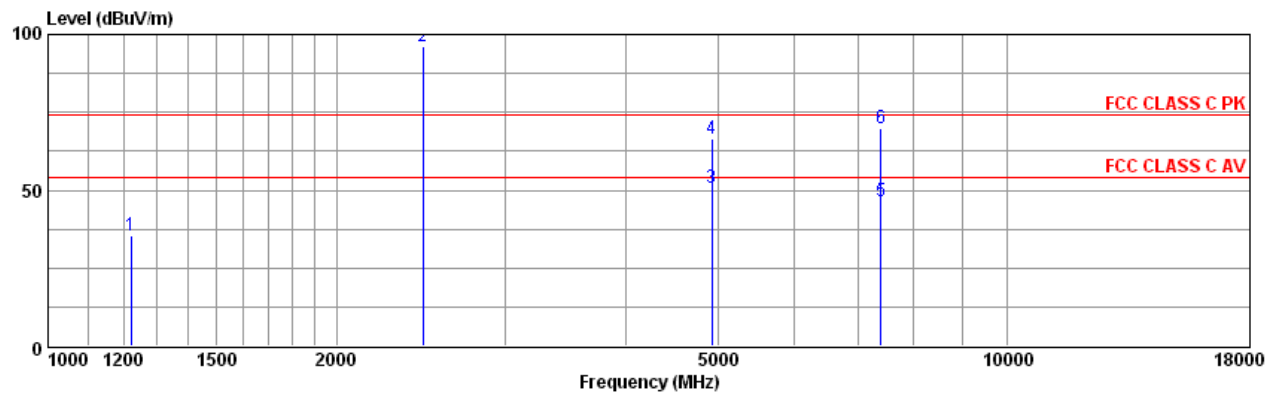


Condition : FCC CLASS C PK 3m HF906 HORIZONTAL
: RBW:1000.000KHz VBW:1000.000KHz SWT:Auto
cut : GSM MOBILE PHONE
mode : GSM+B-Channel 11+Earphone
memo : A1650

	Freq	Remark	Level	Over	Limit	Antenna	Cable	Preamp	Aux	Read	
	MHz		dBuV/m	Limit	Line	Factor	Loss	Factor	Factor	Level	Factor
				dB			dB	dB	dB	dBuV	dB/m
1	1221.00	Peak	35.29	-38.71	74.00	24.09	3.24	27.36	0.00	35.32	-0.03
2	2462.00	Peak	96.34	22.34	74.00	27.66	4.49	25.40	0.00	89.59	6.75
3	4927.00	Average	50.92	-3.08	54.00	32.55	6.43	27.12	0.00	39.06	11.86
4	4927.00	Peak	66.28	-7.72	74.00	32.55	6.43	27.12	0.00	54.42	11.86
5	7392.00	Average	46.46	-7.54	54.00	35.50	7.91	27.00	0.00	30.05	16.41
6	7392.00	Peak	69.64	-4.36	74.00	35.50	7.91	27.00	0.00	53.23	16.41

Test Channel :	01	Test Mode	Mode 4
Test Band :	802.11g	Test Engineer :	Guo-Zheng Li
Remark:	2412MHz is Fundamental signal which can be ignored		


Radiated Emission 30MHz-1GHz Vertical

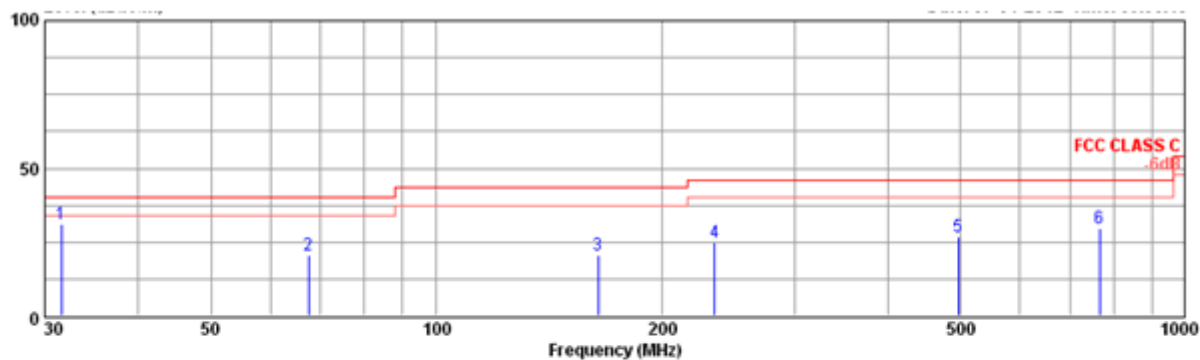

Site : site
Condition : FCC CLASS C 3m HL562 VERTICAL
RBW:120.000KHz VBW:300.000KHz SWT:Auto
cut : GSM MOBILE PHONE
mode : GSM+G-Channel1+Earphone
memo : A1650

	Freq	Remark	Level	Over	Limit	Antenna	Cable	Preamp	Aux	Read	
	MHz		dBuV/m	Limit		Line	Loss	Factor	Factor	Level	Factor
				dB		Factor	dB			dBuV	dB/m
1	31.57	Peak	31.02	-8.98	40.00	18.33	1.24	0.00	0.00	11.45	19.57
2	67.49	Peak	20.73	-19.27	40.00	5.68	1.28	0.00	0.00	13.77	6.96
3	164.27	Peak	20.70	-22.80	43.50	7.43	2.15	0.00	0.00	11.12	9.58
4	234.90	Peak	24.78	-21.22	46.00	8.88	2.42	0.00	0.00	13.48	11.30
5	497.20	Peak	26.94	-19.06	46.00	15.46	3.58	0.00	0.00	7.90	19.04
6	765.80	Peak	29.48	-16.52	46.00	19.15	4.59	0.00	0.00	5.74	23.74


Radiated Emission 1GHz-18GHz Vertical

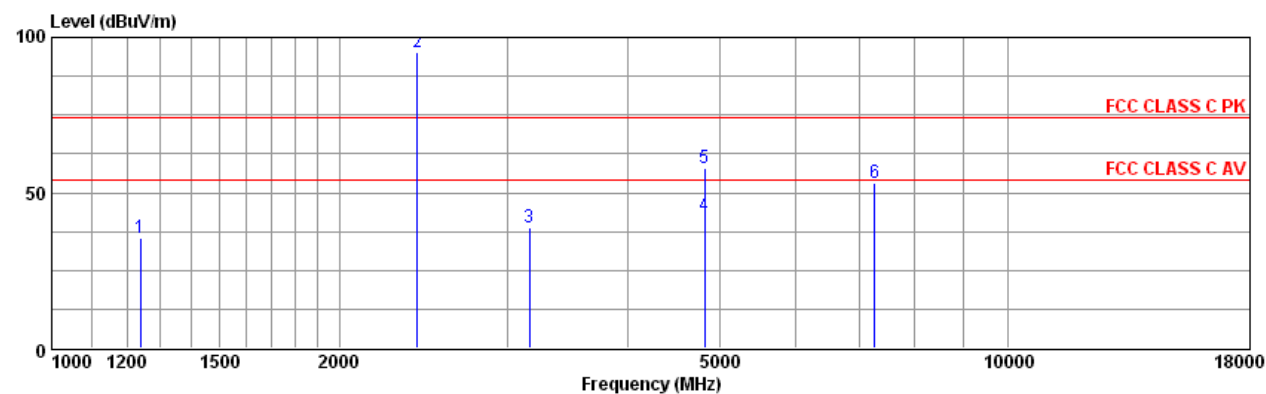

Site : site
Condition : FCC CLASS C PK 3m HF906 VERTICAL
 : RBW:1000.000KHz VBW:1000.000KHz SWT:Auto
eute : GSM MOBILE PHONE
mode : GSM+G-Channel1+Earphone
memo : A1650

	Freq	Remark	Level	Over	Limit	Antenna	Cable	Preamp	Aux	Read	
	MHz		dBuV/m	Limit	Line	Factor	Loss	Factor	Factor	Level	Factor
				dB			dB	dB	dB	dBuV	dB/m
1	1238.00	Peak	35.27	-38.73	74.00	24.15	3.34	27.30	0.00	35.08	0.19
2	2412.00	Peak	95.33	21.33	74.00	27.60	4.42	25.30	0.00	88.61	6.72
3	3159.00	Peak	38.62	-35.38	74.00	29.60	5.00	26.41	0.00	30.43	8.19
4	4825.00	Average	42.53	-11.47	54.00	32.31	6.73	26.97	0.00	30.46	12.07
5	4825.00	Peak	57.69	-16.31	74.00	32.31	6.73	26.97	0.00	45.62	12.07
6	7256.00	Peak	53.07	-20.93	74.00	35.35	8.32	27.10	0.00	36.50	16.57


Radiated Emission 30MHz-1GHz Horizontal

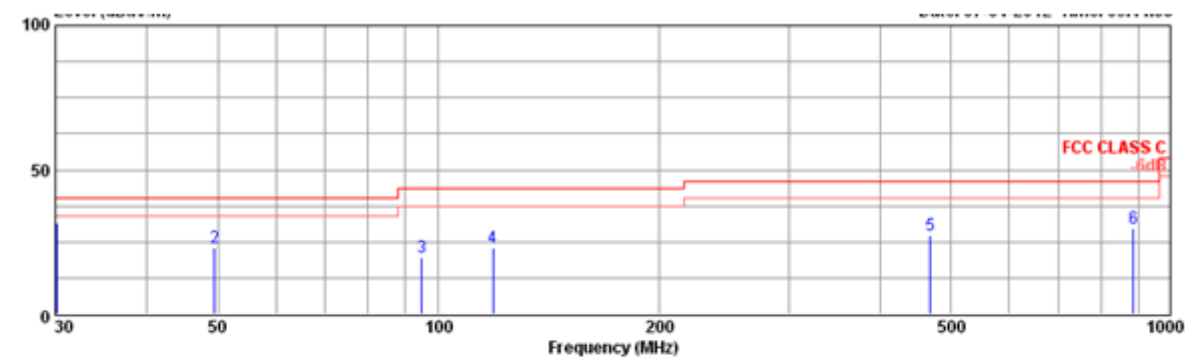

Site : I
Condition : FCC CLASS C 3m HL562 HORIZONTAL
 : RBW:120.000KHz VBW:300.000KHz SWT:Auto
cut : GSM MOBILE PHONE
mode : GSM+G-Channel1+Earphone
memo : A1650

	Freq	Remark	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Aux Factor	Read Level	Factor
	MHz		dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV	dB/m
1	30.08	Peak	31.76	-8.24	40.00	19.11	1.12	0.00	0.00	11.53	20.23
2	49.52	Peak	23.08	-16.92	40.00	8.07	1.14	0.00	0.00	13.87	9.21
3	94.76	Peak	19.57	-23.93	43.50	8.72	1.73	0.00	0.00	9.12	10.45
4	118.67	Peak	23.08	-20.42	43.50	9.57	1.70	0.00	0.00	11.81	11.27
5	468.70	Peak	27.16	-18.84	46.00	14.90	3.42	0.00	0.00	8.84	18.32
6	887.47	Peak	29.76	-16.24	46.00	20.45	4.94	0.00	0.00	4.37	25.39

Radiated Emission 1GHz-18GHz Horizontal

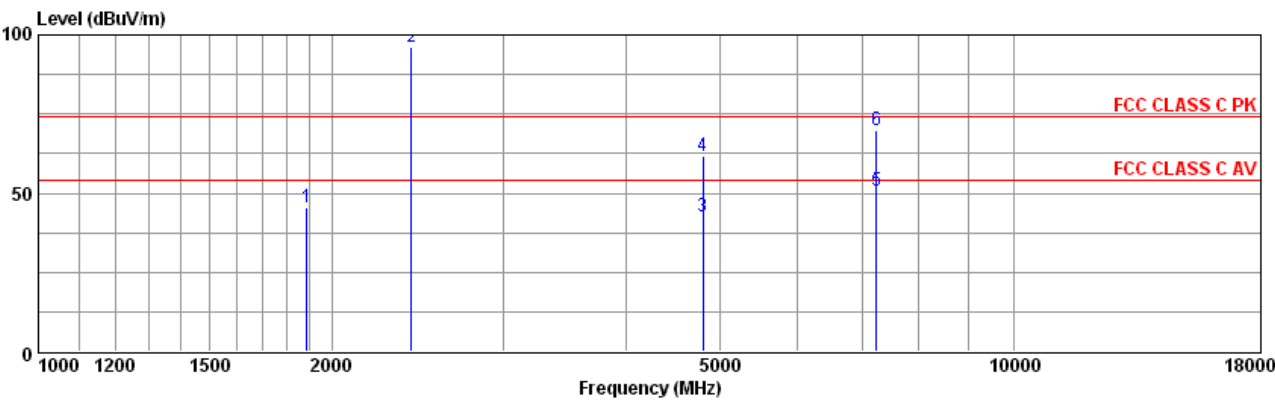


Condition : FCC CLASS C PK 3m HF906 HORIZONTAL
: RBW:1000.000KHz VBW:1000.000KHz SWT:Auto
eut : GSM MOBILE PHONE
mode : GSM+G-Channel 1+Earphone
memo : A1650

	Freq	Remark	Level	Over	Limit	Antenna	Cable	Preamp	Aux	Read	
	MHz		dBuV/m	Limit		Line	Loss	Factor	Factor	Level	Factor
				dB		Factor	dB	dB	dB	dBuV	dB/m
1	1884.00	Peak	45.41	-28.59	74.00	26.61	3.89	26.43	0.00	41.34	4.07
2	2412.00	Peak	96.25	22.25	74.00	27.60	4.42	25.30	0.00	89.53	6.72
3	4808.00	Average	42.42	-11.58	54.00	32.27	6.88	27.19	0.00	30.46	11.96
4	4808.00	Peak	61.72	-12.28	74.00	32.27	6.88	27.19	0.00	49.76	11.96
5	7239.00	Average	50.56	-3.44	54.00	35.33	8.42	27.29	0.00	34.10	16.46
6	7239.00	Peak	70.02	-3.98	74.00	35.33	8.42	27.29	0.00	53.56	16.46

Test Channel :	06	Test Mode	Mode 5
Test Band :	802.11g	Test Engineer :	Guo-Zheng Li
Remark:	2437MHz is Fundamental signal which can be ignored		


Radiated Emission 30MHz-1GHz Vertical

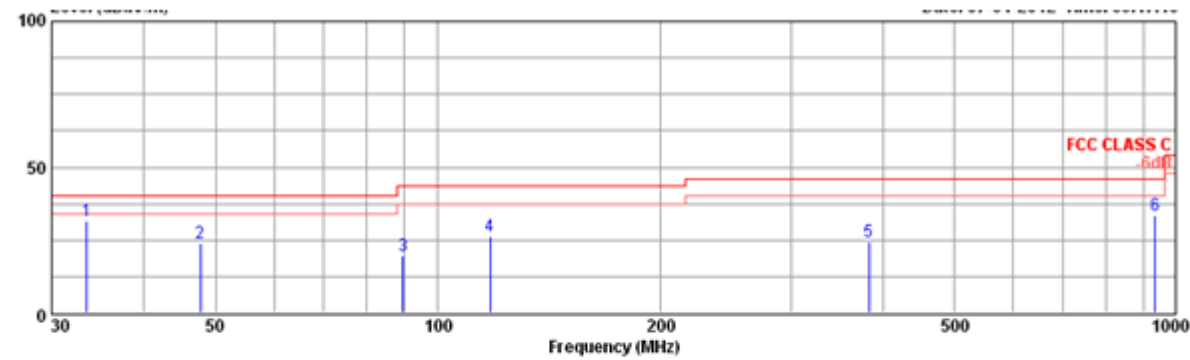

Site : I
Condition : FCC CLASS C 3m HL562 VERTICAL
RBW:120.000KHz VBW:300.000KHz SWT:Auto
eui : GSM MOBILE PHONE
mode : GSM+G-Channel 6+Earphone
memo : A1650

	Freq	Remark	Level	Over	Limit		Antenna	Cable	Preamp	Aux	Read	Factor
			dBuV/m	Limit	dB	dBuV/m	dB/m	Loss	Factor	Factor	Level	Factor
	MHz							dB	dB	dB	dBuV	dB/m
1	33.47	Peak	31.70	-8.30	40.00	17.30		1.27	0.00	0.00	13.13	18.57
2	47.65	Peak	23.80	-16.20	40.00	9.40		1.11	0.00	0.00	13.29	10.51
3	89.67	Peak	19.47	-24.03	43.50	8.61		1.74	0.00	0.00	9.12	10.35
4	117.56	Peak	26.48	-17.02	43.50	9.52		1.69	0.00	0.00	15.27	11.21
5	382.41	Peak	24.60	-21.40	46.00	13.08		3.18	0.00	0.00	8.34	16.26
6	934.70	Peak	33.64	-12.36	46.00	20.88		5.14	0.00	0.00	7.62	26.02


Radiated Emission 1GHz-18GHz Vertical

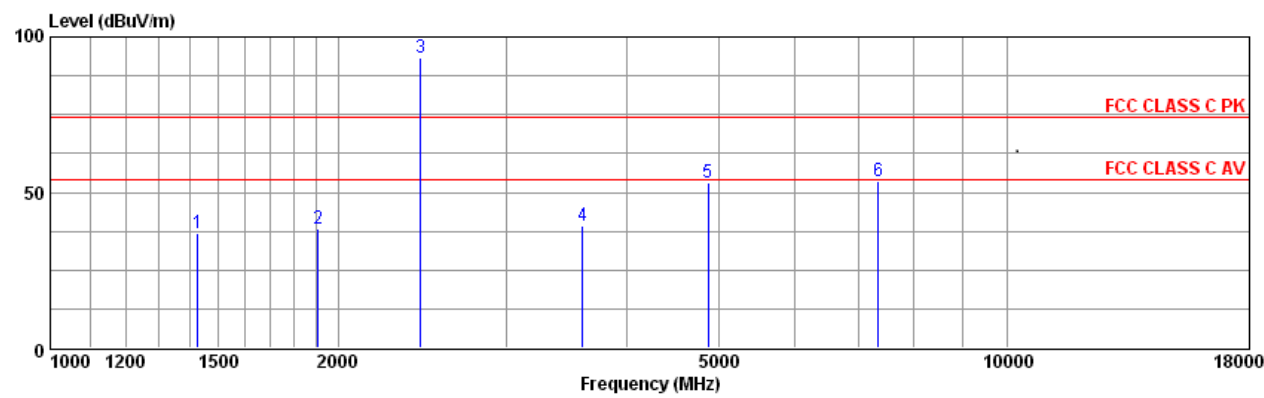

Condition : FCC CLASS C PK 3m HF906 VERTICAL
: RBW:1000.000KHz VBW:1000.000KHz SWT:Auto
eut : GSM MOBILE PHONE
mode : GSM+G-Channel 6+Earphone
memo : A1650

	Freq	Remark	Level	Over	Limit	Antenna	Cable	Preamp	Aux	Read	
	MHz		dBuV/m	Limit		Line	Loss	Factor	Factor	Level	Factor
				dB		dB/m	dB	dB	dB	dBuV	dB/m
1	1425.00	Peak	36.72	-37.28	74.00	24.71	3.52	27.12	0.00	35.61	1.11
2	1906.00	Peak	38.06	-35.94	74.00	26.68	3.90	26.40	0.00	33.88	4.18
3	2437.00	Peak	93.24	19.24	74.00	27.64	4.46	25.32	0.00	86.46	6.78
4	3601.00	Peak	39.42	-34.58	74.00	30.87	5.63	26.53	0.00	29.45	9.97
5	4876.00	Peak	53.08	-20.92	74.00	32.43	6.50	26.98	0.00	41.13	11.95
6	7342.00	Peak	53.73	-20.27	74.00	35.44	8.02	26.98	0.00	37.25	16.48


Radiated Emission 30MHz-1GHz Horizontal

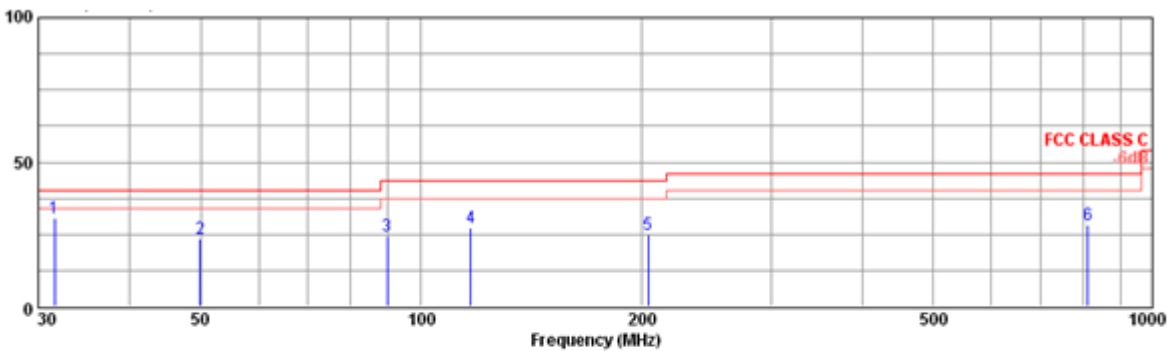

Site : !
Condition : FCC CLASS C 3m HL562 HORIZONTAL
: RBW:120.000KHz VBW:300.000KHz SWT:Auto
eui : GSM MOBILE PHONE
mode : GSM+G-Channel16+Earphone
memo : A1650

	Freq	Remark	Level	Over	Limit	Antenna	Cable	Preamp	Aux	Read	
	MHz		dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV	dB/m
1	31.56	Peak	30.49	-9.51	40.00	18.33	1.24	0.00	0.00	10.92	19.57
2	49.88	Peak	23.47	-16.53	40.00	7.93	1.15	0.00	0.00	14.39	9.08
3	89.78	Peak	24.56	-18.94	43.50	8.61	1.74	0.00	0.00	14.21	10.35
4	116.87	Peak	27.41	-16.09	43.50	9.46	1.68	0.00	0.00	16.27	11.14
5	204.24	Peak	24.99	-18.51	43.50	7.48	2.28	0.00	0.00	15.23	9.76
6	813.54	Peak	28.46	-17.54	46.00	19.67	4.84	0.00	0.00	3.95	24.51

Radiated Emission 1GHz-18GHz Horizontal

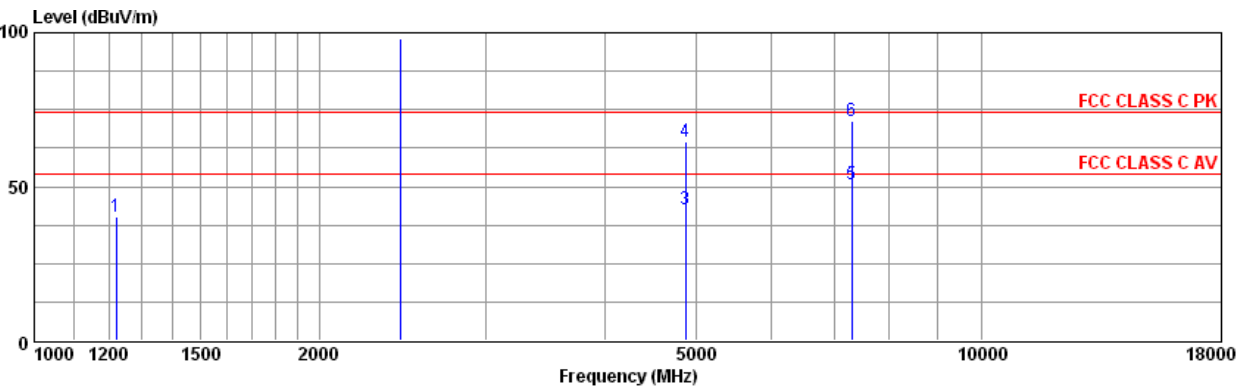


Condition : FCC CLASS C PK 3m HF906 HORIZONTAL
: RBW:1000.000KHz VBW:1000.000KHz SWT:Auto
eut : GSM MOBILE PHONE
mode : GSM+G-Channel 6+Earphone
memo : A1650

	Freq	Remark	Level	Over	Limit	Antenna	Cable	Preamp	Aux	Read	
	MHz		dBuV/m	Limit		Line	Loss	Factor	Factor	Level	Factor
				dB			dB		dB	dBuV	dB/m
1	1221.00	Peak	40.20	-33.80	74.00	24.09	3.24	27.36	0.00	40.23	-0.03
2	2437.00	Peak	97.91	23.91	74.00	27.64	4.46	25.32	0.00	91.13	6.78
3	4876.00	Average	42.71	-11.29	54.00	32.43	6.50	26.98	0.00	30.76	11.95
4	4876.00	Peak	64.54	-9.46	74.00	32.43	6.50	26.98	0.00	52.59	11.95
5	7307.00	Average	50.66	-3.34	54.00	35.41	8.12	26.95	0.00	34.08	16.58
6	7307.00	Peak	71.15	-2.85	74.00	35.41	8.12	26.95	0.00	54.57	16.58

Test Channel :	11	Test Mode	Mode 6
Test Band :	802.11g	Test Engineer :	Guo-Zheng Li
Remark:	2462MHz is Fundamental signal which can be ignored		


Radiated Emission 30MHz-1GHz Vertical

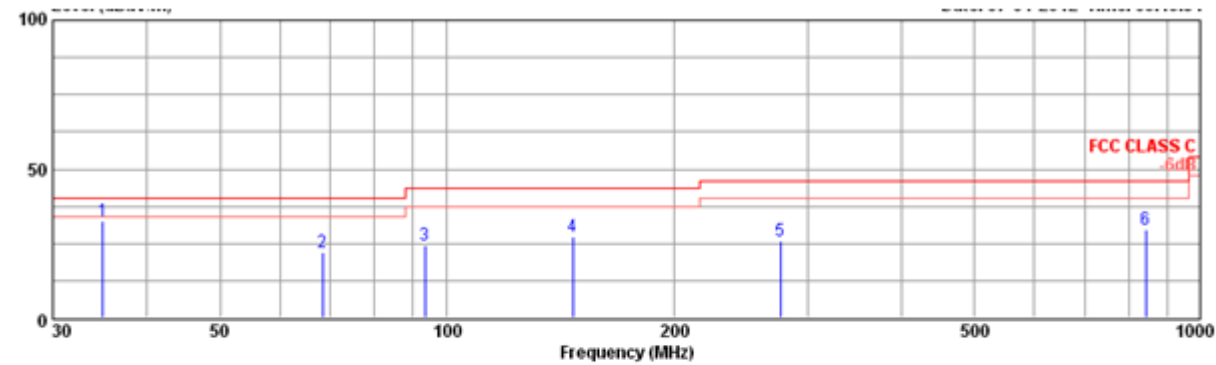

Site :!
Condition : FCC CLASS C 3m HL562 VERTICAL
RBW:120.000KHz VBW:300.000KHz SWT:Auto
eui : GSM MOBILE PHONE
mode : GSM+G-Channel11+Earphone
memo : A1630

	Freq	Remark	Level	Over	Limit	Antenna	Cable	Preamp	Aux	Read	
	MHz		dBμV/m	dB	dBμV/m	dB/m	dB	dB	dB	dBμV	dB/m
1	34.97	Peak	32.65	-7.35	40.00	16.66	1.12	0.00	0.00	14.87	17.78
2	68.41	Peak	21.86	-18.14	40.00	6.01	1.30	0.00	0.00	14.55	7.31
3	93.45	Peak	24.58	-18.92	43.50	8.70	1.74	0.00	0.00	14.14	10.44
4	146.65	Peak	27.40	-16.10	43.50	7.63	1.97	0.00	0.00	17.80	9.60
5	276.65	Peak	25.83	-20.17	46.00	10.23	2.69	0.00	0.00	12.91	12.92
6	843.78	Peak	29.47	-16.53	46.00	19.95	4.98	0.00	0.00	4.54	24.93


Radiated Emission 1GHz-18GHz Vertical

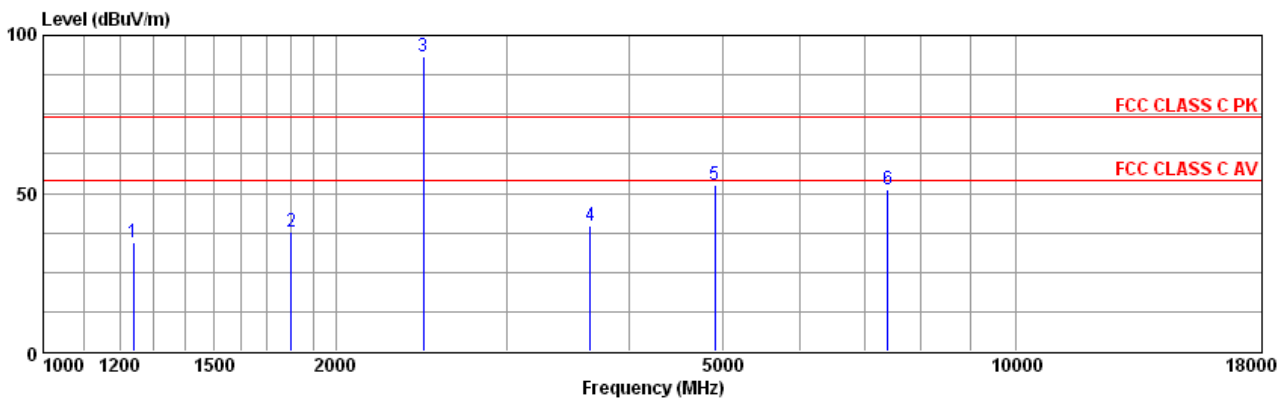

Condition : FCC CLASS C PK 3m HF906 VERTICAL
: RBW:1000.000KHz VBW:1000.000KHz SWT:Auto
eut : GSM MOBILE PHONE
mode : GSM+G-Channel 11+Earphone
memo : A1650

	Freq	Remark	Level	Over	Limit	Antenna	Cable	Preamp	Aux	Read	
	MHz		dBuV/m	Limit	Line	Factor	Loss	Factor	Factor	Level	Factor
				dB			dB	dB	dB	dBuV	dB/m
1	1238.00	Peak	34.47	-39.53	74.00	24.15	3.34	27.30	0.00	34.28	0.19
2	1799.00	Peak	37.71	-36.29	74.00	26.23	3.82	26.49	0.00	34.15	3.56
3	2462.00	Peak	93.11	19.11	74.00	27.66	4.49	25.40	0.00	86.36	6.75
4	3652.00	Peak	39.88	-34.12	74.00	30.96	5.72	26.72	0.00	29.92	9.96
5	4910.00	Peak	52.52	-21.48	74.00	32.51	6.37	26.99	0.00	40.63	11.89
6	7392.00	Peak	51.01	-22.99	74.00	35.50	7.91	27.00	0.00	34.60	16.41


Radiated Emission 30MHz-1GHz Horizontal

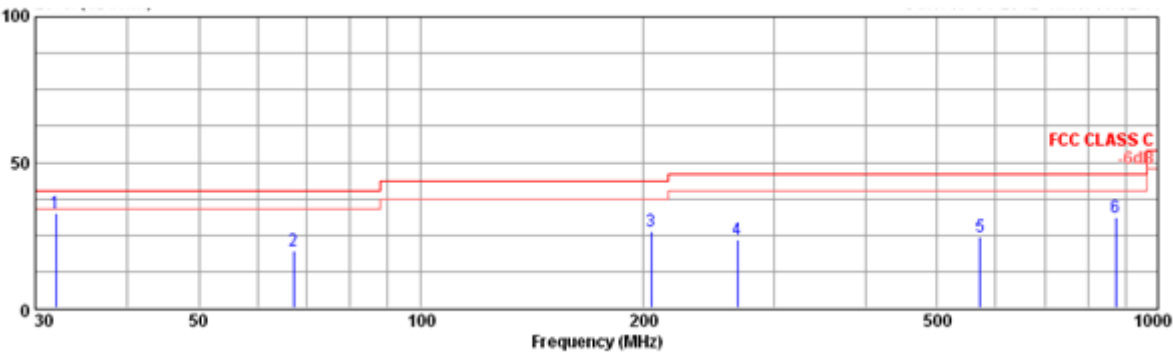

Site : I
Condition : FCC CLASS C 3m HL562 HORIZONTAL
RBW:120.000KHz VBW:300.000KHz SWT:Auto
cut : GSM MOBILE PHONE
mode : GSM+G-Channel II+Earphone
memo : A1650

	Freq	Remark	Level	Over	Limit	Antenna	Cable	Preamp	Aux	Read	
	MHz		dBμV/m	Limit	Line	Factor	Loss	Factor	Factor	Level	Factor
1	31.96	Peak	32.76	-7.24	40.00	18.09	1.36	0.00	0.00	13.31	19.45
2	67.19	Peak	19.81	-20.19	40.00	5.56	1.27	0.00	0.00	12.98	6.83
3	204.90	Peak	26.14	-17.36	43.50	7.48	2.28	0.00	0.00	16.38	9.76
4	267.94	Peak	23.41	-22.59	46.00	9.95	2.67	0.00	0.00	10.79	12.62
5	571.66	Peak	24.49	-21.51	46.00	16.54	3.94	0.00	0.00	4.01	20.48
6	873.50	Peak	30.97	-15.03	46.00	20.28	4.94	0.00	0.00	5.75	25.22

Radiated Emission 1GHz-18GHz Horizontal

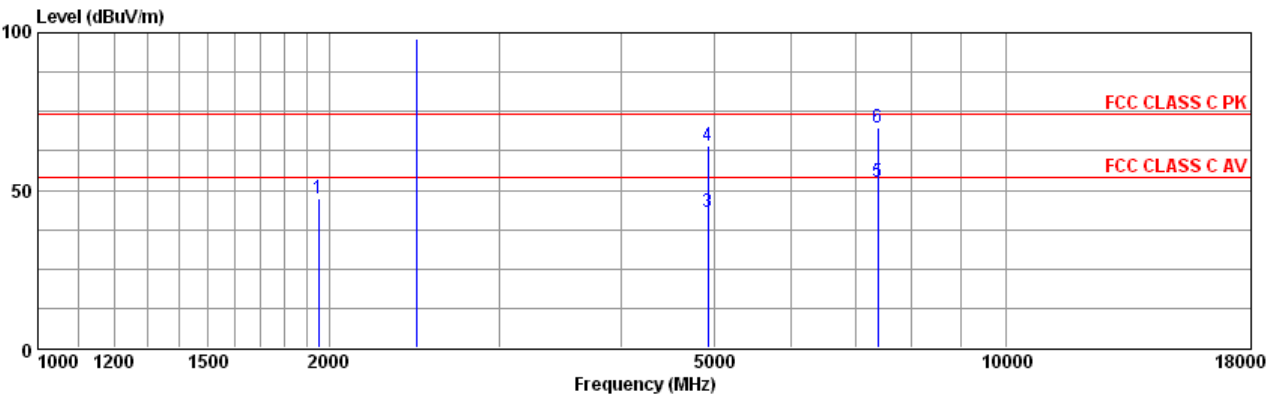

Condition : FCC CLASS C PK 3m HF906 HORIZONTAL
: RBW:1000.000KHz VBW:1000.000KHz SWT:Auto
eut : GSM MOBILE PHONE
mode : GSM+G-Channel 11+Earphone
memo : A1650

Freq Remark		Level	Over Limit	LimitAntenna	Cable Preamp	Aux	Read		
MHz		dBuV/m	dB	Line Factor	Loss Factor	Factor	Level	Factor	
1	1952.00 Peak	47.37	-26.63	74.00	26.89	4.12	26.22	0.00	42.58 4.79
2	2462.00 Peak	98.22	24.22	74.00	27.66	4.49	25.40	0.00	91.47 6.75
3	4927.00 Average	42.95	-11.05	54.00	32.55	6.43	27.12	0.00	31.09 11.86
4	4927.00 Peak	64.05	-9.95	74.00	32.55	6.43	27.12	0.00	52.19 11.86
5	7375.00 Average	52.51	-1.49	54.00	35.48	7.93	26.99	0.00	36.09 16.42
6	7375.00 Peak	70.01	-3.99	74.00	35.48	7.93	26.99	0.00	53.59 16.42

3.6.7 Radiated Emission Measurement Results (18GHz-25GHz)

Test Engineer :	Hogan. He	Temperature :	23°C~26°C
		Relative Humidity :	35%~60%

Frequency (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Notes:

The amplitude of radiated emissions that are attenuated by more than 20dB below the permissible value has no need to be reported. The measurement performed at 1meter distance from turn table to antenna.

4. List of Measuring Equipment

No	Instrument/Ancillary	Provider	Type/Model	Cal. Date
01	Base Station	Agilent	E5515C	2011.12.14
02	Spectrum Analyzer	R&S	FSP30(9kHz~30GHz)	2011.07.19
03	Antenna	Schwarzbeck	VULB9165(30M-1G)	2011.11.09
04	Antenna	R&S	HF906(1G-18G)	2011.08.10
05	Antenna	Schwarzbeck	BBHA 9170 (15G-26.5G)	2011.11.09
06	Loop Antenna	Schwarzbeck	FMZB1516(9KHz~30MHz)	2012.01.07
07	High Pass Filter	R&S	System Integrated	2011.11.14
08	Thermal chamber	Hitachi	EC- 85MHP	2011.12.25
09	Pre-Amplifier	Agilent	83006A(0.01GHz-26.5GHz)	2011.8.16
10	Pre-Amplifier	Agilent	83006A(0.01GHz-26.5GHz)	2011.8.16
11	Helical Antenna	ETS	3102 (1G-10G)	NCR
12	Power Meter	R&S	NRP(10MHz~8GHz)	2011.12.05
13	Relay Switch	R&S	TS-REMI	NCR
14	LISN	ROHDE&SCHWARZ	ENV216 TWO-LINE V-NETWORK	2011.11.13
15	Power Meter	Agilent	E4418B (EPM Series)	2011.12.14
16	Power Sensor	Agilent	E4412A (E-series CW)	2011.12.14

5 Ancillary Equipment List

Product	Manufacturer	Model No.	Serial No.	FCC approval	Power Cord
Wlan AP	D-Link	DWL-2000 AP+A	B2D3161002856	KA2DWLG700A PB1	AC: I/P: Unshielded 1.8m DC:O/P: Unshielded 1.8m
Bluetooth headset	Jabra	BT2080	N/A	FCC DOC	Unshielded 1.8m

6 Uncertainty Evaluation

6.1 Uncertainty of Radiated Spurious Emission evaluation (30MHz~1GHz)

Contribution		Probability Distribution	Partition Coefficient	Ucertainty (ui)	
				Horizontal 30MHz-1GHz	Vertical 30MHz-1GHz
Cable Loss Calibration	U01	Standard deviation	2.00	0.04	0.04
Sine wave voltage accuracy of Spectrum analyzer	U02	Triangle	2.45	0.82	0.82
Impulse response of spectrum analyzer	U03	Triangle	2.45	0.61	0.61
Pulse repetition rate of spectrum analyzer	U04	Triangle	2.45	0.61	0.61
Spectrum analyzer noise level	U05	Standard deviation	2.00	0.25	0.25
Measurement of the signal path mismatch	U06	U-Shape	1.41	0.69	0.69
Free-space antenna factor	U07	Standard deviation	2.00	0.50	0.50
Antenna Factor Interpolation for Frequency	U08	Rectangular	1.73	0.17	0.17
Antenna factor with height in the correlation	U09	Rectangular	1.73	0.17	0.17
Measurement antenna and the absorbing material in the image of the mutual coupling effect	U10	Rectangular	1.73	0.58	0.58
Antenna phase center variation	U11	Rectangular	1.73	0.42	0.42
Antenna cross polarization response	U12	Rectangular	1.73	0.52	0.52
Antenna imbalance	U13	Rectangular	1.73	0.52	0.52
Test distance error	U14	Triangle	2.45	0.46	0.56
Test distance error	U15	Rectangular	1.73	0.17	0.17
Desktop terrain clearance variation	U16	Standard deviation	2.00	0.05	0.05
Random uncertainty	U17	Standard deviation	1.00	0.18	0.03
Combined Standard Uncertainty $U_c(y)$	U_c	Standard deviation	1.00	1.89	1.91
Measuring Uncertainty for a level of Confidence of 95% ($U = 2U_c(y)$)	$U = k U_c$	Standard deviation	k	3.79	3.82

6.2 Uncertainty of Radiated Spurious Emission evaluation (1GHz~26.5GHz)

Contribution		Probability Distribution	Partition Coefficient	Ucertainty (ui)	
				Horizontal 30MHz-1GHz	Vertical 30MHz-1GHz
Cable Loss Calibration	U01	Standard deviation	2	0.04	0.04
Sine wave voltage accuracy of Spectrum analyzer	U02	Triangle	2.45	0.82	0.82
Impulse response of spectrum analyzer	U03	Triangle	2.45	0.61	0.61
Pulse repetition rate of spectrum analyzer	U04	Triangle	2.45	0.61	0.61
Spectrum analyzer noise level	U05	Standard deviation	2.00	0.25	0.25
Measurement of the signal path mismatch	U06	U-Shape	1.41	0.69	0.69
Free-space antenna factor	U07	Standard deviation	2.00	0.50	0.50
Antenna Factor Interpolation for Frequency	U08	Rectangular	1.73	0.173	0.173
Antenna factor with height in the correlation	U09	Rectangular	1.73	NA	NA
Measurement antenna and the absorbing material in the image of the mutual coupling effect	U10	Rectangular	1.73	0.58	0.58
Antenna phase center variation	U11	Rectangular	1.73	0.13	0.13
Antenna cross polarization response	U12	Rectangular	1.73	0.52	0.52
Antenna imbalance	U13	Rectangular	1.73	0.52	0.52
Test distance error	U14	Triangle	2.45	1.48	1.55
Test distance error	U15	Rectangular	1.73	0.17	0.17
Desktop terrain clearance variation	U16	Standard deviation	2.00	0.05	0.05
Random uncertainty	U17	Standard deviation	1.00	0.01	0.08
Combined Standard Uncertainty $U_c(y)$	U_c	Standard deviation	1.00	2.31	2.36
Measuring Uncertainty for a level of Confidence of 95% ($U = 2U_c(y)$)	$U = kU_c$	Standard deviation	K	4.63	4.71