

47 CFR PART 15 C - BLUETOOTH

TEST REPORT

of

GSM Mobile Phone

Brand Name: PCD

Model Name: C2052, GPM381, GPM381CL, GPM381AR, GPM381CA, PCD381, PCD381PE, PCD381AL, PCD381CL, PCD381PO, PCD381MV, PCD381OM, PCD381MX, PCD381CA, PCD381AR, CL381, CL381CL, CL381PO, CL381CA, CL381EN, TE381, TE381PE, TE381MX, TE381CA, AL381AL, MV381MV, VM380

Report No.: SZ11010127E02

prepared for

Cellon Communications Technology (ShenZhen)Co., Ltd.

13/F, Skyworth Building C Gaoxin S. Ave. 1st, High-Tech industrial Park NanShan, ShenZhen

prepared by

Shenzhen Morlab Communications Technology Co., Ltd.

Morlab Laboratory

3/F, Electronic Testing Building, Shahe Road, Xili,
Nanshan District, Shenzhen, 518055 P. R. China

Tel: +86 755 86130398

Fax: +86 755 86130218



NOTE: This test report can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory. Any objections should be raised to us within thirty workdays since the date of issue.

TABLE OF CONTENTS

1.	TEST CERTIFICATION.....	4
2.	GENERAL INFORMATION	5
2.1	EUT Description	5
2.2	Test Standards and Results	6
2.3	Facilities and Accreditations	7
2.3.1	Facilities	7
2.3.2	Test Environment Conditions	7
3.	47 CFR PART 15C REQUIREMENTS	8
3.1	Number of Hopping Frequency	8
3.1.1	Requirement	8
3.1.2	Test Description	8
3.1.3	Test Result	8
3.2	Peak Output Power	11
3.2.1	Requirement	11
3.2.2	Test Description	11
3.2.3	Test Result	11
3.3	20dB Bandwidth	18
3.3.1	Definition	18
3.3.2	Test Description	18
3.3.3	Test Result	18
3.4	Carried Frequency Separation	25
3.4.1	Definition	25
3.4.2	Test Description	25
3.4.3	Test Result	25
3.5	Time of Occupancy (Dwell time)	27
3.5.1	Requirement	27
3.5.2	Test Description	27
3.5.3	Test Result	27
3.6	Conducted Spurious Emissions	32
3.6.1	Requirement	32
3.6.2	Test Description	32

3.6.3	Test Result	32
3.7	Band Edge	43
3.7.1	Requirement	43
3.7.2	Test Description	43
3.7.3	Test Result	44
3.8	Conducted Emission	52
3.8.1	Requirement	52
3.8.2	Test Description	52
3.8.3	Test Result	53
3.9	Radiated Emission	55
3.9.1	Requirement	55
3.9.2	Test Description	55
3.9.3	Test Result	56

Change History		
Issue	Date	Reason for change
1.0	February 15, 2011	First edition

1. TEST CERTIFICATION

Equipment under Test: GSM Mobile phone

Brand Name: PCD

Model Name: C2052, GPM381, GPM381CL, GPM381AR, GPM381CA, PCD381, PCD381PE, PCD381AL, PCD381CL, PCD381PO, PCD381MV, PCD381OM, PCD381MX, PCD381CA, PCD381AR, CL381, CL381CL, CL381PO, CL381CA, CL381EN, TE381, TE381PE, TE381MX, TE381CA, AL381AL, MV381MV, VM380

FCC ID: T38PCD2052

Applicant: Cellon Communications Technology (ShenZhen)Co., Ltd.
13/F, Skyworth Building C Gaoxin S. Ave. 1st, High-Tech industrial Park NanShan, ShenZhen

Manufacturer: Cellon Communications Technology(ShenZhen)Co., Ltd.
13/F, Skyworth Building C Gaoxin S. Ave. 1st, High-Tech industrial Park NanShan, ShenZhen

Test Standards: 47 CFR Part 15 Subpart C

Test Date(s): January 28, 2011 – February 14, 2011

Test Result: PASS

* We Hereby Certify That:

The equipment under test was tested by Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory. The test data, data evaluation, test procedures and equipment configurations shown in this report were made in accordance with the requirement of related FCC rules.

The test results of this report only apply for the tested sample equipment identified above. The test report shall be invalid without all the signatures of the test engineer, the reviewer and the approver.

Tested by:

Tu Lang
Tu Lang

Dated:

2011.2.18

Reviewed by:

Huang Pulong
Huang Pulong

Dated:

2011.2.18

Approved by:

Zeng Dexin
Zeng Dexin

Dated:

2011.2.18



2. GENERAL INFORMATION

2.1 EUT Description

EUT Type: GSM Mobile phone

Model Name: C2052, GPM381, GPM381CL, GPM381AR, GPM381CA, PCD381, PCD381PE, PCD381AL, PCD381CL, PCD381PO, PCD381MV, PCD381OM, PCD381MX, PCD381CA, PCD381AR, CL381, CL381CL, CL381PO, CL381CA, CL381EN, TE381, TE381PE, TE381MX, TE381CA, AL381AL, MV381MV, VM380

Serial No.....: (n.a, marked #1 by test site)

Hardware Version: C2052_MB_P2

Software Version: GPM381_1.00_PCD_PCD_US

Modulation Type.....: FHSS

Frequency: The frequency range used is 2402MHz - 2480MHz (79 channels, at intervals of 1MHz);
The frequency block is 2400MHz to 2483.5MHz.

Power Supply: Battery

Model Name: BTR381

Brand name: PCD

Capacitance: 980mAh

Rated voltage: 3.7V

Manufacturer: Sunwoda Electronic Co., Ltd

Building C, Tong Fu Kang Industrial Area, Shi Yan, Bao An district, Shenzhen

Ancillary Equipments.....: AC Adapter (Charger for Battery)

Model Name: CNR380

Brand Name: PCD

Serial No.: (n.a. marked #1 by test site)

Rated Input: ~ 100-240V, 50- 60Hz, 300mA

Rated Output: = 5.0V, 600mA

Manufacturer: DEE VAN ENTERPRISE CO., LTD

4020 CLIPPER COURT FREMONT, CA 94538, U.S.A.

Note 1: The EUT is a GSM Mobile phone, it contains Bluetooth Module operating at 2.4GHz ISM band; the frequencies allocated for the Bluetooth Module is $F(\text{MHz})=2402+1*n$ ($0 \leq n \leq 78$). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 39 (2441MHz) and 78 (2480MHz).

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

2.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-09 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section in CFR 47	Description	Result
1	15.247(a)	Number of Hopping Frequency	PASS
2	15.247(b)	Peak Output Power	PASS
3	15.247(a)	20dB Bandwidth	PASS
4	15.247(a)	Carrier Frequency Separation	PASS
5	15.247(a)	Time of Occupancy (Dwell time)	PASS
6	15.247(c)	Conducted Spurious Emission	PASS
7	15.247(c)	Band Edge	PASS
8	15.207	Conducted Emission	PASS
9	15.209 15.247(c)	Radiated Emission	PASS

NOTE:

The tests were performed according to the method of measurements prescribed in DA-00-705.

2.3 Facilities and Accreditations

2.3.1 Facilities

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at 3/F, Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen, 518055 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22; the FCC registration number is 741109.

2.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

3. 47 CFR PART 15C REQUIREMENTS


3.1 Number of Hopping Frequency

3.1.1 Requirement

According to FCC §15.247(a)(1)(iii) , frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 75 hopping frequencies.

3.1.2 Test Description

A. Test Setup:

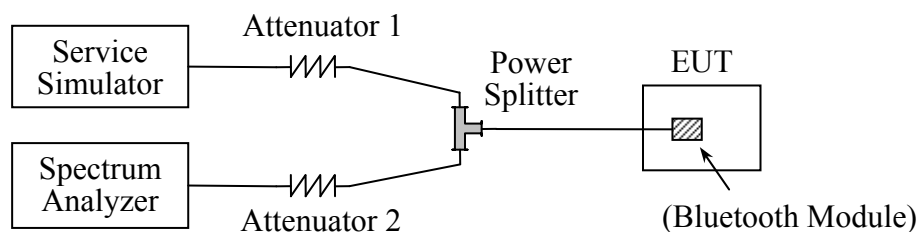

The Bluetooth Module of the EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date
Service Simulator	Agilent	E5515C	GB43130131	2010.09
Spectrum Analyzer	Agilent	E7405A	US44210471	2010.09
Power Splitter	Weinschel	1506A	NW521	(n.a.)
Attenuator 1	Resnet	20dB	(n.a.)	(n.a.)
Attenuator 2	Resnet	3dB	(n.a.)	(n.a.)


3.1.3 Test Result

The Bluetooth Module operates at hopping-on test mode; the frequencies number employed is counted to verify the Module's using the number of hopping frequency.


A. Test Verdict:

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Refer to Plot	Verdict
GFSK	2400 - 2483.5	79	75	Plot A	PASS
$\pi/4$ -DQPSK	2400 - 2483.5	79	75	Plot B	PASS
8-DPSK	2400 - 2483.5	79	75	Plot C	PASS


B. Test Plot:

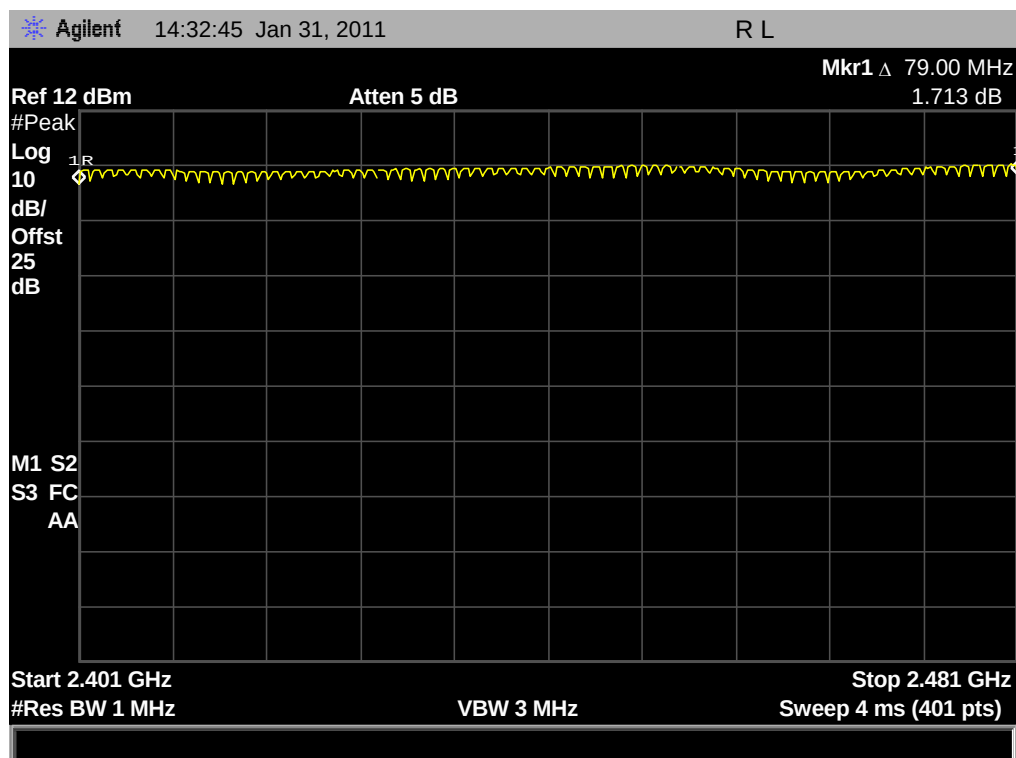

(Plot A: GFSK)

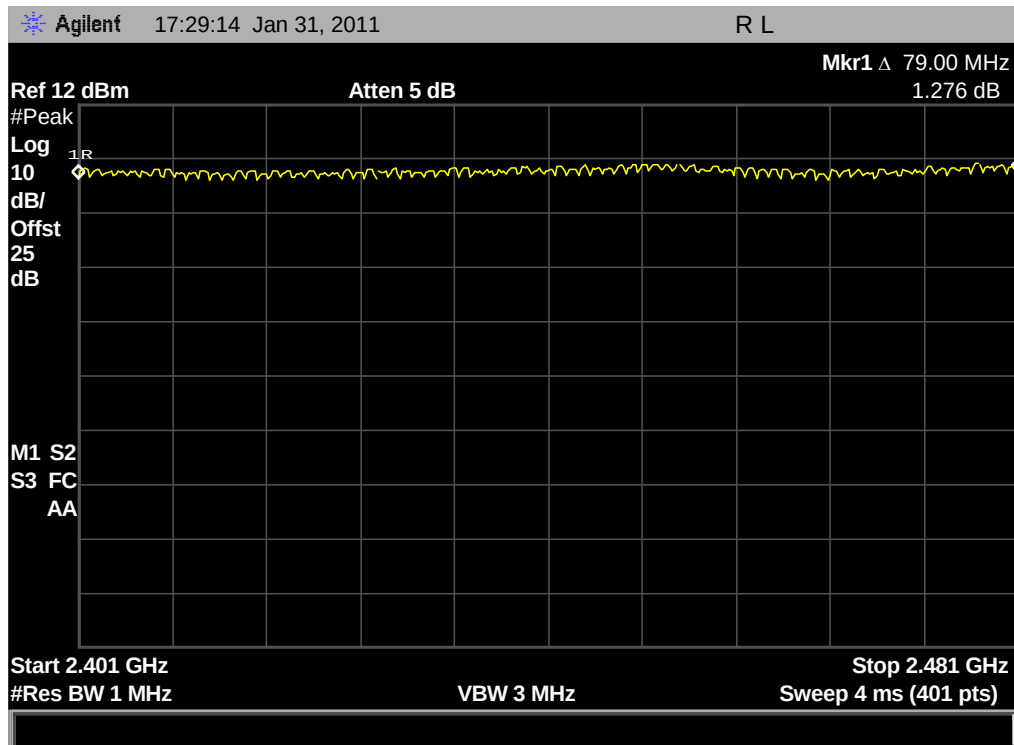

(Plot B: $\pi/4$ -DQPSK)

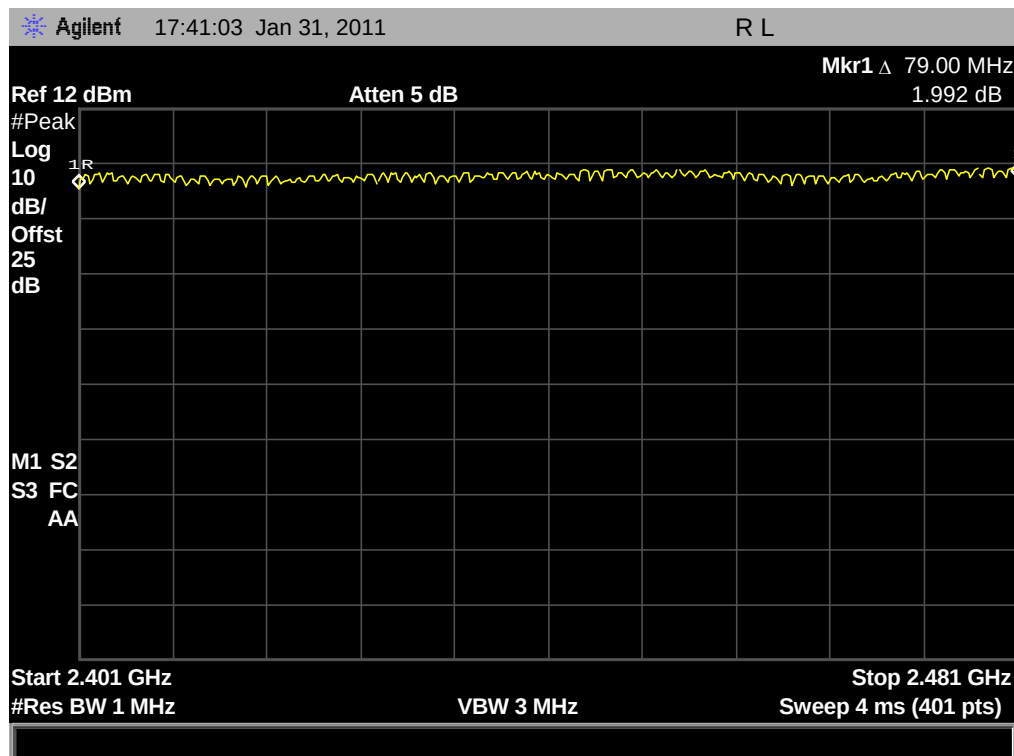

(Plot C: 8- DPSK)

3.2 Peak Output Power

3.2.1 Requirement

According to FCC §15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

3.2.2 Test Description

See section 3.1.2 of this report.

3.2.3 Test Result


The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

A. Test Verdict:


GFSK Mode

Channel	Frequency (MHz)	Measured Output Peak Power			Limit		Verdict
		dBm	W	Refer to Plot	dBm	W	
0	2402	1.234	0.0013	Plot A	30	1	PASS
39	2441	1.616	0.0015	Plot B			PASS
78	2480	2.186	0.0017	Plot C			PASS


B. Test Plot:

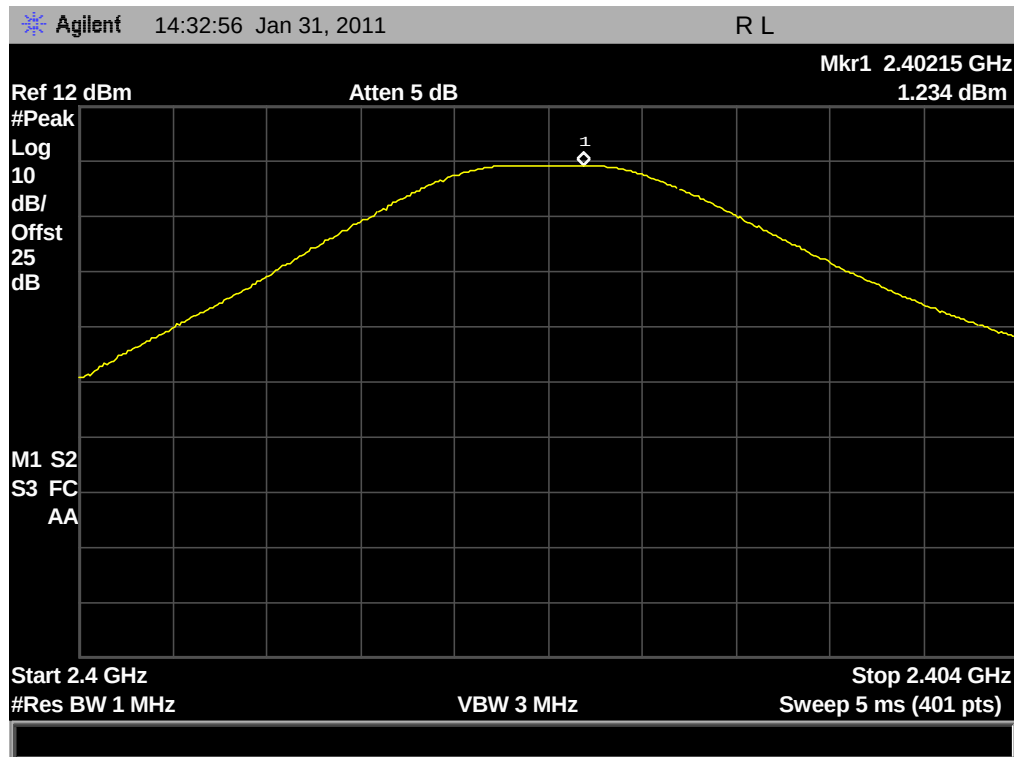

(Plot A: Channel = 2402)

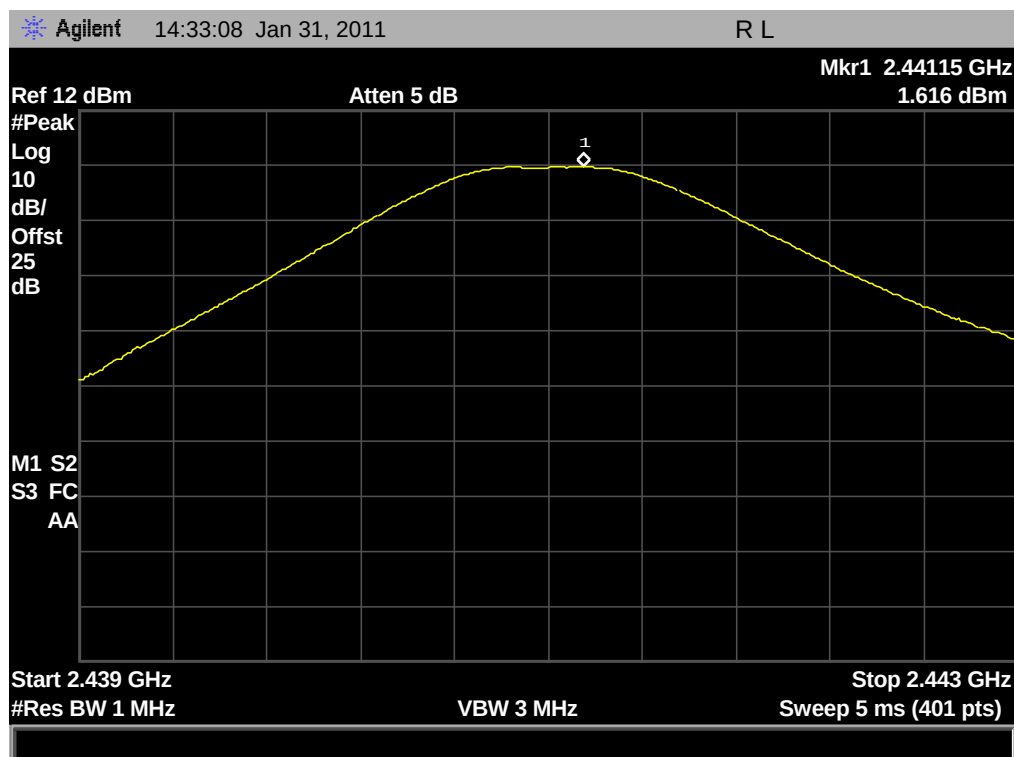

(Plot B: Channel = 2441)

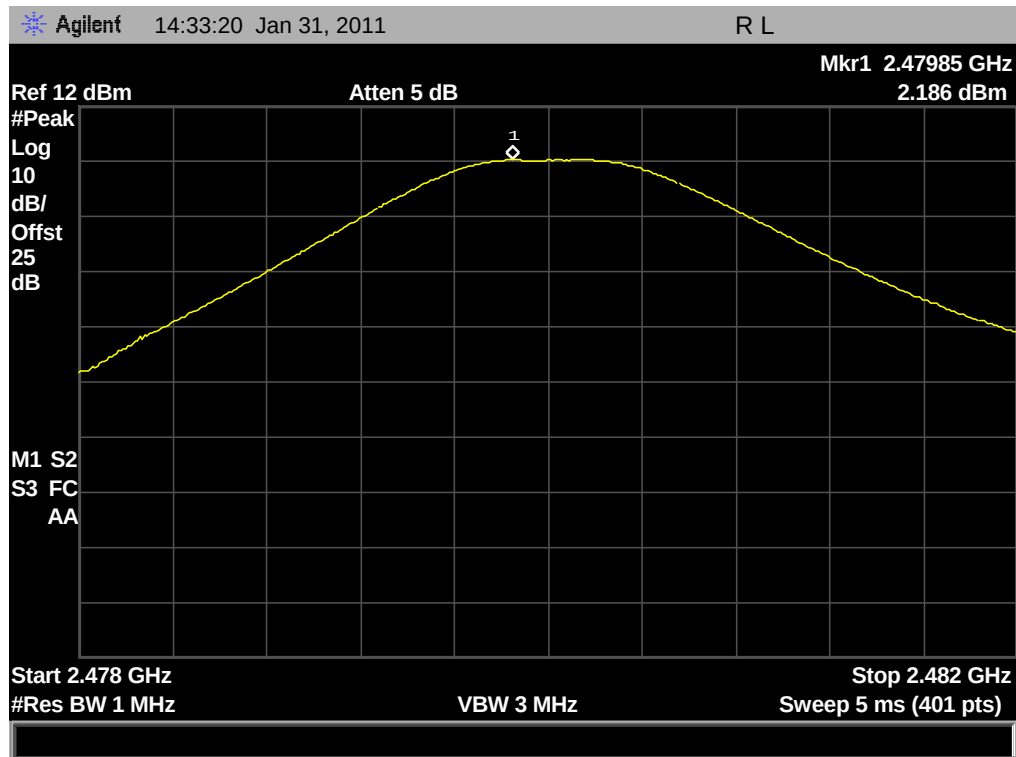


(Plot C: Channel = 2480)

C. Test Verdict:


$\pi/4$ -DQPSK Mode

Channel	Frequency (MHz)	Measured Output Peak Power			Limit		Verdict
		dBm	W	Refer to Plot	dBm	W	
0	2402	1.051	0.0013	Plot D	30	1	PASS
39	2441	1.423	0.0014	Plot E			PASS
78	2480	2.050	0.0016	Plot F			PASS


D. Test Plot:

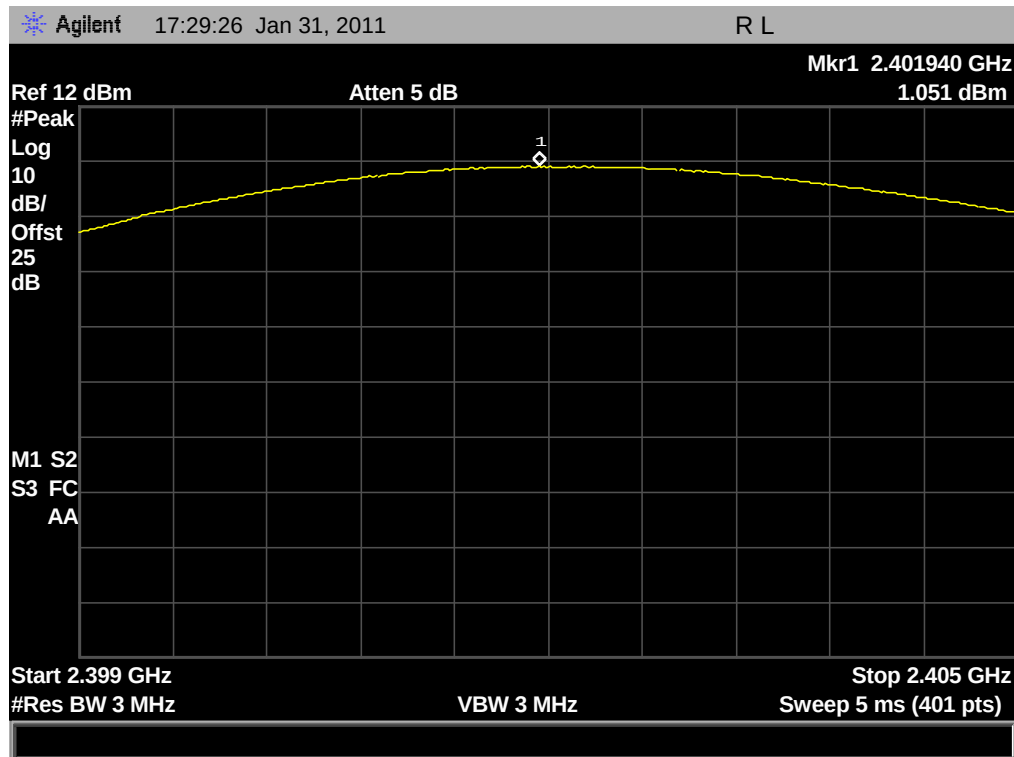

(Plot D: Channel = 2402)

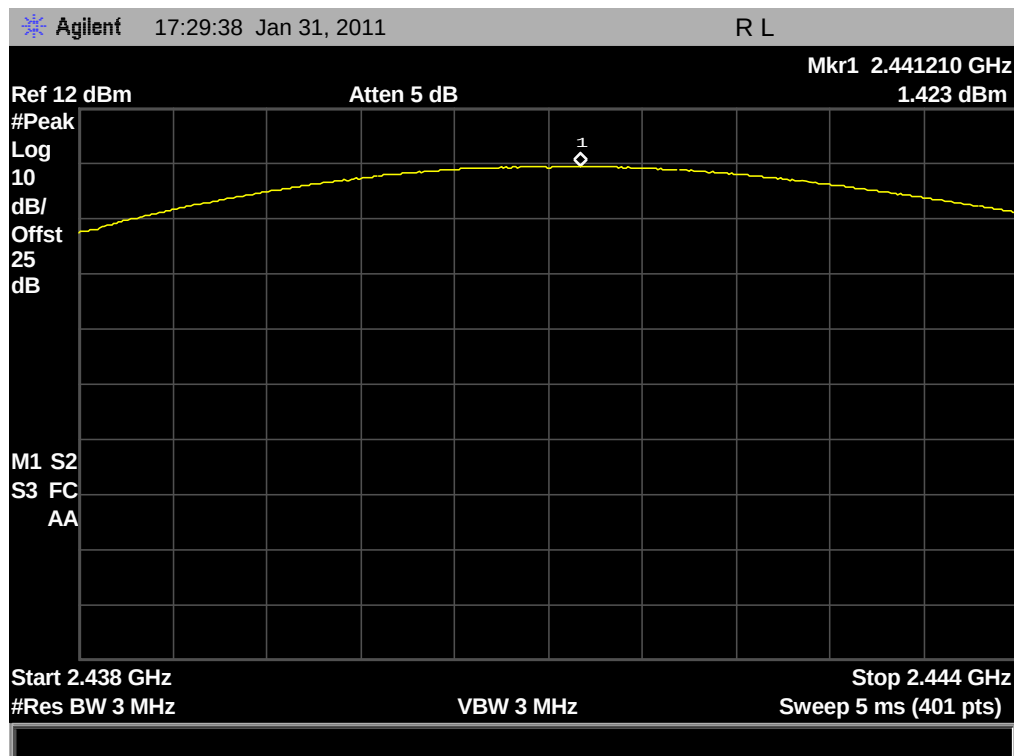

(Plot E: Channel = 2441)

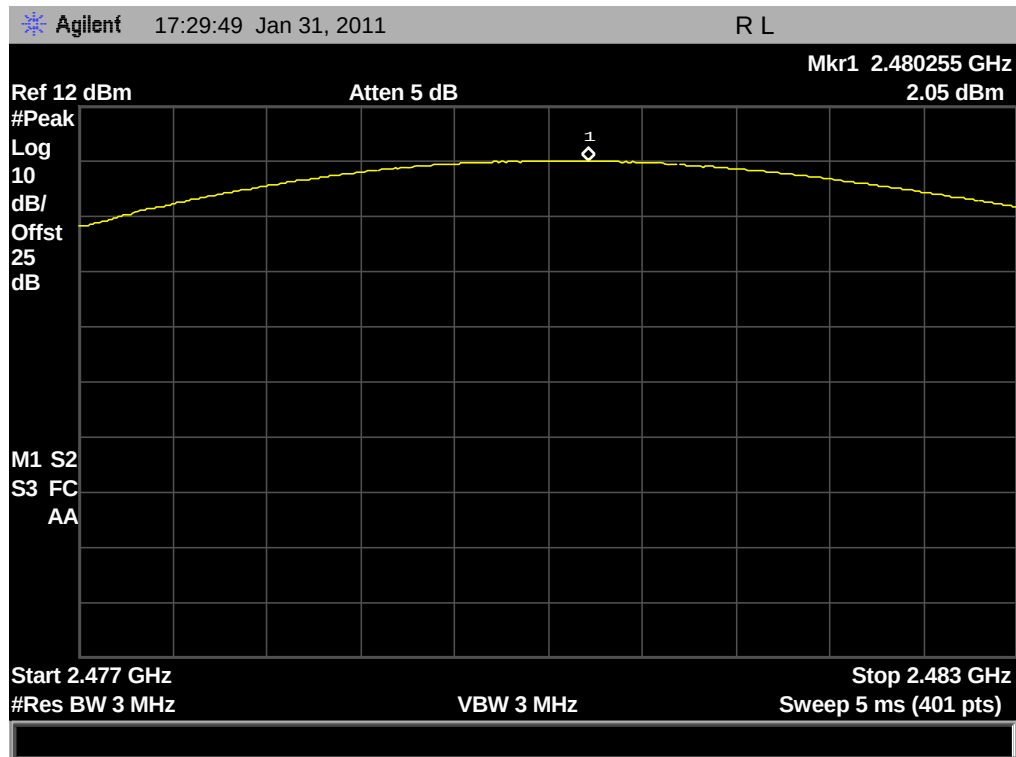


(Plot F: Channel = 2480)

E. Test Verdict:


8-DPSK Mode

Channel	Frequency (MHz)	Measured Output Peak Power			Limit		Verdict
		dBm	W	Refer to Plot	dBm	W	
0	2402	1.341	0.0014	Plot G	30	1	PASS
39	2441	2.014	0.0016	Plot H			PASS
78	2480	2.389	0.0017	Plot I			PASS


F. Test Plot:

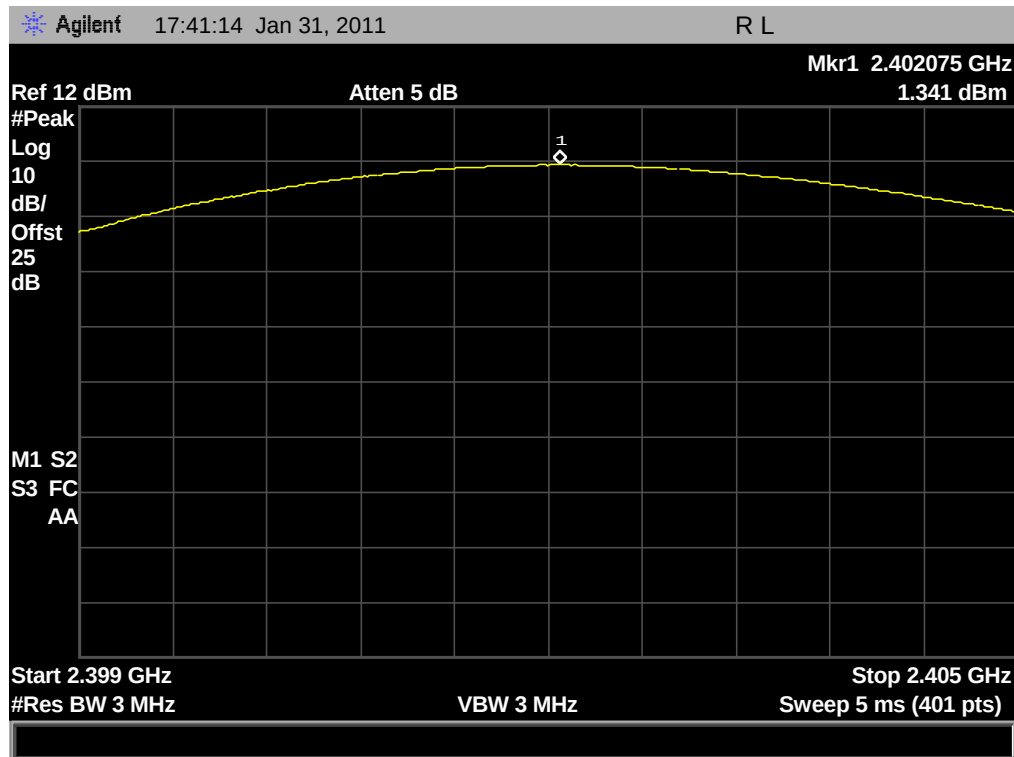

(Plot G: Channel = 2402)

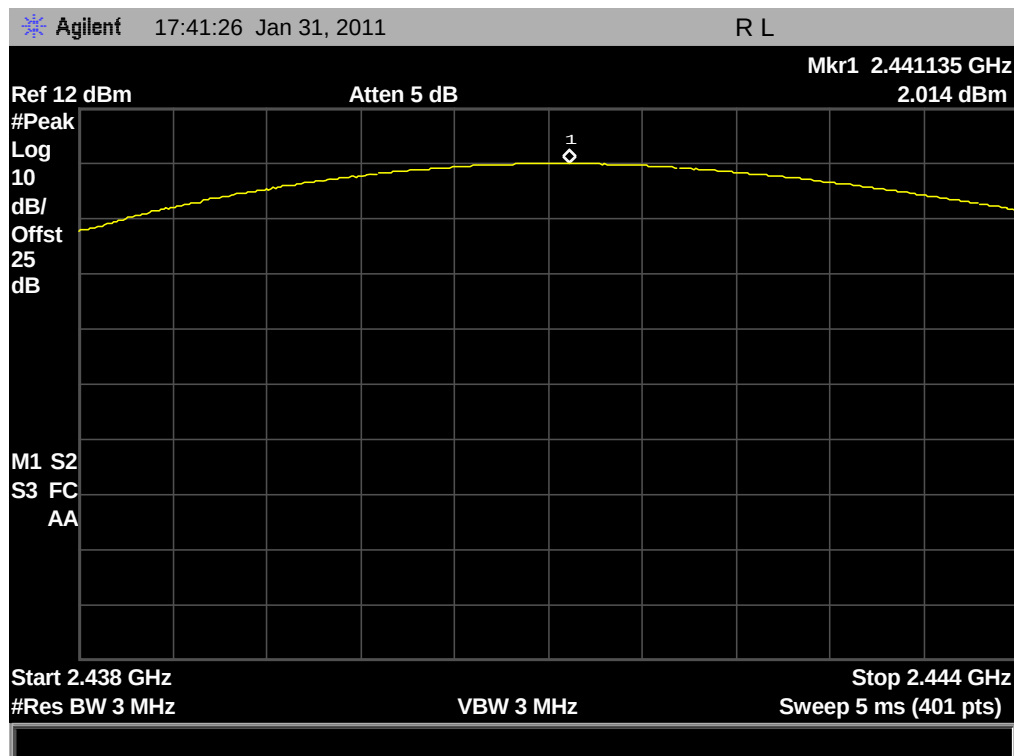

(Plot H: Channel = 2441)

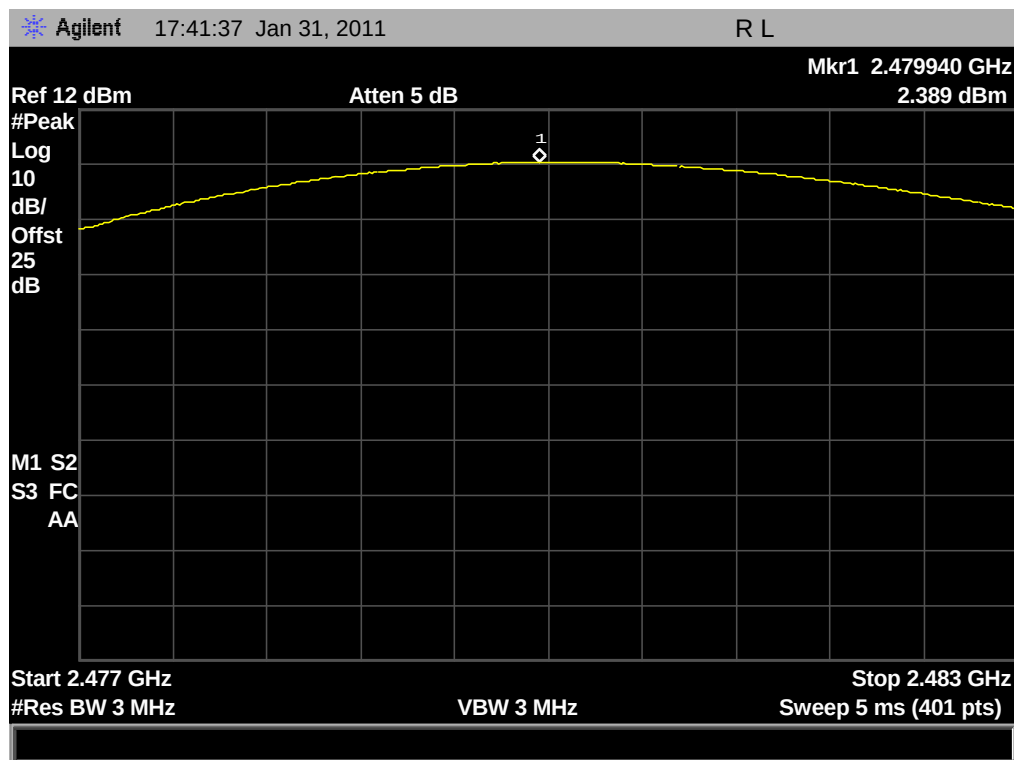

(Plot I: Channel = 2480)

3.3 20dB Bandwidth

3.3.1 Definition

According to FCC §15.247(a)(1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ($10 \cdot \log 1\% = 20\text{dB}$) taking the total RF output power.

3.3.2 Test Description

See section 3.1.2 of this report.

3.3.3 Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to record the 20dB bandwidth of the Module.


A. Test Verdict:

GFSK Mode


The maximum 20dB bandwidth measured is 930KHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (KHz)	Refer to Plot
0	2402	926.25	Plot A
39	2441	922.50	Plot B
78	2480	926.25	Plot C


B. Test Plot:

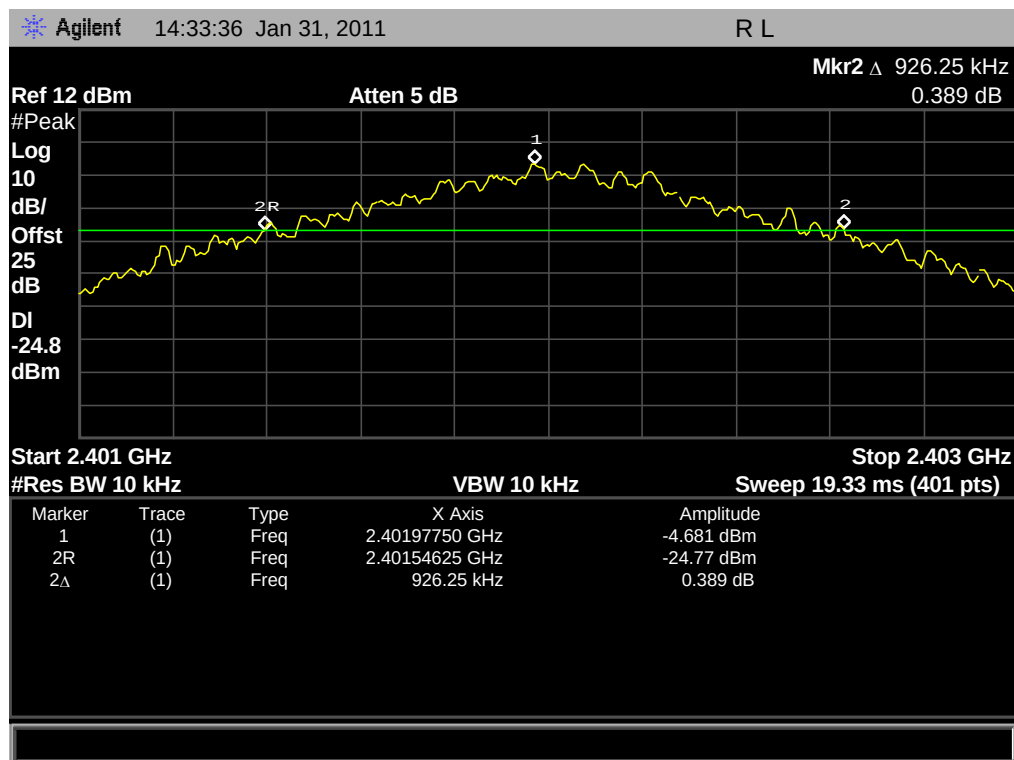

(Plot A: Channel = 2402)

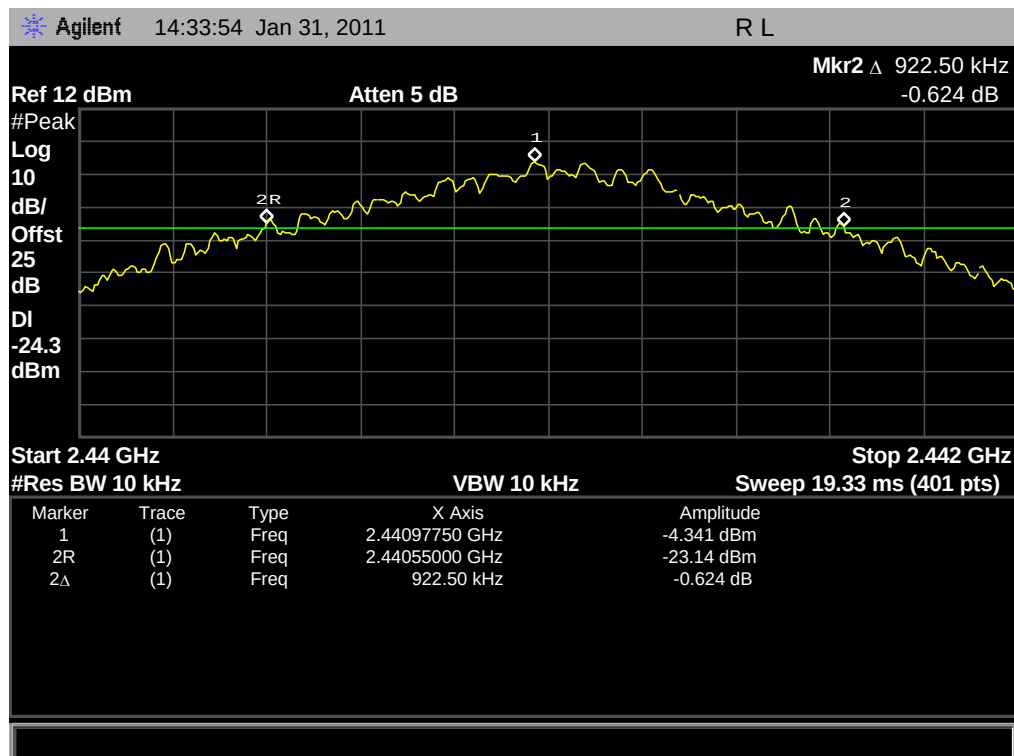

(Plot B: Channel = 2441)

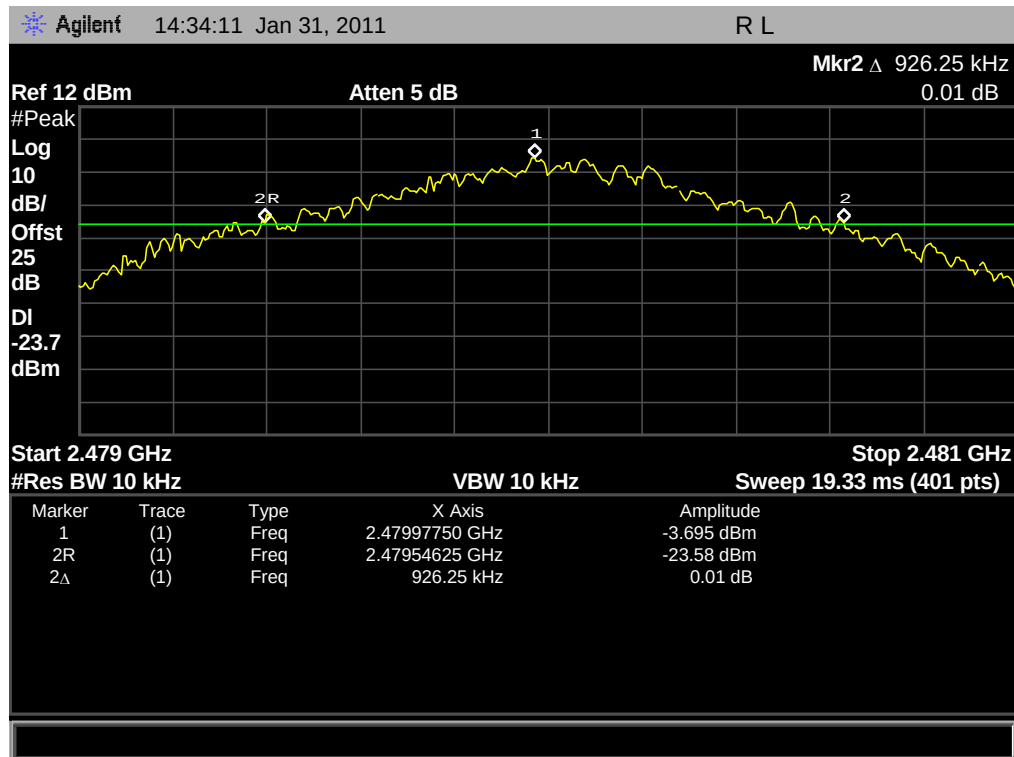

(Plot C: Channel = 2480)


C. Test Verdict:

$\pi/4$ -DQPSK Mode


The maximum 20dB bandwidth measured is 1.260MHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	1.249	Plot D
39	2441	1.219	Plot E
78	2480	1.219	Plot F


D. Test Plot:

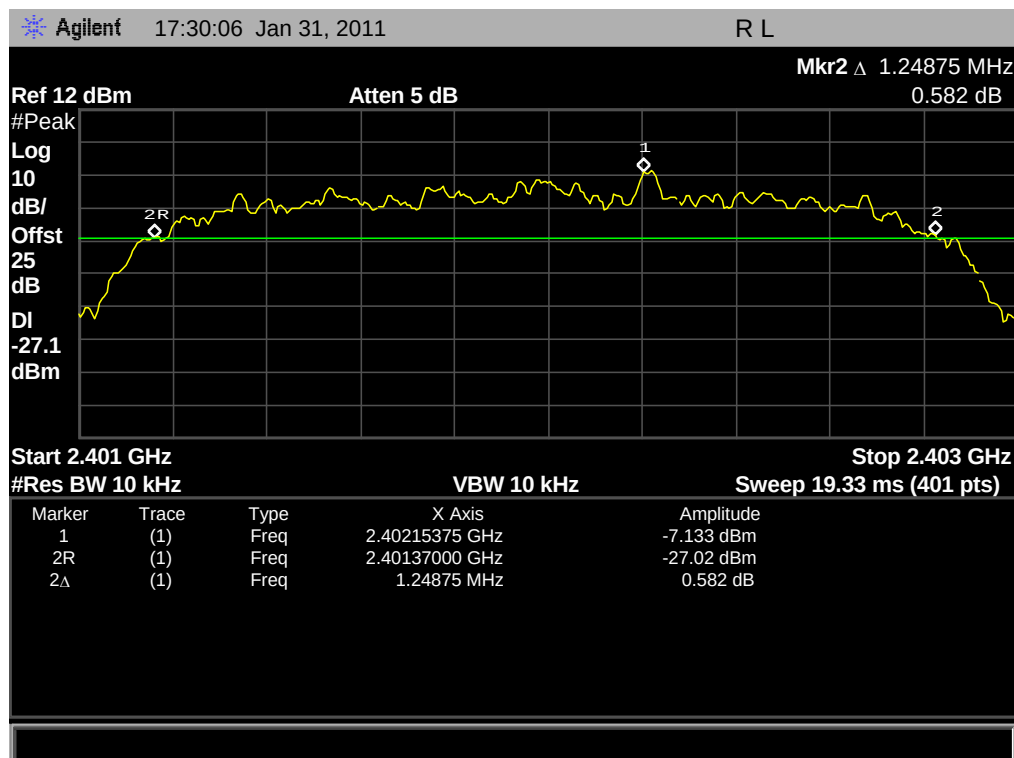

(Plot D: Channel = 2402)

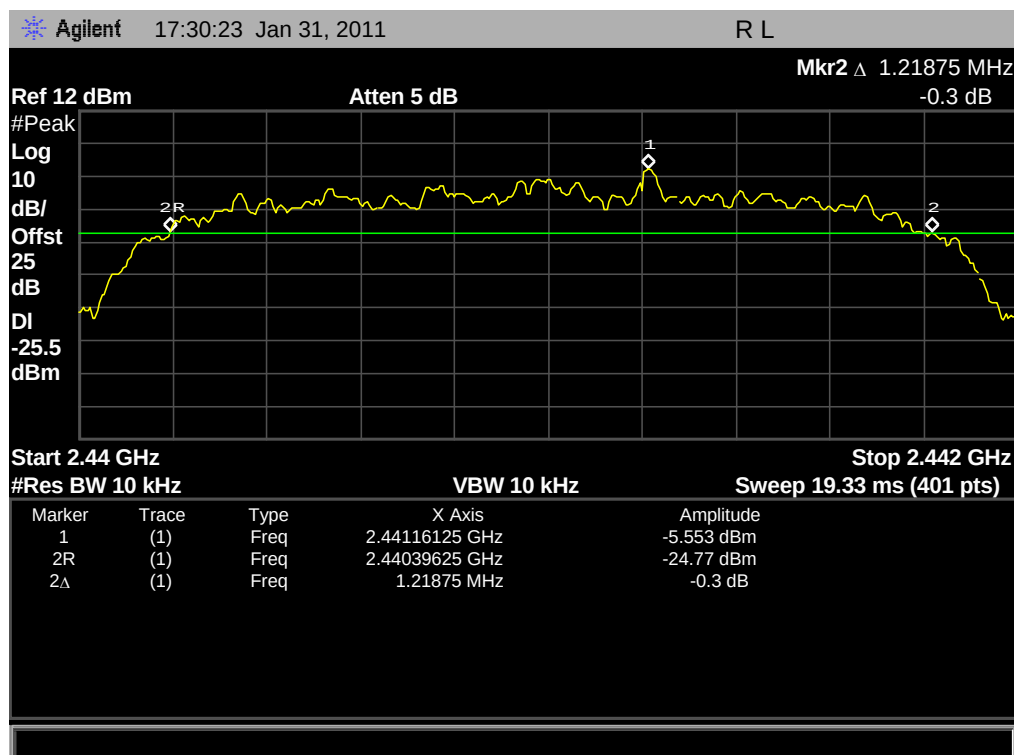

(Plot E: Channel = 2441)

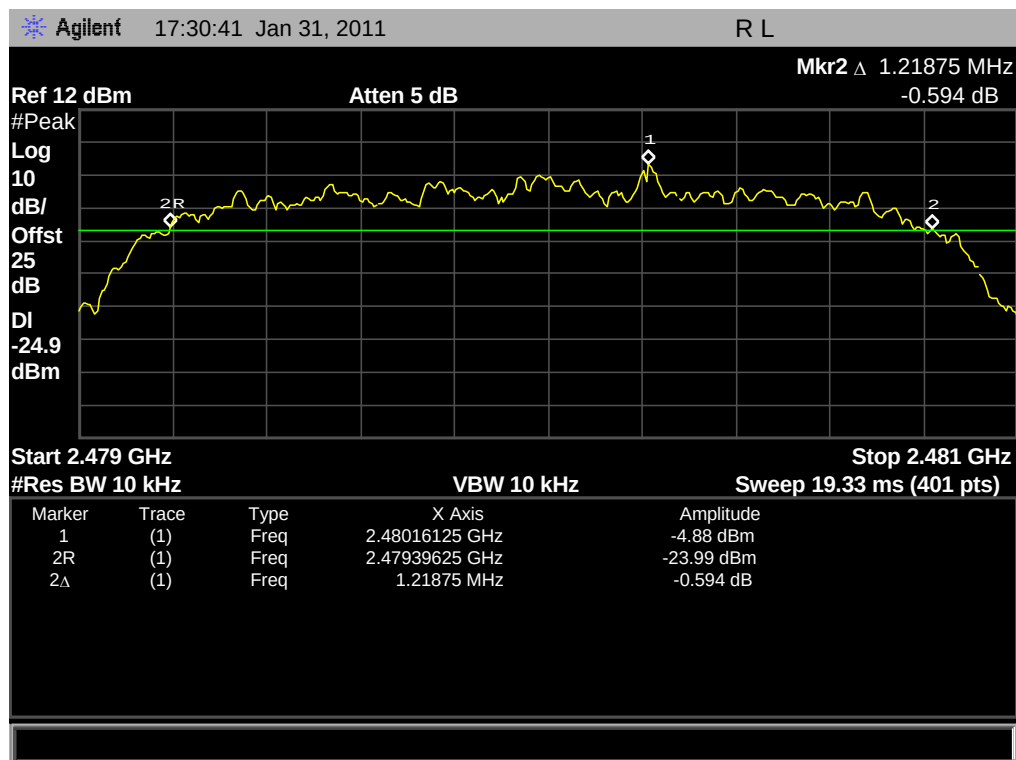

(Plot F: Channel = 2480)


E. Test Verdict:

8-DPSK Mode


The maximum 20dB bandwidth measured is 1.305MHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	1.260	Plot G
39	2441	1.260	Plot H
78	2480	1.260	Plot I


F. Test Plot:

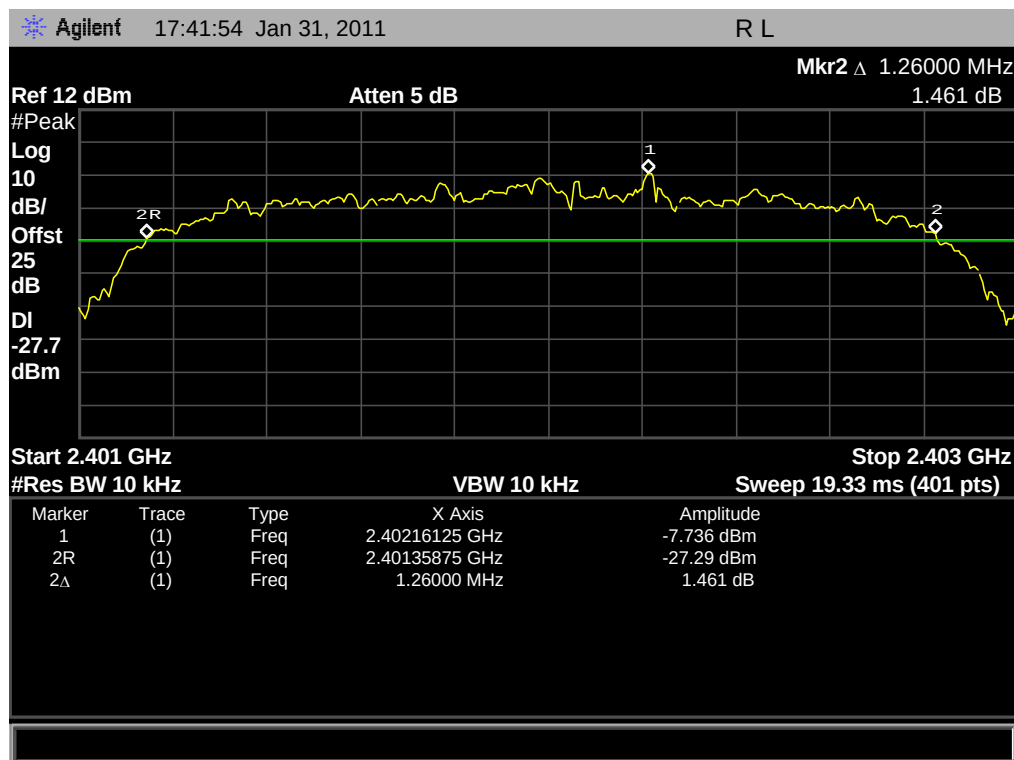

(Plot G: Channel = 2402)

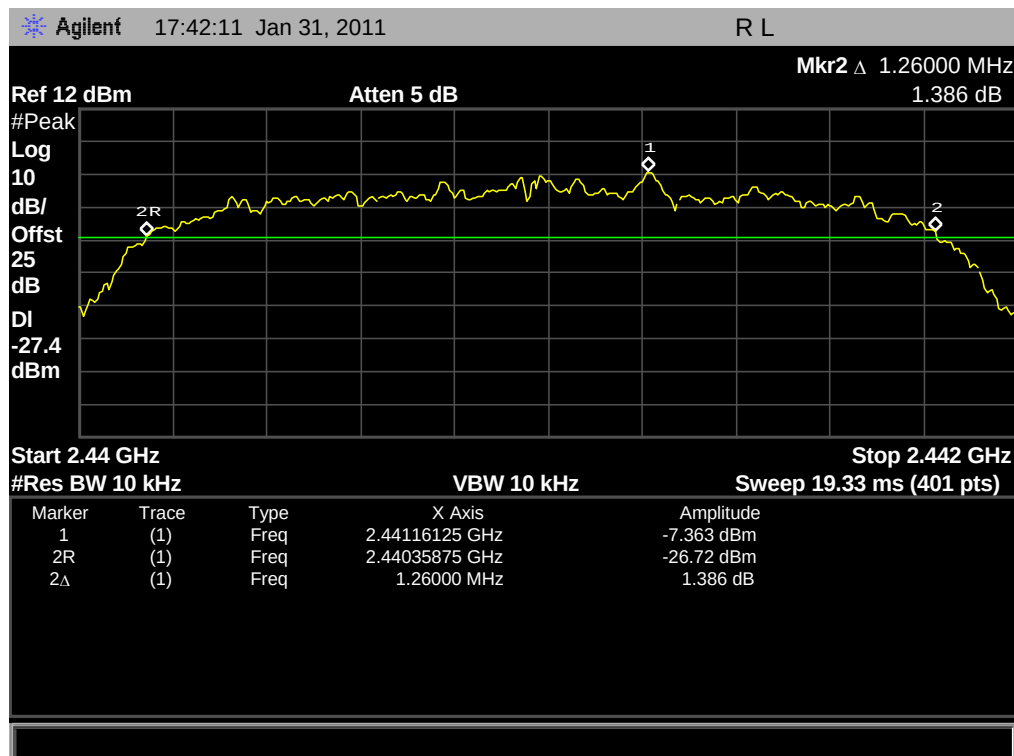

(Plot H: Channel = 2441)

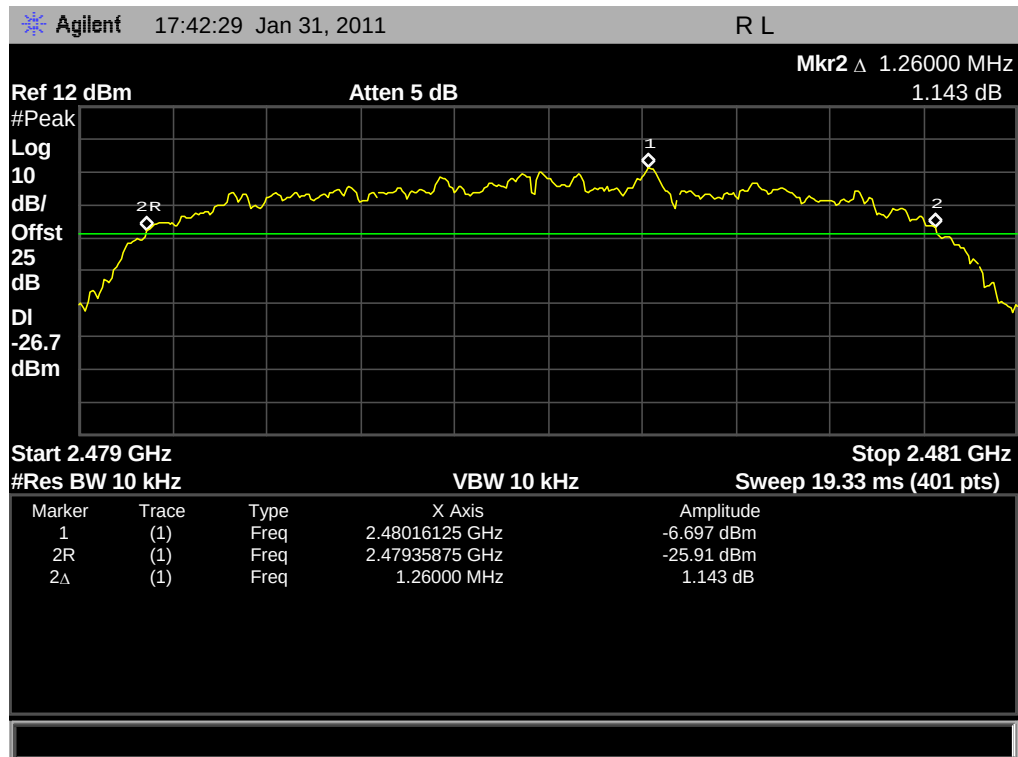

(Plot I: Channel = 2480)

3.4 Carried Frequency Separation

3.4.1 Definition

According to FCC §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.


3.4.2 Test Description

See section 3.1.2 of this report.



3.4.3 Test Result

The Bluetooth Module operates at hopping-on test mode.

For any adjacent channels (e.g. the channel 39 and 40 as showed in the Plot A), the Module does have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel (930.0KHz for GFSK mode, 1.260MHz for $\pi/4$ -DQPSK mode and 1.305MHz for 8-DPSK mode, refer to section 3.3.3), whichever is greater. So, the verdict is PASS.

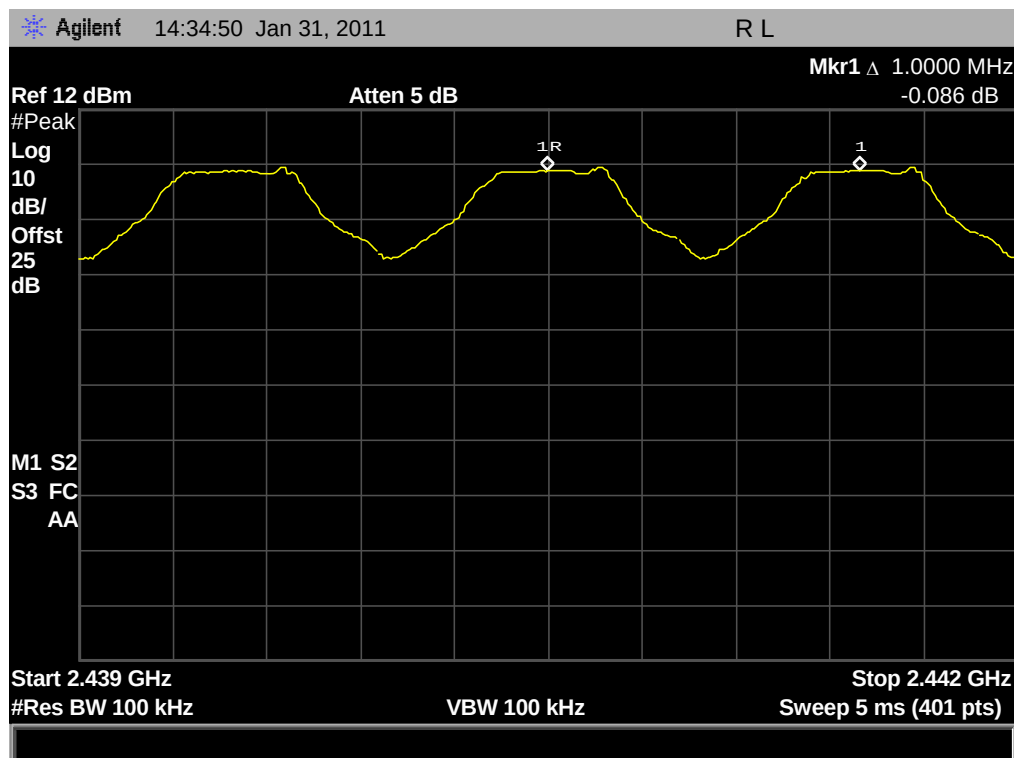

(Plot A: GFSK)

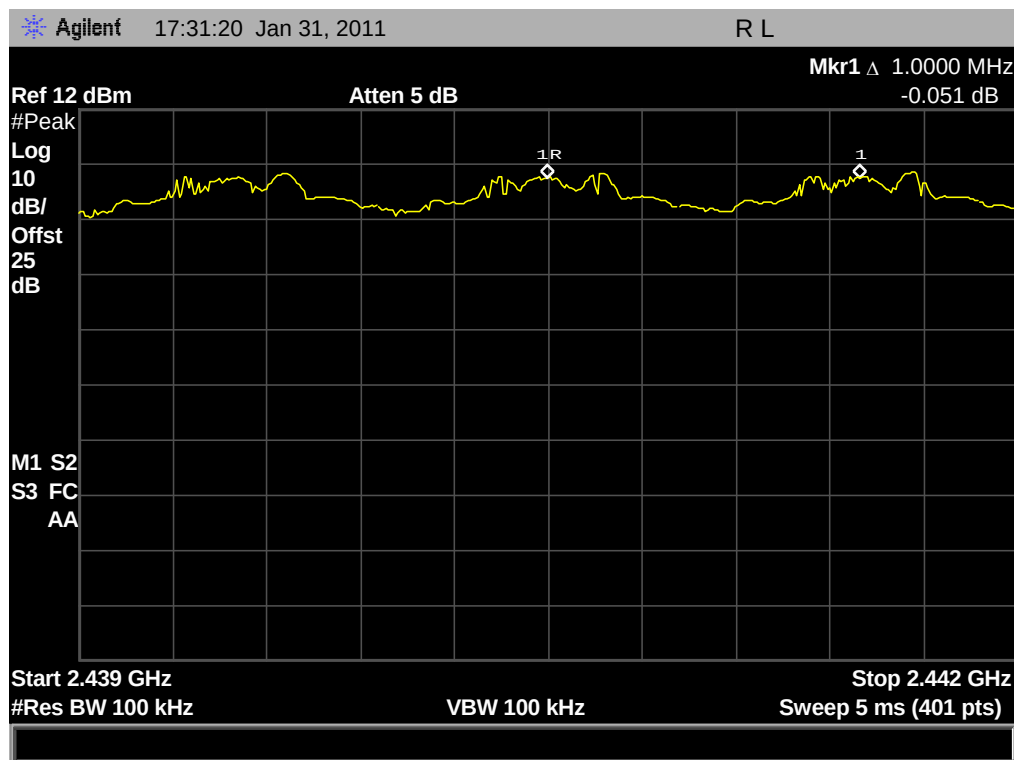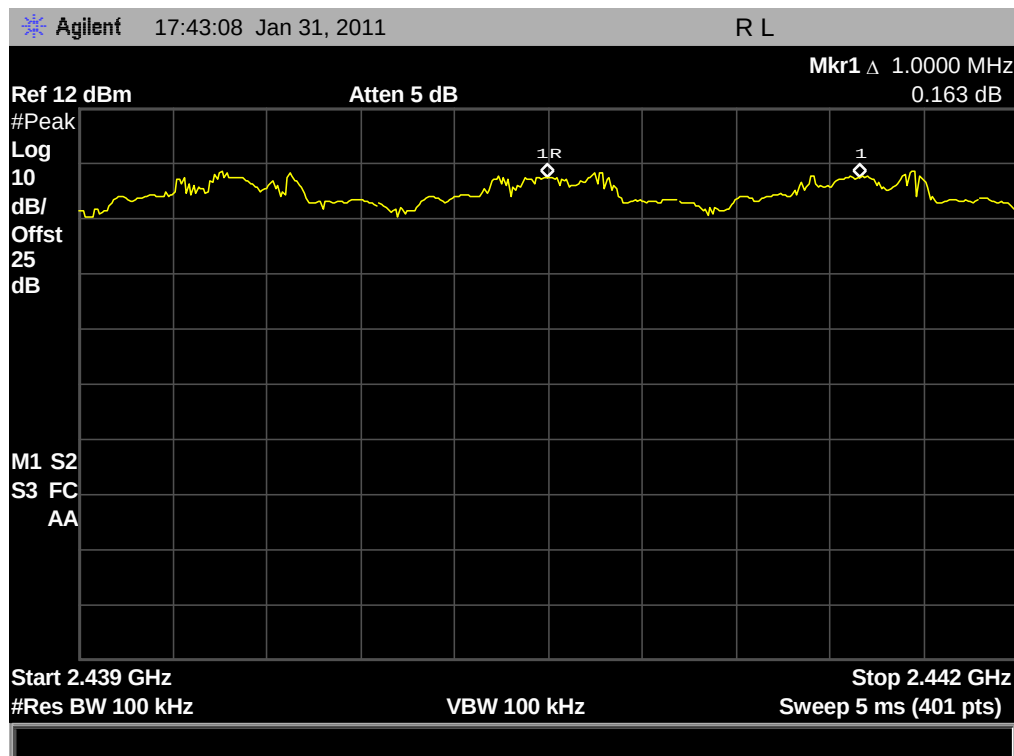
(Plot B: $\pi/4$ -DQPSK)


(Plot C: 8-DPSK)

3.5 Time of Occupancy (Dwell time)

3.5.1 Requirement

According to FCC §15.247(a)(1)(iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

3.5.2 Test Description

See section 3.1.2 of this report.

3.5.3 Test Result

The average time of occupancy on any channel within the Period can be calculated with formulas (for DH5 package type):

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (1600 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4s * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.


A. Test Verdict:

GFSK Mode


Channel	Frequency (MHz)	Pulse Time		Total of Dwell (ms)	Limit (ms)	Verdict
		ms	Refer to Plot			
0	2402	2.875	Plot A	306.7	400	PASS
39	2441	2.875	Plot B	306.7		PASS
78	2480	2.900	Plot C	309.3		PASS

B. Test Plot:


Note: the following plots record the Pulse Time of the Module carrier.

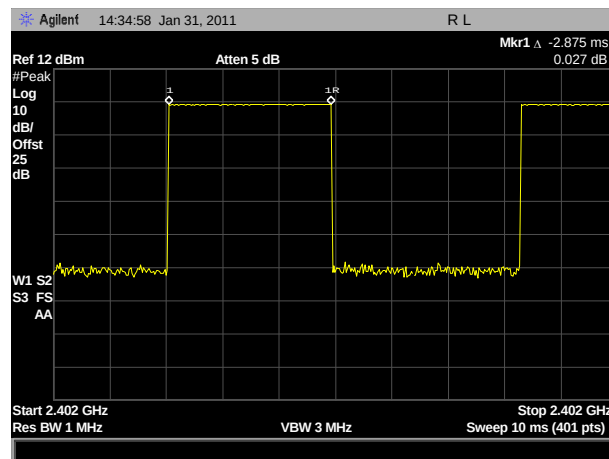

(Plot A: Channel = 2402)

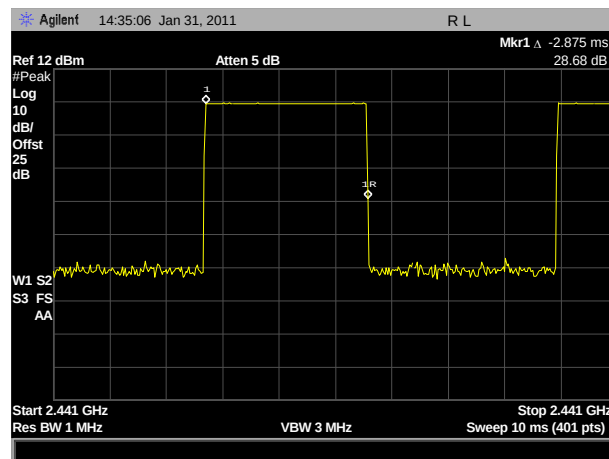

(Plot B: Channel = 2441)

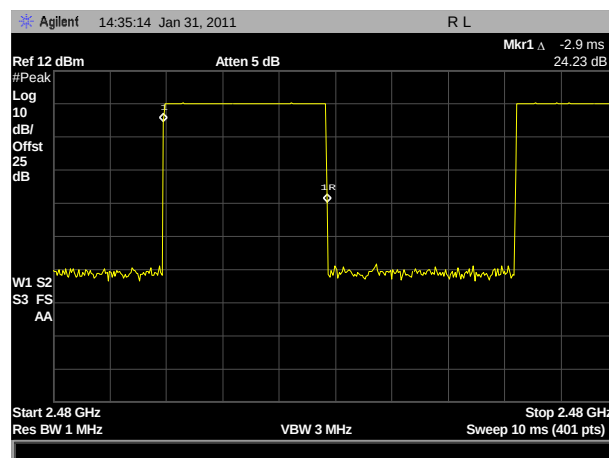

(Plot C: Channel = 2480)


C. Test Verdict:

$\pi/4$ -DQPSK Mode


Channel	Frequency (MHz)	Pulse Time		Total of Dwell (ms)	Limit (ms)	Verdict
		ms	Refer to Plot			
0	2402	2.875	Plot D	306.7	400	PASS
39	2441	2.875	Plot E	306.7		PASS
78	2480	2.875	Plot F	306.7		PASS

D. Test Plot:


Note: the following plots record the Pulse Time of the Module carrier.

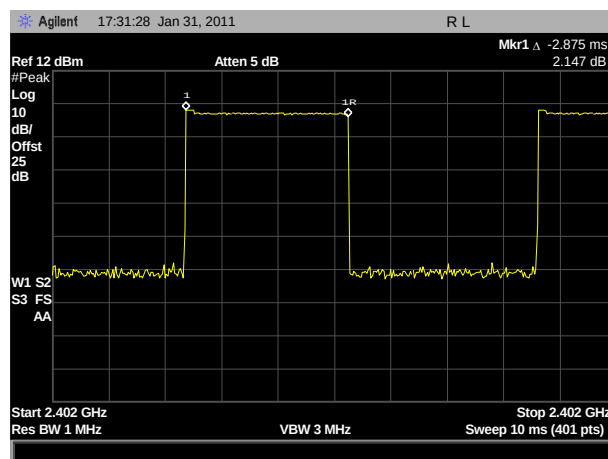

(Plot D: Channel = 2402)

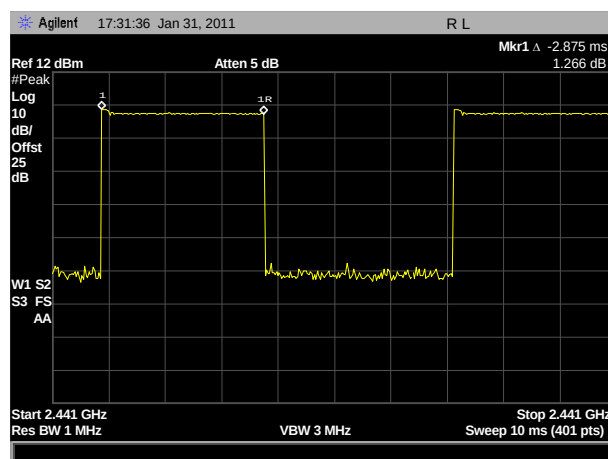

(Plot E: Channel = 2441)

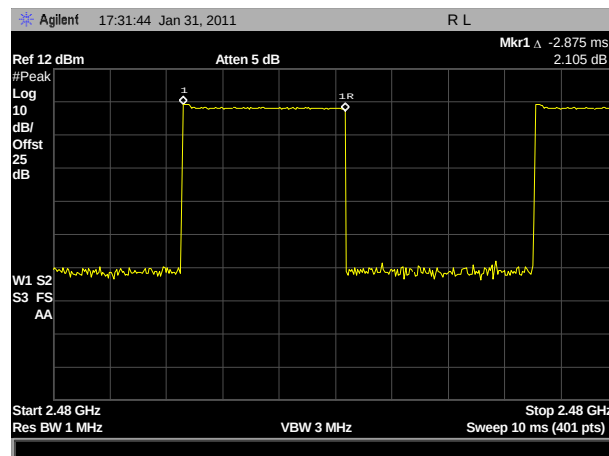

(Plot F: Channel = 2480)


E. Test Verdict (8-DPSK mode):

8-DPSK Mode


Channel	Frequency (MHz)	Pulse Time		Total of Dwell (ms)	Limit (ms)	Verdict
		ms	Refer to Plot			
0	2402	2.875	Plot G	306.7	400	PASS
39	2441	2.875	Plot H	306.7		PASS
78	2480	2.875	Plot I	306.7		PASS

F. Test Plot:


Note: the following plots record the Pulse Time of the Module carrier.

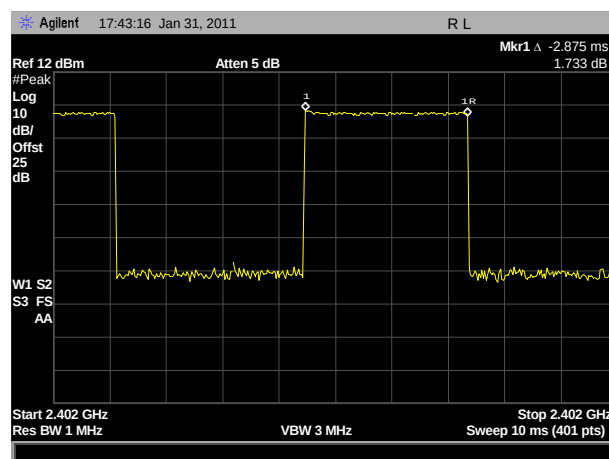

(Plot G: Channel = 2402)

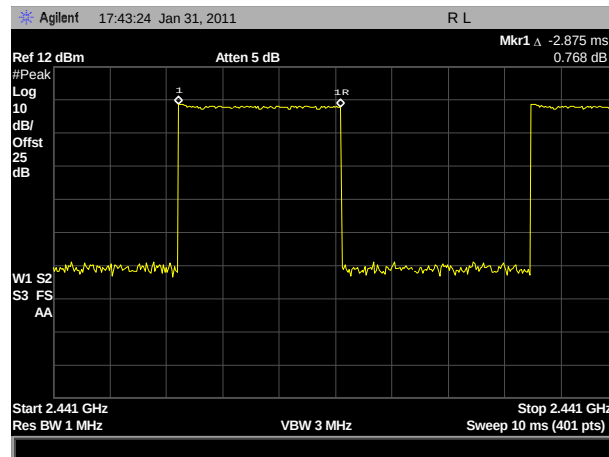

(Plot H: Channel = 2441)

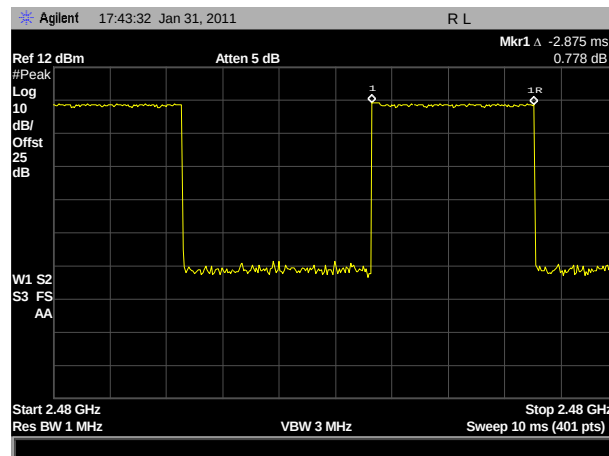

(Plot I: Channel = 2480)

3.6 Conducted Spurious Emissions

3.6.1 Requirement

According to FCC §15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.6.2 Test Description

See section 3.1.2 of this report.

3.6.3 Test Result

The Bluetooth Module operates at hopping-off test mode. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.


A. Test Verdict:

GFSK Mode


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-48.04	Plot A.1/A.2	0.57	-19.4	PASS
39	2441	-48.91	Plot B.1/B.2	0.59	-19.4	PASS
78	2480	-48.62	Plot C.1/C.2	2.14	-17.9	PASS

B. Test Plot:


Note: the power of the Module transmitting frequency should be ignored.

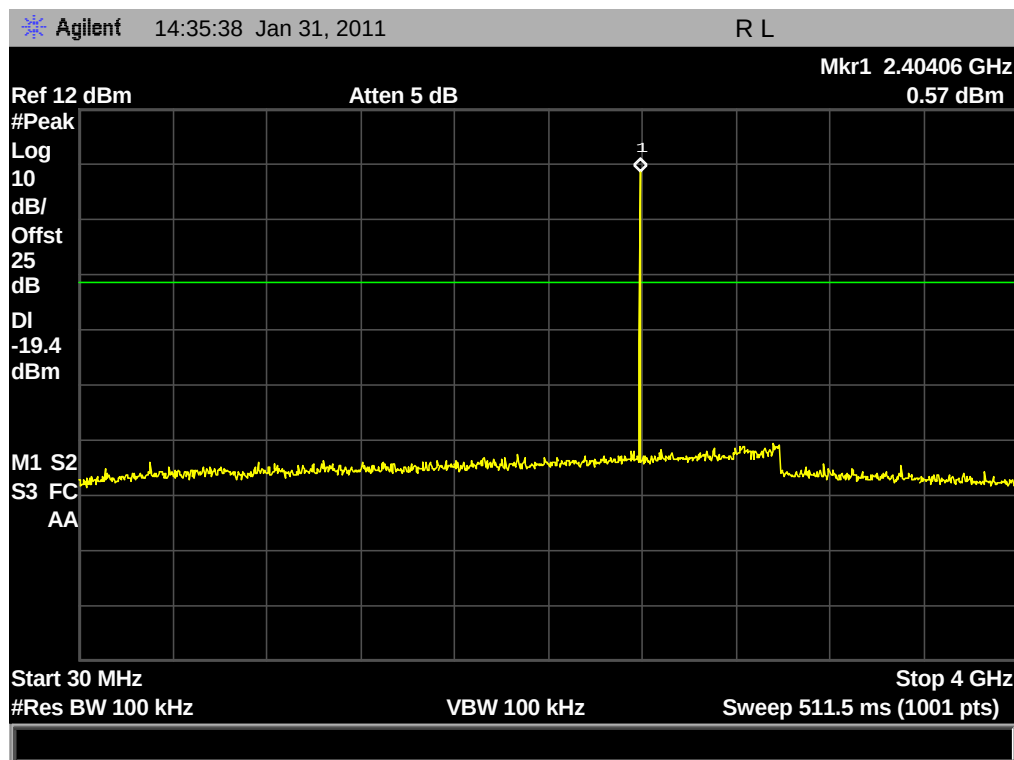


(Plot A.1: Channel = 0, 30MHz to 4GHz)

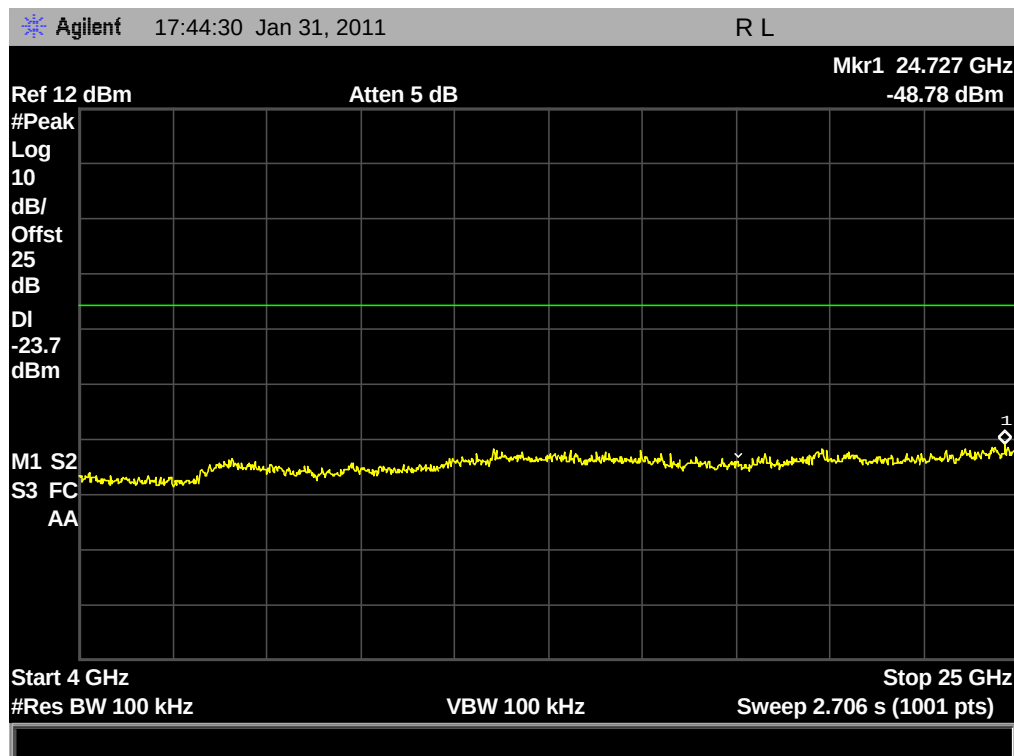


(Plot A.2: Channel = 0, 4GHz to 25GHz)

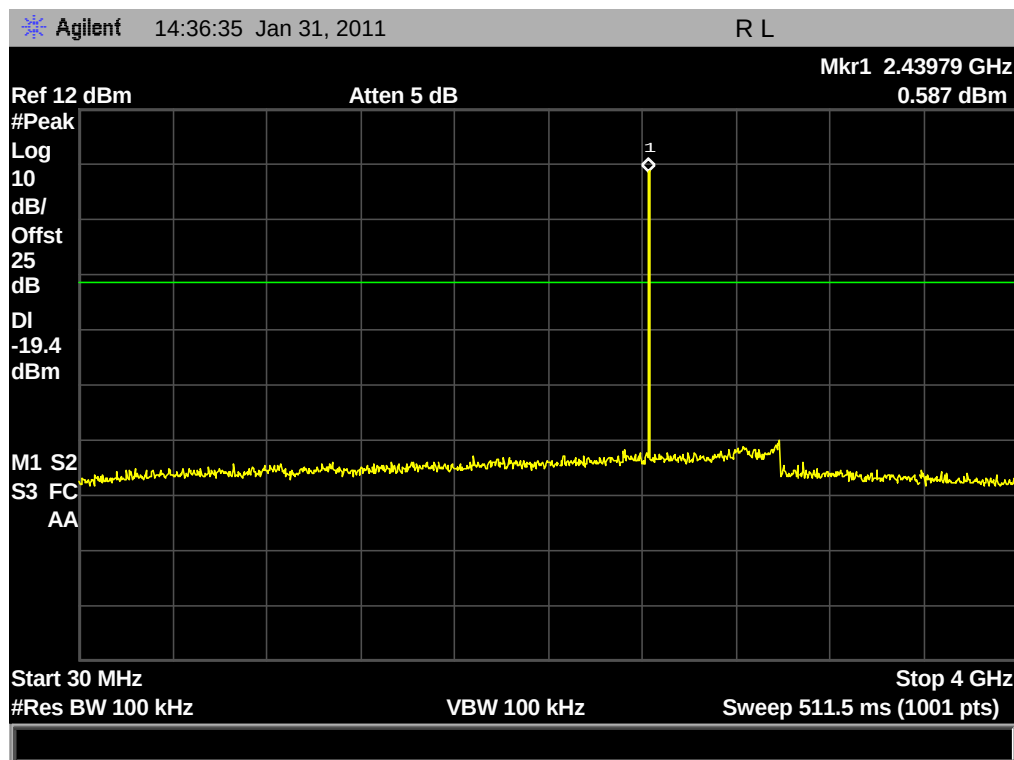


(Plot B.1: Channel = 39, 30MHz to 4GHz)

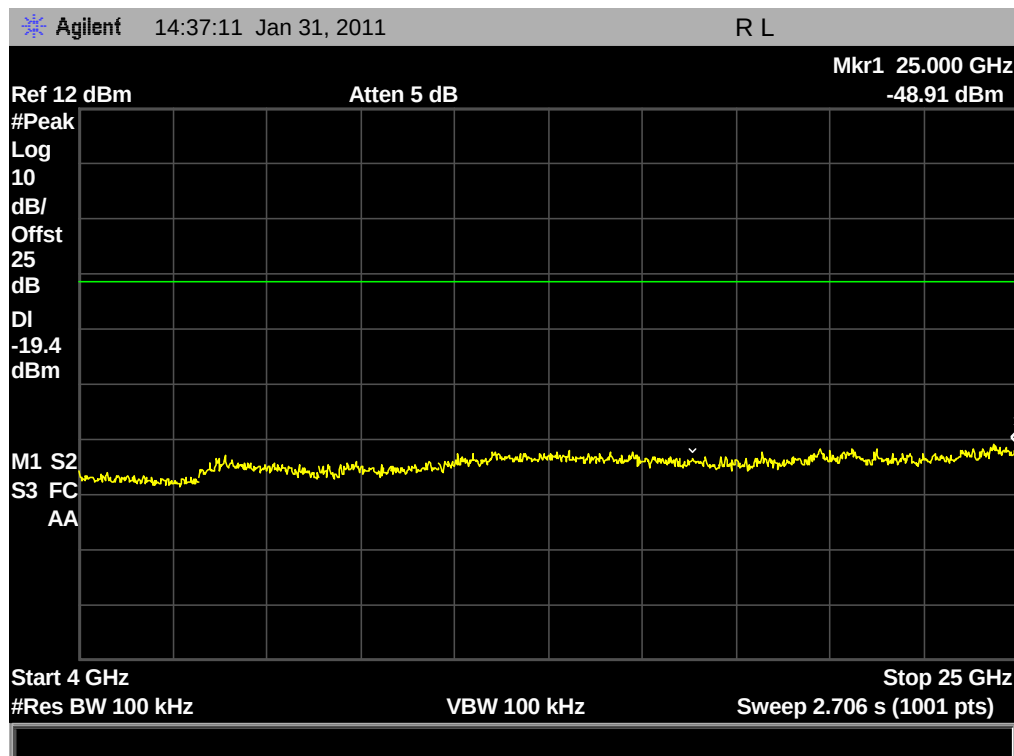

(Plot B.2: Channel = 39, 4GHz to 25GHz)

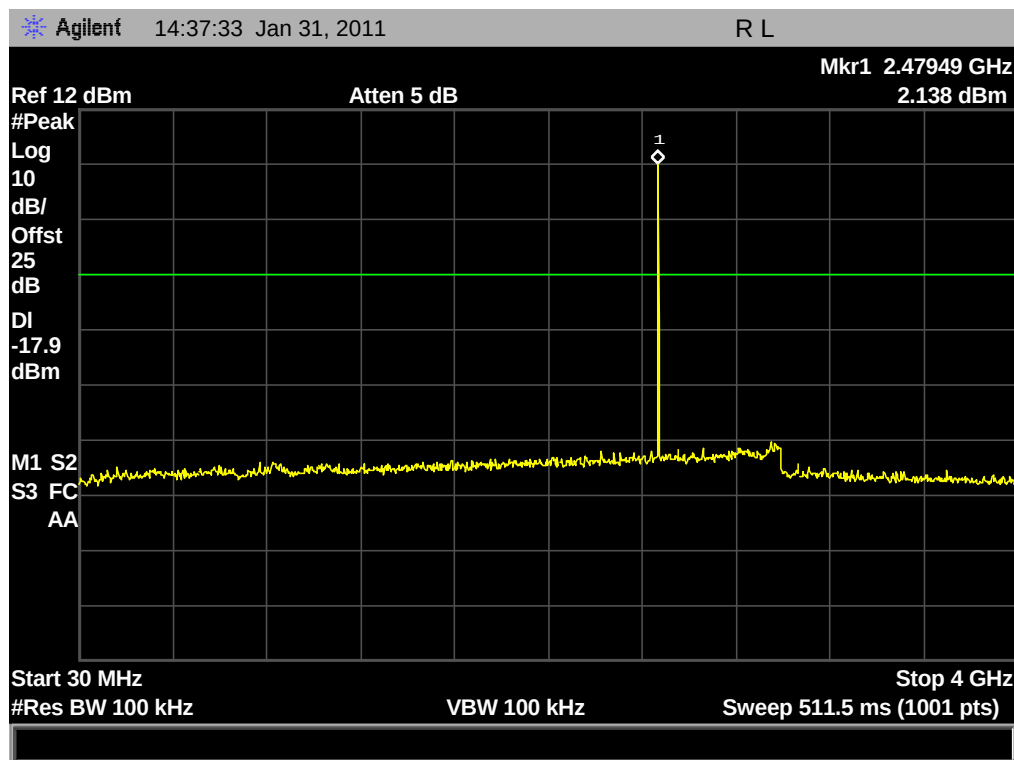

(Plot C.1: Channel = 78, 30MHz to 4GHz)

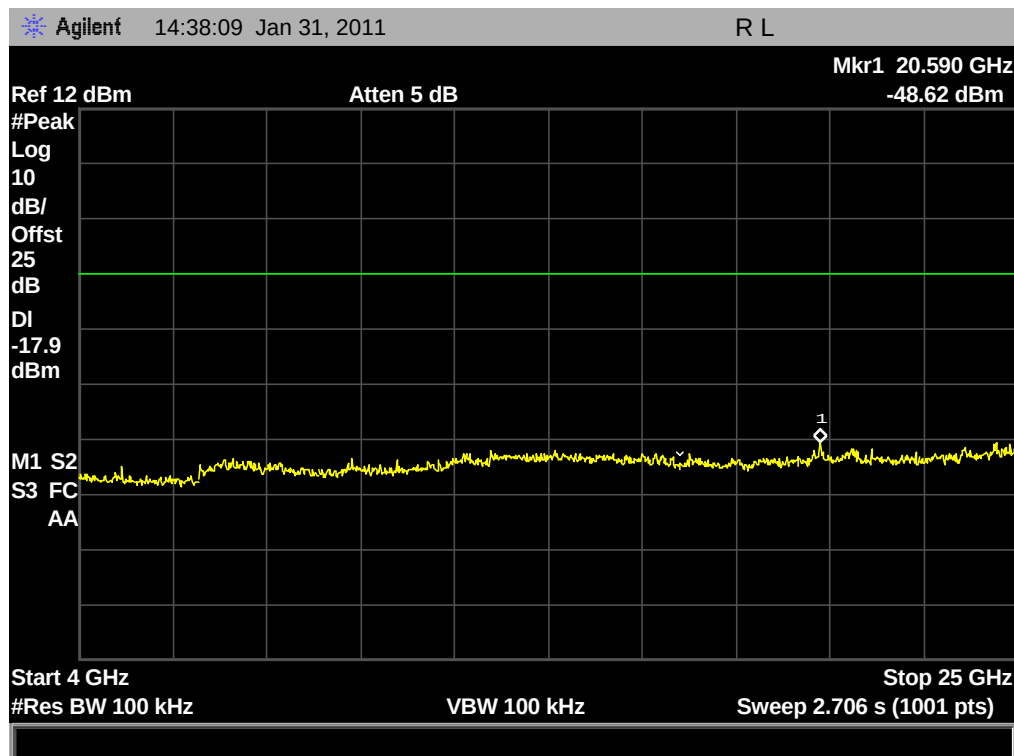

(Plot C.2: Channel = 78, 4GHz to 25GHz)


C. Test Verdict:

$\pi/4$ -DQPSK Mode


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-48.11	Plot D.1/D.2	0.068	-20.1	PASS
39	2441	-48.07	Plot E.1/E.2	-3.743	-23.7	PASS
78	2480	-49.10	Plot F.1/F.2	-3.379	-23.4	PASS

D. Test Plot:


Note: the power of the Module transmitting frequency should be ignored.

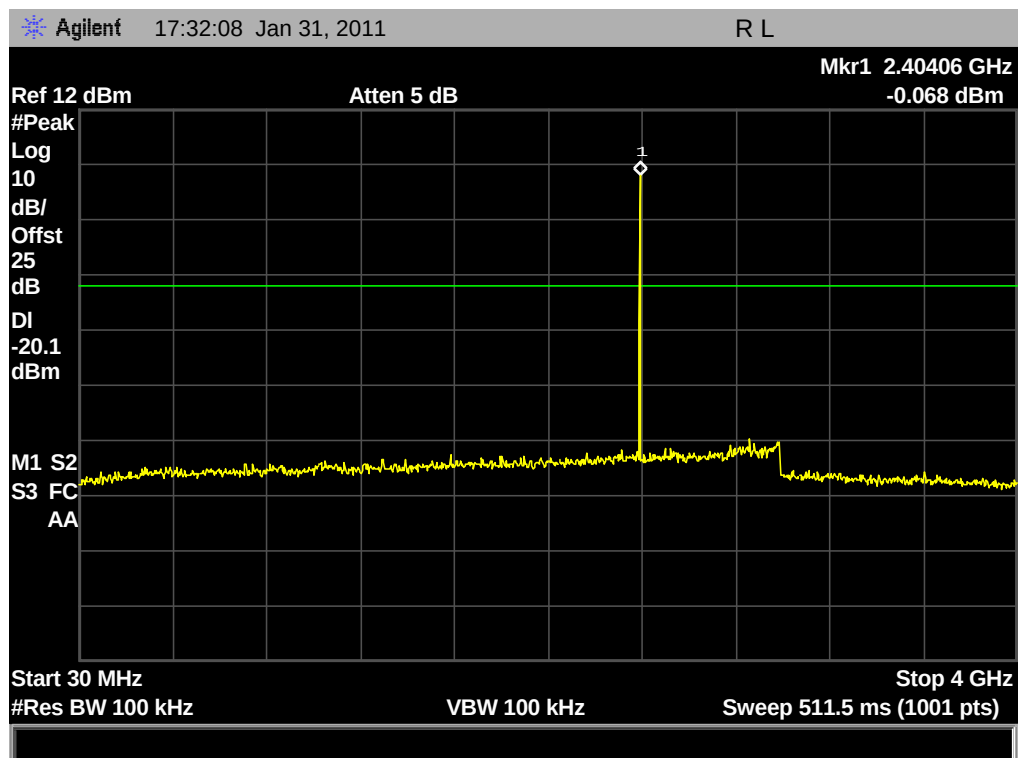


(Plot D.1: Channel = 0, 30MHz to 4GHz)

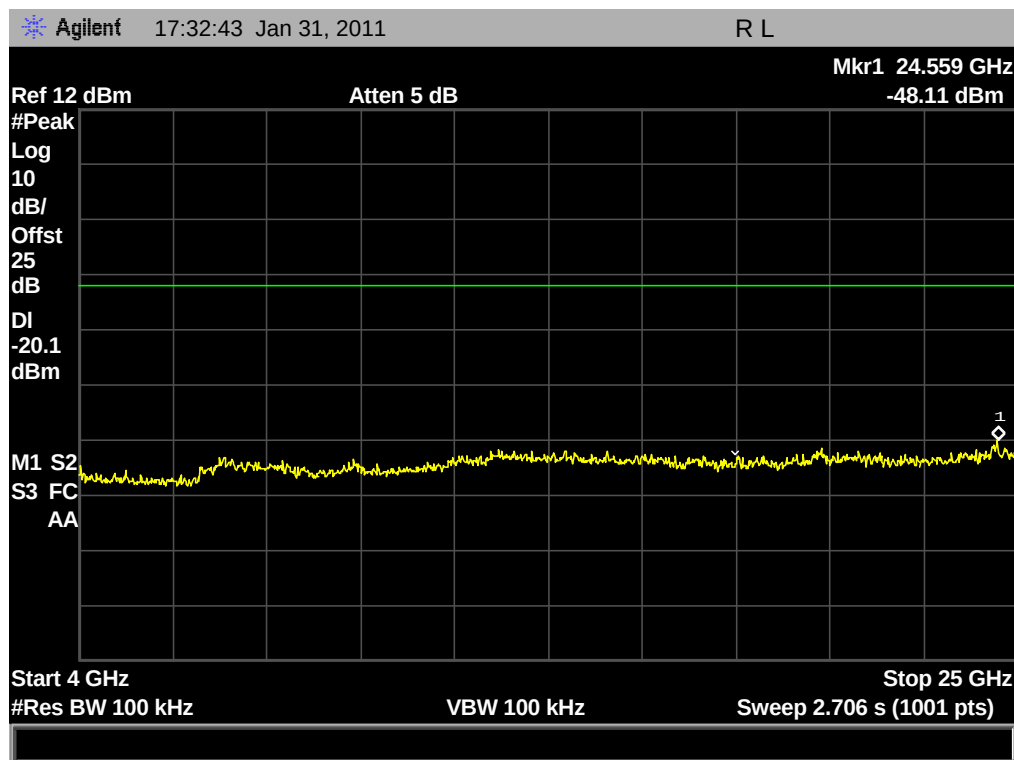


(Plot D.2: Channel = 0, 4GHz to 25GHz)

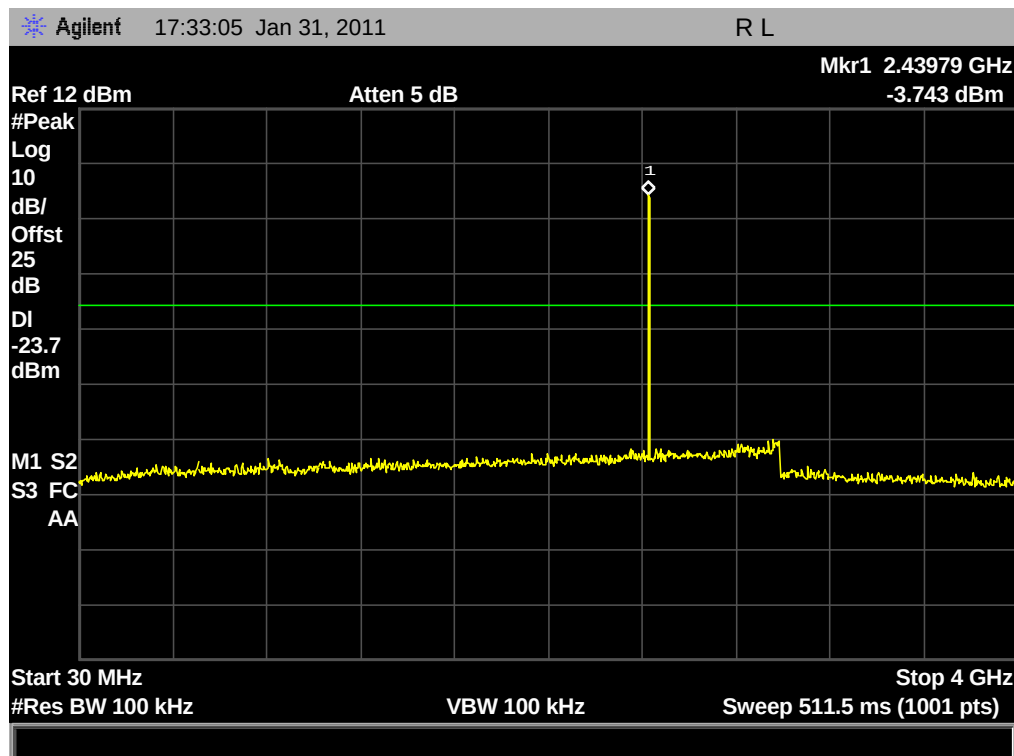


(Plot E.1: Channel = 39, 30MHz to 4GHz)

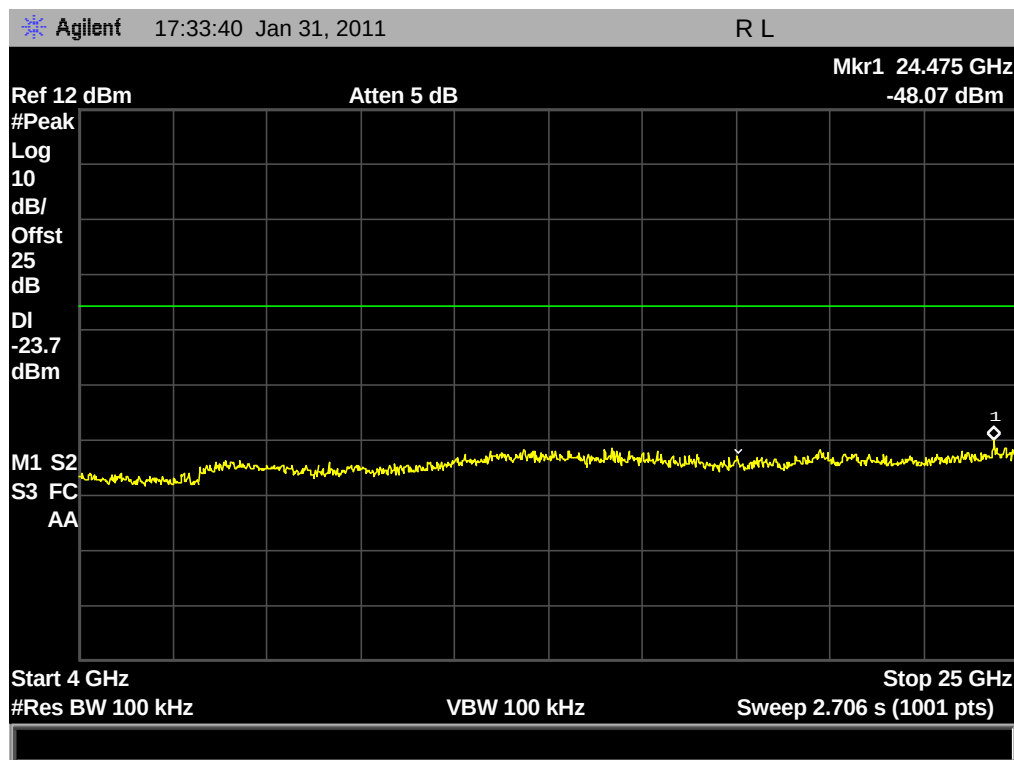

(Plot E.2: Channel = 39, 4GHz to 25GHz)

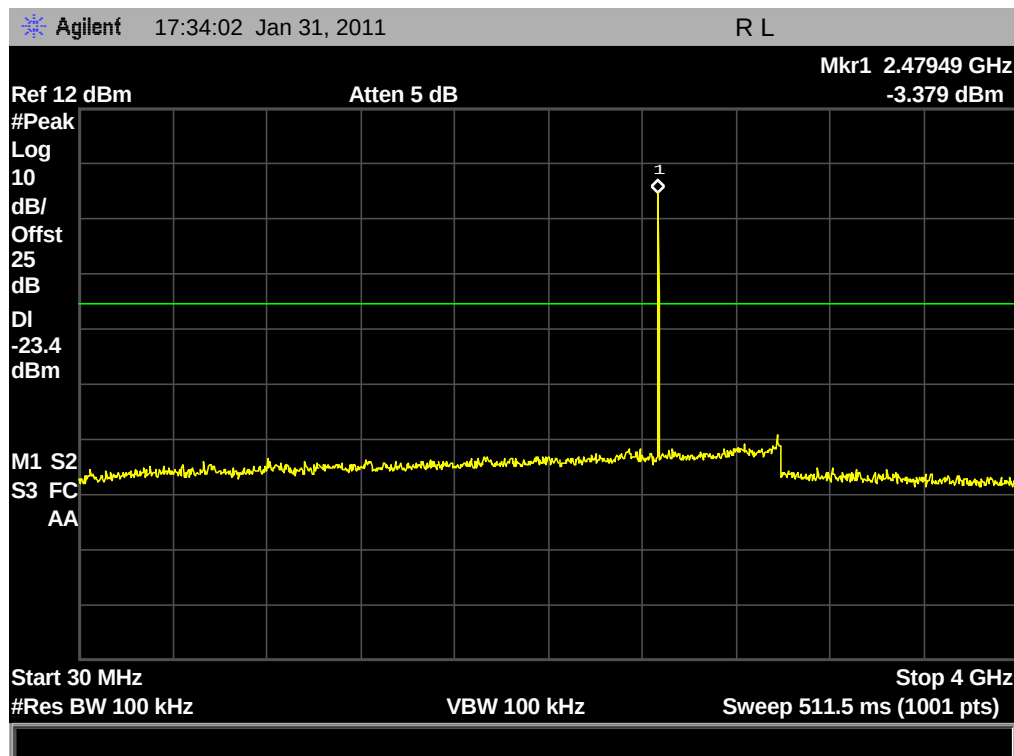

(Plot F.1: Channel = 78, 30MHz to 4GHz)

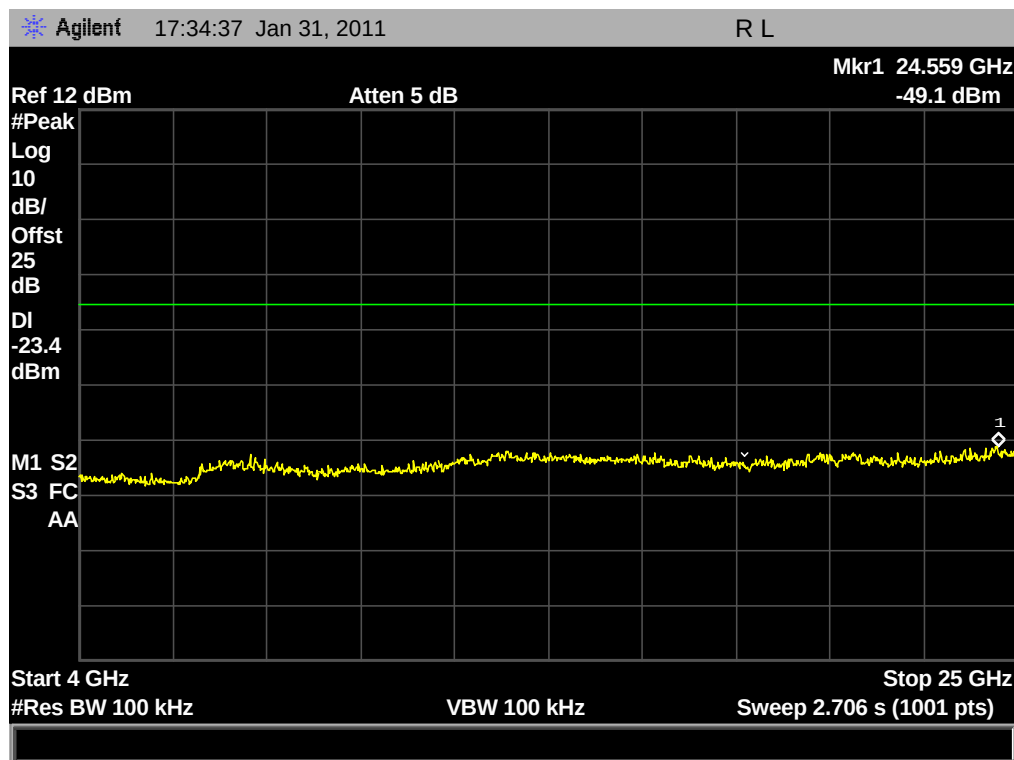

(Plot F.2: Channel = 78, 4GHz to 25GHz)


E. Test Verdict:

8-DPSK Mode


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-48.78	Plot G.1/G.2	-3.71	-23.7	PASS
39	2441	-48.15	Plot H.1/H.2	-3.36	-23.4	PASS
78	2480	-48.66	Plot I.1/I.2	-2.38	-22.4	PASS

F. Test Plot:


Note: the power of the Module transmitting frequency should be ignored.

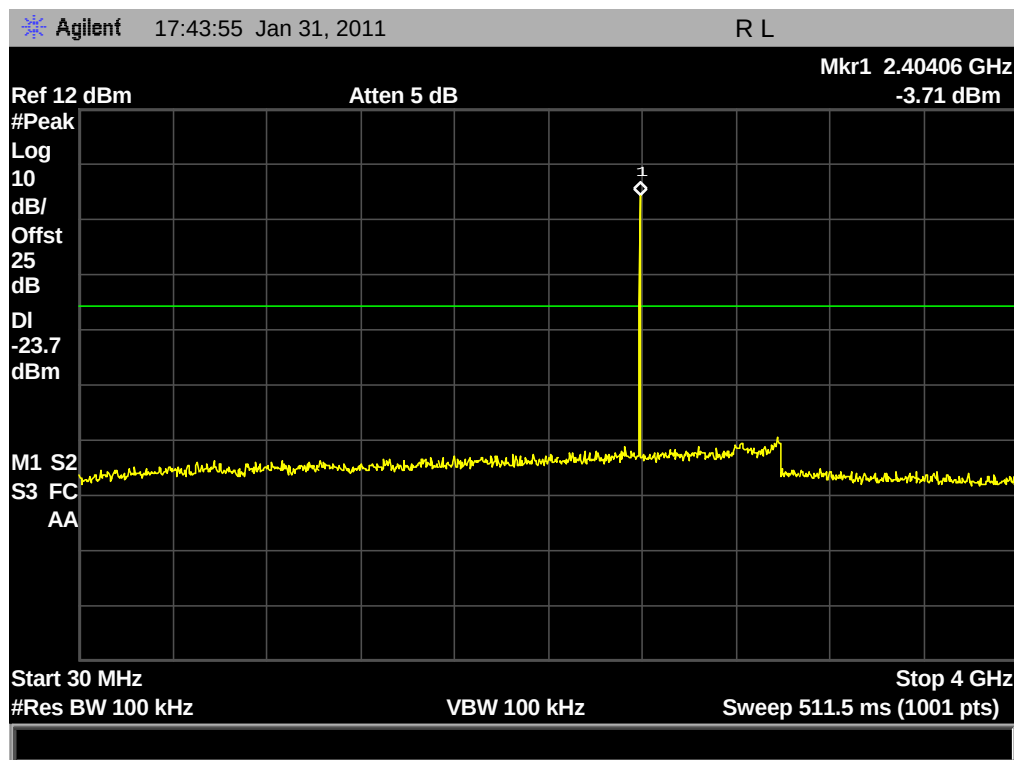


(Plot G.1: Channel = 0, 30MHz to 4GHz)

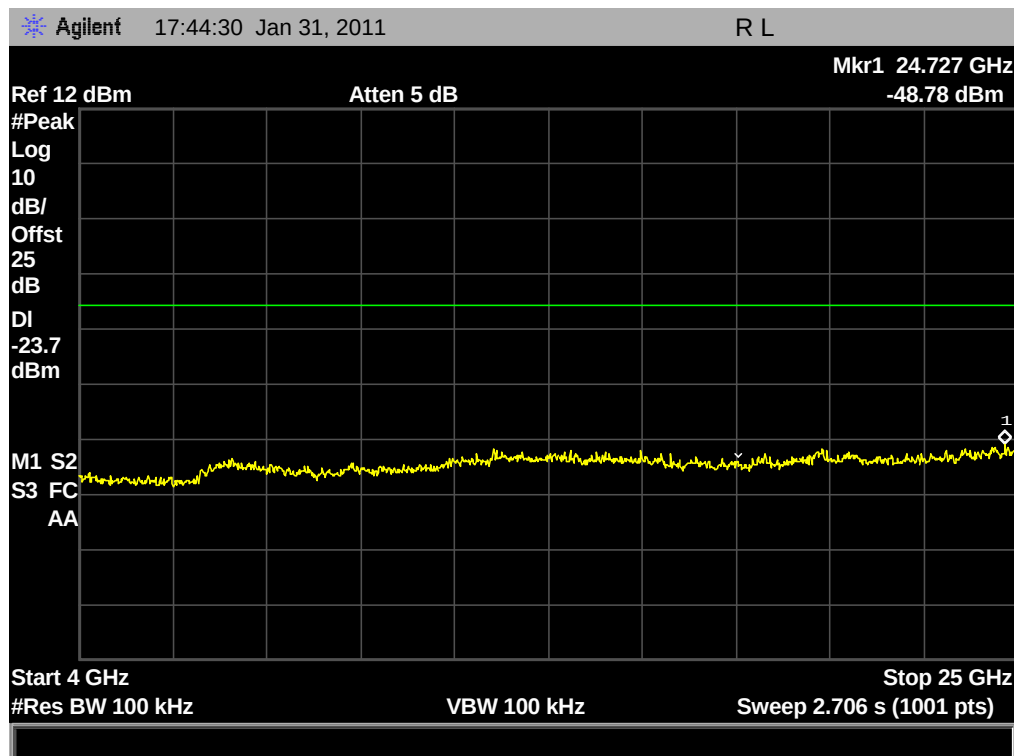


(Plot G.2: Channel = 0, 4GHz to 25GHz)

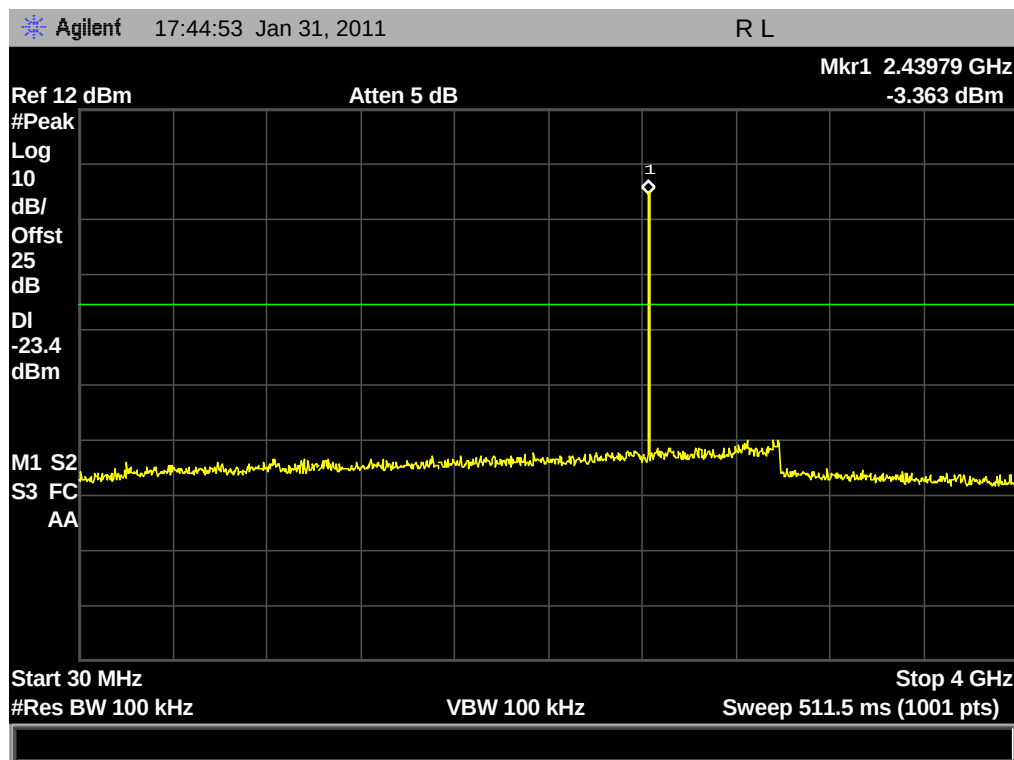


(Plot H.1: Channel = 39, 30MHz to 4GHz)

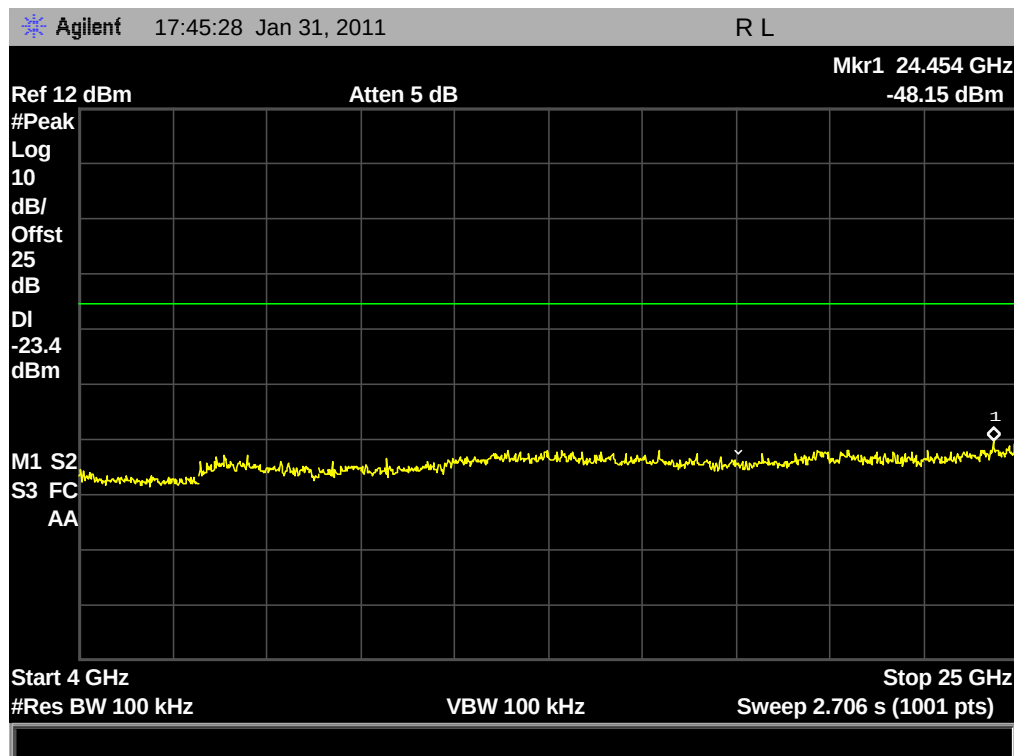

(Plot H.2: Channel = 39, 4GHz to 25GHz)

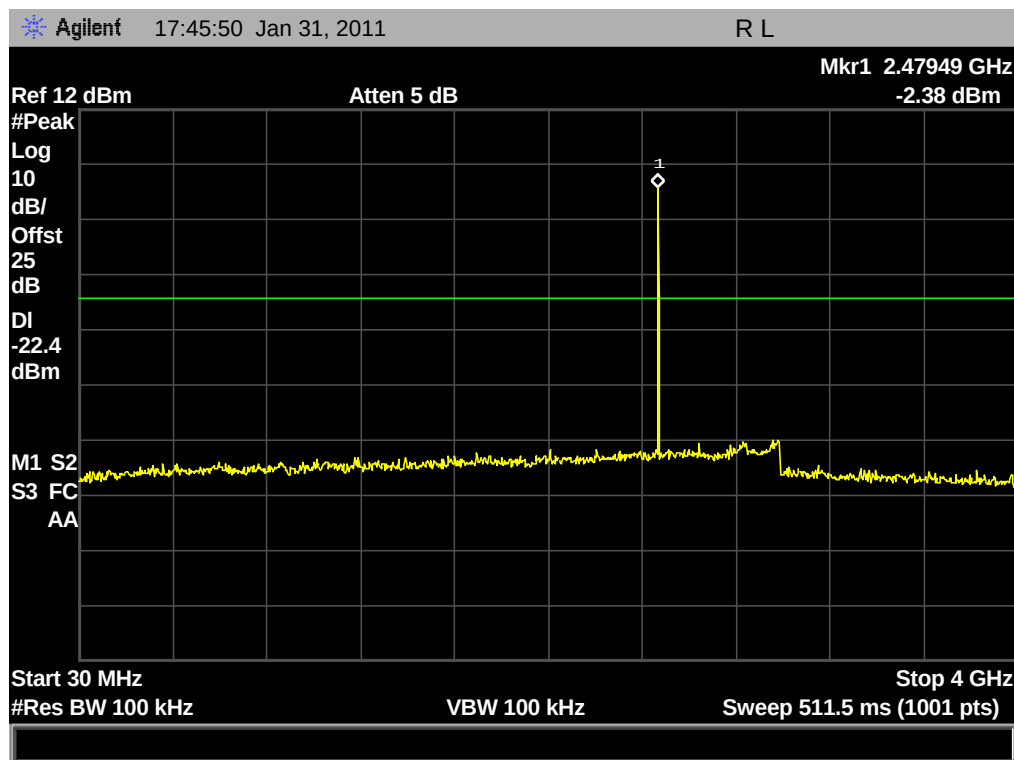

(Plot I.1: Channel = 78, 30MHz to 4GHz)

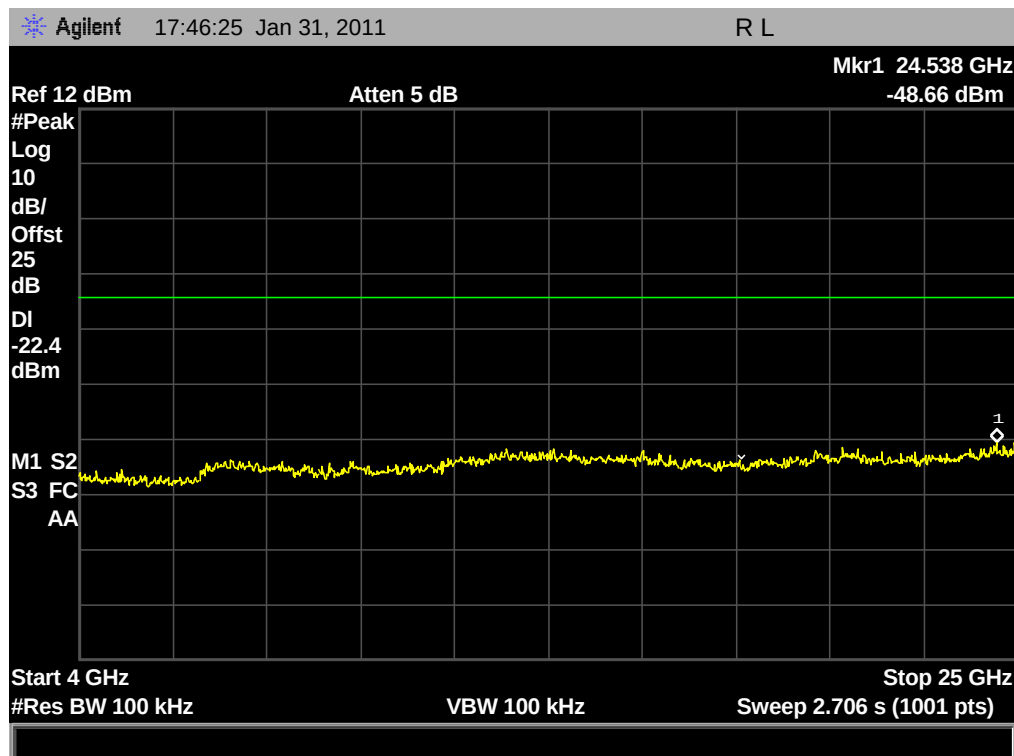

(Plot I.2: Channel = 78, 4GHz to 25GHz)


3.7 Band Edge

3.7.1 Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.7.2 Test Description

A. Test Setup:

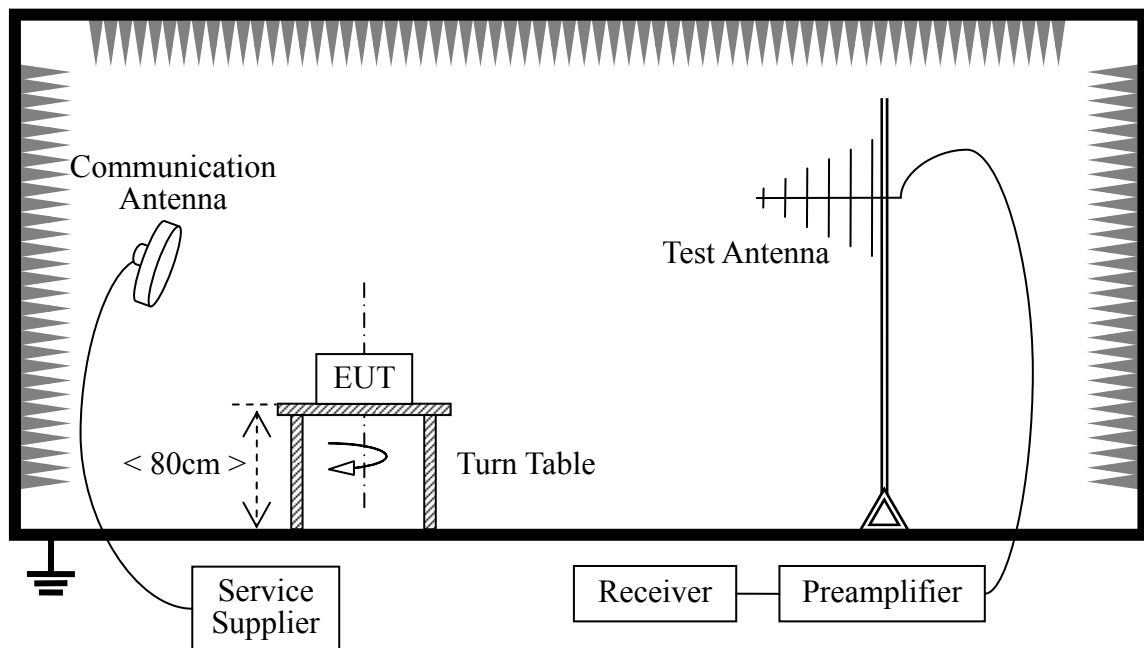

The Bluetooth Module of the EUT is powered by the Battery. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

For the Test Antenna:

Horn Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength..

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date
System Simulator	R&S	CMU200	100448	2010.9
Receiver	Agilent	E7405A	US44210471	2010.9
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2010.9
Test Antenna - Horn	Schwarzbeck	BBHA 9120C	9120C-384	2010.9

3.7.3 Test Result


The Bluetooth Module operates at hopping-off test mode. The lowest and highest channels are tested to verify the band edge emissions.

A. Test Verdict:


GFSK Mode

Channel	Frequency (MHz)	Max. Emission in the Restricted Bands (dB μ V/m)		Limit (dB μ V/m)		Verdict
		PK	AV	PK	AV	
0	2402	40.47	39.13	74	54	PASS
78	2480	38.58	37.74	74	54	PASS


B. Test Plot:

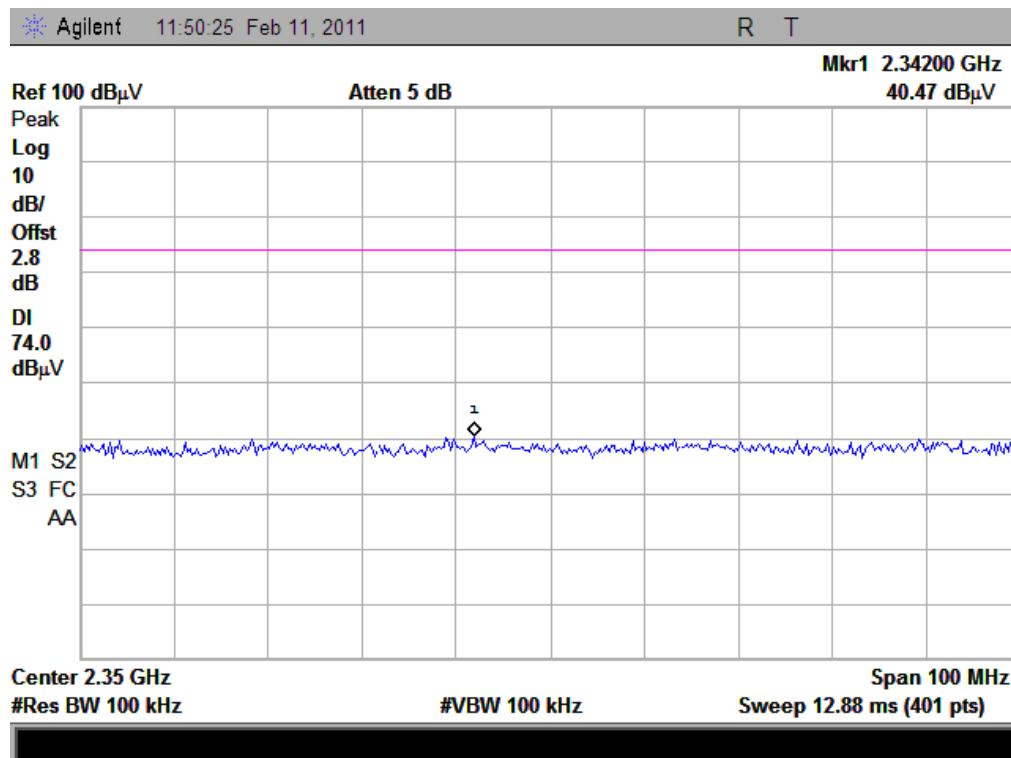


(Plot A1: Channel = 0 PEAK)

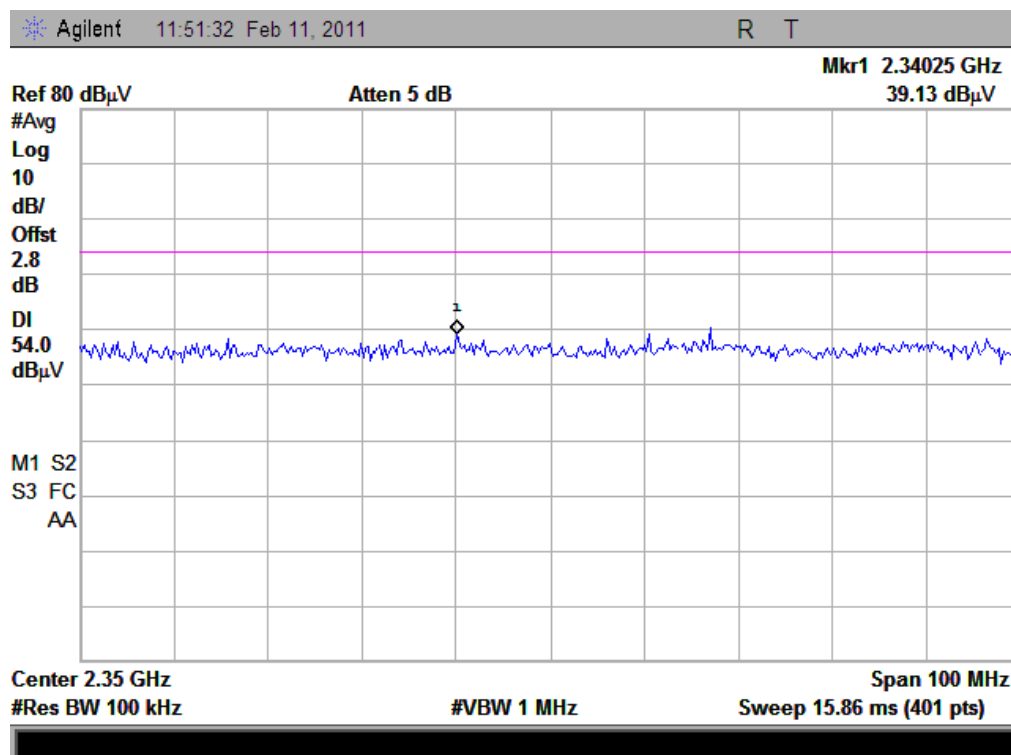

(Plot A2: Channel = 0 AVERAGE)

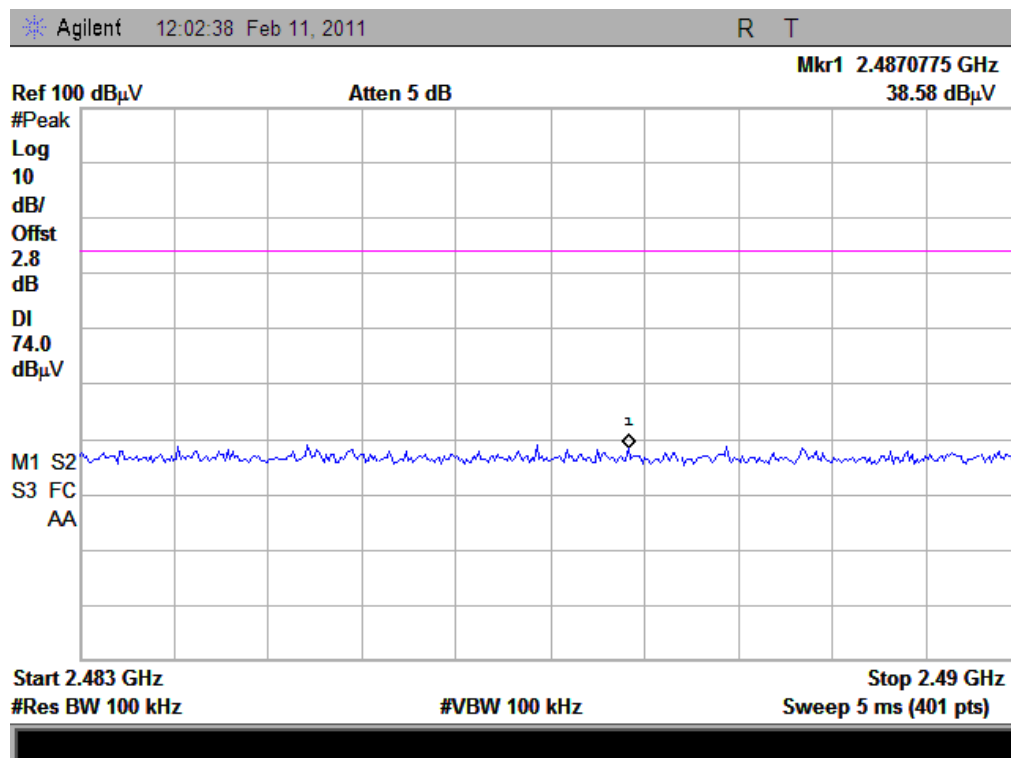

(Plot B1: Channel = 78 PEAK)

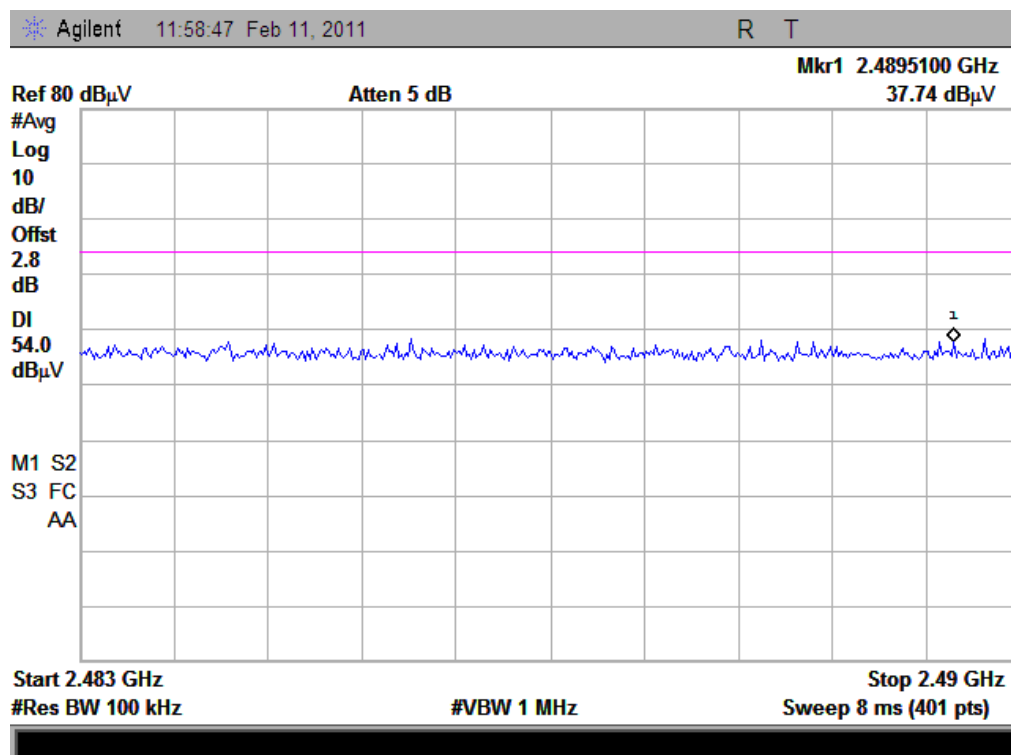


(Plot B2: Channel = 78 AVERAGE)

A. Test Verdict:


$\pi/4$ -DQPSK Mode

Channel	Frequency (MHz)	Max. Emission in the Restricted Bands (dB μ V/m)		Limit (dB μ V/m)		Verdict
		PK	AV	PK	AV	
0	2402	40.67	39.61	74	54	PASS
78	2480	39.76	37.36	74	54	PASS


B. Test Plot:

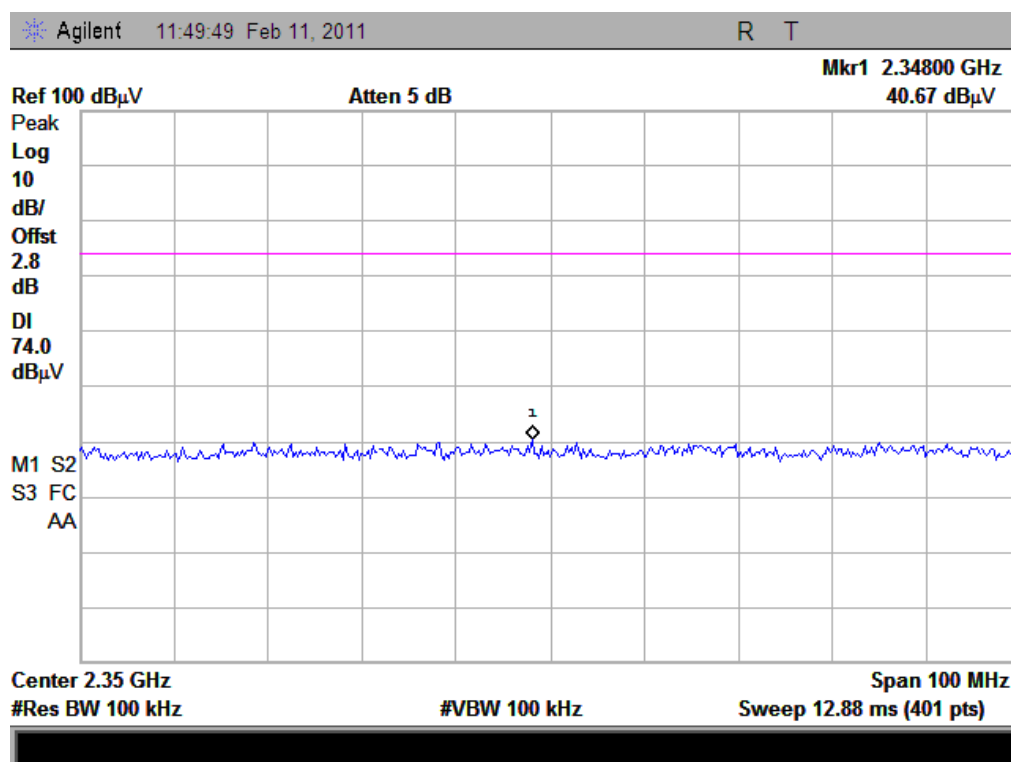


(Plot A1: Channel = 0 PEAK)

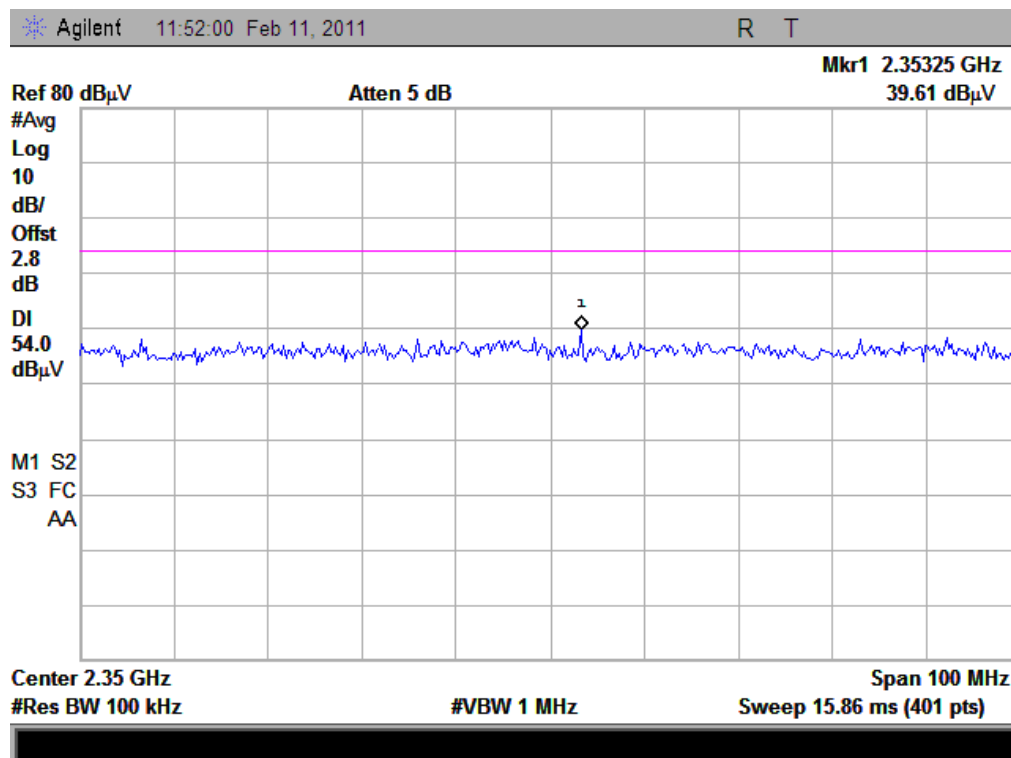

(Plot A2: Channel = 0 AVERAGE)

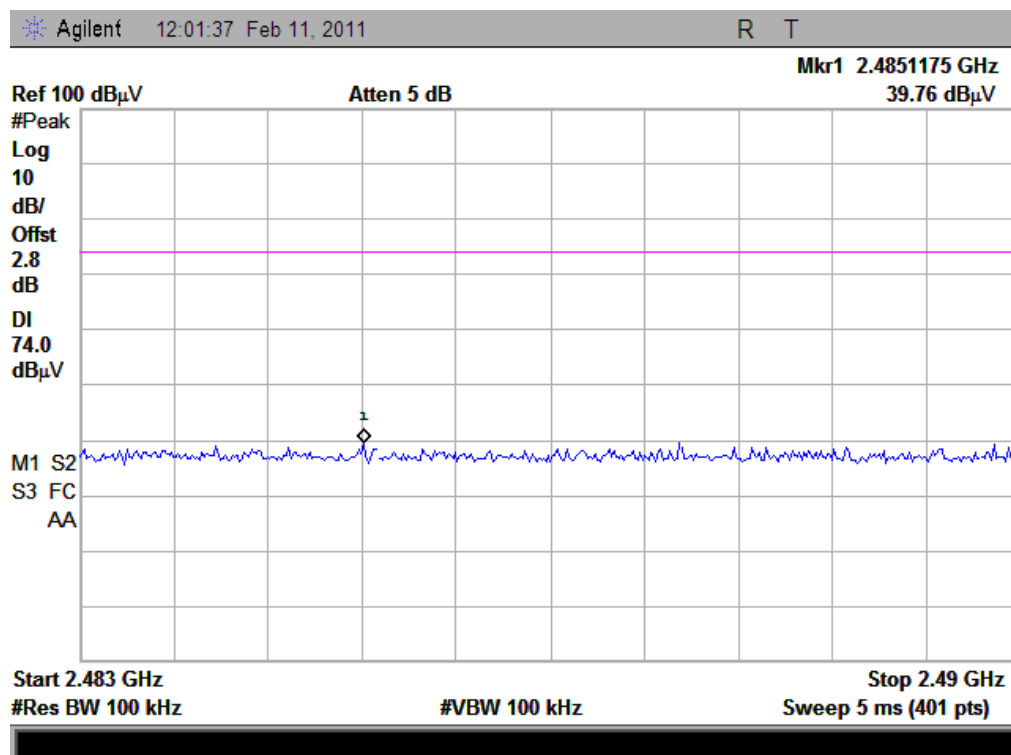

(Plot B1: Channel = 78 PEAK)

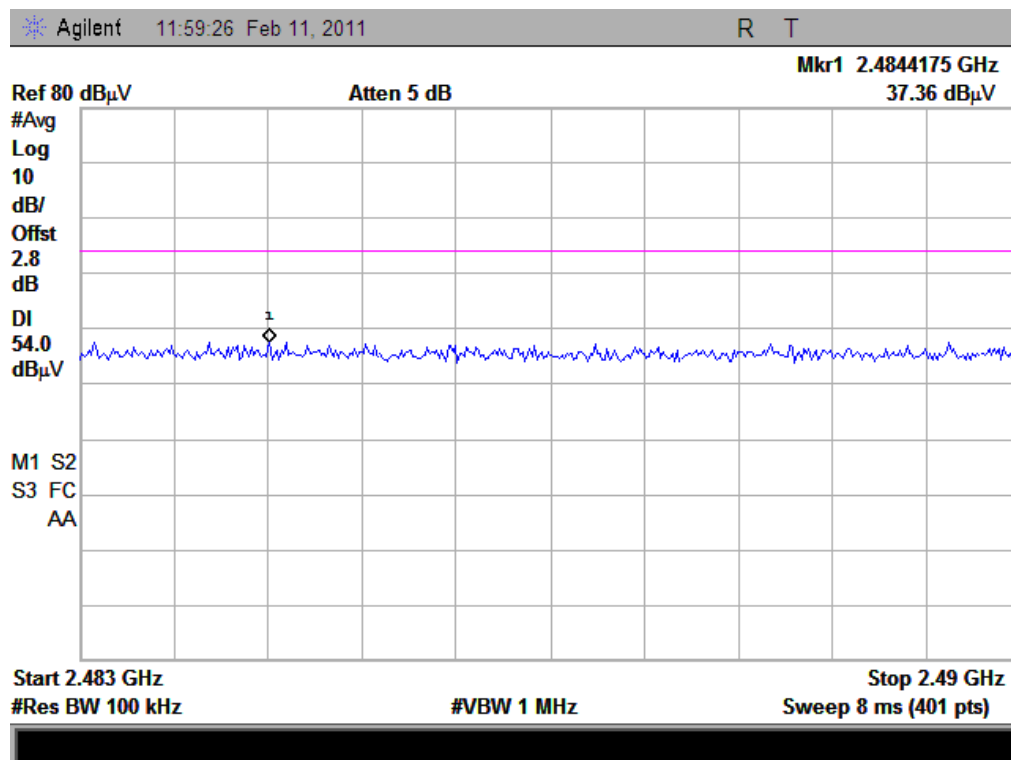


(Plot B2: Channel = 78 AVERAGE)

A. Test Verdict:


8-DPSK Mode

Channel	Frequency (MHz)	Max. Emission in the Restricted Bands (dBμV/m)		Limit (dBμV/m)		Verdict
		PK	AV	PK	AV	
0	2402	39.80	38.67	74	54	PASS
78	2480	40.45	38.18	74	54	PASS


B. Test Plot:

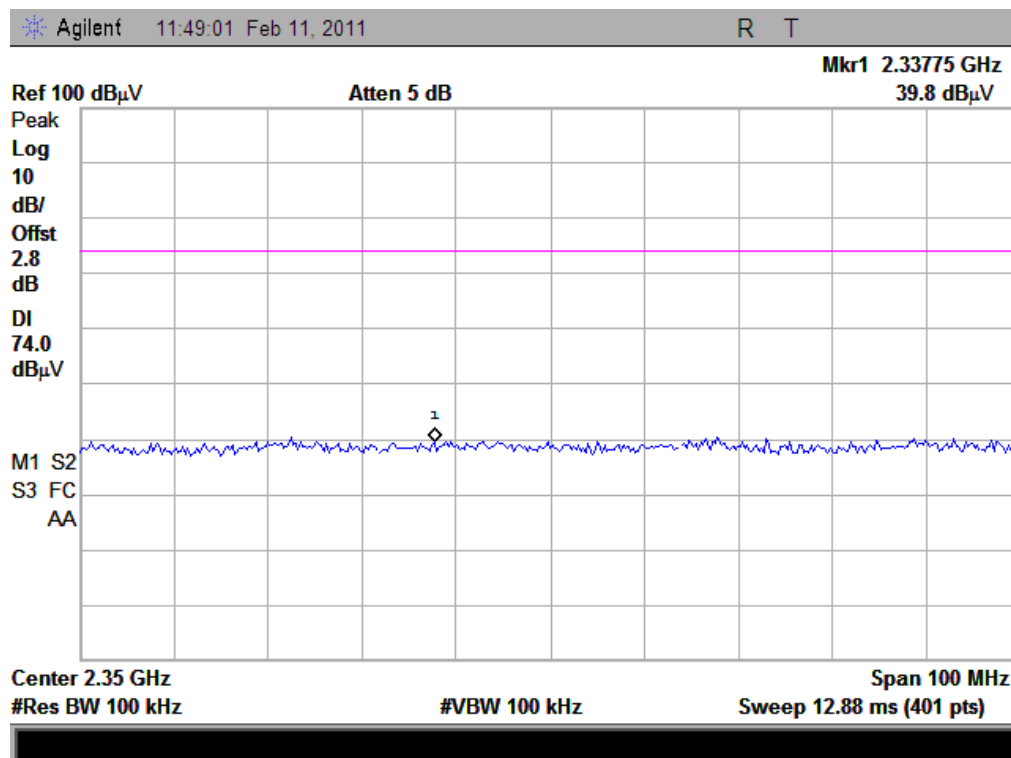


(Plot A1: Channel = 0 PEAK)

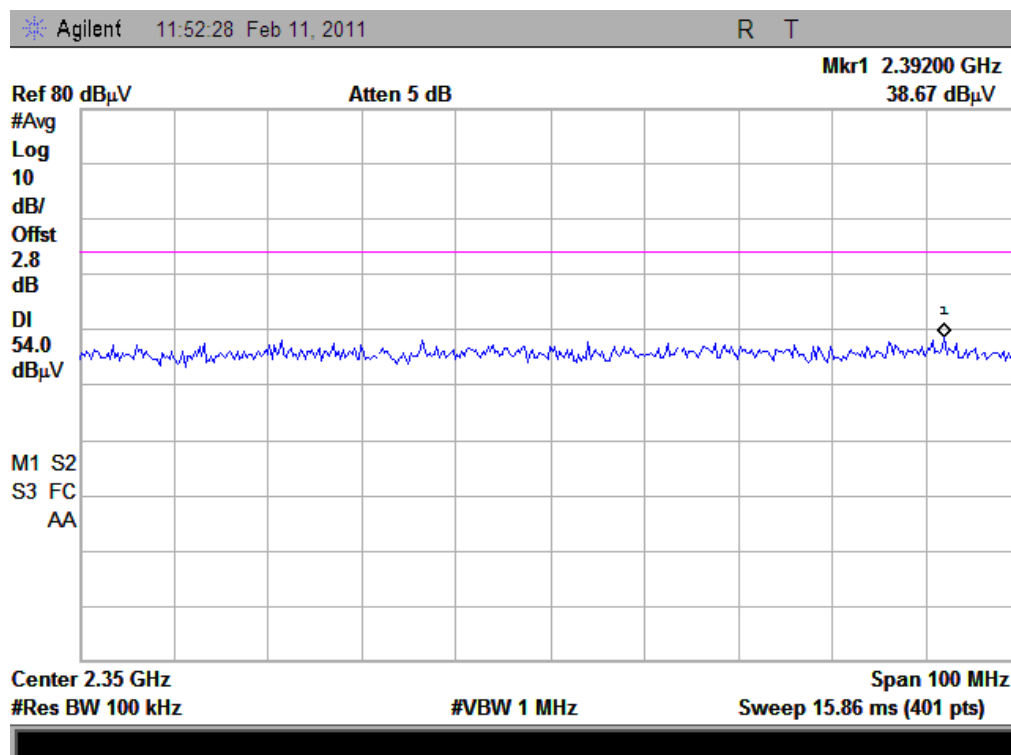

(Plot A2: Channel = 0 AVERAGE)

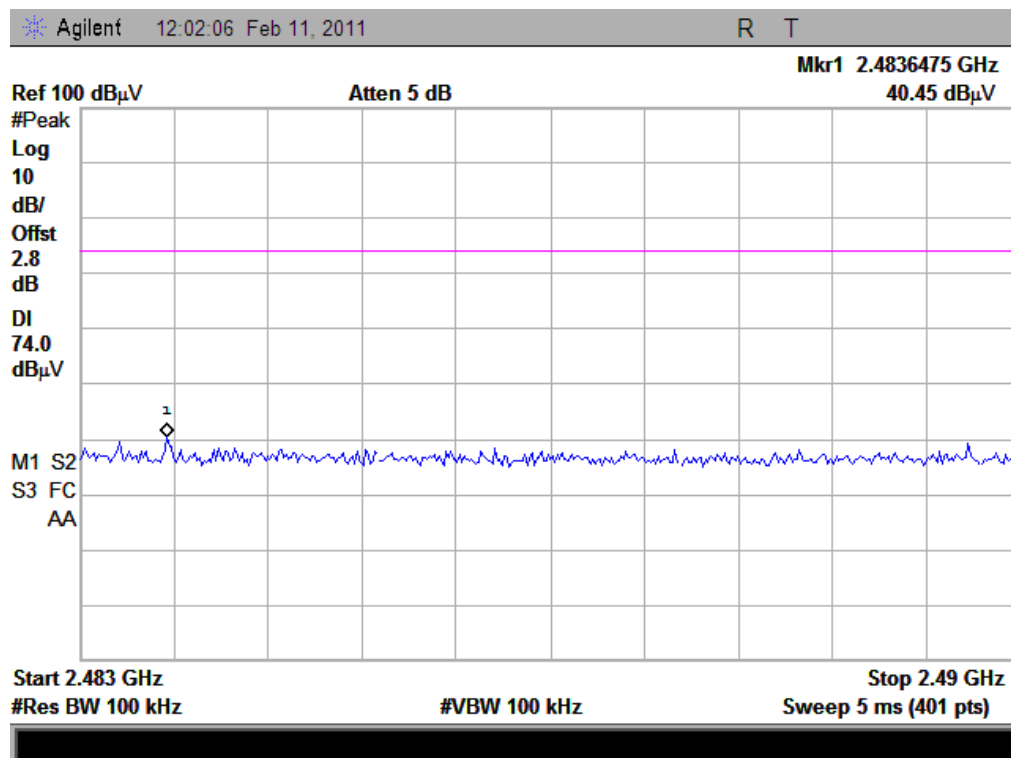

(Plot B1: Channel = 78 PEAK)

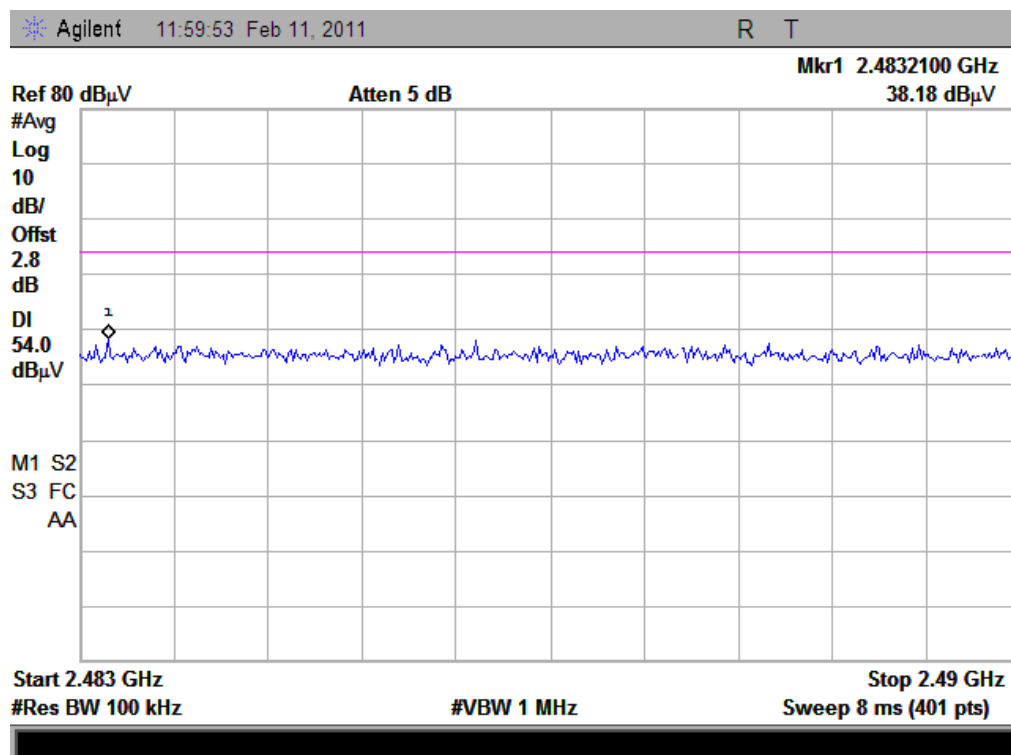

(Plot B2: Channel = 78 AVERAGE)

3.8 Conducted Emission

3.8.1 Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

NOTE:

- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.8.2 Test Description

A. Test Setup:

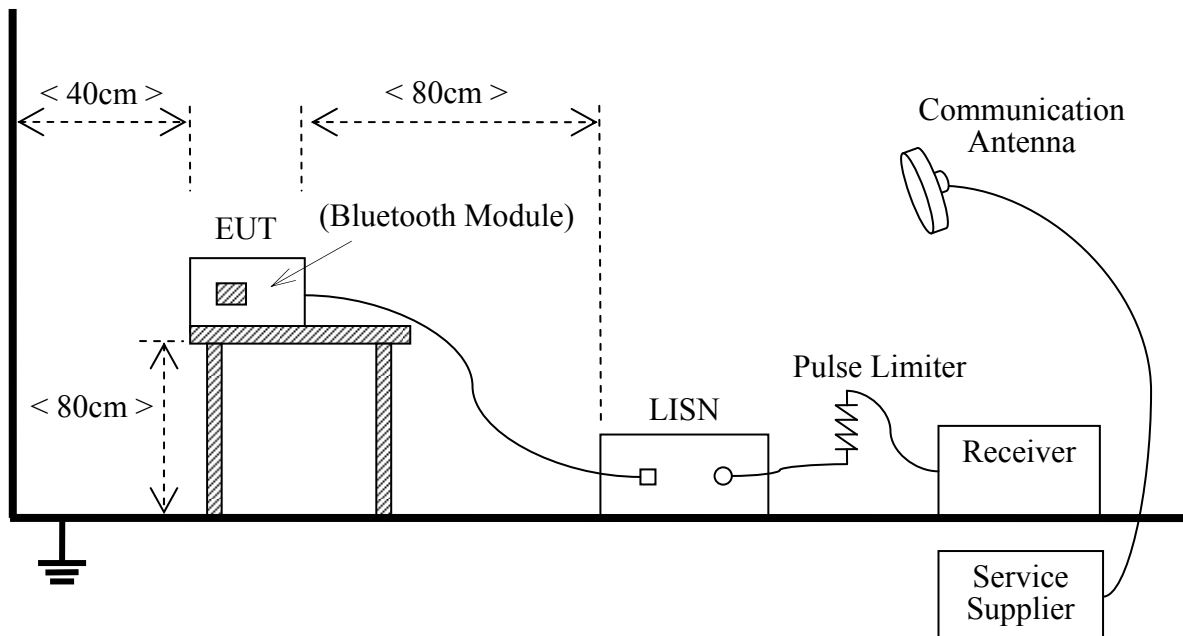

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.4:2003


The Bluetooth Module of the EUT is powered by the Battery charged with the AC Adapter which is powered by 120V, 60Hz AC mains supply. The factors of the site are calibrated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:


Description	Manufacturer	Model	Serial No.	Cal. Date
Receiver	Agilent	E7405A	US44210471	2010.09
LISN	Schwarzbeck	NSLK 8127	812744	2010.09
Service Supplier	R&S	CMU200	100448	2010.09
Pulse Limiter (20dB)	Schwarzbeck	VTSD 9561-D	9391	(n.a.)

3.8.3 Test Result

The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

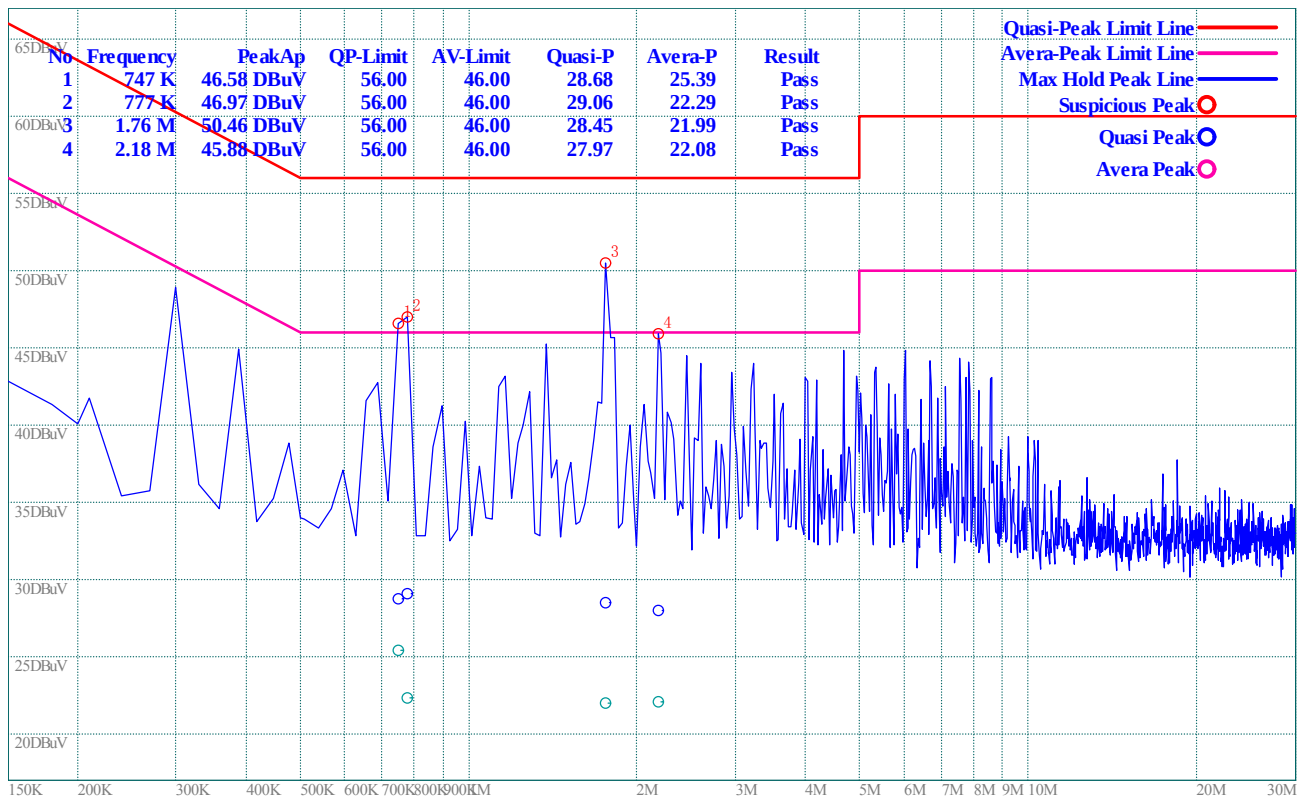

(Plot A: L Phase)

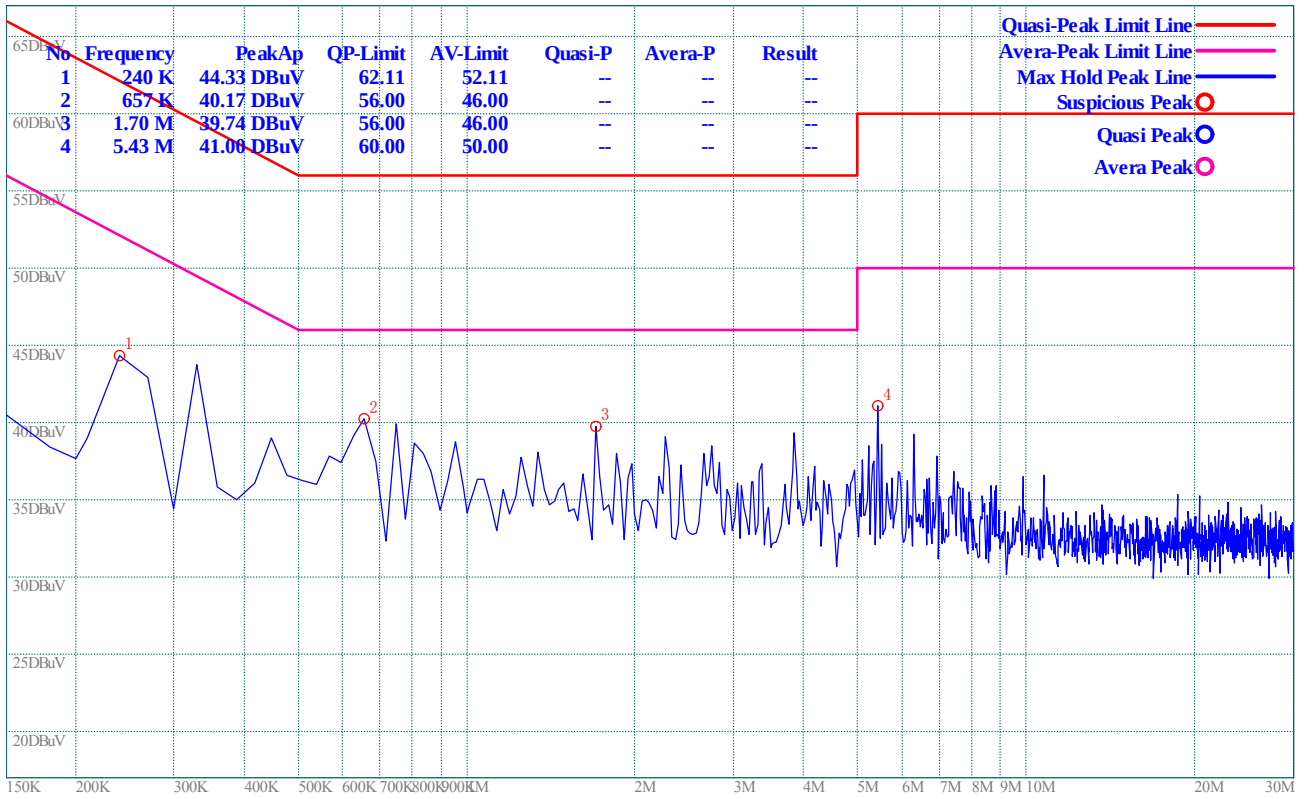

(Plot B: N Phase)

3.9 Radiated Emission

3.9.1 Requirement

According to FCC section 15.247(c), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).


According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)	Detector
30 - 88	100	3	QP
88 - 216	150	3	QP
216 - 960	200	3	QP
960 - 1000	500	3	QP
Above 1000	500	3	AV

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)

3.9.2 Test Description

A. Test Setup:

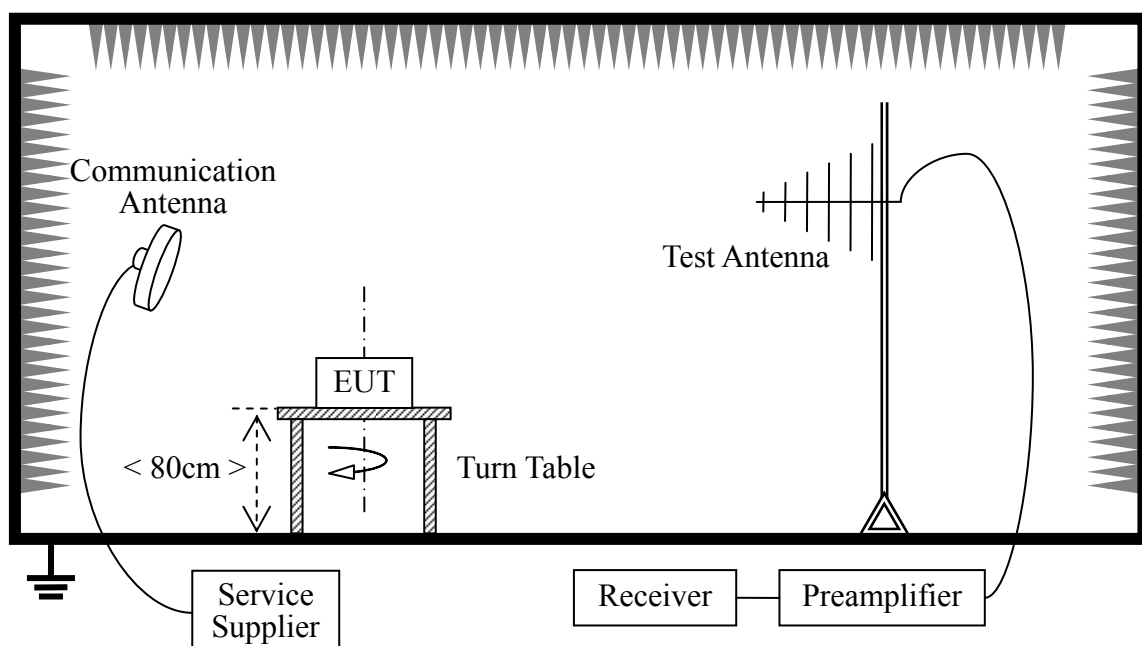

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4 (2003). The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.4.

The Bluetooth Module of the EUT is powered by the Battery. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

For the Test Antenna: In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength, the azimuth range of turntable was 0° to 360°, the receive antenna has two polarizations horizontal and vertical. When doing measurements above 1GHz, the EUT was placed within the 3dB beam width range of the horn antenna, and the EUT was tested in 3 orthogonal positions as recommended in ANSI C63.4 for Radiated Emissions and the worst-case data was presented.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date
System Simulator	R&S	CMU200	100448	2010.9
Receiver	Agilent	E7405A	US44210471	2010.9
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2010.9
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-274	2010.9
Test Antenna - Horn	Schwarzbeck	BBHA 9120C	9120C-384	2010.9
Test Antenna - circular	R&S	AC004R1	0749.3000.03	2010.6

3.9.3 Test Result

GFSK Mode:

C. Test Verdict for Harmonics:

The Fundamental Emissions

The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.

Channel	Frequency (MHz)	Fundamental Emission (dBμV/m)		Antenna Polarization	Refer to Plot
		PK	AV		
0	2402	90.58	78.3	Horizontal	Plot A.1
		95.54	83.5	Vertical	Plot A.2
39	2441	91.10	79.0	Horizontal	Plot B.1
		89.66	77.8	Vertical	Plot B.2
78	2480	88.04	76.2	Horizontal	Plot C.1

Channel	Frequency (MHz)	Fundamental Emission (dB μ V/m)		Antenna Polarization	Refer to Plot
		PK	AV		
		93.15	81.4		
				Vertical	Plot C.2

The un-wanted Emissions:

Test result of channel: 0 (2402MHz)

Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
3.940 G	47.47	54	-6.53	340	100	Vertical
720.6 M	32.67	46	-13.33	4	100	Vertical
664.4 M	35.16	46	-10.84	113	100	Horizontal

Test result of channel: 39 (2442MHz)


Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
720.6 M	33.58	46	-12.42	28	100	Vertical
664.4 M	37.71	46	-8.29	125	100	Horizontal
2.793 G	48.87	54	-5.13	20	100	Horizontal

Test result of channel: 78 (2480MHz)


Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
720.6 M	32.67	46	-13.33	114	100	Vertical
720.6 M	32.7	46	-13.3	60	100	Horizontal
912.7 M	32.96	46	-13.04	46	100	Horizontal
2.793 G	47.76	54	-6.24	92	100	Horizontal

D. Test Plots for the Whole Measurement Frequency Range:


Plots for Channel = 0

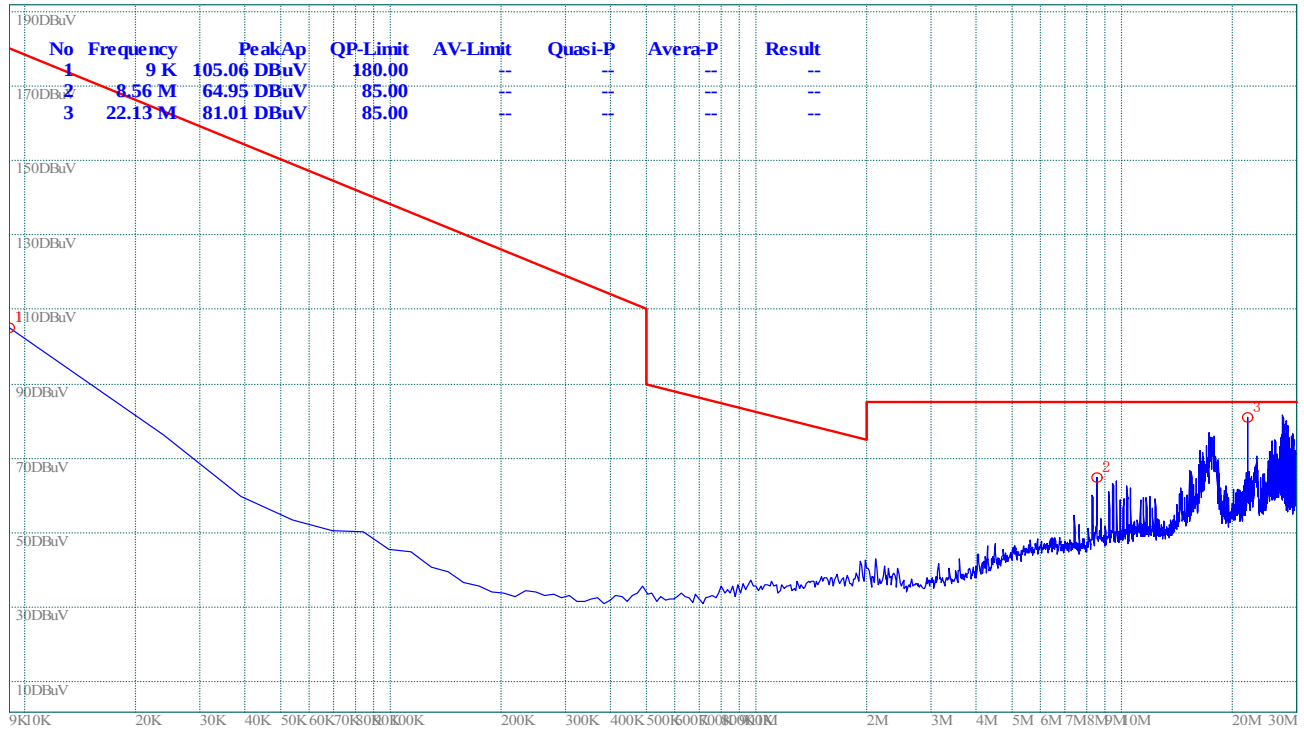

(Plot A.0: 9kHz to 30MHz)

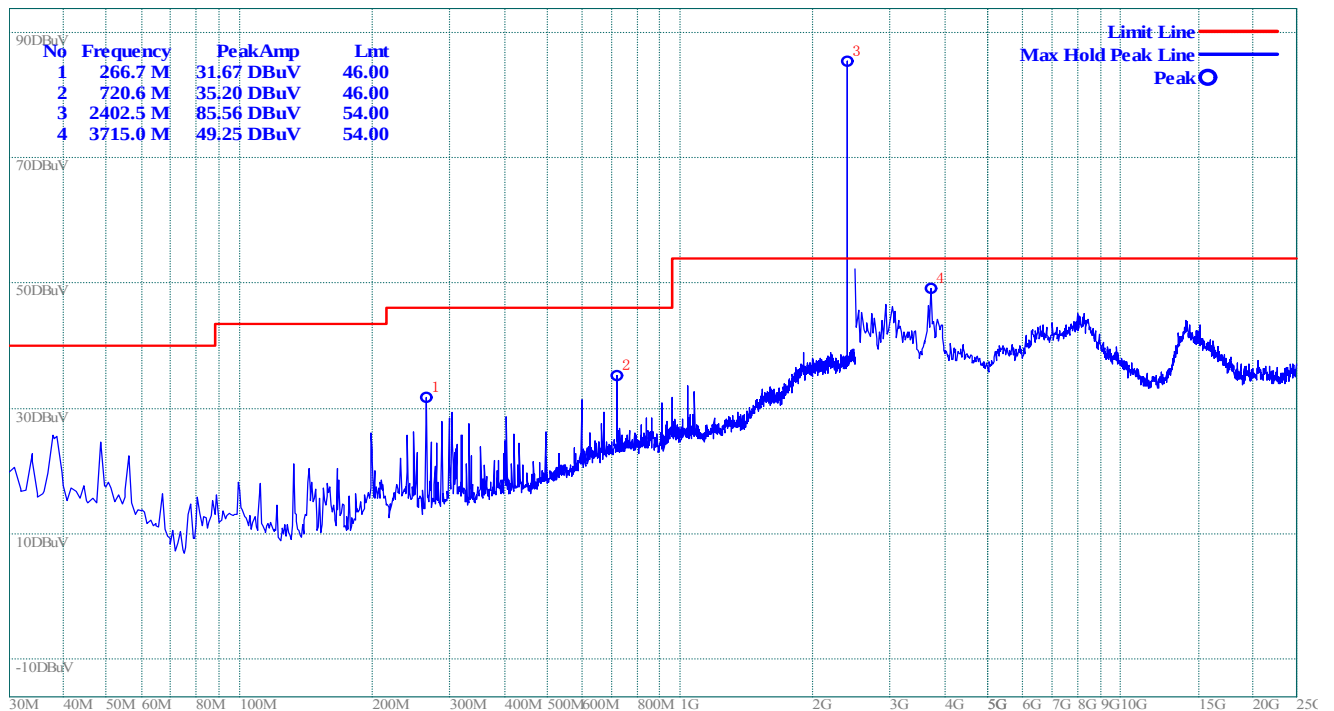


(Plot A.1: Antenna Horizontal)

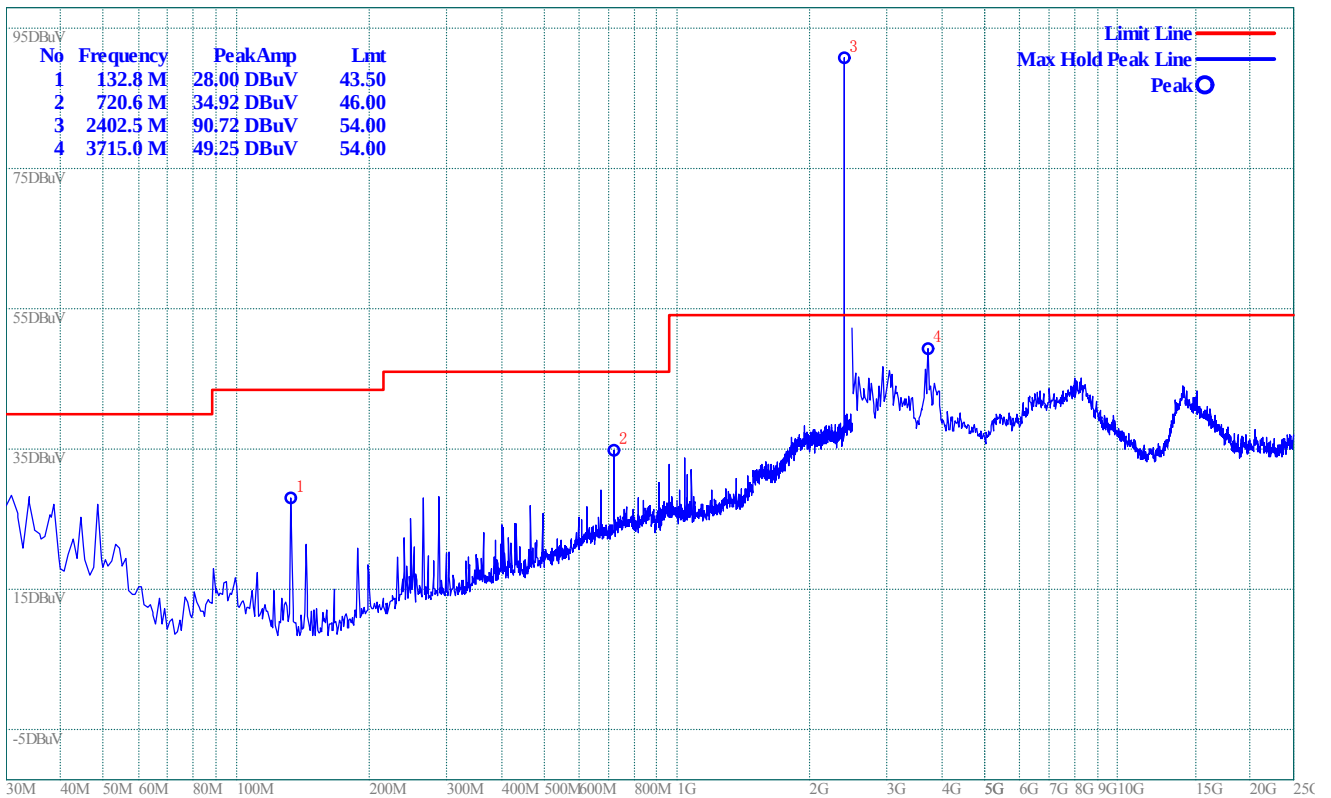


(Plot A.2: Antenna Vertical)


Plot for Channel = 39

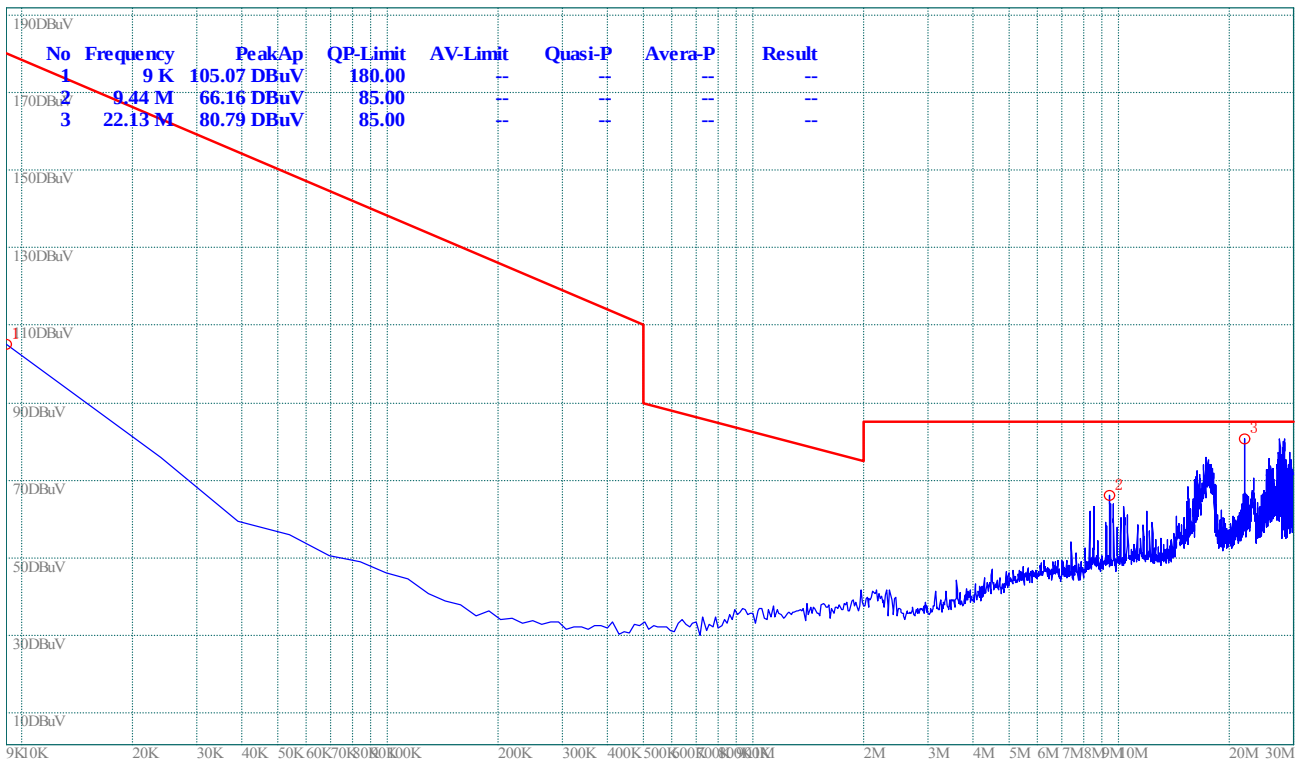

(Plot B.0: 9kHz to 30MHz)

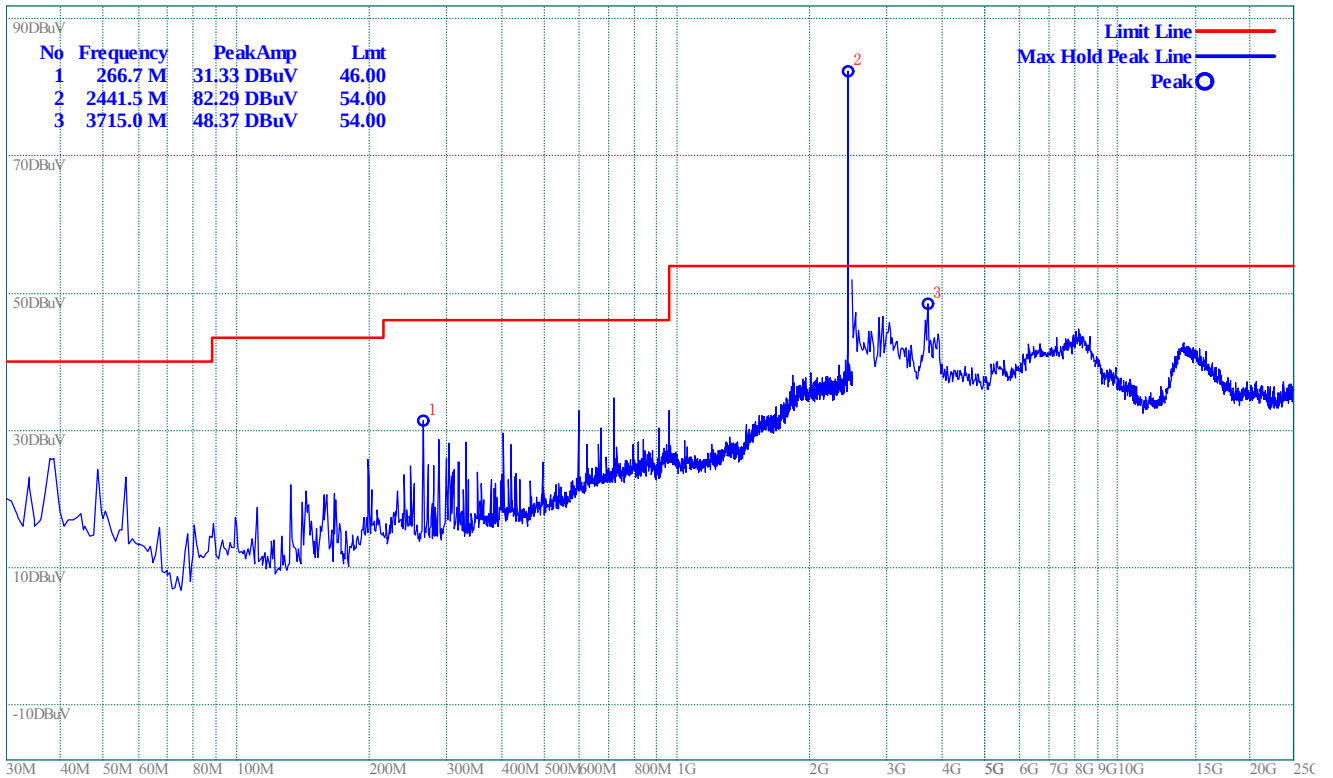


(Plot B.1: Antenna Horizontal)

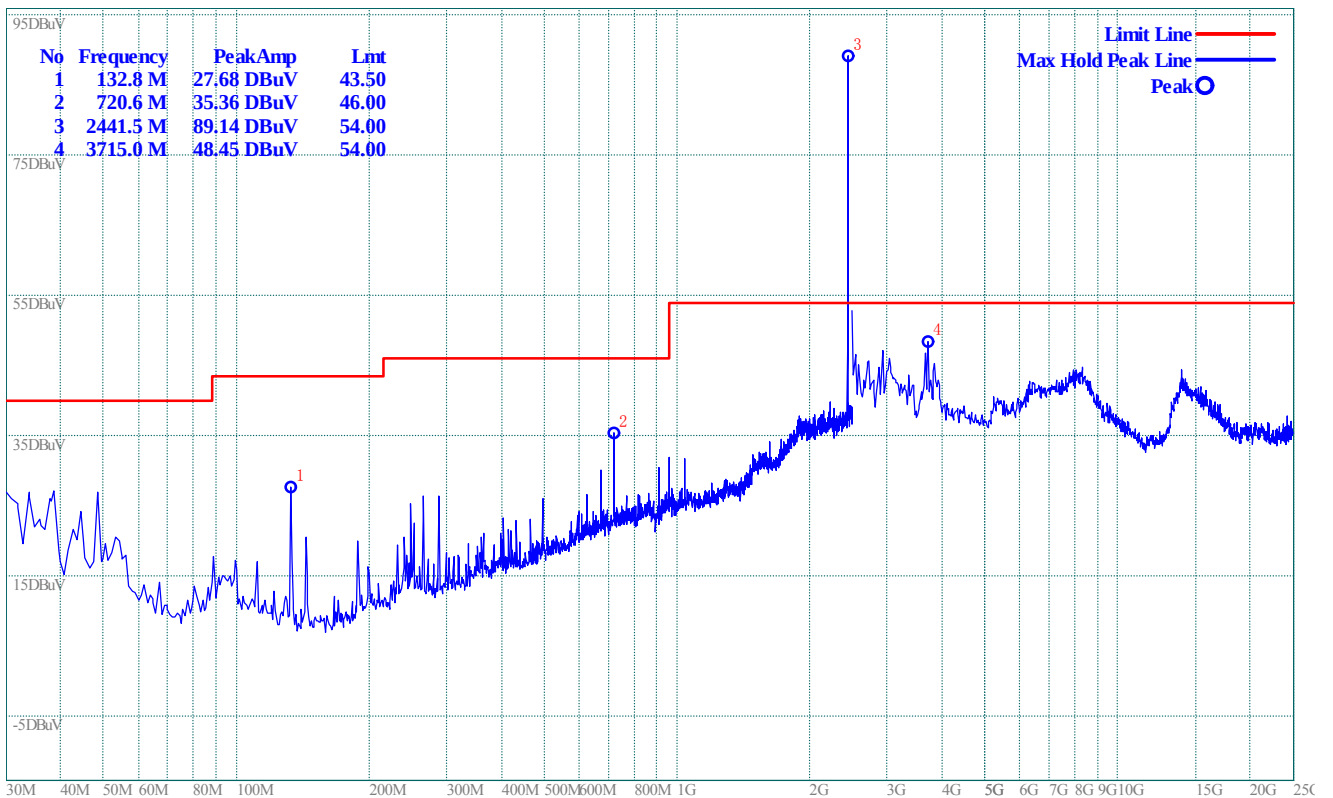


(Plot B.2: Antenna Vertical)


Plot for Channel = 78

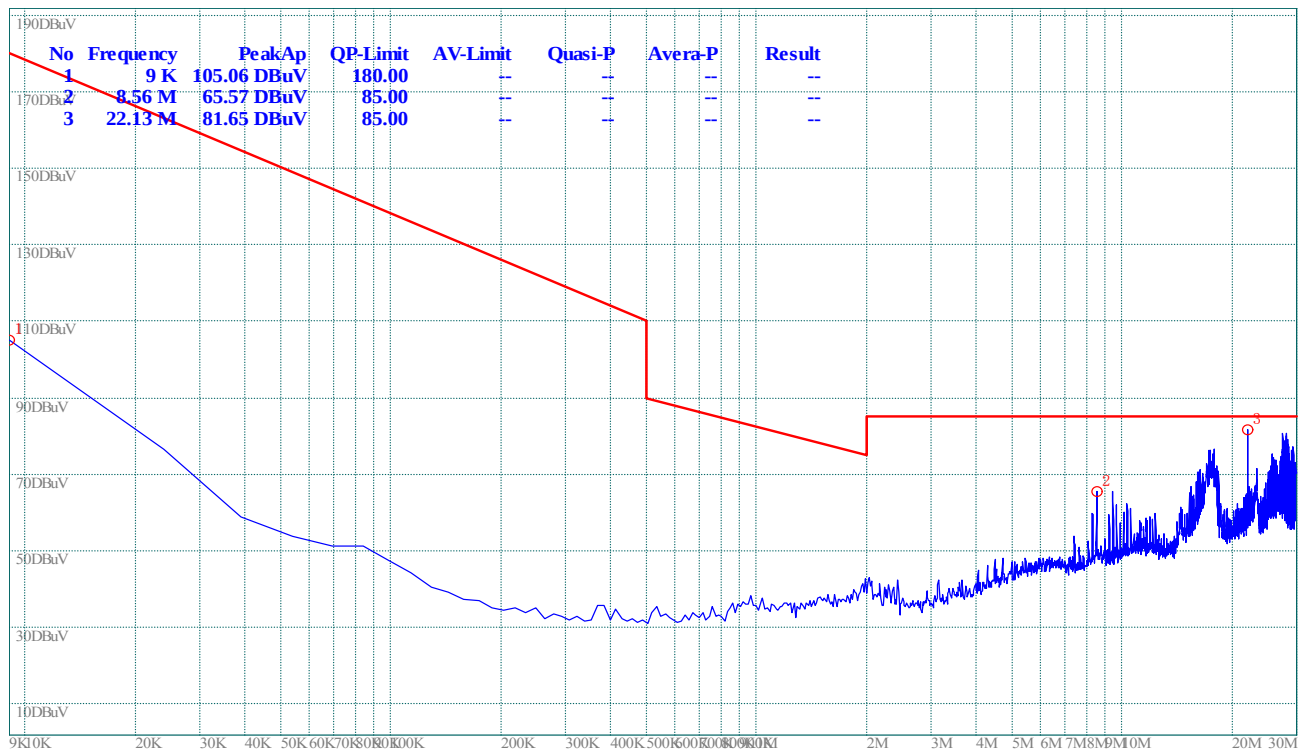

(Plot C.0: 9kHz to 30MHz)

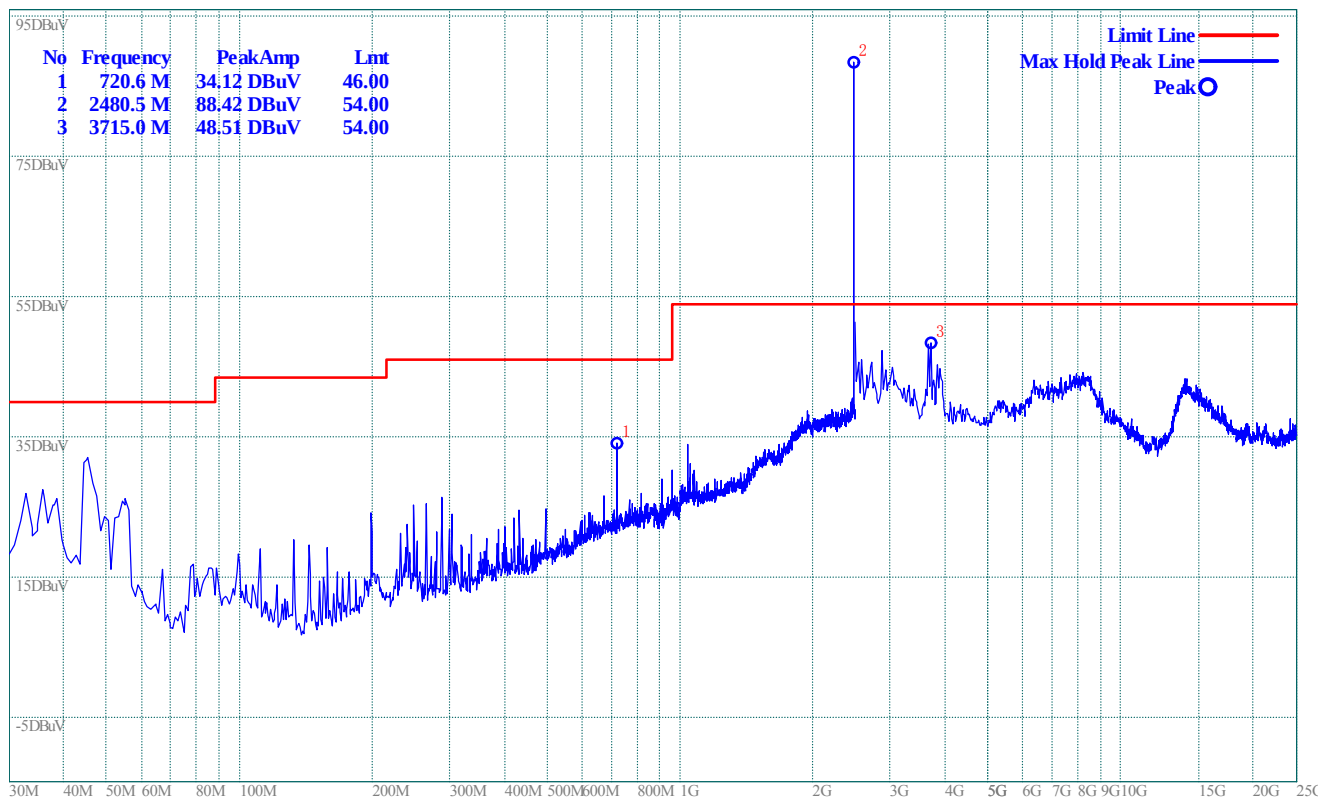

(Plot C.1: Antenna Horizontal)

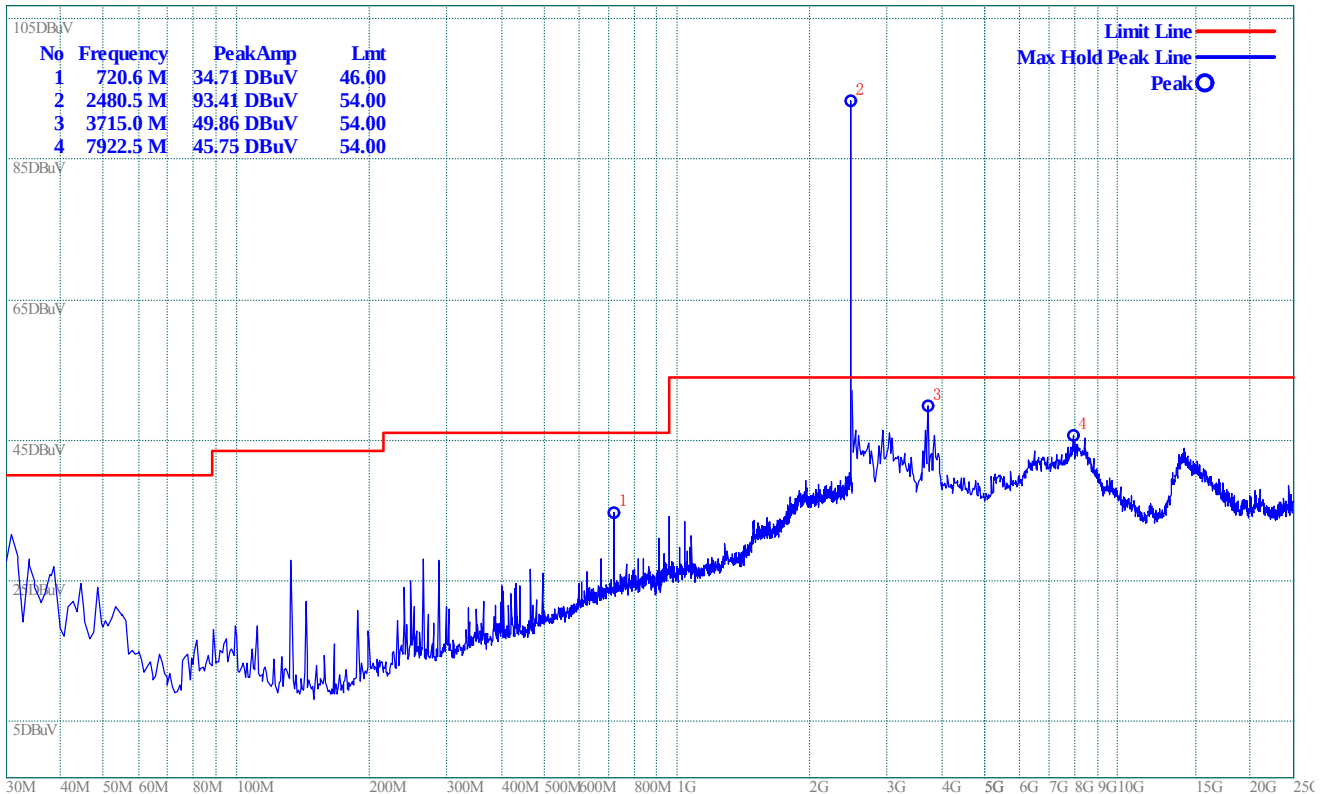

(Plot C.2: Antenna Vertical)

$\pi/4$ -DQPSK Mode:

A. Test Verdict for Harmonics:

The Fundamental Emissions

The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.

Channel	Frequency (MHz)	Fundamental Emission (dB μ V/m)		Antenna Polarization	Refer to Plot
		PK	AV		
0	2402	81.31	70.6	Horizontal	Plot A.1
		87.17	76.4	Vertical	Plot A.2
39	2441	83.74	72.3	Horizontal	Plot B.1
		92.21	81.5	Vertical	Plot B.2
78	2480	82.95	71.4	Horizontal	Plot C.1
		83.96	71.9	Vertical	Plot C.2

The un-wanted Emissions:

Test result of channel: 0 (2402MHz)

Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
720.6 M	34.52	46	-11.48	9	100	Vertical
3.950 G	42.99	54	-11.01	0	100	Vertical
3.940 G	46.26	54	-7.74	67	100	Vertical
598.4 M	37.5	46	-8.5	217	100	Horizontal
2.793 G	48.74	54	-5.26	140	100	Horizontal

Test result of channel: 39 (2442MHz)


Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
720.6 M	34.8	46	-11.2	359	100	Vertical
6.460 G	48.4	54	-5.6	291	100	Vertical
598.4 M	36.48	46	-9.52	211	100	Horizontal
720.6 M	34.49	46	-11.51	198	100	Horizontal

Test result of channel: 78 (2480MHz)


Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
720.6 M	34.17	46	-11.83	33	100	Vertical
912.7 M	31.75	46	-14.25	18	100	Vertical
3.940 G	48.82	54	-5.18	116	100	Vertical
354.0 M	29.74	46	-16.26	214	100	Horizontal
598.4 M	36.72	46	-9.28	220	100	Horizontal
720.6 M	34.6	46	-11.4	220	100	Horizontal
2.793 G	47.54	54	-6.46	140	100	Horizontal

B. Test Plots for the Whole Measurement Frequency Range:


Plots for Channel = 0

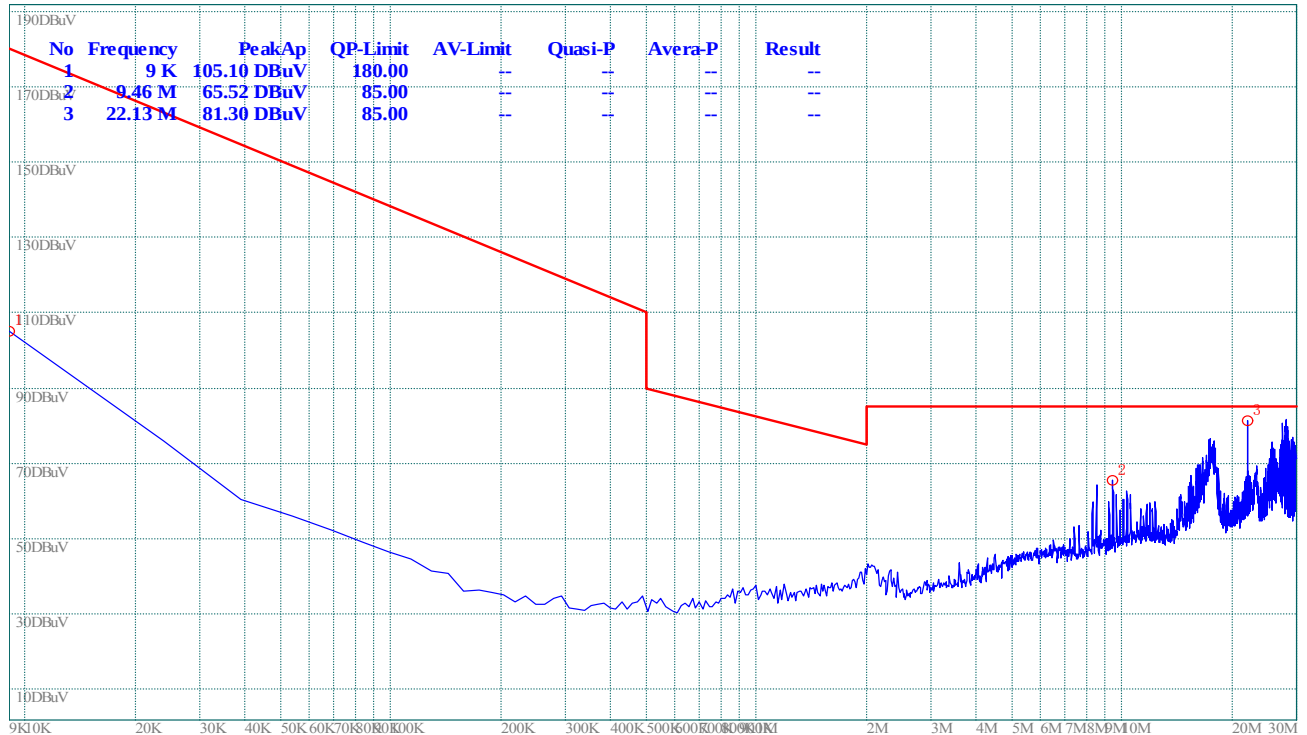

(Plot A.0: 9kHz to 30MHz)

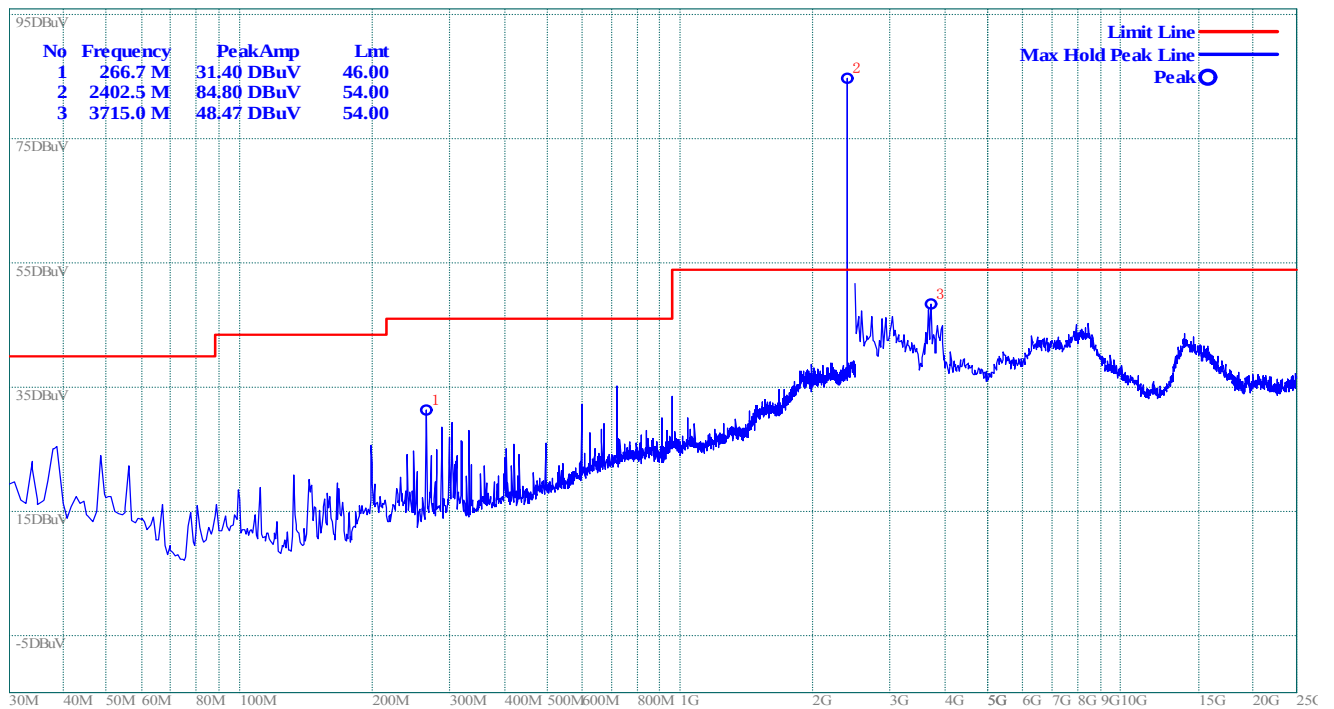


(Plot A.1: Antenna Horizontal)

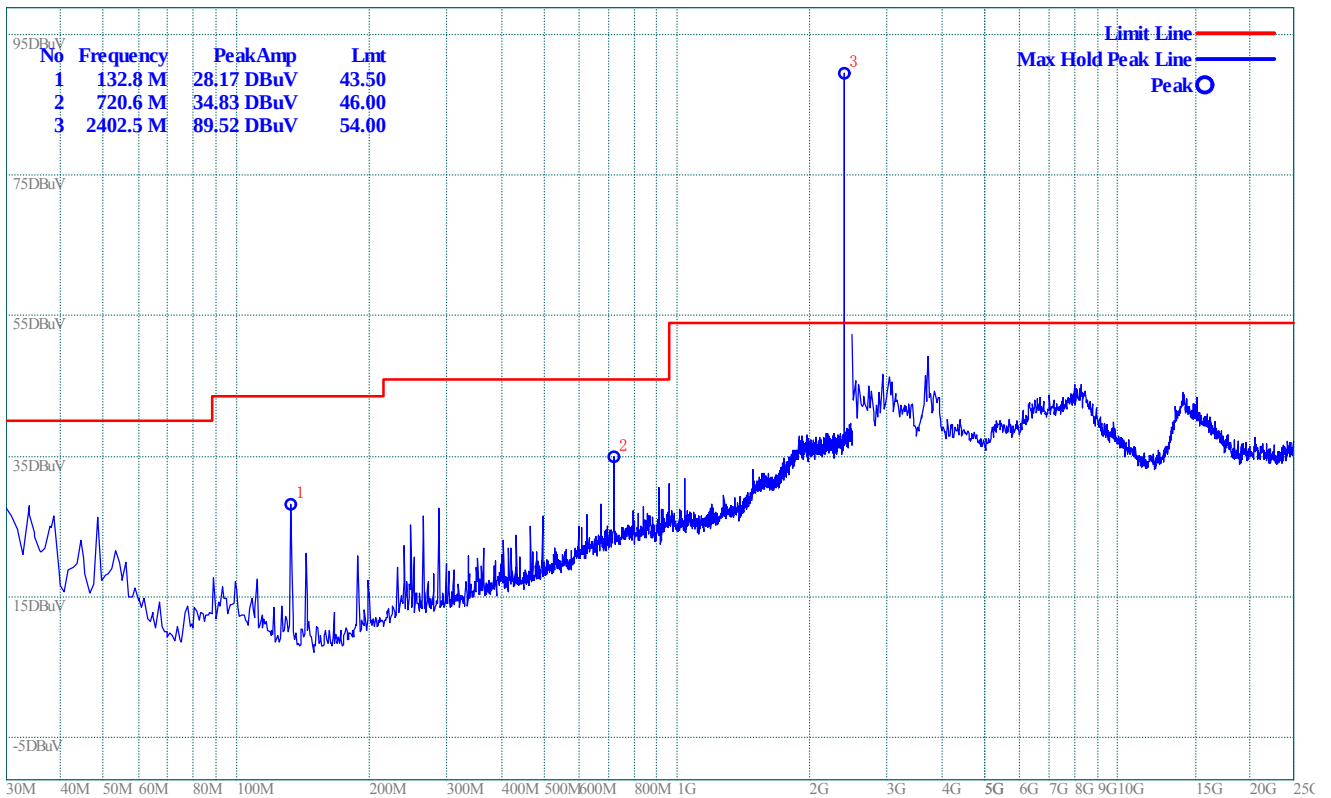


(Plot A.2: Antenna Vertical)


Plot for Channel = 39

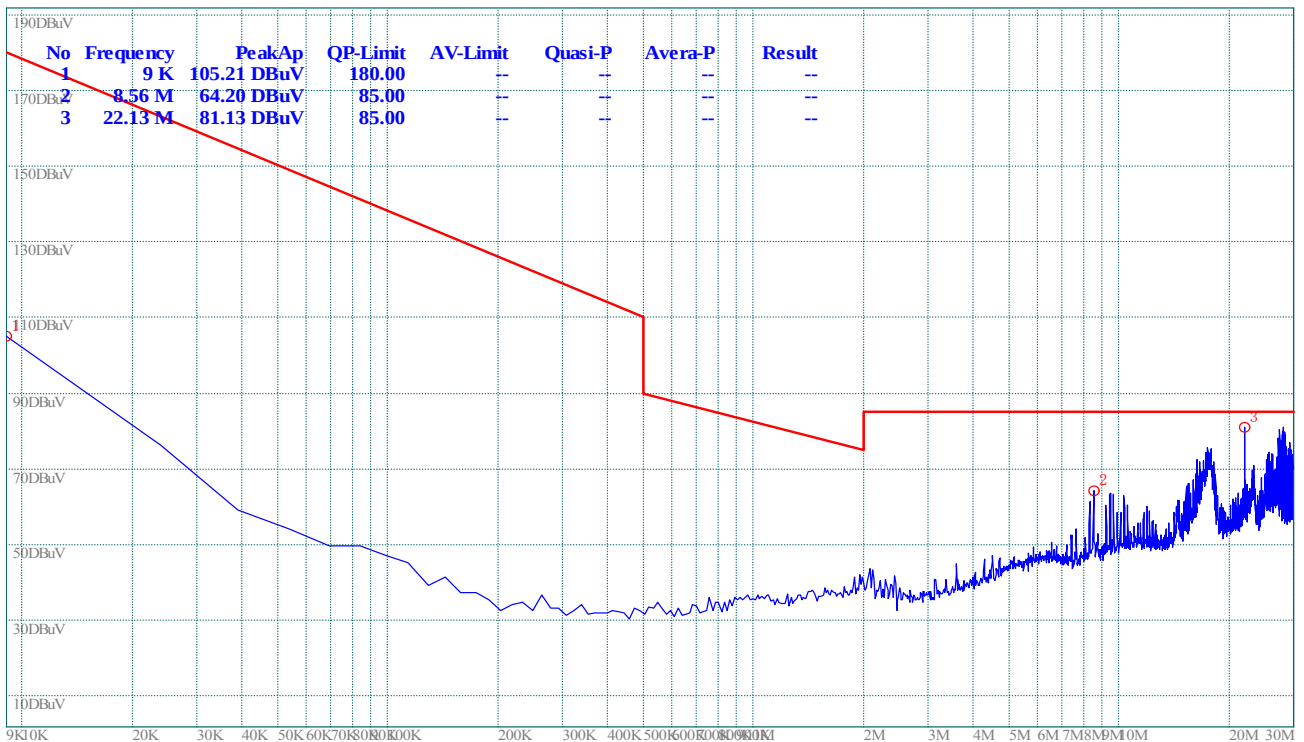

(Plot B.0: 9kHz to 30MHz)

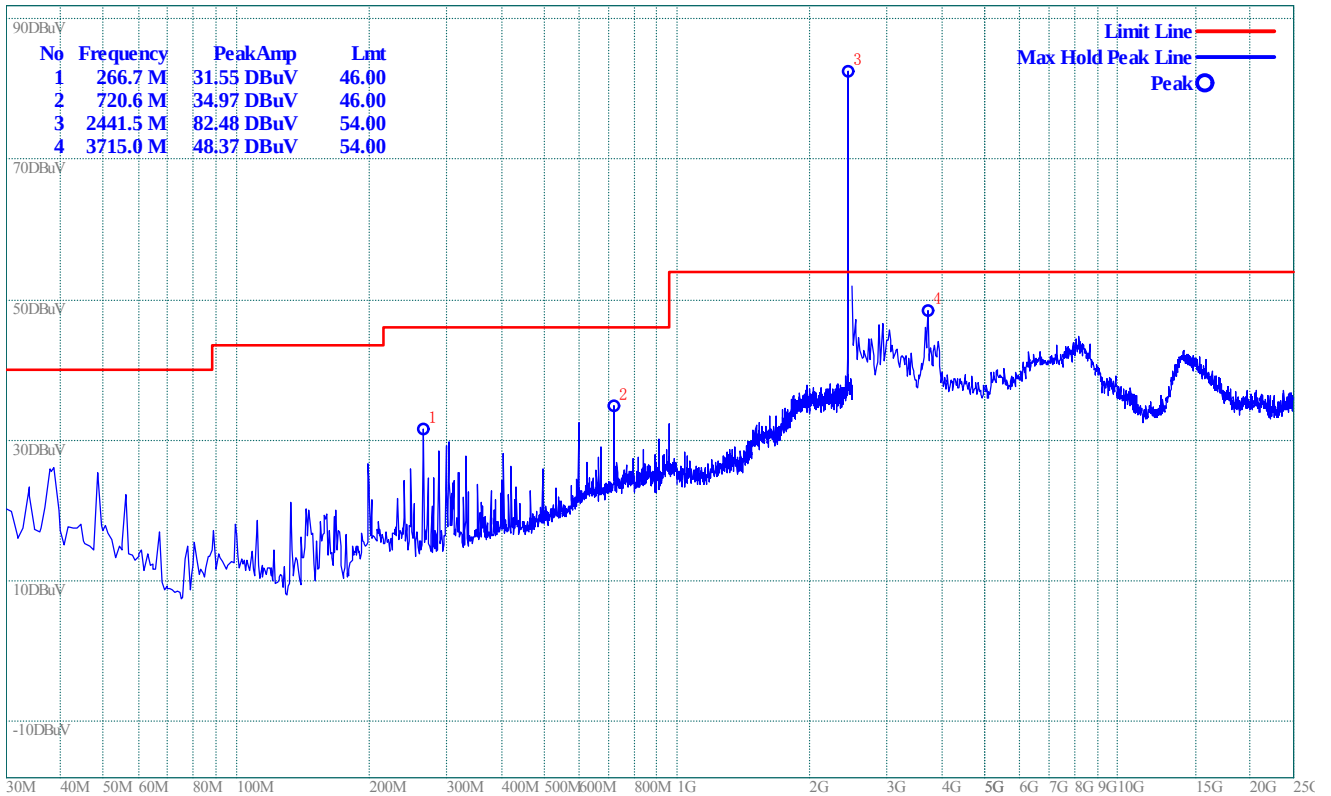


(Plot B.1: Antenna Horizontal)

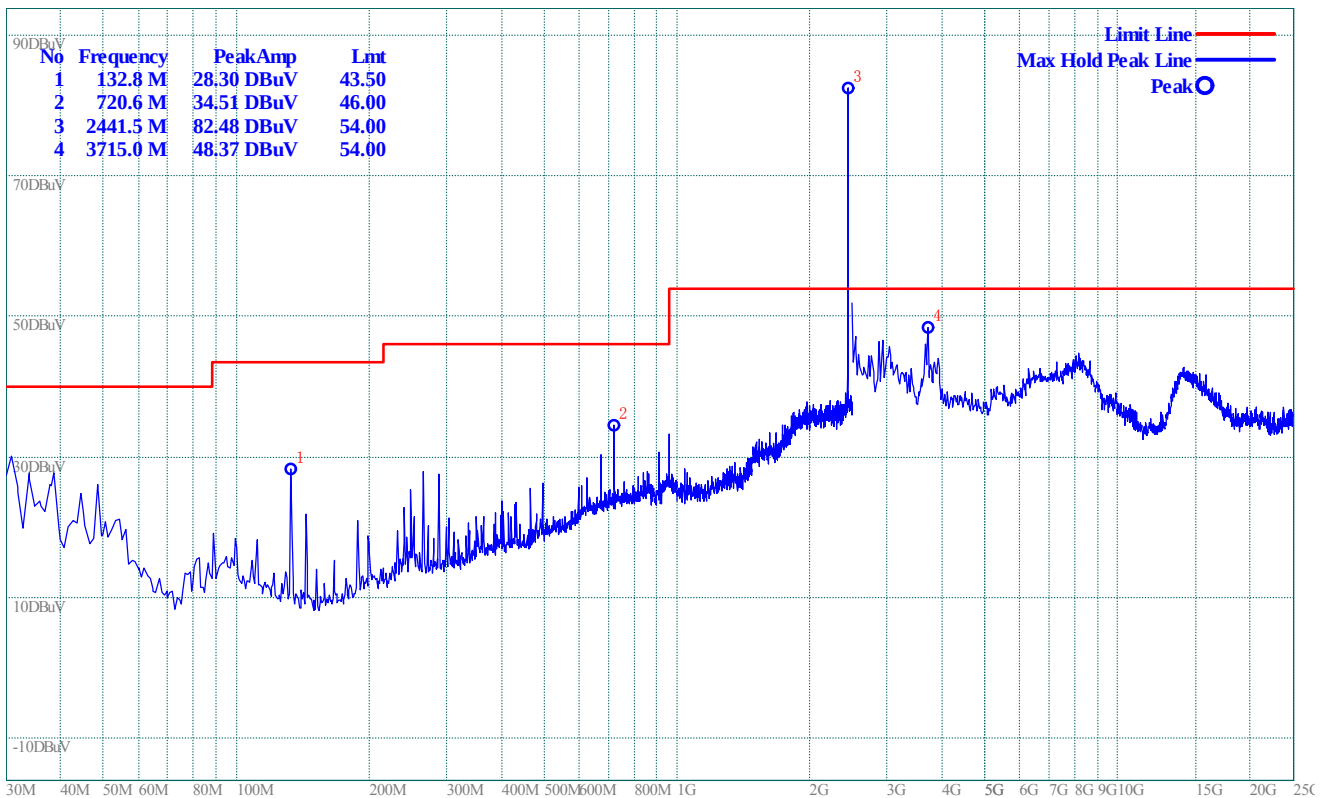


(Plot B.2: Antenna Vertical)


Plot for Channel = 78

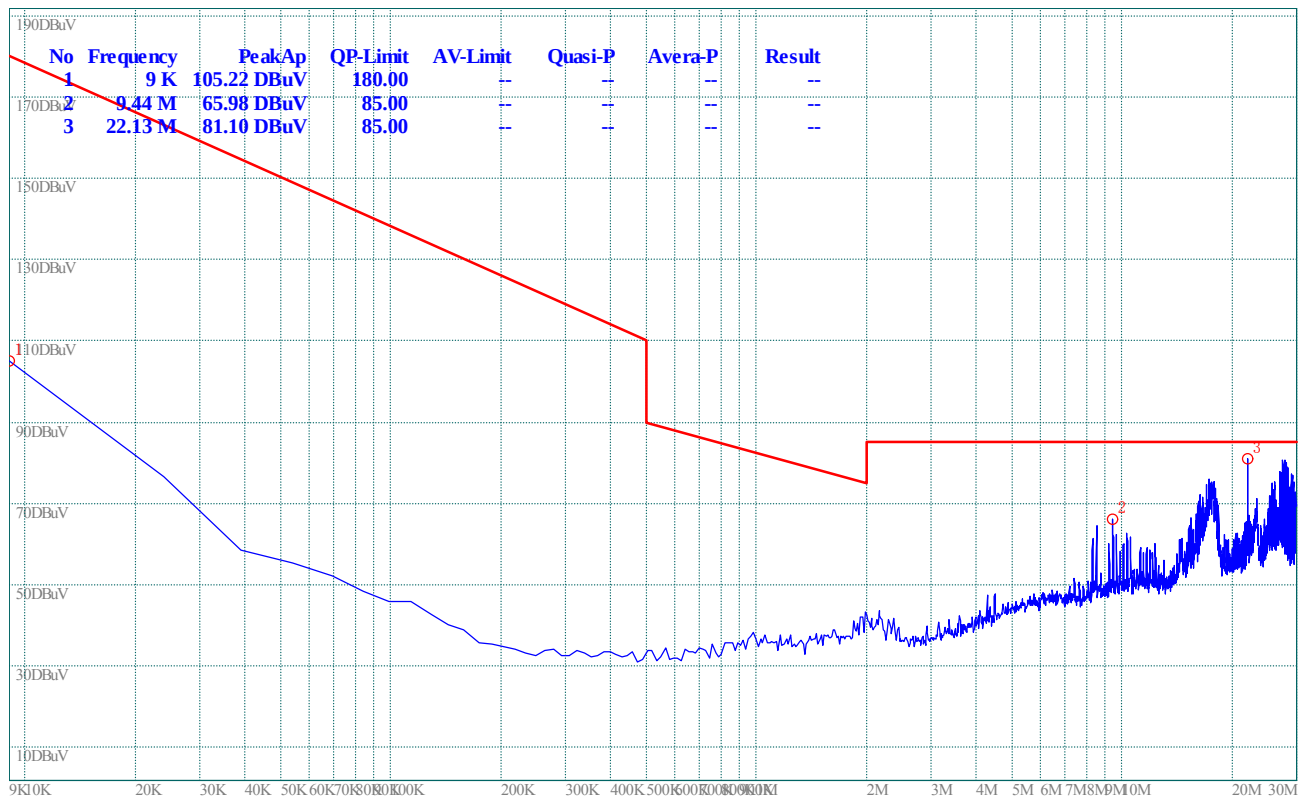

(Plot C.0: 9kHz to 30MHz)

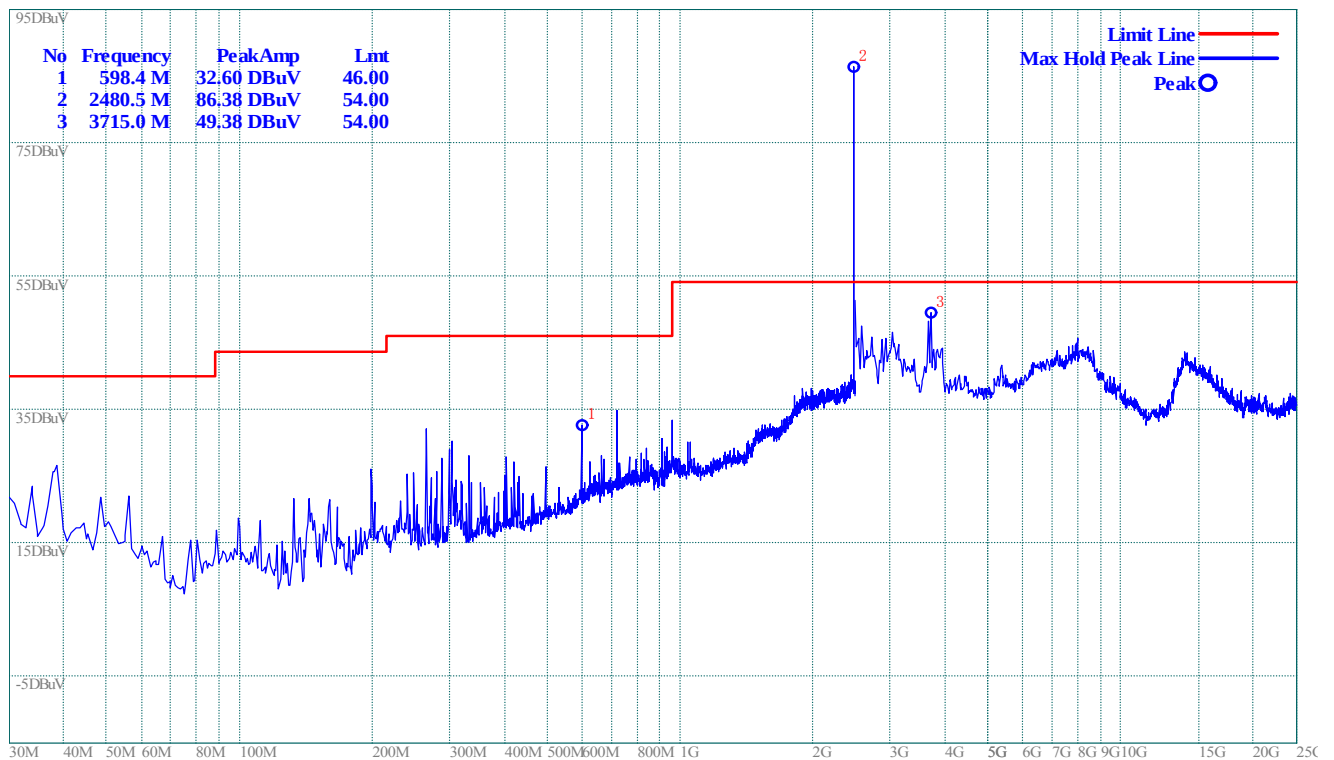

(Plot C.1: Antenna Horizontal)

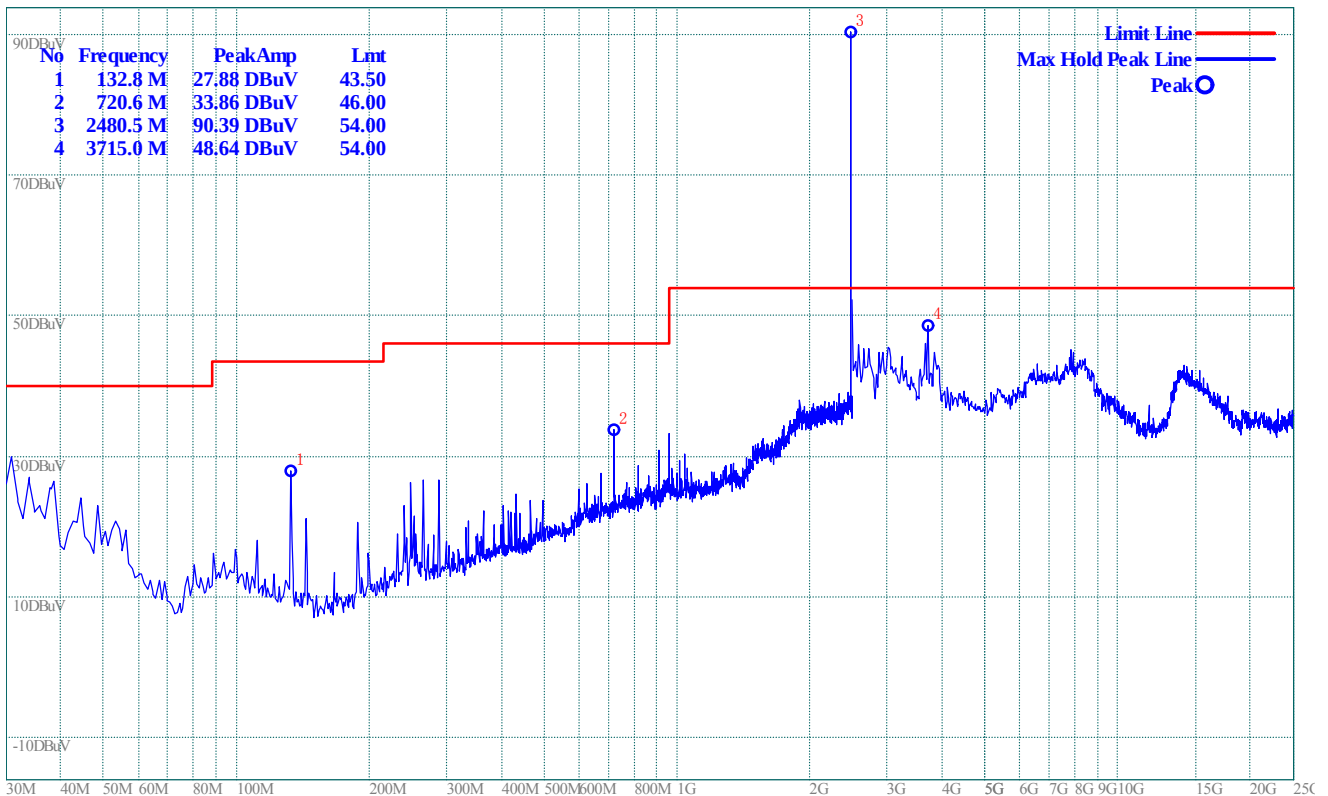

(Plot C.2: Antenna Vertical)

8-DPSK Mode:

A. Test Verdict for Harmonics:

The Fundamental Emissions

The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.

Channel	Frequency (MHz)	Fundamental Emission (dBμV/m)		Antenna Polarization	Refer to Plot
		PK	AV		
0	2402	79.96	70.5	Horizontal	Plot A.1
		86.98	75.8	Vertical	Plot A.2
39	2441	83.66	72.1	Horizontal	Plot B.1
		85.38	73.0	Vertical	Plot B.2
78	2480	79.27	70.2	Horizontal	Plot C.1
		89.38	80.3	Vertical	Plot C.2

The un-wanted Emissions:

Test result of channel: 0 (2402MHz)

Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
53.3 M	36.45	40	-3.55	0	100	Vertical
720.6 M	33.28	46	-12.72	4	100	Vertical
720.6 M	34.16	46	-11.84	0	100	Horizontal
912.7 M	32.09	46	-13.91	31	100	Horizontal
3.940 G	47.44	54	-6.56	244	100	Horizontal

Test result of channel: 39 (2442MHz)


Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
289.0 M	23.12	46	-22.88	0	100	Vertical
720.6 M	34.26	46	-11.74	2	100	Vertical
598.4 M	35.92	46	-10.08	216	100	Horizontal
720.6 M	34.7	46	-11.3	176	100	Horizontal

Test result of channel: 78 (2480MHz)


Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
720.6 M	33.33	46	-12.67	136	100	Vertical
912.7 M	32.55	46	-13.45	18	100	Vertical
3.940 G	47.38	54	-6.62	315	100	Vertical
598.4 M	33.72	46	-12.28	226	100	Horizontal
720.6 M	33.59	46	-12.41	327	100	Horizontal

B. Test Plots for the Whole Measurement Frequency Range:


Plots for Channel = 0

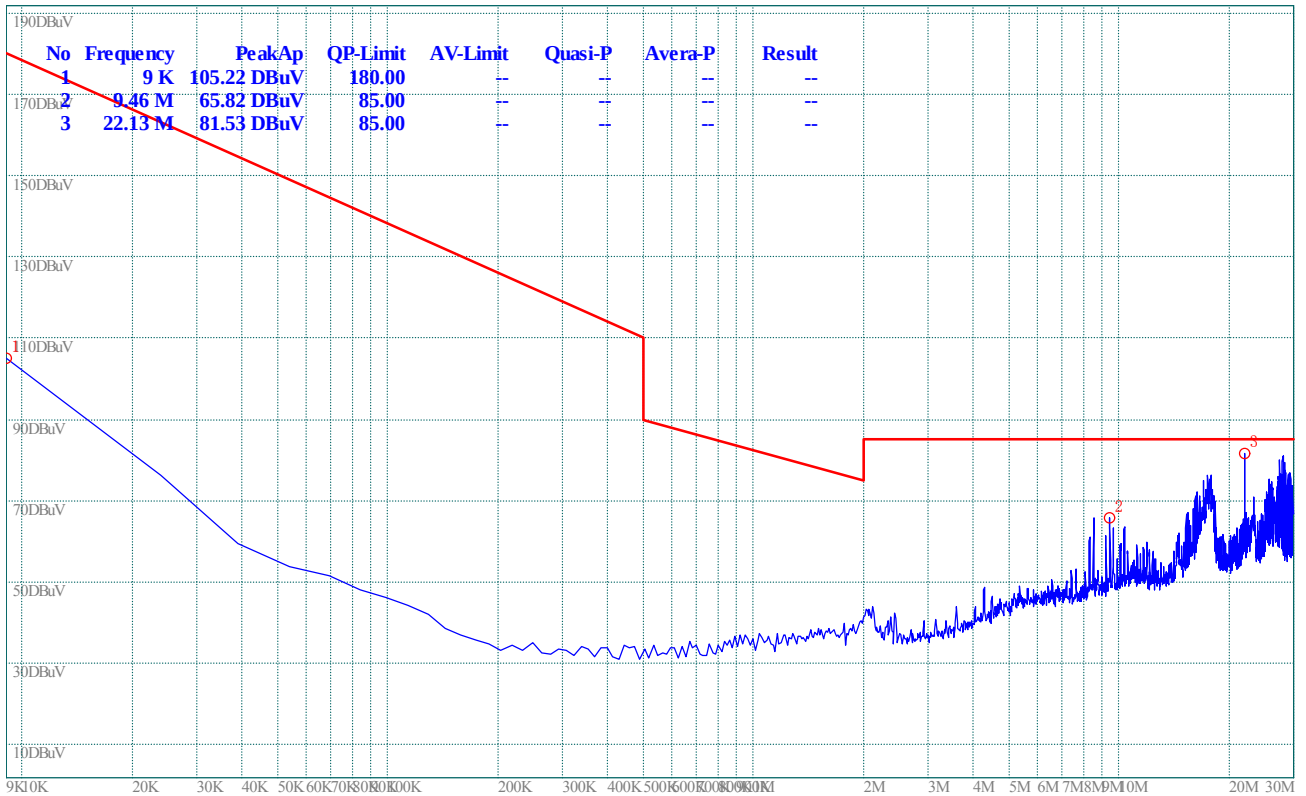

(Plot A.0: 9kHz to 30MHz)

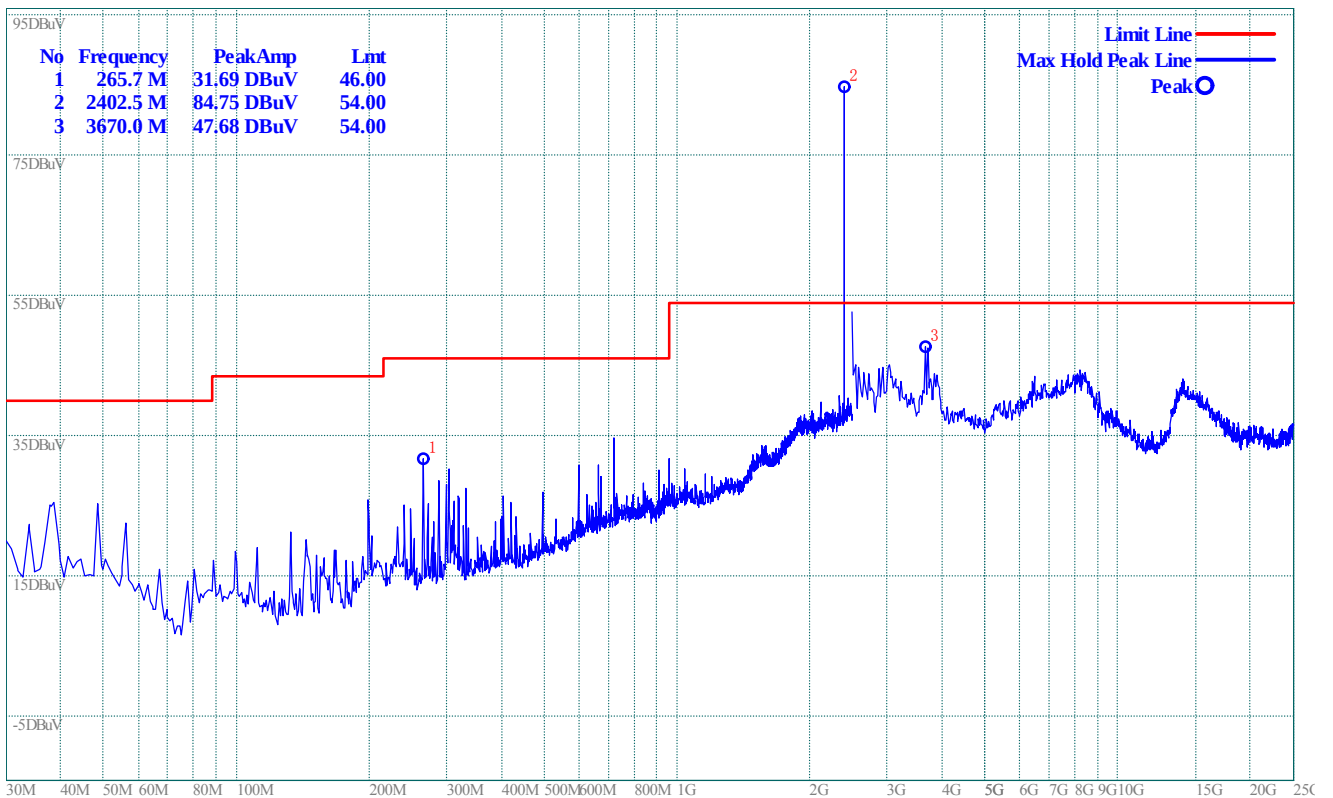


(Plot A.1: Antenna Horizontal)

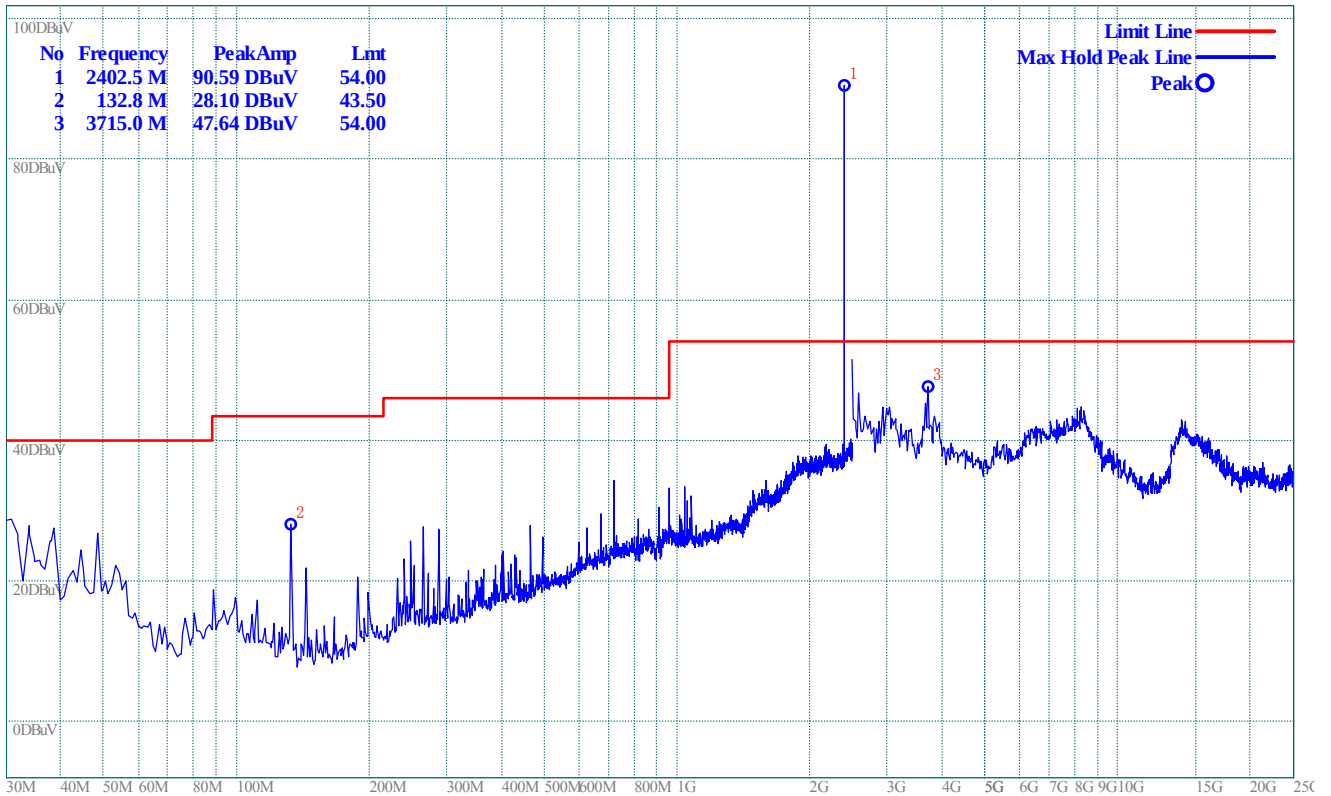


(Plot A.2: Antenna Vertical)


Plot for Channel = 39

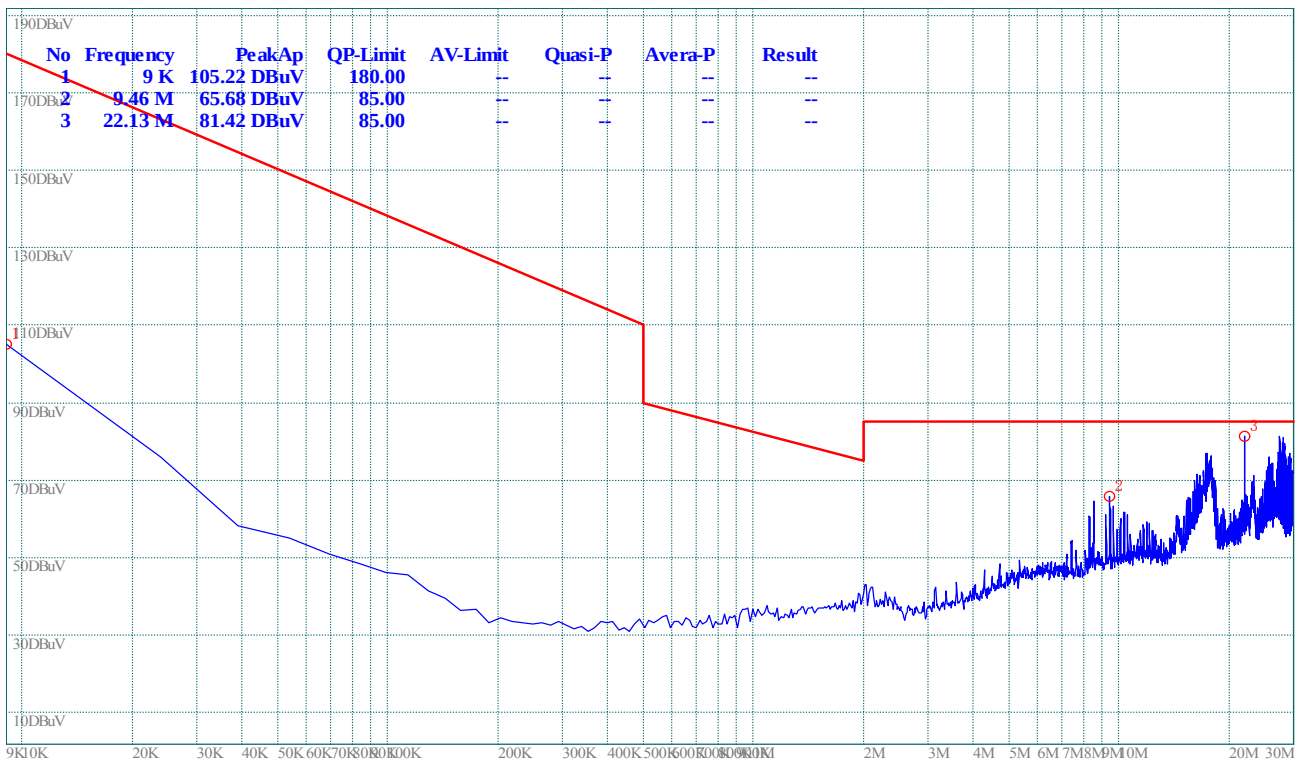

(Plot B.0: 9kHz to 30MHz)

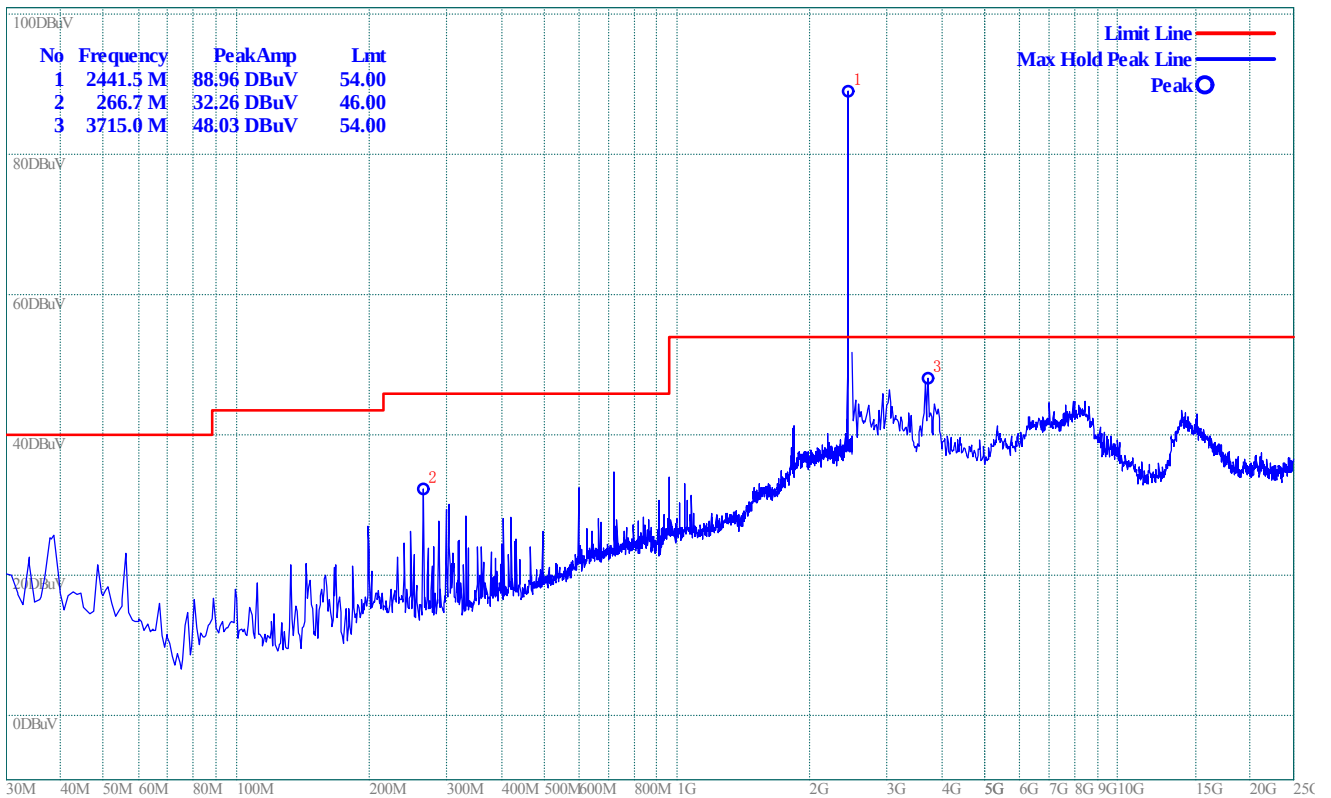


(Plot B.1: Antenna Horizontal)

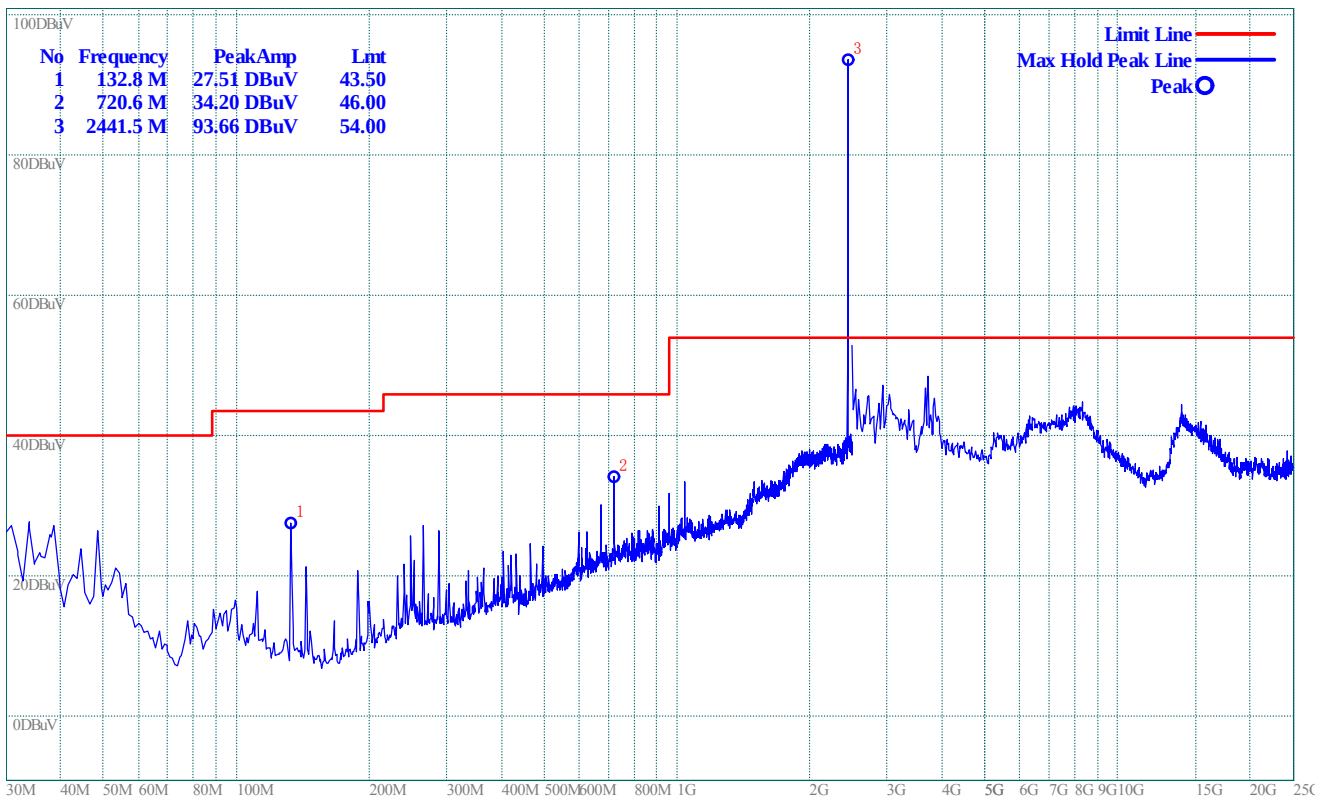


(Plot B.2: Antenna Vertical)


Plot for Channel = 78

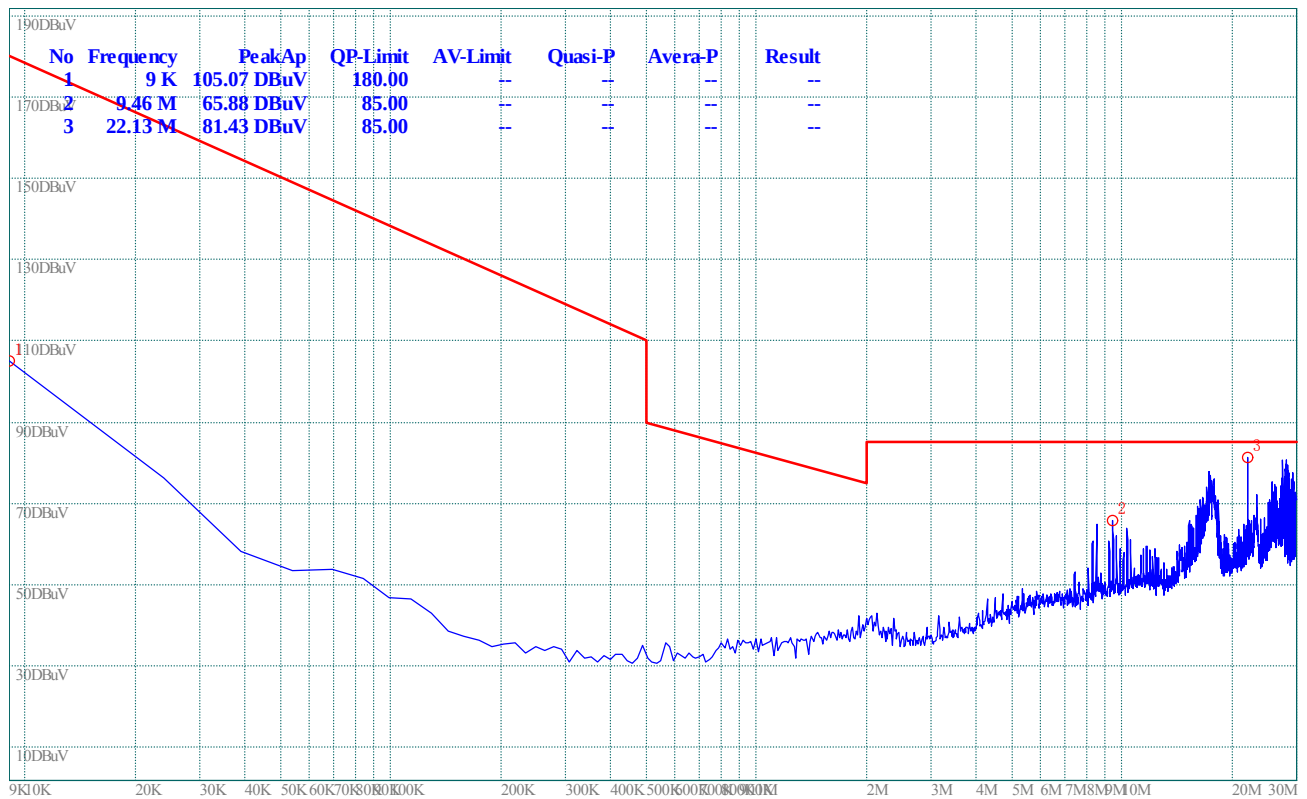

(Plot C.0: 9kHz to 30MHz)

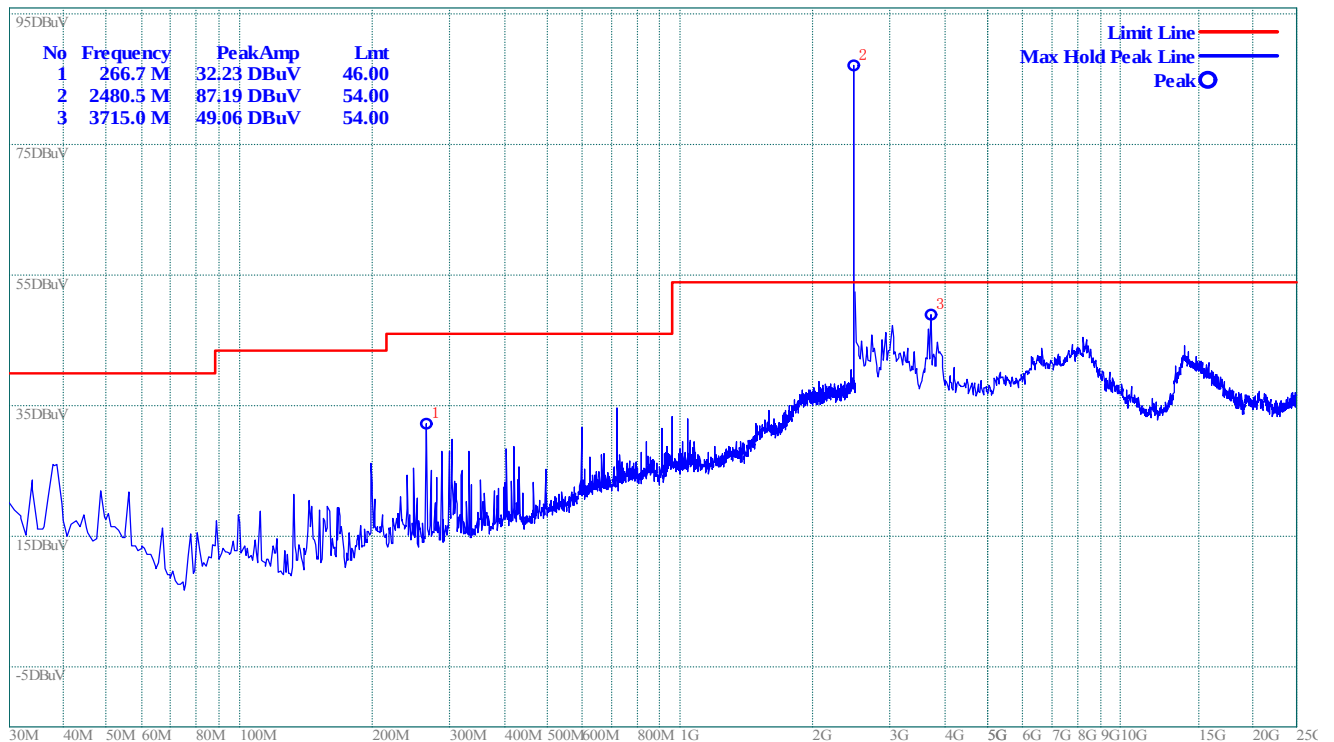

(Plot C.1: Antenna Horizontal)

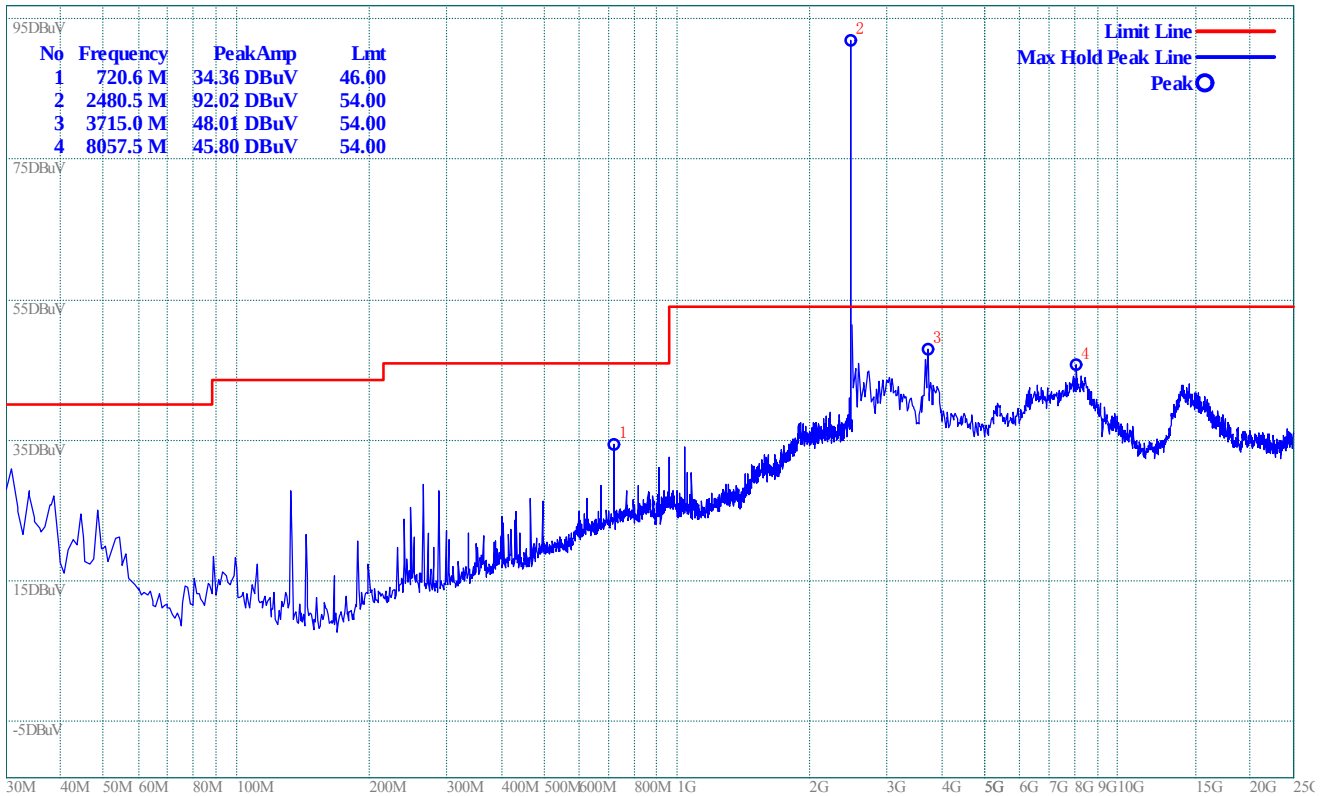

(Plot C.2: Antenna Vertical)

** END OF REPORT **