



# Variant FCC RF Test Report

**APPLICANT** : Cellon Communications Technology Co., Ltd.  
**EQUIPMENT** : GSM850/900/1800/1900 UMTS850/1900 GPRS.  
EDGE. BT mobile phone  
**BRAND NAME** : enspire, Claro, Ring; D-mobile  
**MODEL NAME** : C3021, A1028, 1028CA, 1028EN, 1028EC,  
DM3021K  
**FCC ID** : T38PCD3031  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DSS) Spread Spectrum Transmitter

This is a variant report which is only valid together with the original report. The product was received on Apr. 12, 2013 and completely tested on Jun. 01, 2013. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.

Reviewed by:

Jones Tsai / Manager



***SPORTON INTERNATIONAL (SHENZHEN) INC.***  
No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District,  
Shenzhen, Guangdong, P.R.C.



## TABLE OF CONTENTS

<b>REVISION HISTORY.....</b>	<b>3</b>
<b>SUMMARY OF TEST RESULT .....</b>	<b>4</b>
<b>1 GENERAL DESCRIPTION.....</b>	<b>5</b>
1.1 Applicant .....	5
1.2 Manufacturer.....	5
1.3 Feature of Equipment Under Test .....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Testing Site.....	6
1.6 Applied Standards .....	6
<b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....</b>	<b>7</b>
2.1 Descriptions of Test Mode .....	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system .....	10
2.5 Description of RF Function Operation Test Setup.....	10
2.6 Measurement Results Explanation Example.....	11
<b>3 TEST RESULT .....</b>	<b>12</b>
3.1 Peak Output Power Measurement .....	12
3.2 Radiated Band Edges and Spurious Emission Measurement .....	14
3.3 AC Conducted Emission Measurement.....	22
3.4 Antenna Requirements .....	26
<b>4 LIST OF MEASURING EQUIPMENT.....</b>	<b>27</b>
<b>5 UNCERTAINTY OF EVALUATION.....</b>	<b>28</b>
<b>APPENDIX A. PHOTOGRAPHS OF EUT</b>	
<b>APPENDIX B. SETUP PHOTOGRAPHS</b>	
<b>APPENDIX C. PRODUCT EQUALITY DECLARATION</b>	



# REVISION HISTORY



## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(b)(1)	Peak Output Power	≤ 1 w for 1Mbps ≤ 125 Mw for 2, 3Mbps	Pass	-
3.2	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 15.84 dB at 31.940 MHz
3.3	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 12.46 dB at 0.200 MHz
3.4	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



## 1 General Description

### 1.1 Applicant

**Cellon Communications Technology Co., Ltd.**

11f, Skyworth C Buuiling, Gaoxin S.Ave.1., Hi-Tech Industrial Park, Nanshan.Shenzhen

### 1.2 Manufacturer

**Cellon Communications Technology Co., Ltd.**

11f, Skyworth C Buuiling, Gaoxin S.Ave.1., Hi-Tech Industrial Park, Nanshan.Shenzhen

### 1.3 Feature of Equipment Under Test

Product Feature	
<b>Equipment</b>	GSM850/900/1800/1900 UMTS850/1900 GPRS. EDGE. BT mobile phone
<b>Brand Name</b>	enspire, Claro, Ring; D-mobile
<b>Model Name</b>	C3021, A1028, 1028CA, 1028EN, 1028EC, DM3021K
<b>FCC ID</b>	T38PCD3031
<b>EUT supports Radios application</b>	GSM/GPRS/EGPRS/WCDMA/Bluetooth
<b>HW Version</b>	V1.0
<b>SW Version</b>	V1.0
<b>EUT Stage</b>	Identical Prototype

**Remark:**

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. The different brand names and model names are identical on hardware. The only difference is the label of different branding for different customer.

### 1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
<b>Tx/Rx Frequency Range</b>	2402 MHz ~ 2480 MHz
<b>Number of Channels</b>	79
<b>Carrier Frequency of Each Channel</b>	2402+n*1 MHz; n=0~78
<b>Maximum Output Power to Antenna</b>	Bluetooth BDR (1Mbps) : 8.05 dBm (0.00638 W) Bluetooth EDR (2Mbps) : 7.75 dBm (0.00596 W) Bluetooth EDR (3Mbps) : 8.01 dBm (0.00632 W)
<b>Antenna Type</b>	PIFA Antenna with gain 1.63 dBi
<b>Type of Modulation</b>	Bluetooth BDR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK



## 1.5 Testing Site

<b>Test Site</b>	SPORTON INTERNATIONAL (SHENZHEN) INC.		
<b>Test Site Location</b>	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P.R.C. TEL: +86-755- 3320-2398		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		<b>FCC/IC Registration No.</b>
	TH01-SZ	CO01-SZ	03CH01-SZ

The test site complies with ANSI C63.4 2003 requirement.

## 1.6 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC Public Notice DA 00-705
- ♦ ANSI C63.10-2009

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Descriptions of Test Mode

Preliminary tests were performed in different data rate and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
Ch00	2402MHz	8.05 dBm	7.75 dBm	8.01 dBm
Ch39	2441MHz	7.27 dBm	7.04 dBm	7.27 dBm
Ch78	2480MHz	7.17 dBm	6.86 dBm	7.10 dBm

**Remark:**

1. All the test data for each data rate were verified, but only the worst case was reported.
2. The data rate was set in 1Mbps for all the test items due to the highest RF output power.

a. The EUT has been associated with peripherals pursuant to ANSI C63.10-2009 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 KHz to 30 MHz), radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels, and different data rates were conducted to determine the final configuration (Y plane as worst plane) from all possible combinations, and the worst mode of radiated spurious emissions is Bluetooth 1Mbps mode, and recorded in this report.

b. AC power line Conducted Emission was tested under maximum output power.




## 2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BDR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Power	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz	Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz
Radiated Test Cases	Bluetooth BDR 1Mbps GFSK		
	Mode 1: CH78_2480 MHz		
AC Conducted Emission	Mode 1 :GSM 850 Idle + Bluetooth Link + Adapter + Camera		
<b>Remark:</b> For radiated test cases, the worst mode data rate 1Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and the conducted spurious emissions and conducted band edge measurement for each data rate are no worse than 1Mbps, and no other significantly frequencies found in conducted spurious emission.			

## 2.3 Connection Diagram of Test System

### <Bluetooth Tx Mode>

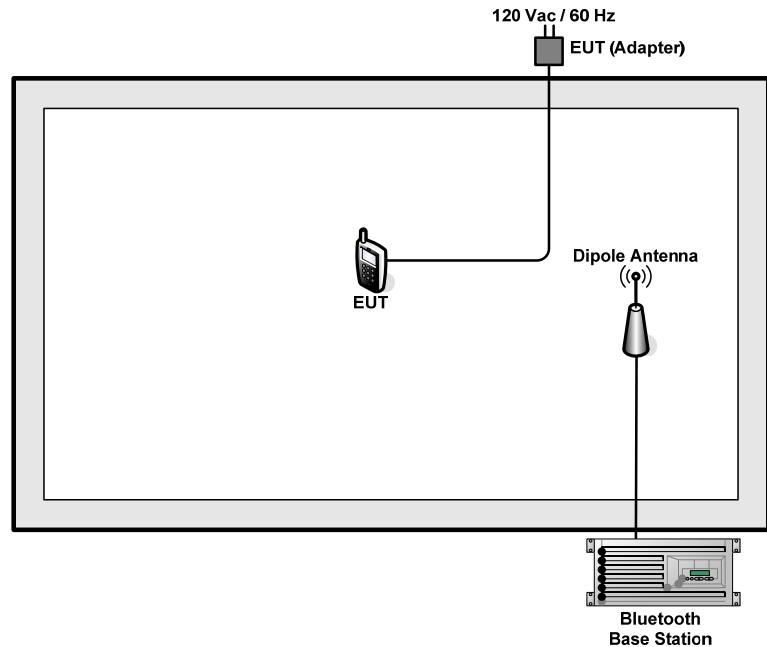

### <AC Conducted Emission Mode>

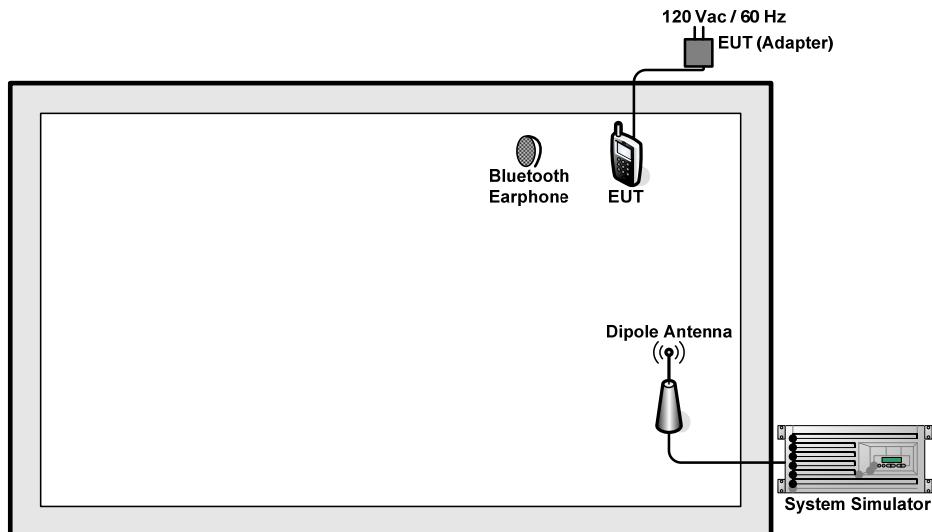



## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Agilent	E5515C	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Base Station	Anritsu	MT8852B	FCC DoC	N/A	Unshielded, 1.8 m
3.	DC Power Supply	TOPWORD	3303DR	N/A	N/A	Unshielded, 1.8 m
4.	Bluetooth Earphone	Nokia	BH-108	N/A	N/A	N/A

## 2.5 Description of RF Function Operation Test Setup

For Bluetooth function, key in “\* # 3646633 #” on the EUT directly. Then, the EUT will get into the engineering modes to contact with Bluetooth base station for continuous transmitting and receiving signals.

## **2.6 Measurement Results Explanation Example**

### **For conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and 10dB attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and 10dB attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following table shows an offset computation example with cable loss 5.6 dB.

Example :

*Offset(dB) = RF cable loss(dB) + attenuator factor(dB).*

= 5.6 + 10 = 15.6 (dB)

### **For radiated band edges and spurious emission test :**

Per part 15.35(c), the EUT Bluetooth average emission level could be determined by the peak emission level applying duty cycle correction factor, to represent averaging over the whole pulse train.

The average level is derived from the peak level corrected with “Duty cycle correction factor”.

*Average Emission Level(dBuV/m) = Peak Emission Level(dBuV/m) + Duty cycle correction factor(dB)*

*Duty cycle correction factor(dB) = 20 \* log(Duty cycle).*

Duty cycle = On time / 100 milliseconds

On time = dwell time \* hopping number in 100 ms

For example : bluetooth with dwell time 2.9ms and 2 hops in 100 ms, then

Duty cycle correction factor(dB) = 20 \* log( (2.9 \* 2) / 100 ) = -24.73 dB

Following shows an average computation example with duty cycle correction factor = -24.73dB, and the peak emission level is 45.61 dBuV/m.

Example :

*Average Emission Level(dBuV/m) = Peak Emission Level(dBuV/m) + duty cycle correction factor(dB)*  
= 45.61 + ( -24.73 ) = 20.88 (dBuV/m)

## **3 Test Result**

### **3.1 Peak Output Power Measurement**

#### **3.1.1 Limit of Peak Output Power**

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps is 1watt, and for 2Mbps, and 3Mbps are 0.125 watts.


#### **3.1.2 Measuring Instruments**

See list of measuring instruments of this test report.

#### **3.1.3 Test Procedures**

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
1. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Measure the conducted output power with cable loss and record the results in the test report.
4. Measure and record the results in the test report.

#### **3.1.4 Test Setup**

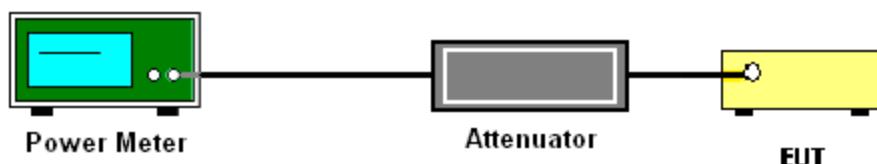

**3.1.5 Test Result of Peak Output Power**

<b>Test Mode :</b>	1Mbps	<b>Temperature :</b>	22~23°C
<b>Test Engineer :</b>	Leo Liao	<b>Relative Humidity :</b>	43~44%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	8.05	30.00	Pass
39	2441	7.27	30.00	Pass
78	2480	7.17	30.00	Pass



## 3.2 Radiated Band Edges and Spurious Emission Measurement

### 3.2.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 KHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

### 3.2.2 Measuring Instruments

See list of measuring instruments of this test report.




### **3.2.3 Test Procedures**

1. The testing follows the guidelines in Spurious Radiated Emissions of FCC Public Notice DA 00-705 Measurement Guidelines and fulfills ANSI C63.4-2003 and the guidelines in ANSI C63.10-2009 test site requirement.
2. The EUT was placed on a turntable with 0.8 meter above ground.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 KHz for  $f < 1$  GHz, RBW=1MHz for  $f > 1$  GHz ; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
  - (3) For average measurement: use duty cycle correction factor method per 15.35(c).  
Duty cycle = On time/100 milliseconds  
On time =  $N_1 \cdot L_1 + N_2 \cdot L_2 + \dots + N_{n-1} \cdot L_{n-1} + N_n \cdot L_n$   
Where  $N_1$  is number of type 1 pulses,  $L_1$  is length of type 1 pulses, etc.  
Average Level = Peak Level +  $20 \cdot \log(\text{Duty cycle})$
8. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (24.79dB) derived from  $20 \log(\text{dwell time}/100\text{ms})$ .

### 3.2.4 Test Setup


For radiated emissions below 30MHz

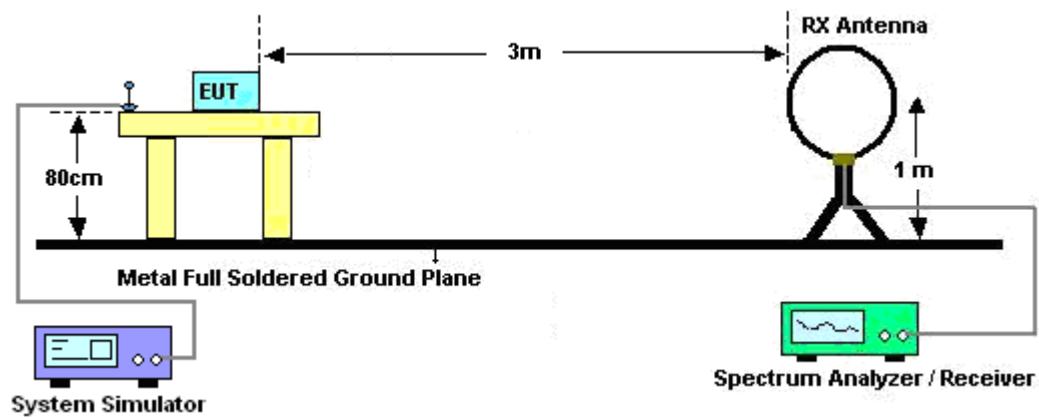

For radiated emissions from 30MHz to 1GHz

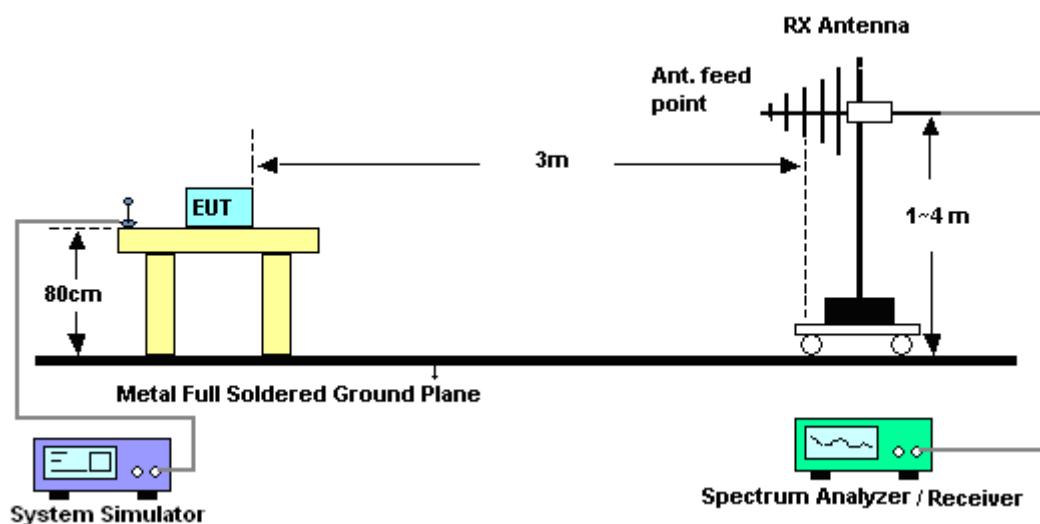

**For radiated emissions above 1GHz**

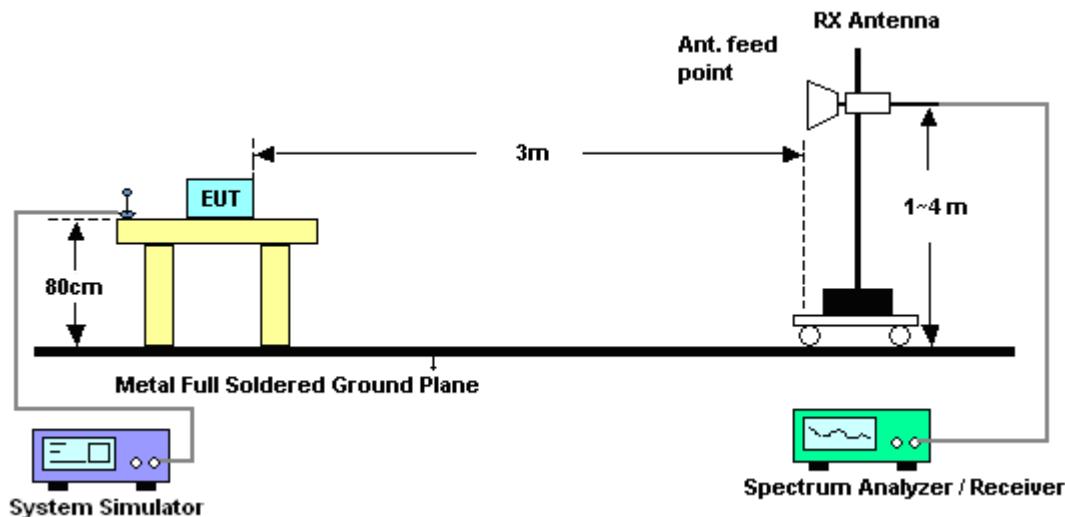


### **3.2.5 Test Results of Radiated Spurious Emission (9 KHz ~ 30 MHz)**

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.


### 3.2.6 Duty cycle correction factor for average measurement

## DH5 on time/100ms (One Pulse) Plot on Channel 39

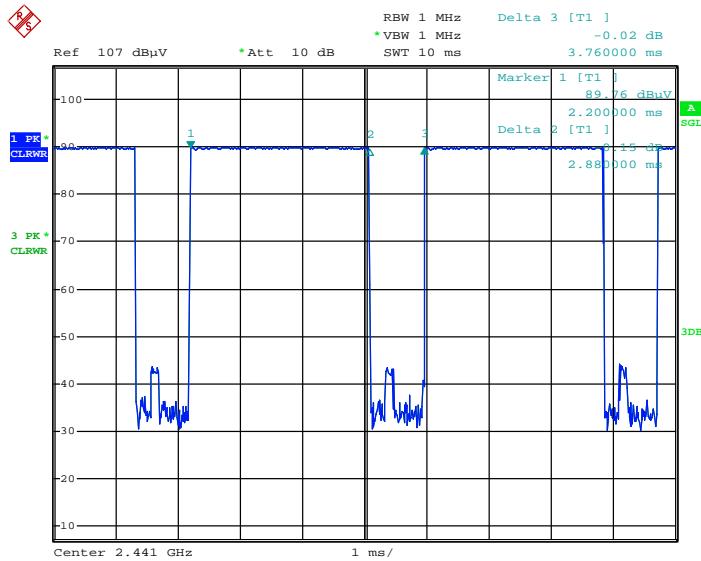

Date: 1.JUN.2013 13:02:19

## DH5 on time/100ms (Count Pulses) Plot on Channel 39

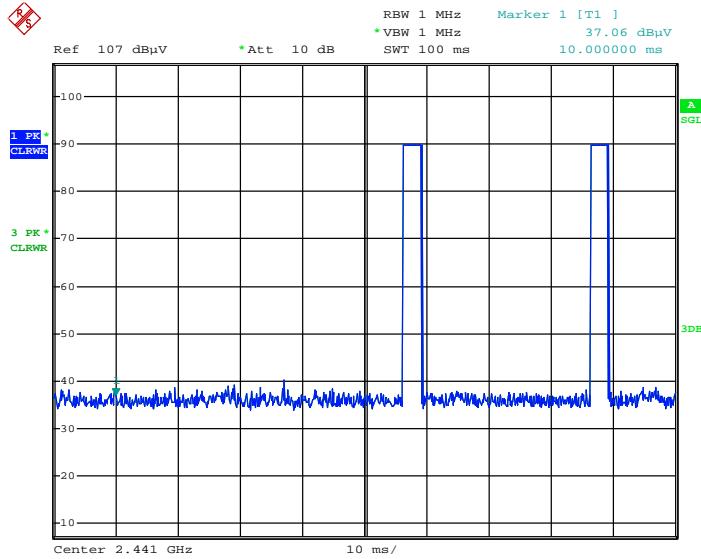

Date: 1.JUN.2013 12:53:05

## Note:

1. Duty cycle = on time/100 milliseconds =  $2 * 2.88 / 100 = 5.76\%$
2. Duty cycle correction factor =  $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. DH5 has the highest duty cycle and is reported.



### 3.2.7 Test Result of Radiated Band Edges

Test Mode :	1Mbps			Temperature :	23~24°C			
Test Channel :	78			Relative Humidity :	55~56%			
					Test Engineer :	Robin Luo		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.5	57.59	-16.41	74	50.61	32.27	4.47	29.76	169	65	Peak
2483.5	32.80	-21.20	54	-	-	-	-	-	-	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.5	55.93	-18.07	74	48.95	32.27	4.47	29.76	100	297	Peak
2483.5	31.14	-22.86	54	-	-	-	-	-	-	Average

Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (24.79dB) derived from  $20\log(\text{dwell time}/100\text{ms})$ .

For example: Average level = 57.59dB $\mu$ V/m – 24.79 (dB) = 32.80dB $\mu$ V/m.

3.2.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10<sup>th</sup> Harmonic)

Test Mode :	1Mbps	Temperature :	23~24°C
Test Channel :	78	Relative Humidity :	55~56%
Test Engineer :	Robin Luo	Polarization :	Horizontal
Remark :	1. 2480 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
32.91	18.99	-21.01	40	35.13	13.5	0.93	30.57	-	-	Peak
92.08	22.51	-20.99	43.5	41.82	10.2	1.14	30.65	-	-	Peak
106.63	24.98	-18.52	43.5	42.51	11.93	1.18	30.64	-	-	Peak
227.88	20.96	-25.04	46	39.42	10.2	1.58	30.24	-	-	Peak
460.68	22.48	-23.52	46	33.09	16.84	2.01	29.46	-	-	Peak
800.18	29.95	-16.05	46	35.76	20.5	2.62	28.93	200	166	Peak
2480	101.02	-	-	94.04	32.27	4.47	29.76	169	64	Peak
2480	76.23	-	-	-	-	-	-	-	-	Average
4960	45.04	-28.96	74	61.95	34.01	6.13	57.05	200	0	Peak
7440	38.68	-35.32	74	53.16	35.37	8.08	57.93	100	0	Peak

Note: Other harmonics are lower than background noise.



<b>Test Mode :</b>	1Mbps			<b>Temperature :</b>		23~24°C				
<b>Test Channel :</b>	78			<b>Relative Humidity :</b>		55~56%				
<b>Test Engineer :</b>	Robin Luo			<b>Polarization :</b>		Vertical				
<b>Remark :</b>	1. 2480 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.									
Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.94	24.16	-15.84	40	40.29	13.5	0.94	30.57	128	33	Peak
40.67	20.83	-19.17	40	40.41	10.1	0.86	30.54	-	-	Peak
45.52	20.74	-19.26	40	41.69	8.7	0.87	30.52	-	-	Peak
93.05	23.69	-19.81	43.5	43	10.2	1.14	30.65	-	-	Peak
197.81	19.84	-23.66	43.5	39.59	9.15	1.44	30.34	-	-	Peak
725.49	23.83	-22.17	46	30.12	20.24	2.5	29.03	-	-	Peak
2480	94.84	-	-	87.86	32.27	4.47	29.76	100	297	Peak
2480	70.05	-	-	-	-	-	-	-	-	Average
4960	42.99	-31.01	74	59.9	34.01	6.13	57.05	100	0	Peak
7440	40.03	-33.97	74	54.51	35.37	8.08	57.93	100	256	Peak

**Note:** Other harmonics are lower than background noise.



### 3.3 AC Conducted Emission Measurement

#### 3.3.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.3.2 Measuring Instruments

See list of measuring instruments of this test report.


#### 3.3.3 Test Procedures

1. The test follows the guidelines in ANSI C63.10-2009 test site requirement.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 KHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.3.4 Test Setup

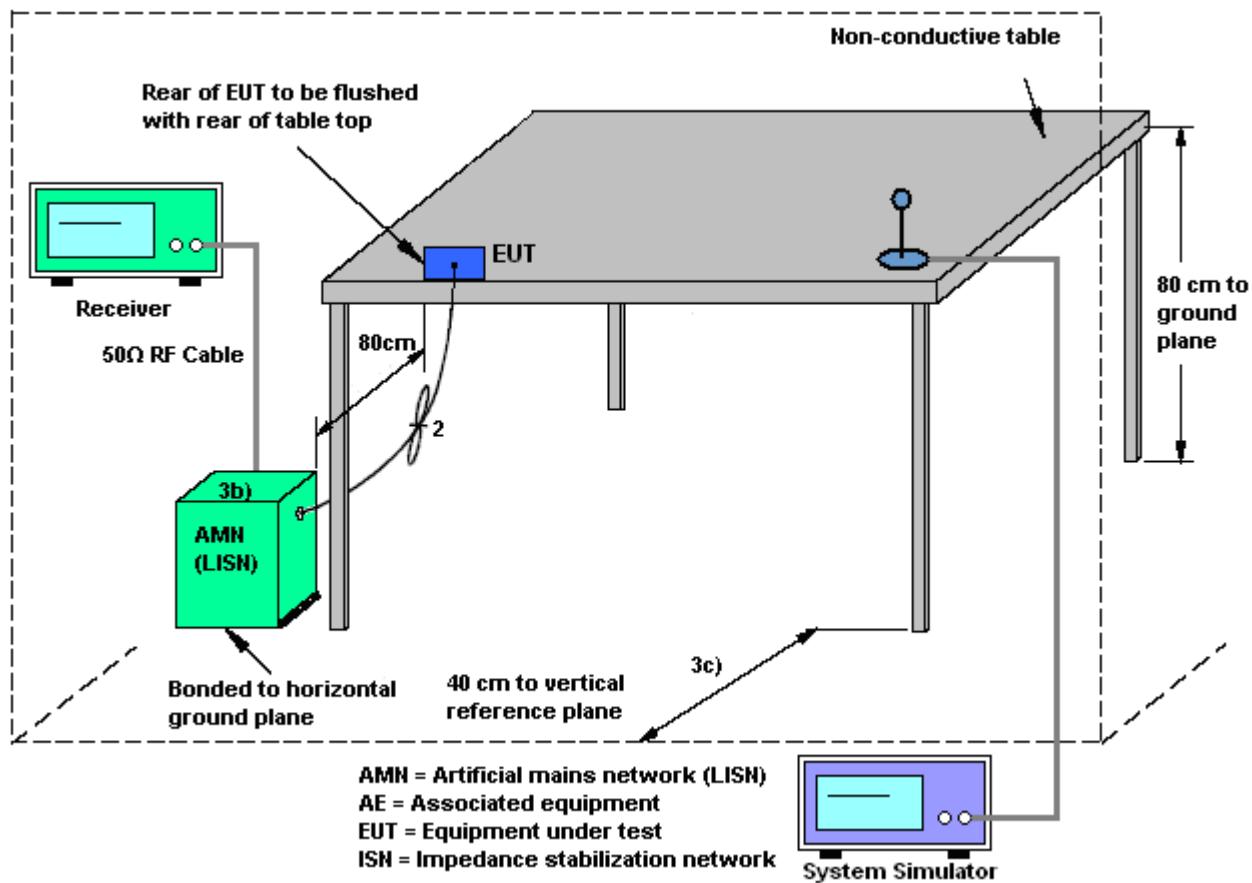


### 3.3.5 Test Result of AC Conducted Emission

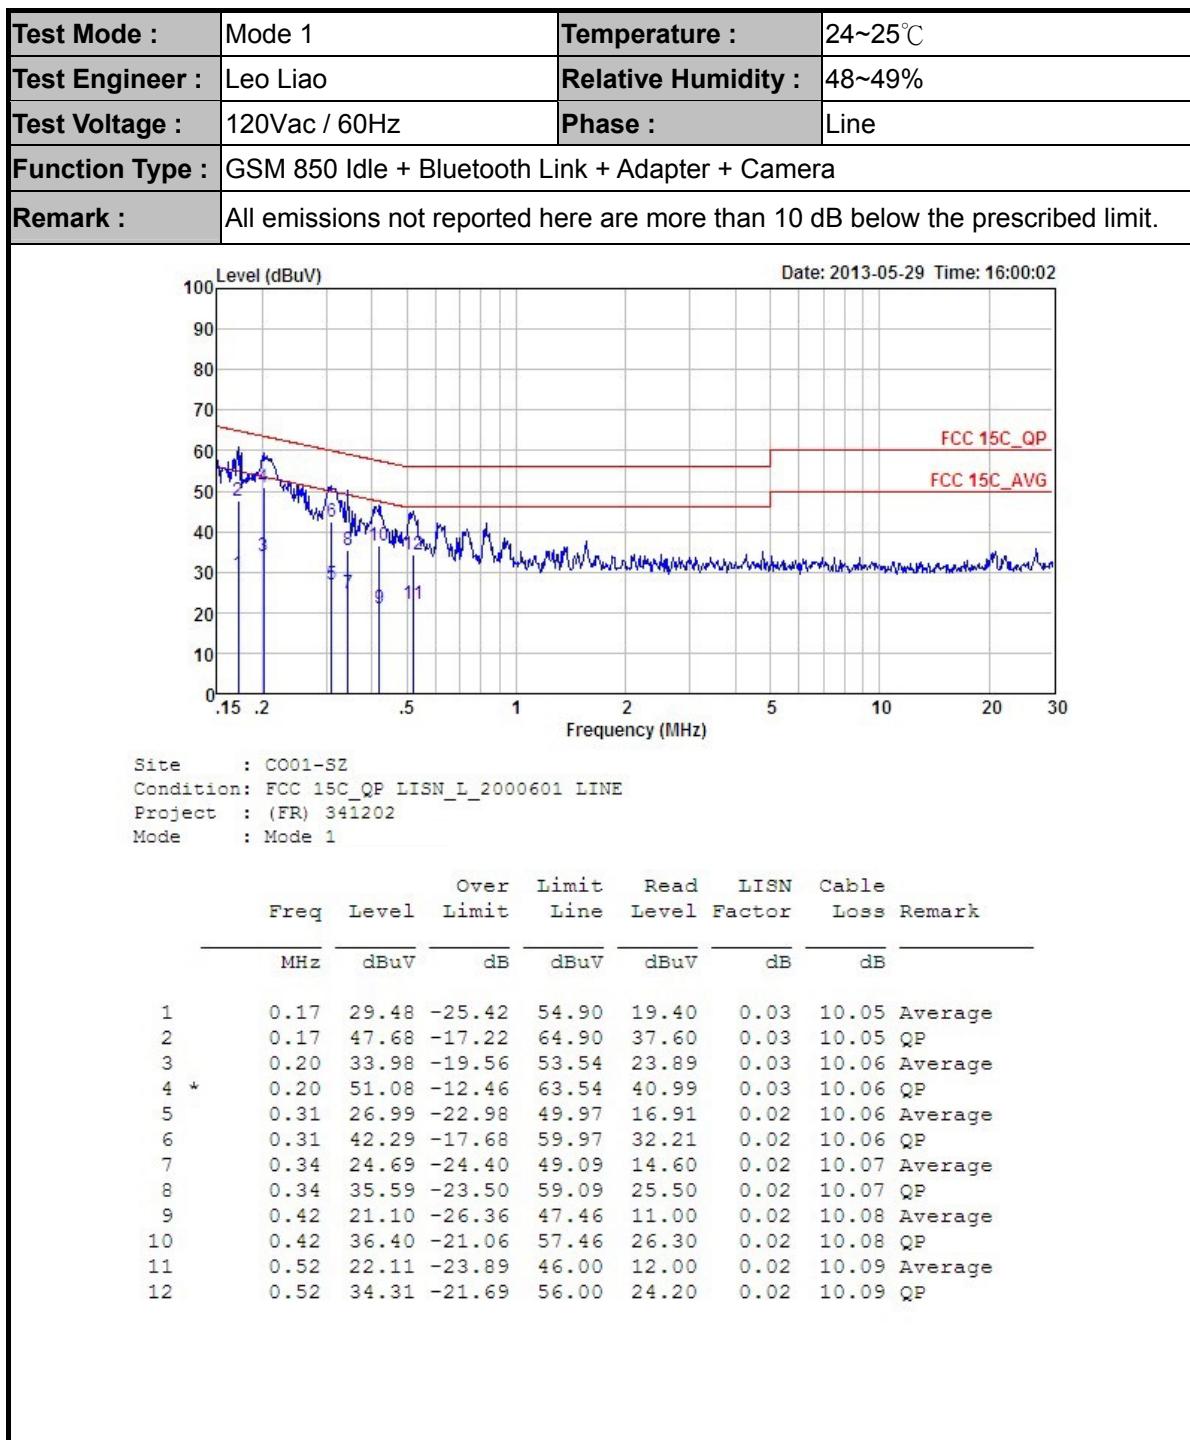



<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	24~25°C
<b>Test Engineer :</b>	Leo Liao	<b>Relative Humidity :</b>	48~49%
<b>Test Voltage :</b>	120Vac / 60Hz	<b>Phase :</b>	Neutral
<b>Function Type :</b>	GSM 850 Idle + Bluetooth Link + Adapter + Camera		
<b>Remark :</b>	All emissions not reported here are more than 10 dB below the prescribed limit.		

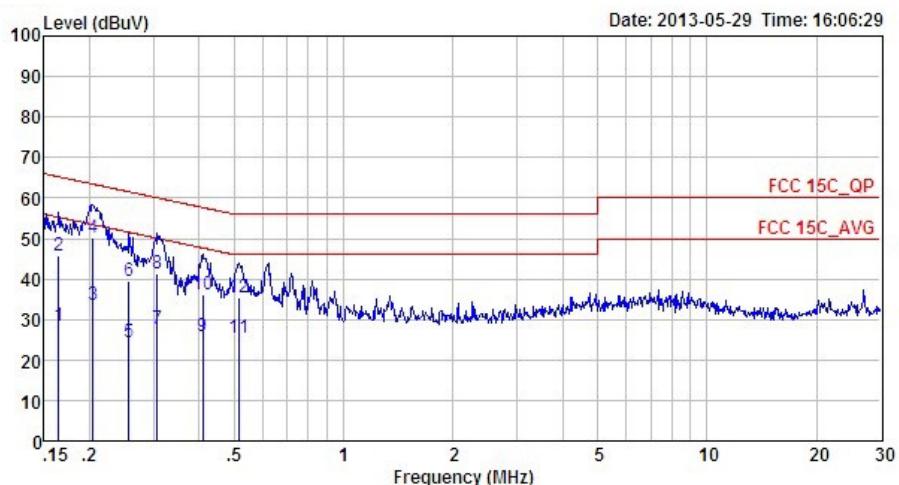

Site : C001-SZ  
Condition: FCC 15C\_QP LISN\_N\_2000601 NEUTRAL  
Project : (FR) 341202  
Mode : Mode 1

Freq	Level	Over	Limit	Read	LISN	Cable	Remark
		MHz	dBuV	dB	dBuV	dB	
1	0.16	28.57	-26.68	55.25	18.50	0.02	10.05 Average
2	0.16	45.87	-19.38	65.25	35.80	0.02	10.05 QP
3	0.20	33.67	-19.78	53.45	23.59	0.02	10.06 Average
4 *	0.20	50.27	-13.18	63.45	40.19	0.02	10.06 QP
5	0.26	24.48	-27.08	51.56	14.40	0.02	10.06 Average
6	0.26	39.58	-21.98	61.56	29.50	0.02	10.06 QP
7	0.31	27.78	-22.28	50.06	17.70	0.02	10.06 Average
8	0.31	41.38	-18.68	60.06	31.30	0.02	10.06 QP
9	0.41	25.69	-21.95	47.64	15.59	0.02	10.08 Average
10	0.41	36.29	-21.35	57.64	26.19	0.02	10.08 QP
11	0.52	25.40	-20.60	46.00	15.29	0.02	10.09 Average
12	0.52	35.60	-20.40	56.00	25.49	0.02	10.09 QP



## **3.4 Antenna Requirements**

### **3.4.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.4.2 Antenna Connected Construction**

Non-standard connector used.

### **3.4.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP30	101400	9kHz~30GHz	Mar. 28, 2013	May 31, 2013	Mar. 27, 2014	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	N/A	Mar. 28, 2013	May 31, 2013	Mar. 27, 2014	Conducted (TH01-SZ)
Power Sensor	Anritsu	MA2411B	1207253	N/A	Mar. 28, 2013	May 31, 2013	Mar. 27, 2014	Conducted (TH01-SZ)
DC Power Supply	TOPWORD	3303DR	N/A714621	N/A	Mar. 28, 2013	May 31, 2013	Mar. 27, 2014	Conducted (TH01-SZ)
Thermal Chamber	Hongzhan	LP-150U	HD20120425	N/A	Mar. 28, 2013	May 31, 2013	Mar. 27, 2014	Conducted (TH01-SZ)
Bluetooth Base Station	Anritsu	MT8852B	6K00004935	BT EDR	Oct. 12, 2012	May 31, 2013	Oct. 11, 2013	Conducted (TH01-SZ)
EMI Test Receiver	R&S	ESCI	100724	9kHz~3GHz	Mar. 28, 2013	Jun. 01, 2013	Mar. 27, 2014	Radiation (03CH01-SZ)
Spectrum Analyzer	R&S	FSP30	101362	9kHz~30GHz	Oct. 11, 2012	Jun. 01, 2013	Oct. 10, 2013	Radiation (03CH01-SZ)
Double Ridge Horn Amtenna	ETS Lindgren	3117	00119436	1GHz~18GHz	Oct. 12, 2012	Jun. 01, 2013	Oct. 11, 2013	Radiation (03CH01-SZ)
Bilog Antenna	SCHAFFNER	CBL6112B	2614	30MHz~2GHz	Nov. 03, 2012	Jun. 01, 2013	Nov. 02, 2013	Radiation (03CH01-SZ)
Amplifier	ADVANTEST	BB525C	E9007003	9kHz~3GHz Gain 30dB	Mar. 28, 2013	Jun. 01, 2013	Mar. 27, 2014	Radiation (03CH01-SZ)
Amplifier	Yiai	AV3860B	04030	2GHz~26.5GHz	Mar. 28, 2013	Jun. 01, 2013	Mar. 27, 2014	Radiation (03CH01-SZ)
SHF-EHF -Horn	Schwarzbeck	BBHA9170	BBHA9170249	14GHz~40GHz	Nov. 23, 2012	Jun. 01, 2013	Nov. 22, 2013	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100321	9KHz~30MHz	Oct. 22, 2012	Jun. 01, 2013	Oct. 21, 2013	Radiation (03CH01-SZ)
Bluetooth Base Station	Anritsu	MT8852B	6K00004935	BT EDR	Oct. 12, 2012	Jun. 01, 2013	Oct. 11, 2013	Radiation (03CH01-SZ)
ESCO TEST Receiver	R&S	1142.800 7.03	100724	9kHz~3GHz	Mar. 28, 2013	May 29, 2013	Mar. 27, 2014	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103912	9kHz~30MHz	Mar. 28, 2013	May 29, 2013	Mar. 27, 2014	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103892	9kHz~30MHz	Mar. 28, 2013	May 29, 2013	Mar. 27, 2014	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	N/A	Nov. 20, 2012	May 29, 2013	Nov. 19, 2013	Conduction (CO01-SZ)
AC Filter	ETS-LINDGREN	LRE-2030/P EN 256260	00093783	N/A	N/A	May 29, 2013	N/A	Conduction (CO01-SZ)
AC Filter	ETS-LINDGREN	LRE-2030/P EN 256260	00097973	N/A	N/A	May 29, 2013	N/A	Conduction (CO01-SZ)
System Simulator	Agilent	E5515C	MY50264168	GSM/WCDMA /CDMA2000	Oct. 09, 2012	May 29, 2013	Oct. 08, 2013	Conduction (CO01-SZ)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 KHz ~ 30 MHz)

<b>Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))</b>	<b>2.26</b>
--	-------------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

<b>Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))</b>	<b>2.54</b>
--	-------------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

<b>Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))</b>	<b>4.72</b>
--	-------------



## **Appendix A. Photographs of EUT**

Please refer to Sporton report number EP341202 as below.



## **Appendix C. Product Equality Declaration**

# Cellon Communications Technology Co., Ltd

11F, Skyworth C Building, Gaoxin S.Ave.1., Hi-Tech Industrial Park, Nanshan, Shenzhen

Date: June 21, 2013

## Product Equality Declaration

We, Cellon, declare on our sole responsibility for the product of C3021 A1028 as below:

The differences between C3021 A1028 and previous model C3031 are as below:

1. MD Difference

A. C3031 is black painting on the front housing

C3021 A1028 have not painting, is raw material black color on the front housing

B. C3031 Keypad have a silver decorate loop on the navigation key;

C3021 A1028 Keypad have not decorate loop on the navigation key, is whole rubber keypad;

C. C3031 is Movistar logo on the Lens and Battery cover;

C3021 A1028 is enspire logo on the Lens and Battery cover;

2. SW Difference

SW version name changed for Model name;

3. Accessory Difference

A. C3031 Charger Model is ASTC20-050065; PCD logo;

C3021 A1028 Charger Model is KSA50500; enspire logo;

B. C3031 Battery Model is BTR380 for 720mAh; PCD logo;

C3021 A1028 Battery Model is BTR1238 for 550mAh; enspire logo;

C. C3031 Headset is dual sound channel;

C3021 A1028 Headset is single sound channel;

4. Memory Difference

C3031 memory is ST NANDA8R4N4AZBB5;

C3021(A1028) memory is Samsung K521H57ACB-B060;

Except listings above, the others are all the same as previous version.

Should you have any questions or comments regarding this matter, please have my best attention.

Sincerely yours,



---

Contact Person: maggie.xu

Company: Cellon Communication Technology(Shenzhen)Co.,Ltd

Tel: +86-755-86365704

Fax: +86-755-86365736

E-Mail: maggie.xu@cellon.com