

FCC RF Test Report

APPLICANT : Cellon Communications Technology Co., Ltd
EQUIPMENT : GSM850/900/1800/1900 UMTS850/1900 GPRS 、
EDGE 、 BT, WIFI mobile phone
BRAND NAME : PCD&Claro&Telcel
MODEL NAME : A3535, PCD777, CL777, TE777, PCD777EN
PCD777PE, PCD777AL, PCD777CL, PCD777PO,
PCD777MV, PCD777OM, PCD777MX,
PCD777CA, TE777PE, AL777AL, CL777CL,
CL777PO, MV777MV, TE777MX. PCD777CA,
PCD777AR, PCD777BR, CL777TL
FCC ID : T38PCD3535
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : Digital Transmission System (DTS)

The product was received on Dec. 28, 2011 and completely tested on Jan. 30, 2012. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Feature of Equipment Under Test	5
1.4 Testing Site.....	6
1.5 Applied Standards	6
1.6 Ancillary Equipment List	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Pre-Scanned RF Power.....	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 RF Utility	11
3 TEST RESULT.....	12
3.1 6dB Bandwidth Measurement	12
3.2 Output Power Measurement.....	17
3.3 Band Edges Measurement.....	19
3.4 Spurious Emission Measurement.....	25
3.5 Power Spectral Density Measurement	32
3.6 AC Conducted Emission Measurement.....	37
3.7 Radiated Emission Measurement.....	41
3.8 Antenna Requirements.....	56
4 LIST OF MEASURING EQUIPMENT	57
5 UNCERTAINTY OF EVALUATION.....	58
APPENDIX A. PHOTOGRAPHS OF EUT	
APPENDIX B. SETUP PHOTOGRAPHS	

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR1D2801B	Rev. 01	Initial issue of report	Feb. 02, 2012

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	Power Output	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(d)	Frequency Band Edges	$\leq 20\text{dBc}$	Pass	-
3.4	15.247(d)	Spurious Emission	$< 20\text{ dBc}$	Pass	-
3.5	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}$	Pass	-
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 9.89 dB at 0.16 MHz
3.7	15.247(d)	Transmitter Radiated Emission	15.209(a) & 15.247(d)	Pass	Under limit 9.47 dB at 936.3 MHz
3.8	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

Cellon Communications Technology Co., Ltd

11f, Skyworth C Building, Gaoxin S.Ave.1., Hi-Tech Industrial Park, Nanshan.Shenzhen

1.2 Manufacturer

Cellon Communications Technology Co., Ltd

11f, Skyworth C Building, Gaoxin S.Ave.1., Hi-Tech Industrial Park, Nanshan.Shenzhen

1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	GSM850/900/1800/1900 UMTS850/1900 GPRS 、EDGE 、 BT, WIFI mobile phone
Brand Name	PCD&Claro&Telcel
Model Name	A3535, PCD777, CL777, TE777, PCD777EN, PCD777PE, PCD777AL, PCD777CL, PCD777PO, PCD777MV, PCD777OM, PCD777MX, PCD777CA, TE777PE, AL777AL, CL777CL, CL777PO, MV777MV, TE777MX, PCD777CA, PCD777AR, PCD777BR, CL777TL
FCC ID	T38PCD3535
Tx/Rx Frequency Range	2400 MHz ~ 2483.5 MHz
Number of Channels	11
Carrier Frequency of Each Channel	2412+(n-1)*5 MHz; n=1~11
Channel Spacing	5 MHz
Maximum Output Power to Antenna	802.11b : 17.08 dBm (0.051 W) 802.11g : 21.11 dBm (0.129 W)
Antenna Type	PIFA Antenna with gain 1.63 dBi
HW Version	P3
SW Version	P3
Type of Modulation	802.11b : DSSS (BPSK / QPSK / CCK) 802.11g : OFDM (BPSK / QPSK / 16QAM / 64QAM)
EUT Stage	Production Unit

Remark:

1. For other wireless features of this EUT, test report will be issued separately.
2. This test report recorded only product characteristics and test results of Digital Transmission System (DTS).
3. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Testing Site

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.
Test Site Location	No. 101, Complex Building C, Guanglong Village, Xili Town, Nanshan District, Shenzhen, Guangdong, P.R.C. TEL: +86-755-8637-9589
Test Site No.	Sporton Site No. : CO01-SZ

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.	
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958	
Test Site No.	Sporton Site No.	
	TH01-KS	03CH01-KS

1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 (Measurement Guidelines of DTS)
- ♦ ANSI C63.4-2003

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B (Certification), recorded in a separate test report.

1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	System Simulator	Agilent	8960	N/A	N/A	Unshielded, 1.8 m
3.	Router	D-Link	DIR-615	N/A	N/A	Unshielded, 1.8 m
4.	Router	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
5.	Notebook	IBM	1706	FCC DoC	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
6.	Bluetooth Earphone	Nokia	BH-108	N/A	N/A	N/A
7.	Bluetooth Earphone	Nokia	BH-102	PYAHS-107W	N/A	N/A

2 Test Configuration of Equipment Under Test

2.1 RF Power

Preliminary tests were performed in different data rate and recorded the RF power output in the following table:

Channel	Frequency	2.4GHz 802.11b RF Power (dBm)			
		DSSS Data Rate			
		1 Mbps	2 Mbps	5.5 Mbps	11 Mbps
CH 01	2412 MHz	16.86	16.84	16.62	16.81
CH 06	2437 MHz	17.08	17.04	16.84	16.98
CH 11	2462 MHz	16.63	16.59	16.42	16.57

Channel	Frequency	2.4GHz 802.11g RF Power (dBm)							
		OFDM Data Rate							
		6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
CH 01	2412 MHz	20.68	20.61	20.54	20.59	20.55	20.51	20.53	20.58
CH 06	2437 MHz	20.78	20.74	20.75	20.71	20.73	20.69	20.68	20.66
CH 11	2462 MHz	21.11	21.08	21.06	21.01	20.97	21.03	20.98	21.04

Remark:

1. The data rates of WLAN 802.11b/g were set in 1Mbps for 802.11b and 6Mbps for 802.11g, for all the test cases due to the highest RF output power.
2. The EUT is programmed to transmit signals continuously for all testing.

2.2 Test Mode


The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz), radiated emission (30 MHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests were conducted to determine the final configuration from all possible combinations. The following tables are showing the test modes as the worst cases (H plane) and recorded in this report.

The following tables are showing the test modes as the worst cases and recorded in this report.


Test Cases		
Test Item	802.11b	802.11g
Conducted TCs	Mode 1 : 802.11b CH01_2412 MHz	Mode 4 : 802.11g CH01_2412 MHz
	Mode 2 : 802.11b CH06_2437 MHz	Mode 5 : 802.11g CH06_2437 MHz
	Mode 3 : 802.11b CH11_2462 MHz	Mode 6 : 802.11g CH11_2462 MHz
Radiated TCs	Mode 1 : 802.11b CH01_2412 MHz	Mode 4 : 802.11g CH01_2412 MHz
	Mode 2 : 802.11b CH06_2437 MHz	Mode 5 : 802.11g CH06_2437 MHz
	Mode 3 : 802.11b CH11_2462 MHz	Mode 6 : 802.11g CH11_2462 MHz
AC Conducted Emission	Mode 1 :GSM 850 Idle + Bluetooth Link + WIFI Link + Adapter + Camera	
Remark: The worst case of conducted emission is mode 1; only the test data of it was reported.		

2.3 Connection Diagram of Test System

<WLAN Tx Mode>

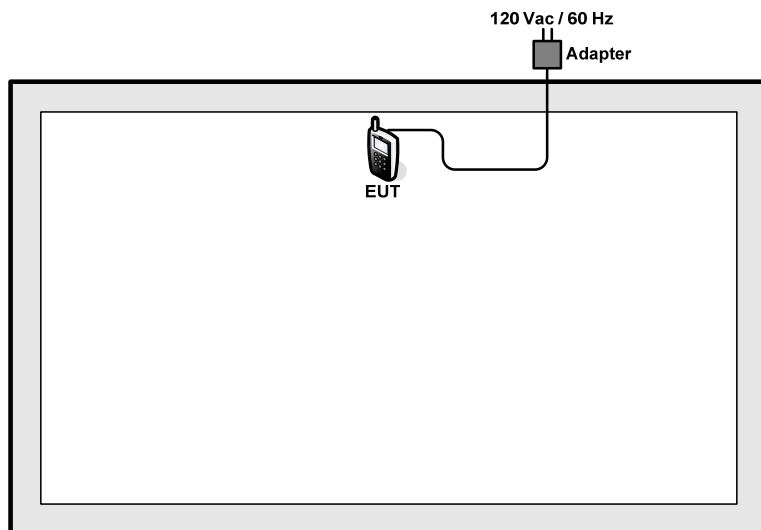

<AC Conducted Emission Mode>

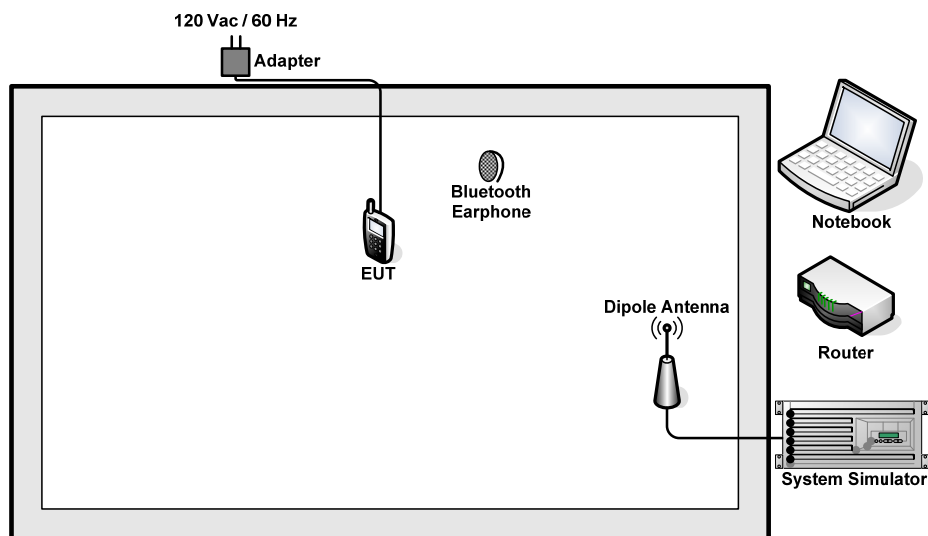



2.4 RF Utility

The programmed RF utility, “* #3646633 #” is installed in EUT to provide channel selection, power level, data rate and the application type. RF Utility can send transmitting signal for all testing. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz.
In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.
4. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

3.1.4 Test Setup

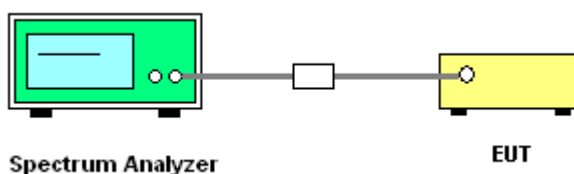


3.1.5 Test Result of 6dB Bandwidth


Test Mode :	Mode 1, 2, 3	Temperature :	24~25℃
Test Engineer :	Fly Chen	Relative Humidity :	46~47%

Channel	Frequency (MHz)	802.11b 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	10.04	0.5	Pass
06	2437	10.04	0.5	Pass
11	2462	10.04	0.5	Pass


Mode 1 : 6 dB Bandwidth Plot on 802.11b Channel 01

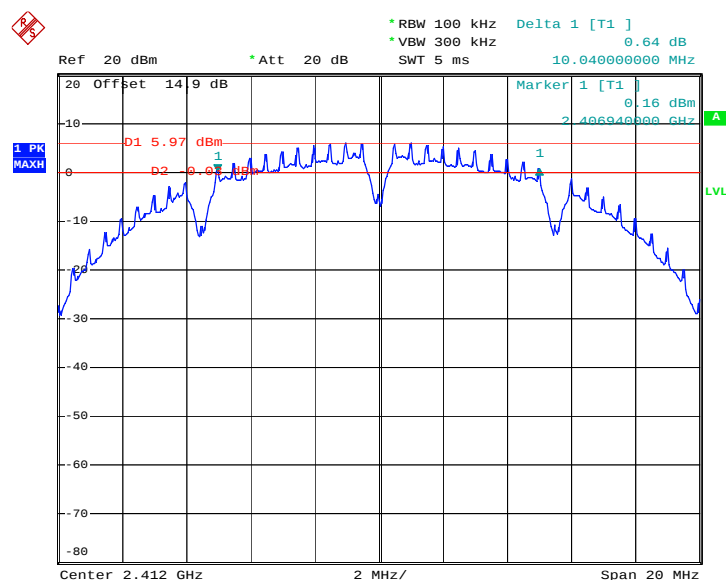

Date : 10.JAN.2012 11:32:43




Mode 3 : 6 dB Bandwidth Plot on 802.11b Channel 11




Test Mode :	Mode 4, 5, 6	Temperature :	24~25°C
Test Engineer :	Fly Chen	Relative Humidity :	46~47%


Channel	Frequency (MHz)	802.11g 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	16.36	0.5	Pass
06	2437	16.40	0.5	Pass
11	2462	16.36	0.5	Pass

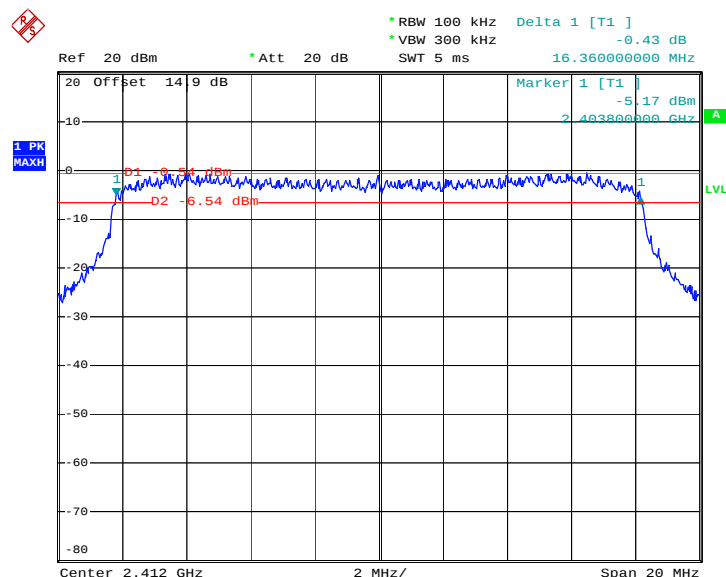Mode 4 : 6 dB Bandwidth Plot on 802.11g Channel 01


Date: 10.JAN.2012 13:10:49

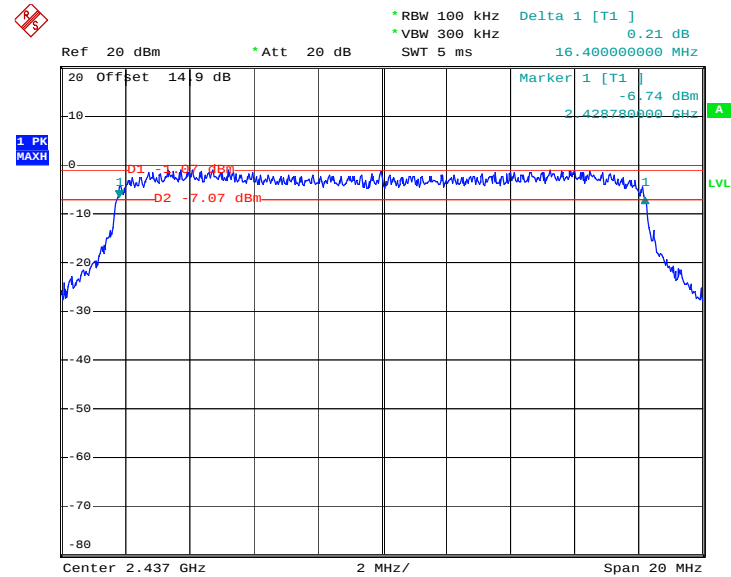Mode 5 : 6 dB Bandwidth Plot on 802.11g Channel 06


Date: 10.JAN.2012 13:25:38

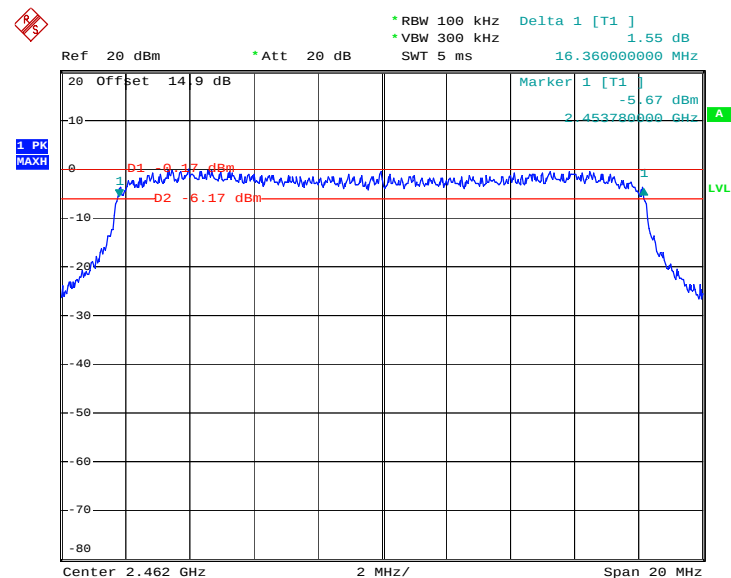Mode 6 : 6 dB Bandwidth Plot on 802.11g Channel 11


Date: 10.JAN.2012 13:42:14

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. The RF output of EUT was connected to the power meter by a low loss cable.
3. Measure the power by power meter.

3.2.4 Test Setup

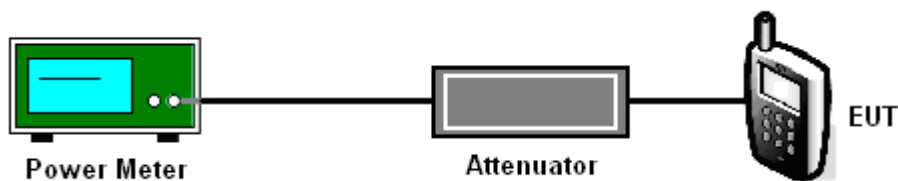

3.2.5 Test Result of Output Power

Test Mode :	Mode 1, 2, 3	Temperature :	24~25℃
Test Engineer :	Fly Chen	Relative Humidity :	46~47%

Channel	Frequency (MHz)	802.11b Measured Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	16.86	30	Pass
06	2437	17.08	30	Pass
11	2462	16.63	30	Pass

Test Mode :	Mode 4, 5, 6	Temperature :	24~25℃
Test Engineer :	Fly Chen	Relative Humidity :	46~47%

Channel	Frequency (MHz)	802.11g Measured Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	20.68	30	Pass
06	2437	20.78	30	Pass
11	2462	21.11	30	Pass

3.3 Band Edges Measurement

3.3.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB.

3.3.2 Measuring Instruments


See list of measuring instruments of this test report.

3.3.3 Test Procedures


1. The testing follows the guidelines in ANSI C63.4-2003 and FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. Conducted emission test: Set RBW = 100 kHz, Video bandwidth (VBW) $\geq$ RBW. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. Note: If the device complies with the use of power option 2 the attenuation under this paragraph shall be 30 dB instead of 20 dB.
3. Radiated emission test: Apply to band edge emissions that fall in the restricted bands listed in FCC Section 15.205. The maximum permitted average field strength is listed in FCC Section 15.209. A pre-amp is necessary for this measurement. For measurements above 1 GHz, set RBW = 1MHz, VBW = 10 Hz, Sweep=Auto. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation as in FCC Section 15.35(b) and (c).

3.3.4 Test Setup

<Radiated Band Edges>

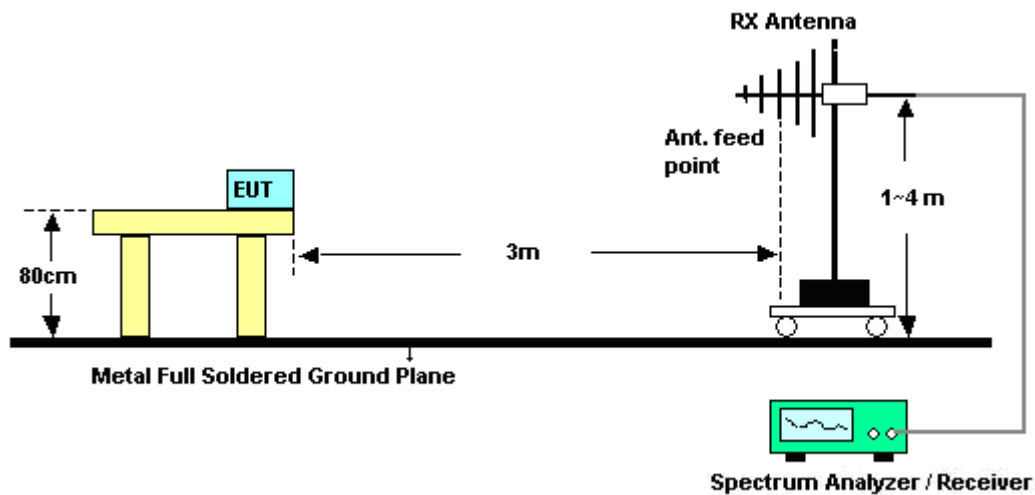

<Conducted Band Edges>

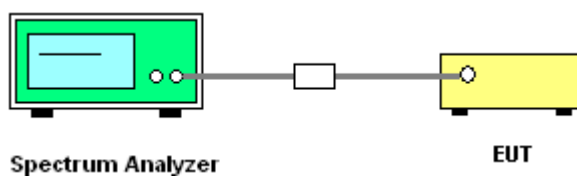

3.3.5 Test Result of Radiated Band Edges

Test Mode :	Mode 1	Temperature :	20~21℃
Test Band :	802.11b	Relative Humidity :	40~41%
Test Channel :	01	Test Engineer :	Jack Li

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2351.04	47.44	-26.56	74	45.27	32.78	3.33	33.94	100	360	Peak
2351.04	34.54	-19.46	54	32.37	32.78	3.33	33.94	100	360	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2357.31	47.28	-26.72	74	45.07	32.81	3.38	33.98	100	0	Peak
2357.31	34.36	-19.64	54	32.15	32.81	3.38	33.98	100	0	Average

Test Mode :	Mode 3	Temperature :	20~21℃
Test Band :	802.11b	Relative Humidity :	40~41%
Test Channel :	11	Test Engineer :	Jack Li

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	48.31	-25.69	74	45.82	33.01	3.68	34.2	100	0	Peak
2483.5	38.1	-15.9	54	35.61	33.01	3.68	34.2	100	0	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2485.75	52.38	-21.62	74	49.89	33.01	3.68	34.2	200	350	Peak
2485.75	37.65	-16.35	54	35.16	33.01	3.68	34.2	200	350	Average



Test Mode :	Mode 4	Temperature :	20~21℃
Test Band :	802.11g	Relative Humidity :	40~41%
Test Channel :	01	Test Engineer :	Jack Li

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.99	60.82	-13.18	74	58.54	32.86	3.47	34.05	200	360	Peak
2389.99	42.83	-11.17	54	40.55	32.86	3.47	34.05	200	360	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.99	59.48	-14.52	74	57.2	32.86	3.47	34.05	154	321	Peak
2389.99	42.23	-11.77	54	39.95	32.86	3.47	34.05	154	321	Average

Test Mode :	Mode 6	Temperature :	20~21℃
Test Band :	802.11g	Relative Humidity :	40~41%
Test Channel :	11	Test Engineer :	Jack Li


ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	60.32	-13.68	74	57.83	33.01	3.68	34.2	200	61	Peak
2483.5	41.7	-12.3	54	39.21	33.01	3.68	34.2	200	61	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	41.68	-12.32	54	39.19	33.01	3.68	34.2	100	44	Average
2483.5	59.32	-14.68	74	56.83	33.01	3.68	34.2	100	44	Peak

3.3.6 Test Plots of Conducted Band Edges


Test Mode :	Mode 1 and 3	Temperature :	24~25°C
Test Band :	802.11b	Relative Humidity :	46~47%
Test Channel :	01 and 11	Test Engineer :	Fly Chen

Low Band Edge Plot on 802.11b Channel 01

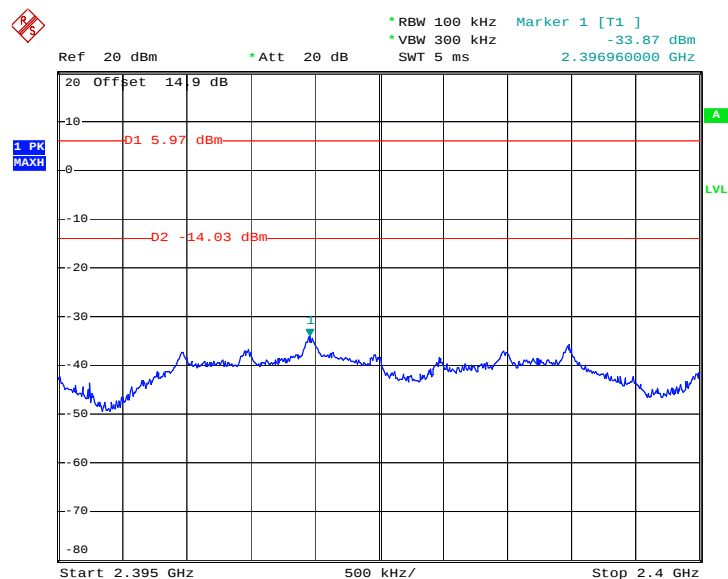

Date: 10.JAN.2012 11:33:55

High Band Edge Plot on 802.11b Channel 11

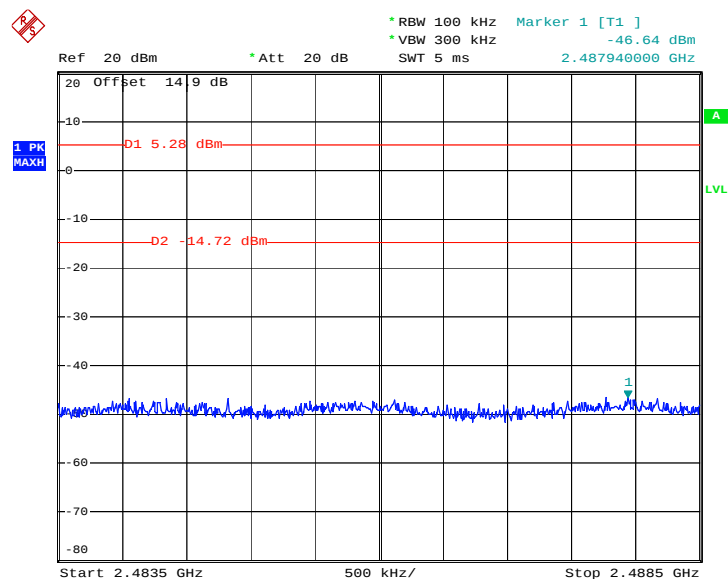


Date: 10.JAN.2012 12:02:07




Test Mode :	Mode 4 and 6	Temperature :	24~25°C
Test Band :	802.11g	Relative Humidity :	46~47%
Test Channel :	01 and 11	Test Engineer :	Fly Chen

Low Band Edge Plot on 802.11g Channel 01

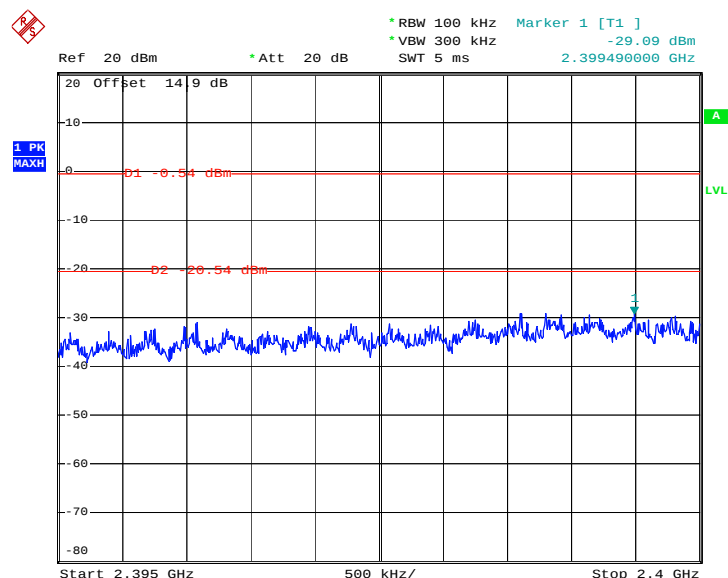

Date: 10.JAN.2012 13:12:00

High Band Edge Plot on 802.11g Channel 11

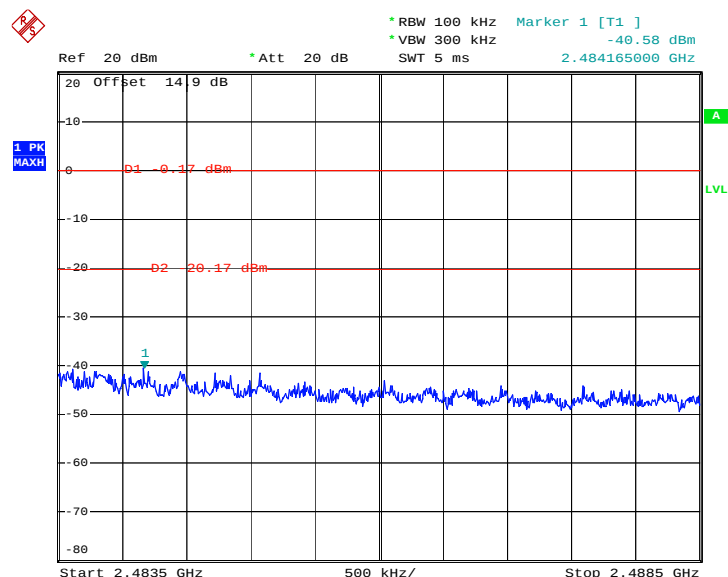

Date: 10.JAN.2012 13:43:02

3.4 Spurious Emission Measurement

3.4.1 Limit of Spurious Emission Measurement

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedure

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set RBW = 100 kHz, Video bandwidth (VBW) $\geq$ RBW, scan up through 10th harmonic. All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.


3.4.4 Test Setup

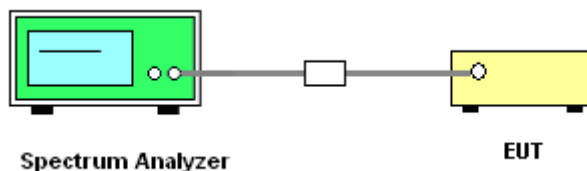

3.4.5 Test Plots of Spurious Emission


Test Mode :	Mode 1	Temperature :	24~25°C
Test Band :	802.11b	Relative Humidity :	46~47%
Test Channel :	01	Test Engineer :	Fly Chen

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

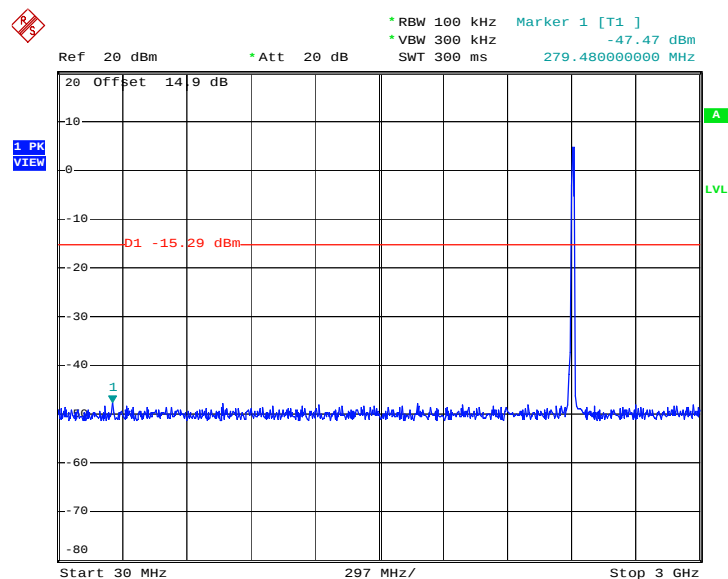


Date: 10.JAN.2012 11:35:13

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

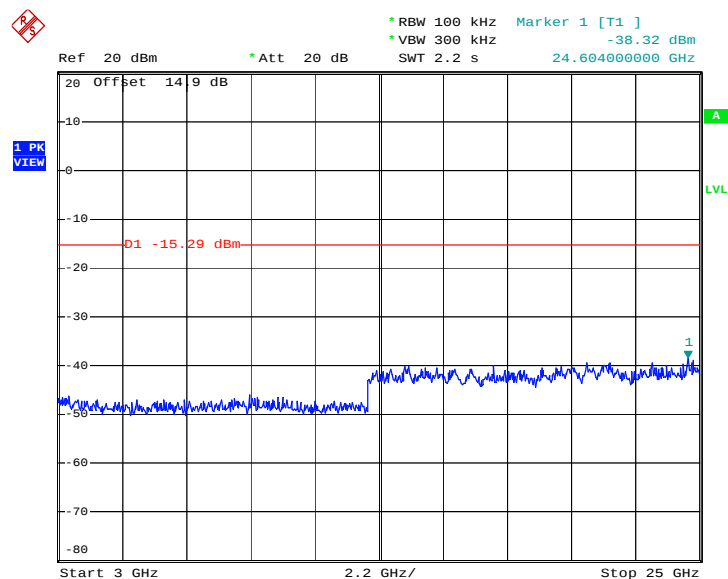


Date: 10.JAN.2012 11:35:30

Test Mode :	Mode 2	Temperature :	24~25°C
Test Band :	802.11b	Relative Humidity :	46~47%
Test Channel :	06	Test Engineer :	Fly Chen

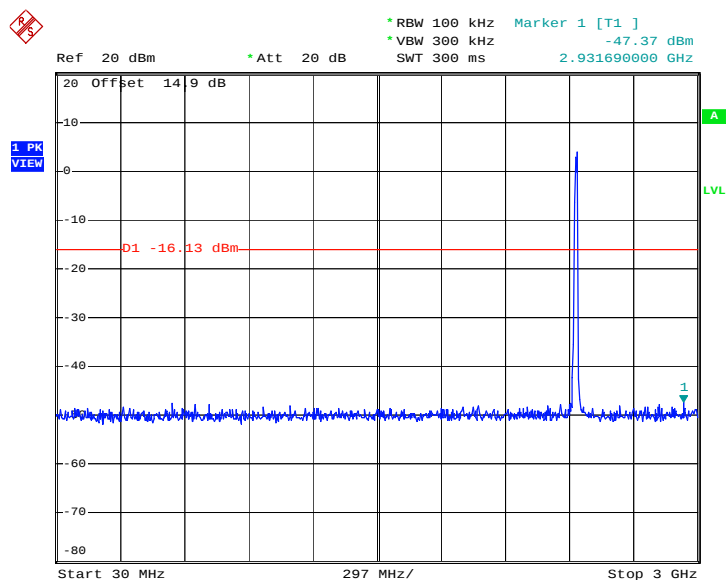Conducted Spurious Emission Plot between 30MHz ~ 3 GHz


Date: 10.JAN.2012 11:49:18

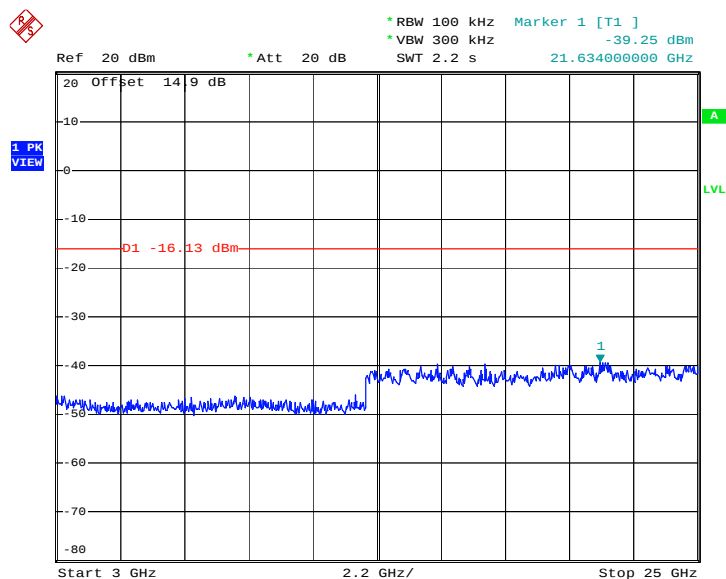
Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz


Date: 10.JAN.2012 11:49:35




Test Mode :	Mode 3	Temperature :	24~25°C
Test Band :	802.11b	Relative Humidity :	46~47%
Test Channel :	11	Test Engineer :	Fly Chen

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

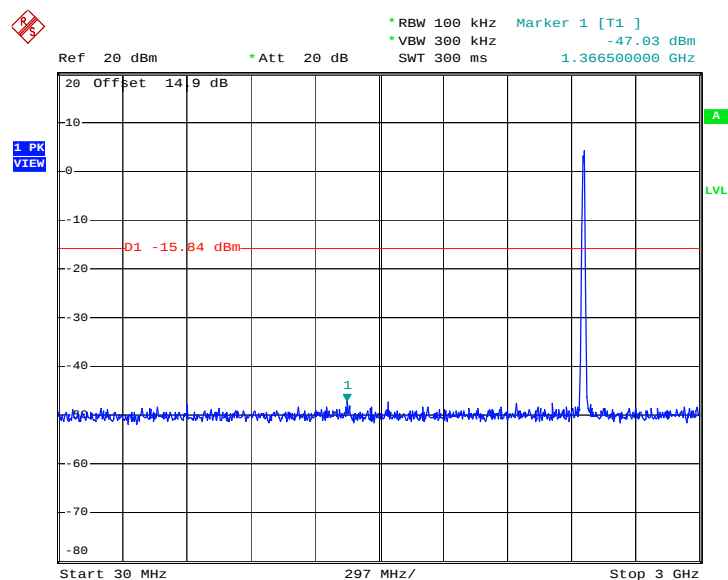


Date: 10.JAN.2012 12:04:33

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

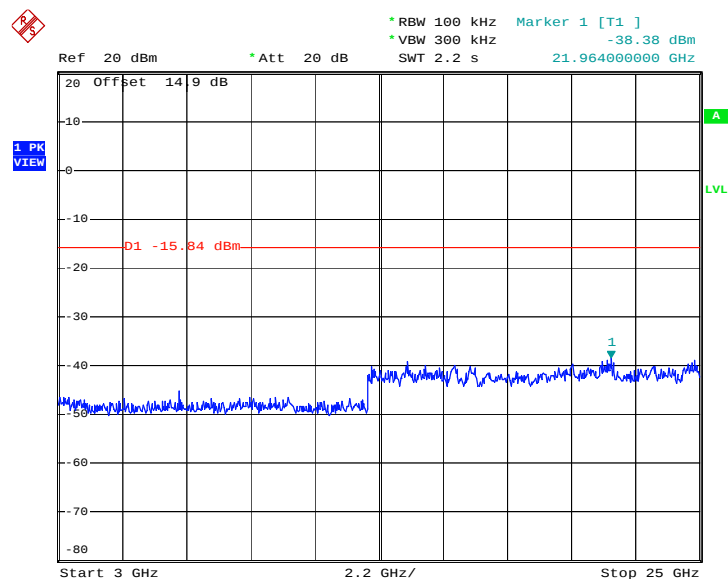


Date: 10.JAN.2012 12:04:50

Test Mode :	Mode 4	Temperature :	24~25°C
Test Band :	802.11g	Relative Humidity :	46~47%
Test Channel :	01	Test Engineer :	Fly Chen

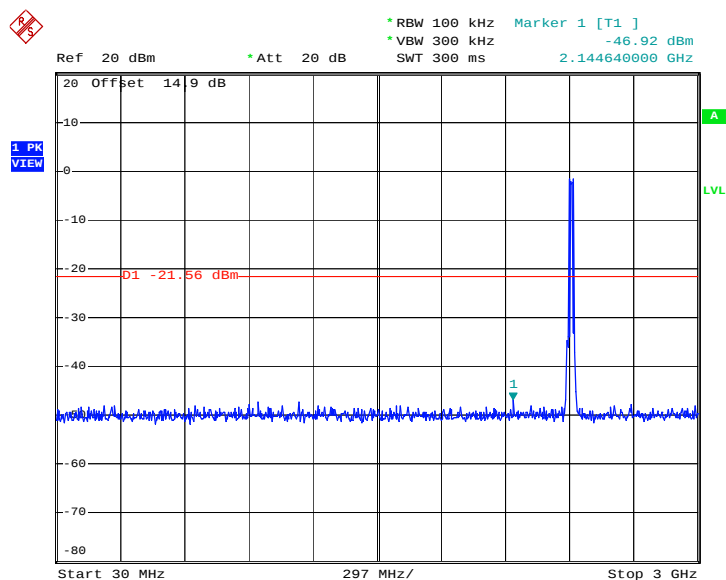Conducted Spurious Emission Plot between 30MHz ~ 3 GHz


Date: 10.JAN.2012 13:13:34

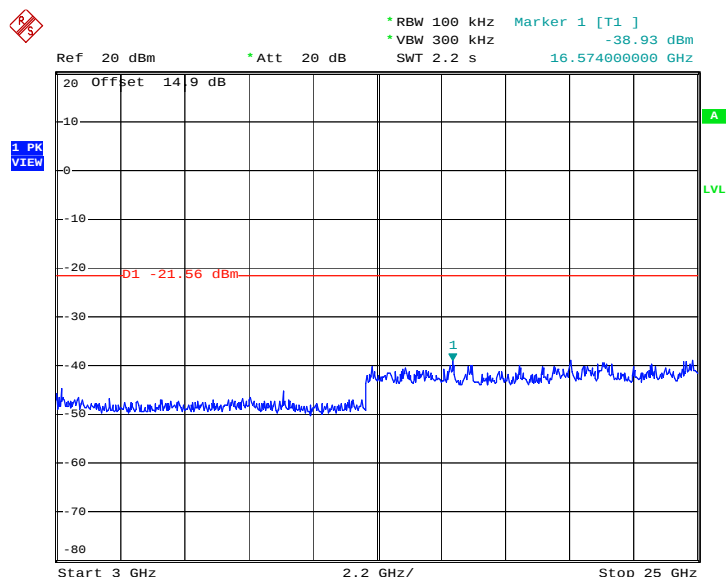
Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz


Date: 10.JAN.2012 13:13:51




Test Mode :	Mode 5	Temperature :	24~25°C
Test Band :	802.11g	Relative Humidity :	46~47%
Test Channel :	06	Test Engineer :	Fly Chen

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

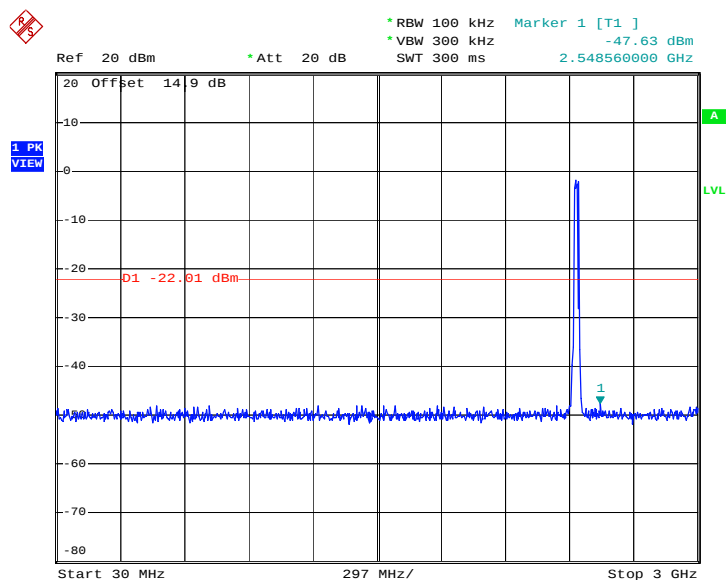


Date: 10.JAN.2012 13:27:10

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

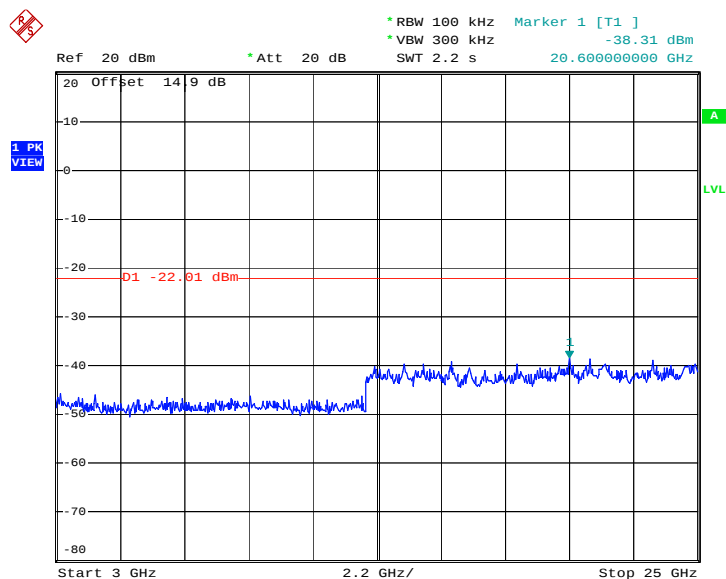


Date: 10.JAN.2012 13:27:27

Test Mode :	Mode 6	Temperature :	24~25°C
Test Band :	802.11g	Relative Humidity :	46~47%
Test Channel :	11	Test Engineer :	Fly Chen

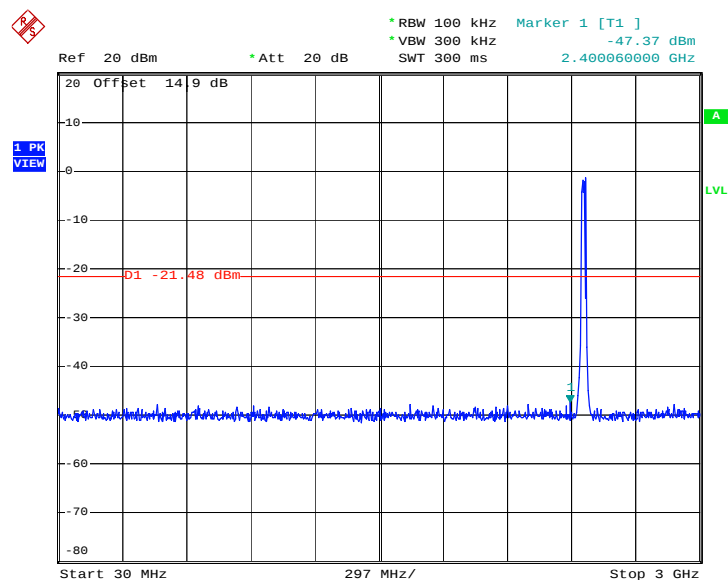Conducted Spurious Emission Plot between 30MHz ~ 3 GHz


Date: 10.JAN.2012 13:46:55

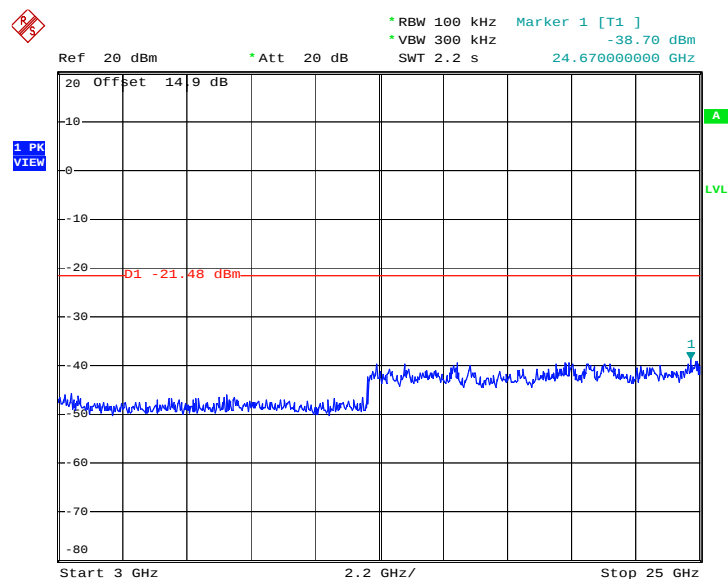Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz


Date: 10.JAN.2012 13:47:12

3.5 Power Spectral Density Measurement

3.5.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The test follows FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Take the measured data from spectrum analyzer.

3.5.4 Test Setup

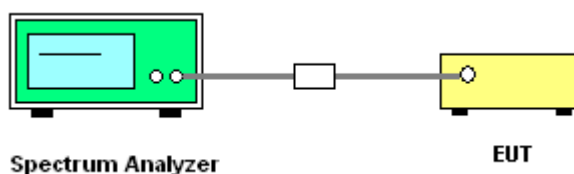


3.5.5 Test Result of Power Spectral Density


Test Mode :	Mode 1, 2, 3	Temperature :	24~25℃
Test Engineer :	Fly Chen	Relative Humidity :	46~47%

Channel	Frequency (MHz)	802.11b Measured PSD (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	-7.27	8	Pass
06	2437	-6.13	8	Pass
11	2462	-6.48	8	Pass


Mode 1 : PSD Plot on 802.11b Channel 01

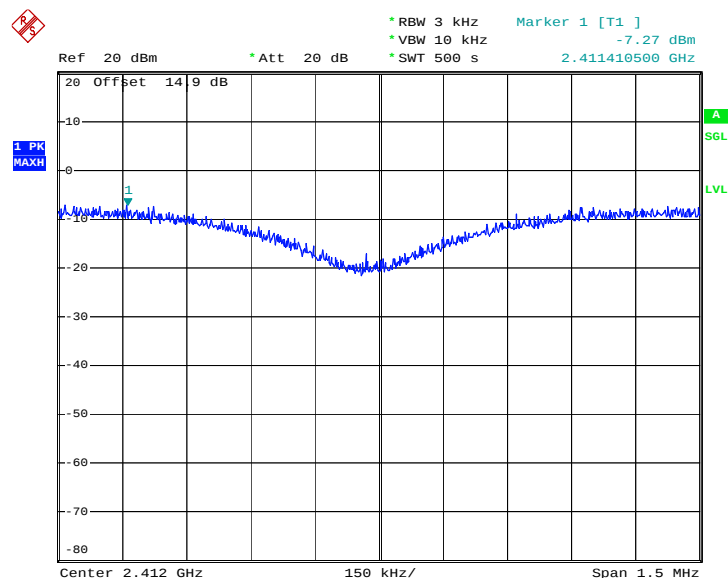

Date: 10.JAN.2012 11:44:30

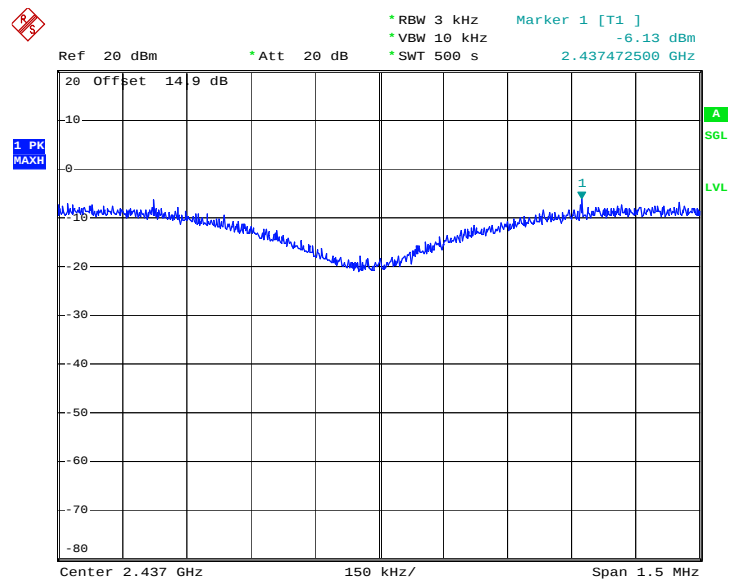Mode 2 : PSD Plot on 802.11b Channel 06


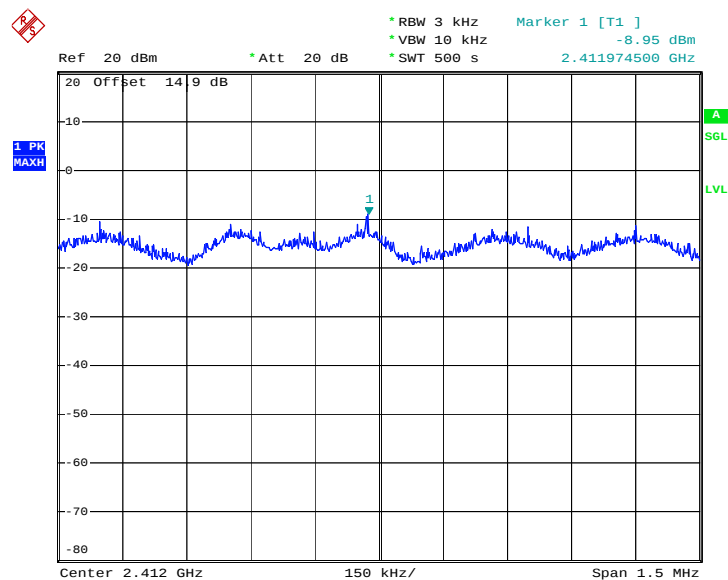
Date: 10.JAN.2012 11:58:24

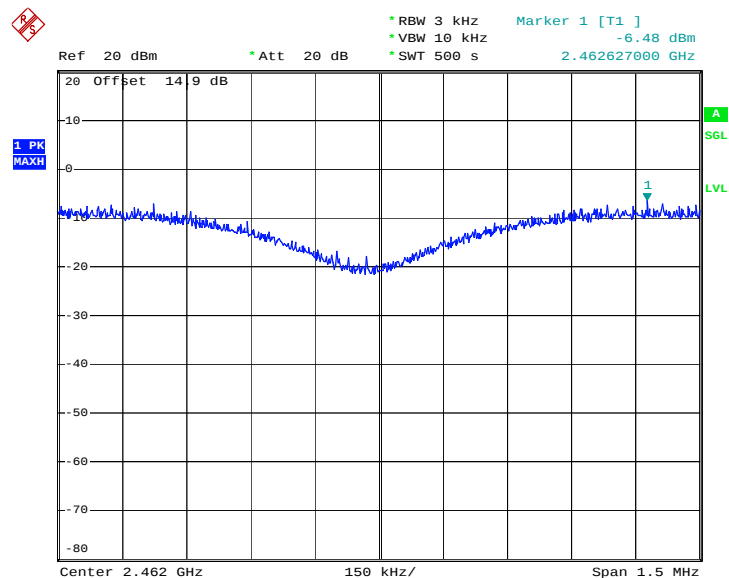Mode 3 : PSD Plot on 802.11b Channel 11


Date: 10.JAN.2012 12:21:43


Test Mode :	Mode 4, 5, 6	Temperature :	24~25℃
Test Engineer :	Fly Chen	Relative Humidity :	46~47%

Channel	Frequency (MHz)	802.11g Measured PSD (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	-8.95	8	Pass
06	2437	-9.61	8	Pass
11	2462	-8.38	8	Pass

Mode 4 : PSD Plot on 802.11g Channel 01


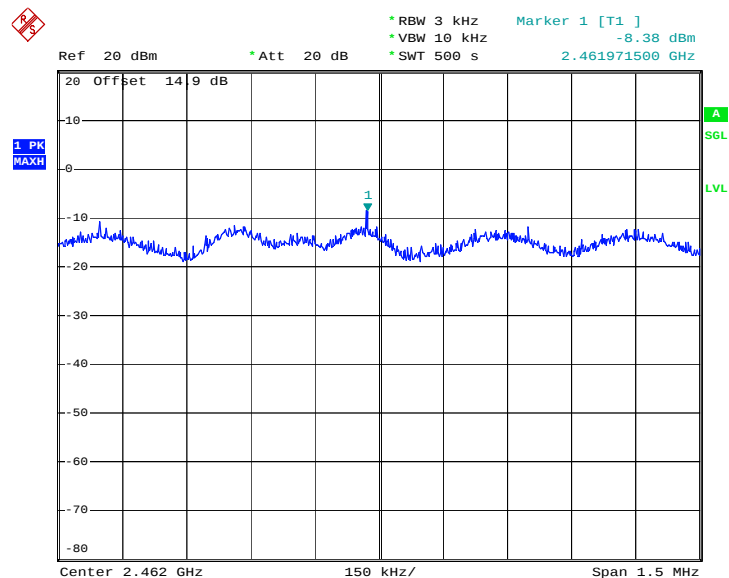
Date: 10.JAN.2012 13:23:14

Mode 5 : PSD Plot on 802.11g Channel 06

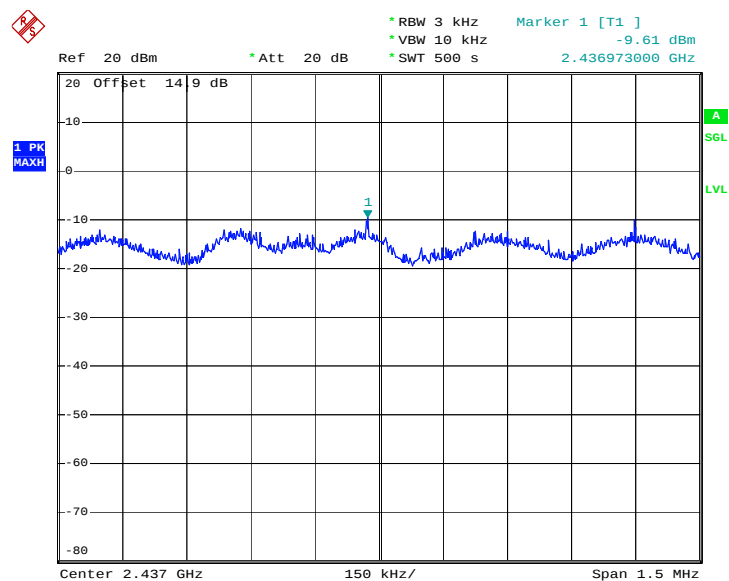

Date: 10.JAN.2012 13:38:06

Mode 6 : PSD Plot on 802.11g Channel 11



Date: 10.JAN.2012 14:01:24

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures


1. The testing follows the guidelines in ANSI C63.4-2003.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.6.4 Test Setup

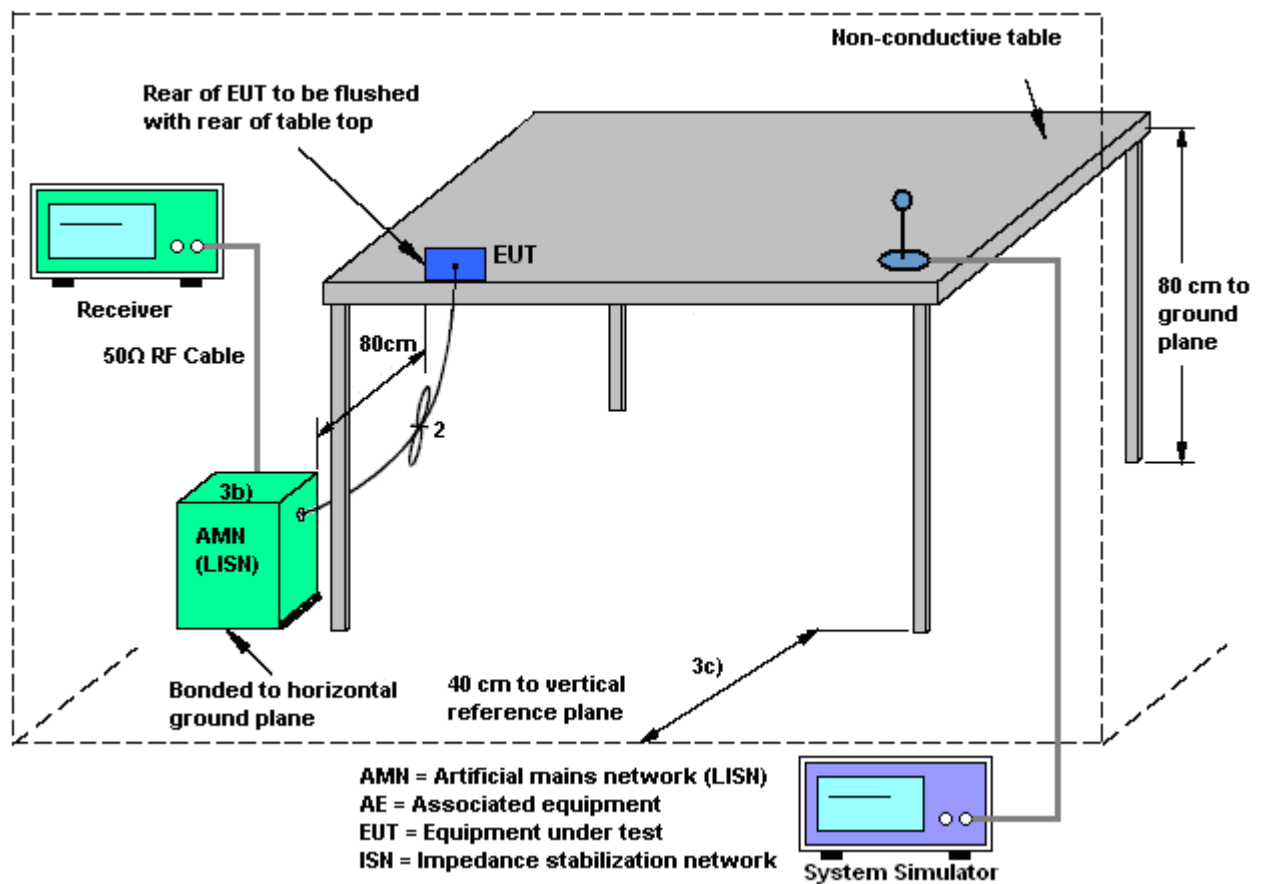

3.6.5 Test Result of AC Conducted Emission


Test Mode :	Mode 1	Temperature :	22~23°C
Test Engineer :	King Liu	Relative Humidity :	44~46%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM 850 Idle + Bluetooth Link + WIFI Link + Adapter + Camera		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

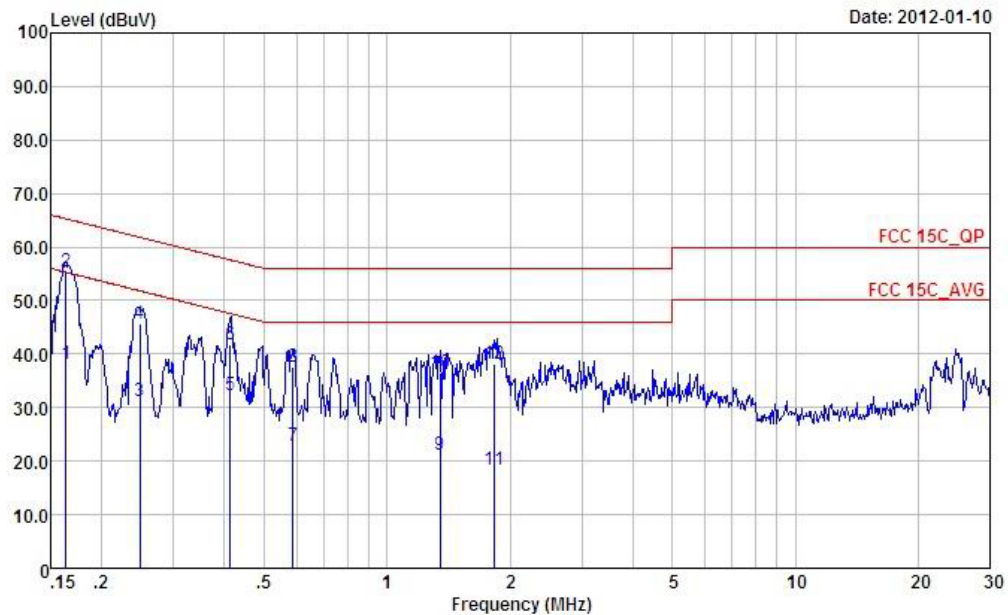

Site : CO01-SZ
 Condition : FCC 15C_QP LISN_L_2000601 LINE
 Project : (FR)1D2801
 Mode : Model1

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.16	38.08	-17.19	55.27	28.00	0.03	10.05	Average
2	0.16	55.38	-9.89	65.27	45.30	0.03	10.05	QP
3	0.25	31.08	-20.75	51.83	21.00	0.02	10.06	Average
4	0.25	45.68	-16.15	61.83	35.60	0.02	10.06	QP
5	0.41	32.30	-15.29	47.59	22.20	0.02	10.08	Average
6	0.41	41.80	-15.79	57.59	31.70	0.02	10.08	QP
7	0.59	22.82	-23.18	46.00	12.71	0.02	10.09	Average
8	0.59	37.72	-18.28	56.00	27.61	0.02	10.09	QP
9	1.35	21.15	-24.85	46.00	11.00	0.03	10.12	Average
10	1.35	36.61	-19.39	56.00	26.46	0.03	10.12	QP
11	1.83	18.27	-27.73	46.00	8.10	0.03	10.14	Average
12	1.83	38.17	-17.83	56.00	28.00	0.03	10.14	QP

Test Mode :	Mode 1	Temperature :	22~23℃
Test Engineer :	King Liu	Relative Humidity :	44~46%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM 850 Idle + Bluetooth Link + WIFI Link + Adapter + Camera		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

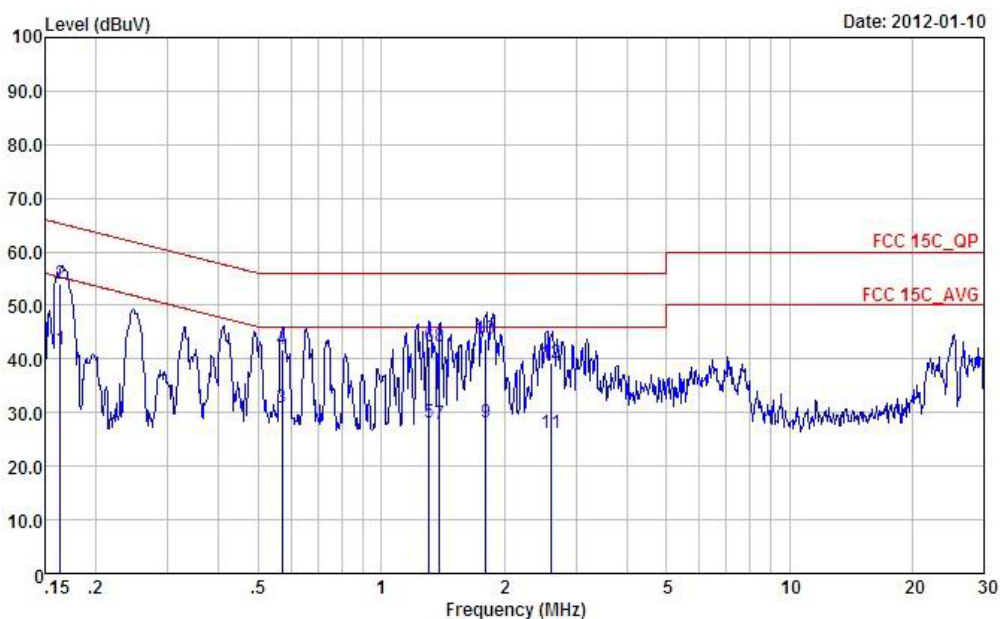

Site : CO01-SZ
 Condition : FCC 15C_QP LISN_N_2000601 NEUTRAL
 Project : (FR)1D2801
 Mode : Model

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.16	41.77	-13.53	55.30	31.70	0.02	10.05	Average
2	0.16	54.07	-11.23	65.30	44.00	0.02	10.05	QP
3	0.57	31.01	-14.99	46.00	20.90	0.02	10.09	Average
4	0.57	41.75	-14.25	56.00	31.64	0.02	10.09	QP
5	1.31	28.15	-17.85	46.00	18.01	0.02	10.12	Average
6	1.31	42.23	-13.77	56.00	32.09	0.02	10.12	QP
7	1.39	27.75	-18.25	46.00	17.60	0.03	10.12	Average
8	1.39	42.33	-13.67	56.00	32.18	0.03	10.12	QP
9	1.81	28.27	-17.73	46.00	18.10	0.03	10.14	Average
10	1.81	43.77	-12.23	56.00	33.60	0.03	10.14	QP
11	2.62	26.32	-19.68	46.00	16.10	0.04	10.18	Average
12	2.62	39.22	-16.78	56.00	29.00	0.04	10.18	QP

3.7 Radiated Emission Measurement

3.7.1 Limit of Radiated Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.7.2 Measuring Instruments


See list of measuring instruments of this test report.

3.7.3 Test Procedures


- The testing follows the guidelines in FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
- Use the following spectrum analyzer settings:
 - Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
 - Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.
Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB)
- Follow the guidelines in ANSI C63.4-2003 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.

3.7.4 Test Setup


For radiated emissions below 30MHz

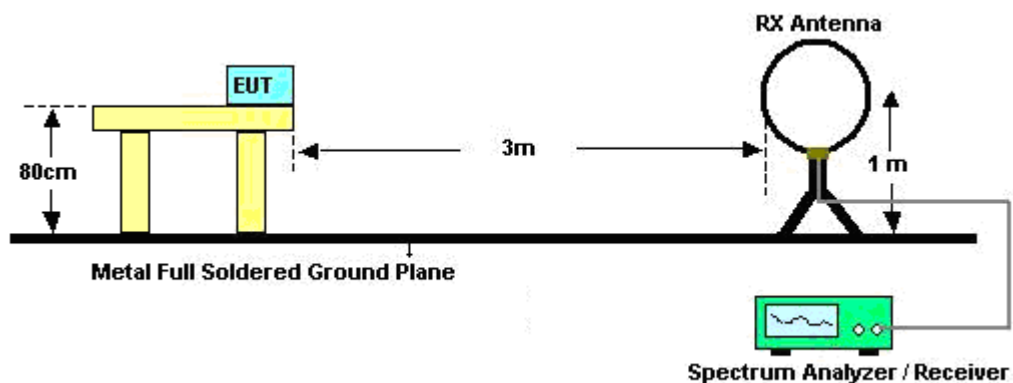

For radiated emissions from 30MHz to 1GHz

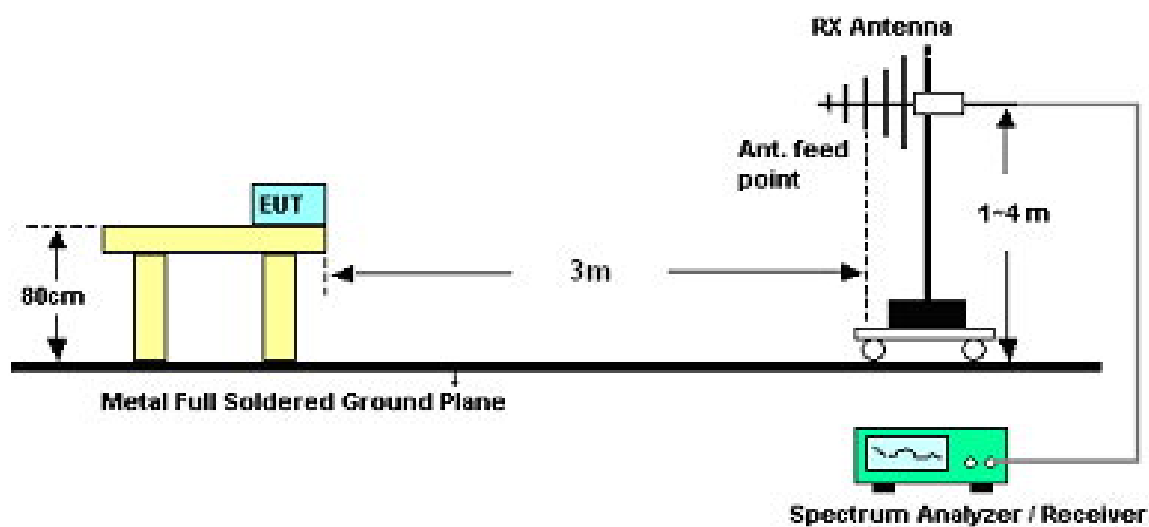

For radiated emissions above 1GHz

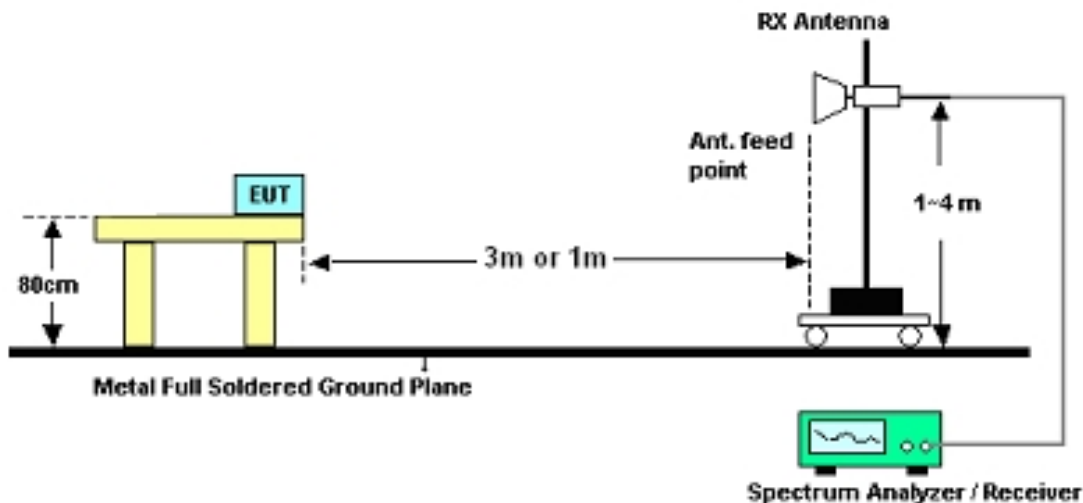

3.7.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

Test Engineer :	Jack Li	Temperature :	20~21℃	
		Relative Humidity :	40~41%	

Frequency (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

3.7.6 Test Result of Radiated Emission (30 MHz ~ 10th Harmonic)

Test Mode :	Mode 1	Temperature :	20~21℃
Test Channel :	01	Relative Humidity :	40~41%
Test Engineer :	Jack Li	Polarization :	Horizontal
Remark :	2412 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30.54	20.98	-19.02	40	33.52	17.29	0.25	30.08	-	-	Peak
134.76	15.97	-27.53	43.5	34.18	11.3	0.48	29.99	-	-	Peak
189.03	16.17	-27.33	43.5	37.05	8.49	0.57	29.94	-	-	Peak
832	25.11	-20.89	46	33.18	20.3	1.27	29.64	-	-	Peak
896.4	26.09	-19.91	46	33.83	20.45	1.3	29.49	-	-	Peak
936.3	29.97	-16.03	46	37.51	20.67	1.32	29.53	179	348	Peak
2351.04	47.44	-26.56	74	45.27	32.78	3.33	33.94	100	360	Peak
2351.04	34.54	-19.46	54	32.37	32.78	3.33	33.94	100	360	Average
2412	94.9	-	-	92.57	32.89	3.52	34.08	103	349	Peak
2412	90.7	-	-	88.37	32.89	3.52	34.08	103	349	Average
2498.29	46.79	-27.21	74	44.25	33.05	3.72	34.23	105	334	Peak
2498.29	33.21	-20.79	54	30.67	33.05	3.72	34.23	105	334	Average

Test Mode :	Mode 1	Temperature :	20~21℃
Test Channel :	01	Relative Humidity :	40~41%
Test Engineer :	Jack Li	Polarization :	Vertical
Remark :	2412 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
39.99	23.71	-16.29	40	41.18	12.3	0.25	30.02	-	-	Peak
81.57	22.22	-17.78	40	45.04	6.87	0.35	30.04	-	-	Peak
189.03	18.34	-25.16	43.5	39.22	8.49	0.57	29.94	-	-	Peak
612.2	22.31	-23.69	46	32.22	18.65	1.07	29.63	-	-	Peak
871.2	24.72	-21.28	46	32.53	20.49	1.29	29.59	-	-	Peak
939.8	30.91	-15.09	46	38.42	20.69	1.33	29.53	200	0	Peak
2357.31	47.28	-26.72	74	45.07	32.81	3.38	33.98	100	0	Peak
2357.31	34.36	-19.64	54	32.15	32.81	3.38	33.98	100	0	Average
2412	94.01	-	-	91.68	32.89	3.52	34.08	100	41	Peak
2412	89.08	-	-	86.75	32.89	3.52	34.08	100	41	Average
2499.05	46.24	-27.76	74	43.7	33.05	3.72	34.23	102	113	Peak
2499.05	32.59	-21.41	54	30.05	33.05	3.72	34.23	102	113	Average

Test Mode :	Mode 2	Temperature :	20~21℃
Test Channel :	06	Relative Humidity :	40~41%
Test Engineer :	Jack Li	Polarization :	Horizontal
Remark :	2437 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30.54	19.86	-20.14	40	32.4	17.29	0.25	30.08	-	-	Peak
102.36	17.3	-26.2	43.5	35.97	10.87	0.42	29.96	-	-	Peak
213.06	14.72	-28.78	43.5	34.45	9.65	0.61	29.99	-	-	Peak
540.1	21.98	-24.02	46	32.37	18.31	0.99	29.69	-	-	Peak
844.6	25.44	-20.56	46	33.35	20.46	1.28	29.65	-	-	Peak
936.3	32.3	-13.7	46	39.84	20.67	1.32	29.53	100	0	Peak
2390	48.83	-25.17	74	46.55	32.86	3.47	34.05	100	0	Peak
2390	33.78	-20.22	54	31.5	32.86	3.47	34.05	100	0	Average
2437	95.96	-	-	93.56	32.95	3.6	34.15	112	24	Peak
2437	91.8	-	-	89.4	32.95	3.6	34.15	112	24	Average
2483.5	48.66	-25.34	74	46.17	33.01	3.68	34.2	100	0	Peak
2483.5	34.89	-19.11	54	32.4	33.01	3.68	34.2	100	0	Average

Test Mode :	Mode 2	Temperature :	20~21℃
Test Channel :	06	Relative Humidity :	40~41%
Test Engineer :	Jack Li	Polarization :	Vertical
Remark :	2437 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
50.52	29.63	-10.37	40	52.08	7.4	0.28	30.13	-	-	Peak
85.89	18.93	-21.07	40	40.68	7.89	0.37	30.01	-	-	Peak
147.72	19.43	-24.07	43.5	38.7	10.21	0.5	29.98	-	-	Peak
570.2	26.21	-19.79	46	36.3	18.54	1.03	29.66	-	-	Peak
876.1	25.8	-20.2	46	33.59	20.48	1.29	29.56	-	-	Peak
936.3	36.53	-9.47	46	44.07	20.67	1.32	29.53	100	0	Peak
2390	49.28	-24.72	74	47	32.86	3.47	34.05	100	0	Peak
2390	33.48	-20.52	54	31.2	32.86	3.47	34.05	100	0	Average
2437	100.32	-	-	97.92	32.95	3.6	34.15	100	330	Peak
2437	96.32	-	-	93.92	32.95	3.6	34.15	100	330	Average
2483.5	49.54	-24.46	74	47.05	33.01	3.68	34.2	100	0	Peak
2483.5	35.49	-18.51	54	33	33.01	3.68	34.2	100	0	Average

Test Mode :	Mode 3	Temperature :	20~21℃
Test Channel :	11	Relative Humidity :	40~41%
Test Engineer :	Jack Li	Polarization :	Horizontal
Remark :	2462 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30	20.73	-19.27	40	32.55	18	0.26	30.08	100	0	Peak
88.86	22.85	-20.65	43.5	43.84	8.61	0.39	29.99	-	-	Peak
270.03	15.5	-30.5	46	32.35	12.36	0.69	29.9	-	-	Peak
535.9	21.02	-24.98	46	31.5	18.22	0.99	29.69	-	-	Peak
850.2	26.63	-19.37	46	34.5	20.51	1.28	29.66	-	-	Peak
957.3	32.79	-21.21	54	40.22	20.77	1.34	29.54	-	-	Peak
2390	48.62	-25.38	74	46.34	32.86	3.47	34.05	100	0	Peak
2390	35.28	-18.72	54	33	32.86	3.47	34.05	100	0	Average
2462	92.2	-	-	89.75	32.98	3.64	34.17	165	307	Peak
2462	89.04	-	-	86.59	32.98	3.64	34.17	165	307	Average
2483.5	48.31	-25.69	74	45.82	33.01	3.68	34.2	100	0	Peak
2483.5	38.1	-15.9	54	35.61	33.01	3.68	34.2	100	0	Average

Test Mode :	Mode 3	Temperature :	20~21℃
Test Channel :	11	Relative Humidity :	40~41%
Test Engineer :	Jack Li	Polarization :	Vertical
Remark :	2462 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
39.18	20.04	-19.96	40	36.85	12.98	0.25	30.04	100	0	Peak
52.95	18.41	-21.59	40	41.45	6.8	0.29	30.13	-	-	Peak
88.86	22.47	-21.03	43.5	43.46	8.61	0.39	29.99	-	-	Peak
570.2	24.78	-21.22	46	34.87	18.54	1.03	29.66	-	-	Peak
876.1	24.98	-21.02	46	32.77	20.48	1.29	29.56	-	-	Peak
951	31.49	-22.51	54	38.97	20.73	1.33	29.54	-	-	Peak
2390	49.43	-24.57	74	47.15	32.86	3.47	34.05	100	0	Peak
2390	34.14	-19.86	54	31.86	32.86	3.47	34.05	100	0	Average
2462	97.31	-	-	94.86	32.98	3.64	34.17	119	349	Peak
2462	94.55	-	-	92.1	32.98	3.64	34.17	119	349	Average
2485.75	52.38	-21.62	74	49.89	33.01	3.68	34.2	200	350	Peak
2485.75	37.65	-16.35	54	35.16	33.01	3.68	34.2	200	350	Average

Test Mode :	Mode 4	Temperature :	20~21℃
Test Channel :	01	Relative Humidity :	40~41%
Test Engineer :	Jack Li	Polarization :	Horizontal
Remark :	2412 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30.27	20.73	-19.27	40	32.55	18	0.26	30.08	-	-	Peak
85.89	15.47	-24.53	40	37.22	7.89	0.37	30.01	-	-	Peak
144.21	15.82	-27.68	43.5	34.86	10.45	0.5	29.99	-	-	Peak
804.7	25.27	-20.73	46	33.71	19.9	1.25	29.59	-	-	Peak
871.2	26.88	-19.12	46	34.69	20.49	1.29	29.59	120	0	Peak
951	30.29	-23.71	54	37.77	20.73	1.33	29.54	-	-	Peak
2389.99	60.82	-13.18	74	58.54	32.86	3.47	34.05	200	360	Peak
2389.99	42.83	-11.17	54	40.55	32.86	3.47	34.05	200	360	Average
2412	94.84	-	-	92.51	32.89	3.52	34.08	105	347	Peak
2412	85.6	-	-	83.27	32.89	3.52	34.08	105	347	Average
2484.04	46.98	-27.02	74	44.49	33.01	3.68	34.2	111	354	Peak
2484.04	34.64	-19.36	54	32.15	33.01	3.68	34.2	111	354	Average

Test Mode :	Mode 4	Temperature :	20~21℃
Test Channel :	01	Relative Humidity :	40~41%
Test Engineer :	Jack Li	Polarization :	Vertical
Remark :	2412 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
39.72	23.73	-16.27	40	41.2	12.3	0.25	30.02	100	0	Peak
80.49	22	-18	40	45.09	6.6	0.35	30.04	-	-	Peak
189.03	19.01	-24.49	43.5	39.89	8.49	0.57	29.94	-	-	Peak
622	24.3	-21.7	46	34.13	18.72	1.08	29.63	-	-	Peak
871.2	26.14	-19.86	46	33.95	20.49	1.29	29.59	-	-	Peak
951	30.52	-23.48	54	38	20.73	1.33	29.54	-	-	Peak
2389.99	59.48	-14.52	74	57.2	32.86	3.47	34.05	154	321	Peak
2389.99	42.23	-11.77	54	39.95	32.86	3.47	34.05	154	321	Average
2412	93.53	-	-	91.2	32.89	3.52	34.08	119	30	Peak
2412	84.53	-	-	82.2	32.89	3.52	34.08	119	30	Average
2488.03	47.41	-26.59	74	44.87	33.05	3.72	34.23	120	0	Peak
2488.03	33.6	-20.4	54	31.06	33.05	3.72	34.23	120	0	Average

Test Mode :	Mode 5	Temperature :	20~21℃
Test Channel :	06	Relative Humidity :	40~41%
Test Engineer :	Jack Li	Polarization :	Horizontal
Remark :	2437 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30.27	20.35	-19.65	40	32.17	18	0.26	30.08	-	-	Peak
88.86	22.22	-21.28	43.5	43.21	8.61	0.39	29.99	-	-	Peak
189.03	13.74	-29.76	43.5	34.62	8.49	0.57	29.94	-	-	Peak
540.1	22.81	-23.19	46	33.2	18.31	0.99	29.69	-	-	Peak
902.7	29.27	-16.73	46	36.99	20.46	1.3	29.48	100	0	Peak
944	33.39	-20.61	54	40.88	20.71	1.33	29.53	-	-	Peak
2390	48.03	-25.97	74	45.75	32.86	3.47	34.05	100	0	Peak
2390	36.38	-17.62	54	34.1	32.86	3.47	34.05	100	0	Average
2437	97.97	-	-	95.57	32.95	3.6	34.15	106	18	Peak
2437	90.6	-	-	88.2	32.95	3.6	34.15	106	18	Average
2483.5	36.39	-17.61	54	33.9	33.01	3.68	34.2	100	0	Average
2483.5	49.09	-24.91	74	46.6	33.01	3.68	34.2	100	0	Peak

Test Mode :	Mode 5	Temperature :	20~21℃
Test Channel :	06	Relative Humidity :	40~41%
Test Engineer :	Jack Li	Polarization :	Vertical
Remark :	2437 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
38.37	19.75	-20.25	40	36.56	12.98	0.25	30.04	-	-	Peak
88.86	20.58	-22.92	43.5	41.57	8.61	0.39	29.99	-	-	Peak
213.6	16.52	-26.98	43.5	36.25	9.65	0.61	29.99	-	-	Peak
529.6	24.15	-21.85	46	34.84	18.02	0.99	29.7	-	-	Peak
876.1	27.21	-18.79	46	35	20.48	1.29	29.56	100	0	Peak
944	33.15	-20.85	54	40.64	20.71	1.33	29.53	-	-	Peak
2390	48.69	-25.31	74	46.41	32.86	3.47	34.05	100	0	Peak
2390	36.98	-17.02	54	34.7	32.86	3.47	34.05	100	0	Average
2437	98.07	-	-	95.67	32.95	3.6	34.15	100	0	Peak
2437	91.35	-	-	88.95	32.95	3.6	34.15	100	0	Average
2483.5	48.09	-25.91	74	45.6	33.01	3.68	34.2	100	0	Peak
2483.5	36.14	-17.86	54	33.65	33.01	3.68	34.2	100	0	Average

Test Mode :	Mode 6	Temperature :	20~21℃
Test Channel :	11	Relative Humidity :	40~41%
Test Engineer :	Jack Li	Polarization :	Horizontal
Remark :	2462 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30.54	19.99	-20.01	40	32.53	17.29	0.25	30.08	-	-	Peak
88.86	18.31	-25.19	43.5	39.3	8.61	0.39	29.99	-	-	Peak
223.86	14.17	-31.83	46	33.08	10.41	0.63	29.95	-	-	Peak
540.1	21.59	-24.41	46	31.98	18.31	0.99	29.69	-	-	Peak
876.1	26.33	-19.67	46	34.12	20.48	1.29	29.56	-	-	Peak
939.8	34.83	-11.17	46	42.34	20.69	1.33	29.53	100	0	Peak
2390	48.62	-25.38	74	46.34	32.86	3.47	34.05	100	0	Peak
2390	36.08	-17.92	54	33.8	32.86	3.47	34.05	100	0	Average
2462	97.83	-	-	95.38	32.98	3.64	34.17	100	0	Peak
2462	88.57	-	-	86.12	32.98	3.64	34.17	100	0	Average
2483.5	60.32	-13.68	74	57.83	33.01	3.68	34.2	200	61	Peak
2483.5	41.7	-12.3	54	39.21	33.01	3.68	34.2	200	61	Average

Test Mode :	Mode 6	Temperature :	20~21℃
Test Channel :	11	Relative Humidity :	40~41%
Test Engineer :	Jack Li	Polarization :	Vertical
Remark :	2462 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30.27	21.41	-18.59	40	33.23	18	0.26	30.08	-	-	Peak
88.86	19.83	-23.67	43.5	40.82	8.61	0.39	29.99	-	-	Peak
212.25	16.36	-27.14	43.5	36.14	9.6	0.61	29.99	-	-	Peak
836.9	32.9	-13.1	46	40.91	20.37	1.27	29.65	-	-	Peak
902.7	36.14	-9.86	46	43.86	20.46	1.3	29.48	100	0	Peak
957.3	32.71	-21.29	54	40.14	20.77	1.34	29.54	-	-	Peak
2390	47.91	-26.09	74	45.63	32.86	3.47	34.05	100	0	Peak
2390	36.38	-17.62	54	34.1	32.86	3.47	34.05	100	0	Average
2462	97.17	-	-	94.72	32.98	3.64	34.17	120	40	Peak
2462	87.18	-	-	84.73	32.98	3.64	34.17	120	40	Average
2483.5	41.68	-12.32	54	39.19	33.01	3.68	34.2	100	44	Average
2483.5	59.32	-14.68	74	56.83	33.01	3.68	34.2	100	44	Peak

3.8 Antenna Requirements

3.8.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.8.2 Antenna Connected Construction

The antennas type used in this product is PIFA Antenna without connector and it is considered to meet antenna requirement.

3.8.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 30, 2011	Jan. 10, 2012	Dec. 29, 2012	Conducted (TH01-KS)
System Simulator	R&S	CMU200	837587/066	2G Full-Band	Dec. 30, 2011	Jan. 10, 2012	Dec. 29, 2012	Conducted (TH01-KS)
DC Power Supply	TOPWARD	GPS-3030D	E1884515	N/A	Aug. 23, 2011	Jan. 10, 2012	Aug. 22, 2012	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	N/A	Dec. 30, 2011	Jan. 10, 2012	Dec. 29, 2012	Conducted (TH01-KS)
EMI TEST Receiver	R&S	ECSI	100724	9K-3GHz	Mar. 08, 2011	Jan. 10, 2012	Mar. 07, 2012	Conduction (CO01-SZ)
AC LISN	ETS-LINDGRE N	3816/2SH	00103912	0.1MHz~108MHz	Feb. 28, 2011	Jan. 10, 2012	Feb. 27, 2012	Conduction (CO01-SZ)
AC LISN	ETS-LINDGRE N	3816/2SH	00103892	0.1MHz~108MHz	Feb. 28, 2011	Jan. 10, 2012	Feb. 27, 2012	Conduction (CO01-SZ)
AVR	Throma	61602	616020000891N/A	/	Oct. 12, 2011	Jan. 10, 2012	Oct. 11, 2012	Conduction (CO01-SZ)
AC Filter	ETS-LINDGRE N	LRE-2030/PE N 256260	00093783	/	N/A	Jan. 10, 2012	N/A	Conduction (CO01-SZ)
AC Filter	ETS-LINDGRE N	LRE-2030/PE N 256260	00097973	/	N/A	Jan. 10, 2012	N/A	Conduction (CO01-SZ)
System Simulator	Aglient	E5515C	MY50264168	GSM/WCDMA /CDMA2000	Mar. 14, 2011	Jan. 10, 2012	Mar. 13, 2012	Conduction (CO01-SZ)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 09, 2011	Jan. 30, 2012	Nov. 08, 2012	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 30, 2011	Jan. 30, 2012	Dec. 29, 2012	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Dec. 08, 2011	Jan. 30, 2012	Dec. 07, 2012	Radiation (03CH01-KS)
Loop Antenna	R&S	HFH2-Z2	860004/00	9 kHz~30 MHz	Jul. 28, 2011	Jan. 30, 2012	Jul. 27, 2012	Radiation (03CH01-KS)
Double Ridge Horn Antenna	EMCO	3117	00075959	1GHz~18GHz	Jan. 06, 2012	Jan. 30, 2012	Jan. 05, 2013	Radiation (03CH01-KS)
Amplifier	Wireless	FPA-6592G	060004	30MHz~2GHz	Dec. 30, 2011	Jan. 30, 2012	Dec. 29, 2012	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Dec. 30, 2011	Jan. 30, 2012	Dec. 29, 2012	Radiation (03CH01-KS)
Active Horn Antenna	com-power	AHA-118	701023	1GHz~18GHz	Nov. 07, 2011	Jan. 30, 2012	Nov. 06, 2012	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Oct. 11, 2011	Jan. 30, 2012	Oct.10, 2012	Radiation (03CH01-KS)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.10	Normal (k=2)	0.05
Cable Loss	0.10	Normal (k=2)	0.05
AMN Insertion Loss	2.50	Rectangular	0.63
Receiver Specification	1.50	Rectangular	0.43
Site Imperfection	1.39	Rectangular	0.80
Mismatch	+0.34 / -0.35	U-Shape	0.24
Combined Standard Uncertainty $U_c(y)$	1.13		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.26		

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
Combined Standard Uncertainty $U_c(y)$	1.27		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.54		

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Contribution	Uncertainty of X_i		$u(X_i)$	C_i	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	± 0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	± 1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	± 0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	± 2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	± 1.50	Rectangular	0.87	1	0.87
Site Imperfection	± 2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
Combined Standard Uncertainty $U_c(y)$	2.36				
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.72				



Appendix A. Photographs of EUT

Please refer to Sporton report number EP1D2801 as below.