



MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVE • BALTIMORE, MD 21230 • PHONE (410) 354-3300 • FAX (410) 354-3313

**Electromagnetic Compatibility Criteria
Test Report**

for the

**Go Networks, Inc
Model MBW-510F**

Tested under
the FCC Certification Rules
contained in
Title 47 of the CFR, Parts 15 Subpart B & ICES-003
for Class A Digital Devices
&
15.247 Subpart C & RSS-210, Issue 7, June 2007
for Intentional Radiators

MET Report: EMC24453A-FCC247

April 29, 2008

Prepared For:

**Go Networks, Inc
126 Yigal Alon Street
Tel-Aviv, 67443, Israel**



Go Networks, Inc
MBW-510F

Electromagnetic Compatibility
Cover Page
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

Electromagnetic Compatibility Criteria Test Report

for the

**Go Networks, Inc
Model MBW-510F**

Tested under
the FCC Certification Rules
contained in
Title 47 of the CFR, Parts 15 Subpart B & ICES-003
for Class A Digital Devices
&
15.247 Subpart C & RSS-210, Issue 7, June 2007
for Intentional Radiators

A handwritten signature in black ink, appearing to read "D. Tennakoon".
Dusmantha Tennakoon Project Engineer
Electromagnetic Compatibility Lab

A handwritten signature in blue ink, appearing to read "Jennifer Sanchez".
Jennifer Sanchez
Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules Parts 15B, 15.247 and Industry Canada standards ICES-003, Issue 4 February 2004, RSS-210, Issue 7, June 2007 under normal use and maintenance.

A handwritten signature in black ink, appearing to read "Shawn McMillen".

Shawn McMillen, Manager
Electromagnetic Compatibility Lab



Go Networks, Inc
MBW-510F

Electromagnetic Compatibility
Report Status
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	April 29, 2008	Initial Issue.



Table of Contents

I.	Executive Summary	1
	A. Purpose of Test	2
	B. Executive Summary	2
II.	Equipment Configuration	3
	A. Overview.....	4
	B. References.....	5
	C. Test Site	6
	D. Description of Test Sample.....	6
	E. Equipment Configuration.....	7
	F. Ports and Cabling Information.....	7
	G. Mode of Operation.....	8
	H. Method of Monitoring EUT Operation	8
	I. Modifications	8
	a) Modifications to EUT.....	8
	b) Modifications to Test Standard.....	8
	J. Disposition of EUT	8
III.	Electromagnetic Compatibility Criteria for Unintentional Radiators	9
	§ 15.107(a) Conducted Emissions Limits.....	10
	§ 15.109(a) Radiated Emission Limits	14
	§ 15.09(a) Radiated Emissions Limits	14
IV.	Electromagnetic Compatibility Criteria for Intentional Radiators.....	18
	§ 15.203 Antenna Requirement.....	19
	§ 15.207(a) Conducted Emissions Limits.....	20
	§ 15.247(a) 6 dB and 99% Bandwidth.....	24
	§ 15.247(b) Peak Power Output and RF Exposure.....	25
	§ 15.247(d) Spurious Emissions Requirements – Radiated and RF Conducted	28
	§ 15.247(d) Peak Power Spectral Density	41
V.	Test Equipment	42
VI.	Certification & User's Manual Information.....	45
	A. Certification Information	46
	B. Label and User's Manual Information	50
VII.	ICES-003 Procedural & Labeling Requirements.....	52



List of Tables

Table 1. Executive Summary of EMC Part 15.247 Compliance Testing	2
Table 2. EUT Summary Table.....	4
Table 3. References	5
Table 4. Equipment Configuration	7
Table 5. Ports and Cabling Information	7
Table 6. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Subsections 15.107(a) (b) and 15.207(a)	10
Table 7. Conducted Emissions - Voltage, AC Power, Phase Line (110 VAC, 60 Hz).....	11
Table 8. Conducted Emissions - Voltage, AC Power, Neutral Line (110 VAC, 60 Hz).....	11
Table 9. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)	14
Table 10. Radiated Emissions Limits Test Results, 30 MHz – 1GHz.....	15
Table 11. Radiated Emissions Limits Test Results, 1GHz – 5GHz.....	16
Table 12. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)	20
Table 13. Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz).....	21
Table 14. Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz).....	21
Table 15. Output Power Requirements from §15.247	25
Table 16. RF Output Power Test Results – 802.11b	26
Table 17. RF Output Power Test Results – 802.11g	26
Table 18. Restricted Bands of Operation.....	28
Table 19. Harmonic Emissions Test Results – 802.11b/g.....	30
Table 20. Test Equipment List – Conducted Emissions 15.107	43
Table 21. Test Equipment List – Radiated Emissions 15.109	43
Table 22. Test Equipment List – Conducted Emissions 15.207	43
Table 23. Test Equipment List – Harmonics Emissions, Restricted Band & RF Output Power	44

List of Photographs

Photograph 1. Go Networks, Inc MBW-510F.....	6
Photograph 2. Conducted Emissions Test Setup	13
Photograph 3. Radiated Emission Test Setup 30 MHz - 1 GHz.....	17
Photograph 4. Conducted Emissions Test Setup	23
Photograph 5. Test Equipment and setup for various Radiated Measurements.....	39



List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
<i>d</i>	Measurement Distance
dB	Decibels
dBμA	Decibels above one microamp
dBμV	Decibels above one microvolt
dBμA/m	Decibels above one microamp per meter
dBμV/m	Decibels above one microvolt per meter
DC	Direct Current μ
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EUT	Equipment Under Test
<i>f</i>	Frequency
FCC	Federal Communications Commission
GR-1089-CORE	(GR) General Requirement(s) imposed by the NEBS standard, (CORE) Central Office Recovery Express (AT&T), (I089) specifies various parts of the General Requirements under Bellcore Technical Standard, Requirements for Electromagnetic Compatibility and Electrical Safety - Generic Criteria for Network Telecommunications Equipment
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	kilohertz
kPa	kilopascal
kV	kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
μH	microhenry
μ	microfarad
μs	microseconds
NEBS	Network Equipment-Building System
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts per meter
VCP	Vertical Coupling Plane



Go Networks, Inc
MBW-510F

Electromagnetic Compatibility
Executive Summary
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

I. Executive Summary



Go Networks, Inc
MBW-510F

Electromagnetic Compatibility
Executive Summary
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

A. Purpose of Test

An EMC evaluation was performed to determine compliance of the Go Networks, Inc MBW-510F, with the requirements of Part 15, §15.247. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the MBW-510F. Go Networks, Inc should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the MBW-510F, has been **permanently** discontinued

B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.247, in accordance with Go Networks, Inc, purchase order number 300560. All tests were conducted using measurement procedure ANSI C63.4-2003.

FCC Reference	IC Reference	Description	Compliance
47 CFR Part 15.247:2005	RSS-210 Issue 7: 2007	Applicable Standard	Compliant
Title 47 of the CFR, Part 15 §15.203	N/A	Antenna Requirement	Compliant
Title 47 of the CFR, Part 15 §15.205	RSS-210(A8.5)	Emissions at Restricted Band	Compliant
Title 47 of the CFR, Part 15 §15.207(a)	RSS-210(7.2.2)	Conducted Emission Voltage	Compliant
Title 47 of the CFR, Part 15 §15.247(a)(1)	RSS-210(A8.1)	Occupied Bandwidth	Refer to FCC ID: SWX-XR2
Title 47 of the CFR, Part 15 §15.247(b)	RSS-210(A8.4)	RF Output Power	Compliant
Title 47 of the CFR, Part 15 §15.209, §15.247(d)	RSS-210(A8.5)	Radiated and Conducted Spurious Emissions	Compliant/ Refer to FCC ID: SWX-XR2
Title 47 of the CFR, Part 15; §15.247(e)	RSS-210(A8.3)	Power Spectral Density	Refer to FCC ID: SWX-XR2
Title 47 of the CFR, Part 15 §15.247(i)	RSSGen(5.5)	Maximum Permissible Exposure	Compliant
N/A	RSSGen(4.8)	Receiver Spurious Emissions	Compliant

Table 1 Executive Summary of EMC Part 15.247 Compliance Testing



Go Networks, Inc
MBW-510F

Electromagnetic Compatibility
Equipment Configuration
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

II. Equipment Configuration



Go Networks, Inc
MBW-510F

Electromagnetic Compatibility
Equipment Configuration
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

A. Overview

MET Laboratories, Inc. was contracted by Go Networks, Inc to perform testing on the MBW-510F, under Go Networks, Inc's purchase order number 300560.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Go Networks, Inc, MBW-510F.

The results obtained relate only to the item(s) tested.

Model(s) Tested:	MBW-510F
Model(s) Covered:	MBW-510F
	Primary Power: 90-240 AC, 47-63 Hz
	FCC ID: T3G-MBW-510F-000
EUT Specifications:	Type of Modulations: DSSS (Direct Sequence Spread Spectrum) OFDM (Orthogonal Frequency Division multiplexing)
	Emission Designators: 16M5D7D
	Equipment Code: DTS
	Peak RF Output Power: 28.1dBm
	EUT Frequency Ranges: 2412 – 2462MHz
Analysis:	The results obtained relate only to the item(s) tested.
Environmental Test Conditions:	Temperature: 15-35° C
	Relative Humidity: 30-60%
	Barometric Pressure: 860-1060 mbar
Evaluated by:	Dusmantha Tennakoon
Date(s):	April 29, 2008

Table 2. EUT Summary Table



B. References

CFR 47, Part 15, Subpart C	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 15: General Rules and Regulations, Allocation, Assignment, and Use of Radio Frequencies
RSS-210, Issue 7, June 2007	Low-power Licence-exempt Radiocommunications Devices (All Frequency Bands): Category I Equipment
CFR 47, Part 15, Subpart B	Electromagnetic Compatibility: Criteria for Radio Frequency Devices
ICES-003, Issue 4 February 2004	Electromagnetic Compatibility: Criteria for Radio Frequency Devices
ANSI C63.4:2003	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI/NCSL Z540-1-1994	Calibration Laboratories and Measuring and Test Equipment - General Requirements
ANSI/ISO/IEC 17025:2000	General Requirements for the Competence of Testing and Calibration Laboratories

Table 3. References

C. Test Site

All testing was performed at MET Laboratories, Inc., 914 West Patapsco Ave, Baltimore, MD 21230. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 3 meter semi-anechoic chamber . In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

D. Description of Test Sample

The Go Networks, Inc MBW-510F, is a 802.11a/b/g Access Point.



Photograph 1. Go Networks, Inc MBW-510F



Go Networks, Inc
MBW-510F

Electromagnetic Compatibility
Equipment Configuration
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

E. Equipment Configuration

The EUT was set up as outlined in Figure 1, Block Diagram of Test Setup. All cards, racks, etc., incorporated as part of the EUT is included in the following list.

Ref. ID	Name / Description	Model Number	Serial Number
GAP1	802.11a/b/g Access Point	MBW-WLF-510F	WLFG1000001 or WLFG1000018
Ant	2.4 GHz Antenna	MT-341018/NV/A	00007

Table 4. Equipment Configuration

F. Ports and Cabling Information

Ref. ID	Port name on EUT	Cable Description or reason for no cable	Qty.	Length (m)	Shielded? (Y/N)	Termination Box ID & Port ID
J2	ETH	RJ45 to RJ45	1	~2 m	N	-
J3	PWR	AC power feed	1	~2 m	N	-
J4	B2	Coaxial	1	~2 m	Y	-
J5	A2	Coaxial	1	~2 m	Y	-
J6	B1			Not applicable		
J7	A1			Not applicable		

Table 5. Ports and Cabling Information



G. Mode of Operation

The EUT was set to transmit continuously during testing.

H. Method of Monitoring EUT Operation

A Spectrum Analyzer was used to monitor the EUT's transmitter channel and power output.

I. Modifications

a) Modifications to EUT

No modifications were made to the EUT.

b) Modifications to Test Standard

No modifications were made to the test standard.

J. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Go Networks, Inc upon completion of testing.



Go Networks, Inc
MBW-510F

Electromagnetic Compatibility
Unintentional Radiators
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

III. Electromagnetic Compatibility Criteria for Unintentional Radiators



Electromagnetic Compatibility Criteria

§ 15.107 Conducted Emissions Limits

Test Requirement(s): **15.107 (a)** Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 6. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

15.107 (b) For a Class A digital device that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 6. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals. The lower limit applies at the band edges.

15.207(a), Except as shown in paragraphs (b) and (c) of this section*, charging, AC adapters or battery eliminators the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the Table 6, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency range (MHz)	Class A Conducted Limits (dB μ V)		*Class B Conducted Limits (dB μ V)	
	Quasi-Peak	Average	Quasi-Peak	Average
* 0.15- 0.45	79	66	66 - 56	56 - 46
0.45 - 0.5	79	66	56	46
0.5 - 30	73	60	60	50

Note 1 — The lower limit shall apply at the transition frequencies.

Note 2 — The limit decreases linearly with the logarithm if the frequency in the range 0.15 MHz to 0.5 MHz.

* -- Limits per Subsection 15.207(a).

Table 6. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Subsections 15.107(a) (b) and 15.207(a)

Test Results: The EUT was found compliant with the Class A requirement(s) of this section. Measured emissions were below applicable limits.

Test Engineer(s): Jeffrey Hazen

Test Date(s): April 14, 2008



Go Networks, Inc
MBW-510F

Electromagnetic Compatibility
Unintentional Radiators
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

Conducted Emissions - Voltage, AC Power, Phase Line (110 VAC, 60 Hz)

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.261	55.81	0.17	55.98	79	-23.02	47.21	0.17	47.38	66	-18.62
0.155	40	0.0935	40.0935	79	-38.9065	18.5	0.0935	18.5935	66	-47.4065
13.22	38.5	0.33	38.83	73	-34.17	25.7	0.33	26.03	60	-33.97
3.382	40.34	0.17	40.51	73	-32.49	37.8	0.17	37.97	60	-22.03
3.08	36.1	0.17	36.27	73	-36.73	31.4	0.17	31.57	60	-28.43
9.64	40.3	0.3108	40.6108	73	-32.3892	26.3	0.3108	26.6108	60	-33.3892


Table 7. Conducted Emissions - Voltage, AC Power, Phase Line (110 VAC, 60 Hz)

Conducted Emissions - Voltage, AC Power, Neutral Line (110 VAC, 60 Hz)


Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.263	53.9	0.17	54.07	79	-24.93	45.7	0.17	45.87	66	-20.13
0.15	43.7	0.085	43.785	79	-35.215	22.3	0.085	22.385	66	-43.615
13.18	45.6	0.33	45.93	73	-27.07	32.8	0.33	33.13	60	-26.87
3.38	39.5	0.17	39.67	73	-33.33	33.6	0.17	33.77	60	-26.23
3.08	36.8	0.17	36.97	73	-36.03	32.3	0.17	32.47	60	-27.53
3.68	40.7	0.17	40.87	73	-32.13	34	0.17	34.17	60	-25.83

Table 8. Conducted Emissions - Voltage, AC Power, Neutral Line (110 VAC, 60 Hz)

Conducted Emissions - Voltage, Worst Case Emissions, AC Power, (110 VAC, 60 Hz)

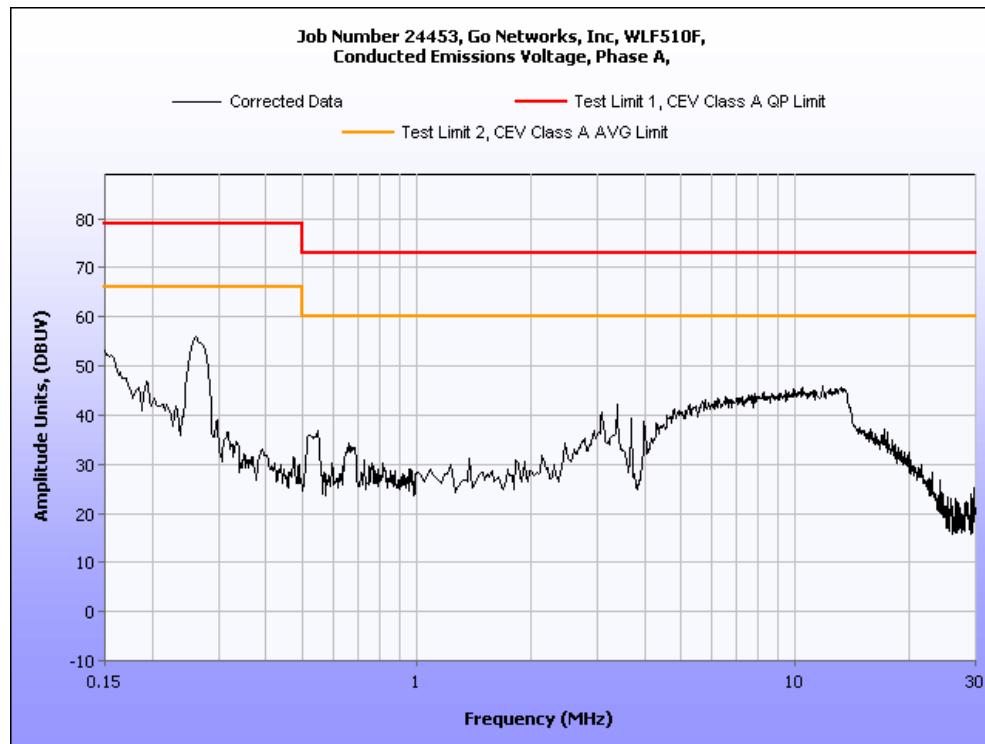

Plot 1. Conducted Emission, Phase Line Plots

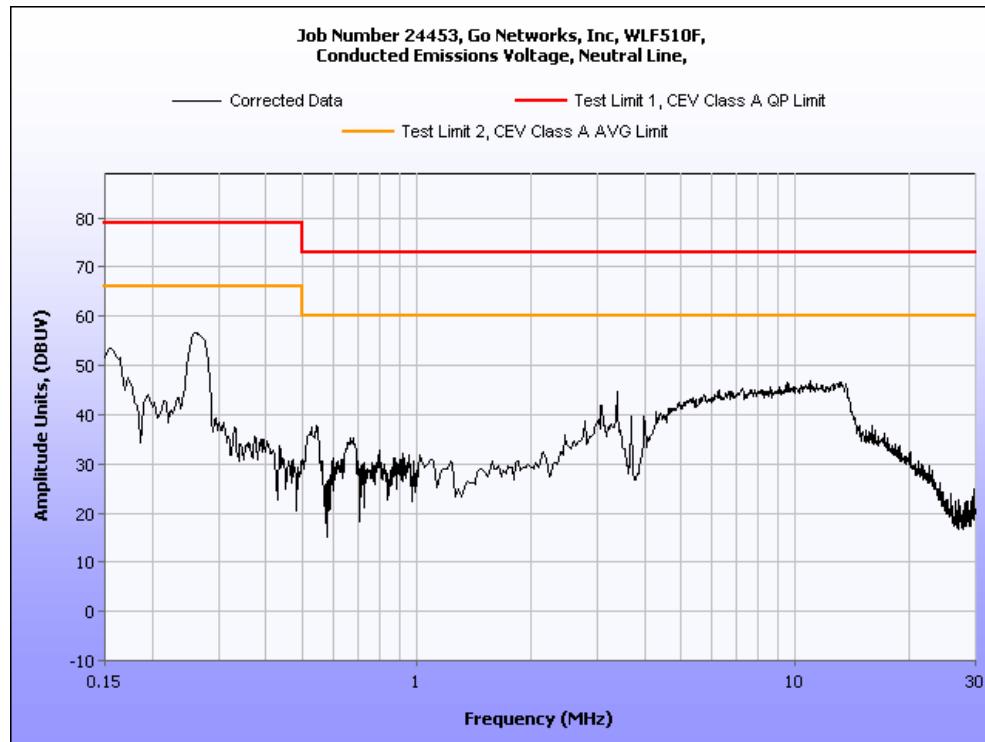

Plot 2. Conducted Emission, Neutral Line Plots

Conducted Emission Limits Test Setup



Photograph 2. Conducted Emissions Test Setup



Radiated Emission Limits

§ 15.109 Radiated Emissions Limits

Test Requirement(s): **15.109 (a)** Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the Class B limits expressed in Table 9.

15.109 (b) The field strength of radiated emissions from a Class A digital device, as determined at a distance of 10 meters, shall not exceed the Class A limits expressed in Table 9.

Frequency (MHz)	Field Strength (dB μ V/m)	
	§15.109 (b), Class A Limit (dB μ V) @ 10m	§15.109 (a), Class B Limit (dB μ V) @ 3m
30 - 88	39.00	40.00
88 - 216	43.50	43.50
216 - 960	46.40	46.00
Above 960	49.50	54.00

Table 9. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)

Test Procedures: The EUT was pole-mounted inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4 were used. An antenna was located 10 m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. Unless otherwise specified, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.

Test Results: The EUT was found to comply with the Class A requirement(s) of this section. Measured emissions were below applicable limits

Test Engineer(s): Jeffrey Hazen & Len Knight

Test Date(s): April 14 & April 22, 2008

Radiated Emissions Limits Test Results, Class A

Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna Height (m)	Uncorrected EMI Meter Reading (dBuV)	Antenna Correction Factor (dB/m) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Results
45.725	138	H	3.37	14.9	9.54	0.63	10.46	14.61	39	-24.39	pass
45.725	77	V	1	30.11	9.10	0.63	10.46	29.38	39	-9.62	pass
111.625	42	H	3.22	10.86	7.00	1.03	10.46	8.43	43.5	-35.07	pass
111.625	341.4	V	1	18.09	7.60	1.03	10.46	16.26	43.5	-27.24	pass
199.238	360	H	2.11	17.21	10.33	1.19	10.46	18.28	43.5	-25.22	pass
199.238	360	V	1	23.35	10.25	1.19	10.46	24.34	43.5	-19.16	pass

Table 10. Radiated Emissions Limits Test Results, 30 MHz – 1GHz

Note: The EUT was tested at 3 m. The data has been corrected for comparison with the 10 m limit using the formula: $20\log(3\text{ m}/10\text{ m})$ as expressed in the 'Distance Correction' column.




Plot 3. Radiated Emissions Limits Test Results, 30 MHz – 1 GHz, Class A

Radiated Emissions Limits Test Results, 1GHz – 5GHz

Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna Height (m)	Uncorrected EMI Meter Reading (dBuV)	Antenna Correction Factor (dB/m) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Results
1	350	H	1	60.13	-1.80	2.20	20	36.13	49.5	-13.37	pass
1	0	V	1	61.3	-2.00	2.20	20	37.10	49.5	-12.40	pass
1.2	10	H	1	60.88	-1.24	2.60	20	37.04	49.5	-12.46	pass
1.2	30	V	1	59.72	-1.36	2.60	20	35.76	49.5	-13.74	pass
1.6	315	H	1	59.06	0.14	3.30	20	35.90	49.5	-13.60	pass
1.6	0	V	1	57.82	0.10	3.30	20	34.62	49.5	-14.88	pass
1.33	350	H	1	59.55	-0.88	2.86	20	35.81	49.5	-13.69	pass
1.33	30	V	1	64.07	-0.94	2.86	20	40.27	49.5	-9.23	pass
5	0	H	1	56.38	5.80	6.37	20	35.81	49.5	-13.69	pass
5	0	V	1	60.64	6.00	6.37	20	40.27	49.5	-9.23	pass


Table 11. Radiated Emissions Limits Test Results, 1GHz – 5GHz

Note: The EUT was tested at 3 m. The data has been corrected for comparison with the 10 m limit using the formula: $20\log (3 \text{ m}/10 \text{ m})$ as expressed in the 'Distance Correction' column.

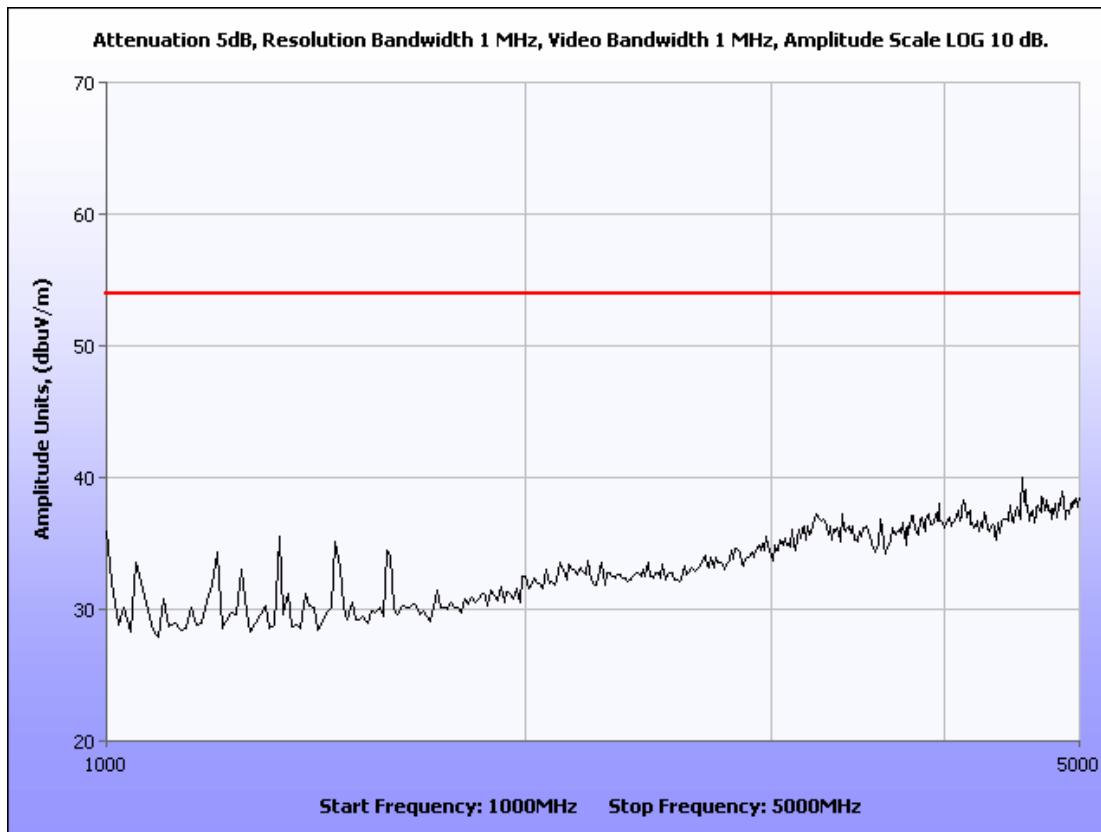

Plot 4. Radiated Emissions Limits Test Results, 1GHz – 5GHz

Radiated Emission Limits Test Setup

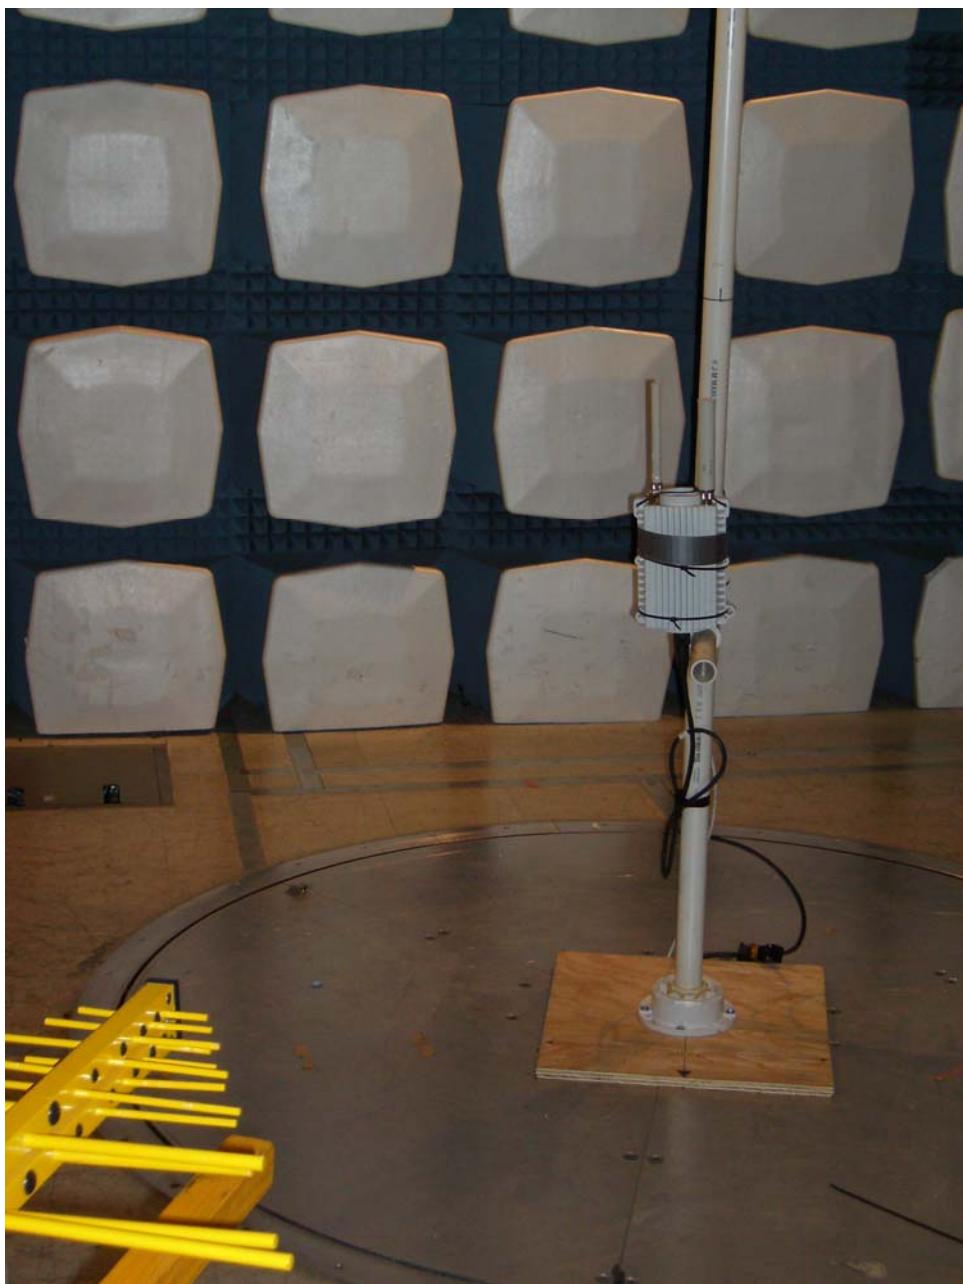

Photograph 3. Radiated Emission Test Setup 30 MHz - 1 GHz



Go Networks, Inc
MBW-510F

Electromagnetic Compatibility
Intentional Radiators

CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

IV. Electromagnetic Compatibility Criteria for Intentional Radiators



Go Networks, Inc
MBW-510F

Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.203 Antenna Requirement

Test Requirement: **§ 15.203:** An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

Results: The EUT as tested meets the criteria of this rule by virtue of having professionally installed. The EUT is therefore compliant with §15.203.

Gain/Model	Manufacturer
7.4/SF-245	NGC Company

Test Engineer(s): Dusmantha Tennakoon



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.207 Conducted Emissions Limits

Test Requirement(s): **§ 15.207 (a):** For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dB μ V)	
	Quasi-Peak	Average
* 0.15- 0.45	66 - 56	56 - 46
0.45 - 0.5	56	46
0.5 - 30	60	50

Table 12. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)

Test Procedure:

The EUT was pole-mounted inside a semi-anechoic chamber. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50 Ω /50 μ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with *ANSI C63.4-1992 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz"*. The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50 Ω /50 μ H LISN as the input transducer to an EMC/field intensity meter. The tests were conducted in a RF-shielded enclosure.

Test Results:

The EUT was found compliant with the requirement(s) of this section. Measured emissions were below applicable limits.

Test Engineer(s):

Dusmantha Tennakoon

Test Date(s):

April 16, 2008



Go Networks, Inc
MBW-510F

Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz)

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.2613	51.97	0.10421	52.07421	61.39	-9.31579	44.55	0.10421	44.65421	51.39	-6.73579
0.3901	40.41	0.17	40.58	58.06	-17.48	29.23	0.17	29.4	48.06	-18.66
2.7647	34.98	0.17	35.15	56	-20.85	22.67	0.17	22.84	46	-23.16
3.3769	42.5	0.17	42.67	56	-13.33	40.77	0.17	40.94	46	-5.06
11.6583	37.49	0.1965328	37.6865328	60	-22.3135	31.97	0.1965328	32.1665328	50	-17.8335
0.1505	42.81	0	42.81	65.97	-23.16	20.45	0	20.45	55.97	-35.52


Table 13. Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz)

Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz)


Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.2605	53.78	0.10285	53.88285	61.42	-7.53715	44.98	0.10285	45.08285	51.42	-6.33715
0.3898	39.14	0.17	39.31	58.07	-18.76	28.07	0.17	28.24	48.07	-19.83
3.3766	43.48	0.17	43.65	56	-12.35	41.9	0.17	42.07	46	-3.93
10.3333	38.07	0.1753328	38.2453328	60	-21.7547	25.03	0.1753328	25.2053328	50	-24.7947
0.6505	32	0.17	32.17	56	-23.83	21.43	0.17	21.6	46	-24.4
3.0706	40.83	0.17	41	56	-15	38.71	0.17	38.88	46	-7.12

Table 14. Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz)

Conducted Emissions - Voltage, Worst Case Emissions, AC Power, (120 VAC, 60 Hz)

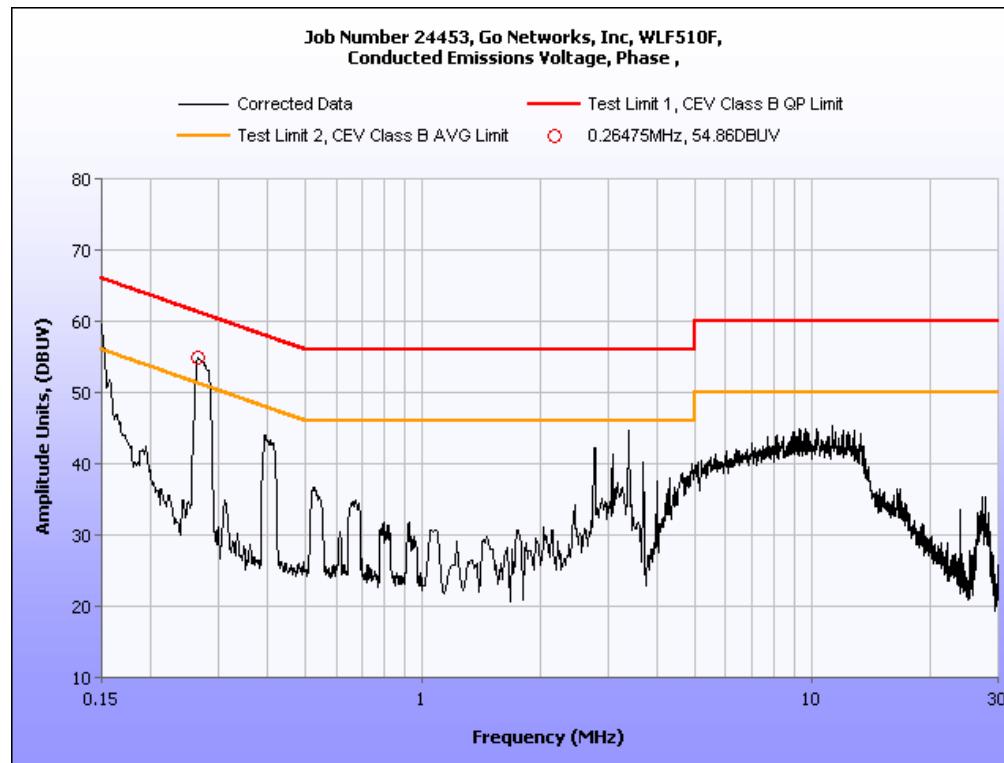


Plot 5. Conducted Emission, Phase Line Plots

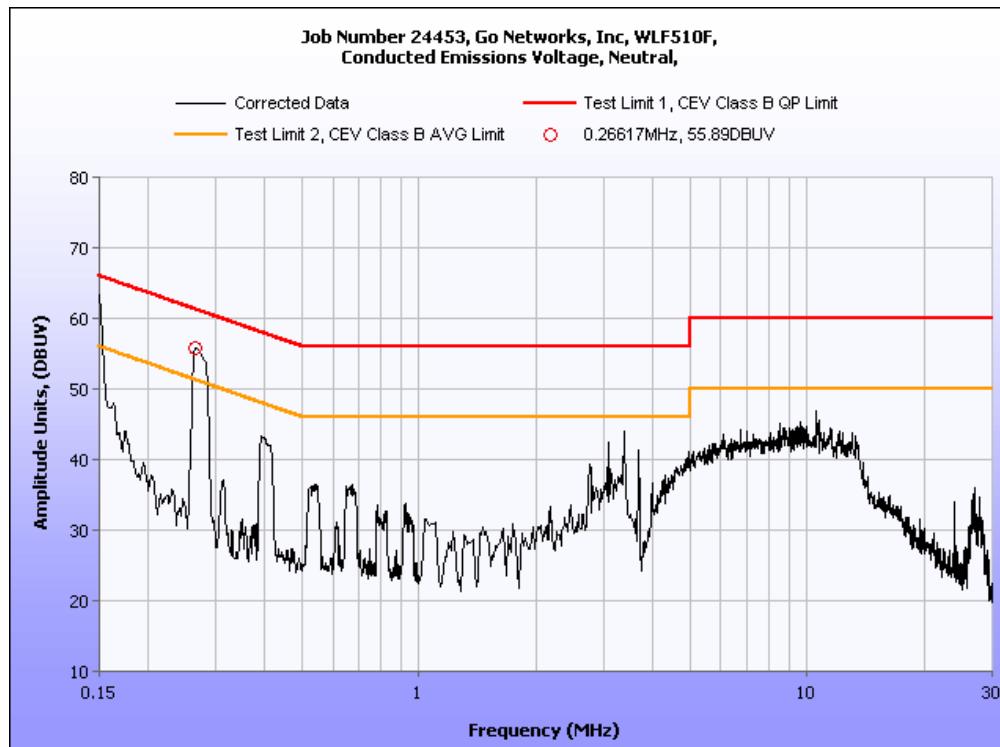

Plot 6. Conducted Emission, Neutral Line Plots

Conducted Emission Limits Test Setup

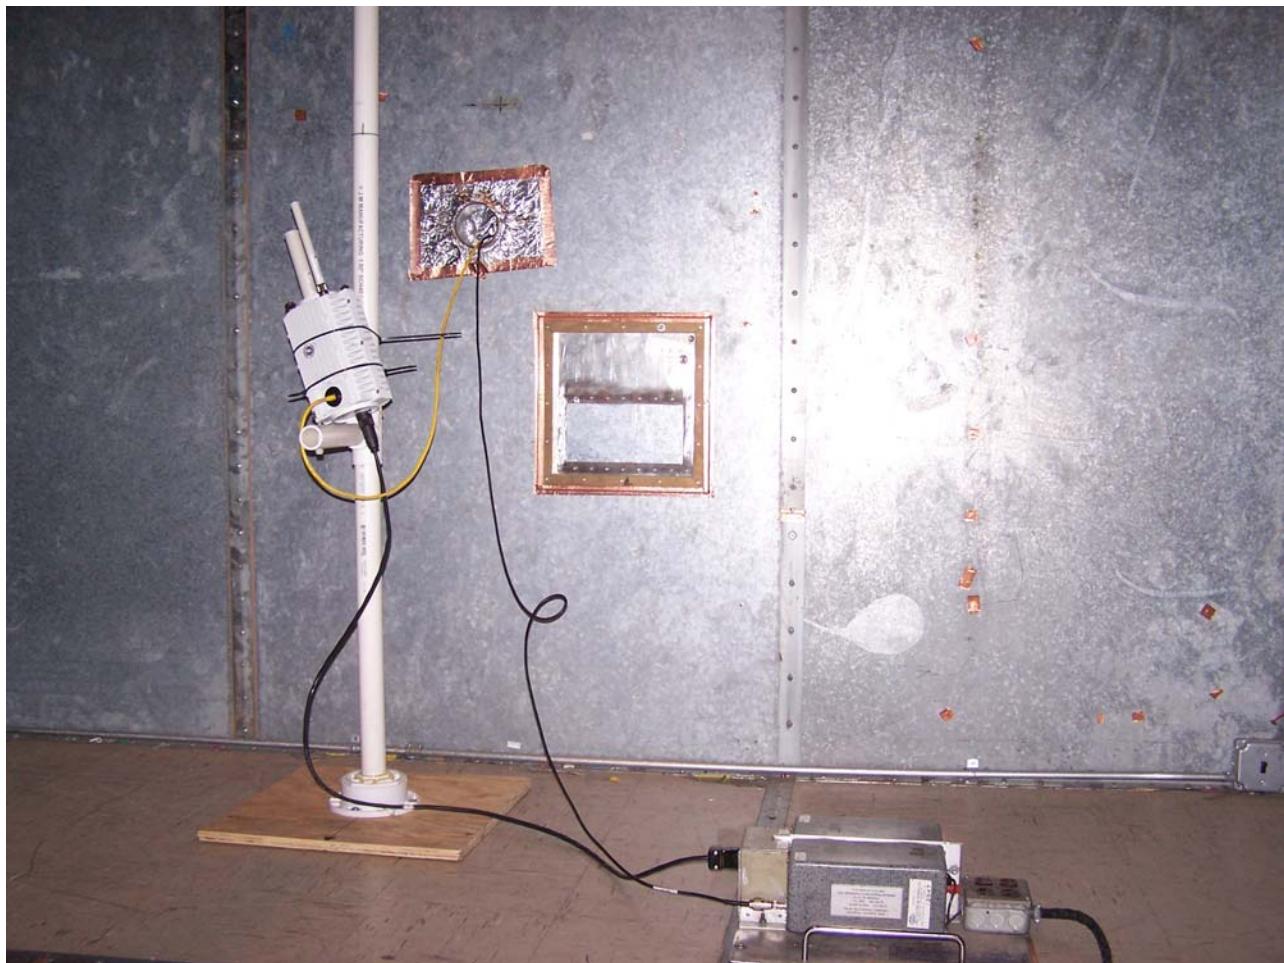

Photograph 4. Conducted Emissions Test Setup



Go Networks, Inc
MBW-510F

Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(a) 6 dB and 99% Bandwidth

Test Requirements: **§ 15.247(a):** Operation under the provisions of this section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

For systems using digital modulation techniques, the EUT may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Results Equipment complies with § 15.247 (a). Please refer to FCC ID: SWX-XR2.



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(b) Peak Power Output and RF Exposure

Test Requirements: **§15.247(b):** The maximum peak output power of the intentional radiator shall not exceed the following:

Digital Transmission Systems (MHz)	Output Limit (Watts)
902-928	1.000
2400-2483.5	1.000
5725- 5850	1.000

Table 15. Output Power Requirements from §15.247

§15.247(c): if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in the Table 15, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 2400 – 2483.5 MHz band may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725 – 5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

Fixed, point-to-point operation excludes the use of point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

Test Procedure: The transmitter was connected to a calibrated Spectrum Analyzer. Cable loss was programmed into Spectrum Analyzer. The EUT was measured at the low, mid and high channels of each band at a data rate which gave the maximum power level.



Go Networks, Inc
MBW-510F

Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

Test Results: Equipment complies with the Peak Power Output limits of § 15.247(b).

802.11b		
Carrier Channel	Frequency (MHz)	Measured Peak Output Power dBm
Low	2412	24.6
Mid	2437	25.8
High	2462	25.22

Table 16. RF Output Power Test Results – 802.11b

802.11g		
Carrier Channel	Frequency (MHz)	Measured Peak Output Power dBm
Low	2412	28.02
Mid	2437	28.1
High	2462	27.94

Table 17. RF Output Power Test Results – 802.11g



Go Networks, Inc
MBW-510F

Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(b) Peak Power Output and RF Exposure

RF Exposure Requirements: **§1.1307(b)(1) and §1.1307(b)(2):** Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

RF Radiation Exposure Limit: **§1.1310:** As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

MPE Limit Calculation: EUT's operating frequencies @ 2412-2462 MHz; highest conducted power = 28.1dBm (peak) therefore, **Limit for Uncontrolled exposure: 1 mW/cm² or 10 W/m²**

EUT maximum antenna gain = **7.4 dBi**.

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2$$

where,

S = Power Density mW/m²

P = Power Input to antenna mili Watts

G = Numeric Antenna Gain

R = Distance to the center of radiation of the antenna (20 cm for Mobile minimum distance)

$$\text{Antenna Numeric Gain} = 10^{\text{dBi}/10}$$

$$\text{Power at antenna port} = 647.2 \text{ mW}$$

$$\text{Antenna Gain} = 7.4 \text{ dBi}$$

$$\text{Numeric antenna gain} = 10^{7.4/10} = 5.5$$

$$S = (647.2)(5.5) / 4(3.1416)(20)^2$$

$$S = \mathbf{0.708 \text{ mW/cm}^2}$$

Therefore, EUT meets the Uncontrolled Exposure limit.



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) Harmonic Emissions – Radiated and Conducted

Test Requirements: §15.247(d); §15.205, §15.209: Emissions outside the frequency band.

§15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).

§15.205(a): Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090–0.110-----	16.42–16.423	399.9–410	4.5–5.15
¹ 0.495–0.505-----	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905-----	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128-----	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775-----	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775-----	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218-----	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825-----	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225-----	123–138	2200–2300	14.47–14.5
8.291–8.294-----	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366-----	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675-----	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475-----	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293-----	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025-----	240–285	3345.8–3358.36.	43–36.5
12.57675–12.57725-----	322–335.4	3600–4400	(²)

Table 18. Restricted Bands of Operation

¹ Until February 1, 1999, this restricted band shall be 0.490 – 0.510 MHz.

² Above 38.6



Go Networks, Inc
MBW-510F

Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

Test Procedure: For intentional radiators with a digital device portion which operates below 10 GHz, the spectrum was investigated as per §15.33(a)(1) and §15.33(a)(4); i.e., the lowest RF signal generated or used in the device up to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

In accordance with §15.35(b) the limit on the radio frequency emissions as measured using instrumentation with a peak detector function shall be 20 dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Test Results: The EUT was found compliant with the Radiated Emission limits of **§15.247(d)**; **§15.205**, **§15.209** for Intentional Radiators. See following pages for detailed test results. .

Test Engineer(s): Dusmantha Tennakoon

Test Date(s): April 21, 2008




Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) Harmonic Emissions Requirements – Radiated (802.11b/g)


Chn	Mode	Frequency (GHz)	Corrected Peak Data (dBuV/m)	Limit (dBuV/m)
1	DSSS	4.824	36.8*	74
	OFDM	4.824	37.5*	74
	DSSS	7.236	44.6*	74
	OFDM	7.236	43.0*	74
	DSSS	9.648	44.6*	74
	OFDM	9.648	43.0*	74
6	DSSS	4.874	36.7*	74
	OFDM	4.874	36.9*	74
	DSSS	7.311	42.3*	74
	OFDM	7.311	44.4*	74
	DSSS	9.748	42.3*	74
	OFDM	9.748	44.4*	74
11	DSSS	4.924	36.5*	74
	OFDM	4.924	36.8*	74
	DSSS	7.386	43.2*	74
	OFDM	7.386	43.6*	74
	DSSS	9.848	43.2*	74
	OFDM	9.848	43.6*	74

Table 19. Harmonic Emissions Test Results – 802.11b/g

Note: All emissions were measured at the noise floor of the spectrum analyzer

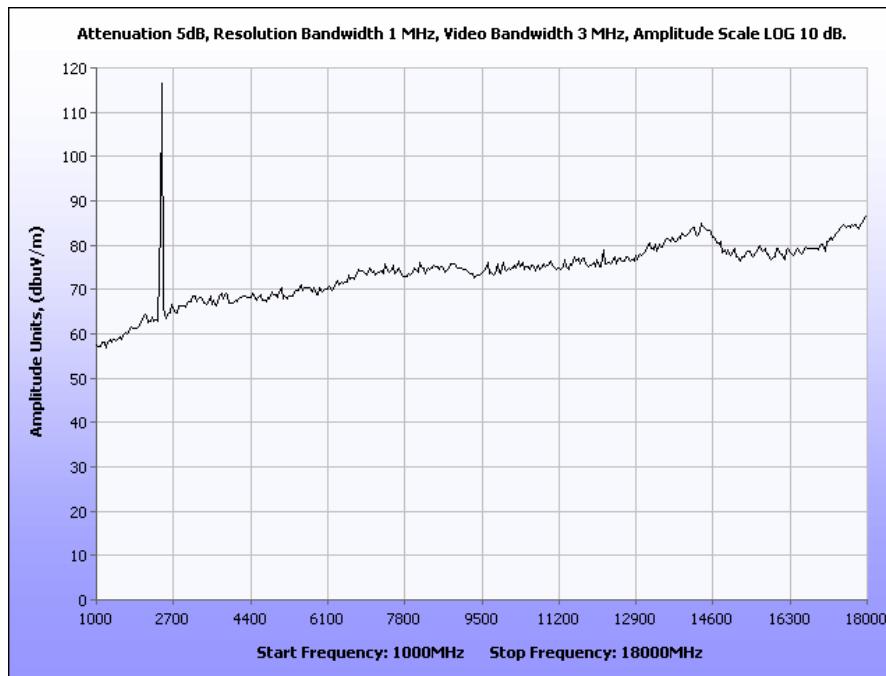Electromagnetic Compatibility Criteria for Intentional Radiators
 § 15.247(d) Radiated Spurious Emissions Requirements –802.11b


Plot 7. 802.11b Radiated Spurious, Low Channel, 1-18GHz

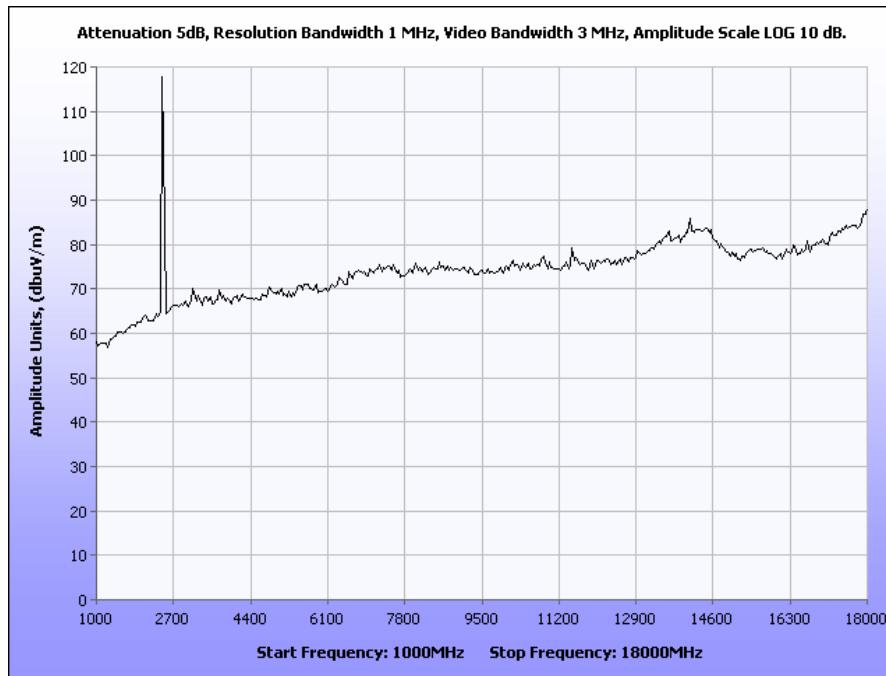


Plot 8. 802.11b Radiated Spurious, Mid Channel, 1-18GHz




Go Networks, Inc
MBW-510F

Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

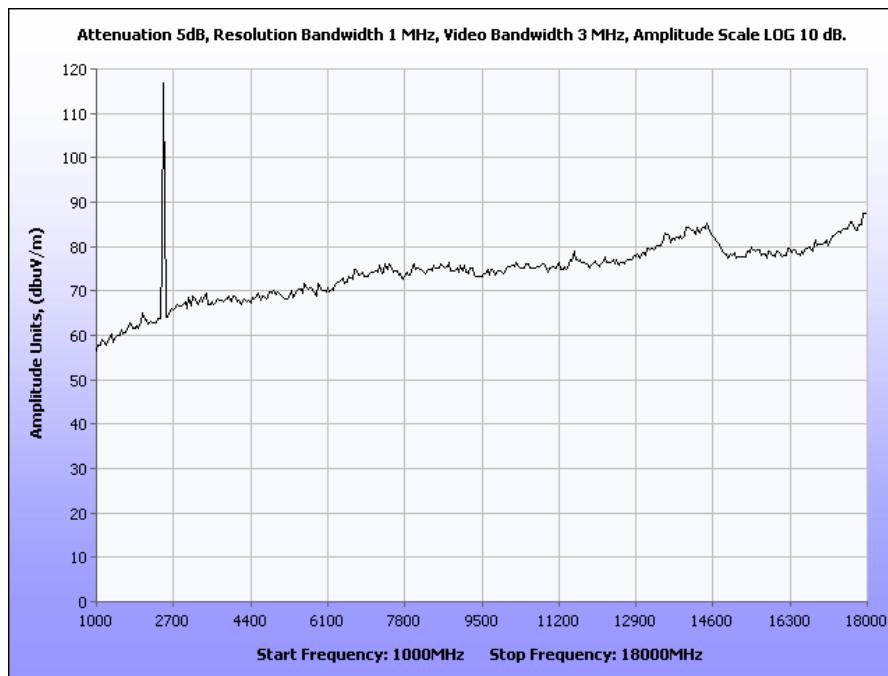


Plot 9. 802.11b Radiated Spurious, High Channel, 1-18GHz


Electromagnetic Compatibility Criteria for Intentional Radiators
§ 15.247(d) Restricted Band Requirements –802.11b

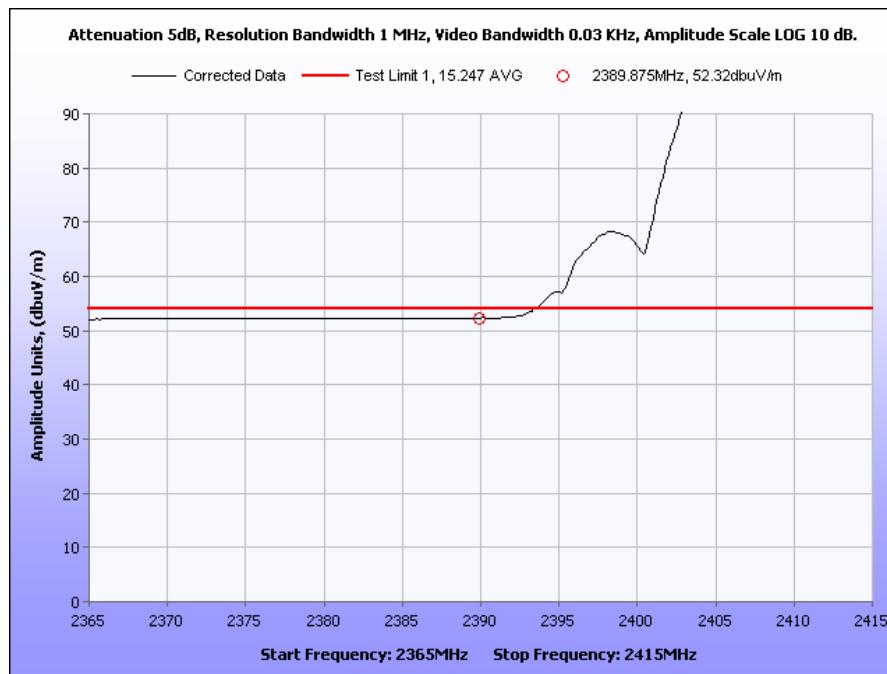


Plot 10. 802.11b Radiated Restricted Band, Low Channel, Avg

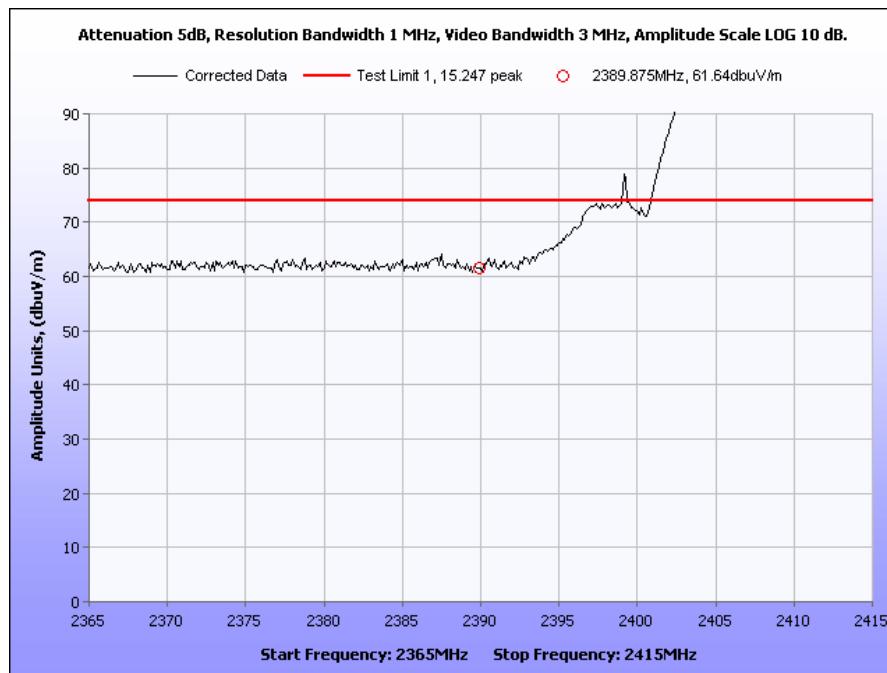

Plot 11. 802.11b Radiated Restricted Band, Low Channel, Peak

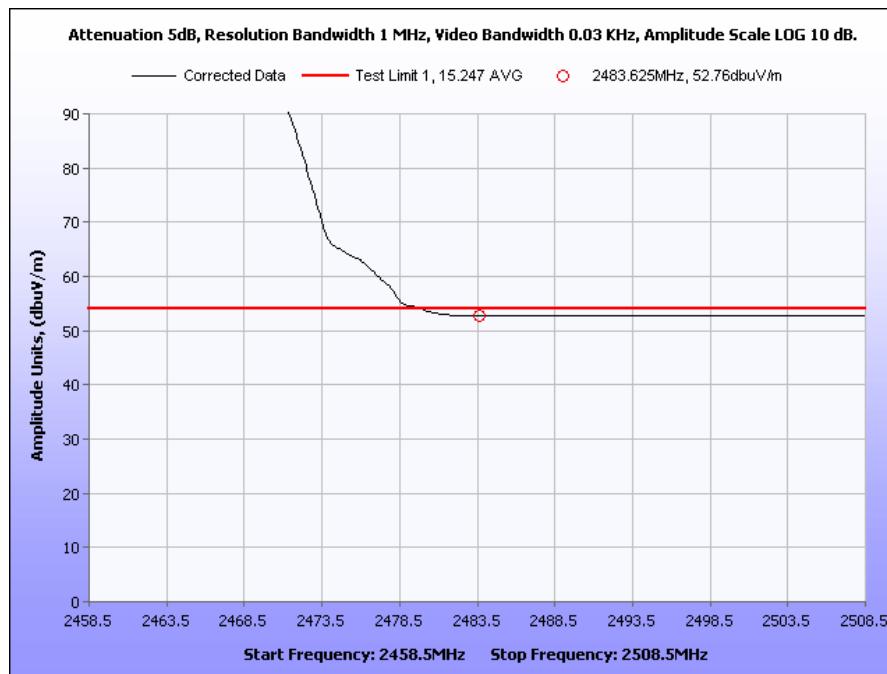


Plot 12. 802.11b Radiated Restricted Band, High Channel, Avg

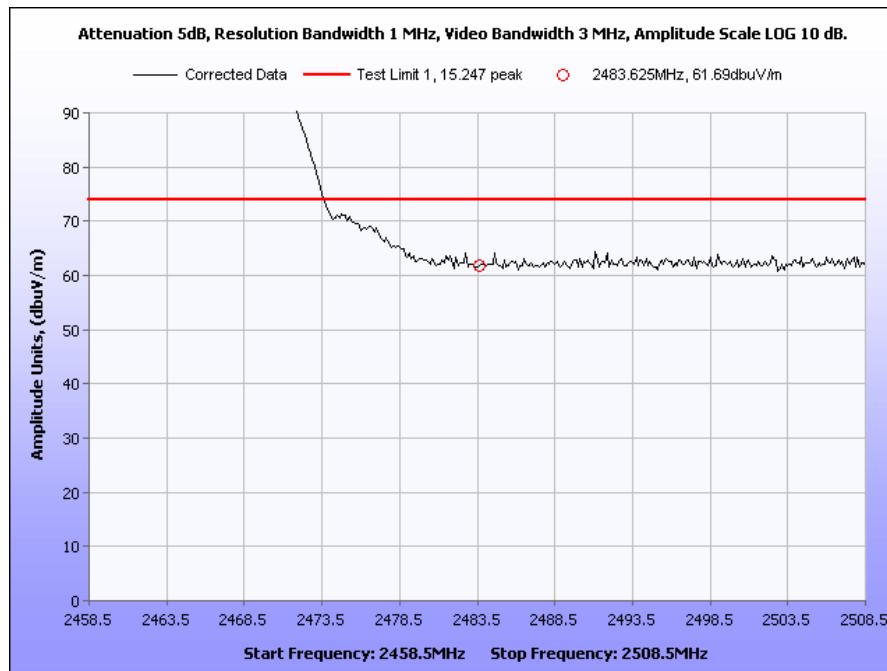


Plot 13. 802.11b Radiated Restricted Band, High Channel, Peak

§ 15.247(d) Radiated Spurious Emissions Requirements –802.11g

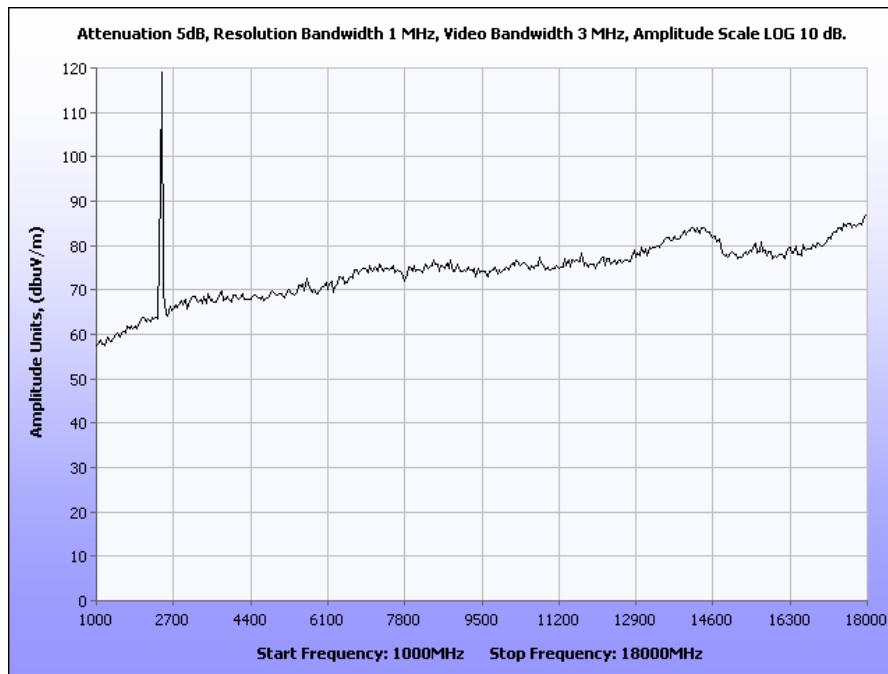

Plot 14. 802.11g Radiated Spurious, Low Channel, 1-18GHz

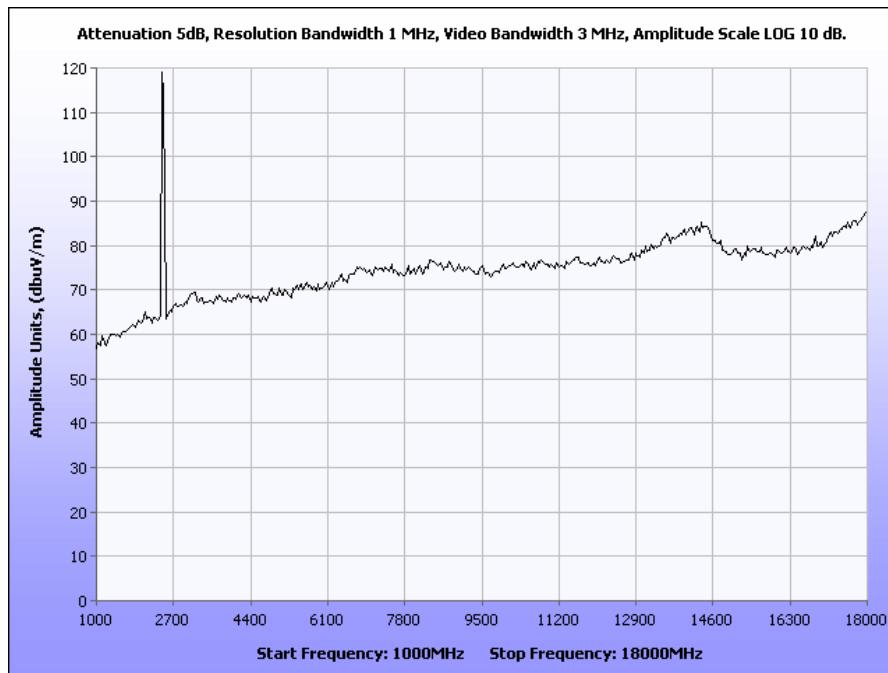


Plot 15. 802.11g Radiated Spurious, Mid Channel, 1-18GHz




Go Networks, Inc
MBW-510F

Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

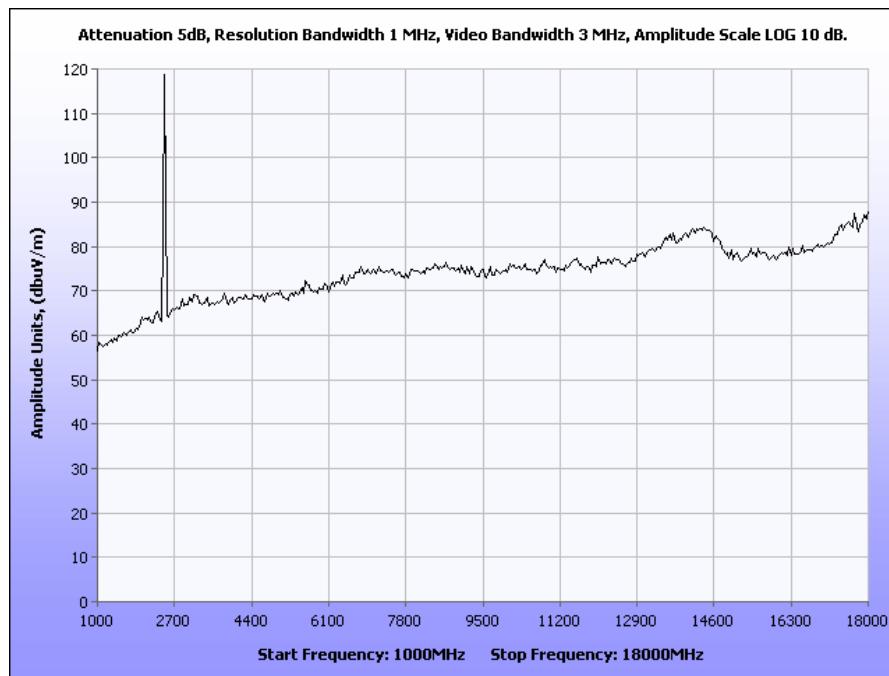


Plot 16. 802.11g Radiated Spurious, High Channel, 1-18GHz


Electromagnetic Compatibility Criteria for Intentional Radiators § 15.247(d) Restricted Band Requirements –802.11g

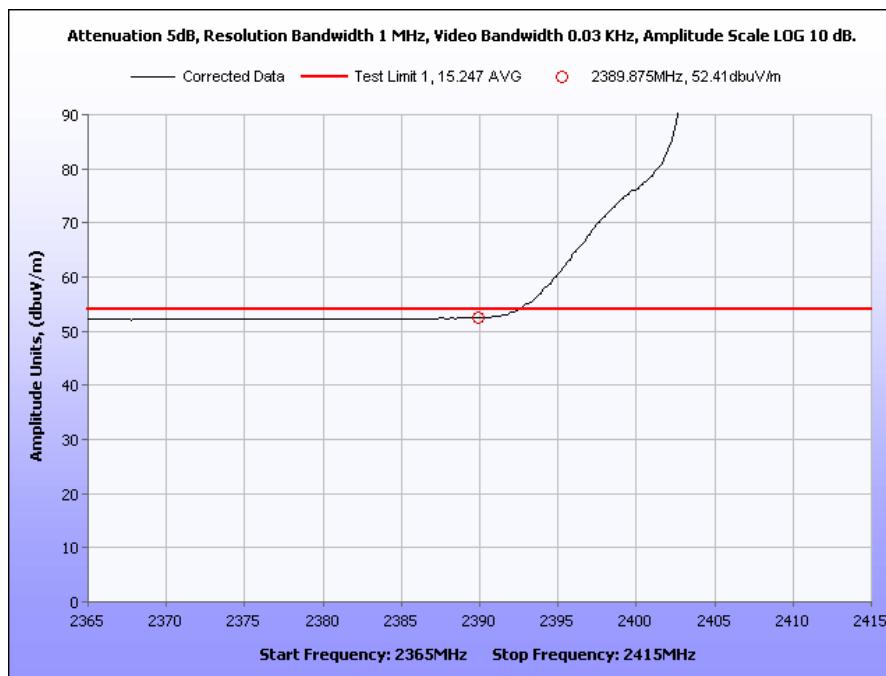


Plot 17. 802.11g Radiated Restricted Band, Low Channel, Avg

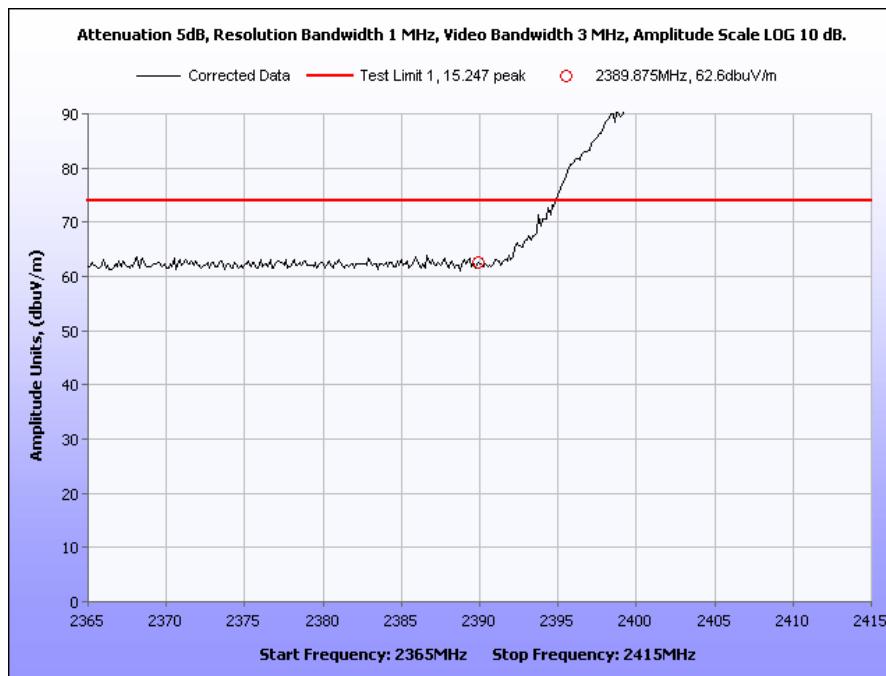

Plot 18. 802.11g Radiated Restricted Band, Low Channel, Peak

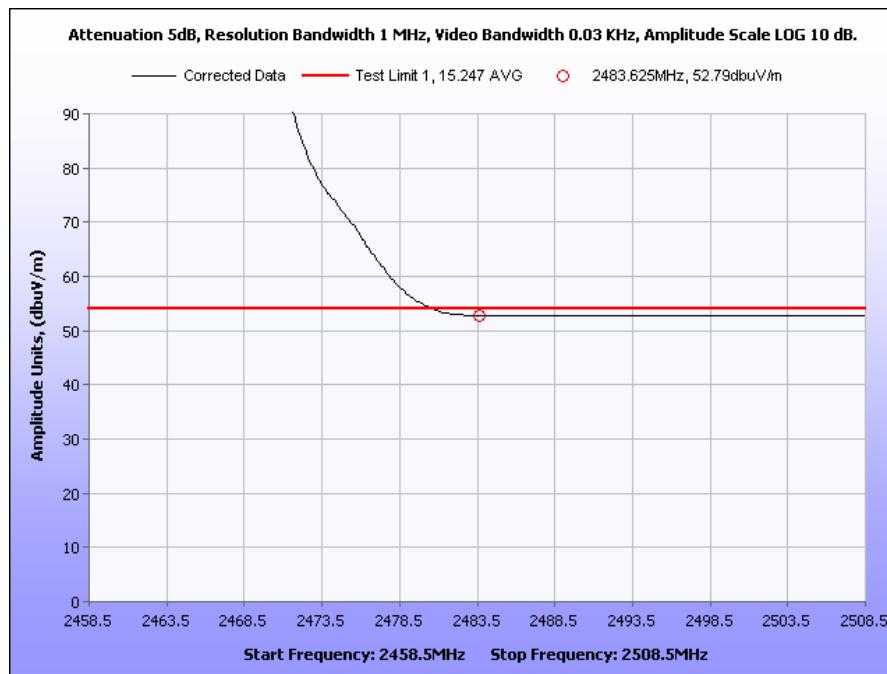


Plot 19. 802.11g Radiated Restricted Band, High Channel, Avg

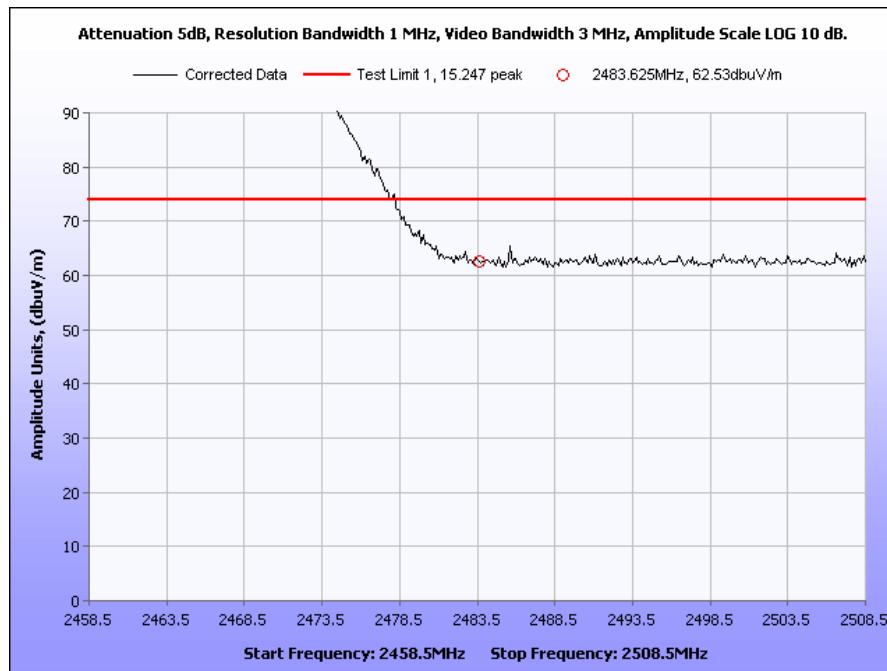

Plot 20. 802.11g Radiated Restricted Band, High Channel, Peak

Electromagnetic Compatibility Criteria for Intentional Radiators
Test Setup Photographs

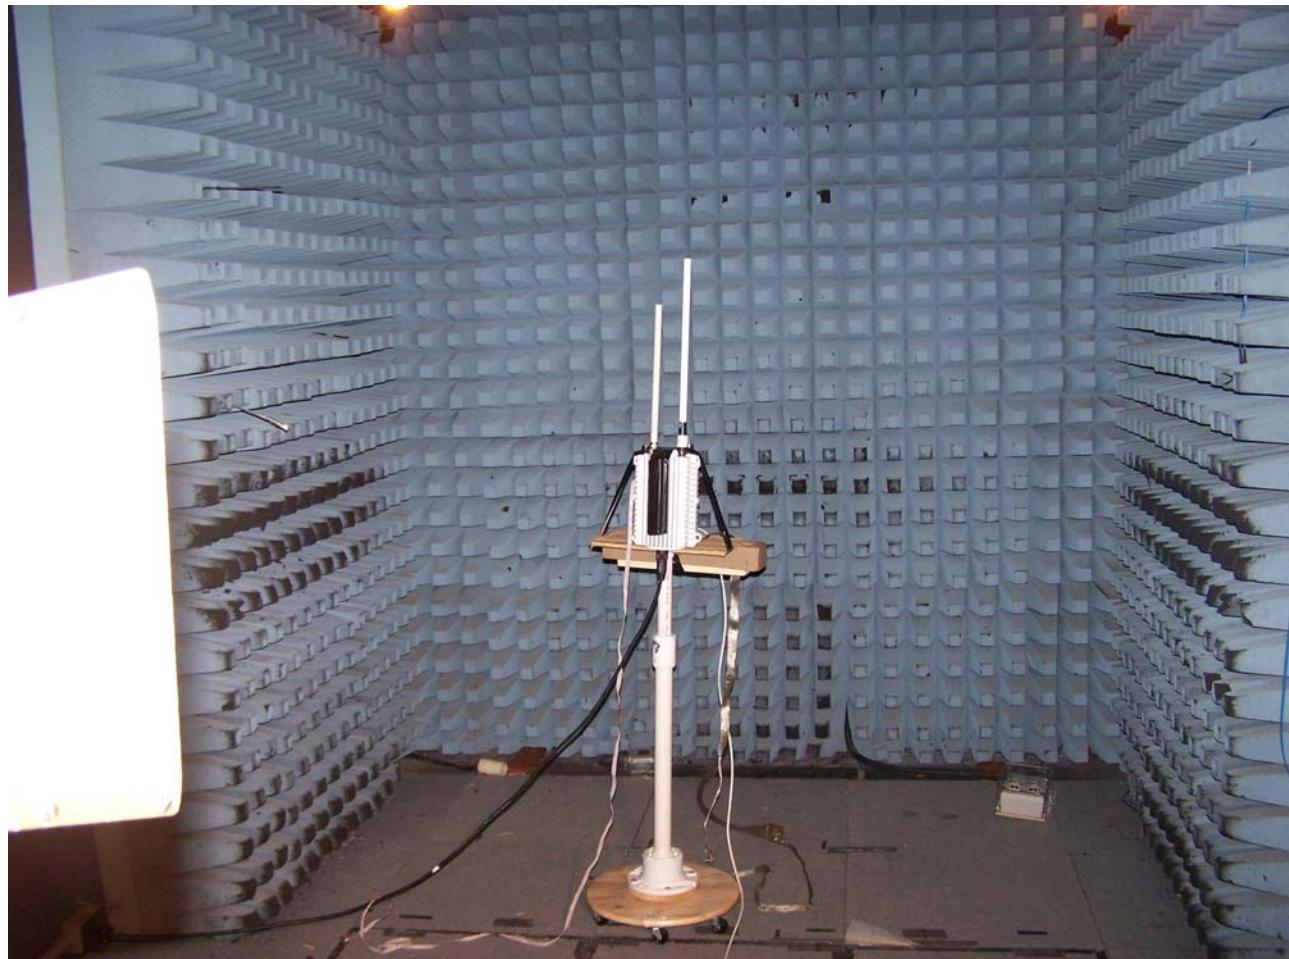

Photograph 5. Test Equipment and setup for various Radiated Measurements



Go Networks, Inc
MBW-510F

Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) Spurious Emissions Requirements –RF Conducted

Test Results: Equipment complies with the Spurious Emissions Requirements – Radiated and RF Conducted limits of § 15.247 (d). For Radiated Emissions result, refer to section “§15.209: Radiated Emission Limits”. Please refer to FCC ID: SWX-XR2 for Conducted Spurious Emissions results.



Go Networks, Inc
MBW-510F

Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(e) Peak Power Spectral Density

Test Requirements: **§15.247(e):** For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

Test Results: Equipment complies with the peak power spectral density limits of **§ 15.247 (e)**. Please refer to FCC ID: SWX-XR2.



Go Networks, Inc
MBW-510F

Electromagnetic Compatibility
Test Equipment
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

IV. Test Equipment



Go Networks, Inc
MBW-510F

Electromagnetic Compatibility
Test Equipment
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ANSI/NCSL Z540-1-1994 and ANSI/ISO/IEC 17025:2000.

Conducted Emissions – 15.107			Test Date: April 14, 2008		
MET #	Equipment	Manufacturer	Model#	Cal Date	Cal Due
1T4214	Shield Room #4	Universal Shield Inc	n/a	01/25/2008	01/25/2009
1T4621	ESA-E Series Spectrum Analyzer	Agilent	E4402B	02/29/2008	03/01/2009
1T4212	LISN; Switch	Solar Electronics	9252-R-24-BNC	01/04/2008	01/04/2009
1T2947	LISN	Solar	8028-50-TS-24-BNC	11/02/2007	11/02/2008
1T2948	LISN	Solar	8028-50-TS-24-BNC	11/02/2007	11/02/2008
1T4619	Thermo-Hygrometer	Control Company	S6-627-9	09/25/2006	09/25/2008

Table 20. Test Equipment List – Conducted Emissions 15.107

Radiated Emissions – 15.109			Test Date: April 14, 2008		
MET #	Equipment	Manufacturer	Model	Cal Date	Cal Due
1S2109	EMI Receiver	HP	8546A	10/24/2007	10/24/2008
1T4303	ANTENNA; BILOG	SCHAFNER - CHASE EMC	CBL6140A	06/29/2007	06/29/2008
1T4300	SEMI-ANECHOIC CHAMBER # 1	EMC TEST SYSTEMS	NONE	02/17/2006	01/17/2009
1T4578	Thermo/Hygrometer	Control Company	S6-627-9	09/24/2006	09/24/2008
1T2511	ANTENNA; HORN	EMCO	3115	07/19/2007	07/19/2008
1T4612	ESA-E Series Spectrum Analyzer	Agilent	E4407B	01/04/2008	01/04/2009
1T4442	Pre-amplifier	Microwave	Miteq	See Note	

Table 21. Test Equipment List – Radiated Emissions 15.109

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

Conducted Emissions – 15.207			Test Date: April 16, 2008		
MET #	Equipment	Manufacturer	Model#	Cal Date	Cal Due
1T4214	Shield Room #4	Universal Shield Inc	n/a	01/25/2008	01/25/2009
1T4146	TRANSIENT LIMITER	HP	11947A	See Note	
1T2948	LISN	Solar	8028-50-TS-24-BNC	11/02/2007	11/02/2008
1T2947	LISN	Solar	8028-50-TS-24-BNC	11/02/2007	11/02/2008
S/N:MY44022503	PSA	Agilent	E4440A	02/28/2008	02/28/2009
1T4578	Thermo/Hygrometer	Control Company	S6-627-9	09/24/2006	09/24/2008

Table 22. Test Equipment List – Conducted Emissions 15.207

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.



Go Networks, Inc
MBW-510F

Electromagnetic Compatibility
Test Equipment
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

Harmonics Emissions , Restricted Band & RF Output Power				Test Date: April 21, 2008	
MET #	Equipment	Manufacturer	Model#	Cal Date	Cal Due
1T4612	ESA-E Series Spectrum Analyzer	Agilent	E4407B	01/04/2008	01/04/2009
1T4442	Pre-amplifier	Microwave	Miteq	See Note	
1T251	Amplifier	Hughes	1177H03R000	See Note	
1T4578	Thermo/Hygrometer	Control Company	S6-627-9	09/24/2006	09/24/2008
1T4148	Shield Room #2 semi-anechoic	Rantec	20	12/20/2007	12/20/2008

Table 23. Test Equipment List – Harmonics Emissions, Restricted Band & RF Output Power

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.



Go Networks, Inc
MBW-510F

Electromagnetic Compatibility
Certification & User's Manual Information
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

V. Certification & User's Manual Information



Certification & User's Manual Information

A. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

§ 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

§ 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
 - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
 - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.



(e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:

- (i) *Compliance testing;*
- (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
- (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.

(e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.

(f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.



Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

§ 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.¹ *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer*, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

§ 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

¹ In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.



Certification & User's Manual Information

§ 2.948 Description of measurement facilities.

(a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.

(1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.

(i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*

(ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.

(2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.



Certification & User's Manual Information

Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

§ 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

(1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

(2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

(3) All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

(4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

(5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

§ 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

§ 15.105 Information to the user.

(a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

(b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



ICES-003 Procedural & Labeling Requirements

From the Industry Canada Electromagnetic Compatibility Advisory Bulletin entitled, "Implementation and Interpretation of the Interference-Causing Equipment Standard for Digital Apparatus, ICES-003" (EMCAB-3, Issue 2, July 1995):

"At present, CISPR 22: 2002 and ICES technical requirements are essentially equivalent. Therefore, if you have CISPR 22: 2002 approval by meeting CISPR Publication 22, the only additional requirements are: to attach a note to the report of the test results for compliance, indicating that these results are deemed satisfactory evidence of compliance with ICES-003 of the Canadian Interference-Causing Equipment Regulations; to maintain these records on file for the requisite five year period; and to provide the device with a notice of compliance in accordance with ICES-003."

Procedural Requirements:

According to Industry Canada's Interference Causing Equipment Standard for Digital Apparatus ICES-003 Issue 4, February 2004:

Section 6.1: A record of the measurements and results, showing the date that the measurements were completed, shall be retained by the manufacturer or importer for a period of at least five years from the date shown in the record and made available for examination on the request of the Minister.

Section 6.2: A written notice indicating compliance must accompany each unit of digital apparatus to the end user. The notice shall be in the form of a label that is affixed to the apparatus. Where because of insufficient space or other constraints it is not feasible to affix a label to the apparatus, the notice may be in the form of a statement in the user's manual.

Labeling Requirements:

The suggested text for the notice, in English and in French, is provided below, from the Annex of ICES-003:

This Class [²] digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe [¹] est conforme à la norme NMB-003 du Canada.

² Insert either A or B but not both as appropriate for the equipment requirements.



Go Networks, Inc
MBW-510F

Electromagnetic Compatibility
End of Report
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

End of Report