



Nemko



Test Report: 6W61089

Applicant: Telemedic Inc
6700 Av Choquette bur 200
St-Hyacinthe, Quebec
J2S 8L1

Apparatus: Unité Portable M93

FCC ID: T3W-M93-xxx

In Accordance With: FCC Part 15 Subpart C, 15.249
Operation in the 902-928MHz, 2400 - 2483.5 MHz,
5725-5850MHz and 24.0-24.25 GHz

Tested By: Nemko Canada Inc.
303 River Road
Ottawa, Ontario
K1V 1H2

Authorized By: Jin Xu, Wireless Specialist

Date: May 4, 2006

Total Number of Pages: 19

Report Summary

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, Subpart C. Radiated tests were conducted in accordance with ANSI C63.4-2003. Radiated emissions are made on an open area test site. A description of the test facility is on file with the FCC.

The assessment summary is as follows:

Apparatus Assessed: Unité Portable M93

Specification: FCC Part 15 Subpart C, 15.249

Compliance Status: Complies

Exclusions: None

Non-compliances: None

Report Release History: Original Release

Author: Jason Nixon, Telecom Specialist

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025.

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

TABLE OF CONTENTS

Report Summary	2
Section 1 : Equipment Under Test	4
1.1 Product Identification	4
1.2 Samples Submitted for Assessment.....	4
1.3 Theory of Operation	4
1.4 Technical Specifications of the EUT	5
1.5 Block Diagram of the EUT.....	5
Section 2 : Test Conditions	6
2.1 Specifications	6
2.2 Deviations From Laboratory Test Procedures	6
2.3 Test Environment	6
2.4 Test Equipment.....	6
Section 3 : Observations	7
3.1 Modifications Performed During Assessment	7
3.2 Record Of Technical Judgements	7
3.3 EUT Parameters Affecting Compliance	7
3.4 Test Deleted.....	7
3.5 Additional Observations.....	7
Section 4 : Results Summary	8
4.1 FCC Part 15 Subpart C : Test Results	9
Appendix A : Test Results	10
Clause 15.215(c) 20dB Bandwidth.....	10
Clause 15.207(a) Powerline Conducted Emissions	11
Clause 15.209(a) Radiated Emissions within Restricted Bands	15
Clause 15.249(a) Radiated emissions not in Restricted Bands	16
Appendix B : Setup Photographs	17
Appendix C : Block Diagram of Test Setups	19

Section 1 : Equipment Under Test

1.1 Product Identification

The Equipment Under Test was identified as follows:

Unité Portable M93

1.2 Samples Submitted for Assessment


The following samples of the apparatus have been submitted for type assessment:

Sample No.	Description	Serial No.
2	Unité Portable M93	03060003
5	DC Power Adapter (MN: 41-6-500 D)	None

The first samples were received on: February 14, 2006

1.3 Theory of Operation

The M93 is used to take medical measurements of the user attached to it and report this to a base.

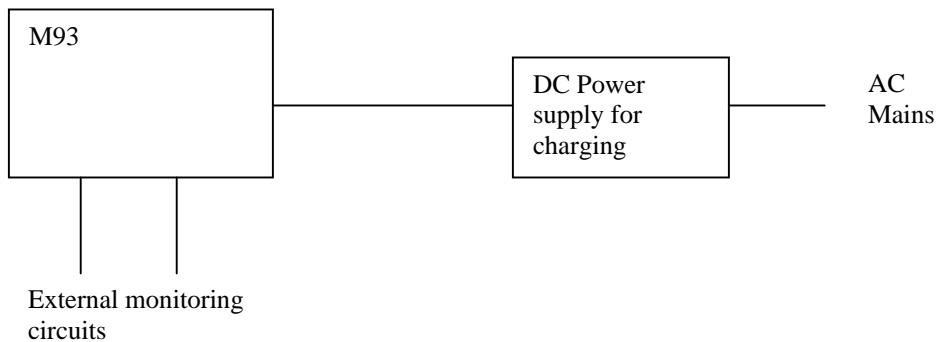1.4 Technical Specifications of the EUT**Manufacturer:** Digico Fabrication Electronique Inc.**Operating Frequency:** 916.48MHz**Emission Designator** F1D**Modulation:** FSK**Antenna Data:** Integral**Power Source:** 3.7VDC Lithium Ion Rechargeable Battery**1.5 Block Diagram of the EUT**

Section 2 : Test Conditions

2.1 Specifications

The apparatus was assessed against the following specifications:

FCC Part 15 Subpart C, 15.249

Operation in the 902-928MHz, 2400 - 2483.5 MHz, 5725-5850MHz
and 24.0-24.25 GHz bands

2.2 Deviations From Laboratory Test Procedures

No deviations were made from laboratory test procedures.

2.3 Test Environment

All tests were performed under the following environmental conditions:

Temperature range	:	15 – 30 °C
Humidity range	:	20 - 75 %
Pressure range	:	86 - 106 kPa
Power supply range	:	+/- 5% of rated voltages

2.4 Test Equipment

Equipment	Manufacturer	Model No.	Asset/Serial No.	Next Cal.
Spectrum Analyzer	Rohde & Schwarz	FSP	FA001920	March 22/06
LISN	Tegam	95300-50	FA000736	Feb 09/06
LISN	Tegam	95300-50	FA000737	Feb 09/06
Spectrum Analyzer	Hewlett-Packard	8566B	FA001432	May 18/06
Spectrum Analyzer Display	Hewlett-Packard	85662A	FA001432	May 18/06
Transient Limiter	Hewlett-Packard	1194 7A	FA001150	May 25/06
Receiver	Rohde & Schwarz	ESVS-30	FA001445	July 04/06
Bilog	Schaffner	CBL6112B	FA001503	Sept. 16/06
1-26.5 GHz Amplifier	Hewlett-Packard	HP 8449	FA001761	May 19/06
Horn Antenna #4	EMCO	3115	FA001451	May 26/06

Section 3 : Observations

3.1 Modifications Performed During Assessment

No modifications were performed during assessment.

3.2 Record Of Technical Judgements

No technical judgements were made during the assessment.

3.3 EUT Parameters Affecting Compliance

The user of the apparatus could not alter parameters that would affect compliance.

3.4 Test Deleted

No Tests were deleted from this assessment.

3.5 Additional Observations

There were no additional observations made during this assessment.

Section 4 : Results Summary

This section contains the following:

FCC Part 15 Subpart C : Test Results

The column headed 'Required' indicates whether the associated clauses were invoked for the apparatus under test. The following abbreviations are used:

N No : not applicable / not relevant.

Y Yes : Mandatory i.e. the apparatus shall conform to these tests.

N/T Not Tested, mandatory but not assessed. (See section 3.4 Test deleted)

The results contained in this section are representative of the operation of the apparatus as originally submitted.

4.1 FCC Part 15 Subpart C : Test Results

Part 15	Test Description	Required	Result
15.31(e)	Variation of power supply	Y	PASS
15.215(c)	20dB Bandwidth	Y	PASS
15.207(a)	Powerline Conducted Emissions	Y	PASS
15.209(a)	Radiated Emissions within Restricted Bands	Y	PASS
15.249(a)	Radiated emissions not in Restricted Bands	Y	PASS
15.249(b)	Fixed Point-to-Point operation in the 24.0-24.25 GHz Band	N	
15.249(d)	Spurious emissions (except Harmonics)	Y (1)	PASS

Notes:

(1) No emissions were detected within 20dB below the limit.

Appendix A : Test Results

Clause 15.215(c) 20dB Bandwidth


Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

Test Conditions:

Sample Number:	2	Temperature:	22
Date:	February 22, 2006	Humidity:	13
Modification State:	0	Tester:	Jason Nixon
		Laboratory:	Wireless

Test Results: See Attached Plots.

20dB Bandwidth:

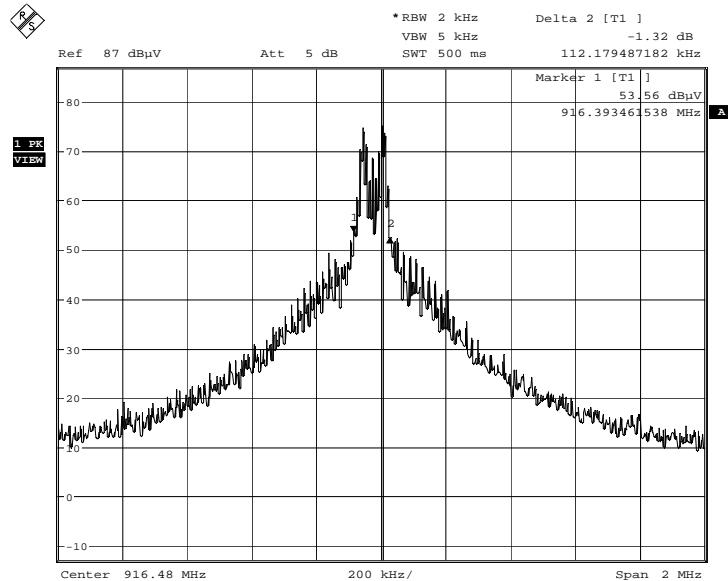

M93 20dB Bandwidth
Date: 22.FEB.2006 10:46:25

Clause 15.207(a) Powerline Conducted Emissions

Frequency of Conducted limit (dBmV)

Emission (MHz)	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.


Test Conditions:

Sample Number:	2	Temperature:	22
Date:	February 23, 2006	Humidity:	54
Modification State:	0	Tester:	Jason Nixon


Test Results: See Attached Plots.**Additional Observations:**

Measurements were performed using a Peak detector and compared to the Average limit.


Phase – Low Frequencies

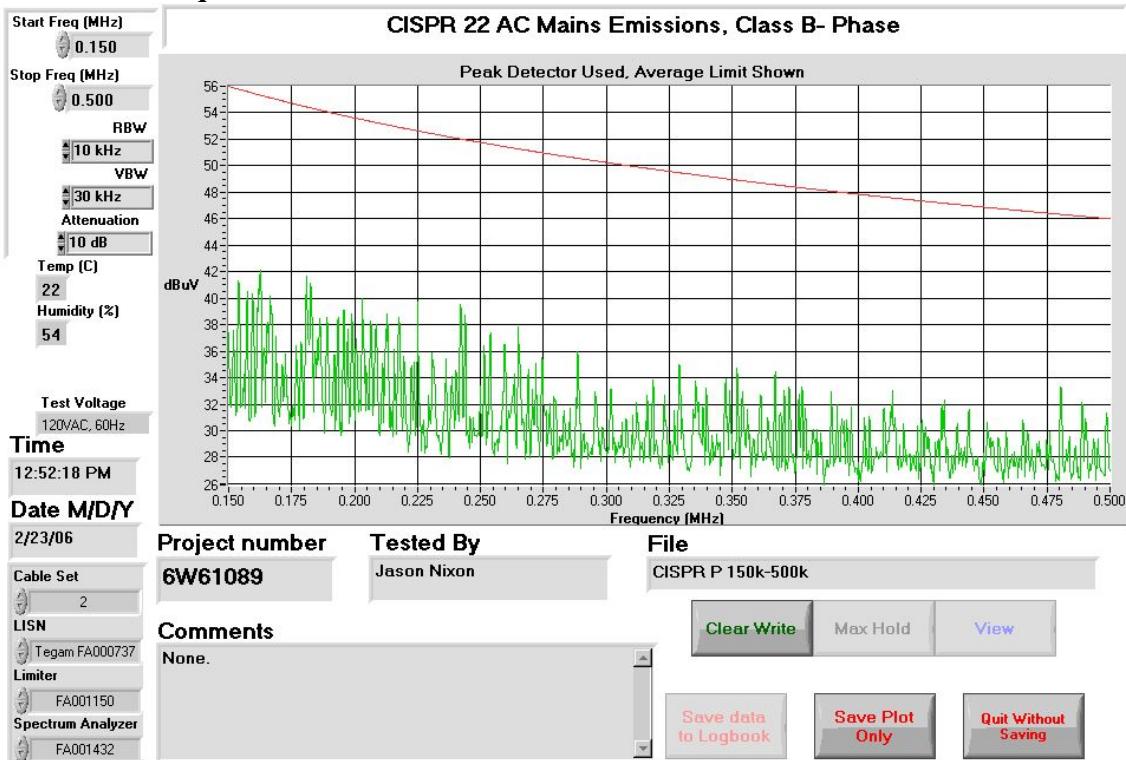


Phase – Mid Frequencies

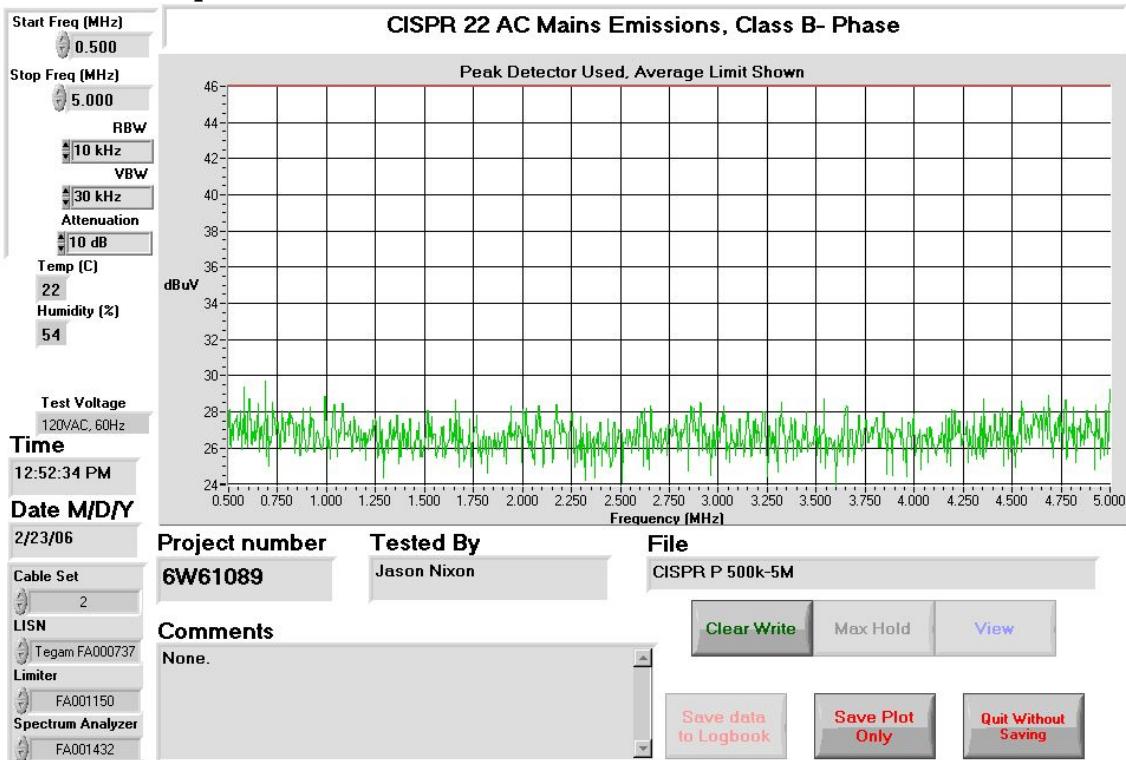


Phase – High Frequencies

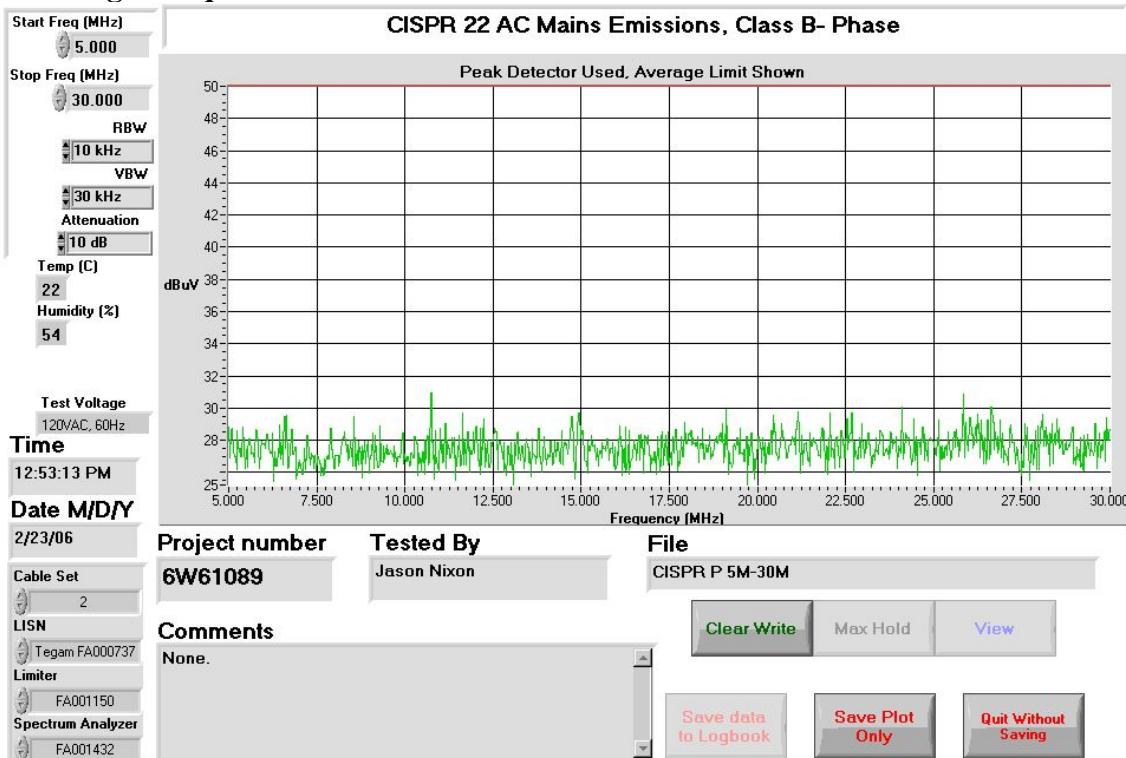


Neutral – Low Frequencies

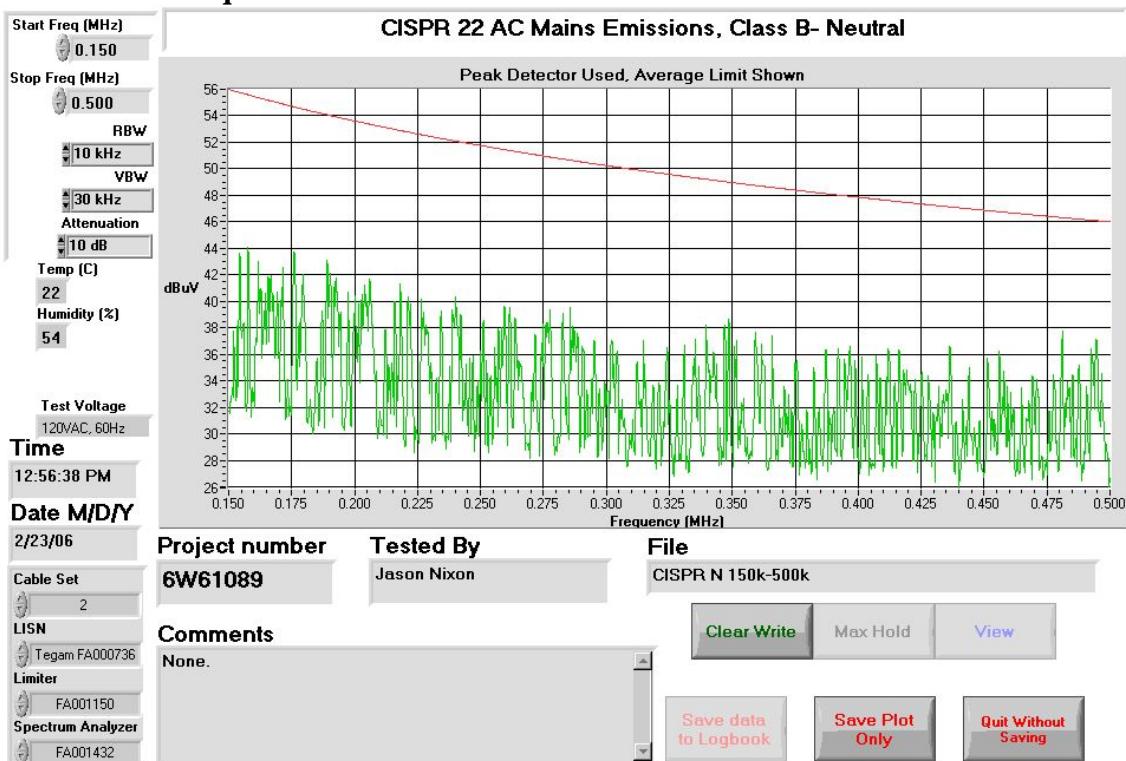

Neutral – Mid Frequencies

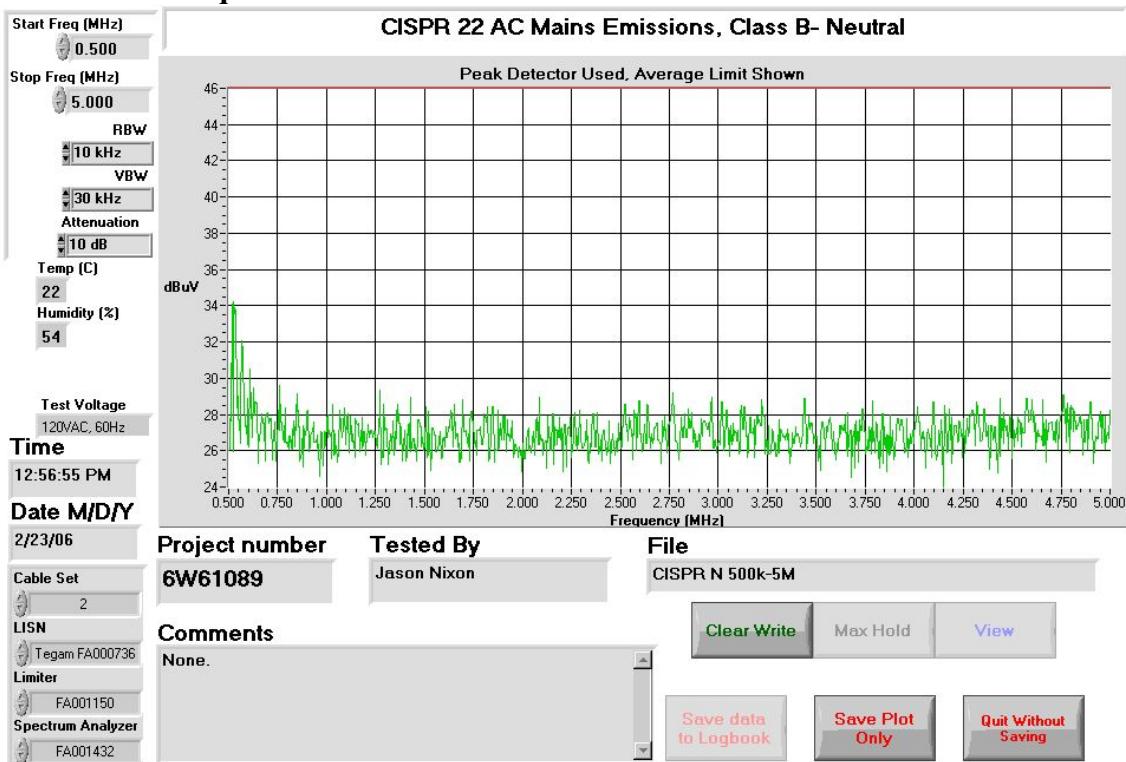

Neutral – High Frequencies

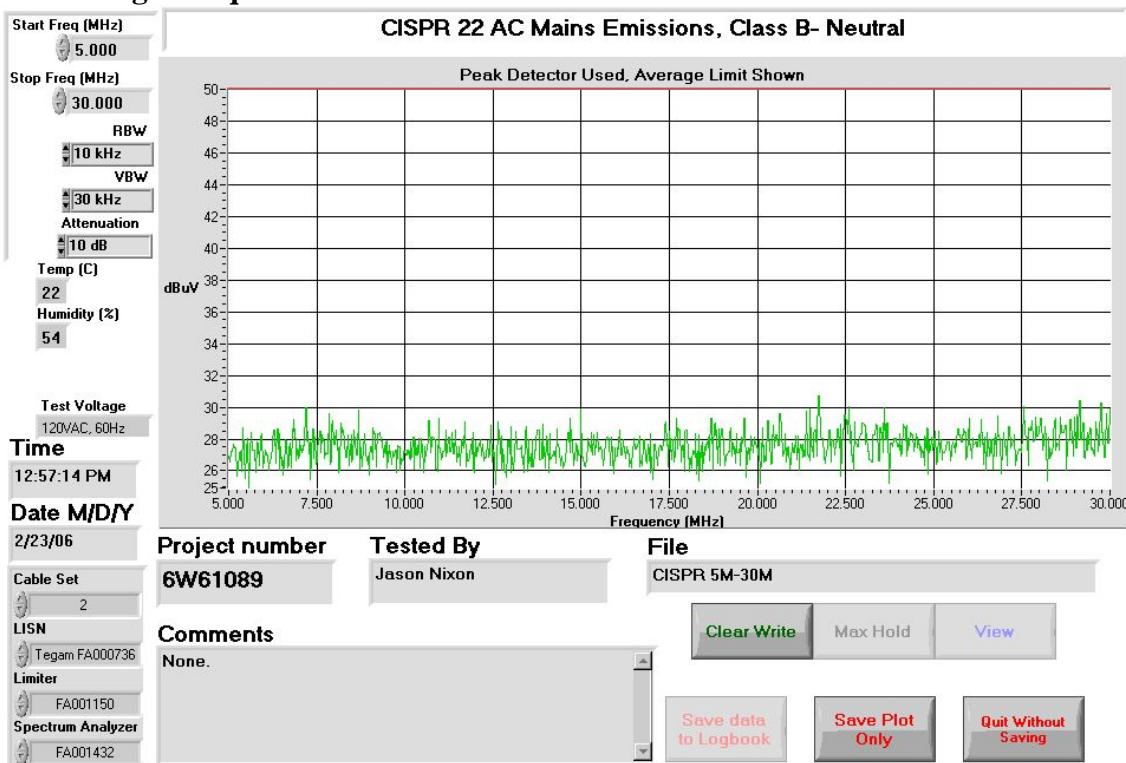

Clause 15.209(a) Radiated Emissions within Restricted Bands

Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvoltsmeter)	Measurement Distance (meters)
0.009-0.490	2400/F (kHz)	300
0.490-1.705	24000/F (kHz)	30
1.705-30.0	30	30
30-88	1001	3
88-216	1502	3
216-960	2003	3
Above 960	500	3

Test Conditions:

Sample Number:	2	Temperature:	13
Date:	February 23, 2006	Humidity:	42
Modification State:	0	Tester:	Jason Nixon
		Laboratory:	Almonte

Test Results:

See Attached Table for Results

Additional Observations:

The Spectrum was searched from 30MHz to the 10GHz.

These results apply to emissions found in the Restricted bands defined in FCC Part 15 Subpart C, 15.205.

The EUT was measured on three orthogonal axis. The EUT was tested with fully charged batteries.

Measurements below 1GHz were performed using a 120kHz RBW Quasi-peak detector and emissions above 1GHz were performed using a 1MHz RBW/VBW peak detector. All measurements were performed at 3m.

Frequency (MHz)	Antenna	Polarity	RCVD Signal (dBuV)	Ant. Factor (dB)	Amp. Gain (dB)	Cable Loss (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	
1	3665.6500	Horn4	H	45.3	31.6	36.8	13.0	53.1 53.1	74.0 54.0	20.9 0.9	Peak Average

Clause 15.249(a) Radiated emissions not in Restricted Bands

Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

Test Conditions:

Sample Number:	2	Temperature:	13
Date:	February 23, 2006	Humidity:	42
Modification State:	0	Tester:	Jason Nixon
		Laboratory:	Almonte

Test Results: See attached Table

Additional Observations:

The Spectrum was searched from 30MHz to the 10GHz.

The EUT was measured on three orthogonal axis. The EUT was tested with fully charged batteries.

Measurements below 1GHz were performed using a 120kHz RBW Quasi-peak detector and emissions above 1GHz were performed using a 1MHz RBW/VBW peak detector. All measurements were performed at 3m.

Freq. (MHz)	Ant	Pol. V/H	RCVD Signal (dB μ V)	Ant. Factor (dB)	Amp. Gain (dB)	Cable Loss (dB)	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector
916.4529	BL	V	61.8	20.8	N/A	4.6	87.2	94.0	6.8	Q-Peak
916.4529	BL	H	63.2	21.7	N/A	4.6	89.5	94.0	4.5	Q-Peak
1832.9000	Horn4	V	48.2	26.7	37.0	7.1	45.0	54.0	9.0	Peak
1832.9000	Horn4	H	49.0	26.8	37.0	7.1	45.8	54.0	8.2	Peak

Note 1: Antenna Legend: BC = Biconical, BL = Bilog, LP = Log-Periodic, Horn = Horn, ED = EMCO Dipole

Appendix B : Setup Photographs

Conducted Emissions Setup:




Spurious Emissions Setup:



Appendix C : Block Diagram of Test Setups

Test Site For Radiated Emissions

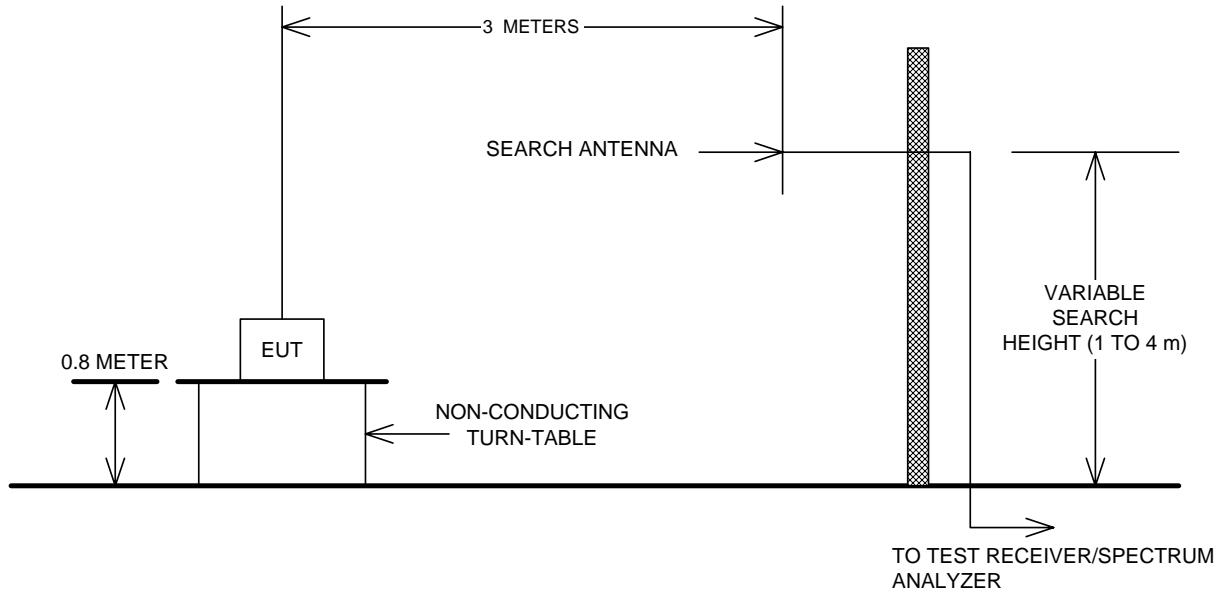

Conducted Emissions

