

GLOBAL TESTING & CERTIFICATION CENTRE LTD.

FCC
TEST REPORT

Application No. : 06021625 (27MHz, Tx)

Rm09, 5/F Wah Wai Ind Ctr, 38-40 Au Pui Wan Street, Fotan Shatin, N.T., Hong Kong
Tel: [852] 23200326 Fax: [852] 23206287

REPORT NO.: 06021625

DATE: 13 March, 2006

TABLE OF CONTENTS

Cover Sheet	-----	p. 1
Table of Contents	-----	p. 2
General Details	-----	p. 3 ~ p. 4
Summary of Test Results	-----	p. 5
Radiation Emission Test	-----	p. 6 ~ p. 8
Conducted Emission Test	-----	p. 9
Bandwidth Measurement	-----	p. 10 ~ p. 11
Appendix A List of Measurement Equipment	-----	p. 12
Appendix B Duty Cycle correction During 100msec	-----	p. 13 ~ p. 14
Appendix C Test Sample (Photo)	-----	p. 15 ~ p. 17

REPORT NO.: 06021625

DATE: 13 March, 2006

APPLICANT: Hobby Master Limited

ADDRESS: Room 11, 7th Floor,
Good Harvest Building,
Tsun Wen Road, Tuen Mun,
N.T., Hong Kong

DATE OF RECEIVED: 24 February, 2006

DATE OF TESTING: 24 February, 2006 to 13 March, 2006

DESCRIPTION OF SAMPLE:

Product:	1/56 Tiger 1 R/C Tank
Brand Name:	HOBBYMASTER
Model No.:	HT0101
Additional Brand Name:	1/56 Tiger 1 R/C Tank, M1A1, King Tiger, M4 Sherman, Panzer III, KV-1, Leopard M2, M-28 Pershing
Additional Model No.:	HT0102, HT0103, HT0104, HT0105, HT0106, HT0107, HT0108, HT0109, HT0110, HT0111, HT0112, HT0113, HT0114, HT0115, HT0116, HT0117, HT0118, HT0119, HT0120, HT0121, HT0122, HT0123, HT0124, HT0125, HT0126, HT0127, HT0128, HT0129
FCC ID:	T43HB-HT010127
Input Voltage:	DC9V (6F22)


Description of EUT Operation

The Equipment Under Test (EUT) is a Hobby Master Limited, 1/56 Tiger 1 R/C Tank. The transmitter is a 4 button transmitter. The EUT continues to Transmit while button is being pressed, Modulation by IC. And type is pulse modulation.

INVESTIGATION REQUESTED: FCC PART 15 SUBPART C

TEST RESULTS: See attached sheets

CONCLUSIONS: The submitted product COMPLIED with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on page 5 in this Test report.

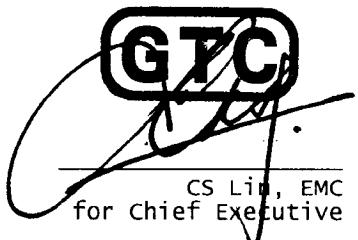

CS Lin, EMC
for Chief Executive

REPORT NO.: 06021625

DATE: 13 March, 2006

General Details

Test Laboratory

GLOBAL TESTING & CERTIFICATION CENTRE LTD
EMC Laboratory
Rm09, 5/F Wah Wai Ind Ctr, 38-40 Au Pui Wan Street,
Fotan Shatin, N.T., Hong Kong

Tel ephone: 852 2320 0326
Fax: 852 2320 6287

Applicant Details
Applicant

Hobby Master Limited
Room 11, 7th Floor,
Good Harvest Building,
Tsun Wan Road, Tuen Mun,
N.T., Hong Kong

Manufacturer

Muli tech International (HK) Limited
Room 30, 5/F, BLK A,
Cambri dge Plaza, 188 Sun Wan Road,
Sheung Shui, Hong Kong

REPORT NO.: 06021625

DATE: 13 March, 2006

Technical Details

Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15 and ANSI C63.4:2003 for FCC Certification.

Test Standards and Results Summary Tables

EMISSION Results Summary					
Test Condition	Test Requirement	Test Method	Test Result		
			Pass	Failed	N/A
Field Strength of Fundamental Emissions & Spurious Emissions	FCC 47CFR 15.227	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Radiated Emissions, 30MHz to 1GHz	FCC 47CFR 15.209	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Conducted Emissions on AC, 0.15MHz to 30MHz	FCC 47CFR 15.207	ANSI C63.4:2003	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>


Note: N/A – Not Applicable

Test Results

Emission

Radiation Emission Measurement (30MHz to 1GHz)

Setup diagram:

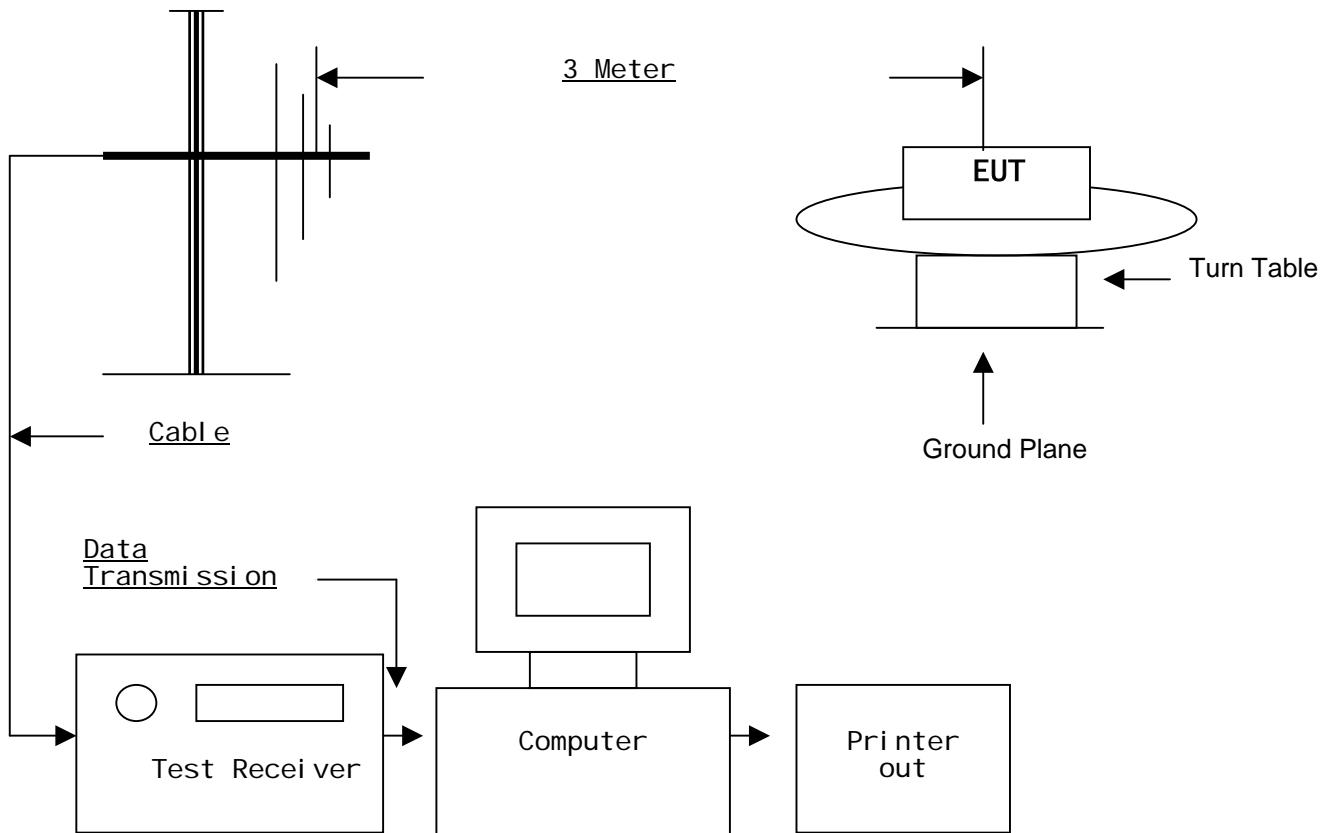

Test Method:

The sample was placed 0.8m above the ground plane on the OATS*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

*. OATS [Open Area Test Site] located at GTC with a metal ground plane filled with the FCC pursuant to section 2.948 of the FCC rules. With Registration Number: 493655

REPORT NO.: 06021625

DATE: 13 March, 2006

Radiation Emissions Measurement

Appl. : Hobby Master Limited
Model : HT0101
Operation: TX mode

Test Requirement: FCC 47CFR 15.227
Test Method: ANSI C63.4: 2003
Test Date: 2006-03-07

Limits for Field Strength of Fundamental Emissions :

Frequency Range of Fundamental [MHz]	Field Strength of Fundamental Emission [Peak] [μ V/m]	Field Strength of Fundamental Emission [Average] [μ V/m]
26. 96-27. 28	100, 000	10, 000

Results:

Field Strength of Fundamental Emissions Peak Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Field Strength μ V/m	Limit @3m μ V/m	E-Field Polarity
27. 14	49	19. 2	68. 2	2, 570. 4	100, 000	Vertical

Field Strength of Fundamental Emissions Average							
Frequency MHz	Measured Level @3m dB μ V	Adjusted by Duty Cycle dB	Correction Factor dB/m	Field Strength dB μ V/m	Field Strength μ V/m	Limit @3m μ V/m	E-Field Polarity
27. 14	41. 4	-7. 6	19. 2	60. 6	1, 071. 5	10, 000	Vertical

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Remarks:

Correction Factor included Antenna Factor and Cable Attenuation.
Calculated measurement uncertainty : 30MHz to 1GHz \pm 4. 1dB

Radiation Emissions Measurement

Appl. : Hobby Master Limited
 Model : HT0101
 Operation: TX mode

Test Requirement: FCC 47CFR 15.209
 Test Method: ANSI C63.4: 2003
 Test Date: 2006-03-07

Results:

Frequency Range [MHz]	Quasi-Peak Limits [μ V/m]
30-88	100
88-216	150
216-960	200
Above 960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Radiated Emissions Quasi-Peak						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Field Strength μ V/m	Limit @3m μ V/m	E-Field Polarity
54.28	23.0	10.3	33.3	46.2	100	Horizontal
81.42	22.0	7.1	29.1	28.5	100	Horizontal
108.56	19.0	11.6	30.6	33.9	150	Horizontal
135.70	< 18.0	14.3	< 32.3	< 41.2	150	Horizontal
162.84	< 18.0	15.6	< 33.6	< 47.9	150	Horizontal
189.98	< 18.0	16.3	< 34.3	< 51.9	150	Horizontal
217.12	< 18.0	16.9	< 34.9	< 55.6	200	Horizontal
244.26	< 18.0	17.6	< 35.6	< 60.2	200	Horizontal
271.40	< 18.0	18.4	< 36.4	< 66.1	200	Horizontal
298.54	< 18.0	19.5	< 37.5	< 75.0	200	Horizontal

Remarks:

Correction Factor included Antenna Factor and Cable Attenuation.
 Calculated measurement uncertainty : 30MHz to 1GHz ± 4.1 dB

REPORT NO.: 06021625

DATE: 13 March, 2006

Conducted Emission on AC (0.15MHz to 30MHz)

Appl.: Hobby Master Limited

Model: HT0101

Operation: N/A

Test Requirement: FCC 47CFR 15.207

Test Method: ANSI C63.4: 2003

Test Date: N/A

Results: N/A

The EUT is operated by a single source of internal battery power [located in the battery compartment], therefore power line conducted emission was deemed unnecessary.

REPORT NO.: 06021625

DATE: 13 March, 2006

20dB Bandwidth of Fundamental Emission

Appl. : Hobby Master Limited
Model : HT0101
Operation: On mode

Test Requirement: FCC 47CFR 15.235
Test Method: ANSI C63.4: 2003
(section 13.1.7)
Test Date: 2006-03-07

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Setup diagram:

As Test Setup of page. 6 in this report


REPORT NO.: 06021625

DATE: 13 March, 2006

Li mits for 20dB bandwi dth of Fundamental Emi ssi on:

Frequency Range [MHz]	20dB Bandwi dth [KHz]	FCC Li mits [MHz]
27.145	41.0	Within 26.96-27.28

20dB Bandwi dth of Fundamental Emi ssi on

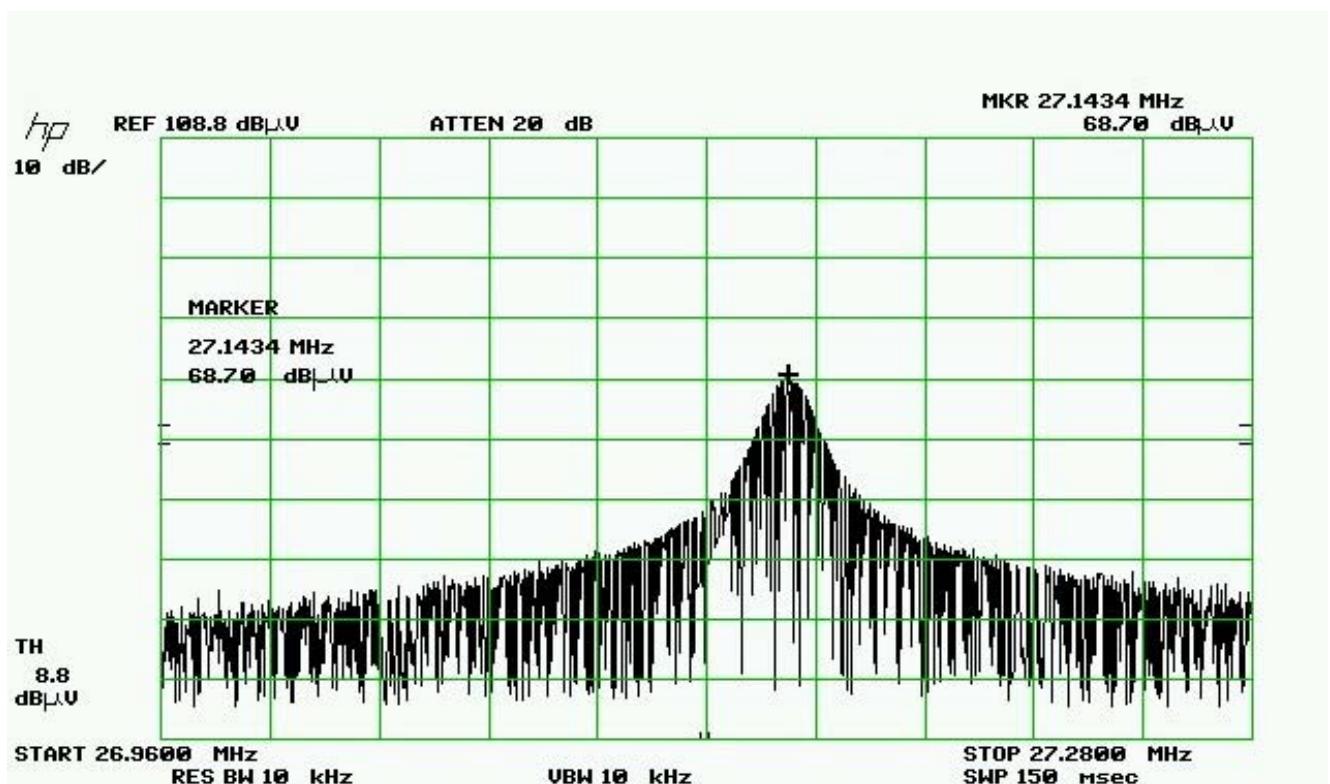

APPENDIX A**LIST OF MEASUREMENT EQUIPMENT**

<u>Equi . No.</u>	<u>Equipment</u>	<u>Manufacturer</u>	<u>Model No.</u>	<u>Serial No.</u>	<u>Calibration Date</u>	<u>Due Date</u>
E005	EMI Test Receiver	Rohde & Schwarz	ESVP	89347/019	21 Sep 2005	20 Sep 2006
E003	Spectrum Analyzer With Q/P	Tektronix	2712	S034039	21 Sep 2005	20 Sep 2006
E004	RF Preselector	Tektronix	2706	B010649	21 Sep 2005	20 Sep 2006
E007	EMI Test Receiver	Rohde & Schwarz	ESVP	863112/007	18 Dec 2004	17 Sep 2006
E084	Spectrum Analyzer	Hewlett Packard	HP 8568B	3001A04930	07 Sep 2005	06 Sep 2006
E085	Display of Spectrum Analyzer	Hewlett Packard	HP 85662A	2033A01841	07 Sep 2005	06 Sep 2006
E086	Quasi-Peak Adaptor	Hewlett Packard	HP 85650A	2527A00785	07 Sep 2005	06 Sep 2006
E090	RF Signal Generator	Rohde & Schwarz	SMX	832566/005	13 June 2005	12 June 2006
E001	Antenna System	Schwarzbeck	D6917	UHALP9107	14 May 2005	13 May 2006
E002	Antenna System	Schwarzbeck	VHA9013	VHA90131253	14 May 2005	13 May 2006
E008	LISN	EMCO	3825/2	1115	24 Feb 2006	25 Feb 2007
E009	Impulse Limiter	Schwarzbeck	ECH-3-Z2	-----	18 Jan 2004	17 June 2006
E100	Turntable	Chi oce Way	TB1200	051112	-----	-----
E006	RF Signal Generator	Fluke	6060A	3880007	19 May 2005	18 May 2006
E092	Antenna Tri pole	IT&T	UH800100	A05011	13 June 2005	12 June 2006
E098	Pre-Amplifier	Hewlett Packard	8447D	2944A09089	04 Mar 2006	03 Mar 2007
E099	Antenna Mast	Schwarzbeck	AM9014	-----	-----	-----
E101	Loop Antenna	EMCO	6502	9902-3269	07 Feb 2006	07 Feb 2007

APPENDIX B

Duty Cycle Correction During 100msec


Each function key sends a different series of characters, but each packet period (43.95msec) never exceeds a series of 4 long (950usec) and 58 short (250usec) pulses. Assuming any combination of short and long pulses may be obtained due to encoding the worst case transmit duty cycle would be considered $4 \times 950\text{msec} + 58 \times 250\text{msec} \text{ per } 43.95\text{msec} = 41.6\%$ duty cycle. Figure A through C show the characteristics of the pulse train for one of these functions.

Remarks:

Duty Cycle Correction = $20\log(0.416) = -7.6\text{dB}$

The following figures [Figure A to Figure C] show the characteristics of the pulse train for one of these functions.

Figure A [Pulse Train]

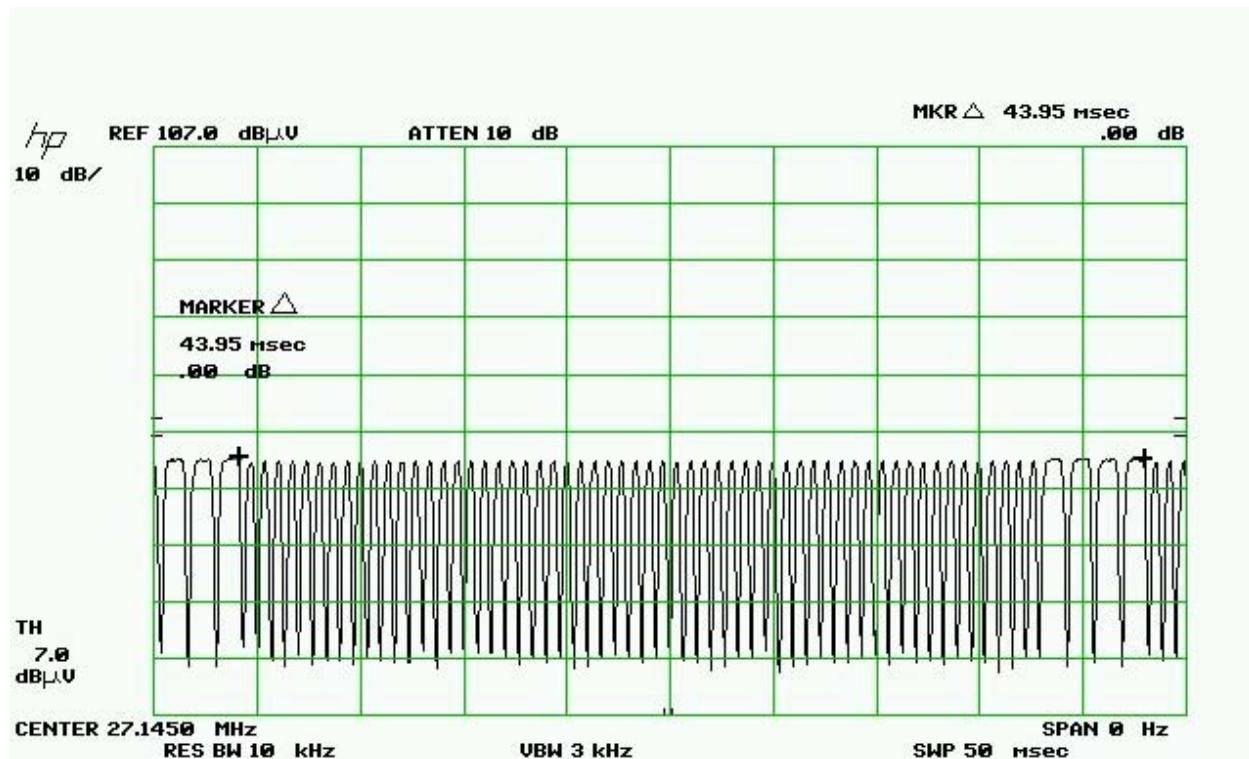

REPORT NO.: 06021625

DATE: 13 March, 2006

Figure B [Long Pulse]


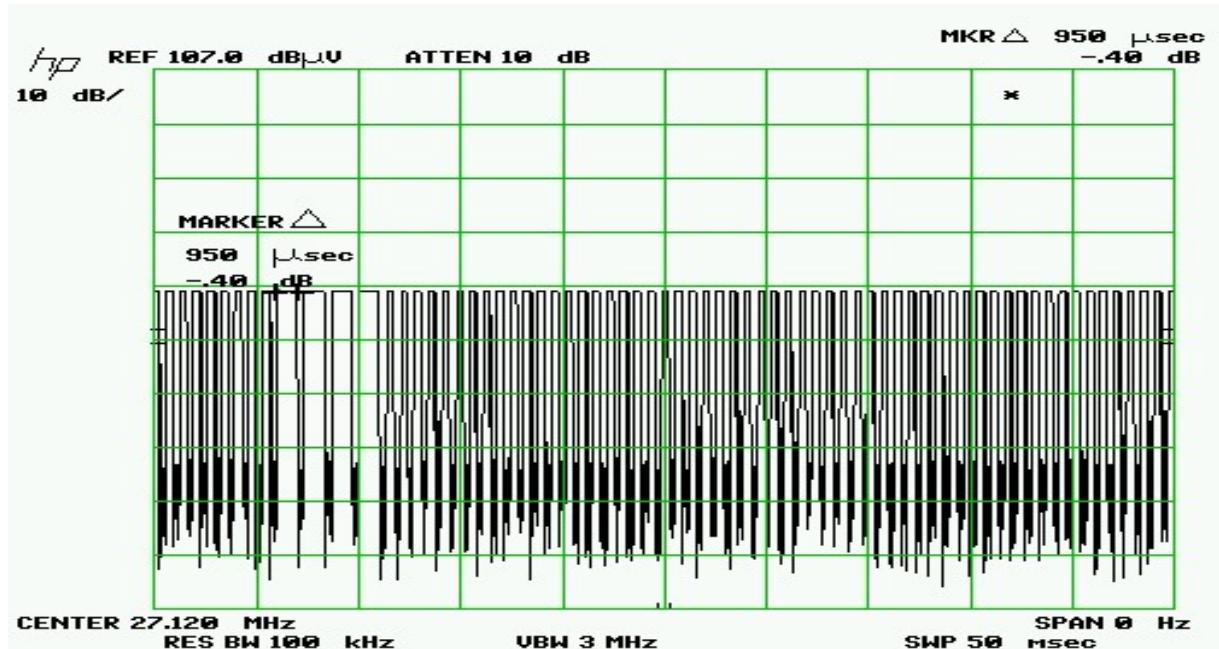


Figure C [Short Pulse]

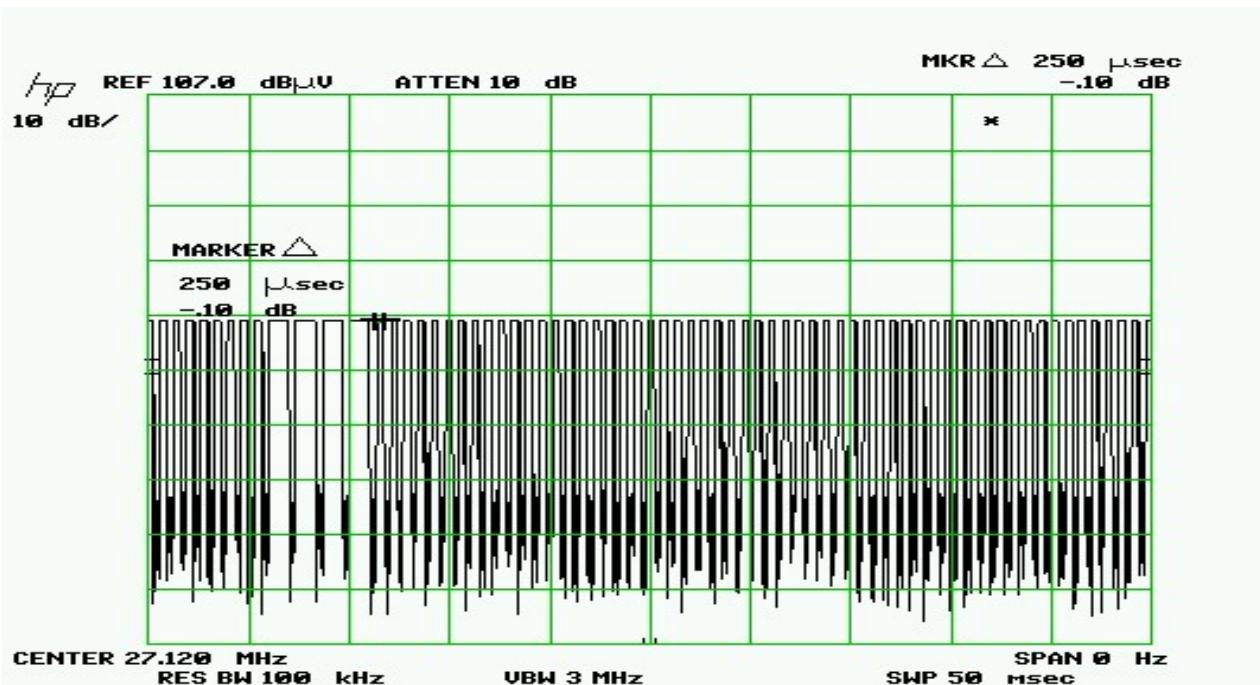

REPORT NO.: 06021625

DATE: 13 March, 2006

APPENDIX C

Photos of EUT


Front View of the product




Rear View of the product



Component Side View

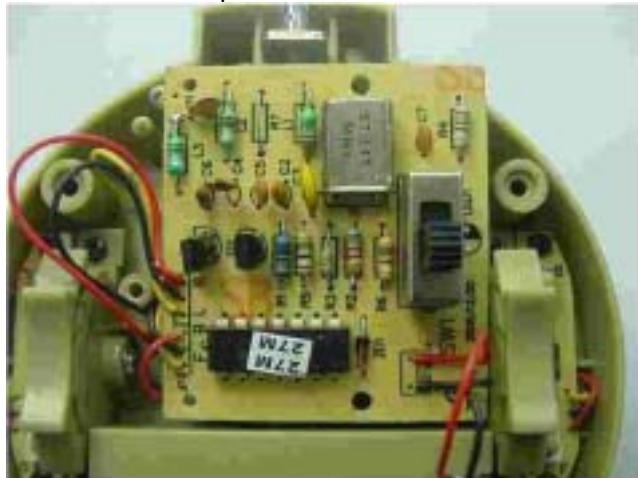

Copper Side View

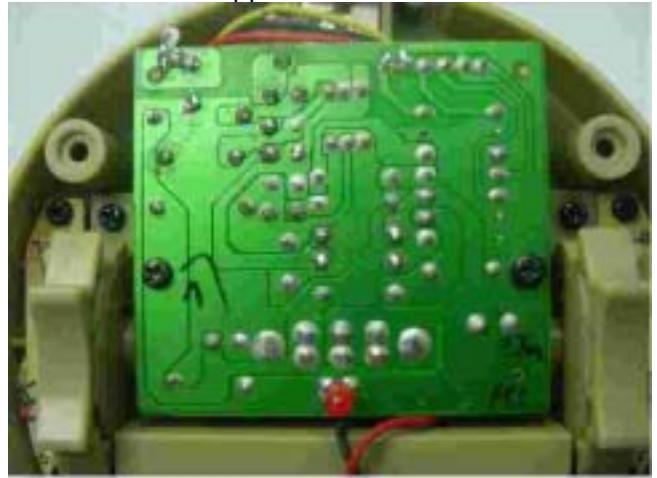

REPORT NO.: 06021625

DATE: 13 March, 2006

Photos of EUT

Measurement of Radiated Emission Test Set up




REPORT NO.: 06021625

DATE: 13 March, 2006

Photos of EUT

Measurement of Radiated Emission Test Set up

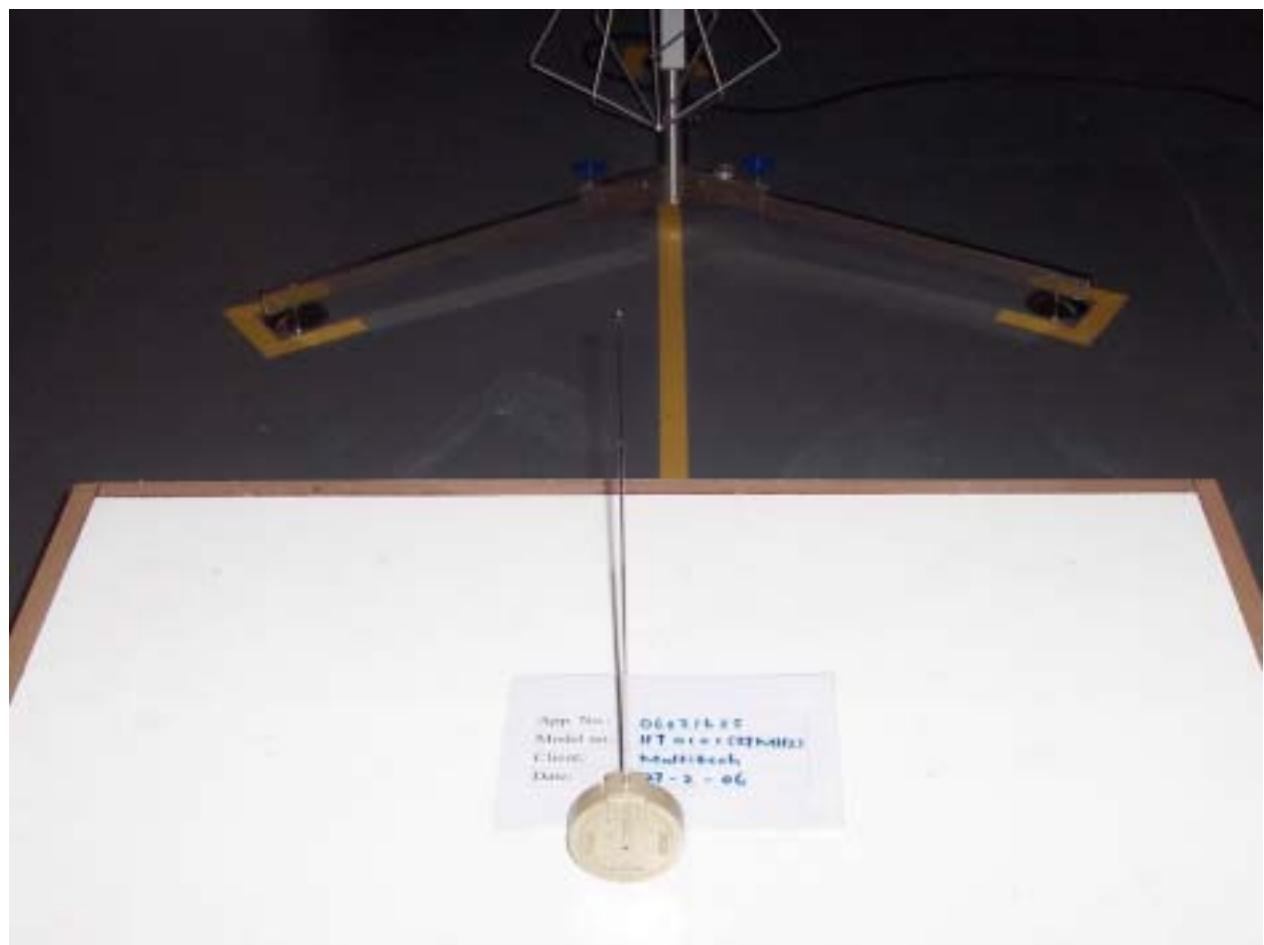

End of Document