

# **FCC Test Report**

Report No.: AGC01284221006FE08

**FCC ID** : T4K-D278U

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION: Digital DMR and Analog UHF Two Way Radio

**BRAND NAME** : Anytone, RADIOCOM

MODEL NAME : AT-D278, T-D278EX, AT-D278U, AT-D278II, AT-D278 PLUS,

AT-D279, AT-D279EX, AT-D279U, AT-D279II, DT1000

**APPLICANT** : Qixiang Electron Science & Technology Co., Ltd.

**DATE OF ISSUE** : Feb. 08, 2023

**STANDARD(S)** : FCC Part 15 Rules

**REPORT VERSION**: V 1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 20

## REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Feb. 08, 2023	Valid	Initial Release



Page 3 of 20

## **TABLE OF CONTENTS**

1. VERIFICATION OF COMPLIANCE	4
2. PRODUCT INFORMATION	5
3. IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION	6
4. SUPPORT EQUIPMENT LIST	6
5. SYSTEM DESCRIPTION	7
6. MEASUREMENT UNCERTAINTY	8
7. SUMMARY OF TEST RESULTS	8
8. FCC RADIATED EMISSION TEST	
8.1 PROVISIONS APPLICABLE	9
8.2 TEST SETUP BLOCK DIAGRAM	9
8.3 TEST PROCEDURE	11
8.4 TEST RESULT	
9. FCC CONDUCTED EMISSION TEST	
9.1 PROVISIONS APPLICABLE	
9.2 TEST SETUP BLOCK DIAGRAM	16
9.4 TEST RESULT	18
APPENDIX I PHOTOGRAPHS OF TEST SETUP	20
APPENDIX II: PHOTOGRAPHS OF TEST FUT	20



Page 4 of 20

#### 1. VERIFICATION OF COMPLIANCE

Applicant:	Qixiang Electron Science & Technology Co., Ltd.	
AUULDEE.	Qixiang Building, Tangxi Industrial Zone, Luojiang, Quanzhou, Fujian, 362011 China	
Manufacturer:	Qixiang Electron Science & Technology Co., Ltd.	
AUULDES.	Qixiang Building, Tangxi Industrial Zone, Luojiang, Quanzhou, Fujian, 362011 China	
Factory:	Qixiang Electron Science & Technology Co., Ltd.	
AUULDES.	Qixiang Building, Tangxi Industrial Zone, Luojiang, Quanzhou, Fujian, 362011 China	
Product Designation:	Digital DMR and Analog UHF Two Way Radio	
Brand Name:	Anytone, RADIOCOM	
Test Model:	AT-D278	
	AT-D278EX, AT-D278U, AT-D278II, AT-D278 PLUS, AT-D279, AT-D279EX, AT-D279U, AT-D279II, DT1000	
Declaration of Difference	AT-D278 series only model name is different, AT-D279 series only model name is different.  AT-D278 series & AT-D279 series both brand name is Anytone, the brand name of D1000 is RADIOCOM.  AT-D278 series & D1000 have different cover line design from AT-D279 series.	
Measurement Procedure:	ANSI C63.4: 2014	
Deviation:	No any deviation from the test method.	
Date of receipt of test item	Oct. 18, 2022	
Date of Test:	Oct. 18, 2022~Feb. 08, 2023	
Condition of Test Sample:	Normal	
Test Result:	Pass	
Report Template;	AGCRT-US-PTT/EMC	

The above equipment was tested by Attestation Of Global Compliance (Shenzhen) Co., Ltd. for compliance with the requirements set forth in the FCC Rules and Regulations Part 15, the measurement procedure according to ANSI C63.4:2014. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment are within the compliance requirements. The test results of this report relate only to the tested sample identified in this report.

Reviewed By

Bibo Zhang
(Project Engineer)

Calvin Liu
(Reviewer)

Feb. 08, 2023

Approved By

Max Zhang
Authorized Officer

Feb. 08, 2023



Page 5 of 20

#### 2. PRODUCT INFORMATION

The EUT is designed as a "**Digital DMR and Analog UHF Two Way Radio**". designed for voice communication. It is designed by way of utilizing the F3E modulation achieves the system operating. A major technical description of EUT is described as following:

	V : /D :
Communication Type	Voice /Data
Modulation	FM/4FSK
RX Frequency Range	400-480 MHz
<b>Emission Type</b>	F3E/F1D/F1W
Antenna Designation	Detachable Antenna
Antenna Gain	1.5dBi
Hardware Version	V2.2
Software Version	V1.0
Power Supply	DC 7.4V,2600mAh by battery, charging for DC8.4V

I/O Port Information (⊠Applicable ☐Not Applicable)

I/O Port of EUT					
I/O Port Type Q'TY Cable Tested with					
Antenna Port	1	-	1		
Earphone Port	1	-	1		



Page 6 of 20

## 3. IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION

Test Site Attestation of Global Compliance (Shenzhen) Co., Ltd		
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China	
Designation Number	CN1259	
FCC Test Firm Registration Number	975832	
A2LA Cert. No.	5054.02	
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA	

# **List of Test Equipment:**

## TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	May 09, 2022	May 08, 2023
LISN	R&S	ESH2-Z5	100086	Jun. 08, 2022	Jun. 07, 2023
TEST SOFTWARE	FARA	EZ-EMC	Ver.AGC-CO N03A1	N/A	N/A

## **TEST EQUIPMENT OF RADIATED EMISSION TEST**

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	May 09, 2022	May 08, 2023
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 08, 2021	Jan. 07, 2023
ANTENNA	SCHWARZBECK	VULB9168	D69250	Apr. 28, 2021	Apr. 27, 2023
Broadband Preamplifier	ETS LINDGREN	3117PA	00246148	Aug. 04, 2022	Aug. 03, 2023
POSITIONING CONTROLLER	MF	MF-7802	MF780208285		
HORN ANTENNA	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
RF Communication Test Set	HP	8920B	US35010161	Aug. 03, 2022	Aug. 02, 2023
EXA Signal Analyzer	Agilent	N9020A	MY53300860	Jun. 08, 2022	Jun. 07, 2023
Attenuator	Schaffner	58-30-33	ML030	Oct. 22, 2022	Oct. 21, 2023
Test software	Tonscend	JS32-RE	Ver.2.5	N/A	N/A



Page 7 of 20

#### 4. SUPPORT EQUIPMENT LIST

Device Type	Manufacturer	Model Name	Serial No.	Data Cable	Power Cable
Charger	-	-	-	-	1.2m Unshielded
Battery	-	QB-55HL	-	-	-
Back clip	-	-	-	-	-

## 5. SYSTEM DESCRIPTION

#### **EUT TEST PROCEDURE:**

- 1. Connect EUT and peripheral devices.
- 2. Power on the EUT, the EUT begins to work.
- 3. Make sure the EUT normal working.

## **EMC TEST MODE:**

No.	TEST MODES
1	Analog Receiving at low channel of 400 MHz to 480 MHz
2	Analog Receiving at middle channel of 400 MHz to 480 MHz
3	Analog Receiving at high channel of 400 MHz to 480 MHz
4	Digital Receiving at low channel of 400 MHz to 480 MHz
5	Digital Receiving at middle channel of 400 MHz to 480 MHz
6	Digital Receiving at high channel of 400 MHz to 480 MHz

Note: Only the result of the worst case was recorded in the report.



Page 8 of 20

#### **6. MEASUREMENT UNCERTAINTY**

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in measurement" (GUM) published by CISPR and ANSI.

- Uncertainty of Conducted Emission, Uc = ±3.1 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±4.0 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 Db

#### 7. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.107	Conduction Emission	Compliant
§15.109	Radiated Emission	Compliant



Page 9 of 20

#### 8. FCC RADIATED EMISSION TEST

#### **8.1 PROVISIONS APPLICABLE**


FCC CFR Title 47 Part 15 Subpart B Section 15.109:

Frequency	Limit (dBuV/m @3m)	Value				
30MHz-88MHz	40.00	Quasi-peak				
88MHz-216MHz	43.50	Quasi-peak				
216MHz-960MHz	46.00	Quasi-peak				
960MHz-1GHz	54.00	Quasi-peak				
Above 1GHz	54.00	Average				
Above Toriz	74.00	Peak				

Note: The lower limit shall apply at the transition frequency. Because the EUT RX frequency range up to 480 MHz, so the upper the frequency range up to 2 GHz.

#### **8.2 TEST SETUP BLOCK DIAGRAM**


#### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

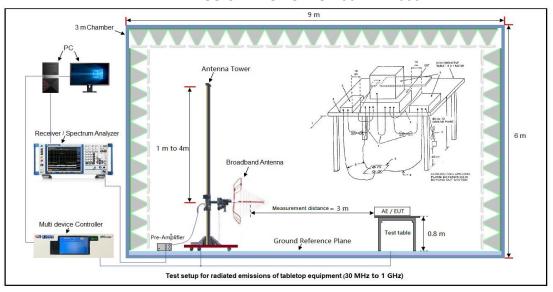



Page 10 of 20

## RADIATED EMISSION TEST SETUP ABOVE 1000MHz

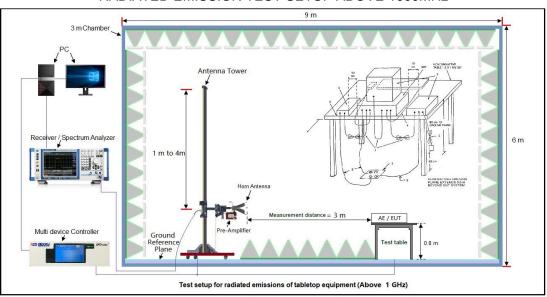

## **EMI TEST RECEIVER SETUP:**

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurment
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
Above I GHZ	1MHz	10 Hz	/	Ave.



Page 11 of 20


#### **8.3 TEST PROCEDURE**

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.4.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4. The EUT received power by AC 120V/60Hz.
- 5. The antenna was placed at 3 meter away from the EUT as stated in FCC Part 15. The antenna connected to the Analyzer via a cable and at times a pre-amplifier would be used.
- 6. The Analyzer / Receiver quickly scanned from 30MHz to 1000MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- 7. The test mode(s) were scanned during the test:
- 8. Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and Q.P./Peak reading is presented. For emissions below 1GHz, use 120KHz RBW and VBW>=3RBW for QP reading.
- 9. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 10. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 11. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 12. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 13. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.
- 14. The test data of the worst case condition (mode 1) was reported on the following Data page.



Page 12 of 20

#### **8.4 TEST RESULT**

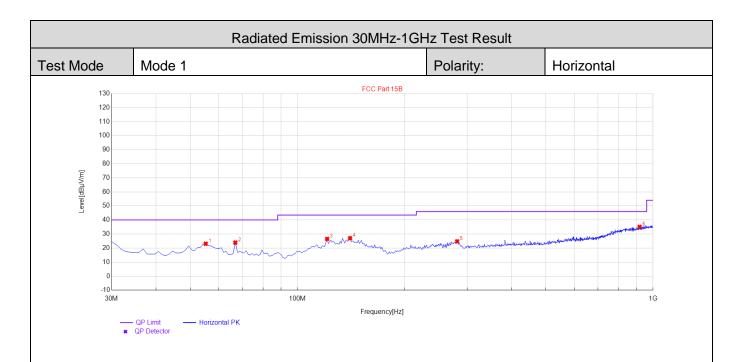

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	55.22	23.09	11.27	40.00	16.91	100	352	Horizontal
2	66.86	23.92	9.76	40.00	16.08	100	155	Horizontal
3	121.18	26.50	13.73	43.50	17.00	100	202	Horizontal
4	140.58	27.06	17.79	43.50	16.44	100	231	Horizontal
5	281.23	24.81	16.33	46.00	21.19	100	7	Horizontal
6	916.58	35.07	30.85	46.00	10.93	100	73	Horizontal

**RESULT: PASS** 






Radiated Emission 30MHz-1GHz Test Result Mode 1 Polarity: Vertical Test Mode FCC Part 15B 120 110 100 90 Level[dBµV/m] 70 60 50 40 30 20 10 -10 Frequency[Hz] QP Limit


QP Detector — Vertical PK

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	30.97	29.49	10.02	40.00	10.51	100	1	Vertical
2	55.22	29.69	11.80	40.00	10.31	100	26	Vertical
3	124.09	35.48	16.36	43.50	8.02	100	360	Vertical
4	139.61	36.54	19.79	43.50	6.96	100	130	Vertical
5	820.55	35.92	31.52	46.00	10.08	100	360	Vertical
6	953.44	37.97	32.96	46.00	8.03	100	360	Vertical

# **RESULT: PASS**





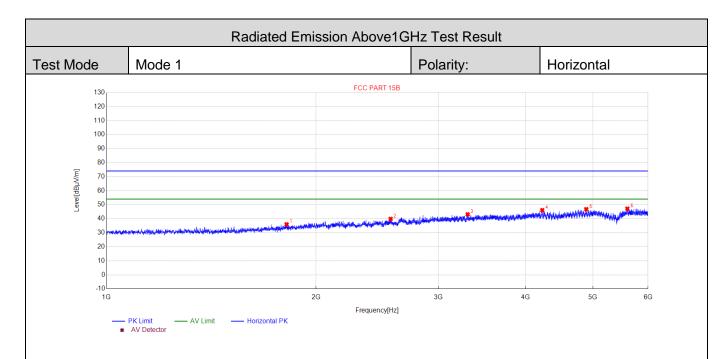


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	[dB]	Height [cm]	Angle [°]	Polarity
1	1814.5815	35.95	-17.47	74.00	38.05	100	90	Horizontal
2	2560.156	39.84	-12.89	74.00	34.16	100	240	Horizontal
3	3303.2303	43.06	-10.30	74.00	30.94	100	170	Horizontal
4	4227.8228	46.06	-7.83	74.00	27.94	100	210	Horizontal
5	4890.8891	46.76	-6.58	74.00	27.24	100	350	Horizontal
6	5603.4603	47.13	-6.24	74.00	26.87	100	60	Horizontal

# **RESULT: PASS**



Page 15 of 20

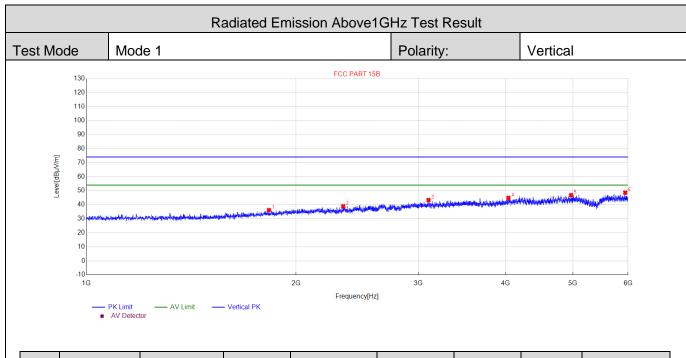

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1828.5829	36.15	-17.36	74.00	37.85	100	210	Vertical
2	2337.6338	38.91	-14.06	74.00	35.09	100	280	Vertical
3	3100.21	43.30	-10.92	74.00	30.70	100	130	Vertical
4	4038.8039	44.87	-8.05	74.00	29.13	100	10	Vertical
5	4968.3968	46.84	-6.39	74.00	27.16	100	290	Vertical
6	5943.9944	48.61	-5.07	74.00	25.39	100	90	Vertical

# **RESULT: PASS**

Note: 1. Factor=Antenna Factor + Cable loss - Amplifier gain, Margin= Limit-Measurement.

2. The "Factor" value can be calculated automatically by software of measurement system.



Page 16 of 20

#### 9. FCC CONDUCTED EMISSION TEST


#### 9.1 PROVISIONS APPLICABLE

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the, the radio frequency voltage that is conducted back onto the AC power line on any frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50uH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted Limit(dBuV)				
	Quasi-Peak	Average			
0.15 – 0.5	66 to 56 *	56 to 46 *			
0.5 – 5	56	46			
5 – 30	60	50			

<sup>\*</sup> Decreases with the logarithm of the frequency.

#### 9.2 TEST SETUP BLOCK DIAGRAM

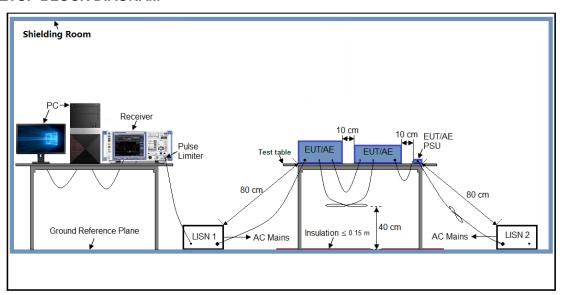




Page 17 of 20

#### 9.3 TEST PROCEDURE

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.4.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4. The EUT received AC 120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5. All support equipments received AC power from a second LISN, if any.
- 6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test data of the worst case condition (mode 1) was reported on the following Data page.



## 9.4 TEST RESULT

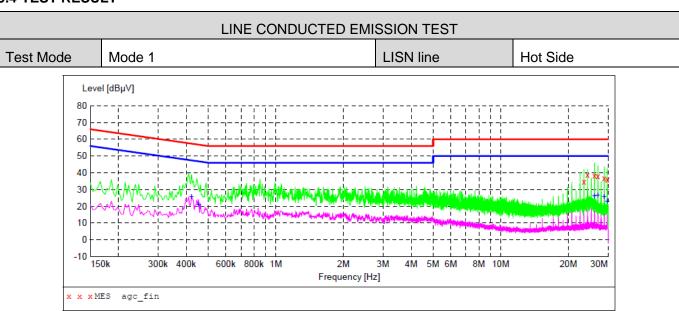


# MEASUREMENT RESULT: "agc\_fin"

2022/10/26 16	:54					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
23.426000	34.80	9.1	60	25.2	QP	L1
24.298000	38.90	9.1	60	21.1	QΡ	L1
26.102000	38.50	9.3	60	21.5	QP	L1
27.030000	37.90	9.3	60	22.1	QP	L1
28.818000	36.90	9.5	60	23.1	QP	L1
29.730000	36.00	9.6	60	24.0	QP	L1

# MEASUREMENT RESULT: "agc fin2"

2022/10/26 16	5:54					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.422000 0.454000 26.114000 27.026000 28.826000 29.726000	26.00 21.10 26.20 26.90 26.00 23.00	5.6 5.5 9.3 9.5 9.6	47 47 50 50 50	21.4 25.7 23.8 23.1 24.0 27.0	AV AV AV AV AV	L1 L1 L1 L1 L1 L1



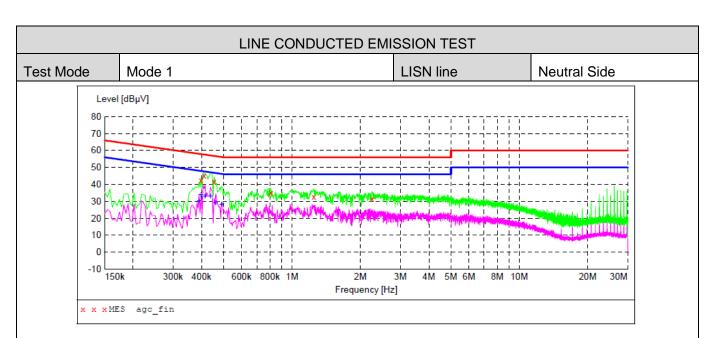

# MEASUREMENT RESULT: "agc\_fin"

2022/10	/26 16	:49					
Freq	uency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.3	98000	42.60	5.7	58	15.3	QP	N
0.4	10000	45.20	5.7	58	12.4	QP	N
0.4	54000	41.70	5.5	57	15.1	QP	N
0.8	06000	35.00	5.4	56	21.0	QP	N
1.2	46000	32.90	5.8	56	23.1	QP	N
2.2	50000	31.70	6.5	56	24.3	QP	N

# MEASUREMENT RESULT: "agc fin2"

2022/10/26 16	:49					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.390000	30.20	5.7	48	17.9	AV	N
0.398000	33.80	5.7	48	14.1	VA	N
0.414000	33.00	5.6	48	14.6	AV	N
0.438000	33.00	5.6	47	14.1	VA	N
0.462000	29.20	5.5	47	17.5	VA	N
0.490000	28.30	5.4	46	17.9	VA	N



Page 20 of 20

# APPENDIX I PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC01284221006AP04

**APPENDIX II: PHOTOGRAPHS OF Test EUT** 

Refer to the Report No.: AGC01284221006AP02

----END OF REPORT-----



# Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.