



**FCC CFR47 PART 15 SUBPART C
CERTIFICATION
TEST REPORT**

FOR

WIRELESS STATION

MODEL NUMBER: 35220-QAB

FCC ID: T4S-35220-QAB

REPORT NUMBER: 06J10177-1B

ISSUE DATE: APRIL 27, 2006

Prepared for
**HONDA R&D CO., LTD.
8-1 HONCHO, WAKO-SHI
SAITAMA-KEN, 351-0114 JAPAN**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888**

NVLAP[®]
LAB CODE:200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	4/25/06	Initial Issue	Thu
B	4/27/06	Re-inserted the correct setup photos based on Client's setup instruction	A. Ilarina

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION.....	5
4. CALIBRATION AND UNCERTAINTY.....	5
4.1. MEASURING INSTRUMENT CALIBRATION.....	5
4.2. MEASUREMENT UNCERTAINTY	5
5. EQUIPMENT UNDER TEST.....	6
5.1. DESCRIPTION OF EUT.....	6
5.2. MAXIMUM OUTPUT POWER.....	6
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	6
5.4. SOFTWARE AND FIRMWARE	6
5.5. WORST-CASE CONFIGURATION AND MODE.....	6
5.6. DESCRIPTION OF TEST SETUP.....	7
6. TEST AND MEASUREMENT EQUIPMENT.....	9
7. LIMITS AND RESULTS	10
7.1. CHANNEL TESTS FOR THE 2400 TO 2483.5 MHz BAND.....	10
7.1.1. 6 dB BANDWIDTH.....	10
7.1.2. 99% BANDWIDTH.....	17
7.1.3. PEAK OUTPUT POWER.....	24
7.1.4. MAXIMUM PERMISSIBLE EXPOSURE	32
7.1.5. AVERAGE POWER.....	35
7.1.6. PEAK POWER SPECTRAL DENSITY	36
7.1.7. CONDUCTED SPURIOUS EMISSIONS.....	43
7.2. RADIATED EMISSIONS	56
7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS.....	56
7.2.2. TRANSMITTER ABOVE 1 GHz FOR THE 2400 TO 2483.5 MHz BAND – WITH ANTENNA TMM1260	59
7.2.3. TRANSMITTER ABOVE 1 GHz FOR THE 2400 TO 2483.5 MHz BAND – WITH ANTENNA TMM1261	77
7.2.4. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz	95
7.3. POWERLINE CONDUCTED EMISSIONS	97
8. SETUP PHOTOS.....	101

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: HONDA R&D CO., LTD.
8-1 HONCHO, WAKO-SHI
SAITAMA-KEN, 351-0114 JAPAN

EUT DESCRIPTION: WIRELESS STATION

MODEL: 35220-QAB

SERIAL NUMBER: 00305B3000FD

DATE TESTED: MARCH 31 - APRIL 05, 2006

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



ALVIN ILARINA
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

THANH NGUYEN
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a Wireless Station.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

2400 to 2483.5 MHz Authorized Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2462	802.11b	22.13	163.31
2412 - 2462	802.11g	23.33	215.28

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes the following two antennas for diversity, with a maximum gain at each band as indicated in the table below:

Antenna Manufacturer / Model Number	Antenna Type	Maximum Peak Antenna Gain (dBi)	Operating Mode
TMM1260	Monopole	1.4dBi @2.4GHz 5.7dBi @5GHz	☐ Point to Point ☒ Point to Multipoint
TMM1261	Patch	1.1dBi @2.4GHz 5.0dBi @5GHz	☒ Point to Point ☐ Point to Multipoint

5.4. SOFTWARE AND FIRMWARE

The test utility software used during testing was Atheros ART rev 5.3.

5.5. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power, based on the radio test reports for this product. The highest measured output power was at 2437 MHz in 11b mode and 2462 in 11g mode.

The worst-case data rate for this channel is determined to be 1Mb/s for b mode and 6Mb/s for g mode, based on previous experience with Atheros 802.11 product design architectures.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	TOSHIBA	TECRA8200	12048027PU	DoC
AC Adapter	TOSHIBA	PA3048U-1ACA	0111A1092289G	DoC


I/O CABLES

N/A.

TEST SETUP

The EUT is installed in a host laptop computer via a PCMCIA adapter/extension board during the tests. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS

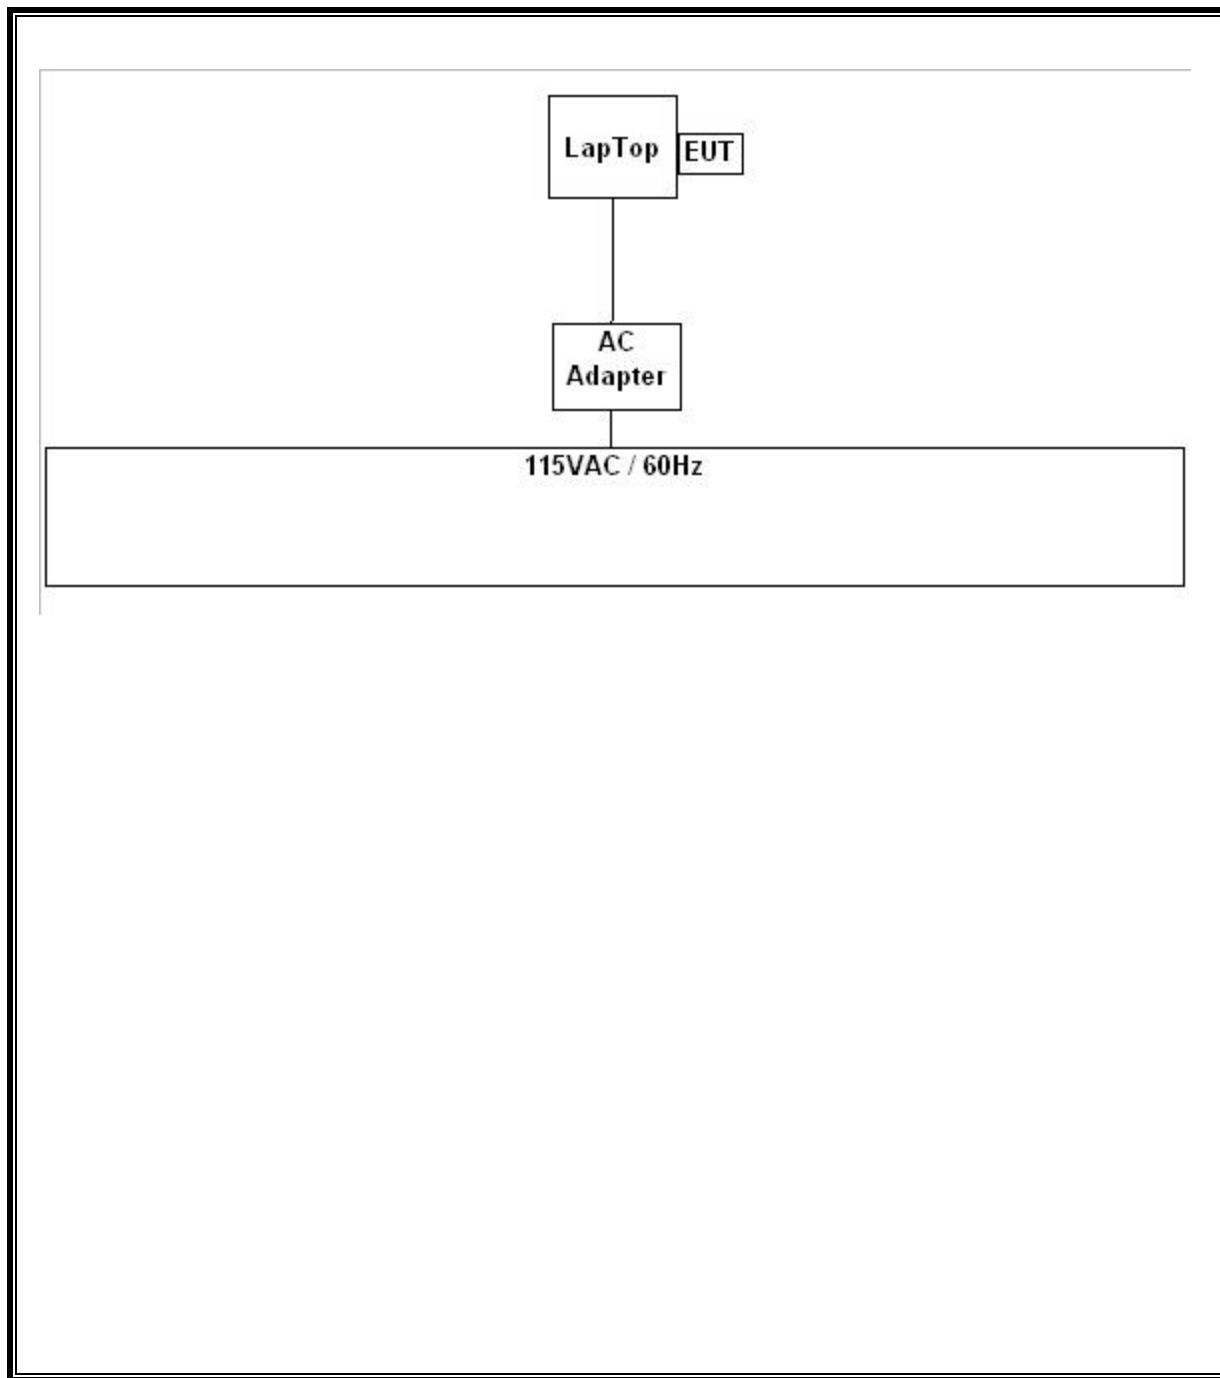

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	6717	4/22/2006
Preamplifier, 1 ~ 26 GHz	HP	8449B	3008A00931	6/24/2006
Spectrum Analyzer 3 Hz ~ 44 GHz	Agilent	E4446A	US42510266	10/19/2006
EMI Receiver, 9 kHz ~ 2.9 GHz	HP	8542E	3942A00286	2/4/2007
RF Filter Section	HP	85420E	3705A00256	2/4/2007
Antenna, Bilog 30 MHz ~ 2 Ghz	Sunol Sciences	JB1	A121003	9/3/2006
LISN, 10 kHz ~ 30 MHz	FCC	LISN-50/250-25-2	2023	8/30/2006
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	8379443	8/30/2006
EMI Test Receiver	R & S	ESHS 20	827129/006	6/3/2006
AC Power Source, 10 kVA	ACS	AFC-10K-AFC-2	J1568	1/0/1900
Spectrum Analyzer 3 Hz ~ 44 GHz	Agilent	E4446A	US42510266	10/19/06
Peak / Average Power Sensor	Agilent	E9327A	US40440755	2/10/07
Peak Power Meter	Agilent	E4416A	GB41291160	2/9/07

7. LIMITS AND RESULTS

7.1. CHANNEL TESTS FOR THE 2400 TO 2483.5 MHz BAND

7.1.1. 6 dB BANDWIDTH

LIMIT

§15.247 (a) (2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

No non-compliance noted:


802.11b Mode


Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	12500	500	12000
Middle	2437	11083.3	500	10583
High	2462	10166.7	500	9667


802.11g Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	16416.7	500	15917
Middle	2437	16083.3	500	15583
High	2462	16166.7	500	15667


6 DB BANDWIDTH (802.11b MODE)

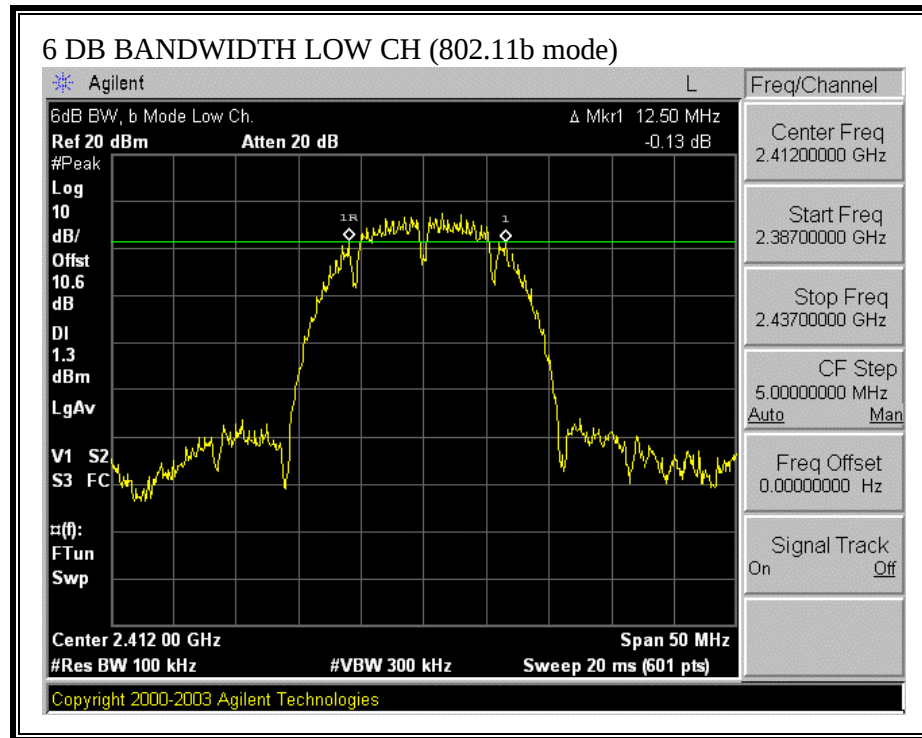


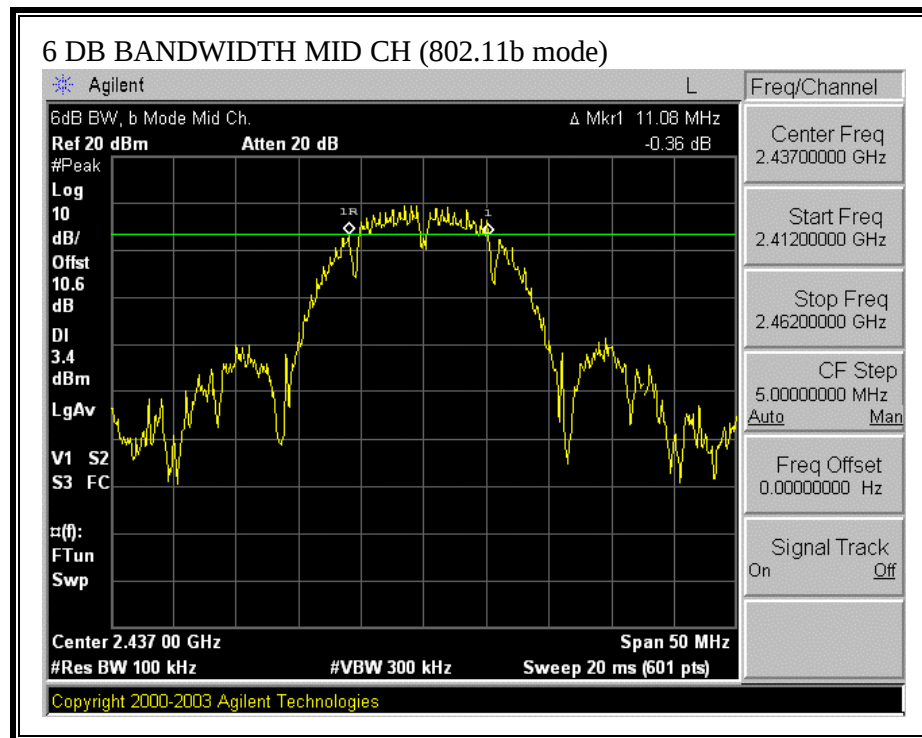


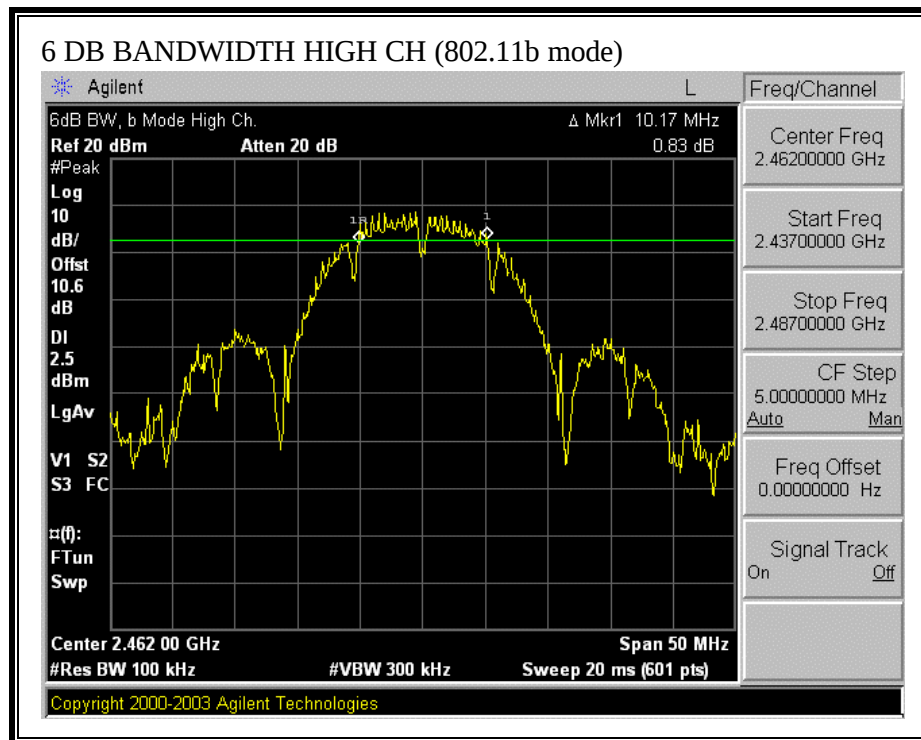

6 DB BANDWIDTH (802.11g MODE)

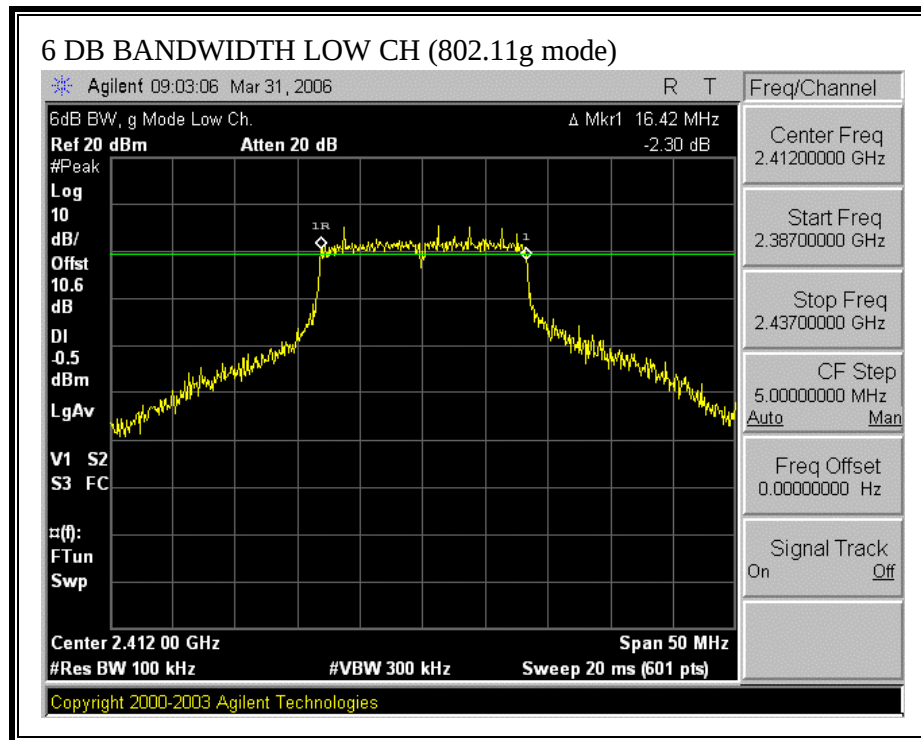

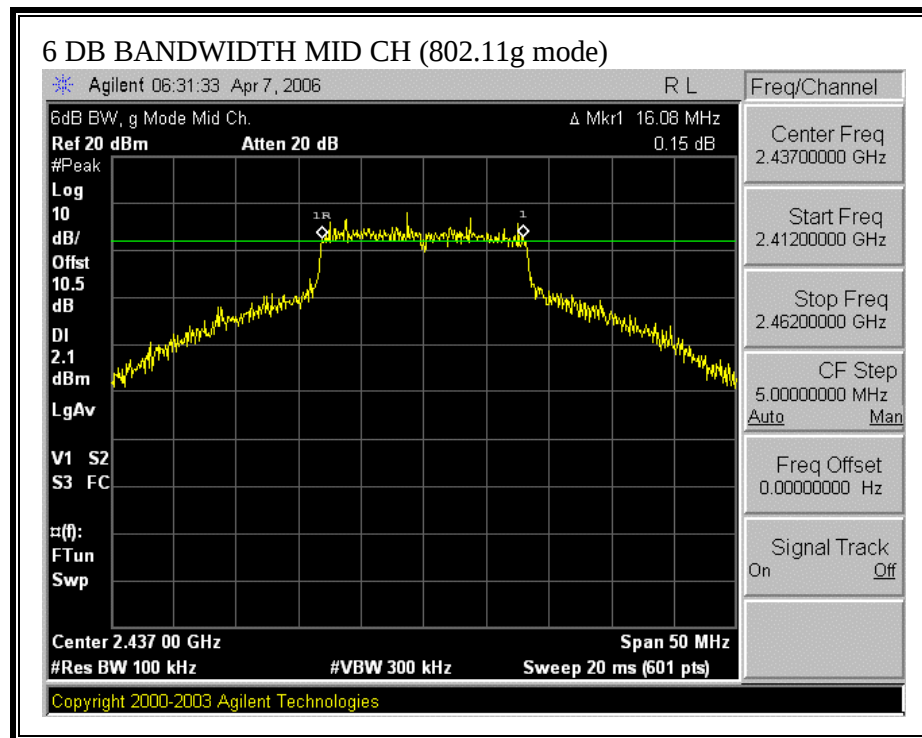

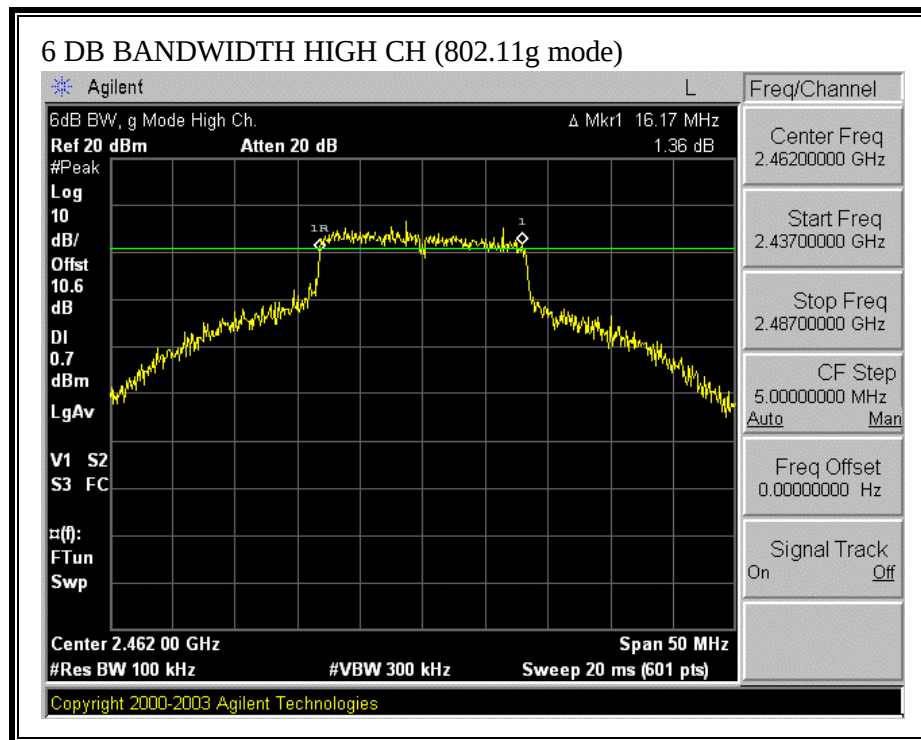

7.1.2. 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

No non-compliance noted:


802.11b Mode


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	15.513
Middle	2437	15.808
High	2462	16.256


802.11g Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	17.626
Middle	2437	19.629
High	2462	19.761


99% BANDWIDTH (802.11b MODE)

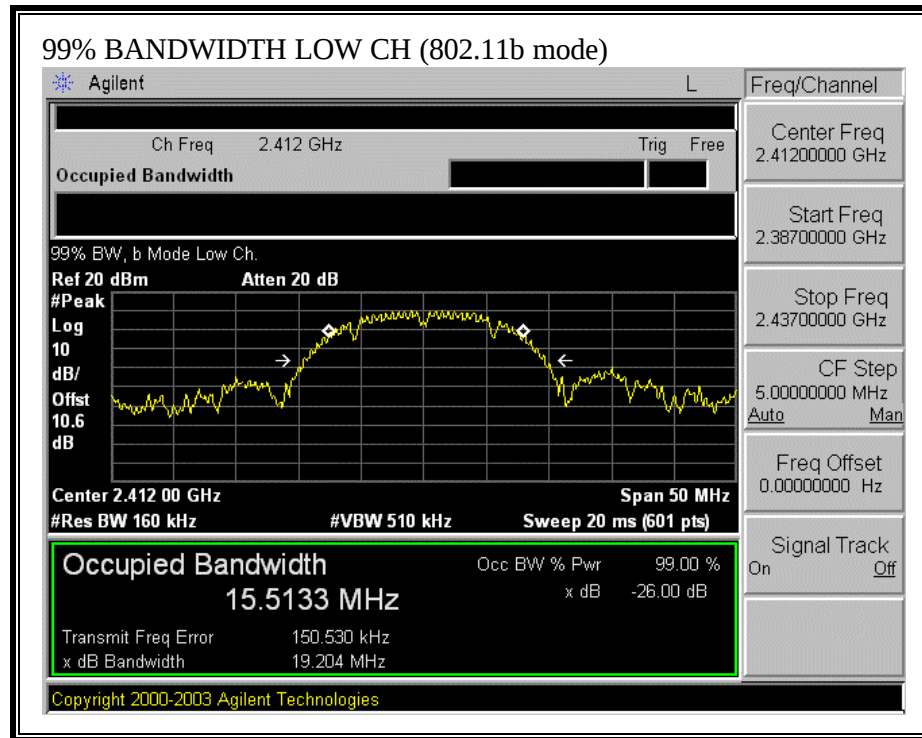


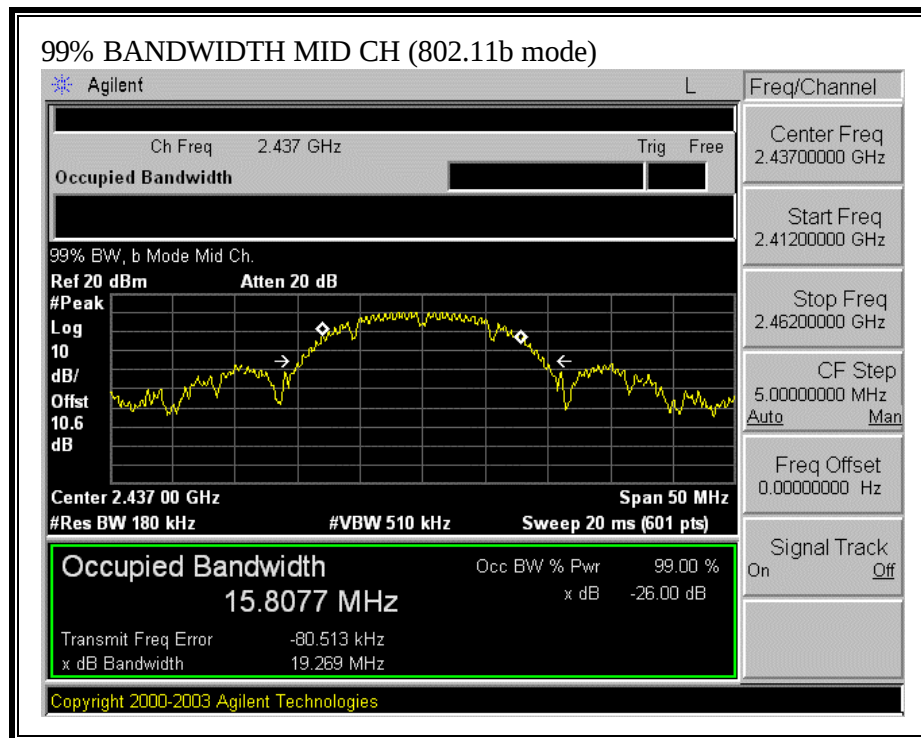


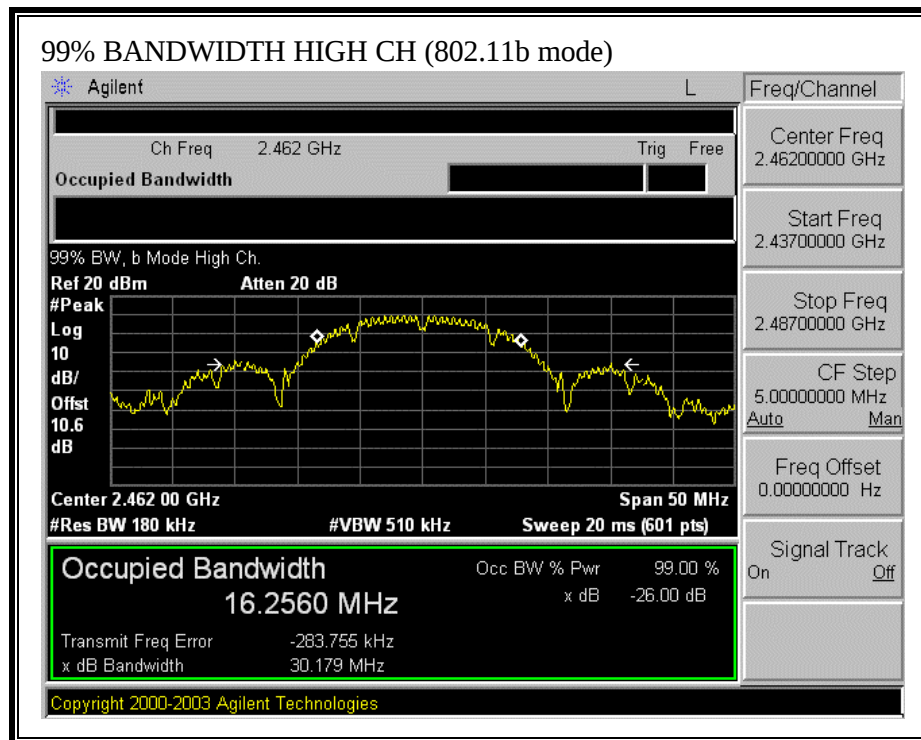

99% BANDWIDTH (802.11g MODE) (1% of 99%BW)

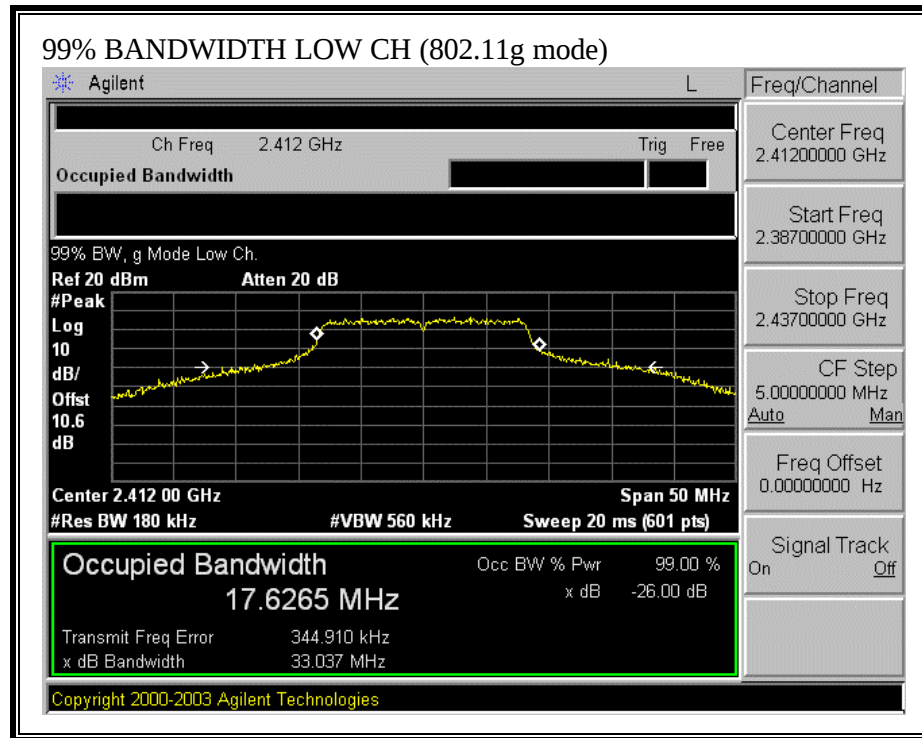

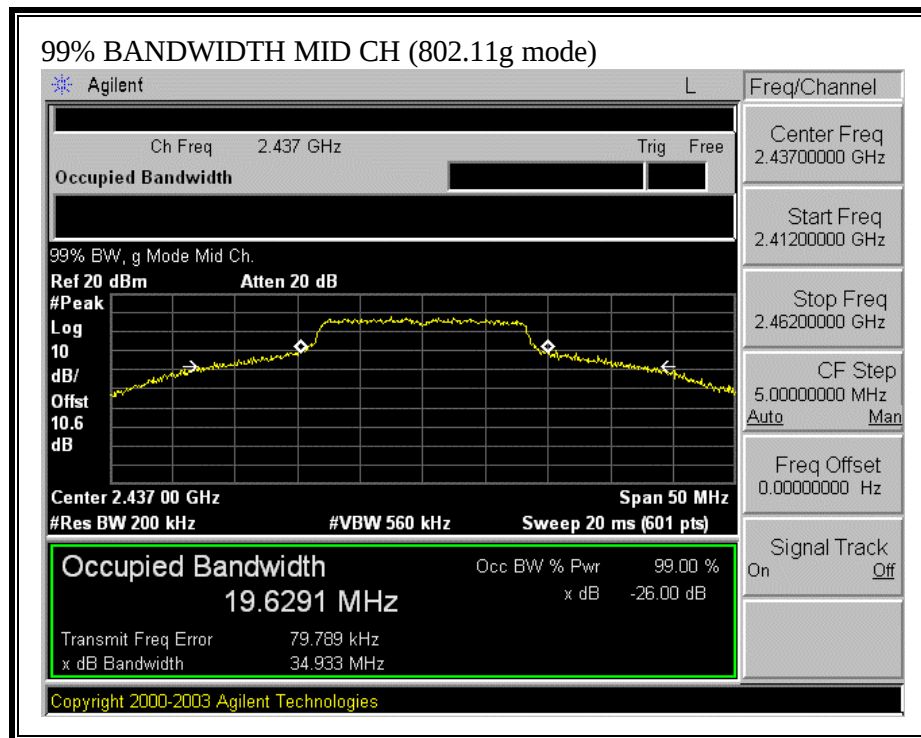

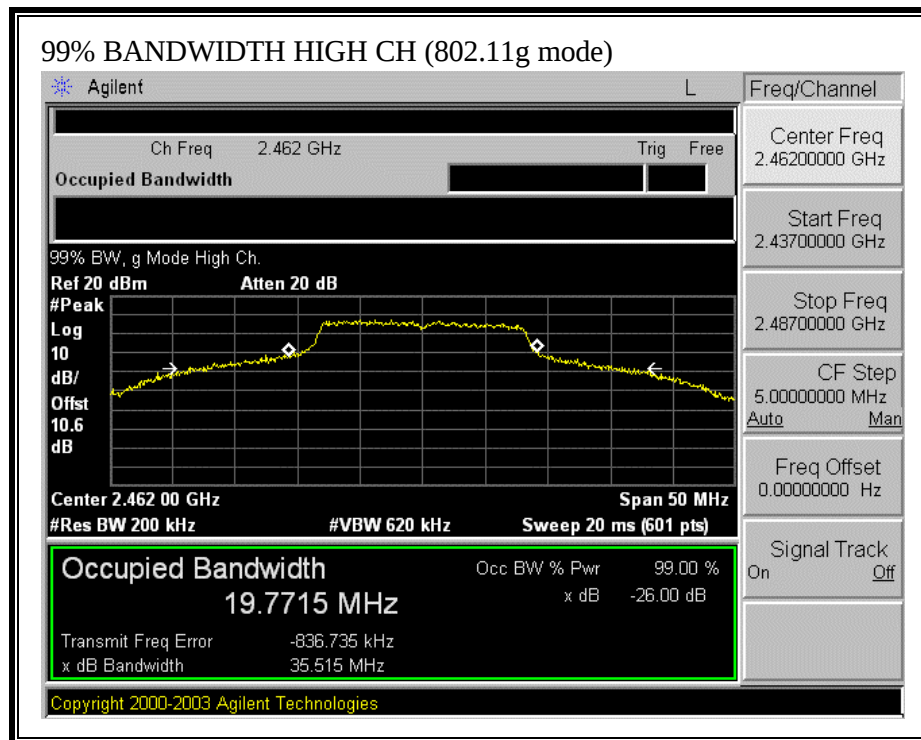

7.1.3. PEAK OUTPUT POWER

PEAK POWER LIMIT

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt.

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

§15.247 (b) (4) (i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.

RESULTS

The maximum antenna gain is 1.4 dBi for other than fixed, point-to-point operations, therefore the limit is 30 dBm.

No non-compliance noted:


802.11b Mode


Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	21.50	30	-8.50
Middle	2437	22.13	30	-7.87
High	2462	21.04	30	-8.96


802.11g Mode

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	22.87	30	-7.13
Middle	2437	23.33	30	-6.67
High	2462	22.80	30	-7.20


OUTPUT POWER (802.11b MODE)

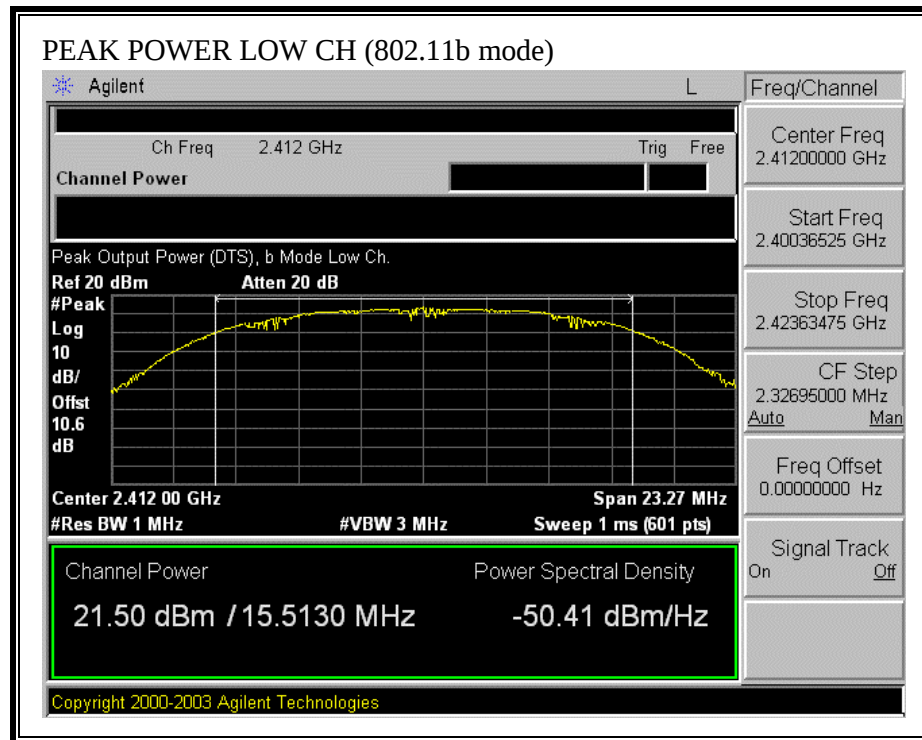


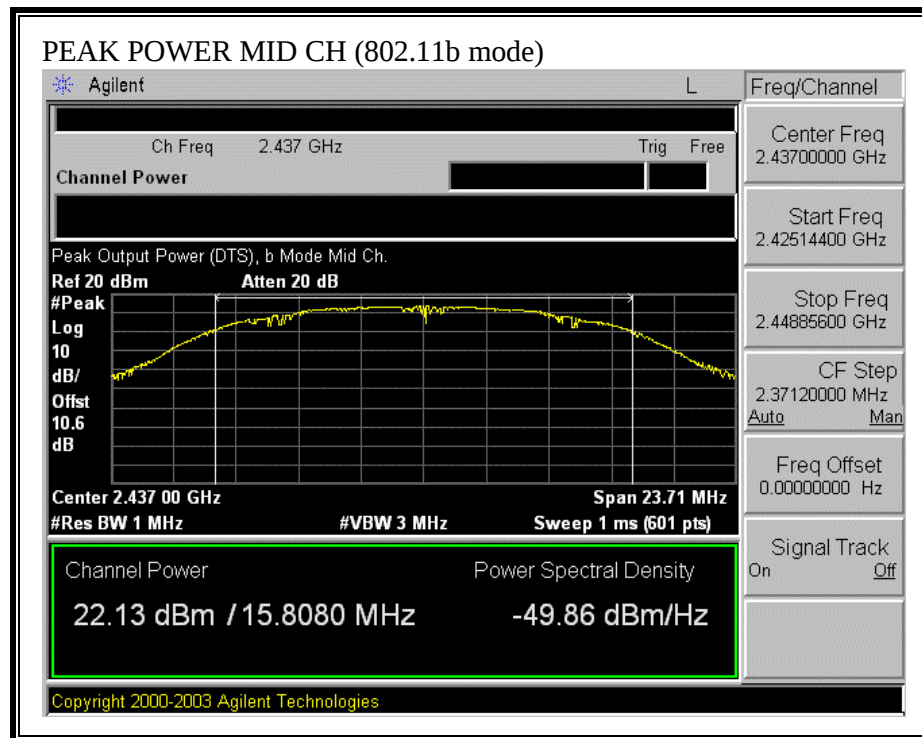


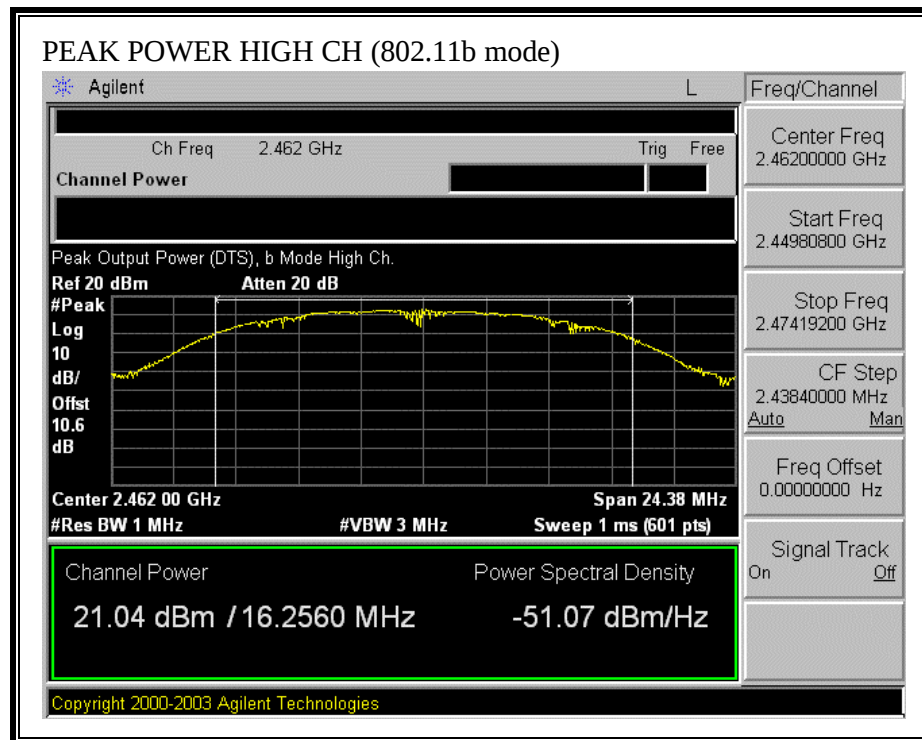

OUTPUT POWER (802.11g MODE)

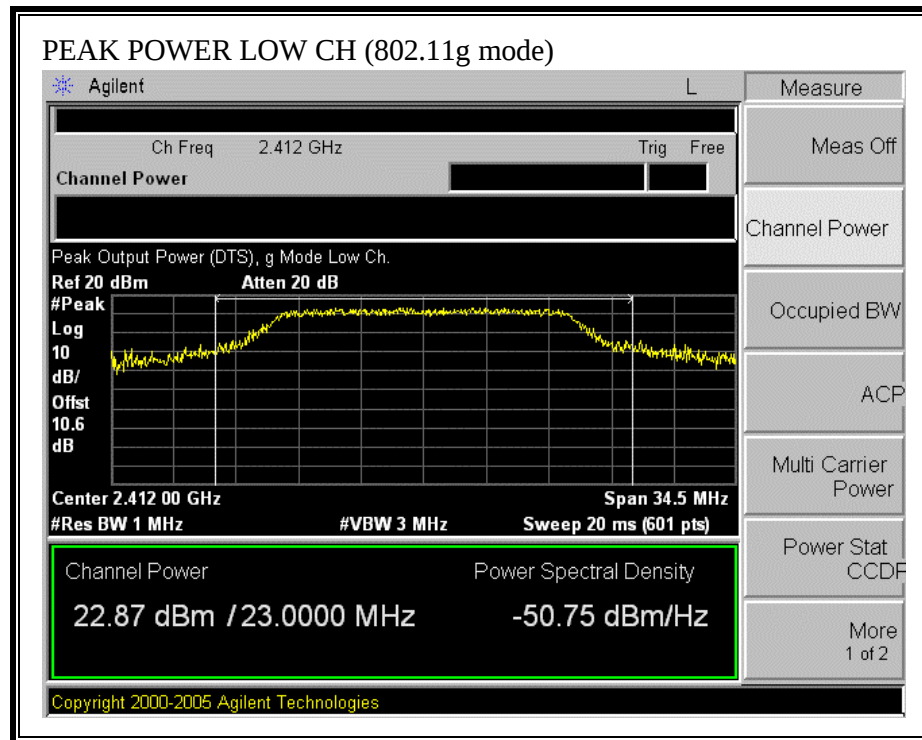

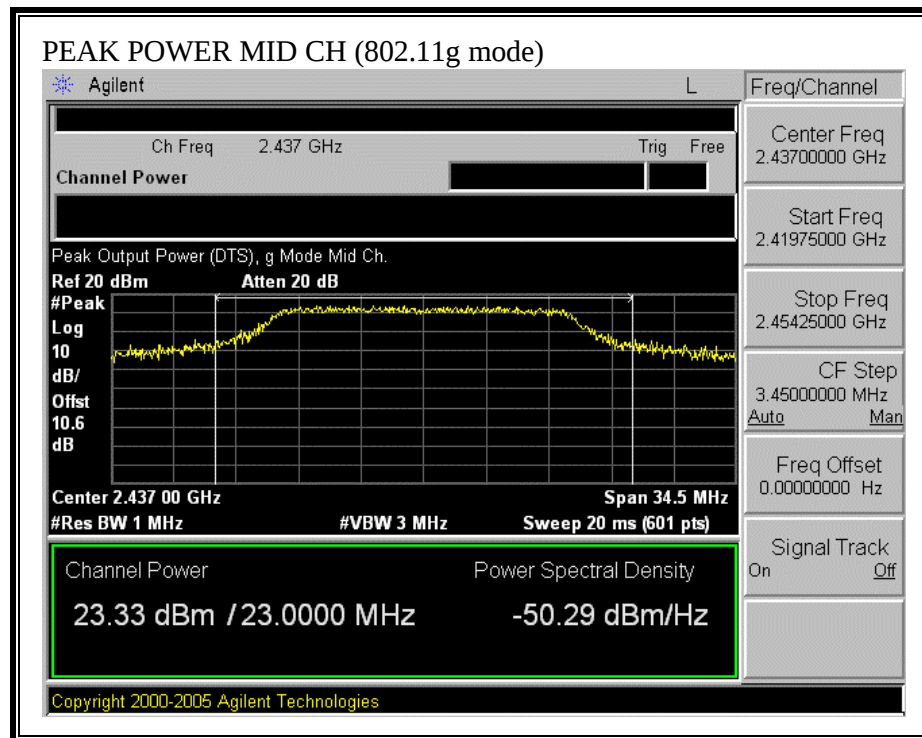

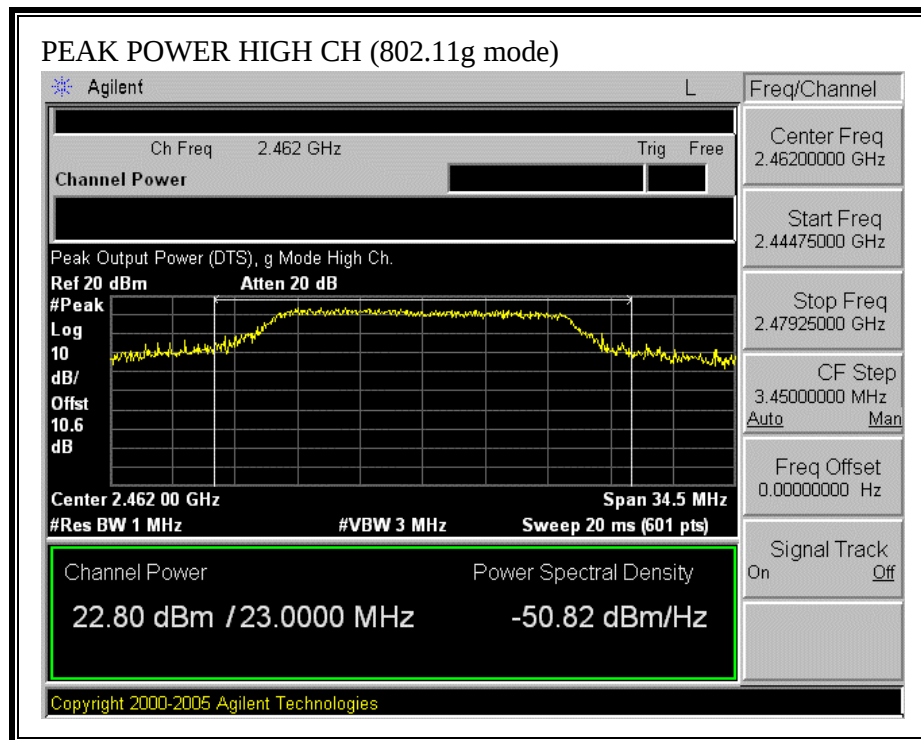

7.1.4. MAXIMUM PERMISSIBLE EXPOSURE

LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500			f/300	6
1500–100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500			f/1500	30
1500–100,000			1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of Power to mW and Distance to cm, using:

$$P \text{ (mW)} = P \text{ (W)} / 1000 \text{ and}$$

$$d \text{ (cm)} = 100 * d \text{ (m)}$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW/cm²

Substituting the logarithmic form of power and gain using:

$$P \text{ (mW)} = 10^{(P \text{ (dBm)} / 10)} \text{ and}$$

$$G \text{ (numeric)} = 10^{(G \text{ (dBi)} / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm²

Rearranging terms to calculate the power density at a specific distance yields

$$S = 0.0795 * 10^{((P + G) / 10)} / (d^2)$$

LIMITS

From §1.1310 Table 1 (B), the maximum value of $S = 1.0 \text{ mW/cm}^2$

RESULTS

No non-compliance noted: (MPE distance equals 20 cm)

Mode	MPE Distance (cm)	Output Power (dBm)	Antenna Gain (dBi)	Power Density (mW/cm²)
802.11b	20.0	22.13	1.40	0.04
802.11g	20.0	23.33	1.40	0.06

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

7.1.5. AVERAGE POWER

AVERAGE POWER LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 10.2 dB (including 10 dB pad and .2 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

802.11b Mode

Channel	Frequency (MHz)	Power (dBm)
Low	2412	17.46
Middle	2437	17.50
High	2462	17.88

802.11g Mode

Channel	Frequency (MHz)	Power (dBm)
Low	2412	17.54
Middle	2437	17.60
High	2462	17.21

7.1.6. PEAK POWER SPECTRAL DENSITY

LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.

RESULTS

No non-compliance noted:


802.11b Mode


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-2.04	8	-10.04
Middle	2437	-1.72	8	-9.72
High	2462	-3.98	8	-11.98


802.11g Mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-6.59	8	-14.59
Middle	2437	-1.81	8	-9.81
High	2462	-2.39	8	-10.39


PEAK POWER SPECTRAL DENSITY (802.11b MODE)

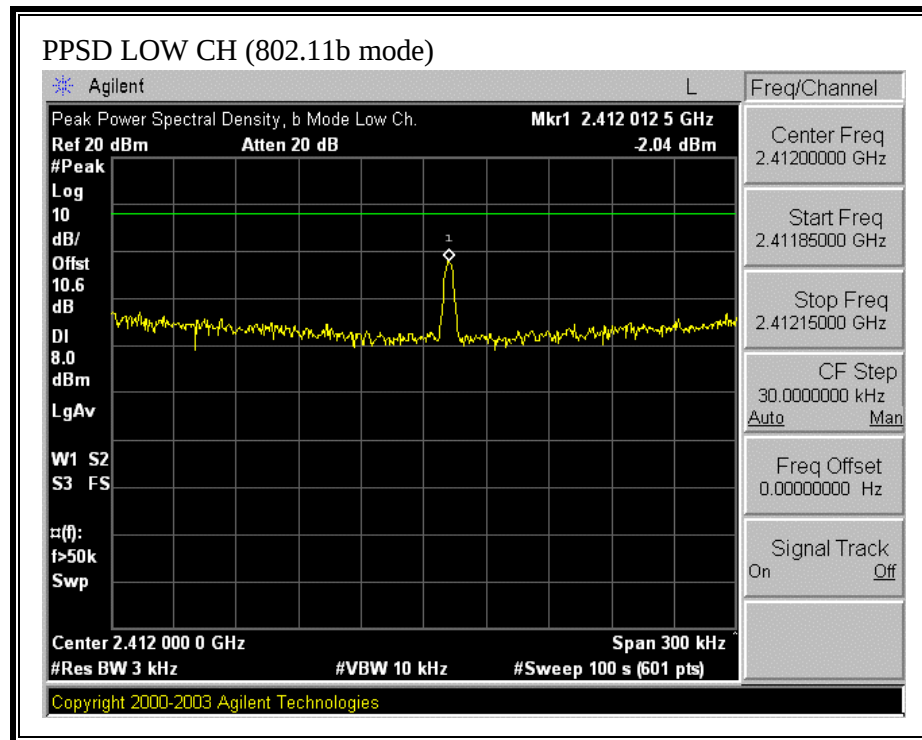


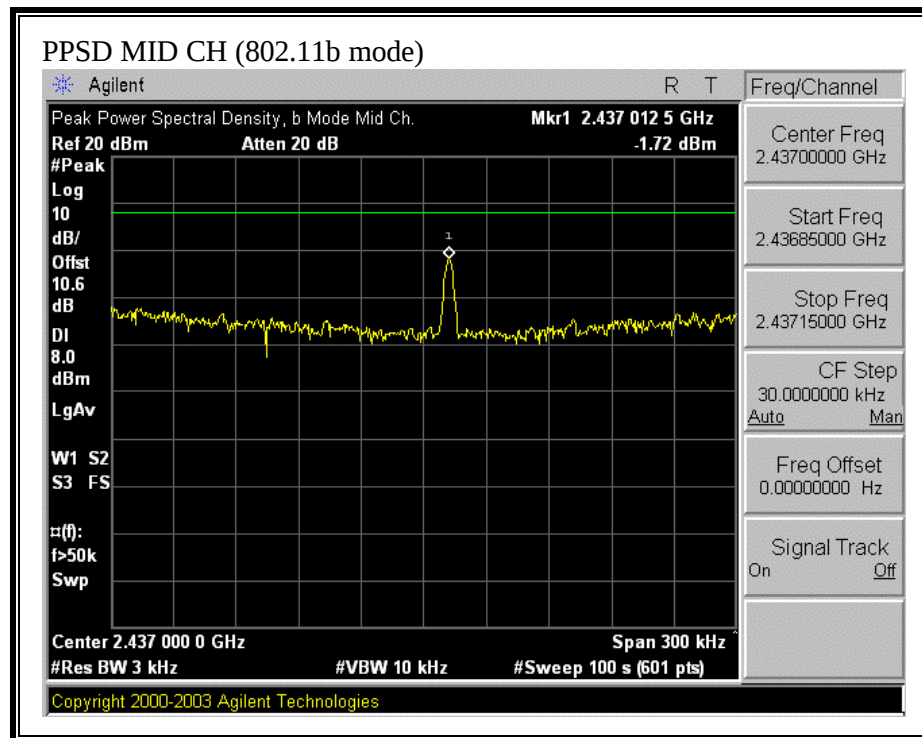


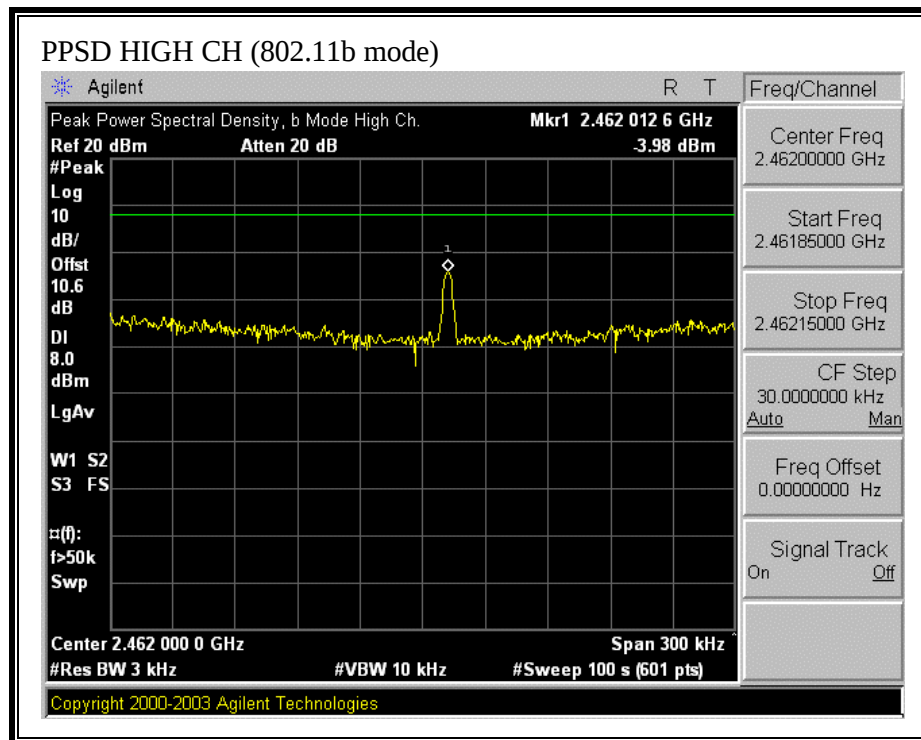

PEAK POWER SPECTRAL DENSITY (802.11g MODE)

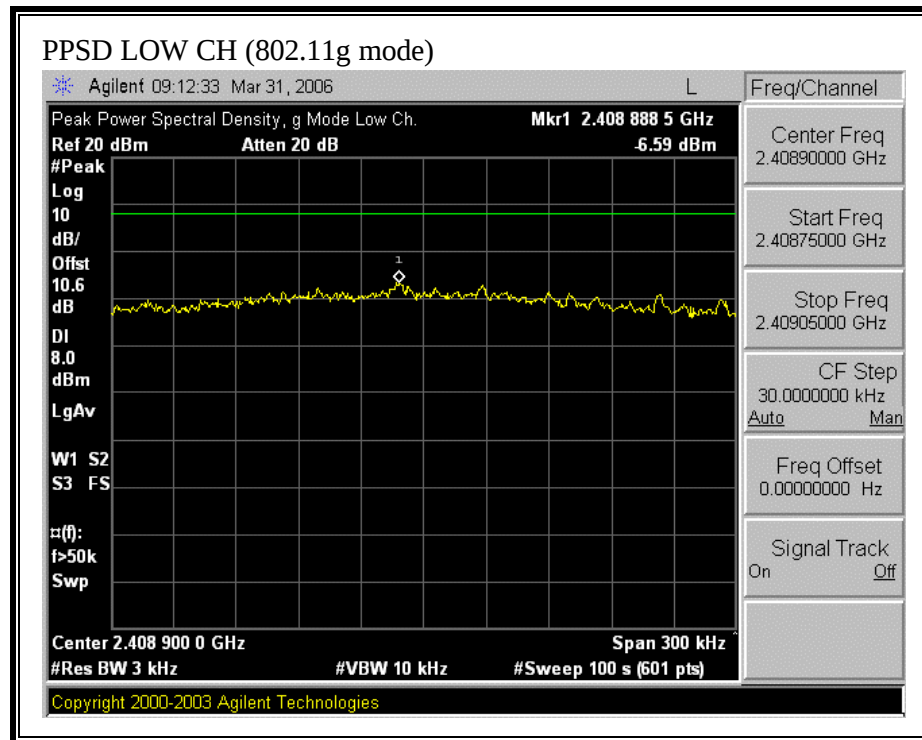

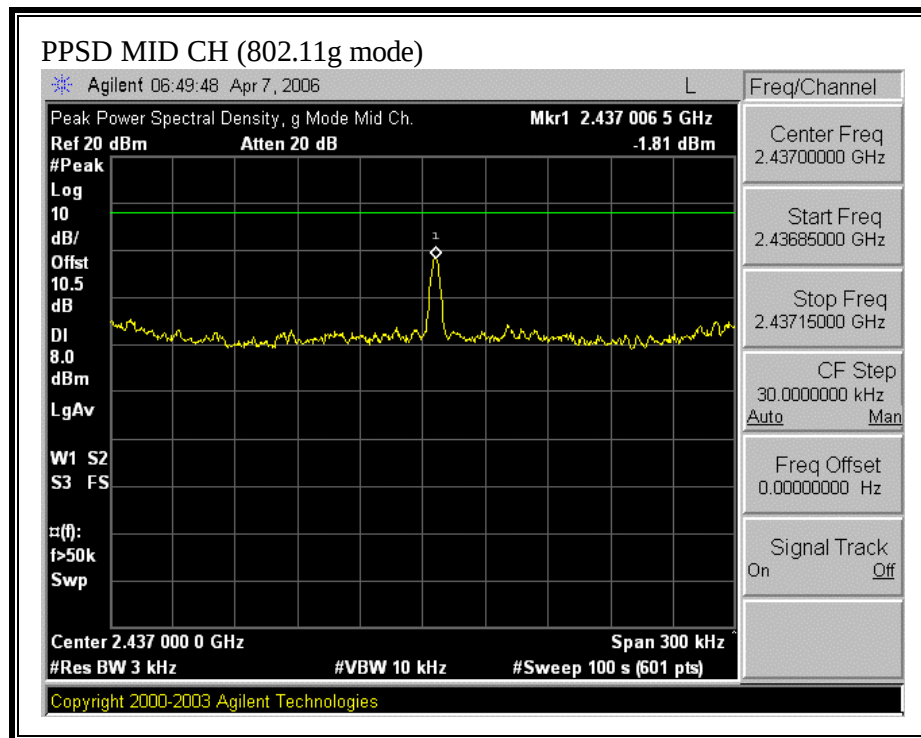

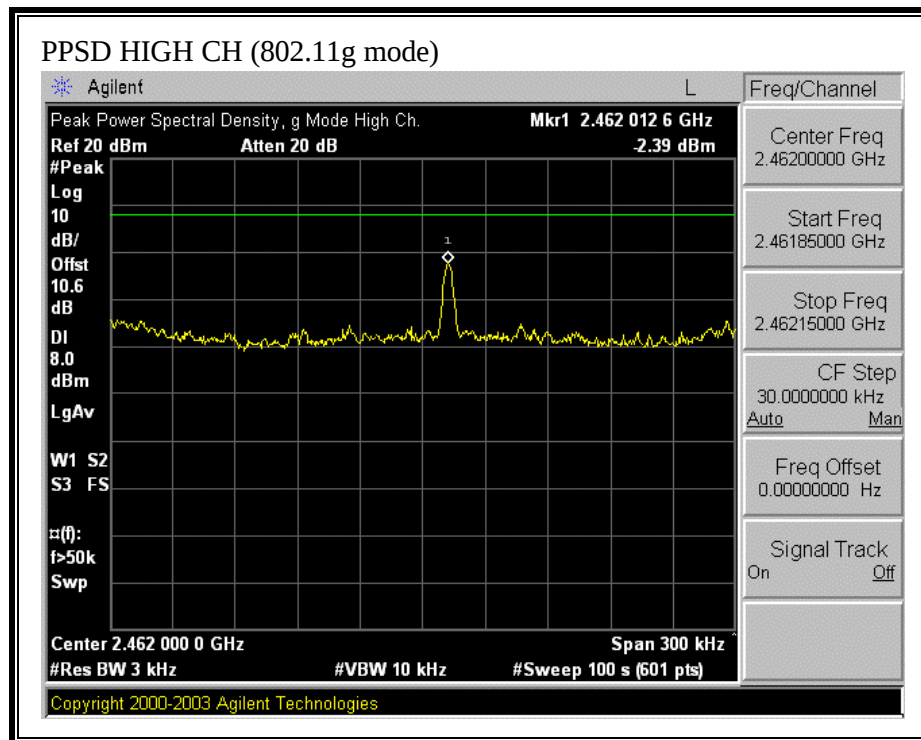

7.1.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

RESULTS


No non-compliance noted:


SPURIOUS EMISSIONS, LOW CHANNEL (802.11b MODE)

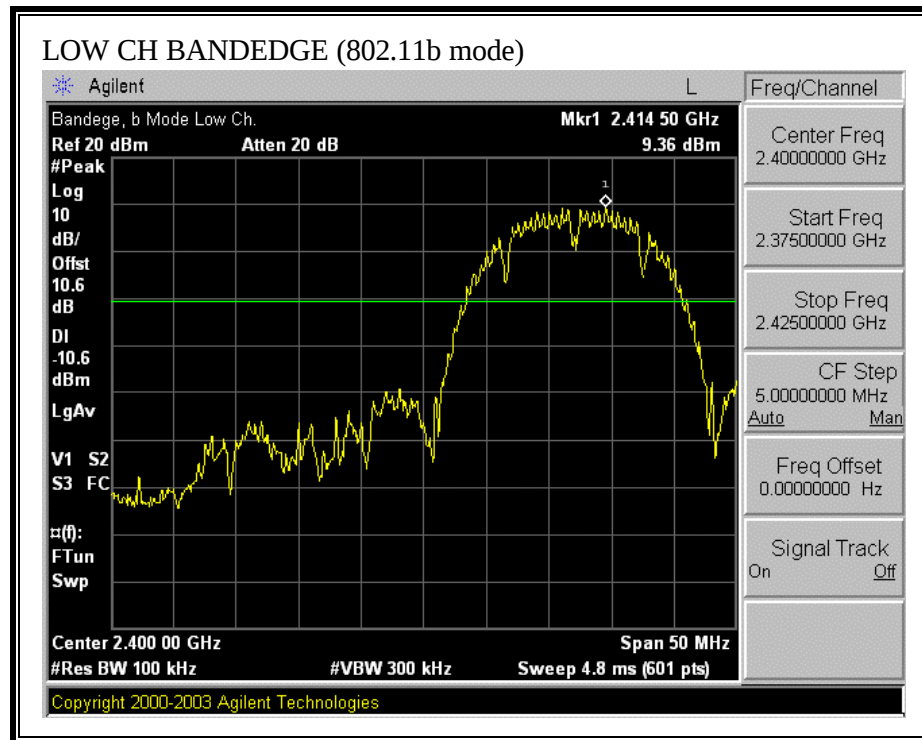

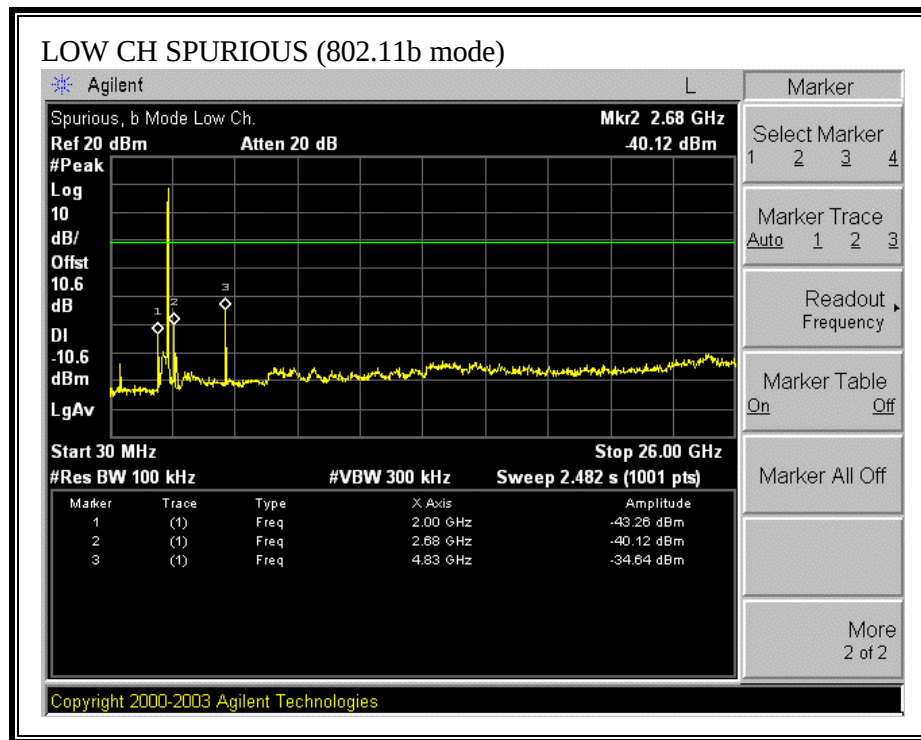



SPURIOUS EMISSIONS, MID CHANNEL (802.11b MODE)

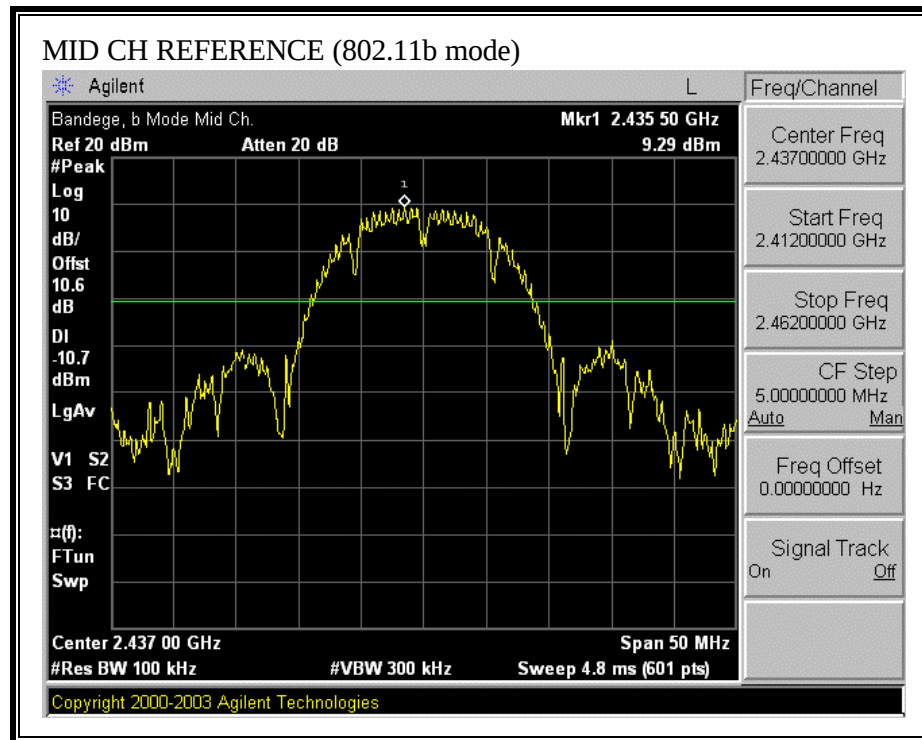

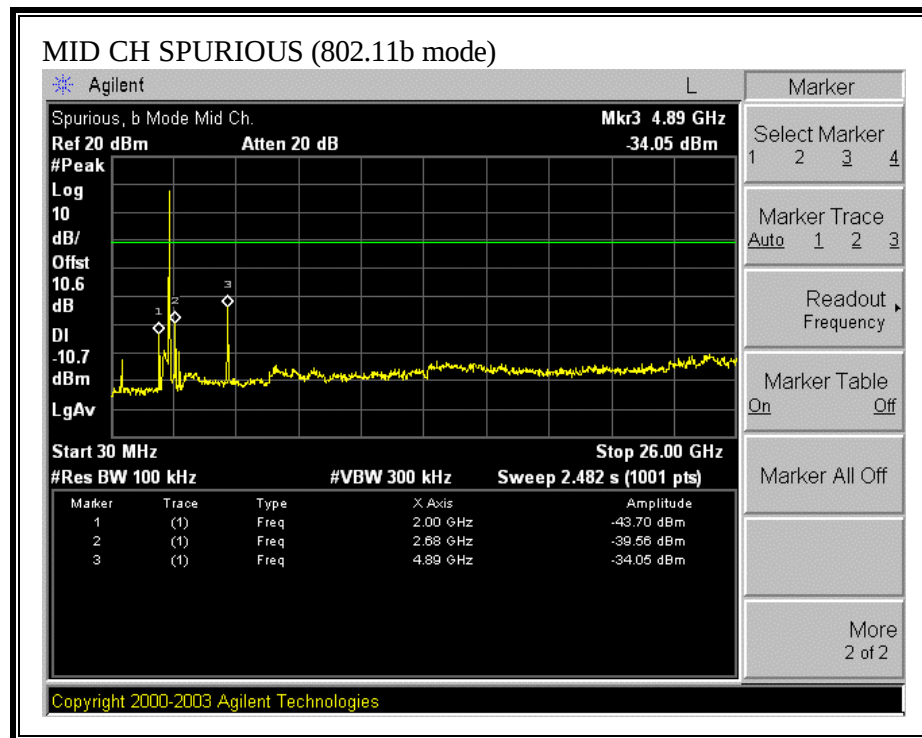



SPURIOUS EMISSIONS, HIGH CHANNEL (802.11b MODE)

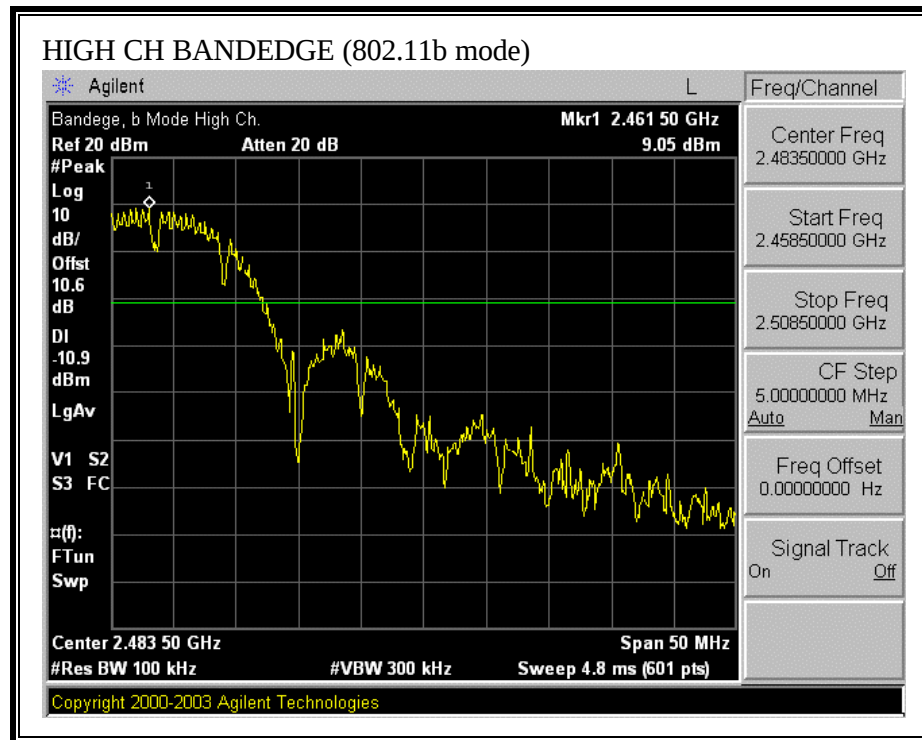

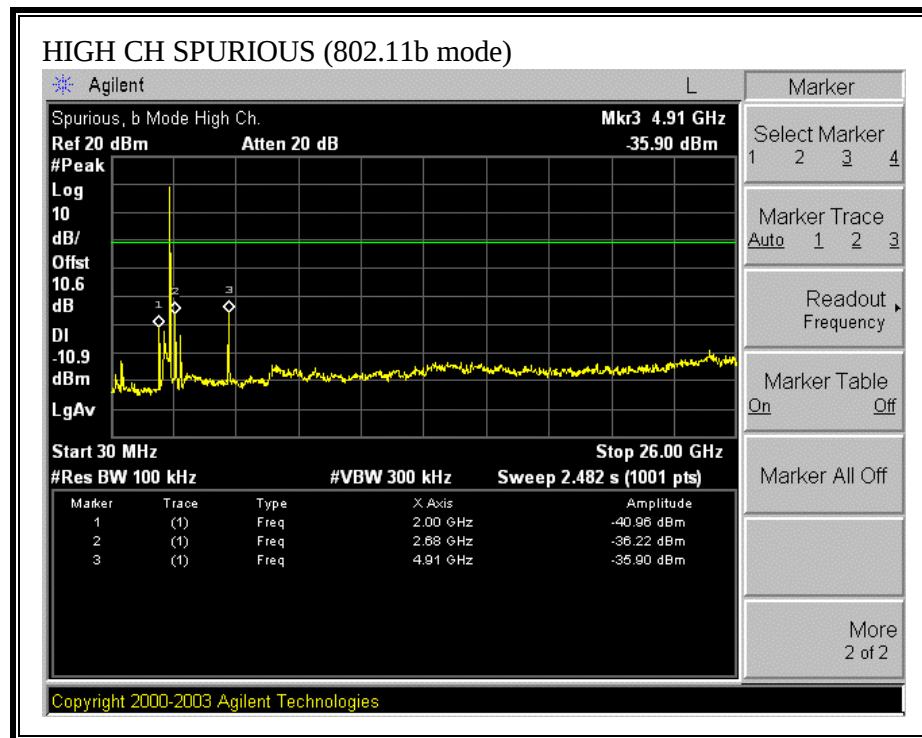



SPURIOUS EMISSIONS, LOW CHANNEL (802.11g MODE)

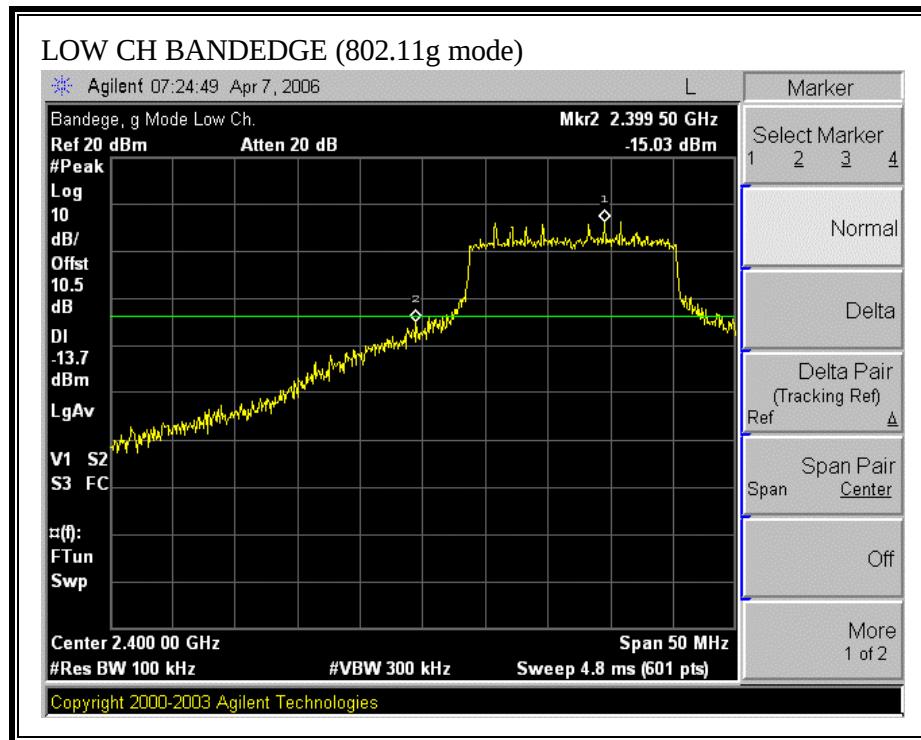

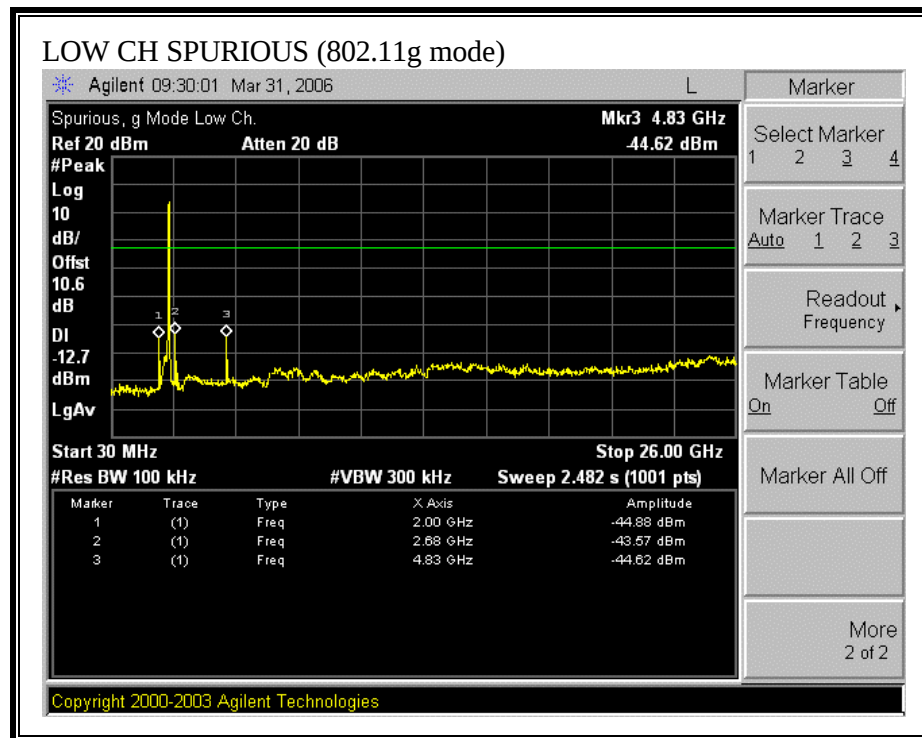



SPURIOUS EMISSIONS, MID CHANNEL (802.11g MODE)

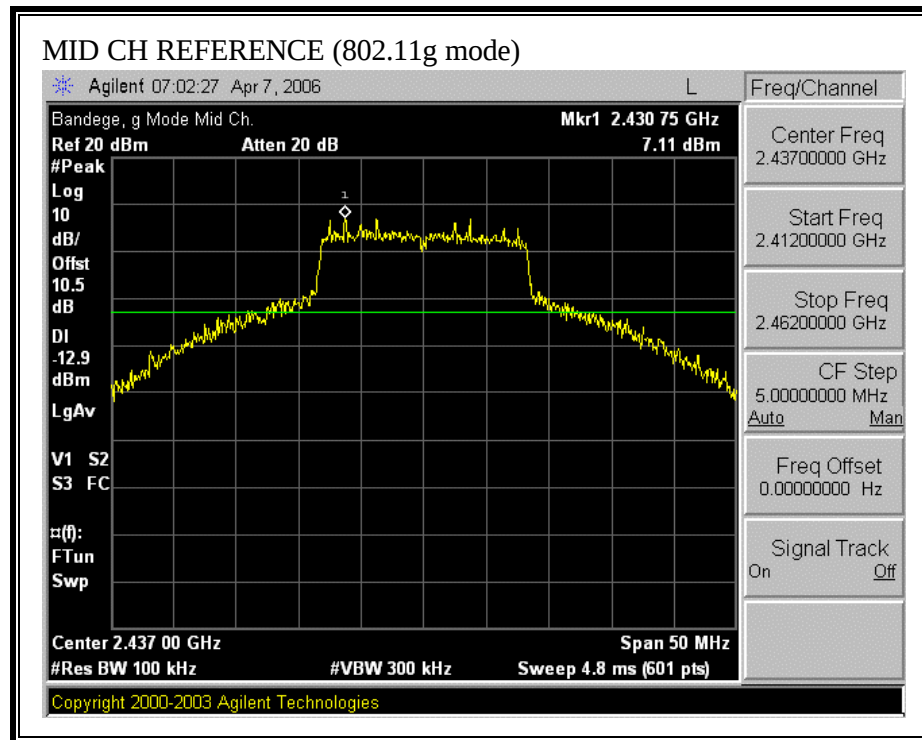

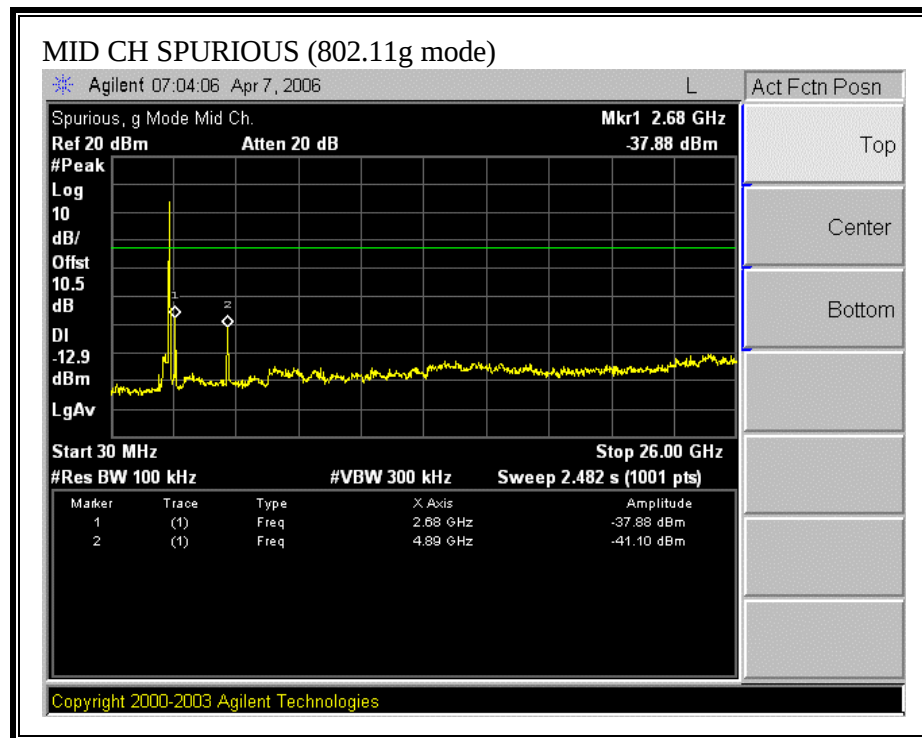

SPURIOUS EMISSIONS, HIGH CHANNEL (802.11g MODE)

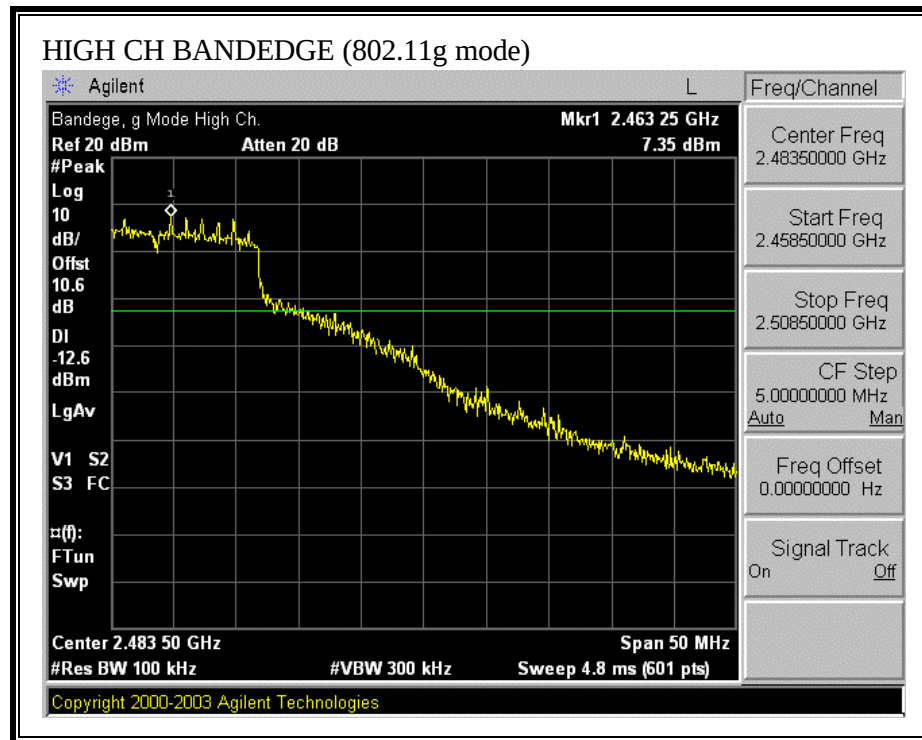

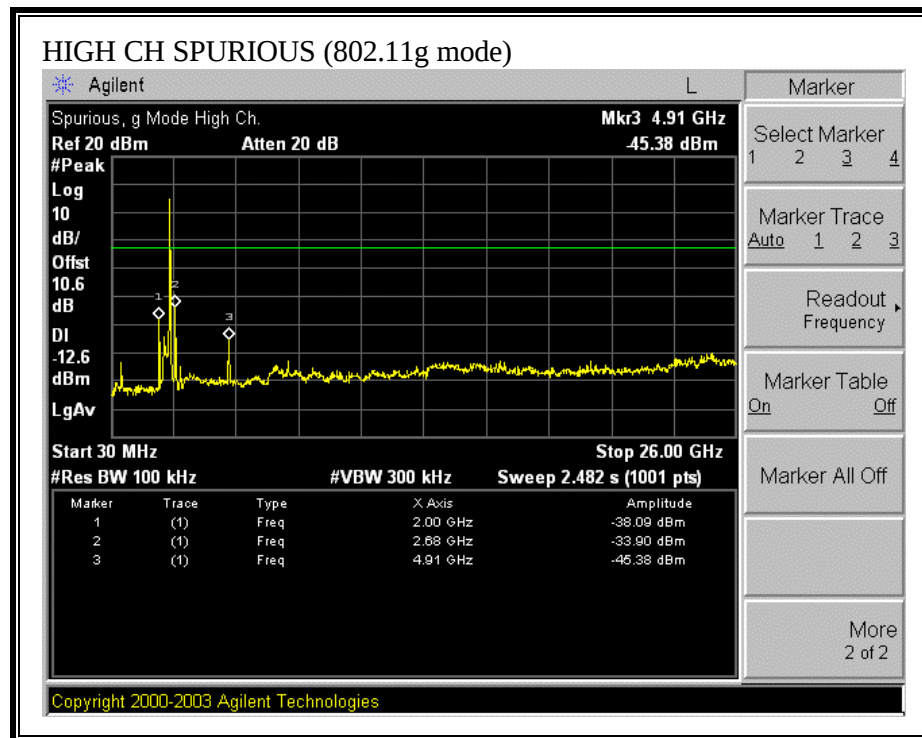

7.2. RADIATED EMISSIONS

7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each 5 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


7.2.2. TRANSMITTER ABOVE 1 GHz FOR THE 2400 TO 2483.5 MHz BAND – WITH ANTENNA TMM1260


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

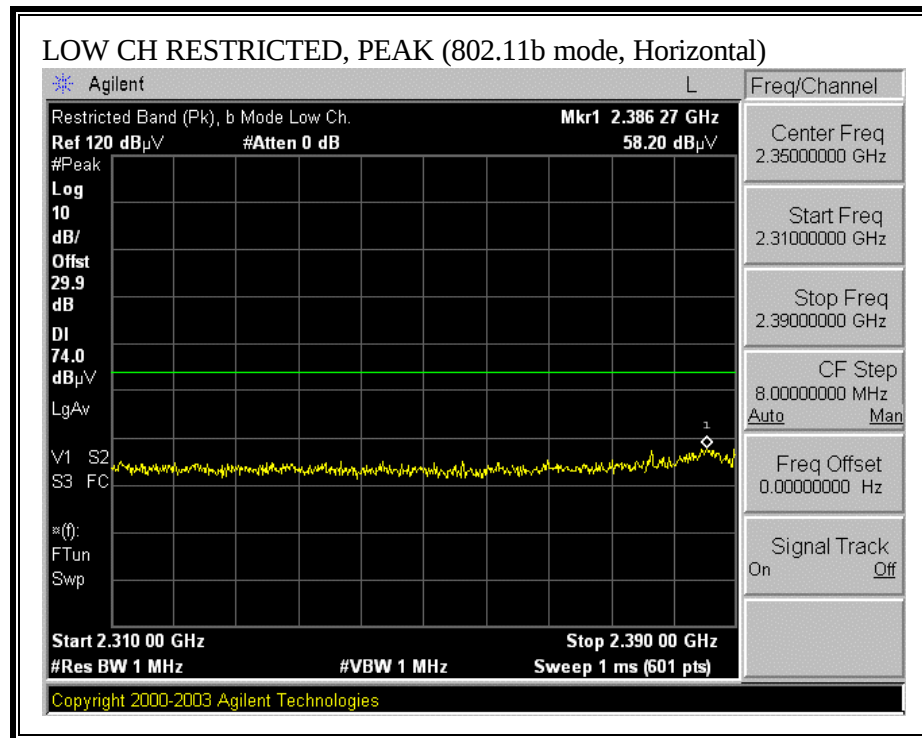

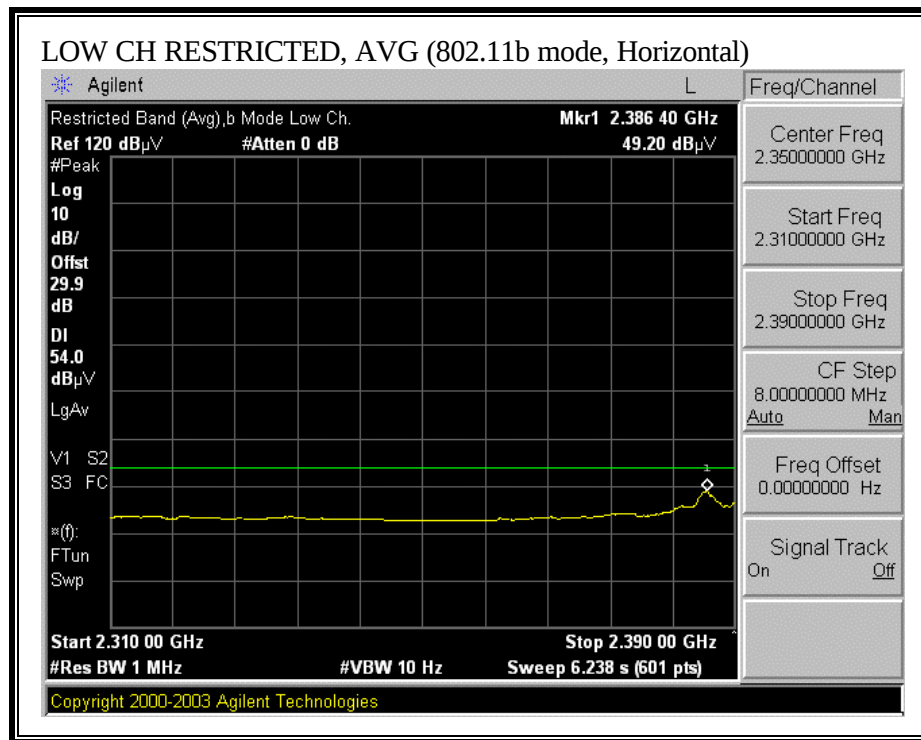



RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

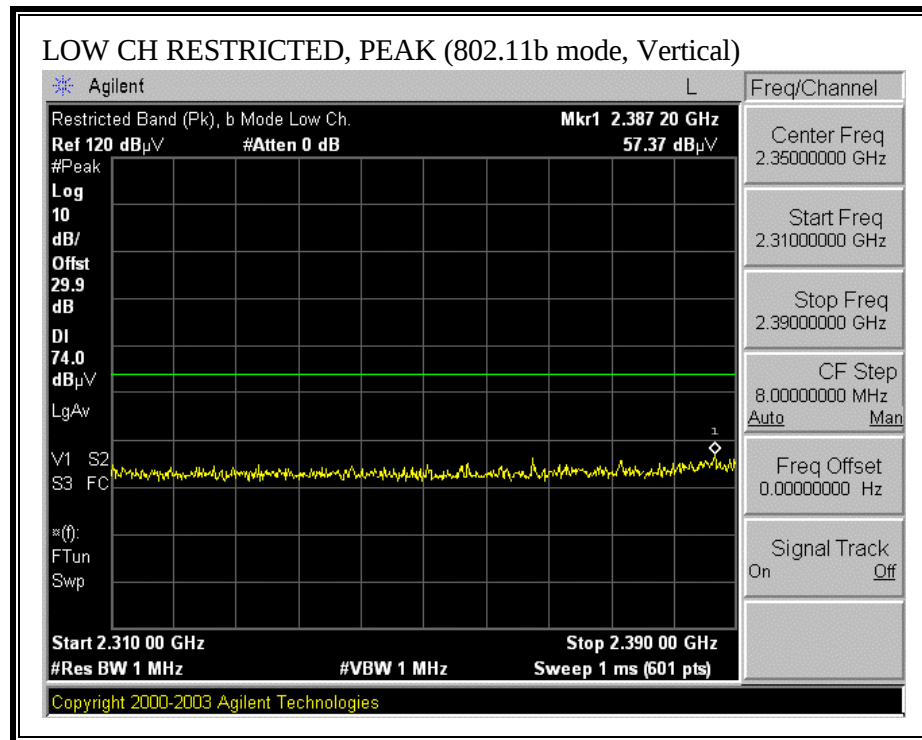

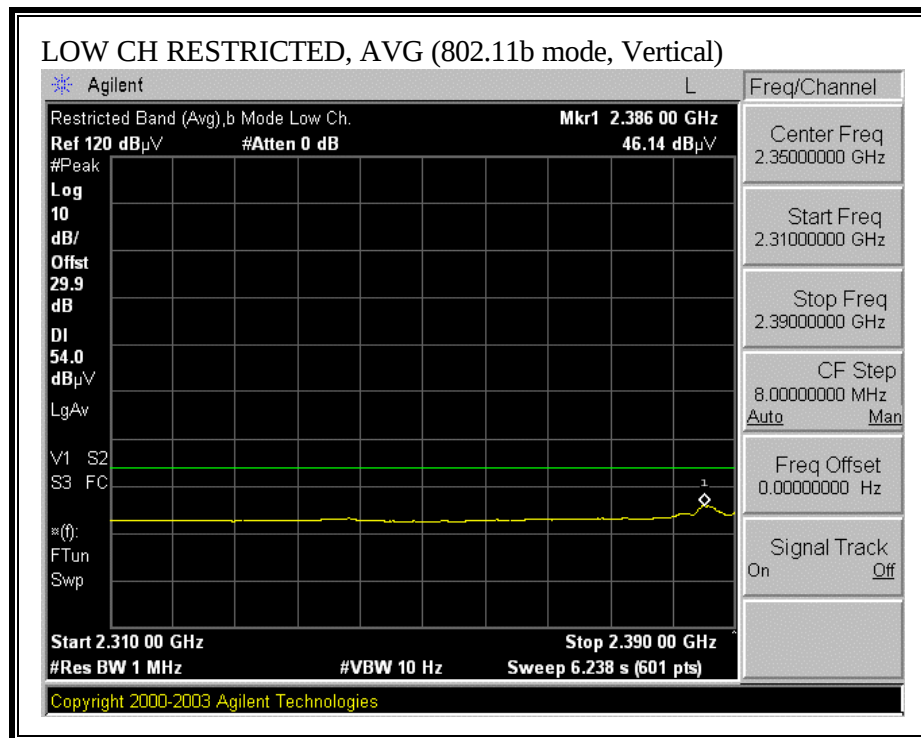



RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

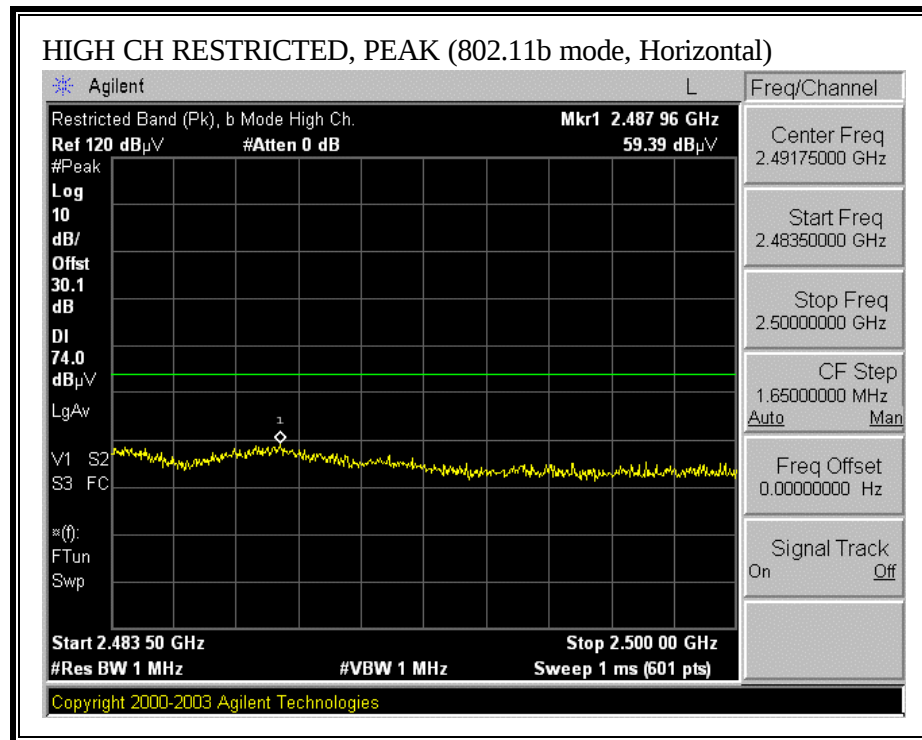

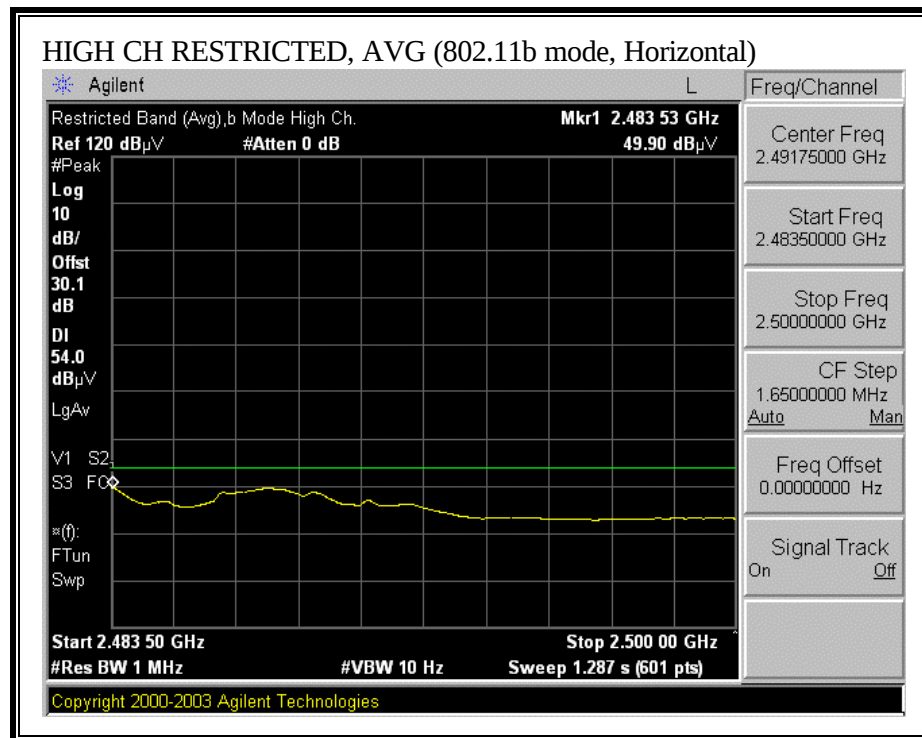

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

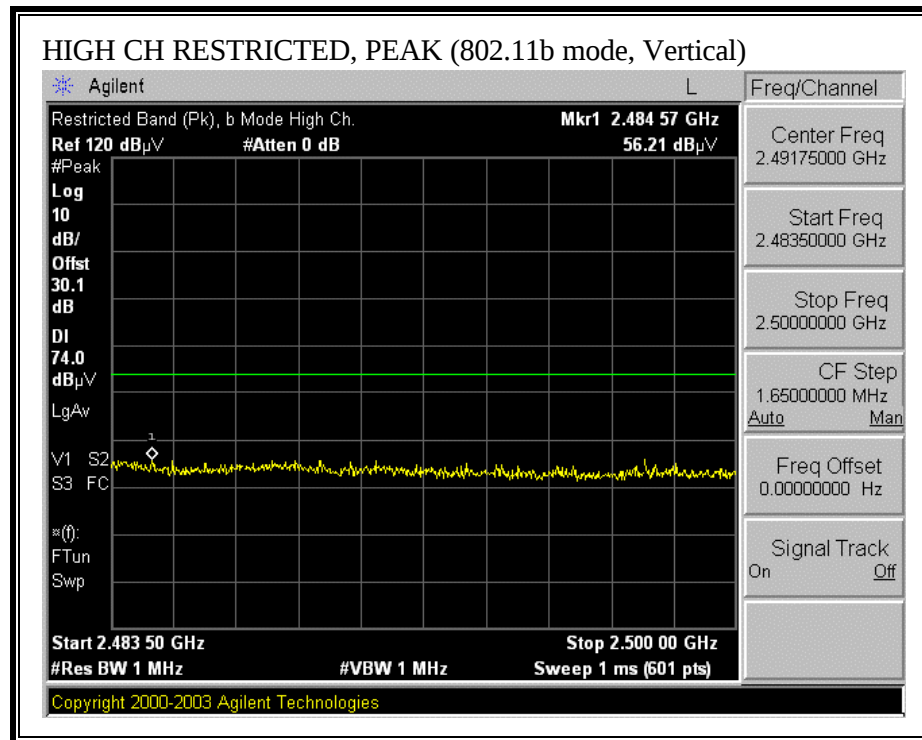

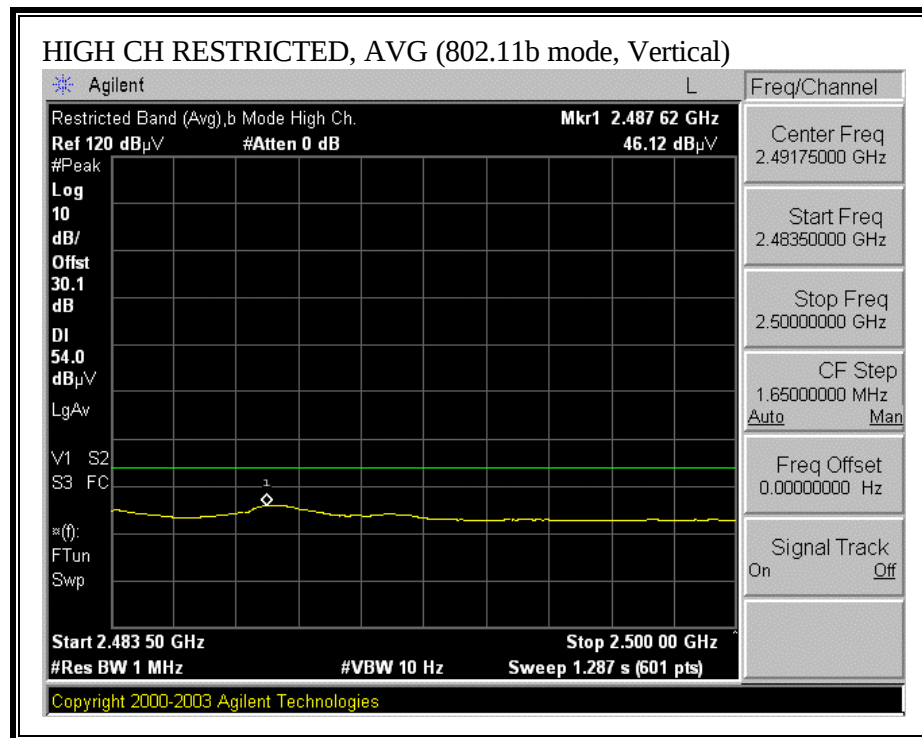

HARMONICS AND SPURIOUS EMISSIONS (b MODE)

041405 High Frequency Measurement
Compliance Certification Services, Morgan Hill Open Field Site

Test Engineer: Thanh Nguyen
Project #: 06J10177-2
Company: HONA R&D Co. LTD
EUT Description: WIRELESS STATION
EUT M/N: 35220-QIP
EUT S/N:
Test Target: FCC Part 15.247
Mode Of Operation: Transmit b mode with Antenna 1260

Test Equipment:

Horn 1-18GHz
T119; S/N: 29301 @3m

Pre-amplifier 1-26GHz
T144 Miteq 3008A09931

Pre-amplifier 26-40GHz

Horn > 18GHz

Limit
FCC 15.299

Hi Frequency Cables

2 foot cable
Thanh 177079008

3 foot cable

12 foot cable
Thanh 208946003

HPF
HPF_40GHz

Reject Filter

Peak Measurements
RBW=VBW=1MHz
Average Measurements
RBW=1MHz; VEW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filt dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Ch 2412 MHz															
4.824	3.0	52.26	51.87	34.0	2.8	-36.5	0.0	0.6	53.2	52.8	74	54	-20.8	-1.2	Y
7.236	3.0	46.26	35.86	35.6	3.3	-36.2	0.0	0.6	49.6	39.2	74	54	-24.4	-14.8	Y
9.648	3.0	44.47	36.26	37.1	3.7	-37.0	0.0	0.8	49.2	41.0	74	54	-24.8	-13.0	Y
12.060	3.0	44.00	30.10	38.4	4.3	-35.4	0.0	0.9	52.3	38.4	74	54	-21.7	-15.6	Noise floor
4.824	3.0	52.17	51.23	34.0	2.8	-36.5	0.0	0.6	53.1	52.2	74	54	-20.9	-1.8	H
7.236	3.0	44.36	35.67	35.0	3.3	-36.2	0.0	0.6	47.7	39.0	74	54	-26.3	-15.0	H
9.648	3.0	44.37	33.30	37.1	3.7	-37.0	0.0	0.8	49.1	38.0	74	54	-24.9	-16.0	Noise floor
Mid Ch 2437 MHz															
4.874	3.0	52.27	50.56	34.1	2.8	-36.5	0.0	0.6	53.3	51.6	74	54	-20.7	-2.4	H
7.311	3.0	43.80	34.46	35.6	3.3	-36.2	0.0	0.6	47.2	37.8	74	54	-26.8	-16.2	H
9.748	3.0	44.33	36.48	37.3	3.7	-37.0	0.0	0.8	49.2	41.3	74	54	-24.8	-12.7	H
12.185	3.0	44.38	35.57	38.5	4.3	-35.4	0.0	0.9	52.7	43.9	74	54	-21.3	-19.1	Noise floor
4.874	3.0	50.46	47.55	34.1	2.8	-36.5	0.0	0.6	51.5	48.6	74	54	-22.5	-5.4	Y
7.311	3.0	46.58	33.67	35.0	3.3	-36.2	0.0	0.6	50.0	37.1	74	54	-24.0	-16.9	Y
9.748	3.0	44.78	35.47	37.3	3.7	-37.0	0.0	0.8	49.6	40.3	74	54	-24.4	-13.7	Noise floor
High Ch 2462 MHz															
4.924	3.0	52.27	51.36	34.1	2.8	-36.5	0.0	0.6	53.4	52.4	74	54	-20.6	-1.6	Y
7.386	3.0	44.26	33.38	35.7	3.3	-36.2	0.0	0.6	47.7	36.8	74	54	-26.3	-17.2	Y
9.848	3.0	44.20	33.67	37.5	3.7	-37.0	0.0	0.8	49.3	38.7	74	54	-24.7	-15.3	Noise floor
4.924	3.0	53.67	51.56	34.1	2.8	-36.5	0.0	0.6	54.5	52.6	74	54	-19.2	-1.4	H
7.386	3.0	43.37	31.67	35.7	3.3	-36.2	0.0	0.6	46.8	35.1	74	54	-27.2	-18.9	Noise floor


No other spurious emissions were detected above 5th harmonics.


f Measurement Frequency
Dist Distance to Antenna
Read Analyzer Reading
AF Antenna Factor
CL Cable Loss

Amp Preamp Gain
D Corr Distance Correct to 3 meters
Avg Average Field Strength @ 3 m
Peak Calculated Peak Field Strength
HPF High Pass Filter


Avg Lim Average Field Strength Limit
Pk Lim Peak Field Strength Limit
Avg Mar Margin vs. Average Limit
Pk Mar Margin vs. Peak Limit


RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

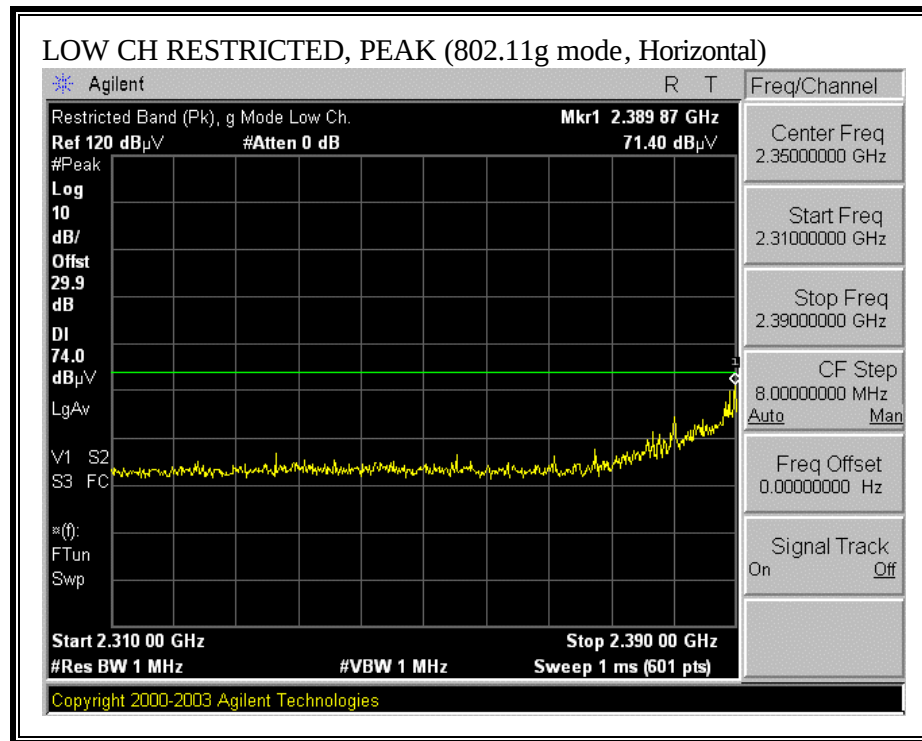

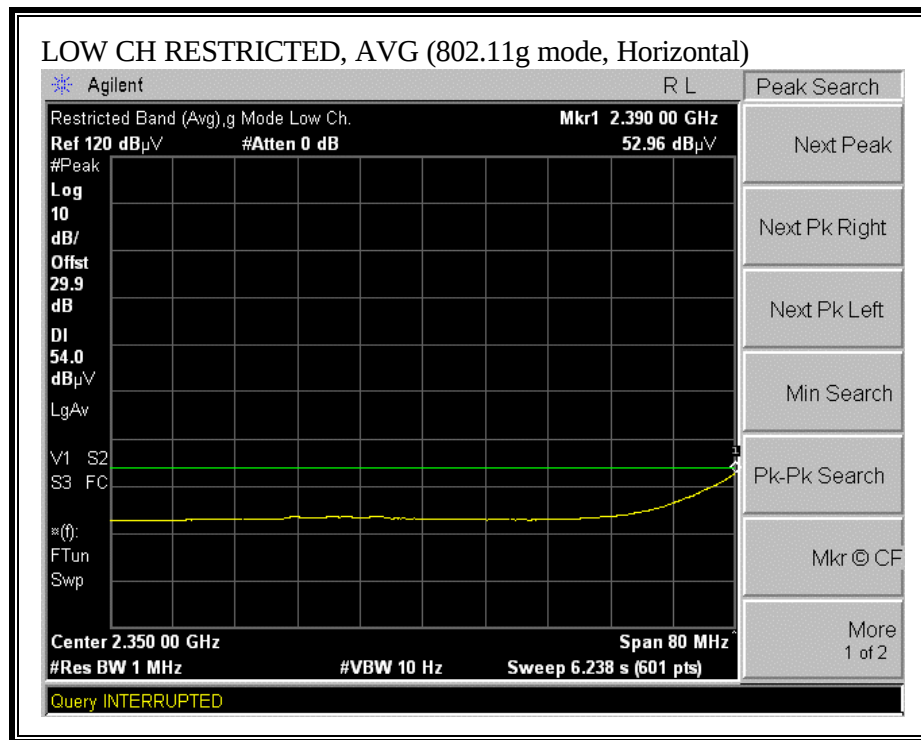



RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

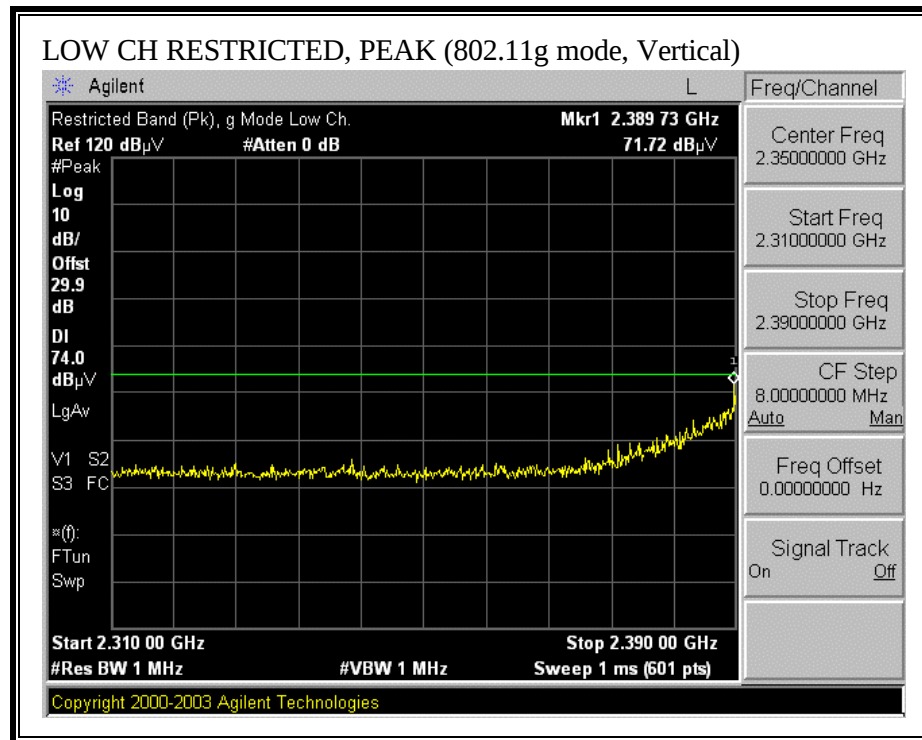

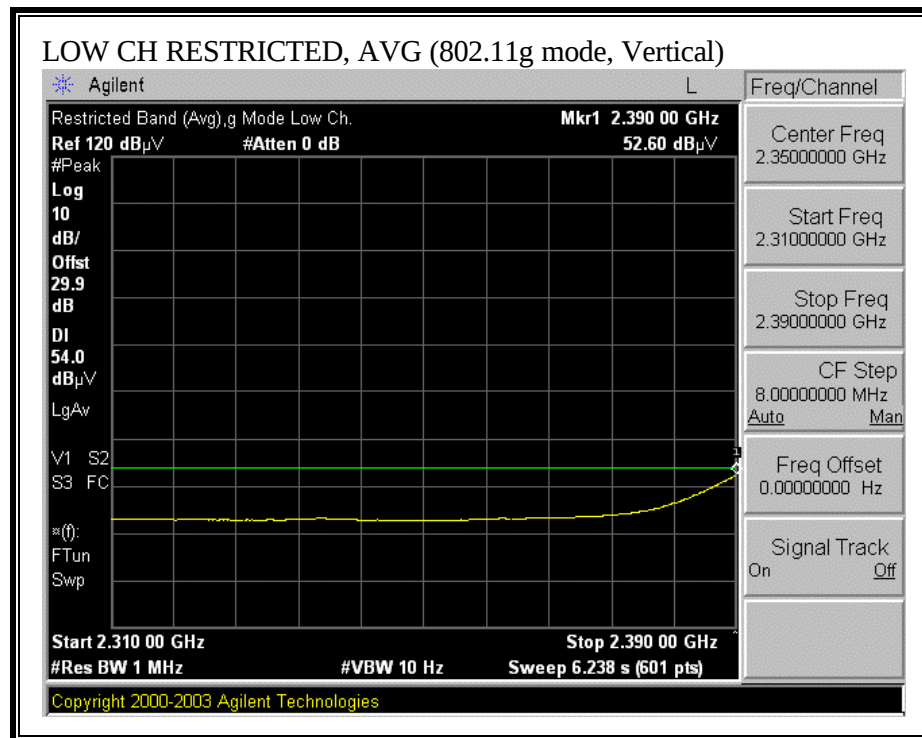



RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)

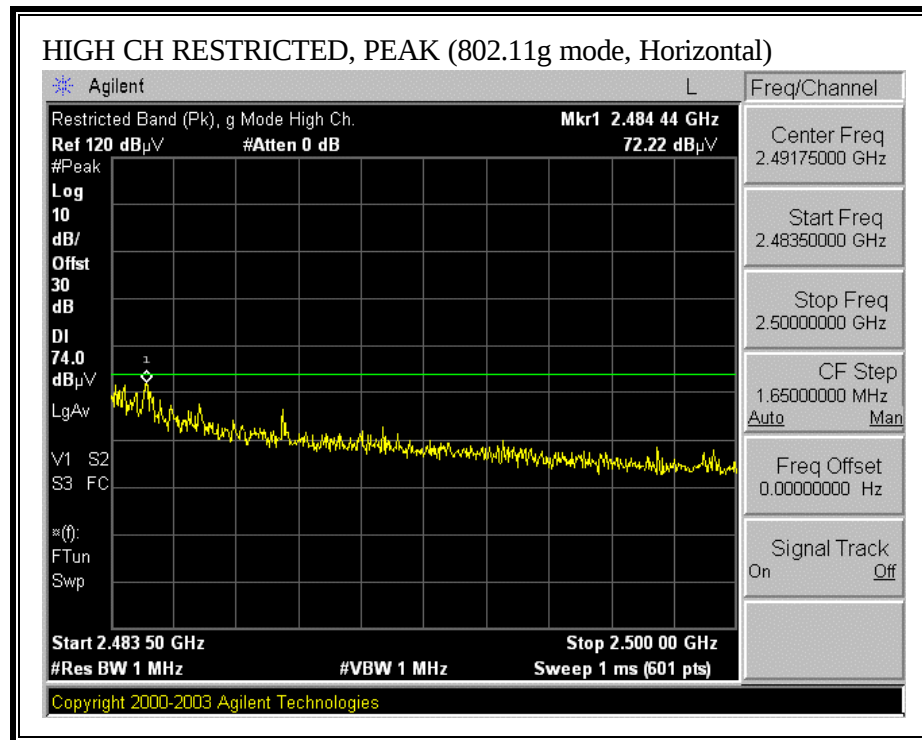

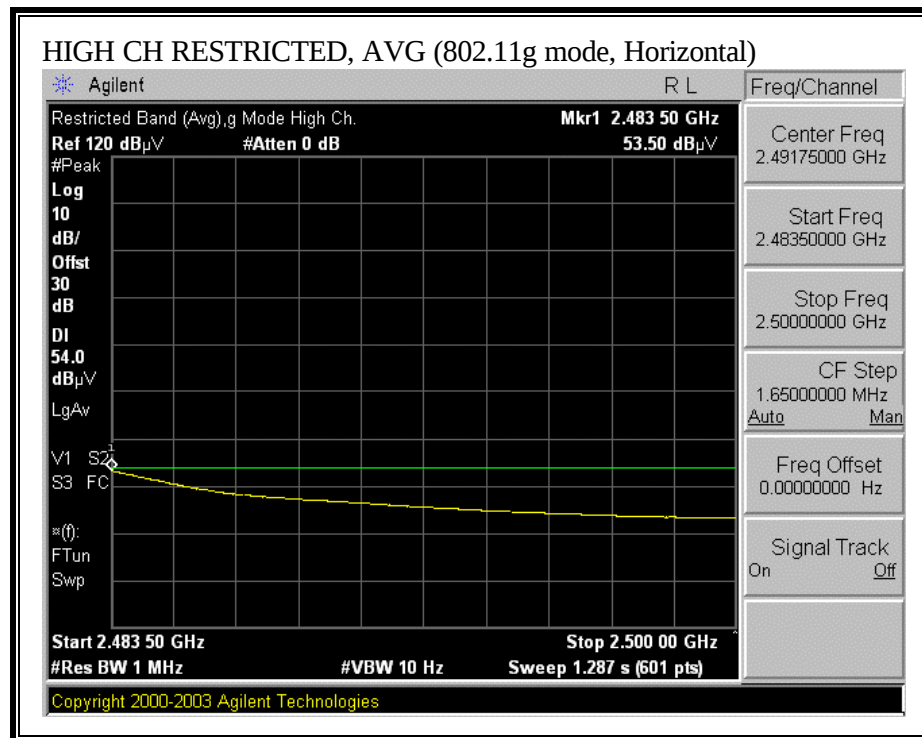

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

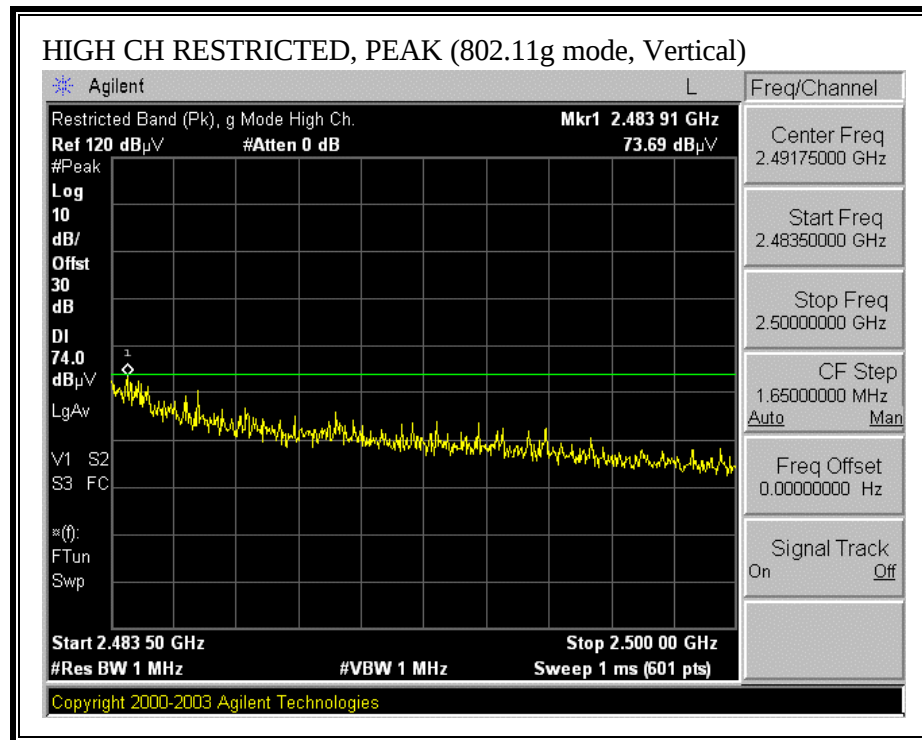

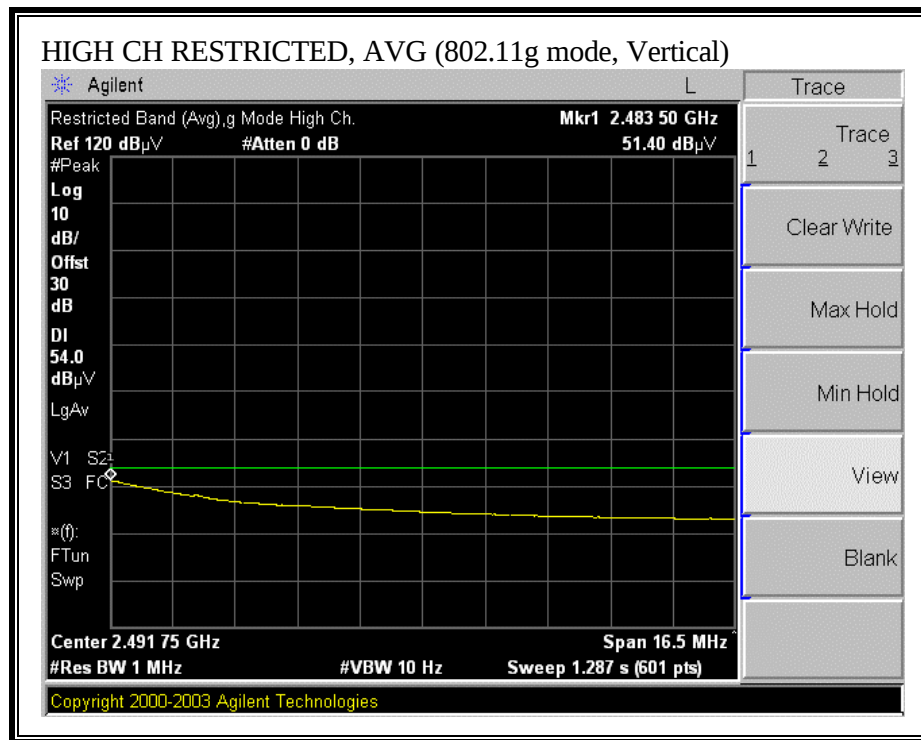



HARMONICS AND SPURIOUS EMISSIONS (g MODE)

041306 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site Test Engineer: Thanh Nguyen Project #: 06J10177-2 Company: HONA R&D Co. LTD EUT Description: WIRELESS STATION EUT M/N: 35220-QIP EUT S/N: Test Target: FCC Part 15.247 Mode Of Operation: Transmit g mode with Antenna 1260															
Test Equipment:															
Horn 1-18GHz		Pre-amplifier 1-25GHz		Pre-amplifier 25-40GHz		Horn > 18GHz		Limit							
T73; S/N: 6747 @3m		T144 Miteq 3008A09931						FCC 15.249							
RF Frequency Cables															
2 foot cable		3 foot cable		12 foot cable		HPF		Reject Filter		Peak Measurements RBW=VBW=1 MHz Average Measurements RBW=1MHz, VBW=10Hz					
Thanh 177079008				Thanh 208946003		HPF_4.0GHz									
f GHz	Dist (m)	Read Pk dBuV	Read Avg dBuV	AF dBm	CL dB	Amp dB	D Corr dB	Filt dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (VH)
Low Ch 2412 MHz															
4.824	3.0	50.9	36.5	33.7	2.8	-36.5	0.0	0.6	51.5	37.1	74	54	-22.5	-16.9	V
7.236	3.0	55.4	36.4	35.4	3.3	-36.2	0.0	0.6	59.5	39.5	74	54	-15.5	-14.5	V
9.648	3.0	43.9	32.8	37.5	3.7	-37.0	0.0	0.8	48.9	37.8	74	54	-25.1	-16.2	Noise floor
4.824	3.0	54.9	40.1	33.7	2.8	-36.5	0.0	0.6	55.5	40.8	74	54	-18.5	-13.2	H
7.236	3.0	51.4	35.2	35.4	3.3	-36.2	0.0	0.6	54.5	38.3	74	54	-19.5	-15.7	H
9.648	3.0	44.4	32.6	37.5	3.7	-37.0	0.0	0.8	49.4	37.6	74	54	-24.6	-16.4	Noise floor
Mid Ch 24370 MHz															
4.874	3.0	53.85	40.44	33.8	2.8	-36.5	0.0	0.6	54.6	41.2	74	54	-19.4	-12.8	H
7.311	3.0	55.79	37.91	35.5	3.3	-36.2	0.0	0.6	59.0	41.2	74	54	-15.0	-12.8	H
9.748	3.0	45.30	33.78	37.5	3.7	-37.0	0.0	0.8	50.4	38.8	74	54	-23.6	-15.2	Noise floor
4.874	3.0	53.26	40.06	33.8	2.8	-36.5	0.0	0.6	54.0	40.8	74	54	-20.0	-13.2	V
7.311	3.0	61.15	43.32	35.5	3.3	-36.2	0.0	0.6	64.4	46.6	74	54	-9.6	-7.4	V
9.748	3.0	48.88	35.65	37.5	3.7	-37.0	0.0	0.8	53.9	40.7	74	54	-20.1	-13.3	V
12.185	3.0	44.19	32.30	38.5	4.3	-35.4	0.0	0.9	52.5	40.7	74	54	-21.5	-13.3	Noise floor
High Ch 246200 Hz															
4.924	3.0	55.32	44.41	33.8	2.8	-36.5	0.0	0.6	56.1	45.2	74	54	-17.9	-8.5	V
7.386	3.0	55.44	39.11	35.5	3.3	-36.2	0.0	0.6	58.5	42.5	74	54	-15.2	-11.5	V
9.848	3.0	50.57	36.11	37.6	3.7	-37.0	0.0	0.8	55.7	41.2	74	54	-18.3	-12.8	V
12.310	3.0	42.95	32.16	38.5	4.4	-35.4	0.0	0.9	51.3	40.5	74	54	-22.7	-13.5	Noise floor
4.924	3.0	56.70	43.32	33.8	2.8	-36.5	0.0	0.6	57.5	44.1	74	54	-16.5	-9.9	H
7.386	3.0	51.30	36.78	35.6	3.3	-36.2	0.0	0.6	54.7	40.1	74	54	-19.3	-13.9	H
9.848	3.0	44.41	32.36	37.6	3.7	-37.0	0.0	0.8	49.5	37.5	74	54	-24.5	-16.5	Noise floor
Spurious emissions															
1.064	3.0	59.50	55.78	24.1	1.3	-39.4	0.0	0.0	45.5	41.7	74	54	-28.5	-12.3	V
1.392	3.0	57.88	58.43	25.2	1.5	-38.9	0.0	0.0	45.6	26.2	74	54	-28.4	-27.8	V
1.589	3.0	62.87	44.63	25.9	1.6	-38.6	0.0	0.0	51.7	33.4	74	54	-22.3	-29.6	V
1.700	3.0	58.73	39.88	26.2	1.7	-38.5	0.0	0.0	48.1	29.3	74	54	-25.9	-24.7	V
2.015	3.0	49.84	43.76	27.3	1.8	-38.0	0.0	0.0	40.9	34.9	74	54	-33.1	-19.1	H
2.347	3.0	51.00	39.22	28.1	2.0	-37.6	0.0	0.0	43.6	31.8	74	54	-30.4	-22.2	H
No other spurious emissions were detected above 5th harmonics.															
f	Measurement Frequency			Amp	Preamp Gain			Avg Lim	Average Field Strength Limit						
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters			Pk Lim	Peak Field Strength Limit						
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m			Avg Mar	Margin vs. Average Limit						
AF	Antenna Factor			Peak	Calculated Peak Field Strength			Pk Mar	Margin vs. Peak Limit						
CL	Cable Loss			HPF	High Pass Filter										


7.2.3. TRANSMITTER ABOVE 1 GHz FOR THE 2400 TO 2483.5 MHz BAND – WITH ANTENNA TMM1261


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

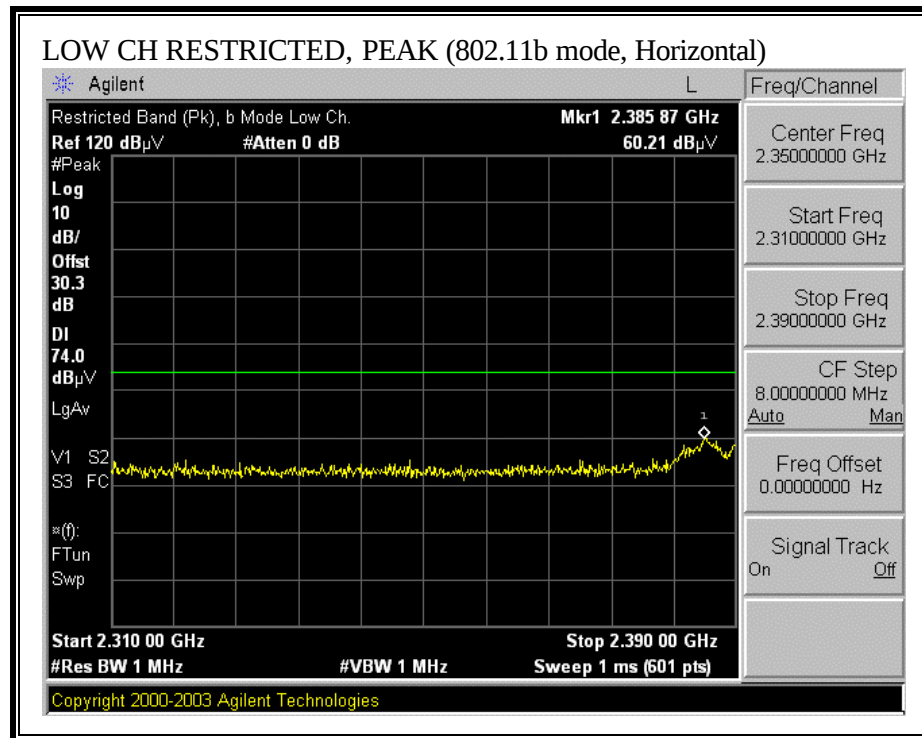

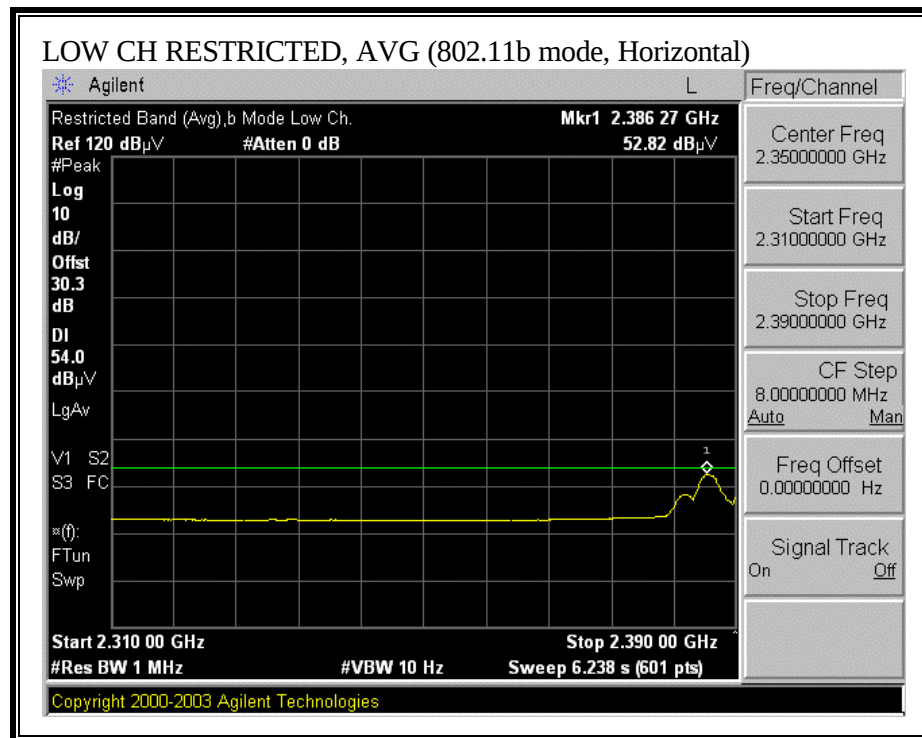



RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

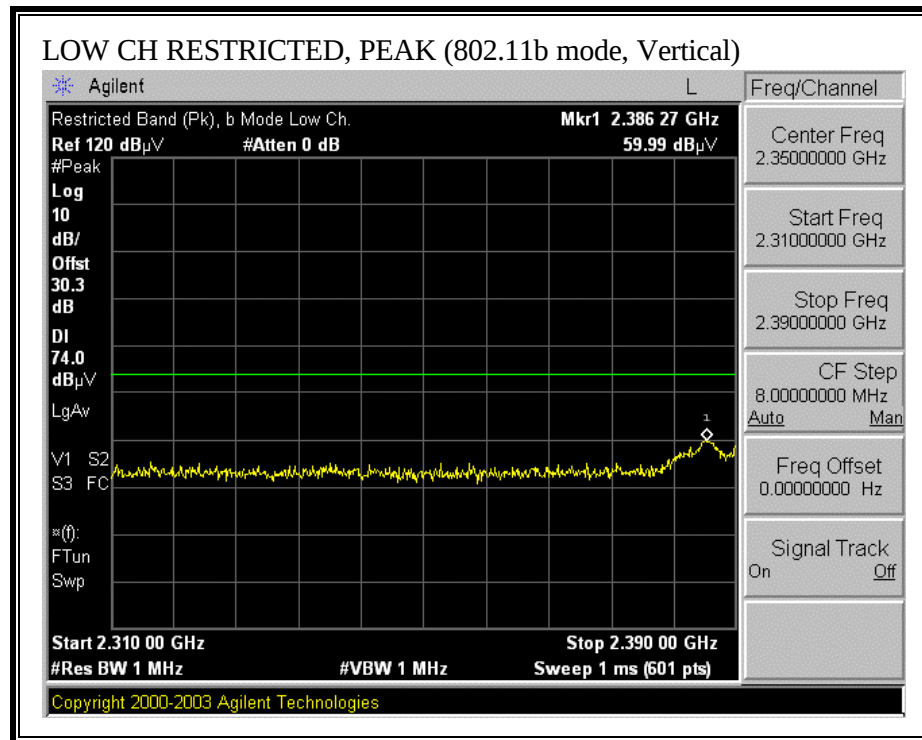

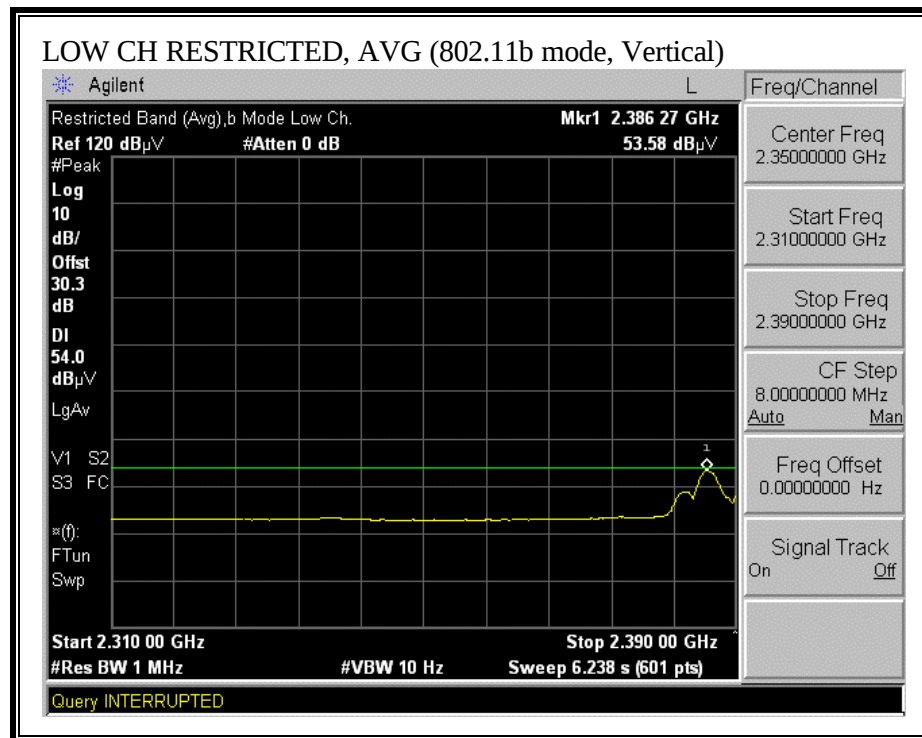



RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

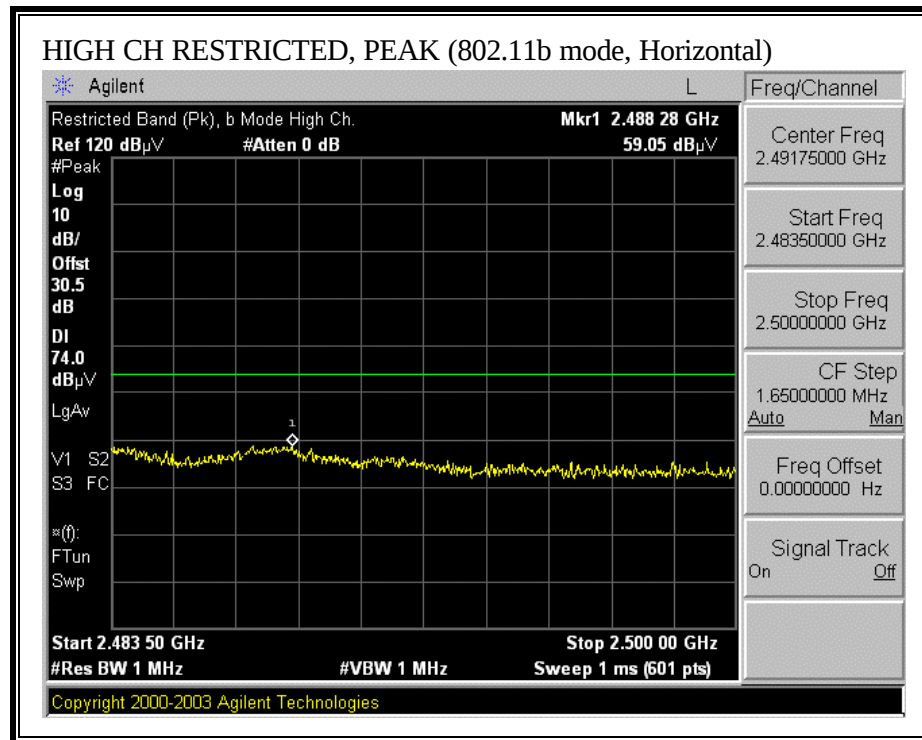

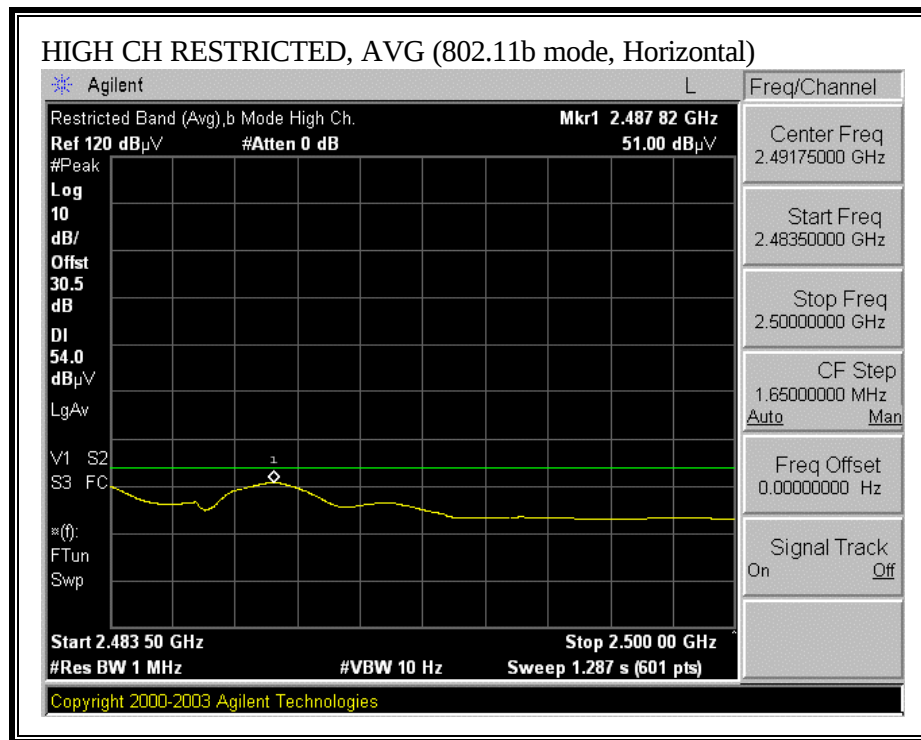

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

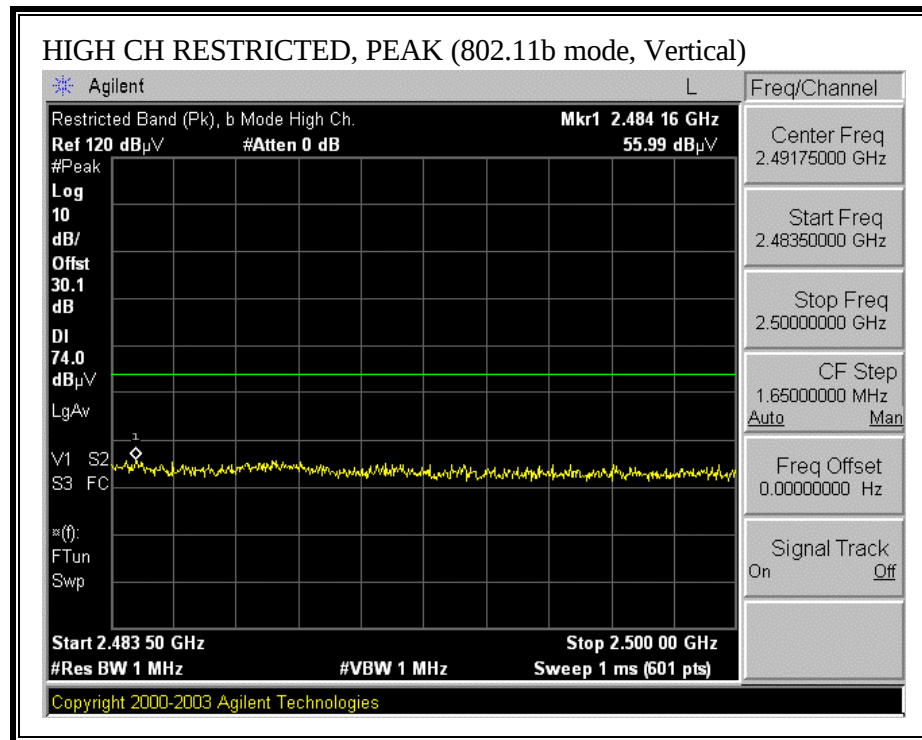

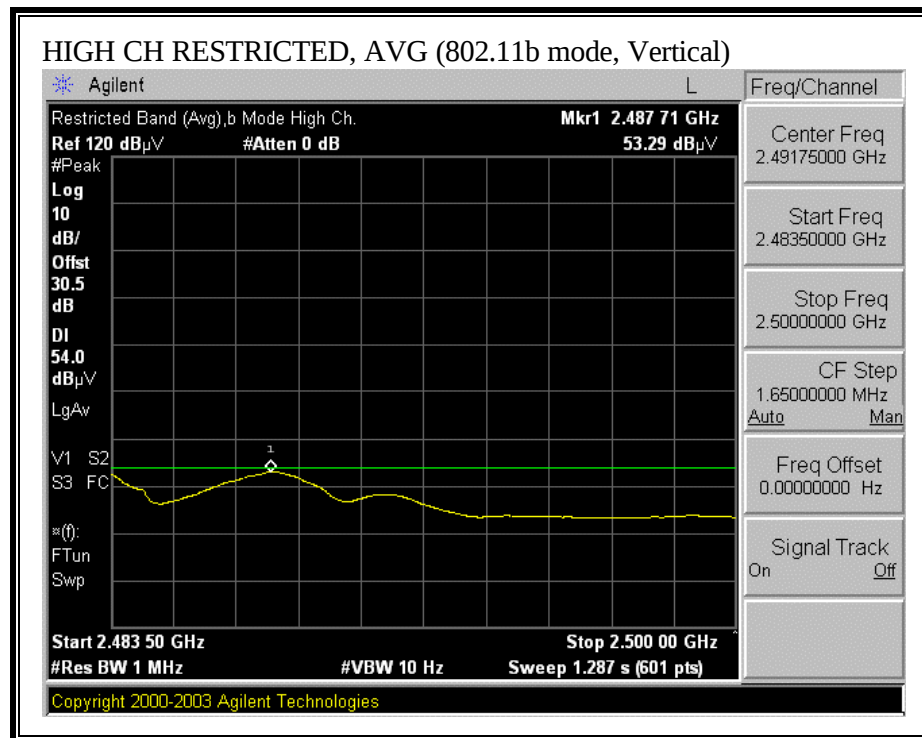

HARMONICS AND SPURIOUS EMISSIONS (b MODE)

040495 High Frequency Measurement
Compliance Certification Services, Morgan Hill Open Field Site

Test Engineer: Thanh Nguyen
Project #: 06J10177-2
Company: HONA R&D Co. LTD
EUT Description: WIRELESS STATION
EUT M/N: 35120-QIP
EUT S/N:
Test Target: FCC Part 15.247
Mode Of Operation: Transmit b mode with Antenna 1261

Test Equipment:

Horn 1-18GHz
T73; S/N: 6717 @3m

Pre-amplifier 1-26GHz
T144 Miniq 3008A00931

Pre-amplifier 26-40GHz

Horn > 18GHz

Limit
FCC 15.249

Hi Frequency Cables

2 foot cable
Thanh 17709008

3 foot cable

12 foot cable
Thanh 200946003

HPF
HPF_4.0GHz

Reject Filter

Peak Measurements
RBW=VBW=1 MHz
Average Measurements
RBW=1MHz, VEW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dBm	CL dB	Amp dB	D Corr dB	Filt dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Ch 2412 MHz															
4.824	3.0	53.9	52.2	33.7	2.8	-36.5	0.0	0.6	54.5	52.9	74	54	19.5	-1.1	V
7.236	3.0	46.7	36.7	38.4	3.3	-36.2	0.0	0.6	49.8	39.8	74	54	-24.2	-14.2	V
9.648	3.0	45.8	37.3	37.5	3.7	-37.0	0.0	0.8	50.8	42.3	74	54	-23.2	-11.7	V
12.060	3.0	44.2	31.8	38.5	4.3	-35.4	0.0	0.9	52.5	40.1	74	54	-21.5	-13.9	Noise floor
4.824	3.0	54.9	52.6	33.7	2.8	-36.5	0.0	0.6	55.5	53.1	74	54	18.5	-0.9	H
7.236	3.0	46.6	37.1	35.4	3.3	-36.2	0.0	0.6	49.7	40.2	74	54	-24.3	-13.8	H
9.648	3.0	44.2	32.5	37.5	3.7	-37.0	0.0	0.8	49.2	37.5	74	54	-24.8	-16.5	Noise floor
12.060	3.0	44.8	32.9	38.5	4.3	-35.4	0.0	0.9	53.1	41.2	74	54	-20.9	-12.8	Noise floor
Mid Ch 2437 MHz															
4.874	3.0	54.2	51.7	33.8	2.8	-36.5	0.0	0.6	55.0	52.5	74	54	19.0	-1.5	H
7.311	3.0	46.9	33.9	35.5	3.3	-36.2	0.0	0.6	50.1	37.1	74	54	-23.9	-16.9	H
9.748	3.0	45.8	37.4	37.5	3.7	-37.0	0.0	0.8	50.8	42.5	74	54	-23.2	-11.5	H
12.185	3.0	45.2	34.6	38.5	4.3	-35.4	0.0	0.9	53.5	43.0	74	54	-20.5	-11.0	Noise floor
14.622	3.0	45.8	35.2	40.2	4.6	-35.3	0.0	0.9	56.1	45.6	74	54	-17.9	-8.4	Noise floor
4.874	3.0	51.9	48.6	33.8	2.8	-36.5	0.0	0.6	52.6	49.3	74	54	21.4	-4.7	V
7.311	3.0	45.8	33.1	35.5	3.3	-36.2	0.0	0.6	49.1	36.3	74	54	-24.9	-17.7	V
9.748	3.0	45.8	36.2	37.5	3.7	-37.0	0.0	0.8	50.9	41.3	74	54	-23.1	-12.7	V
12.185	3.0	44.1	31.7	38.5	4.3	-35.4	0.0	0.9	52.5	40.0	74	54	21.5	-14.0	Noise floor
14.622	3.0	45.6	31.5	40.2	4.6	-35.3	0.0	0.9	56.0	41.9	74	54	18.0	-12.1	Noise floor
High Ch 2462 MHz															
4.924	3.0	54.5	52.9	33.8	2.8	-36.5	0.0	0.6	55.3	53.7	74	54	18.7	-0.3	V
7.386	3.0	43.8	32.4	35.6	3.3	-36.2	0.0	0.6	47.2	35.8	74	54	-26.8	-18.2	V
9.848	3.0	45.0	35.6	37.6	3.7	-37.0	0.0	0.8	50.1	40.7	74	54	-23.9	-13.3	V
12.310	3.0	43.7	31.9	38.5	4.4	-35.4	0.0	0.9	52.0	40.2	74	54	-22.0	-13.8	Noise floor
4.924	3.0	55.1	53.1	33.8	2.8	-36.5	0.0	0.6	55.9	53.9	74	54	18.1	-0.1	H
7.386	3.0	42.4	30.4	35.6	3.3	-36.2	0.0	0.6	45.7	33.8	74	54	-28.3	-20.2	Noise floor
No other spurious emissions were detected above 5th harmonics.															

f Measurement Frequency

Dist Distance to Antenna

Read Analyzer Reading

AF Antenna Factor

CL Cable Loss

Amp Preamp Gain

D Corr Distance Correct to 3 meters

Avg Average Field Strength @ 3 m

Peak Calculated Peak Field Strength

HPF High Pass Filter

Avg Lim Average Field Strength Limit

Pk Lim Peak Field Strength Limit

Avg Mar Margin vs. Average Limit


Pk Mar Margin vs. Peak Limit


Page 85 of 105

COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA
This report shall not be reproduced except in full, without the written approval of CCS.


DOCUMENT NO: CCSUP4031A
TEL: (408) 463-0885 FAX: (408) 463-0888


RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

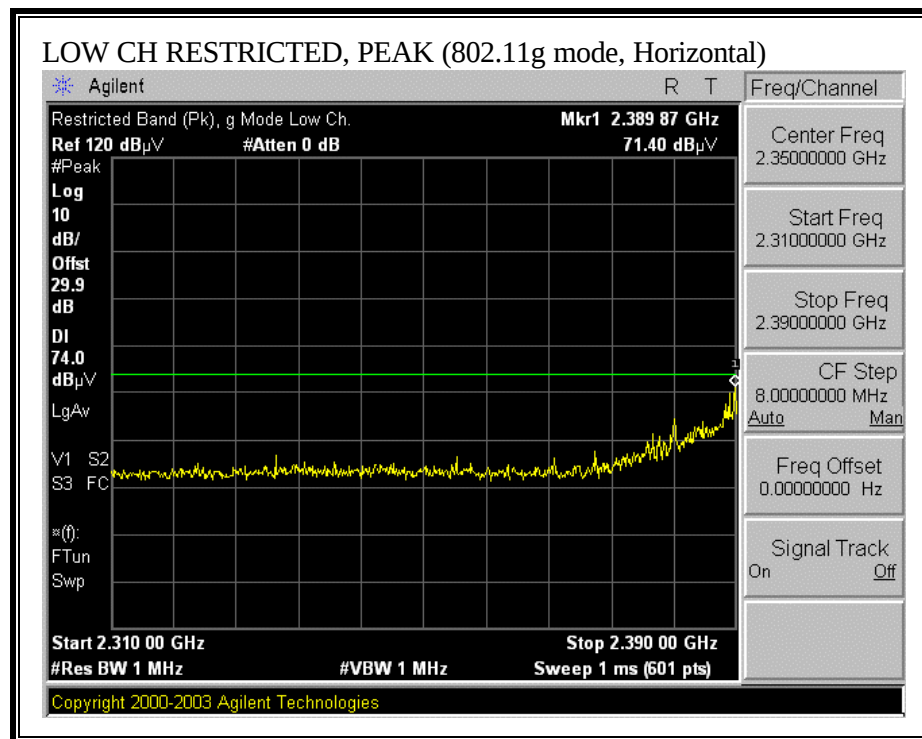

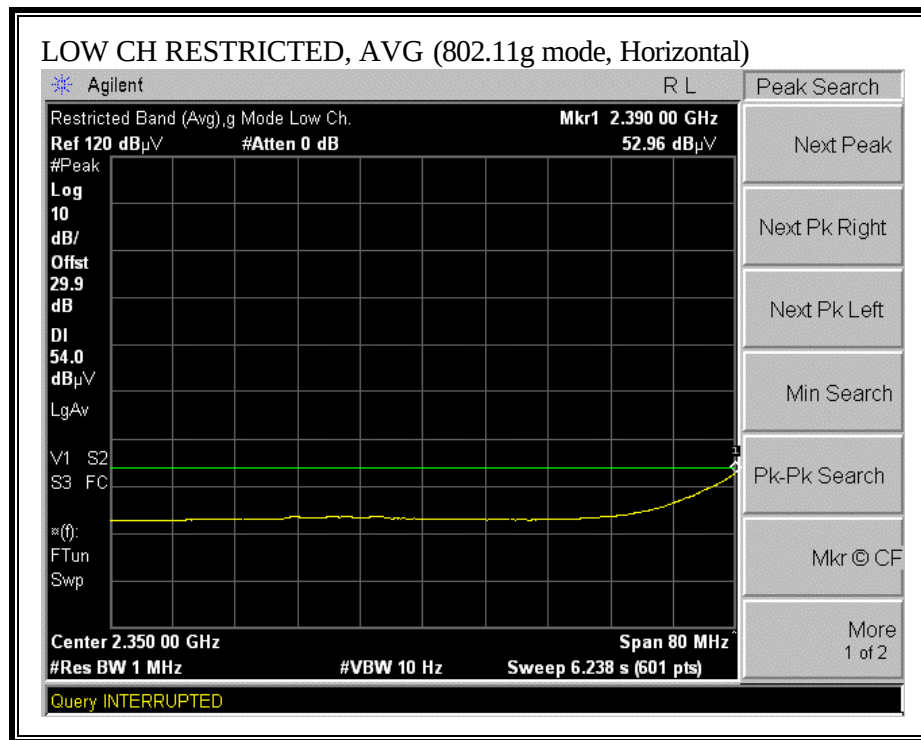



RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

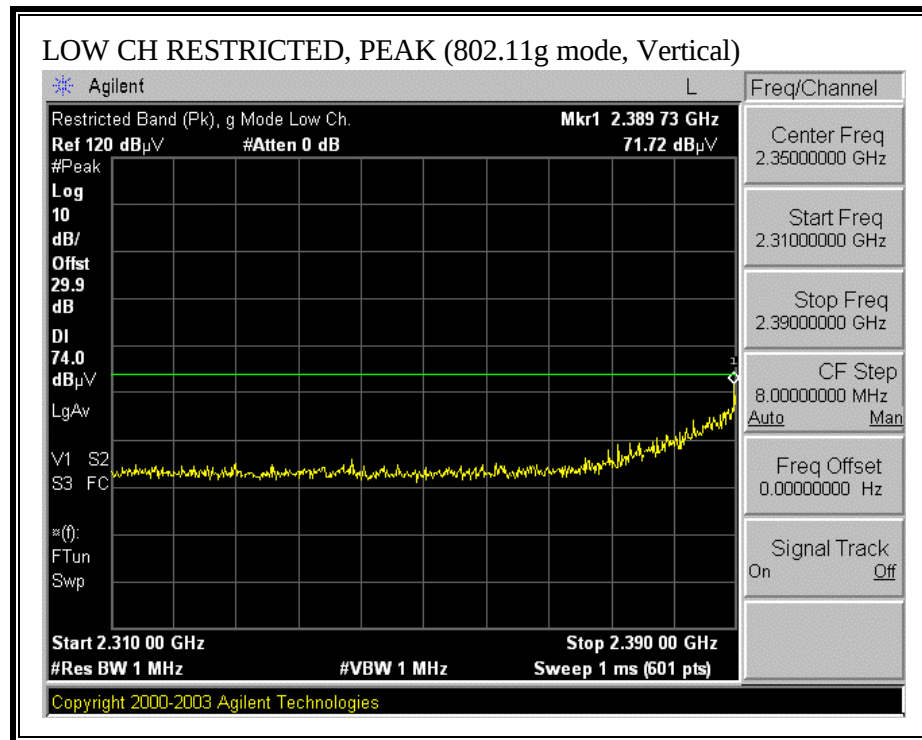

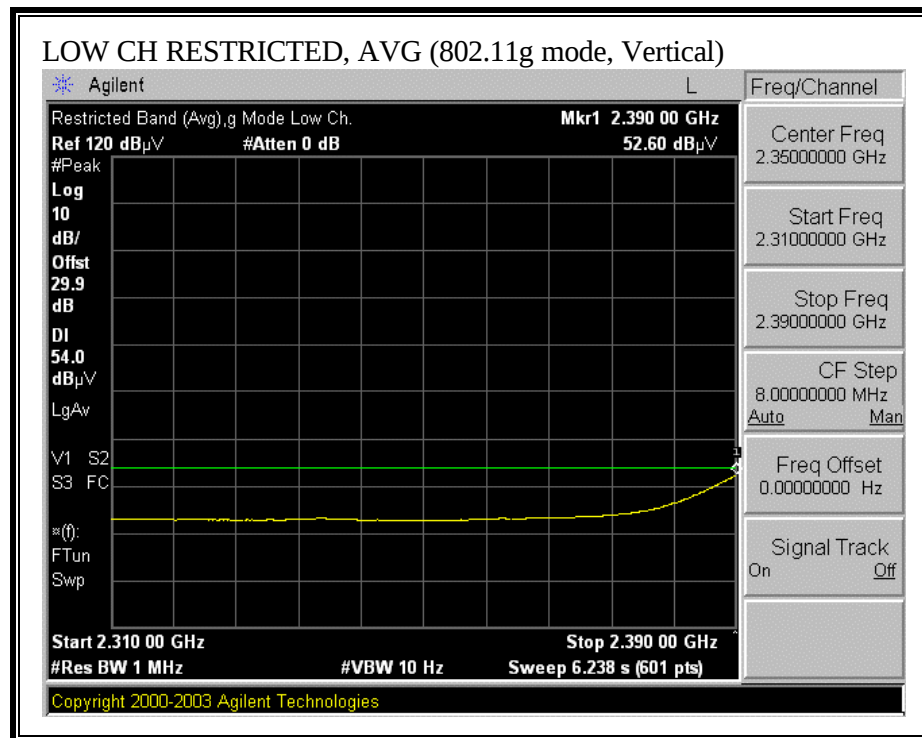



RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)

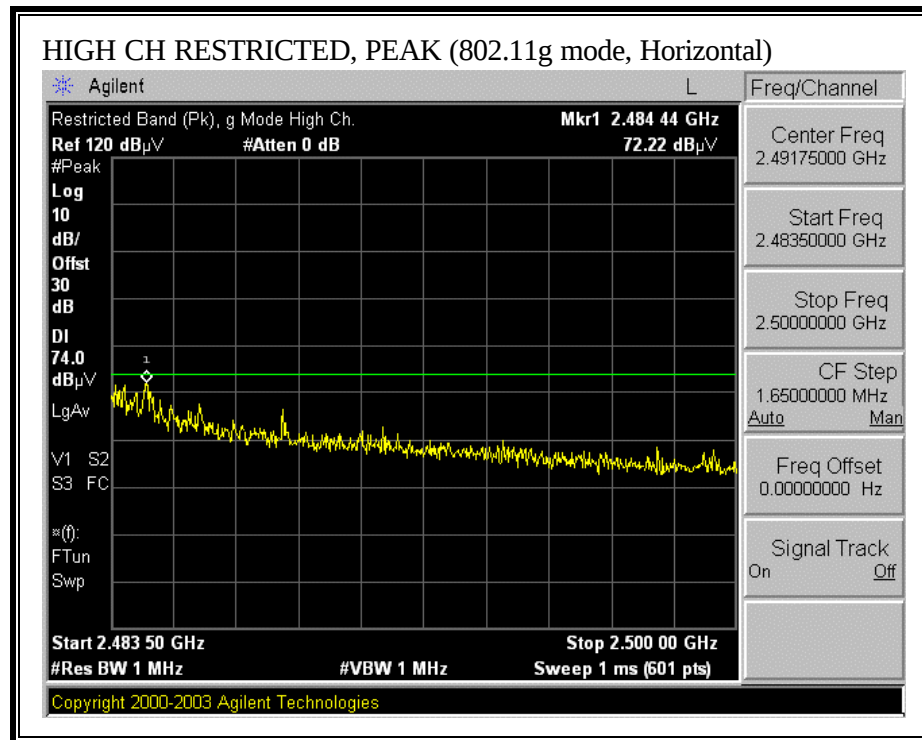

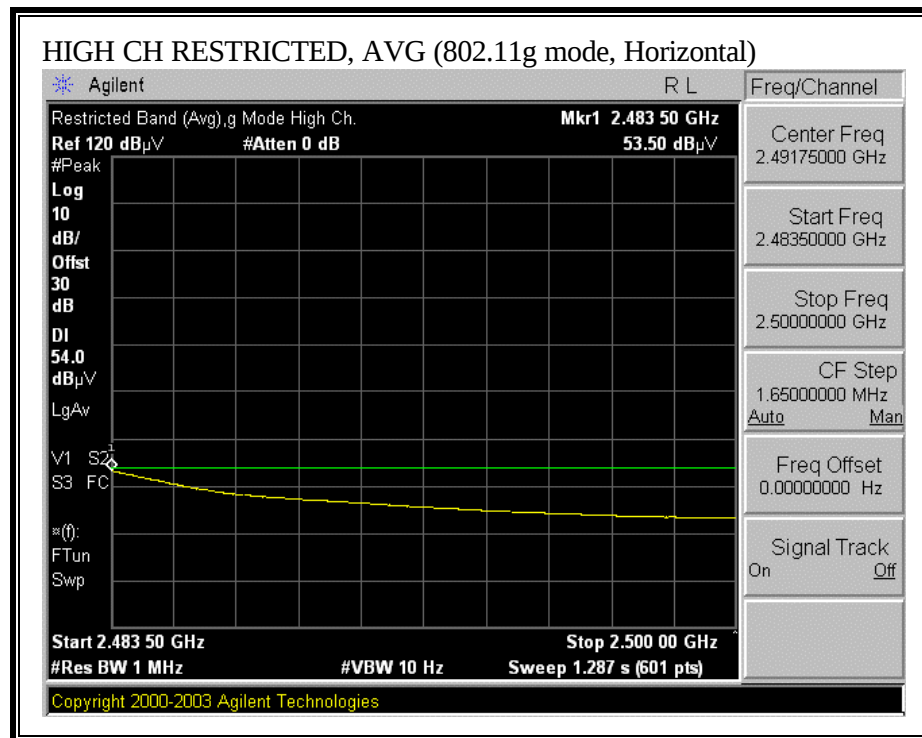

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

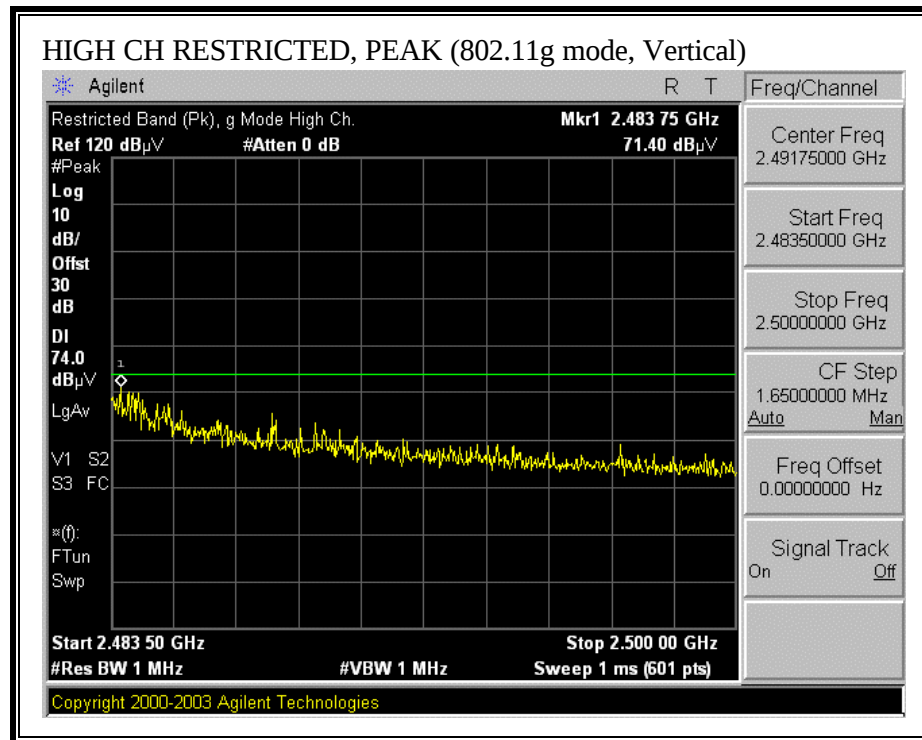

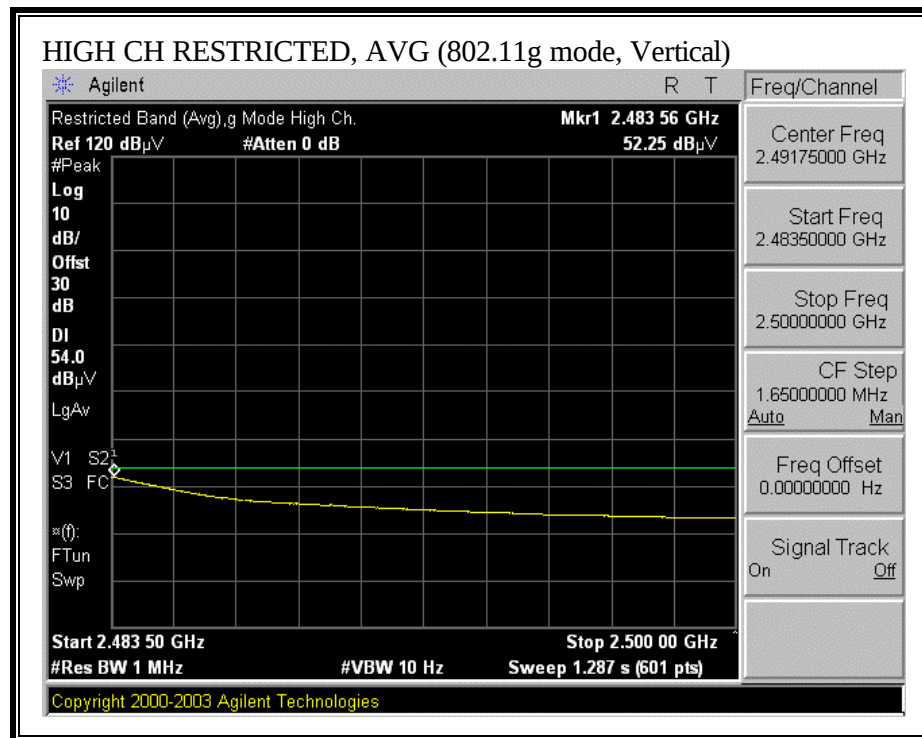

HARMONICS AND SPURIOUS EMISSIONS (g MODE)

040405 High Frequency Measurement
Compliance Certification Services, Morgan Hill Open Field Site

Test Engineer: Thanh Nguyen
Project #: 06J10177-2
Company: HONA R&D Co. LTD
EUT Description: WIRELESS STATION
EUT M/N: 35220-QIP
EUT S/N:
Test Target: FCC Part 15.247
Mode Of Operation: Transmit g mode with Antenna 1261

Test Equipment:

Horn 1-18GHz
T73; S/N: 6717 @3m

Pre-amplifier 1-26GHz
T144 Miteq 3008A09931

Pre-amplifier 26-40GHz

Horn > 18GHz

Limit
FCC 15.209

2 foot cable
Thanh 177079008

3 foot cable

12 foot cable
Thanh 208946003

HPF
HPF_4.0GHz

Reject Filter

Peak Measurements
RBW=VBW=1MHz
Average Measurements
RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg dBuV	AF dBm	CL dB	Amp dB	D Corr dB	Filt dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)		
Low Ch 2412 MHz																	
4.824	3.0	53.5	39.4	33.7	2.8	-36.5	0.0	0.6	54.1	40.0	74	54	-19.9	-14.0	V		
7.236	3.0	62.1	42.9	35.4	3.3	-36.2	0.0	0.6	65.2	46.0	74	54	-8.5	-8.0	V		
9.648	3.0	45.1	33.2	37.5	3.7	-37.0	0.0	0.8	50.1	38.2	74	54	-23.9	-15.8	Noise floor		
4.824	3.0	52.1	38.7	33.7	2.8	-36.5	0.0	0.6	52.7	39.3	74	54	-21.3	-14.7	H		
7.236	3.0	52.5	36.7	35.4	3.3	-36.2	0.0	0.6	55.7	39.8	74	54	-18.3	-14.2	H		
9.648	3.0	45.4	32.4	37.5	3.7	-37.0	0.0	0.8	50.1	37.4	74	54	-23.6	-16.6	Noise floor		
Mid Ch 243700Hz																	
4.874	3.0	56.9	43.2	33.8	2.8	-36.5	0.0	0.6	57.6	43.9	74	54	-16.4	-10.1	H		
7.311	3.0	53.4	40.2	35.5	3.3	-36.2	0.0	0.6	56.7	43.5	74	54	-17.3	-10.5	H		
9.748	3.0	44.9	32.4	37.5	3.7	-37.0	0.0	0.8	49.9	37.4	74	54	-24.1	-16.6	Noise floor		
4.874	3.0	53.3	40.1	33.8	2.8	-36.5	0.0	0.6	54.0	40.8	74	54	-20.0	-13.2	V		
7.311	3.0	61.2	43.3	35.5	3.3	-36.2	0.0	0.6	64.4	46.6	74	54	-9.6	-7.4	V		
9.748	3.0	48.9	35.7	37.5	3.7	-37.0	0.0	0.8	53.9	40.7	74	54	-20.1	-13.3	V		
12.185	3.0	44.2	32.3	38.5	4.3	-35.4	0.0	0.9	52.5	40.7	74	54	-21.5	-13.3	Noise floor		
High Ch 246250Hz																	
4.924	3.0	55.7	42.3	33.8	2.8	-36.5	0.0	0.6	56.5	43.1	74	54	-17.5	-10.9	V		
7.386	3.0	57.1	39.4	35.6	3.3	-36.2	0.0	0.6	60.5	42.7	74	54	-13.5	-11.3	V		
9.848	3.0	51.4	35.8	37.5	3.7	-37.0	0.0	0.8	56.5	40.9	74	54	-17.5	-13.1	V		
12.310	3.0	44.0	31.4	38.5	4.4	-35.4	0.0	0.9	52.4	39.7	74	54	-21.6	-14.3	Noise floor		
4.924	3.0	57.7	44.4	33.8	2.8	-36.5	0.0	0.6	58.5	45.2	74	54	-15.5	-8.8	H		
7.386	3.0	52.5	37.4	35.6	3.3	-36.2	0.0	0.6	55.9	40.7	74	54	-18.1	-13.3	H		
9.848	3.0	51.4	35.8	37.5	3.7	-37.0	0.0	0.8	56.5	40.9	74	54	-17.5	-13.1	Noise floor		
No other spurious emissions were detected above 5th harmonics.																	
f	Measurement Frequency		Amp	Preamp Gain		Avg Lim		Average Field Strength Limit		Pk Lim		Peak Field Strength Limit		Avg Mar		Margin vs. Average Limit	
Dist	Distance to Antenna		D Corr	Distance Correct to 3 meters		Pk Mar		Margin vs. Peak Limit		Avg Mar		Margin vs. Average Limit		Avg Mar		Margin vs. Average Limit	
Read	Analyzer Reading		Avg	Average Field Strength @ 3 m		Avg Mar		Margin vs. Average Limit		Avg Mar		Margin vs. Average Limit		Avg Mar		Margin vs. Average Limit	
AF	Antenna Factor		Peak	Calculated Peak Field Strength		Pk Mar		Margin vs. Peak Limit		Avg Mar		Margin vs. Average Limit		Avg Mar		Margin vs. Average Limit	
CL	Cable Loss		HPF	High Pass Filter													

7.2.4. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL DATA



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 27 File#: Station.EMI Date: 04-05-2006 Time: 12:22:17
Audix ATC

Condition: FCC CLASS-B HORIZONTAL
Test Operator : Thanh Nguyen
Project # : 06J10177
Company : HONDA R&D Co., LTD.
EUT : Wireless Station
Model No : 35220-QAB
S/N : N/A
Configuration : EUT,laptop and PCI Ext.card
Mode of operation: Tx worst case
Target of Test : FCC /IC class B, DGT Class B

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	136.700	24.70	14.93	39.64	43.50	-3.86	Peak
2	191.990	26.26	13.25	39.51	43.50	-3.99	Peak
3	327.790	21.86	16.35	38.21	46.00	-7.79	Peak
4	441.280	19.00	19.02	38.02	46.00	-7.98	Peak
5	528.580	20.49	20.63	41.12	46.00	-4.88	Peak
6	741.980	14.09	23.74	37.83	46.00	-8.17	Peak

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL DATA



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 29 File#: Station.EMI Date: 04-05-2006 Time: 12:26:32
Audix ATC

Condition: FCC CLASS-B VERTICAL
Test Operator : Thanh Nguyen
Project # : 06J10177
Company : HONDA R&D Co., LTD.
EUT : Wireless Station
Model No : 35220-QAB
S/N : N/A
Configuration : EUT,laptop and PCI Ext.card
Mode of operation: Tx worst case
Target of Test : FCC /IC class B, DGT Class B

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	103.720	20.80	12.23	33.03	43.50	-10.47	Peak
2	135.730	18.74	14.96	33.70	43.50	-9.80	Peak
3	227.880	24.27	12.95	37.22	46.00	-8.78	Peak
4	305.480	20.55	15.80	36.35	46.00	-9.65	Peak
5	406.360	23.02	18.20	41.22	46.00	-4.78	Peak
6	505.300	23.08	20.28	43.36	46.00	-2.64	Peak
7	706.090	19.36	23.17	42.53	46.00	-3.47	Peak

7.3. POWERLINE CONDUCTED EMISSIONS

LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.


RESULTS

No non-compliance noted:


6 WORST EMISSIONS

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit	EN B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.18	47.30	--	--	0.00	64.39	54.39	-17.09	-7.09	L1
0.24	42.48	--	--	0.00	62.03	52.03	-19.55	-9.55	L1
1.17	26.54	--	--	0.00	56.00	46.00	-29.46	-19.46	L1
0.18	47.50	--	--	0.00	64.58	54.58	-17.08	-7.08	L2
0.21	35.52	--	--	0.00	63.24	53.24	-27.72	-17.72	L2
1.17	27.38	--	--	0.00	56.00	46.00	-28.62	-18.62	L2
6 Worst Data									

LINE 1 RESULTS

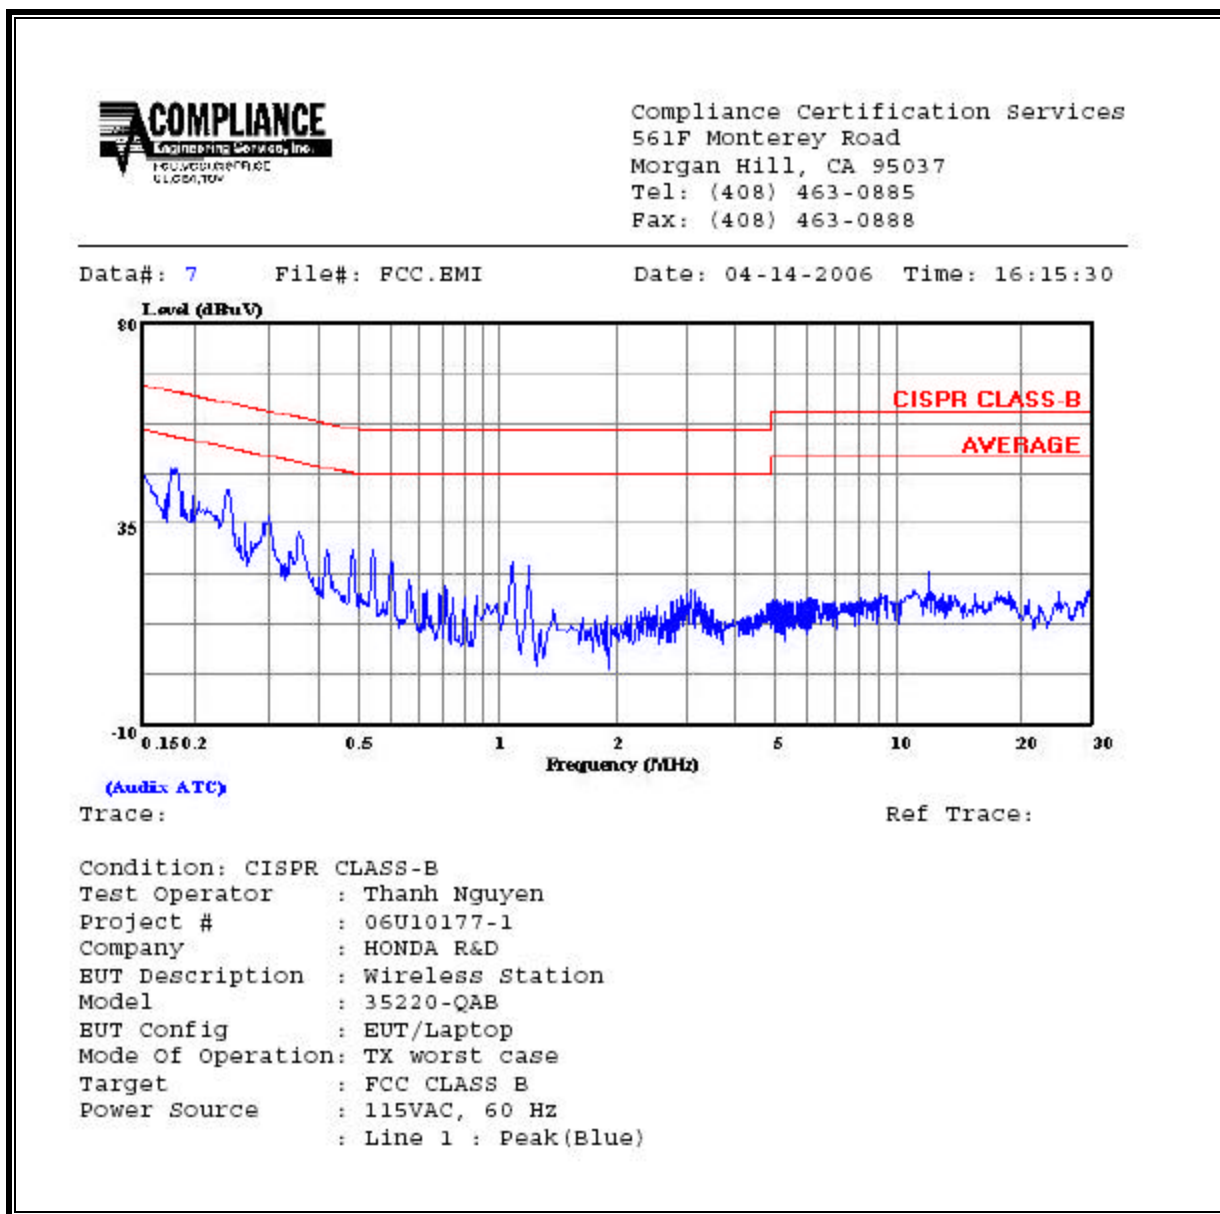


LINE 2 RESULTS

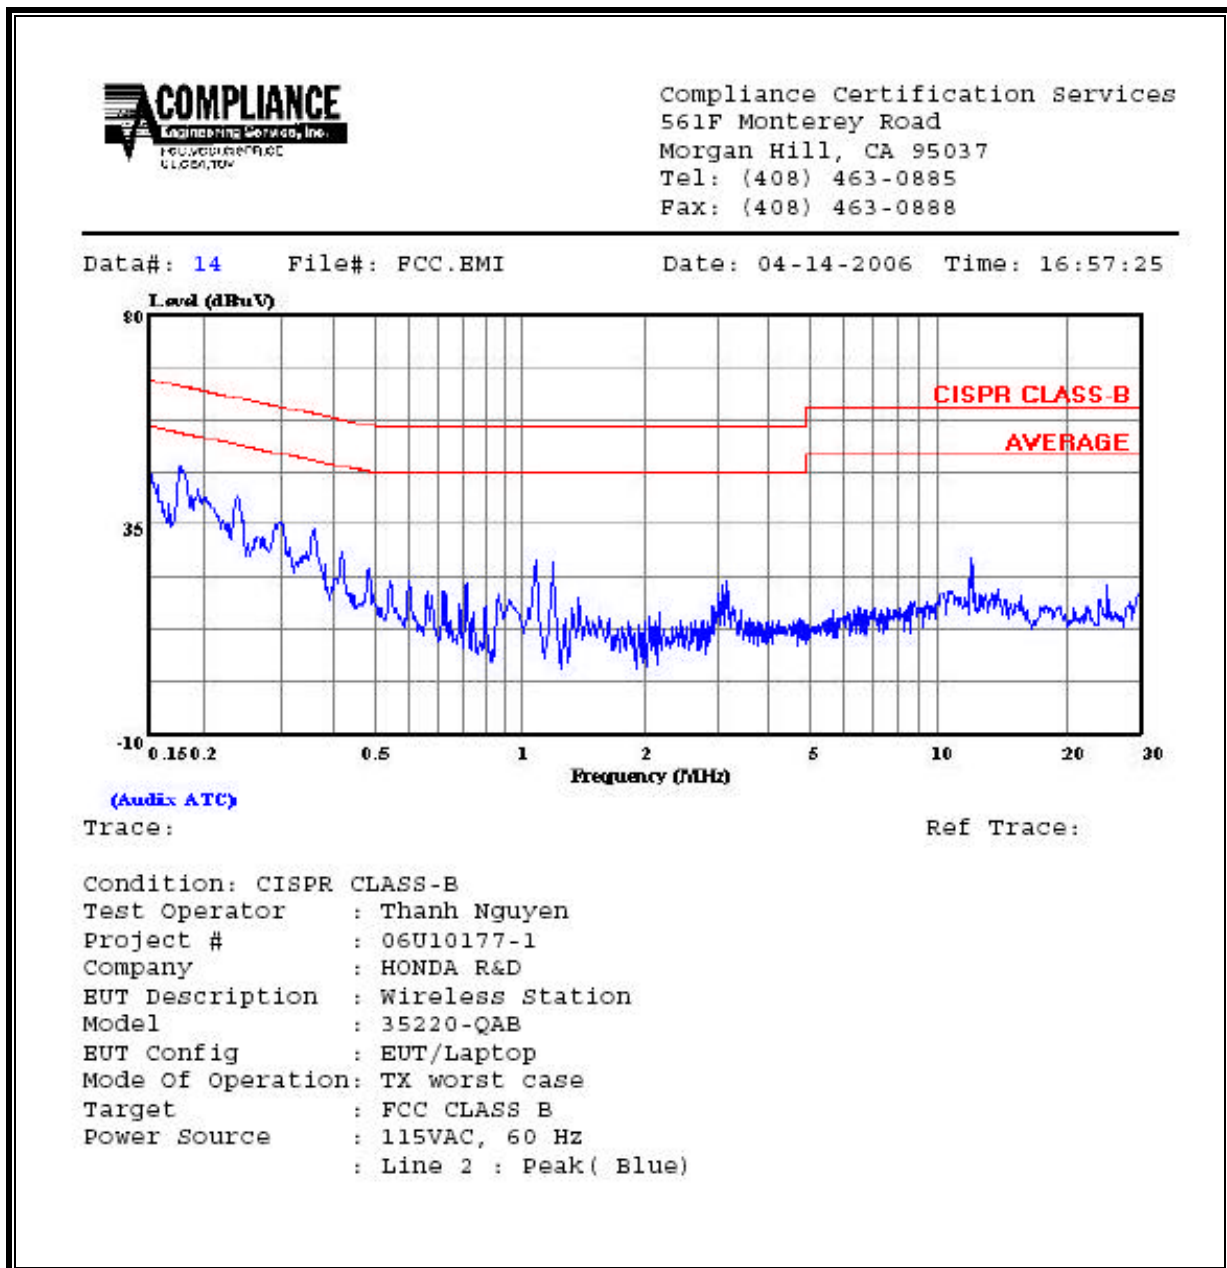

8. SETUP PHOTOS

ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

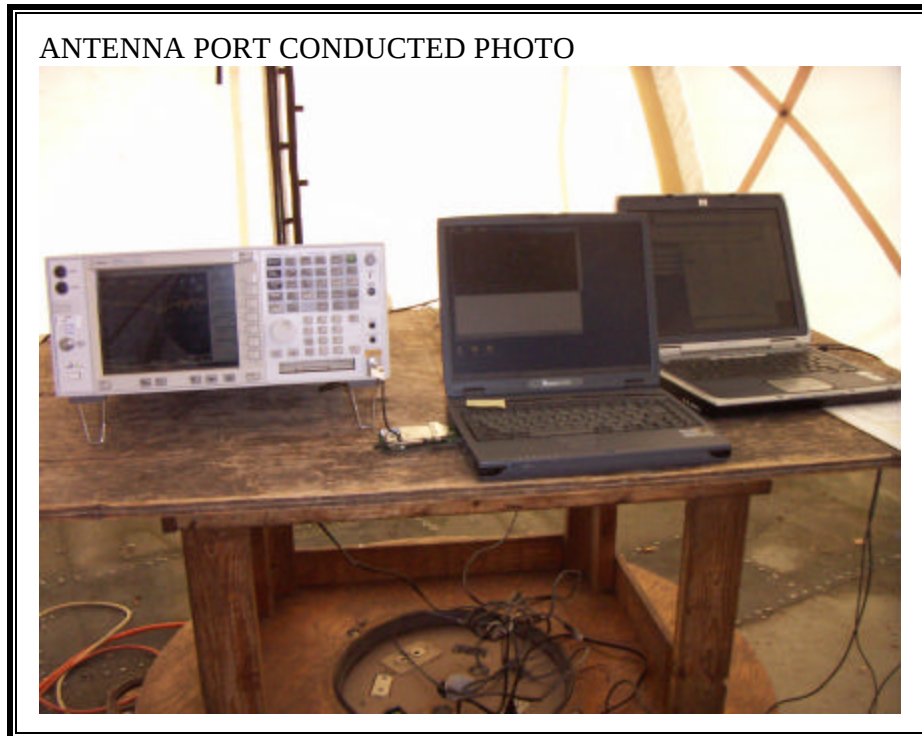

RADIATED RF MEASUREMENT SETUP

RADIATED FRONT PHOTO



RADIATED BACK PHOTO



POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP

LINE CONDUCTED FRONT PHOTO



LINE CONDUCTED BACK PHOTO



END OF REPORT