



FCC PART 15 SUBPART C TEST REPORT

FCC Part 15.249

Report Reference No......: TRE12020117

FCC ID......: T54ADSM-24FCAMERA

Compiled by

(position+printed name+signature)..
File administrators Eric Zhang

Eric Zhang

Supervised by

(position+printed name+signature)..
Test Engineer Tim Zhang

Tim. Zhang

Approved by

(position+printed name+signature)..
Manager Wenliang Li

Wenliang Li

Date of issue.....: Apr 13, 2012

Testing Laboratory Name: Shenzhen Huatongwei International Inspection Co., Ltd

Address.....: Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China

Applicant's name: AnJieLun Electronic Techology Limited

Address.....: 2F, 12st, LONGBI INDUSTRIAL PARK BANTIAN VILLAGE, BUJI TOWN

Test specification:

Standard: FCC Part 15.249: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5850 MHz and 24.0 - 24.25 GHz.

TRF Originator: Shenzhen Huatongwei International Inspection CO., Ltd

Master TRF: Dated 2006-06

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: ADSM-24FCAMERA

Trade Mark: /

Model/Type reference.....: SW322-YDW-CAMERA

Listed Models: /

Modulation: GFSK

Result.....: **Positive**

TEST REPORT

Test Report No. :	TRE12020117	Apr 13, 2012
		Date of issue

Equipment under Test : ADSM-24FCAMERA

Model /Type : SW322-YDW-CAMERA

Listed Models : /

Applicant : **SHENZHEN ANJIELUN ELECTRONIC TECHNOLOGY LTD**

Address : 12ST LONGBI INDUSTRIAL PARK BUJI TOWN BANTIAN VILLAGE SHENZHEN CHINA

Manufacturer : **SHENZHEN ANJIELUN ELECTRONIC TECHNOLOGY LTD**

Address : 12ST LONGBI INDUSTRIAL PARK BUJI TOWN BANTIAN VILLAGE SHENZHEN CHINA

Test Result according to the standards on page 4:	Positive
--	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

<u>1.</u>	<u>TEST STANDARDS</u>	<u>4</u>
<u>2.</u>	<u>SUMMARY</u>	<u>5</u>
2.1.	General Remarks	5
2.2.	Equipment Under Test	5
2.3.	Short description of the Equipment under Test (EUT)	5
2.4.	EUT operation mode	5
2.5.	EUT configuration	5
2.6.	Related Submittal(s) / Grant (s)	5
<u>3.</u>	<u>TEST ENVIRONMENT.....</u>	<u>6</u>
3.1.	Address of the test laboratory	6
3.2.	Test Facility	6
3.3.	Environmental conditions	7
3.4.	Statement of the measurement uncertainty	7
3.5.	Configuration of Tested System	8
3.6.	Equipments Used during the Test	8
<u>4.</u>	<u>TEST CONDITIONS AND RESULTS.....</u>	<u>9</u>
4.1.	Conducted Emissions Test	9
4.2.	Radiated Emission Test	13
4.3.	Band Edge Measurement	21
4.4.	20dB Bandwidth Measurement	30
<u>5.</u>	<u>ANTENNA REQUIREMENT</u>	<u>34</u>
<u>6.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>35</u>
<u>7.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>37</u>

1. TEST STANDARDS

The tests were performed according to following standards:

FCC Rules Part 15.249: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, 5725-5850 MHz and 24.0 - 24.25 GHz.

ANSI C63.10: American National Standard for Testing Unlicensed Wireless Devices

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Apr 11, 2012
Testing commenced on	:	Apr 11, 2012
Testing concluded on	:	Apr 16, 2012

Note: The test report based on original test report No.: WE10060029. The EUT increases some components, But it does not affect the RF test, please refer to the modified circuit diagram about this problem.

2.2. Equipment Under Test

Power supply system utilised

Power supply voltage	:	<input checked="" type="radio"/> 120V / 60 Hz	<input type="radio"/> 115V / 60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input type="radio"/> Other (specified in blank below)	

2.3. Short description of the Equipment under Test (EUT)

2.4GHz (ADSM-24FCAMERA)

For more details, refer to the user's manual of the EUT.

Serial number: Prototype

2.4. EUT operation mode

The EUT has been tested under typical operating condition.

2.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- supplied by the manufacturer

- supplied by the lab

<input type="radio"/>	AC ADAPTER	Manufacturer:	Nalin
		Model No.:	NLA10050W1A
		Power Cable:	150cm
<input checked="" type="radio"/>	/	Manufacturer:	/
		Model No.:	/

2.6. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **T54ADSM-24FCAMERA** filing to comply with Section 15.249 of the FCC Part 15, Subpart C Rules.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Huatongwei International Inspection Co., Ltd
Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China
Phone: 86-755-26715686 Fax: 86-755-26748089

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2009) and CISPR Publication 22.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: Mar. 29, 2012. Valid time is until Feb. 28, 2015.

A2LA-Lab Cert. No. 2243.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. Valid time is until Sept. 30, 2013.

FCC-Registration No.: 662850

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 662850, Renewal date Jul. 01, 2009, valid time is until Jun. 30, 2012.

IC-Registration No.: 5377A

The 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377A on Jan. 25, 2011, valid time is until Jan. 24, 2014.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

NEMKO-Aut. No.: ELA125

Shenzhen Huatongwei International Inspection Co., Ltd has been assessed the quality assurance system, the testing facilities, qualifications and testing practices of the relevant parts of the organization. The quality assurance system of the Laboratory has been validated against ISO/IEC 17025 or equivalent. The laboratory also fulfils the conditions described in Nemko Document NLA-10, the authorization is valid through July 07, 2013

VCCI

The 3m Semi-anechoic chamber (12.2m×7.95m×6.7m) and Shielded Room (8m×4m×3m) of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-292. Date of Registration: Dec. 24, 2010. Valid time is until Dec. 23, 2013.

Main Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-2726. Date of Registration: Dec. 20, 2009. Valid time is until Dec. 19, 2012.

Telecommunication Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-1837. Date of Registration: May 07, 2010. Valid time is until May 06, 2013.

DNV

Shenzhen Huatongwei International Inspection Co., Ltd. has been found to comply with the requirements of DNV towards subcontractor of EMC and safety testing services in conjunction with the EMC and Low voltage Directives and in the voluntary field. The acceptance is based on a formal quality Audit and follow-ups according to relevant parts of ISO/IEC Guide 17025 (2005), in accordance with the requirements of the DNV Laboratory Quality Manual towards subcontractors. Valid time is until Aug. 24, 2013.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test Items	Measurement Uncertainty	Notes
Frequency stability	150 Hz	(1)
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emission 9KHz-12.75 GHz	1.60 dB	(1)
Radiated spurious emission 9KHz-12.75 GHz	2.20 dB	(1)
Conducted Emission 9KHz-30MHz	3.39 dB	(1)
Radiated Emission 30~1000MHz	4.24 dB	(1)
Radiated Emissio 1~18GHz	5.16 dB	(1)
Radiated Emissio 18-40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)
Emission Mask	-----	(1)
Modulation Characteristic	-----	(1)
Transmitter Frequency Behavior	-----	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

3.5. Configuration of Tested System

Fig. 3-1 Configuration of Tested System

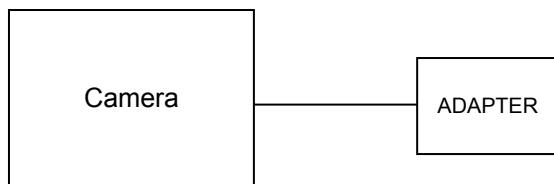


Table 3-1 Equipment Used in Tested System

No.	Product	Manufacturer	Model No.	Serial No.	Note
1	AC ADAPTER	Nalin	NLA10050W1A	/	/

3.6. Equipments Used during the Test

AC Power Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESCS30	100038	2011/10/23
2	ARTIFICIAL MAINS	ROHDE & SCHWARZ	ESH2-Z5	100028	2011/10/23
3	PULSE LIMITER	ROHDE & SCHWARZ	ESHSZ2	100044	2011/10/23
4	EMI TEST SOFTWARE	ROHDE & SCHWARZ	ES-K1 1.71	N/A	2011/10/23


Radiated Emissions					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	ULTRA-BROADBAND ANTENNA	ROHDE & SCHWARZ	HL562	100015	2011/10/23
2	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESI 26	100009	2011/10/23
3	RF TEST PANEL	ROHDE & SCHWARZ	TS / RSP	335015/ 0017	2011/10/23
4	TURNTABLE	ETS	2088	2149	2011/10/23
5	ANTENNA MAST	ETS	2075	2346	2011/10/23
6	EMI TEST SOFTWARE	ROHDE & SCHWARZ	ESK1	N/A	2011/10/23
7	HORN ANTENNA	ROHDE & SCHWARZ	HF906	100039	2011/10/23

Bandwidth / Band Edge Measurement					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESCI	100106	2011/10/23

4. TEST CONDITIONS AND RESULTS

4.1. Conducted Emissions Test

TEST CONFIGURATION

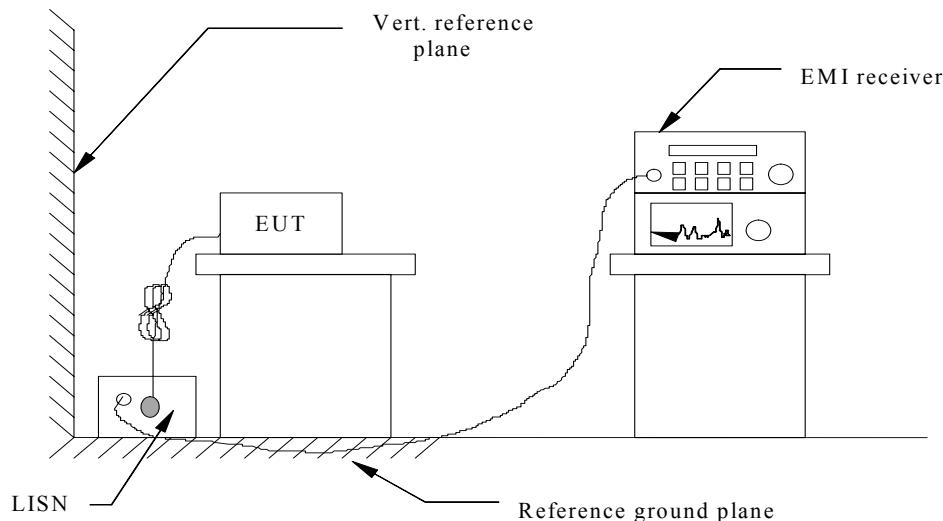

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4-2009.
- 2 Support equipment, if needed, was placed as per ANSI C63.4-2009.
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4-2009.
- 4 If a EUT received DC power from the adapter, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

Conducted Power Line Emission Limit

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following :

Frequency (MHz)	Maximum RF Line Voltage (dB μ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50


* Decreasing linearly with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

TEST RESULTS

Please see next page

SCAN TABLE: "Voltage (9K-30M) FIN"
 Short Description: 150K-30M Voltage

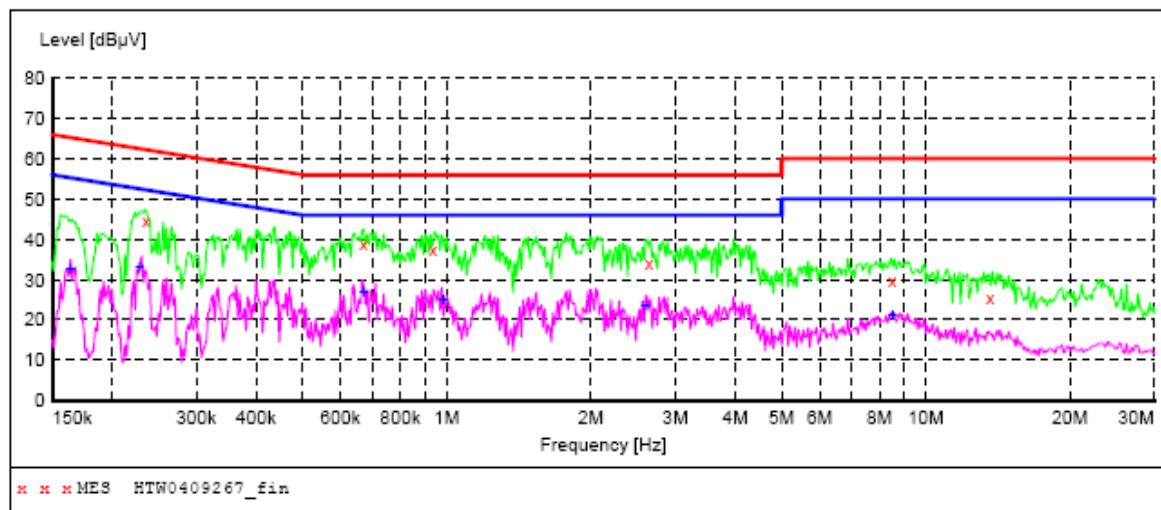

MEASUREMENT RESULT: "HTW0409267_fin"

4/9/2012 3:29PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.236230	44.90	10.1	62	17.3	QP	N	GND
0.670915	39.00	10.1	56	17.0	QP	N	GND
0.937590	37.60	10.2	56	18.4	QP	N	GND
2.641690	34.20	10.2	56	21.8	QP	N	GND
8.522765	30.00	10.5	60	30.0	QP	N	GND
13.638050	25.40	10.7	60	34.6	QP	N	GND


MEASUREMENT RESULT: "HTW0409267_fin2"

4/9/2012 3:29PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.163740	32.70	10.1	55	22.6	AV	N	GND
0.228820	33.10	10.1	53	19.4	AV	N	GND
0.670920	26.90	10.1	46	19.1	AV	N	GND
0.983500	25.00	10.2	46	21.0	AV	N	GND
2.599924	23.50	10.2	46	22.5	AV	N	GND
8.522770	21.00	10.5	50	29.0	AV	N	GND

Page 1/1 4/9/2012 3:29PM HTW0409267

SCAN TABLE: "Voltage (9K-30M) FIN"
 Short Description: 150K-30M Voltage

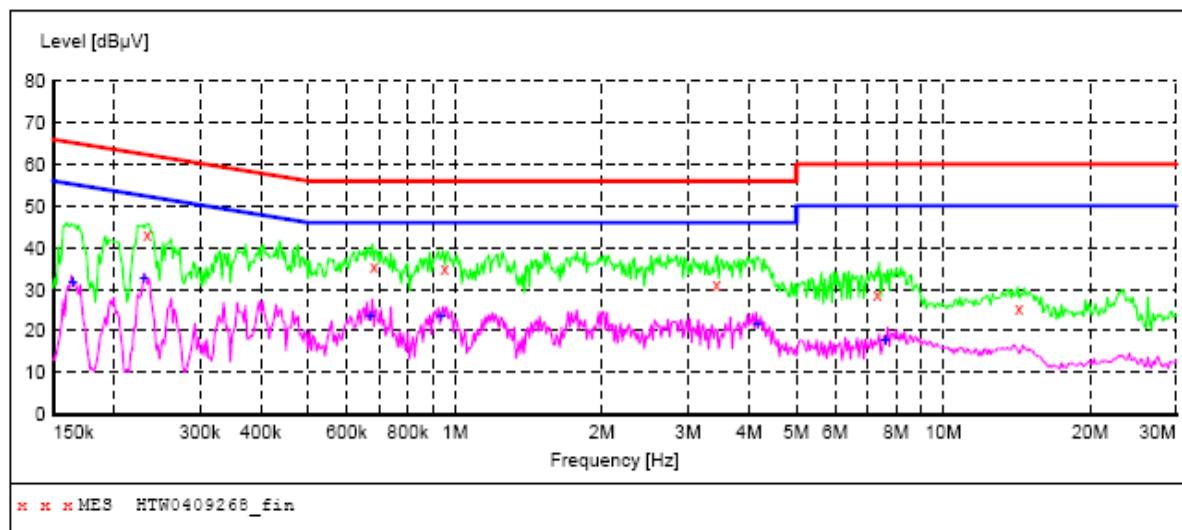

MEASUREMENT RESULT: "HTW0409268_fin"

4/9/2012 3:38PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.234350	43.40	10.1	62	18.9	QP	L1	GND
0.681690	35.60	10.1	56	20.4	QP	L1	GND
0.952650	35.30	10.2	56	20.7	QP	L1	GND
3.436212	31.20	10.2	56	24.8	QP	L1	GND
7.325390	28.80	10.4	60	31.2	QP	L1	GND
14.305907	25.30	10.7	60	34.7	QP	L1	GND

MEASUREMENT RESULT: "HTW0409268_fin2"


4/9/2012 3:38PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.165050	31.80	10.1	55	23.4	AV	L1	GND
0.230651	32.60	10.1	52	19.8	AV	L1	GND
0.670920	23.70	10.1	46	22.3	AV	L1	GND
0.937590	23.80	10.2	46	22.2	AV	L1	GND
4.160376	21.80	10.2	46	24.2	AV	L1	GND
7.623130	17.90	10.4	50	32.1	AV	L1	GND


4.2. Radiated Emission Test

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency below 30MHz

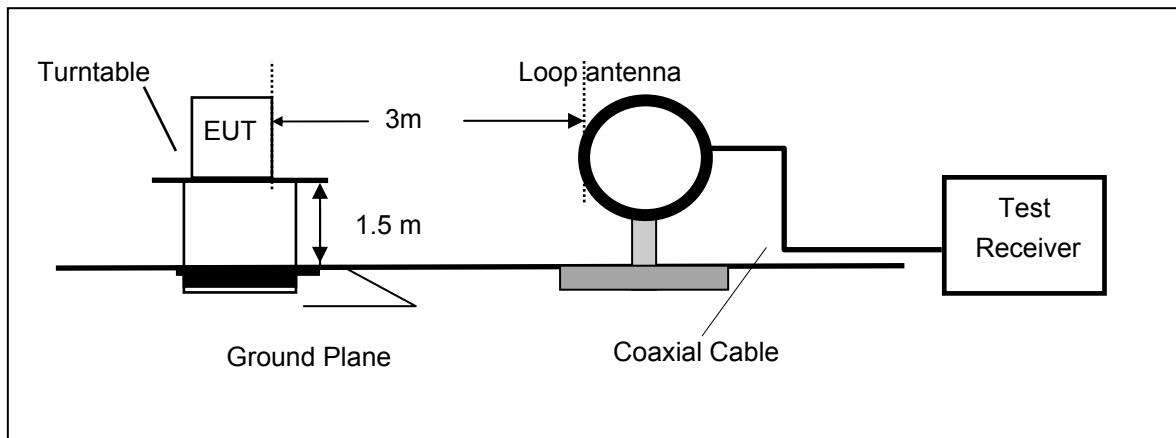

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

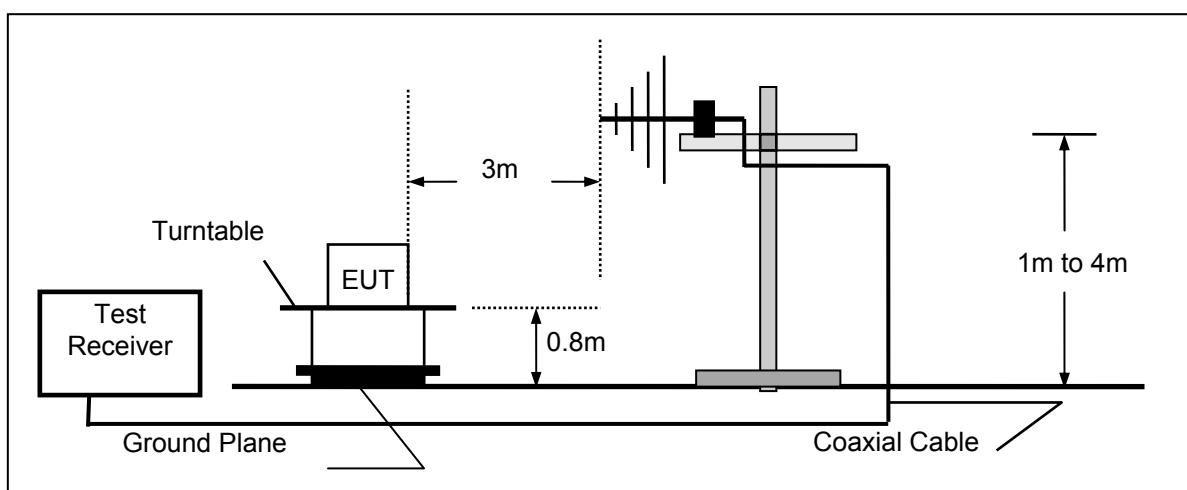

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

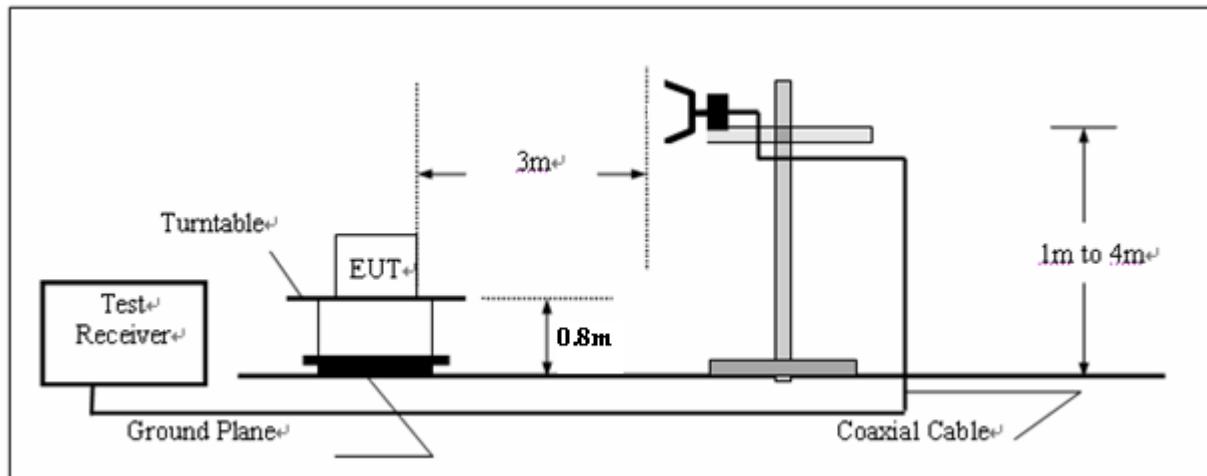

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

RADIATION LIMIT

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

Fundamental and Harmonics Emission Limits

Frequency MHz	Field Strength of Fundamental (mV/m @3m)	Field Strength of Harmonics (uV/m @3m)	Field Strength of Harmonics (dB μ V/m @3m)
2400-2483.5	50	94 (Average) 114 (Peak)	500 54 (Average) 74 (Peak)

TEST RESULTS**Spurious radiated emission below 30MHz**


Frequency (MHz)	Corrected Reading (dB μ V/m)@3m	FCC Limit (dB μ V/m) @3m	Margin (dB)	Detector	Polari-zation
Low channel(2408MHz)					
24	30.27	69.54	39.27	QP	/
Middle channel(2448MHz)					
24	31.04	69.54	38.50	QP	/
High channel(2475MHz)					
24	30.73	69.54	38.81	QP	/

Spurious radiated emission from 30MHz to 1GHz

The radiated measurement are performed at three channels (low/mid/high), the datum recorded below (the middle channel) is the worst case for all the test mode and channel.

SWEET TABLE: "test (30M-1G)"

Short Description:		Field Strength		
Start Frequency	Stop Frequency	Detector	Meas.	IF Time Bandw.
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz
		Transducer HL562 201106		

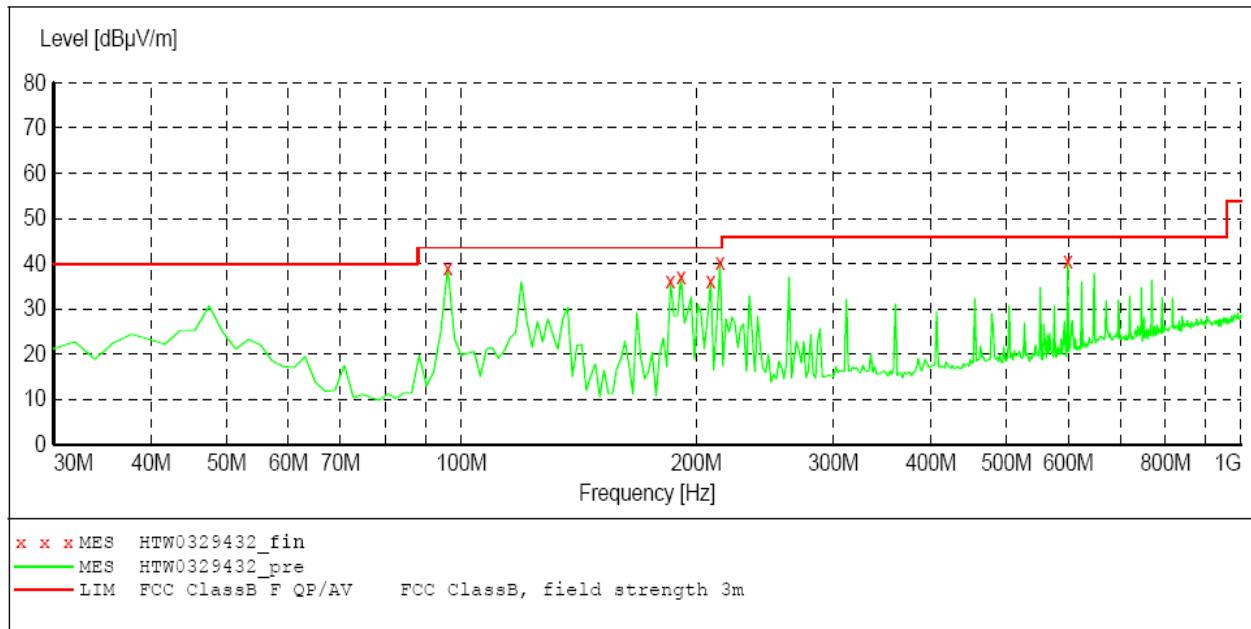
***MEASUREMENT RESULT: "HTW0329432_fin"***

3/30/2012 12:23AM

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Det. QP	Height cm	Azimuth deg	Polarization
96.092184	39.00	-19.9	43.5	4.5	QP	100.0	154.00	VERTICAL
185.511022	36.00	-22.2	43.5	7.5	QP	100.0	63.00	VERTICAL
191.342685	37.20	-22.2	43.5	6.3	QP	100.0	68.00	VERTICAL
208.837675	36.00	-21.0	43.5	7.5	QP	100.0	31.00	VERTICAL
214.669339	40.20	-20.7	43.5	3.3	QP	100.0	93.00	VERTICAL
599.559118	40.50	-12.5	46.0	5.5	QP	100.0	88.00	VERTICAL

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength		
Start Frequency	Stop Frequency	Detector	Meas.	IF
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz
				Transducer
				HL562 201106

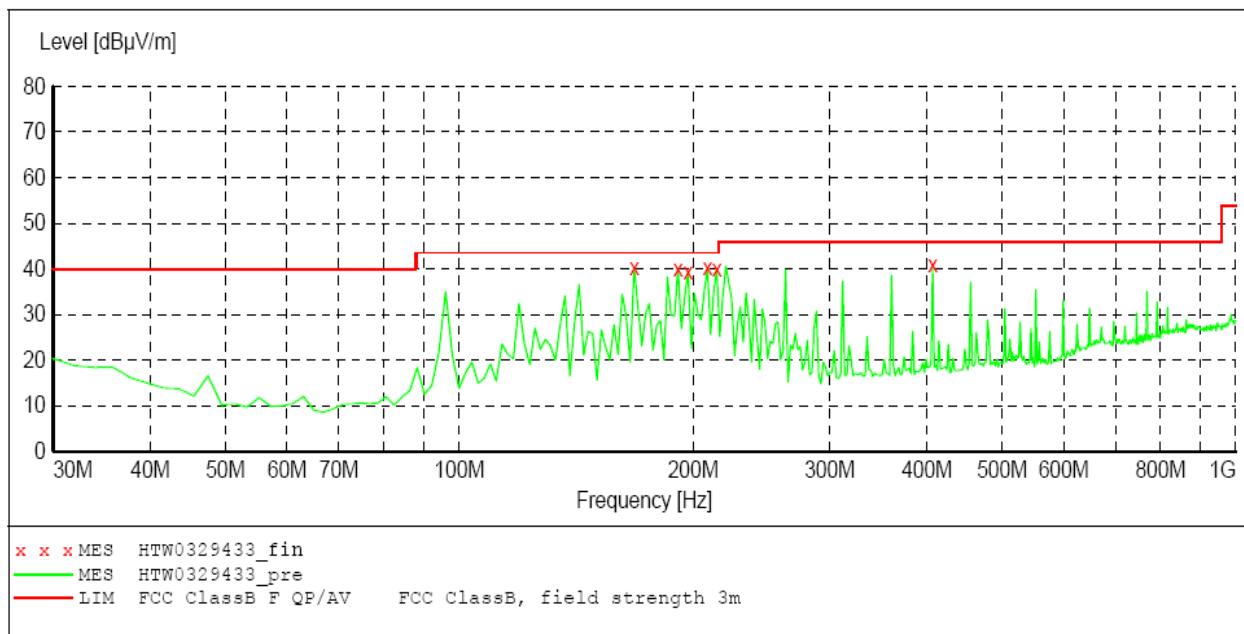***MEASUREMENT RESULT: "HTW0329433_fin"***

3/30/2012 12:26AM

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Det. QP	Height cm	Azimuth deg	Polarization
168.016032	40.30	-23.4	43.5	3.2	QP	300.0	29.00	HORIZONTAL
191.342685	40.10	-22.2	43.5	3.4	QP	300.0	277.00	HORIZONTAL
197.174349	39.30	-21.6	43.5	4.2	QP	300.0	277.00	HORIZONTAL
208.837675	40.40	-21.0	43.5	3.1	QP	300.0	277.00	HORIZONTAL
214.669339	40.00	-20.7	43.5	3.5	QP	100.0	106.00	HORIZONTAL
407.114228	41.00	-15.1	46.0	5.0	QP	100.0	292.00	HORIZONTAL

Spurious radiated emission from above 1GHz

Operation Mode: TX on Top Channel

Temperature: 20 °C Humidity: 70 % RH

Polarity: Ver. / Hor.

Remark:

- (1) Measuring frequencies from 30 MHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes harmonic frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver was 120KHz for measuring from 30 MHz to 1 GHz and 1 MHz for measuring above 1 GHz
- (6) The average measurement was not performed when the peak measured data under the limit of average detection.

Operation Mode: TX on Mid Channel

Temperature: 20 °C Humidity: 70 % RH Polarity: Ver. / Hor.

Remark:

- (1) Measuring frequencies from 30 MHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes harmonic frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver was 120KHz for measuring from 30 MHz to 1 GHz and 1 MHz for measuring above 1 GHz
- (6) The average measurement was not performed when the peak measured data under the limit of average detection.

Operation Mode: TX on Bot Channel

Temperature: 20 °C Humidity: 70 % RH

Remark:

- (1) Measuring frequencies from 30 MHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes harmonic frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver was 120KHz for measuring from 30 MHz to 1 GHz and 1 MHz for measuring above 1 GHz
- (6) The average measurement was not performed when the peak measured data under the limit of average detection.

4.3. Band Edge Measurement

TEST CONFIGURATION

Same as Section 4.2

TEST PROCEDURE

The band edge compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW to 1MHz and VBM to 3MHz to measure the peak field strength and set RBW to 1MHz and VBW to 10Hz to measure the average radiated field strength.

The conducted RF band edge was measured by using a spectrum analyzer. Set span wide enough to capture the highest in-band emission and the emission at the band edge. Set RBW to 100 KHz and VBM to 300 KHz, to measure the conducted peak band edge.


LIMIT

FCC PART 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

TEST RESULTS

Please see next page

Operation Mode: TX on Bot Channel Temperature: 20 °C Humidity: 70 % RH Polarity: Hor.

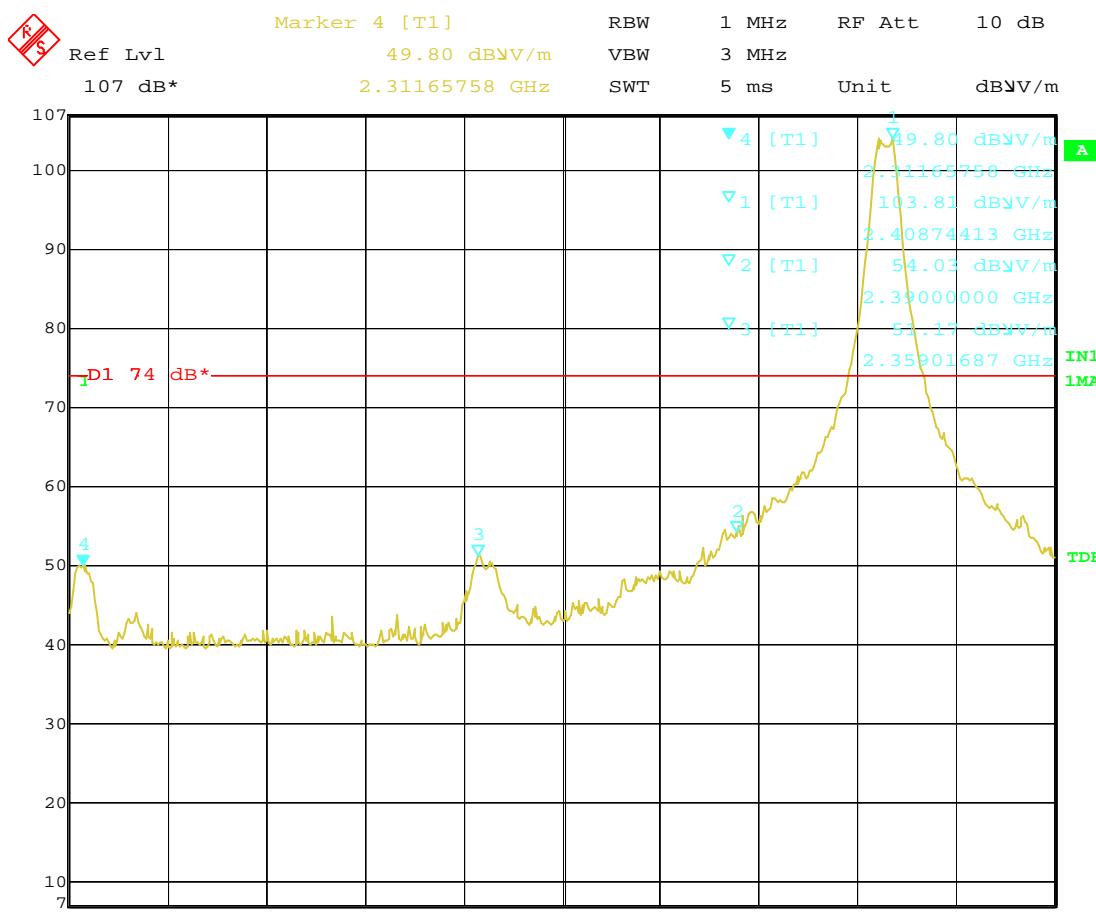


Date: 17.AUG.2010 00:52:54

Note:

1. The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209, the peak radiated field strength shall blow 74dB μ V/m.

Operation Mode: TX on Bot Channel

Temperature: 20 °C Humidity: 70 % RH Polarity: Hor.

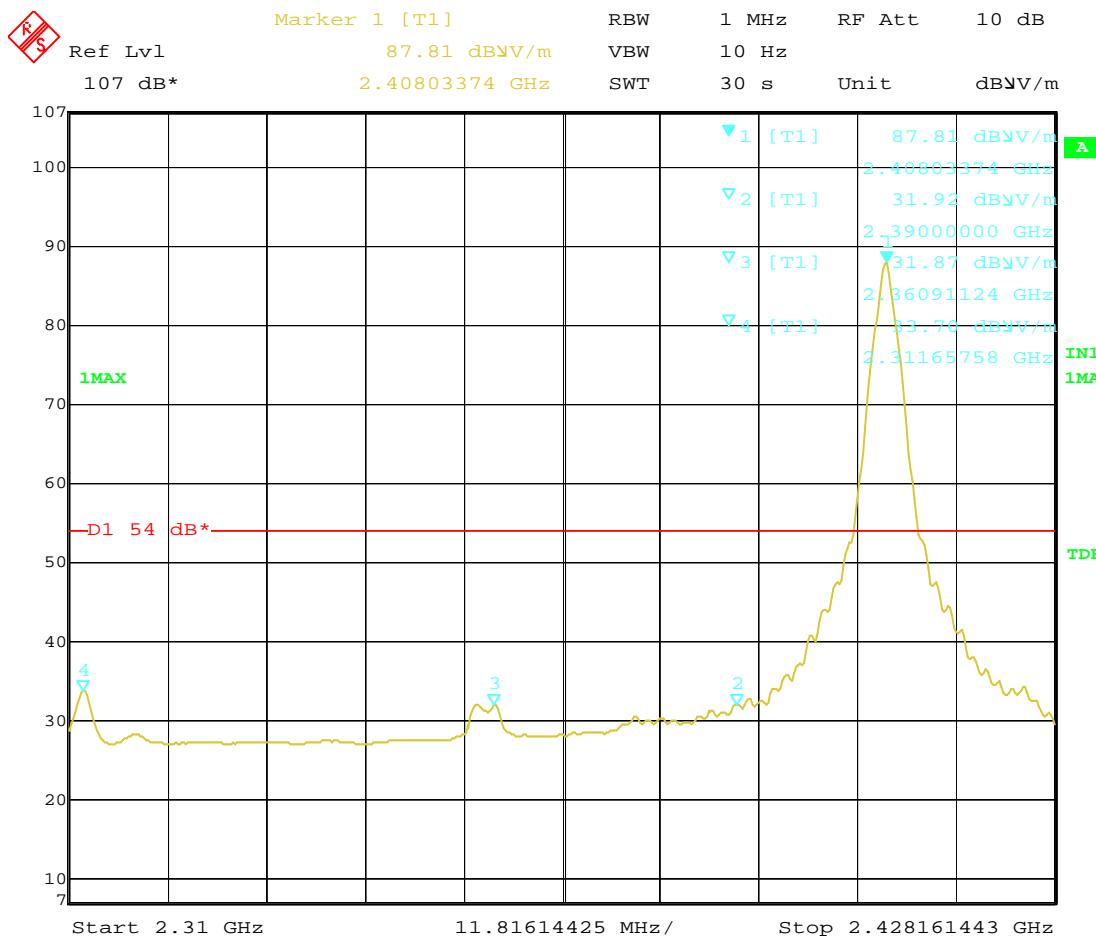


Date: 17.AUG.2010 00:55:09

Note:

1. The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209, the average radiated field strength shall blow 54dB μ V/m.


Operation Mode: TX on Bot Channel Temperature: 20 °C Humidity: 70 % RH Polarity: Ver.

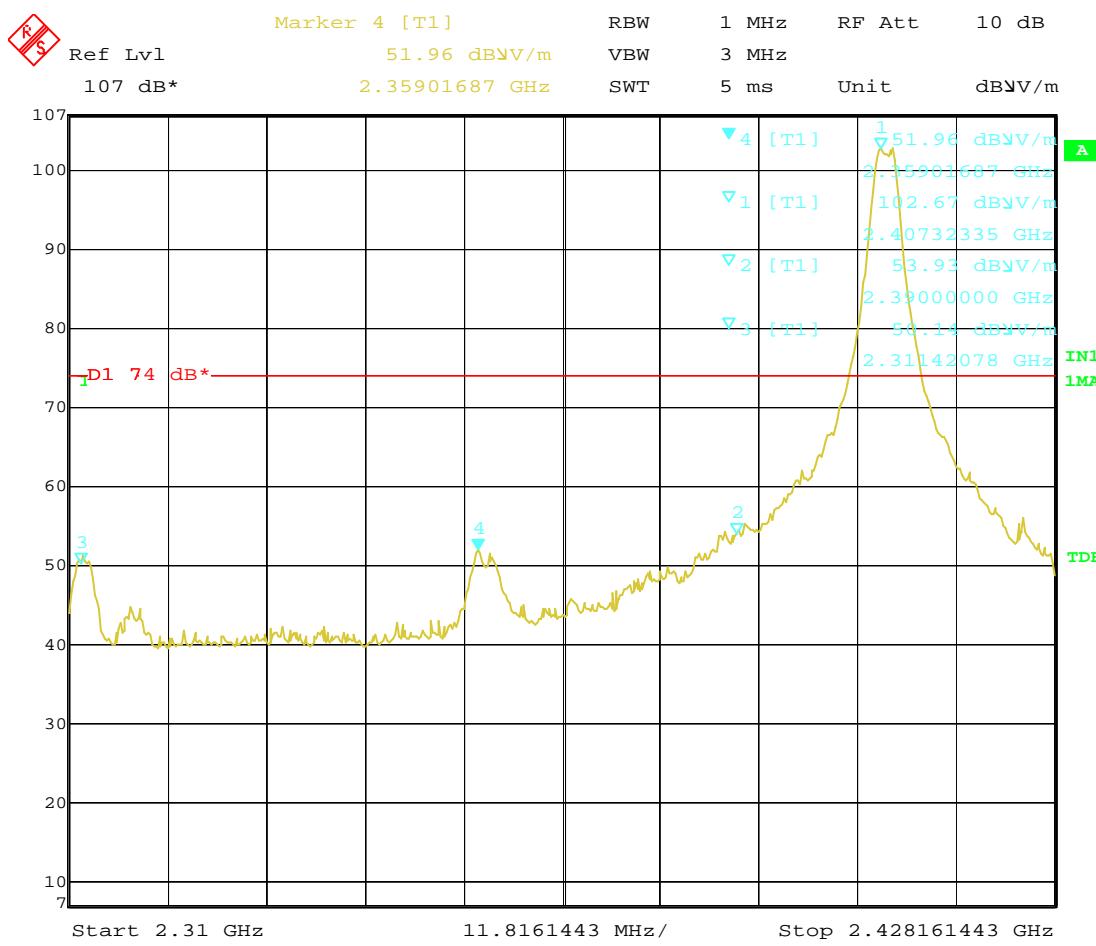

Note:

1. The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209, the peak radiated field strength shall blow 74dB μ V/m.


Operation Mode: TX on Bot Channel Temperature: 20 °C Humidity: 70 % RH Polarity: Ver.

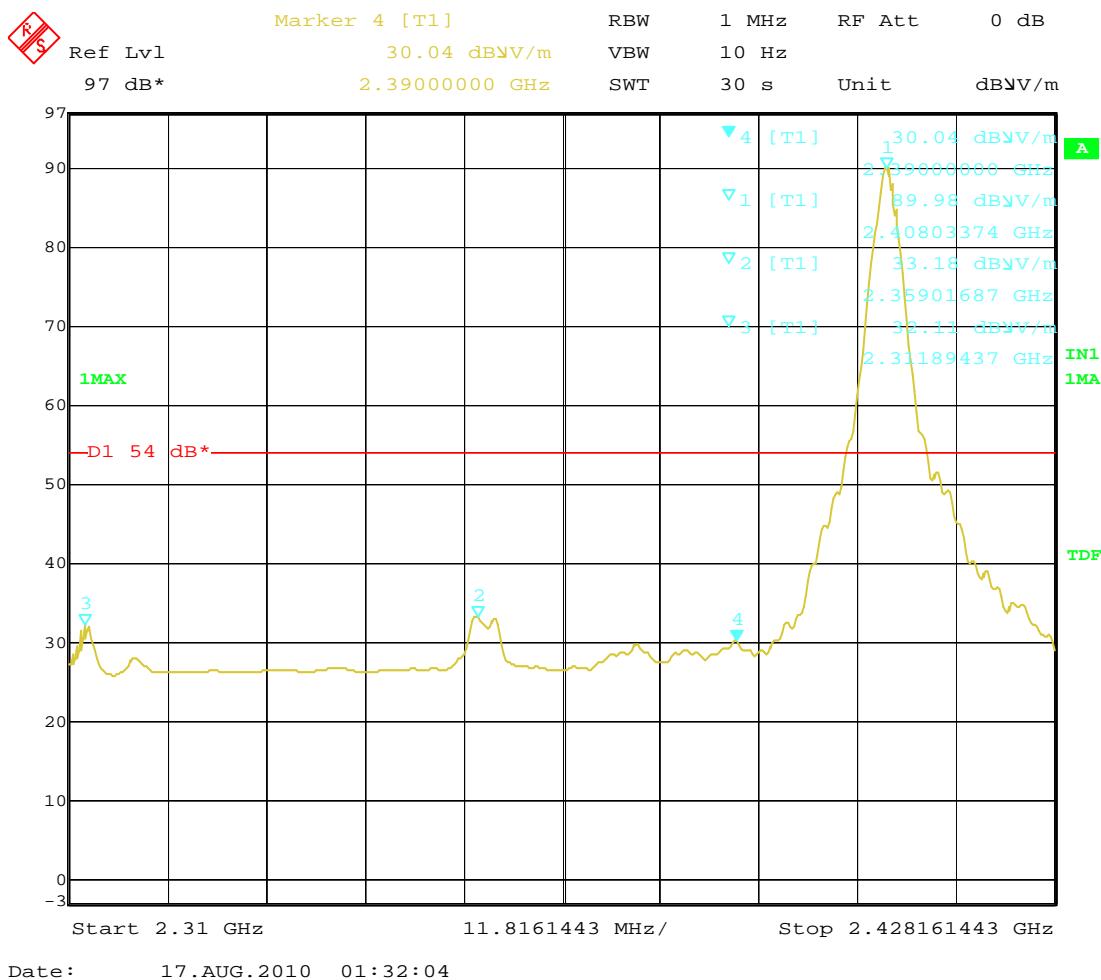

Note:

1. The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209, the average radiated field strength shall blow 54dB μ V/m.


Operation Mode: TX on Top Channel Temperature: 20 °C Humidity: 70 % RH Polarity: Hor.

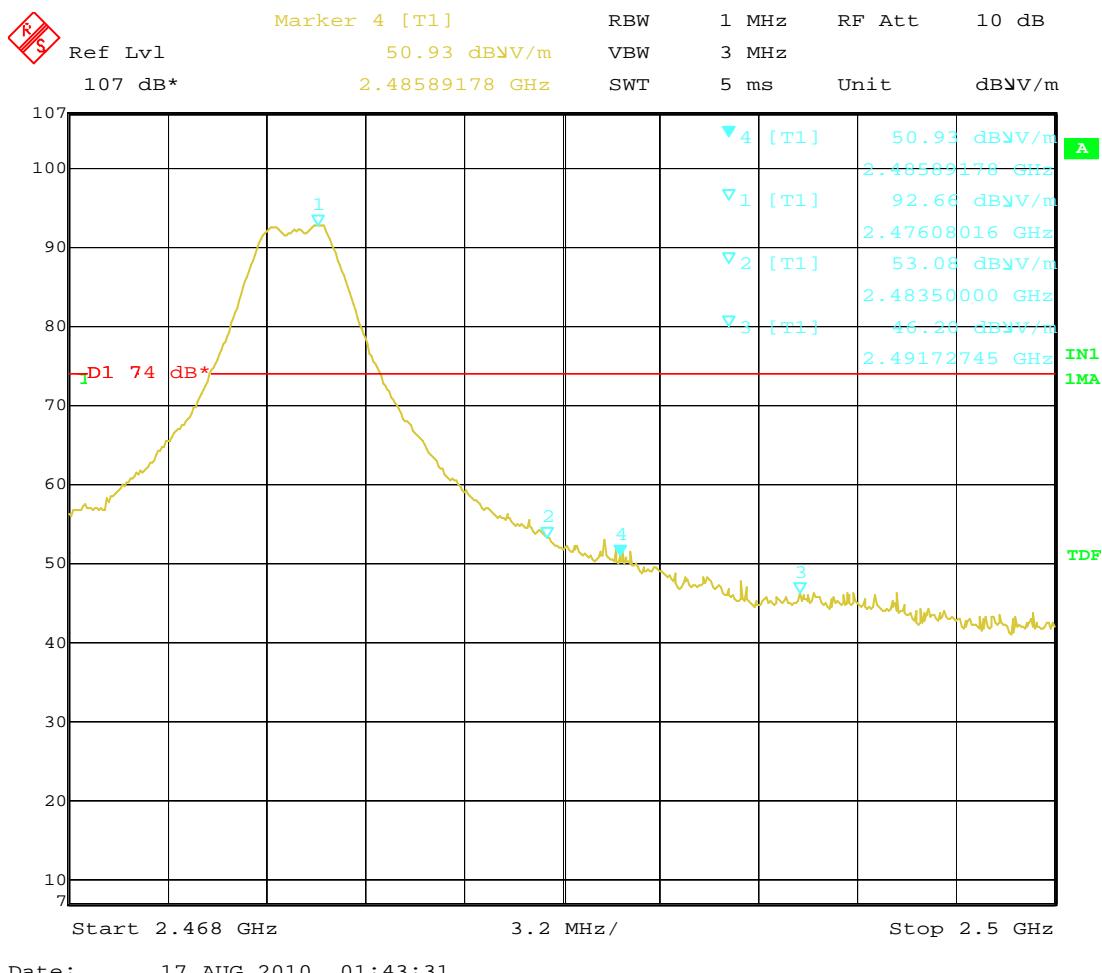

Note:

1. The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209, the peak radiated field strength shall blow 74dB μ V/m.

Operation Mode: TX on Top Channel Temperature: 20 °C Humidity: 70 % RH Polarity: Hor.

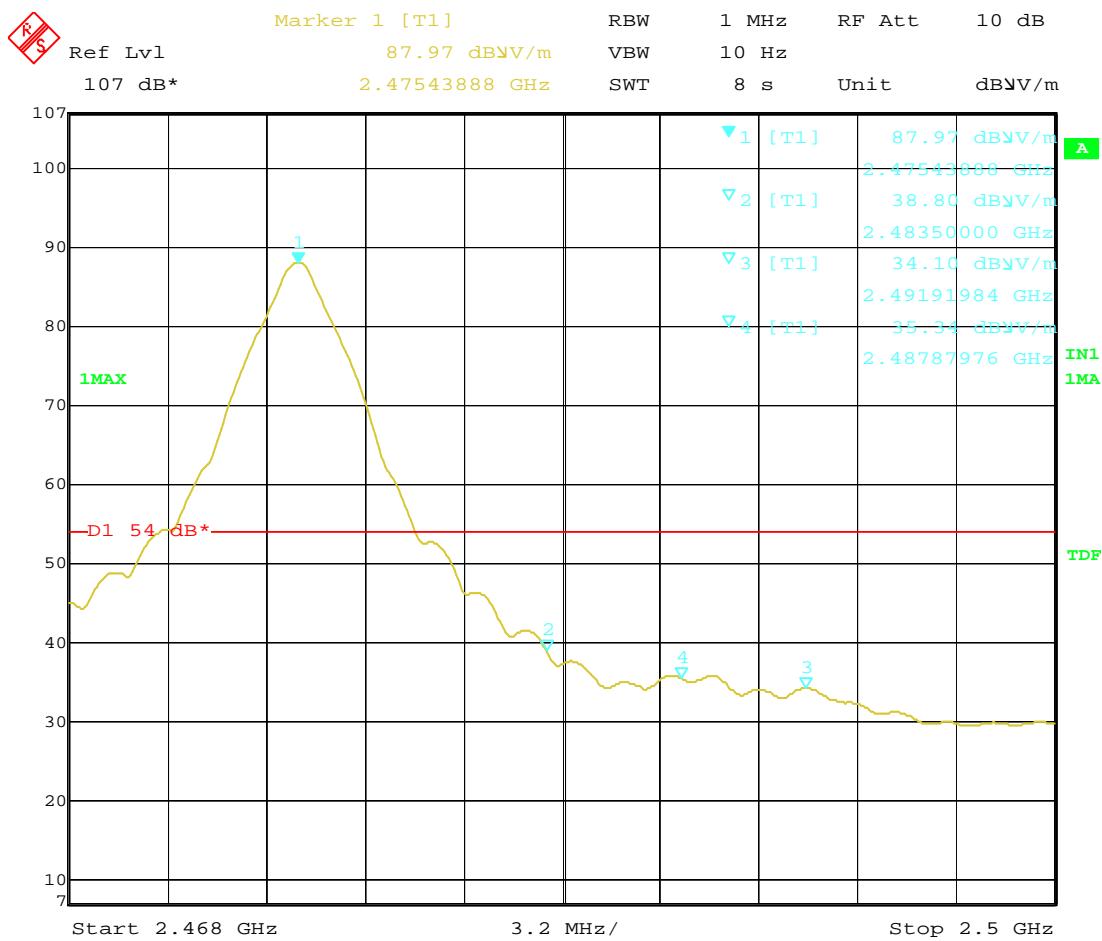


Date: 17.AUG.2010 01:44:31

Note:

1. The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209, the average radiated field strength shall blow 54dB μ V/m.


Operation Mode: TX on Top Channel Temperature: 20 $^{\circ}$ C Humidity: 70 % RH Polarity: Ver.

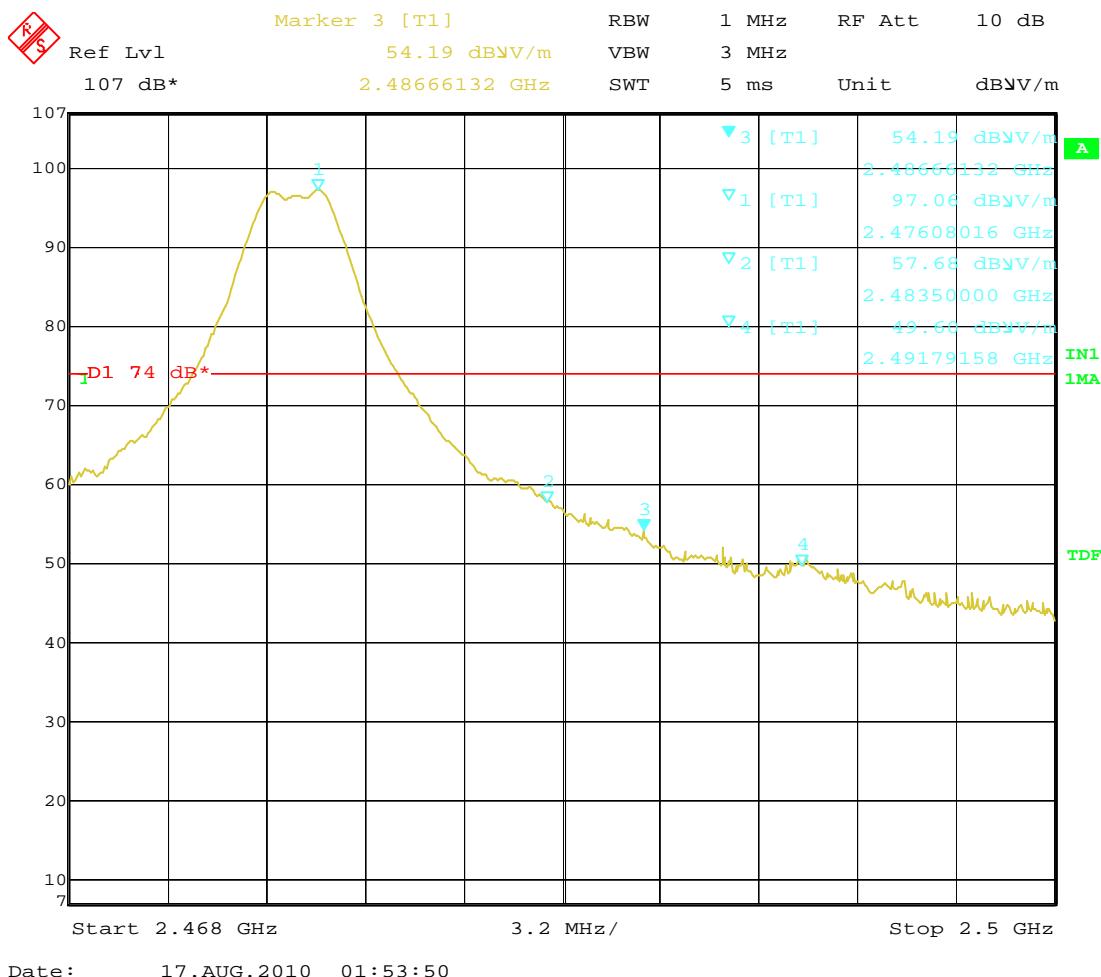

Note:

1. The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209, the peak radiated field strength shall blow 74dB μ V/m.

Operation Mode: TX on Top Channel Temperature: 20 $^{\circ}$ C Humidity: 70 % RH Polarity: Ver.

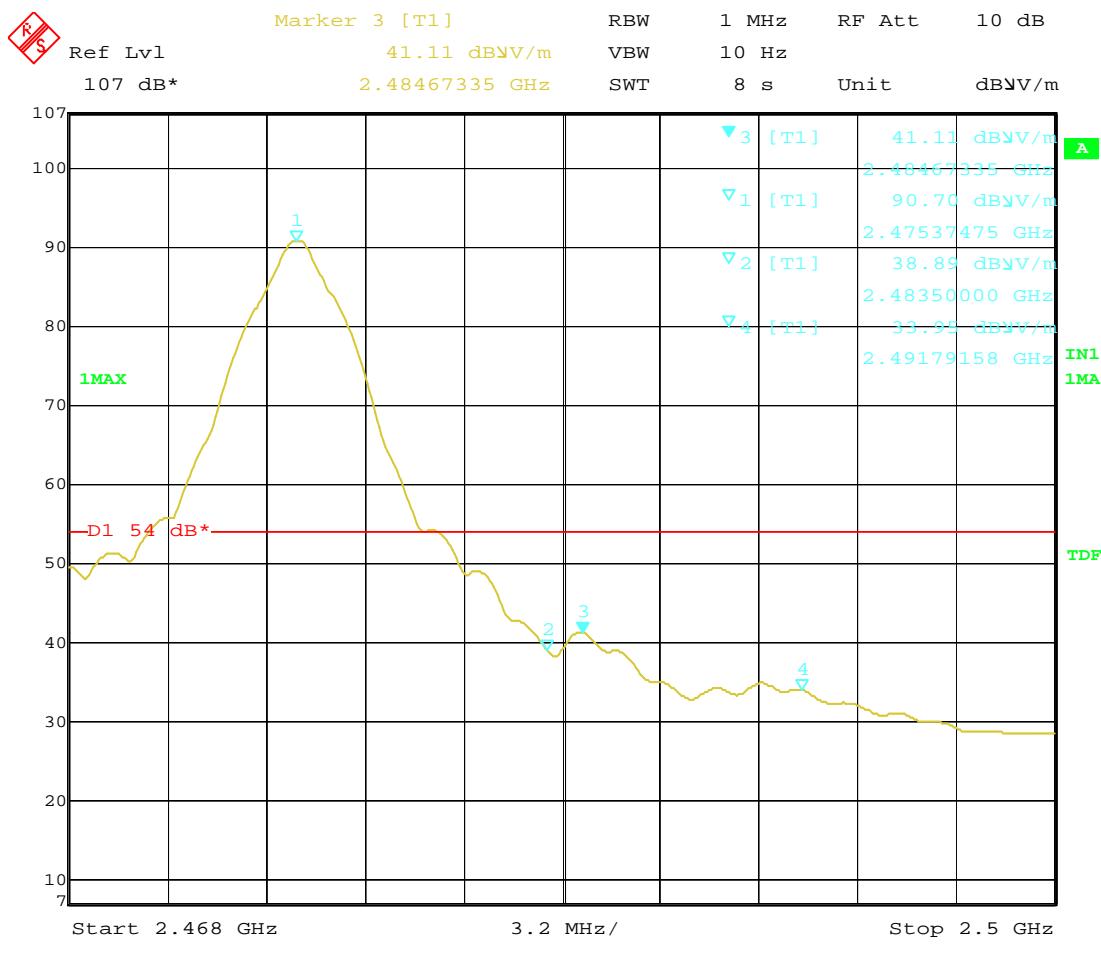


Note:

1. The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209, the average radiated field strength shall blow 54dB μ V/m.

4.4. 20dB Bandwidth Measurement

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The spectrum analyzer center frequency is set to the transmitter frequency. The RBW is set to 100 KHz and VBW is set 300 KHz.


LIMIT

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.


TEST RESULTS

20dB Bandwidth Measurement Result					
Operating Frequency	Test Data(MHz)		Limits(MHz)		Result
	Lower Frequency	Upper Frequency	Lower Frequency	Upper Frequency	
Bottom Channel	2405.88	2409.85	>2400	<2483.5	PASS
Middle Channel	2446.34	2450.37	>2400	<2483.5	PASS
Top Channel	2473.35	2477.44	>2400	<2483.5	PASS


Bottom Channel:

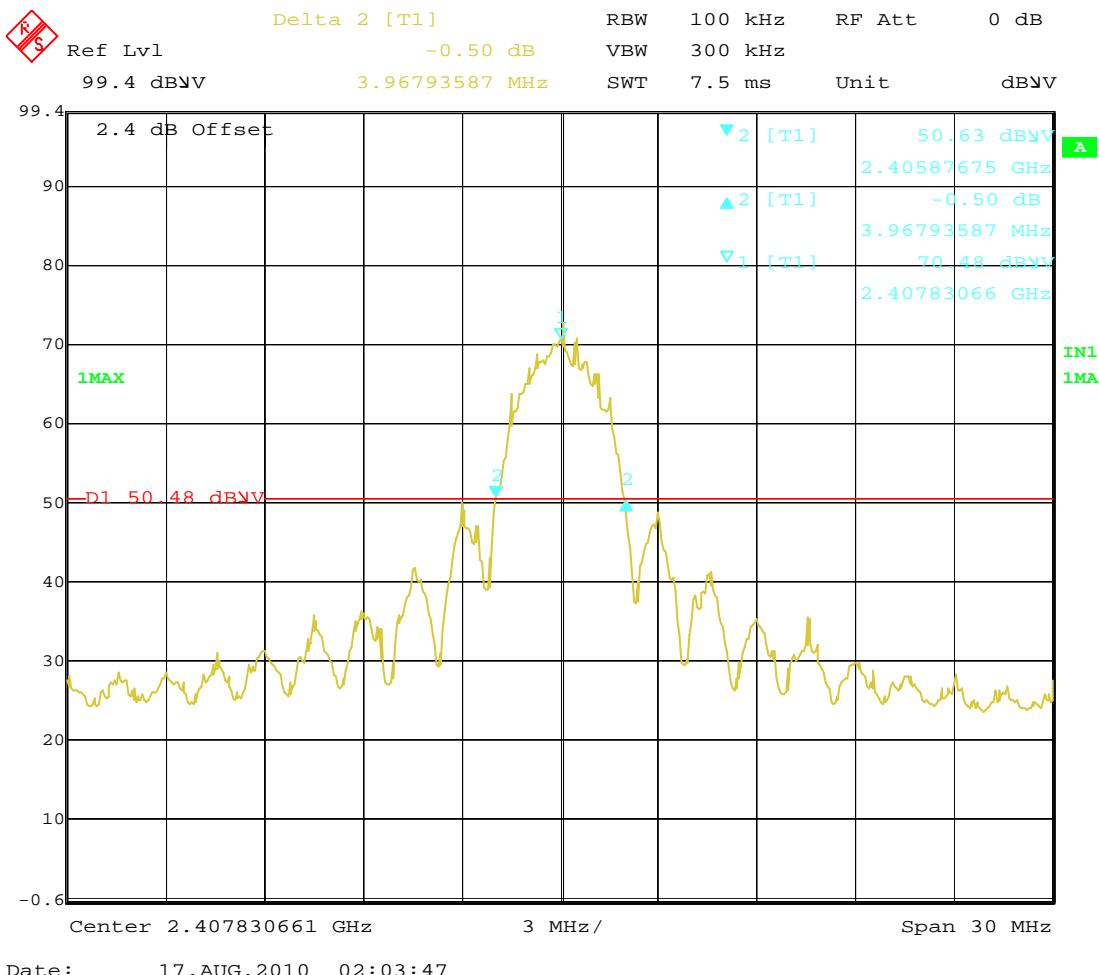

Mid Channel:

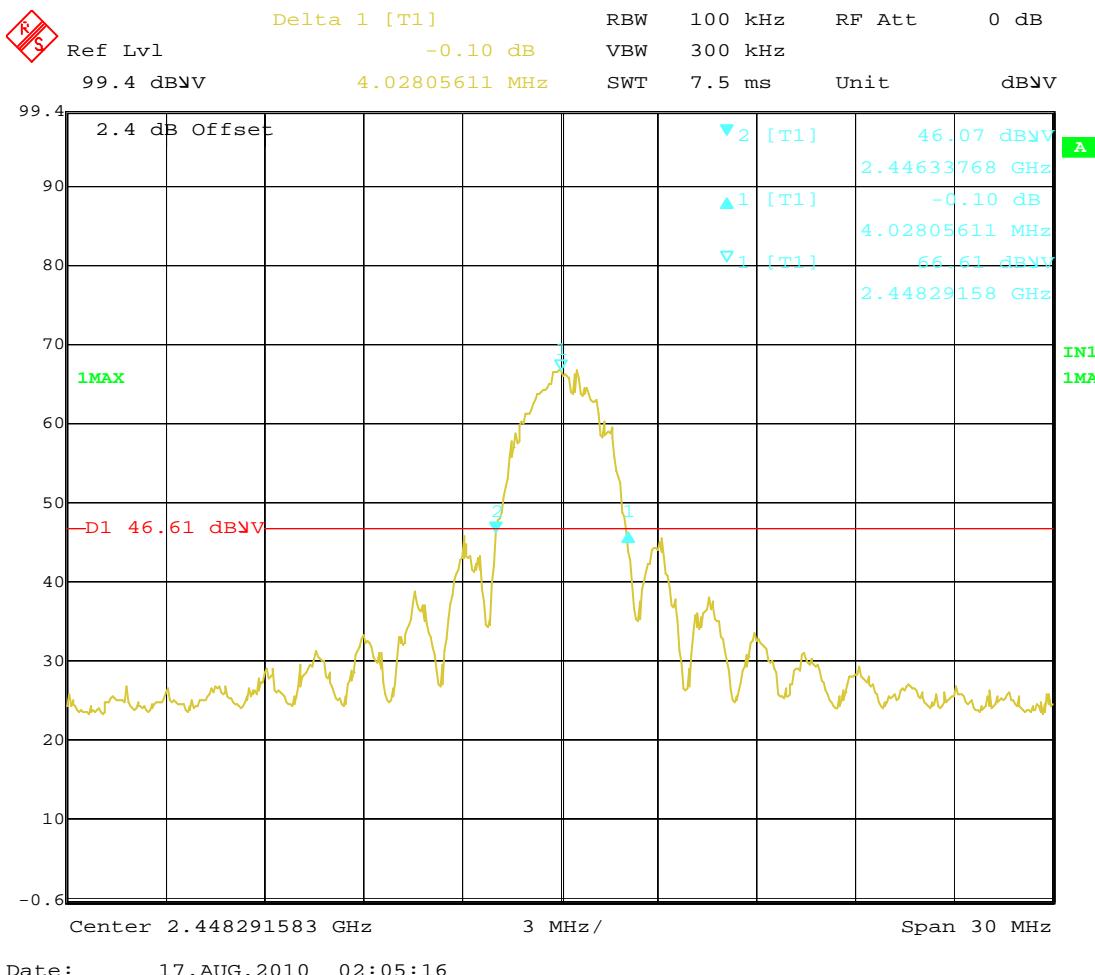

Top Channel:

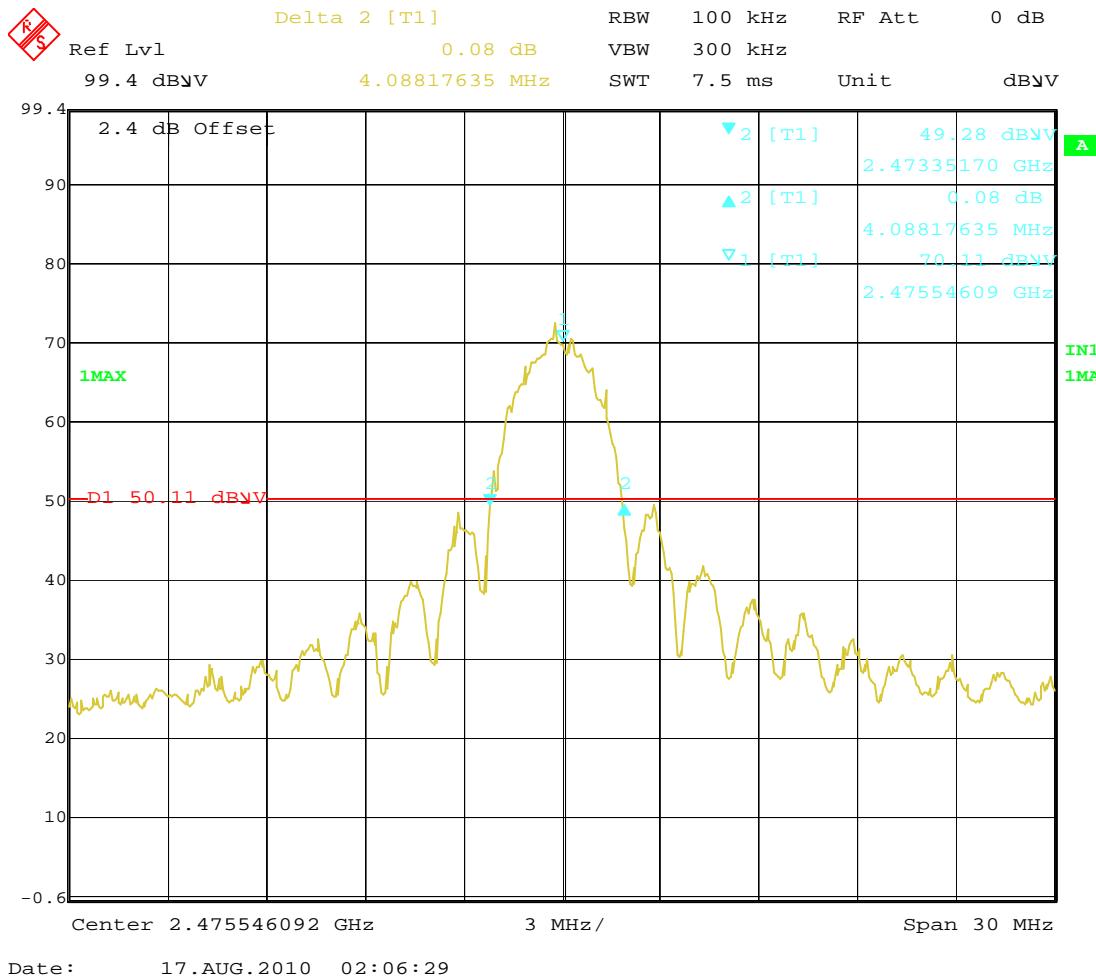


5. Antenna Requirement

According to FCC Part 15C § 15.203,


- a), An intentional radiator shall be de-signed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.
- b), The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The EUT use of a nonstandard antenna connector (Reverse SMA), so the EUT meets the requirements of antenna. Detial please see the photos as following:

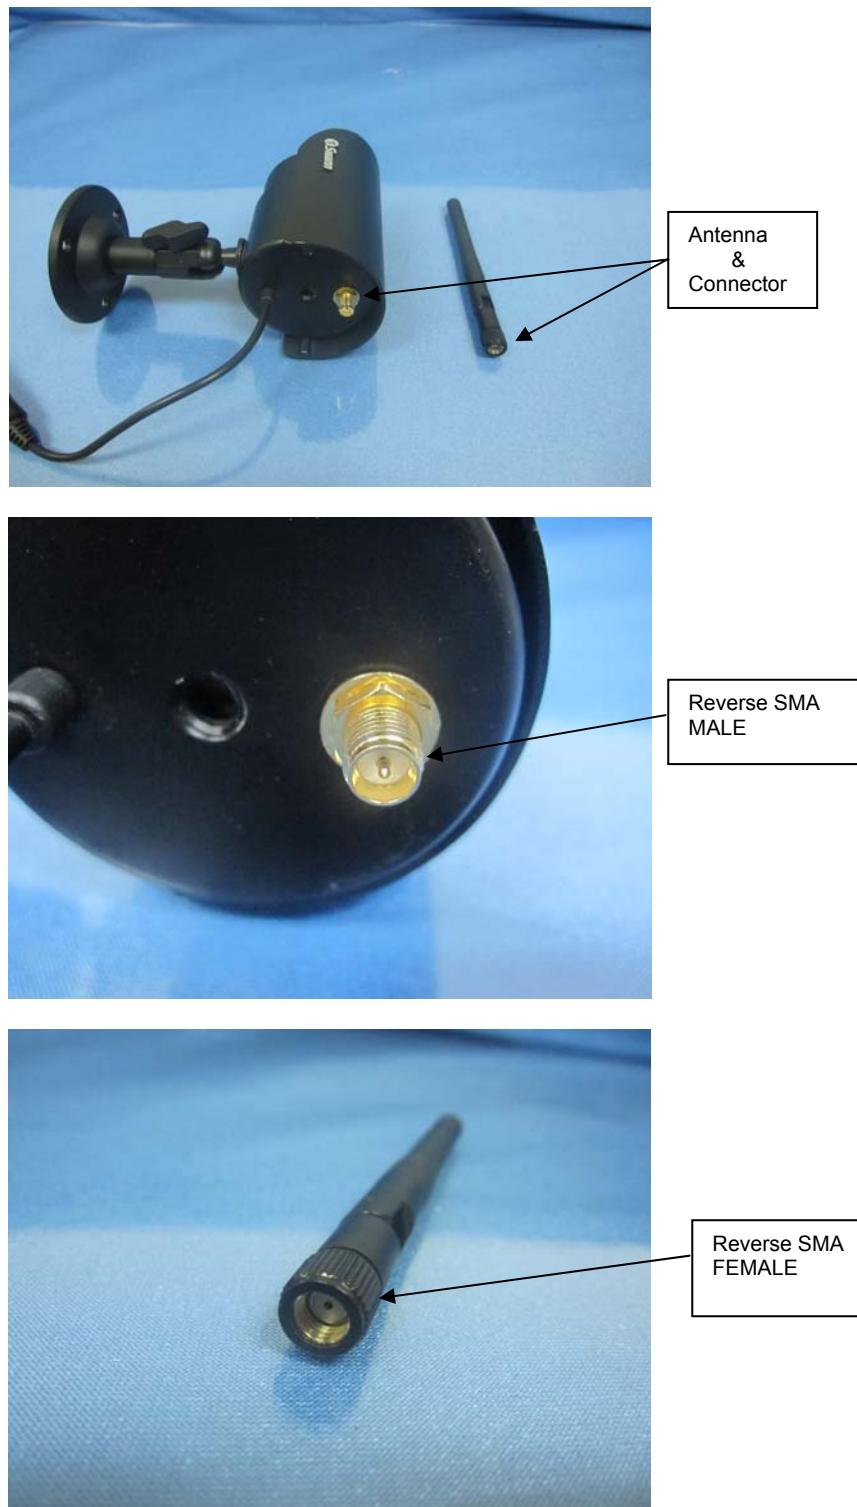

6. Test Setup Photos of the EUT





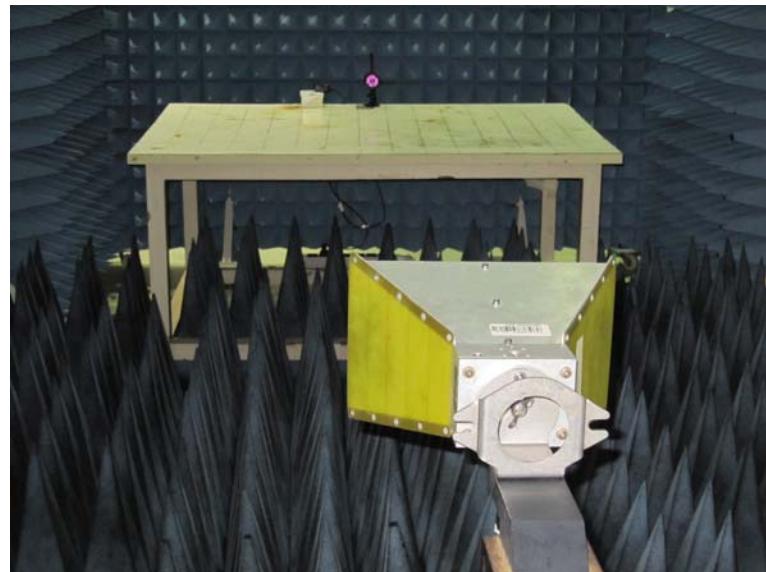




7. External and Internal Photos of the EUT




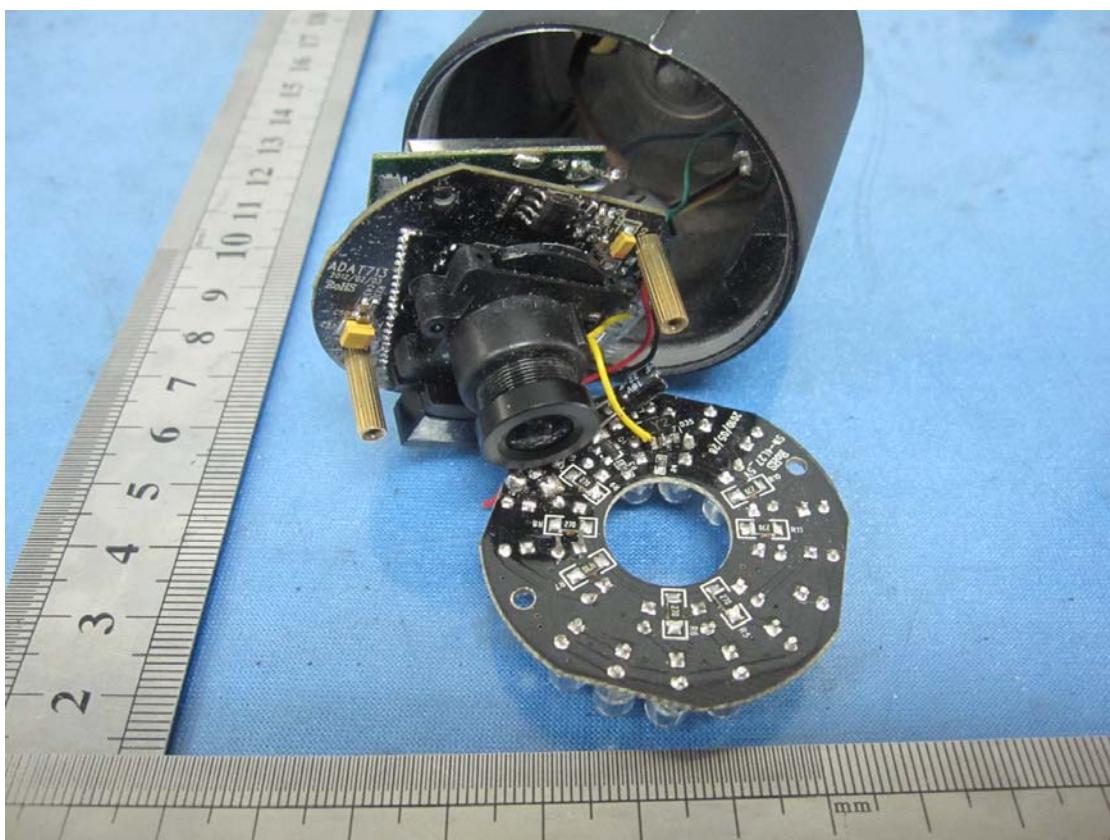


Internal Photos

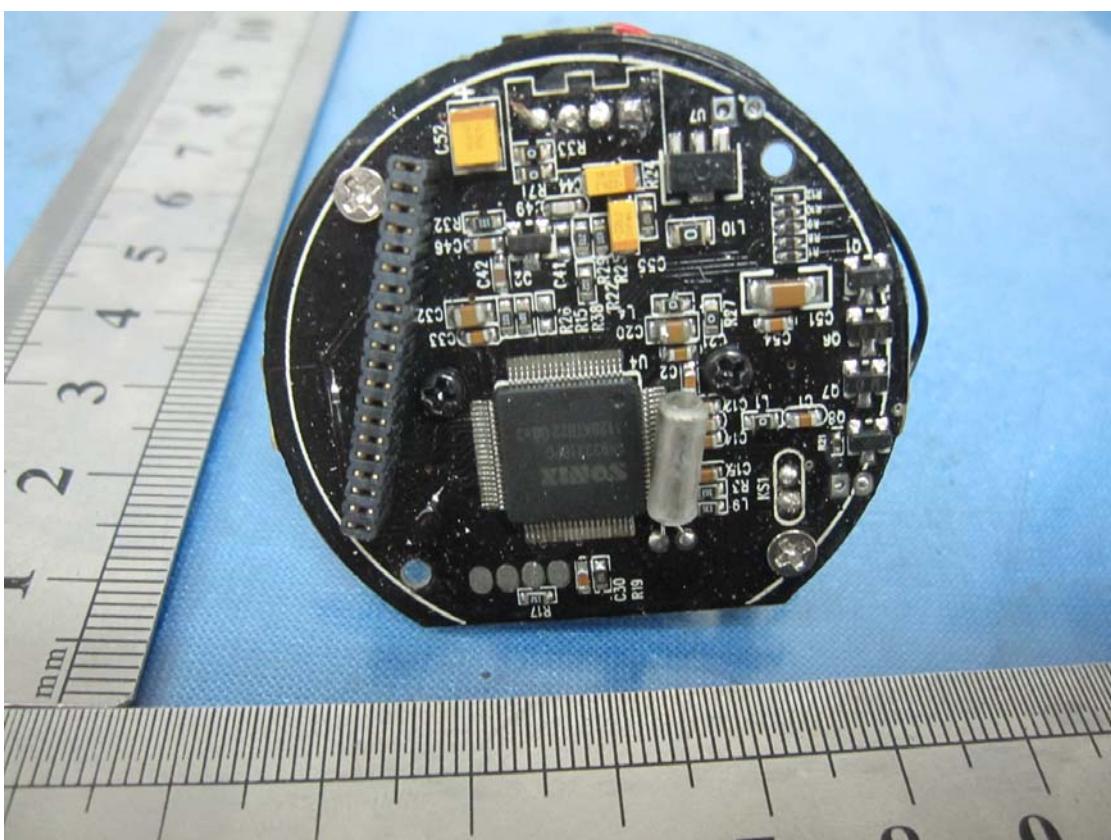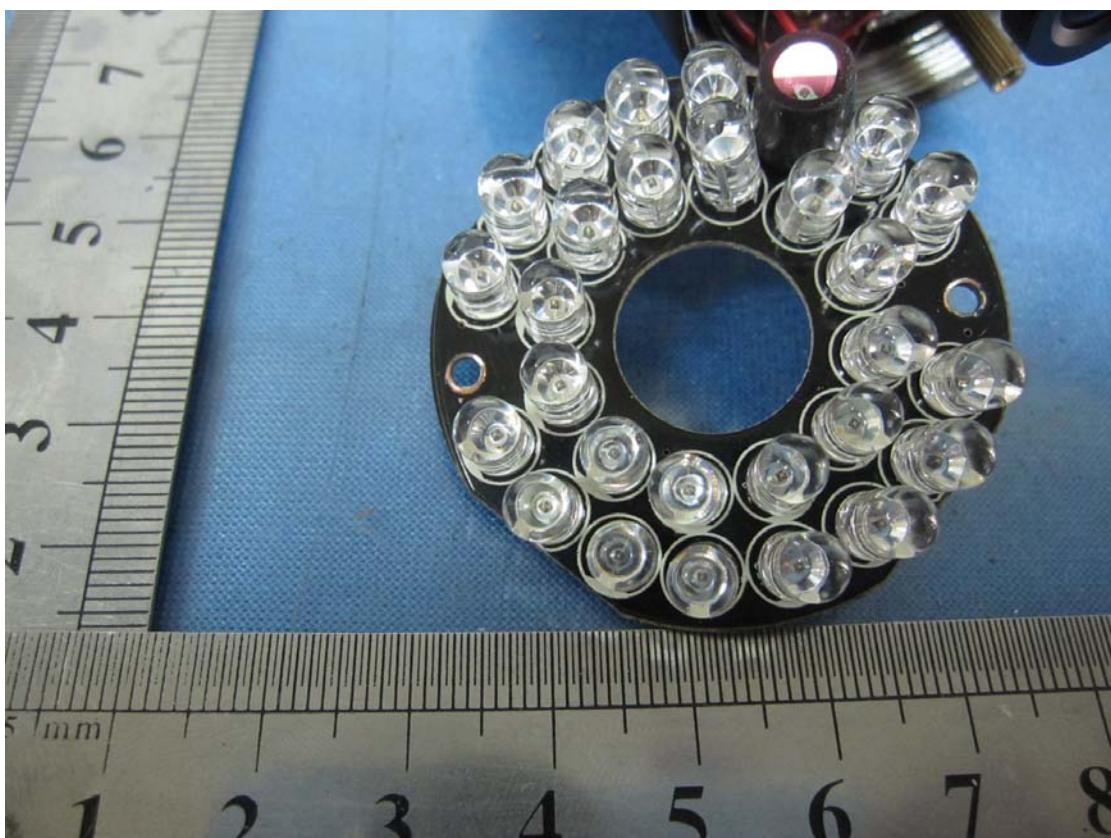

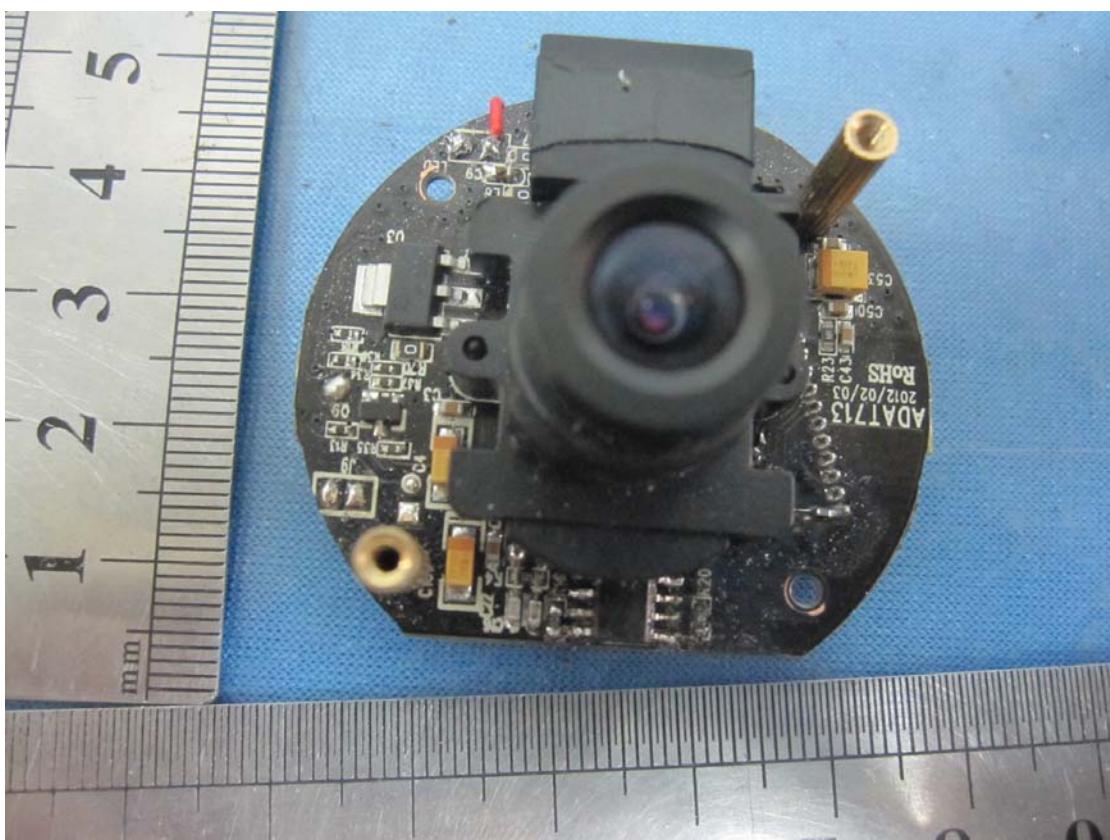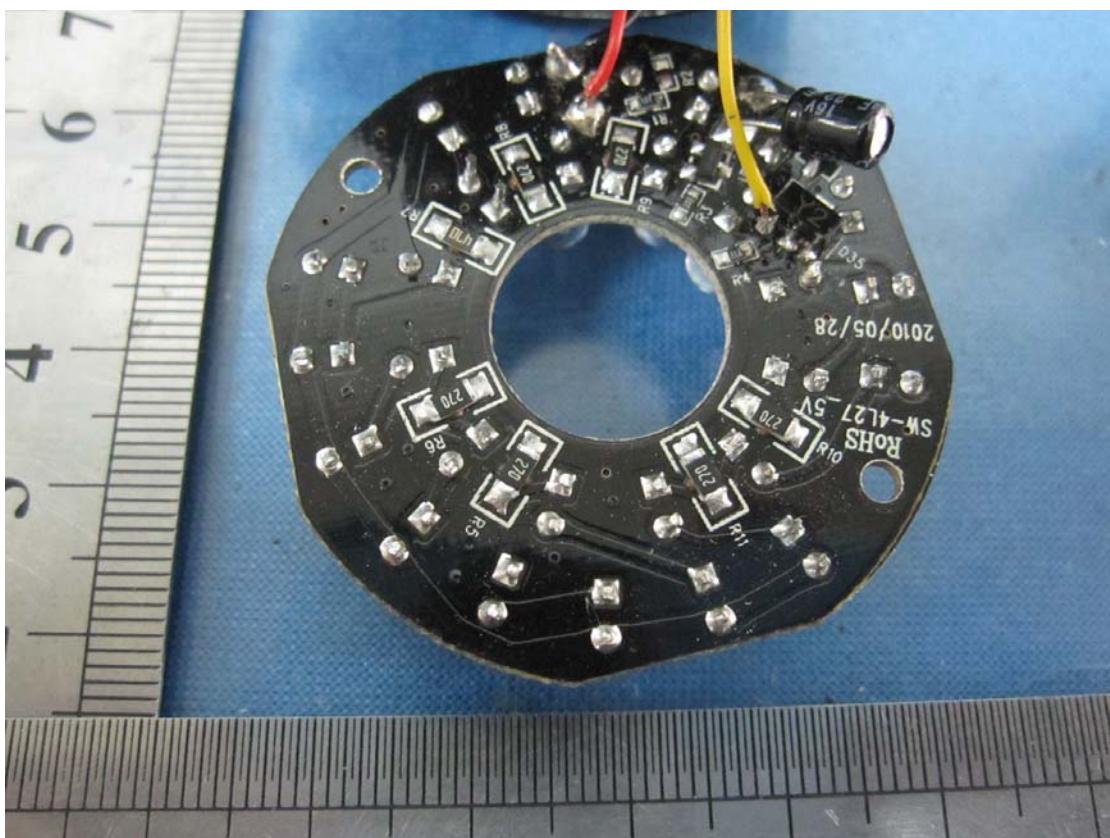

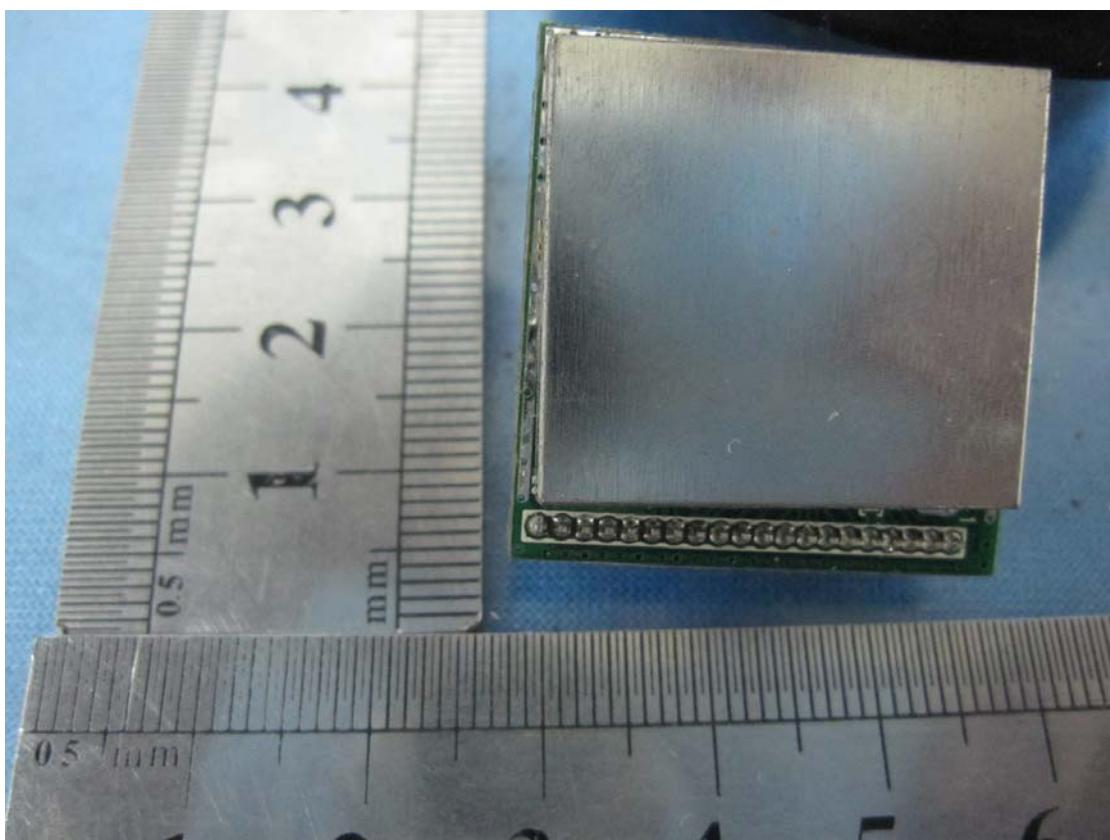

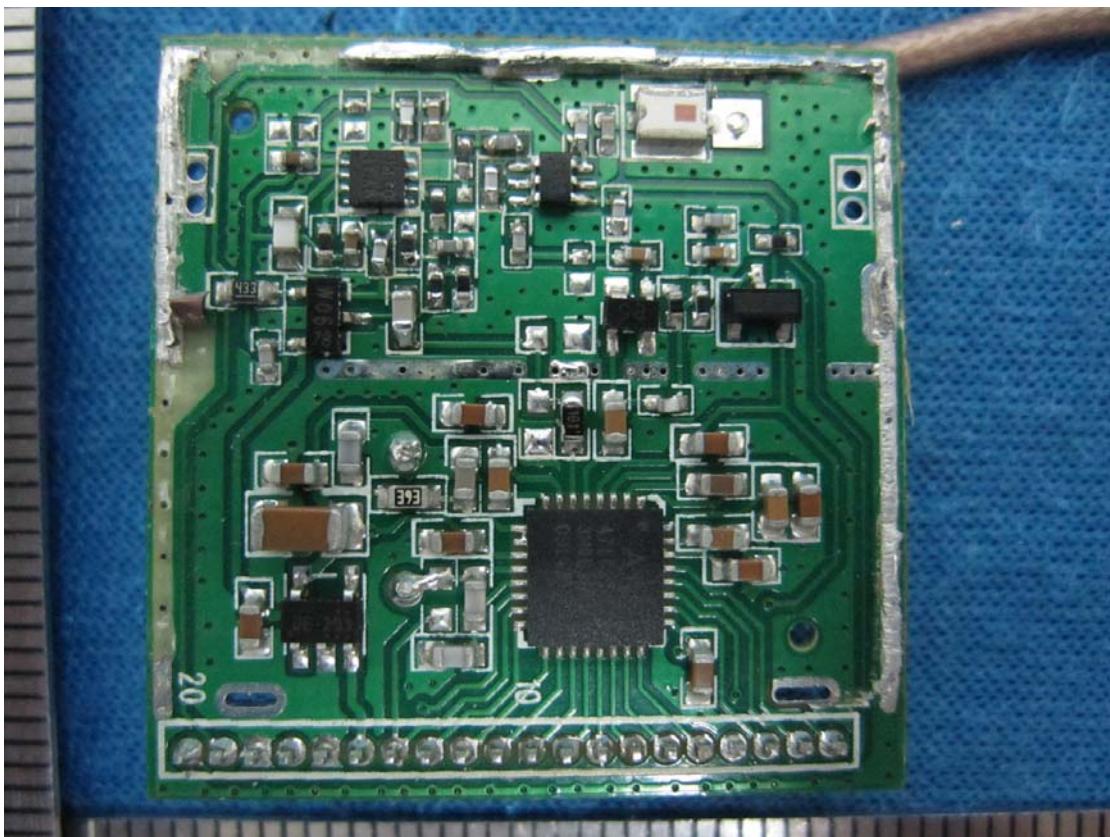

.....End of Report.....