



RF TEST REPORT

Product Name: AX3000 Wireless Dual-Band WiFi6 Router

Model Name: NX30, DIR-X3060Z, DIR-X3000, DIR-X3000Z

FCC ID: T58NX30R

Issued For : NETIS SYSTEMS CO., LTD

Floor 8, Building B, TongFang Information Harbor, No.11 Langshan Road, Nanshan District, Shenzhen, China

Issued By : Shenzhen LGT Test Service Co., Ltd.

Room 205, Building 13, Zone B, Chen Hsong Industrial Park, No.177 Renmin West Road, Jinsha Community, Kengzi Street, Pingshan New District, Shenzhen, China

Report Number: LGT23C033RF01

Sample Received Date: Mar. 16, 2023

Date of Test: Mar. 16, 2023 – Mar. 28, 2023

Date of Issue: Mar. 28, 2023

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.



TEST REPORT CERTIFICATION

Applicant NETIS SYSTEMS CO., LTD
Address Floor 8, Building B, TongFang Information Harbor, No.11 Langshan Road, Nanshan District, Shenzhen, China
Manufacturer NETIS SYSTEMS CO., LTD
Address Floor 8, Building B, TongFang Information Harbor, No.11 Langshan Road, Nanshan District, Shenzhen, China
Factory Jiangxi Netis Technology Co., Ltd.
Address No.6 tongjiu road, Economic and Technological Development District, Pingxiang, Jiangxi, China.
Product Name AX3000 Wireless Dual-Band WiFi6 Router
Trade Mark N/A
Model Name NX30, DIR-X3060Z, DIR-X3000, DIR-X3000Z
Sample Status: Normal

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC Part 15.247, Subpart C ANSI C63.10-2013	PASS

Prepared by:

Zane Shan

Zane Shan
Engineer

Approved by:

Vita Li

Vita Li
Technical Director





Table of Contents	Page
1. SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2. GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF THE TEST MODES	10
2.3 TEST SOFTWARE AND POWER LEVEL	11
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3. EMC EMISSION TEST	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.2 RADIATED EMISSION MEASUREMENT	17
4. CONDUCTED SPURIOUS & BAND EDGE EMISSION	31
4.1 LIMIT	31
4.2 TEST PROCEDURE	31
4.3 DEVIATION FROM STANDARD	31
4.4 TEST SETUP	31
4.5 EUT OPERATION CONDITIONS	31
4.6 TEST RESULTS	31
5. POWER SPECTRAL DENSITY TEST	32
5.1 LIMIT	32
5.2 TEST PROCEDURE	32
5.3 DEVIATION FROM STANDARD	32
5.4 TEST SETUP	32
5.5 EUT OPERATION CONDITIONS	32
5.6 TEST RESULTS	32
6. BANDWIDTH TEST	33
6.1 LIMIT	33
6.2 TEST PROCEDURE	33
6.3 DEVIATION FROM STANDARD	33
6.4 TEST SETUP	33
6.5 EUT OPERATION CONDITIONS	33
6.6 TEST RESULTS	33
7. PEAK OUTPUT POWER TEST	34



Table of Contents	Page
7.1 LIMIT	34
7.2 TEST PROCEDURE	34
7.3 DEVIATION FROM STANDARD	34
7.4 TEST SETUP	34
7.5 EUT OPERATION CONDITIONS	34
7.6 TEST RESULTS	34
8. ANTENNA REQUIREMENT	35
8.1 STANDARD REQUIREMENT	35
8.2 EUT ANTENNA	35
APPENDIX I:TEST RESULTS	36
DUTY CYCLE	36
MAXIMUM PEAK CONDUCTED OUTPUT POWER	53
-6DB BANDWIDTH	55
MAXIMUM POWER SPECTRAL DENSITY LEVEL	68
BAND EDGE	90
CONDUCTED RF SPURIOUS EMISSION	107
APPENDIX II:PHOTOS OF TEST SETUP	132



Revision History

Rev.	Issue Date	Contents
00	Mar. 28, 2023	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:
KDB 558074 D01 15.247 Meas Guidance v05r02.

FCC Part 15.247, Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--
15.247 (a)(2)	6dB Bandwidth	PASS	--
15.247 (b)(3)	Output Power	PASS	--
15.209	Radiated Spurious Emission	PASS	--
15.247 (d)	Conducted Spurious & Band Edge Emission	PASS	--
15.247 (e)	Power Spectral Density	PASS	--
15.205	Restricted Band Edge Emission	PASS	--
Part 15.247(d)/ Part 15.209(a)	Band Edge Emission	PASS	--
15.203	Antenna Requirement	PASS	--

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2013.



1.1 TEST FACTORY

Company Name:	Shenzhen LGT Test Service Co., Ltd.
Address:	Room 205, Building 13, Zone B, Chen Hsong Industrial Park, No.177 Renmin West Road, Jinsha Community, Kengzi Street, Pingshan New District, Shenzhen, China
Accreditation Certificate	A2LA Certificate No.: 6727.01
	FCC Registration No.: 746540
	CAB ID: CN0136

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

Parameter	Uncertainty
Occupied Channel Bandwidth	$\pm 3.2 \%$
RF Output Power, Conducted	$\pm 0.71 \text{ dB}$
Power Spectral Density, Conducted	$\pm 1.57 \text{ dB}$
Unwanted Emission, Conducted	$\pm 0.63 \text{ dB}$
Conducted emission	$\pm 2.80 \text{ dB}$
All Emissions, Radiated (0.009-30MHz)	$\pm 2.16 \text{ dB}$
All Emissions, Radiated (30MHz-1GHz)	$\pm 4.40 \text{ dB}$
All Emissions, Radiated (1GHz-18GHz)	$\pm 5.49 \text{ dB}$
Temperature	$\pm 0.5^\circ \text{C}$
Humidity	$\pm 2\%$
Duty Cycle	$\pm 2.3\%$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	AX3000 Wireless Dual-Band WiFi6 Router	
Trade Mark	N/A	
Model Name	NX30	
Series Model	DIR-X3060Z, DIR-X3000, DIR-X3000Z	
Model Difference	No difference, Just sold to D-link	
Product Description	The EUT is a AX3000 Wireless Dual-Band WiFi6 Router	
	Operation Frequency:	802.11b/g/n/ax(20MHz): 2412~2462 MHz 802.11n/ax(40MHz):2422~2452MHz
	Modulation Type:	802.11b(DSSS):CCK,DQPSK,DBPSK 802.11g(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11ax(OFDM,OFDMA): BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024QAM
	Number of Channel:	13CH/9CH
	Antenna Designation:	Omni-directional
	Antenna Gain(dBi):	ANT1: 4.96dBi ANT2: 5.55dBi MIMO: 8.27dBi
Channel List	Please refer to the Note 2.	
Adapter	Model: ES098C-US-1200150 Input: 100-240V ~ 50/60Hz 0.5A Output: 12.0V1.5A Model: KL-WA120150-D Input:100-240V~50/60Hz 0.7A Ouptut: 12.0V1.5A	
Battery	N/A	
Hardware Version	N/A	
Software Version	N/A	
Connecting I/O Port(s)	Please refer to the Note 1.	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.



Operation Frequency of channel			
802.11b/g/n/ax(20MHz)		Channel List for 802.11n/ax(40MHz)	
Channel	Frequency	Channel	Frequency
01	2412	03	2422
02	2417	04	2427
03	2422	05	2432
04	2427	06	2437
05	2432	07	2442
06	2437	08	2447
07	2442	09	2452
08	2447		
09	2452		
10	2457		
11	2462		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Carrier Frequency Channel

2.4GHz Test Frequency:

For 802.11b/g/n/ax (HT20)		For 802.11n/ax (HT40)	
Channel	Freq.(MHz)	Channel	Freq.(MHz)
01	2412	03	2422
06	2437	06	2437
11	2462	09	2452

3KDB 662911 D01 Multiple Transmitter Output v02r01

2) Directional Gain Calculations for In-Band Measurements

a) Basic methodology with NANT transmit antennas, each with the same directional gain GANT dBi, being driven by NANT transmitter outputs of equal power. Directional gain is to be computed as follows:

(i) If any transmit signals are correlated with each other,

Directional gain = GANT + 10 log(NANT) dBi

(ii) If all transmit signals are completely uncorrelated with each other,

Directional gain = GANT

4

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	RF link	U00T01S104N00832	PCB	RP-SMA	ANT 1:4.96	2.4G WIFI ANT
2		U00T01S104N00833		RP-SMA	ANT 2:5.55 MIMO:8.27	

Note: The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report.



2.2 DESCRIPTION OF THE TEST MODES

Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Data Rate
Mode 1	TX IEEE 802.11b CH1	1 Mbps
Mode 2	TX IEEE 802.11b CH6	1 Mbps
Mode 3	TX IEEE 802.11 b CH11	1 Mbps
Mode 4	TX IEEE 802.11g CH1	6 Mbps
Mode 5	TX IEEE 802.11g CH6	6 Mbps
Mode 6	TX IEEE 802.11g CH11	6 Mbps
Mode 7	TX IEEE 802.11n HT20/ax CH1	MCS 0
Mode 8	TX IEEE 802.11n HT20/ax CH6	MCS 0
Mode 9	TX IEEE 802.11n HT20/ax CH11	MCS 0
Mode 10	TX IEEE 802.11n/ax HT40 CH3	MCS 0
Mode 11	TX IEEE 802.11n/ax HT40 CH6	MCS 0
Mode 12	TX IEEE 802.11n/ax HT40 CH9	MCS 0

Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

AC Conducted Emission

Test Case	
AC Conducted Emission	Mode13: Keeping TX + WLAN Link



2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Test software Version	Test program: 2.4G WIFI	
QATool_Dbg 0.0.2.73	b	10
	g	10
	n20	10
	n40	10
	ax20	10
	ax40	10

2.4 DESCRIPTION OF necessary accessories AND support units

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Accessories Equipment

Description	Manufacturer	Model	S/N	Rating
Adapter	Xiamen Keli Electronics Co., Ltd	KL-WA120150-D	N/A	Input:100-240V ~ 50/60Hz 0.7A Output:12.0V, 1.5A
Adapter	Shenzhen East Sun Electronic Co.,Ltd	ES098C-US-1200 150	N/A	Input:100-240V ~ 50/60Hz 0.5A Output:12.0V, 1.5A
RJ45 Cable	N/A	N/A	N/A	N/A

Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating
Laptop	HUAWEI	HKF-16	N/A	N/A
Docking Station	HUAWEI	CD12	N/A	N/A
RJ45 Cable	N/A	N/A	N/A	N/A

Note:

(1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESU8	100372	2022.04.12	2023.04.11
Active loop Antenna	R&S	HFH2-Z2	POS871398181	2022.06.02	2024.06.01
Spectrum Analyzer	Keysight	N9010B	MY60242508	2022.04.29	2023.04.28
Bilog Antenna	Schwarzbeck	VULB 9168	01447	2022.12.12	2024.12.11
Horn Antenna	Schwarzbeck	3115	10SL0060	2022.06.02	2024.06.01
Pre-amplifier(0.1M-3GHz)	HP	8447D	2727A05655	2022.04.11	2023.04.10
Pre-amplifier(1-26.5G)	Agilent	8449B	3008A4722	2022.04.13	2023.04.12
RE Cable (9K-1G)	N.A	R01	N.A	2022.05.05	2023.05.04
RE Cable (1-26G)	N.A	R02	N.A	2022.05.05	2023.05.04
Wireless Communications Test Set	R&S	CMW 500	137737	2022.04.29	2023.04.28
Temperature & Humidity	KTJ	TA218B	N.A	2022.05.05	2023.05.04
Testing Software	EZ-EMC(Ver.STSLAB 03A1 RE)				

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESU8	100372	2022.04.12	2023.04.11
LISN	COM-POWER	LI-115	02032	2022.04.13	2023.04.12
LISN	Schwarzbeck	NNLK 8121	00847	2022.08.19	2023.08.18
CE Cable	N.A	C01	N.A	2022.05.05	2023.05.04
Transient Limiter	CYBERTEK	EM5010A	E2250100049	2022.08.19	2023.08.18
Temperature & Humidity	KTJ	TA218B	N.A	2022.05.05	2023.05.04
Testing Software	EZ-EMC(Ver.EMC-CON 3A1.1)				

RF Connected Test

RF Conducted Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
Signal Analyzer	Keysight	N9010B	MY60242508	2022.04.29	2023.04.28
RF Automatic Test system	MW	MW200-RFCB	MW220322LG	2022.04.29	2023.04.28
MXG Vector Signal Generator	Keysight	N5182B	MY59100717	2022.06.02	2023.06.01
Temperature& Humidity test chamber	AISRY	LX-1000L	171200018	2022.05.10	2023.05.09
Attenuator	eastsheep	90db	N.A	2022.04.29	2023.04.28
Temperature & Humidity	KTJ	TA218B	N.A	2022.05.05	2023.05.04
Testing Software	MTS8310_V2.0.0.0_MW				



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Conducted Emission limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

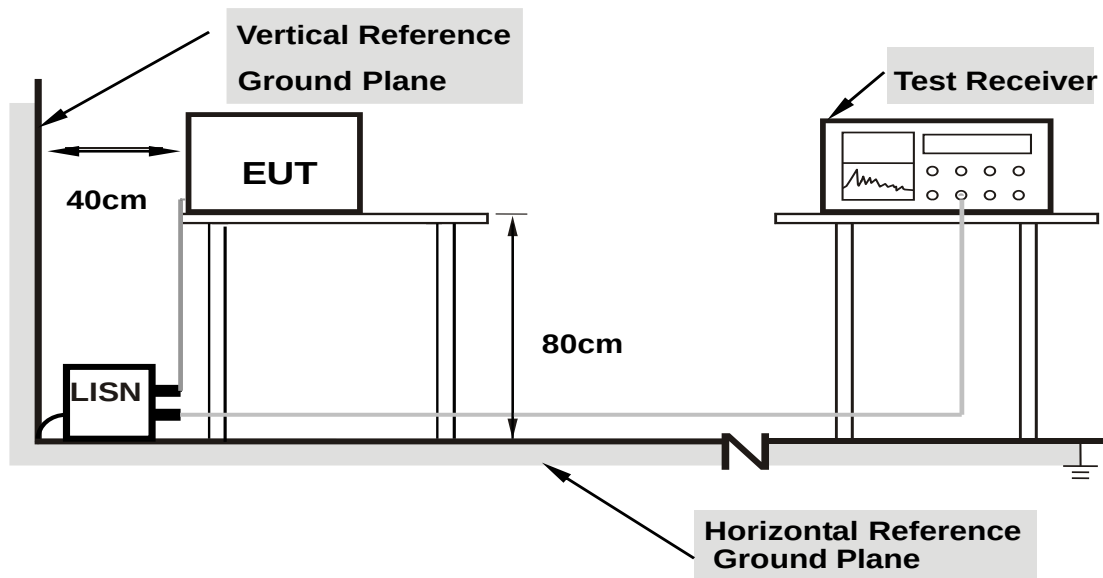

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.


3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.1.5 TEST RESULT


Project: LGT23C033	Test Engineer: Dylan.shi
EUT: AX3000 Wireless Dual-Band WiFi6 Router	Temperature: 24.8°C
M/N: NX30	Humidity: 64%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-03-22
Test Mode: 2.4GHz Wi-Fi TX	
Note:	

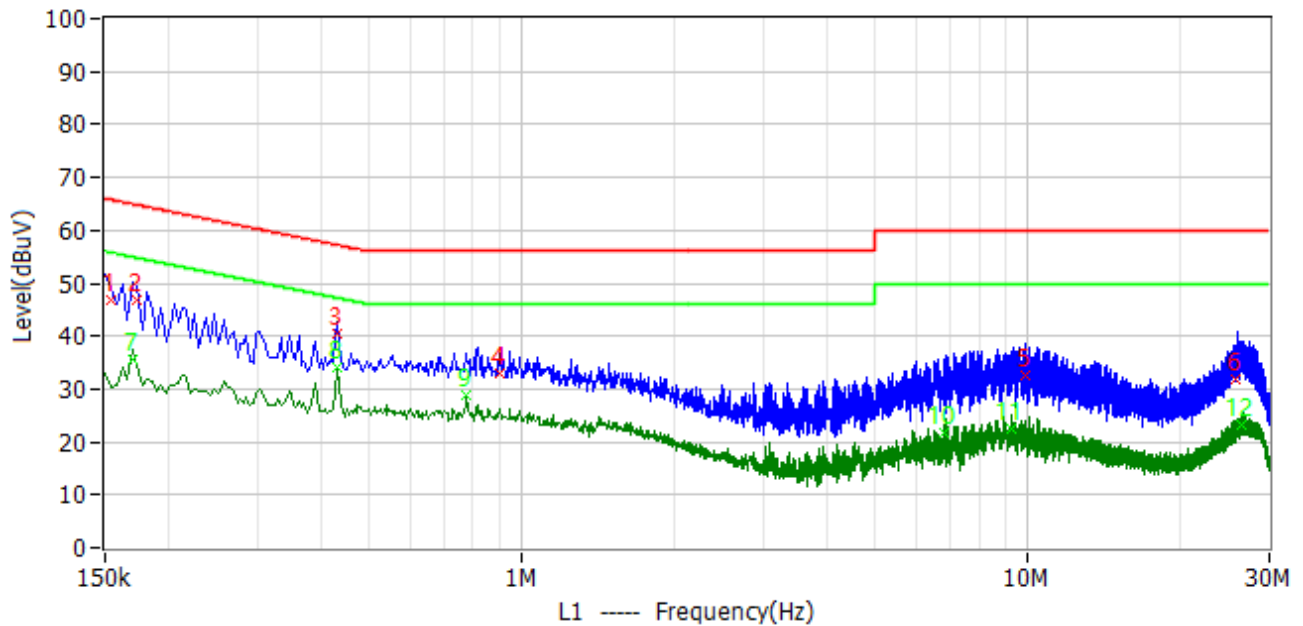

No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1	154.000kHz	36.25	10.60	46.85	65.78	-18.93	QP	L1
2	174.000kHz	36.27	10.60	46.87	64.77	-17.90	QP	L1
3	430.000kHz	29.92	10.60	40.52	57.25	-16.73	QP	L1
4	902.000kHz	22.25	10.60	32.85	56.00	-23.15	QP	L1
5	9.858MHz	21.68	10.90	32.58	60.00	-27.42	QP	L1
6	25.834MHz	20.68	11.30	31.98	60.00	-28.02	QP	L1
7	170.000kHz	25.11	10.60	35.71	54.96	-19.25	AV	L1
8	430.000kHz	23.41	10.60	34.01	47.25	-13.24	AV	L1
9	778.000kHz	18.32	10.60	28.92	46.00	-17.08	AV	L1
10	6.834MHz	10.82	10.80	21.62	50.00	-28.38	AV	L1
11	9.258MHz	11.72	10.90	22.62	50.00	-27.38	AV	L1
12	26.514MHz	11.82	11.30	23.12	50.00	-26.88	AV	L1



Project: LGT23C033	Test Engineer: Dylan.shi
EUT: AX3000 Wireless Dual-Band WiFi6 Router	Temperature: 24.8°C
M/N: NX30	Humidity: 64%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-03-22
Test Mode: 2.4GHz Wi-Fi TX	
Note:	

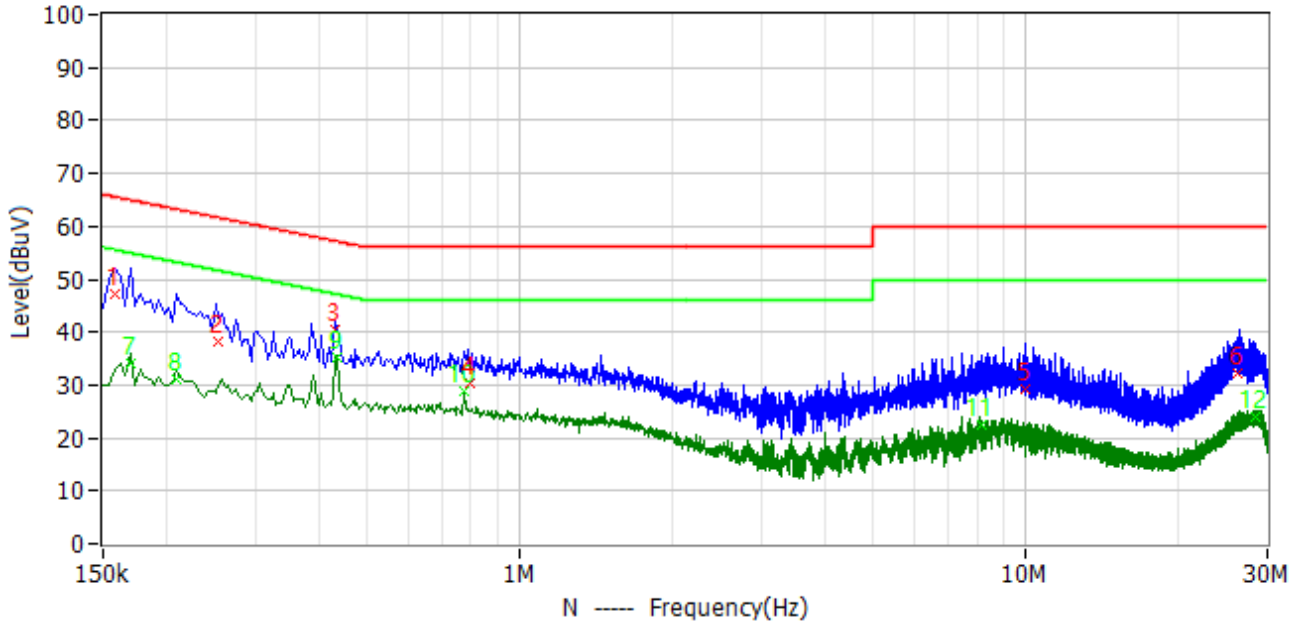

No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1	158.000kHz	36.74	10.60	47.34	65.57	-18.23	QP	N
2	254.000kHz	27.51	10.60	38.11	61.63	-23.52	QP	N
3	430.000kHz	29.98	10.60	40.58	57.25	-16.67	QP	N
4	798.000kHz	19.62	10.60	30.22	56.00	-25.78	QP	N
5	9.990MHz	18.30	10.90	29.20	60.00	-30.80	QP	N
6	26.118MHz	20.54	11.50	32.04	60.00	-27.96	QP	N
7	170.000kHz	23.42	10.60	34.02	54.96	-20.94	AV	N
8	210.000kHz	20.41	10.60	31.01	53.21	-22.20	AV	N
9	434.000kHz	24.65	10.60	35.25	47.18	-11.93	AV	N
10	778.000kHz	18.12	10.60	28.72	46.00	-17.28	AV	N
11	8.150MHz	11.71	10.80	22.51	50.00	-27.49	AV	N
12	28.342MHz	12.62	11.50	24.12	50.00	-25.88	AV	N



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2013 below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (1000MHz-25GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			



For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP/AV
Start Frequency	9 KHz/150KHz(Peak/QP/AV)
Stop Frequency	150KHz/30MHz(Peak/QP/AV)
RB / VB (emission in restricted band)	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz); 200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP
Start Frequency	30 MHz(Peak/QP)
Stop Frequency	1000 MHz (Peak/QP)
RB / VB (emission in restricted band)	120 KHz/300 KHz

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	1 MHz/3 MHz(Peak) 1 MHz/1/T MHz(AVG)

For Restricted band

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2310 to 2430 MHz Upper Band Edge: 2445 to 2500 MHz
RB / VB	1 MHz/3 MHz(Peak) 1 MHz/1/T MHz(AVG)



Receiver Parameter	Setting
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE


- The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

3.2.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

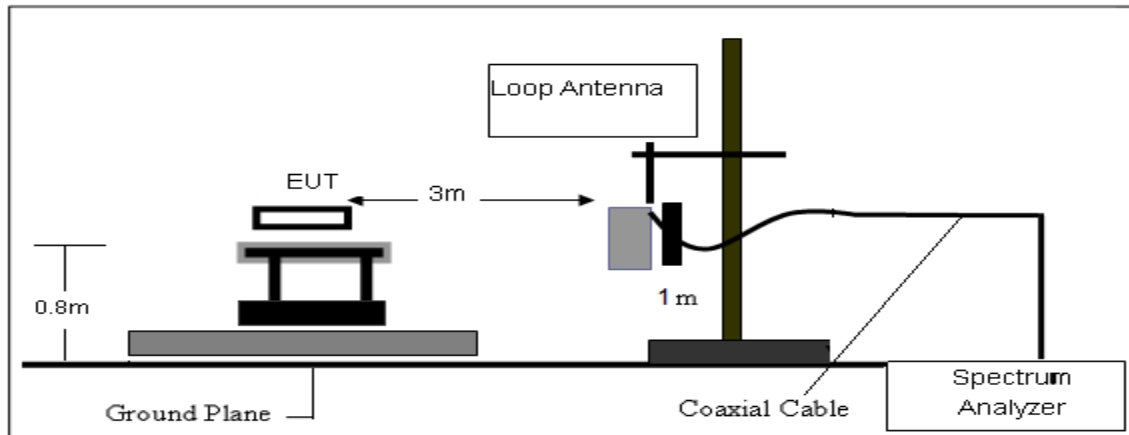

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

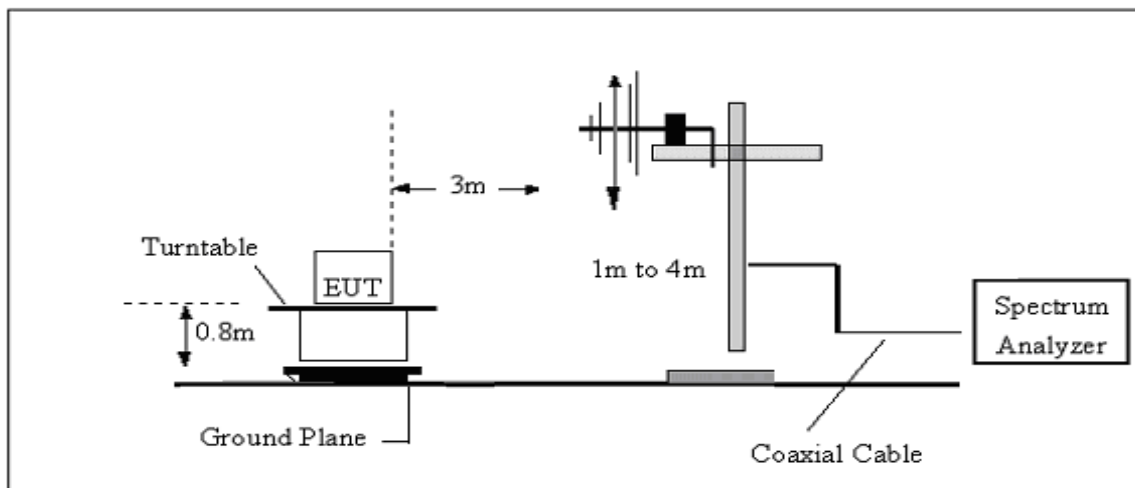

(C) Radiated Emission Test-Up Frequency Above 1GHz

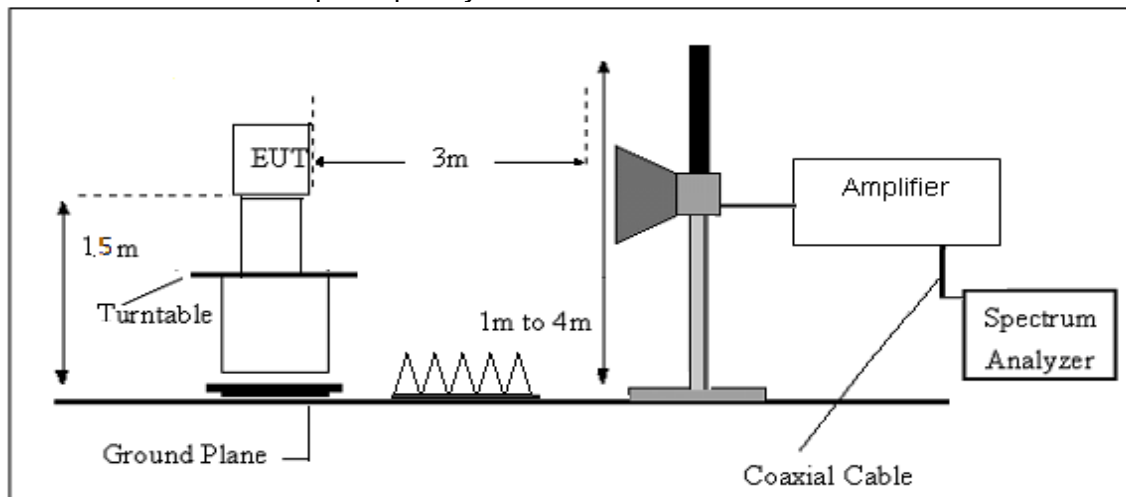

3.2.4 EUT OPERATING CONDITIONS

Please refer to section 3.1.4 of this report.



3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example


Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$




3.2.6 TEST RESULT

Project: LGT23C033	Test Engineer: Dylan.shi
EUT: AX3000 Wireless Dual-Band WiFi6 Router	Temperature: 23.5°C
M/N: NX30	Humidity: 61%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-03-22
Test Mode: 2.4G WIFI	
Note:	

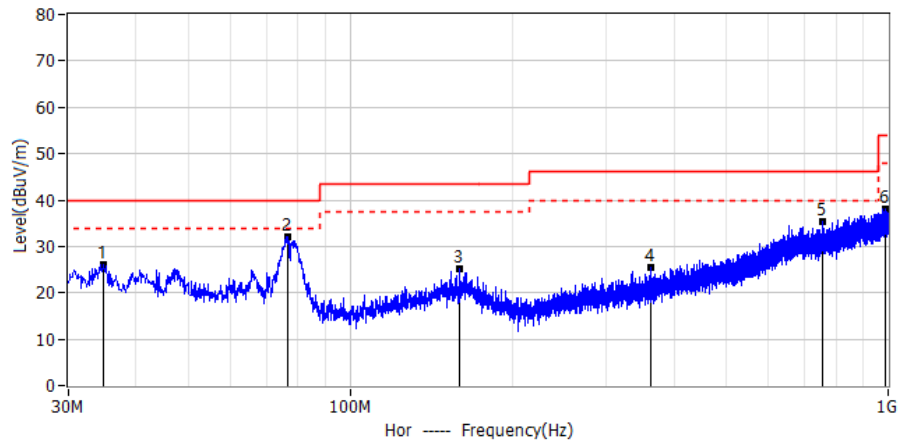


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	34.729MHz	7.60	18.52	26.12	40.00	-13.88	QP	Hor
2*	76.681MHz	16.06	16.14	32.20	40.00	-7.80	Q	Hor
3*	159.495MHz	5.28	19.85	25.13	43.50	-18.37	Q	Hor
4*	363.195MHz	3.83	21.66	25.49	46.00	-20.51	Q	Hor
5*	753.378MHz	4.82	30.55	35.37	46.00	-10.63	Q	Hor
6*	985.329MHz	3.67	34.50	38.17	54.00	-15.83	Q	Hor

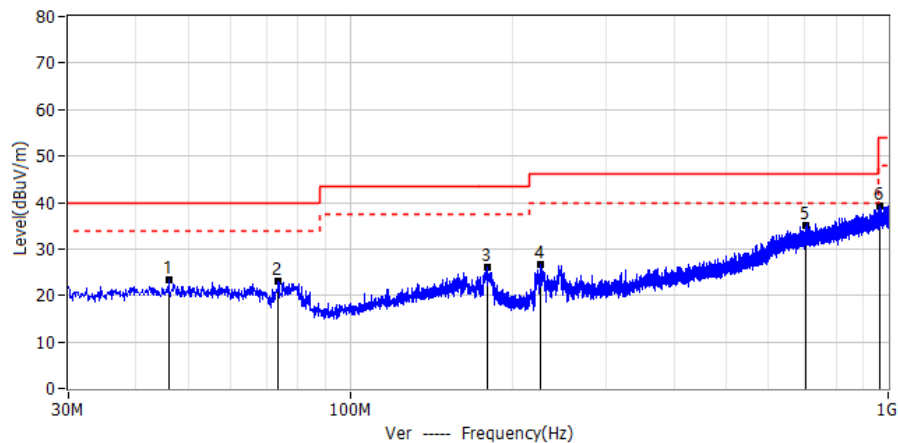

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	46.005MHz	4.22	19.25	23.47	40.00	-16.53	Q	Ver
2*	73.529MHz	6.02	17.02	23.04	40.00	-16.96	Q	Ver
3*	179.865MHz	7.30	18.84	26.14	43.50	-17.36	Q	Ver
4*	226.061MHz	9.79	16.90	26.69	46.00	-19.31	Q	Ver
5*	704.635MHz	5.00	29.91	34.91	46.00	-11.09	Q	Ver
6*	965.686MHz	4.92	34.26	39.18	54.00	-14.82	Q	Ver




Project: LGT23C033	Test Engineer: Dylan.shi
EUT: AX3000 Wireless Dual-Band WiFi6 Router	Temperature: 26.1°C
M/N: NX30	Humidity: 58%RH
Test Voltage: AC 120V/50Hz	Test Data: 2023-03-30
Test Mode: 802.11n20 2412	
Note:	

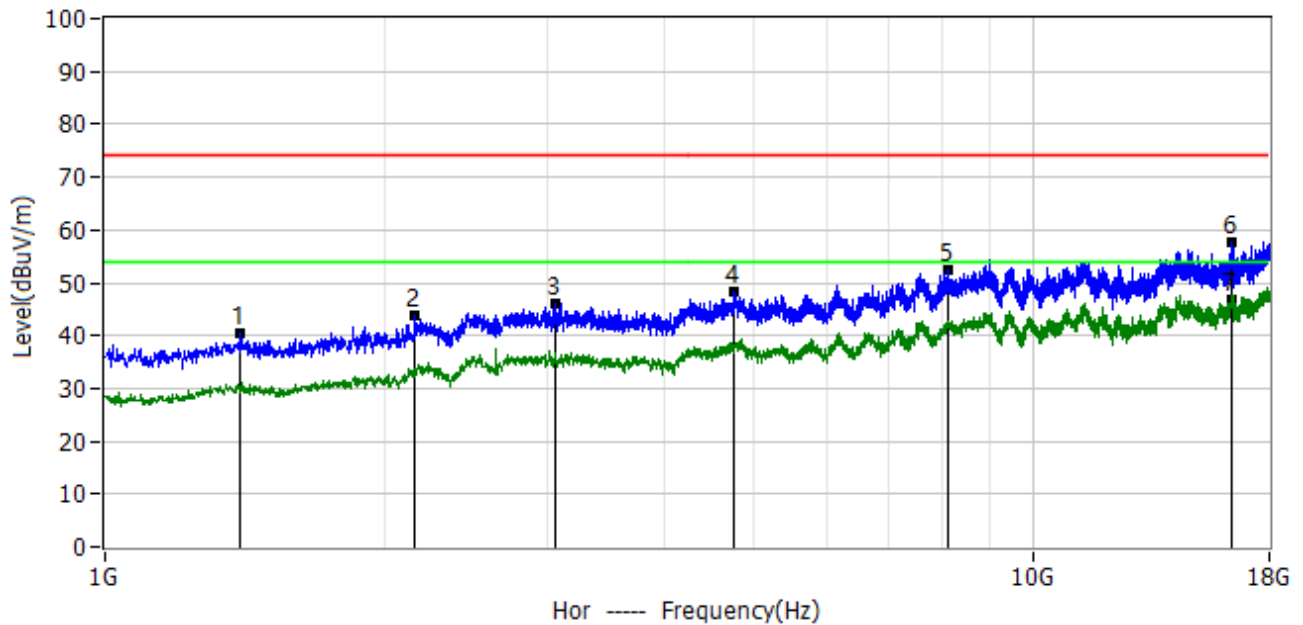

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.400GHz	61.73	-21.39	40.34	74.00	-33.66	PK	Hor
2*	2.154GHz	58.39	-14.62	43.77	74.00	-30.23	PK	Hor
3*	3.051GHz	54.33	-8.36	45.97	74.00	-28.03	PK	Hor
4*	4.774GHz	54.24	-5.97	48.27	74.00	-25.73	PK	Hor
5*	8.112GHz	56.09	-3.68	52.41	74.00	-21.59	PK	Hor
6*	16.366GHz	50.71	6.83	57.54	74.00	-16.46	PK	Hor
7*	16.366GHz	40.17	6.83	47.00	54.00	-7.00	AV	Hor




Project: LGT23C033	Test Engineer: Dylan.shi
EUT: AX3000 Wireless Dual-Band WiFi6 Router	Temperature: 26.1°C
M/N: NX30	Humidity: 58%RH
Test Voltage: AC 120V/50Hz	Test Data: 2023-03-30
Test Mode: 802.11n20 2412	
Note:	

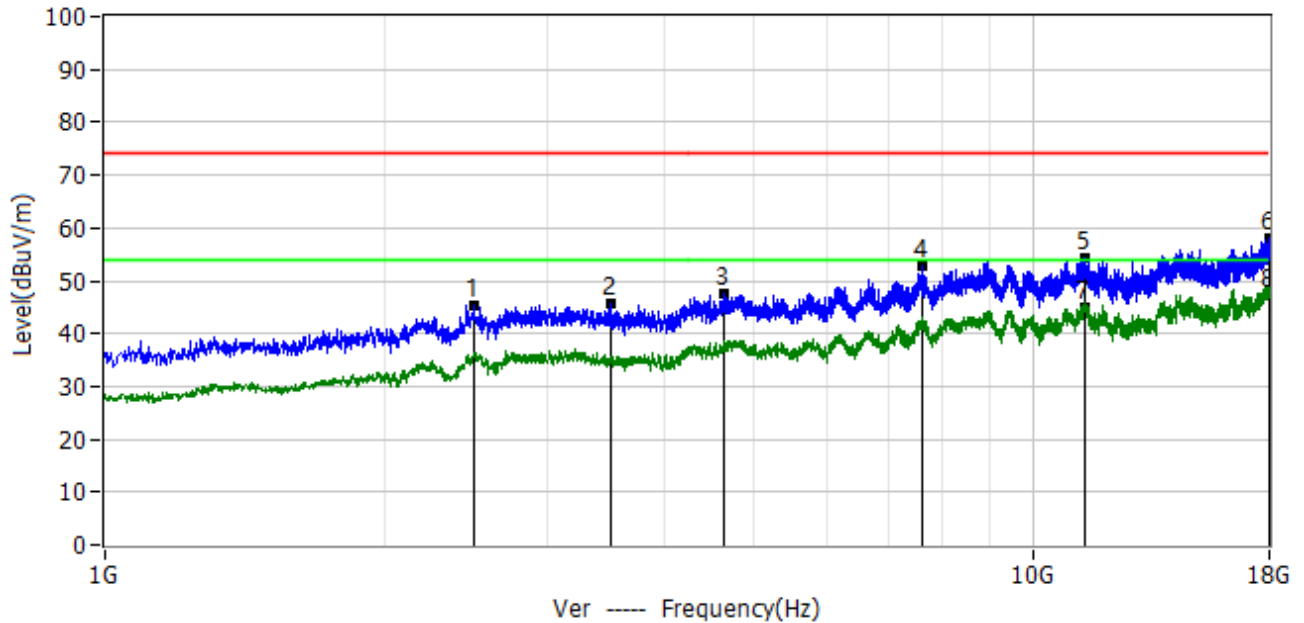

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2.496GHz	56.47	-11.03	45.44	74.00	-28.56	PK	Ver
2*	3.503GHz	54.08	-8.50	45.58	74.00	-28.42	PK	Ver
3*	4.655GHz	53.29	-5.87	47.42	74.00	-26.58	PK	Ver
4*	7.596GHz	57.08	-4.24	52.84	74.00	-21.16	PK	Ver
5*	11.393GHz	52.63	1.86	54.49	74.00	-19.51	PK	Ver
6*	17.996GHz	49.47	8.52	57.99	74.00	-16.01	PK	Ver
7*	11.393GHz	42.94	1.86	44.80	54.00	-9.20	AV	Ver
8*	17.996GHz	38.68	8.52	47.20	54.00	-6.80	AV	Ver




Project: LGT23C033	Test Engineer: Dylan.shi
EUT: AX3000 Wireless Dual-Band WiFi6 Router	Temperature: 26.1°C
M/N: NX30	Humidity: 58%RH
Test Voltage: AC 120V/50Hz	Test Data: 2023-03-30
Test Mode: 802.11n20 2437	
Note:	

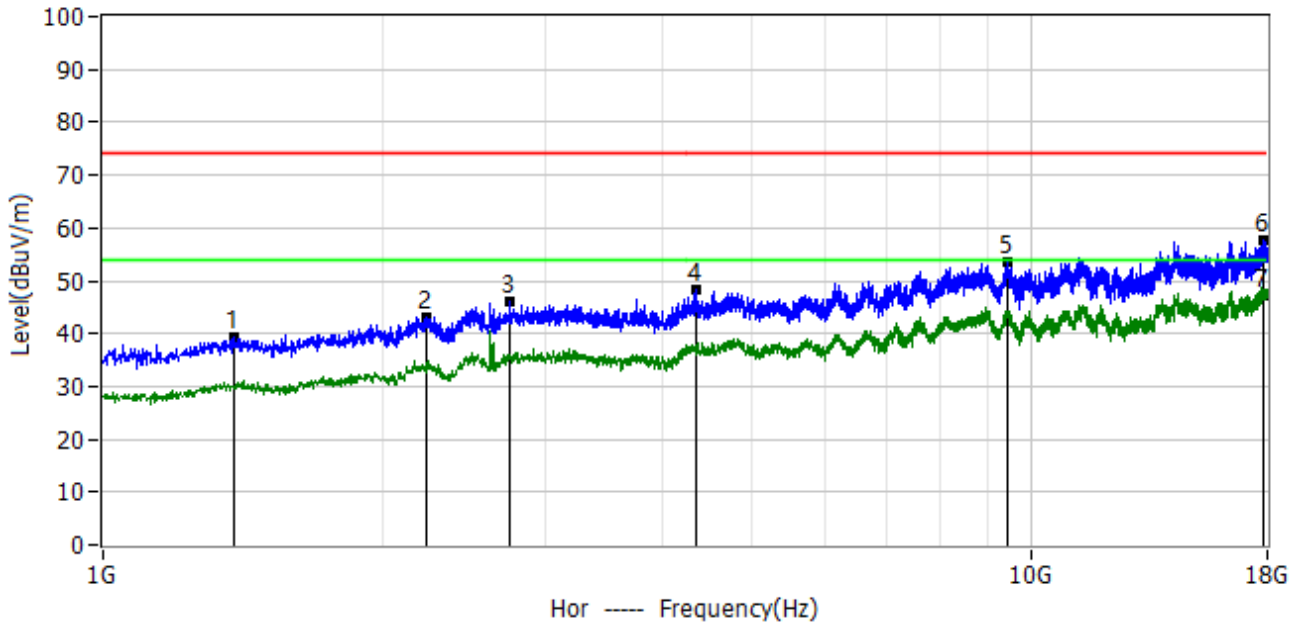

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.387GHz	60.76	-21.49	39.27	74.00	-34.73	PK	Hor
2*	2.230GHz	57.02	-13.81	43.21	74.00	-30.79	PK	Hor
3*	2.743GHz	55.83	-9.70	46.13	74.00	-27.87	PK	Hor
4*	4.368GHz	54.51	-6.31	48.20	74.00	-25.80	PK	Hor
5*	9.438GHz	54.63	-1.17	53.46	74.00	-20.54	PK	Hor
6*	17.826GHz	49.21	8.40	57.61	74.00	-16.39	PK	Hor
7*	17.826GHz	38.80	8.40	47.20	54.00	-6.80	AV	Hor




Project: LGT23C033	Test Engineer: Dylan.shi
EUT: AX3000 Wireless Dual-Band WiFi6 Router	Temperature: 26.1°C
M/N: NX30	Humidity: 58%RH
Test Voltage: AC 120V/50Hz	Test Data: 2023-03-30
Test Mode: 802.11n20 2437	
Note:	

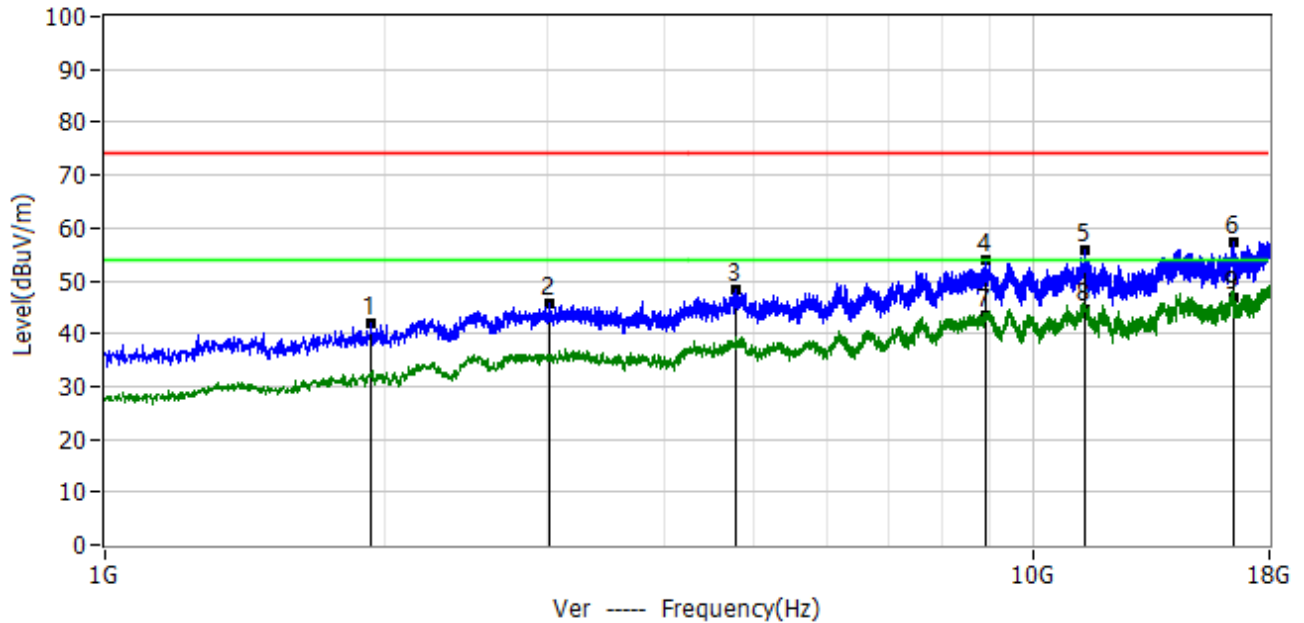

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.937GHz	58.69	-16.87	41.82	74.00	-32.18	PK	Ver
2*	3.019GHz	54.10	-8.35	45.75	74.00	-28.25	PK	Ver
3*	4.791GHz	54.29	-5.98	48.31	74.00	-25.69	PK	Ver
4*	8.916GHz	55.44	-1.41	54.03	74.00	-19.97	PK	Ver
5*	11.400GHz	54.03	1.87	55.90	74.00	-18.10	PK	Ver
6*	16.453GHz	50.49	6.97	57.46	74.00	-16.54	PK	Ver
7*	8.916GHz	45.01	-1.41	43.60	54.00	-10.40	AV	Ver
8*	11.400GHz	42.73	1.87	44.60	54.00	-9.40	AV	Ver
9*	16.453GHz	39.93	6.97	46.90	54.00	-7.10	AV	Ver




Project: LGT23C033	Test Engineer: Dylan.shi
EUT: AX3000 Wireless Dual-Band WiFi6 Router	Temperature: 26.1°C
M/N: NX30	Humidity: 58%RH
Test Voltage: AC 120V/50Hz	Test Data: 2023-03-30
Test Mode: 802.11n20 2462	
Note:	

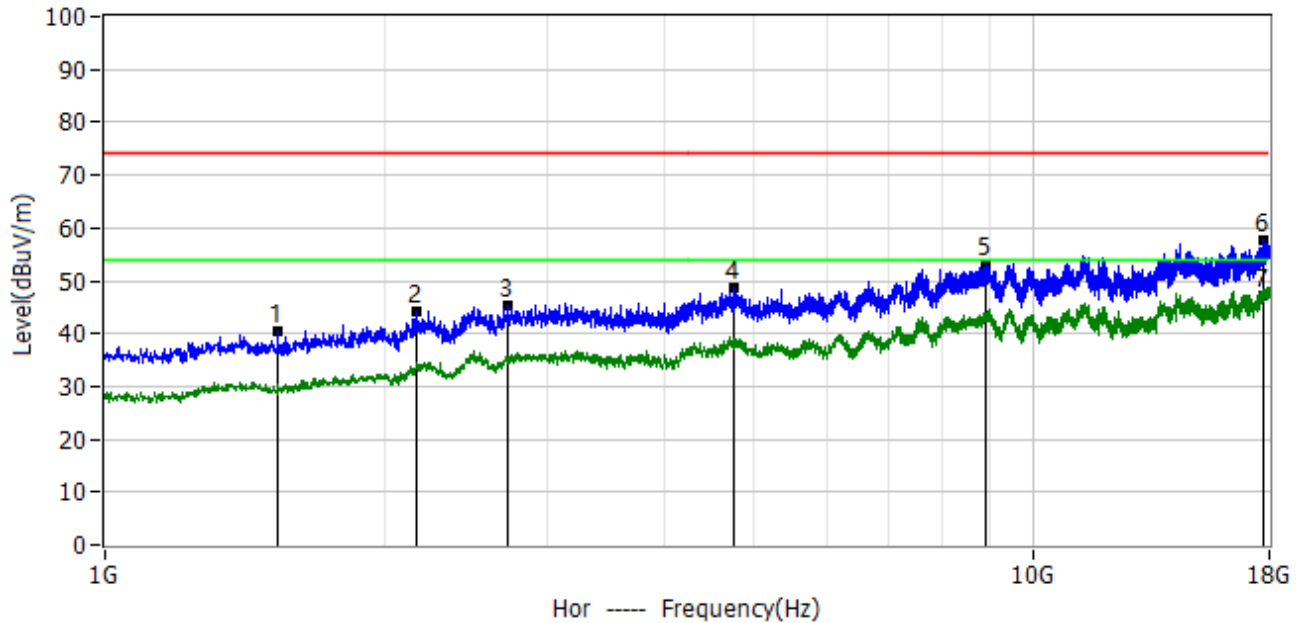

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.536GHz	61.01	-20.60	40.41	74.00	-33.59	PK	Hor
2*	2.165GHz	58.62	-14.50	44.12	74.00	-29.88	PK	Hor
3*	2.717GHz	55.26	-9.84	45.42	74.00	-28.58	PK	Hor
4*	4.768GHz	54.75	-5.96	48.79	74.00	-25.21	PK	Hor
5*	8.882GHz	54.79	-1.51	53.28	74.00	-20.72	PK	Hor
6*	17.724GHz	49.40	8.33	57.73	74.00	-16.27	PK	Hor
7*	17.724GHz	38.77	8.33	47.10	54.00	-6.90	AV	Hor



Project: LGT23C033	Test Engineer: Dylan.shi
EUT: AX3000 Wireless Dual-Band WiFi6 Router	Temperature: 26.1°C
M/N: NX30	Humidity: 58%RH
Test Voltage: AC 120V/50Hz	Test Data: 2023-03-30
Test Mode: 802.11n20 2462	
Note:	

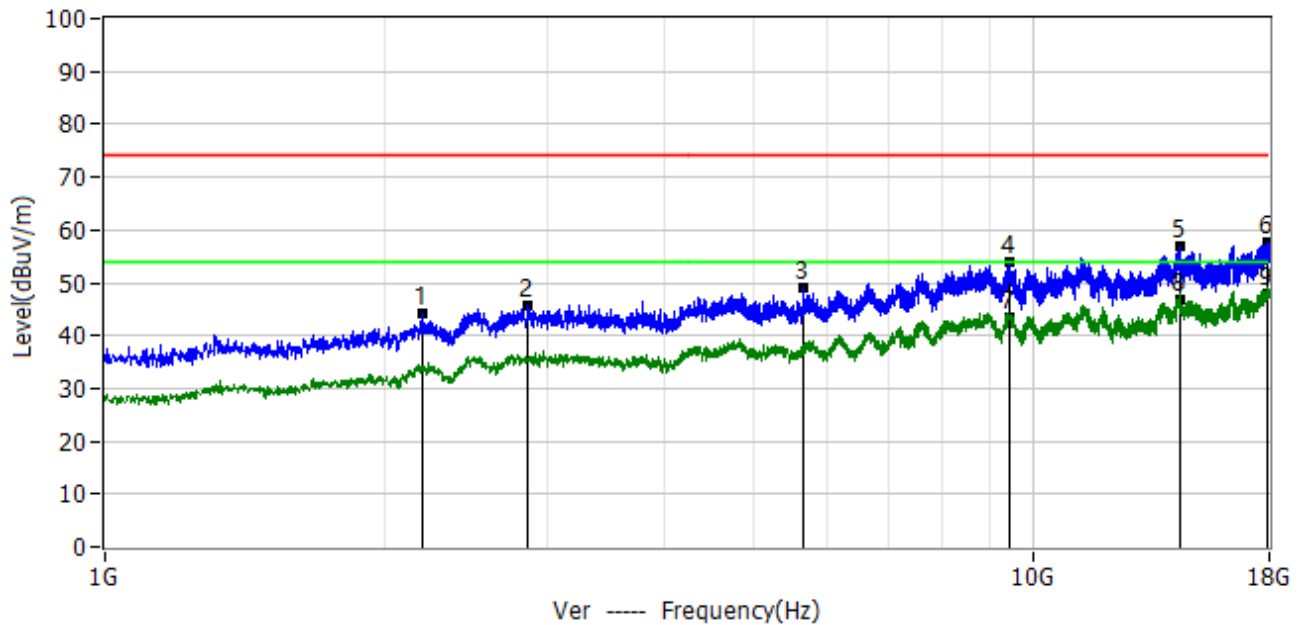


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2.199GHz	58.18	-14.15	44.03	74.00	-29.97	PK	Ver
2*	2.855GHz	54.67	-9.11	45.56	74.00	-28.44	PK	Ver
3*	5.671GHz	56.61	-7.67	48.94	74.00	-25.06	PK	Ver
4*	9.455GHz	55.01	-1.17	53.84	74.00	-20.16	PK	Ver
5*	14.409GHz	50.84	5.91	56.75	74.00	-17.25	PK	Ver
6*	17.936GHz	49.38	8.48	57.86	74.00	-16.14	PK	Ver
7*	9.455GHz	44.67	-1.17	43.50	54.00	-10.50	AV	Ver
8*	14.409GHz	40.89	5.91	46.80	54.00	-7.20	AV	Ver
9*	17.936GHz	39.32	8.48	47.80	54.00	-6.20	AV	Ver




3.2.7 TEST RESULTS (RESTRICTED BANDS REQUIREMENTS)

Project: LGT23C033	Test Engineer: Dylan.shi
EUT: AX3000 Wireless Dual-Band WiFi6 Router	Temperature: 24.5°C
M/N: NX30	Humidity: 61%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-03-29
Test Mode: 802.11n20 2412	
Note:	

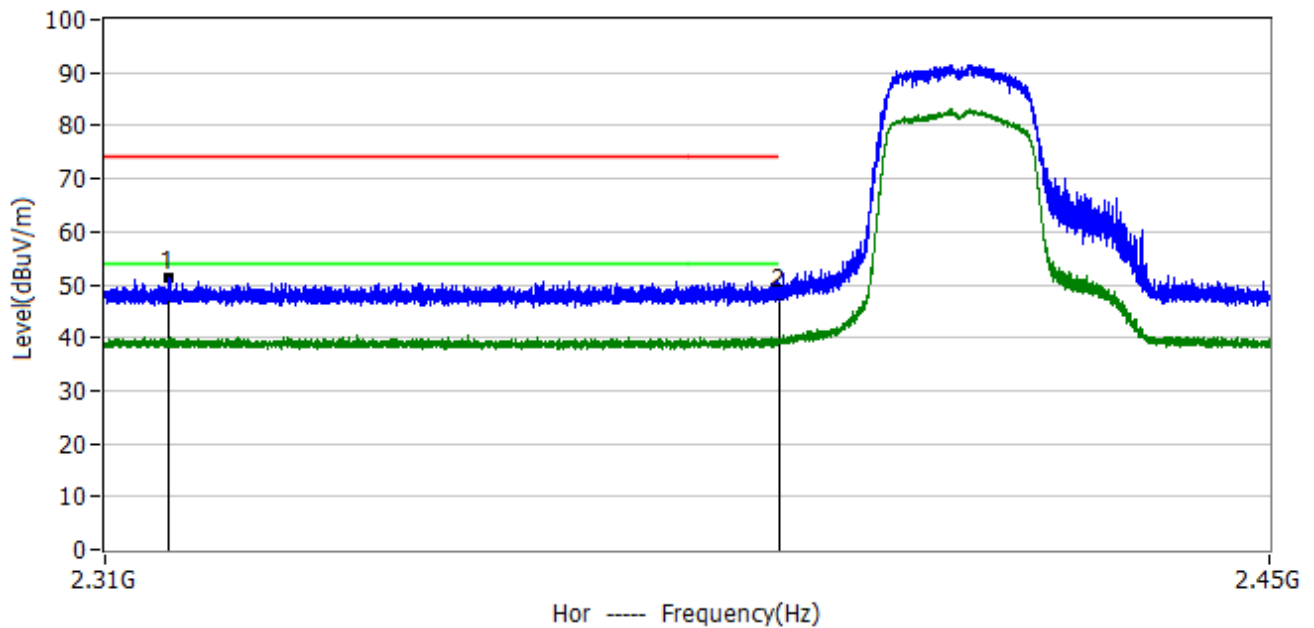


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2.3174GHz	17.17	34.12	51.29	74.00	-22.71	PK	Hor
2*	2.3900GHz	13.85	33.95	47.80	74.00	-26.20	PK	Hor

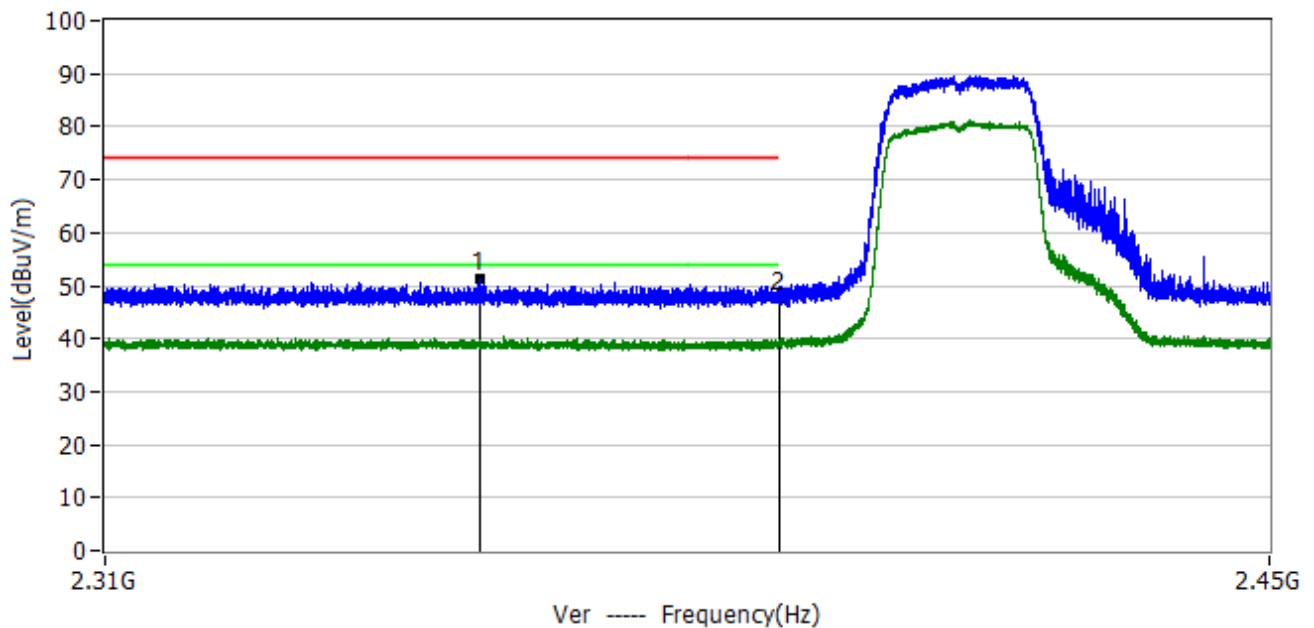


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2.3542GHz	17.18	34.04	51.22	74.00	-22.78	PK	Ver
2*	2.3900GHz	13.55	33.95	47.50	74.00	-26.50	PK	Ver



Project: LGT23C033	Test Engineer: Dylan.shi
EUT: AX3000 Wireless Dual-Band WiFi6 Router	Temperature: 24.5°C
M/N: NX30	Humidity: 61%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-03-29
Test Mode: 802.11n20 2462	
Note:	

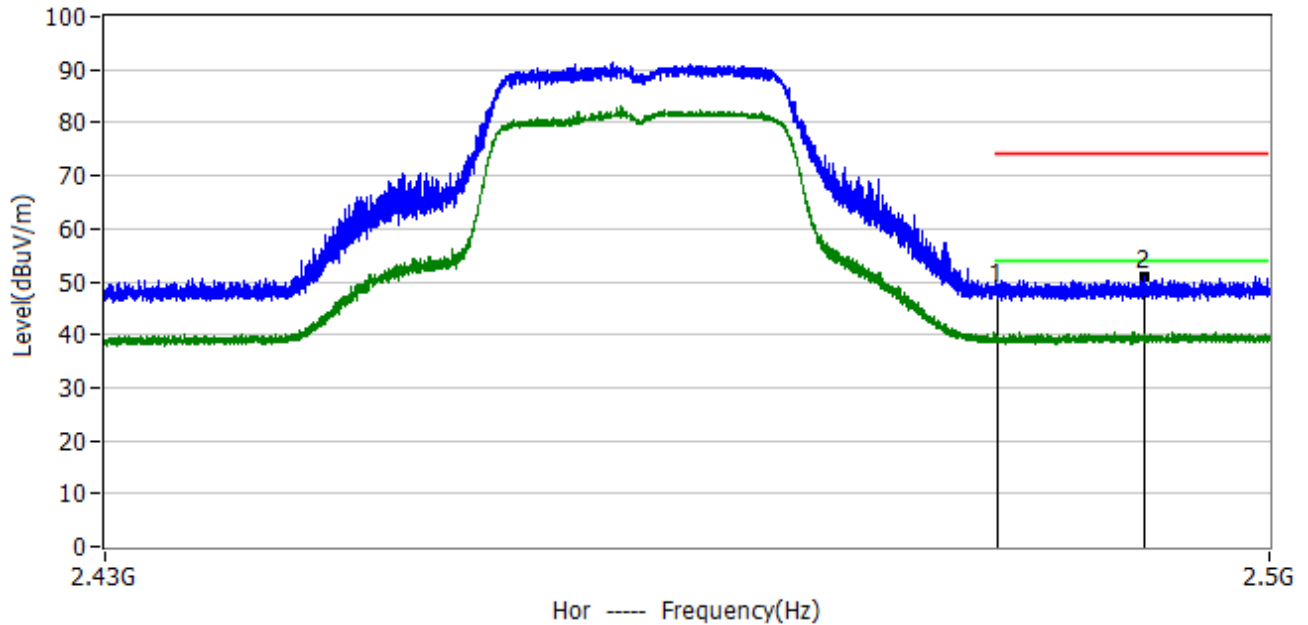

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2.4835GHz	14.17	34.13	48.30	74.00	-25.70	PK	Hor
2*	2.4924GHz	16.93	34.15	51.08	74.00	-22.92	PK	Hor

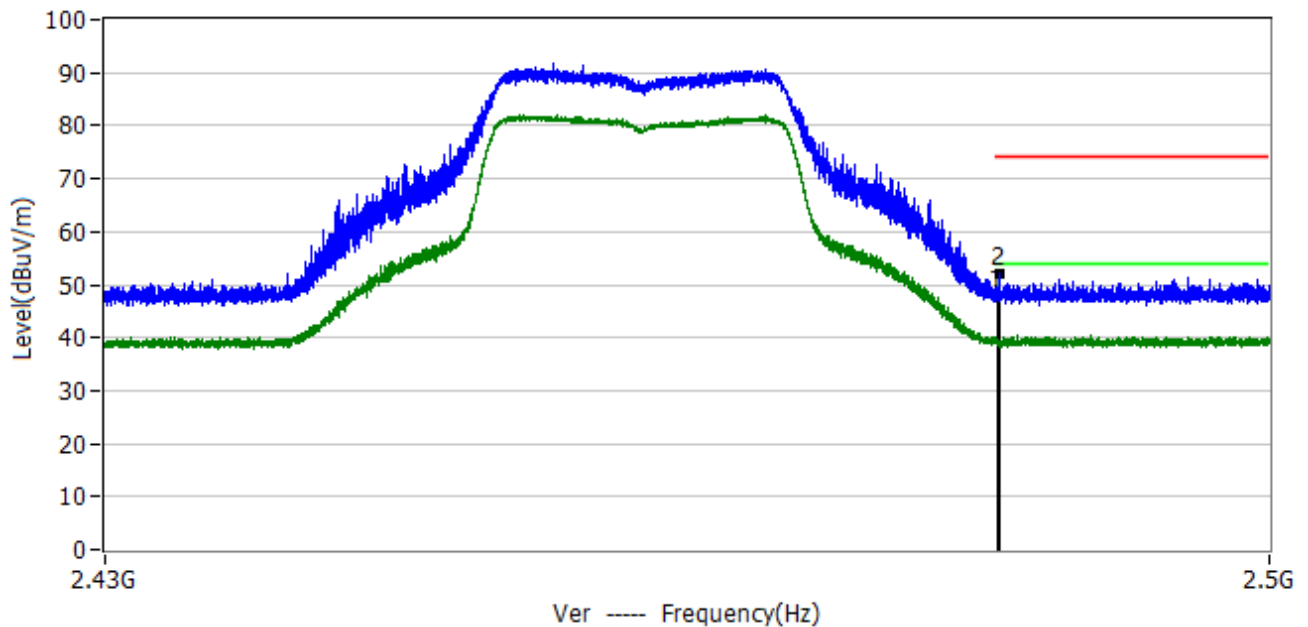

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2.4835GHz	13.77	34.13	47.90	74.00	-26.10	PK	Ver
2*	2.4836GHz	17.90	34.13	52.03	74.00	-21.97	PK	Ver



4. CONDUCTED SPURIOUS & BAND EDGE EMISSION

4.1 LIMIT

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

4.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2300 to 2432 MHz Upper Band Edge: 2442 to 2500 MHz
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

4.3 DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP



The EUT is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

4.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

4.6 TEST RESULTS

For the measurement records, refer to the appendix I.



5. POWER SPECTRAL DENSITY TEST

5.1 LIMIT

FCC Part15.247 , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	≤ 8 dBm (RBW ≥ 3 KHz)	2400-2483.5	PASS

5.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the $100 \text{ kHz} \geq \text{RBW} \geq 3 \text{ kHz}$.
4. Set the $\text{VBW} \geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

5.6 TEST RESULTS

For the measurement records, refer to the appendix I.



6. BANDWIDTH TEST

6.1 LIMIT

FCC Part15.247,Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS


6.2 TEST PROCEDURE

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW $\geq$ 3RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be $\geq$ 6 dB.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

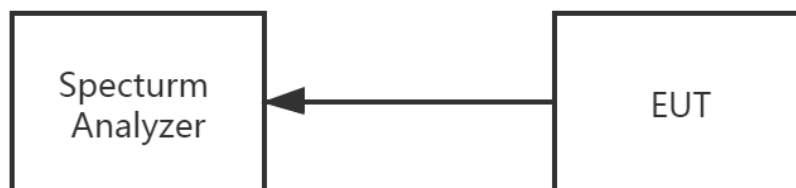

6.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

6.6 TEST RESULTS

For the measurement records, refer to the appendix I.