



FCC Radio Test Report

FCC ID: T58WF2780R

This report concerns (check one) : Original Grant Class I Change

Issued Date : Apr. 10, 2014
Project No. : 1402C047
Equipment : AC1200 Wireless Dual Band Gigabit Router
Model Name : WF2780
Applicant : NETIS SYSTEMS CO., LTD
Address : 4F&5F R&D Building, Oriental Cyberport, High-Tech Industrial Park, Nanshan, Shenzhen, China.

Tested by: Neutron Engineering Inc. EMC Laboratory


Date of Receipt: Feb. 17, 2014

Date of Test: Feb. 17, 2014~ Apr. 09, 2014

Testing Engineer

: 
(David Mao)

Technical Manager

: 
(Leo Hung)

Authorized Signatory

: 
(Steven Lu)

Neutron Engineering Inc.

No.3,Jinshagang 1st Road, ShiXia,
Dalang Town, Dong Guan, China.

TEL: 0769-8318-3000

FAX: 0769-8319-6000



Declaration

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

Neutron's reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron**'s authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.



Table of Contents	Page
1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	11
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	12
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
3.5 DESCRIPTION OF SUPPORT UNITS	13
4 . EMC EMISSION TEST	14
4.1 CONDUCTED EMISSION MEASUREMENT	14
4.1.1 POWER LINE CONDUCTED EMISSION	14
4.1.2 MEASUREMENT INSTRUMENTS LIST	14
4.1.3 TEST PROCEDURE	15
4.1.4 DEVIATION FROM TEST STANDARD	15
4.1.5 TEST SETUP	15
4.1.6 EUT OPERATING CONDITIONS	15
4.1.7 TEST RESULTS	16
4.2 RADIATED EMISSION MEASUREMENT	19
4.2.1 RADIATED EMISSION LIMITS	19
4.2.2 MEASUREMENT INSTRUMENTS LIST	20
4.2.3 TEST PROCEDURE	20
4.2.4 DEVIATION FROM TEST STANDARD	21
4.2.5 TEST SETUP	21
4.2.6 EUT OPERATING CONDITIONS	22
4.2.7 TEST RESULTS-BETWEEN 30MHZ - 1000MHZ	23
4.2.8 TEST RESULTS - ABOVE 1000MHZ	30
5 . 26dB SPECTRUM BANDWIDTH	86
5.1 APPLIED PROCEDURES / LIMIT	86
5.1.1 MEASUREMENT INSTRUMENTS LIST	86
5.1.2 TEST PROCEDURE	86
5.1.3 DEVIATION FROM STANDARD	86
5.1.4 TEST SETUP	86
5.1.5 EUT OPERATION CONDITIONS	86
5.1.6 TEST RESULTS	87
6 . MAXIMUM CONDUCTED OUTPUT POWER	98



Table of Contents

	Page
6.1 APPLIED PROCEDURES / LIMIT	98
6.1.1 MEASUREMENT INSTRUMENTS LIST	98
6.1.2 TEST PROCEDURE	98
6.1.3 DEVIATION FROM STANDARD	99
6.1.4 TEST SETUP	99
6.1.5 EUT OPERATION CONDITIONS	99
6.1.6 TEST RESULTS	100
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	106
7.1 APPLIED PROCEDURES / LIMIT	106
7.1.1 MEASUREMENT INSTRUMENTS LIST	106
7.1.2 TEST PROCEDURE	106
7.1.3 DEVIATION FROM STANDARD	106
7.1.4 TEST SETUP	106
7.1.5 EUT OPERATION CONDITIONS	106
7.1.6 TEST RESULTS	107
8 . POWER SPECTRAL DENSITY TEST	127
8.1 APPLIED PROCEDURES / LIMIT	127
8.1.1 MEASUREMENT INSTRUMENTS LIST	127
8.1.2 TEST PROCEDURE	127
8.1.3 DEVIATION FROM STANDARD	127
8.1.4 TEST SETUP	127
8.1.5 EUT OPERATION CONDITIONS	127
9 . PEAK EXCURSION MEASUREMENT	153
9.1 APPLIED PROCEDURES / LIMIT	153
9.1.1 MEASUREMENT INSTRUMENTS LIST	153
9.1.2 TEST PROCEDURE	153
9.1.3 DEVIATION FROM STANDARD	153
9.1.4 TEST SETUP	154
9.1.5 EUT OPERATION CONDITIONS	154
9.1.6 TEST RESULTS	155
10 . FREQUENCY STABILITY MEASUREMENT	166
10.1 APPLIED PROCEDURES / LIMIT	166
10.1.1 MEASUREMENT INSTRUMENTS LIST	166
10.1.2 TEST PROCEDURE	166
10.1.3 DEVIATION FROM STANDARD	166
10.1.4 TEST SETUP	167
10.1.5 EUT OPERATION CONDITIONS	167
10.1.6 TEST RESULTS	168
11. EUT TEST PHOTO	169



REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
NEI-FCCP-2-1402C047	Original Issue.	Apr. 10, 2014



1. CERTIFICATION

Equipment : AC1200 Wireless Dual Band Gigabit Router
Brand Name : netis
Model Name : WF2780
Applicant : NETIS SYSTEMS CO., LTD
Manufacturer : Shenzhen Netcore Industrial Ltd.
Address : 4F&5F R&D Building, Oriental Cyberport, High-Tech Industrial Park, Nanshan, Shenzhen, China.
Factory : Dongguan City Netcore Network Technology Co.,Ltd.
Address : No. 10-1, Sankeng Road, Qinghutou, Tangxia Town, Dongguan City
Date of Test : Feb. 17, 2014~ Apr. 09, 2014
Test Item : ENGINEERING SAMPLE
Standard(s) : FCC Part15, Subpart E(15.407) / ANSI C63.4 : 2009;
FCC KDB 789033 D01 General UNII Test Procedures v01r03 .

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-2-1402C047) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Test result included in this report is only for the 5150MHz~5250MHz Mode part of the product.

**2. SUMMARY OF TEST RESULTS**

Test procedures according to the technical standard(s):

FCC Part15, Subpart E			
Standard(s) Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emissions	PASS	
15.407(a)	26dB Spectrum Bandwidth	PASS	
15.407(a)	Maximum Conducted Output Power	PASS	
15.407(a)	Power Spectral Density	PASS	
15.407(a)	Peak Excursion	PASS	
15.407(a)	Radiated Emissions	PASS	
15.407(b)	Band Edge Emissions	PASS	
15.407(g)	Frequency Stability	PASS	
15.203	Antenna Requirements	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this test report.



2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **DG-C02/DG-CB03** at the location of No.3,Jinshagang 1st Road, ShiXia, Dalang Town, Dong Guan, China.523792

Neutron's test firm number for FCC: 319330

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty **U** is based on a standard uncertainty multiplied by a coverage factor of **k=2**, providing a level of confidence of approximately **95%**.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
DG-C02	CISPR	150 KHz ~ 30MHz	1.94	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)	NOTE
DG-CB03	CISPR	9KHz~30MHz	V	3.79	
		9KHz~30MHz	H	3.57	
		30MHz ~ 200MHz	V	3.82	
		30MHz ~ 200MHz	H	3.60	
		200MHz ~ 1,000MHz	V	3.86	
		200MHz ~ 1,000MHz	H	3.94	
		1GHz~18GHz	V	3.12	
		1GHz~18GHz	H	3.68	
		18GHz~40GHz	V	4.15	
		18GHz~40GHz	H	4.14	



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	AC1200 Wireless Dual Band Gigabit Router													
Brand Name	netis													
Model Name	WF2780													
Mode Different	N/A													
Product Description	<table border="1"><tr><td>Operation Frequency</td><td>Band 1:5150MHz~5250MHz</td></tr><tr><td>Modulation Type</td><td>OFDM</td></tr><tr><td>Bit Rate of Transmitter</td><td>300Mbps</td></tr><tr><td>Antenna Designation</td><td>Please see note 3.(Page 10)</td></tr><tr><td>Antenna Gain(Peak)</td><td></td></tr><tr><td>Output Power (Max.)-</td><td>802.11a: 13.72 dBm 802.11n (20M): 15.78 dBm 802.11n (40M): 15.63 dBm 802.11ac (20M): 15.84 dBm 802.11ac (40M): 15.63 dBm 802.11ac (80M): 15.64 dBm</td></tr></table>		Operation Frequency	Band 1:5150MHz~5250MHz	Modulation Type	OFDM	Bit Rate of Transmitter	300Mbps	Antenna Designation	Please see note 3.(Page 10)	Antenna Gain(Peak)		Output Power (Max.)-	802.11a: 13.72 dBm 802.11n (20M): 15.78 dBm 802.11n (40M): 15.63 dBm 802.11ac (20M): 15.84 dBm 802.11ac (40M): 15.63 dBm 802.11ac (80M): 15.64 dBm
Operation Frequency	Band 1:5150MHz~5250MHz													
Modulation Type	OFDM													
Bit Rate of Transmitter	300Mbps													
Antenna Designation	Please see note 3.(Page 10)													
Antenna Gain(Peak)														
Output Power (Max.)-	802.11a: 13.72 dBm 802.11n (20M): 15.78 dBm 802.11n (40M): 15.63 dBm 802.11ac (20M): 15.84 dBm 802.11ac (40M): 15.63 dBm 802.11ac (80M): 15.64 dBm													
	More details of EUT technical specification, please refer to the User's Manual.													
Power Source	DC voltage supplied from AC/DC adapter Brand / Model: tenpao / NT12V1AUL													
Power Rating	I/P AC 100-240V~0.3A 50/60Hz O/P DC 12V 1A													
Connecting I/O Port(s)	Please refer to the User's Manual.													

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2. Channel List:

802.11a / 802.11n 20MHz/802.11ac 20MHz		802.11n 40M/802.11ac 40MHz		802.11ac 80MHz	
Band 1		Band 1		Band 1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

3. Antenna Specification:

Ant.	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)
6	RF link	RF21C00077A	Dipole Antenna	N/A	5.88
7	RF link	RF21C00073A	Dipole Antenna	N/A	5.88

Note:

The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers (2T2R). all transmit signals are completely uncorrelated, then, **Direction gain = G_{ANT}**, that is Directional gain=5.88dBi

4.

Operating Mode	1TX	3TX
802.11a	V (ANT 6)	-
802.11n(20MHz)	-	V (ANT 6 + ANT 7)
802.11n(40MHz)	-	V (ANT 6 + ANT 7)
802.11ac(20MHz)	-	V (ANT 6 + ANT 7)
802.11ac(40MHz)	-	V (ANT 6 + ANT 7)
802.11ac(80MHz)	-	V (ANT 6 + ANT 7)



3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Test Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48(Band 1)
Mode 2	TX N20 Mode / CH36, CH40, CH48(Band 1)
Mode 3	TX N40 Mode / CH38, CH46 (Band 1)
Mode 4	TX AC N20 Mode / CH36, CH40, CH48(Band 1)
Mode 5	TX AC N40 Mode / CH38, CH46 (Band 1)
Mode 6	TX AC N80 Mode / CH42 (Band 1)
Mode 7	TX Mode

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 7	TX Mode

For Radiated Test	
Final Test Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48(Band 1)
Mode 2	TX N20 Mode / CH36, CH40, CH48(Band 1)
Mode 3	TX N40 Mode / CH38, CH46 (Band 1)
Mode 4	TX AC N20 Mode / CH36, CH40, CH48(Band 1)
Mode 5	TX AC N40 Mode / CH38, CH46 (Band 1)
Mode 6	TX AC N80 Mode / CH42 (Band 1)

Note: For Radiated Below 1G test, the 802.11a mode is found to be the worst case and recorded.

**3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING**

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product


Test software version	Cart		
Frequency	5180 MHz	5200MHz	5240 MHz
A Mode	23	22	21
N20 Mode	30	29	28
AC 20 Mode	20	19	17

Test software version	Cart		
Frequency	5190 MHz	5230MHz	
N40 Mode	30	29	
AC 40 Mode	27	27	

Test software version	Cart		
Frequency	5210 MHz		
AC 80 Mode	23		



3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

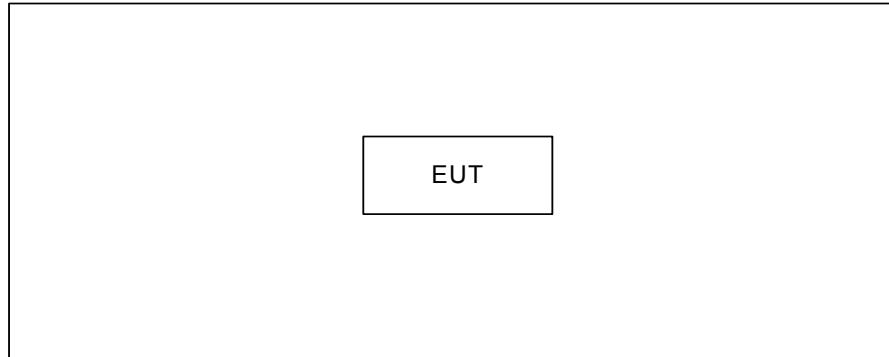

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID/IC	Series No.	Note
-	-	-	-	-	-	

Item	Shielded Type	Ferrite Core	Length	Note
-	-	-	-	-

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	00052765	Apr. 25, 2014
2	LISN	R&S	ENV216	100087	Nov. 11, 2014
3	Test Cable	N/A	C_17	N/A	Mar. 15, 2014
4	EMI TEST RECEIVER	R&S	ESCS30	833364/017	Nov. 11, 2014
5	50Ω Terminator	SHX	TF2-3G-A	08122902	Apr. 25, 2014

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.




4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

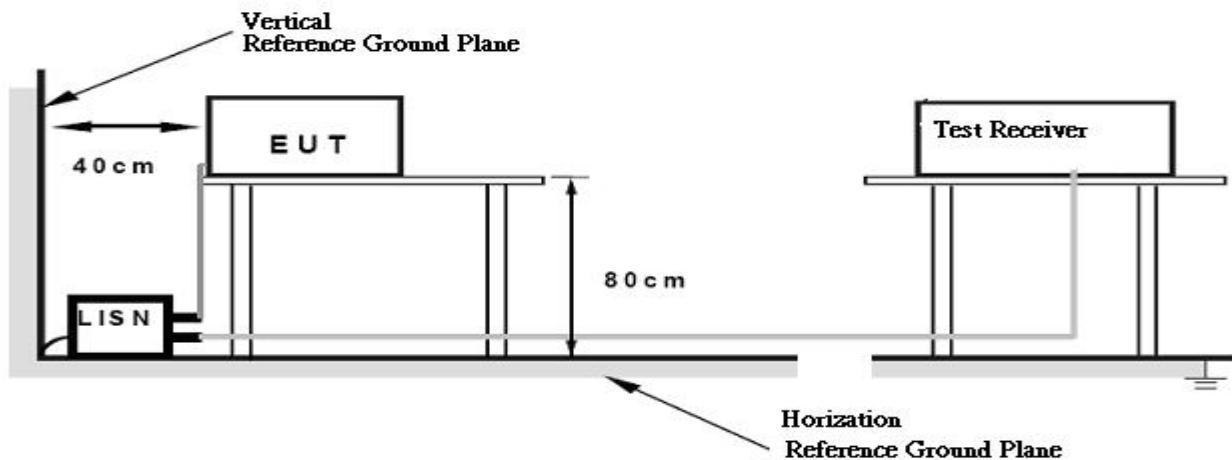

4.1.6 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical function (as a customer would normally use it). The EUT was programmed to be in continuously transmitting/TX Mode mode.




4.1.7 TEST RESULTS

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “*” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.




EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name:	WF2780
Temperature:	24 °C	Relative Humidity:	55 %
Test Power:	AC 120V/60Hz	Phase:	Line
Test Mode :	TX Mode		

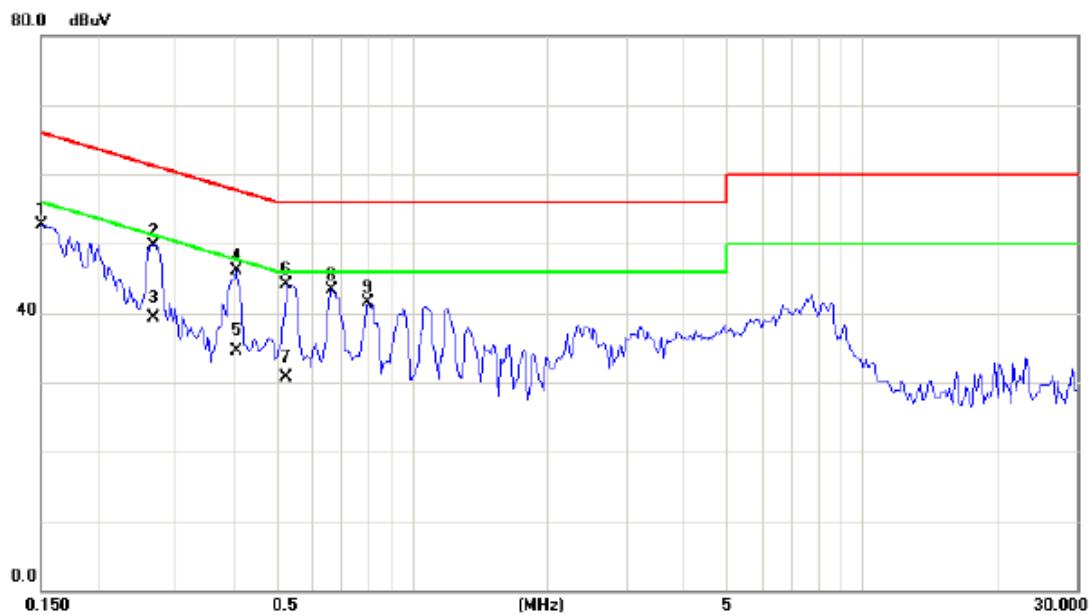

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		0.1500	43.24	9.49	52.73	66.00	-13.27	peak	
2	*	0.2672	40.12	9.52	49.64	61.20	-11.56	peak	
3		0.2672	29.80	9.52	39.32	51.20	-11.88	AVG	
4		0.4078	36.46	9.56	46.02	57.69	-11.67	peak	
5		0.4078	24.90	9.56	34.46	47.69	-13.23	AVG	
6		0.5290	34.54	9.59	44.13	56.00	-11.87	peak	
7		0.5290	21.10	9.59	30.69	46.00	-15.31	AVG	
8		0.6617	33.70	9.61	43.31	56.00	-12.69	peak	
9		0.7984	31.94	9.62	41.56	56.00	-14.44	peak	



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name:	WF2780
Temperature:	24 °C	Relative Humidity:	55 %
Test Power:	AC 120V/60Hz	Phase:	Neutral
Test Mode :	TX Mode		

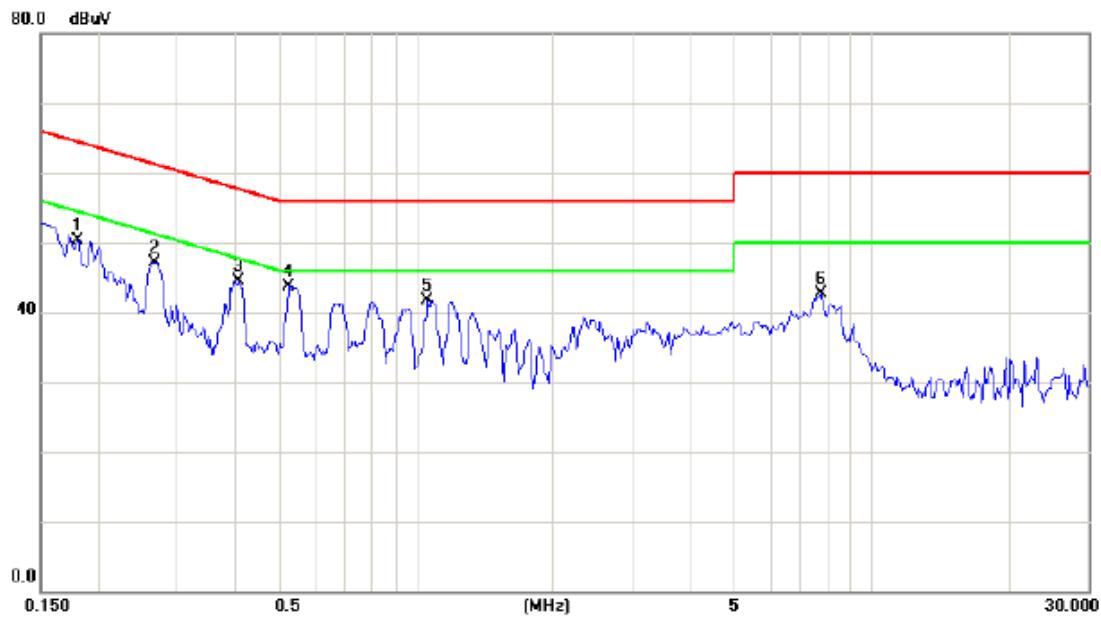

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1811	40.80	9.51	50.31	64.44	-14.13	peak	
2		0.2671	37.62	9.52	47.14	61.21	-14.07	peak	
3		0.4077	34.96	9.56	44.52	57.70	-13.18	peak	
4	*	0.5290	34.04	9.59	43.63	56.00	-12.37	peak	
5		1.0640	32.02	9.65	41.67	56.00	-14.33	peak	
6		7.7460	32.78	9.96	42.74	60.00	-17.26	peak	



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Notes

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dB μ V/m)
5150~5250	-27	68.3
5250~5350	-27	68.3
5470~5725	-27	68.3
5725~5825	-27	68.3
	-17	78.3

NOTE: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m}, \text{ where } P \text{ is the eirp (Watts)}$$

**4.2.2 MEASUREMENT INSTRUMENTS LIST**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Apr. 25, 2014
2	Amplifier	HP	8447D	2944A09673	Apr. 25, 2014
3	Test Receiver	R&S	ESCI	100382	Apr. 25, 2014
4	Test Cable	N/A	C-01_CB03	N/A	Jul. 02, 2014
5	Antenna	ETS	3115	00075789	Apr. 25, 2014
6	Amplifier	Agilent	8449B	3008A02274	Apr. 25, 2014
7	Spectrum	Agilent	E4408B	US39240143	Nov. 11, 2014
8	Test Cable	HUBER+SUHNER	C-45	N/A	Apr. 30, 2014
9	Controller	CT	SC100	N/A	N/A
10	Horn Antenna	EMCO	3115	9605-4803	Apr. 25, 2014
11	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Apr. 25, 2014
12	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Oct. 22, 2014

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

4.2.3 TEST PROCEDURE

- a. The measuring distance of at 1.5m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.




4.2.4 DEVIATION FROM TEST STANDARD


No deviation

4.2.5 TEST SETUP

Radiated Emission Test Set-Up Frequency 30 - 1000MHz

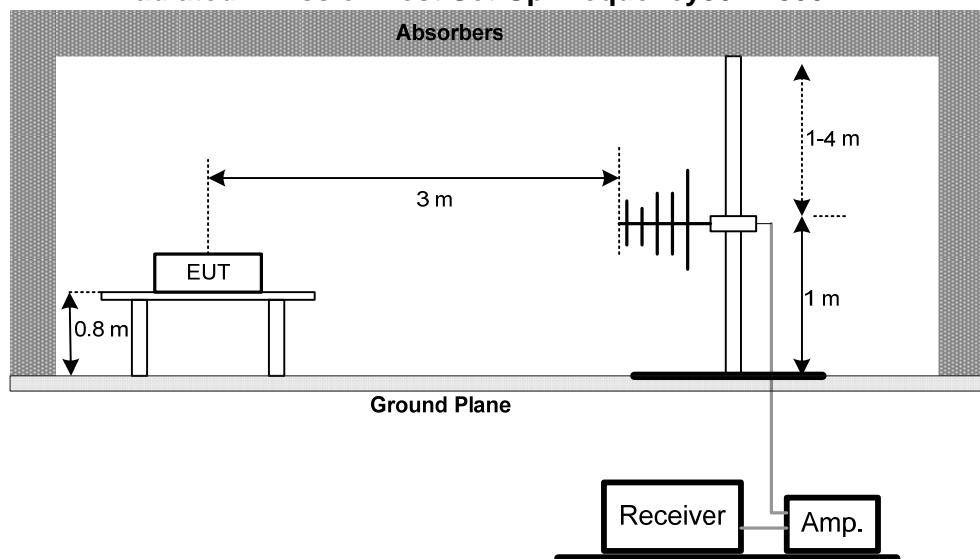


Radiated Emission Test Set-Up Frequency Above 1 GHz

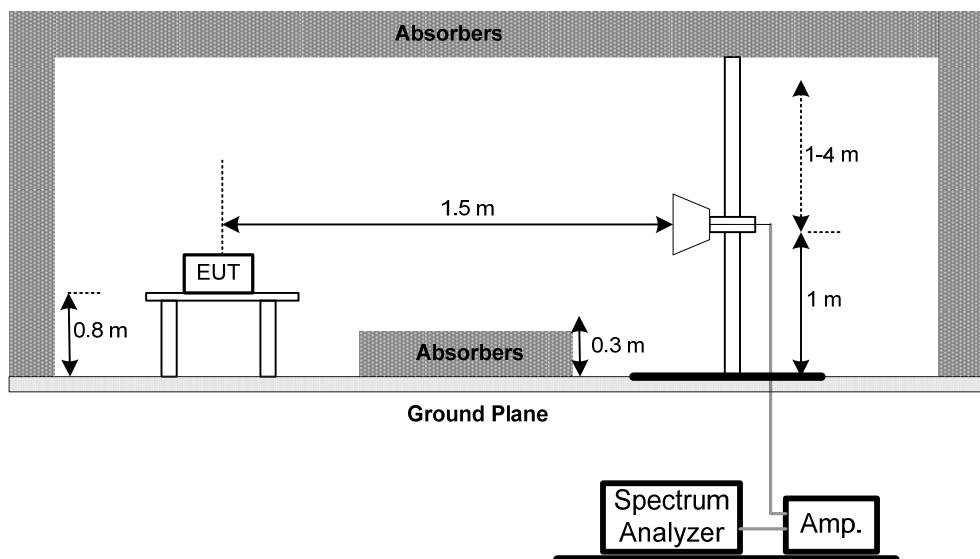



Radiated emissions below 30MHz

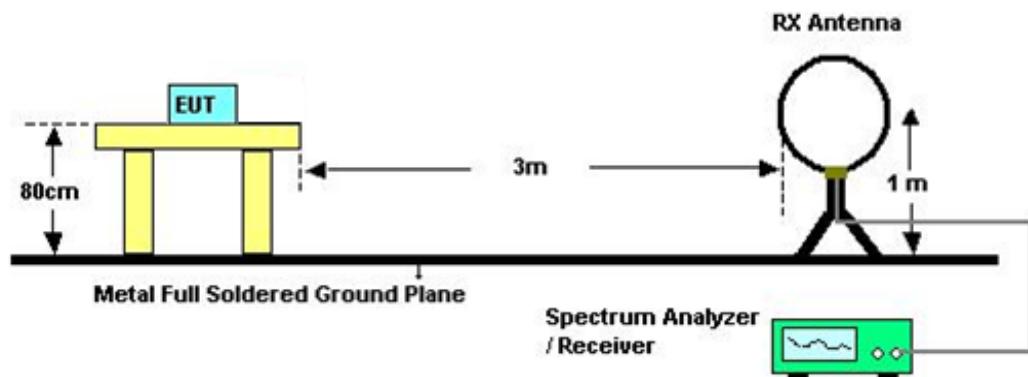

4.2.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.




4.2.7 TEST RESULTS-BETWEEN 30MHZ - 1000MHZ

Remark:

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.




EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5180MHz		
Phase:	Vertical		

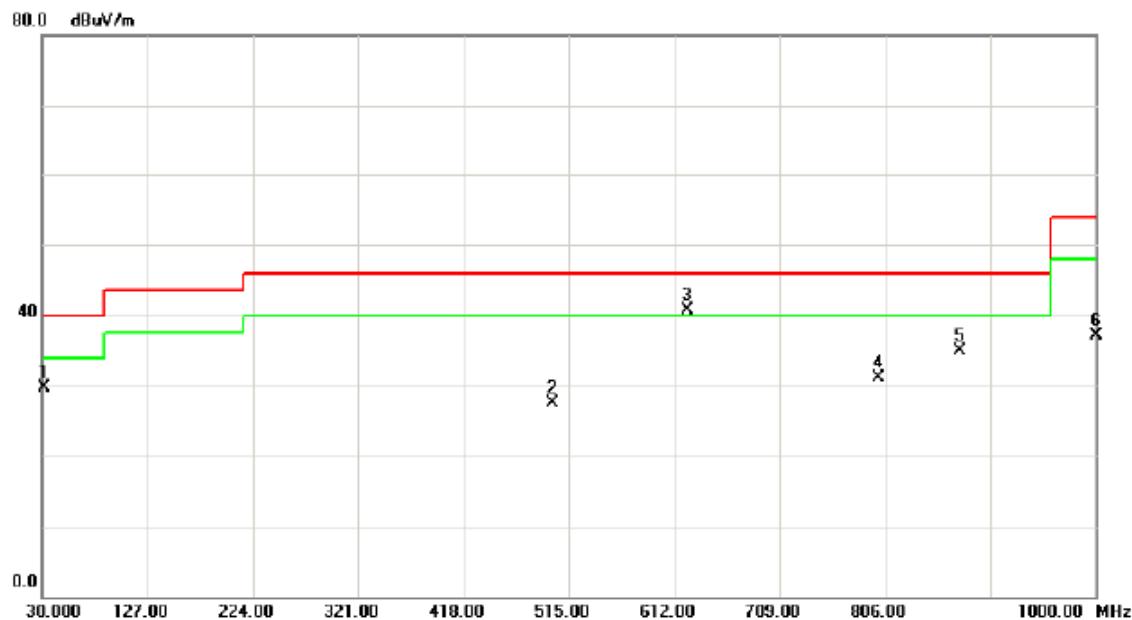

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB	Over Detector	Comment
1		31.9400	44.53	-14.86	29.67	40.00	-10.33	peak
2		500.4500	38.01	-10.50	27.51	46.00	-18.49	peak
3	*	624.6100	47.85	-7.06	40.79	46.00	-5.21	peak
4		800.1800	32.81	-1.62	31.19	46.00	-14.81	peak
5		874.8700	36.78	-1.78	35.00	46.00	-11.00	peak
6		1000.000 0	37.69	-0.54	37.15	54.00	-16.85	peak




EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5180MHz		
Phase:	Horizontal		

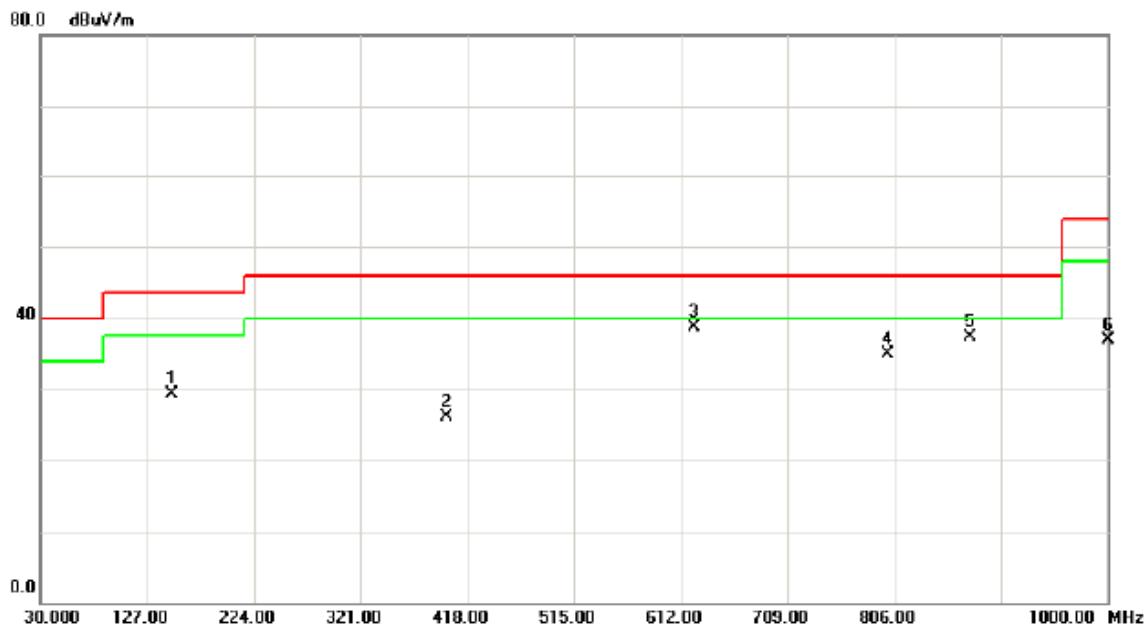

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		149.3100	42.93	-13.61	29.32	43.50	-14.18	peak
2		398.6000	35.90	-9.82	26.08	46.00	-19.92	peak
3	*	624.6100	45.78	-7.06	38.72	46.00	-7.28	peak
4		800.1800	36.51	-1.62	34.89	46.00	-11.11	peak
5		874.8700	39.03	-1.78	37.25	46.00	-8.75	peak
6		1000.000	37.39	-0.54	36.85	54.00	-17.15	peak




EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5200MHz		
Phase:	Vertical		

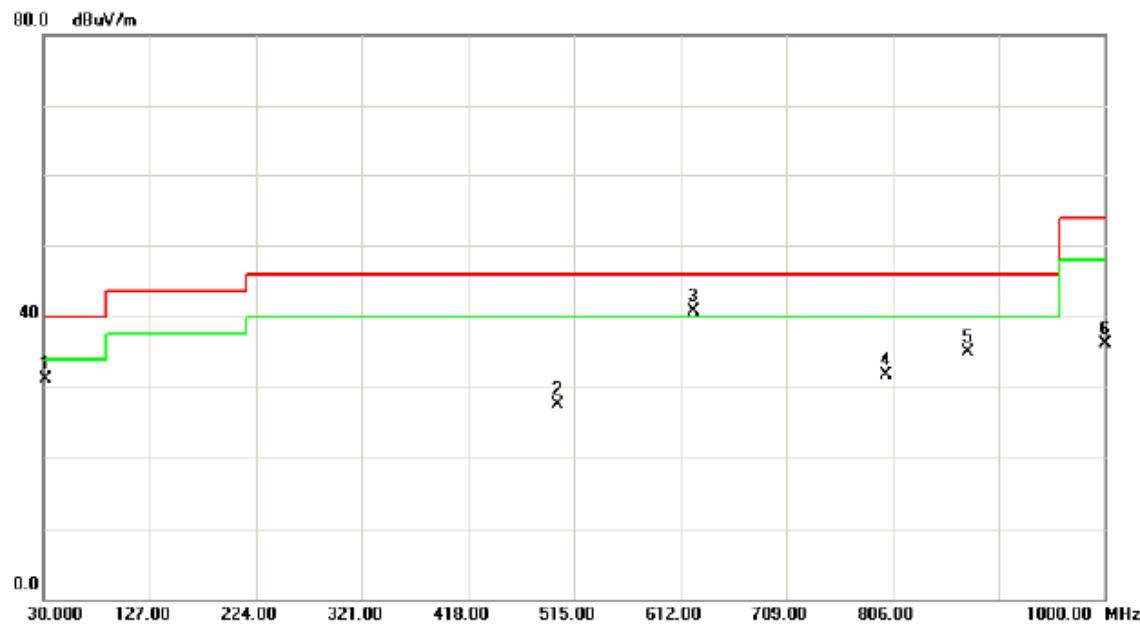

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Comment
			Level	Factor	ment			
1		31.9400	46.03	-14.86	31.17	40.00	-8.83	peak
2		500.4500	38.01	-10.50	27.51	46.00	-18.49	peak
3	*	624.6100	47.85	-7.06	40.79	46.00	-5.21	peak
4		800.1800	33.31	-1.62	31.69	46.00	-14.31	peak
5		874.8700	36.78	-1.78	35.00	46.00	-11.00	peak
6		1000.0000	36.69	-0.54	36.15	54.00	-17.85	peak




EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5200MHz		
Phase:	Horizontal		

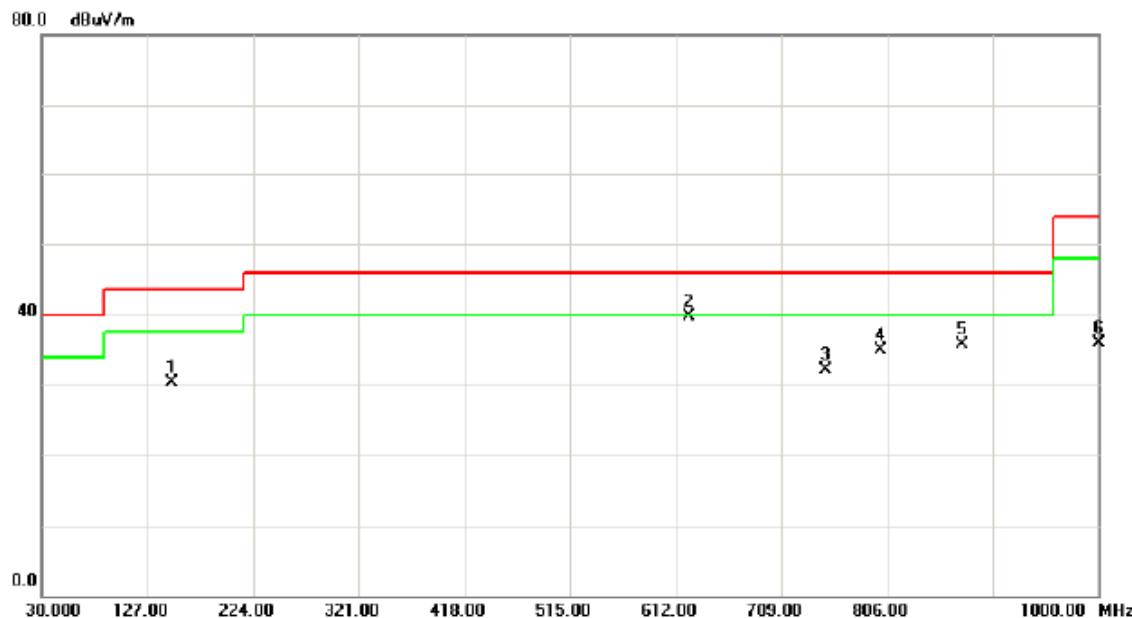

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	
1		149.3100	43.93	-13.61	30.32	43.50	-13.18	peak
2	*	624.6100	46.78	-7.06	39.72	46.00	-6.28	peak
3		749.7400	37.47	-5.30	32.17	46.00	-13.83	peak
4		800.1800	36.51	-1.62	34.89	46.00	-11.11	peak
5		874.8700	37.53	-1.78	35.75	46.00	-10.25	peak
6		1000.0000	36.39	-0.54	35.85	54.00	-18.15	peak




EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5240MHz		
Phase:	Vertical		

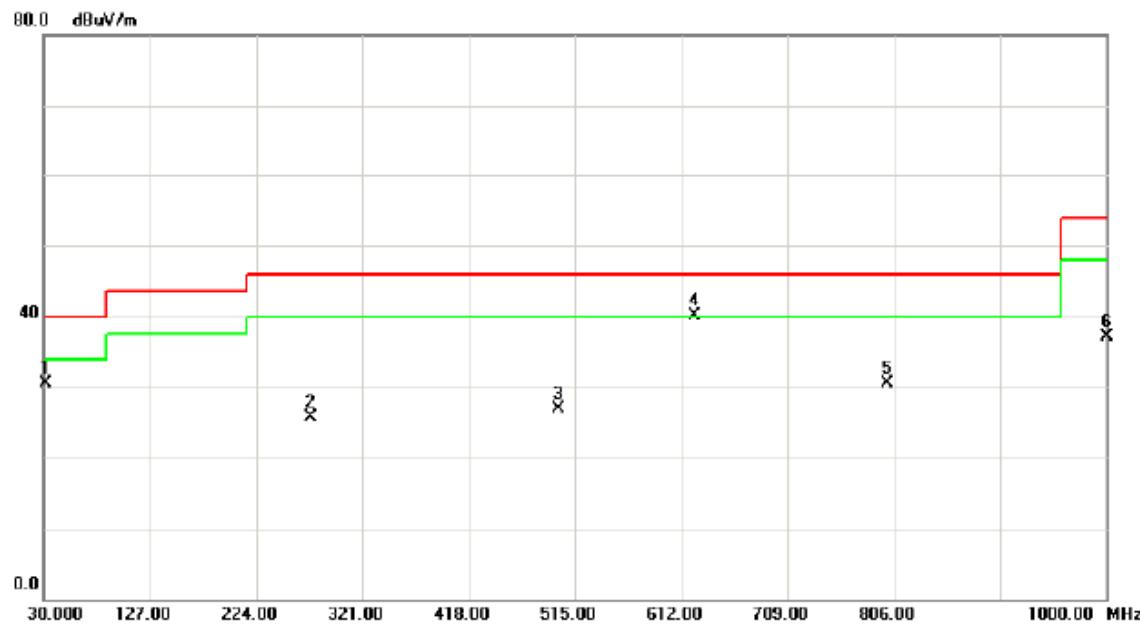

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	
1		31.9400	45.42	-14.86	30.56	40.00	-9.44	peak
2		273.4700	39.34	-13.55	25.79	46.00	-20.21	peak
3		500.4500	37.40	-10.50	26.90	46.00	-19.10	peak
4	*	624.6100	47.25	-7.06	40.19	46.00	-5.81	peak
5		800.1800	32.21	-1.62	30.59	46.00	-15.41	peak
6		1000.0000	37.58	-0.54	37.04	54.00	-16.96	peak



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5240MHz		
Phase:	Horizontal		

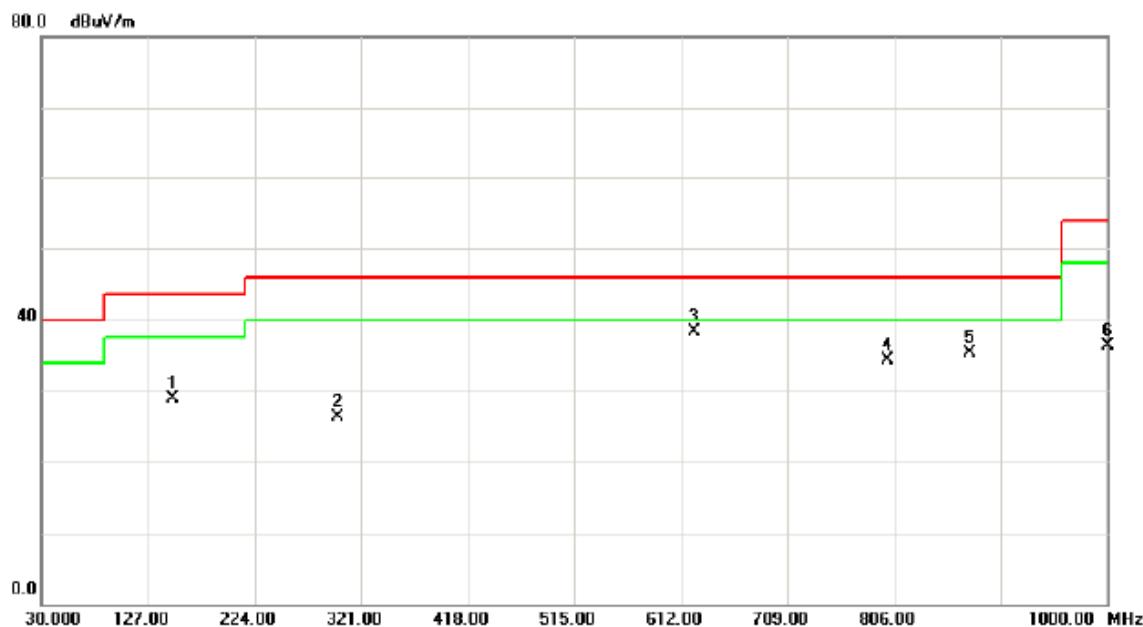

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		149.3100	42.43	-13.61	28.82	43.50	-14.68	peak	
2		299.6600	37.29	-10.97	26.32	46.00	-19.68	peak	
3	*	624.6100	45.28	-7.06	38.22	46.00	-7.78	peak	
4		800.1800	36.01	-1.62	34.39	46.00	-11.61	peak	
5		874.8700	37.03	-1.78	35.25	46.00	-10.75	peak	
6		1000.0000	36.89	-0.54	36.35	54.00	-17.65	peak	

**4.2.8 TEST RESULTS - ABOVE 1000MHZ**

EUT:	AC1200 Wireless Dual Band Gigabit Router				Model Name :		WF2780			
Temperature:	25 °C				Relative Humidity :				58 %	
Test Voltage :	AC 120V/60Hz									
Test Mode :	Band 1/ TX A Mode 5180MHz									



Freq. (MHz)	Ant.Pol. HV	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	V	6.82	-1.47	42.72	49.54	41.25	-55.23	-63.52	68.30	54.00	-27.00	-41.30	X/E
5173.70	V	43.25	35.95	42.78	86.03	78.73	-18.74	-26.04					X/F
10360.05	V	41.49	30.68	16.03	57.52	46.71	-47.25	-58.06	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency."F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



**Orthogonal Axis:X
Band 1/CH36(Above 1000 MHz, Vertical)**

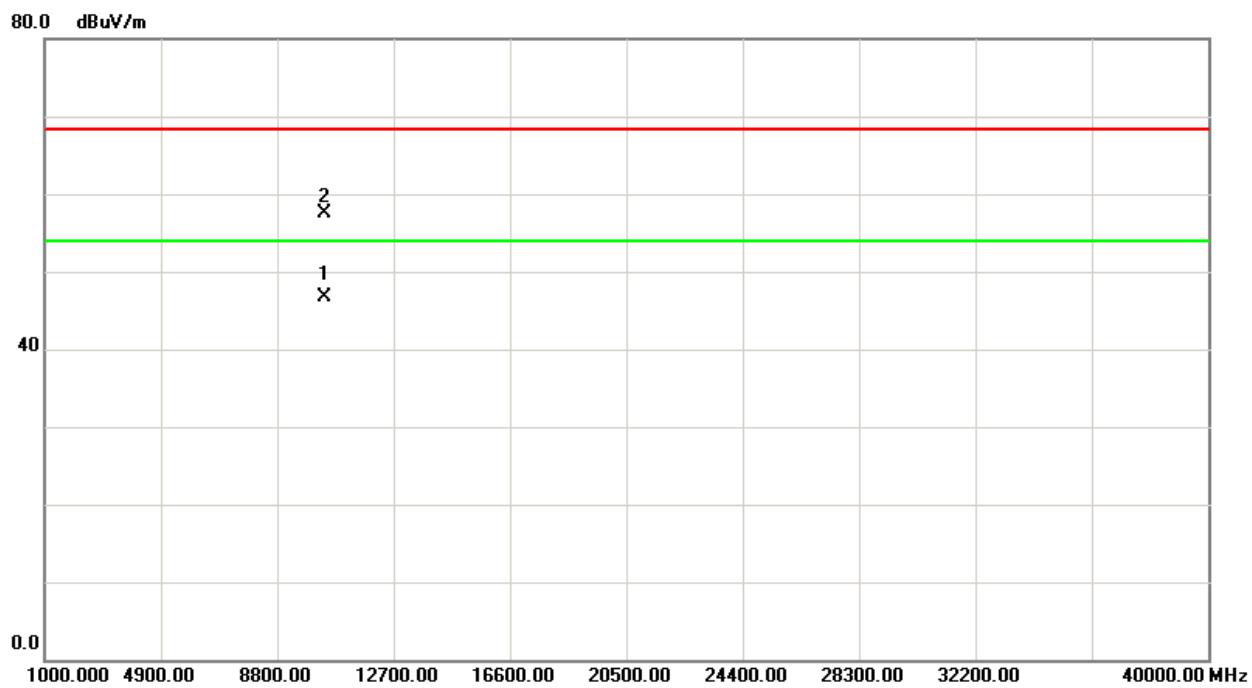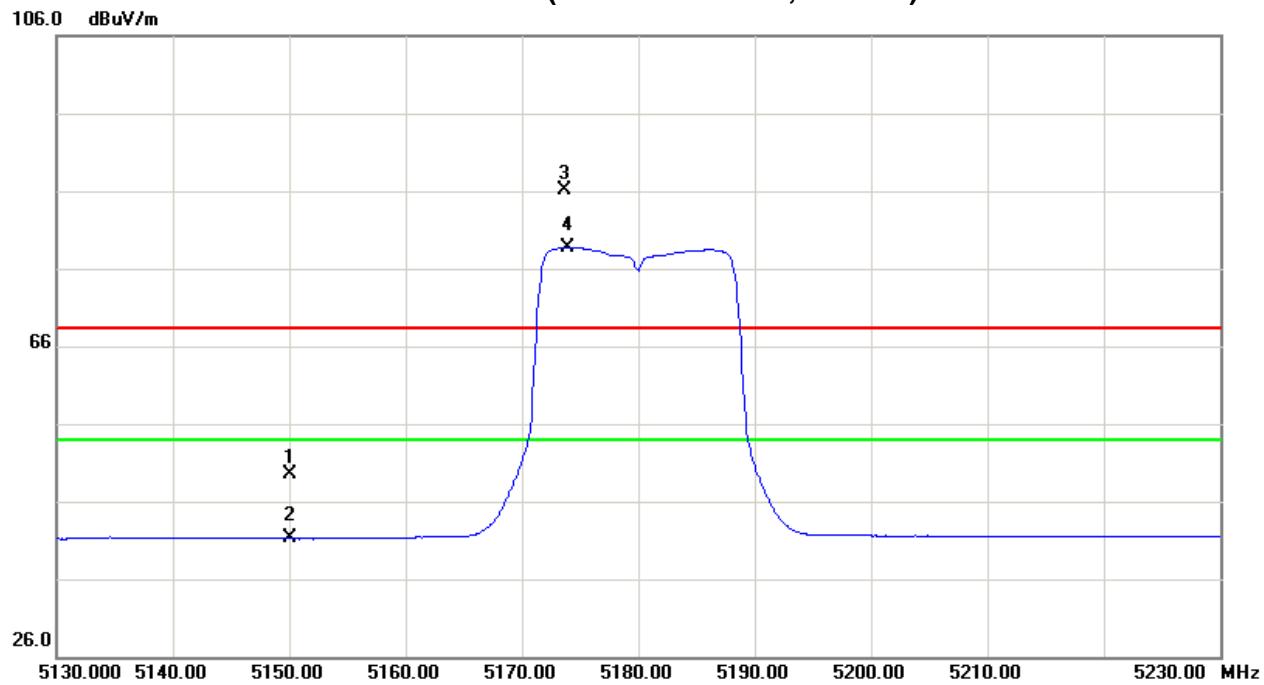



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX A Mode 5180MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	H	5.67	-1.62	42.72	48.39	41.10	-56.38	-63.67	68.30	54.00	-27.00	-41.30	X/E
5186.30	H	30.56	23.66	42.81	73.37	66.47	-31.40	-38.30					X/F
10354.95	H	40.30	29.90	16.04	56.34	45.94	-48.43	-58.83	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency."F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



**Orthogonal Axis:X
Band 1/CH36(Above 1000 MHz, Horizontal)**

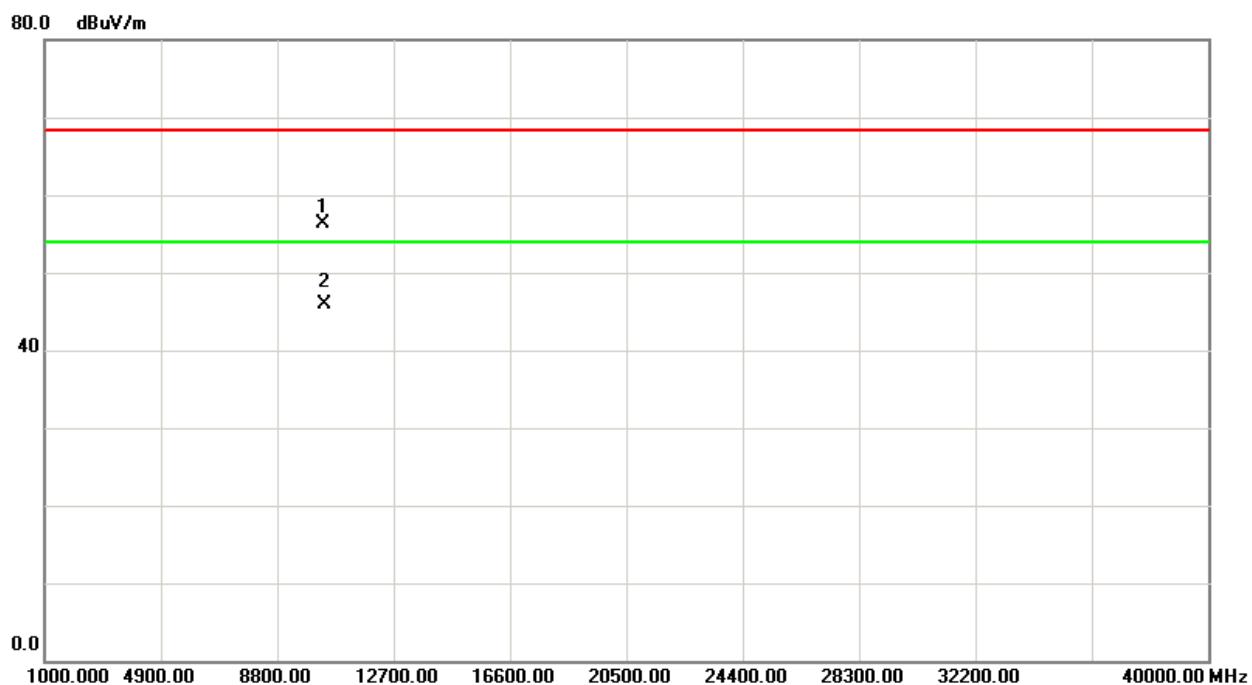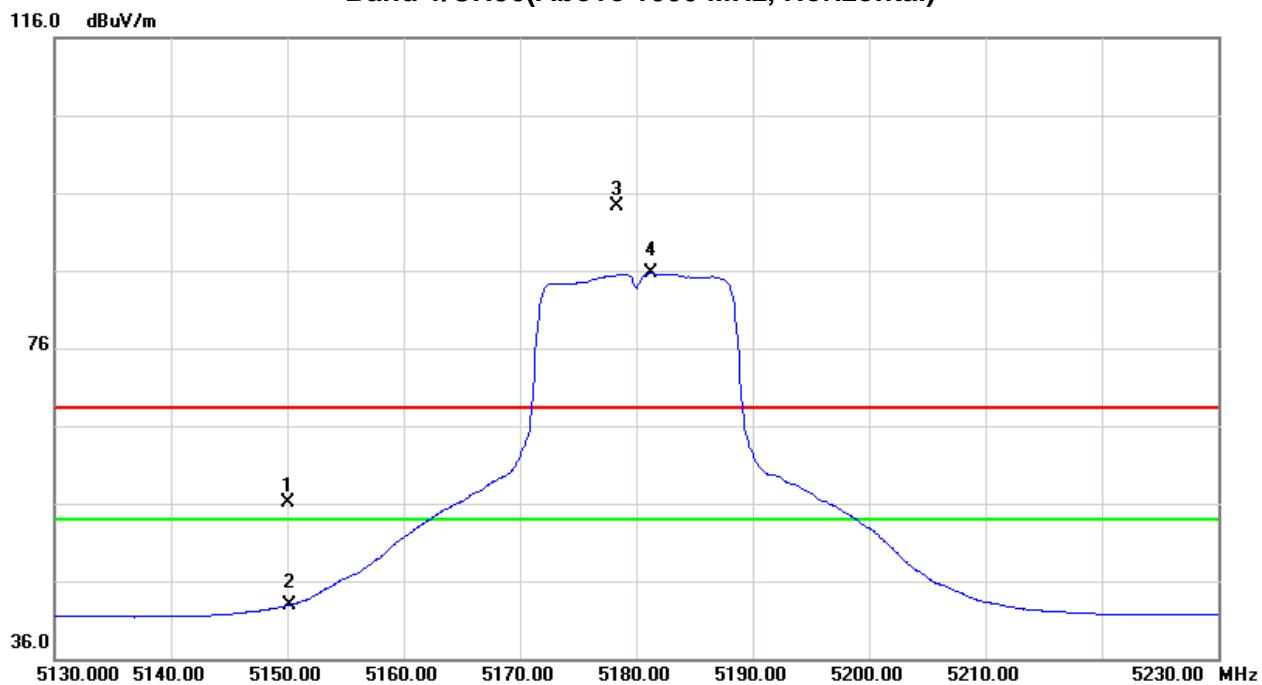



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX A Mode 5200MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5193.80	V	41.50	34.49	42.83	84.33	77.32	-20.44	-27.45					X/F
10401.17	V	41.45	30.35	15.96	57.41	46.31	-47.36	-58.46	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency."F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



**Orthogonal Axis:X
Band 1/CH40(Above 1000 MHz, Vertical)**

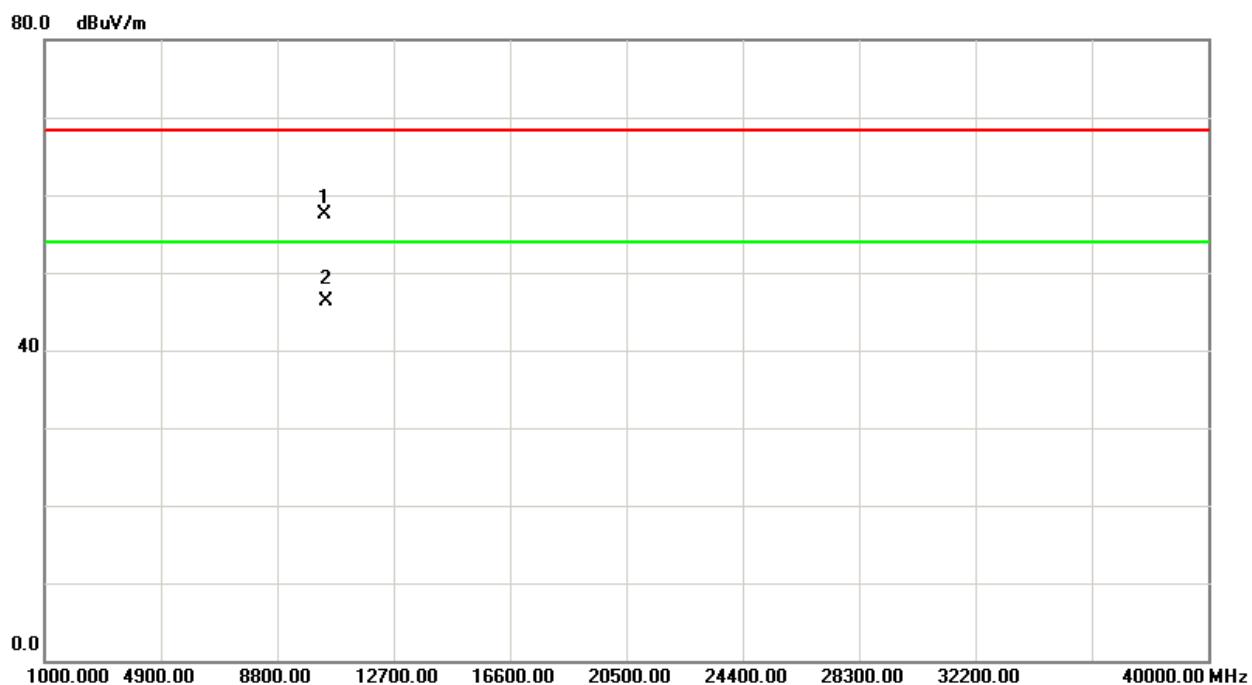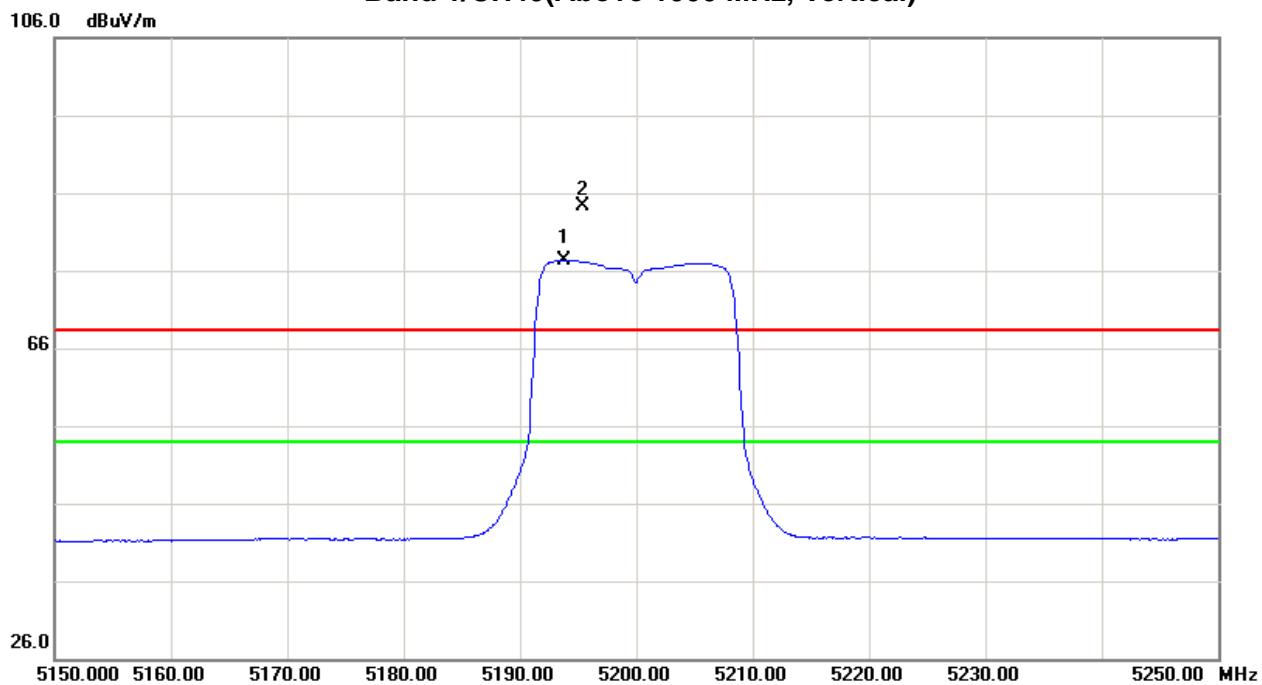



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX A Mode 5200MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5206.20	H	31.33	24.44	42.86	74.19	67.30	-30.58	-37.47					X/F
10400.55	H	40.75	29.56	15.97	56.72	45.53	-48.05	-59.24	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency."F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



**Orthogonal Axis:X
Band 1/CH40(Above 1000 MHz, Horizontal)**

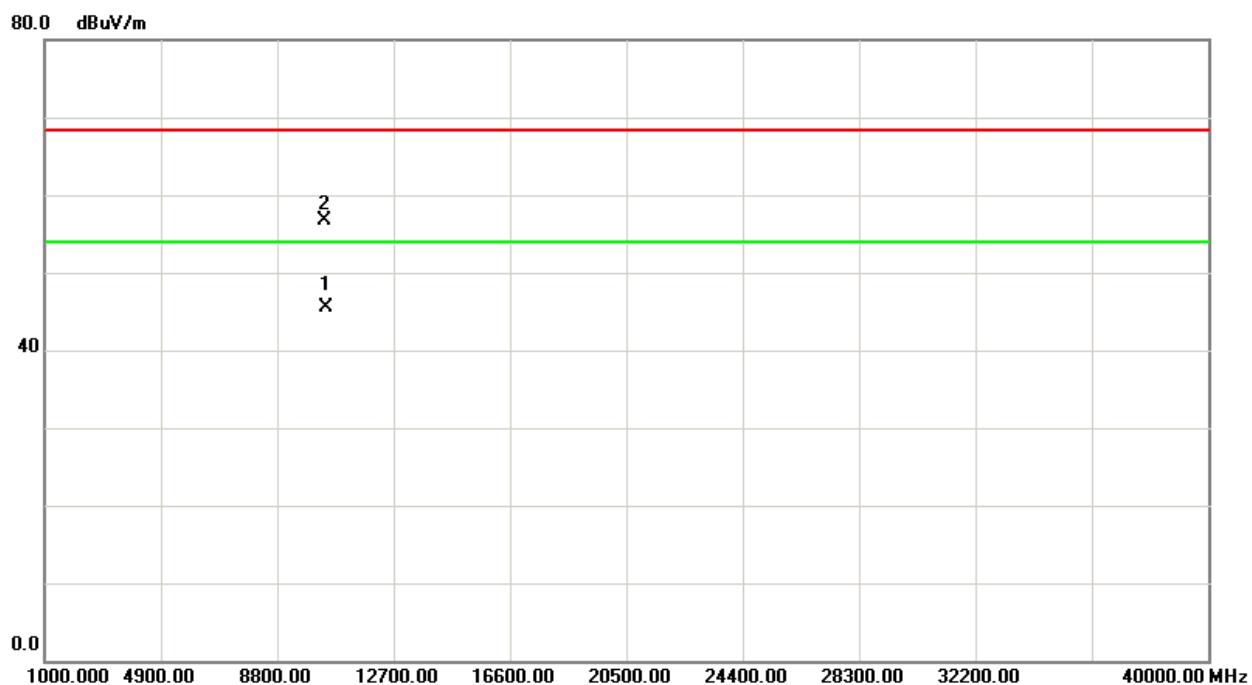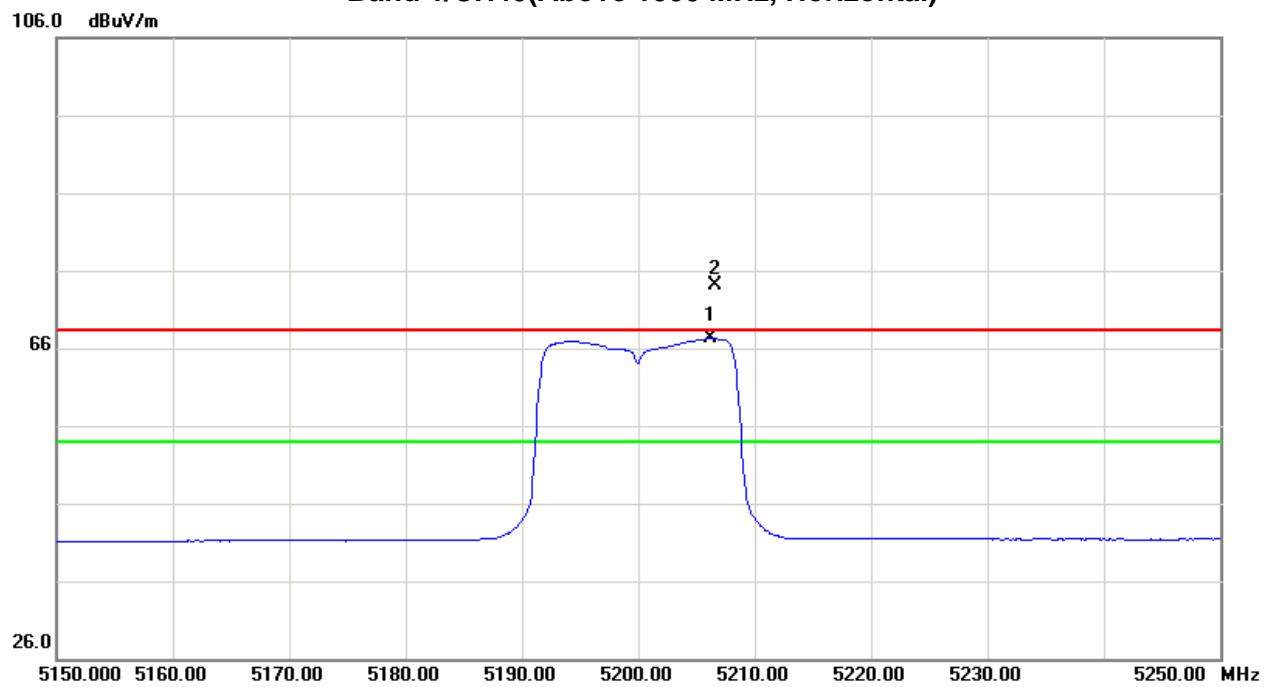



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX A Mode 5240MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5233.80	V	40.18	33.08	42.92	83.10	76.00	-21.67	-28.77					X/F
10481.17	V	41.38	30.37	15.85	57.23	46.22	-47.54	-58.55	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency."F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



**Orthogonal Axis:X
Band 1/CH48(Above 1000 MHz, Vertical)**

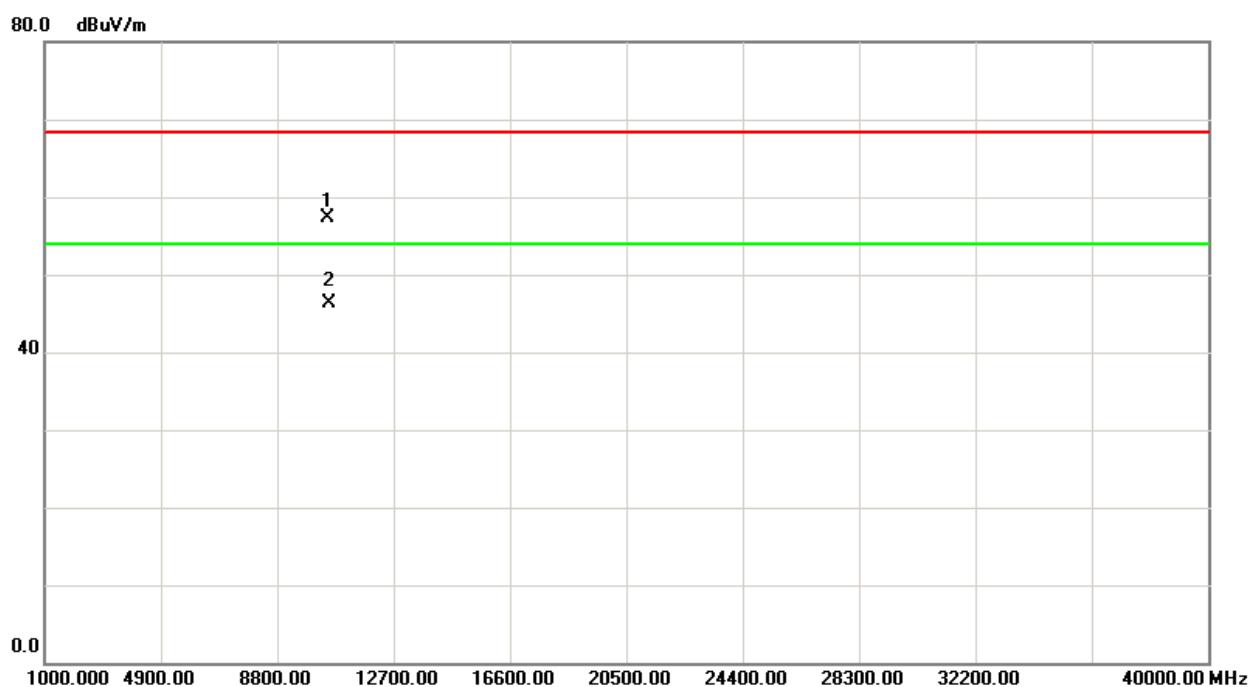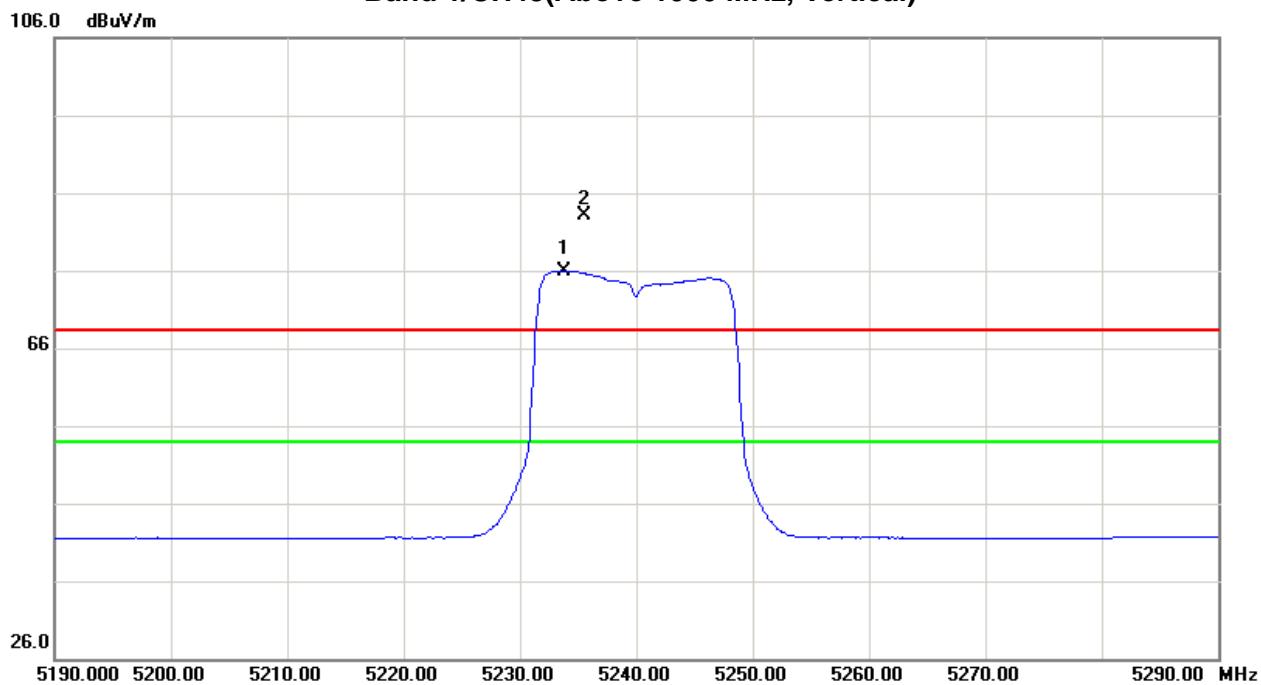



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX A Mode 5240MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5246.20	H	30.68	23.81	42.95	73.63	66.76	-31.14	-38.01					X/F
10480.55	H	40.68	29.58	15.85	56.53	45.43	-48.24	-59.34	53.63	46.76	-41.67	-48.54	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency."F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



**Orthogonal Axis:X
Band 1/CH48(Above 1000 MHz, Horizontal)**

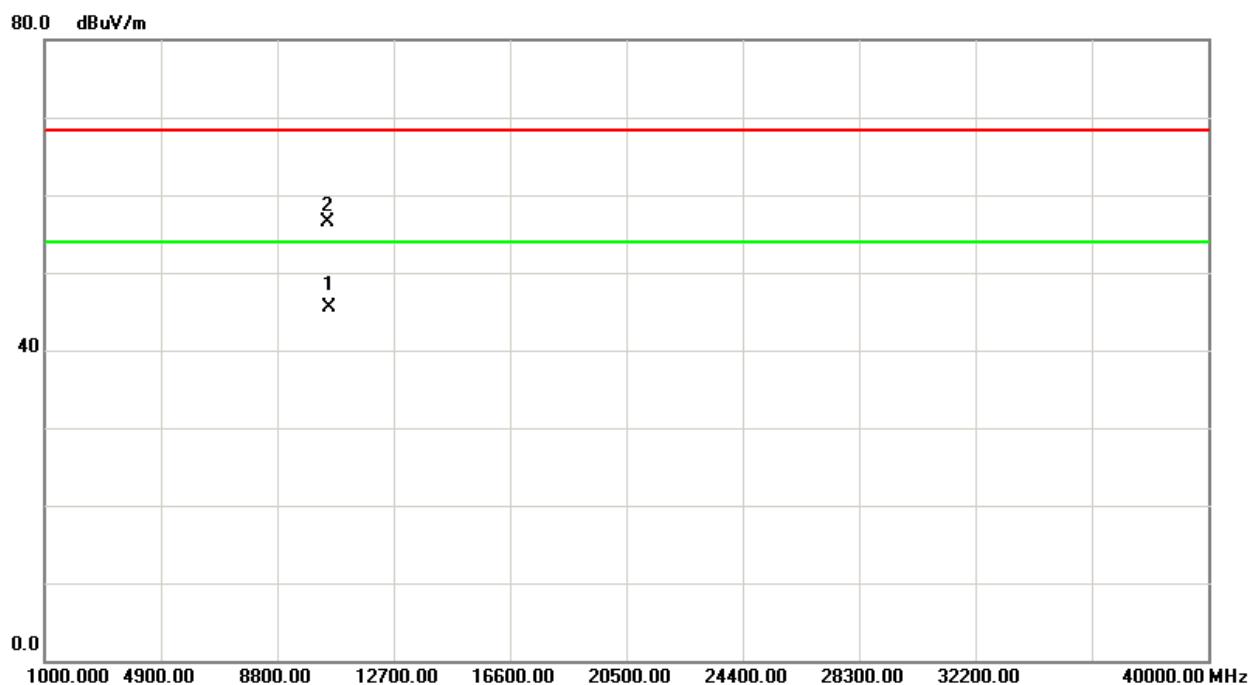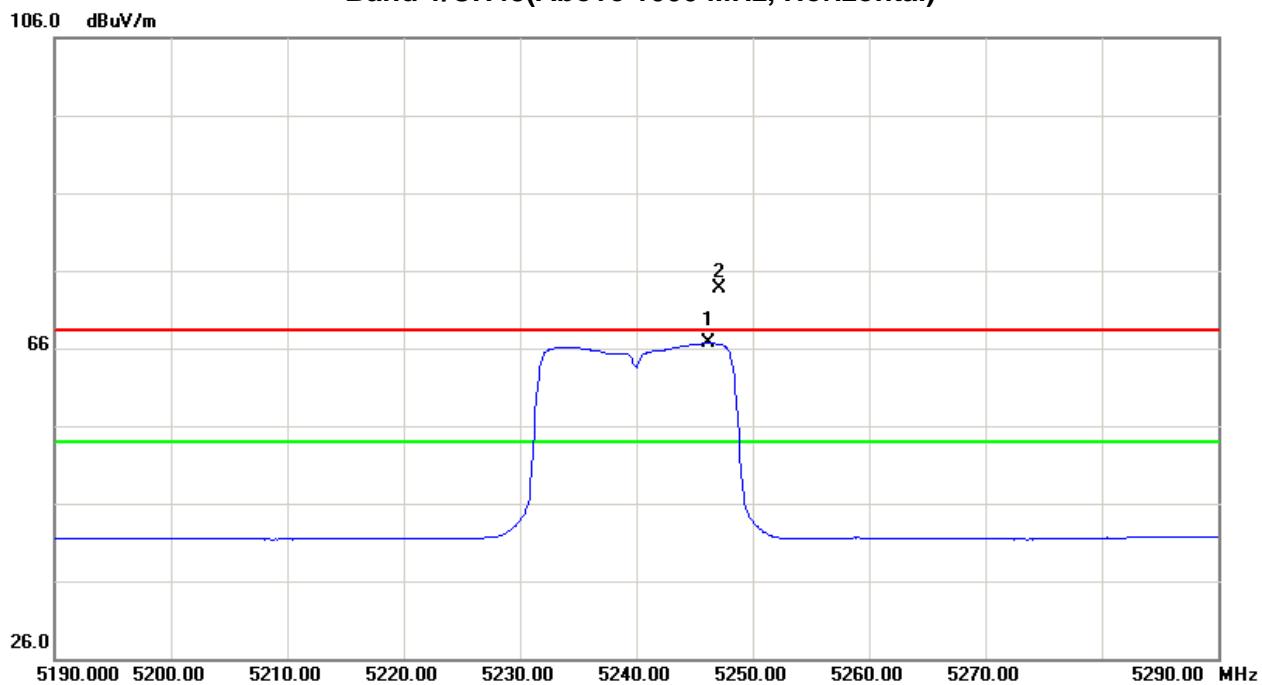



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N20 Mode 5180MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	V	6.13	-1.52	42.72	48.85	41.20	-55.92	-63.57	68.30	54.00	-27.00	-41.30	X/E
5174.00	V	44.49	36.66	42.78	87.27	79.44	-17.50	-25.33					X/F
10355.15	V	40.52	30.25	16.03	56.55	46.28	-48.22	-58.49	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency."F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



**Orthogonal Axis:X
Band 1/CH36(Above 1000 MHz, Vertical)**

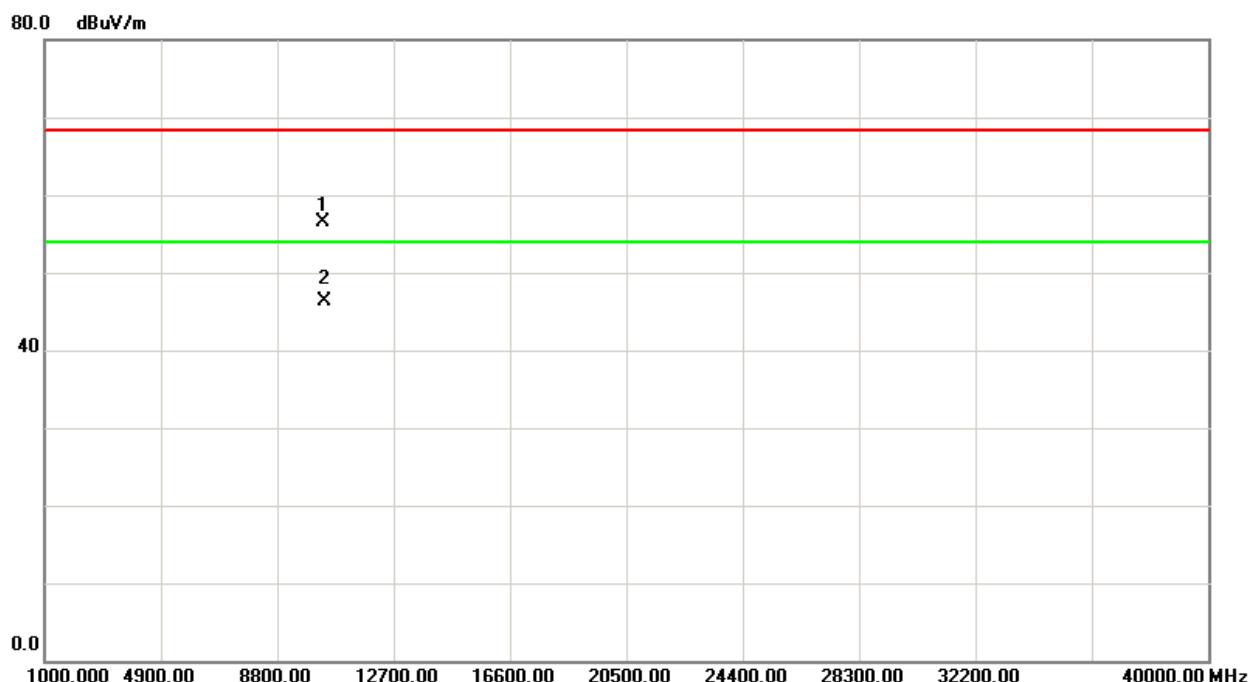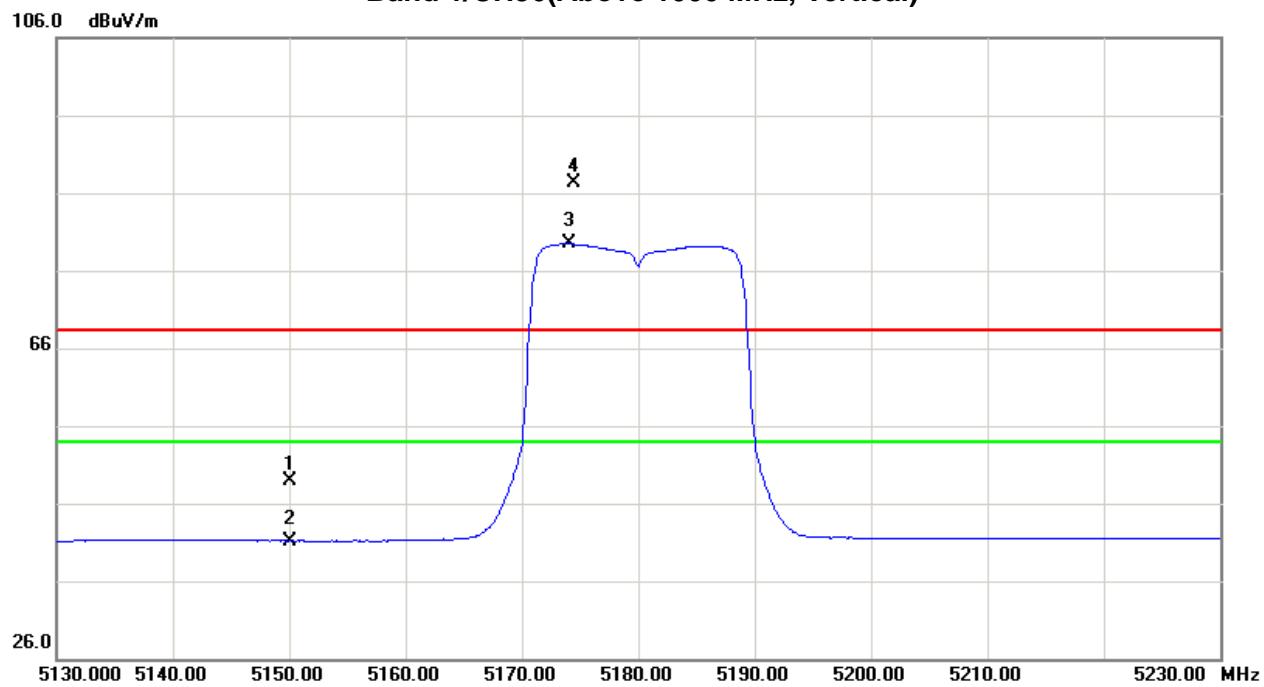



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N20 Mode 5180MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	H	7.10	-1.59	42.72	49.82	41.13	-54.95	-63.64	68.30	54.00	-27.00	-41.30	X/E
5184.30	H	34.66	26.47	42.80	77.46	69.27	-27.31	-35.50					X/F
10357.25	H	40.25	29.12	16.02	56.27	45.14	-48.50	-59.63	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency."F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



**Orthogonal Axis:X
Band 1/CH36(Above 1000 MHz, Horizontal)**

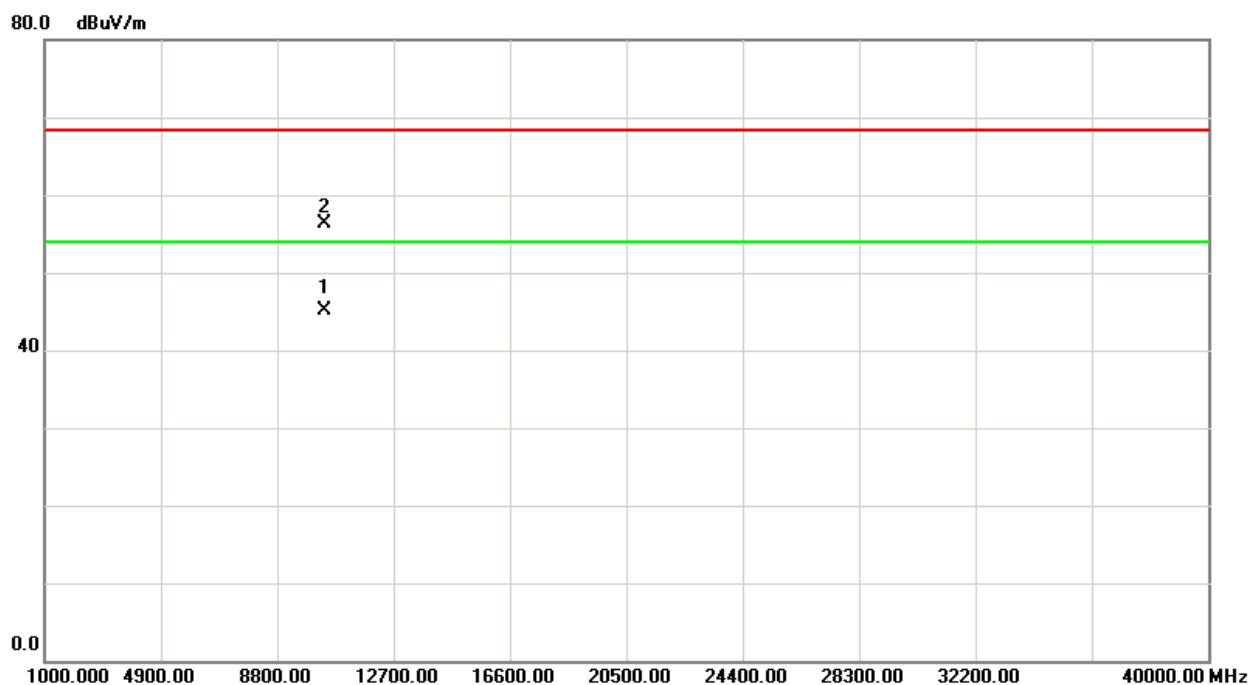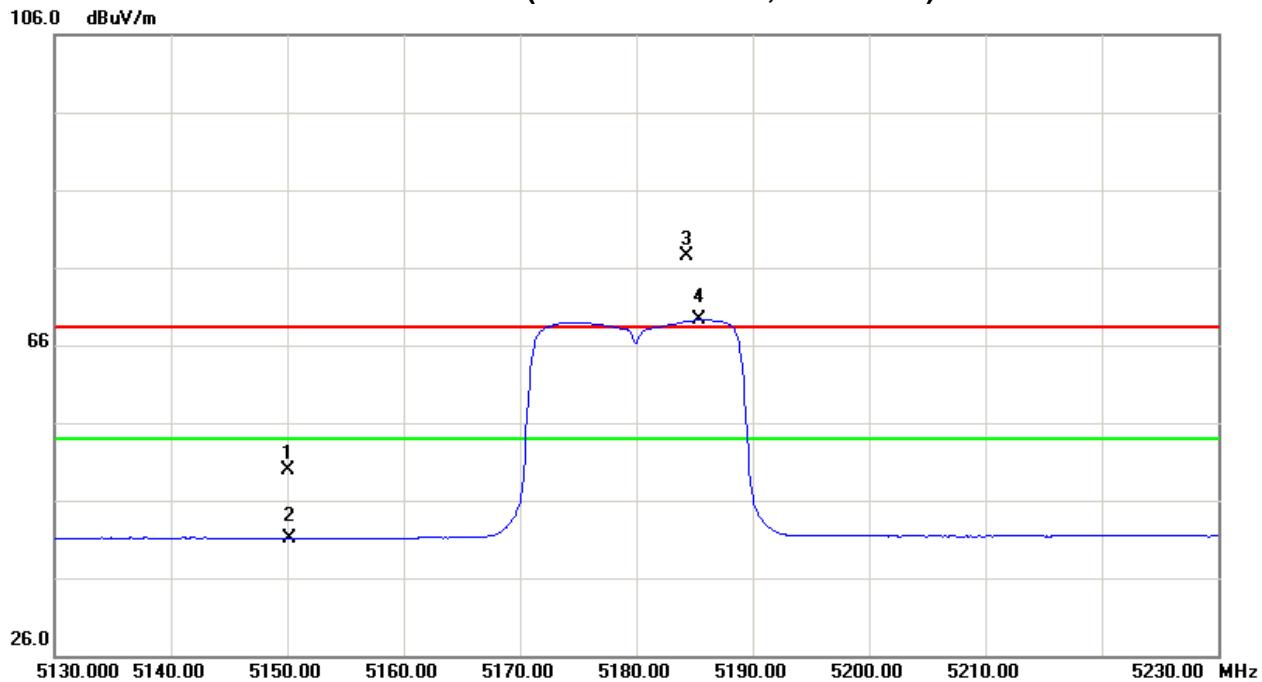



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N20 Mode 5200MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5194.00	V	44.04	36.88	42.83	86.87	79.71	-17.90	-25.06					X/F
10404.30	V	40.83	30.25	15.96	56.79	46.21	-47.98	-58.56	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency."F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



**Orthogonal Axis:X
Band 1/CH40(Above 1000 MHz, Vertical)**

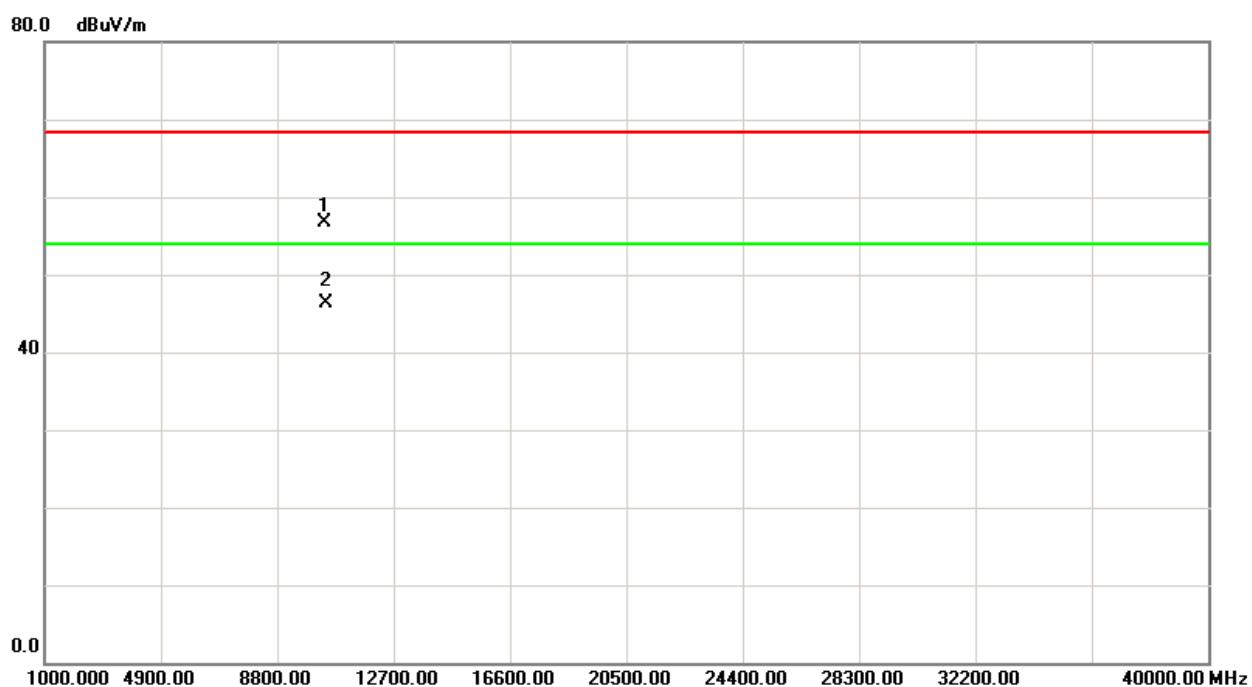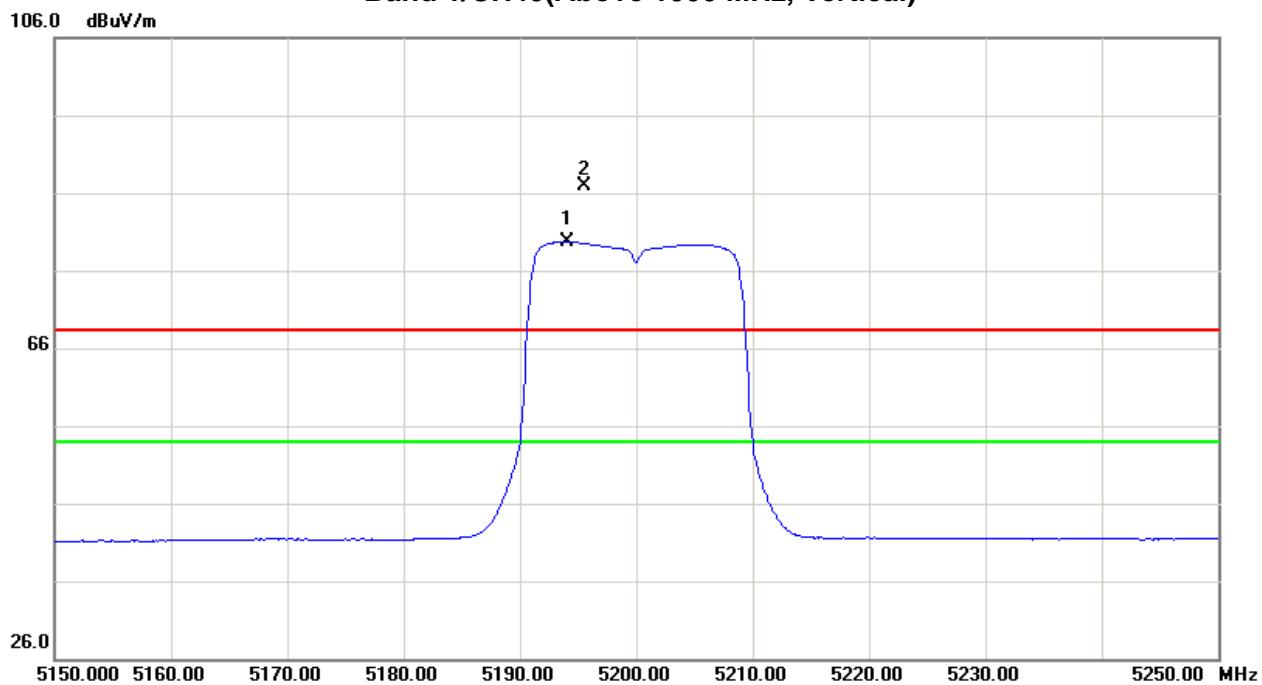



EUT:	AC1200 Wireless Dual Band Gigabit Router			Model Name :		WF2780		
Temperature:	25 °C			Relative Humidity :			58 %	
Test Voltage :	AC 120V/60Hz							
Test Mode :	Band 1/ TX N20 Mode 5200MHz							



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5193.50	H	32.27	24.95	42.83	75.10	67.78	-29.67	-36.99					X/F
10402.95	H	40.42	29.48	15.96	56.38	45.44	-48.39	-59.33	55.10	47.78	-40.20	-47.52	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency."F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



**Orthogonal Axis:X
Band 1/CH40(Above 1000 MHz, Horizontal)**

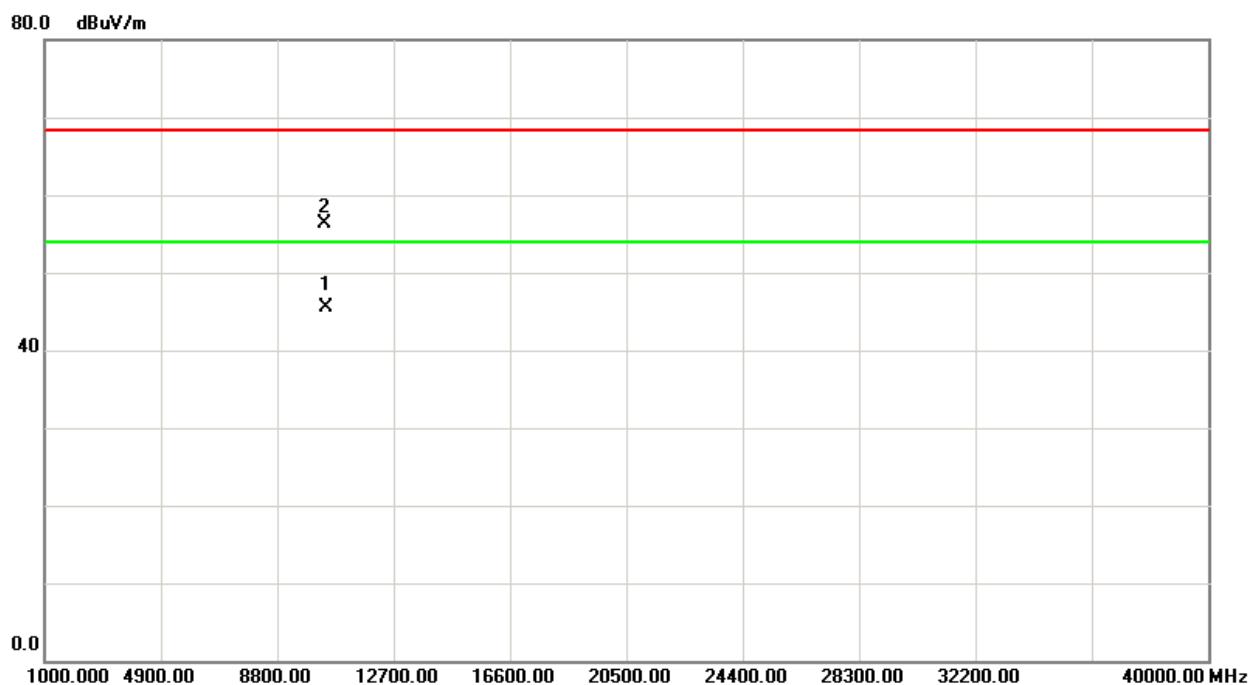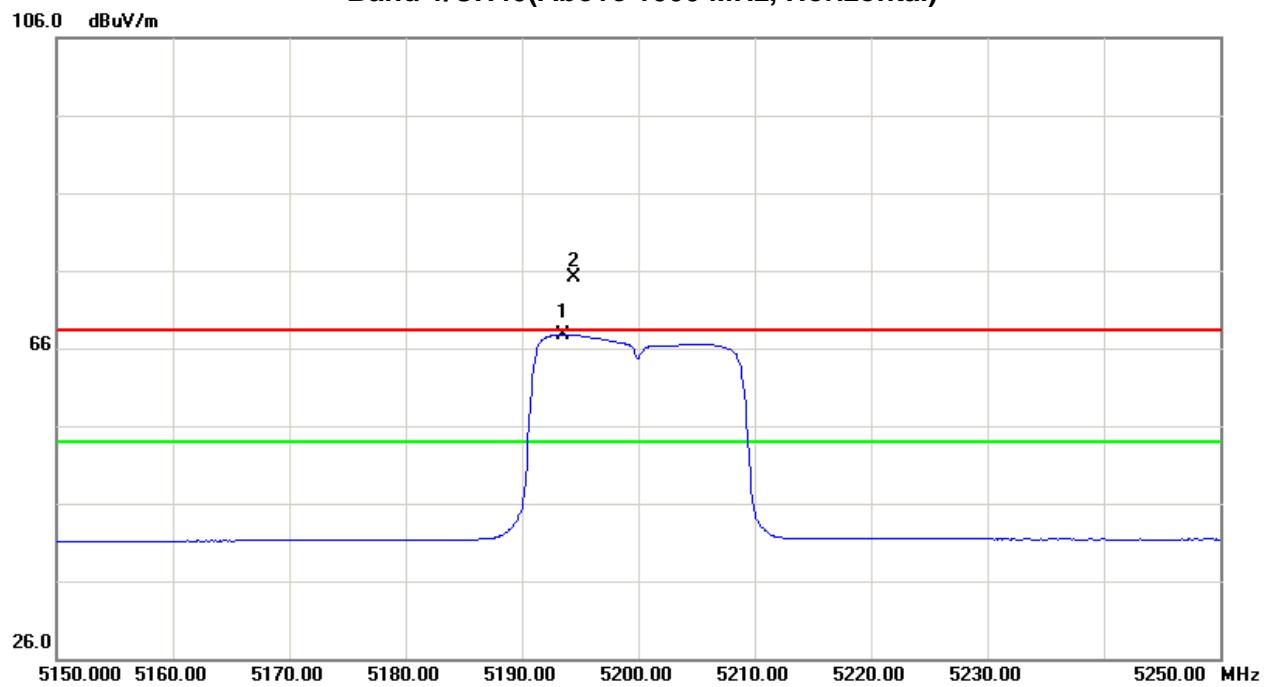



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N20 Mode 5240MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5233.40	V	42.22	34.92	42.92	85.14	77.84	-19.63	-26.93					X/F
10485.15	V	40.67	30.31	15.85	56.52	46.16	-48.25	-58.61	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency."F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



**Orthogonal Axis:X
Band 1/CH48(Above 1000 MHz, Vertical)**

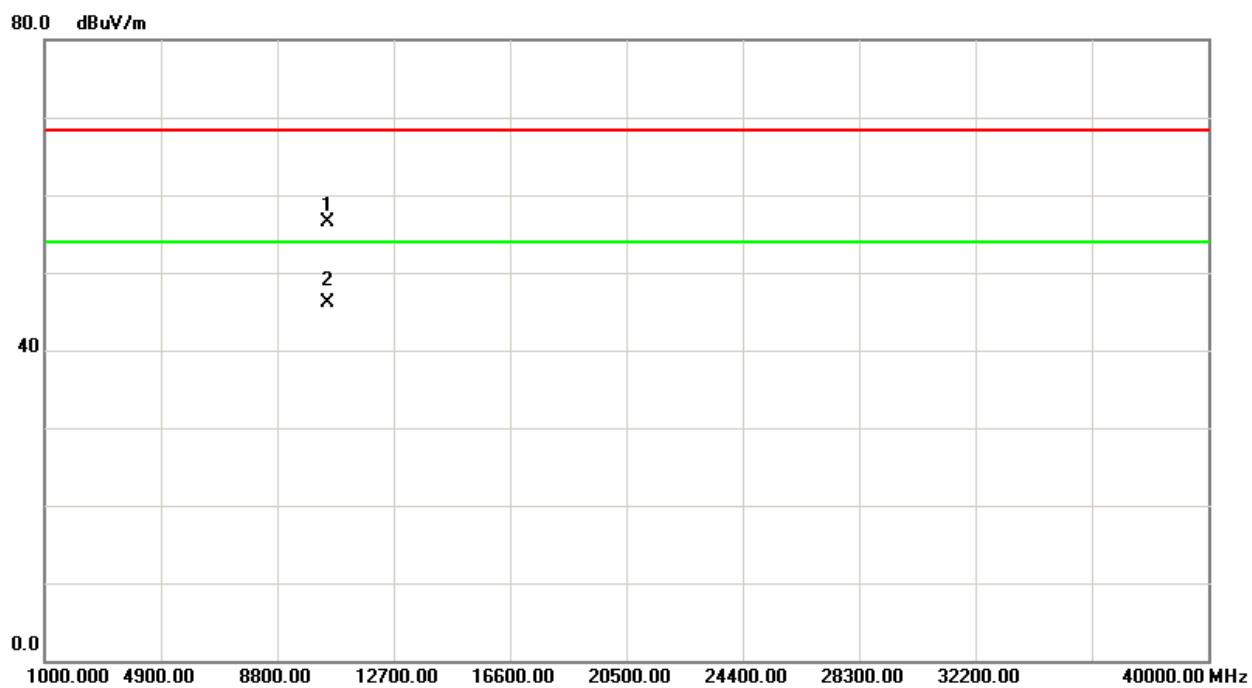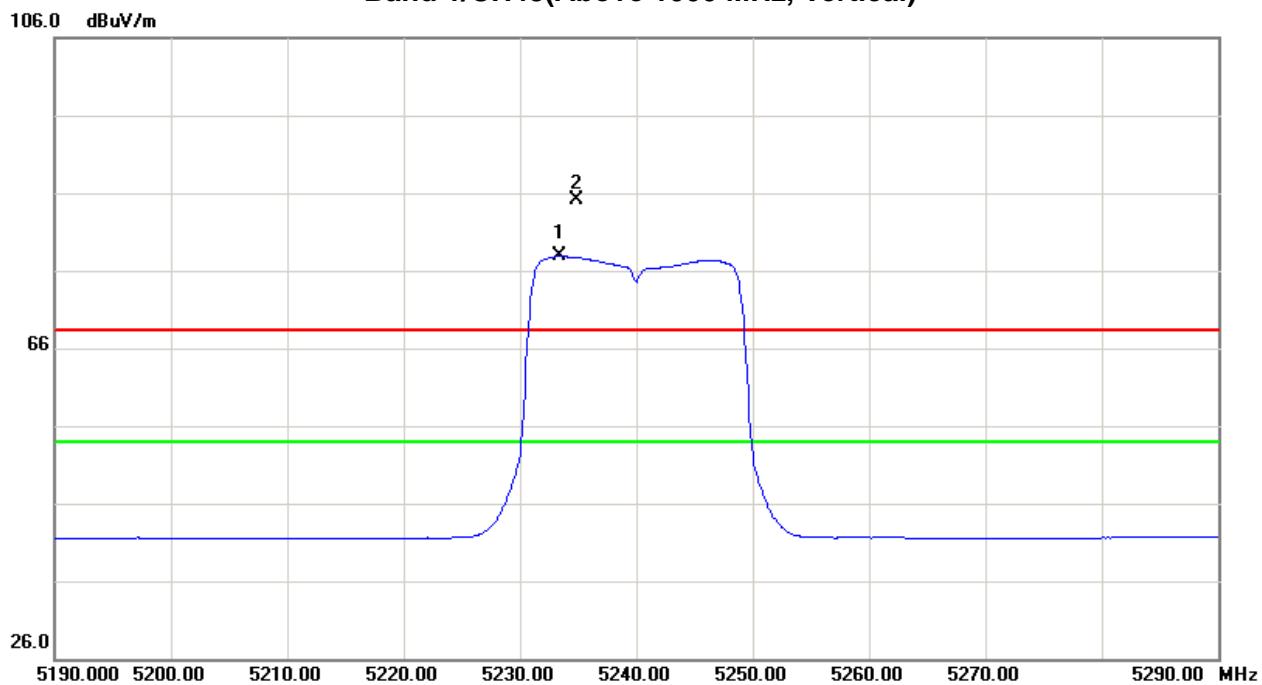



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N20 Mode 5240MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5246.20	H	31.21	22.94	42.95	74.16	65.89	-30.61	-38.88					X/F
10483.95	H	40.25	30.58	15.84	56.09	46.42	-48.68	-58.35	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency."F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



**Orthogonal Axis:X
Band 1/CH48(Above 1000 MHz, Horizontal)**

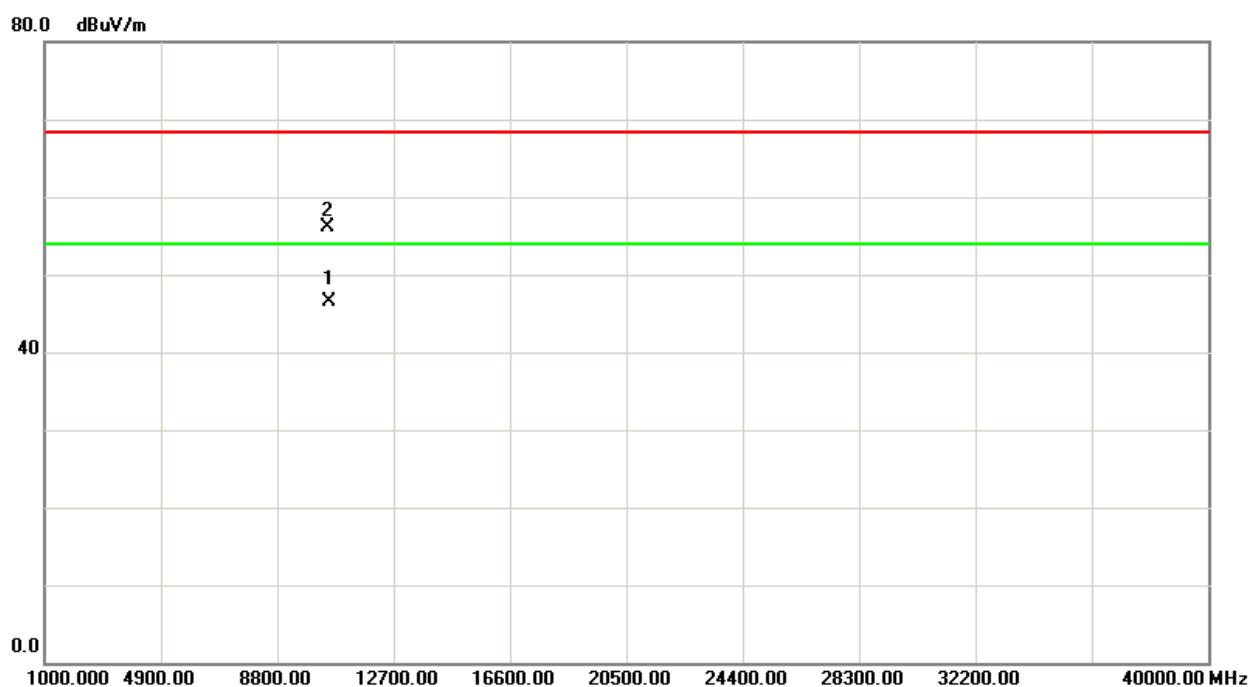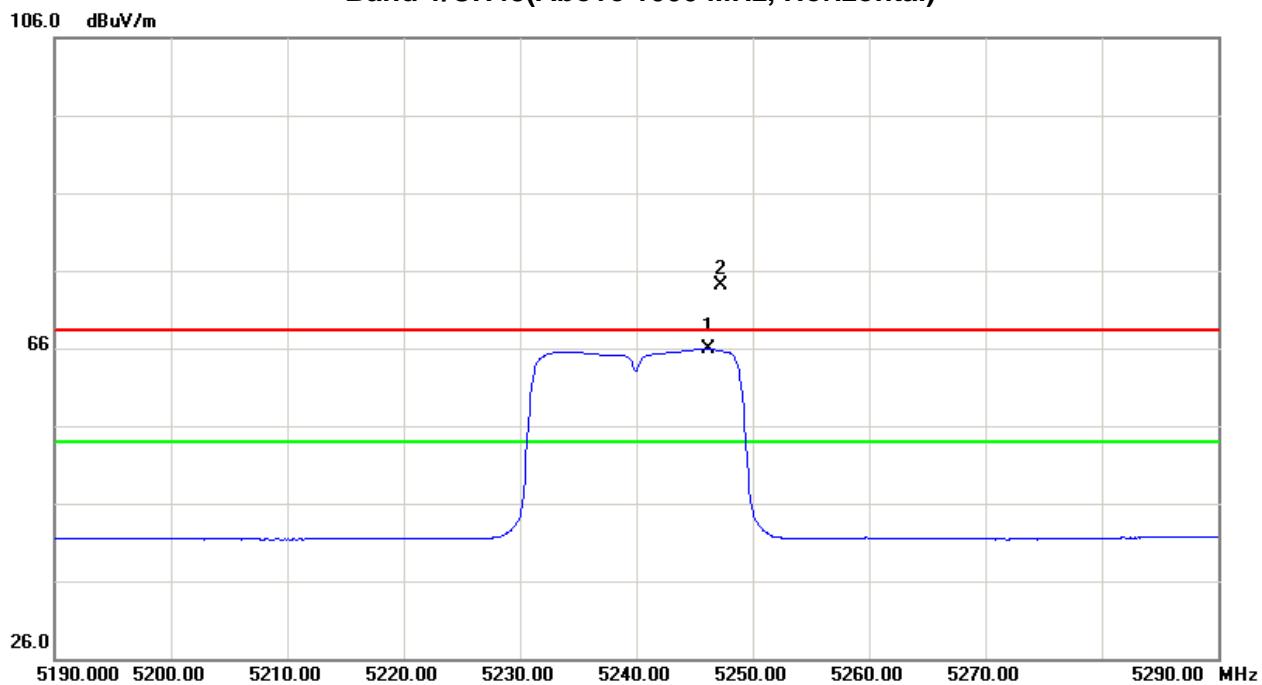



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N40 Mode 5190MHz		



Freq. (MHz)	Ant.Pol. HV	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	V	6.18	-1.49	42.72	48.90	41.23	-55.87	-63.54	68.30	54.00	-27.00	-41.30	X/E
5191.40	V	40.39	32.73	42.82	83.21	75.55	-21.56	-29.22					X/F
10371.15	V	37.34	26.57	16.01	53.35	42.58	-51.42	-62.19	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency."F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X Band 1/CH38(Above 1000 MHz, Vertical)

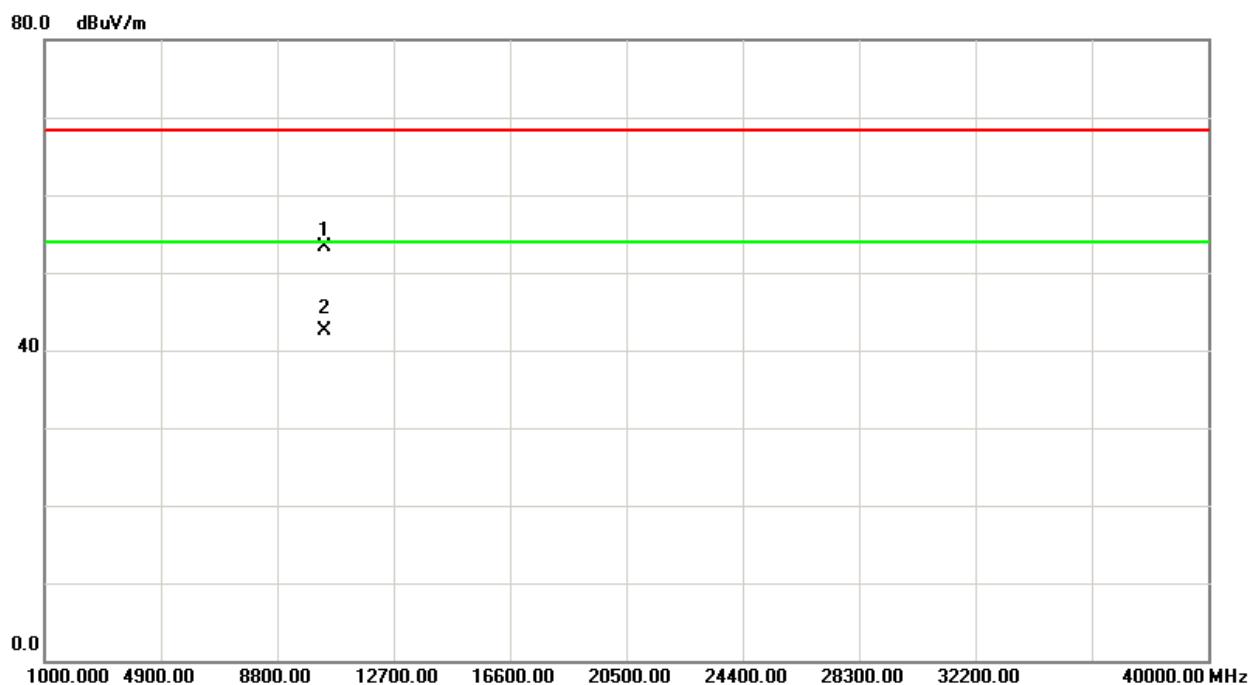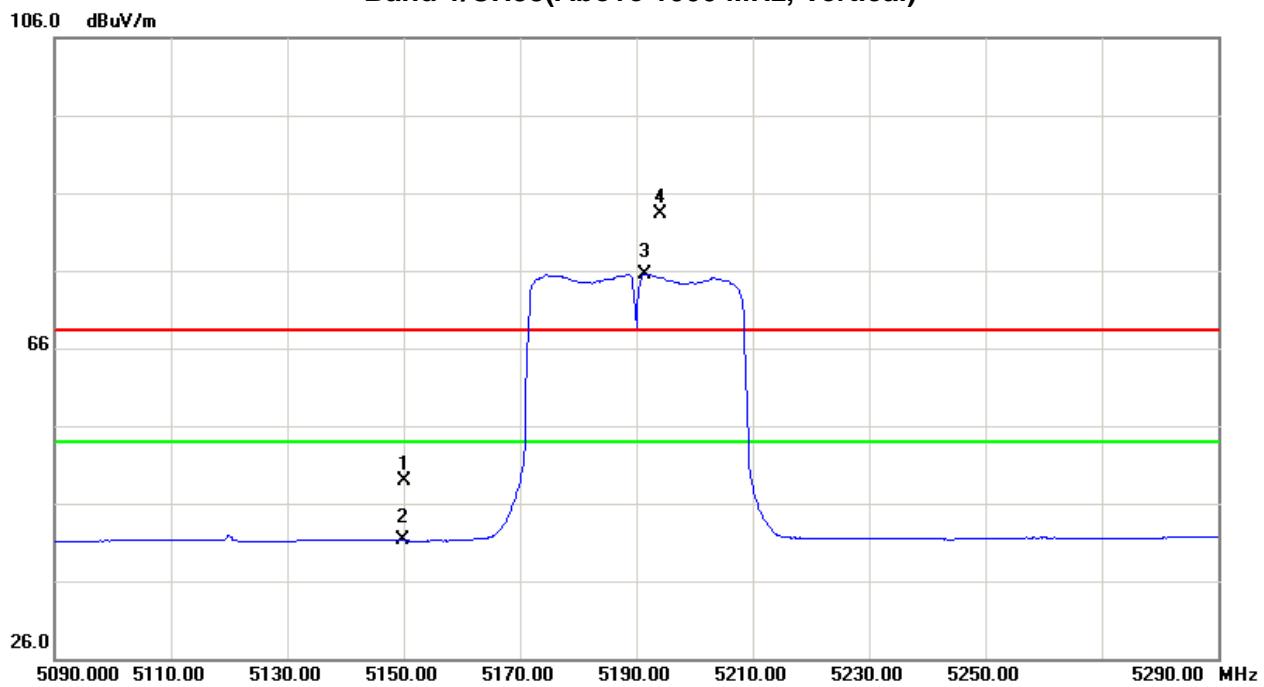



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N40 Mode 5190MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	H	6.99	-1.63	42.72	49.71	41.09	-55.06	-63.68	68.30	54.00	-27.00	-41.30	X/E
5185.20	H	30.59	22.23	42.81	73.40	65.04	-31.37	-39.73					X/F
10384.37	H	37.12	26.15	15.98	53.10	42.13	-51.67	-62.64	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency."F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



**Orthogonal Axis:X
Band 1/CH38(Above 1000 MHz, Horizontal)**

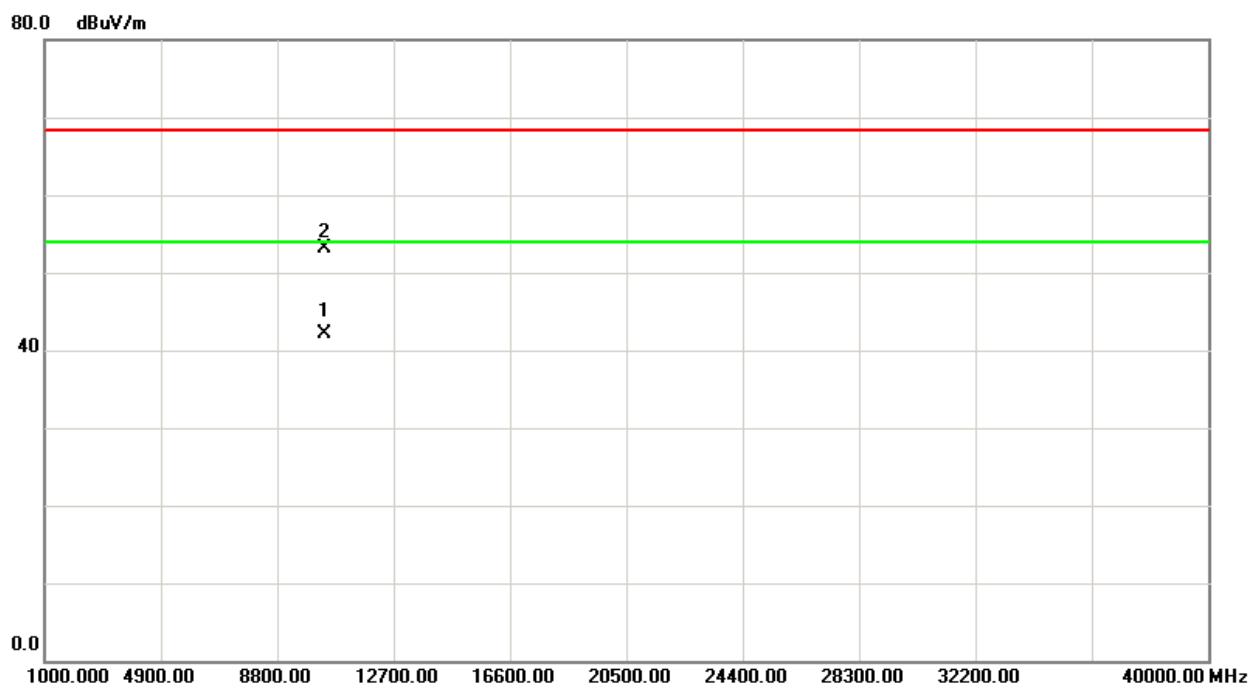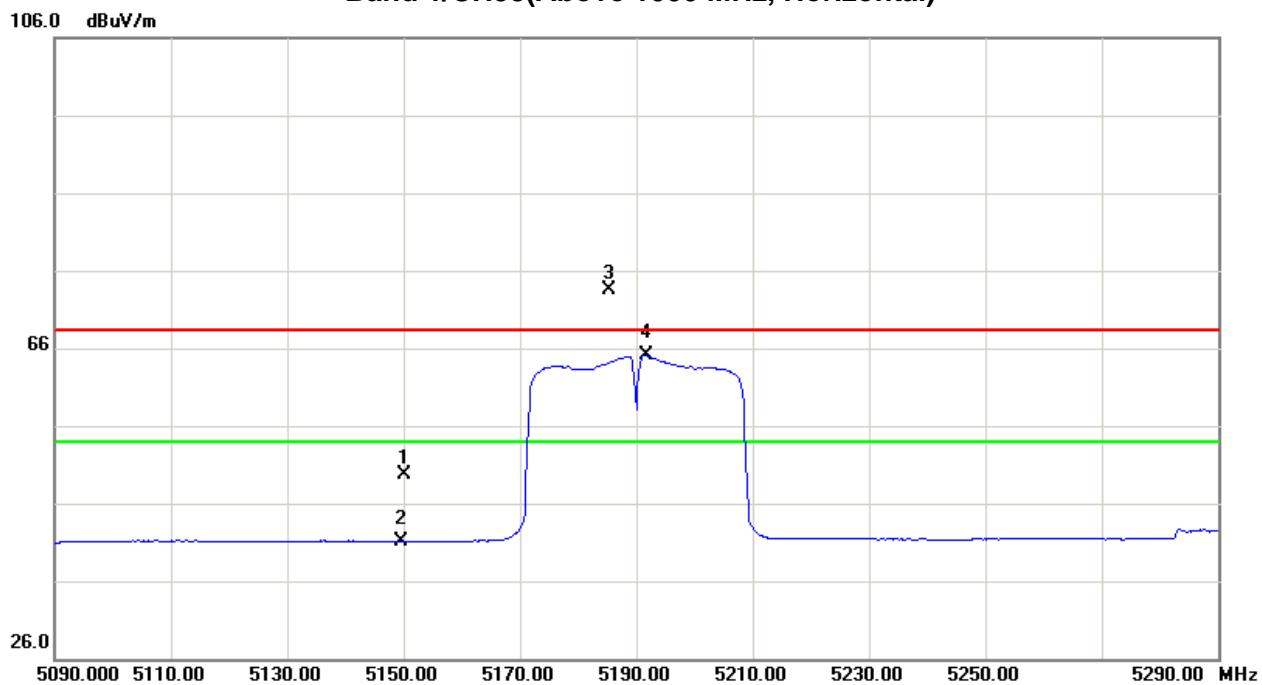



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N40 Mode 5230MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5218.00	V	38.23	31.28	42.89	81.12	74.17	-23.65	-30.60					X/F
10455.16	V	37.45	26.46	15.89	53.34	42.35	-51.43	-62.42	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency."F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



**Orthogonal Axis:X
Band 1/CH46(Above 1000 MHz, Vertical)**

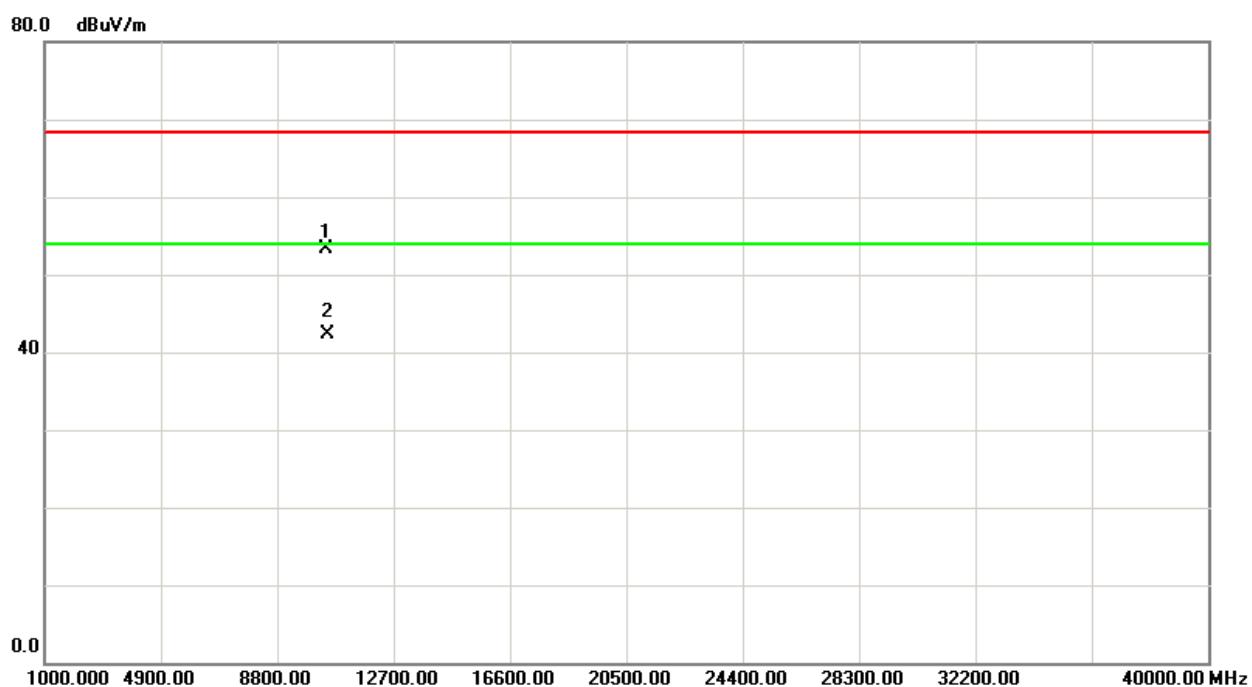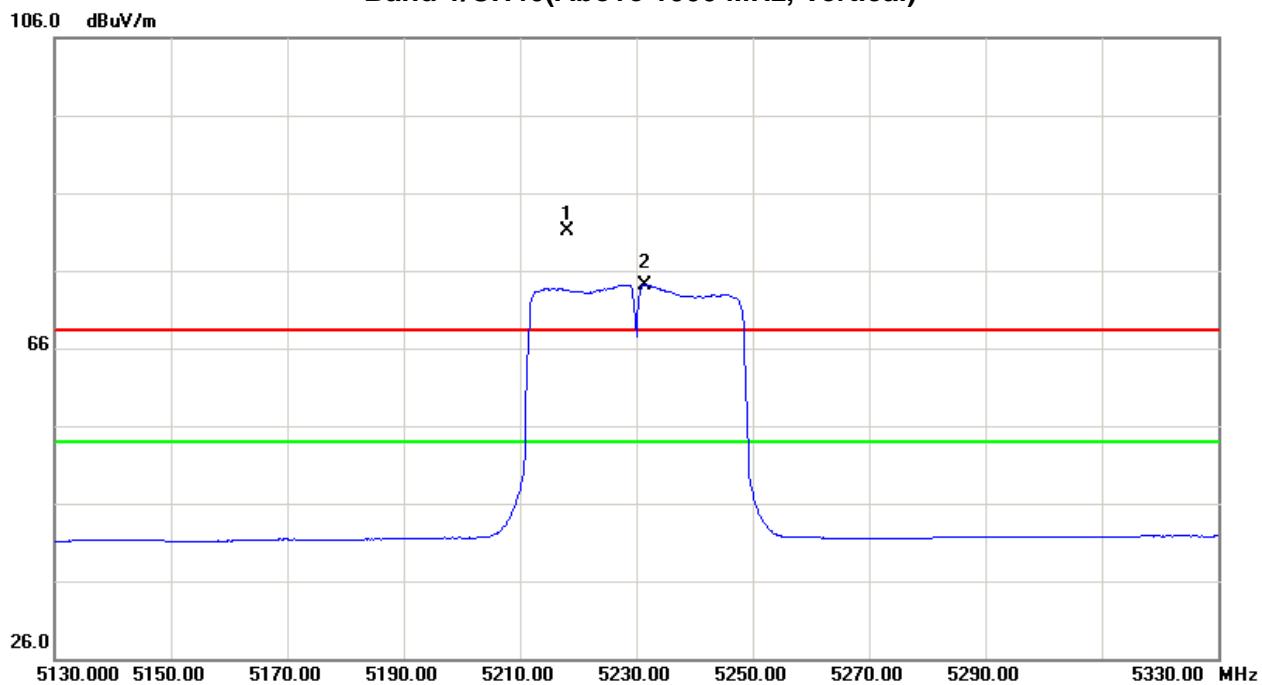



EUT:	AC1200 Wireless Dual Band Gigabit Router			Model Name :		WF2780		
Temperature:	25 °C			Relative Humidity :			58 %	
Test Voltage :	AC 120V/60Hz							
Test Mode :	Band 1/ TX N40 Mode 5230MHz							



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5216.40	H	27.42	20.09	42.89	70.31	62.98	-34.46	-41.79					X/F
10468.95	H	37.31	26.41	15.86	53.17	42.27	-51.60	-62.50	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency."F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



**Orthogonal Axis:X
Band 1/CH46(Above 1000 MHz, Horizontal)**

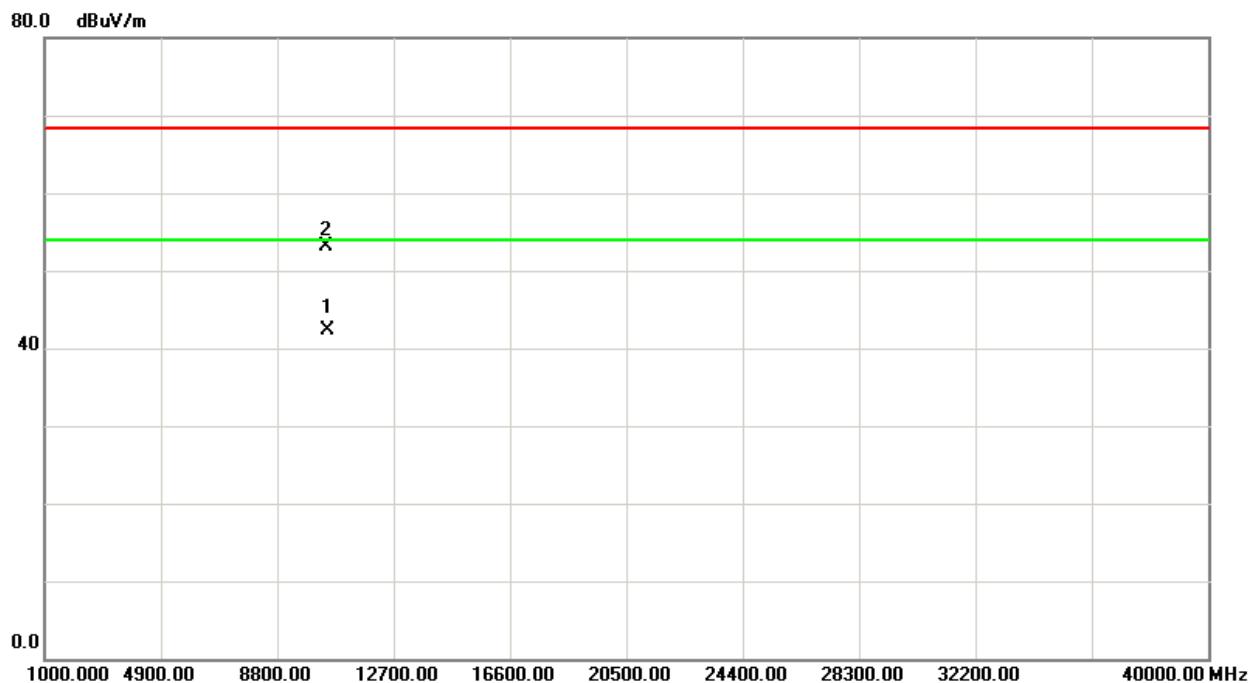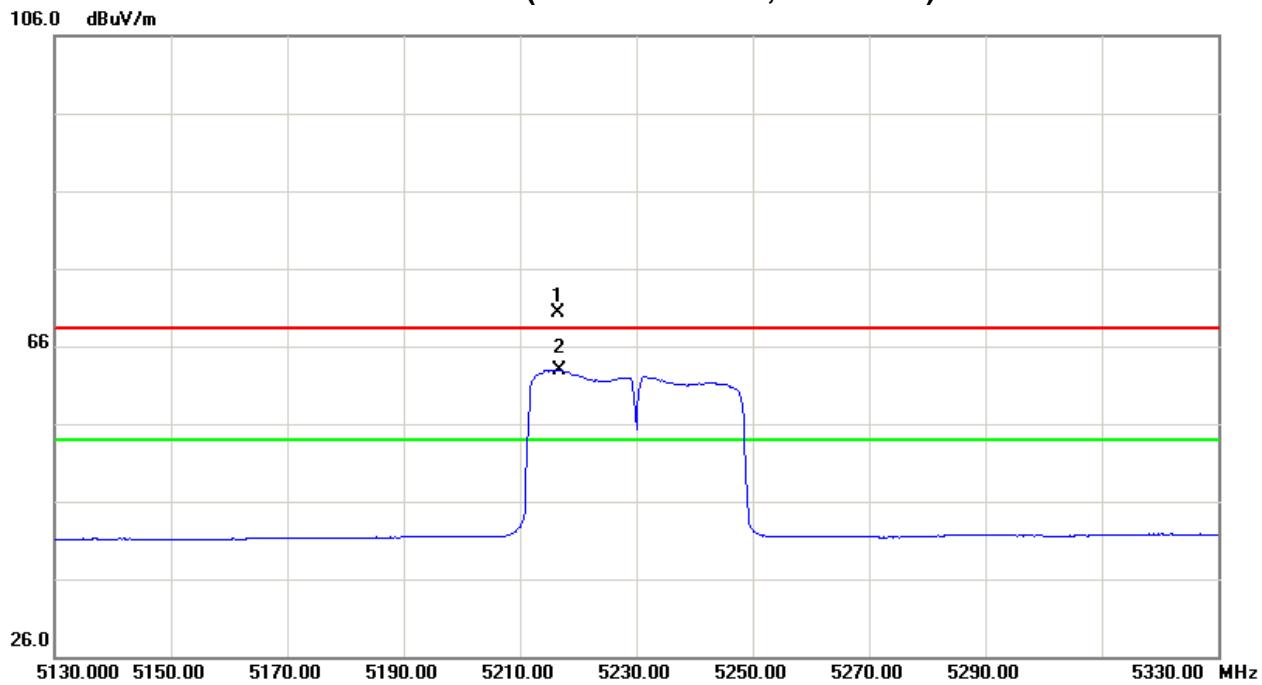



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX AC N20 Mode 5180MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	V	6.18	-1.46	42.72	48.90	41.26	-55.87	-63.51	68.30	54.00	-27.00	-41.30	X/E
5174.20	V	44.44	36.11	42.78	87.22	78.89	-17.55	-25.88					X/F
10355.18	V	40.24	30.19	16.03	56.27	46.22	-48.50	-58.55	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency.“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



**Orthogonal Axis:X
Band 1/CH36(Above 1000 MHz, Vertical)**

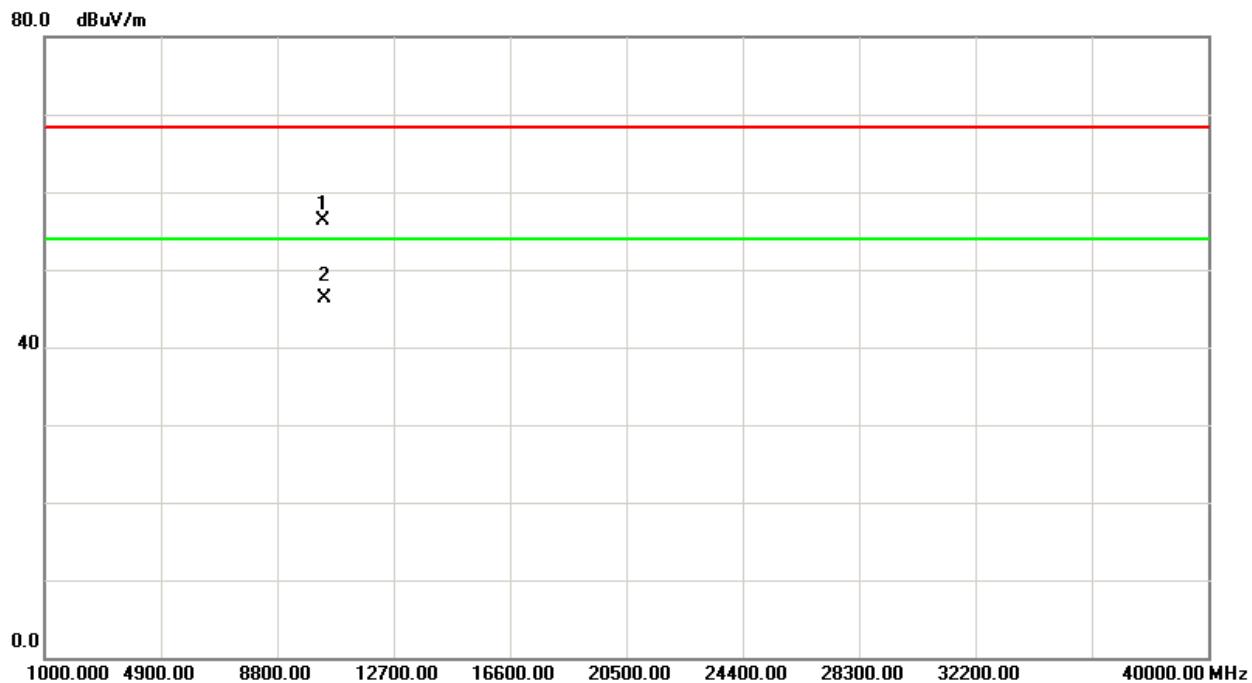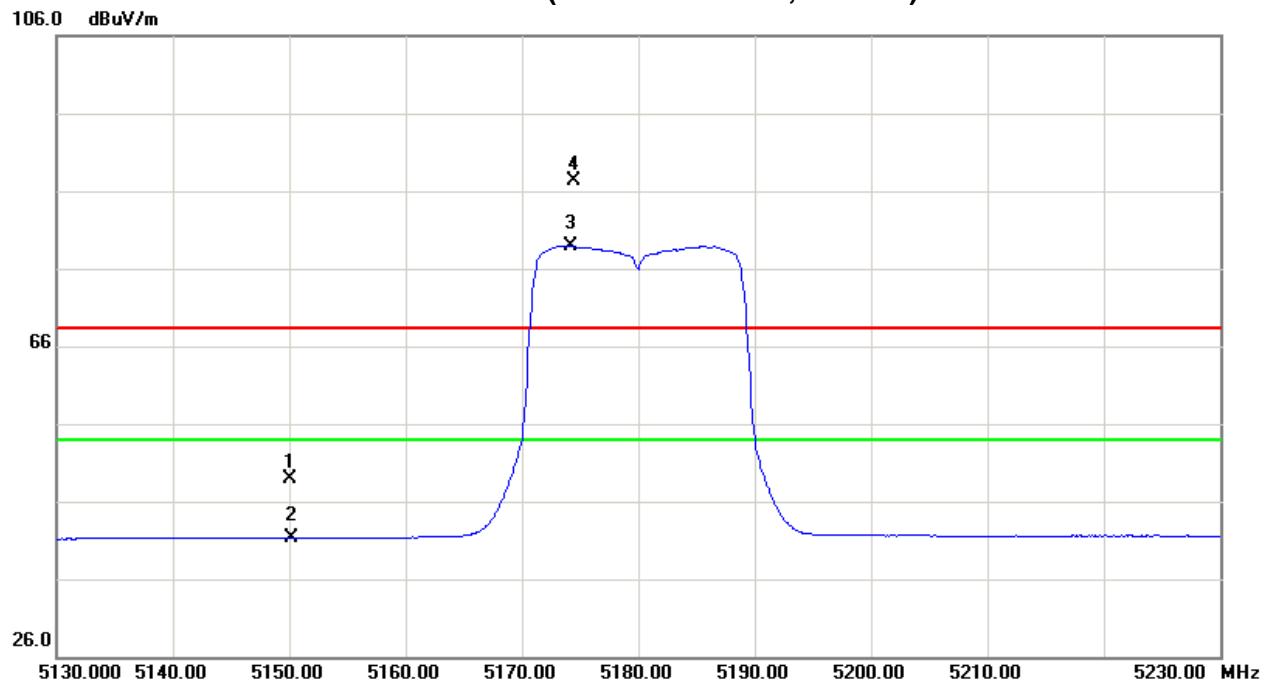



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX AC N20 Mode 5180MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	H	7.51	-1.61	42.72	50.23	41.11	-54.54	-63.66	68.30	54.00	-27.00	-41.30	X/E
5173.30	H	34.44	25.56	42.78	77.22	68.34	-27.55	-36.43					X/F
10357.22	H	40.43	29.31	16.02	56.45	45.33	-48.32	-59.44	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency."F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



**Orthogonal Axis:X
Band 1/CH36(Above 1000 MHz, Horizontal)**

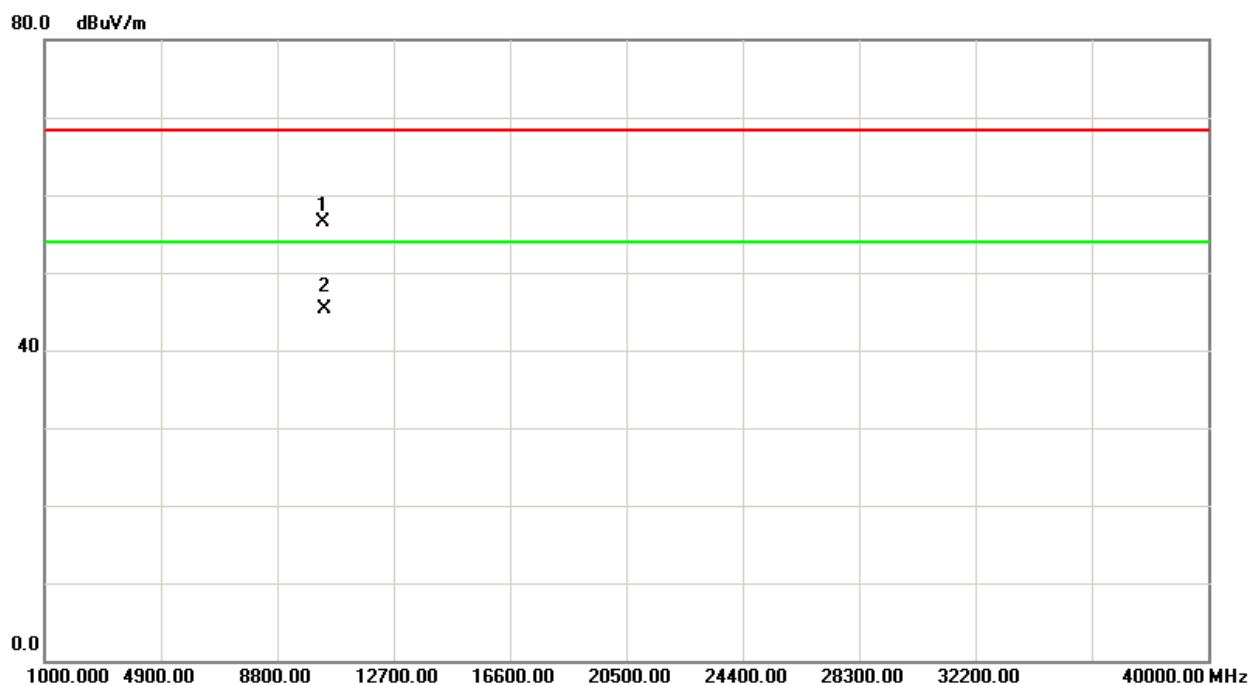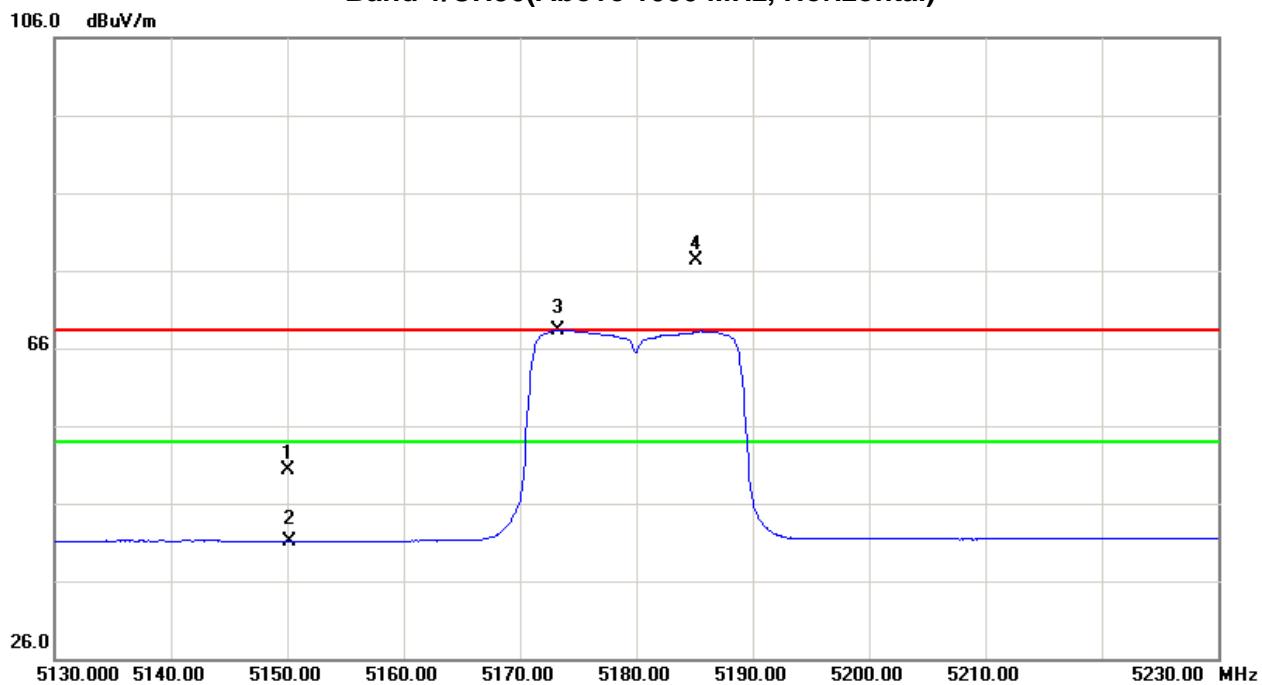



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX AC N20 Mode 5200MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5205.50	V	41.89	33.17	42.86	84.75	76.03	-20.02	-28.74					X/F
10404.35	V	40.73	30.15	15.96	56.69	46.11	-48.08	-58.66	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency."F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



**Orthogonal Axis:X
Band 1/CH40(Above 1000 MHz, Vertical)**

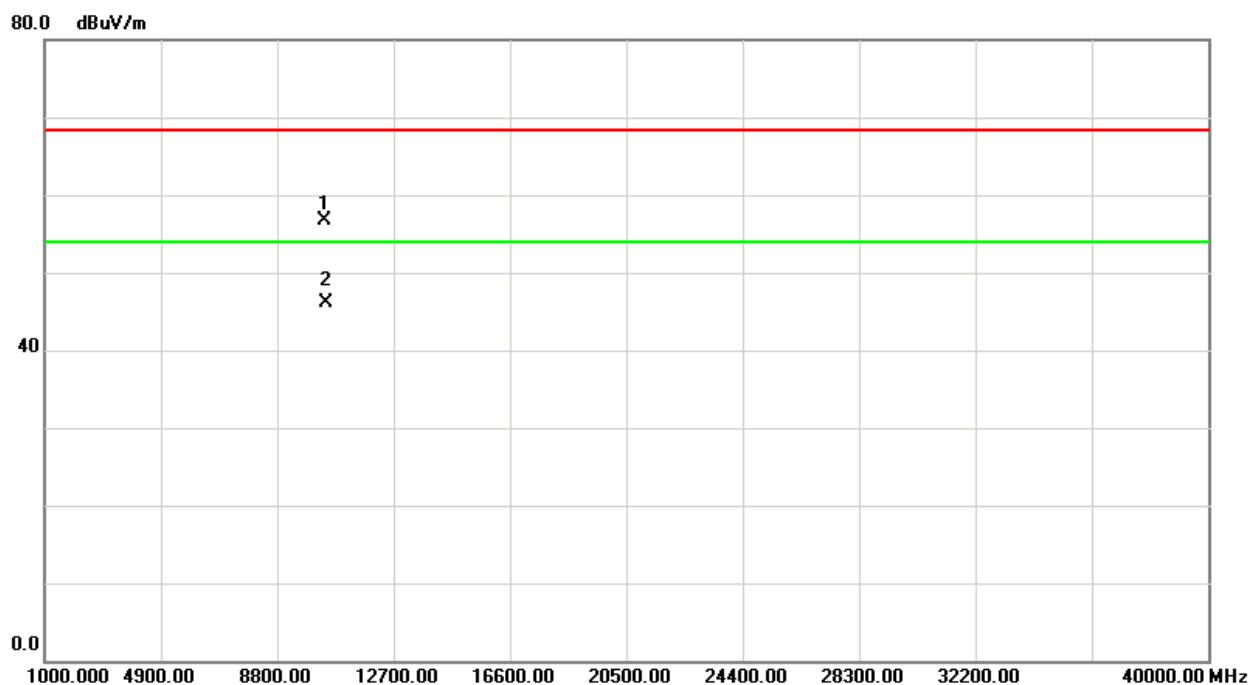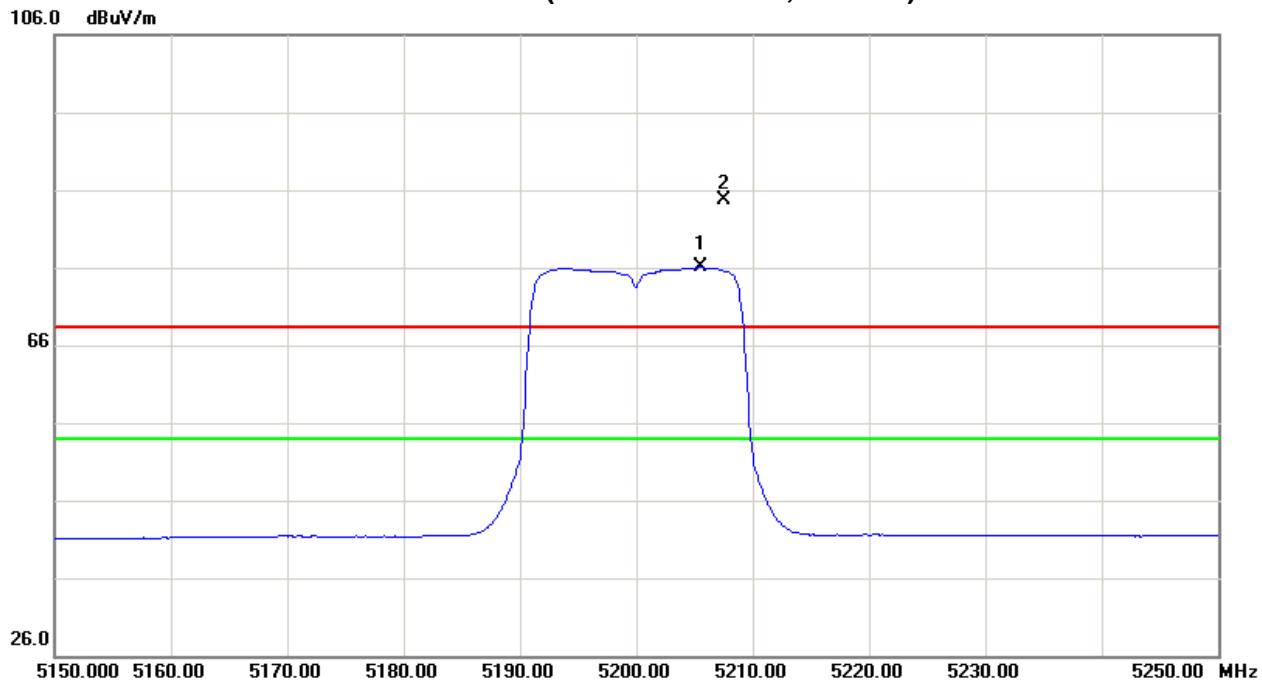



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX AC N20 Mode 5200MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5205.10	H	30.42	22.17	42.86	73.28	65.03	-31.49	-39.74					X/F
10402.98	H	40.27	29.53	15.96	56.23	45.49	-48.54	-59.28	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency."F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



**Orthogonal Axis:X
Band 1/CH40(Above 1000 MHz, Horizontal)**

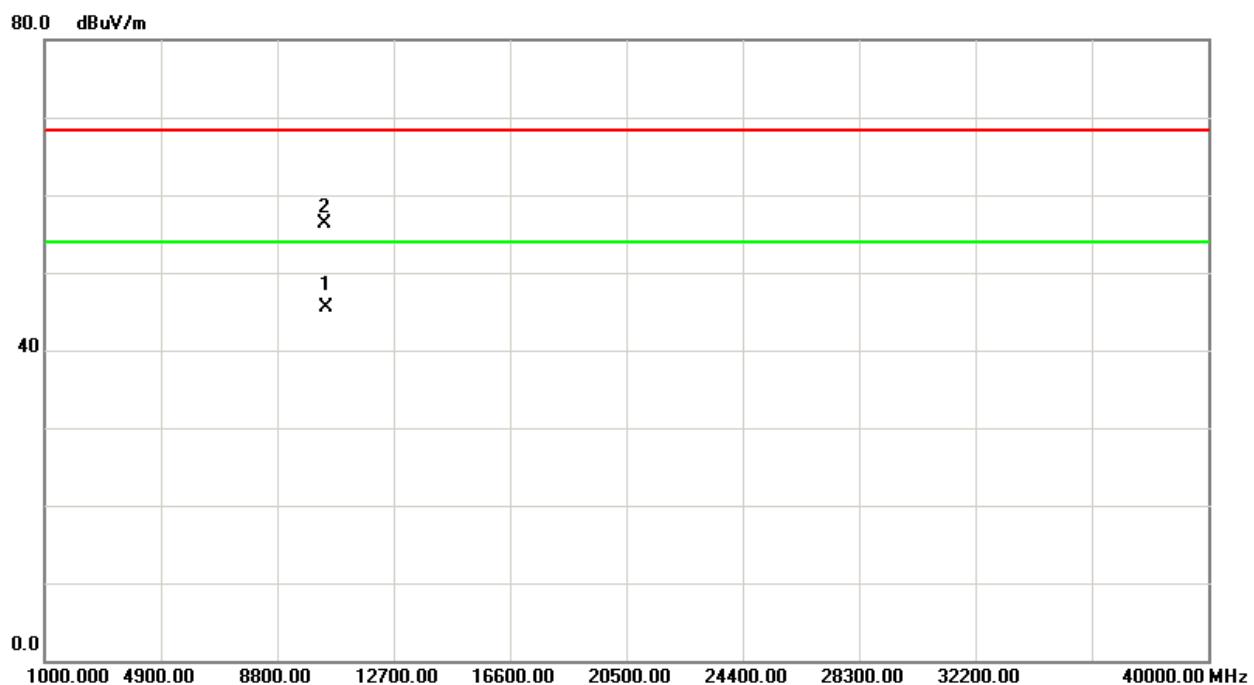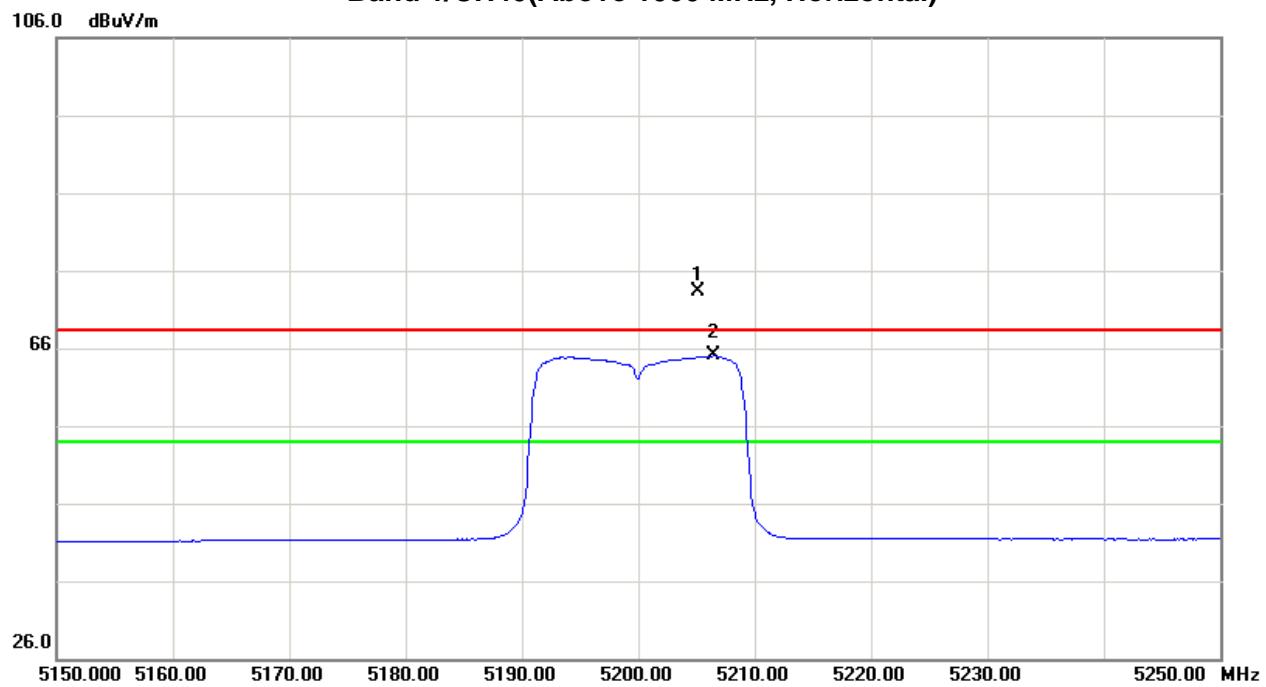



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX AC N20 Mode 5240MHz		


Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5233.40	V	43.05	34.79	42.92	85.97	77.71	-18.80	-27.06					X/F
10485.16	V	40.79	30.36	15.84	56.63	46.20	-48.14	-58.57	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency."F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



**Orthogonal Axis:X
Band 1/CH48(Above 1000 MHz, Vertical)**

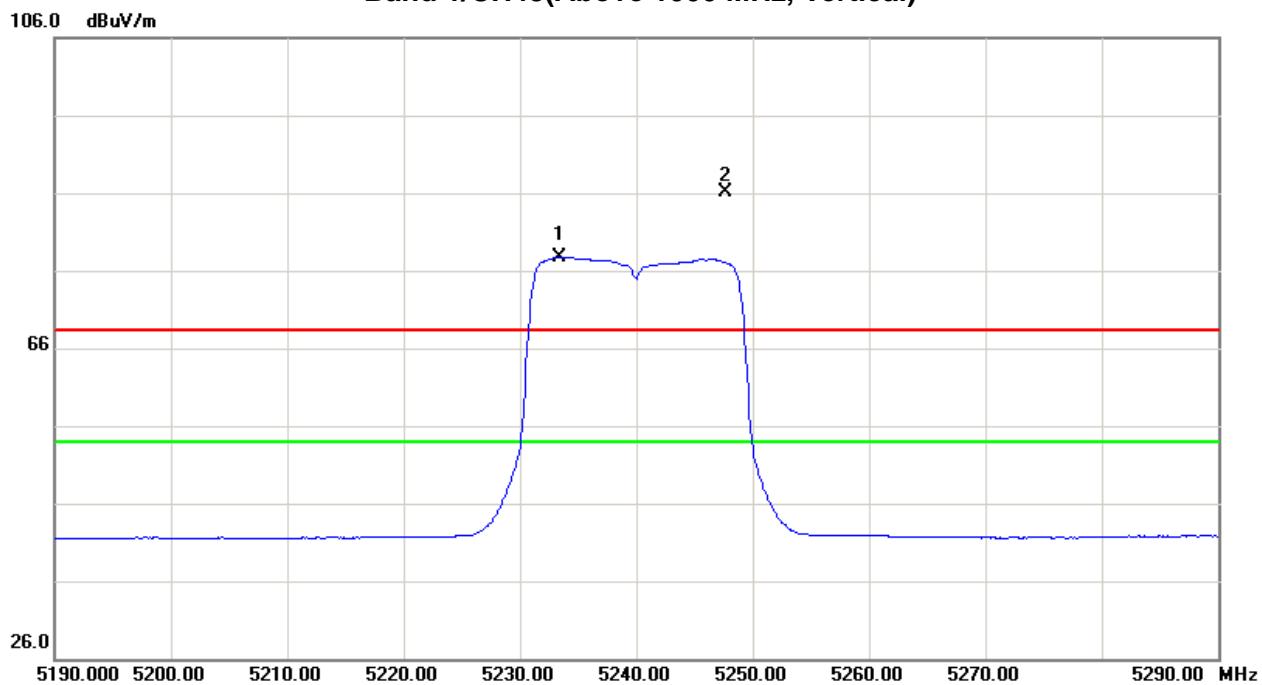



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX AC N20 Mode 5240MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5246.50	H	33.43	25.37	42.95	76.38	68.32	-28.39	-36.45					X/F
10483.97	H	40.13	30.64	15.84	55.97	46.48	-48.80	-58.29	56.38	48.32	-38.92	-46.98	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency."F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



**Orthogonal Axis:X
Band 1/CH48(Above 1000 MHz, Horizontal)**

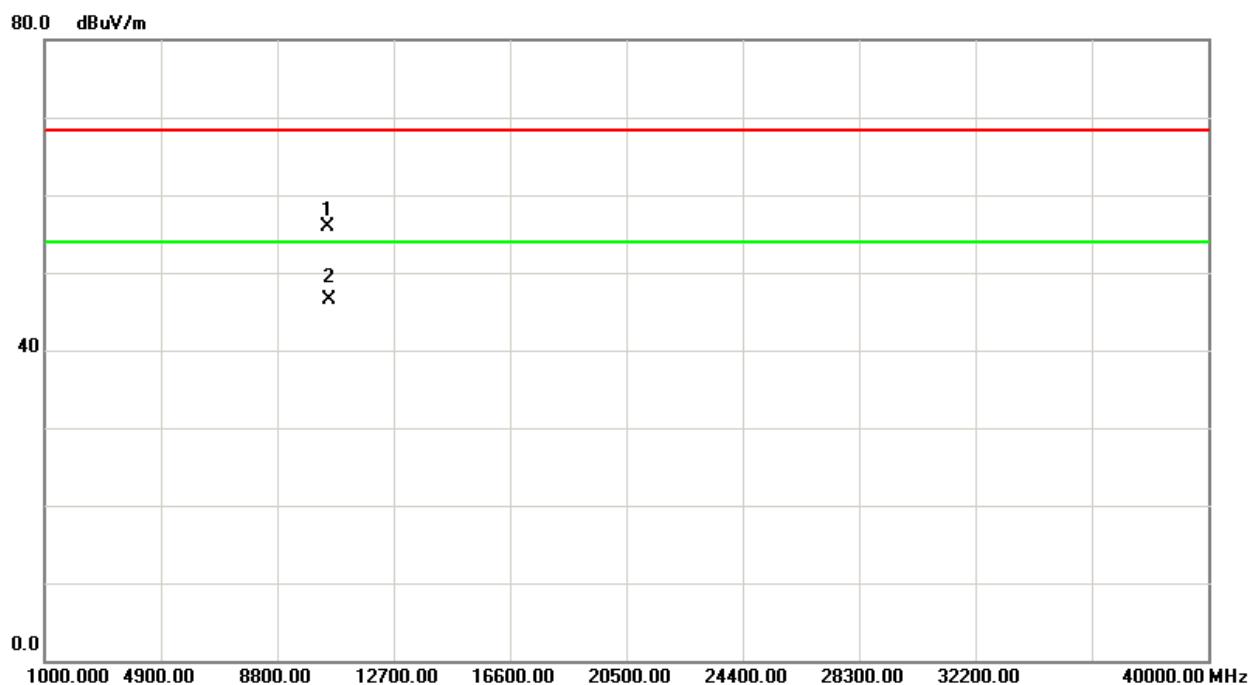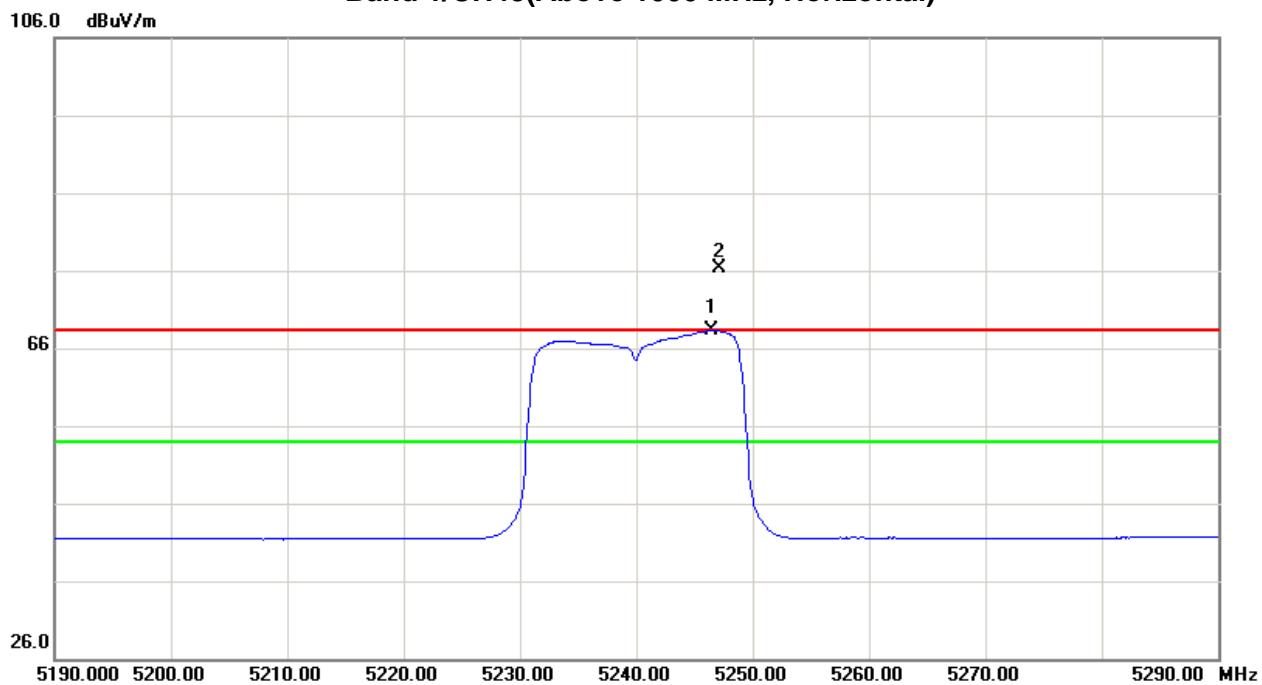



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX AC N40 Mode 5190MHz		



Freq. (MHz)	Ant.Pol. HV	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	V	7.05	-1.48	42.72	49.77	41.24	-55.00	-63.53	68.30	54.00	-27.00	-41.30	X/E
5188.00	V	43.35	33.91	42.81	86.16	76.72	-18.61	-28.05					X/F
10371.39	V	37.52	25.46	16.01	53.53	41.47	-51.24	-63.30	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency."F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



**Orthogonal Axis:X
Band 1/CH38(Above 1000 MHz, Vertical)**

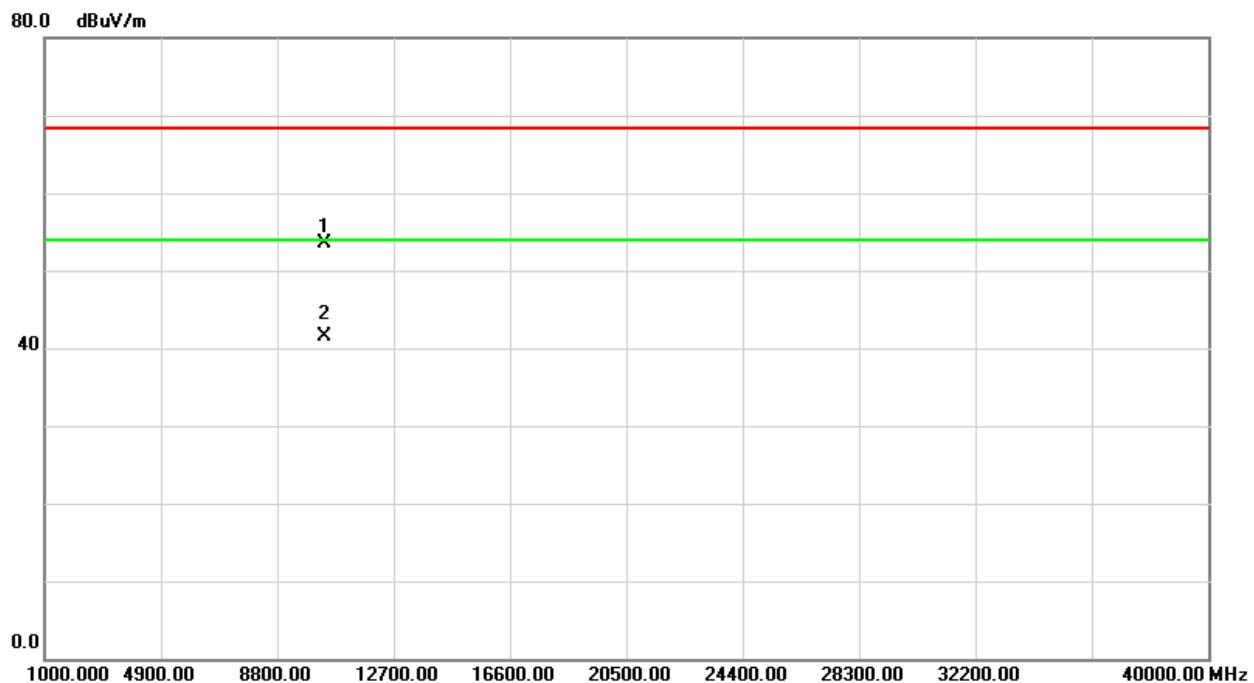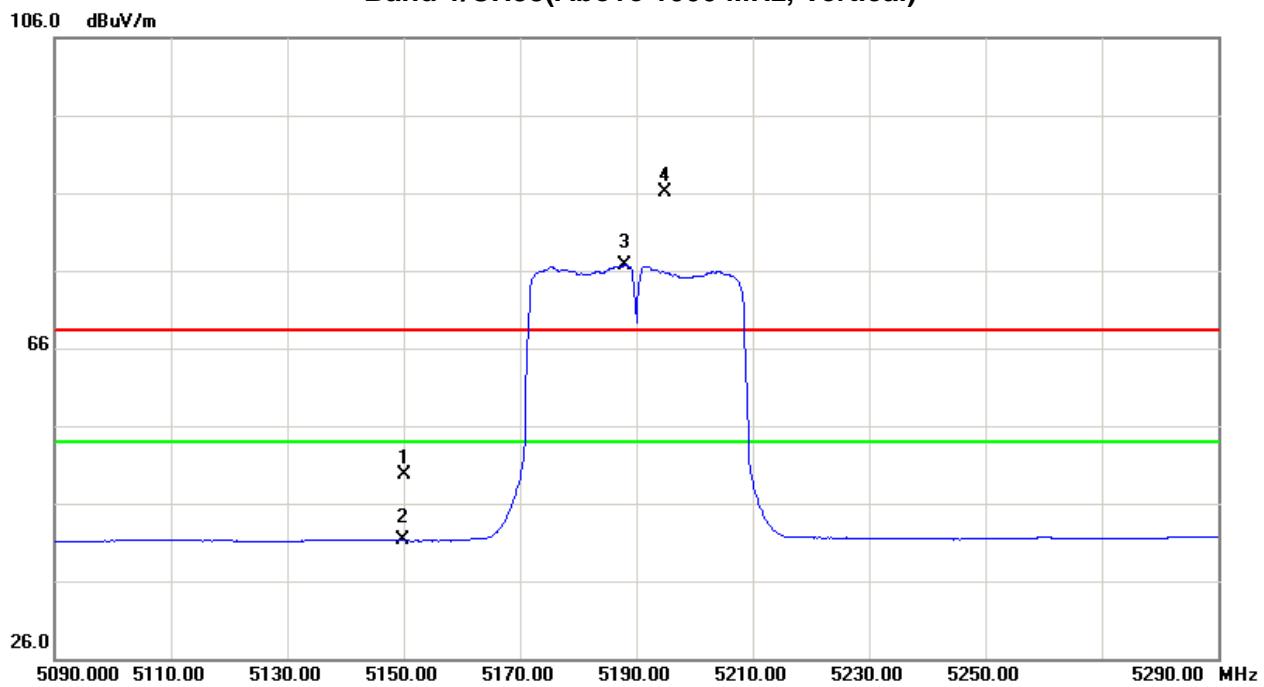



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1 / TX AC N40 Mode 5190MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	H	6.54	-1.60	42.72	49.26	41.12	-55.51	-63.65	68.30	54.00	-27.00	-41.30	X/E
5186.00	H	32.47	23.13	42.81	75.28	65.94	-29.49	-38.83					X/F
10384.53	H	37.19	26.26	15.98	53.17	42.24	-51.60	-62.53	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency."F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



**Orthogonal Axis:X
Band 1/CH38(Above 1000 MHz, Horizontal)**

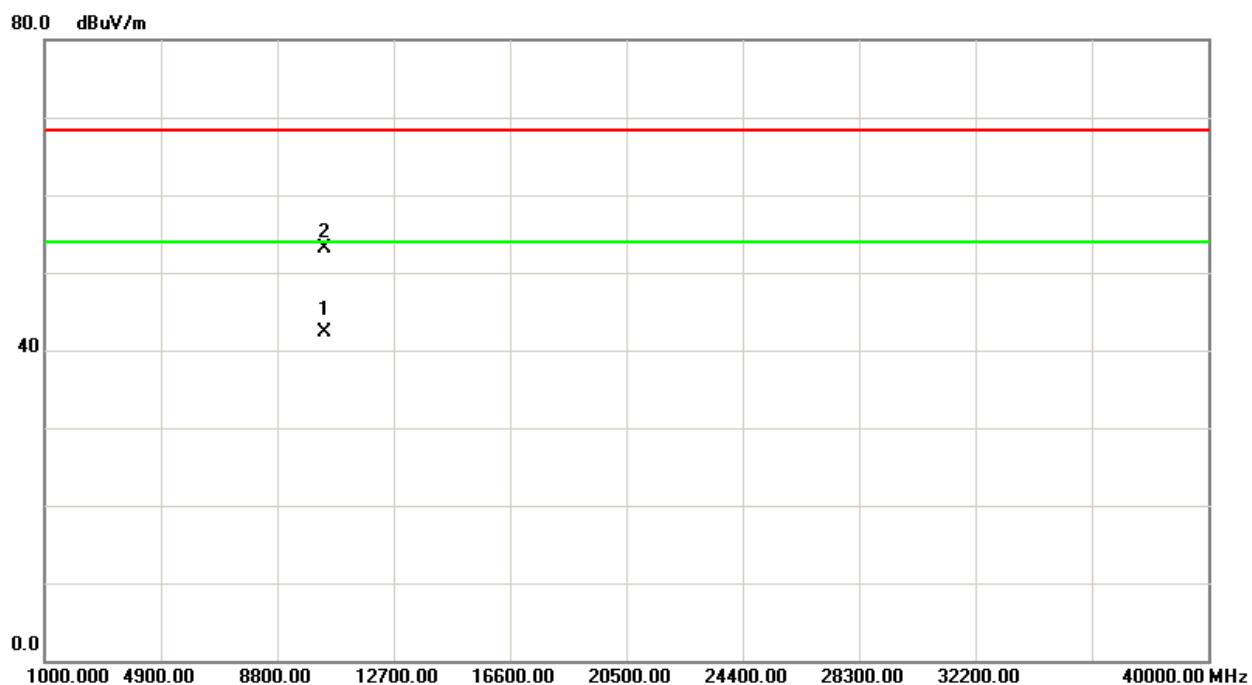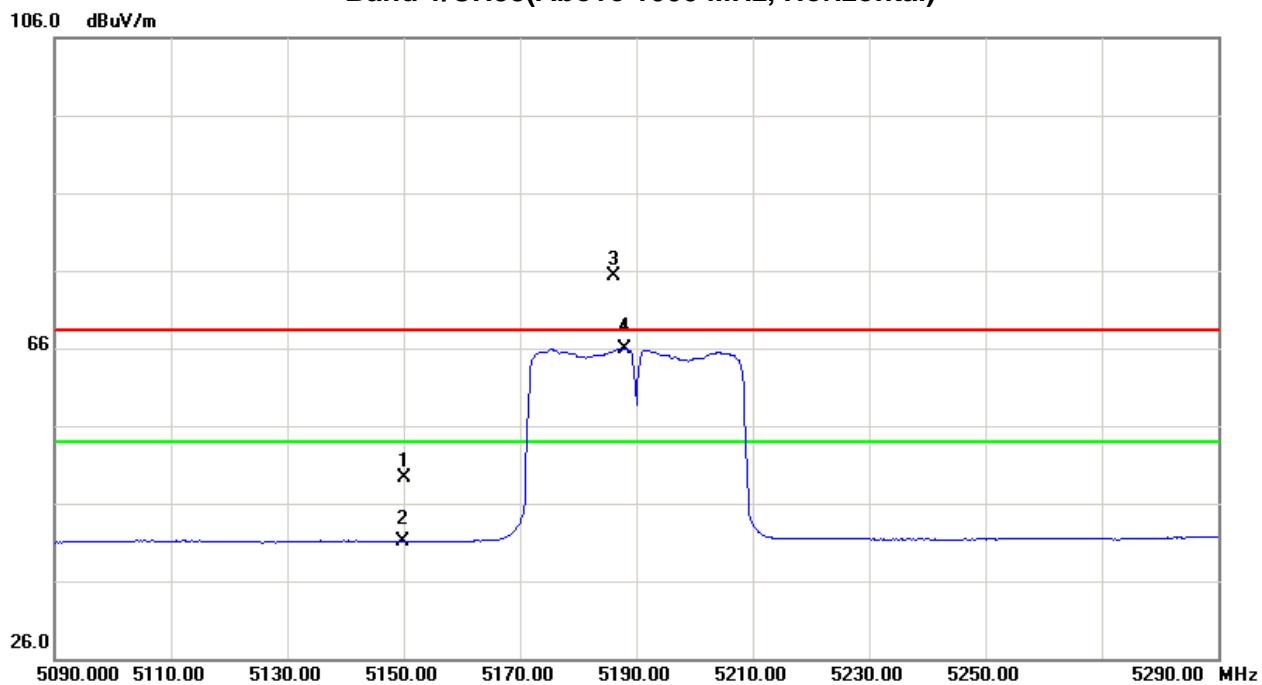



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX AC N40 Mode 5230MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5215.20	V	41.38	33.14	42.88	84.26	76.02	-20.51	-28.75					X/F
10455.83	V	37.67	26.44	15.89	53.56	42.33	-51.21	-62.44	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency."F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



**Orthogonal Axis:X
Band 1/CH46(Above 1000 MHz, Vertical)**

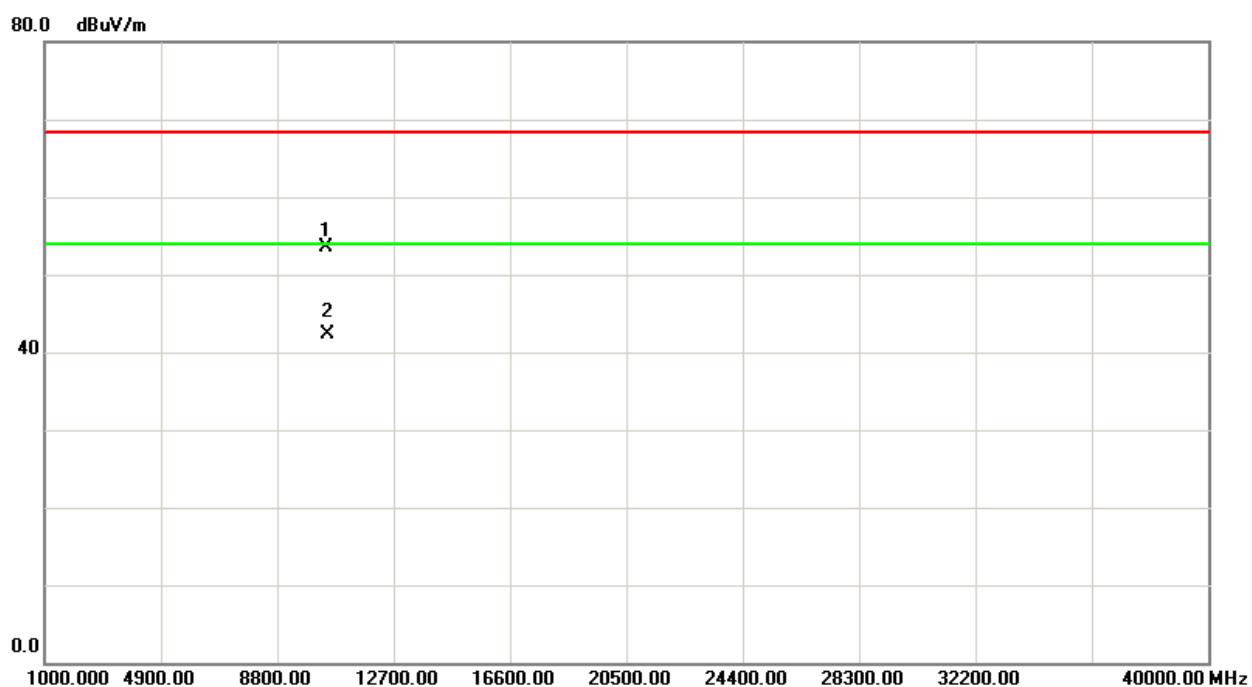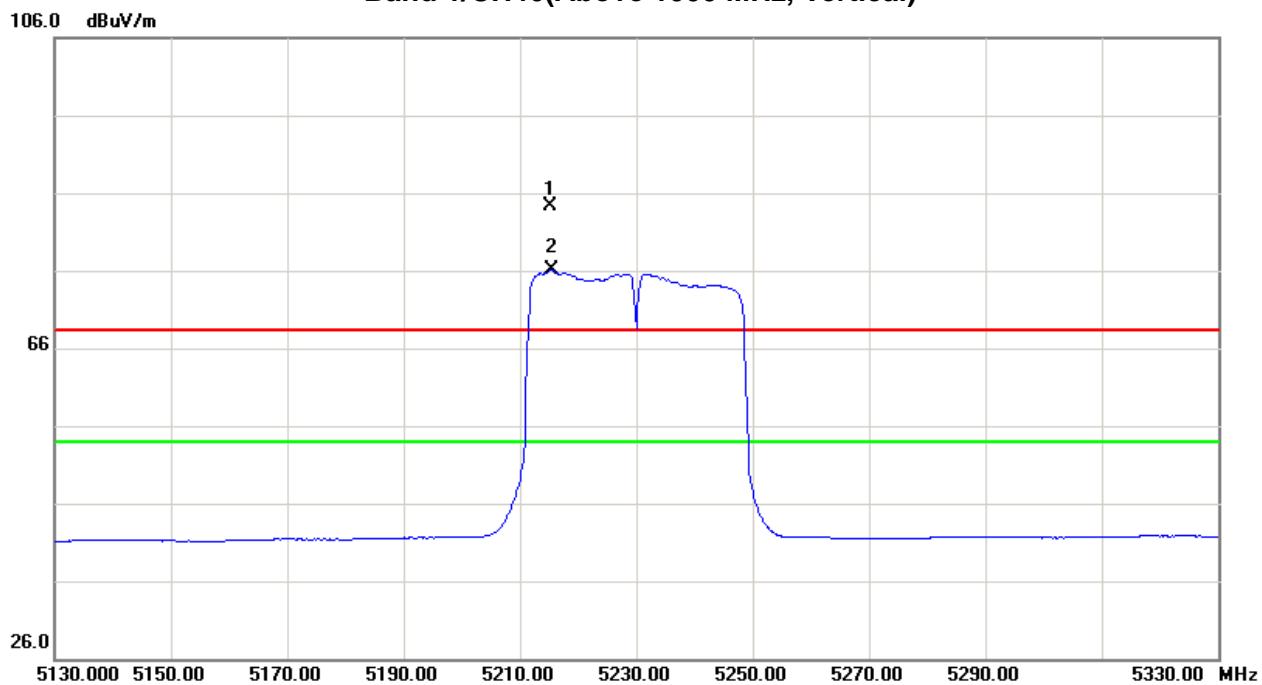



EUT:	AC1200 Wireless Dual Band Gigabit Router			Model Name :		WF2780		
Temperature:	25 °C			Relative Humidity :			58 %	
Test Voltage :	AC 120V/60Hz							
Test Mode :	Band 1 / TX AC N40 Mode 5230MHz							



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5244.00	H	31.56	23.17	42.95	74.51	66.12	-30.26	-38.65					X/F
10468.99	H	37.62	26.55	15.86	53.48	42.41	-51.29	-62.36	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency."F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



**Orthogonal Axis:X
Band 1/CH46(Above 1000 MHz, Horizontal)**

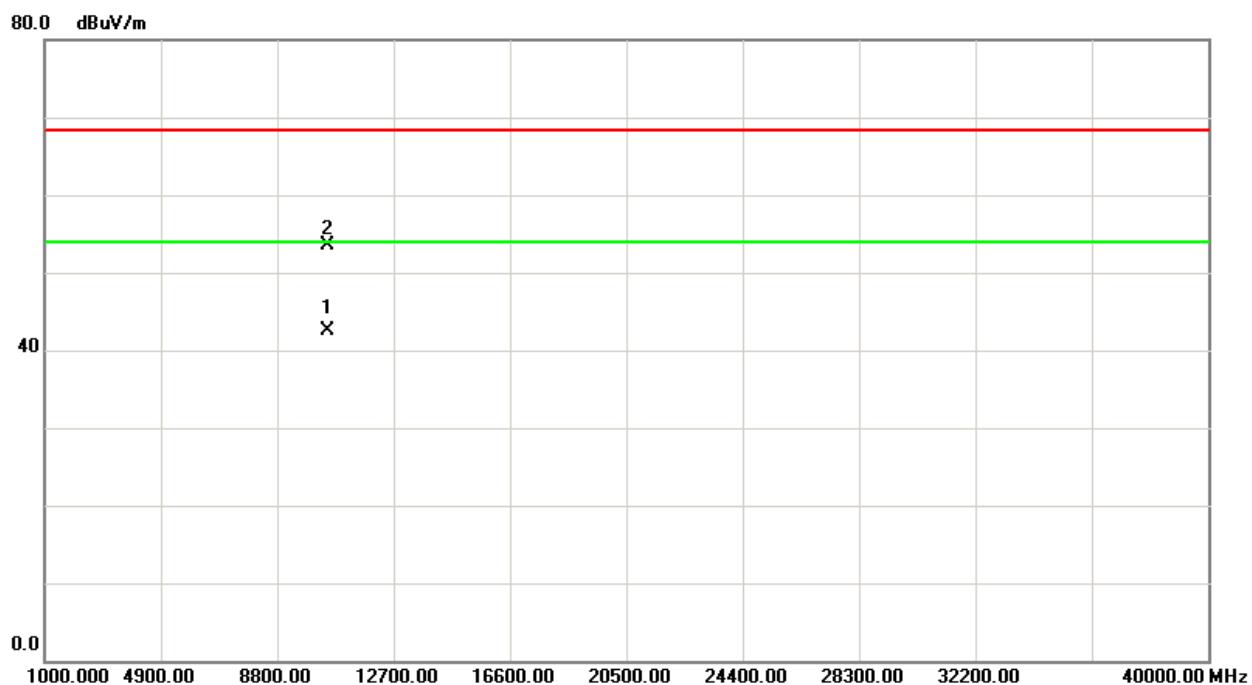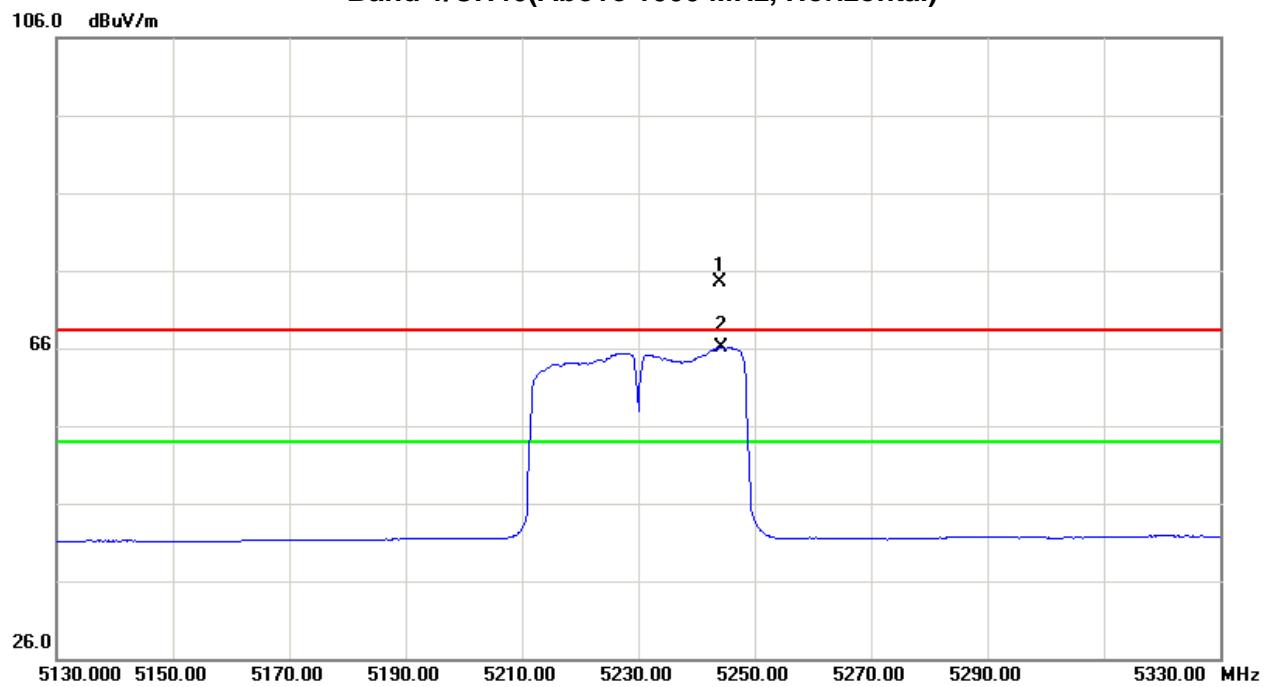



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX AC N80 Mode 5210MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	V	7.59	-1.55	42.72	50.31	41.17	-54.46	-63.60	68.30	54.00	-27.00	-41.30	X/E
5236.80	V	41.79	32.38	42.93	84.72	75.31	-20.05	-29.46					X/F
10423.70	V	36.52	26.11	15.93	52.45	42.04	-52.32	-62.73	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency."F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



**Orthogonal Axis:X
Band 1/CH42(Above 1000 MHz, Vertical)**

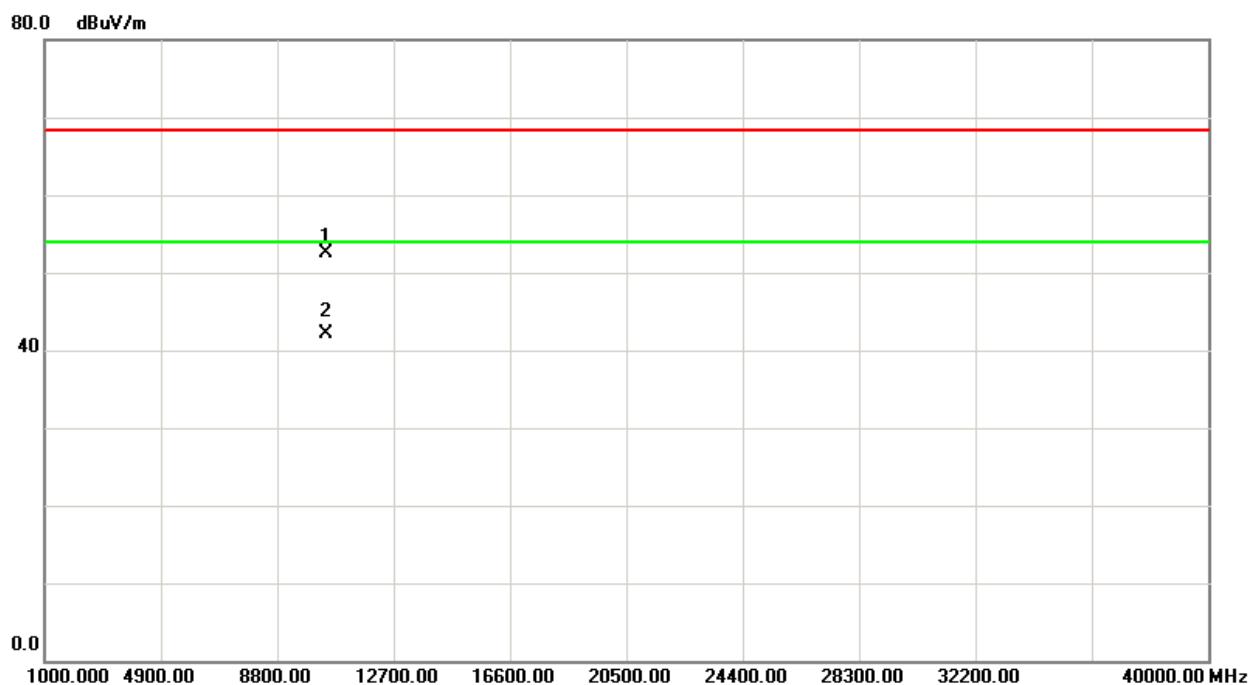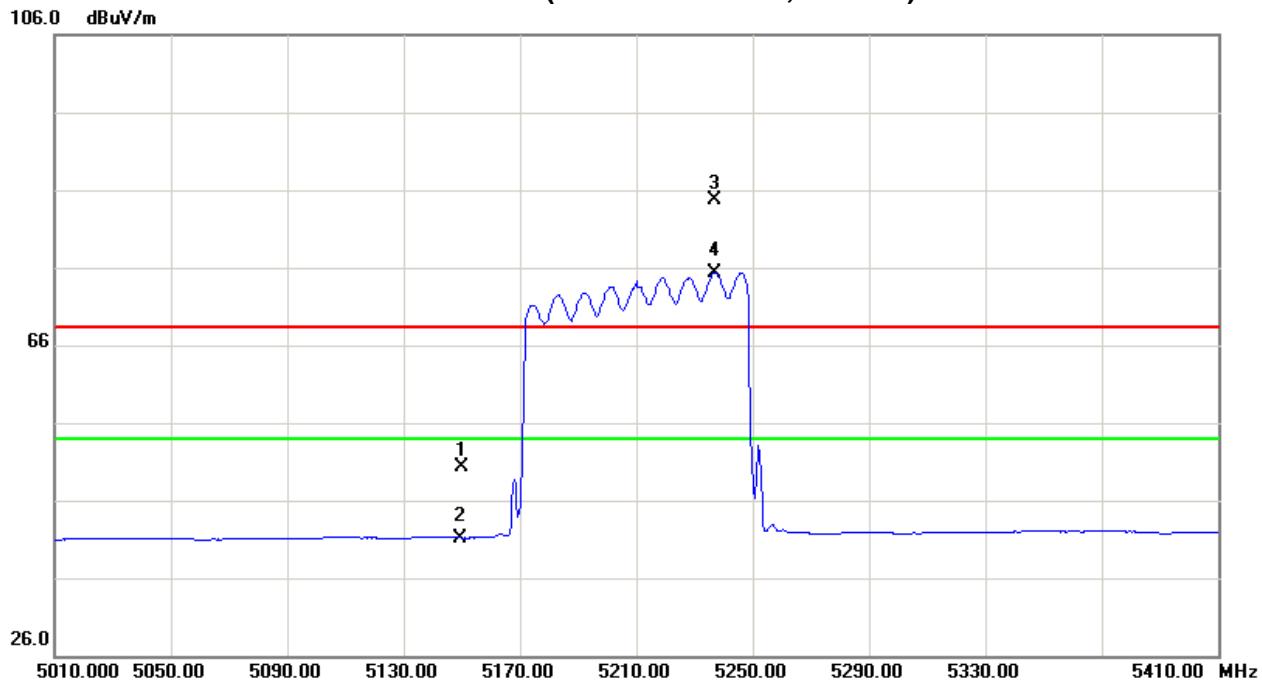



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1 / TX AC N80 Mode 5210MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	H	8.48	-1.58	42.72	51.20	41.14	-53.57	-63.63	68.30	54.00	-27.00	-41.30	X/E
5236.80	H	29.39	20.78	42.93	72.32	63.71	-32.45	-41.06					X/F
10422.84	H	36.33	25.49	15.94	52.27	41.43	-52.50	-63.34	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency."F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



**Orthogonal Axis:X
Band 1/CH42(Above 1000 MHz, Horizontal)**

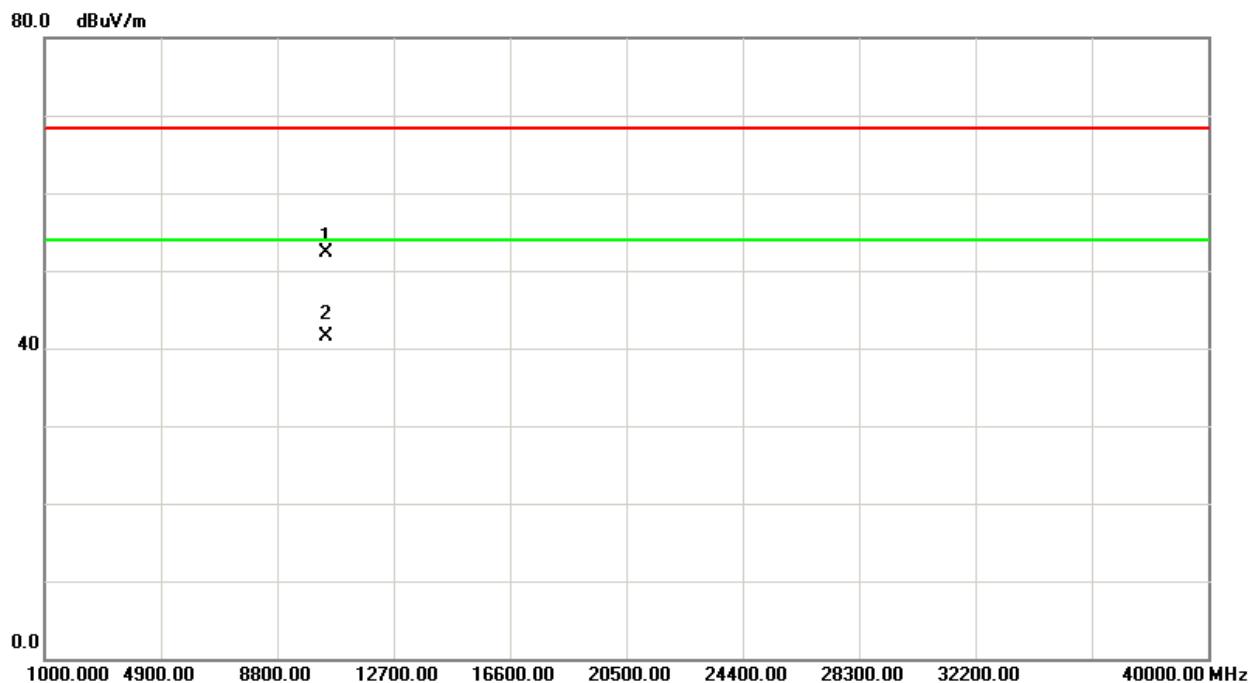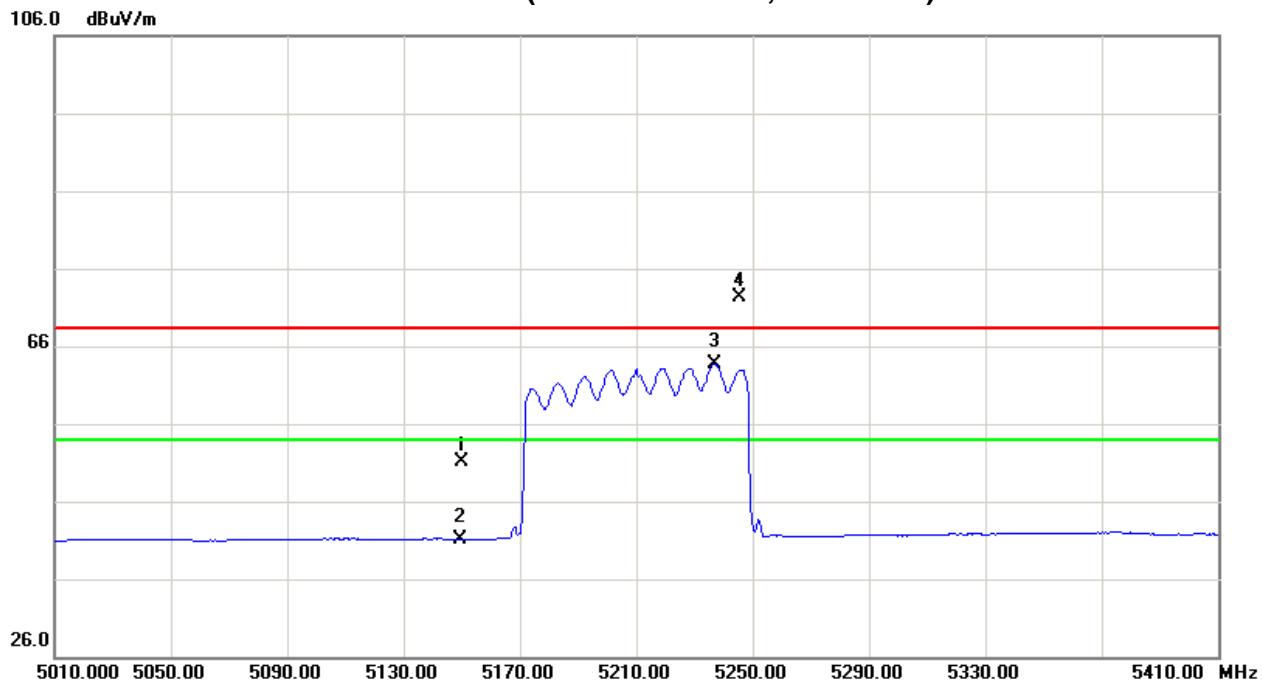



5. 26dB SPECTRUM BANDWIDTH

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
26 dB Bandwidth	-----	5150MHz~5250	PASS

5.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP_40	100129	Nov. 11, 2014

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

5.1.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RB	300 kHz
VB	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- c. Measured the spectrum width with power higher than 26dB below carrier

5.1.3 DEVIATION FROM STANDARD

No deviation.

5.1.4 TEST SETUP




5.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.



5.1.6 TEST RESULTS


EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX A Mode /CH36, CH40, CH48		

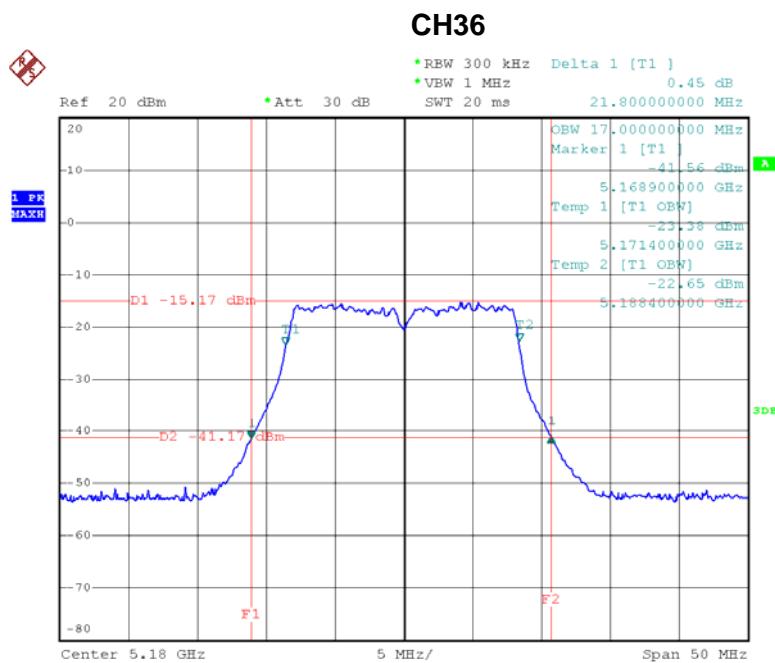

Date: 27.MAR.2014 02:51:58




CH40

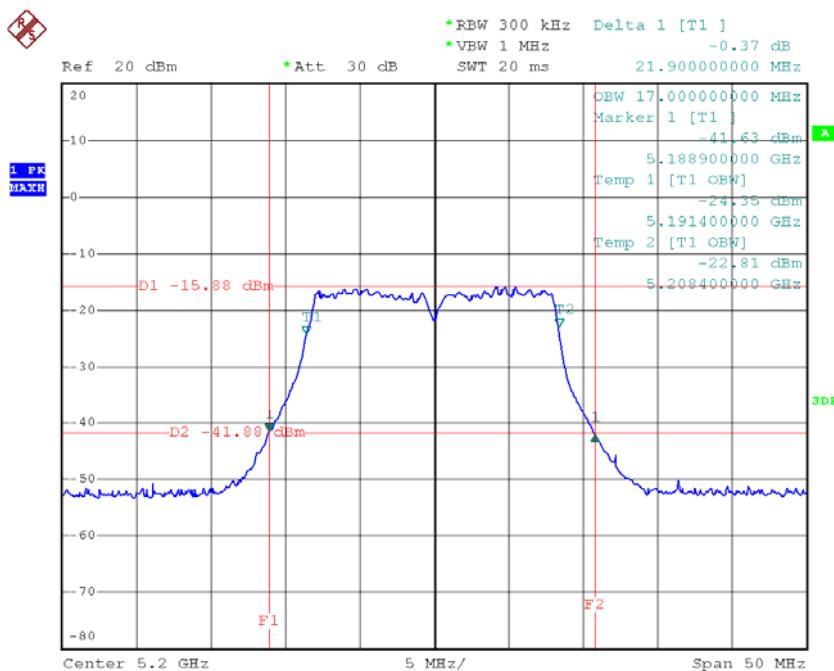

Date: 27.MAR.2014 02:50:37

CH48

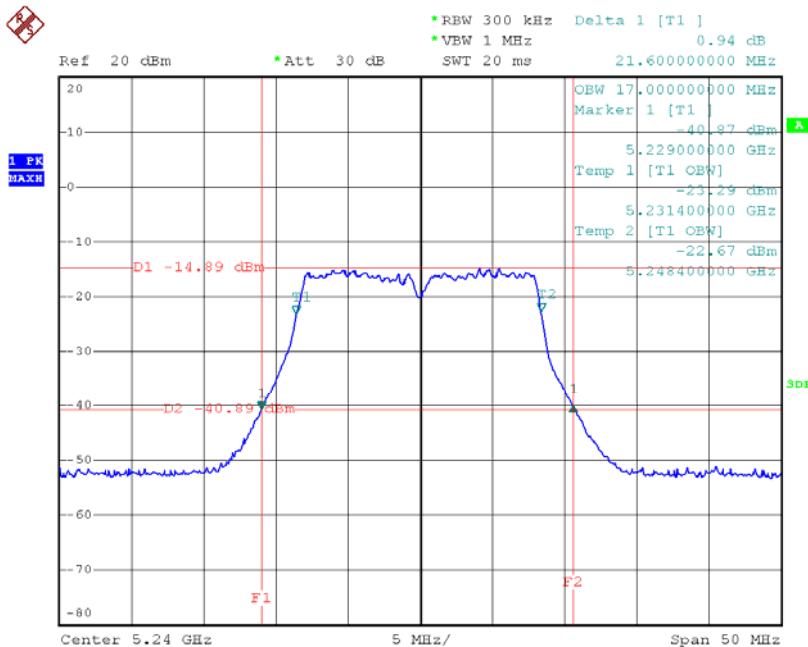


Date: 27.MAR.2014 02:44:41



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N20 Mode /CH36, CH40, CH48		


CH36

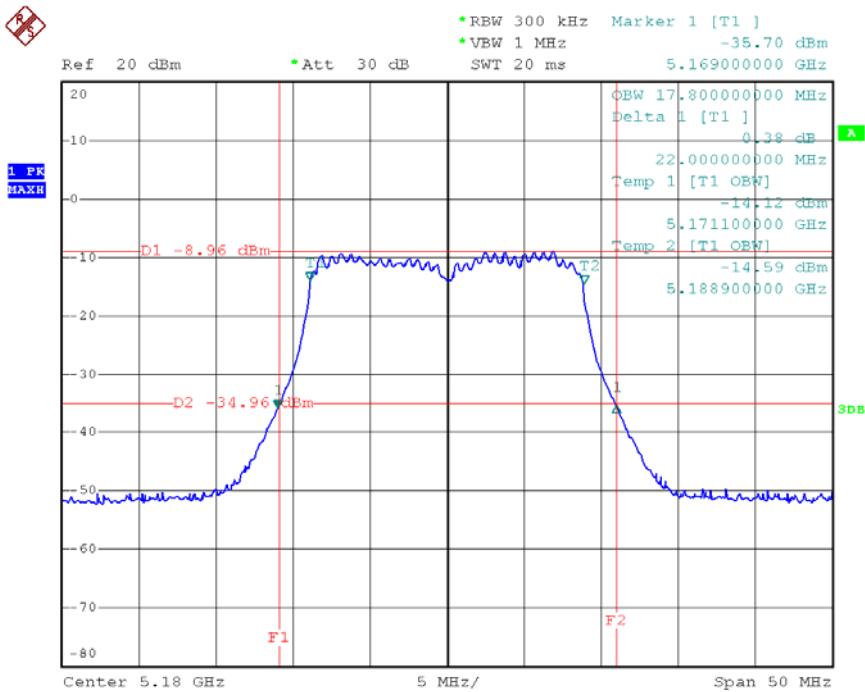

Date: 27.MAR.2014 02:05:51




CH40

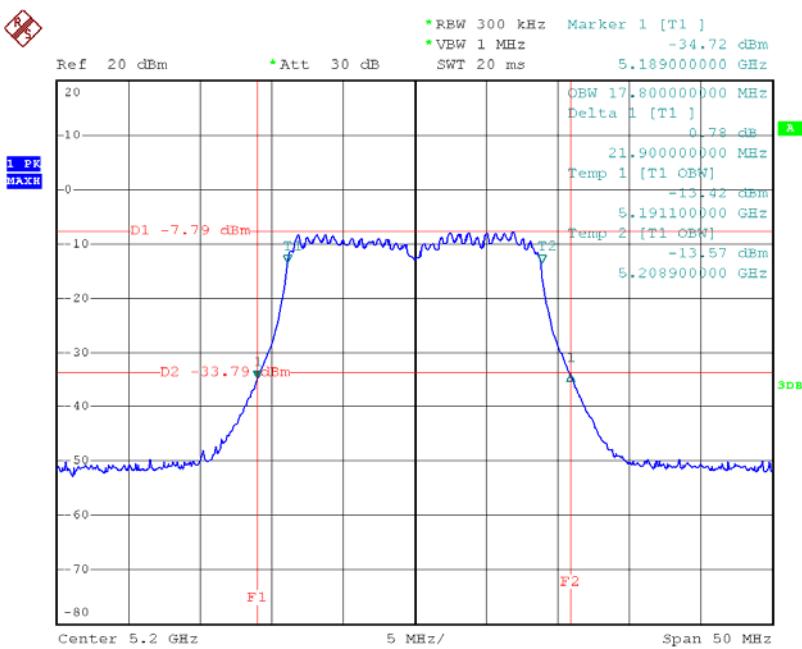

Date: 27.MAR.2014 02:08:08

CH48

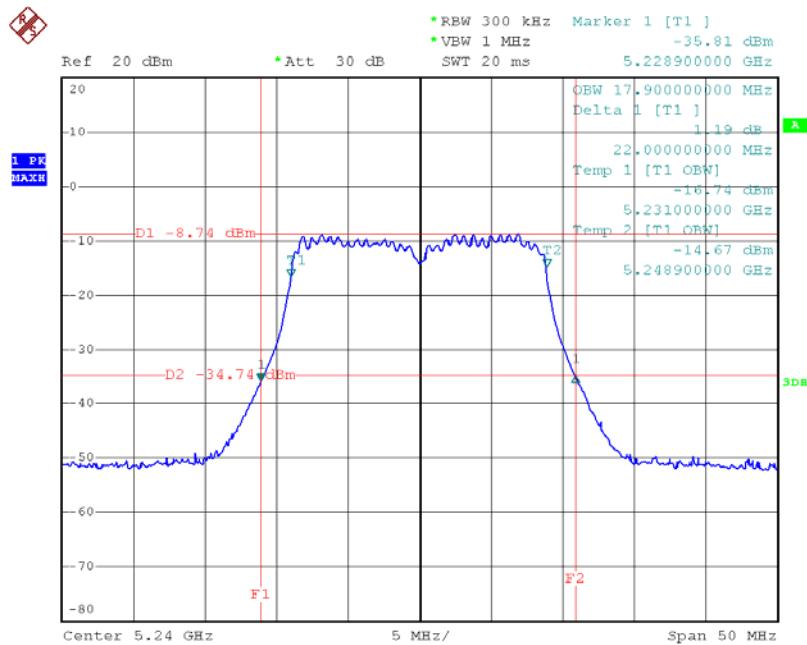


Date: 27.MAR.2014 02:19:53



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N40 Mode /CH38, CH46		


CH38

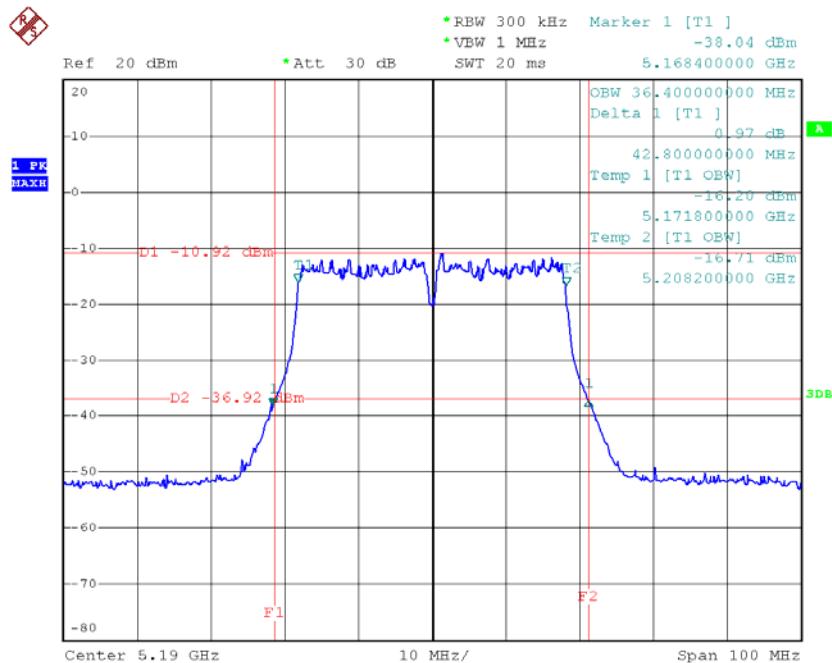

Date: 27.MAR.2014 01:52:37



CH46

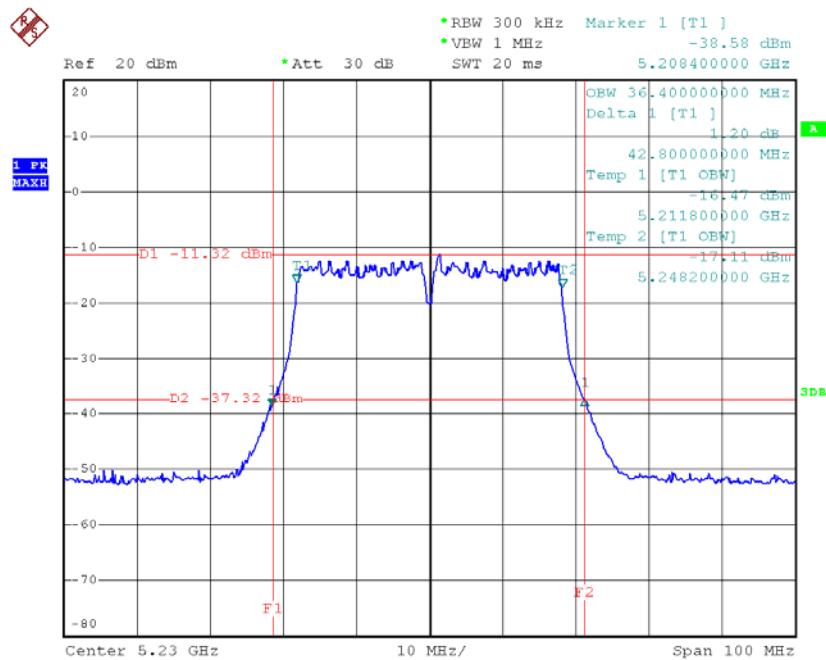


Date: 27.MAR.2014 01:50:43



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX AC 20 Mode /CH36, CH40, CH48		


CH36

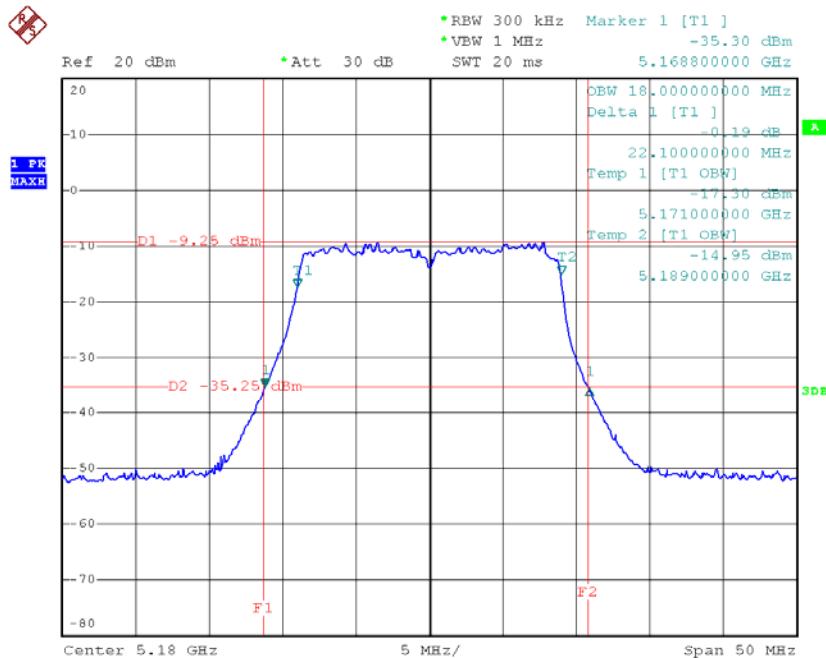

Date: 27.MAR.2014 02:28:42




CH40

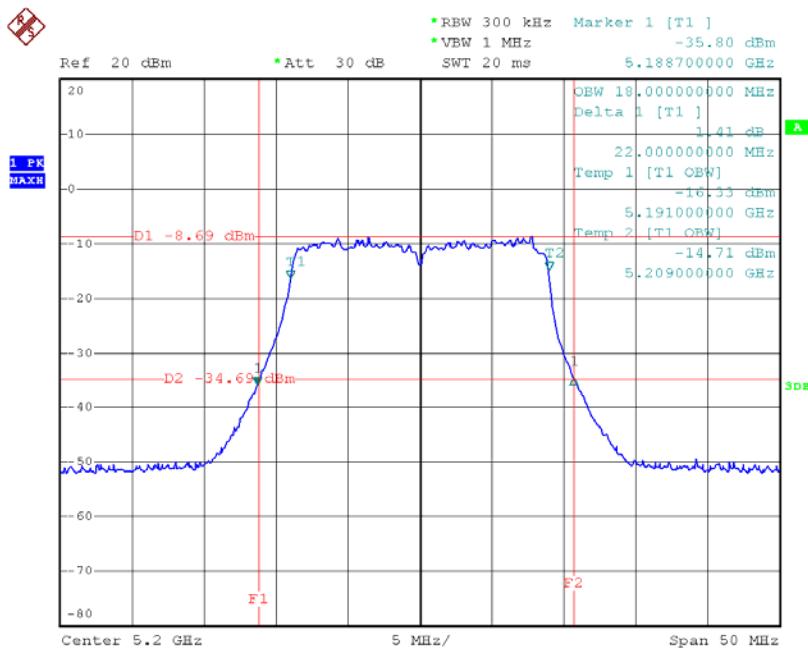

Date: 27.MAR.2014 02:30:57

CH48

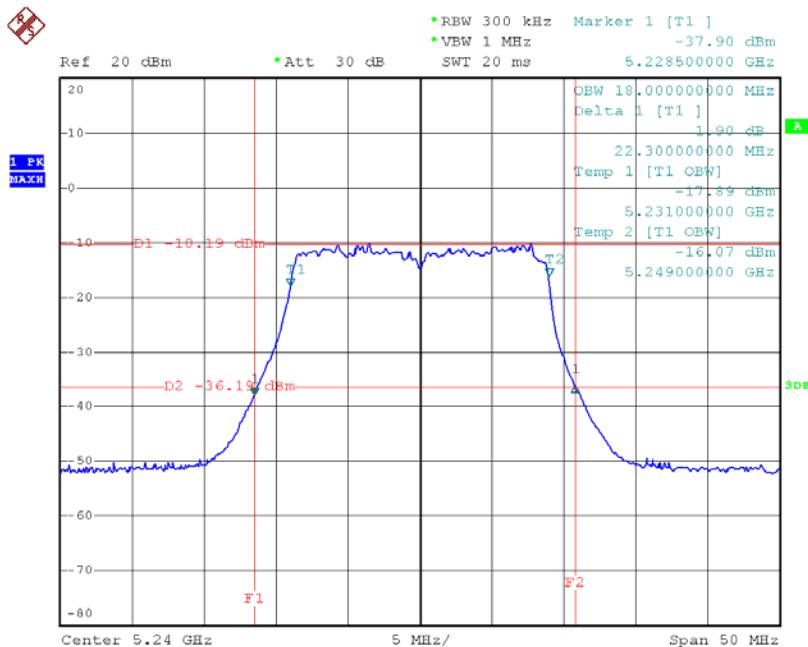


Date: 27.MAR.2014 02:40:20



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX AC 40 Mode /CH38, CH46		


CH38

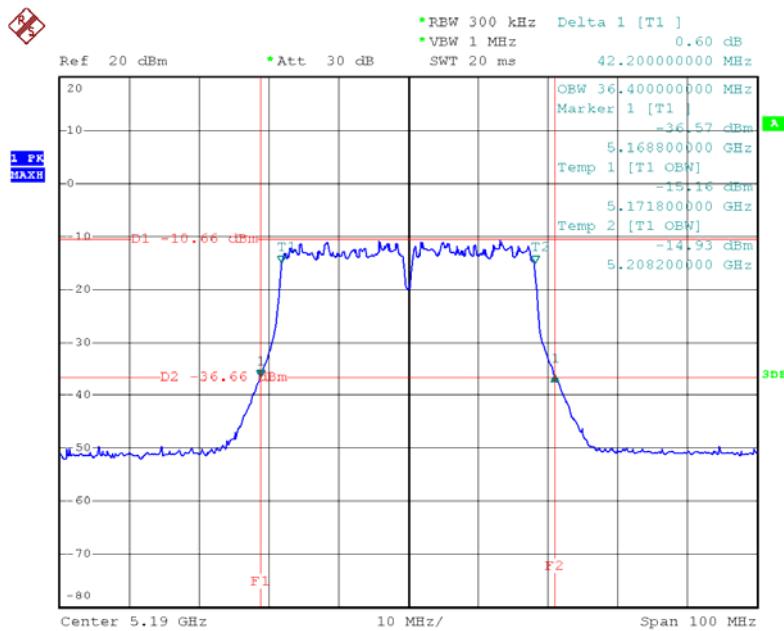

Date: 27.MAR.2014 01:27:04



CH46

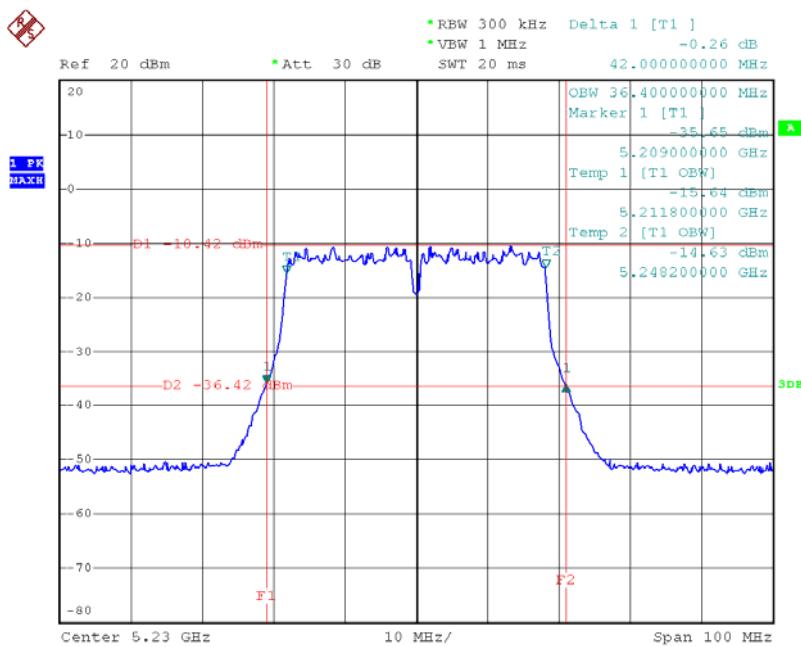


Date: 27.MAR.2014 01:29:23



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX AC 80 Mode /CH42		

CH42

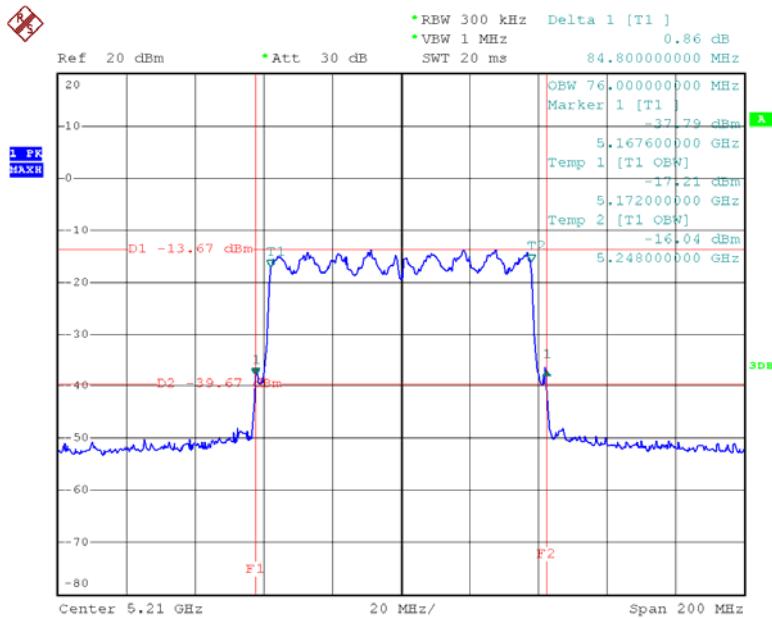

Date: 27.MAR.2014 00:37:24

**6. MAXIMUM CONDUCTED OUTPUT POWER****6.1 APPLIED PROCEDURES / LIMIT**

FCC Part15, Subpart E			
Test Item	Frequency Range (MHz)	Limit	Result
Conducted Output Power	5150 - 5250	not exceed the lesser of 50 mW (17dBm) or 4 dBm + 10log B,	PASS

Note: where "B" is the 26 dB emissions bandwidth in MHz.

6.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP_40	100129	Nov. 11, 2014

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

6.1.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
-

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1 MHz.
VBW	≥ 3 MHz.
Detector	RMS
Trace	Max Hold
Sweep Time	auto


-
- Test was performed in accordance with method of KDB 789033 D01.



6.1.3 DEVIATION FROM STANDARD

No deviation.

6.1.4 TEST SETUP



6.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.



6.1.6 TEST RESULTS

EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX A Mode/CH36, CH40, CH48		

Test Channel	Frequency (MHz)	Conducted Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH36	5180	13.70	17.00	0.0501
CH40	5200	13.71	17.00	0.0501
CH48	5240	13.72	17.00	0.0501



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N20 Mode/CH36, CH40, CH48		

ANT 6

Test Channel	Frequency (MHz)	Conducted Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH36	5180	12.87	17.00	0.0501
CH40	5200	12.71	17.00	0.0501
CH48	5240	12.72	17.00	0.0501

EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N20 Mode/CH36, CH40, CH48		

ANT 7

Test Channel	Frequency (MHz)	Conducted Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH36	5180	12.35	17.00	0.0501
CH40	5200	12.43	17.00	0.0501
CH48	5240	12.82	17.00	0.0501

EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N20 Mode/CH36, CH40, CH48		

ANT 6+ANT 7

Test Channel	Frequency (MHz)	Conducted Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH36	5180	15.63	17.00	0.0501
CH40	5200	15.58	17.00	0.0501
CH48	5240	15.78	17.00	0.0501

Note: The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers (2T2R). all transmit signals are completely uncorrelated.



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N40 Mode/CH38, CH46		

ANT 6

Test Channel	Frequency (MHz)	Conducted Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH38	5190	12.38	17.00	0.0501
CH46	5230	12.51	17.00	0.0501

EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N40 Mode/CH38, CH46		

ANT 7

Test Channel	Frequency (MHz)	Conducted Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH38	5190	12.74	17.00	0.0501
CH46	5230	12.72	17.00	0.0501

EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N40 Mode/CH38, CH46		

ANT 6+ANT 7

Test Channel	Frequency (MHz)	Conducted Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH38	5190	15.57	17.00	0.0501
CH46	5230	15.63	17.00	0.0501

Note: The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers (2T2R). all transmit signals are completely uncorrelated.



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX AC 20 Mode/CH36, CH40, CH48		

ANT 6

Test Channel	Frequency (MHz)	Conducted Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH36	5180	12.94	17.00	0.0501
CH40	5200	12.81	17.00	0.0501
CH48	5240	12.62	17.00	0.0501

EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX AC 20 Mode/CH36, CH40, CH48		

ANT 7

Test Channel	Frequency (MHz)	Conducted Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH36	5180	12.71	17.00	0.0501
CH40	5200	12.64	17.00	0.0501
CH48	5240	12.34	17.00	0.0501

EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX AC 20 Mode/CH36, CH40, CH48		

ANT 6+ ANT 7

Test Channel	Frequency (MHz)	Conducted Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH36	5180	15.84	17.00	0.0501
CH40	5200	15.74	17.00	0.0501
CH48	5240	15.49	17.00	0.0501

Note: The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers (2T2R). all transmit signals are completely uncorrelated.



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX AC 40 Mode/CH38, CH46		

ANT 6

Test Channel	Frequency (MHz)	Conducted Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH38	5190	12.34	17.00	0.0501
CH46	5230	12.82	17.00	0.0501

EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX AC 40 Mode/CH38, CH46		

ANT 7

Test Channel	Frequency (MHz)	Conducted Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH38	5190	12.53	17.00	0.0501
CH46	5230	12.42	17.00	0.0501

EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX AC 40 Mode/CH38, CH46		

ANT 6+ANT 7

Test Channel	Frequency (MHz)	Conducted Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH38	5190	15.45	17.00	0.0501
CH46	5230	15.63	17.00	0.0501

Note: The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers (2T2R). all transmit signals are completely uncorrelated.



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX AC 80 Mode/CH42		

ANT 6

Test Channel	Frequency (MHz)	Conducted Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH42	5210	12.89	17.00	0.0501

EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX AC 80 Mode/CH42		

ANT 7

Test Channel	Frequency (MHz)	Conducted Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH42	5210	12.35	17.00	0.0501

EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX AC 80 Mode/CH42		

ANT 6+ANT 7

Test Channel	Frequency (MHz)	Conducted Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH42	5210	15.64	17.00	0.0501

Note: The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers (2T2R). all transmit signals are completely uncorrelated.



7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Antenna conducted Spurious Emission	-27 dBm/1MHz	5150 – 5250	PASS

7.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP_40	100129	Nov. 11, 2014

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

7.1.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,


b.

Spectrum Parameter	Setting
Attenuation	Auto
RB	1000 kHz
VB	1000 kHz
Trace	Max Hold
Sweep Time	Auto

7.1.3 DEVIATION FROM STANDARD

No deviation.

7.1.4 TEST SETUP



7.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.




7.1.6 TEST RESULTS

EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25°C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX A Mode/ CH36, CH40, CH48		




TX mode CH36

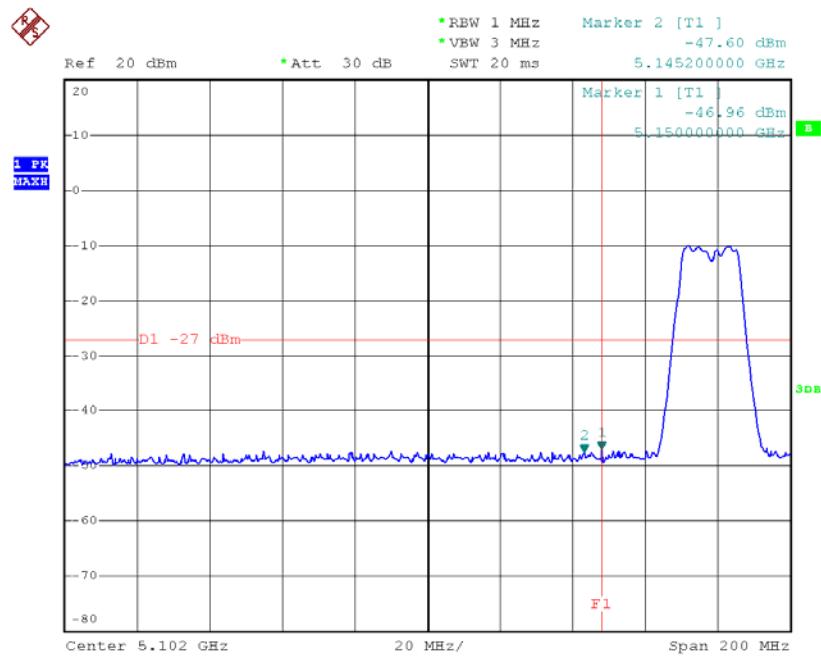

Date: 27.MAR.2014 02:53:24

TX mode CH48

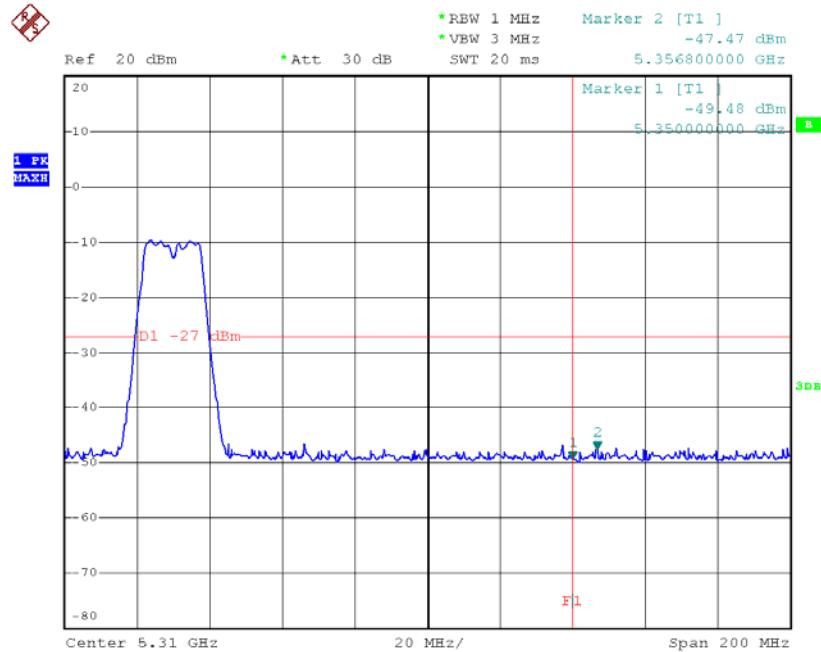


Date: 27.MAR.2014 02:45:16



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N20 Mode/ CH36, CH40 , CH48/ANT 6		




TX mode CH36

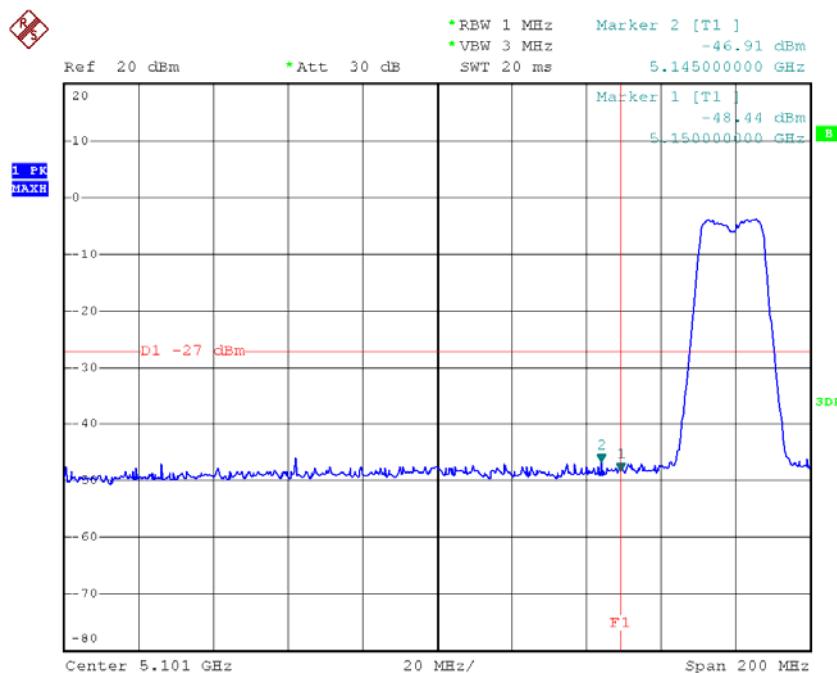

Date: 27.MAR.2014 02:21:44

TX mode CH48

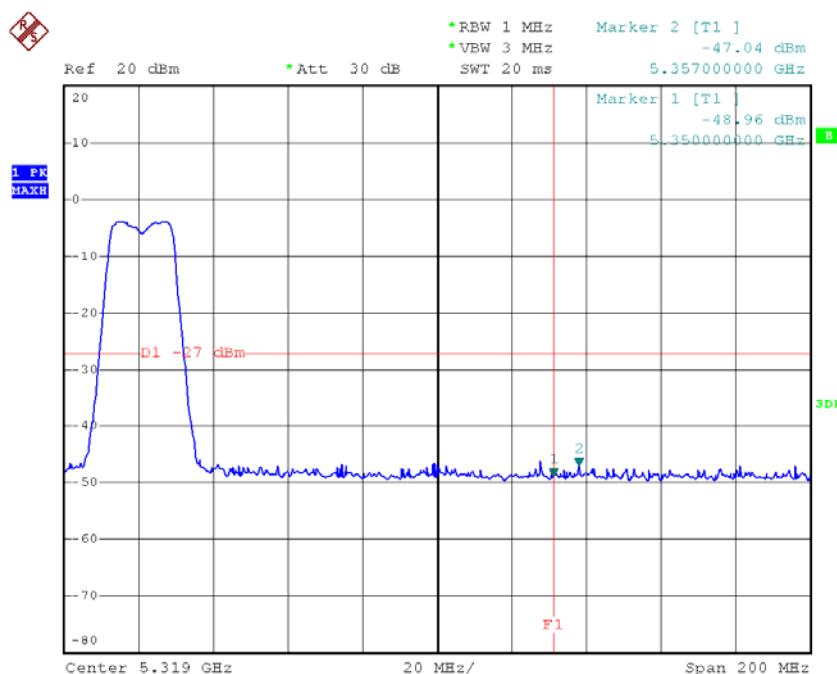


Date: 27.MAR.2014 02:17:52



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N20 Mode/ CH36, CH40 , CH48/ANT 7		




TX mode CH36

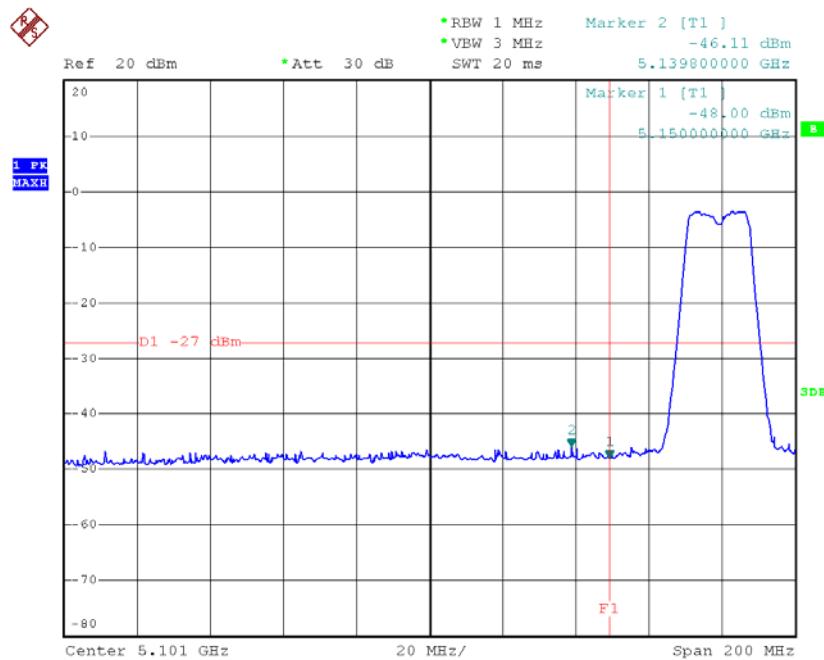

Date: 27.MAR.2014 02:21:33

TX mode CH48

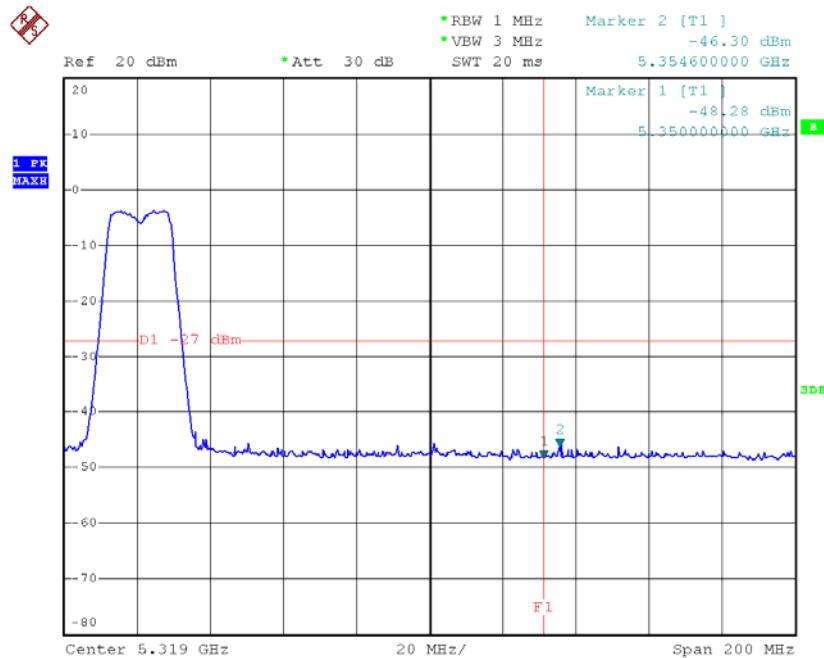


Date: 27.MAR.2014 02:17:42



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N40 Mode/ CH38, CH46/ANT 6		




TX mode CH38

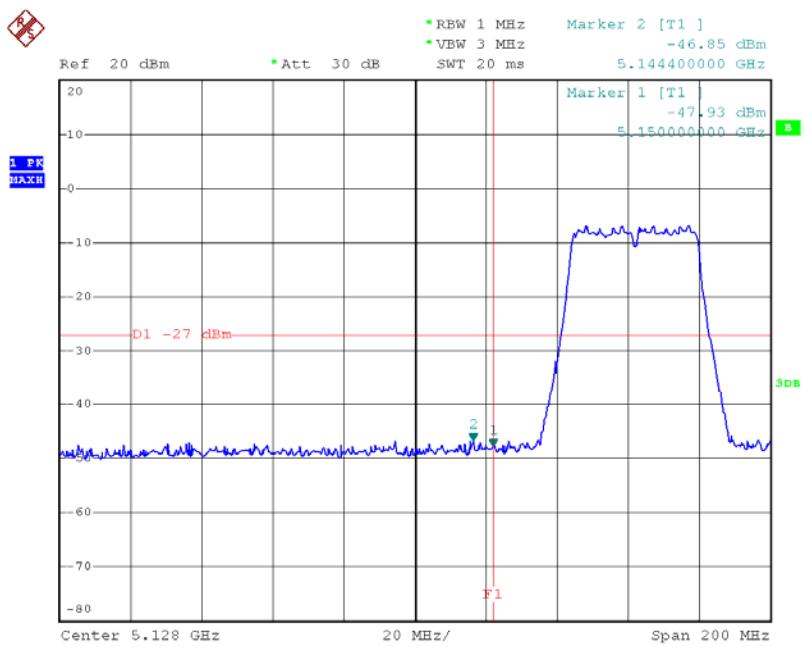

Date: 27.MAR.2014 01:56:11

TX mode CH46

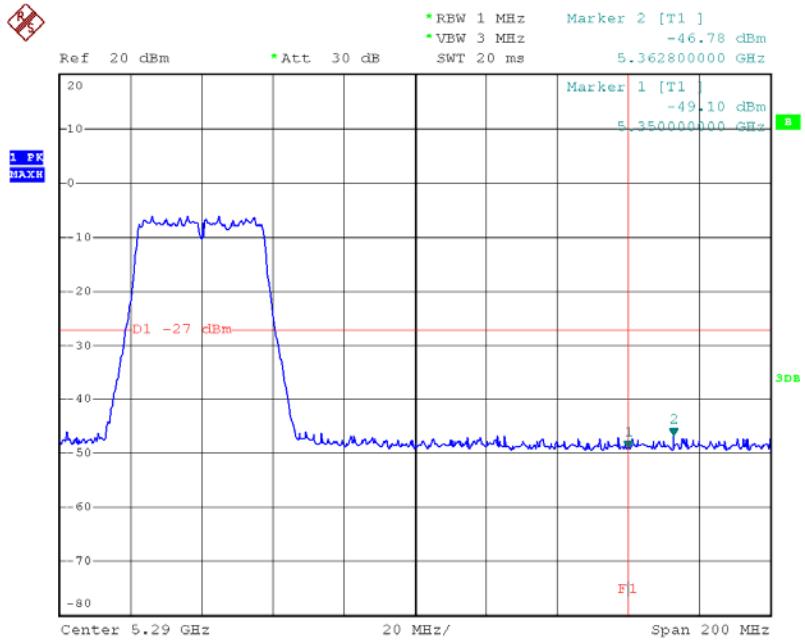


Date: 27.MAR.2014 01:46:44



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N40 Mode/ CH38, CH46/ANT 7		




TX mode CH38

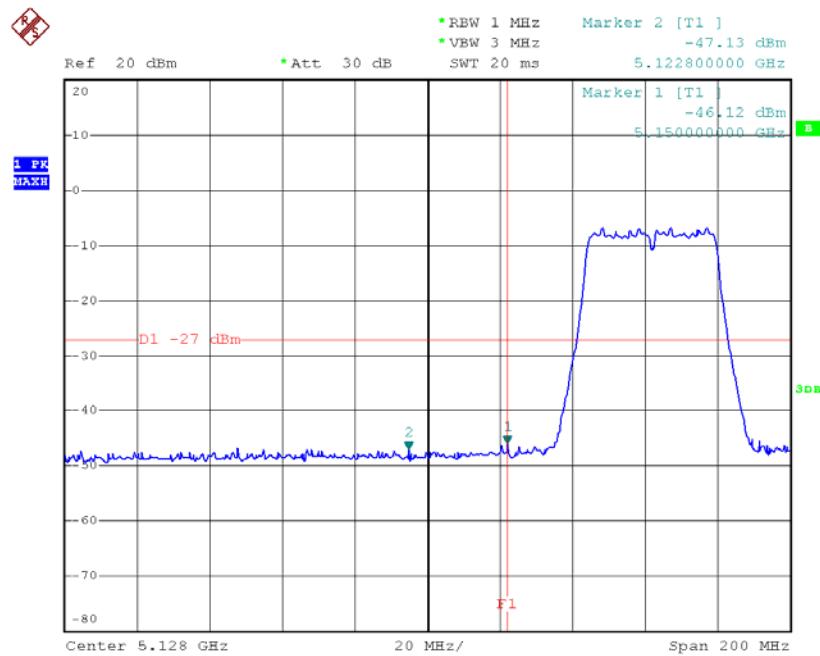

Date: 27.MAR.2014 01:55:59

TX mode CH46

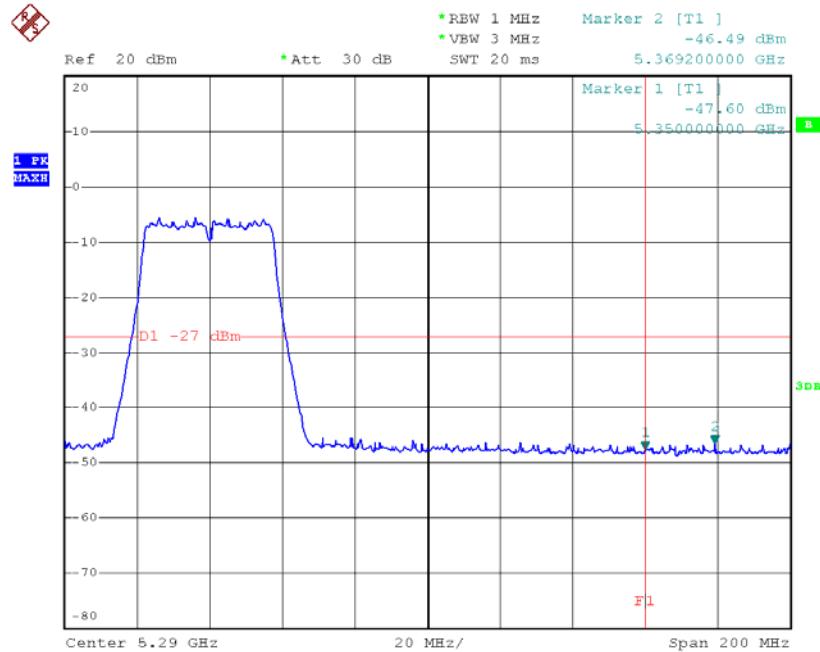


Date: 27.MAR.2014 01:46:34



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX AC 20 Mode/ CH36, CH40 , CH48/ANT 6		




TX mode CH36

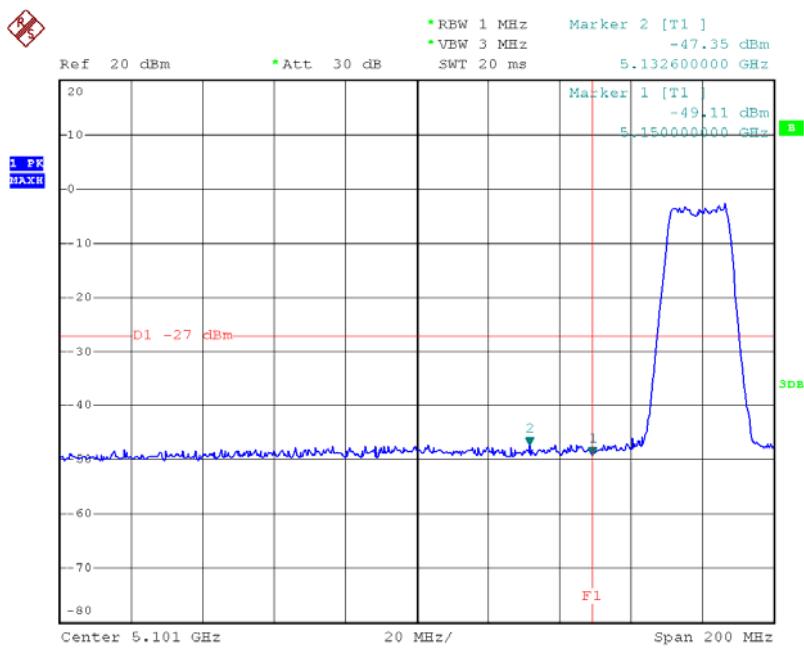

Date: 27.MAR.2014 02:24:18

TX mode CH48

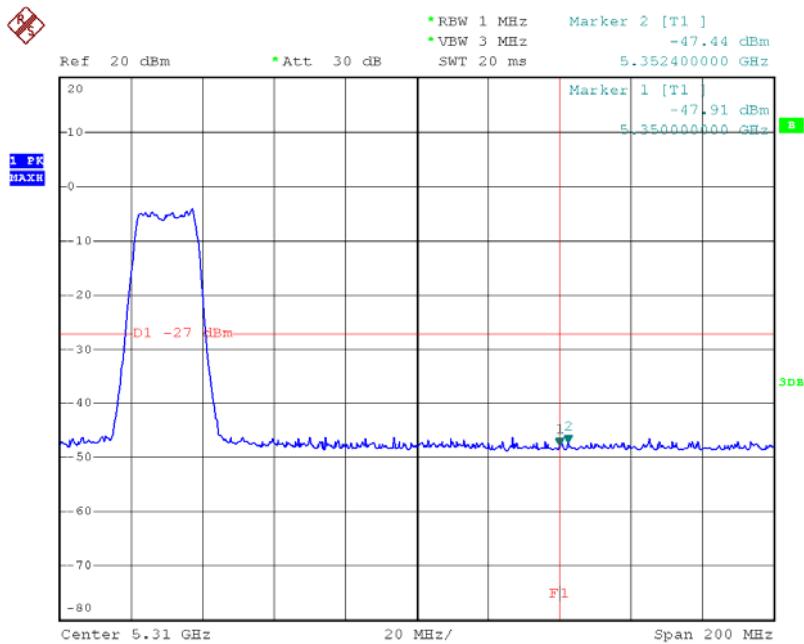


Date: 27.MAR.2014 02:38:00



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX AC 20 Mode/ CH36, CH40 , CH48/ANT 7		




TX mode CH36

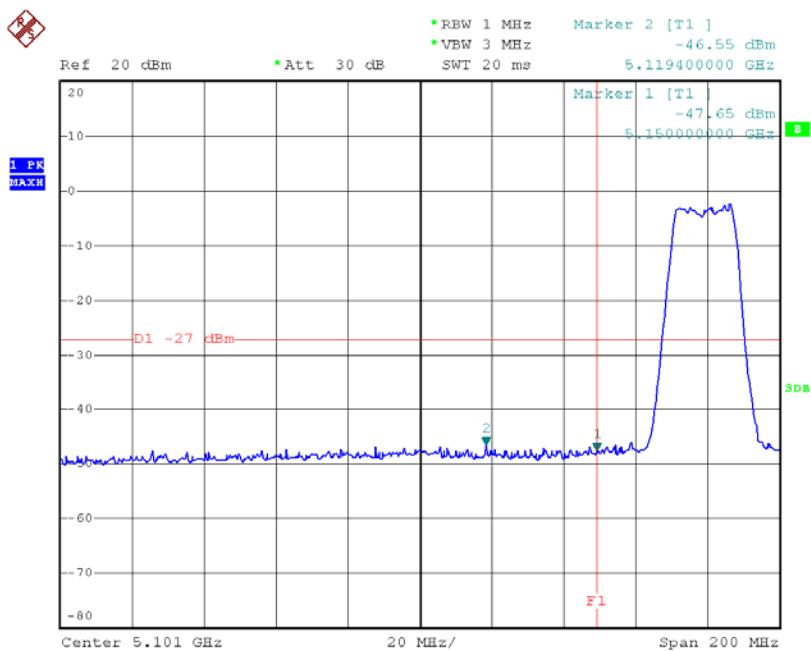

Date: 27.MAR.2014 02:24:07

TX mode CH48

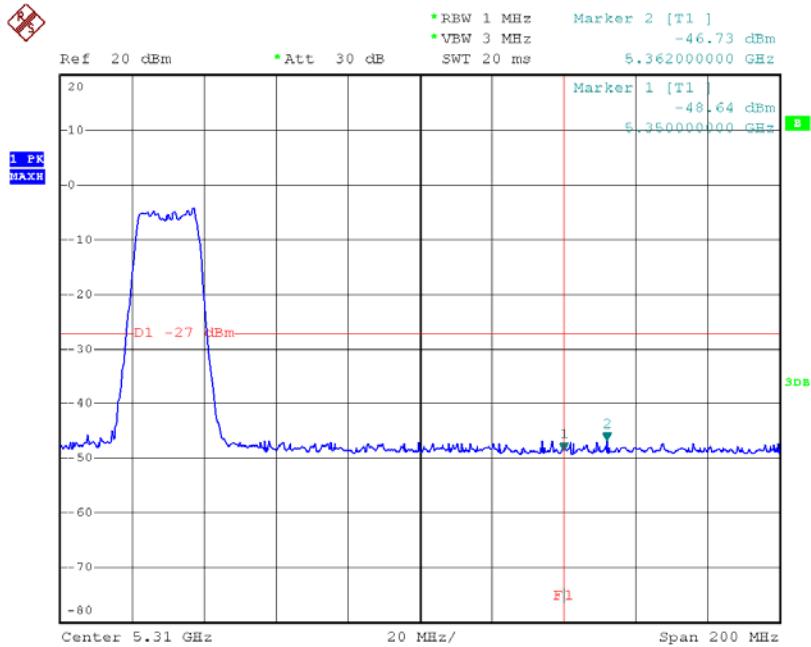


Date: 27.MAR.2014 02:38:11



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX AC 40 Mode/ CH38, CH46/ANT 6		




TX mode CH38

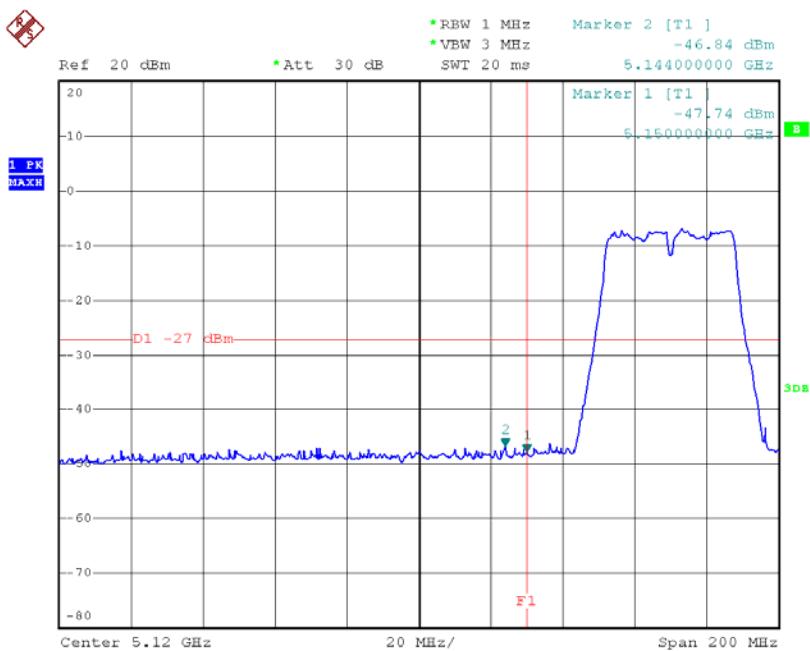

Date: 27.MAR.2014 01:40:19

TX mode CH46

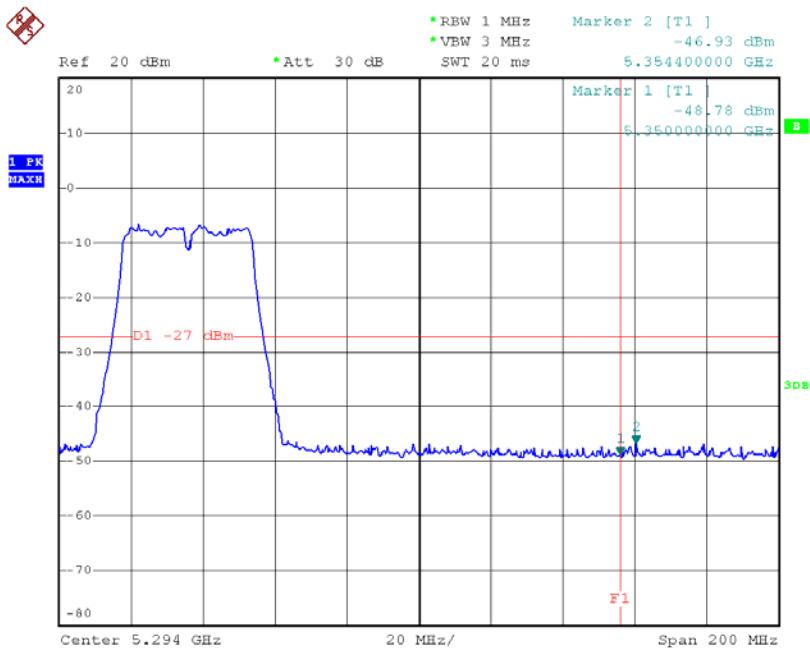


Date: 27.MAR.2014 01:32:18



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX AC 40 Mode/ CH38, CH46/ANT 7		




TX mode CH38

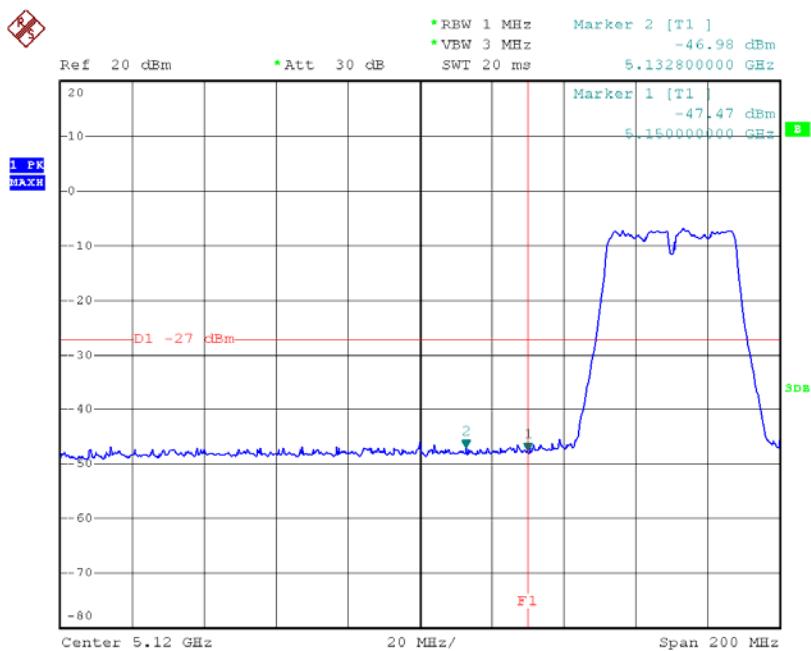

Date: 27.MAR.2014 01:40:07

TX mode CH46

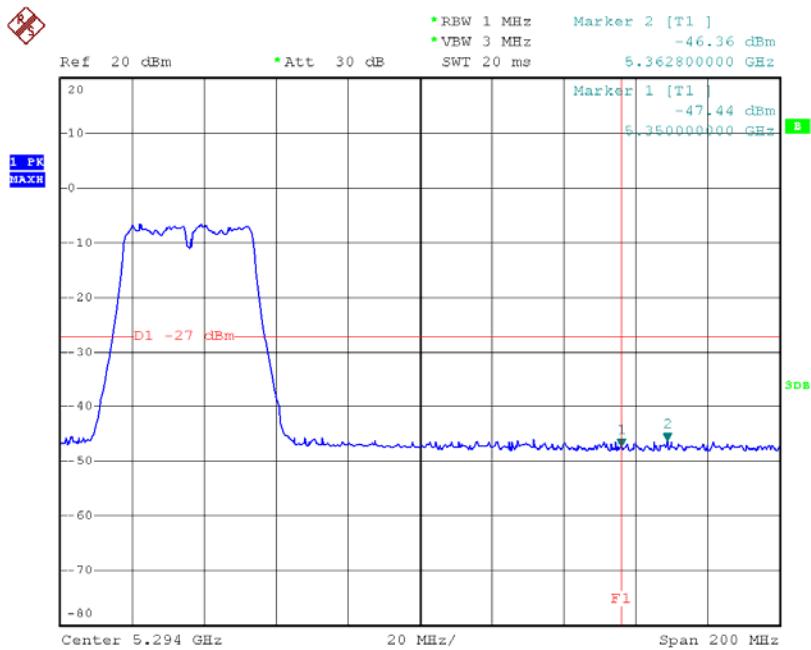


Date: 27.MAR.2014 01:32:00



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX AC 80 Mode/ CH42/ANT 6		

TX mode CH42

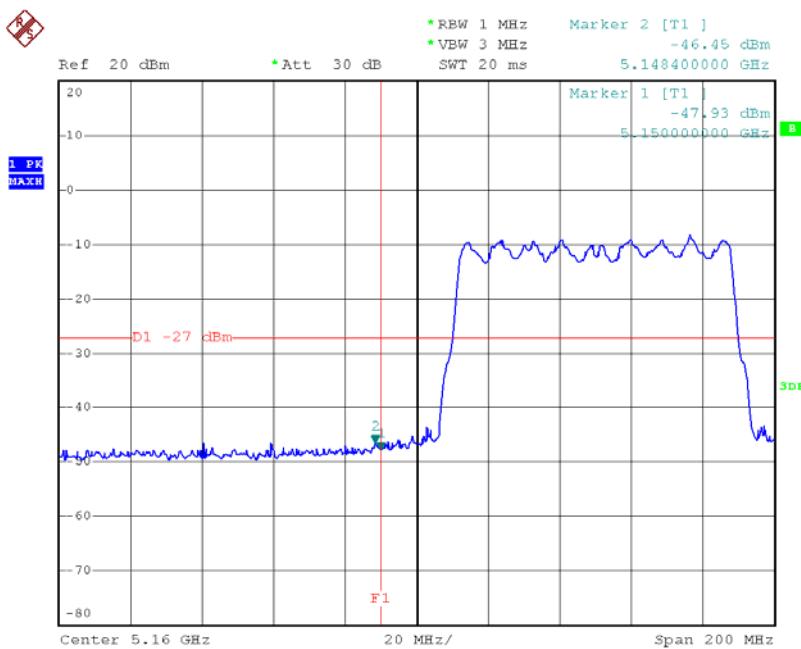


Date: 27.MAR.2014 01:42:51



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX AC 80 Mode/ CH42/ANT 7		

TX mode CH42

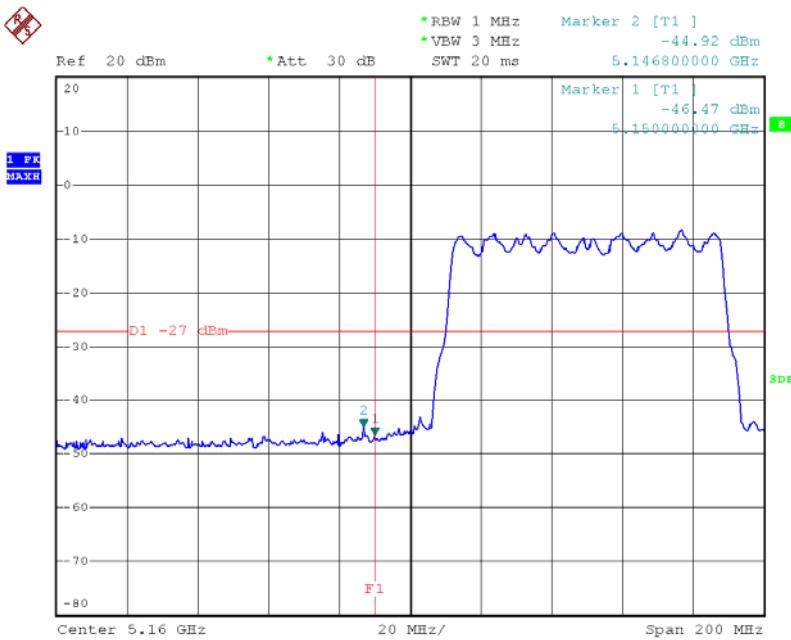

Date: 27.MAR.2014 01:42:36



8. POWER SPECTRAL DENSITY TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Power Spectral Density	4 dBm	5150 - 5250	PASS

8.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP_40	100129	Nov. 11, 2014

Remark: "N/A" denotes no model name, serial no. or calibration specified.

8.1.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,


b.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	= 1 MHz.
VB	\geq 3 MHz.
Detector	RMS
Trace	Max Hold
Sweep Time	Auto

8.1.3 DEVIATION FROM STANDARD

No deviation.

8.1.4 TEST SETUP




8.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.



8.1.6 TEST RESULTS


EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX A Mode/CH36, CH40, CH48		

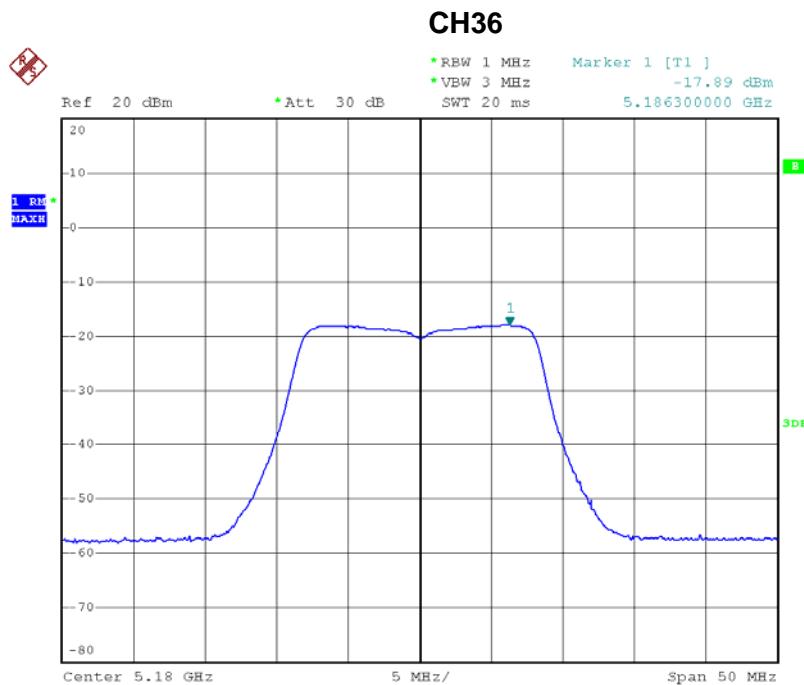

Date: 27.MAR.2014 02:52:23




CH40

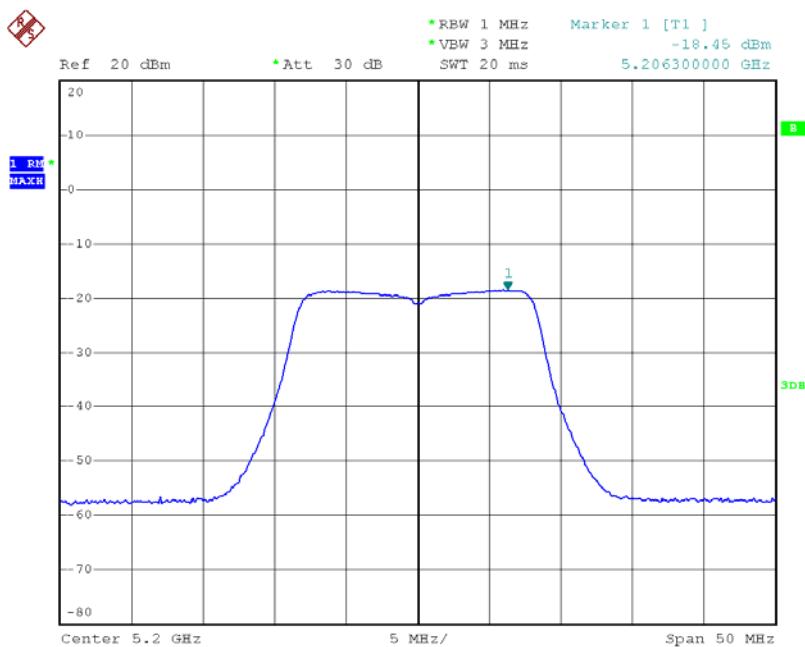

Date: 27.MAR.2014 02:49:11

CH48

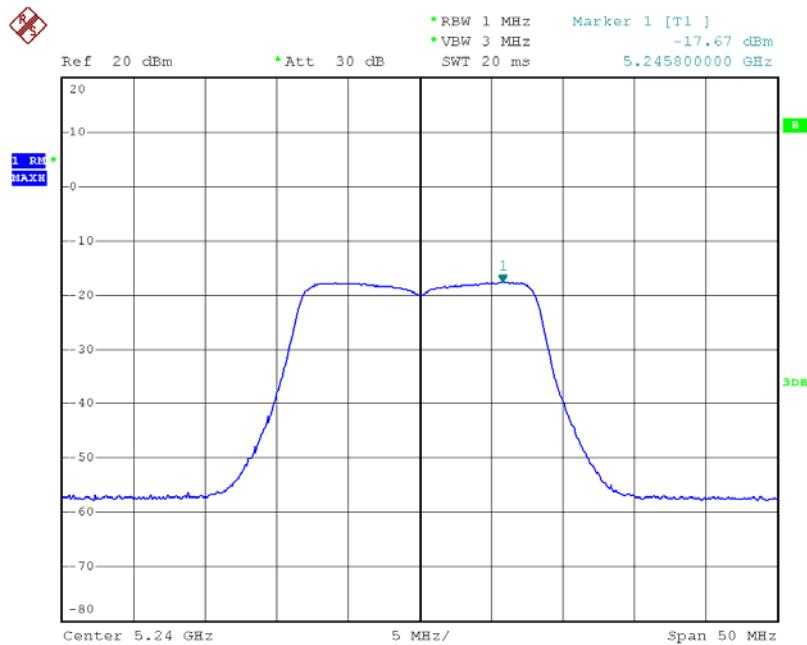


Date: 27.MAR.2014 02:45:52



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N20 Mode/CH36, CH40, CH48 – ANT 6		


CH36

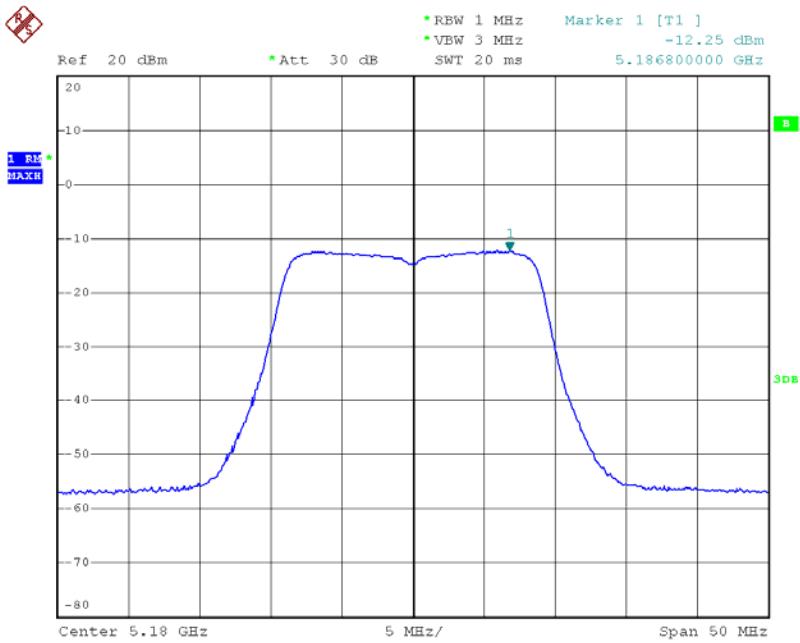

Date: 27.MAR.2014 02:02:05




CH40

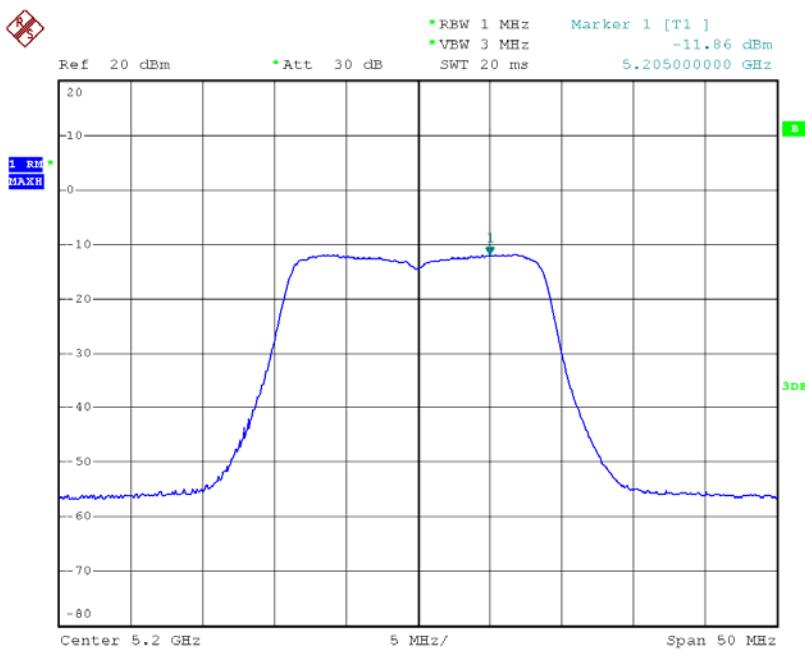

Date: 27.MAR.2014 02:09:40


CH48

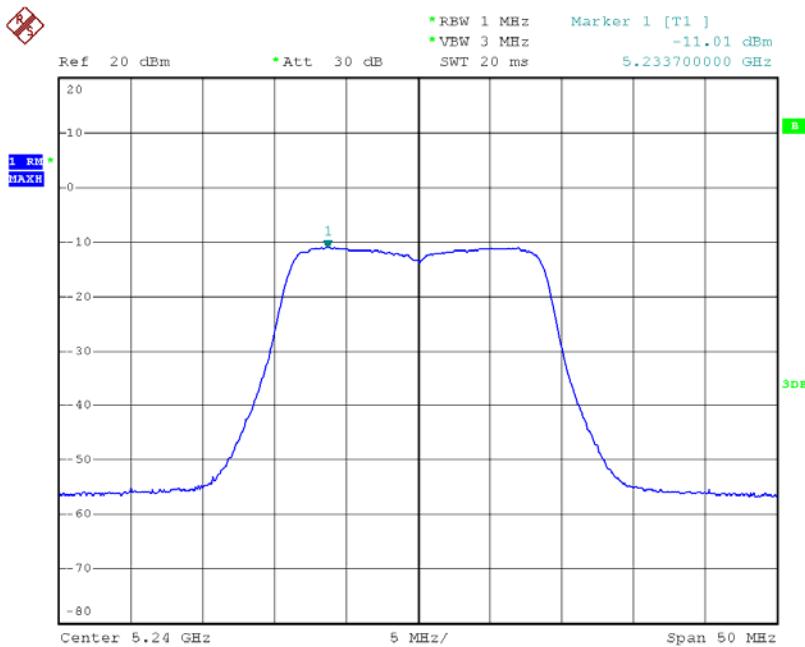

Date: 27.MAR.2014 02:12:48




EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N20 Mode/CH36, CH40, CH48 – ANT 7		

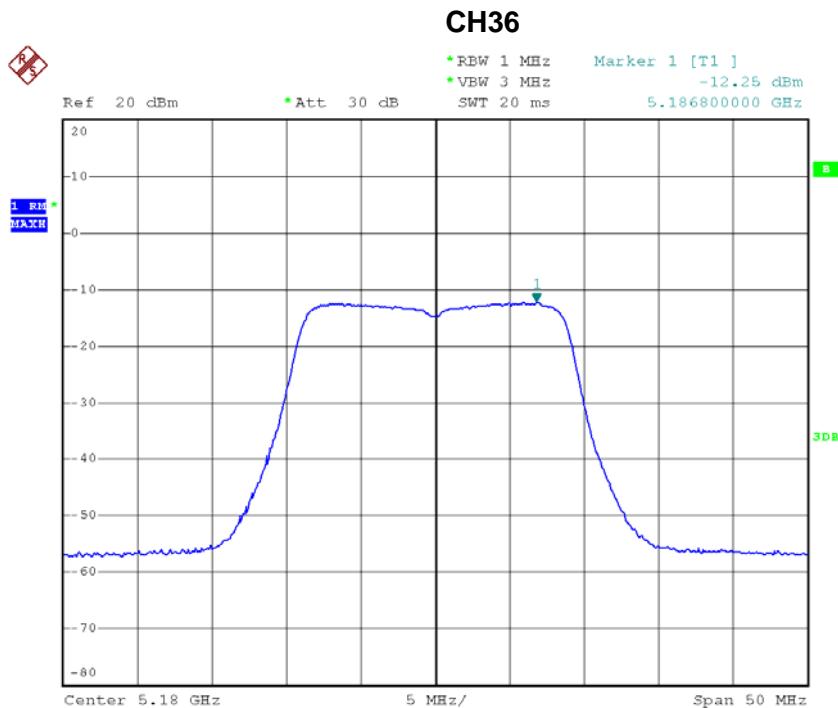

Date: 27.MAR.2014 02:02:05




CH40

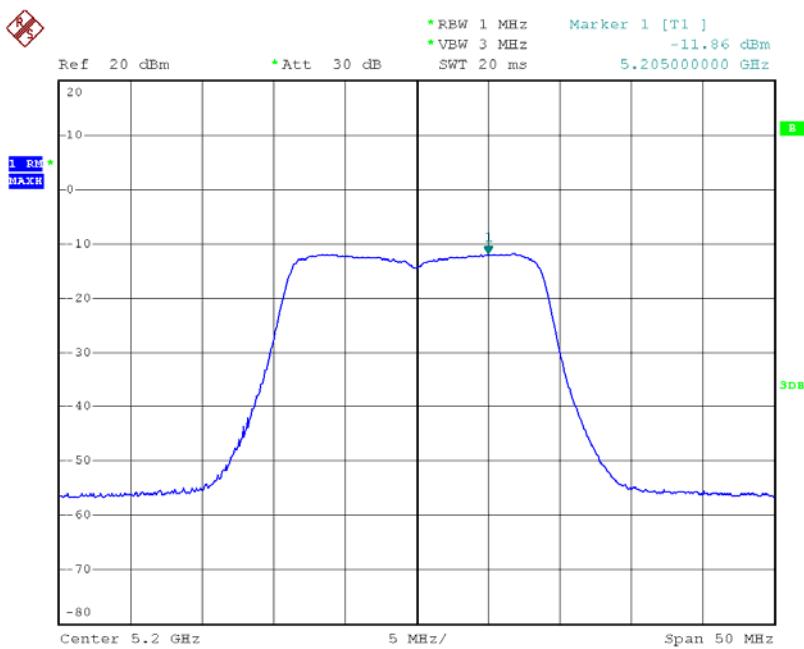

Date: 27.MAR.2014 02:09:40

CH48

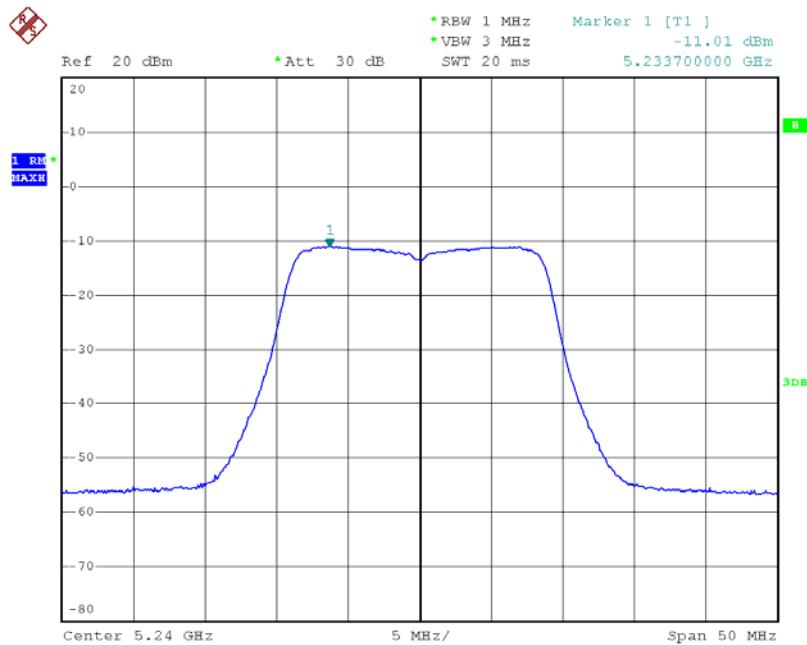

Date: 27.MAR.2014 02:12:48



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N20 Mode/CH36, CH40, CH48		


ANT 6+ANT 7

Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH36	5180	-9.22	4.00
CH40	5200	-8.80	4.00
CH48	5240	-7.80	4.00

Note: The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers (2T2R). all transmit signals are completely uncorrelated.




EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N40 Mode/CH38, CH46 – ANT 6		

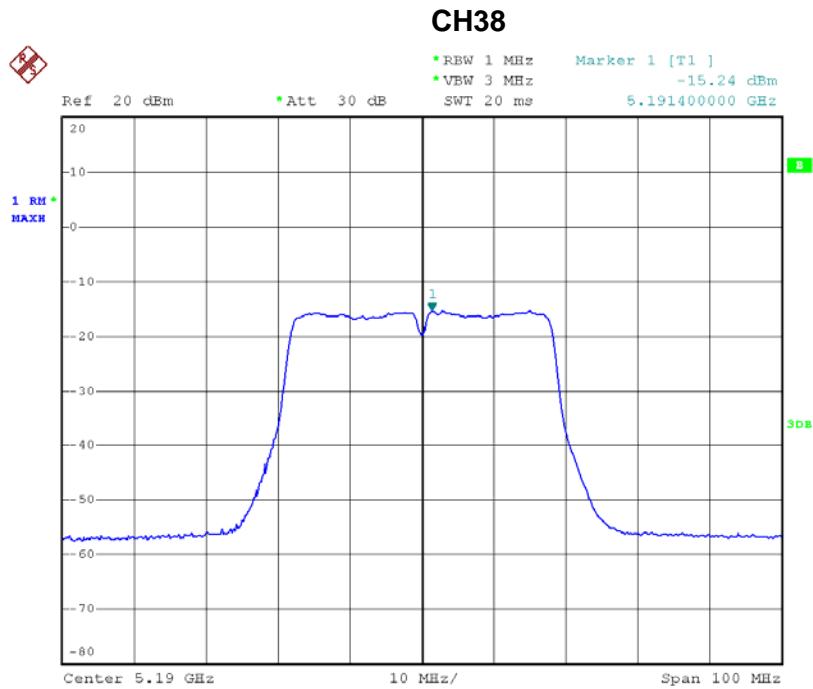

Date: 27.MAR.2014 01:54:13



CH46

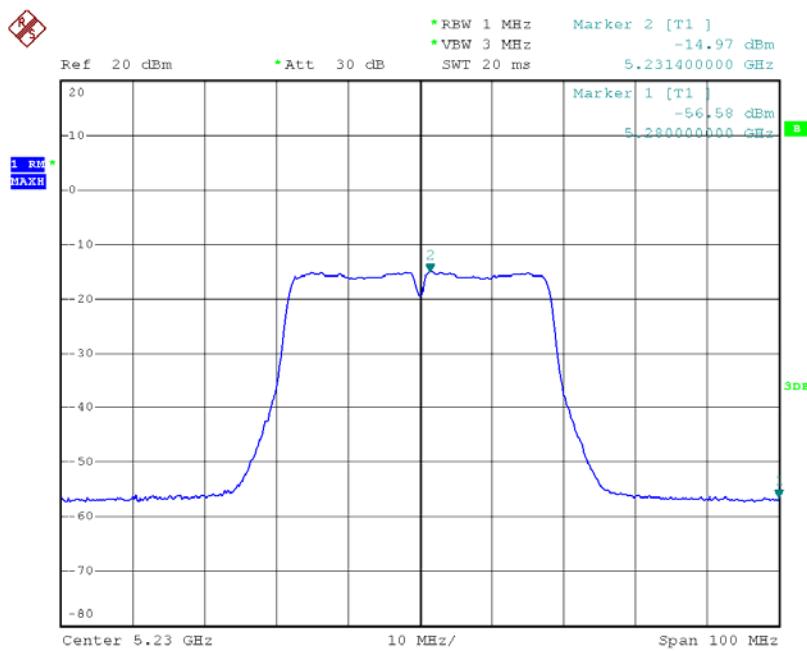


Date: 27.MAR.2014 01:47:48



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N40 Mode/CH38, CH46 – ANT 7		


CH38

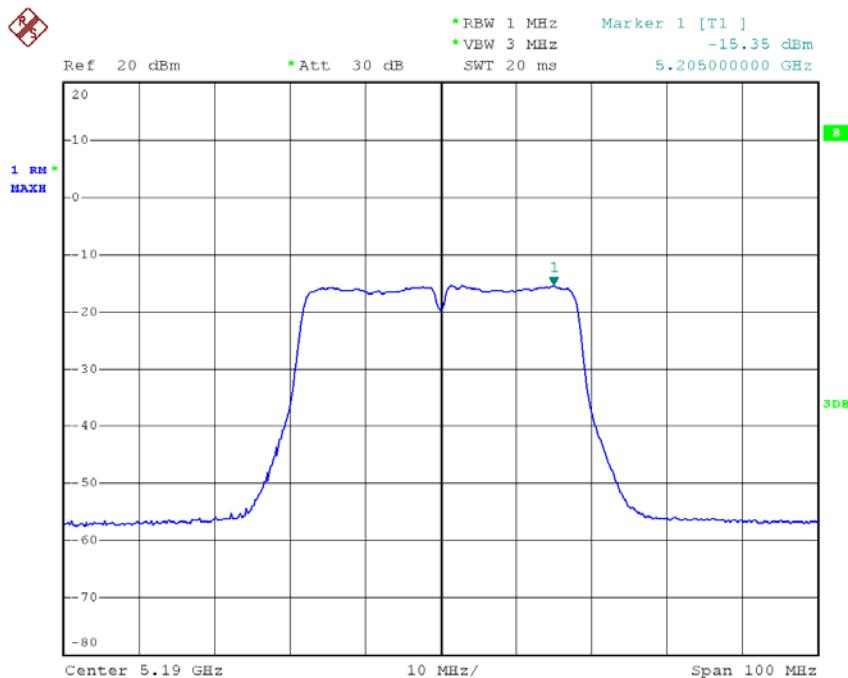

Date: 27.MAR.2014 01:54:09



CH46

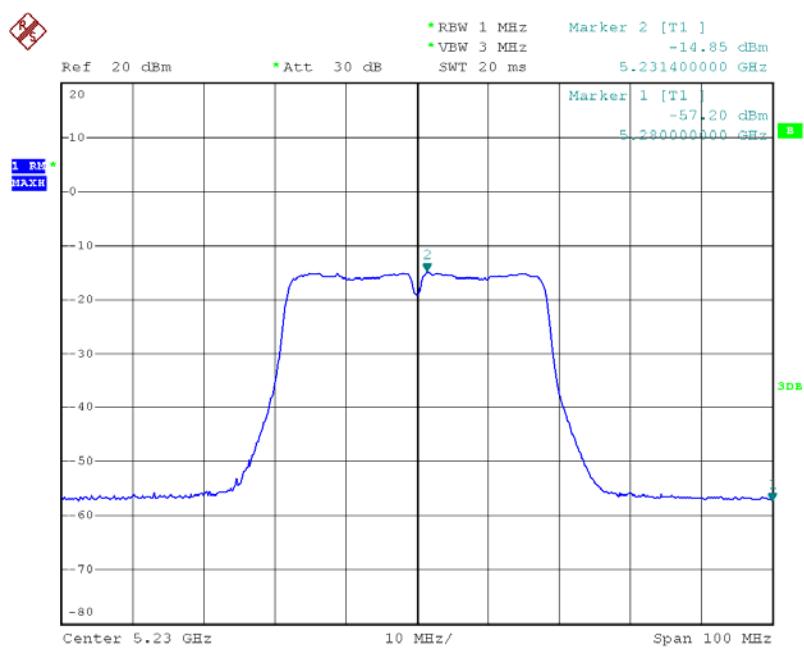

Date: 27.MAR.2014 01:47:41




EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N40 Mode/CH38, CH46		

ANT 6+ANT 7			
Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH38	5190	-12.28	4.00
CH46	5230	-11.90	4.00

Note: The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers (2T2R). all transmit signals are completely uncorrelated.




EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX AC 20 Mode/CH36, CH40, CH48 – ANT 6		

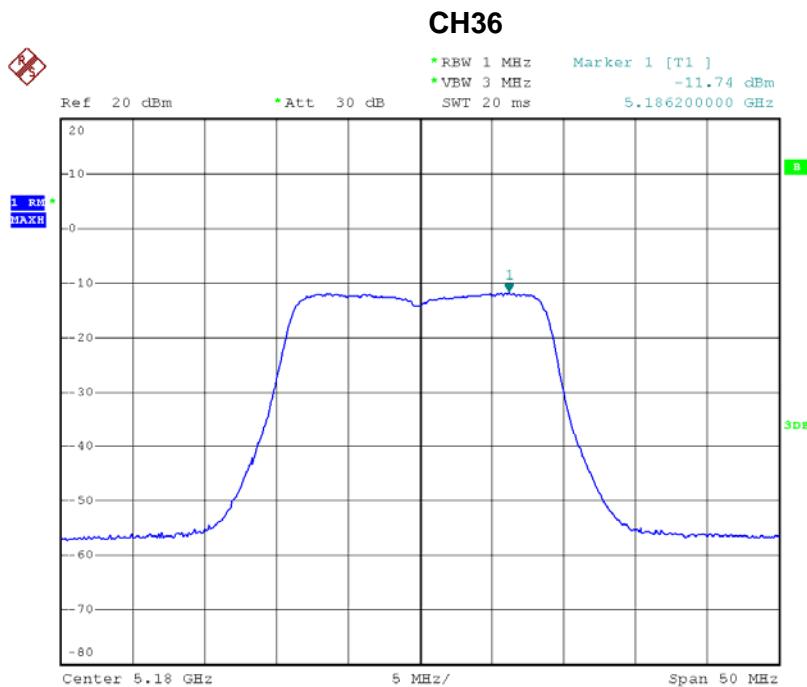

Date: 27.MAR.2014 02:25:36




CH40

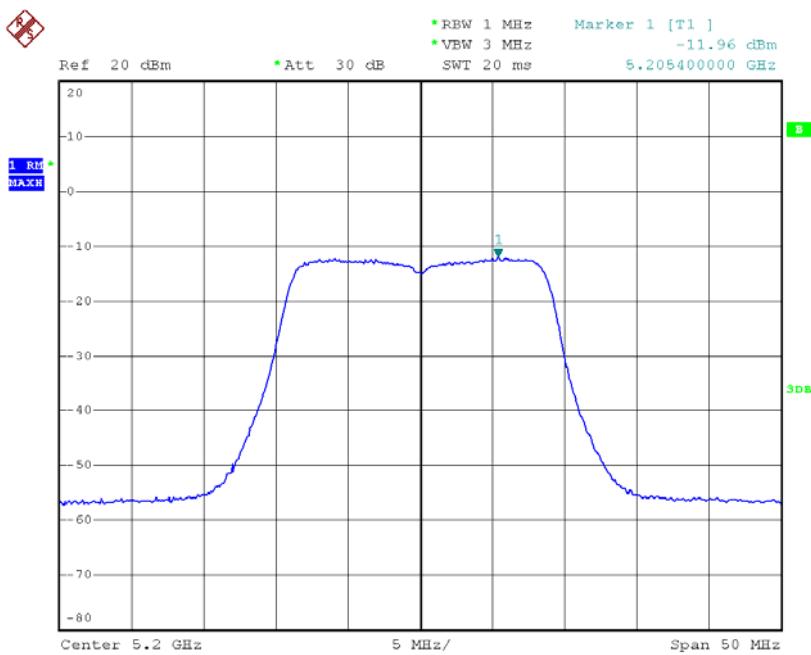

Date: 27.MAR.2014 02:34:10


CH48

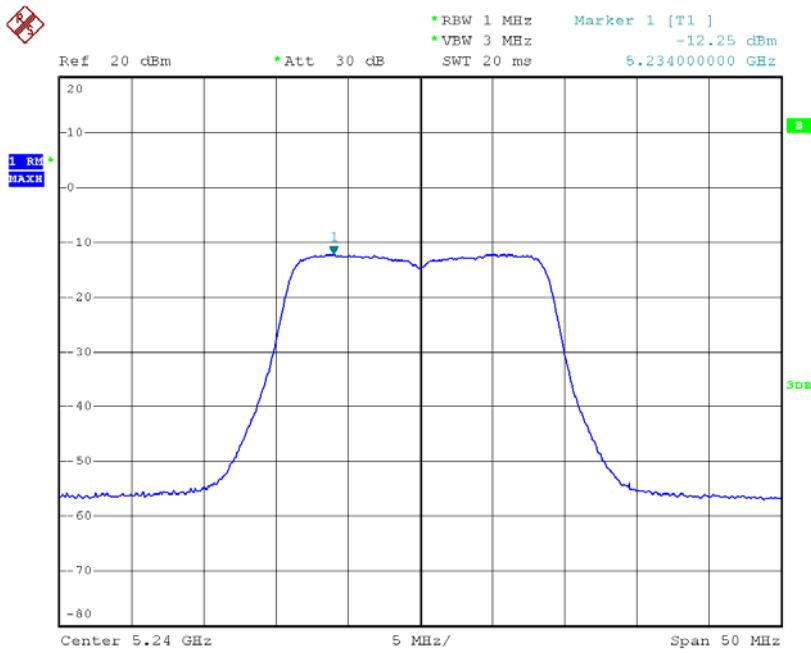

Date: 27.MAR.2014 02:35:33




EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX AC 20 Mode/CH36, CH40, CH48 – ANT 7		

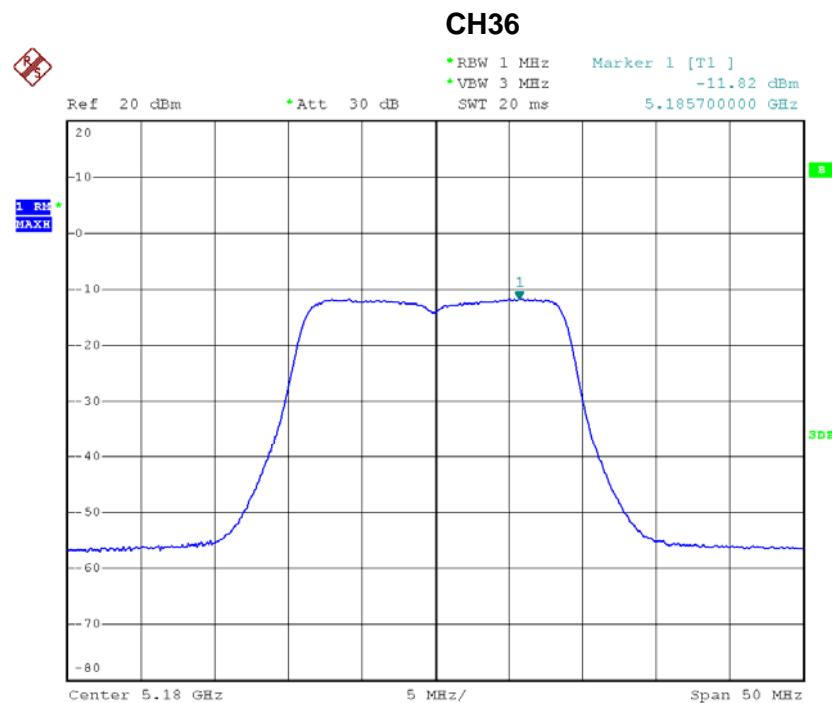

Date: 27.MAR.2014 02:25:28




CH40

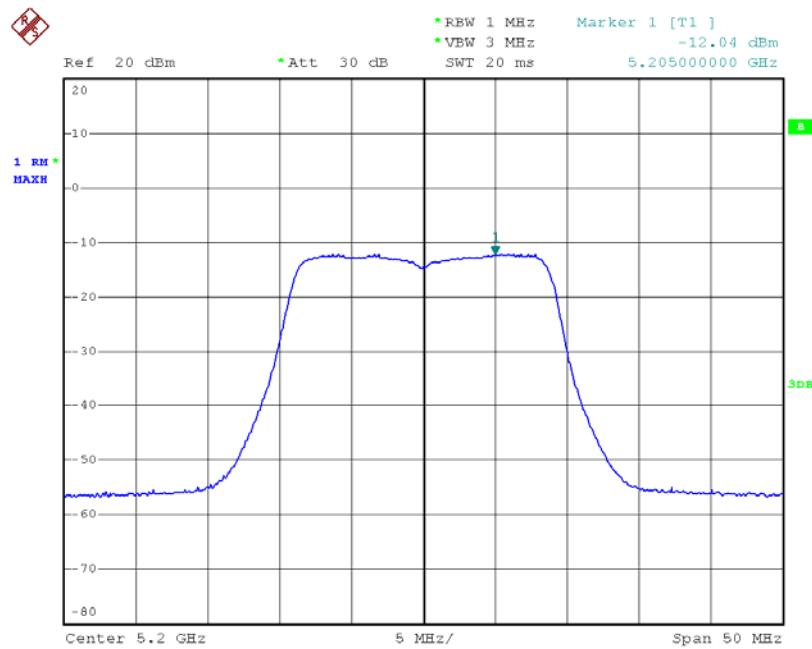

Date: 27.MAR.2014 02:33:56

CH48

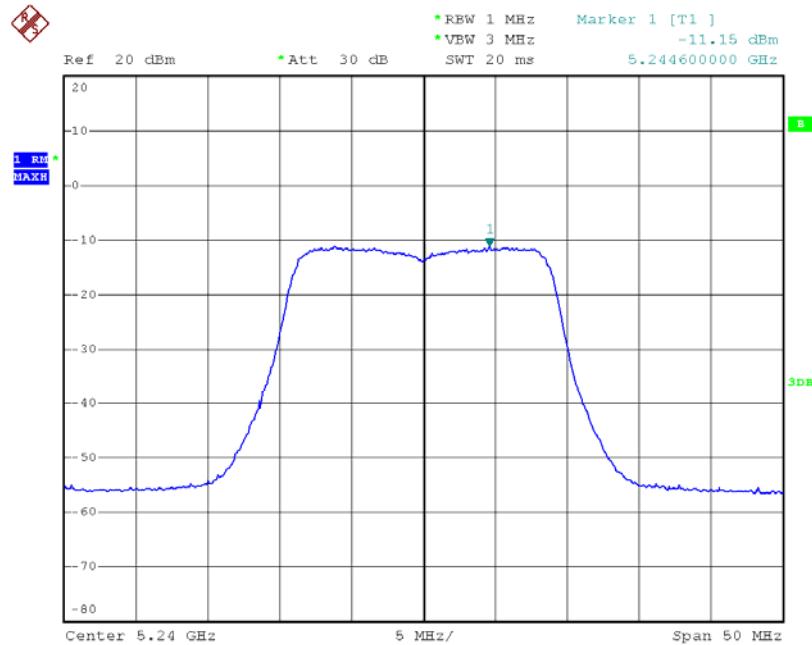

Date: 27.MAR.2014 02:35:28



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX AC 20 Mode/CH36, CH40, CH48		


ANT 6+ANT 7			
Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH36	5180	-8.77	4.00
CH40	5200	-8.99	4.00
CH48	5240	-8.65	4.00

Note: The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers (2T2R). all transmit signals are completely uncorrelated.



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX AC 40 Mode/CH38, CH46 – ANT 6		


CH38

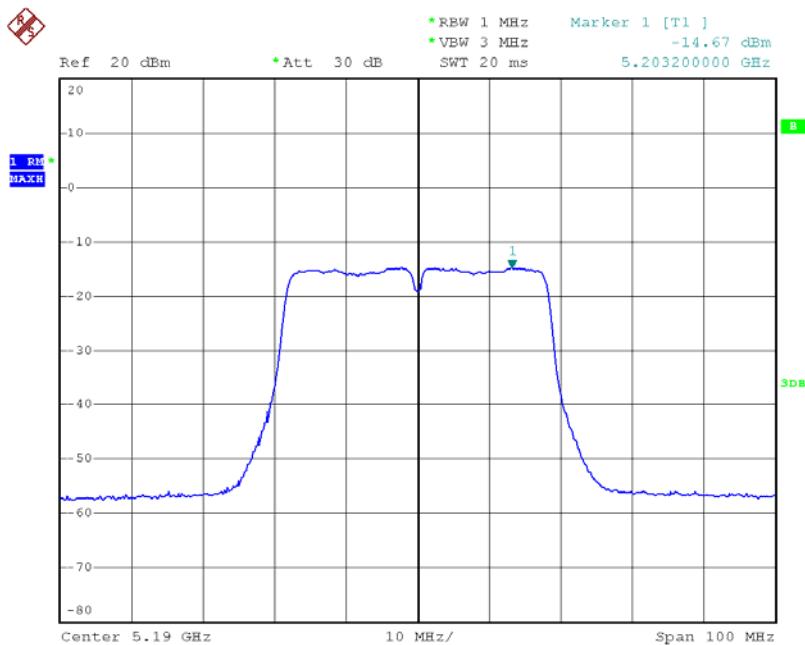

Date: 27.MAR.2014 01:07:49




CH46

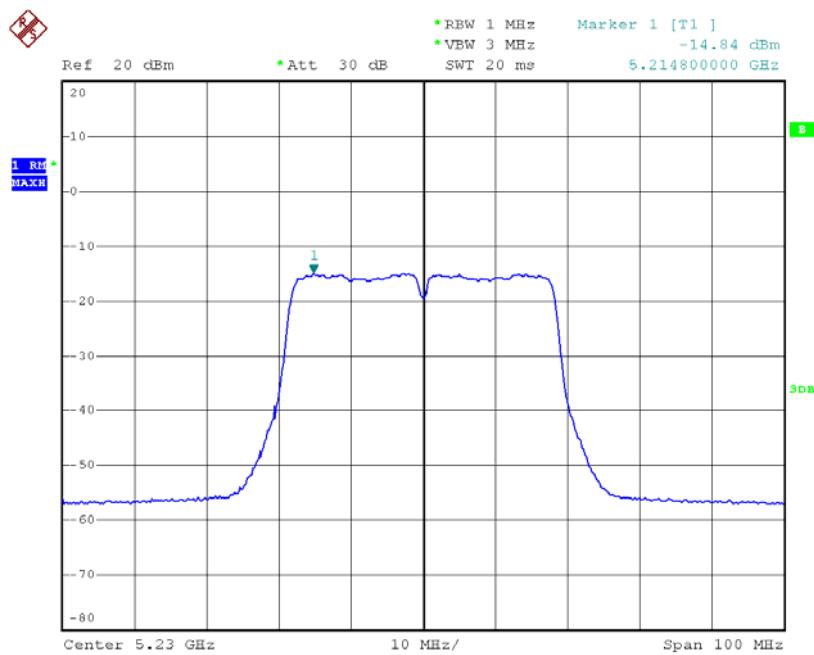

Date: 27.MAR.2014 01:34:38




EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX AC 40 Mode/CH38, CH46 – ANT 7		

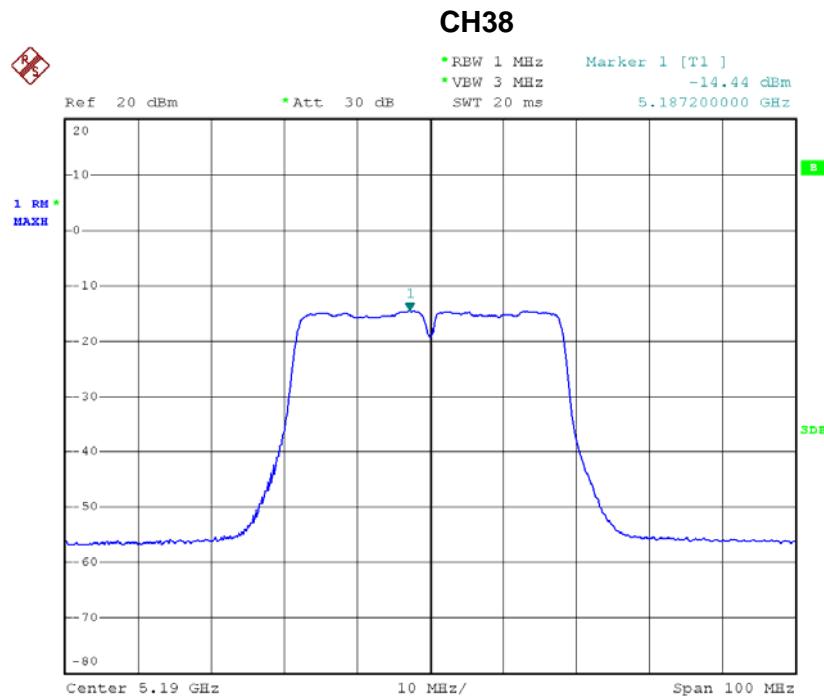

Date: 27.MAR.2014 01:07:24



CH46

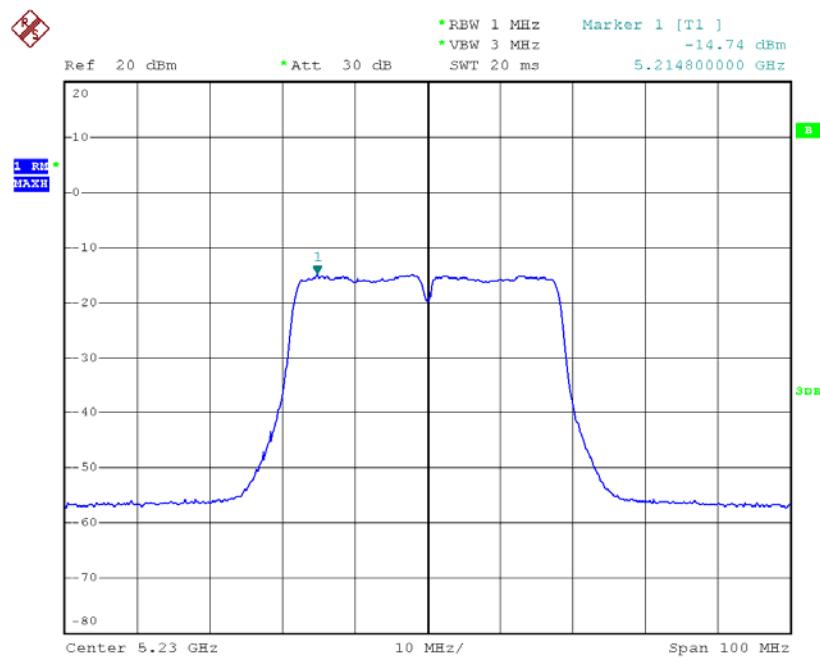

Date: 27.MAR.2014 01:34:25



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX AC 40 Mode/CH38, CH46		

ANT 6+ANT 7


Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH38	5190	-14.44	4.00
CH46	5230	-14.74	4.00

Note: The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers (2T2R). all transmit signals are completely uncorrelated.



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX AC 80 Mode/CH42 – ANT 6		


CH42

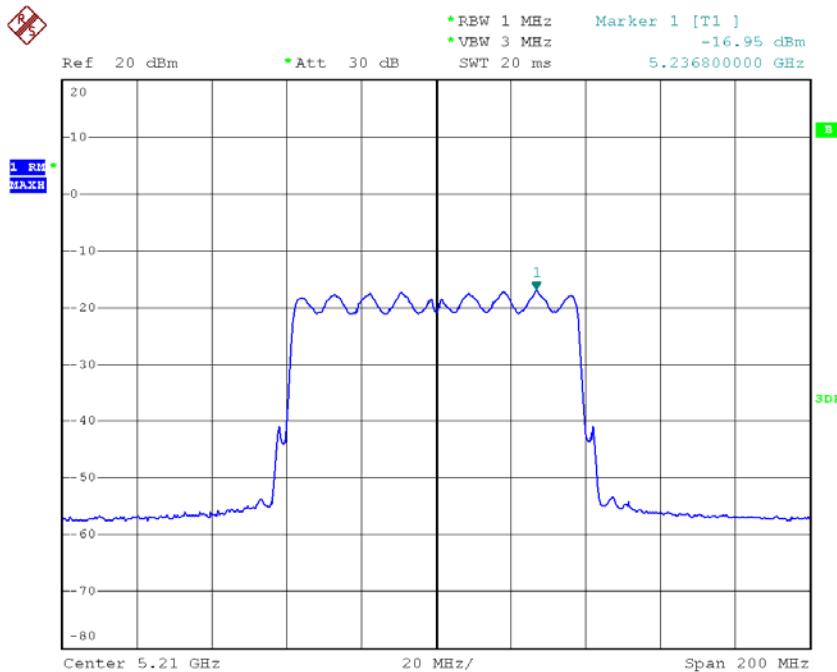

Date: 27.MAR.2014 00:51:45



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX AC 80 Mode/CH42 – ANT 7		

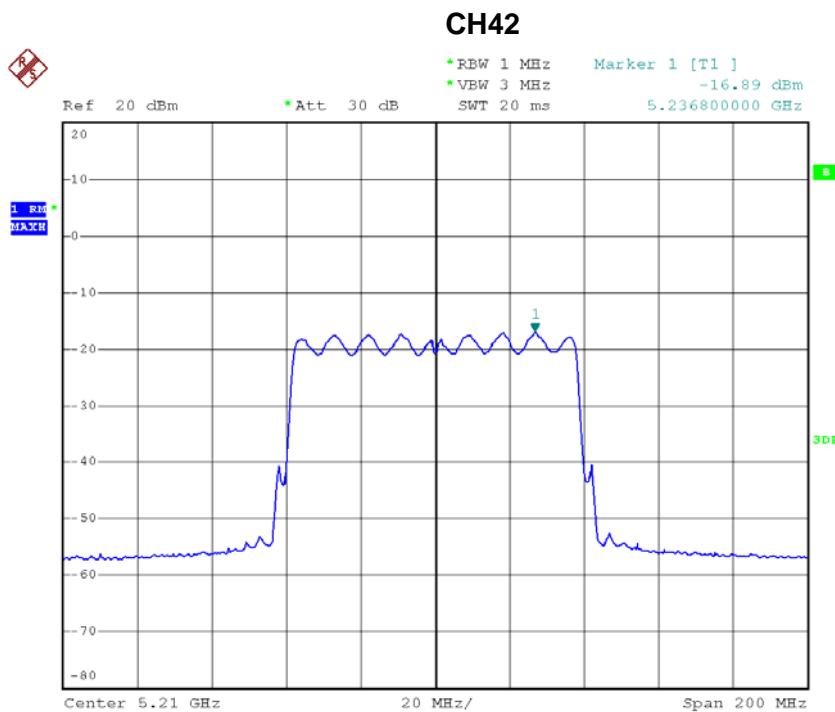

Date: 27.MAR.2014 00:51:39



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX AC 80 Mode/CH42		

ANT 6+ANT 7

Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH42	5210	-13.91	4.00

Note: The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers (2T2R). all transmit signals are completely uncorrelated.



9. PEAK EXCURSION MEASUREMENT

9.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Peak Excursion Measurement	13 dB	5150 - 5250	PASS

9.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP_40	100129	Nov. 11, 2014

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

9.1.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz (Peak Trace) / 1000 kHz (Average Trace)
VB	3000 kHz (Peak Trace) / 3000 kHz (Average Trace)
Detector	Peak (Peak Trace) / RMS (Average Trace)
Trace	Max Hold
Sweep Time	60s

- c. Peak Trace: Set RBW = 1 MHz, VBW \geq 3 MHz with peak detector and maxhold settings.

- d. Average Trace: set RBW = 1 MHz, VBW = 3 MHz with RMS detector and trace average across 100 traces in power averaging mode.

9.1.3 DEVIATION FROM STANDARD

No deviation.



9.1.4 TEST SETUP




9.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.



9.1.6 TEST RESULTS


EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX A Mode/CH36, CH40, CH48		

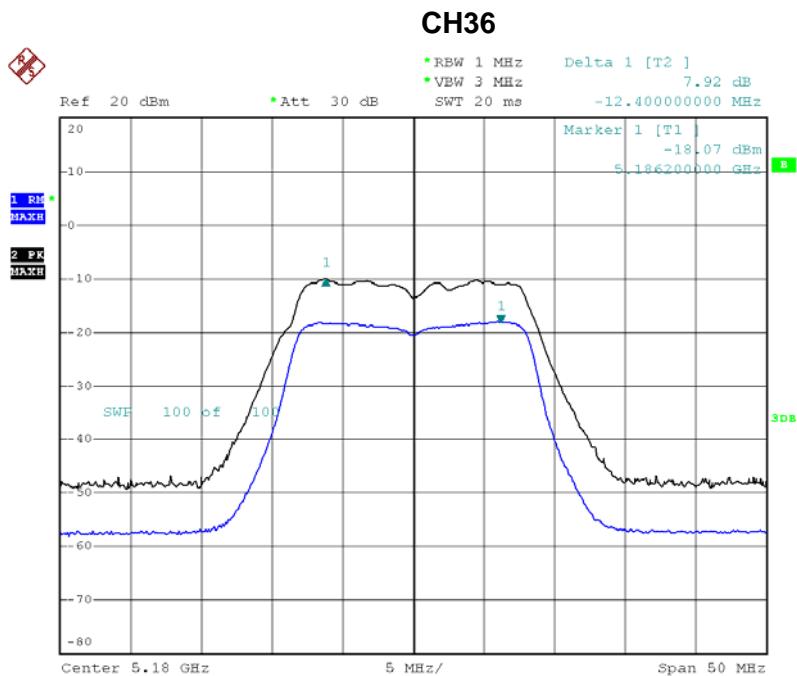

Date: 27.MAR.2014 02:56:28




CH40

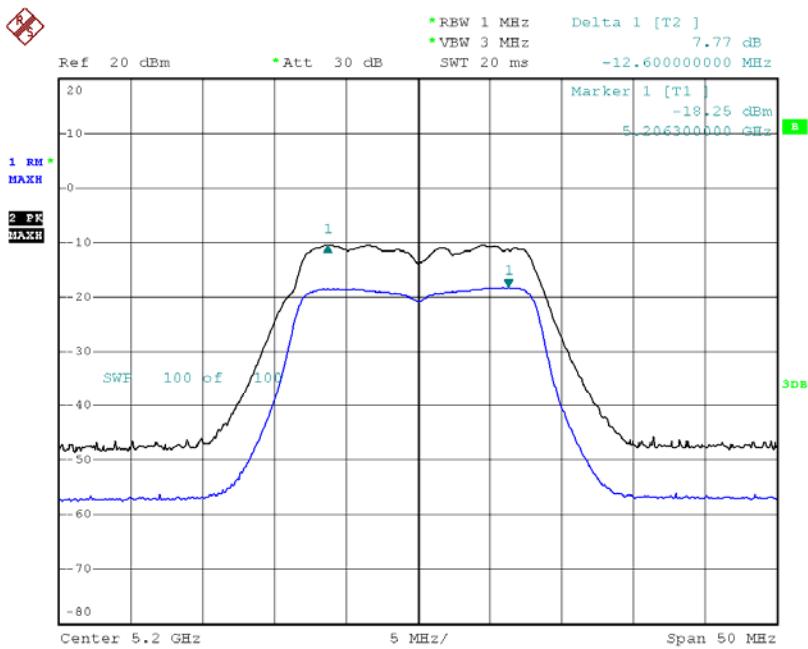

Date: 27.MAR.2014 02:48:10


CH48

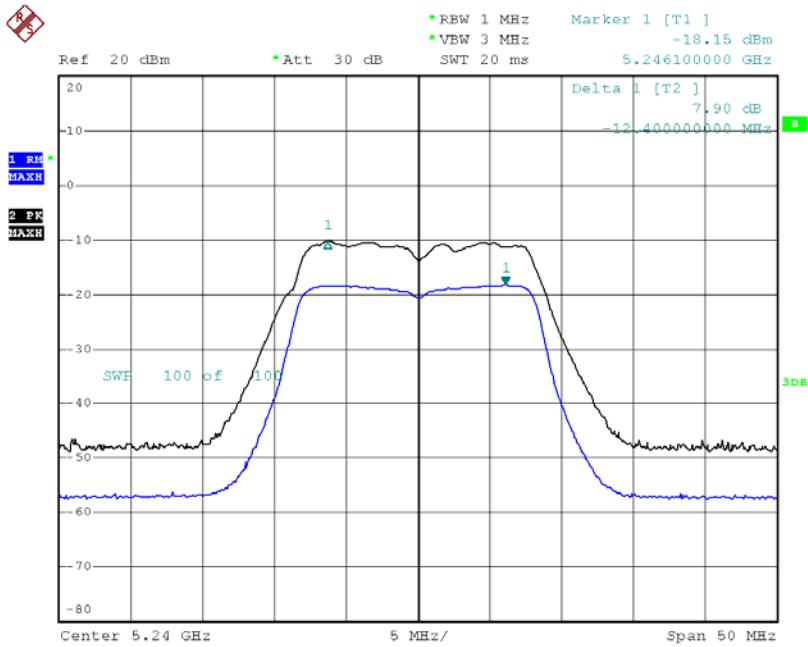

Date: 27.MAR.2014 02:55:31




EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N20 Mode/CH36, CH40, CH48		

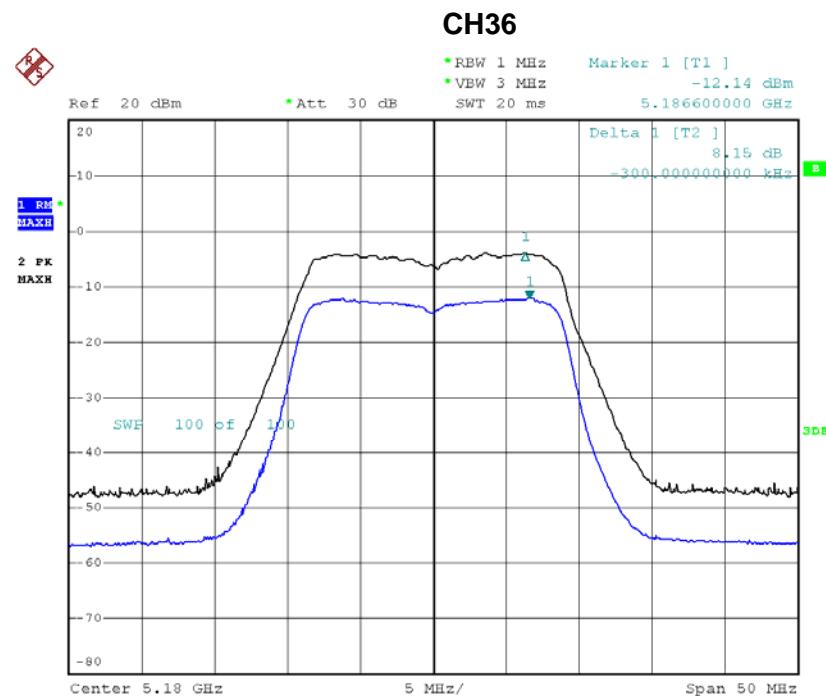

Date: 27.MAR.2014 02:03:24




CH40

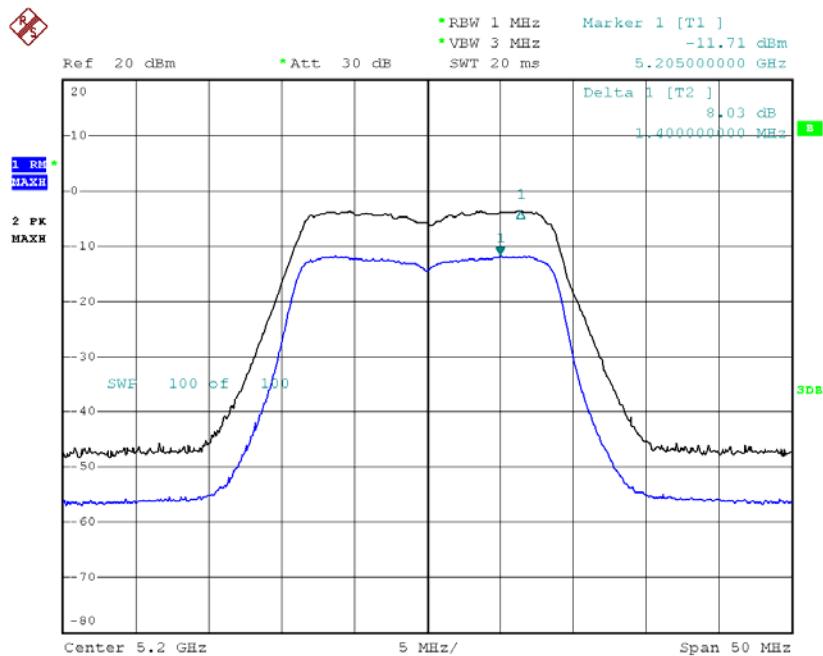

Date: 27.MAR.2014 02:08:48


CH48

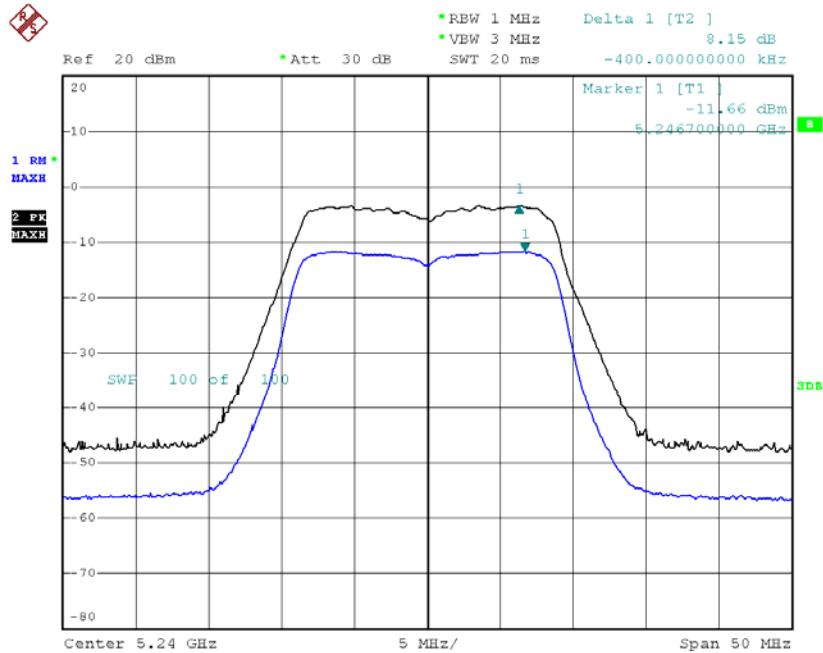

Date: 27.MAR.2014 02:14:09




EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N40 Mode/CH38, CH46		

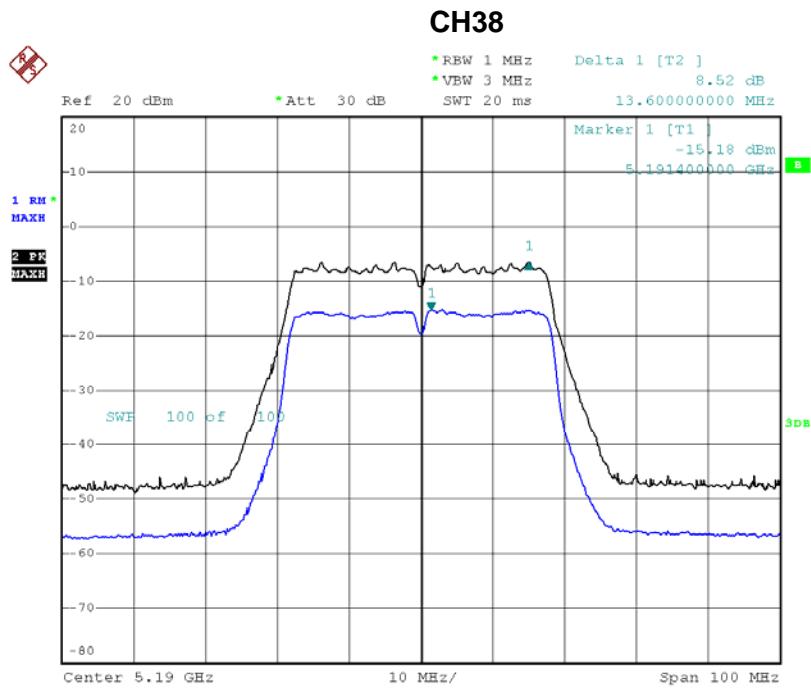

Date: 27.MAR.2014 01:53:23




CH46

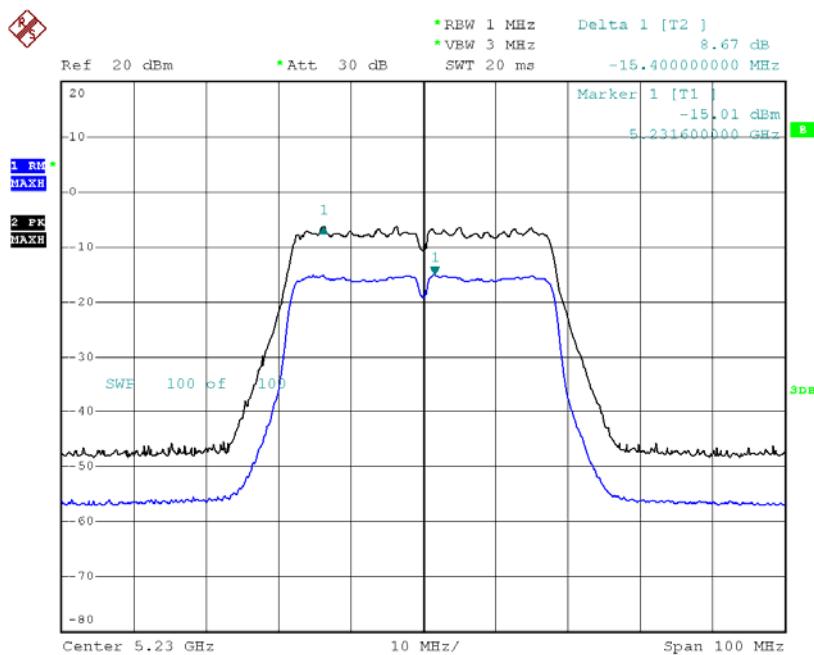

Date: 27.MAR.2014 01:49:11




EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX AC 20 Mode/CH36, CH40, CH48		

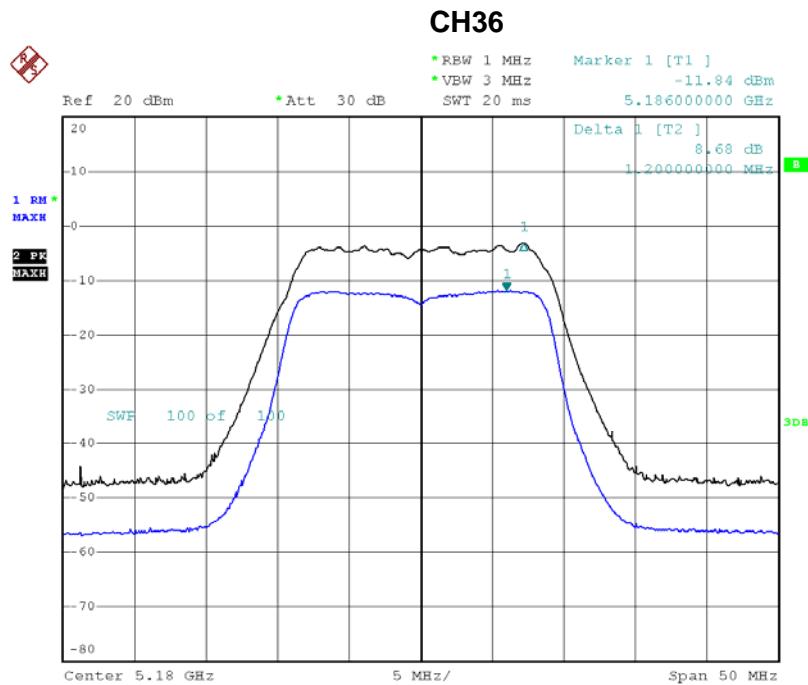

Date: 27.MAR.2014 02:26:47




CH40

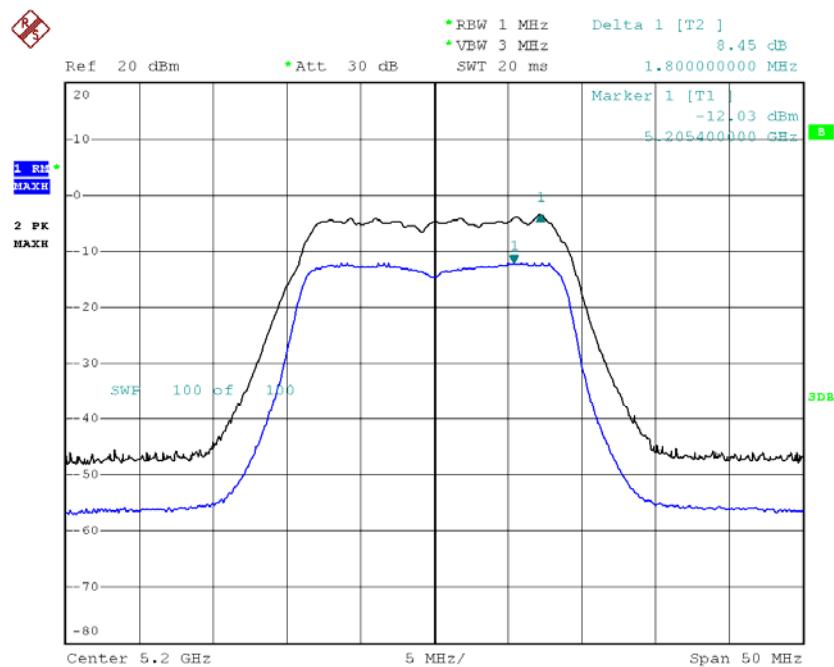

Date: 27.MAR.2014 02:32:06


CH48

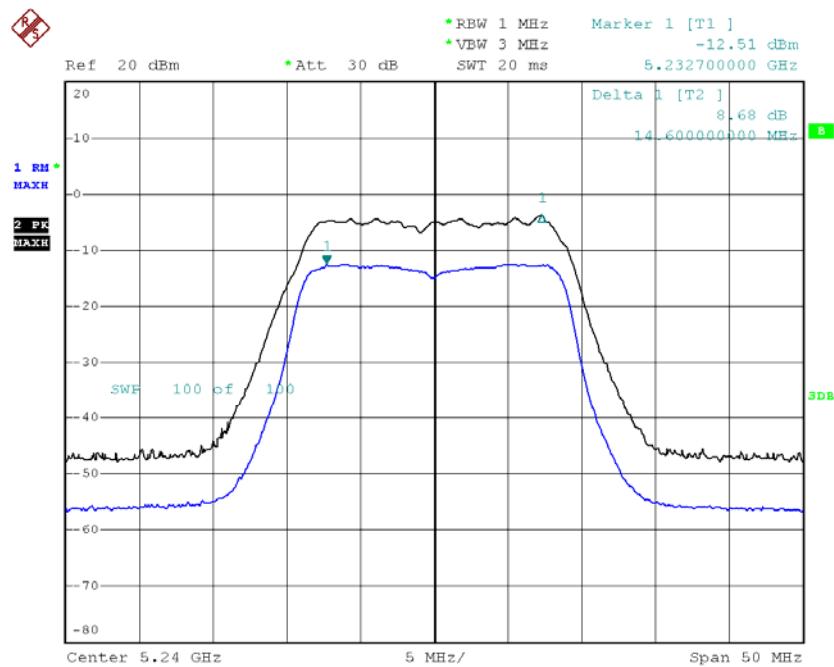


Date: 27.MAR.2014 02:36:13



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX AC 40 Mode/CH38, CH46		

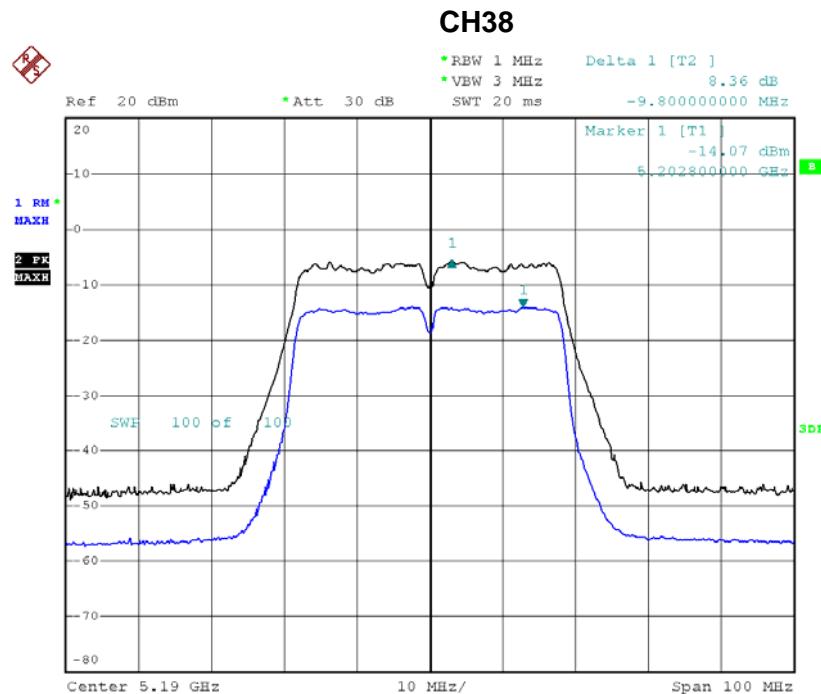


Date: 27.MAR.2014 01:03:07

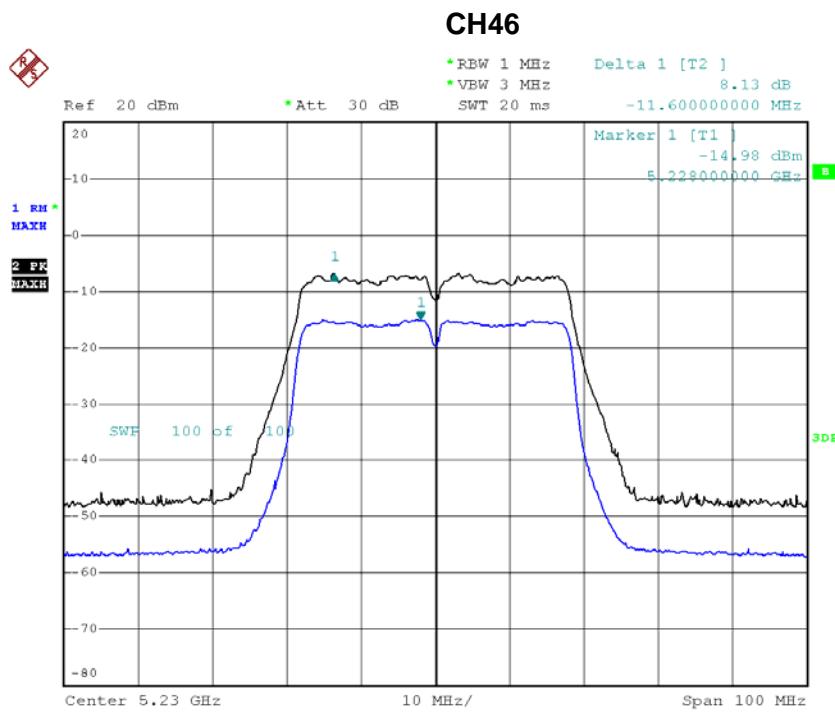

Date: 27.MAR.2014 01:36:56



EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX AC 80 Mode/CH38, CH46		

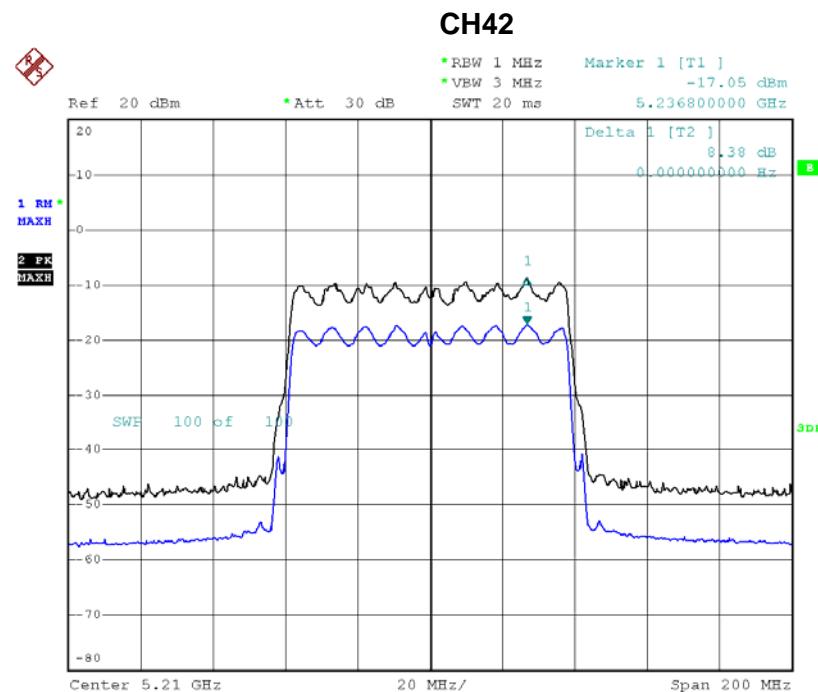

Date: 27.MAR.2014 01:00:48



10. FREQUENCY STABILITY MEASUREMENT

10.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E 15.407(g)			
Test Item	Limit	Frequency Range (MHz)	Result
Frequency Stability	specified in the user's manual	5150 – 5250	PASS

10.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP_40	100129	Nov. 11, 2014
2	Precision Oven Tester	HOLINK	H-T-1F-D	BA03101701	May.25.2014

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

10.1.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RB	10 kHz
VB	10 kHz
Sweep Time	Auto

- c. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.

- d. user manual temperature is 0°C~45°C.

10.1.3 DEVIATION FROM STANDARD

No deviation.



10.1.4 TEST SETUP



10.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

**10.1.6 TEST RESULTS**

EUT:	AC1200 Wireless Dual Band Gigabit Router	Model Name :	WF2780
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX A Mode		

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5180
132	5180.000000
120	5179.985000
108	5179.984000
Max. Deviation (MHz)	0.016000
Max. Deviation (ppm)	3.09

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5180
0	5179.986000
10	5179.983000
20	5179.986000
30	5179.982000
40	5179.986000
Max. Deviation (MHz)	0.018000
Max. Deviation (ppm)	3.47





11. EUT TEST PHOTO

Conducted Measurement Photos





Radiated Measurement Photos
30~1000MHz

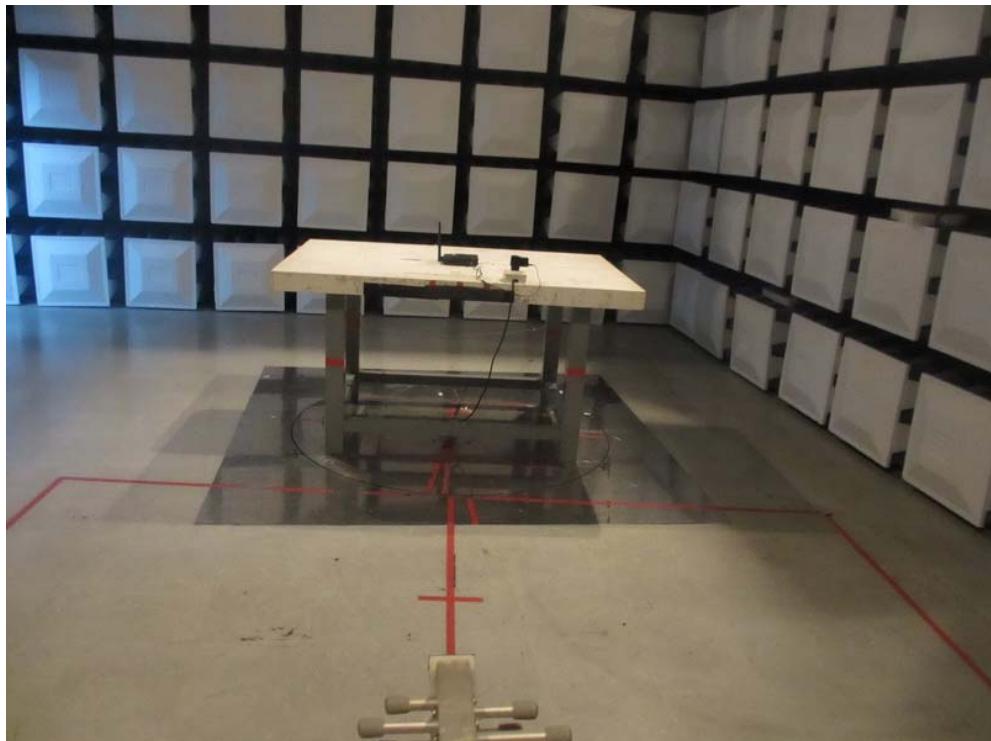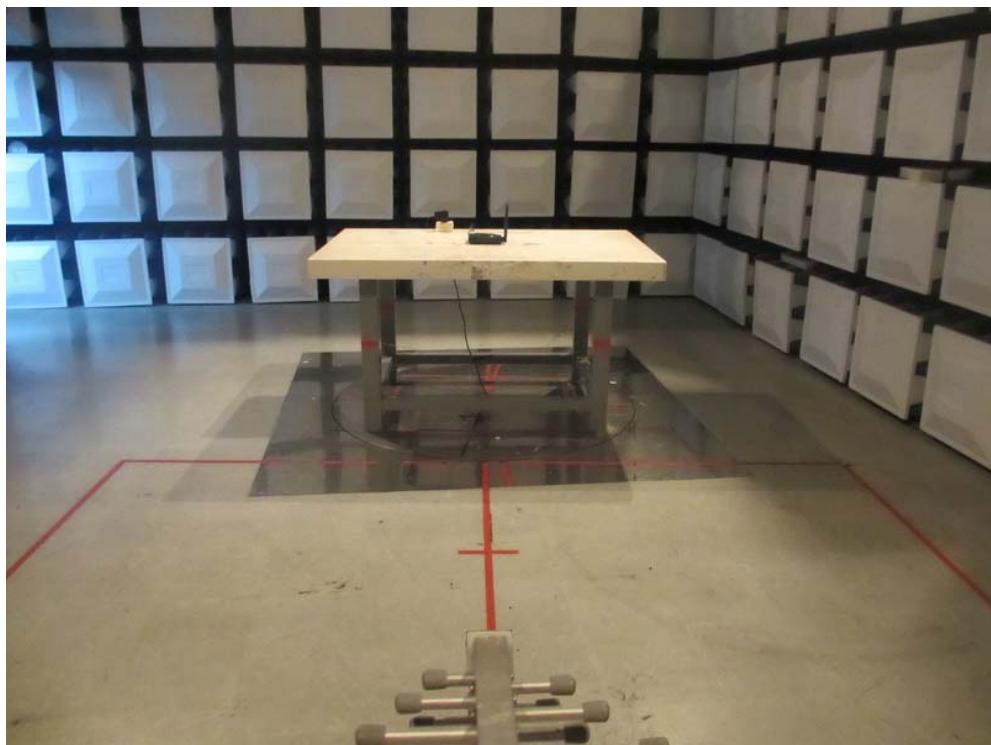



**Radiated Measurement Photos
Above 1000MHz**

