



CTK Co., Ltd.
The Power Leader of Global Regulatory Certification

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com



EMC TEST REPORT For FCC

Test Report No. : 2006060039-1
Date of Issue : September 8, 2006
FCC ID : T5ISNA-260AA
Model/Type No. : SNA-260AA, SN-260AB, SNA-260AB, SN-260CA, SN-260CB, SN-260BB, SN-260BA, SN-260DA, SN-260DB and IV100
Kind of Product : Digital Satellite Receiver
Applicant : Tcom Technology Co., Ltd.
Applicant Address : 602, Chungjuk tower 546-9, Sang2-dong, Wonmi-gu, Bucheon-si, Gyeonggi-do, Korea
Manufacturer : Tcom Technology Co., Ltd.
Manufacturer Address : 602, Chungjuk tower 546-9, Sang2-dong, Wonmi-gu, Bucheon-si, Gyeonggi-do, Korea
Contact Person : Young-Gyu Kim / Assistant Research Engineer
Telephone : + 82-32-326-4842
Received Date : August 22, 2006
Test period : Start : August 31, 2006 End : September 7, 2006
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

The test results presented in this report relate only to the object tested.

CTK Co., Ltd. is accredited by Korea Laboratory Accreditation Scheme (KOLAS) which signed the International Laboratory Accreditation Cooperation (ILAC) Mutual Recognition Arrangement (MRA) for the above test item(s) and test method(s).

Tested by

Eun-Won, Lee
EMC Test Engineer
Date: September 8, 2006

Reviewed by

James Hong
EMC Technical Manager
Date: September 8, 2006



CTK Co., Ltd.
The Power Leader of Global Regulatory Certification

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com



REPORT REVISION HISTORY

Date	Revision	Page No
June 28, 2006	Initial Issue (2006060039)	All
September 8, 2006	Added Smart Card Reader (2006060039-1)	All

This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.



CTK Co., Ltd.
The Pioneer Leader of EMI/EMC Regulatory Certification

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com



TABLE OF CONTENTS

REPORT REVISION HISTORY	2
1.0 General Product Description	4
1.1 Model Differences	4
1.2 Device Modifications	5
1.3 EUT Configuration(s)	6
1.4 Test Software	6
1.5 EUT Operating Mode(s)	6
1.6 Configuration	7
1.7 Calibration Details of Equipment Used for Measurement	8
1.8 Test Facility	8
1.9 Measurement Procedure	8
1.10 Laboratory Accreditations and Listings	9
2.0 Emissions Test Regulations	10
2.1 Conducted Voltage Emissions	11
2.2 Radiated Electric Field Emissions	12
2.3 Antenna-Conducted Power	13
2.4 Output and Spurious Conducted Level	14
2.5 Antenna Transfer Switch	15
APPENDIX A – TEST DATA	16
Conducted Voltage Emissions	16
Radiated Electric Field Emissions	18
Output and Spurious Conducted Level	19
APPENDIX B - Test Setup Photos and Configuration	20
Conducted Voltage Emissions	20
Radiated Electric Field Emissions	21
Antenna-Conducted Power	22
Output and Spurious Conducted Level	23
Antenna Transfer Switch	24
APPENDIX C – EUT Photographs	25
EUT External Photographs	26
EUT Internal Photographs	27
PCB	28
Photographs related to Label	32
FCC ID label location	33



CTK Co., Ltd.
The Power Leader of Global Regulatory Certification

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com



1.0 General Product Description

1.0.1 Tested Equipment

- ☒ Unless otherwise indicated, all tests were conducted on Model SNA-260AA.
- ☒ Tests performed on Model SNA-260AA were considered to be representative of Model(s) SN-260AB, SNA-260AB, SN-260CA, SN-260CB, SN-260BB, SN-260BA, SN-260DA, SN-260DB and IV100.

1.0.2 Equipment Size, Mobility and Identification

Dimensions: 260(W) by 210(L) by 45(H) ☒ mm ☐ inch
Mobility: ☐ Hand-held ☒ Table-top ☐ Built-in
☐ Traveling ☐ Floor-standing
Serial No.: Prototype

1.0.3 Electrical Ratings

Input: 110-120 Vac, 60 Hz
Output: -

1.0.4 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage: 120 Vac
Frequency: 60 Hz

1.0.5 Clock & Other Frequencies Utilized


27.000 MHz

1.1 Model Differences


SNA-260AA, SN-260AB, SNA-260AB, SN-260CA, SN-260CB, SN-260BB, SN-260BA, SN-260DA, SN-260DB and IV100 are identical to each other only except for model designations for the marketing purpose.

1.2 Device Modifications


The following modifications were necessary for compliance:

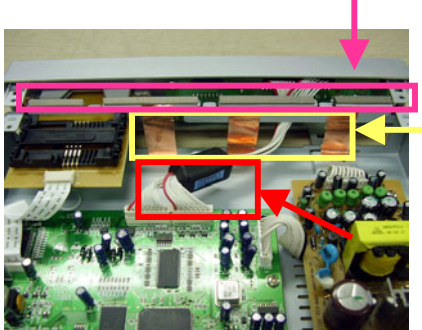



Core location	Manufacturer	Part No.
Display Cable	E-Tech Electronics Co., Ltd.	CU0930B



Copper Tape

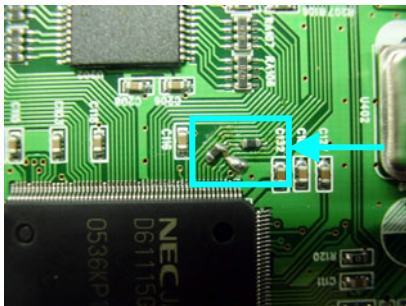


75Ω beads and 10pF capacitor are inserted additionally in main board.

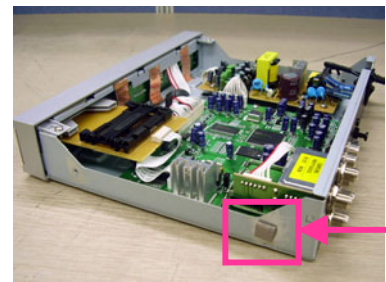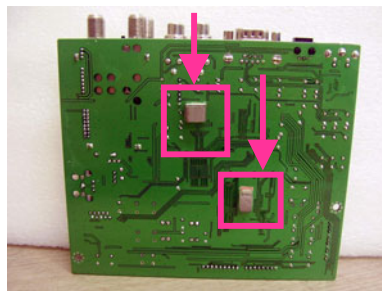

Gasket

1.6 Configuration

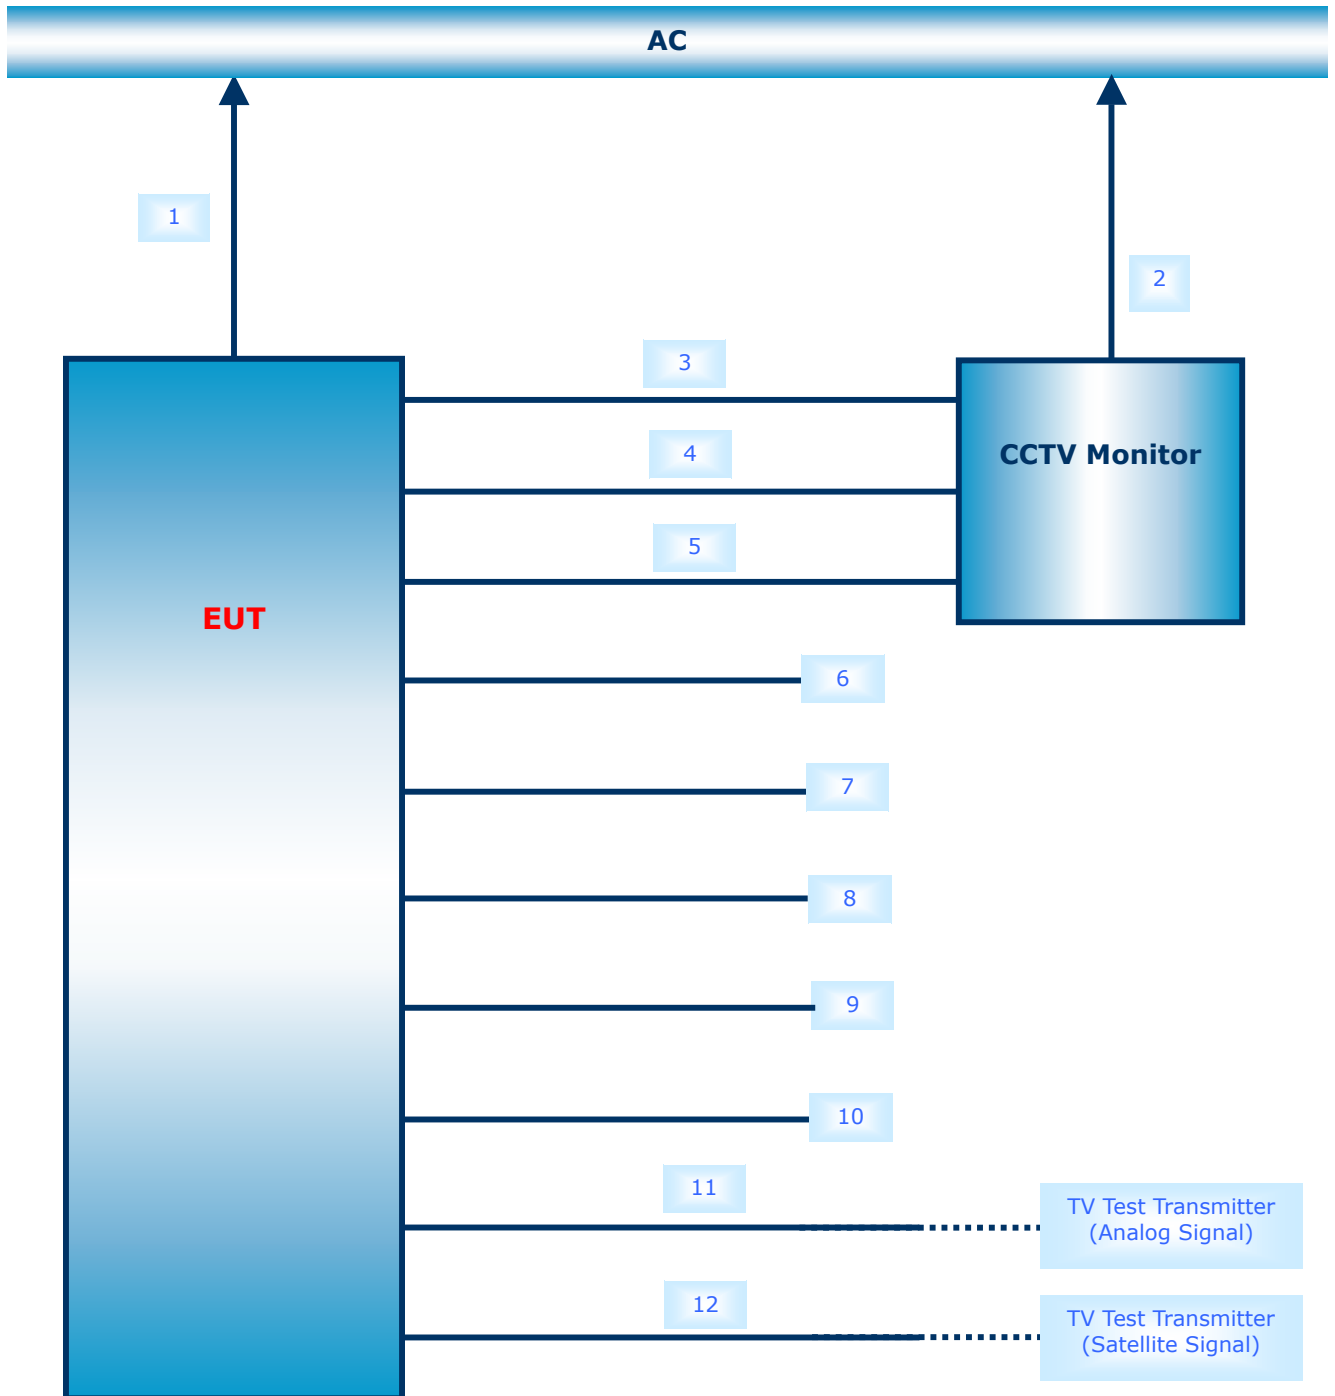



CTK Co., Ltd.
The Power Leader of Global Regulatory Certification

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com



1.7 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

1.8 Test Facility

The measurement facility is located at 386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4.

1.9 Measurement Procedure

Preliminary AC power line conducted emissions tests were performed shielded room. To find worst mode, several typical mode and typical cable position were tested. Final AC power line conducted emissions test was performed shielded room. (location is same as Preliminary test)
Based on the preliminary tests of the EUT, final test was proceeded worst case test mode and cable configuration.

Preliminary radiated emissions test were performed anechoic chamber (Distance of antenna and EUT was 3 m). To find worst mode, several typical mode and typical cable position were tested and peak level and frequency were recorded.

Final radiated emissions test was performed Open Area Test Site. Based on the preliminary tests of the EUT, final test was proceeded worst case test mode and cable configuration.

* Measurement procedures was In accordance with ANSI C63.4-2003 7.2.3, 7.2.4, 8.3.1.1, 8.3.1.2



CTK Co., Ltd.
The Pioneer Provider of Global Regulatory Certification

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com



1.10 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3 & 10 meter Open Area Test Sites and one conducted site to perform FCC Part 15/18 measurements.	 93250
JAPAN	VCCI	10 meter Open Area Test Site and one conducted site.	 R-948, C-986
KOREA	MIC	EMI (10 meter Open Area Test Site and two conducted sites) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 No. 51, KR0025
International	KOLAS	EMC	
Europe	GLAS	EMC EN 55011, EN 55022, EN 61000-6-3, EN 61000-6-4, EN 61000-3-2, EN 61000-3-3, EN 61000-6-1, EN 61000-6-2, EN 50130-4, EN 55024, EN 61204-3, EN 60601-1-2, EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-8, EN 61000-4-11	 No.13000796-02



CTK Co., Ltd.
The Power Leader of Global Regulatory Certification

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com



2.0 Emissions Test Regulations

The emissions tests were performed according to following regulations:

- | | | |
|--|----------------------------------|---|
| ☐ EN 61000-6-3:2001 | ☐ Class A | ☐ Class B |
| ☐ EN 61000-6-4:2001 | ☐ Class A | ☐ Class B |
| ☐ EN 50083-2:2001 | | |
| ☐ EN 55011:1998 +A1:1999 | ☐ Group 1 | ☐ Group 2 |
| | ☐ Class A | ☐ Class B |
| ☐ EN 55011:1998 +A1:1999 +A2:2002 | ☐ Group 1 | ☐ Group 2 |
| | ☐ Class A | ☐ Class B |
| ☐ EN 55013:1990 +A12:1994 +A13:1996 +A14:1999 | | |
| ☐ EN 55013:2001 | | |
| ☐ EN 55014-1:2000 | | |
| ☐ EN 55014-1:2000 +A1:2001 | | |
| ☐ EN 55015:2000 | | |
| ☐ EN 55015:2000 +A1:2001 | | |
| ☐ EN 55022:1994 +A1:1995 +A2:1997 | ☐ Class A | ☐ Class B |
| ☐ EN 55022:1998 | ☐ Class A | ☐ Class B |
| ☐ EN 55022:1998 +A1:2000 | ☐ Class A | ☐ Class B |
| ☐ EN 55022:1998 +A1:2000 +A2:2003 | ☐ Class A | ☐ Class B |
| ☐ EN 61000-3-2:2000 | | |
| ☐ EN 61000-3-3:1995 +A1:2001 | | |
| ☐ VCCI V-3/2004.04 | ☐ Class A | ☐ Class B |
| ☐ AS/NZS 3548:1995 +A1:1997 +A2:1997 | ☐ Class A | ☐ Class B |
| ☒ FCC Part 15 Subpart B | ☐ Class A | ☒ Class B |
| ☐ CISPR 22:1997 | ☐ Class A | ☐ Class B |
- The unit was tested to CISPR 22 and complied with the alternate methods allowed by FCC under paragraphs 15.107 and 15.109.
- | | | |
|---|----------------------------------|----------------------------------|
| ☐ CISPR 22:1997 +A1:2000 | ☐ Class A | ☐ Class B |
|---|----------------------------------|----------------------------------|



CTK Co., Ltd.
The Power Leader of Global Regulatory Certification

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com



2.1 Conducted Voltage Emissions

Test Date

August 31, 2006

Test Location

Shielded Room

Test Equipment

	Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
☒	Field Strength Meter	Rohde & Schwarz	ESHS30	828144/002	2007-02-10
☒	LISN	EMCO	3825/2	9607-2575	2006-09-03
☒	LISN	EMCO	3825/2	9409-2246	2006-09-03

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Procedures

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

Test was performed in Analog signal receiving mode and Satellite signal receiving mode.

The emission of Satellite signal receiving mode was higher, only the test results of Satellite signal receiving mode is listed in Appendix A.

Test Results

The requirements are:

☒ MET

Frequency (MHz)	Measured Data (dBuV)	Margin (dB)	Remark
13.50	52.2	7.8	Quasi-peak

☐ NOT MET

Frequency (MHz)	Measured Data (dBuV)	Margin (dB)	Remark

Remarks

See Appendix A for test data.

2.2 Radiated Electric Field Emissions

Test Date

September 4, 2006

Test Location

☒ Testing was performed at a test distance of 3 meter Open Area Test Site

Test Equipment

	Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
☒	Field Strength Meter	Rohde & Schwarz	ESVS30	826638/008	2007-04-25
☒	ULTRA Broadband Antenna	Rohde & Schwarz	HL562	361324/014	2007-06-12
☐	Biconical Antenna	EMCO	3110	9202-1510	2007-04-25
☐	Log-periodic Antenna	EMCO	3146	9607-4567	2007-04-25

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Procedures

The height of the measuring antenna was varied between 1 to 4 m and the table was rotated a full revolution in order to obtain maximum values of the electric field intensity. The measurement was made in both the vertical and horizontal polarization, and the maximum value is presented in the report.

Measurements were performed with a quasi-peak detector.

Test was performed in Analog signal receiving mode and Satellite signal receiving mode.

The emission of Satellite signal receiving mode was higher, only the test results of Satellite signal receiving mode is listed in Appendix A.

Test Results

The requirements are:

☒ MET

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
929.25	42.5	3.5	Quasi-peak

☐ NOT MET

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark

Remarks

See Appendix A for test data.



CTK Co., Ltd.
The Power Leader of Global Regulatory Certification

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com



2.3 Antenna-Conducted Power

Test Date

September 7, 2006

Test Location

Shielded Room

Test Equipment

	Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
☒	Spectrum Analyzer	Agilent	8564E	3551A00410	2006-11-04
☒	Matching Pad	Rohde & Schwarz	RAM	100619	2007-07-07
☒	TV-TEST TRANSMITTER	Rohde & Schwarz	SFQ	100547	2007-08-04
☒	TV-TEST TRANSMITTER	Rohde & Schwarz	SFM	100169	2007-08-04

Instrument Settings

IF Band Width: 100 kHz (30 to 1000 MHz)

IF Band Width: 1 MHz (Above 1000 MHz)

Test Procedures

Antenna-conducted power measurements are performed with the EUT antenna terminals connected directly to a spectrum analyzer, if the antenna impedance matches the impedance of the measuring instrument. Otherwise, use an impedance-matching network to connect the measuring instrument to the antenna terminals of the EUT. Losses in decibels in any impedance matching network used are added to the measured value in dBuV.

With the EUT tuned to one of the number of frequencies, measure both the frequency and voltage present at the antenna input terminals over the frequency range specified in the individual equipment requirements. Repeat this measurement with the EUT tuned to another frequency until the number of frequencies have been successively measured.

Power available from the EUT antenna terminals is the ratio of V^2/R , where V is the loss-corrected voltage measured at the antenna terminals, and R is the impedance of the measuring instrument.

Test Results

The requirements are:

- ☒ MET
☐ NOT MET

Remarks

No values due to local oscillator higher than 20dB below the limits was measured during the disturbance voltage at the antenna terminals.
Emissions 20dB's below the limit were not necessarily recorded.



CTK Co., Ltd.
The Power Leader of Global Regulatory Certification

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com



2.4 Output and Spurious Conducted Level

Test Date

September 7, 2006

Test Location

Shielded Room

Test Equipment

	Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
☒	Spectrum Analyzer	Agilent	8564E	3551A00410	2006-11-04
☒	Matching Pad	Rohde & Schwarz	RAM	100619	2007-07-07
☒	TV-TEST TRANSMITTER	Rohde & Schwarz	SFQ	100547	2007-08-04
☒	TV-TEST TRANSMITTER	Rohde & Schwarz	SFM	100169	2007-08-04

Instrument Settings

IF Band Width: 100 kHz (30 to 1000 MHz)

IF Band Width: 1 MHz (Above 1000 MHz)

Test Procedures

The Output signal level is the maximum voltage level present at the output terminals of the EUT on a particular frequency during normal use of the device.

Measurements were made by direct connection to the spectrum analyzer and EUT with proper impedance matching.

The Cable was supported between the EUT and the measuring instrument in a straight horizontal line so it had at least 75 cm clearance from any conducting surface.

The EUT was provided with a typical signal consistent with normal operation. For each channel on which the device operates and in each mode in which the device operates, the video carrier level, audio carrier level and the spurious emissions over the frequency range was measured and recorded.

Test Results

The requirements are:

- ☒ MET
☐ NOT MET

Remarks

See Appendix A for test data.



CTK Co., Ltd.
The Power Leader of Global Regulatory Certification

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com



2.5 Antenna Transfer Switch

Test Date

September 7, 2006

Test Location

Shielded Room

Test Equipment

	Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
☒	Spectrum Analyzer	Agilent	8564E	3551A00410	2006-11-04
☒	Matching Pad	Rohde & Schwarz	RAM	100619	2007-07-07
☒	TV-TEST TRANSMITTER	Rohde & Schwarz	SFQ	100547	2007-08-04
☒	TV-TEST TRANSMITTER	Rohde & Schwarz	SFM	100169	2007-08-04

Instrument Settings

IF Band Width: 100 kHz

Test Procedures

Isolation was measured for all positions of an antenna transfer switch on all output channels of the EUT. All unused RF ports or terminals was terminated in a proper impedance. TV interface device transfer switch isolation is the difference the levels of a signal going into one antenna input port of the switch and that of the same signal coming out of another antenna input port of the transfer switch. The isolation of an antenna transfer switch equipped with coaxial connectors was performed by measuring the maximum voltage of the visual carrier. The maximum voltage corresponds to the peak envelope power of a modulated signal during maximum amplitude peaks. Using an impedance-matching device, the length of coaxial cable was connected between the antenna terminal of the switch and the measuring instrument. The measuring instrument was tuned to the output channel of the EUT in peak mode. The voltage level present at the antenna input port of the EUT and the output channel of the EUT was measured and recorded

Test Results

The requirements are:

- ☒ MET
☐ NOT MET

Remarks

No Values in other frequencies was detected during antenna transfer switch Measurements.



CTK Co., Ltd.
The Power Leader of Global Regulatory Certification

CTK Co., Ltd.



386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com



APPENDIX A – TEST DATA

Conducted Voltage Emissions

Frequency [MHz]	Correction Factor		Line	Quasi-peak				Average			
				Limit	Reading	Result	Margin	Limit	Reading	Result	Margin
	LISN	Cable		[dBuV]	[dBuV]	[dBuV]	[dB]	[dBuV]	[dBuV]	[dBuV]	[dB]
0.20	0.1	0.2	H	63.6	44.1	44.4	19.2	53.6	35.8	36.1	17.5
0.39	0.1	0.2	N	58.1	41.0	41.3	16.8	48.1	19.2	19.5	28.6
0.46	0.1	0.2	H	56.7	31.1	31.4	25.3	46.7	27.0	27.3	19.4
0.72	0.1	0.2	H	56.0	29.2	29.5	26.5	46.0	26.5	26.8	19.2
13.30	0.5	0.2	H	60.0	51.1	51.8	8.2	50.0	38.0	38.7	11.3
13.50	0.6	0.2	H	60.0	51.4	52.2	7.8	50.0	38.5	39.3	10.7
									</		

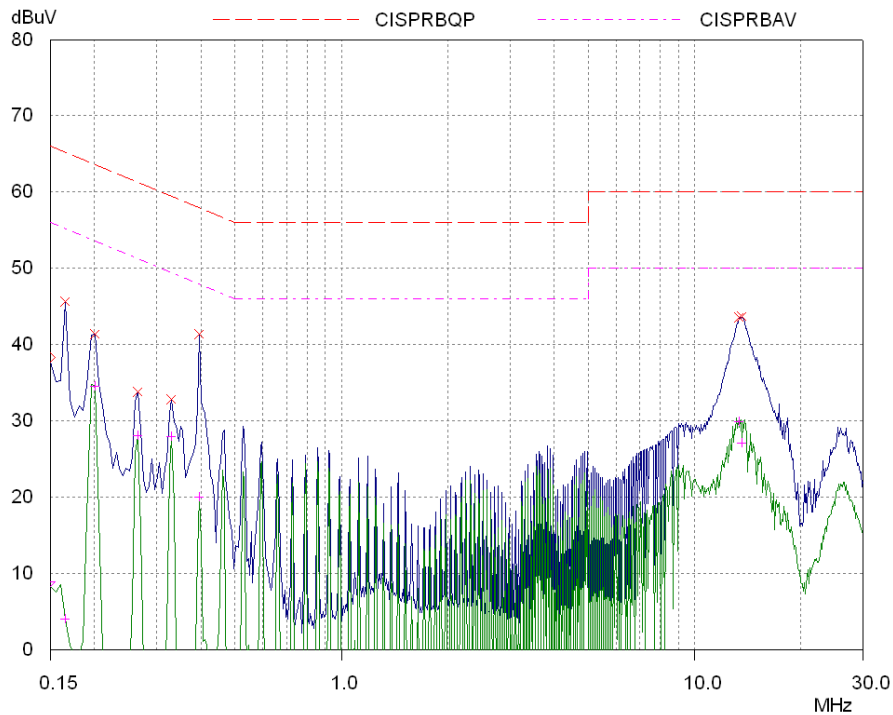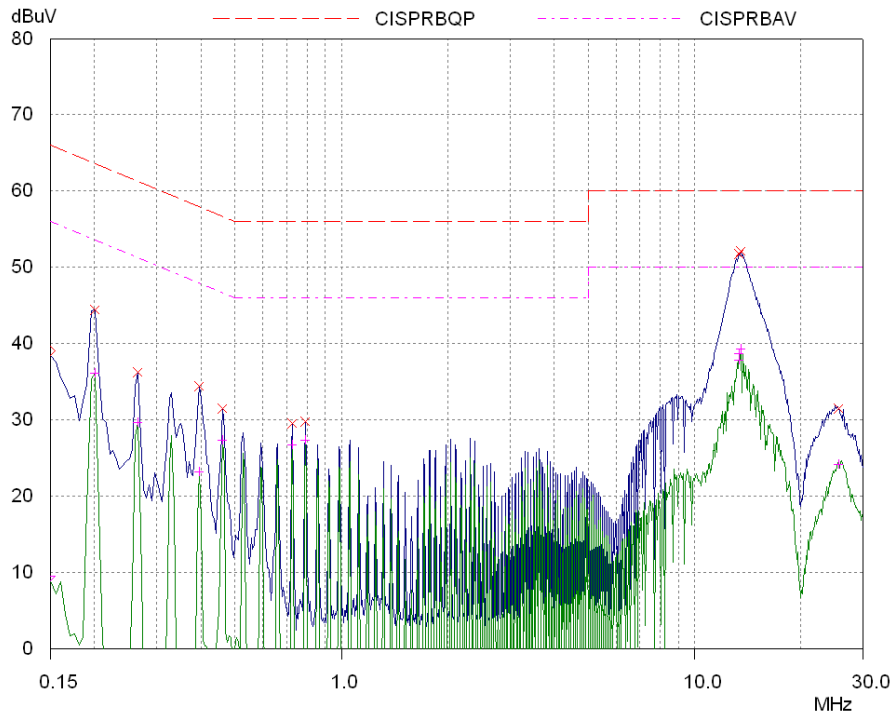



CTK Co., Ltd.

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com



Radiated Electric Field Emissions

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor		Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
				Antenna	Cable			
110.00	20.1	V	1.5	9.5	1.2	43.5	30.8	12.7
398.65	24.9	V	1.0	13.3	2.9	46.0	41.0	5.0
532.05	11.3	H	2.5	15.8	3.5	46.0	30.6	15.4
665.45	16.8	V	1.1	17.9	4.1	46.0	38.8	7.2
796.35	10.8	H	2.0	19.4	4.6	46.0	34.8	11.2
929.25	17.1	V	1.0	20.5	4.9	46.0	42.5	3.5



CTK Co., Ltd.
The Power Tester of Global Regulatory Certification

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com



Output and Spurious Conducted Level

[Output Signal Test Data]

Test Channel	Frequency [MHz]	Reading [dBuV/m]	MPL	Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
3	56.75	43.0	7.5	56.5	50.5	6.0
	61.25	57.9	7.5	69.5	65.4	4.1
	65.75	43.0	7.5	56.5	50.5	6.0
4	62.75	43.2	7.5	56.5	50.7	5.8
	67.25	58.7	7.5	69.5	66.2	3.3
	71.75	42.9	7.5	56.5	50.4	6.1

*MPL : Matching Pad Loss

[Output Terminal Conducted Spurious Test data]

Test Channel	Frequency [MHz]	Reading [dBuV/m]	MPL	Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
3	1063.00	28.6	7.5	39.5	36.1	3.4
	1328.00	28.4	7.5	39.5	35.9	3.6
	1727.00	26.0	7.5	39.5	33.5	6.0
4	1592.00	26.5	7.5	39.5	34.0	5.5
	1727.00	29.0	7.5	39.5	36.5	3.0
	1992.00	29.2	7.5	39.5	36.7	2.8

*MPL : Matching Pad Loss