

Nemko Test Report:	126984-7TRFWL
Applicant:	DAP Technologies 875 Charest Boulevard West, suite 200, Québec City, QC, Canada G1N 2C9
Apparatus:	Handheld computer 8900V series
FCC ID:	T5M8900V2
In Accordance With:	FCC Part 15 Subpart C, 15.247 FHSS System and Digitally Modulated Radiators 902–928 MHz, 2400–2483.5 MHz, 5725–5850 MHz
Authorized By:	Kevin Ma, Wireless/EMC Specialist
Date:	November 25, 2009
Total Number of Pages:	23



Specification: FCC Part 15 Subpart C, 15.247

TABLE OF CONTENTS

Section	1 : Report Summary	3
Section	2 : Equipment Under Test	4
2.1	Identification of Equipment Under Test (EUT).	
2.2	Accessories	
2.3	EUT Description	4
2.4	Technical Specifications of the EUT	5
2.5	EUT Setup diagram	
2.6	Operation of the EUT during testing	
2.7	Modifications incorporated in the EUT	5
Section	3 : Test Conditions	6
3.1	Specifications	
3.2	Deviations From Laboratory Test Procedures	6
3.3	Test Environment	
3.4	Measurement Uncertainty	
3.5	Test Equipment	6
Section	4: Results Summary	7
4.1	FCC Part 15 Subpart C: Test Results	7
Append	lix A: Test Results	8
	use 15.207(a) Powerline Conducted Emissions	
Cla	use 15.209(a) Radiated Emissions within Restricted Bands	10
	use 15.247(a)(1) Frequency hopping systems	
	use 15.247(a)(1)(iii) Frequency hopping systems operating in the 2400–2483.5 MHz band	
	use 15.247(b)(1) Maximum peak output power of Frequency hopping systems operating in the 2	
	MHz band and 5725–5850 MHz band	
	use 15.247(b)(4) Maximum peak output power	
Cla	use 15.247(d) Radiated Emissions Not in Restricted Bands	20
Append	lix B : Setup Photographs	22
Append	lix C : Block Diagram of Test Setups	23
~ ~ ~ ~ ~ ~ ~	· · 	





Specification: FCC Part 15 Subpart C, 15.247

Section 1 : Report Summary

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, Subpart C. Radiated tests were conducted in accordance with ANSI C63.4-2003.

The assessment summary is as follows:

Apparatus Assessed: Handheld computer 8900V series

Specification: FCC Part 15 Subpart C, 15.247

Compliance Status: Complies

Exclusions: None

Non-compliances: None

Report Release History: Original Release

Test Location: Nemko Canada Inc.

303 River Road Ottawa, Ontario

K1V 1H2

Registration Number: 176392 (3 m Semi-Anechoic Chamber)

Tests Performed By: Andrey Adelberg, EMC/Wireless Specialist

Test Dates: September–August, 2009

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contain in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.



Specification: FCC Part 15 Subpart C, 15.247

Section 2 : Equipment Under Test

2.1 Identification of Equipment Under Test (EUT)

The following information identifies the EUT under test:

Type of Equipment:	Handheld computer 8900K series
Brand Name:	DAP, Kinsys
Model Number:	8900V2
Serial Number:	HN00002
Nemko Sample Number:	3
FCC ID:	T5M8900V2
Date of Receipt:	June 12, 2009

2.2 Accessories

The following information identifies accessories used to exercise the EUT during testing:

Description:	Docking station (Ethernet-USB host)
Brand Name:	DAP, Microflex
Model Name or Number:	CBCE840
Serial Number:	EH03401
Nemko Sample Number:	5
Connection Port:	Contact connection

Description:	AC adapter
Manufacturer:	Cincon Electronics Co., Ltd.
Model Name or Number:	TRG36A15
Serial Number:	36150-0000202
Nemko Sample Number:	10
Connection Port:	DC jack to the Ethernet-USB host

2.3 EUT Description

The EUT is a handheld computer with internal Bluetooth, GPRS and WiFi connectivity. The WiFi/BT and GPRS are restricted in software from operating simultaneously.



Specification: FCC Part 15 Subpart C, 15.247

2.4 Technical Specifications of the EUT

Operating Band: 2400–2483.5 MHz

Operating Frequencies: 2402–2480 MHz


Modulation: FHSS; GFSK

Emission Designator: F1D

Antenna Data: Chip antenna 1 dBi

Power Supply Requirements: 120 VAC, 60 Hz

2.5 EUT Setup diagram

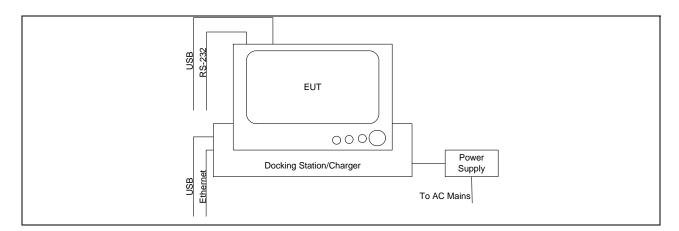

2.6 Operation of the EUT during testing

The EUT was operated using test software that would cause the EUT to transmit continuously on selected channels.

2.7 Modifications incorporated in the EUT

There were no modifications performed to the EUT during this assessment.



Specification: FCC Part 15 Subpart C, 15.247

Section 3: Test Conditions

3.1 Specifications

The apparatus was assessed against the following specifications:

FCC Part 15 Subpart C, 15.247 FHSS System and Digitally Modulated Radiators 902–928 MHz, 2400–2483.5 MHz and 5725–5850 MHz

3.2 Deviations From Laboratory Test Procedures

No deviations were made from laboratory test procedures.

3.3 Test Environment

All tests were performed under the following environmental conditions:

Temperature range : 15–30 °C Humidity range : 20–75 % Pressure range : 86–106 kPa

Power supply range : ± 5 % of rated voltages

3.4 Measurement Uncertainty

Nemko Canada measurement uncertainty has been calculated using guidance of UKAS LAB 34:2003 and TIA-603-B Nov 7, 2002. All calculations have been performed to provide a confidence level of 95 % and can be found in Nemko Canada document MU-003.

3.5 Test Equipment

Equipment	Manufacturer	Model No.	Asset/Serial No.	Cal. Date	Next Cal.
3 m EMI Test Chamber	TDK	SAC-3	FA002047	May 06/09	May 06/10
Receiver/Spectrum Analyzer	Rohde & Schwarz	ESU 26	FA002043	Dec. 16/08	Dec. 16/09
Bilog	Sunol	JB3	FA002108	Jan. 27/09	Jan. 27/10
Horn Antenna #2	EMCO	3115	FA000825	Jan. 21/09	Jan. 21/10
1 – 18 GHz Amplifier	JCA	JCA118-503	FA002091	Oct 2/08	Oct 2/09
LISN	Rohde & Schwarz	ENV216	FA002023	Sept. 08/09	Sept. 08/10
Horn 18 – 26.5 GHz	Electro-Metrics	SH-50/60-1	FA000479	COU	COU

COU – Calibrate on Use

NCR - No Calibration Required



Specification: FCC Part 15 Subpart C, 15.247

Section 4 : Results Summary

This section contains the following:

FCC Part 15 Subpart C: Test Results

The column headed 'Required' indicates whether the associated clauses were invoked for the apparatus under test. The following abbreviations are used:

N No : not applicable / not relevant.

Y Yes: Mandatory i.e. the apparatus shall conform to these tests.

N/T Not Tested, mandatory but not assessed. (See Report Summary)

4.1 FCC Part 15 Subpart C : Test Results

Part 15	Test Description	Required	Result
15.31(e)	Variation of power supply	Υ	PASS
15.31(e) 15.207(a)	Powerline Conducted Emissions	Y	PASS
15.207(a) 15.209(a)	Radiated Emissions within Restricted Bands	Y	PASS
15.247(a)(1)	Frequency hopping systems	Ý	PASS
15.247(a)(1) 15.247(a)(1)(i)	Frequency hopping systems operating in the 902–928 MHz band	N	1 700
15.247(a)(1)(ii)	Frequency hopping systems operating in the 5725–5850 MHz band	N	
15.247(a)(1)(iii)	Frequency hopping systems operating in the 2400–2483.5 MHz band	Y	PASS
15.247(a)(2)	Minimum 6 dB bandwidth	N	
15.247(b)(1)	Maximum peak output power of Frequency hopping systems operating in the 2400–2483.5 MHz band and 5725–5850 MHz band	Υ	PASS
15.247(b)(2)	Maximum peak output power of Frequency hopping systems operating in the 902–928 MHz band	N	
15.247(b)(3)	Maximum peak output power of systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands	N	
15.247(b)(4)	Maximum peak output power	Υ	PASS
15.247(c)(1)	Fixed point-to-point Operation with directional antenna gains greater than 6 dBi	N	
15.247(c)(2)	Transmitters operating in the 2400–2483.5 MHz band that emit multiple directional beams	N	
15.247(d)	Radiated Emissions Not in Restricted Bands	Υ	PASS
15.247(e)	Power Spectral Density for Digitally Modulated Devices	N	
15.247(f)	Time of Occupancy for Hybrid Systems	Ν	





Specification: FCC Part 15 Subpart C, 15.247

Appendix A: Test Results

Clause 15.207(a) Powerline Conducted Emissions

Frequency of Conducted limit (dBµV)

Emission (MHz)	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

Test Results: Pass

Additional Observations:


All plots were obtained using a sweeping receiver with an IF of 9 kHz using a Peak and Average detector. The plots have been corrected with the cable loss and LISN loss to show compliance.





Specification: FCC Part 15 Subpart C, 15.247

Phase

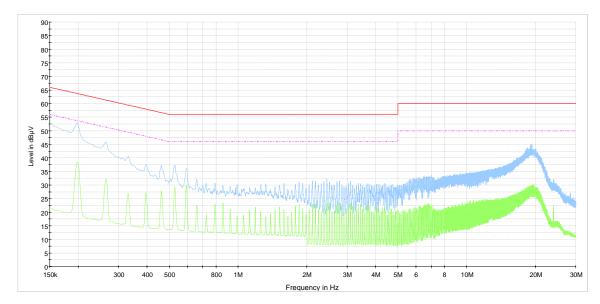


Conducted emissions on Phase line at 120 VAC, 60 Hz

CISPR 22 Mains QP Class B.LimitLine
CISPR 22 Mains AV Class B.LimitLine
Preview Result 1

Preview Result 2

Neutral

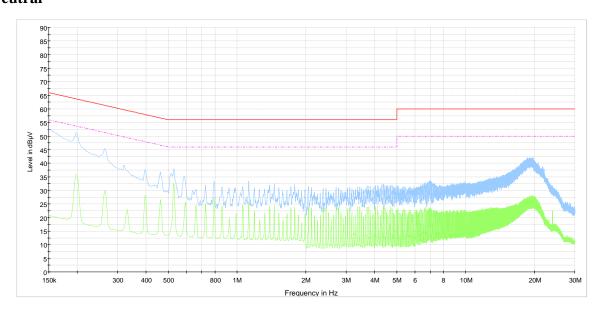

Conducted emissions on Neutral line at 120 VAC, 60 Hz
CISPR 22 Mains QP Class B.LimitLine
CISPR 22 Mains AV Class B.LimitLine
Preview Result 1
Preview Result 2





Specification: FCC Part 15 Subpart C, 15.247

Clause 15.209(a) Radiated Emissions within Restricted Bands

Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency	Field Strength		Measurement Distance
(MHz)	(µV/m)	(dBµV/m)	(meters)
0.009-0.490	2400/F	67.6-20log(F)	300
0.490-1.705	24000/F	87.6-20log(F)	30
1.705-30.0	30	29.5	30
30–88	100	40.0	3
88–216	150	43.5	3
216–960	200	46.0	3
Above 960	500	54.0	3

Note: F = fundamental frequency in kHz

Test Results: Pass

Additional Observations:

These results apply to emissions found in the Restricted bands defined in FCC Part 15 Subpart C, 15.205.

The EUT was measured on three orthogonal axis.

The Emissions measured at a distance of 3 m and the spectrum was searched from 30 MHz to 25 GHz. Measurements were performed using a Peak detector with 1 MHz RBW / 1 MHz VBW for the Peak values.

For the frequency below 1 GHz Quasi-Peak detector with 120 kHz RBW/300 kHz VBW was used.



Specification: FCC Part 15 Subpart C, 15.247

Frequencies above 1 GHz:

	requencies above 1 Gills.							
	Channel	Frequency, MHz	Pol.	Peak FS, dBμV/m	Pk Limit, dBμV/m	Pk Margin, dB		
	1	4824	Н	63.63	74.00	10.37		
	1	4824	V	67.40	74.00	6.60		
Ī	6	4872	Н	60.70	74.00	13.30		
Ī	6	4872	V	68.18	74.00	5.82		
	11	4924	Н	62.08	74.00	11.92		
ſ	11	4924	V	61.46	74.00	12.54		

Channel	Frequency, MHz	Pol.	Average FS, dBμV/m	Avg Limit, dBμV/m	Avg Margin, dB
1	4824	Н	47.63	54.00	6.37
1	4824	V	51.39	54.00	2.61
6	4872	Н	44.70	54.00	9.30
6	4872	V	52.17	54.00	1.83
11	4924	Н	46.08	54.00	7.92
11	4924	V	45.45	54.00	8.55


Note: Peak FS values include antenna factor, cable losses and amplifier gain. Average FS is calculated from Peak FS minus the duty cycle factor (-16 dB)

Frequencies below 1 GHz:

Frequency MHz	Quasi-Peak dBμV/m	Polarity	Corr. dB	Margin dB	Limit dBµV/m
124.890	32.9	V	15.4	10.6	43.5
166.620	37.6	V	13.5	5.9	43.5
168.270	36.7	V	13.5	6.8	43.5
169.230	34.7	V	13.4	8.8	43.5
999.690	47.3	Н	26.6	6.7	54.0

Specification: FCC Part 15 Subpart C, 15.247

Delta Marker Measurement for 2.4835 GHz Band Edge



Date: 23.SEP.2009 09:54:27


Measured Field Strength for High Channel in 1 MHz RBW/3 MHz VBW = $108.32 \text{ dB}\mu\text{V/m}$

Delta Marker = -42.71 dB

Therefore, Peak Field Strength = $108.32~dB\mu V/m - 42.71~dB = 65.61~dB\mu V/m$ Limit = $74~dB\mu V/m$

Average Field Strength = $65.61~dB\mu V/m - 16~dB$ (Duty cycle factor) = $49.61~dB\mu V/m$ Limit = $54~dB\mu V/m$

Upper Band Edge Hopping On:




Date: 16.SEP.2009 16:59:26



Specification: FCC Part 15 Subpart C, 15.247


Duty cycle correction factor calculation:

Number of transmissions within 100 ms is 80

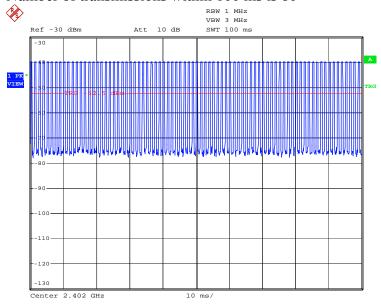

Date: 23.SEP.2009 09:36:57

Transmission width is 196 µs.

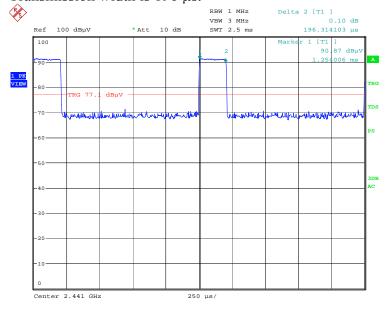

Date: 28.SEP.2009 11:34:18

Duty cycle factor calculation: $20 \times Log \{(80 \times 0.196 \text{ ms}) / 100 \text{ ms}\} = -16.093 \sim -16 \text{ dB}$



APPENDIX A : TEST RESULTS

Report Number: 126984-7TRFWL

Specification: FCC Part 15 Subpart C, 15.247

Clause 15.247(a)(1) Frequency hopping systems

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Results: Pass

20 dB BW:

Frequency, MHz	20 dB bandwidth, MHz		
2402	1.098		
2441	1.088		
2480	1.111		


Channel separation is 1.005 MHz


Widest channel bandwidth was 1.111 MHz. Two-thirds is 741 kHz

Channel separation, MHz	Minimum limit, MHz	Margin, MHz
1.005	0.741	0.264



Specification: FCC Part 15 Subpart C, 15.247






Date: 23.SEP.2009 09:44:16

Date: 23.SEP.2009 09:42:43

High channel *RBW 100 kHz Mar VBW 300 kHz 10 db SWT 5 ms




Date: 23.SEP.2009 09:43:21



Specification: FCC Part 15 Subpart C, 15.247

Channel separation:

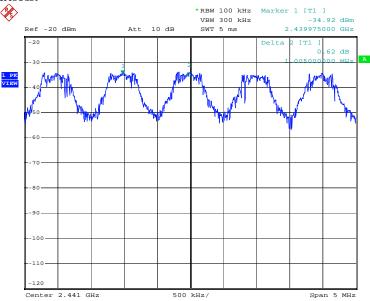

Date: 23.SEP.2009 09:26:15






Specification: FCC Part 15 Subpart C, 15.247

Clause 15.247(a)(1)(iii) Frequency hopping systems operating in the 2400–2483.5 MHz band

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 s within a period of 0.4 s multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used

Test Results: Pass

Number of Hopping Channels:

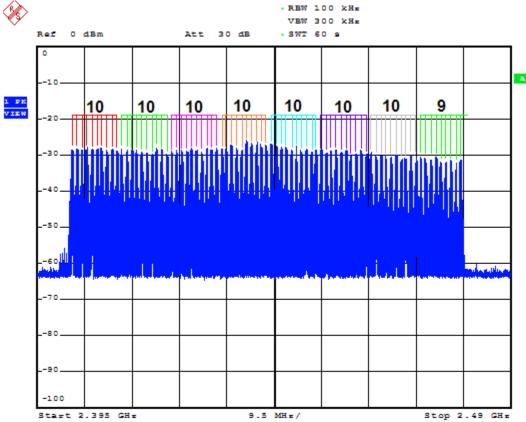


Date: 23.SEP.2009 09:18:24

Total number of hopping channels is 79


Specification: FCC Part 15 Subpart C, 15.247

Time of Occupancy:



Date: 23.SEP.2009 09:28:51

Number of pulses within 2 s period is 21.

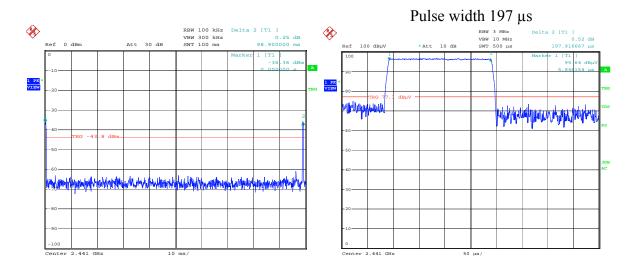

Occupancy Time

Limit:

0.4 seconds within a period of 0.4 s multiplied by the number of hopping channels employed, which is 0.4 s within the period of time $0.4 \times 79 = 31.6 \text{ s}$

Measurement data:

Time of occupancy plots showing 21 hits per 2 s; therefore there would be $16 \times 21 = 336$ hits within 32 s

Total of Occupancy Time is therefore = $336 \times 0.197 \text{ ms} = 66.2 \text{ ms}$





Specification: FCC Part 15 Subpart C, 15.247

Clause 15.247(b)(1) Maximum peak output power of Frequency hopping systems operating in the 2400–2483.5 MHz band and 5725–5850 MHz band

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 W. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 W.

Clause 15.247(b)(4) Maximum peak output power

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Results: Pass

Peak Output Power:

Frequency	POP	POP	POP Limit	Margin	Ag	EIRP	EIRP Limit	Margin
MHz	mW	dBm	dBm	dB	dBi	dBm	dB	dB
2402	17.79	12.50	30.00	17.50	1.00	13.50	36.00	22.50
2441	17.10	12.33	30.00	17.67	1.00	13.33	36.00	22.67
2480	21.52	13.33	30.00	16.67	1.00	14.33	36.00	21.67

Additional Observations:

All Measurements were performed conducted using a peak detector with 2 MHz/3 MHz RBW/VBW.

The input voltage has been changed ± 15 % of nominal; no significant change in power reading was noticed.



APPENDIX A : TEST RESULTS

Report Number: 126984-7TRFWL

Specification: FCC Part 15 Subpart C, 15.247

Clause 15.247(d) Radiated Emissions Not in Restricted Bands

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Results: Pass

Additional Observations:

The Emissions measured at a distance of 3 m and the spectrum was searched from 30 MHz to 25 GHz. Measurements were performed using a Peak detector with 100 kHz RBW / 300 kHz VBW.

The EUT was measured on three orthogonal axis.

No emissions were detected higher that 20 dB below the in-band emission measured with 100 kHz IF bandwidth.

Specification: FCC Part 15 Subpart C, 15.247

Lower Band Edge Hopping On:



Date: 31.AUG.2009 16:20:51

Lower Band Edge Hopping Off:




Date: 31.AUG.2009 16:23:07




Specification: FCC Part 15 Subpart C, 15.247

Appendix B : Setup Photographs

Conducted Emissions Setup:

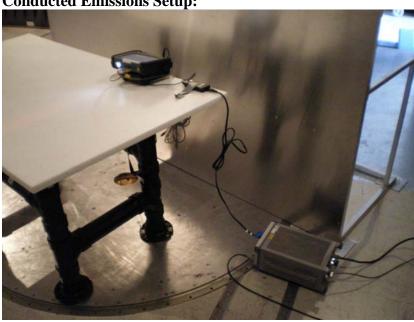



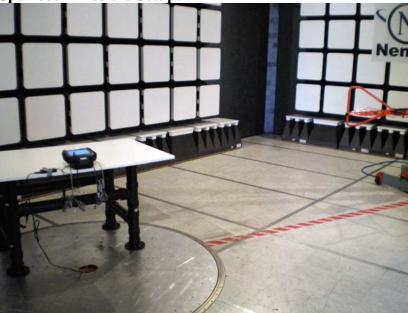




Specification: FCC Part 15 Subpart C, 15.247

Appendix C: Block Diagram of Test Setups

Radiated Emissions above 30 MHz Test Site

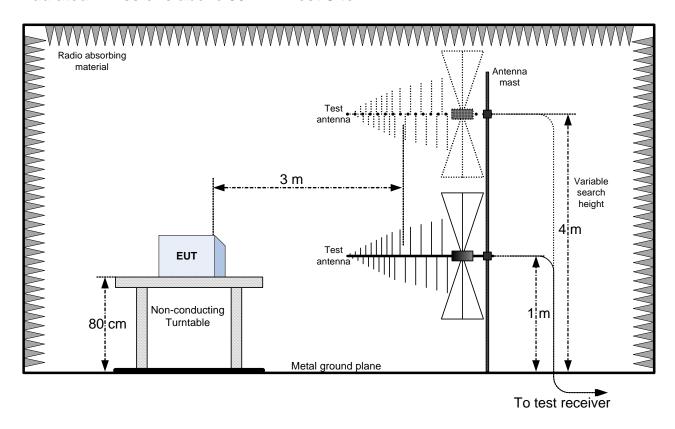

Conducted Emissions Test Site

