

Certification of Compliance

CFR 47 Part 15 Subpart B

Test Report File No. : 06-IST-0205

Date of Issue : April 20, 2006

FCC ID : T5STP42N

Model(s) : TP42N ☒ Basic ☐ Alternate

Kind of Product : 42" PDP TV Monitor

Applicant : Total Display Solution Co.,Ltd

Address : Rm 607, Hyundai I valley, 14-1, Dang-Dong,
Gunpo City, Kyunggi-Do, Korea

Manufacturer : Total Display Solution Co.,Ltd

Address : Rm 607, Hyundai I valley, 14-1, Dang-Dong,
Gunpo City, Kyunggi-Do, Korea

Test Result ☒ Positive ☐ Negative

Reviewed By



S.J.Cho / EMC Group Manager

Approved By



J.H.Lee / Chief

Comment(s)

- Investigations requested : Measurement to the relevant clauses of FCC rules and regulations Part 15 Subpart B - Unintentional Radiators, Class B.
- The test report with appendix consists of 22 pages.
- The test result only responds to the tested sample.
- It is not allowed to copy this report even partly without the allowance of IST EMC Laboratory.
- This equipment as for has been shown to be capable of continued compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4 2003.



TABLE OF CONTENTS

Table of contents	2
Information of test laboratory, Environmental conditions, Power supply system used, Product information	3
Descriptions of test	
Conducted Emission	4
Radiated Emission	5
Measurement Uncertainty Calculations	6
Equipment Under Test	7
Test Set-Up (Figure)	8
Summary	9
■ Test Conditions and Data - Emissions	
◆ Conducted Emissions	0.15MHz- 30MHz
Test Conditions / Data and Plots	Applicable
	10-12
◆ Radiated Emissions	30MHz - 1GHz
Test Conditions / Data and Plots	Applicable
	13-17
Appendix	
A. The Photos of Test Setup	18-19
B. The Photos of Equipment Under Test	20-22

Note:

INFORMATIONS OF TEST LABORATORY

EMC LABORATORY of IST Co., Ltd. (*FCC Filing Lab.*)

San 21-8, Goan-Ri, Baekam-Myun, Yongin-City

Kyonggi-Do, 449-860, Korea

TEL : +82 31 333 4093

FAX : +82 31 333 4094

ENVIRONMENTAL CONDITIONS

Temperature 19.3 °C

Humidity 40 %

Atmospheric pressure 1012 mbar

POWER SUPPLY SYSTEM USED

Power supply system AC 120Vac 60Hz

(Refer to the product information)

PRODUCT INFORMATION

Display	Screen Size Aspect ratio		42", 933.89(H) x 532.22(V) (mm), 16:9
	Number of Pixels		1024(H) x 768(V), WVGA
	Pixel Pitch		0.912 x 0.693 (mm)
	Displayable Colors		16.77 M(8 bit), 1073.7 M(10 bit)
	Brightness		1100 cd/m ²
	Color Temp		9500K
	Viewing Angle		Over 160° (U/D & L/R)
Record	Power Supply		AC 100~240V, 50/60Hz
	Power Consumption		Stand-dy: 5W, Typical: 330W(MAX)
	Dimensions(WxHxD)		1036 x 691 x 270 (mm) (with stand)
	Weight	Net	32kgs
		Gross	35kgs

- EMC suppression device is not used during the test.
- Please refer to user's manual.


DESCRIPTIONS OF TEST

Conducted Emissions:

The measurement were performed over the frequency range of 0.15MHz to 30MHz using a $50\Omega/50\mu\text{H}$ LISN as the input transducer to a Spectrum Analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 10KHz or for "quasi-peak" & "Average" within a bandwidth of 9KHz.

-Procedure of Test

The line-conducted facility is located inside a shielded room No.1. A 1m X 1.5m wooden table 80cm height is placed 40cm away from the vertical wall and 1.5m away from the other wall of the shielded room. The R/S 3725/2 and Hyup-Rip KNW-407 LISN are bonded to bottom of the shielded room. The EUT is located on the wooden table with distance more than 80cm from the LISN and powered from the LISN. The peripheral equipment is powered from the other LISN. Power to the LISNs are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner ϕ 1.2cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the EMCO LISN. All interconnecting cables more than 1m were shortened by non-inductive bundling to a 1m length. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating conditions. The RF output of the LISN was connected to the R/S receiver to determine the frequency producing the maximum emission from the EUT. The frequency producing the maximum level was reexamined using Quasi-Peak mode by manual measurement, after scanned by automatic Peak mode for frequency range from 0.15 to 30MHz. The bandwidth of the receiver was set to 10kHz. The EUT, peripheral equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

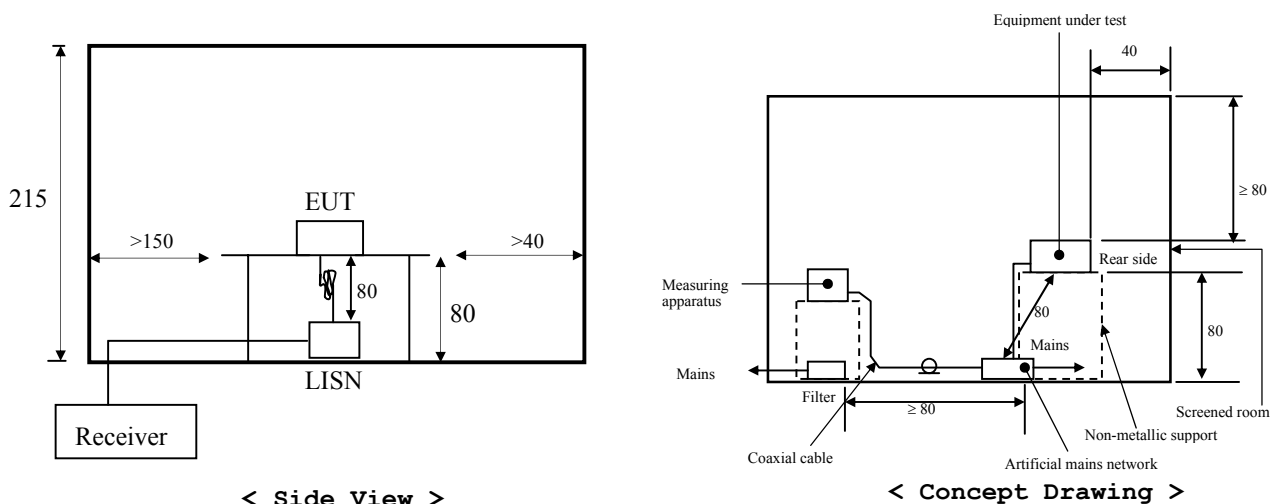



DESCRIPTION OF TEST

Radiated Emissions:

The measurement was performed over the frequency range of 30MHz to 1GHz using antenna as the input transducer to a Spectrum analyzer or a Field Intensity Meter. The measurement was made with the detector set for "quasi-peak" within a bandwidth of 120KHz.

-Procedure of Test

Preliminary measurements were made at 3 meter using bi-conical and log-periodic antennas, and spectrum analyzer to determine the frequency producing the max. emission in anechoic chamber. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turn-table azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30MHz to 1000MHz using S/B LogBicon antenna VL9160. Under 30MHz, magnetic loop antenna were used. Final measurements were made at open site with 3-meters test distance using the same antenna. The OATS have been verified in regular for its normalized site attenuation. The test equipment was placed on a wooden table. Sufficient time for the EUT, peripheral equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 120kHz or 1MHz depending on the frequency of type of signal. The EUT, peripheral equipment and interconnecting cables were re-configured to the set-up producing the max. emission for the frequency and were placed on top of a 0.8-meter high nonmetallic 1 x 1.5 meter table. The EUT, peripheral equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation to the EUT and/or peripheral equipment and changing the polarity of the antenna, whichever determined the worst-case emission.

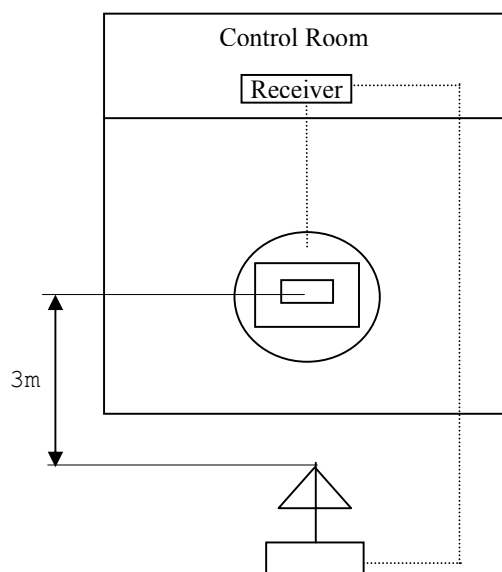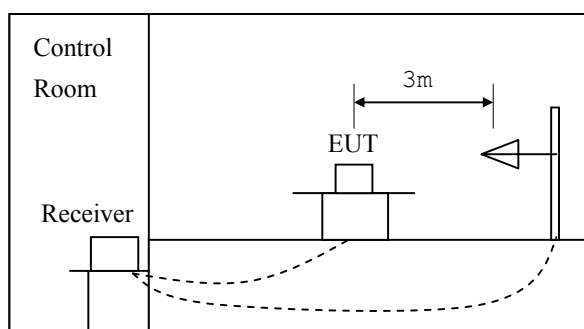

Measurement Uncertainty Calculations

The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and NIS 81 (1994).

Contribution (Conducted Emissions)	Probability Distribution	Uncertainty (±dB)
		0.15-30MHz
Receiver Specification	Rectangular	1.5
LISN Coupling Specification	Rectangular	1.5
Cable and Input Attenuator Calibration	Normal (k=2)	0.5
Mismatch to Reciver	U-Shaped	-0.8 / +0.7
System Repeatability	Normal (k=1)	0.2
Combined Standard Uncertainty	Normal (k=2)	-1.85 / +1.71
Expanded Uncertainty U	Normal (k=2)	-3.7 / +3.42

$$U_{c,minus} = -1.85, \quad U_{c,plus} = 1.71$$

$$U = -3.70 / +3.42 \text{ (k=2, 95.45\% confidence level)}$$

Contribution (Radiated Emissions)	Probability Distribution	Uncertainties (±dB)
		3 m
Antenna		
Factor	Normal (k=2)	0.9968
Frequency Interpolation	Rectangular	0.1039
Height Variation	Rectangular	-2.6 / +1.5
Directivity Difference	Rectangular	-1.0 / +0
Phase Center Location	Rectangular	1.0
Cable Loss	Normal (k=2)	0.5
Receiver		
Voltage Accuracy	Normal (k=2)	2.0
Pulse Response	Rectangular	1.5
Absolute Repetition Rate	Rectangular	1.5
Mismatch to Receiver		
Γ_{antenna} = 0.33	U-Shaped	-1.0 / +0.9
Γ_{receiver} = 0.33		
System Repeatability	Std Deviation	0.5
Combined Standard Uncertainty	Normal	-2.6048 / 2.2775
Expanded Uncertainty U	Normal (k=2)	-5.21 / +4.55

$$U_{c,minus} = -2.6048, \quad U_{c,plus} = 2.2775$$

$$U = -5.21 / +4.55 \text{ (k=2, 95.45\% confidence level)}$$

Equipment Under Test

EUT Type :

- ☒ Table-Top. ☐ Floor-Standing.
☐ Table-Top and Floor-Standing(Combination).

Operation - mode of the E.U.T. :

The equipment under test was operated during the measurement under following conditions :

- ☐ Standby Mode
☒ Operational Condition : Scrolling "H" Pattern Mode.
■ 1600 x 1200, 60Hz.
■ 1280 x 1024, 60Hz.
■ 1024 x 768, 60Hz.
■ 800 x 600, 60Hz.
■ 640 x 480, 60Hz.

Configuration of the equipment under test :

Following peripheral devices and interface cables were connected during the measurement :


Equipment	Type	Brand	Serial No.	FCC Compliance Info.
PC	DX 7200 MT	HP	CNG60809T2	DOC
Keyboard(PS/2)	SK-2885	HP	N/A	DOC
Mouse(PS/2)	M-UV69	HP	N/A	DOC
Mouse(Serial)	M-M28	Logitech	N/A	DZL210365
Printer	A0302380	Northern Telecom	2633S60168	DSI6XU2225C-L

Connecting Interface Cables :


- Unshielded AC power cable : 1.8 m
- Shielded monitor's signal cable (with two ferrite core) : 1.8 m
- Shielded Printer's signal cable (without ferrite core) : 1.8 m
- Unshielded Keyboard's signal cable (without ferrite core) : 1.8 m
- Unshielded Mouse's signal cable (without ferrite core) : 1.8 m

Note :

Test Set-Up

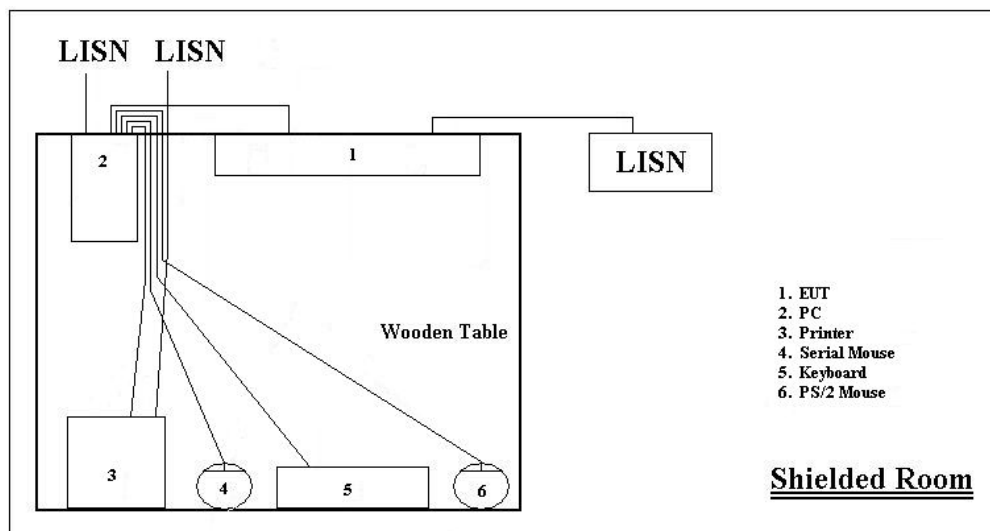

Conducted Emissions

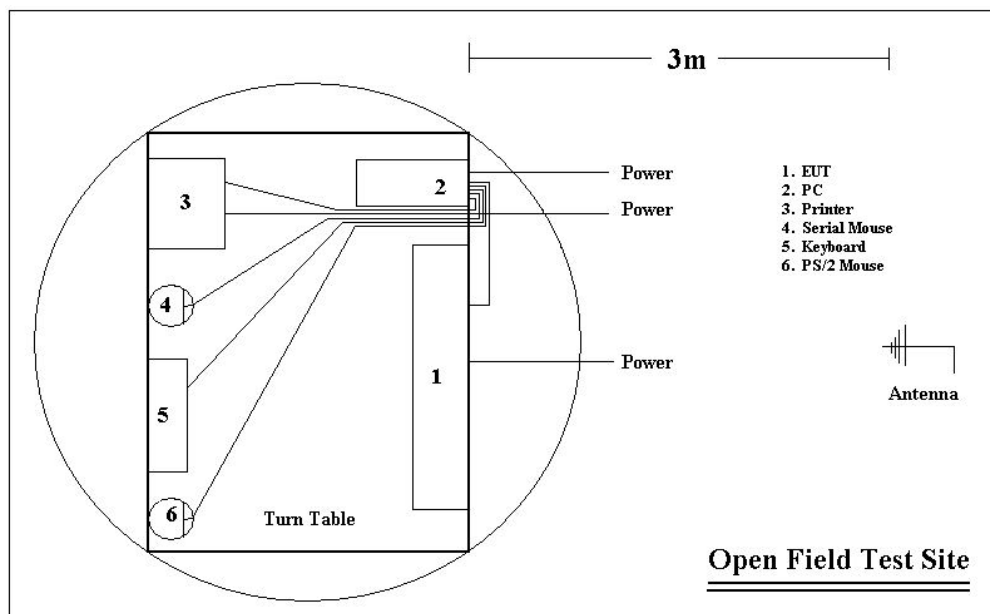

Radiated Emissions

SUMMARY

Emissions

■ Conducted Emission

Test Rule Part 15.107(c)

The requirements are

● MET

○ Not MET

Minimum limit margin

4.5dB at 0.508MHz

Maximum limit exceeding

Remarks : Limits are kept with more 3dB margin.

Find the test data in following pages 11 to 12.

■ Radiated Emission

Test Rule Part 15.109(a)

The requirements are

● MET

○ Not MET

Minimum limit margin

5.8dB at 82.57MHz

Maximum limit exceeding

Remarks : Limits are kept with more 3dB margin.

Find the test data in following page 13 to 19.

test Date

Begin of testing : April 17, 2006

End of testing : April 19, 2006

Note :

Prepared By



- ■ means the test is applicable,
- □ is not applicable.

S. J. OH / EMC Engineer

TEST CONDITIONS AND DATA

Conducted Emissions

[Applicable]

◆ Test Equipment Used

Model Name	Description	Manufacture	Calibration Date	Serial Number
ESH 3	Test Receiver	Rohde & Schwarz	Jul. 12, 2005	892108/018
3725/2	LISN	Rohde & Schwarz	Jul. 12, 2005	9101-2068
KNW-407	LISN	Hyup-Rip	Jul. 12, 2005	9101-2068
ESH 3-Z2	Pulse limiter	Rohde & Schwarz	Jul. 12, 2005	357.8810.52

◆ Test Accessories Used

Type	Manufacturer
Aneroid Barometer	Sato
Hygrometer	Sato


◆ Test Program Scrolling "H" Pattern Mode.

◆ Test Date April 17, 2006

◆ Test Area Shielded Room (for Conducted Emission test)

Note : The equipment used is calibrated in regular for every year.

Conducted Emissions

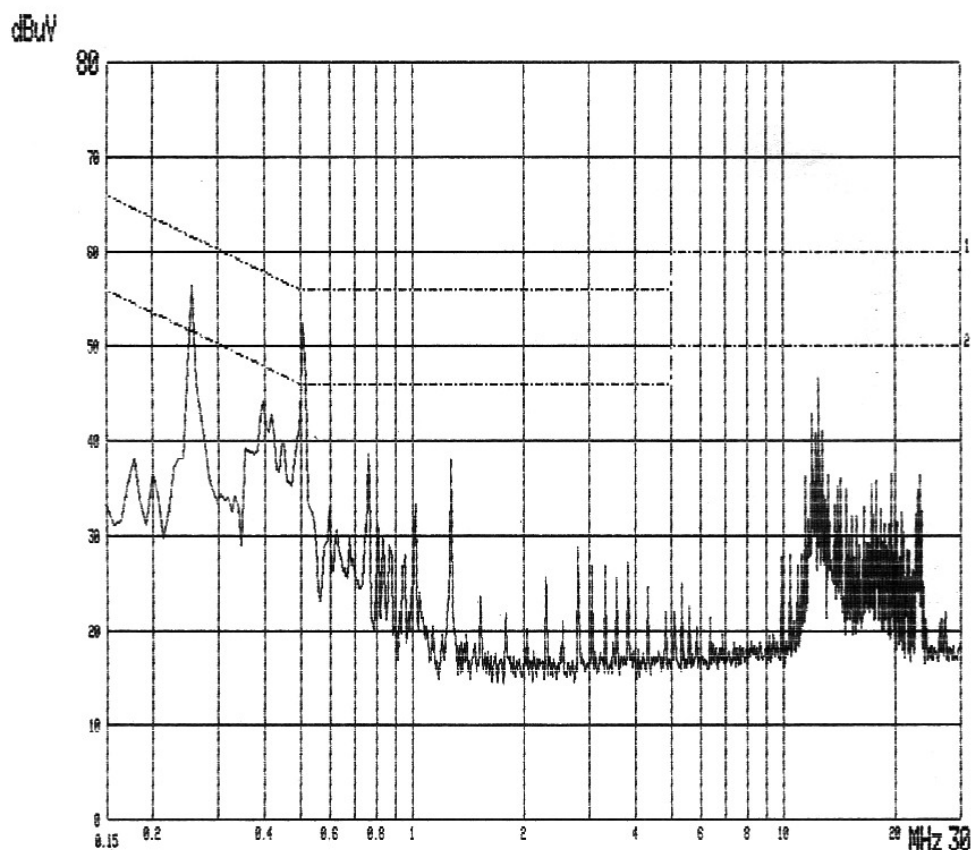


MODEL NAME : TP42N
120Vac 60Hz PHASE : LIVE

Freq. [MHz]	Measurement [dB μ V]		Limit [dB μ V]		Insertion Loss	Cable Loss	Result [dB μ V]		Margin [dB]	
	Q-peak	Average	Q-peak	Average			Q-peak	Average	Q-peak	Average
0.255	55.20	24.40	61.59	51.59	0.3	0.4	55.8	25.0	5.8	26.6
0.506	49.80	19.80	56.00	46.00	0.2	0.5	50.5	20.5	5.5	25.5
0.761	35.00	13.20	56.00	46.00	0.2	0.6	35.8	13.0	20.2	32.0
1.269	36.30	13.90	56.00	46.00	0.2	0.6	37.2	14.8	18.8	31.2
12.456	43.50	16.20	60.00	50.00	0.5	0.8	44.8	17.5	15.2	32.5
23.388	34.00	12.60	60.00	50.00	0.7	1.1	35.8	14.4	24.2	35.6

Note :

Conducted Emissions

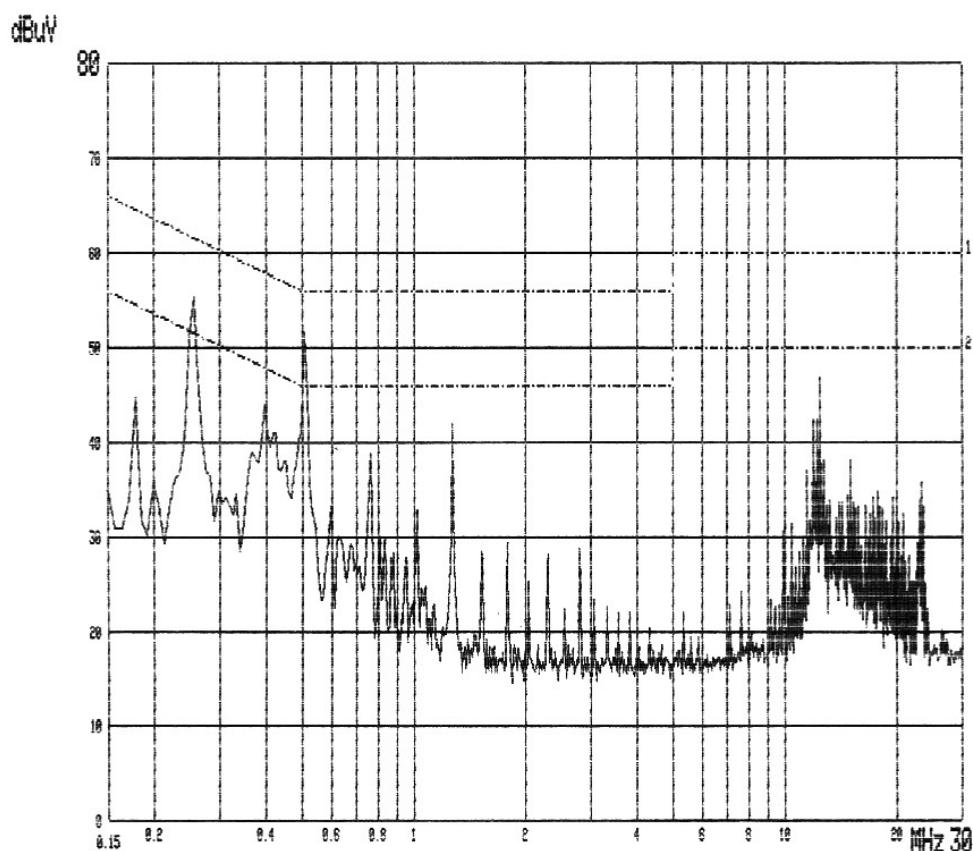

MODEL NAME : TP42N
120Vac 60Hz PHASE : NEUTRAL

Freq. [MHz]	Measurement [dB μ V]		Limit [dB μ V]		Insertion Loss [dB]	Cable Loss [dB μ V]	Result [dB μ V]		Margin [dB]	
	Q-peak	Average	Q-peak	Average			Q-peak	Average	Q-peak	Average
0.254	54.20	24.00	61.63	51.63	0.3	0.4	54.8	24.6	6.8	27.0
0.508	50.80	19.50	56.00	46.00	0.2	0.5	51.5	20.2	4.5	25.8
0.761	35.60	13.70	56.00	46.00	0.2	0.6	36.4	14.5	19.6	31.5
1.272	40.80	14.20	56.00	46.00	0.3	0.6	46.0	15.1	10.0	30.9
12.456	45.10	17.10	60.00	50.00	0.5	0.8	46.4	18.4	13.6	31.6
23.390	35.70	13.00	60.00	50.00	0.7	1.1	37.5	14.8	22.5	35.2

Note :

TEST CONDITIONS AND DATA

Radiated Emission

[Applicable]

◆ Test Equipment Used

Name	Type	Manufacturer	Calibration Date	Serial Number
ESVS10	Test Receiver	Rohde & Schwarz	Aug. 16, 2005	839049/004
VULB 9160	LogBicon Ant.	Schwarzbeck	Aug. 23, 2005	3048

◆ Test Accessories Used

Type	Manufacturer
Aneroid Barometer	Sato
Hygrometer	Sato

◆ Test Program Scrolling "H" Pattern Mode.
 1600 x 1200, 60Hz.
 1280 x 1024, 60Hz.
 1024 x 768, 60Hz.
 800 x 600, 60Hz.
 640 x 480, 60Hz.

◆ Test Date April 17, 2006

◆ Test Area Open Area Test Site No.2


Note : The equipment used is calibrated in regular for every year.

Radiated Emissions

Freq. [MHz]	Reading [dBuV]	Antenna Factor [dB/m]	Cable Loss [dB]	Polar. [H/V]	Limit [dBuV/m]	Result [dBuV/m]	Margin [dB]
1600 x 1200, 60Hz							
41.30	19.32	11.4	1.3	V	40.0	32.0	8.1
128.23	21.10	11.4	2.7	V	43.5	35.1	8.4
162.42	20.90	11.4	3.1	V	43.5	35.4	8.1
183.51	18.76	11.4	3.4	V	43.5	33.6	9.9
194.34	21.35	11.4	3.5	V	43.5	36.2	7.3
240.00	22.45	11.4	4.1	V	46.0	38.0	8.0
324.31	17.65	11.4	4.8	H	46.0	33.9	12.1
561.30	18.12	11.4	6.4	H	46.0	35.9	10.1
1280 x 1024, 60Hz							
41.31	18.42	11.4	1.3	V	40.0	31.1	9.0
128.94	21.04	11.4	2.7	V	43.5	35.1	8.4
194.56	21.24	11.4	3.5	V	43.5	36.1	7.4
324.75	18.23	11.4	4.8	H	46.0	34.5	11.6
1024 x 768, 60Hz							
41.30	18.24	11.4	1.3	V	40.0	30.9	9.1
128.15	21.42	11.4	2.7	V	43.5	35.5	8.0
162.75	20.86	11.4	3.1	V	43.5	35.4	8.1
194.53	17.35	11.4	3.5	V	43.5	32.2	11.3
800 x 600, 60Hz							
41.28	17.36	11.4	1.3	V	40.0	30.0	10.0
162.85	20.12	11.4	3.1	V	43.5	34.6	8.9
194.65	19.54	11.4	3.5	V	43.5	34.4	9.1
324.51	18.63	11.4	4.8	H	46.0	34.9	11.2
640 x 480, 60Hz							
41.33	18.12	11.4	1.3	V	40.0	30.8	9.3
128.52	20.30	11.4	2.7	V	43.5	34.4	9.2
194.75	21.22	11.4	3.5	V	43.5	36.1	7.4
324.58	17.32	11.4	4.8	H	46.0	33.5	12.5

Note : D-Sub Port

MEASUREMENT OF DISTURBANCE RADIATION

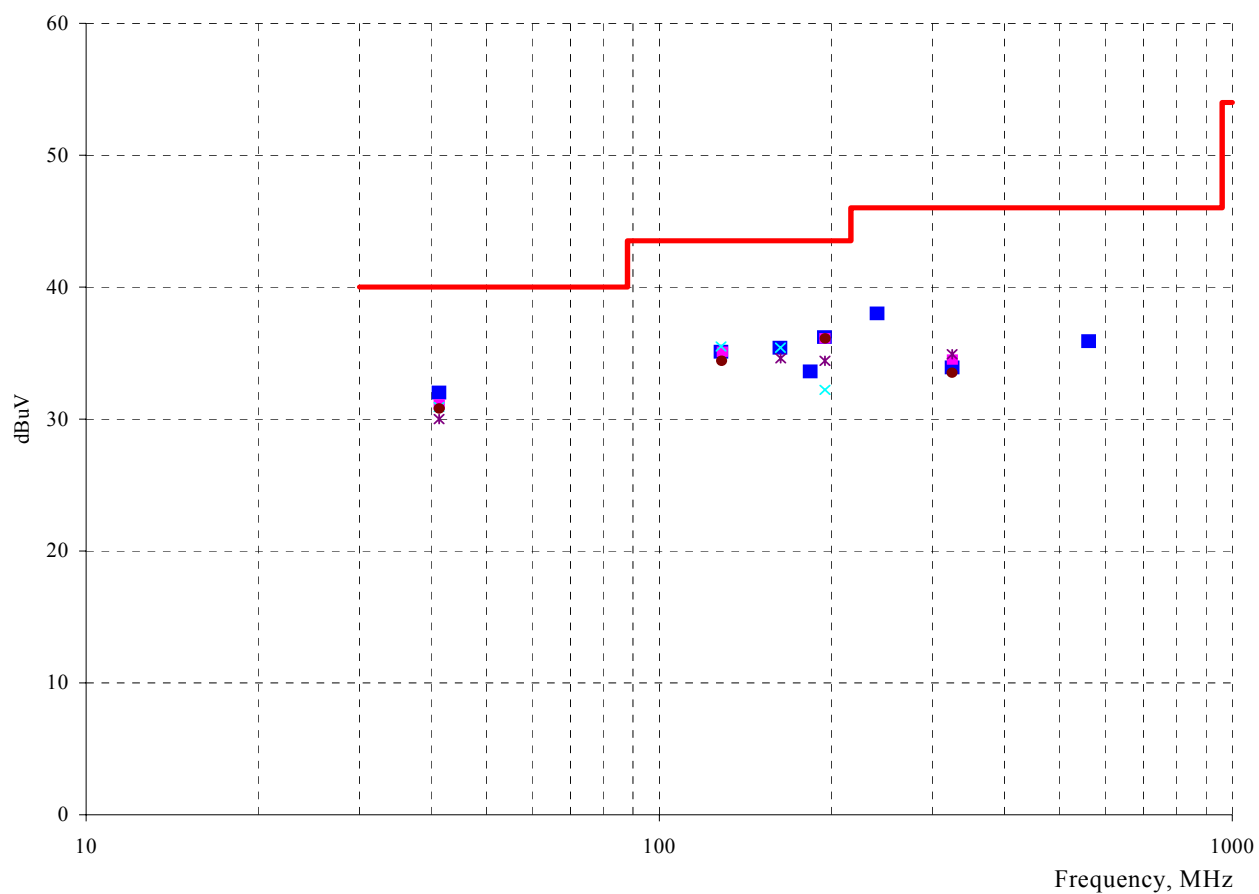


— LIMIT QP ■ 1600 x 1200 ■ 1280 x 1024
 × 1024 x 768 × 800 x 600 ● 640 x 480

Radiated Emissions

Freq. [MHz]	Reading [dBuV]	Antenna Factor [dB/m]	Cable Loss [dB]	Polar. [H/V]	Limit [dBuV/m]	Result [dBuV/m]	Margin [dB]
1600 x 1200, 60Hz.							
41.53	19.45	11.4	1.3	V	40.0	32.1	7.9
82.56	18.60	11.4	1.8	V	40.0	31.8	8.3
142.34	21.30	11.4	2.9	V	43.5	35.6	7.9
162.45	19.40	11.4	3.1	V	43.5	33.9	9.6
183.69	20.78	11.4	3.4	V	43.5	35.6	7.9
194.75	21.87	11.4	3.5	H	43.5	36.7	6.8
240.35	18.64	11.4	4.1	V	46.0	34.2	11.8
561.48	17.63	11.4	6.4	H	46.0	35.4	10.6
1280 x 1024, 60Hz.							
41.31	18.42	11.4	1.3	V	40.0	31.1	9.0
82.57	21.04	11.4	1.8	V	40.0	34.2	5.8
240.52	21.24	11.4	4.1	H	46.0	36.8	9.2
1024 x 768, 60Hz.							
41.53	18.24	11.4	1.3	V	40.0	30.9	9.1
162.56	21.42	11.4	3.1	V	43.5	35.9	7.6
194.35	20.86	11.4	3.5	H	43.5	35.7	7.8
240.75	17.35	11.4	4.2	V	46.0	32.9	13.1
800 x 600, 60Hz.							
40.65	17.36	11.4	1.2	V	40.0	30.0	10.0
162.35	20.12	11.4	3.1	V	43.5	34.6	8.9
194.85	19.54	11.4	3.5	V	43.5	34.4	9.1
561.34	18.63	11.4	6.4	H	46.0	36.4	9.6
640 x 480, 60Hz.							
41.89	18.12	11.4	1.3	V	40.0	30.8	9.2
129.01	20.30	11.4	2.7	V	43.5	34.4	9.1
194.52	21.22	11.4	3.5	V	43.5	36.1	7.4
240.65	17.32	11.4	4.2	H	46.0	32.9	13.2

Note : **DVI Port**

MEASUREMENT OF DISTURBANCE RADIATION

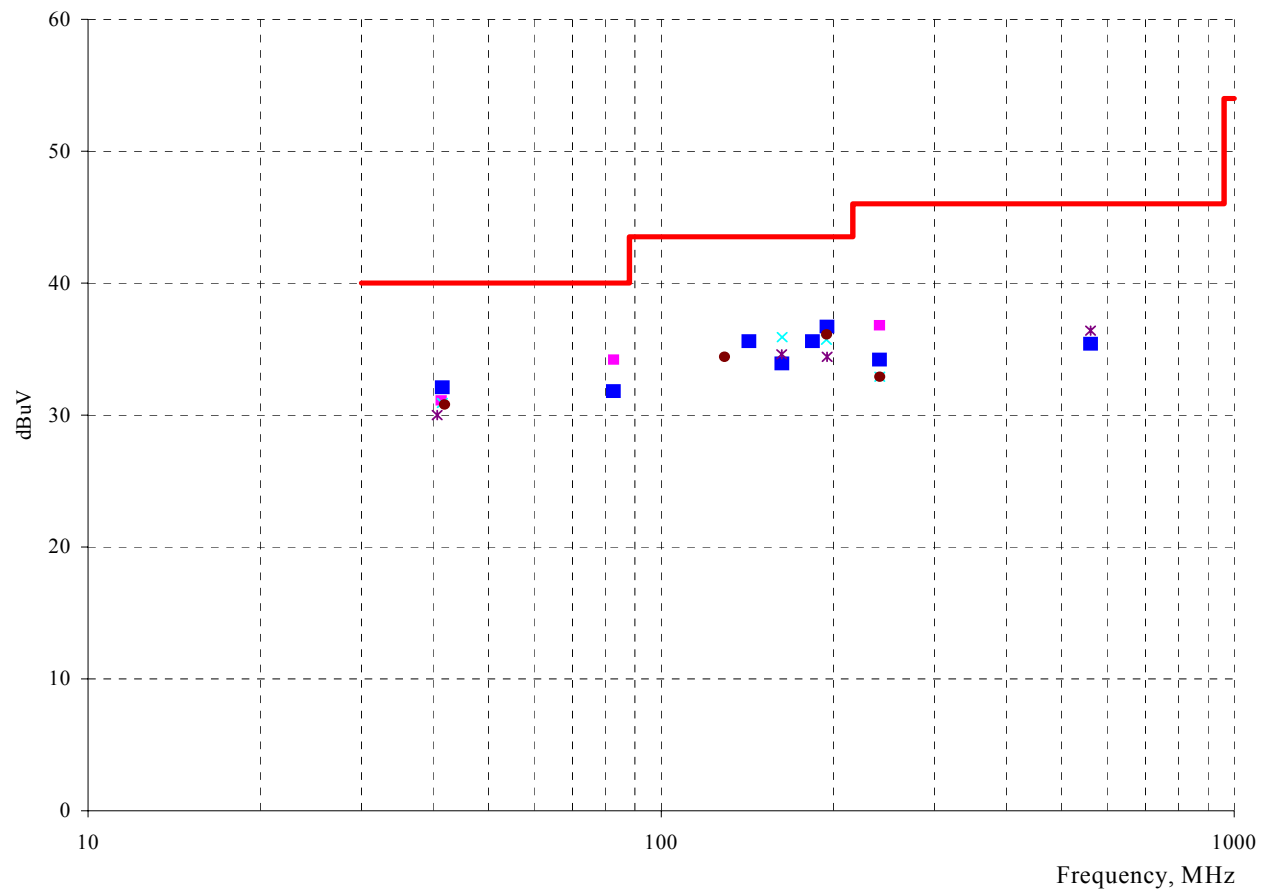

— LIMIT QP ■ 1600 x 1200 ■ 1280 x 1024
 × 1024 x 768 × 800 x 600 ● 640 x 480

End of Data

Appendix A. The Photos of Test Setup



Conducted Emissions-Front View



Conducted Emissions-Rear View

Appendix A. The Photos of Test Setup



Radiated Emissions (30MHz-1GHz) -Front View



Radiated Emissions (30MHz-1GHz) -Rear View

Appendix B. The Photos of EUT




Front View




Rear View

Appendix B. The Photos of EUT

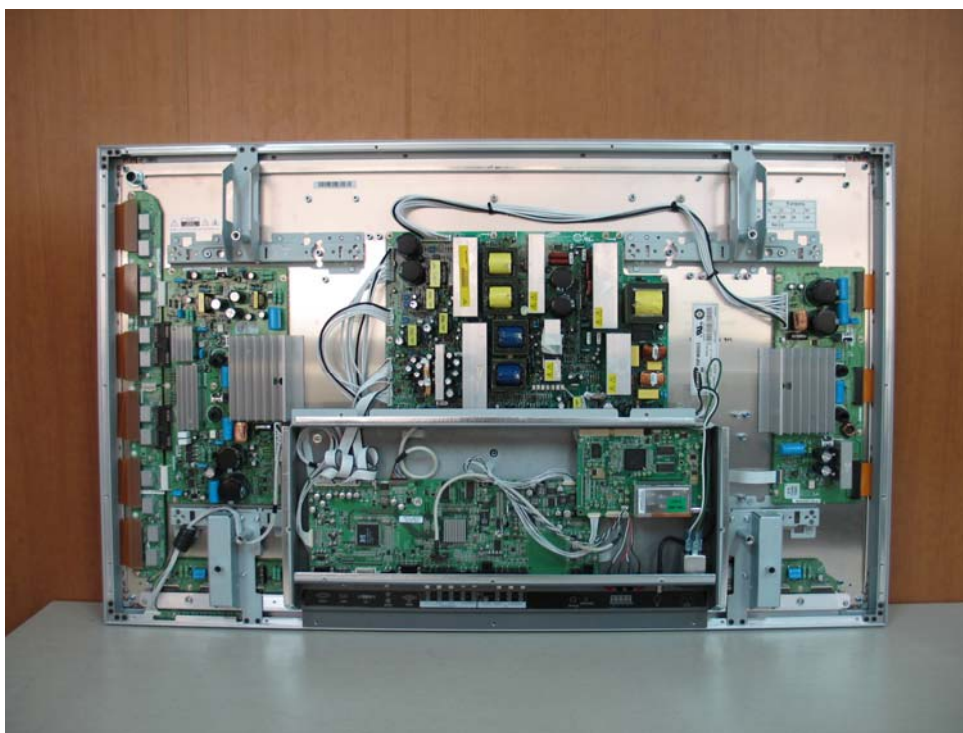

Inner View

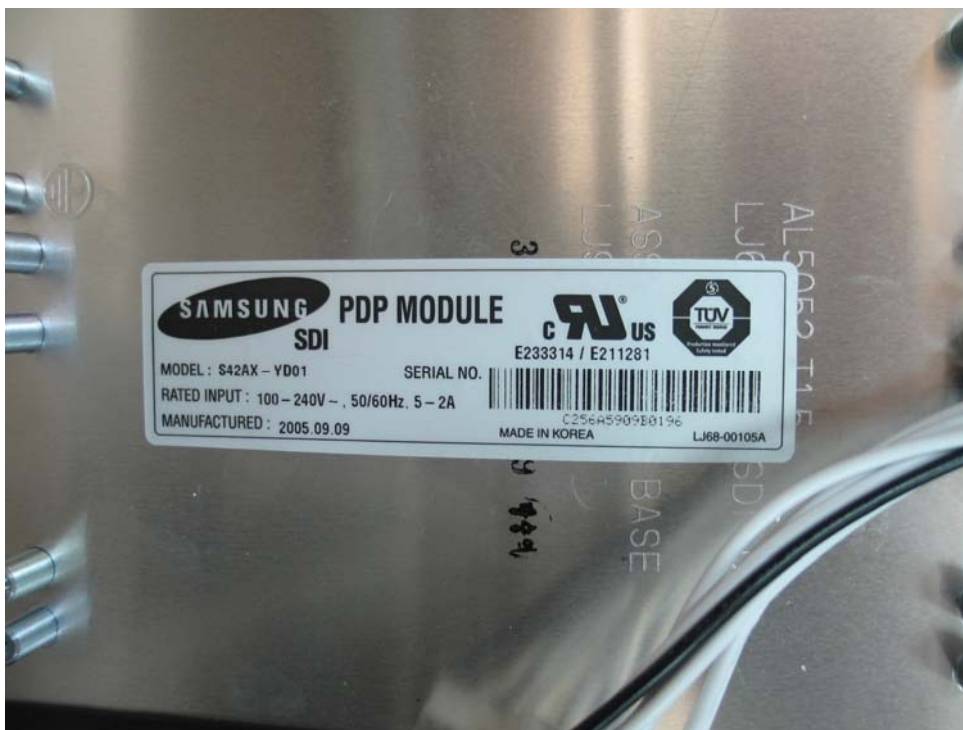

LCD Label

Appendix B. The Photos of EUT



Speaker



Remote Control