

Page: 1 of 267

## SAR TEST REPORT





The following samples were submitted and identified on behalf of the client as:

LTE Tablet PC **Equipment Under Test** 

**Brand Name** Sprint AQT82 Model No.

Quanta Microsystems, Inc. **Company Name** 

188 Wenhwa 2nd Rd., Guishan Dist., Tao Yuan City, **Company Address** 

Taiwan, 33377

**Standards** IEEE/ANSI C95.1-1992, IEEE 1528-2013,

> KDB248227D01v02r02,KDB865664D01v01r04, KDB865664D02v01r02,KDB447498D01v06,

> KDB616217D04v01r02, KDB941225D05v02r05

**FCC ID** T5UAQT82

**Date of Receipt** Feb. 20, 2017

Date of Test(s) Mar. 08, 2017 ~ Mar. 30, 2017

Date of Issue Apr. 11, 2017

In the configuration tested, the EUT complied with the standards specified above.

#### Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan Electronic & Communication Laboratory or testing done by SGS Taiwan Electronic & Communication Laboratory in connection with distribution or use of the product described in this report must be approved by SGS Taiwan Electronic & Communication Laboratory in writing.

#### Signed on behalf of SGS

**Engineer Supervisor** 

Jimmy Chang **Jimmy Chang** 

Date: Apr. 11, 2017 Date: Apr. 11, 2017

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

John Yeh



Page: 2 of 267

# **Revision History**

Report Number	Revision	Description	Issue Date
E5/2017/20018	Rev.00	Initial creation of document	Apr. 11, 2017

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 3 of 267

# **Contents**

1. General Information	
1.1 Testing Laboratory	
1.2 Details of Applicant	
1.3 Description of EUT	
1.4 Test Environment	
1.5 Operation Description	91
1.6 Proximity sensor operation description	
1.7 The SAR Measurement System	119
1.8 System Components	121
1.9 SAR System Verification	
1.10 Tissue Simulant Fluid for the Frequency Band	125
1.11 Evaluation Procedures	127
1.12 Probe Calibration Procedures	128
1.13 Test Standards and Limits	131
2. Summary of Results	133
3. Simultaneous Transmission Analysis	143
3.1 Estimated SAR calculation	
3.1 SPLSR evaluation and analysis	145
4. Instruments List	
5. Measurements	165
6. SAR System Performance Verification	177
7. DAE & Probe Calibration Certificate	
8. Uncertainty Budget	
9. Phantom Description	
10. System Validation from Original Equipment Supplier	
10. Oystem vandation nom Ongmai Equipment Supplier	200

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 4 of 267

## 1. General Information

### 1.1 Testing Laboratory

SGS Taiwan Ltd. Electronics & Communication Laboratory					
No. 2, Keji 1st Rd., Guishan Township, Taoyuan County, 33383, Taiwan					
Tel	+886-2-2299-3279				
Fax	+886-2-2298-0488				
Internet	http://www.tw.sgs.com/				

## 1.2 Details of Applicant

Company Name	Quanta Microsystems, Inc.					
Company Address	188 Wenhwa 2nd Rd., Guishan Dist., Tao Yuan City,					
Company Address	Taiwan, 33377					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 5 of 267

## 1.3 Description of EUT

LTE Tablet PC									
<u> </u>									
QT82									
Γ5UAQT82									
— ☑WLAN802.11 a/b/g/n(20M/40M)									
LTE FDD		1							
LTE TDD	0	.633							
WLAN802.11 a/b/g/n(20M/40M)	1								
Bluetooth	1								
LTE FDD Band 2	1850	_	1910						
LTE FDD Band 4	1710	_	1755						
LTE FDD Band 5	824	_	849						
LTE FDD Band 12	699	_	716						
LTE FDD Band 25	1850	_	1915						
LTE FDD Band 26	815	_	849						
LTE TDD Band 41	2496	_	2690						
WiFi 2.4GHz	2400	_	2483.5						
WiFi 5GHz	5150-5250/5250-5 5470-5725/5725-5								
Bluetooth	2400	_	2483.5						
	☑Bluetooth LTE FDD LTE TDD WLAN802.11 a/b/g/n(20M/40M) Bluetooth LTE FDD Band 2 LTE FDD Band 4 LTE FDD Band 5 LTE FDD Band 12 LTE FDD Band 25 LTE FDD Band 26 LTE TDD Band 41 WiFi 2.4GHz WiFi 5GHz	Sprint         AQT82         T5UAQT82         ☑LTE         ☑WLAN802.11 a/b/g/n(20M/40M)         ☑Bluetooth         LTE FDD         WLAN802.11 a/b/g/n(20M/40M)         Bluetooth         LTE FDD Band 2       1850         LTE FDD Band 5       824         LTE FDD Band 12       699         LTE FDD Band 25       1850         LTE FDD Band 26       815         LTE TDD Band 41       2496         WiFi 2.4GHz       2400         WiFi 5GHz       5150-525	Sprint         AQT82         T5UAQT82         ☑LTE         ☑WLAN802.11 a/b/g/n(20M/40M)         ☑Bluetooth         LTE FDD       1         LTE TDD       0.633         WLAN802.11 a/b/g/n(20M/40M)       1         Bluetooth       1         LTE FDD Band 2       1850 —         LTE FDD Band 4       1710 —         LTE FDD Band 5       824 —         LTE FDD Band 12       699 —         LTE FDD Band 25       1850 —         LTE FDD Band 26       815 —         LTE TDD Band 41       2496 —         WiFi 2.4GHz       2400 —         WiFi 5GHz       5150-5250/528/5470-5725/572						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 6 of 267

	LTE FDD Band 2	18607	_	19193
	LTE FDD Band 4	19957	_	20393
	LTE FDD Band 5	20407	_	20643
	LTE FDD Band 12	23017	_	23173
Channel Number	LTE FDD Band 25	26047	_	26683
(ARFCN)	LTE FDD Band 26	26697	_	27033
	LTE TDD Band 41	39675	_	41565
	WiFi 2.4GHz	1	_	11
	WiFi 5GHz	36	_	165
	Bluetooth	0	_	78

Max. SAR (1 g) (Unit: W/Kg)									
Band	Measured	Reported	Channel	Position					
LTE FDD Band 2	1.33	1.38	18900	Back side					
LTE FDD Band 4	1.21	1.32	20050	Back side					
LTE FDD Band 5	1.07	1.15	20525	Back side					
LTE FDD Band 12	1.25	1.32	23060	Back side					
LTE FDD Band 25	1.10	1.19	26365	Back side					
LTE FDD Band 26	1.04	1.16	26965	Back side					
LTE TDD Band 41	1.20	1.25	41490	Back side					
WLAN802.11b	1.08	1.10	6	Back side					
WLAN802.11 n(40M) 5.2G	1.04	1.11	38	Back side					
WLAN802.11 n(40M) 5.3G	0.84	0.91	62	Back side					
WLAN802.11 n(40M) 5.6G	1.15	1.16	134	Top side					
WLAN802.11 n(40M) 5.8G	0.92	0.94	151	Back side					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



Page: 7 of 267

## LTE FDD Band 2 / Band 4 / Band 5 / Band 12 / Band 25 / Band 26 power table:

	Dana 27	Daile 17		Band 2 (Full P		25 / Band	<u> </u>	- tablel
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1860	18700	23.72	24	0
			0	1880	18900	23.44	24	0
				1900	19100	23.38	24	0
				1860	18700	23.83	24	0
		1 RB	50	1880	18900	23.41	24	0
				1900	19100	23.56	24	0
				1860	18700	23.55	24	0
			99	1880	18900	23.52	24	0
				1900	19100	23.07	24	0
				1860	18700	22.59	23	0-1
	QPSK		0	1880	18900	22.52	23	0-1
				1900	19100	22.52	23	0-1
				1860	18700	22.58	23	0-1
		50 RB	25	1880	18900	22.39	23	0-1
				1900	19100	22.54	23	0-1
			50	1860	18700	22.52	23	0-1
				1880	18900	22.47	23	0-1
				1900	19100	22.43	23	0-1
				1860	18700	22.58	23	0-1
		100	)RB	1880	18900	22.48	23	0-1
20				1900	19100	22.50	23	0-1
20			0	1860	18700	22.73	23	0-1
				1880	18900	23.00	23	0-1
				1900	19100	22.47	23	0-1
				1860	18700	22.85	23	0-1
		1 RB	50	1880	18900	22.50	23	0-1
				1900	19100	22.88	23	0-1
				1860	18700	22.27	23	0-1
			99	1880	18900	22.70	23	0-1
				1900	19100	22.18	23	0-1
				1860	18700	21.64	22	0-2
	16-QAM		0	1880	18900	21.62	22	0-2
				1900	19100	21.45	22	0-2
				1860	18700	21.54	22	0-2
		50 RB	25	1880	18900	21.45	22	0-2
				1900	19100	21.51	22	0-2
				1860	18700	21.52	22	0-2
			50	1880	18900	21.32	22	0-2
				1900	19100	21.31	22	0-2
				1860	18700	21.49	22	0-2
		100	)RB	1880	18900	21.45	22	0-2
				1900	19100	21.36	22	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

www.tw.sas.com



Page: 8 of 267

FDD Band 2 (Full Power)									
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
				1857.5	18675	23.33	24	0	
			0	1880	18900	23.56	24	0	
				1902.5	19125	23.49	24	0	
				1857.5	18675	23.27	24	0	
		1 RB	36	1880	18900	23.35	24	0	
				1902.5	19125	23.36	24	0	
				1857.5	18675	23.49	24	0	
			74	1880	18900	23.55	24	0	
				1902.5	19125	23.21	24	0	
				1857.5	18675	22.55	23	0-1	
	QPSK		0	1880	18900	22.41	23	0-1	
				1902.5	19125	22.55	23	0-1	
				1857.5	18675	22.46	23	0-1	
		36 RB	18	1880	18900	22.44	23	0-1	
				1902.5	19125	22.47	23	0-1	
				1857.5	18675	22.47	23	0-1	
			37	1880	18900	22.46	23	0-1	
				1902.5	19125	22.42	23	0-1	
				1857.5	18675	22.50	23	0-1	
		75	75RB		18900	22.49	23	0-1	
15				1902.5	19125	22.47	23	0-1	
15			0	1857.5	18675	22.35	23	0-1	
				1880	18900	22.48	23	0-1	
				1902.5	19125	22.97	23	0-1	
				1857.5	18675	22.47	23	0-1	
		1 RB	36	1880	18900	22.13	23	0-1	
				1902.5	19125	22.35	23	0-1	
				1857.5	18675	22.69	23	0-1	
			74	1880	18900	23.00	23	0-1	
				1902.5	19125	22.01	23	0-1	
				1857.5	18675	21.56	22	0-2	
	16-QAM		0	1880	18900	21.34	22	0-2	
				1902.5	19125	21.40	22	0-2	
				1857.5	18675	21.52	22	0-2	
		36 RB	18	1880	18900	21.42	22	0-2	
				1902.5	19125	21.42	22	0-2	
				1857.5	18675	21.43	22	0-2	
			37	1880	18900	21.46	22	0-2	
				1902.5	19125	21.34	22	0-2	
				1857.5	18675	21.43	22	0-2	
		75	RB	1880	18900	21.35	22	0-2	
				1902.5	19125	21.41	22	0-2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_end\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this onlineful and offenders may be

prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 9 of 267

FDD Band 2 (Full Power)									
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
				1855	18650	23.53	24	0	
			0	1880	18900	23.36	24	0	
				1905	19150	23.28	24	0	
				1855	18650	23.53	24	0	
		1 RB	25	1880	18900	23.52	24	0	
				1905	19150	23.57	24	0	
				1855	18650	23.45	24	0	
			49	1880	18900	23.48	24	0	
				1905	19150	23.15	24	0	
				1855	18650	22.66	23	0-1	
	QPSK		0	1880	18900	22.40	23	0-1	
				1905	19150	22.54	23	0-1	
				1855	18650	22.41	23	0-1	
		25 RB	12	1880	18900	22.36	23	0-1	
				1905	19150	22.47	23	0-1	
				1855	18650	22.42	23	0-1	
			25	1880	18900	22.40	23	0-1	
				1905	19150	22.23	23	0-1	
				1855	18650	22.48	23	0-1	
		50	50RB		18900	22.38	23	0-1	
10				1905	19150	22.39	23	0-1	
10			0	1855	18650	22.94	23	0-1	
				1880	18900	22.73	23	0-1	
				1905	19150	22.79	23	0-1	
				1855	18650	22.93	23	0-1	
		1 RB	25	1880	18900	22.99	23	0-1	
				1905	19150	22.82	23	0-1	
				1855	18650	22.64	23	0-1	
			49	1880	18900	22.19	23	0-1	
				1905	19150	22.30	23	0-1	
				1855	18650	21.33	22	0-2	
	16-QAM		0	1880	18900	21.68	22	0-2	
				1905	19150	21.41	22	0-2	
				1855	18650	21.33	22	0-2	
		25 RB	12	1880	18900	21.79	22	0-2	
				1905	19150	21.28	22	0-2	
				1855	18650	21.19	22	0-2	
			25	1880	18900	21.72	22	0-2	
				1905	19150	21.23	22	0-2	
				1855	18650	21.49	22	0-2	
		50	RB	1880	18900	21.49	22	0-2	
				1905	19150	21.36	22	0-2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 10 of 267

FDD Band 2 (Full Power)									
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
				1852.5	18625	23.31	24	0	
			0	1880	18900	23.34	24	0	
				1907.5	19175	23.33	24	0	
				1852.5	18625	23.54	24	0	
		1 RB	12	1880	18900	23.23	24	0	
				1907.5	19175	23.45	24	0	
				1852.5	18625	23.29	24	0	
			24	1880	18900	23.30	24	0	
				1907.5	19175	23.33	24	0	
				1852.5	18625	22.49	23	0-1	
	QPSK		0	1880	18900	22.22	23	0-1	
				1907.5	19175	22.23	23	0-1	
				1852.5	18625	22.52	23	0-1	
		12 RB	6	1880	18900	22.32	23	0-1	
				1907.5	19175	22.25	23	0-1	
				1852.5	18625	22.41	23	0-1	
			13	1880	18900	22.39	23	0-1	
				1907.5	19175	22.14	23	0-1	
				1852.5	18625	22.55	23	0-1	
		25	RB	1880	18900	22.40	23	0-1	
5				1907.5	19175	22.25	23	0-1	
3				1852.5	18625	22.47	23	0-1	
			0	1880	18900	22.73	23	0-1	
				1907.5	19175	22.41	23	0-1	
				1852.5	18625	22.94	23	0-1	
		1 RB	12	1880	18900	22.90	23	0-1	
				1907.5	19175	22.07	23	0-1	
				1852.5	18625	23.00	23	0-1	
			24	1880	18900	21.90	23	0-1	
				1907.5	19175	22.27	23	0-1	
				1852.5	18625	21.45	22	0-2	
	16-QAM		0	1880	18900	21.29	22	0-2	
				1907.5	19175	21.19	22	0-2	
				1852.5	18625	21.52	22	0-2	
		12 RB	6	1880	18900	21.33	22	0-2	
				1907.5	19175	21.21	22	0-2	
				1852.5	18625	21.32	22	0-2	
			13	1880	18900	21.17	22	0-2	
				1907.5	19175	21.18	22	0-2	
				1852.5	18625	21.32	22	0-2	
		25	RB	1880	18900	21.43	22	0-2	
			1907.5	19175	21.20	22	0-2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 11 of 267

FDD Band 2 (Full Power)									
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max.	MPR Allowed per	
					10015		Tolerance (dBm)	3GPP(dB)	
			0	1851.5	18615	23.43	24	0	
			0	1880	18900	23.40	24	0	
				1908.5	19185	23.16	24 24	0	
		1 RB	7	1851.5 1880	18615 18900	23.80 23.45	24	0	
		TKB	,	1908.5	19185	23.45	24	0	
				1851.5	18615	23.71	24	0	
			14	1880	18900	23.42	24	0	
			14	1908.5	19185	23.26	24	0	
				1851.5	18615	22.43	23	0-1	
	QPSK		0	1880	18900	22.34	23	0-1	
	Q. 3.1		, and the second	1908.5	19185	22.15	23	0-1	
				1851.5	18615	22.63	23	0-1	
		8 RB	4	1880	18900	22.37	23	0-1	
		0.12		1908.5	19185	22.11	23	0-1	
			7	1851.5	18615	22.58	23	0-1	
				1880	18900	22.33	23	0-1	
				1908.5	19185	22.06	23	0-1	
					18615	22.44	23	0-1	
		15RB		1880	18900	22.29	23	0-1	
3				1908.5	19185	22.09	23	0-1	
3			0	1851.5	18615	22.51	23	0-1	
				1880	18900	22.15	23	0-1	
				1908.5	19185	22.14	23	0-1	
				1851.5	18615	22.13	23	0-1	
		1 RB	7	1880	18900	22.60	23	0-1	
				1908.5	19185	22.12	23	0-1	
				1851.5	18615	22.42	23	0-1	
			14	1880	18900	22.61	23	0-1	
				1908.5	19185	21.96	23	0-1	
				1851.5	18615	21.48	22	0-2	
	16-QAM		0	1880	18900	21.19	22	0-2	
				1908.5	19185	21.20	22	0-2	
				1851.5	18615	21.82	22	0-2	
		8 RB	4	1880	18900	21.21	22	0-2	
				1908.5	19185	21.21	22	0-2	
			_	1851.5	18615	21.68	22	0-2	
			7	1880	18900	21.34	22	0-2	
				1908.5	19185	21.20	22	0-2	
			DD	1851.5	18615	21.54	22	0-2	
		15	RB	1880	18900	21.26	22	0-2	
			1908.5	19185	20.95	22	0-2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_end\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this onlineful and offenders may be

prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 12 of 267

FDD Band 2 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				1850.7	18607	23.43	24	0			
			0	1880	18900	23.27	24	0			
				1909.3	19193	23.08	24	0			
				1850.7	18607	23.68	24	0			
		1 RB	2	1880	18900	23.43	24	0			
				1909.3	19193	23.23	24	0			
				1850.7	18607	23.52	24	0			
			5	1880	18900	23.31	24	0			
				1909.3	19193	23.19	24	0			
				1850.7	18607	23.57	24	0			
	QPSK		0	1880	18900	23.33	24	0			
				1909.3	19193	23.07	24	0			
				1850.7	18607	23.71	24	0			
		3 RB	2	1880	18900	23.41	24	0			
				1909.3	19193	23.12	24	0			
				1850.7	18607	23.61	24	0			
			3	1880	18900	23.42	24	0			
				1909.3	19193	23.23	24	0			
				1850.7	18607	22.49	23	0-1			
		6F	RB	1880	18900	22.39	23	0-1			
1.4				1909.3	19193	22.14	23	0-1			
17				1850.7	18607	22.09	23	0-1			
			0	1880	18900	22.59	23	0-1			
				1909.3	19193	22.50	23	0-1			
				1850.7	18607	22.30	23	0-1			
		1 RB	2	1880	18900	22.67	23	0-1			
				1909.3	19193	22.50	23	0-1			
				1850.7	18607	22.66	23	0-1			
			5	1880	18900	22.68	23	0-1			
				1909.3	19193	22.32	23	0-1			
				1850.7	18607	22.51	23	0-1			
	16-QAM		0	1880	18900	22.43	23	0-1			
				1909.3	19193	22.07	23	0-1			
				1850.7	18607	22.69	23	0-1			
		3 RB	2	1880	18900	22.51	23	0-1			
				1909.3	19193	22.16	23	0-1			
				1850.7	18607	22.83	23	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			
			3	1880	18900	22.58	23				
				1909.3	19193	22.44	23	0-1			
				1850.7	18607	21.32	22	0-2			
		6F	RB	1880	18900	21.17	22				
				1909.3	19193	21.03	22	0-2			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 13 of 267

	FDD Band 2 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1860	18700	16.34	16.5	0				
			0	1880	18900	16.32	16.5	0				
				1900	19100	16.32	16.5	0				
				1860	18700	16.49	16.5	0				
		1 RB	50	1880	18900	16.35	16.5	0				
				1900	19100	16.50	16.5	0				
				1860	18700	16.48	16.5	0				
			99	1880	18900	16.28	16.5	0				
				1900	19100	16.21	16.5	0				
				1860	18700	15.50	15.5	0-1				
	QPSK		0	1880	18900	15.41	15.5	0-1				
				1900	19100	15.40	15.5	0-1				
				1860	18700	15.47	15.5	0-1				
		50 RB	25	1880	18900	15.41	15.5	0-1				
				1900	19100	15.36	15.5	0-1				
				1860	18700	15.44	15.5	0-1				
			50	1880	18900	15.43	15.5	0-1				
				1900	19100	15.33	15.5	0-1				
				1860	18700	15.50	15.5	0-1				
		100	)RB	1880	18900	15.37	15.5	0-1				
20				1900	19100	15.32	15.5	0-1				
				1860	18700	15.45	15.5	0-1				
			0	1880	18900	15.17	15.5	0-1				
				1900	19100	14.72	15.5	0-1				
				1860	18700	15.44	15.5	0-1				
		1 RB	50	1880	18900	15.40	15.5	0-1				
				1900	19100	15.44	15.5	0-1				
				1860	18700	15.47	15.5					
			99	1880	18900	15.32	15.5					
				1900	19100	15.11	15.5					
				1860	18700	14.43	14.5					
	16-QAM		0	1880	18900	14.37	14.5	0-2				
				1900	19100	14.09	14.5	0-2				
			_	1860	18700	14.30	14.5	0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-1				
		50 RB	25	1880	18900	14.37	14.5					
				1900	19100	14.15	14.5					
				1860	18700	14.42	14.5					
			50	1880	18900	14.25	14.5					
				1900	19100	14.12	14.5					
				1860	18700	14.36	14.5	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-				
		100	)RB	1880	18900	14.27	14.5					
					1900	19100	14.10	14.5	0-2			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_end\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this onlineful and offenders may be

prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 14 of 267

	FDD Band 2 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1857.5	18675	16.10	16.5	0				
			0	1880	18900	16.25	16.5	0				
				1902.5	19125	16.41	16.5	0				
				1857.5	18675	16.04	16.5	0				
		1 RB	36	1880	18900	16.30	16.5	0				
				1902.5	19125	16.33	16.5	0				
				1857.5	18675	16.25	16.5	0				
			74	1880	18900	16.13	16.5	0				
				1902.5	19125	16.33	16.5	0				
				1857.5	18675	15.39	15.5	0-1				
	QPSK		0	1880	18900	15.28	15.5	0-1				
				1902.5	19125	15.46	15.5	0-1				
				1857.5	18675	15.36	15.5	0-1				
		36 RB	18	1880	18900	15.32	15.5	0-1				
				1902.5	19125	15.40	15.5	0-1				
				1857.5	18675	15.37	15.5	0-1				
			37	1880	18900	15.34	15.5	0-1				
				1902.5	19125	15.36	15.5	0-1				
				1857.5	18675	15.47	15.5	0-1				
		75	RB	1880	18900	15.36	15.5	0-1				
15				1902.5	19125	15.29	15.5	0-1				
				1857.5	18675	15.46	15.5	0 0 0 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-				
			0	1880	18900	15.47	15.5	0-1				
				1902.5	19125	15.47	15.5	0-1				
				1857.5	18675	15.47	15.5	0-1				
		1 RB	36	1880	18900	15.15	15.5	0-1				
				1902.5	19125	15.40	15.5					
				1857.5	18675	15.37	15.5					
			74	1880	18900	15.03	15.5					
				1902.5	19125	15.46	15.5					
			_	1857.5	18675	14.18	14.5					
	16-QAM		0	1880	18900	14.37	14.5					
				1902.5	19125	14.36	14.5	0-2				
		00.55	4.5	1857.5	18675	14.16	14.5					
		36 RB	18	1880	18900	14.31	14.5					
				1902.5	19125	14.31	14.5					
			0.7	1857.5	18675	14.43	14.5	3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-				
			37	1880	18900	14.32	14.5					
				1902.5	19125	14.40	14.5					
				1857.5	18675	14.37	14.5					
		75	RB	1880	18900	14.33	14.5					
				1902.5	19125	14.37	14.5	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 15 of 267

	FDD Band 2 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1855	18650	16.18	16.5	0				
			0	1880	18900	16.22	16.5	0				
				1905	19150	16.20	16.5	0				
				1855	18650	16.10	16.5	0				
		1 RB	25	1880	18900	16.32	16.5	0				
				1905	19150	16.33	16.5	0				
				1855	18650	16.23	16.5	0				
			49	1880	18900	16.24	16.5	0				
				1905	19150	16.11	16.5	0				
				1855	18650	15.44	15.5	0-1				
	QPSK		0	1880	18900	15.25	15.5	0-1				
				1905	19150	15.40	15.5	0-1				
				1855	18650	15.29	15.5	0-1				
		25 RB	12	1880	18900	15.36	15.5	0-1				
				1905	19150	15.40	15.5	0-1				
				1855	18650	15.21	15.5	0-1				
			25	1880	18900	15.27	15.5	0-1				
				1905	19150	15.17	15.5	0-1				
				1855	18650	15.32	15.5	0-1				
		50	RB	1880	18900	15.26	15.5	0-1				
10			•	1905	19150	15.30	15.5	0-1				
				1855	18650	15.42	15.5	0-1				
			0	1880	18900	15.29	15.5	0-1				
				1905	19150	15.33	15.5	0-1				
				1855	18650	15.20	15.5	0-1				
		1 RB	25	1880	18900	15.50	15.5	0-1				
				1905	19150	15.45	15.5	0-1				
				1855	18650	15.41	15.5	0-1				
			49	1880	18900	15.48	15.5	0-1				
				1905	19150	15.46	15.5	0-1				
				1855	18650	14.42	14.5					
	16-QAM		0	1880	18900	14.35	14.5	0-2				
				1905	19150	14.34	14.5	0-2				
				1855	18650	14.37	14.5	0-2				
		25 RB	12	1880	18900	14.32	14.5					
				1905	19150	14.48	14.5	0-2				
				1855	18650	14.18	14.5	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
			25	1880	18900	14.26	14.5					
				1905	19150	14.02	14.5					
1				1855	18650	14.38	14.5	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-				
		50	RB	1880	18900	14.34	14.5					
				1905	19150	14.36	14.5	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 16 of 267

FDD Band 2 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				1852.5	18625	16.07	16.5	0			
			0	1880	18900	16.08	16.5	0			
				1907.5	19175	16.05	16.5	0			
				1852.5	18625	16.20	16.5	0			
		1 RB	12	1880	18900	16.16	16.5	0			
				1907.5	19175	16.38	16.5	0			
				1852.5	18625	16.15	16.5	0			
			24	1880	18900	16.04	16.5	0			
				1907.5	19175	16.13	16.5	0			
				1852.5	18625	15.30	15.5	0-1			
	QPSK		0	1880	18900	15.18	15.5	0-1			
				1907.5	19175	15.09	15.5	0-1			
				1852.5	18625	15.35	15.5	0-1			
		12 RB	6	1880	18900	15.18	15.5	0-1			
				1907.5	19175	15.14	15.5	0-1			
				1852.5	18625	15.34	15.5	0-1			
			13	1880	18900	15.23	15.5	0-1			
				1907.5	19175	15.10	15.5	0-1			
				1852.5	18625	15.33	15.5	0-1			
		25	RB	1880	18900	15.17	15.5	0-1			
5				1907.5	19175	15.12	15.5	0-1			
				1852.5	18625	15.42	15.5	0-1			
			0	1880	18900	15.50	15.5	0-1			
				1907.5	19175	14.99	15.5	0-1			
				1852.5	18625	15.47	15.5	0-1			
		1 RB	12	1880	18900	15.02	15.5	0-1			
				1907.5	19175	15.25	15.5	0-1			
				1852.5	18625	15.48	15.5	0-1			
			24	1880	18900	15.45	15.5	0-1			
				1907.5	19175	15.43	15.5	0-1			
				1852.5	18625	14.20	14.5	0-2			
	16-QAM		0	1880	18900	14.16	14.5	0-2			
				1907.5	19175	14.00	14.5	0-2			
			_	1852.5	18625	14.23	14.5	0-2			
		12 RB	6	1880	18900	14.16	14.5	0-2			
				1907.5	19175	14.01	14.5	0-2			
			4.5	1852.5	18625	14.24	14.5	0-2			
			13	1880	18900	14.26	14.5	0-2			
				1907.5	19175	13.94	14.5	0-2			
			DD	1852.5	18625	14.34	14.5	0-2			
		25	RB	1880	18900	14.25	14.5	0-2			
				1907.5	19175	14.16	14.5	0-2			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 17 of 267

	FDD Band 2 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1851.5	18615	16.30	16.5	0				
			0	1880	18900	16.24	16.5	0				
				1908.5	19185	16.05	16.5	0				
				1851.5	18615	16.44	16.5	0				
		1 RB	7	1880	18900	16.29	16.5	0				
				1908.5	19185	16.28	16.5	0				
				1851.5	18615	16.26	16.5	0				
			14	1880	18900	16.25	16.5	0				
				1908.5	19185	16.08	16.5	0				
				1851.5	18615	15.33	15.5	0-1				
	QPSK		0	1880	18900	15.21	15.5	0-1				
				1908.5	19185	15.12	15.5	0-1				
				1851.5	18615	15.40	15.5	0-1				
		8 RB	4	1880	18900	15.26	15.5	0-1				
				1908.5	19185	15.10	15.5	0-1				
				1851.5	18615	15.37	15.5	0-1				
			7	1880	18900	15.17	15.5	0-1				
				1908.5	19185	15.06	15.5					
				1851.5	18615	15.37	15.5					
		15	RB	1880	18900	15.17	15.5					
3			1	1908.5	19185	15.00	15.5					
				1851.5	18615	15.21	15.5	0 0 0 0 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1				
			0	1880	18900	14.96	15.5					
				1908.5	19185	14.98	15.5					
		4.00	_	1851.5	18615	15.24	15.5					
		1 RB	7	1880	18900	15.31	15.5					
				1908.5	19185	15.44	15.5					
				1851.5	18615	15.48	15.5					
			14	1880	18900	14.90	15.5					
			1	1908.5	19185	14.95	15.5					
	16 OAM		0	1851.5	18615	14.31	14.5					
	16-QAM		0	1880	18900	14.22	14.5					
				1908.5	19185	14.19	14.5					
		8 RB	4	1851.5	18615	14.28	14.5					
		0 17 0	4	1880	18900	14.30	14.5					
				1908.5	19185	13.97	14.5					
			7	1851.5	18615	14.44	14.5	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1				
			'	1880 1908.5	18900	14.31	14.5					
					19185	14.08	14.5					
		15	RB	1851.5 1880	18615	14.32	14.5					
		13	IVD.		18900	14.03	14.5					
				1908.5	19185	13.96	14.5	∪-∠				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 18 of 267

	FDD Band 2 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1850.7	18607	16.16	16.5	0				
			0	1880	18900	16.16	16.5	0				
				1909.3	19193	15.90	16.5	0				
				1850.7	18607	16.42	16.5	0				
		1 RB	2	1880	18900	16.09	16.5	0				
				1909.3	19193	16.04	16.5	0				
				1850.7	18607	16.03	16.5	0				
			5	1880	18900	16.17	16.5	0				
				1909.3	19193	15.94	16.5	0				
				1850.7	18607	16.12	16.5	0				
	QPSK		0	1880	18900	16.04	16.5	0				
				1909.3	19193	16.14	16.5	0				
				1850.7	18607	16.23	16.5	0				
		3 RB	2	1880	18900	16.07	16.5	0				
				1909.3	19193	16.15	16.5	0				
				1850.7	18607	16.24	16.5	0				
			3	1880	18900	16.15	16.5	0				
				1909.3	19193	16.07	16.5	0				
				1850.7	18607	15.17	15.5	0-1				
		6F	RB	1880	18900	15.20	15.5	0-1				
1.4				1909.3	19193	15.01	15.5	0-1				
				1850.7	18607	15.50	15.5	0-1				
			0	1880	18900	15.40	15.5	0-1				
				1909.3	19193	14.99	15.5	0-1				
				1850.7	18607	15.43	15.5	0-1				
		1 RB	2	1880	18900	15.15	15.5	0-1				
				1909.3	19193	15.03	15.5	0-1				
				1850.7	18607	15.47	15.5					
			5	1880	18900	15.19	15.5					
				1909.3	19193	14.92	15.5					
			_	1850.7	18607	15.18	15.5					
	16-QAM		0	1880	18900	15.35	15.5					
				1909.3	19193	15.14	15.5	0-1				
			_	1850.7	18607	15.49	15.5	0-1				
		3 RB	2	1880	18900	15.49	15.5					
				1909.3	19193	15.25	15.5					
				1850.7	18607	15.25	15.5	3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
			3	1880	18900	15.48	15.5					
				1909.3	19193	15.02	15.5					
			20	1850.7	18607	14.09	14.5					
		6F	6RB	1880	18900	14.15	14.5					
				1909.3	19193	14.22	14.5	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 19 of 267

			FDD	Band 4 (Full P	ower)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1720	20050	23.17	24	0
			0	1732.5	20175	23.31	24	0
				1745	20300	23.46	24	0
				1720	20050	23.00	24	0
		1 RB	50	1732.5	20175	23.29	24	0
				1745	20300	23.32	24	0
				1720	20050	23.05	24	0
			99	1732.5	20175	23.08	24	0
				1745	20300	22.93	24	0
				1720	20050	22.18	23	0-1
	QPSK		0	1732.5	20175	22.32	23	0-1
				1745	20300	22.29	23	0-1
				1720	20050	22.18	23	0-1
		50 RB	25	1732.5	20175	22.27	23	0-1
				1745	20300	22.22	23	0-1
				1720	20050	22.24	23	0-1
			50	1732.5	20175	22.22	23	0-1
				1745	20300	22.10	23	0-1
				1720	20050	22.22	23	0-1
		100	)RB	1732.5	20175	22.21	23	0-1
20				1745	20300	22.21	23	0-1
20				1720	20050	22.35	23	0-1
			0	1732.5	20175	22.74	23	0-1
				1745	20300	22.61	23	0-1
				1720	20050	22.50	23	0-1
		1 RB	50	1732.5	20175	22.64	23	0-1
				1745	20300	22.91	23	0-1
				1720	20050	22.23	23	0-1
			99	1732.5	20175	22.09	23	0-1
				1745	20300	22.71	23	0-1
				1720	20050	21.19	22	
	16-QAM		0	1732.5	20175	21.17	22	0-2
				1745	20300	21.17	22	0-2
				1720	20050	21.20	22	0-2
		50 RB	25	1732.5	20175	21.23	22	0-2
				1745	20300	21.08	22	0-2
				1720	20050	21.14	22	0-2
			50	1732.5	20175	21.17	22	0-2
				1745	20300	21.10	22	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
				1720	20050	21.25	22	
		100	)RB	1732.5	20175	21.20	22	
			100112	1745	20300	21.19	22	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 20 of 267

	FDD Band 4 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1717.5	20025	23.29	24	0				
			0	1732.5	20175	23.33	24	0				
				1747.5	20325	23.27	24	0				
				1717.5	20025	22.84	24	0				
		1 RB	36	1732.5	20175	23.14	24	0				
				1747.5	20325	22.84	24	0				
				1717.5	20025	23.07	24	0				
			74	1732.5	20175	23.13	24	0				
				1747.5	20325	22.92	24	0				
				1717.5	20025	22.21	23	0-1				
	QPSK		0	1732.5	20175	22.29	23	0-1				
				1747.5	20325	22.24	23	0-1				
				1717.5	20025	22.23	23	0-1				
		36 RB	18	1732.5	20175	22.24	23	0-1				
				1747.5	20325	22.14	23	0-1				
				1717.5	20025	22.21	23	0-1				
			37	1732.5	20175	22.13	23	0-1				
				1747.5	20325	22.17	23	0-1				
				1717.5	20025	22.15	23	0-1				
		75	RB	1732.5	20175	22.30	23	0-1				
15			T	1747.5	20325	22.14	23	0-1				
				1717.5	20025	22.26	23	0-1				
			0	1732.5	20175	22.74	23					
				1747.5	20325	22.28	23					
				1717.5	20025	22.59	23					
		1 RB	36	1732.5	20175	22.29	23					
				1747.5	20325	21.69	23					
				1717.5	20025	22.28	23					
			74	1732.5	20175	22.39	23					
				1747.5	20325	22.00	23					
	40.0444			1717.5	20025	21.11	22					
	16-QAM		0	1732.5	20175	21.20	22					
				1747.5	20325	21.23	22					
		00.00	40	1717.5	20025	21.03	22					
		36 RB	18	1732.5	20175	21.15	22					
				1747.5	20325	21.16	22	3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1				
			27	1717.5	20025	21.09	22					
			37	1732.5	20175	21.05	22					
				1747.5	20325	20.98	22	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-				
		75	DD	1717.5	20025	21.11	22					
		/5	RB	1732.5	20175	21.21	22					
				1747.5	20325	21.14	22	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 21 of 267

			FDD	Band 4 (Full P	ower)				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
				1715	20000	23.08	24	0	
			0	1732.5	20175	23.33	24	0	
				1750	20350	23.31	24	0	
				1715	20000	23.00	24	0	
		1 RB	25	1732.5	20175	23.48	24	0	
				1750	20350	23.26	24	0	
				1715	20000	22.88	24	0	
			49	1732.5	20175	23.12	24	0	
				1750	20350	23.16	24	0	
				1715	20000	22.27	23	0-1	
	QPSK		0	1732.5	20175	22.31	23	0-1	
				1750	20350	22.28	23	0-1	
				1715	20000	22.25	23	0-1	
		25 RB	12	1732.5	20175	22.33	23	0-1	
				1750	20350	22.19	23	0-1	
				1715	20000	22.15	23	0-1	
			25	1732.5	20175	22.11	23	0-1	
				1750	20350	22.14	23	0-1	
				1715	20000	22.20	23	0-1	
		50	RB	1732.5	20175	22.28	23	0-1	
10				1750	20350	22.22	23	0-1	
10				1715	20000	21.94	23	0-1	
			0	1732.5	20175	22.87	23	0-1	
				1750	20350	22.52	23	0-1	
				1715	20000	22.03	23	0-1	
		1 RB	25	1732.5	20175	22.26	23	0-1	
				1750	20350	22.03	23	0-1	
				1715	20000	21.97	23	0-1	
			49	1732.5	20175	22.58	23	0-1	
				1750	20350	22.32	23	0-1	
				1715	20000	21.37	22	0-2	
	16-QAM		0	1732.5	20175	21.28	22	0-2	
				1750	20350	21.38	22	0-2	
				1715	20000	21.03	22	0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-1 0-	
		25 RB	12	1732.5	20175	21.21	22		
				1750	20350	20.99	22		
				1715	20000	21.01	22		
			25	1732.5	20175	21.05	22		
				1750	20350	21.06	22	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1	
				1715	20000	21.10	22	0-2	
		50	RB	1732.5	20175	21.26	22		
					1750	20350	21.10	22	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



Page: 22 of 267

	FDD Band 4 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1712.5	19975	23.36	24	0				
			0	1732.5	20175	23.18	24	0				
				1752.5	20375	23.10	24	0				
				1712.5	19975	22.85	24	0				
		1 RB	12	1732.5	20175	23.20	24	0				
				1752.5	20375	23.03	24	0				
				1712.5	19975	23.01	24	0				
			24	1732.5	20175	23.20	24	0				
				1752.5	20375	22.97	24	0				
				1712.5	19975	22.14	23	0-1				
	QPSK		0	1732.5	20175	22.25	23	0-1				
				1752.5	20375	22.11	23	0-1				
				1712.5	19975	22.15	23	0-1				
		12 RB	6	1732.5	20175	22.24	23	0-1				
				1752.5	20375	22.12	23	0-1				
				1712.5	19975	22.04	23	0-1				
			13	1732.5	20175	22.25	23	0-1				
				1752.5	20375	22.07	23	0-1				
				1712.5	19975	22.09	23	0-1				
		25	RB	1732.5	20175	22.24	23	0-1				
5				1752.5	20375	21.99	23	0-1				
				1712.5	19975	22.34	23	0-1				
			0	1732.5	20175	22.06	23	0-1				
				1752.5	20375	22.54	23	0-1				
				1712.5	19975	22.38	23	0-1				
		1 RB	12	1732.5	20175	22.17	23	0-1				
				1752.5	20375	22.34	23	0-1				
				1712.5	19975	22.04	23	0-1				
			24	1732.5	20175	22.14	23	0-1				
				1752.5	20375	22.39	23	0-1				
				1712.5	19975	21.14	22	0-2				
	16-QAM		0	1732.5	20175	21.24	22	0-2				
				1752.5	20375	21.04	22	0-2				
				1712.5	19975	21.12	22	0-2				
		12 RB	6	1732.5	20175	21.20	22	0-2				
				1752.5	20375	21.03	22	0-2				
				1712.5	19975	21.16	22	0-2				
			13	1732.5	20175	21.21	22	0-2				
				1752.5	20375	21.11	22	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
				1712.5	19975	21.12	22					
		25	RB	1732.5	20175	21.30	22					
			201		1752.5	20375	21.02	22	0-2			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 23 of 267

			FDD	Band 4 (Full P	ower)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1711.5	19965	23.17	24	0
			0	1732.5	20175	23.25	24	0
				1753.5	20385	23.11	24	0
				1711.5	19965	23.17	24	0
		1 RB	7	1732.5	20175	23.21	24	0
				1753.5	20385	23.44	24	0
				1711.5	19965	23.21	24	0
			14	1732.5	20175	23.08	24	0
				1753.5	20385	23.16	24	0
				1711.5	19965	22.19	23	0-1
	QPSK		0	1732.5	20175	22.23	23	0-1
				1753.5	20385	22.09	23	0-1
				1711.5	19965	22.05	23	0-1
		8 RB	4	1732.5	20175	22.24	23	0-1
				1753.5	20385	22.06	23	0-1
				1711.5	19965	22.09	23	0-1
			7	1732.5	20175	22.33	23	0-1
				1753.5	20385	22.16	23	0-1
				1711.5	19965	22.13	23	0-1
		15	RB	1732.5	20175	22.22	23	0-1
3				1753.5	20385	22.08	23	0-1
				1711.5	19965	22.74	23	0-1
			0	1732.5	20175	22.74	23	0-1
				1753.5	20385	22.41	23	0-1
				1711.5	19965	22.57	23	0-1
		1 RB	7	1732.5	20175	22.29	23	0-1
				1753.5	20385	22.40	23	0-1
				1711.5	19965	22.03	23	0-1
			14	1732.5	20175	21.96	23	0-1
				1753.5	20385	22.63	23	0-1
				1711.5	19965	21.07	22	0-2
	16-QAM		0	1732.5	20175	21.09	22	0-2
				1753.5	20385	21.09	22	0-2
				1711.5	19965	20.96	22	0-2
		8 RB	4	1732.5	20175	21.36	22	0-2
				1753.5	20385	21.27	22	0-2
				1711.5	19965	21.14	22	0-2
			7	1732.5	20175	21.12	22	0-2
				1753.5	20385	21.27	22	0-2
				1711.5	19965	21.01	22	0-2
		15	RB	1732.5	20175	21.21	22	0-2
					1753.5	20385	21.22	22

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 24 of 267

	FDD Band 4 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1710.7	19957	23.09	24	0				
			0	1732.5	20175	23.22	24	0				
				1754.3	20393	22.96	24	0				
				1710.7	19957	22.95	24	0				
		1 RB	2	1732.5	20175	23.11	24	0				
				1754.3	20393	23.05	24	0				
				1710.7	19957	22.98	24	0				
			5	1732.5	20175	23.02	24	0				
				1754.3	20393	22.96	24	0				
				1710.7	19957	22.99	24	0				
	QPSK		0	1732.5	20175	23.20	24	0				
				1754.3	20393	22.99	24	0				
				1710.7	19957	23.06	24	0				
		3 RB	2	1732.5	20175	23.22	24	0				
				1754.3	20393	22.99	24	0				
				1710.7	19957	23.07	24	0				
			3	1732.5	20175	23.19	24	0				
				1754.3	20393	23.02	24	0				
				1710.7	19957	22.18	23	0-1				
		6F	RB	1732.5	20175	22.14	23	0-1				
1.4				1754.3	20393	22.00	23	0-1				
17				1710.7	19957	22.29	23	0-1				
			0	1732.5	20175	22.07	23	0-1				
				1754.3	20393	22.40	23	0-1				
				1710.7	19957	22.37	23	0-1				
		1 RB	2	1732.5	20175	22.18	23	0-1				
				1754.3	20393	22.75	23	0-1				
				1710.7	19957	22.33	23	0-1				
			5	1732.5	20175	22.32	23	0-1				
				1754.3	20393	22.66	23	0-1				
				1710.7	19957	21.99	23					
	16-QAM		0	1732.5	20175	22.40	23	0-1				
				1754.3	20393	22.33	23	0-1				
				1710.7	19957	22.06	23	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
		3 RB	2	1732.5	20175	22.30	23					
				1754.3	20393	22.36	23					
				1710.7	19957	21.94	23	0-1				
			3	1732.5	20175	22.23	23	0-1				
				1754.3	20393	22.53	23	0-1				
				1710.7	19957	21.94	22	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
		6F	RB	1732.5	20175	21.19	22					
				ONE		1754.3	20393	21.17	22	0-2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_end\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this onlineful and offenders may be

prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 25 of 267

FDD Band 4 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				1720	20050	15.61	16	0			
			0	1732.5	20175	15.65	16	0			
				1745	20300	15.85	16	0			
				1720	20050	15.62	16	0			
		1 RB	50	1732.5	20175	15.75	16	0			
				1745	20300	15.53	16	0			
				1720	20050	15.44	16	0			
			99	1732.5	20175	15.18	16	0			
				1745	20300	15.30	16	0			
				1720	20050	14.58	15	0-1			
	QPSK		0	1732.5	20175	14.68	15	0-1			
				1745	20300	14.54	15	0-1			
				1720	20050	14.49	15	0-1			
		50 RB	25	1732.5	20175	14.60	15	0-1			
				1745	20300	14.39	15	0-1			
				1720	20050	14.51	15	0-1			
			50	1732.5	20175	14.49	15	0-1			
				1745	20300	14.46	15	0-1			
				1720	20050	14.55	15	0-1			
		100	)RB	1732.5	20175	14.62	15	0-1			
20			•	1745	20300	14.50	15	0-1			
				1720	20050	14.18	15	0-1			
			0	1732.5	20175	14.98	15	0-1			
				1745	20300	14.40	15	0-1			
				1720	20050	14.62	15	0-1			
		1 RB	50	1732.5	20175	14.68	15	0-1			
				1745	20300	15.00	15	0-1			
				1720	20050	14.36	15	0-1			
			99	1732.5	20175	14.11	15	0-1			
				1745	20300	14.17	15	0-1			
				1720	20050	13.47	14				
	16-QAM		0	1732.5	20175	13.96	14	0-2			
				1745	20300	13.49	14	0-2			
			_	1720	20050	13.45	14				
		50 RB	25	1732.5	20175	13.79	14				
				1745	20300	13.28	14	0-2			
				1720	20050	13.48	14	0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1			
1			50	1732.5	20175	13.42	14				
1				1745	20300	13.19	14				
1				1720	20050	13.51	14				
		100	)RB	1732.5	20175	13.61	14				
				1745	20300	13.33	14	0-2			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

t (886-2) 2299-3279

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 26 of 267

			FDD Ba	nd 4 (Reduced	d Power)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1717.5	20025	15.46	16	0
			0	1732.5	20175	15.72	16	0
				1747.5	20325	15.68	16	0
				1717.5	20025	15.32	16	0
		1 RB	36	1732.5	20175	15.68	16	0
				1747.5	20325	15.30	16	0
				1717.5	20025	15.55	16	0
			74	1732.5	20175	15.42	16	0
				1747.5	20325	15.44	16	0
				1717.5	20025	14.58	15	0-1
	QPSK		0	1732.5	20175	14.74	15	0-1
				1747.5	20325	14.47	15	0-1
				1717.5	20025	14.55	15	0-1
		36 RB	18	1732.5	20175	14.68	15	0-1
				1747.5	20325	14.36	15	0-1
				1717.5	20025	14.56	15	0-1
			37	1732.5	20175	14.49	15	0-1
				1747.5	20325	14.34	15	0-1
				1717.5	20025	14.58	15	0-1
		75	RB	1732.5	20175	14.61	15	0-1
15				1747.5	20325	14.47	15	0-1
				1717.5	20025	14.69	15	0-1
			0	1732.5	20175	14.58	15	0-1
				1747.5	20325	14.72	15	0-1
				1717.5	20025	14.44	15	0-1
		1 RB	36	1732.5	20175	14.40	15	0-1
				1747.5	20325	14.84	15	0-1
				1717.5	20025	14.92	15	
			74	1732.5	20175	14.15	15	
				1747.5	20325	14.57	15	
				1717.5	20025	13.60	14	
	16-QAM		0	1732.5	20175	14.00	14	0-2
				1747.5	20325	13.34	14	0-2
				1717.5	20025	13.67	14	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-
		36 RB	18	1732.5	20175	13.81	14	
				1747.5	20325	13.32	14	
			_	1717.5	20025	13.71	14	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
			37	1732.5	20175	13.45	14	
				1747.5	20325	13.17	14	-
				1717.5	20025	13.69	14	
		75	RB	1732.5	20175	13.76	14	
			1747.5	20325	13.17	14	0-2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 27 of 267

	FDD Band 4 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1715	20000	15.31	16	0				
			0	1732.5	20175	15.61	16	0				
				1750	20350	15.51	16	0				
				1715	20000	15.48	16	0				
		1 RB	25	1732.5	20175	15.81	16	0				
				1750	20350	15.38	16	0				
				1715	20000	15.32	16	0				
			49	1732.5	20175	15.38	16	0				
				1750	20350	15.17	16	0				
				1715	20000	14.50	15	0-1				
	QPSK		0	1732.5	20175	14.68	15	0-1				
				1750	20350	14.42	15	0-1				
				1715	20000	14.52	15	0-1				
		25 RB	12	1732.5	20175	14.67	15	0-1				
				1750	20350	14.42	15	0-1				
				1715	20000	14.45	15	0-1				
			25	1732.5	20175	14.46	15	0-1				
				1750	20350	14.33	15	0-1				
				1715	20000	14.48	15	0-1				
		50	RB	1732.5	20175	14.51	15	0-1				
10				1750	20350	14.44	15	0-1				
				1715	20000	14.65	15	0-1				
			0	1732.5	20175	14.78	15					
				1750	20350	15.00	15					
				1715	20000	14.89	15					
		1 RB	25	1732.5	20175	14.94	15					
				1750	20350	14.68	15					
			,_	1715	20000	14.29	15					
			49	1732.5	20175	14.53	15					
				1750	20350	14.11	15					
	40.0414			1715	20000	13.48	14					
	16-QAM		0	1732.5	20175	13.72	14					
				1750	20350	13.05	14					
		05.00	40	1715	20000	13.57	14	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1				
		25 RB	12	1732.5	20175	13.72	14					
				1750	20350	13.13	14					
			25	1715	20000	13.50	14					
			25	1732.5	20175	13.37	14					
				1750	20350	12.99	14	-				
			DD	1715	20000	13.54	14					
		50	RB	1732.5 1750	20175	13.60	14					
				20350	13.18	14	0-2					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_end\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this onlineful and offenders may be

f (886-2) 2298-0488

prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 28 of 267

FDD Band 4 (Reduced Power)												
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1712.5	19975	15.49	16	0				
			0	1732.5	20175	15.68	16	0				
				1752.5	20375	15.33	16	0				
				1712.5	19975	15.51	16	0				
		1 RB	12	1732.5	20175	15.56	16	0				
				1752.5	20375	15.60	16	0				
				1712.5	19975	15.54	16	0				
			24	1732.5	20175	15.42	16	0				
				1752.5	20375	15.57	16	0				
				1712.5	19975	14.45	15	0-1				
	QPSK		0	1732.5	20175	14.61	15	0-1				
				1752.5	20375	14.40	15	0-1				
				1712.5	19975	14.37	15	0-1				
		12 RB	6	1732.5	20175	14.48	15	0-1				
				1752.5	20375	14.39	15	0-1				
				1712.5	19975	14.31	15	0-1				
			13	1732.5	20175	14.54	15	0-1				
				1752.5	20375	14.34	15	0-1				
				1712.5	19975	14.45	15	0-1				
		25	RB	1732.5	20175	14.55	15	0-1				
5				1752.5	20375	14.36	15	0-1				
				1712.5	19975	14.34	15	0-1				
			0	1732.5	20175	15.00	15	0-1				
				1752.5	20375	14.73	15	0-1				
				1712.5	19975	14.64	15	0-1				
		1 RB	12	1732.5	20175	14.64	15	0-1				
				1752.5	20375	14.88	15	0-1				
				1712.5	19975	14.84	15	0-1				
			24	1732.5	20175	14.89	15	0-1				
				1752.5	20375	14.49	15	0-1				
				1712.5	19975	13.53	14	0-2				
	16-QAM		0	1732.5	20175	13.86	14	0-2				
				1752.5	20375	13.25	14	0-2				
				1712.5	19975	13.49	14	0-2				
		12 RB	6	1732.5	20175	13.71	14	0-2				
				1752.5	20375	13.11	14	0-2				
				1712.5	19975	13.65	14	0-2				
			13	1732.5	20175	13.67	14	0-2				
				1752.5	20375	13.38	14	0-2				
				1712.5	19975	13.63	14	0-2				
		25	RB	1732.5	20175	13.87	14	0-2				
				1752.5	20375	13.22	14	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 29 of 267

			FDD Ba	nd 4 (Reduced	l Power)				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
				1711.5	19965	15.63	16	0	
			0	1732.5	20175	15.49	16	0	
				1753.5	20385	15.46	16	0	
				1711.5	19965	15.38	16	0	
		1 RB	7	1732.5	20175	15.45	16	0	
				1753.5	20385	15.31	16	0	
				1711.5	19965	15.52	16	0	
			14	1732.5	20175	15.52	16	0	
				1753.5	20385	15.31	16	0	
				1711.5	19965	14.42	15	0-1	
	QPSK		0	1732.5	20175	14.48	15	0-1	
				1753.5	20385	14.49	15	0-1	
				1711.5	19965	14.44	15	0-1	
		8 RB	4	1732.5	20175	14.59	15	0-1	
				1753.5	20385	14.48	15	0-1	
				1711.5	19965	14.38	15	0-1	
			7	1732.5	20175	14.57	15	0-1	
				1753.5	20385	14.46	15	0-1	
				1711.5	19965	14.46	15	0-1	
		15	RB	1732.5	20175	14.58	15	0-1	
3				1753.5	20385	14.35	15	0-1	
				1711.5	19965	14.73	15	0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1	
			0	1732.5	20175	14.99	15	0-1	
				1753.5	20385	14.11	15	0-1	
				1711.5	19965	14.06	15	0-1	
		1 RB	7	1732.5	20175	14.60	15	0-1	
				1753.5	20385	14.68	15		
				1711.5	19965	14.62	15		
			14	1732.5	20175	14.63	15		
				1753.5	20385	14.95	15		
				1711.5	19965	13.47	14		
	16-QAM		0	1732.5	20175	13.82	14	0-2	
				1753.5	20385	13.27	14	0-2	
				1711.5	19965	13.54	14	0-2	
		8 RB	4	1732.5	20175	13.76	14		
				1753.5	20385	13.30	14		
				1711.5	19965	13.49	14	0-2	
			7	1732.5	20175	13.73	14	0-2	
				1753.5	20385	13.28	14	0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1	
				1711.5	19965	13.53	14		
		15	RB	1732.5	20175	13.83	14		
					1753.5	20385	13.35	14	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 30 of 267

	FDD Band 4 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1710.7	19957	15.28	16	0				
			0	1732.5	20175	15.33	16	0				
				1754.3	20393	15.42	16	0				
				1710.7	19957	15.36	16	0				
		1 RB	2	1732.5	20175	15.60	16	0				
				1754.3	20393	15.44	16	0				
				1710.7	19957	15.28	16	0				
			5	1732.5	20175	15.45	16	0				
				1754.3	20393	15.49	16	0				
				1710.7	19957	15.31	16	0				
	QPSK		0	1732.5	20175	15.59	16	0				
				1754.3	20393	15.29	16	0				
				1710.7	19957	15.27	16	0				
		3 RB	2	1732.5	20175	15.59	16	0				
				1754.3	20393	15.43	16	0				
				1710.7	19957	15.28	16	0				
			3	1732.5	20175	15.58	16	0				
				1754.3	20393	15.42	16	0				
				1710.7	19957	14.39	15	0-1				
		6F	RB	1732.5	20175	14.64	15	0-1				
1.4			T	1754.3	20393	14.40	15	0-1				
				1710.7	19957	14.35	15	0-1				
			0	1732.5	20175	14.78	15					
				1754.3	20393	14.09	15					
				1710.7	19957	14.75	15					
		1 RB	2	1732.5	20175	14.80	15					
				1754.3	20393	14.52	15					
				1710.7	19957	14.74	15					
			5	1732.5	20175	14.93	15					
				1754.3	20393	14.05	15					
	40.0444			1710.7	19957	14.39	15					
	16-QAM		0	1732.5	20175	14.75	15					
				1754.3	20393	14.03	15					
		0.00		1710.7	19957	14.40	15	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
		3 RB	2	1732.5	20175	14.87	15					
				1754.3	20393	14.17	15	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
			_	1710.7	19957	14.32	15					
			3	1732.5	20175	14.67	15					
				1754.3	20393	14.05	15	-				
		0.5	חח	1710.7	19957	13.45	14					
		61	₹B	1732.5	20175	13.70	14					
				1754.3	20393	13.20	14	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



Page: 31 of 267

	FDD Band 5 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				829	20450	22.79	24	0				
			0	836.5	20525	23.02	24	0				
				844	20600	23.07	24	0				
				829	20450	22.88	24	0				
		1 RB	25	836.5	20525	23.17	24	0				
				844	20600	23.20	24	0				
				829	20450	22.83	24	0				
			49	836.5	20525	22.90	24	0				
				844	20600	22.99	24	0				
				829	20450	22.08	23	0-1				
	QPSK		0	836.5	20525	22.16	23	0-1				
				844	20600	22.18	23	0-1				
				829	20450	22.10	23	0-1				
		25 RB	12	836.5	20525	22.08	23	0-1				
				844	20600	22.23	23	0-1				
				829	20450	22.14	23	0-1				
			25	836.5	20525	22.12	23	0-1				
				844	20600	22.09	23	0-1				
				829	20450	22.22	23	0-1				
		50	RB	836.5	20525	22.19	23	0-1				
10				844	20600	22.17	23	0-1				
10				829	20450	21.90	23	0-1				
			0	836.5	20525	22.68	23	0-1				
				844	20600	22.64	23	0-1				
				829	20450	22.42	23	0-1				
		1 RB	25	836.5	20525	22.61	23	0-1				
				844	20600	22.25	23	0-1				
				829	20450	22.54	23					
			49	836.5	20525	22.02	23					
				844	20600	21.85	23					
			_	829	20450	20.97	22					
	16-QAM		0	836.5	20525	21.18	22					
				844	20600	21.46	22	0-2				
		05.55	4.5	829	20450	21.02	22					
		25 RB	12	836.5	20525	20.99	22					
				844	20600	21.26	22					
			0.5	829	20450	20.92	22	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1				
			25	836.5	20525	20.99	22					
				844	20600	21.25	22	-				
			DD	829	20450	21.08	22					
		50	RB	836.5	20525	21.07	22					
			844	20600	21.17	22	0-2					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 32 of 267

	FDD Band 5 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				826.5	20425	22.85	24	0				
			0	836.5	20525	23.08	24	0				
				846.5	20625	22.95	24	0				
				826.5	20425	22.84	24	0				
		1 RB	12	836.5	20525	23.33	24	0				
				846.5	20625	22.92	24	0				
				826.5	20425	22.89	24	0				
			24	836.5	20525	23.06	24	0				
				846.5	20625	22.92	24	0				
				826.5	20425	22.00	23	0-1				
	QPSK		0	836.5	20525	22.15	23	0-1				
				846.5	20625	22.17	23	0-1				
				826.5	20425	22.02	23	0-1				
		12 RB	6	836.5	20525	22.05	23	0-1				
				846.5	20625	22.05	23	0-1				
				826.5	20425	22.09	23	0-1				
			13	836.5	20525	22.07	23	0-1				
				846.5	20625	22.05	23					
				826.5	20425	22.13	23					
		25	RB	836.5	20525	22.11	23					
5			1	846.5	20625	22.13	23					
			0	826.5	20425	22.52	23					
			0	836.5	20525	22.24	23					
				846.5	20625	23.00	23					
		4 DD	40	826.5	20425	22.49	23					
		1 RB	12	836.5	20525	22.14	23					
				846.5	20625	22.49	23					
			24	826.5	20425	22.42	23					
			24	836.5	20525	21.63	23					
				846.5	20625	22.41	23 22					
	16-QAM		0	826.5	20425	20.82	22					
	10-QAIVI		U	836.5	20525							
				846.5 826.5	20625	20.80 20.94	22 22					
		12 RB	6	836.5	20425 20525	20.94	22	0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-1				
		וב ועט		846.5	20525	20.80	22					
				826.5	20025	20.88	22	0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2				
			13	836.5	20525	21.10	22					
				846.5	20625	20.85	22					
				826.5	20425	20.03	22	-				
		25	RB	836.5	20525	21.29	22					
			irb	846.5	20625	20.91	22					
				0.0.0	20020	20.01		_ <u> </u>				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 33 of 267

			FDD	Band 5 (Full P	ower)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				825.5	20415	23.04	24	0
			0	836.5	20525	23.21	24	0
				847.5	20635	23.13	24	0
				825.5	20415	23.23	24	0
		1 RB	7	836.5	20525	23.14	24	0
				847.5	20635	23.32	24	0
				825.5	20415	22.94	24	0
			14	836.5	20525	23.28	24	0
				847.5	20635	23.00	24	0
				825.5	20415	22.09	23	0-1
	QPSK		0	836.5	20525	22.15	23	0-1
				847.5	20635	22.07	23	0-1
				825.5	20415	21.99	23	0-1
		8 RB	4	836.5	20525	22.10	23	0-1
				847.5	20635	22.13	23	0-1
				825.5	20415	21.95	23	0-1
			7	836.5	20525	22.10	23	0-1
				847.5	20635	22.13	23	0-1
				825.5	20415	21.97	23	0-1
		15	RB	836.5	20525	22.21	23	0-1
3			T	847.5	20635	22.13	23	0-1
				825.5	20415	22.56	23	
			0	836.5	20525	22.09	23	
				847.5	20635	22.40	23	
			_	825.5	20415	22.04	23	
		1 RB	7	836.5	20525	22.06	23	
				847.5	20635	21.86	23	
				825.5	20415	22.12	23	
			14	836.5	20525	22.03	23	
				847.5	20635	21.57	23	
	40.0414			825.5	20415	20.83	22	
	16-QAM		0	836.5	20525	21.21	22	
				847.5	20635	21.10	22	
		0 00		825.5	20415	20.81	22	3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-
		8 RB	4	836.5	20525	21.32	22	
				847.5	20635	20.95	22	
			7	825.5	20415	20.78	22	
			7	836.5	20525	21.14	22	
				847.5	20635	21.02	22	-
		4.5	DD	825.5	20415	20.88	22	
		15	RB	836.5	20525	21.20	22	
				847.5	20635	20.93	22	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 34 of 267

	FDD Band 5 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				824.7	20407	23.05	24	0				
			0	836.5	20525	23.04	24	0				
				848.3	20643	23.17	24	0				
				824.7	20407	23.10	24	0				
		1 RB	2	836.5	20525	23.10	24	0				
				848.3	20643	23.10	24	0				
				824.7	20407	22.89	24	0				
			5	836.5	20525	23.05	24	0				
				848.3	20643	22.89	24	0				
				824.7	20407	23.06	24	0				
	QPSK		0	836.5	20525	23.06	24	0				
				848.3	20643	23.15	24	0				
				824.7	20407	23.13	24	0				
		3 RB	2	836.5	20525	23.18	24	0				
				848.3	20643	23.17	24	0				
				824.7	20407	23.06	24	0				
			3	836.5	20525	23.13	24	0				
				848.3	20643	23.07	24	0				
				824.7	20407	22.11	23	0-1				
		6F	RB	836.5	20525	22.16	23	0-1				
1.4				848.3	20643	22.14	23	0-1				
17				824.7	20407	22.62	23	0-1				
			0	836.5	20525	22.51	23	0-1				
				848.3	20643	22.08	23	0-1				
				824.7	20407	22.69	23	0-1				
		1 RB	2	836.5	20525	22.63	23	0-1				
				848.3	20643	21.76	23	0-1				
				824.7	20407	22.55	23	0-1				
			5	836.5	20525	22.33	23	0-1				
				848.3	20643	21.43	23	0-1				
				824.7	20407	22.21	23	0-1				
	16-QAM		0	836.5	20525	22.12	23	0-1				
				848.3	20643	22.17	23	0-1				
				824.7	20407	22.24	23	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
		3 RB	2	836.5	20525	22.10	23					
				848.3	20643	22.26	23	0-1				
				824.7	20407	22.24	23	0-1				
			3	836.5	20525	22.09	23	0-1				
				848.3	20643	22.25	23	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
				824.7	20407	20.98	22					
		6F	RB	836.5	20525	21.18	22					
		ON		848.3	20643	20.78	22	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_end\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this onlineful and offenders may be

prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 35 of 267

	FDD Band 5 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				829	20450	19.02	19.5	0				
			0	836.5	20525	19.11	19.5	0				
				844	20600	19.24	19.5	0				
				829	20450	18.96	19.5	0				
		1 RB	25	836.5	20525	19.18	19.5	0				
				844	20600	19.31	19.5	0				
				829	20450	18.85	19.5	0				
			49	836.5	20525	18.95	19.5	0				
				844	20600	19.20	19.5	0				
				829	20450	18.01	18.5	0-1				
	QPSK		0	836.5	20525	18.11	18.5	0-1				
				844	20600	18.09	18.5	0-1				
				829	20450	18.05	18.5	0-1				
		25 RB	12	836.5	20525	18.00	18.5	0-1				
				844	20600	18.06	18.5	0-1				
				829	20450	18.04	18.5	0-1				
			25	836.5	20525	17.98	18.5	0-1				
				844	20600	17.90	18.5	0-1				
				829	20450	18.08	18.5	0-1				
		50	RB	836.5	20525	18.02	18.5	0-1				
10				844	20600	18.12	18.5	0-1				
10				829	20450	18.06	18.5	0-1				
			0	836.5	20525	18.49	18.5	0-1				
				844	20600	17.97	18.5	0-1				
				829	20450	18.12	18.5	0-1				
		1 RB	25	836.5	20525	18.28	18.5	0-1				
				844	20600	18.21	18.5	0-1				
				829	20450	18.02	18.5	0-1				
			49	836.5	20525	18.26	18.5	0-1				
				844	20600	18.02	18.5	0-1				
				829	20450	17.14	17.5	0-2				
	16-QAM		0	836.5	20525	17.11	17.5	0-2				
				844	20600	17.21	17.5	0-2				
				829	20450	17.24	17.5	0-2				
		25 RB	12	836.5	20525	17.12	17.5	0-2				
				844	20600	17.24	17.5	0-2				
				829	20450	17.24	17.5	0-2				
			25	836.5	20525	17.18	17.5	0-2				
				844	20600	17.17	17.5	0-2				
				829	20450	17.12	17.5	0-2				
		50	RB	836.5	20525	16.96	17.5	0-2				
				30.		844	20600	16.96	17.5	0-2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 36 of 267

FDD Band 5 (Reduced Power)								
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
5	QPSK	1 RB	0	826.5	20425	18.86	19.5	0
				836.5	20525	19.22	19.5	0
				846.5	20625	18.96	19.5	0
			12	826.5	20425	18.81	19.5	0
				836.5	20525	19.32	19.5	0
				846.5	20625	18.81	19.5	0
			24	826.5	20425	18.87	19.5	0
				836.5	20525	18.87	19.5	0
				846.5	20625	18.79	19.5	0
		12 RB	0	826.5	20425	17.86	18.5	0-1
				836.5	20525	18.05	18.5	0-1
				846.5	20625	17.97	18.5	0-1
			6	826.5	20425	17.93	18.5	0-1
				836.5	20525	18.02	18.5	0-1
				846.5	20625	17.87	18.5	0-1
			13	826.5	20425	17.95	18.5	0-1
				836.5	20525	17.97	18.5	0-1
				846.5	20625	17.91	18.5	0-1
		25RB		826.5	20425	17.94	18.5	0-1
				836.5	20525	18.03	18.5	0-1
				846.5	20625	17.98	18.5	0-1
	16-QAM	1 RB	0	826.5	20425	18.01	18.5	0-1
				836.5	20525	18.24	18.5	0-1
				846.5	20625	18.18	18.5	0-1
			12	826.5	20425	17.89	18.5	0-1
				836.5	20525	18.03	18.5	0-1
				846.5	20625	18.42	18.5	0-1
			24	826.5	20425	17.94	18.5	0-1
				836.5	20525	18.09	18.5	0-1
				846.5	20625	18.34	18.5	0-1
		12 RB	0	826.5	20425	16.89	17.5	0-2
				836.5	20525	16.97	17.5	0-2
				846.5	20625	16.89	17.5	0-2
			6	826.5	20425	16.75	17.5	0-2
				836.5	20525	16.95	17.5	0-2
				846.5	20625	16.81	17.5	0-2
			13	826.5	20425	16.89	17.5	0-2
				836.5	20525	16.99	17.5	0-2
				846.5	20625	16.79	17.5	0-2
		25RB		826.5	20425	16.97	17.5	0-2
				836.5	20525	17.12	17.5	0-2
				846.5	20625	16.96	17.5	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 37 of 267

	FDD Band 5 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				825.5	20415	19.28	19.5	0				
			0	836.5	20525	19.09	19.5	0				
				847.5	20635	19.18	19.5	0				
				825.5	20415	19.08	19.5	0				
		1 RB	7	836.5	20525	19.08	19.5	0				
				847.5	20635	19.36	19.5	0				
				825.5	20415	18.95	19.5	0				
			14	836.5	20525	19.15	19.5	0				
				847.5	20635	19.02	19.5	0				
				825.5	20415	18.05	18.5	0-1				
	QPSK		0	836.5	20525	18.14	18.5	0-1				
				847.5	20635	18.00	18.5	0-1				
				825.5	20415	17.96	18.5	0-1				
		8 RB	4	836.5	20525	17.97	18.5	0-1				
				847.5	20635	18.04	18.5	0-1				
				825.5	20415	17.85	18.5	0-1				
			7	836.5	20525	18.03	18.5	0-1				
				847.5	20635	17.98	18.5	0-1				
				825.5	20415	17.87	18.5	0-1				
		15	RB	836.5	20525	17.99	18.5					
3				847.5	20635	17.92	18.5	0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1				
				825.5	20415	18.44	18.5					
			0	836.5	20525	18.10	18.5	_				
				847.5	20635	17.86	18.5					
			_	825.5	20415	18.07	18.5					
		1 RB	7	836.5	20525	18.23	18.5					
				847.5	20635	17.74	18.5					
				825.5	20415	17.99	18.5					
			14	836.5	20525	18.04	18.5					
				847.5	20635	17.72	18.5					
	40.0414		0	825.5	20415	16.85	17.5					
	16-QAM		0	836.5	20525	16.90	17.5					
				847.5	20635	17.05	17.5					
		0.00	4	825.5	20415	16.77	17.5					
		8 RB	4	836.5	20525	16.71	17.5					
				847.5	20635	17.03	17.5					
			7	825.5	20415	16.87	17.5	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1				
			7	836.5	20525	17.11	17.5					
				847.5	20635	17.06	17.5					
		4.5	RB	825.5	20415	16.65	17.5					
		15	עט	836.5 847.5	20525	17.06	17.5					
					20635	17.13	17.5	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 38 of 267

	FDD Band 5 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				824.7	20407	18.91	19.5	0				
			0	836.5	20525	19.08	19.5	0				
				848.3	20643	19.01	19.5	0				
				824.7	20407	18.88	19.5	0				
		1 RB	2	836.5	20525	19.16	19.5	0				
				848.3	20643	19.03	19.5	0				
				824.7	20407	19.00	19.5	0				
			5	836.5	20525	19.09	19.5	0				
				848.3	20643	18.89	19.5	0				
				824.7	20407	18.93	19.5	0				
	QPSK		0	836.5	20525	19.10	19.5	0				
				848.3	20643	19.21	19.5	0				
				824.7	20407	18.99	19.5	0				
		3 RB	2	836.5	20525	19.13	19.5	0				
				848.3	20643	19.07	19.5	0				
				824.7	20407	18.88	19.5	0				
			3	836.5	20525	19.09	19.5	0				
				848.3	20643	19.16	19.5	0				
				824.7	20407	18.01	18.5	0-1				
		6F	RB	836.5	20525	18.08	18.5	0-1				
1.4				848.3	20643	18.05	18.5	0-1				
17				824.7	20407	17.89	18.5	5         0           5         0           5         0           5         0           5         0           5         0           5         0           5         0           5         0           5         0           5         0           5         0-1				
			0	836.5	20525	18.10	18.5	0-1				
				848.3	20643	18.41	18.5	0-1				
				824.7	20407	18.11	18.5	0-1				
		1 RB	2	836.5	20525	18.12	18.5	0-1				
				848.3	20643	18.01	18.5					
				824.7	20407	18.23	18.5	0-1				
			5	836.5	20525	18.13	18.5					
				848.3	20643	17.81	18.5					
1				824.7	20407	17.95	18.5					
	16-QAM		0	836.5	20525	18.24	18.5					
				848.3	20643	18.17	18.5	0-1				
				824.7	20407	17.93	18.5	0-1				
1		3 RB	2	836.5	20525	18.27	18.5	0-1				
				848.3	20643	17.80	18.5	0-1				
1			_	824.7	20407	17.81	18.5	+ MPR Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
1			3	836.5	20525	18.30	18.5					
				848.3	20643	17.79	18.5					
				824.7	20407	16.79	17.5					
1		6F	RB	836.5	20525	16.73	17.5					
		on the		848.3	20643	16.96	17.5	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 39 of 267

	FDD Band 12 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				704	23060	22.57	24	0				
			0	707.5	23095	23.03	24	0				
				711	23130	23.15	24	0				
				704	23060	23.08	24	0				
		1 RB	25	707.5	23095	22.90	24	0				
				711	23130	22.90	24	0				
				704	23060	22.76	24	0				
			49	707.5	23095	22.96	24	0				
				711	23130	23.01	24	0				
				704	23060	21.80	23	0-1				
	QPSK		0	707.5	23095	22.11	23	0-1				
				711	23130	22.14	23	0-1				
				704	23060	21.93	23	0-1				
		25 RB	12	707.5	23095	22.06	23	0-1				
				711	23130	22.17	23	0-1				
				704	23060	22.12	23	0-1				
			25	707.5	23095	22.01	23	0-1				
				711	23130	22.19	23	0-1				
				704	23060	22.01	23	0-1				
		50	RB	707.5	23095	22.08	23	0-1				
10			T	711	23130	22.11	23	0-1				
			0	704	23060	22.51	23	0-1				
			0	707.5	23095	22.44	23					
				711	23130	22.42	23					
				704	23060	22.45	23					
		1 RB	25	707.5	23095	22.44	23					
				711	23130	21.92	23					
				704	23060	21.90	23					
			49	707.5	23095	21.57	23					
				711	23130	22.26	23					
	40.044			704	23060	20.79	22					
	16-QAM		0	707.5	23095	21.18	22					
				711	23130	21.51	22					
		05.00	40	704	23060	20.88	22	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1				
		25 RB	12	707.5	23095	21.27	22					
				711	23130	21.48	22					
			25	704	23060	20.92	22					
			25	707.5	23095	21.32	22					
				711	23130	21.50	22	-				
			DD	704	23060	21.05	22					
	5	50	RB	707.5	23095	21.06	22					
				711	23130	21.18	22	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The

Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 40 of 267

FDD Band 12 (Full Power)										
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				701.5	23035	22.81	24	0		
			0	707.5	23095	23.08	24			
			Ü	713.5	23155	23.00	24			
				701.5	23035	22.81	24			
		1 RB	12	707.5	23095	22.91	24			
		1112		713.5	23155	23.37	24			
				701.5	23035	22.91	24			
			24	707.5	23095	23.05	24			
				713.5	23155	23.21	24			
				701.5	23035	21.88	23			
	QPSK		0	707.5	23095	22.14	23			
				713.5	23155	22.02	23			
				701.5	23035	21.85	23			
		12 RB	6	707.5	23095	22.04	23			
				713.5	23155	21.97	23			
				701.5	23035	22.10	23	0-1		
			13	707.5	23095	21.97	23			
				713.5	23155	22.12	23	0-1		
				701.5	23035	22.00	23	0-1		
		25	RB	707.5	23095	22.01	23	0-1		
_				713.5	23155	22.09	23	0-1		
5				701.5	23035	21.98	23	0-1		
			0	707.5	23095	22.42	23	0-1		
				713.5	23155	22.04	23	0-1		
				701.5	23035	21.66	23	0-1		
		1 RB	12	707.5	23095	21.91	23	0-1		
				713.5	23155	22.11	23	0-1		
				701.5	23035	21.89	23	0-1		
			24	707.5	23095	22.41	23	0-1		
				713.5	23155	22.15	23	0-1		
				701.5	23035	20.81	22	0-2		
	16-QAM		0	707.5	23095	20.87	22	0-2		
				713.5	23155	20.86	22	0-2		
				701.5	23035	20.90	22	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1		
		12 RB	6	707.5	23095	20.98	22	0-2		
				713.5	23155	20.94	22	0-2		
				701.5	23035	21.19	22	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1		
			13	707.5	23095	20.99	22	0-2		
				713.5	23155	20.91	22	0-2		
				701.5	23035	21.09	22	0-2		
	25R	RB	707.5	23095	20.82	22	0-2			
			713.5	23155	20.87	22	0-2			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 41 of 267

	FDD Band 12 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				700.5	23025	22.59	24	0				
			0	707.5	23095	23.09	24	0				
				714.5	23165	23.10	24	0				
				700.5	23025	22.74	24	0				
		1 RB	7	707.5	23095	23.22	24	0				
				714.5	23165	23.29	24	0				
				700.5	23025	22.72	24	0				
			14	707.5	23095	23.07	24	0				
				714.5	23165	22.84	24	0				
				700.5	23025	21.83	23	0-1				
	QPSK		0	707.5	23095	22.10	23	0-1				
				714.5	23165	22.16	23	0-1				
				700.5	23025	21.80	23	0-1				
		8 RB	4	707.5	23095	22.08	23	0-1				
				714.5	23165	22.13	23	0-1				
				700.5	23025	21.90	23	0-1				
			7	707.5	23095	22.15	23	0-1				
				714.5	23165	22.09	23	0-1				
				700.5	23025	21.78	23	0-1				
		15	RB	707.5	23095	22.01	23	0-1				
3			•	714.5	23165	22.06	23	3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-				
			0	700.5	23025	22.65	23	0-1				
			0	707.5	23095	22.71	23	0-1				
				714.5	23165	22.21	23					
				700.5	23025	22.01	23	0-1				
		1 RB	7	707.5	23095	21.84	23					
				714.5	23165	21.92	23					
				700.5	23025	22.35	23					
			14	707.5	23095	21.82	23					
				714.5	23165	22.43	23					
			_	700.5	23025	20.85	22					
	16-QAM		0	707.5	23095	20.96	22					
				714.5	23165	20.98	22					
		0.55		700.5	23025	20.89	22					
		8 RB	4	707.5	23095	21.20	22	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
				714.5	23165	20.80	22					
			_	700.5	23025	20.91	22					
			7	707.5	23095	21.03	22					
				714.5	23165	20.77	22	-				
			DD	700.5	23025	20.86	22					
		15	RB	707.5	23095	21.11	22					
			714.5	23165	20.86	22	0-2					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 42 of 267

FDD Band 12 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				699.7	23017	23.01	24	0			
			0	707.5	23095	23.03	24	0			
				715.3	23173	22.89	24	0			
				699.7	23017	22.75	24	0			
		1 RB	2	707.5	23095	23.05	24	0			
				715.3	23173	22.92	24	0			
				699.7	23017	22.88	24	0			
			5	707.5	23095	22.99	24	0			
				715.3	23173	22.86	24	0			
				699.7	23017	23.15	24	0			
	QPSK		0	707.5	23095	23.11	24	0			
				715.3	23173	22.98	24	0			
				699.7	23017	22.87	24	0			
		3 RB	2	707.5	23095	22.92	24	0			
				715.3	23173	22.86	24	0			
				699.7	23017	22.86	24	0			
			3	707.5	23095	23.04	24	0			
				715.3	23173	23.10	24	0			
				699.7	23017	21.75	23	0-1			
		6F	RB	707.5	23095	22.11	23	0-1			
1.4				715.3	23173	22.06	23	0-1			
				699.7	23017	21.98	23	0-1			
			0	707.5	23095	21.55	23	0-1			
				715.3	23173	22.12	23	0-1			
				699.7	23017	21.97	23	0-1			
		1 RB	2	707.5	23095	21.49	23	0-1			
				715.3	23173	22.09	23				
				699.7	23017	22.09	23				
			5	707.5	23095	21.99	23				
				715.3	23173	22.01	23				
			_	699.7	23017	22.29	23				
	16-QAM		0	707.5	23095	22.23	23				
				715.3	23173	21.82	23	0-1			
		0.55		699.7	23017	21.73	23				
		3 RB	2	707.5	23095	22.26	23				
				715.3	23173	21.80	23	0-1			
			_	699.7	23017	21.71	23	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			
			3	707.5	23095	22.37	23				
				715.3	23173	21.82	23				
		_ <b>_</b> _		699.7	23017	20.52	22				
		6F	RB	707.5	23095	21.02	22				
				0.0		715.3	23173	20.67	22	0-2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 43 of 267

	FDD Band 12 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				704	23060	20.40	21	0				
			0	707.5	23095	20.78	21	0				
				711	23130	20.92	21	0				
				704	23060	20.72	21	0				
		1 RB	25	707.5	23095	20.94	21	0				
				711	23130	21.00	21	0				
				704	23060	20.77	21	0				
			49	707.5	23095	20.73	21	0				
				711	23130	20.91	21	0				
				704	23060	19.92	20	0-1				
	QPSK		0	707.5	23095	20.00	20	0-1				
				711	23130	19.98	20	0-1				
				704	23060	19.84	20	0-1				
		25 RB	12	707.5	23095	19.95	20	0-1				
				711	23130	19.94	20	0-1				
				704	23060	19.97	20	0-1				
			25	707.5	23095	19.97	20	0-1				
				711	23130	19.94	20	0-1				
				704	23060	19.94	20	0-1				
		50	RB	707.5	23095	19.95	20	0-1				
10			T	711	23130	19.98	20	0-1				
			0	704	23060	19.55	20	0-1				
			0	707.5	23095	19.89	20					
				711	23130	19.84	20	0-1				
				704	23060	20.00	20					
		1 RB	25	707.5	23095	19.99	20					
				711	23130	19.88	20					
				704	23060	19.91	20					
			49	707.5	23095	19.93	20					
				711	23130	19.79	20					
	40.0414			704	23060	18.81	19					
	16-QAM		0	707.5	23095	18.88	19					
				711	23130	18.74	19					
		05 DD	40	704	23060	18.73	19					
		25 RB	12	707.5	23095	18.93	19					
				711	23130	18.41	19					
			25	704	23060	18.95	19					
			25	707.5	23095	18.87	19	0 0 0 0 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1				
				711	23130	18.40	19	-				
			DD	704	23060	18.83	19					
		50	RB	707.5	23095	18.92	19					
			711	23130	18.76	19	0-2					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 44 of 267

FDD Band 12 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				701.5	23035	20.66	21	0			
			0	707.5	23095	20.86	21	0			
				713.5	23155	20.80	21	0			
				701.5	23035	20.93	21	0			
		1 RB	12	707.5	23095	20.81	21	0			
				713.5	23155	20.96	21	0			
				701.5	23035	20.94	21	0			
			24	707.5	23095	20.85	21	0			
				713.5	23155	20.96	21	0			
				701.5	23035	19.84	20	0-1			
	QPSK		0	707.5	23095	19.93	20	0-1			
				713.5	23155	19.91	20	0-1			
				701.5	23035	19.74	20	0-1			
		12 RB	6	707.5	23095	19.97	20	0-1			
				713.5	23155	19.87	20	0-1			
				701.5	23035	20.00	20	0-1			
			13	707.5	23095	19.86	20	0-1			
				713.5	23155	19.98	20	0-1			
				701.5	23035	19.89	20	0-1			
		25	RB	707.5	23095	19.92	20	0-1			
5				713.5	23155	19.92	20	0-1			
Ŭ				701.5	23035	20.00	20	0-1			
			0	707.5	23095	19.98	20	0-1			
				713.5	23155	19.98	20	0-1			
				701.5	23035	19.94	20	0-1			
		1 RB	12	707.5	23095	19.94	20	0-1			
				713.5	23155	19.91	20	0-1			
				701.5	23035	19.83	20				
			24	707.5	23095	19.82	20	1			
				713.5	23155	19.85	20				
			_	701.5	23035	18.75	19				
	16-QAM		0	707.5	23095	18.93	19				
				713.5	23155	18.85	19				
		40.55		701.5	23035	18.80	19	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1			
		12 RB	6	707.5	23095	18.93	19				
				713.5	23155	18.75	19				
			40	701.5	23035	18.93	19	3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1			
			13	707.5	23095	18.79	19				
				713.5	23155	18.92	19				
	25R		DD	701.5	23035	19.00	19	<del> </del>			
		KR	707.5	23095	18.88	19	1				
								713.5	23155	18.89	19

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 45 of 267

			FDD Bar	nd 12 (Reduce	d Power)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				700.5	23025	20.79	21	0
			0	707.5	23095	20.91	21	0
				714.5	23165	20.96	21	0
				700.5	23025	20.86	21	0
		1 RB	7	707.5	23095	20.83	21	0
				714.5	23165	20.81	21	0
				700.5	23025	20.81	21	0
			14	707.5	23095	20.76	21	0
				714.5	23165	20.78	21	0
				700.5	23025	19.73	20	0-1
	QPSK		0	707.5	23095	19.88	20	0-1
				714.5	23165	19.87	20	0-1
				700.5	23025	19.57	20	0-1
		8 RB	4	707.5	23095	19.76	20	0-1
				714.5	23165	19.86	20	0-1
				700.5	23025	19.65	20	0-1
			7	707.5	23095	19.93	20	0-1
				714.5	23165	19.71	20	0-1
				700.5	23025	19.58	20	0-1
		15	RB	707.5	23095	19.79	20	0-1
3				714.5	23165	19.91	20	0-1
				700.5	23025	19.91	20	0-1
			0	707.5	23095	19.89	20	0-1
				714.5	23165	19.73	20	0-1
				700.5	23025	19.88	20	
		1 RB	7	707.5	23095	20.00	20	
				714.5	23165	19.73	20	0-1
				700.5	23025	19.47	20	
			14	707.5	23095	19.87	20	
				714.5	23165	19.75	20	
	100011			700.5	23025	18.67	19	
	16-QAM		0	707.5	23095	18.85	19	
				714.5	23165	18.88	19	
		0.00	_	700.5	23025	18.59	19	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-
		8 RB	4	707.5	23095	18.73	19	
				714.5	23165	19.00	19	
			7	700.5	23025	18.82	19	3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-
			7	707.5	23095	18.83	19	
				714.5	23165	18.95	19	
		4-	DD	700.5	23025	18.83	19	
		15	RB	707.5	23095	18.67	19	
			714.5	23165	18.98	19	0-2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 46 of 267

FDD Band 12 (Reduced Power)										
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				699.7	23017	20.83	21	0		
			0	707.5	23095	20.83	21	0		
				715.3	23173	20.89	21	0		
				699.7	23017	20.77	21	0		
		1 RB	2	707.5	23095	20.92	21	0		
				715.3	23173	21.00	21	0		
				699.7	23017	20.82	21	0		
			5	707.5	23095	20.93	21	0		
				715.3	23173	21.00	21	0		
				699.7	23017	20.79	21	0		
	QPSK		0	707.5	23095	20.95	21	0		
				715.3	23173	20.91	21	0		
				699.7	23017	20.83	21	0		
		3 RB	2	707.5	23095	20.98	21	0		
				715.3	23173	20.97	21	0		
				699.7	23017	20.79	21	0		
			3	707.5	23095	20.98	21	0		
				715.3	23173	20.96	21	0		
				699.7	23017	19.76	20	0-1		
		6F	RB	707.5	23095	19.88	20	0-1		
1.4			T	715.3	23173	19.93	20	0-1		
				699.7	23017	19.48	20	0-1		
			0	707.5	23095	19.74	20	0-1		
				715.3	23173	19.65	20			
				699.7	23017	19.40	20			
		1 RB	2	707.5	23095	19.66	20			
				715.3	23173	19.98	20			
				699.7	23017	19.85	20			
			5	707.5	23095	19.54	20			
				715.3	23173	19.97	20			
	40.0444			699.7	23017	19.54	20			
	16-QAM		0	707.5	23095	19.41	20			
				715.3	23173	19.93	20			
		0.00	_	699.7	23017	19.91	20			
		3 RB	2	707.5	23095	19.85	20			
				715.3	23173	19.93	20	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
			_	699.7	23017	19.84	20			
			3	707.5	23095	19.93	20			
				715.3	23173	19.87	20	-		
		0.5	חח	699.7	23017	18.58	19			
		61	₹B	707.5	23095	18.85	19			
					715.3	23173	18.70	19	0-2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The

Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 47 of 267

			FDD F	Band 25 (Full F	Power)					
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				1860	26140	23.10	24	0		
			0	1882.5	26365	23.16	24	0		
				1905	26590	23.09	24	0		
				1860	26140	23.33	24	0		
		1 RB	50	1882.5	26365	23.08	24	0		
				1905	26590	23.09	24	0		
				1860	26140	23.03	24	0		
			99	1882.5	26365	23.24	24	0		
				1905	26590	23.24	24	0		
				1860	26140	22.25	23	0-1		
	QPSK		0	1882.5	26365	22.11	23	0-1		
				1905	26590	22.30	23	0-1		
				1860	26140	22.18	23	0-1		
		50 RB	25	1882.5	26365	22.16	23	0-1		
				1905	26590	22.12	23	0-1		
				1860	26140	22.11	23	0-1		
			50	1882.5	26365	22.15	23	0-1		
				1905	26590	22.17	23	0-1		
				1860	26140	22.13	23	0-1		
		100	)RB	1882.5	26365	22.14	23	0-1		
20				1905	26590	22.20	23	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-		
20				1860	26140	22.12	23	0-1		
			0	1882.5	26365	22.07	23	0-1		
				1905	26590	22.31	23	0-1		
				1860	26140	22.24	23	0-1		
		1 RB	50	1882.5	26365	22.35	23	0-1		
				1905	26590	22.04	23	0-1		
				1860	26140	22.03	23	0-1		
			99	1882.5	26365	22.15	23	0-1		
				1905	26590	22.61	23			
				1860	26140	21.05	22	0-2		
	16-QAM		0	1882.5	26365	21.26	22	0-2		
				1905	26590	21.21	22			
				1860	26140	20.95	22			
		50 RB	25	1882.5	26365	21.19	22	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-		
				1905	26590	21.15	22			
				1860	26140	20.94	22			
			50	1882.5	26365	21.25	22			
				1905	26590	21.11	22	0-2		
				1860	26140	21.08	22	0-2		
		100	)RB	1882.5	26365	21.20	22			
		100	TOOKS	1905	26590	21.25	22	0-2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



Page: 48 of 267

	FDD Band 25 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1857.5	26115	23.26	24	0				
			0	1882.5	26365	23.25	24	0				
				1907.5	26615	23.21	24	0				
				1857.5	26115	23.00	24	0				
		1 RB	36	1882.5	26365	23.16	24	0				
				1907.5	26615	22.98	24	0				
				1857.5	26115	22.94	24	0				
			74	1882.5	26365	23.02	24	0				
				1907.5	26615	23.01	24	0				
				1857.5	26115	22.12	23	0-1				
	QPSK		0	1882.5	26365	22.10	23	0-1				
				1907.5	26615	22.21	23	0-1				
				1857.5	26115	22.17	23	0-1				
		36 RB	18	1882.5	26365	22.18	23	0-1				
				1907.5	26615	22.14	23	0-1				
				1857.5	26115	22.17	23	0-1				
			37	1882.5	26365	22.19	23	0-1				
				1907.5	26615	22.30	23	0-1				
				1857.5	26115	22.19	23	0-1				
		75	RB	1882.5	26365	22.14	23	0-1				
15				1907.5	26615	22.27	23	0-1				
				1857.5	26115	22.77	23	0-1				
			0	1882.5	26365	22.55	23	0-1				
				1907.5	26615	22.18	23	0-1				
				1857.5	26115	22.04	23	0-1				
		1 RB	36	1882.5	26365	21.98	23	0-1				
				1907.5	26615	22.28	23	0-1				
				1857.5	26115	21.83	23					
			74	1882.5	26365	21.97	23	0-1				
				1907.5	26615	21.89	23	0-1				
				1857.5	26115	21.11	22	0-2				
	16-QAM		0	1882.5	26365	21.15	22	0-2				
				1907.5	26615	21.18	22	0-2				
				1857.5	26115	21.21	22	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-				
		36 RB	18	1882.5	26365	21.21	22					
				1907.5	26615	21.15	22					
			_	1857.5	26115	21.01	22	0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-1				
			37	1882.5	26365	21.28	22					
				1907.5	26615	21.36	22	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1				
				1857.5	26115	21.12	22					
		75	RB	1882.5	26365	21.18	22					
							1907.5	26615	21.21	22	0-2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 49 of 267

			FDD E	Band 25 (Full F	Power)					
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				1855	26090	23.22	24	0		
			0	1882.5	26365	23.17	24	0		
				1910	26640	22.97	24	0		
				1855	26090	22.97	24	0		
		1 RB	25	1882.5	26365	23.47	24	0		
				1910	26640	23.41	24	0		
				1855	26090	23.12	24	0		
			49	1882.5	26365	23.36	24	0		
				1910	26640	23.08	24	0		
				1855	26090	22.18	23	0-1		
	QPSK		0	1882.5	26365	22.18	23	0-1		
				1910	26640	22.14	23	0-1		
				1855	26090	22.20	23	0-1		
		25 RB	12	1882.5	26365	22.19	23	0-1		
				1910	26640	22.26	23	0-1		
				1855	26090	22.30	23	0-1		
			25	1882.5	26365	22.22	23	0-1		
				1910	26640	22.38	23	0-1		
				1855	26090	22.18	23	0-1		
		50	RB	1882.5	26365	22.22	23	0-1		
10				1910	26640	22.30	23	0-1		
10				1855	26090	22.59	23	0-1		
			0	1882.5	26365	22.35	23	0-1		
				1910	26640	22.35	23	0-1		
				1855	26090	22.79	23	0-1		
		1 RB	25	1882.5	26365	22.59	23	0-1		
				1910	26640	22.60	23	0-1		
				1855	26090	22.48	23	0-1		
			49	1882.5	26365	22.27	23	0-1		
				1910	26640	22.43	23	0-1		
				1855	26090	21.16	22	0-2		
	16-QAM		0	1882.5	26365	21.27	22	0-2		
				1910	26640	21.30	22	0-2		
				1855	26090	21.22	22	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1		
		25 RB	12	1882.5	26365	21.61	22			
				1910	26640	21.52	22			
				1855	26090	21.36	22			
			25	1882.5	26365	21.44	22	0-2		
				1910	26640	21.48	22	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-		
				1855	26090	21.22	22			
		50	RB	1882.5	26365	21.28	22			
							1910	26640	21.38	22

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 50 of 267

	FDD Band 25 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1852.5	26065	23.45	24	0				
			0	1882.5	26365	22.98	24	0				
				1912.5	26665	23.15	24	0				
				1852.5	26065	23.47	24	0				
		1 RB	12	1882.5	26365	23.11	24	0				
				1912.5	26665	23.43	24	0				
				1852.5	26065	23.20	24	0				
			24	1882.5	26365	23.12	24	0				
				1912.5	26665	23.19	24	0				
				1852.5	26065	22.19	23	0-1				
	QPSK		0	1882.5	26365	22.12	23	0-1				
				1912.5	26665	22.26	23	0-1				
				1852.5	26065	22.23	23	0-1				
		12 RB	6	1882.5	26365	22.14	23	0-1				
				1912.5	26665	22.23	23	0-1				
				1852.5	26065	22.17	23	0-1				
			13	1882.5	26365	22.12	23	0-1				
				1912.5	26665	22.30	23	0-1				
				1852.5	26065	22.17	23	0-1				
		25	RB	1882.5	26365	22.22	23	0-1				
5				1912.5	26665	22.33	23	0-1				
Ŭ				1852.5	26065	22.38	23	0-1				
			0	1882.5	26365	22.62	23	0-1				
				1912.5	26665	22.79	23	0-1				
				1852.5	26065	22.40	23	0-1				
		1 RB	12	1882.5	26365	21.82	23	0-1				
				1912.5	26665	22.35	23	0-1				
				1852.5	26065	22.42	23	0-1				
			24	1882.5	26365	22.32	23	0-1				
				1912.5	26665	22.82	23	0-1				
				1852.5	26065	21.09	22	0-2				
	16-QAM		0	1882.5	26365	20.94	22					
				1912.5	26665	21.29	22	0-2				
				1852.5	26065	20.91	22	0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-				
		12 RB 6	1882.5	26365	21.16	22	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-					
				1912.5	26665	21.22	22	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-				
				1852.5	26065	20.90	22					
			13	1882.5	26365	20.94	22					
				1912.5	26665	21.26	22	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-				
				1852.5	26065	21.09	22					
		25	RB	1882.5	26365	20.96	22					
				1912.5	26665	21.27	22	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 51 of 267

			FDD E	Band 25 (Full F	Power)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1851.5	26055	23.25	24	0
			0	1882.5	26365	23.16	24	0
				1913.5	26675	23.31	24	0
				1851.5	26055	23.44	24	0
		1 RB	7	1882.5	26365	23.36	24	0
				1913.5	26675	23.50	24	0
				1851.5	26055	23.33	24	0
			14	1882.5	26365	23.45	24	0
				1913.5	26675	23.16	24	0
				1851.5	26055	22.25	23	0-1
	QPSK		0	1882.5	26365	22.27	23	0-1
				1913.5	26675	22.36	23	0-1
				1851.5	26055	22.24	23	0-1
		8 RB	4	1882.5	26365	22.22	23	0-1
				1913.5	26675	22.31	23	0-1
				1851.5	26055	22.25	23	0-1
			7	1882.5	26365	22.26	23	0-1
				1913.5	26675	22.30	23	0-1
				1851.5	26055	22.17	23	0-1
		15	RB	1882.5	26365	22.10	23	0-1
3			T	1913.5	26675	22.18	23	0-1
				1851.5	26055	21.94	23	
			0	1882.5	26365	22.46	23	
				1913.5	26675	22.75	23	
			_	1851.5	26055	21.96	23	
		1 RB	7	1882.5	26365	22.57	23	
				1913.5	26675	22.07	23	
				1851.5	26055	22.38	23	
			14	1882.5	26365	22.31	23	
				1913.5	26675	22.18	23	
	40.0414			1851.5	26055	21.25	22	
	16-QAM		0	1882.5	26365	21.32	22	
				1913.5	26675	21.24	22	
		0 DD	A	1851.5	26055	21.25	22	0 0 0 0 0 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-
		8 RB	4	1882.5	26365	21.33	22	
				1913.5	26675	21.30	22	
			7	1851.5	26055	21.16	22	
			7	1882.5	26365	21.34	22	
				1913.5	26675	21.36	22	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1
		4 5	DD	1851.5	26055	21.00	22	
		15	RB	1882.5	26365	21.12	22	
				1913.5	26675	21.24	22	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 52 of 267

	FDD Band 25 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1850.7	26047	23.33	24	0				
			0	1882.5	26365	23.20	24	0				
				1914.3	26683	23.12	24	0				
				1850.7	26047	23.41	24	0				
		1 RB	2	1882.5	26365	23.21	24	0				
				1914.3	26683	23.08	24	0				
				1850.7	26047	23.08	24	0				
			5	1882.5	26365	23.22	24	0				
				1914.3	26683	22.95	24	0				
				1850.7	26047	23.13	24	0				
	QPSK		0	1882.5	26365	23.28	24	0				
				1914.3	26683	23.00	24	0				
				1850.7	26047	23.20	24	0				
		3 RB	2	1882.5	26365	23.11	24	0				
				1914.3	26683	22.95	24	0				
				1850.7	26047	23.34	24	0				
			3	1882.5	26365	23.27	24	0				
				1914.3	26683	22.96	24	0				
				1850.7	26047	22.24	23	0-1				
		6F	RB	1882.5	26365	22.20	23	0-1				
1.4				1914.3	26683	22.11	23	0-1				
17				1850.7	26047	22.63	23	0-1				
			0	1882.5	26365	22.58	23	0-1				
				1914.3	26683	22.48	23	0-1				
				1850.7	26047	22.23	23	0-1				
		1 RB	2	1882.5	26365	22.46	23	0-1				
				1914.3	26683	21.84	23	0-1				
				1850.7	26047	22.21	23	0-1				
			5	1882.5	26365	22.76	23	0-1				
				1914.3	26683	22.03	23	0-1				
				1850.7	26047	22.06	23	0-1				
	16-QAM		0	1882.5	26365	22.24	23	0-1				
				1914.3	26683	21.98	23	0-1				
				1850.7	26047	22.16	23	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
		3 RB	2	1882.5	26365	22.43	23					
				1914.3	26683	22.02	23					
				1850.7	26047	22.05	23	0-1				
			3	1882.5	26365	22.27	23	0-1				
				1914.3	26683	22.23	23	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
				1850.7	26047	21.04	22	0-2				
		1914.3 26683 22.23 23										
				1914.3	26683	21.07	22	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 53 of 267

FDD Band 25 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				1860	26140	14.91	15.5	0			
			0	1882.5	26365	15.15	15.5	0			
				1905	26590	14.97	15.5	0			
				1860	26140	14.95	15.5	0			
		1 RB	50	1882.5	26365	14.93	15.5	0			
				1905	26590	15.01	15.5	0			
				1860	26140	14.87	15.5	0			
			99	1882.5	26365	14.92	15.5	0			
				1905	26590	15.05	15.5	0			
				1860	26140	14.20	14.5	0-1			
	QPSK		0	1882.5	26365	14.06	14.5	0-1			
				1905	26590	14.18	14.5	0-1			
				1860	26140	14.16	14.5	0-1			
		50 RB	25	1882.5	26365	14.09	14.5	0-1			
				1905	26590	14.07	14.5	0-1			
				1860	26140	14.11	14.5	0-1			
			50	1882.5	26365	14.07	14.5	0-1			
				1905	26590	14.17	14.5	0-1			
				1860	26140	14.15	14.5	0-1			
		100	RB	1882.5	26365	14.05	14.5	0-1			
20				1905	26590	14.02	14.5	0-1			
20				1860	26140	14.20	14.5	0-1			
			0	1882.5	26365	14.42	14.5	0-1			
				1905	26590	14.11	14.5	0-1			
				1860	26140	14.24	14.5	0-1			
		1 RB	50	1882.5	26365	14.03	14.5	0-1			
				1905	26590	14.37	14.5	0-1			
				1860	26140	13.99	14.5	0-1			
			99	1882.5	26365	13.98	14.5	0-1			
				1905	26590	14.47	14.5	0-1			
				1860	26140	12.99	13.5	0-2			
	16-QAM		0	1882.5	26365	12.36	13.5	0-2			
				1905	26590	12.63	13.5	0-2			
				1860	26140	12.94	13.5	0-2			
		50 RB	25	1882.5	26365	12.71	13.5	0-2			
				1905	26590	12.82	13.5	0-2			
				1860	26140	12.86	13.5	0-2			
			50	1882.5	26365	12.86	13.5	0-2			
				1905	26590	12.84	13.5	0-2			
				1860	26140	12.82	13.5	0-2			
		100	)RB	1882.5	26365	12.54	13.5	0-2			
				1905	26590	12.66	13.5	0-2			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 54 of 267

	FDD Band 25 (Reduced Power)											
			, <i>DD</i> Dai	14 ZO (NOGGOE	a . ovvoi)		Toract					
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1857.5	26115	15.17	15.5	0				
			0	1882.5	26365	15.10	15.5	0				
				1907.5	26615	15.09	15.5	0				
				1857.5	26115	14.96	15.5	0				
		1 RB	36	1882.5	26365	14.83	15.5	0				
				1907.5	26615	14.96	15.5	0				
				1857.5	26115	14.96	15.5	0				
			74	1882.5	26365	15.12	15.5	0				
				1907.5	26615	15.15	15.5	0				
				1857.5	26115	13.92	14.5	0-1				
	QPSK		0	1882.5	26365	14.03	14.5	0-1				
				1907.5	26615	14.05	14.5	0-1				
				1857.5	26115	14.02	14.5	0-1				
		36 RB	18	1882.5	26365	14.09	14.5	0-1				
				1907.5	26615	13.94	14.5	0-1				
				1857.5	26115	14.15	14.5	0-1				
			37	1882.5	26365	14.11	14.5	0-1				
				1907.5	26615	14.15	14.5	0-1				
				1857.5	26115	14.13	14.5	0-1				
		75	RB	1882.5	26365	14.08	14.5	0-1				
15			T	1907.5	26615	14.06	14.5	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-				
				1857.5	26115	13.86	14.5					
			0	1882.5	26365	14.08	14.5					
				1907.5	26615	14.10	14.5					
				1857.5	26115	14.42	14.5					
		1 RB	36	1882.5	26365	14.16	14.5	Allowed pe 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
				1907.5	26615	13.86	14.5					
				1857.5	26115	14.44	14.5					
			74	1882.5	26365	14.11	14.5					
				1907.5	26615	14.28	14.5					
			_	1857.5	26115	13.00	13.5					
	16-QAM		0	1882.5	26365	12.56	13.5	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-				
				1907.5	26615	12.65	13.5					
		00.55	4.5	1857.5	26115	13.10	13.5					
		36 RB	18	1882.5	26365	12.72	13.5	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
				1907.5	26615	12.60	13.5					
			0.7	1857.5	26115	12.92	13.5					
			37	1882.5	26365	12.92	13.5					
				1907.5	26615	12.83	13.5	-				
				1857.5	26115	13.04	13.5					
		75	RB	1882.5	26365	12.80	13.5					
				1907.5	26615	12.84	13.5	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 55 of 267

			FDD Bar	nd 25 (Reduce	d Power)							
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1855	26090	15.25	15.5	0				
			0	1882.5	26365	15.17	15.5	0				
				1910	26640	14.82	15.5	0				
				1855	26090	15.28	15.5	0				
		1 RB	25	1882.5	26365	15.34	15.5	0				
				1910	26640	15.26	15.5	0				
				1855	26090	15.18	15.5	0				
			49	1882.5	26365	15.26	15.5	0				
				1910	26640	14.96	15.5	0				
				1855	26090	13.99	14.5	0-1				
	QPSK		0	1882.5	26365	14.05	14.5	0-1				
				1910	26640	13.97	14.5	0-1				
				1855	26090	14.07	14.5	0-1				
		25 RB	12	1882.5	26365	14.06	14.5	0-1				
				1910	26640	14.22	14.5	0-1				
				1855	26090	14.08	14.5	0-1				
			25	1882.5	26365	14.06	14.5	0-1				
				1910	26640	14.23	14.5	0-1				
				1855	26090	14.10	14.5	0-1				
		50	RB	1882.5	26365	14.07	14.5	0-1				
10				1910	26640	14.09	14.5	0-1				
10				1855	26090	13.83	14.5	0 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-				
			0	1882.5	26365	13.73	14.5	0-1				
				1910	26640	14.50	14.5	0-1				
				1855	26090	14.10	14.5	0-1				
		1 RB	25	1882.5	26365	13.86	14.5	0-1				
				1910	26640	14.28	14.5	0-1				
				1855	26090	14.18	14.5	0-1				
			49	1882.5	26365	13.67	14.5	0-1				
				1910	26640	14.13	14.5					
				1855	26090	13.01	13.5	0-2				
	16-QAM		0	1882.5	26365	12.50	13.5	0-2				
				1910	26640	12.47	13.5	0-2				
				1855	26090	13.14	13.5	0-2				
		25 RB	12	1882.5	26365	12.71	13.5	0-2				
				1910	26640	12.79	13.5	0-2				
				1855	26090	13.18	13.5	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1				
			25	1882.5	26365	12.70	13.5	0-2				
				1910	26640	13.01	13.5	0-2				
				1855	26090	13.01	13.5	0-2				
		50	RB	1882.5	26365	12.65	13.5					
								1910	26640	12.73	13.5	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 56 of 267

FDD Band 25 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				1852.5	26065	15.16	15.5	0			
			0	1882.5	26365	14.90	15.5	0			
				1912.5	26665	15.11	15.5	0			
				1852.5	26065	15.33	15.5	0			
		1 RB	12	1882.5	26365	15.03	15.5	0			
				1912.5	26665	15.16	15.5	0			
				1852.5	26065	15.20	15.5	0			
			24	1882.5	26365	15.12	15.5	0			
				1912.5	26665	15.27	15.5	0			
				1852.5	26065	14.09	14.5	0-1			
	QPSK		0	1882.5	26365	13.89	14.5	0-1			
				1912.5	26665	14.08	14.5	0-1			
				1852.5	26065	14.12	14.5	0-1			
		12 RB	6	1882.5	26365	13.99	14.5	0-1			
				1912.5	26665	14.04	14.5	0-1			
				1852.5	26065	14.18	14.5	0-1			
			13	1882.5	26365	13.95	14.5	0-1			
				1912.5	26665	14.12	14.5	0-1			
				1852.5	26065	14.07	14.5	0-1			
		25	RB	1882.5	26365	13.99	14.5	0-1			
5				1912.5	26665	14.17	14.5	0-1			
Ŭ				1852.5	26065	14.10	14.5	0-1			
			0	1882.5	26365	13.97	14.5	0-1			
				1912.5	26665	14.11	14.5	0-1			
				1852.5	26065	14.26	14.5	0-1			
		1 RB	12	1882.5	26365	13.92	14.5	0-1			
				1912.5	26665	14.48	14.5	0-1			
				1852.5	26065	14.47	14.5	0-1			
			24	1882.5	26365	14.06	14.5	0-1			
				1912.5	26665	14.40	14.5	0-1			
				1852.5	26065	13.24	13.5	0-2			
	16-QAM		0	1882.5	26365	12.78	13.5	0-2			
				1912.5	26665	13.03	13.5	0-2			
				1852.5	26065	13.23	13.5	0-2			
		12 RB	6	1882.5	26365	12.70	13.5				
				1912.5	26665	13.08	13.5	0-2			
				1852.5	26065	13.30	13.5	0 0 0 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-			
			13	1882.5	26365	12.86	13.5				
				1912.5	26665	13.27	13.5				
				1852.5	26065	13.27	13.5	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-			
		25	RB	1882.5	26365	12.86	13.5				
				1912.5	26665	13.02	13.5	0-2			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 57 of 267

	FDD Band 25 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1851.5	26055	15.14	15.5	0				
			0	1882.5	26365	14.84	15.5	0				
				1913.5	26675	15.02	15.5	0				
				1851.5	26055	15.36	15.5	0				
		1 RB	7	1882.5	26365	14.94	15.5	0				
				1913.5	26675	15.17	15.5	0				
				1851.5	26055	15.13	15.5	0				
			14	1882.5	26365	15.01	15.5	0				
				1913.5	26675	15.08	15.5	0				
				1851.5	26055	14.08	14.5	0-1				
	QPSK		0	1882.5	26365	13.95	14.5	0-1				
				1913.5	26675	14.04	14.5	0-1				
				1851.5	26055	14.03	14.5	0-1				
		8 RB	4	1882.5	26365	13.99	14.5	0-1				
				1913.5	26675	14.14	14.5	0-1				
				1851.5	26055	14.14	14.5	0-1				
			7	1882.5	26365	14.02	14.5	0-1				
				1913.5	26675	14.14	14.5	0-1				
				1851.5	26055	14.01	14.5	0-1				
		15	RB	1882.5	26365	14.00	14.5	0-1				
3				1913.5	26675	14.03	14.5	0-1				
				1851.5	26055	14.42	14.5	0-1				
			0	1882.5	26365	14.09	14.5	0-1				
				1913.5	26675	14.23	14.5	0-1				
				1851.5	26055	14.21	14.5	0-1				
		1 RB	7	1882.5	26365	14.09	14.5	0-1				
				1913.5	26675	14.48	14.5	0-1				
				1851.5	26055	14.49	14.5	0-1				
			14	1882.5	26365	14.16	14.5	0-1				
				1913.5	26675	14.44	14.5	0-1				
				1851.5	26055	13.27	13.5	0-2				
	16-QAM		0	1882.5	26365	12.74	13.5	0-2				
				1913.5	26675	13.05	13.5	0-2				
				1851.5	26055	13.34	13.5	0-2				
		8 RB	4	1882.5	26365	12.77	13.5	0-2				
				1913.5	26675	13.14	13.5	0-2				
				1851.5	26055	13.37	13.5	0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-1 0-1 0-1				
			7	1882.5	26365	12.80	13.5					
				1913.5	26675	13.15	13.5					
				1851.5	26055	13.11	13.5	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-				
		15	RB	1882.5	26365	12.75	13.5					
			4 7 15RB 0 7 14 0	1913.5	26675	12.98	13.5	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 58 of 267

FDD Band 25 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				1850.7	26047	14.90	15.5	0			
			0	1882.5	26365	14.95	15.5	0			
				1914.3	26683	14.80	15.5	0			
				1850.7	26047	15.11	15.5	0			
		1 RB	2	1882.5	26365	15.04	15.5	0			
				1914.3	26683	14.85	15.5	0			
				1850.7	26047	14.91	15.5	0			
			5	1882.5	26365	14.86	15.5	0			
				1914.3	26683	14.92	15.5	0			
				1850.7	26047	15.00	15.5	0			
	QPSK		0	1882.5	26365	14.89	15.5	0			
				1914.3	26683	14.95	15.5	0			
				1850.7	26047	15.15	15.5	0			
		3 RB	2	1882.5	26365	14.98	15.5	0			
				1914.3	26683	15.05	15.5	0			
				1850.7	26047	15.21	15.5	0			
			3	1882.5	26365	14.94	15.5	0			
				1914.3	26683	14.95	15.5	0			
				1850.7	26047	14.07	14.5	0-1			
		6F	RB	1882.5	26365	14.01	14.5	0-1			
1.4				1914.3	26683	14.13	14.5	0-1			
1.4				1850.7	26047	14.39	14.5	0-1			
			0	1882.5	26365	14.19	14.5	0-1			
				1914.3	26683	14.39	14.5	0-1			
				1850.7	26047	14.44	14.5	0-1			
		1 RB	2	1882.5	26365	14.08	14.5	0-1			
				1914.3	26683	14.38	14.5	0-1			
				1850.7	26047	14.35	14.5	0-1			
			5	1882.5	26365	14.19	14.5	0-1			
				1914.3	26683	14.41	14.5	0-1			
				1850.7	26047	14.12	14.5	0-1			
	16-QAM		0	1882.5	26365	13.84	14.5	0-1			
				1914.3	26683	14.00	14.5	0-1			
				1850.7	26047	14.03	14.5	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			
		3 RB	2	1882.5	26365	13.75	14.5	0-1			
				1914.3	26683	14.12	14.5	0-1			
				1850.7	26047	14.29	14.5	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			
			3	1882.5	26365	13.60	14.5	0-1			
				1914.3	26683	14.03	14.5	0-1			
				1850.7	26047	13.32	13.5	0-2			
		6F	₹B	1882.5	26365	12.80	13.5				
		OND	1914.3	26683	13.06	13.5	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 59 of 267

	FDD Band 26 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				822.5	26825	23.00	24	0				
			0	831.5	26865	23.14	24	0				
				841.5	26965	23.05	24	0				
				822.5	26825	22.86	24	0				
		1 RB	36	831.5	26865	22.86	24	0				
				841.5	26965	22.99	24	0				
				822.5	26825	23.12	24	0				
			74	831.5	26865	23.20	24	0				
				841.5	26965	23.06	24	0				
				822.5	26825	22.17	23	0-1				
	QPSK		0	831.5	26865	22.18	23	0-1				
				841.5	26965	22.25	23	0-1				
				822.5	26825	22.01	23	0-1				
		36 RB	18	831.5	26865	22.12	23	0-1				
				841.5	26965	22.21	23	0-1				
				822.5	26825	22.07	23	0-1				
			37	831.5	26865	22.03	23	0-1				
				841.5	26965	22.14	23	0-1				
				822.5	26825	22.09	23	0-1				
		75	RB	831.5	26865	22.18	23	0-1				
15				841.5	26965	22.20	23	0-1				
10				822.5	26825	22.03	23	0-1				
			0	831.5	26865	22.01	23	0-1				
				841.5	26965	22.33	23	0-1				
				822.5	26825	21.69	23	0-1				
		1 RB	36	831.5	26865	22.35	23	0-1				
				841.5	26965	22.09	23	0-1				
				822.5	26825	21.89	23	0-1				
			74	831.5	26865	22.19	23	0-1				
				841.5	26965	22.28	23	0-1				
				822.5	26825	21.08	22	0-2				
	16-QAM		0	831.5	26865	20.96	22	0-2				
				841.5	26965	21.15	22	0-2				
				822.5	26825	21.07	22	0-2				
		36 RB	18	831.5	26865	21.03	22	0-2				
				841.5	26965	21.15	22	0-2				
				822.5	26825	21.00	22	0-2				
			37	831.5	26865	20.86	22	0-2				
				841.5	26965	20.96	22	0-2				
				822.5	26825	20.91	22	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 0-1 0-				
		75	RB	831.5	26865	21.05	22	0-2				
		7.514	70112	841.5	26965	21.09	22	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 60 of 267

			FDD E	Band 26 (Full F	Power)				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
				820	26800	23.10	24	0	
			0	831.5	26865	22.97	24	0	
				844	26990	23.50	24	0	
				820	26800	23.18	24	0	
		1 RB	25	831.5	26865	23.05	24	0	
				844	26990	23.28	24	0	
				820	26800	23.03	24	0	
			49	831.5	26865	23.11	24	0	
				844	26990	23.23	24	0	
				820	26800	22.29	23	0-1	
	QPSK		0	831.5	26865	22.24	23	0-1	
				844	26990	22.18	23	0-1	
				820	26800	22.12	23	0-1	
		25 RB	12	831.5	26865	22.09	23	0-1	
				844	26990	22.14	23	0-1	
				820	26800	22.14	23	0-1	
			25	831.5	26865	22.16	23	0-1	
				844	26990	22.10	23	0-1	
				820	26800	22.10	23	0-1	
		50	RB	831.5	26865	22.16	23	0-1	
10				844	26990	22.15	23	0-1	
10				820	26800	22.01	23	0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-1 0-	
			0	831.5	26865	22.40	23	0-1	
				844	26990	22.98	23	0-1	
				820	26800	22.32	23	0-1	
		1 RB	25	831.5	26865	22.42	23	0-1	
				844	26990	22.30	23	0-1	
				820	26800	22.39	23		
			49	831.5	26865	22.46	23	0-1	
				844	26990	21.93	23	0-1	
				820	26800	20.92	22	0-2	
	16-QAM		0	831.5	26865	21.08	22	0-2	
				844	26990	21.19	22		
				820	26800	20.86	22		
		25 RB	12	831.5	26865	21.16	22		
				844	26990	21.01	22		
				820	26800	21.23	22	0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-1 0-	
			25	831.5	26865	20.99	22		
				844	26990	20.94	22	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1	
				820	26800	21.13	22		
		50	RB	831.5	26865	21.12	22		
						844	26990	21.14	22

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 61 of 267

	FDD Band 26 (Full Power)										
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				816.5	26715	23.28	24	0			
			0	831.5	26865	22.92	24	0			
				846.5	27015	23.32	24	0			
				816.5	26715	23.03	24	0			
		1 RB	12	831.5	26865	23.11	24	0			
				846.5	27015	23.23	24	0			
				816.5	26715	22.93	24	0			
			24	831.5	26865	23.32	24	0			
				846.5	27015	22.89	24	0			
				816.5	26715	22.13	23	0-1			
	QPSK		0	831.5	26865	22.09	23	0-1			
				846.5	27015	22.19	23	0-1			
				816.5	26715	21.98	23	0-1			
		12 RB	6	831.5	26865	22.10	23	0-1			
				846.5	27015	22.01	23	0-1			
				816.5	26715	22.02	23	0-1			
			13	831.5	26865	22.20	23	0-1			
				846.5	27015	22.04	23	0-1			
				816.5	26715	22.03	23	0-1			
		25	RB	831.5	26865	22.07	23	0-1			
5				846.5	27015	22.15	23	0-1			
Ŭ				816.5	26715	22.30	23	0-1			
			0	831.5	26865	22.45	23	0-1			
				846.5	27015	22.00	23	0-1			
				816.5	26715	22.49	23	0-1			
		1 RB	12	831.5	26865	22.38	23	0-1			
				846.5	27015	21.70	23	0-1			
				816.5	26715	22.05	23	0-1			
			24	831.5	26865	22.34	23	0-1			
				846.5	27015	21.62	23	0-1			
				816.5	26715	20.99	22	0-2			
	16-QAM		0	831.5	26865	21.14	22	0-2			
				846.5	27015	21.06	22	0-2			
				816.5	26715	20.99	22	0-2			
		12 RB	6	831.5	26865	21.11	22	0-2			
				846.5	27015	20.95	22	0-2			
				816.5	26715	21.04	22	0-2			
			13	831.5	26865	21.22	22	0-2			
				846.5	27015	21.09	22	0-2			
1				816.5	26715	21.15	22	0-2			
		25	RB	831.5	26865	21.22	22	0-2			
		2		846.5	27015	21.06	22	0-2			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 62 of 267

	FDD Band 26 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				815.5	26705	23.20	24	0				
			0	831.5	26865	23.07	24	0				
				847.5	27025	23.27	24	0				
				815.5	26705	23.32	24	0				
		1 RB	7	831.5	26865	23.13	24	0				
				847.5	27025	23.29	24	0				
				815.5	26705	22.98	24	0				
			14	831.5	26865	23.36	24	0				
				847.5	27025	23.06	24	0				
				815.5	26705	22.12	23	0-1				
	QPSK		0	831.5	26865	22.17	23	0-1				
				847.5	27025	22.24	23	0-1				
				815.5	26705	22.02	23	0-1				
		8 RB	4	831.5	26865	22.03	23	0-1				
				847.5	27025	22.10	23	0-1				
				815.5	26705	22.02	23	0-1				
		7	831.5	26865	22.03	23	0-1					
				847.5	27025	22.07	23	0-1				
				815.5	26705	22.11	23	0-1				
		15	RB	831.5	26865	22.05	23	0-1				
3				847.5	27025	22.15	23	0-1				
J				815.5	26705	22.51	23	0-1				
			0	831.5	26865	22.33	23	0-1				
				847.5	27025	22.73	23	0-1				
				815.5	26705	22.23	23	0-1				
		1 RB	7	831.5	26865	22.43	23	0-1				
				847.5	27025	22.42	23	0-1				
				815.5	26705	21.97	23	0-1				
			14	831.5	26865	22.45	23	0-1				
				847.5	27025	22.17	23	0-1				
				815.5	26705	21.22	22	0-2				
	16-QAM		0	831.5	26865	21.29	22	0-2				
				847.5	27025	21.09	22	0-2				
				815.5	26705	21.14	22	0-2				
		8 RB	4	831.5	26865	21.21	22	0-2				
				847.5	27025	20.82	22	0-2				
				815.5	26705	21.20	22	0-2				
			7	831.5	26865	21.27	22	0-2				
				847.5	27025	20.98	22	0-2				
				815.5	26705	21.35	22	0-2				
		15	RB	831.5	26865	21.10	22	0-2				
	131		847.5	27025	20.81	22	0-2					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 63 of 267

	FDD Band 26 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				814.7	26697	22.86	24	0				
			0	831.5	26865	22.95	24	0				
				848.3	27033	23.13	24	0				
				814.7	26697	23.16	24	0				
		1 RB	2	831.5	26865	22.93	24	0				
				848.3	27033	23.02	24	0				
				814.7	26697	22.99	24	0				
			5	831.5	26865	22.79	24	0				
				848.3	27033	23.00	24	0				
				814.7	26697	23.21	24	0				
	QPSK		0	831.5	26865	23.00	24	0				
				848.3	27033	23.18	24	0				
				814.7	26697	23.29	24	0				
		3 RB	2	831.5	26865	22.99	24	0				
				848.3	27033	23.35	24	0				
				814.7	26697	23.29	24	0				
			3	831.5	26865	23.08	24	0				
				848.3	27033	23.22	24	0				
				814.7	26697	22.14	23	0-1				
		6F	RB	831.5	26865	22.15	23	0-1				
1.4				848.3	27033	22.03	23	0-1				
				814.7	26697	21.80	23	0-1				
			0	831.5	26865	22.34	23	0-1				
				848.3	27033	21.95	23	0-1				
				814.7	26697	21.92	23	0-1				
		1 RB	2	831.5	26865	22.21	23	0-1				
				848.3	27033	22.29	23	0-1				
				814.7	26697	22.21	23	0-1				
			5	831.5	26865	22.12	23	0-1				
				848.3	27033	22.66	23	0-1				
	10000			814.7	26697	22.27	23	0-1				
	16-QAM		0	831.5	26865	22.18	23	0-1				
				848.3	27033	22.27	23	0-1				
		0.55		814.7	26697	22.45	23	0-1				
		3 RB	2	831.5	26865	21.90	23	0-1				
				848.3	27033	22.57	23	0-1				
			_	814.7	26697	22.41	23	0-1				
			3	831.5	26865	21.90	23	0-1				
				848.3	27033	22.36	23	0-1				
			<b>D</b> D	814.7	26697	20.87	22	0-2				
		6F	RB	831.5	26865	20.81	22	0-2				
				848.3	27033	21.02	22	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 64 of 267

			FDD Bar	nd 26 (Reduce	d Power)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance	MPR Allowed per 3GPP(dB)
				822.5	26825	19.02	(dBm) 19.5	0
			0	831.5	26865	19.02	19.5	0
				841.5	26965	19.00	19.5	0
				822.5	26825	18.91	19.5	0
		1 RB	36	831.5	26865	18.90	19.5	0
		1112		841.5	26965	18.77	19.5	0
				822.5	26825	19.03	19.5	0
			74	831.5	26865	18.98	19.5	0
				841.5	26965	18.82	19.5	0
				822.5	26825	18.03	18.5	0-1
	QPSK		0	831.5	26865	18.03	18.5	0-1
				841.5	26965	18.18	18.5	0-1
				822.5	26825	17.91	18.5	0-1
		36 RB	18	831.5	26865	18.01	18.5	0-1
				841.5	26965	18.08	18.5	0-1
				822.5	26825	17.98	18.5	0-1
			37	831.5	26865	17.86	18.5	0-1
				841.5	26965	18.08	18.5	0-1
			1	822.5	26825	17.87	18.5	0-1
		75	RB	831.5	26865	17.99	18.5	0-1
45				841.5	26965	17.98	18.5	0-1
15				822.5	26825	18.04	18.5	0-1
			0	831.5	26865	18.22	18.5	0-1
				841.5	26965	18.41	18.5	0-1
				822.5	26825	17.84	18.5	0-1
		1 RB	36	831.5	26865	18.36	18.5	0-1
				841.5	26965	17.89	18.5	0-1
				822.5	26825	17.71	18.5	0-1
			74	831.5	26865	18.15	18.5	0-1
				841.5	26965	17.95	18.5	0-1
				822.5	26825	17.02	17.5	0-2
	16-QAM		0	831.5	26865	17.20	17.5	0-2
				841.5	26965	17.23	17.5	0-2
				822.5	26825	17.03	17.5	0-2
		36 RB	18	831.5	26865	17.20	17.5	0-2
				841.5	26965	17.12	17.5	0-2
				822.5	26825	16.99	17.5	0-2
			37	831.5	26865	17.18	17.5	0-2
				841.5	26965	16.88	17.5	0-2
				822.5	26825	17.05	17.5	0-2
		75	RB	831.5	26865	17.00	17.5	0-2
				841.5	26965	16.99	17.5	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The

Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 65 of 267

			FDD Bar	nd 26 (Reduce	d Power)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				820	26800	18.93	19.5	0
			0	831.5	26865	19.09	19.5	0
				844	26990	19.25	19.5	0
				820	26800	18.78	19.5	0
		1 RB	25	831.5	26865	19.02	19.5	0
				844	26990	19.13	19.5	0
				820	26800	18.67	19.5	0
			49	831.5	26865	19.06	19.5	0
				844	26990	18.87	19.5	0
				820	26800	17.92	18.5	0-1
	QPSK		0	831.5	26865	18.03	18.5	0-1
				844	26990	18.06	18.5	0-1
				820	26800	17.90	18.5	0-1
		25 RB	12	831.5	26865	18.05	18.5	0-1
				844	26990	17.95	18.5	0-1
				820	26800	17.95	18.5	0-1
			25	831.5	26865	18.01	18.5	0-1
				844	26990	17.92	18.5	0-1
				820	26800	18.01	18.5	0-1
		50	RB	831.5	26865	17.99	18.5	0-1
10				844	26990	18.05	18.5	0-1
10				820	26800	18.05	18.5	0-1
			0	831.5	26865	18.39	18.5	0-1
				844	26990	18.47	18.5	0-1
				820	26800	18.08	18.5	0-1
		1 RB	25	831.5	26865	18.38	18.5	0-1
				844	26990	18.44	18.5	0-1
				820	26800	18.02	18.5	0-1
			49	831.5	26865	18.18	18.5	0-1
				844	26990	18.40	18.5	0-1
				820	26800	17.02	17.5	0-2
	16-QAM		0	831.5	26865	16.99	17.5	0-2
				844	26990	17.08	17.5	0-2
				820	26800	16.99	17.5	0-2
		25 RB	12	831.5	26865	17.00	17.5	0-2
				844	26990	16.98	17.5	0-2
			6-	820	26800	16.90	17.5	0-2
			25	831.5	26865	17.01	17.5	0-2
				844	26990	16.85	17.5	0-2
				820	26800	16.94	17.5	0-2
		50	RB	831.5	26865	17.01	17.5	0-2
				844	26990	17.20	17.5	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_end\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this onlineful.

f (886-2) 2298-0488

prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 66 of 267

			FDD Bar	nd 26 (Reduce	d Power)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance	MPR Allowed per 3GPP(dB)
				816.5	26715	19.17	(dBm) 19.5	0
			0	831.5	26865	18.97	19.5	0
				846.5	27015	19.33	19.5	0
				816.5	26715	19.30	19.5	0
		1 RB	12	831.5	26865	19.25	19.5	0
				846.5	27015	19.25	19.5	0
				816.5	26715	18.93	19.5	0
			24	831.5	26865	19.13	19.5	0
				846.5	27015	18.95	19.5	0
				816.5	26715	18.22	18.5	0-1
	QPSK		0	831.5	26865	17.89	18.5	0-1
				846.5	27015	18.03	18.5	0-1
				816.5	26715	18.02	18.5	0-1
		12 RB	6	831.5	26865	17.96	18.5	0-1
				846.5	27015	17.92	18.5	0-1
				816.5	26715	17.91	18.5	0-1
			13	831.5	26865	18.07	18.5	0-1
				846.5	27015	17.86	18.5	0-1
				816.5	26715	18.06	18.5	0-1
		25	RB	831.5	26865	18.03	18.5	0-1
5				846.5	27015	17.89	18.5	0-1
				816.5	26715	17.95	18.5	0-1
			0	831.5	26865	18.48	18.5	0-1
				846.5	27015	17.91	18.5	0-1
				816.5	26715	17.88	18.5	0-1
		1 RB	12	831.5	26865	18.31	18.5	0-1
				846.5	27015	17.57	18.5	0-1
				816.5	26715	17.57	18.5	0-1
			24	831.5	26865	18.40	18.5	0-1
				846.5	27015	17.42	18.5	0-1
				816.5	26715	17.26	17.5	0-2
	16-QAM		0	831.5	26865	16.93	17.5	0-2
				846.5	27015	16.97	17.5	0-2
				816.5	26715	17.06	17.5	0-2
		12 RB	6	831.5	26865	17.00	17.5	0-2
				846.5	27015	16.70	17.5	0-2
				816.5	26715	16.94	17.5	0-2
			13	831.5	26865	17.04	17.5	0-2
				846.5	27015	16.79	17.5	0-2
				816.5	26715	17.12	17.5	0-2
		25	RB	831.5	26865	17.17	17.5	0-2
				846.5	27015	16.99	17.5	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_end\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this onlineful.

prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 67 of 267

FDD Band 26 (Reduced Power)										
		, 55 5ai		2 / 5 // 5 //		Target Power +	MPR			
BW(Mhz) Modulati	on RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Max. Tolerance (dBm)	Allowed per 3GPP(dB)			
			815.5	26705	19.18	19.5	0			
		0	831.5	26865	18.84	19.5	0			
			847.5	27025	18.95	19.5	0			
			815.5	26705	19.28	19.5	0			
	1 RB	7	831.5	26865	18.83	19.5	0			
			847.5	27025	19.02	19.5	0			
			815.5	26705	19.13	19.5	0			
		14	831.5	26865	18.92	19.5	0			
			847.5	27025	18.74	19.5	0			
			815.5	26705	17.97	18.5	0-1			
QPSK		0	831.5	26865	18.02	18.5	0-1			
			847.5	27025	18.06	18.5	0-1			
			815.5	26705	17.96	18.5	0-1			
	8 RB	4	831.5	26865	18.03	18.5	0-1			
			847.5	27025	17.89	18.5	0-1			
			815.5	26705	17.93	18.5	0-1			
		7	831.5	26865	17.96	18.5	0-1			
			847.5	27025	17.94	18.5	0-1			
			815.5	26705	18.08	18.5	0-1			
	15	SRB	831.5	26865	18.00	18.5	0-1			
3		1	847.5	27025	17.98	18.5	0-1			
			815.5	26705	18.33	18.5	0-1			
		0	831.5	26865	18.37	18.5	0-1			
			847.5	27025	18.32	18.5	0-1			
	4.00	-	815.5	26705	18.17	18.5	0-1			
	1 RB	7	831.5	26865	17.99	18.5	0-1			
			847.5	27025	17.72	18.5	0-1			
		14	815.5	26705	17.94	18.5	0-1			
		14	831.5	26865	17.81	18.5	0-1			
			847.5	27025	18.02	18.5	0-1			
16-QAI	,	0	815.5 831.5	26705 26865	17.21 17.17	17.5 17.5	0-2 0-2			
10-QAI	'		847.5	27025	17.17	17.5	0-2			
			815.5	26705	16.92	17.5	0-2			
	8 RB	4	831.5	26865	17.21	17.5	0-2			
	31.5		847.5	27025	16.88	17.5	0-2			
			815.5	26705	16.94	17.5	0-2			
		7	831.5	26865	17.21	17.5	0-2			
			847.5	27025	17.05	17.5	0-2			
		<u> </u>	815.5	26705	17.03	17.5	0-2			
	15	SRB	831.5	26865	17.20	17.5	0-2			
			847.5	27025	16.87	17.5	0-2			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

t (886-2) 2299-3279

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 68 of 267

			FDD Bar	nd 26 (Reduce	d Power)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				814.7	26697	18.91	19.5	0
			0	831.5	26865	18.87	19.5	0
				848.3	27033	18.98	19.5	0
				814.7	26697	19.16	19.5	0
		1 RB	2	831.5	26865	18.98	19.5	0
				848.3	27033	18.98	19.5	0
				814.7	26697	19.00	19.5	0
			5	831.5	26865	18.96	19.5	0
				848.3	27033	18.76	19.5	0
				814.7	26697	19.06	19.5	0
	QPSK		0	831.5	26865	18.92	19.5	0
				848.3	27033	19.07	19.5	0
				814.7	26697	19.10	19.5	0
		3 RB	2	831.5	26865	18.91	19.5	0
				848.3	27033	18.90	19.5	0
				814.7	26697	19.13	19.5	0
			3	831.5	26865	18.92	19.5	0
				848.3	27033	18.91	19.5	0
				814.7	26697	18.02	18.5	0-1
		6F	RB	831.5	26865	17.89	18.5	0-1
1.4				848.3	27033	18.06	18.5	0-1
17				814.7	26697	17.68	18.5	0-1
			0	831.5	26865	18.09	18.5	0-1
				848.3	27033	18.36	18.5	0-1
				814.7	26697	17.70	18.5	0-1
		1 RB	2	831.5	26865	18.21	18.5	0-1
				848.3	27033	17.91	18.5	0-1
				814.7	26697	17.65	18.5	0-1
			5	831.5	26865	17.94	18.5	0-1
				848.3	27033	17.39	18.5	0-1
				814.7	26697	17.88	18.5	0-1
	16-QAM		0	831.5	26865	17.94	18.5	0-1
				848.3	27033	18.22	18.5	0-1
				814.7	26697	17.93	18.5	0-1
		3 RB	2	831.5	26865	18.03	18.5	0-1
				848.3	27033	17.88	18.5	0-1
				814.7	26697	17.85	18.5	0-1
			3	831.5	26865	18.12	18.5	0-1
				848.3	27033	17.64	18.5	0-1
				814.7	26697	17.07	17.5	0-2
		6F	RB	831.5	26865	16.91	17.5	0-2
				848.3	27033	16.84	17.5	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 69 of 267

## LTE TDD Band 41 power table:

	Band 41	•		Band 41 (Full F	Power)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				2506	39750	22.81	24	0
				2549.5	40185	22.71	24	0
			0	2593	40620	22.74	24	0
				2636.5	41055	22.73	24	0
				2680	41490	22.61	24	0
				2506	39750	22.76	24	0
				2549.5	40185	22.52	24	0
		1 RB	50	2593	40620	22.55	24	0
				2636.5	41055	22.51	24	0
				2680	41490	22.54	24	0
				2506	39750	22.44	24	0
				2549.5	40185	22.51	24	0
			99	2593	40620	22.56	24	0
				2636.5	41055	22.44	24	0
	-		2680 414 2506 397	41490	22.24	24	0	
			2506 2549.5	39750	21.72	23	0-1	
				2549.5	2549.5     40185     22.51     2       2593     40620     22.56     2       2636.5     41055     22.44     2       2680     41490     22.24     2       2506     39750     21.72     2       2549.5     40185     21.64     2       2593     40620     22.00     2       2636.5     41055     21.69     2       2680     41490     21.67     2	23	0-1	
20	QPSK		0	2593	40620	22.00	23	0-1
				2636.5	41055	21.69	23	0-1
				2680	41490	21.67	23	0-1
				2506	39750	21.62	23	0-1
				2549.5	40185	21.72	23	0-1
		50 RB	25	2593	40620	21.77	23	0-1
				2636.5	41055	21.63	23	0-1
				2506   39750   22.81   2549.5   40185   22.71   2636.5   41055   22.52   2549.5   40185   22.52   2549.5   40185   22.52   2549.5   40185   22.52   2636.5   41055   22.51   2680   41490   22.54   2506   39750   22.44   2549.5   40185   22.51   2680   41490   22.54   2549.5   40185   22.51   2636.5   41055   22.51   2636.5   41055   22.51   2593   40620   22.56   2636.5   41055   22.44   2506   39750   21.72   2549.5   40185   21.64   2593   40620   22.00   2636.5   41055   21.69   2680   41490   21.67   2506   39750   21.62   2549.5   40185   21.62   2549.5   40185   21.62   2549.5   40185   21.62   2549.5   40185   21.72   2549.5   40185   21.72   2549.5   40185   21.72   2549.5   40185   21.72   2549.5   40185   21.72   2549.5   40185   21.72   2549.5   40185   21.72   2549.5   40185   21.77   2569.5   40185   21.77   2593   40620   2	23	0-1		
				Frequency (MHz)         Channel power (dBm)         Conducted power (dBm)         Max. Tolerance (dBm)           2506         39750         22.81         24           2549.5         40185         22.71         24           2593         40620         22.74         24           2636.5         41055         22.73         24           2680         41490         22.61         24           2506         39750         22.76         24           2549.5         40185         22.52         24           2593         40620         22.55         24           2593         40620         22.55         24           2680         41490         22.54         24           2506         39750         22.44         24           2549.5         40185         22.51         24           2593         40620         22.56         24           2549.5         40185         22.51         24           2593         40620         22.56         24           2636.5         41055         22.44         24           2593         40620         22.24         24           2549.5         40		0-1		
				2549.5	40185	21.45	23	0-1
			50	2593	40620	21.85	23	0-1
					41055	21.65		0-1
							23	0-1
			-	2506	39750	21.64	23	0-1
				2549.5	40185		23	0-1
		100	)RB		40620			0-1
				2636.5	41055	21.64	23	0-1
				2680	41490	21.42	23	0-1

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 70 of 267

			TDD E	Band 41 (Full F	Power)				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
				2506	39750	21.97	23	0-1	
				2549.5	40185	21.85	23	0-1	
			0	2593	40620	22.00	23	0-1	
				2636.5	41055	21.98	23	0-1	
				2680	41490	21.82	23	0-1	
				2506	39750	21.99	23	0-1	
				2549.5	40185	21.84	23	0-1	
		1 RB	50	2593	40620	21.97	23	0-1	
				2636.5	41055	21.87	23	0-1	
				2680	41490	21.88	23	0-1	
				2506	39750	21.54	23	0-1	
				2549.5	40185	21.68	23	0-1	
			99	2593	40620	21.78	23	0-1	
				2636.5	41055	21.81	23	0-1	
		2680 41490	21.39	23	0-1				
				2506	39750	20.74	22	0-2	
				2549.5	40185	20.81	22	0-2	
20	16-QAM		0	2593	40620	20.84	22	0-2	
				2636.5	41055	20.72	22	0-2	
				2680	41490	20.58	22	0-2	
				2506	39750	20.74	22	0-2	
				2549.5	40185	20.66	22	0-2	
		50 RB	25	2593	40620	20.70	22	0-2	
				2636.5	41055	20.61	22	0-2	
				2680	41490	20.46	22	0-2	
				2506	39750	20.56	22	0-2	
				2549.5	40185	20.45	22	0-2	
			50	2593	40620	20.75	22	0-2	
				2636.5	41055	20.32	22	0-2	
				2680	41490	20.38	22	0-2	
				2506	39750	20.63	22	0-2	
				2549.5	40185	20.82	Conducted ower (dBm)         Power + Max. Tolerance (dBm)         MPR Allowed p 3GPP(decompt)           21.97         23         0-1           21.85         23         0-1           22.00         23         0-1           21.98         23         0-1           21.82         23         0-1           21.84         23         0-1           21.87         23         0-1           21.87         23         0-1           21.88         23         0-1           21.87         23         0-1           21.88         23         0-1           21.88         23         0-1           21.89         23         0-1           21.87         23         0-1           21.88         23         0-1           21.89         23         0-1           21.89         23         0-1           21.87         23         0-1           21.88         23         0-1           21.89         23         0-1           21.81         23         0-1           21.81         23         0-1           21.81         23         0-1		
		100	)RB	2593	40620	20.80	22	0-2	
				2636.5	41055	20.71	22	0-2	
				2680	41490	20.55	22	0-2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 71 of 267

			TDD E	Band 41 (Full F	Power)				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
				2503.5	39725	22.63	23	0	
				2548.3	40173	22.71	23	0	
			0	2593	40620	22.78	23	0	
				2637.8	41068	22.64	23	0	
				2682.5	41515	22.56	23	0	
				2503.5	39725	22.63	23	0	
				2548.3	40173	22.45	23	0	
		1 RB	36	2593	40620	22.66	23	0	
				2637.8	41068	22.49	23	0	
				2682.5	41515	22.42	23	0	
				2503.5	39725	22.49	23	0	
				2548.3	40173	22.56	23	0	
			74	2593	40620	22.72	23	0	
				2637.8	41068	22.51	23	0	
				2682.5	41515	22.37	23	0	
				2503.5	39725	21.69	22	0-1	
				2548.3	40173	21.84	22	0-1	
15	QPSK		0	2593	40620	21.92	22	0-1	
				2637.8	41068	21.73	22	0-1	
				2682.5	41515	21.56	22	0-1	
				2503.5	39725	21.66	22	0-1	
				2548.3	40173	21.62	22	0-1	
		36 RB	18	2593	40620	21.79	22	0-1	
				2637.8	41068	21.54	22	0-1	
				2682.5	41515	21.44	22	0-1	
				2503.5	39725	21.61	22	0-1	
				2548.3	40173	21.54	22	0-1	
			37	2593	40620	21.44	22	0-1	
				2637.8	41068	21.67	22	0-1	
	-		2682.5	41515	21.31	22	0-1		
				2503.5	39725	21.59	22	0-1	
				2548.3	40173	21.45	22	0-1	
		75	RB	2593	40620	21.70	22	0-1	
				2637.8	41068	21.44	22	0-1	
					2682.5	41515	21.44	22	0-1

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 72 of 267

			TDD E	Band 41 (Full F	Power)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				2503.5	39725	21.61	22	0-1
				2548.3	40173	21.55	22	0-1
			0	2593	40620	21.68	22	0-1
				2637.8	41068	21.47	22	0-1
				2682.5	41515	21.79	22	0-1
				2503.5	39725	21.32	22	0-1
				2548.3	40173	21.55	22	0-1
		1 RB	36	2593	40620	21.64	22	0-1
				2637.8	41068	21.44	22	0-1
				2682.5	41515	21.22	22	0-1
				2503.5	39725	21.43	22	0-1
				2548.3	40173	21.72	22	0-1
			74	2593	40620	21.88	22	0-1
				2637.8	41068	21.49	22	0-1
				2682.5	41515	21.48	22	0-1
				2503.5	39725	20.58	21	0-2
				2548.3	40173	20.66	21	0-2
15	16-QAM		0	2593	40620	20.78	21	0-2
				2637.8	41068	20.52	21	0-2
				2682.5	41515	20.43	21	0-2
				2503.5	39725	20.47	21	0-2
				2548.3	40173	20.54	21	0-2
		36 RB	18	2593	40620	20.75	21	0-2
				2637.8	41068	20.46	21	0-2
				2682.5	41515	20.42	21	0-2
1				2503.5	39725	20.58	21	0-2
1				2548.3	40173	20.65	21	0-2
1			37	2593	40620	20.72	21	0-2
				2637.8	41068	20.42	21	0-2
				2682.5	41515	20.40	21	0-2
				2503.5	39725	20.69	21	0-2
1				2548.3	40173	20.54	21	0-2
		75	RB	2593	40620	20.79	21	0-2
				2637.8	41068	20.62	21	0-2
				2682.5	41515	20.45	21	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 73 of 267

	TDD Band 41 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				2501	39700	22.72	23	0				
				2547	40160	22.72	23	0				
			0	2593	40620	22.81	23	0				
				2639	41080	22.64	23	0				
				2685	41540	22.69	23	0				
				2501	39700	22.68	23	0				
				2547	40160	22.66	23	0				
		1 RB	25	2593	40620	22.85	23	0				
				2639	41080	22.73	23	0				
				2685	41540	22.54	23	0				
				2501	39700	22.63	23	0				
				2547	40160	22.44	23	0				
			49	2593	40620	22.52	23	0				
				2639	41080	22.45	23	0				
				2685	41540	22.28	23	0				
				2501	39700	21.76	22	0-1				
				2547	40160	21.82	22	0-1				
10	QPSK		0	2593	40620	21.96	22	0-1				
				2639	41080	21.74	22	0-1				
				2685	41540	21.53	22	0-1				
				2501	39700	21.70	22	0-1				
				2547	40160	21.84	22	0-1				
		25 RB	12	2593	40620	21.96	22	0-1				
				2639	41080	21.77	22	0-1				
				2685	41540	21.43	22	0-1				
				2501	39700	21.69	22	0-1				
				2547	40160	21.66	22	0-1				
			25	2593	40620	21.83	22	0-1				
				2639	41080	21.45	22	0-1				
				2685	41540	21.54	22	0-1				
				2501	39700	21.64	22	0-1				
				2547	40160	21.66	22	0-1				
		50	RB	2593	40620	21.87	22	Allowed per 3GPP(dB)  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
				2639	41080	21.54	22	0-1				
				2685	41540	21.48	22	0-1				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 74 of 267

	TDD Band 41 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				2501	39700	21.87	22	0-1				
				2547	40160	21.72	22	0-1				
			0	2593	40620	21.93	22	0-1				
				2639	41080	21.66	22	0-1				
				2685	41540	21.80	22	0-1				
				2501	39700	21.67	22	0-1				
				2547	40160	21.74	22	0-1				
		1 RB	25	2593	40620	21.94	22	0-1				
				2639	41080	21.73	22	0-1				
				2685	41540	21.69	22	0-1				
				2501	39700	21.68	22	0-1				
				2547	40160	21.73	22	0-1				
			49	2593	40620	21.90	22	0-1				
				2639	41080	21.56	22	0-1				
				2685	41540	21.62	22	0-1				
				2501	39700	20.69	21	0-2				
				2547	40160	20.66	21	0-2				
10	16-QAM		0	2593	40620	20.99	21	0-2				
				2639	41080	20.74	21	0-2				
				2685	41540	20.58	21	0-2				
				2501	39700	20.74	21	0-2				
				2547	40160	20.71	21	0-2				
		25 RB	12	2593	40620	20.98	21	0-2				
				2639	41080	20.43	21	0-2				
				2685	41540	20.55	21	0-2				
				2501	39700	20.73	21	0-2				
				2547	40160	20.75	21	0-2				
			25	2593	40620	20.96	21	0-2				
				2639	41080	20.72	21	0-2				
				2685	41540	20.76	21	0-2				
				2501	39700	20.69	21	0-2				
				2547	40160	20.62	21	0-2				
		50RB		2593	40620	20.79	21	0-2				
				2639	41080	20.54	21	0-2				
				2685	41540	20.63	21	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 75 of 267

	TDD Band 41 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				2498.5	39675	22.53	23	0				
				2547.8	40148	22.42	23	0				
			0	2593	40620	22.67	23	0				
				2640.3	41093	22.39	23	0				
				2687.5	41565	22.63	23	0				
				2498.5	39675	23.00	23	0				
				2547.8	40148	22.81	23	0				
		1 RB	12	2593	40620	22.95	23	0				
				2640.3	41093	22.74	23	0				
				2687.5	41565	22.75	23	0				
				2498.5	39675	22.51	23	0				
				2547.8	40148	22.66	23	0				
			24	2593	40620	22.70	23	0				
				2640.3	41093	22.31	23	0				
				2687.5	41565	22.33	23	0				
				2498.5	39675	21.63	22	0-1				
				2547.8	40148	21.74	22	0-1				
5	QPSK		0	2593	40620	21.82	22	0-1				
				2640.3	41093	21.51	22	0-1				
				2687.5	41565	21.53	22	0-1				
				2498.5	39675	21.57	22	0-1				
				2547.8	40148	21.51	22	0-1				
		12 RB	6	2593	40620	21.85	22	0-1				
				2640.3	41093	21.44	22	0-1				
				2687.5	41565	21.48	22	0-1				
				2498.5	39675	21.59	22	0-1				
				2547.8	40148	21.44	22	0-1				
			13	2593	40620	21.80	22	0-1				
				2640.3	41093	21.51	22	0-1				
				2687.5	41565	21.53	22	0-1				
				2498.5	39675	21.64	22	0-1				
				2547.8	40148	21.72	22	0-1				
		25RB		2593	40620	21.81	22	0-1				
				2640.3	41093	21.63	22	0-1				
					2687.5	41565	21.62	22	0-1			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 76 of 267

	TDD Band 41 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				2498.5	39675	21.74	22	0-1				
				2547.8	40148	21.54	22	0-1				
			0	2593	40620	21.68	22	0-1				
				2640.3	41093	21.55	22	0-1				
				2687.5	41565	21.40	22	0-1				
				2498.5	39675	21.51	22	0-1				
				2547.8	40148	21.52	22	0-1				
		1 RB	12	2593	40620	21.68	22	0-1				
				2640.3	41093	21.43	22	0-1				
				2687.5	41565	21.52	22	0-1				
				2498.5	39675	21.74	22	0-1				
				2547.8	40148	21.52	22	0-1				
			24	2593	40620	21.78	22	0-1				
				2640.3	41093	21.47	22	0-1				
				2687.5	41565	21.61	22	0-1				
				2498.5	39675	20.65	21	0-2				
				2547.8	40148	20.66	21	0-2				
5	16-QAM		0	2593	40620	20.90	21	0-2				
				2640.3	41093	20.54	21	0-2				
				2687.5	41565	20.56	21	0-2				
				2498.5	39675	20.69	21	0-2				
				2547.8	40148	20.81	21	0-2				
		12 RB	6	2593	40620	20.93	21	0-2				
				2640.3	41093	20.52	21	0-2				
				2687.5	41565	20.60	21	0-2				
				2498.5	39675	20.52	21	0-2				
				2547.8	40148	20.71	21	0-2				
			13	2593	40620	20.89	21	0-2				
				2640.3	41093	20.63	21	0-2				
				2687.5	41565	20.56	21	0-2				
				2498.5	39675	20.61	21	0-2				
				2547.8	40148	20.66	21	0-2				
		25RB		2593	40620	21.00	21	0-2				
				2640.3	41093	20.45	21	0-2				
				2687.5	41565	20.47	21	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 77 of 267

	TDD Band 41 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				2506	39750	17.99	18	0				
				2549.5	40185	17.97	18	0				
			0	2593	40620	17.96	18	0				
				2636.5	41055	17.70	18	0				
				2680	41490	17.81	18	0				
				2506	39750	17.69	18	0				
				2549.5	40185	17.74	18	0				
		1 RB	50	2593	40620	17.63	18	0				
				2636.5	41055	17.66	18	0				
				2680	41490	17.55	18	0				
				2506	39750	17.67	18	0				
				2549.5	40185	17.70	18	0				
			99	2593	40620	17.58	18	0				
				2636.5	41055	17.42	18	0				
				2680	41490	17.42	18	0				
				2506	39750	16.97	17	0-1				
				2549.5	40185	16.85	17	0-1				
20	QPSK		0	2593	40620	16.95	17	0-1				
				2636.5	41055	16.74	17	0-1				
				2680	41490	16.80	17	0-1				
				2506	39750	16.89	17	0-1				
				2549.5	40185	17.00	17	0-1				
		50 RB	25	2593	40620	16.77	17	0-1				
				2636.5	41055	16.78	17	0-1				
				2680	41490	16.69	17	0-1				
				2506	39750	16.74	17	0-1				
				2549.5	40185	16.92	17	0-1				
			50	2593	40620	16.91	17	0-1				
				2636.5	41055	16.62	17	0-1				
				2680	41490	16.65	17	0-1				
				2506	39750	16.79	17	0-1				
				2549.5	40185	16.96	17	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
	100		100RB		40620	16.98	17	0-1				
				2636.5	41055	16.79	17	0-1				
				2680	41490	16.69	17	0-1				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 78 of 267

	TDD Band 41 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				2506	39750	16.81	17	0-1				
				2549.5	40185	16.78	17	0-1				
			0	2593	40620	16.84	17	0-1				
				2636.5	41055	16.60	17	0-1				
				2680	41490	16.66	17	0-1				
				2506	39750	16.96	17	0-1				
				2549.5	40185	16.99	17	0-1				
		1 RB	50	2593	40620	16.62	17	0-1				
				2636.5	41055	16.83	17	0-1				
				2680	41490	16.74	17	0-1				
				2506	39750	16.84	17	0-1				
				2549.5	40185	16.98	17	0-1				
			99	2593	40620	16.84	17	0-1				
				2636.5	41055	16.72	17	0-1				
				2680	41490	16.30	17	0-1				
				2506	39750	15.91	16	0-2				
				2549.5	40185	15.94	16	0-2				
20	16-QAM		0	2593	40620	16.00	16	0-2				
				2636.5	41055	15.82	16	0-2				
				2680	41490	15.76	16	0-2				
				2506	39750	15.81	16	0-2				
				2549.5	40185	15.95	16	0-2				
		50 RB	25	2593	40620	15.94	16	0-2				
				2636.5	41055	15.67	16	0-2				
				2680	41490	15.65	16	0-2				
				2506	39750	15.77	16	0-2				
				2549.5	40185	15.97	16	0-2				
			50	2593	40620	15.89	16	0-2				
				2636.5	41055	15.68	16	0-2				
				2680	41490	15.60	16	0-2				
				2506	39750	15.84	16	0-2				
				2549.5	40185	15.88	16	0-2				
		100	)RB	2593	40620	15.93	16	0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1				
				2636.5	41055	15.76	16	0-2				
				2680	41490	15.64	16	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 79 of 267

	TDD Band 41 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				2503.5	39725	18.00	18	0				
				2548.3	40173	17.99	18	0				
			0	2593	40620	17.97	18	0				
				2637.8	41068	17.75	18	0				
				2682.5	41515	17.85	18	0				
				2503.5	39725	17.78	18	0				
				2548.3	40173	17.88	18	0				
		1 RB	36	2593	40620	17.63	18	0				
				2637.8	41068	17.64	18	0				
				2682.5	41515	17.63	18	0				
				2503.5	39725	17.75	18	0				
				2548.3	40173	17.98	18	0				
			74	2593	40620	17.59	18	0				
				2637.8	41068	17.73	18	0				
				2682.5	41515	17.64	18	0				
				2503.5	39725	16.93	17	0-1				
				2548.3	40173	16.83	17	0-1				
15	QPSK		0	2593	40620	16.73	17	0-1				
				2637.8	41068	16.83	17	0-1				
				2682.5	41515	16.78	17	0-1				
				2503.5	39725	17.00	17	0-1				
				2548.3	40173	16.79	17	0-1				
		36 RB	18	2593	40620	16.67	17	0-1				
				2637.8	41068	16.83	17	0-1				
				2682.5	41515	16.69	17	0-1				
				2503.5	39725	16.85	17	0-1				
				2548.3	40173	16.76	17	0-1				
			37	2593	40620	16.70	17	0-1				
				2637.8	41068	16.70	17	0-1				
				2682.5	41515	16.58	17	0-1				
				2503.5	39725	16.69	17	0-1				
				2548.3	40173	16.82	17	0-1				
		75RB		2593	40620	16.68	17	0-1				
				2637.8	41068	16.83	17	0-1				
							2682.5	41515	16.69	17	0-1	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 80 of 267

	TDD Band 41 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				2503.5	39725	16.91	17	0-1				
				2548.3	40173	17.00	17	0-1				
			0	2593	40620	16.98	17	0-1				
				2637.8	41068	16.95	17	0-1				
				2682.5	41515	16.93	17	0-1				
				2503.5	39725	16.54	17	0-1				
				2548.3	40173	16.88	17	0-1				
		1 RB	36	2593	40620	16.84	17	0-1				
				2637.8	41068	16.85	17	0-1				
				2682.5	41515	16.45	17	0-1				
				2503.5	39725	16.48	17	0-1				
				2548.3	40173	16.99	17	0-1				
			74	2593	40620	16.88	17	0-1				
				2637.8	41068	16.85	17	0-1				
				2682.5	41515	16.38	17	0-1				
				2503.5	39725	15.73	16	0-2				
				2548.3	40173	15.95	16	0-2				
15	16-QAM		0	2593	40620	15.74	16	0-2				
				2637.8	41068	15.64	16	0-2				
				2682.5	41515	15.61	16	0-2				
				2503.5	39725	16.00	16	0-2				
				2548.3	40173	15.99	16	0-2				
		36 RB	18	2593	40620	15.67	16	0-2				
				2637.8	41068	15.74	16	0-2				
				2682.5	41515	15.50	16	0-2				
				2503.5	39725	15.75	16	0-2				
				2548.3	40173	15.69	16	0-2				
			37	2593	40620	15.72	16	0-2				
				2637.8	41068	15.72	16	0-2				
				2682.5	41515	15.41	16	0-2				
				2503.5	39725	15.74	16	0-2				
				2548.3	40173	15.76	16	0-2				
		75	RB	2593	40620	15.73	16	0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1				
				2637.8	41068	15.67	16	0-2				
				2682.5	41515	15.63	16	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_end\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this onlineful and offenders may be

f (886-2) 2298-0488

prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 81 of 267

	TDD Band 41 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				2501	39700	17.82	18	0				
				2547	40160	17.84	18	0				
			0	2593	40620	17.95	18	0				
				2639	41080	17.67	18	0				
				2685	41540	17.67	18	0				
				2501	39700	17.85	18	0				
				2547	40160	17.74	18	0				
		1 RB	25	2593	40620	17.73	18	0				
				2639	41080	17.69	18	0				
				2685	41540	17.67	18	0				
				2501	39700	17.82	18	0				
				2547	40160	17.75	18	0				
			49	2593	40620	17.64	18	0				
				2639	41080	17.43	18	0				
				2685	41540	17.52	18	0				
				2501	39700	16.94	17	0-1				
				2547	40160	16.87	17	0-1				
10	QPSK		0	2593	40620	16.89	17	0-1				
				2639	41080	16.78	17	0-1				
				2685	41540	16.78	17	0-1				
				2501	39700	16.86	17	0-1				
				2547	40160	16.76	17	0-1				
		25 RB	12	2593	40620	16.82	17	0-1				
				2639	41080	16.76	17	0-1				
				2685	41540	16.68	17	0-1				
				2501	39700	16.87	17	0-1				
				2547	40160	16.63	17	0-1				
			25	2593	40620	16.85	17	0-1				
				2639	41080	16.58	17	0-1				
				2685	41540	16.64	17	0-1				
				2501	39700	16.69	17	0-1				
				2547	40160	16.68	17	0-1				
		50RB		2593	40620	16.83	17	0-1				
				2639	41080	16.78	17	0-1				
							2685	41540	16.64	17	0-1	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 82 of 267

	TDD Band 41 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				2501	39700	17.00	17	0-1				
				2547	40160	16.87	17	0-1				
			0	2593	40620	16.90	17	0-1				
				2639	41080	16.69	17	0-1				
				2685	41540	16.73	17	0-1				
				2501	39700	16.84	17	0-1				
				2547	40160	16.83	17	0-1				
		1 RB	25	2593	40620	16.82	17	0-1				
				2639	41080	16.87	17	0-1				
				2685	41540	16.94	17	0-1				
				2501	39700	16.90	17	0-1				
				2547	40160	16.94	17	0-1				
			49	2593	40620	16.62	17	0-1				
				2639	41080	16.70	17	0-1				
				2685	41540	16.70	17	0-1				
				2501	39700	15.70	16	0-2				
				2547	40160	15.77	16	0-2				
10	16-QAM		0	2593	40620	15.86	16	0-2				
				2639	41080	15.75	16	0-2				
				2685	41540	15.96	16	0-2				
				2501	39700	15.84	16	0-2				
				2547	40160	15.84	16	0-2				
		25 RB	12	2593	40620	15.79	16	0-2				
				2639	41080	15.75	16	0-2				
				2685	41540	15.95	16	0-2				
				2501	39700	15.93	16	0-2				
				2547	40160	15.70	16	0-2				
			25	2593	40620	15.72	16	0-2				
				2639	41080	15.59	16	0-2				
				2685	41540	15.89	16	0-2				
				2501	39700	15.75	16	0-2				
				2547	40160	15.74	16	0-2				
		50RB		2593	40620	15.79	16	0-2				
				2639	41080	15.72	16	0-2				
				2685	41540	15.63	16	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 83 of 267

	TDD Band 41 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				2498.5	39675	17.67	18	0				
				2547.8	40148	17.81	18	0				
			0	2593	40620	17.80	18	0				
				2640.3	41093	17.54	18	0				
				2687.5	41565	17.50	18	0				
				2498.5	39675	18.00	18	0				
				2547.8	40148	17.83	18	0				
		1 RB	12	2593	40620	17.81	18	0				
				2640.3	41093	17.70	18	0				
				2687.5	41565	17.75	18	0				
				2498.5	39675	17.69	18	0				
				2547.8	40148	17.69	18	0				
			24	2593	40620	17.65	18	0				
				2640.3	41093	17.54	18	0				
				2687.5	41565	17.43	18	0				
				2498.5	39675	16.72	17	0-1				
				2547.8	40148	16.85	17	0-1				
5	QPSK		0	2593	40620	16.77	17	0-1				
				2640.3	41093	16.74	17	0-1				
				2687.5	41565	16.61	17	0-1				
				2498.5	39675	16.76	17	0-1				
				2547.8	40148	16.77	17	0-1				
		12 RB	6	2593	40620	16.82	17	0-1				
				2640.3	41093	16.70	17	0-1				
				2687.5	41565	16.65	17	0-1				
				2498.5	39675	16.75	17	0-1				
				2547.8	40148	16.72	17	0-1				
			13	2593	40620	16.81	17	0-1				
				2640.3	41093	16.69	17	0-1				
				2687.5	41565	16.62	17	0-1				
				2498.5	39675	16.82	17	0-1				
		25RB		2547.8	40148	16.82	17	0-1				
				2593	40620	16.79	17	0-1				
				2640.3	41093	16.75	17	0-1				
						2687.5	41565	16.60	17	0-1		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 84 of 267

	TDD Band 41 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				2498.5	39675	16.60	17	0-1				
				2547.8	40148	16.96	17	0-1				
			0	2593	40620	16.94	17	0-1				
				2640.3	41093	16.79	17	0-1				
				2687.5	41565	16.73	17	0-1				
				2498.5	39675	16.84	17	0-1				
				2547.8	40148	16.85	17	0-1				
		1 RB	12	2593	40620	16.88	17	0-1				
				2640.3	41093	16.77	17	0-1				
				2687.5	41565	16.50	17	0-1				
				2498.5	39675	16.63	17	0-1				
				2547.8	40148	16.80	17	0-1				
			24	2593	40620	16.74	17	0-1				
				2640.3	41093	16.65	17	0-1				
				2687.5	41565	16.60	17	0-1				
				2498.5	39675	15.66	16	0-2				
				2547.8	40148	15.72	16	0-2				
5	16-QAM		0	2593	40620	15.83	16	0-2				
				2640.3	41093	15.78	16	0-2				
				2687.5	41565	15.75	16	0-2				
				2498.5	39675	15.70	16	0-2				
				2547.8	40148	15.64	16	0-2				
		12 RB	6	2593	40620	15.76	16	0-2				
				2640.3	41093	15.64	16	0-2				
				2687.5	41565	15.79	16	0-2				
				2498.5	39675	15.71	16	0-2				
				2547.8	40148	15.67	16	0-2				
			13	2593	40620	15.65	16	0-2				
				2640.3	41093	15.64	16	0-2				
				2687.5	41565	15.76	16	0-2				
				2498.5	39675	15.80	16	0-2				
				2547.8	40148	15.81	16	0-2				
		25RB		2593	40620	15.64	16	0-2				
				2640.3	41093	15.61	16	0-2				
				2687.5	41565	15.99	16	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 85 of 267

# WLAN802.11 a/b/g/n(20M/40M) conducted power table:

Full Power (Sensor OFF)								
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max.	Average power (dBm)		
	802.11b	1	2412		19.00	18.87		
		6	2437	1Mbps	19.00	18.75		
		11	2462		19.00	18.89		
	802.11g	1	2412	6Mbps	19.00	18.92		
		6	2437		19.00	18.81		
2450 MHz		11	2462		19.00	18.74		
2430 1011 12		1	2412		19.00	18.71		
	802.11n-HT20	6	2437	MCS0	19.00	18.52		
		11	2462		19.00	18.66		
	802.11n-HT40	3	2422	MCS0	19.00	18.57		
		6	2437		19.00	18.84		
		9	2452		19.00	18.92		

	Full Power (Sensor OFF)								
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max.	Average power (dBm)			
	802.11a	36	5180		19.00	18.61			
		40	5200	6Mbps	19.00	18.54			
		44	5220		19.00	18.87			
		48	5240		19.00	18.81			
5.15-5.25 GHz		36	5180		19.00	18.92			
0.13-3.23 GHZ	802.11n-HT20	40	5200	MCS0	19.00	18.66			
	002.1111-11120	44	5220	IVICOU	19.00	18.59			
		48	5240		19.00	18.76			
	802.11n-HT40	38	5190	MCS0	19.00	18.70			
	002.1111-11140	46	5230	IVICOU	19.00	18.68			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 86 of 267

Full Power (Sensor OFF)								
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max.	Average power (dBm)		
	802.11a	52	5260	6Mbps	19.00	18.92		
		56	5280		19.00	18.88		
		60	5300		19.00	18.72		
		64	5320		19.00	18.63		
5.25-5.35 GHz		52	5260		19.00	18.74		
0.23-3.33 GHZ	802.11n-HT20	56	5280	MCS0	19.00	18.59		
	002.1111-11120	60	5300	IVICSU	19.00	18.85		
		64	5320		19.00	18.63		
	802.11n-HT40	54	5270	MCS0	19.00	18.87		
	002.1111-11140	62	5310	IVICOU	19.00	18.65		

		Full Powe	r (Sensor O	FF)		
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max.	Average power (dBm)
		100	5500		19.00	18.82
		120	5600	6Mbps	19.00	18.93
	802.11a	124	5620		19.00	18.45
		128	5640		19.00	18.66
		140	5700		19.00	18.41
		100	5500		19.00	18.65
5600 MHz		120	5600		19.00	18.74
3000 1011 12	802.11n-HT20	124	5620	MCS0	19.00	18.54
		128	5640		19.00	18.49
		140	5700		19.00	18.93
		102	5510		19.00	18.63
	802.11n-HT40	118	5590	MCS0	19.00	18.52
	80∠.11n-H140	126	5630		19.00	18.64
		134	5670		19.00	18.95

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 87 of 267

	Full Power (Sensor OFF)								
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max.	Average power (dBm)			
	802.11a	149	5745	6Mbps	19.00	18.99			
		157	5785		19.00	18.81			
		165	5825		19.00	18.92			
5800 MHz		149	5745		19.00	18.74			
3600 1011 12	802.11n-HT20	157	5785	MCS0	19.00	18.79			
		165	5825		19.00	18.61			
	802.11n-HT40	151	5755	MCS0	19.00	18.96			
	002.1111-11140	159	5795	IVICSU	19.00	18.67			

	Reduction Power (Sensor ON)								
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max.	Average power (dBm)			
		1	2412		14.50	14.31			
	802.11b	6	2437	1Mbps	14.50	14.43			
		11	2462		14.50	14.39			
	802.11g	1	2412	6Mbps	14.50	14.41			
		6	2437		14.50	14.50			
2450 MHz		11	2462		14.50	14.46			
2430 1011 12		1	2412		14.50	14.19			
	802.11n-HT20	6	2437	MCS0	14.50	14.28			
		11	2462		14.50	14.44			
	802.11n-HT40	3	2422	MCS0	14.50	14.44			
		6	2437		14.50	14.47			
		9	2452		14.50	14.24			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 88 of 267

	Reduction Power (Sensor ON)								
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max.	Average power (dBm)			
	802.11a	36	5180		7.50	7.42			
		40	5200	6Mbps	7.50	7.41			
		44	5220		7.50	7.36			
		48	5240		7.50	7.35			
5.15-5.25 GHz		36	5180		7.50	7.24			
0.13-3.23 GHZ	802.11n-HT20	40	5200	MCS0	7.50	7.48			
	002.1111-11120	44	5220	IVICSU	7.50	7.41			
		48	5240		7.50	7.44			
	802.11n-HT40	38	5190	MCS0	7.50	7.21			
	002.1111-11140	46	5230	IVICOU	7.50	7.45			

	Reduction Power (Sensor ON)								
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max.	Average power (dBm)			
	802.11a	52	5260	6Mbps	7.50	7.44			
		56	5280		7.50	7.43			
		60	5300		7.50	7.32			
		64	5320		7.50	7.44			
5.25-5.35 GHz		52	5260		7.50	7.25			
0.23-3.33 GHZ	802.11n-HT20	56	5280	MCS0	7.50	7.29			
	002.1111-11120	60	5300	IVICOU	7.50	7.44			
		64	5320		7.50	7.50			
	802.11n-HT40	54	5270	MCS0	7.50	7.38			
	002.1111-11140	62	5310	IVICOU	7.50	7.19			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 89 of 267

	Re	duction P	ower (Senso	or ON)		
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max.	Average power (dBm)
		100	5500		8.00	7.72
	802.11a	120	5600	6Mbps	8.00	7.44
		124	5620		8.00	7.65
		128	5640		8.00	7.48
		140	5700		8.00	7.92
		100	5500		8.00	7.94
5600 MHz		120	5600		8.00	7.83
3000 1011 12	802.11n-HT20	124	5620	MCS0	8.00	7.49
		128	5640		8.00	7.57
		140	5700		8.00	7.85
		102	5510		8.00	7.95
	000 44 m LIT40	118	5590	MCS0	8.00	7.74
	802.11n-HT40	126	5630		8.00	7.71
		134	5670		8.00	7.69

Reduction Power (Sensor ON)								
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max.	Average power (dBm)		
	802.11a	149	5745	6Mbps	9.50	9.45		
		157	5785		9.50	9.48		
		165	5825		9.50	9.31		
5800 MHz		149	5745		9.50	9.44		
3600 WII 12	802.11n-HT20	157	5785	MCS0	9.50	9.46		
		165	5825		9.50	9.47		
	802.11n-HT40	151	5755	MCS0	9.50	9.43		
	002.1111-11140	159	5795	IVICOU	9.50	9.15		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 90 of 267

# Bluetooth conducted power table:

Mode	Channel	Frequency	Average	Max. Rated Avg.			
Mode	Chamilei	(MHz)	1Mbps	2Mbps	3Mbps	Power + Max. Tolerance	
	CH 00	2402	-1.07	-0.92	0.93		
BR/EDR	CH 39	2441	0.02	1.03	1.84	4	
	CH 78	2480	-2.10	-0.68	-0.67		

Mode	e Channe	Frequency	Average Output Power (dBm)	Max. Rated Avg.
MOGE	e Channe	(MHz)	GFSK	Power + Max. Tolerance
	CH 00	2402	-1.19	
LE	CH 19	2440	0.24	4
	CH 39	2480	-2.77	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 www.tw.sgs.com



Page: 91 of 267

#### 1.4 Test Environment

Ambient Temperature: 22±2° C Tissue Simulating Liquid: 22±2° C

# 1.5 Operation Description

#### 1. WWAN

The EUT is controlled by using Radio Communication Tester (Anritsu MT8820C), and the communication between the EUT and the tester is established by air link. The EUT was tested in the following configurations:

Configuration 1: Back / top / left sides\_0mm with power reduction.

Configuration 2: Back / top / left sides \_15mm without power reduction.

#### 2. WLAN

Use chipset specific software to control the EUT, and makes it transmit in maximum power. The EUT was tested in the following configurations:

Configuration 1: Back / top / right sides\_0mm with power reduction.

Configuration 2: Backside\_15mm without power reduction.

Configuration 3: Top side 5mm without power reduction.

Configuration 4: Right side\_12mm without power reduction.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Page: 92 of 267

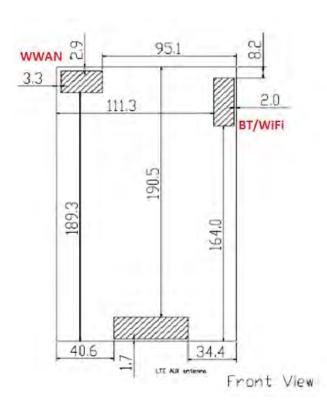

Front view of tablet (The p-sensor is colocated with WWAN and WLAN antenna respectively)

#### Note:

802.11b DSSS SAR Test Requirements:

- 1. SAR is measured for 2.4 GHz 802.11b DSSS mode using the highest measured maximum output power channel, when the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

802.11g/n OFDM SAR Test Exclusion Requirements:

3. SAR is not required for 802.11g/n since the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 93 of 267

# **Initial Test Configuration:**

- 4. An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band.
- 5. SAR is measured using the highest measured maximum output power channel. When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
- 6. For WLAN antenna, 5.2n(HT40)/5.3n(HT40)/5.6n(HT40)/5.8n(HT40) are chosen to be the initial test configurations.
- 7. For 5.2n(HT40)/5.3n(HT40)/5.6n(HT40)/5.8n(HT40), since the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for subsequent test configuration.
- 8. BT and WLAN use the same antenna path and Bluetooth may transmit simultaneously with WWAN.
- LTE modes test according to KDB 941225D05v02r05.
  - a. Per Section 5.2.1, the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation.
  - Using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
  - When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel.
  - When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel. b. Per Section 5.2.2, the largest channel bandwidth and measure SAR for QPSK with 50% RB allocation
  - The procedures required for 1 RB allocation in 5.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 94 of 267

- c. Per Section 5.2.3, the largest channel bandwidth and measure SAR for QPSK with 100% RB allocation
- For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 5.2.1 and 5.2.2 are ≤ 0.8 W/kg.
- Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
- d. Per Section 5.2.4, Higher order modulations
- For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in sections 5.2.1, 5.2.2 and 5.2.3 to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is > ½ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.
- e. Per Section 5.3, other channel bandwidth standalone SAR test requirements
- For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section 5.2 to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is > ½ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg. The equivalent channel configuration for the RB allocation, RB offset and modulation etc. is determined for the smaller channel bandwidth according to the same number of RB allocated in the largest channel bandwidth.

TDD LTE was tested at highest duty factor using UL-DL configuration 0 with 6 UL subframes and 2 S subframes using extended cyclic prefix only and special subframe configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Section 4, the duty factor for special subframe configuration 6 using extended cyclic prefix is 0.633.

10. According to KDB447498 D01, testing of other required channels is not required when the reported 1-g SAR for the highest output channel is ≤ 0.8 W/kg, when the transmission band is ≤ 100 MHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 95 of 267

11. According to KDB865664 D01, SAR measurement variability must be assessed for each frequency band. When the original highest measured SAR is ≥ 0.8 W/kg, repeated that measurement once. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~10% from the 1-g SAR limit)

- 12. Based on KDB447498D01,
  - (1) SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances≤ 50 mm are determined by:

$$\frac{\text{Max. tune up power(mW)}}{\text{Min. test separation distance(mm)}} \times \sqrt{f(\text{GHz})} \leq 3$$

When the minimum test separation distance is < 5mm, 5mm is applied to determine SAR test exclusion.

Mode		LTE Band 2	LTE Band 4	LTE Band 5	LTE Band 12	LTE Band 25	LTE Band 26	LTE Band 41
Max. tune-up power(dBm)		24	24	24	24	24	24	24
Max. tune-up power(mW)		251.189	251.189	251.189	251.189	251.189	251.189	251.189
Top side	Test separation distance (mm)	less than 5	less than 5	less than 5	less than 5	less than 5	less than 5	less than 5
	Calculation value	69.248	66.363	46.153	42.361	69.339	46.085	82.243
	Require SAR testing?	YES	YES	YES	YES	YES	YES	YES
Right side	Test separation distance (mm)	95.1	95.1	95.1	95.1	95.1	95.1	95.1
	Calculation value	457.925	457.636	258.378	218.010	457.934	257.619	459.224
	Require SAR testing?	NO	NO	NO	NO	NO	NO	NO
Left side	Test separation distance (mm)	less than 5	less than 5	less than 5	less than 5	less than 5	less than 5	less than 5
	Test separation distance (mm)	69.248	66.363	46.153	42.361	69.339	46.085	82.243
	Require SAR testing?	YES	YES	YES	YES	YES	YES	YES
Bottom side	Test separation distance (mm)	189.3	189.3	189.3	189.3	189.3	189.3	189.3
	Calculation value	1399.925	1399.636	788.410	664.518	1399.934	786.081	1401.224
	Require SAR testing?	NO	NO	NO	NO	NO	NO	NO
Back side	Test separation distance (mm)	less than 5	less than 5	less than 5	less than 5	less than 5	less than 5	less than 5
	Calculation value	69.248	66.363	46.153	42.361	69.339	46.085	82.243
	Require SAR testing?	YES	YES	YES	YES	YES	YES	YES

I	Mode	WLAN 2.45GHz	WLAN 5GHz	
Max. tune-	up power(dBm)	19	19	
Max. tune-	-up power(mW)	79.433	79.433	
	Test separation distance (mm)	8.2	8.2	
Top side	Calculation value	15.200	23.319	
	Require SAR testing?	YES	YES	
	Test separation distance (mm)	less than 5	less than 5	
Right side	Calculation value	24.927	38.243	
	Require SAR testing?	YES	YES	
	Test separation distance (mm)	111.3	111.3	
Left side	Calculation value	615.493	616.824	
	Require SAR testing?	NO	NO	
Bottom	Test separation distance (mm)	164	164	
side	Calculation value	1142.493	1143.824	
	Require SAR testing?	NO	NO	
	Test separation distance (mm)	less than 5	less than 5	
Back side	Calculation value	24.927	38.243	
	Require SAR testing?	YES	YES	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 96 of 267

(2) For test separation distances > 50 mm, and the frequency at 100 MHz to 1500MHz, the SAR test exclusion threshold is determined according to the following, and as illustrated in Appendix B of KDB447498 D01. [(Threshold at 50mm in step1) + (test separation distance-50mm)x( $\frac{f(NHz)}{160}$ )](mW),

(3) For test separation distances > 50 mm, and the frequency at >1500MHz to 6GHz, the SAR test exclusion threshold is determined according to the following, and as illustrated in Appendix B of KDB447498 D01.

[(Threshold at 50mm in step1) + (test separation distance-50mm)x10](mW),

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd.



Page: 97 of 267

# 1.6 Proximity sensor operation description

The P-sensor being used to reduce output power is capacitive in which when the object such as human body, metal or plastic is being approached, the sensing capacitance would be increased with the antenna pad. Once the capacitance is accumulated, and reached over the threshold as set in MCU of the microchip, the interruption signal is pulled low (High state without trigger) and further inform modem module of the transmitter to make power reduction.

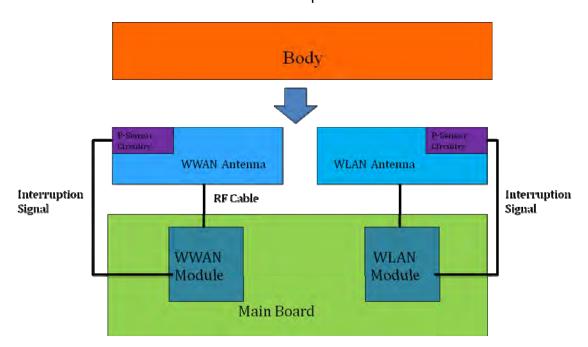

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd.



Page: 98 of 267

# 1.6.1 Proximity sensor measurement procedure

- The proximity sensor are collocated with WWAN and WLAN antenna respectively.
- 2. Output power is measured, and WWAN monitored by using the communication tester, WLAN monitored by using the power meter & sensor. A RF cables with sufficient length was being attached from the antenna port of the module, and used for the measurement. The appropriate loss attenuated from cable is compensated in the communication tester and power meter.

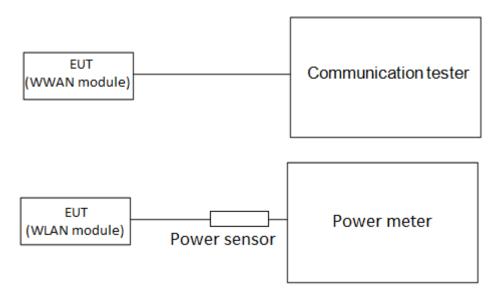

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 99 of 267

## 1.6.2 Trigger distances for back/top/left/right sides

## Test procedure:

- 1. The entire back surface or edge of the tablet is positioned below a flat phantom filled with the required tissue equivalent medium and positioned at least 20 mm further than the distance that triggers power reduction.
- The back surface or edge is moved toward the phantom in 3 mm steps until the sensor triggers.
- 3. The back surface or edge is then moved back (further away) from the phantom until maximum output power is returned to the normal maximum level.
- The back surface or edge is again moved toward the phantom, but in 1 mm steps, until it is at least 5 mm past the triggering point or touching the phantom
- 5. If the tablet is not touching the phantom, it is moved in 3 mm steps until it touches the phantom to confirm that the sensor remains triggered and the maximum power stays reduced.
- 6. The process is then reversed by moving the tablet away from the phantom to determine triggering release, until it is at least 10 mm beyond the point that triggers the return of normal maximum power.
- 7. The measured output power within ± 5 mm of the triggering points, or until the tablet is touching the phantom, for movements to and from the phantom should be tabulated.
- To ensure all production units are compliant, it is generally necessary to reduce the triggering distance determined from the triggering tests by 1 mm, or more if it is necessary, and use the smallest distance for movements to and from the phantom, minus 1 mm, as the sensor triggering distance for determining the SAR measurement distance.
- 9. For back side, the trigger distance of WWAN and WLAN proximity sensors both are 16mm.
- 10. For top side, the trigger distance of WWAN proximity sensor is 17mm, and the trigger distance of WLAN proximity sensor is 7mm. We perform the 1.6.3 tilt angle testing in next step.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

> t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sas.com

SGS Taiwan Ltd.



Page: 100 of 267

11. For left side, the trigger distance of proximity sensor is 17mm, and we perform the 1.6.3 tilt angle testing in next step.

12. For right side, the trigger distance of proximity sensor is 14mm, and we perform the 1.6.3 tilt angle testing in next step.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com



Page: 101 of 267

# 1.6.3 Tilt angle testing

#### Test procedure:

- The influence of table tilt angles to proximity sensor triggering is determined by positioning each tablet edge that contains a transmitting antenna, perpendicular to the flat phantom, at the smallest sensor triggering test distance determined in sections 1.6.2 by rotating the tablet around the edge next to the phantom in ≤ 10 deg increments until the tablet is +/- 45deg or more from the vertical position at 0 deg.
- If sensor triggering is released and normal maximum output power is restored within the +/- 45deg range, the procedures in step 1) should be repeated by reducing the tablet to phantom separation distance by 1 mm until the proximity sensor no longer releases triggering, and maximum output power remains in the reduced mode.
- 3. The smallest separation distance determined in steps 1) and 2), minus 1 mm, is the sensor triggering distance for tablet tilt coverage.
- 4. The smallest separation distance determined in sections 1.6.2, 1.6.3 minus 1 mm should be used in the SAR measurements.
- The influence of tablet tilt angles to proximity sensor triggering is determined by positioning top/left/right sides, please refer to table 1.6.6 ~ 1.6.9.
- 6. After the tilt angle testing for WWAN top side, the sensor is not released during +/- 45deg, so 17-1=16mm, is the sensor triggering distance for tablet tilt coverage. The smallest separation distance minus 1 mm(16-1=15mm) should be used in the SAR measurements.
- 7. After the tilt angle testing for WLAN top side, the sensor is not released during +/- 45deg, so 7-1=6mm, is the sensor triggering distance for tablet tilt coverage. The smallest separation distance minus 1 mm(6-1=5mm) should be used in the SAR measurements.
- After the tilt angle testing for left side, the sensor is not released during +/- 45deg, so 17-1=16mm, is the sensor triggering distance for tablet tilt coverage. The smallest separation distance minus 1 mm(16-1=15mm) should be used in the SAR measurements.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

公司 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Page: 102 of 267

 After the tilt angle testing for right side, the sensor is not released during +/- 45deg, so 14-1=13mm, is the sensor triggering distance for tablet tilt coverage. The smallest separation distance minus 1 mm(13-1=12mm) should be used in the SAR measurements.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 103 of 267

## 1.6.4 Proximity sensor coverage

The following procedures do not apply and are not required for configurations where the antenna and sensor are collocated and the peak SAR location is overlapping with the sensor.

#### Test procedure:

- The back surface or edges of the tablet is positioned at a test separation distance less than or equal to the distance required for back surface or edge triggering, with both the antenna and sensor pad located at least 20 mm laterally outside the edge (boundary) of the phantom, along the direction of maximum antenna and sensor offset.
- 2. The similar sequence of steps applied to determine sensor triggering distance in section 1.6.2 are used to verify back surface and edge sensor coverage by moving the tablet (sensor and antenna) horizontally toward the phantom while maintaining the same vertical separation between the back surface or edge and the phantom.
- 3. After the exact location where triggering of power reduction is determined, with respect to the sensor and antenna, the tablet movement should be continued, in 3 mm increments, until both the sensor and antenna(s) are fully under the phantom and at least 20 mm inside the phantom edge.
- 4. The process is then repeated from the other direction, at the opposite end of maximum antenna and sensor offset, by rotating the tablet 180 degrees.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 104 of 267


#### 1.6.5 Results

The measured output power within  $\pm 5$  mm of the triggering points, or until the tablet is touching the phantom, for movements to and from the phantom is tabulated in the following.

#### **Back side**

Moving device toward the phantom

WWAN (LTE B2/B4/B5/B12/B25/B26/B41)

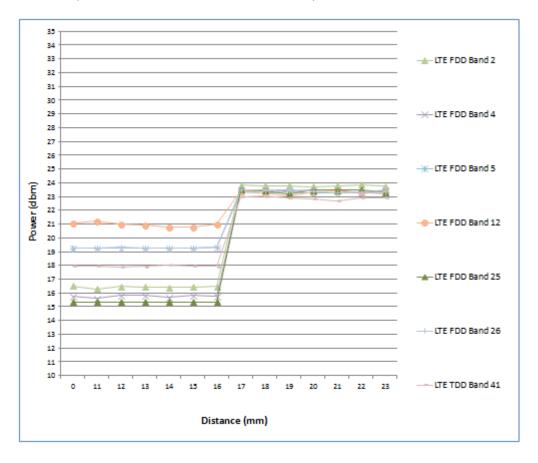

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format


documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 105 of 267

# WLAN (2.4GHz/5GHz)

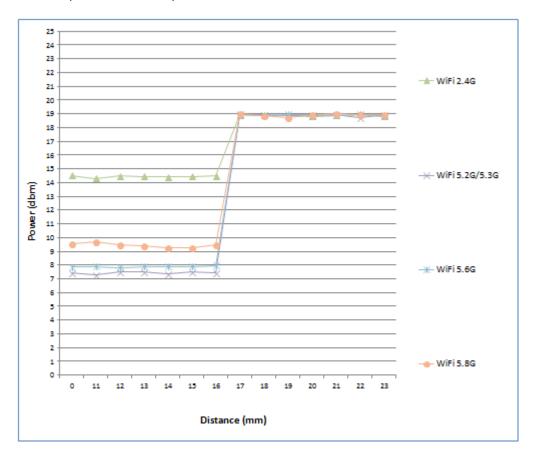

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd.



Page: 106 of 267

# Moving device away from the phantom

# WWAN (LTE B2/B4/B5/B12/B25/B26/B41)

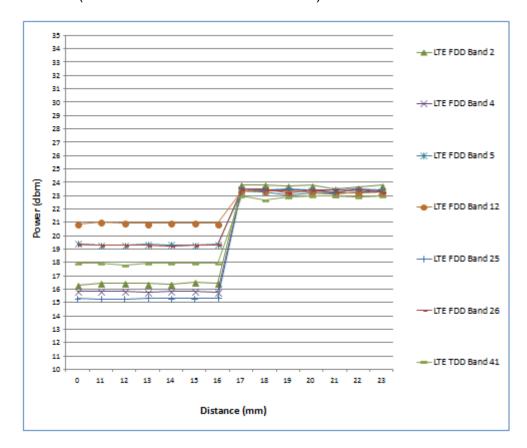

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_end\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.


No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sgs.com



Page: 107 of 267

# WLAN (2.4GHz/5GHz)

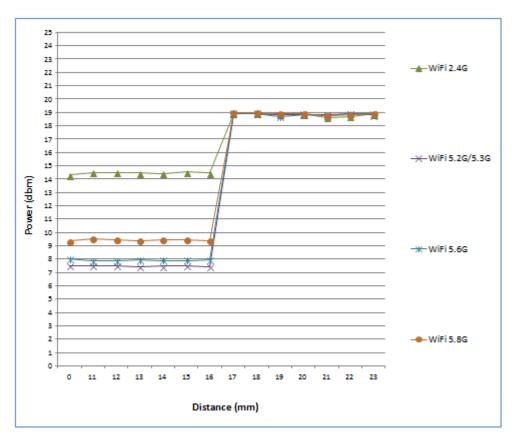

For WWAN back side, the worst trigger distance of proximity sensor is 16mm, thus we test back side SAR in 15mm without power reduction and 0mm with power reduction.

For WLAN back side, the worst trigger distance of proximity sensor is 16mm, thus we test back side SAR in 15mm without power reduction and 0mm with power reduction.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 108 of 267

# Top side

# Moving device toward the phantom

# WWAN (LTE B2/B4/B5/B12/B25/B26/B41)

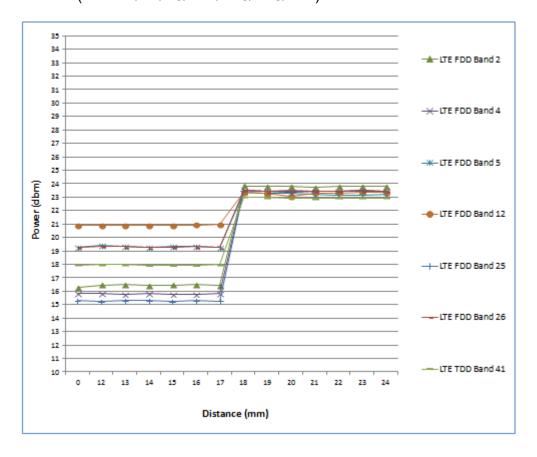

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 109 of 267

# WLAN (2.4GHz/5GHz)

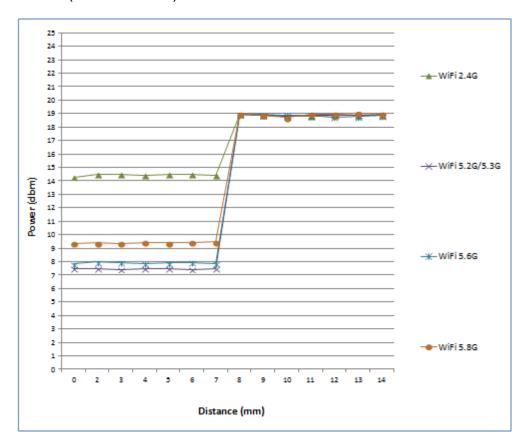

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488


SGS Taiwan Ltd.



Page: 110 of 267

## Moving device away from the phantom

#### WWAN (LTE B2/B4/B5/B12/B25/B26/B41)

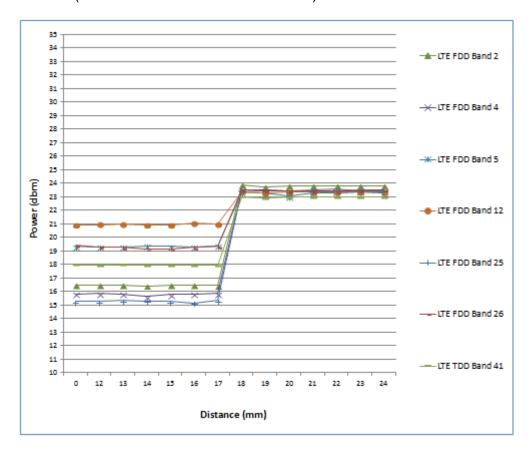

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 111 of 267

# WLAN (2.4GHz/5GHz)

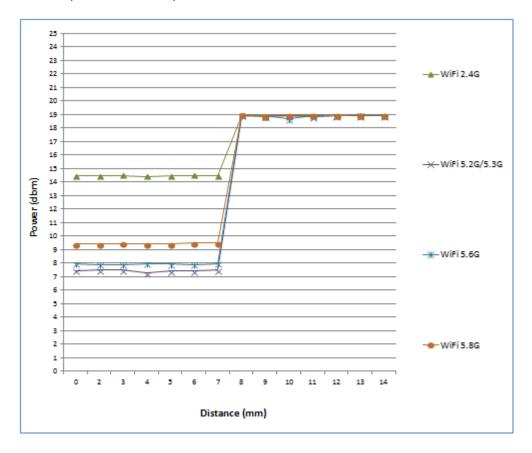

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.




Page: 112 of 267

#### Left side

## Moving device toward the phantom

## WWAN (LTE B2/B4/B5/B12/B25/B26/B41)

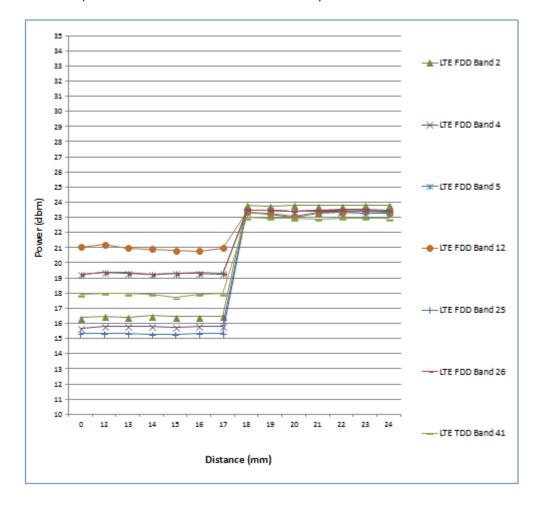

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd.



Page: 113 of 267

## Moving device away from the phantom

## WWAN (LTE B2/B4/B5/B12/B25/B26/B41)

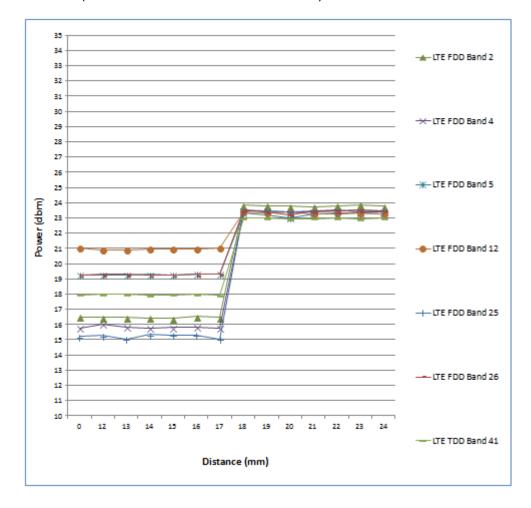

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd. N




Page: 114 of 267

## Right side

## Moving device toward the phantom

WLAN (2.4GHz/5GHz)

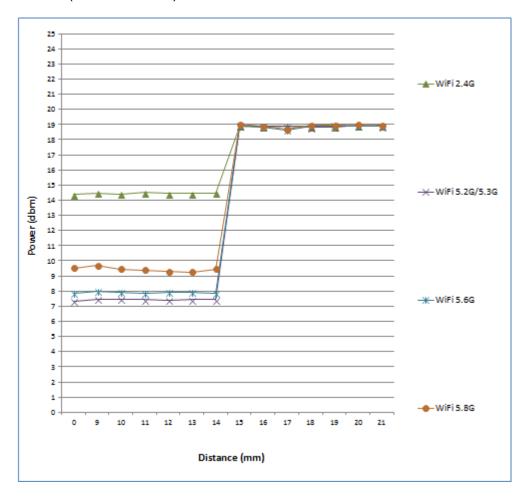

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format


documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 115 of 267

## Moving device away from the phantom

## WLAN (2.4GHz/5GHz)

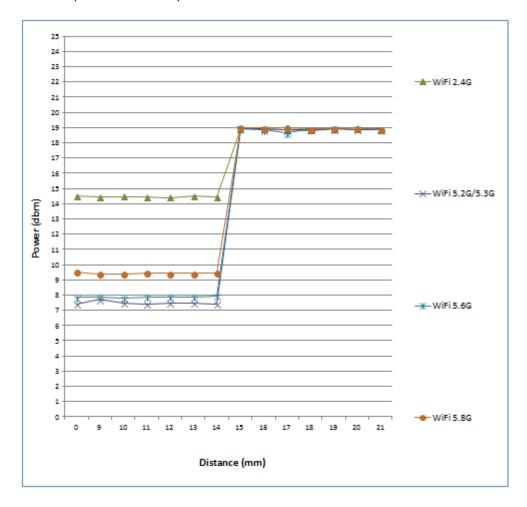

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 116 of 267

Table 1.6.6 Tilt angle test results for **WWAN top side** 

P-sensor	-50	-45	-40	-30	-20	-10	0	10	20	30	40	45	50
ON/OFF	deg												
17mm	ON												

During the tilt angle testing for top side, the sensor is not released in 17mm, so 17-1=16mm, is the sensor triggering distance for tablet tilt coverage. The smallest separation distance minus 1 mm (16-1=15mm) should be used in the SAR measurements for WWAN top side.

Table 1.6.7 Tilt angle test results for **WLAN top side** 

P-sensor	-50	-45	-40	-30	-20	-10	0	10	20	30	40	45	50
ON/OFF	deg												
7mm	ON												

During the tilt angle testing for top side, the sensor is not released in 7mm, so 7-1=6mm, is the sensor triggering distance for tablet tilt coverage. The smallest separation distance minus 1 mm (6-1=5mm) should be used in the SAR measurements for WLAN top side.

Table 1.6.8 Tilt angle test results for **WWAN left side** 

P-sensor	-50	-45	-40	-30	-20	-10	0	10	20	30	40	45	50
ON/OFF	deg												
17mm	ON												

During the tilt angle testing for left side, the sensor is not released in 17mm, so 17-1=16mm, is the sensor triggering distance for tablet tilt coverage. The smallest separation distance minus 1 mm(16-1=15mm) should be used in the SAR measurements for left side.

Table 1.6.9 Tilt angle test results for **WLAN right side** 

P-sensor	-50	-45	-40	-30	-20	-10	0	10	20	30	40	45	50
ON/OFF	deg												
14mm	ON												

During the tilt angle testing for right side, the sensor is not released in 14mm, so 14-1=13mm, is the sensor triggering distance for tablet tilt coverage. The smallest separation distance minus 1 mm(13-1=12mm) should be used in the SAR measurements for Right side.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 117 of 267

#### Note:

- 1. The triggering variations and hysteresis effect has been evaluated separately according to the tissue-equivalent medium required for each frequency band, and sensor triggering does not change with different tissue-equivalent media.
- 2. The default power level for sensor failure and malfunctioning, including all compliance concerns, has been addressed in the client's operation description (1.6.6~1.6.9) for the proximity sensor implementation to be acceptable.
- 3. Conducted power is monitored qualitatively to identify the general triggering characteristics and recorded quantitatively, versus spacing.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



Page: 118 of 267

## 1.6.6 Operation description for P-sensor

#### Power Reduction Design Specification (for P-sensor)

The mechanism of power reduction is used only for WWAN and WLAN, not for Bluetooth. The reduced power for each technology/band is defined in Table1-1. With P-sensor mechanism, the LTE and WLAN default power when P-sensor failure or malfunction are show in Table1-2 as below.

Table1-1: The power reduction scenario table

Band	Power Reduction
LTE B2/4/5/12/25/26/41	YES
WLAN	YES
ВТ	NO

Table1-2: The default maximum power when p-sensor failure or malfunction

Technology / Band	Mode	Default Maximum Power (dBm)
LTE B2	All	16.5
LTE B4	All	16.0
LTE B5	All	19.5
LTE B12	All	21.0
LTE B25	All	15.5
LTE B26	All	19.5
LTE B41	All	18.0
WiFi 2.4G	All	14.5
WiFi 5.2G/5.3G	All	7.5
WiFi 5.6G	All	8.0
WiFi 5.8G	All	9.5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 119 of 267

## 1.7 The SAR Measurement System

A block diagram of the SAR measurement System is given in Fig. a. This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY 5 professional system). The model EX3DV4 field probe is used to determine the internal electric fields. The SAR can be obtained from the equation SAR=  $\sigma$  ( $|Ei|^2$ )/  $\rho$  where  $\sigma$  and  $\rho$  are the conductivity and mass density of the tissue-simulant.

The DASY 5 system for performing compliance tests consists of the following items:

- 1. A standard high precision 6-axis robot (Staubli RX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- 2. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage intissue simulating liquid. The probe is equipped with an optical surface detector system.
- 3. A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

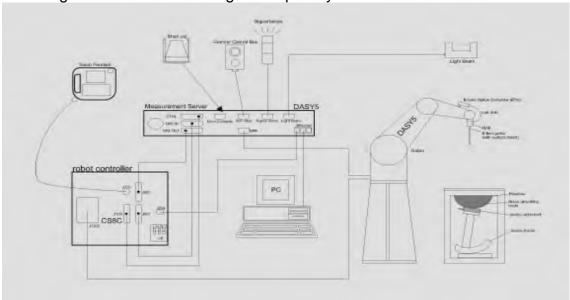


Fig. a The block diagram of SAR system

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

> t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sas.com



Page: 120 of 267

- 4. The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- 5. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- 6. A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- 7. A computer operating Windows 7.
- 8. DASY 5 software.
- 9. Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- 10. The SAM twin phantom enabling testing left-hand and right-hand usage.
- 11. The device holder for handheld mobile phones.
- 12. Tissue simulating liquid mixed according to the given recipes.
- 13. Validation dipole kits allowing to validate the proper functioning of the system.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

\*\*SGS Taiwan Ltd.\*\*

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

**有限公司** t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Page: 121 of 267

## 1.8 System Components

#### **EX3DV4 E-Field Probe**

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 750/835/1750/1900/2450/2600/5200/ 5300/5600/5800 MHz Additional CF for other liquids and frequencies upon request	
Frequency	10 MHz to > 6 GHz	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic	10 μW/g to > 100 mW/g	
Range	Linearity: ± 0.2 dB (noise: typically < 1 µW/g)	
Dimensions	Tip diameter: 2.5 mm	
Application	High precision dosimetric measurements in any exposure sce (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision better 30%.	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 122 of 267

#### PHANTOM

PHANTOW		
Model	ELI	
Construction	body-mounted wireless device to 6 GHz. ELI is fully compatible standard and all known tissue optimized regarding its perform our standard phantom tables. I liquid. Reference markings on the complete setup, including and measurement grids, by te	ompliance testing of handheld and is in the frequency range of 30 MHz le with the IEC 62209-2 simulating liquids. ELI has been nance and can be integrated into A cover prevents evaporation of the the phantom allow installation of all predefined phantom positions aching three points. The phantom dosimetric probes and dipoles.
Shell	2 ± 0.2 mm	
Thickness		
Filling Volume	Approx. 30 liters	
Dimensions	Major axis: 600 mm Minor axis: 400 mm	

#### DEVICE HOLDER

DEVICE HOLL	JER	
Construction	The device holder (Supporter) for Notebook is made by POM (polyoxymethylene resin), which is non-metal and non-conductive. The height can be adjusted to fit varies kind of notebooks.	
		2011001101401

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 123 of 267

#### 1.9 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. b. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values. These tests were done at 750/835/ 1750/1900/2450/2600/5200/5300/5600/5800MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1 (SAR values are normalized to 1W forward power delivered to the dipole). During the tests, the liquid depth above the ear reference points was  $\geq 15$  cm  $\pm 5$  mm (frequency  $\leq 3$  GHz) or  $\geq$ 10 cm ± 5 mm (frequency > 3 G Hz) in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

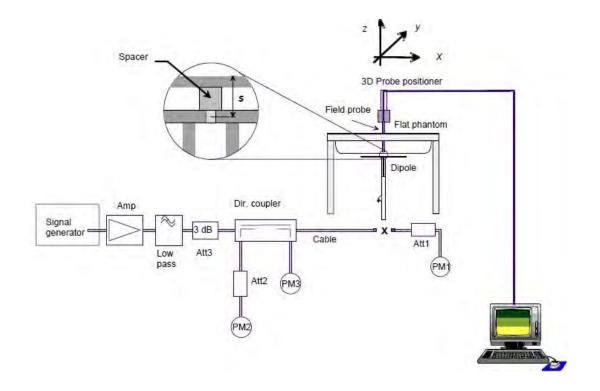


Fig. b The block diagram of system verification

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 124 of 267

Validation Kit	S/N	Frequency (MHz)		1W Target SAR-1g (mW/g)	Measured SAR-1g (mW/g)	Measured SAR-1g normalized to 1W	Deviation (%)	Measured Date
D750V3	1015	750	Body	8.77	2.24	8.96	2.17%	Mar. 30, 2017
D835V2	4d063	835	Body	9.57	2.41	9.64	0.73%	Mar. 28, 2017
D1750V2	1008	1750	Body	37.3	9.27	37.08	-0.59%	Mar. 23, 2017
D1900V2	5d027	1900	Body	39.7	9.73	38.92	-1.96%	Mar. 21, 2017
D2450V2	727	2450	Body	49.6	12.8	51.2	3.23%	Mar. 20, 2017
D2600V2	1005	2600	Body	55.1	14	56	1.63%	Mar. 17, 2017
		5200	Body	72.8	7.2	72	-1.10%	Mar. 15, 2017
D5GHzV2	1023	5300	Body	76.1	7.36	73.6	-3.29%	Mar. 13, 2017
D5GHZV2	1023	5600	Body	79.6	8.11	81.1	1.88%	Mar. 10, 2017
		5800	Body	75.9	7.87	78.7	3.69%	Mar. 08, 2017

Table 1. Results of system validation

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 125 of 267

#### 1.10 Tissue Simulant Fluid for the Frequency Band

The dielectric properties for this body-simulant fluid were measured by using the Schmid & Partner Engineering AG Model DAKS Dielectric Probe Kit in conjunction with Network Analyzer .

All dielectric parameters of tissue simulates were measured within 24 hours of SAR measurements. The measured conductivity and permittivity are all within  $\pm$  5% of the target values.

Tissue Type	Measurement Date	Measured Frequency (MHz)	Target Dielectric Constant, εr	Target Conductivity, σ (S/m)	Measured Dielectric Constant, εr	Measured Conductivity, σ (S/m)	% dev εr	% dev σ
		704	55.710	0.960	54.713	0.934	1.79%	2.69%
	Mar. 30, 2017	707.5	55.697	0.960	54.727	0.937	1.74%	2.40%
	War. 50, 2017	711	55.683	0.960	54.717	0.940	1.74%	2.12%
		750	55.531	0.963	54.338	0.982	2.15%	-1.93%
		822.5	55.249	0.969	53.474	0.997	3.21%	-2.89%
		829	55.223	0.970	53.432	1.002	3.24%	-3.35%
		831.5	55.214	0.970	53.402	1.005	3.28%	-3.64%
	Mar. 28, 2017	835	55.200	0.970	53.344	1.007	3.36%	-3.81%
		836.5	55.195	0.972	53.297	1.009	3.44%	-3.82%
		841.5	55.180	0.978	53.267	1.013	3.47%	-3.58%
		844	55.172	0.981	53.197	1.016	3.58%	-3.56%
	Mar. 23, 2017	1720	53.511	1.469	51.681	1.504	3.42%	-2.35%
		1732.5	53.478	1.477	51.559	1.519	3.59%	-2.82%
		1745	53.445	1.485	51.542	1.536	3.56%	-3.42%
Body		1750	53.432	1.488	51.536	1.537	3.55%	-3.26%
Body		1860	53.300	1.520	52.039	1.474	2.37%	3.03%
		1880	53.300	1.520	52.011	1.499	2.42%	1.38%
	Mar. 21, 2017	1882.5	53.300	1.520	51.995	1.500	2.45%	1.32%
		1900	53.300	1.520	51.985	1.520	2.47%	0.00%
		1905	53.300	1.520	51.951	1.524	2.53%	-0.26%
		2412	52.751	1.914	52.634	1.953	0.22%	-2.05%
	Mar. 20, 2017	2437	52.717	1.938	52.585	1.995	0.25%	-2.96%
	IVIAI. 20, 2017	2450	52.700	1.950	52.528	2.018	0.33%	-3.49%
		2462	52.685	1.967	52.533	2.036	0.29%	-3.51%
		2506	52.629	2.029	51.711	2.105	1.74%	-3.72%
		2549.5	52.573	2.091	51.324	2.121	2.38%	-1.43%
	Mar. 17, 2017	2593	52.518	2.153	51.075	2.199	2.75%	-2.15%
	IVIAI. 17, 2017	2600	52.509	2.163	51.119	2.216	2.65%	-2.46%
		2636.5	52.463	2.214	51.316	2.268	2.19%	-2.42%
		2680	52.407	2.276	50.777	2.287	3.11%	-0.48%

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 126 of 267

Tissue Type	Measurement Date	Measured Frequency (MHz)	Target Dielectric Constant, εr	Target Conductivity, σ (S/m)	Measured Dielectric Constant, εr	Measured Conductivity, σ (S/m)	% dev ɛr	% dev σ
		5190	49.028	5.288	48.327	5.410	1.43%	-2.31%
	Mar. 15, 2017	5200	49.014	5.299	48.367	5.484	1.32%	-3.49%
		5230	48.974	5.334	48.219	5.526	1.54%	-3.59%
	Mar. 13, 2017	5270	48.919	5.381	48.061	5.560	1.75%	-3.33%
		5300	48.879	5.416	48.283	5.539	1.22%	-2.27%
		5310	48.865	5.428	48.287	5.544	1.18%	-2.14%
Body		5510	48.594	5.661	49.016	5.722	-0.87%	-1.07%
	Mar. 10, 2017	5590	48.485	5.755	48.846	5.833	-0.74%	-1.36%
	Iviai. 10, 2017	5600	48.471	5.766	48.838	5.855	-0.76%	-1.54%
		5670	48.376	5.848	48.676	5.954	-0.62%	-1.81%
		5755	48.261	5.947	48.095	6.141	0.34%	-3.25%
	Mar. 8, 2017	5795	48.207	5.994	48.035	6.191	0.36%	-3.28%
		5800	48.200	6.000	48.048	6.197	0.32%	-3.28%

Table 2. Dielectric Parameters of Tissue Simulant Fluid

#### The composition of the tissue simulating liquid:

						<u> </u>		
<b></b>				Ingre	dient			Tatal
Frequency (MHz)	Mode	DGMBE	Water	Salt	Preventol D-7	Cellulose	Sugar	Total amount
750	Body	_	631.68 g	11.72 g	1.2 g	-	600 g	1.0L(Kg)
850	Body	_	631.68 g	11.72 g	1.2 g	-	600 g	1.0L(Kg)
1750	Body	300.67 g	716.56 g	4.0 g	_	-	1	1.0L(Kg)
1900	Body	300.67 g	716.56 g	4.0 g	_	_	_	1.0L(Kg)
2450	Body	301.7ml	698.3ml	_	_	_	ı	1.0L(Kg)
2600	Body	301.7ml	698.3ml	_	_	_	_	1.0L(Kg)

Body Simulating Liquids for 5 GHz, Manufactured by SPEAG:

Ingredients	Water	Esters, Emulsifiers, Inhibitors	Sodium and Salt
(% by weight)	60-80	20-40	0-1.5

Table 3. Recipes for Tissue Simulating Liquid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 127 of 267

#### 1.11 Evaluation Procedures

The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- 1. The extraction of the measured data (grid and values) from the Zoom Scan.
- 2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- 3. The generation of a high-resolution mesh within the measured volume
- 4. The interpolation of all measured values from the measurement grid to the high-resolution grid
- 5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- 6. The calculation of the averaged SAR within masses of 1g and 10g.

The probe is calibrated at the center of the dipole sensors that is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated. The angle between the probe axis and the surface normal line is less than 30 degree.

In the Area Scan, the gradient of the interpolation function is evaluated to find all the extreme of the SAR distribution. The uncertainty on the locations of the extreme is less than 1/20 of the grid size. Only local maximum within -2 dB of the global maximum are searched and passed for the Cube Scan measurement. In the Cube Scan, the interpolation function is used to extrapolate the Peak SAR from the lowest measurement points to the inner phantom surface (the extrapolation distance). The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5mm.

The maximum search is automatically performed after each area scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the area scanning measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations. The 1g and 10g peak evaluations are only available for the predefined cube 7x7x7 scans. The routines are verified and optimized for the grid dimensions used in these cube measurements.

The measured volume of 30x30x30mm contains about 30g of tissue.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 128 of 267

The first procedure is an extrapolation (incl. Boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume. In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is the moved around until the highest averaged SAR is found. If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

#### 1.12 Probe Calibration Procedures

For the calibration of E-field probes in lossy liquids, an electric field with an accurately known field strength must be produced within the measured liquid. For standardization purposes it would be desirable if all measurements which are necessary to assess the correct field strength would be traceable to standardized measurement procedures. In the following two different calibration techniques are summarized:

#### 1.12.1 Transfer Calibration with Temperature Probes

In lossy liquids the specific absorption rate (SAR) is related both to the electric field (E) and the temperature gradient ( $\delta T / \delta t$ ) in the liquid.

$$SAR = \frac{\sigma}{\rho} |E|^2 = c \frac{\delta T}{\delta t}$$

whereby  $\sigma$  is the conductivity,  $\rho$  the density and c the heat capacity of the liquid.

Hence, the electric field in lossy liquid can be measured indirectly by measuring the temperature gradient in the liquid. Non-disturbing temperature probes (optical probes or thermistor probes with resistive lines) with high spatial resolution (<1-2 mm) and fast reaction time (<1 s) are available and can be easily calibrated with high precision [1]. The setup and the exciting source have no influence on the calibration; only the relative positioning uncertainties of the standard temperature probe and the E-field probe to be calibrated must be considered. However, several problems limit the available accuracy of probe calibrations with temperature probes:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. t (886-2) 2299-3279 www.tw.sas.com



Page: 129 of 267

• The temperature gradient is not directly measurable but must be evaluated from temperature measurements at different time steps. Special precaution is necessary to avoid measurement errors caused by temperature gradients due to energy equalizing effects or convection currents in the liquid. Such effects cannot be completely avoided, as the measured field itself destroys the thermal equilibrium in the liquid. With a careful setup these errors can be kept small.

- The measured volume around the temperature probe is not well defined. It is difficult to calculate the energy transfer from a surrounding gradient temperature field into the probe. These effects must be considered, since temperature probes are calibrated in liquid with homogeneous temperatures. There is no traceable standard for temperature rise measurements.
- The calibration depends on the assessment of the specific density, the heat capacity and the conductivity of the medium. While the specific density and heat capacity can be measured accurately with standardized procedures (~ 2% for c; much better for ρ), there is no standard for the measurement of the conductivity. Depending on the method and liquid, the error can well exceed ±5%.
- Temperature rise measurements are not very sensitive and therefore are often performed at a higher power level than the E-field measurements.
   The nonlinearities in the system (e.g., power measurements, different components, etc.) must be considered.

Considering these problems, the possible accuracy of the calibration of E-field probes with temperature gradient measurements in a carefully designed setup is about  $\pm 10\%$  (RSS) [2]. Recently, a setup which is a combination of the waveguide techniques and the thermal measurements was presented in [3]. The estimated uncertainty of the setup is  $\pm 5\%$  (RSS) when the same liquid is used for the calibration and for actual measurements and  $\pm 7$ -9% (RSS) when not, which is in good agreement with the estimates given in [2].

#### 1.12.2 Calibration with Analytical Fields

In this method a technical setup is used in which the field can be calculated analytically from measurements of other physical magnitudes (e.g., input power). This corresponds to the standard field method for probe calibration in air; however, there is no standard defined for fields in lossy liquids. When using calculated fields in lossy liquids for probe calibration, several points must be considered in the assessment of the uncertainty:

- The setup must enable accurate determination of the incident power.
- The accuracy of the calculated field strength will depend on the assessment of the dielectric parameters of the liquid.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 130 of 267

 Due to the small wavelength in liquids with high permittivity, even small setups might be above the resonant cutoff frequencies. The field distribution in the setup must be carefully checked for conformity with the theoretical field distribution.

#### References

- N. Kuster, Q. Balzano, and J.C. Lin, Eds., Mobile Communications Safety, Chapman & Hall, London, 1997.
- K. Meier, M. Burkhardt, T. Schmid, and N. Kuster, \Broadband calibration of E-field probes in lossy media", IEEE Transactions on Microwave Theory and Techniques, vol. 44, no. 10, pp. 1954{1962, Oct. 1996.
- K. Jokela, P. Hyysalo, and L. Puranen, \Calibration of specific absorption rate (SAR) probes in waveguide at 900 MHz", IEEE Transactions on Instrumentation and Measurements, vol. 47, no. 2, pp. 432{438, Apr. 1998.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 131 of 267

#### 1.13 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate ("SAR") in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE C95.1, By the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter. Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

- Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over an 10 grams of tissue (defined as a tissue volume in the shape of a cube).
- Occupational/Controlled limits apply when persons are exposed as a (2)consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.
- Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

t (886-2) 2299-3279 www.tw.sas.com



Page: 132 of 267

exercise control over their exposure. Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section. (Table 4.)

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR (Brain)	1.60 W/Kg	8.00 W/Kg
Spatial Average SAR (Whole Body)	0.08 W/Kg	0.40 W/Kg
Spatial Peak SAR (Hands/Feet/Ankle/Wrist)	4.00 W/Kg	20.00 W/Kg

Table 4. RF exposure limits

#### Notes:

- 1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
- 2. Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 133 of 267

# 2. Summary of Results

#### LTE FDD Band 2

					Sc	nsor OFF	/without	nower	reduction	`				
	Dondui					31301 011	(without	power	Max. Rated			Averaged 3		
Mode	Bandwi dth (MHz)	Modulatior	RB Size	RB start	Position	Distance (mm)	CH	Freq. (MHz)	Avg. Power + Max. Toleranc e (dBm)	Measured Avg. Power (dBm)	Scaling	Measured	Reported	Plot page
					Back side	15	18700	1860	24	23.83	3.99%	0.365	0.380	-
			1 RB	50	Top side	15	18700	1860	24	23.83	3.99%	0.260	0.270	-
					Left side	15	18700	1860	24	23.83	3.99%	0.298	0.310	-
LTE					Back side	15	18700	1860	23	22.58	10.15%	0.285	0.314	-
Band 2	20MHz	QPSK	50 RB	25	Top side	15	18700	1860	23	22.58	10.15%	0.199	0.219	-
Dana 2					Left side	15	18700	1860	23	22.58	10.15%	0.239	0.263	-
					Back side	15	18700	1860	23	22.58	10.15%	0.289	0.318	-
			100	RB	Top side	15	18700	1860	23	22.58	10.15%	0.202	0.223	-
					Left side	15	18700	1860	23	22.58	10.15%	0.244	0.269	-
						Sensor Of	l (with p	ower re	duction)					
	Bandwi								Max. Rated	Measured		Averaged 3 1g (W		
Mode	dth (MHz)	Modulatior	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Avg. Power + Max. Toleranc	Avg. Power (dBm)	Scaling	Measured	Reported	Plot page
									e (dBm)					
					Back side	0	18700	1860	e (dBm) 16.5	16.49	0.23%	1.300	1.303	-
					Back side Back side	0	18700 18900	1860 1880	, ,	16.49 16.35	0.23%	1.300 1.330	1.303	- 165
			1 DB	50					16.5					- 165 -
			1 RB	50	Back side	0	18900	1880	16.5 16.5	16.35	3.51%	1.330	1.377	
			1 RB	50	Back side Back side*	0	18900 18900	1880 1880	16.5 16.5 16.5	16.35 16.35	3.51% 3.51%	1.330 1.320	1.377 1.366	-
			1 RB	50	Back side* Back side*	0 0	18900 18900 19100	1880 1880 1900	16.5 16.5 16.5 16.5	16.35 16.35 16.50	3.51% 3.51% 0.00%	1.330 1.320 1.320	1.377 1.366 1.320	-
			1 RB	50	Back side* Back side* Back side Top side	0 0 0 0	18900 18900 19100 19100	1880 1880 1900 1900	16.5 16.5 16.5 16.5 16.5	16.35 16.35 16.50 16.50	3.51% 3.51% 0.00% 0.00%	1.330 1.320 1.320 0.459	1.377 1.366 1.320 0.459	-
LTE	20MH-7	OBSK	1 RB		Back side  Back side*  Back side  Top side  Left side	0 0 0 0	18900 18900 19100 19100 19100	1880 1880 1900 1900	16.5 16.5 16.5 16.5 16.5 16.5	16.35 16.35 16.50 16.50	3.51% 3.51% 0.00% 0.00% 0.00%	1.330 1.320 1.320 0.459 0.403	1.377 1.366 1.320 0.459 0.403	- - -
LTE Band 2	20MHz	QPSK	1 RB 50 RB	50	Back side Back side* Back side Top side Left side Back side	0 0 0 0 0	18900 18900 19100 19100 19100 18700	1880 1880 1900 1900 1900 1860	16.5 16.5 16.5 16.5 16.5 16.5 15.5	16.35 16.35 16.50 16.50 16.50 15.50	3.51% 3.51% 0.00% 0.00% 0.00% 0.00%	1.330 1.320 1.320 0.459 0.403 1.090	1.377 1.366 1.320 0.459 0.403 1.090	- - -
	20MHz	QPSK			Back side Back side* Back side Top side Left side Back side Back side	0 0 0 0 0	18900 18900 19100 19100 19100 18700 19100	1880 1880 1900 1900 1900 1860 1900	16.5 16.5 16.5 16.5 16.5 16.5 15.5	16.35 16.35 16.50 16.50 16.50 15.50	3.51% 3.51% 0.00% 0.00% 0.00% 0.00% 2.33%	1.330 1.320 1.320 0.459 0.403 1.090 1.050	1.377 1.366 1.320 0.459 0.403 1.090 1.074	
	20MHz	QPSK			Back side* Back side* Back side Top side Left side Back side Back side Top side	0 0 0 0 0 0	18900 18900 19100 19100 19100 18700 19100 18700	1880 1880 1900 1900 1900 1860 1900	16.5 16.5 16.5 16.5 16.5 16.5 15.5 15.5	16.35 16.35 16.50 16.50 16.50 15.50 15.40	3.51% 3.51% 0.00% 0.00% 0.00% 0.00% 2.33% 0.00%	1.330 1.320 1.320 0.459 0.403 1.090 1.050 0.439	1.377 1.366 1.320 0.459 0.403 1.090 1.074 0.439	- - - - -
	20MHz	QPSK		0	Back side* Back side* Back side Top side Left side Back side Back side Top side Left side	0 0 0 0 0 0 0	18900 18900 19100 19100 19100 18700 19100 18700 18700	1880 1880 1900 1900 1900 1860 1900 1860 1860	16.5 16.5 16.5 16.5 16.5 16.5 15.5 15.5	16.35 16.35 16.50 16.50 16.50 15.50 15.40 15.50	3.51% 3.51% 0.00% 0.00% 0.00% 0.00% 2.33% 0.00% 0.00%	1.330 1.320 1.320 0.459 0.403 1.090 1.050 0.439 0.372	1.377 1.366 1.320 0.459 0.403 1.090 1.074 0.439 0.372	- - - - - -
	20MHz	QPSK	50 RB	0 50	Back side* Back side* Back side Top side Left side Back side Back side Top side Left side Back side	0 0 0 0 0 0 0 0 0	18900 18900 19100 19100 19100 19100 18700 18700 18700 18900 18700	1880 1880 1900 1900 1900 1860 1860 1860 1880	16.5 16.5 16.5 16.5 16.5 16.5 15.5 15.5	16.35 16.35 16.50 16.50 16.50 15.50 15.40 15.50 15.43 15.50 15.37	3.51% 3.51% 0.00% 0.00% 0.00% 2.33% 0.00% 1.62% 0.00% 3.04%	1.330 1.320 1.320 0.459 0.403 1.090 1.050 0.439 0.372	1.377 1.366 1.320 0.459 0.403 1.090 1.074 0.439 0.372 1.087 1.070 1.113	
	20MHz	QPSK		0 50	Back side Back side* Back side Top side Left side Back side Top side Left side Back side Top side Left side Back side Back side	0 0 0 0 0 0 0 0 0 0	18900 18900 19100 19100 19100 18700 18700 18700 18700 18900 18900 19100	1880 1880 1900 1900 1900 1860 1860 1860 1860	16.5 16.5 16.5 16.5 16.5 16.5 15.5 15.5	16.35 16.35 16.50 16.50 16.50 15.50 15.40 15.50 15.43 15.50	3.51% 3.51% 0.00% 0.00% 0.00% 0.00% 2.33% 0.00% 1.62% 0.00% 3.04% 4.23%	1.330 1.320 1.320 0.459 0.403 1.090 1.050 0.439 0.372 1.070 1.080 1.070	1.377 1.366 1.320 0.459 0.403 1.090 1.074 0.439 0.372 1.087 1.070 1.113 1.115	
	20MHz	QPSK	50 RB	0 50	Back side Back side* Back side Top side Left side Back side Top side Left side Back side Top side Left side Back side Back side Back side	0 0 0 0 0 0 0 0 0	18900 18900 19100 19100 19100 19100 18700 18700 18700 18900 18700	1880 1880 1900 1900 1900 1860 1860 1860 1880	16.5 16.5 16.5 16.5 16.5 16.5 15.5 15.5	16.35 16.35 16.50 16.50 16.50 15.50 15.40 15.50 15.43 15.50 15.37	3.51% 3.51% 0.00% 0.00% 0.00% 2.33% 0.00% 1.62% 0.00% 3.04%	1.330 1.320 1.320 0.459 0.403 1.090 1.050 0.439 0.372 1.070 1.070	1.377 1.366 1.320 0.459 0.403 1.090 1.074 0.439 0.372 1.087 1.070 1.113	

<sup>\* -</sup> repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 134 of 267

#### LTE FDD Band 4

						anaar OFI	= (with a		oduation)					
					3	ensor OFI	- (withou	nt power i	Max. Rated			Averaged 1g (W		
Mode	Bandwi dth (MHz)	Modulatior	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Avg. Power + Max. Toleranc e (dBm)	Measured Avg. Power (dBm)	Scaling	Measured	Reported	Plot page
					Back side	15	20300	1745	24	23.46	13.24%	0.402	0.455	-
			1 RB	0	Top side	15	20300	1745	24	23.46	13.24%	0.327	0.370	-
					Left side	15	20300	1745	24	23.46	13.24%	0.281	0.318	-
LTE					Back side	15	20175	1732.5	23	22.32	16.95%	0.299	0.350	-
Band 4	20MHz	QPSK	50 RB	0	Top side	15	20175	1732.5	23	22.32	16.95%	0.253	0.296	-
Bana 4					Left side	15	20175	1732.5	23	22.32	16.95%	0.213	0.249	-
					Back side	15	20050	1720	23	22.22	19.67%	0.294	0.352	-
			100	RB	Top side	15	20050	1720	23	22.22	19.67%	0.248	0.297	-
					Left side	15	20050	1720	23	22.22	19.67%	0.208	0.249	-
						Sensor C	N (with p	ower rec	duction)					
	Donahui			DD					Max. Rated	Magazirad		Averaged 1g (W		
Mode	Bandwi dth (MHz)	Modulatior	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Avg. Power + Max. Toleranc e (dBm)	Measured Avg. Power (dBm)	Scaling	Measured	Reported	Plot page
					Back side	0	20300	1745	16	15.85	3.51%	1.240	1.284	166
				0	Back side*	0	20300	1745	16	15.85	3.51%	1.220	1.263	-
			1 RB	0	Top side	0	20300	1745	16	15.85	3.51%	0.693	0.717	-
			IND		Left side	0	20300	1745	16	15.85	3.51%	0.445	0.461	-
				50	Back side	0	20050	1720	16	15.62	9.14%	1.210	1.321	-
				30	Back side	0	20175	1732.5	16	15.75	5.93%	1.200	1.271	-
					Back side	0	20050	1720	15	14.58	10.15%	0.968	1.066	-
LTE	20MHz	QPSK			Back side	0	20175	1732.5	15	14.68	7.65%	0.976	1.051	-
Band 4	ZOWII IZ	Qi Oit	50 RB	0	Back side	0	20300	1745	15	14.54	11.17%	0.994	1.105	-
					Top side	0	20175	1732.5	15	14.68	7.65%	0.546	0.588	-
					Left side	0	20175	1732.5	15	14.68	7.65%	0.359	0.386	-
					Back side	0	20050	1720	15	14.55	10.92%	0.988	1.096	-
					Back side	0	20175	1732.5	15	14.62	9.14%	0.986	1.076	-
			100	RB	Back side	0	20300	1745	15	14.50	12.20%	0.979	1.098	-
					Top side	0	20175	1732.5	15	14.62	9.14%	0.534	0.583	-
					Left side	0	20175	1732.5	15	14.62	9.14%	0.335	0.366	-

<sup>\* -</sup> repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 135 of 267

#### LTE FDD Band 5

					Se	nsor OFF	(without	power	reduction)	)				
	Bandwi						(		Max. Rated Avg.	Measured		Averaged 1		
Mode	dth (MHz)	Modulatior	RB Size	RB start	Position	Distance (mm)	CH	Freq. (MHz)	Power + Max. Toleranc e (dBm)	Avg. Power (dBm)	Scaling	Measured	Reported	Plot page
					Back side	15	20600	844	24	23.20	20.23%	0.357	0.429	-
			1 RB	25	Top side	15	20600	844	24	23.20	20.23%	0.177	0.213	-
					Left side	15	20600	844	24	23.20	20.23%	0.061	0.073	-
					Back side	15	20600	844	23	22.23	19.40%	0.267	0.319	-
LTE Band 5	10MHz	QPSK	25 RB	12	Top side	15	20600	844	23	22.23	19.40%	0.131	0.156	-
Danu 5					Left side	15	20600	844	23	22.23	19.40%	0.050	0.060	-
					Back side	15	2050	829	23	22.22	19.67%	0.255	0.305	-
			50 F	RB	Top side	15	2050	829	23	22.22	19.67%	0.125	0.150	-
1					Left side	15	2050	829	23	22.22	19.67%	0.050	0.060	-
	•		•			Sensor Ol	N (with p	ower re	duction)			•	•	•
	Bandwi								Max. Rated Avg.	Measured		Averaged 1 1g (W		
Mode	dth (MHz)	Modulatior	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Power + Max. Toleranc e (dBm)	Avg. Power (dBm)	Scaling	Measured	Reported	Plot page
				0	Back side	0	20450	829	19.5	19.02	11.69%	1.010	1.128	-
					Back side	0	20525	836.5	19.5	19.18	7.65%	1.070	1.152	167
			1 RB		Back side*	0	20525	836.5	19.5	19.18	7.65%	1.060	1.141	-
			IKB	25	Back side	0	20600	844	19.5	19.31	4.47%	1.060	1.107	-
					Top side	0	20600	844	19.5	19.31	4.47%	0.419	0.438	-
					Left side	0	20600	844	19.5	19.31	4.47%	0.154	0.161	-
					Back side	0	20525	836.5	18.5	18.11	9.40%	0.849	0.929	-
LTE	400411-	ODOK		_	Back side	0	20600	844	18.5	18.09	9.90%	0.881	0.968	-
Band 5	10MHz	QPSK	25 RB	0	Top side	0	20525	836.5	18.5	18.11	9.40%	0.340	0.372	-
					Left side	0	20525	836.5	18.5	18.11	9.40%	0.121	0.132	-
				12	Back side	0	20450	829	18.5	18.05	10.92%	0.811	0.900	-
					Back side	0	20450	829	18.5	18.08	10.15%	0.824	0.908	-
	l				Back side	_	20525	836.5	18.5	18.02	11.69%	0.845	0.944	-
					Dack Side	0	20525	030.3	10.5	10.02	11.0370	0.073	0.377	
			50 F	RB	Back side	0	20600	844	18.5	18.12	9.14%	0.841	0.918	-
			50 F	RB										

<sup>\* -</sup> repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 136 of 267

#### LTE FDD Band 12

						nnor OFF	/with aut		raduation\					
					56	ensor OFF	(without	power	Max.				0.4.0	
	Bandwi								Rated Avg.	Measured		Averaged 3		
Mode	dth (MHz)	Modulatior	RB Size	RB start	Position	Distance (mm)	CH	Freq. (MHz)	Power + Max. Toleranc e (dBm)	Avg. Power (dBm)	Scaling	Measured	Reported	Plot page
					Back side	15	23130	711	24	23.15	21.62%	0.183	0.223	-
			1 RB	0	Top side	15	23130	711	24	23.15	21.62%	0.038	0.046	-
					Left side	15	23130	711	24	23.15	21.62%	0.015	0.018	-
LTE					Back side	15	23130	711	23	22.19	20.50%	0.131	0.158	-
Band	10MHz	QPSK	25 RB	25	Top side	15	23130	711	23	22.19	20.50%	0.025	0.030	-
12					Left side	15	23130	711	23	22.19	20.50%	0.012	0.014	-
					Back side	15	23130	711	23	22.11	22.74%	0.131	0.161	-
			50 F	RB	Top side	15	23130	711	23	22.11	22.74%	0.026	0.031	-
					Left side	15	23130	711	23	22.11	22.74%	0.012	0.015	-
						Sensor Ol	N (with p	ower red	duction)			,		
	Bandwi								Max. Rated Avg.	Measured		Averaged 3		
Mode		Modulatior	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Power +	Avg. Power (dBm)	Scaling		Banartad	Plot page
									Toleranc e (dBm)	(dBiii)		Measured	Керопеа	
					Back side	0	23095	707.5	Toleranc	20.94	1.39%	1.290	1.308	168
					Back side Back side*	0	23095 23095	707.5 707.5	Toleranc e (dBm)	` ,	1.39% 1.39%		·	168
			1 DD	25		_			Toleranc e (dBm) 21	20.94		1.290	1.308	
			1 RB	25	Back side*	0	23095	707.5	Toleranc e (dBm) 21 21	20.94	1.39%	1.290 1.260	1.308 1.278	-
			1 RB	25	Back side* Back side	0	23095 23130	707.5 711	Toleranc e (dBm) 21 21 21	20.94 20.94 21.00	1.39% 0.00%	1.290 1.260 1.220	1.308 1.278 1.220	-
			1 RB	25	Back side* Back side Top side	0 0	23095 23130 23130	707.5 711 711	Toleranc e (dBm) 21 21 21 21	20.94 20.94 21.00 21.00	1.39% 0.00% 0.00%	1.290 1.260 1.220 0.281	1.308 1.278 1.220 0.281	-
LTE			1 RB		Back side* Back side Top side Left side	0 0 0 0	23095 23130 23130 23130	707.5 711 711 711	Toleranc e (dBm) 21 21 21 21 21	20.94 20.94 21.00 21.00 21.00	1.39% 0.00% 0.00% 0.00%	1.290 1.260 1.220 0.281 0.101	1.308 1.278 1.220 0.281 0.101	-
LTE Rand	10MHz	OBSK	1 RB	49	Back side* Back side Top side Left side Back side	0 0 0 0	23095 23130 23130 23130 23060	707.5 711 711 711 704	Toleranc e (dBm) 21 21 21 21 21 21 21	20.94 20.94 21.00 21.00 21.00 20.77	1.39% 0.00% 0.00% 0.00% 5.44%	1.290 1.260 1.220 0.281 0.101 1.250	1.308 1.278 1.220 0.281 0.101 1.318	-
Band	10MHz	QPSK	1 RB 25 RB		Back side* Back side Top side Left side Back side Back side	0 0 0 0 0	23095 23130 23130 23130 23060 23095	707.5 711 711 711 704 707.5	Toleranc e (dBm) 21 21 21 21 21 21 21 21	20.94 20.94 21.00 21.00 21.00 20.77 20.00	1.39% 0.00% 0.00% 0.00% 5.44% 0.00%	1.290 1.260 1.220 0.281 0.101 1.250 0.987	1.308 1.278 1.220 0.281 0.101 1.318 0.987	-
	10MHz	QPSK		49	Back side* Back side Top side Left side Back side Back side Back side	0 0 0 0 0	23095 23130 23130 23130 23060 23095 23130	707.5 711 711 711 704 707.5 711	Toleranc e (dBm) 21 21 21 21 21 21 21 20 20	20.94 20.94 21.00 21.00 21.00 20.77 20.00 19.98	1.39% 0.00% 0.00% 0.00% 5.44% 0.00% 0.46%	1.290 1.260 1.220 0.281 0.101 1.250 0.987 0.991	1.308 1.278 1.220 0.281 0.101 1.318 0.987 0.996	-
Band	10MHz	QPSK		49	Back side* Back side Top side Left side Back side Back side Back side Top side	0 0 0 0 0 0	23095 23130 23130 23130 23060 23095 23130 23095	707.5 711 711 711 704 707.5 711 707.5	Toleranc e (dBm) 21 21 21 21 21 21 21 20 20	20.94 20.94 21.00 21.00 21.00 20.77 20.00 19.98 20.00	1.39% 0.00% 0.00% 0.00% 5.44% 0.00% 0.46% 0.00%	1.290 1.260 1.220 0.281 0.101 1.250 0.987 0.991	1.308 1.278 1.220 0.281 0.101 1.318 0.987 0.996 0.234	
Band	10MHz	QPSK		49	Back side* Back side Top side Left side Back side Back side Top side Left side Back side Back side Top side Left side Back side	0 0 0 0 0 0 0 0 0	23095 23130 23130 23130 23060 23095 23130 23095 23095	707.5 711 711 711 704 707.5 711 707.5 707.5 704	Toleranc e (dBm) 21 21 21 21 21 21 21 20 20 20 20 20 20	20.94 20.94 21.00 21.00 21.00 20.77 20.00 19.98 20.00 20.00 19.97 19.94	1.39% 0.00% 0.00% 0.00% 5.44% 0.00% 0.46% 0.00% 0.00% 0.69% 1.39%	1.290 1.260 1.220 0.281 0.101 1.250 0.987 0.991 0.234 0.085 0.960	1.308 1.278 1.220 0.281 0.101 1.318 0.987 0.996 0.234 0.085 0.967 0.973	-
Band	10MHz	QPSK	25 RB	0 25	Back side* Back side Top side Left side Back side Back side Back side Top side Left side Back side	0 0 0 0 0 0 0 0 0	23095 23130 23130 23130 23060 23095 23130 23095 23095 23060 23060 23095	707.5 711 711 711 704 707.5 711 707.5 707.5 704 704	Toleranc e (dBm) 21 21 21 21 21 21 21 20 20 20 20 20 20 20 20	20.94 20.94 21.00 21.00 21.00 20.77 20.00 19.98 20.00 20.00 19.97 19.94 19.95	1.39% 0.00% 0.00% 0.00% 5.44% 0.00% 0.46% 0.00% 0.00%	1.290 1.260 1.220 0.281 0.101 1.250 0.987 0.991 0.234 0.085 0.960	1.308 1.278 1.220 0.281 0.101 1.318 0.987 0.996 0.234 0.085 0.967 0.973	-
Band	10MHz	QPSK		0 25	Back side* Back side Top side Left side Back side Back side Top side Left side Back side	0 0 0 0 0 0 0 0 0 0	23095 23130 23130 23130 23060 23095 23130 23095 23095 23060 23060 23095 23130	707.5 711 711 711 704 707.5 711 707.5 707.5 704 704 707.5 711	Toleranc e (dBm) 21 21 21 21 21 21 21 20 20 20 20 20 20 20 20 20 20 20 20	20.94 20.94 21.00 21.00 21.00 20.77 20.00 19.98 20.00 20.00 19.97 19.94 19.95 19.98	1.39% 0.00% 0.00% 5.44% 0.00% 0.46% 0.00% 0.69% 1.39% 1.16% 0.46%	1.290 1.260 1.220 0.281 0.101 1.250 0.987 0.991 0.234 0.085 0.960 0.960 0.959	1.308 1.278 1.220 0.281 0.101 1.318 0.987 0.996 0.234 0.085 0.967 0.973 0.970	-
Band	10MHz	QPSK	25 RB	0 25	Back side* Back side Top side Left side Back side Back side Top side Left side Back side Back side Left side Back side Back side Back side	0 0 0 0 0 0 0 0 0	23095 23130 23130 23130 23060 23095 23130 23095 23095 23060 23060 23095	707.5 711 711 711 704 707.5 711 707.5 707.5 704 704	Toleranc e (dBm) 21 21 21 21 21 21 21 20 20 20 20 20 20 20 20	20.94 20.94 21.00 21.00 21.00 20.77 20.00 19.98 20.00 20.00 19.97 19.94 19.95	1.39% 0.00% 0.00% 0.00% 5.44% 0.00% 0.46% 0.00% 0.69% 1.39% 1.16%	1.290 1.260 1.220 0.281 0.101 1.250 0.987 0.991 0.234 0.085 0.960 0.960	1.308 1.278 1.220 0.281 0.101 1.318 0.987 0.996 0.234 0.085 0.967 0.973	

Left side 0 23130 711 20 19.98 0.46% 0.084 0.084

\* - repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 137 of 267

#### LTE FDD Band 25

					5	Sensor OFI	F (withou	t power r	eduction)					
	Bandwi						(Williams)	power.	Max. Rated Avg.	Measured		Averaged S		
Mode		Modulation	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Power + Max. Toleranc e (dBm)	Avg. Power (dBm)	Scaling	Measured	Reported	Plot page
					Back side	15	26140	1860	24	23.33	16.68%	0.349	0.407	-
			1 RB	50	Top side	15	26140	1860	24	23.33	16.68%	0.261	0.305	-
					Left side	15	26140	1860	24	23.33	16.68%	0.283	0.330	-
LTE					Back side	15	26590	1905	23	22.30	17.49%	0.290	0.341	-
Band	20MHz	QPSK	50 RB	0	Top side	15	26590	1905	23	22.30	17.49%	0.178	0.209	-
25					Left side	15	26590	1905	23	22.30	17.49%	0.218	0.256	-
					Back side	15	26590	1905	23	22.20	20.23%	0.287	0.345	-
			100	RB	Top side	15	26590	1905	23	22.20	20.23%	0.170	0.204	-
					Left side	15	26590	1905	23	22.20	20.23%	0.209	0.251	-
						Sensor C	N (with p	ower rec	luction)					
	Bandwi		ulation RB	RB RB		Distance		F	Max. Rated Avg.	Measured		Averaged \$ 1g (W		Dist
Mode	dth (MHz)	Modulatior	Size	start	Position	Distance (mm)	СН	Freq. (MHz)	Power + Max. Toleranc e (dBm)	Avg. Power (dBm)	Scaling	Measured	Reported	Plot page
					Back side	0	26365	1882.5	15.5	15.15	8.39%	1.100	1.192	169
					Back side*	0	26365	1882.5	15.5	15.15	8.39%	1.060	1.149	-
			4 DD	0	Top side	0	26365	1882.5	15.5	15.15	8.39%	0.410	0.444	-
			1 RB		Left side	0	26365	1882.5	15.5	15.15	8.39%	0.356	0.386	-
				50	Back side	0	26140	1860	15.5	14.95	13.50%	1.040	1.180	-
				99	Back side	0	26590	1905	15.5	15.05	10.92%	0.993	1.101	-
					Back side	0	26140	1860	14.5	14.20	7.15%	0.863	0.925	-
LTE	20MHz	QPSK		0	Back side	0	26590	1905	14.5	14.18	7.65%	0.844	0.909	-
Band 25	ZUIVITZ	QPSK	50 RB	U	Top side	0	26140	1860	14.5	14.20	7.15%	0.340	0.364	-
20					Left side	0	26140	1860	14.5	14.20	7.15%	0.285	0.305	-
				25	Back side	0	26365	1882.5	14.5	14.09	9.90%	0.922	1.013	-
					Back side	0	26140	1860	14.5	14.15	8.39%	0.848	0.919	-
					Back side	0	26365	1882.5	14.5	14.05	10.92%	0.988	1.096	-
			100	RB	Back side	0	26590	1905	14.5	14.02	11.69%	0.895	1.000	-
1														
					Top side	0	26140	1860	14.5	14.15	8.39%	0.332	0.360	-

<sup>\* -</sup> repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 138 of 267

#### LTE FDD Band 26

					S-6	ensor OFF	(withou	t nower	reduction	1				
	Bandwi						(William	power	Max. Rated Avg.			Averaged 1g (W		
Mode		Modulatior	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Power + Max. Toleranc e (dBm)	Measured Avg. Power (dBm)	Scaling	Measured	Reported	Plot page
					Back side	15	26865	831.5	24	23.20	20.23%	0.338	0.406	-
			1 RB	74	Top side	15	26865	831.5	24	23.20	20.23%	0.175	0.210	-
					Left side	15	26865	831.5	24	23.20	20.23%	0.060	0.072	-
LTE					Back side	15	26965	841.5	23	22.25	18.85%	0.256	0.304	-
Band	15MHz	QPSK	36 RB	0	Top side	15	26965	841.5	23	22.25	18.85%	0.134	0.159	-
26					Left side	15	26965	841.5	23	22.25	18.85%	0.049	0.058	-
					Back side	15	26965	841.5	23	22.20	20.23%	0.256	0.308	-
			75 F	RB	Top side	15	26965	841.5	23	22.20	20.23%	0.137	0.165	-
					Left side	15	26965	841.5	23	22.20	20.23%	0.050	0.060	-
						Sensor O	N (with p	ower re	duction)					
									Max. Rated			Averaged 1g (W		
Mode	Bandwi dth (MHz)	Modulatior	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Avg. Power + Max. Toleranc e (dBm)	Measured Avg. Power (dBm)	Scaling	Measured	Reported	Plot page
					Back side	0	26865	831.5	19.5	19.08	10.15%	1.050	1.157	170
					Back side*	0	26865	831.5	19.5	19.08	10.15%	1.040	1.146	-
			1 RB	0	Back side	0	26965	841.5	19.5	19.01	11.94%	1.040	1.164	-
			IKD		Top side	0	26865	831.5	19.5	19.08	10.15%	0.423	0.466	-
					Left side	0	26865	831.5	19.5	19.08	10.15%	0.163	0.180	-
				74	Back side	0	26825	822.5	19.5	19.03	11.43%	1.040	1.159	-
LTE					Back side	0	26825	822.5	18.5	18.03	11.43%	0.838	0.934	-
Band	15MHz	QPSK			Back side	0	26865	831.5	18.5	18.03	11.43%	0.824	0.918	-
26	1 JIVII 12	QIOIC	36 RB	0	Back side	0	26965	841.5	18.5	18.18	7.65%	0.875	0.942	-
-					Top side	0	26965	841.5	18.5	18.18	7.65%	0.334	0.360	-
					Left side	0	26965	841.5	18.5	18.18	7.65%	0.121	0.130	-
					Back side	0	26825	822.5	18.5	17.87	15.61%	0.813	0.940	-
					Back side	0	26865	831.5	18.5	17.99	12.46%	0.844	0.949	-
			75 F	RB	Back side	0	26965	841.5	18.5	17.98	12.72%	0.868	0.978	-
					Top side	0	26865	831.5	18.5	17.99	12.46%	0.326	0.367	-
					Left side	0	26865	831.5	18.5	17.99	12.46%	0.120	0.135	-

<sup>\* -</sup> repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_end\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 139 of 267

#### LTE TDD Band 41

					S	ensor OFF	(withou	t power r	eduction)					
Mode	Bandwi dth (MHz)	Modulation	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Toleranc e (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged 1g (W	//kg)	Plot page
					Back side	15	39750	2506	24	22.81	31.52%	0.223	0.293	-
			1 RB	0	Top side	15	39750	2506	24	22.81	31.52%	0.123	0.162	-
					Left side	15	39750	2506	24	22.81	31.52%	0.107	0.141	-
LTE					Back side	15	40620	2593	23	22.00	25.89%	0.159	0.200	-
Band	20MHz	QPSK	50 RB	0	Top side	15	40620	2593	23	22.00	25.89%	0.050	0.063	-
41					Left side	15	40620	2593	23	22.00	25.89%	0.112	0.141	-
					Back side	15	40620	2593	23	21.91	28.53%	0.154	0.198	-
			100	RB	Top side	15	40620	2593	23	21.91	28.53%	0.046	0.059	•
					Left side	15	40620	2593	23	21.91	28.53%	0.112	0.144	-
						Sensor O	N (with p	ower rec	luction)					
Mode	Bandwi dth (MHz)	Modulatior	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power (dBm)	Scaling	Averaged : 1g (W	//kg)	Plot page
	, ,						00750	0500	Toleranc e (dBm)	17.00	0.000/		·	
					Back side	0	39750	2506	18	17.99	0.23%	0.975	0.977	-
					Back side	0	40185	2549.5	18	17.97	0.69%	0.968	0.975	-
					Back side Back side	0	40620 41055	2593 2636.5	18 18	17.96 17.70	0.93% 7.15%	1.060 1.110	1.070 1.189	-
			1 RB	0		0								171
					Back side*	0	41490 41490	2680 2680	18 18	17.81 17.81	4.47% 4.47%	1.200 1.180	1.254 1.233	171
					Top side	0	39750	2506	18	17.99	0.23%	0.503	0.504	-
					Left side	0	39750	2506	18	17.99	0.23%	0.303	0.304	-
					Back side	0	39750	2506	17	16.97	0.69%	0.222	0.223	-
				0	Back side	0	40620	2593	17	16.95	1.16%	0.826	0.836	-
LTE					Back side	0	41490	2680	17	16.80	4.71%	0.962	1.007	_
Band	20MHz	QPSK	50 RB		Back side	0	40185	2549.5	17	17.00	0.00%	0.734	0.734	-
41			00.12		Back side	0	41055	2636.5	17	16.78	5.20%	0.858	0.903	-
				25	Top side	0	40185	2549.5	17	17.00	0.00%	0.246	0.246	-
					Left side	0	40185	2549.5	17	17.00	0.00%	0.172	0.172	-
					Back side	0	39750	2506	17	16.79	4.95%	0.694	0.728	-
					Back side	0	40185	2549.5	17	16.96	0.93%	0.735	0.742	-
					Back side	0	40620	2593	17	16.98	0.46%	0.797	0.801	-
			100	RB	Back side	0	41055	2636.5	17	16.79	4.95%	0.876	0.919	-
					Back side	0	41490	2680	17	16.69	7.40%	0.920	0.988	-
					Top side	0	40620	2593	17	16.98	0.46%	0.139	0.140	-
	1	I	l		1 -44 -1-1-	_	40000	0500	47	40.00	0.400/	0.000	0.004	1

<sup>\* -</sup> repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 140 of 267

#### WiFi 2.4GHz - WLAN802.11b

		5	Senso	r OFF (	without power r	eduction)				
Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling		SAR over 1g /kg)	Plot page
		(11111)		(1711 12)	Tolerance (dBm)	(dBm)		Measured	Reported	page
	Back side	15	11	2462	19	18.89	102.57%	0.226	0.232	-
WLAN802.11 b	Top side	5	11	2462	19	18.89	102.57%	0.038	0.039	-
	Right side	12	11	2462	19	18.89	102.57%	0.272	0.279	-
			Sen	sor ON	(with power red	luction)				
Mode	Position	Distance	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling		SAR over 1g /kg)	Plot
		(mm)		(MHz)	Tolerance (dBm)	(dBm)		Measured	Reported	page
	Back side	0	6	2437	14.5	14.43	101.62%	1.080	1.098	172
	Back side*	0	6	2437	14.5	14.43	101.62%	1.070	1.087	-
WLAN802.11 b	Back side	0	11	2462	14.5	14.39	102.57%	0.752	0.771	-
	Top side	0	6	2437	14.5	14.43	101.62%	0.189	0.192	-
	Right side	0	6	2437	14.5	14.43	101.62%	0.125	0.127	-

<sup>\* -</sup> repeated at the highest SAR measurement according to the KDB 865664 D01

## WiFi 5.2GHz - WLAN802.11n(40M)

		5	Senso	r OFF (	without power r	eduction)				
Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling		AR over 1g /kg)	Plot page
		(11111)		(1411 12)	Tolerance (dBm)	(dBm)		Measured	Reported	page
\\\\\	Back side	15	38	5190	19	18.70	107.15%	0.221	0.237	-
WLAN802.11 n(40M) 5.2G	Top side	5	38	5190	19	18.70	107.15%	0.135	0.145	-
0.20	Right side	12	38	5190	19	18.70	107.15%	0.125	0.134	-
			Sen	sor ON	(with power red	luction)				
Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling		AR over 1g /kg)	Plot
		(111111)		(1011 12)	Tolerance (dBm)	(dBm)		Measured	Reported	page
	Back side	0	38	5190	7.5	7.21	106.91%	1.040	1.112	173
NA(I ANIOGO 44 - (40NA)	Back side*	0	38	5190	7.5	7.21	106.91%	1.020	1.090	-
WLAN802.11 n(40M) 5.2G	Back side	0	46	5230	7.5	7.45	101.16%	0.997	1.009	-
0.20	Top side	0	46	5230	7.5	7.45	101.16%	0.015	0.015	-
	Right side	0	46	5230	7.5	7.45	101.16%	0.114	0.115	-

<sup>\* -</sup> repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

> t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sas.com



Page: 141 of 267

# WiFi 5.3GHz - WLAN802.11n(40M)

Sensor OFF (without power reduction)										
Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged SAR over 1g (W/kg)		Plot
					Tolerance (dBm)	(dBm)		Measured	Reported	page
M// ANIOOO 44 - /40NA)	Back side	15	54	5270	19	18.87	103.04%	0.486	0.501	-
WLAN802.11 n(40M) 5.3G	Top side	5	54	5270	19	18.87	103.04%	0.309	0.318	-
	Right side	12	54	5270	19	18.87	103.04%	0.355	0.366	-
Sensor ON (with power reduction)										
Mode	Position Distan		СН	CH Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged SAR over 1g (W/kg)		Plot
		(mm)		(IVITZ)	Tolerance (dBm)	(dBm)		Measured	Reported	page
WLAN802.11 n(40M) 5.3G	Back side	0	54	5270	7.5	7.38	102.80%	0.813	0.836	-
	Back side	0	62	5310	7.5	7.19	107.40%	0.843	0.905	174
	Back side*	0	62	5310	7.5	7.19	107.40%	0.822	0.883	-
	Top side	0	54	5270	7.5	7.38	102.80%	0.040	0.041	-

<sup>\* -</sup> repeated at the highest SAR measurement according to the KDB 865664 D01

## WiFi 5.6GHz - WLAN802.11n(40M)

Sensor OFF (without power reduction)											
Mode	Position	Distance (mm)	СН	Freq. (MHz)	Power + Max. Avg	Measured Avg. Power	Scaling	Averaged SAR over 1g (W/kg)		Plot page	
					Tolerance (dBm)	(dBm)		Measured	Reported	pago	
	Back side	15	134	5670	19	18.95	101.16%	0.404	0.409	-	
WLAN802.11 n(40M) 5.6G	Top side	5	102	5510	19	18.63	108.89%	0.967	1.053	-	
	Top side	5	134	5670	19	18.95	101.16%	1.150	1.163	175	
	Right side	12	134	5670	19	18.95	101.16%	0.623	0.630	-	
	Sensor ON (with power reduction)										
Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power Scaling		aged SAR over 1g (W/kg)			
					Tolerance (dBm)	(dBm)		Measured	Reported	page	
	Back side	0	102	5510	8	7.95	101.16%	0.777	0.786	-	
WLAN802.11 n(40M) 5.6G	Top side	0	102	5510	8	7.95	101.16%	0.152	0.154	-	
0.00	Right side	0	102	5510	8	7.95	101.16%	0.190	0.192	-	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 142 of 267

## WiFi 5.8GHz - WLAN802.11n(40M)

			-	-						
Sensor OFF (without power reduction)										
Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	0	Scaling	Averaged SAR over 1g (W/kg)		Plot
					Tolerance (dBm)	(dBm)		Measured	Reported	page
	Back side	15	151	5755	19	18.96	100.93%	0.377	0.380	-
WLAN802.11 n(40M) 5.8G	Top side	5	151	5755	19	18.96	100.93%	0.899	0.907	-
	Top side	5	159	5795	19	18.67	107.89%	0.728	0.785	-
	Right side	12	151	5755	19	18.96	100.93%	0.557	0.562	-
	Sensor ON (with power reduction)									
Mode	Position	osition Distance (mm)		Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged SAR over 1g (W/kg)		Plot page
		(11111)		(1411 12)	Tolerance (dBm)	(dBm)		Measured	Reported	page
WLAN802.11 n(40M) 5.8G	Back side	0	151	5755	9.5	9.43	101.62%	0.924	0.939	176
	Back side*	0	151	5755	9.5	9.43	101.62%	0.912	0.927	-
	Back side	0	159	5795	9.5	9.15	108.39%	0.792	0.858	-
	Top side	0	151	5755	9.5	9.43	101.62%	0.184	0.187	-
	Right side	0	151	5755	9.5	9.43	101.62%	0.347	0.353	-

<sup>\* -</sup> repeated at the highest SAR measurement according to the KDB 865664 D01

Note:

Scaling = 
$$\frac{\text{reported 2AK}}{\text{measured 5AR}} = \frac{\text{PI}(\text{mW})}{\text{PI}(\text{mW})} = 10^{\left(\frac{P_2 - P_1}{\text{so}}\right)(\text{dPm})}$$

Reported SAR = measured SAR \* (scaling)

Where P2 is maximum specified power, P1 is measured conducted power

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 143 of 267

# 3. Simultaneous Transmission Analysis

#### **Simultaneous Transmission Scenarios:**

Simultaneous Transmit Configurations	Body
LTE + 2.4GHz WLAN	Yes
LTE + 5GHz WLAN	Yes
LTE + BT	Yes

#### Note:

- 1. WWAN and WLAN may transmit simultaneously.
- 2. Bluetooth and WLAN share the same antenna path, but BT can't transmit with WLAN simultaneously.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 144 of 267

#### 3.1 Estimated SAR calculation

According to KDB447498 D01v06 – When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

Estimated SAR = 
$$\frac{\text{Max.tune up power(mW)}}{\text{Min.test separation distance(mm)}} \times \frac{\sqrt{f(GHz)}}{7.5}$$

If the minimum test separation distance is < 5mm, a distance of 5mm is used for estimated SAR calculation. When the test separation distance is >50mm, the 0.4W/kg is used for SAR-1g.

Mode	Test position	antenna to user separation distance	Estimated SAR(W/kg)		
ВТ	Right / Back	< 5mm	0.105		
ВТ	Тор	8.2mm	0.064		
WLAN/BT	Left	> 50mm	0.4		
WWAN	Right	> 50mm	0.4		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 145 of 267

#### 3.1 SPLSR evaluation and analysis

Per KDB447498D01, when the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR sum to peak location separation ratio(SPLSR).

The simultaneous transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SAR to peak location separation ratio to qualify for test exclusion.

The ratio is determined by (SAR1 + SAR2)^1.5/Ri, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

SAR1 and SAR2 are the highest reported or estimated SAR for each antenna in the pair, and Ri is the separation distance between the peak SAR locations for the antenna pair in mm.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

prosecuted to the fullest extent of the law. SGS Taiwan Ltd.




Page: 146 of 267

#### LTE FDD Band 2 + 2.4 GHz WLAN

ETET DD Dating ETET OTTE WEATH										
No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN	SAR Sum	SPLSR			
		Back side	0	1.377	1.098	2.475	Analyzed as below			
1	LTE Band 2	Top side	0	0.459	0.192	0.651	ΣSAR<1.6, Not required			
'	LTE Ballu 2	Right side	0	0.400	0.127	0.527	ΣSAR<1.6, Not required			
	-	Left side	0	0.403	0.400	0.803	ΣSAR<1.6, Not required			

SPLSR analysis

T LOTT analysis											
Conditions	Position	SAR Value (W/kg)	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation	SPLSR	Simultaneous Transmission		
			x	у	Z	(vv/kg)	Distance (mm)		SAR Test		
LTE Band 2	Back side	1.377	-47.00	-86.80	-1.14	2.475	100.81	0.039	SPLSR<0.04,		
2.4 GHz WLAN	. Back side	1.098	53.80	-86.60	-2.45	2.475	100.01	0.039	Not required		

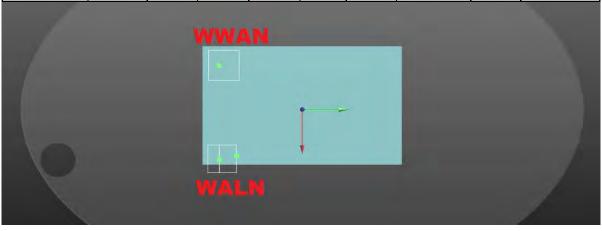

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 147 of 267

#### LTE FDD Band 4 + 2.4 GHz WLAN

	TE 1 DD Bulla 4 1 2.4 OH2 WEAR											
No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN	SAR Sum	SPLSR					
		Back side		1.321	1.098	2.419	Analyzed as below					
2	LTE Band 4	Top side	0	0.717	0.192	0.909	ΣSAR<1.6, Not required					
	LIE Band 4	Right side	0	0.400	0.127	0.527	ΣSAR<1.6, Not required					
		Left side	0	0.461	0.400	0.861	ΣSAR<1.6, Not required					

SPLSR analysis

Conditions	Position	SAR Value (W/kg)	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation		Simultaneous Transmission
			х	У	Z	(vv/kg)	Distance (mm)		SAR Test
LTE Band 4	Back side	1.321	-47.10	-82.10	-2.28	2.419	101	0.037	SPLSR<0.04,
2.4 GHz WLAN	2.4 GHz		53.80	-86.60	-2.45	2.419	101	0.037	Not required

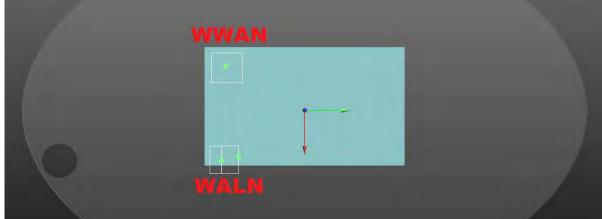

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 148 of 267

### LTE FDD Band 5 + 2.4 GHz WLAN

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN	SAR Sum	SPLSR				
		Back side	0	1.152	1.098	2.250	Analyzed as below				
3	LTE Band 5	Top side	0	0.438	0.192	0.630	ΣSAR<1.6, Not required				
	LIE Band 5	Right side	0	0.400	0.127	0.527	ΣSAR<1.6, Not required				
		Left side	0	0.161	0.400	0.561	ΣSAR<1.6, Not required				

SPLSR analysis

Conditions	Position	SAR Value (W/kg)	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation	SPLSR	Simultaneous Transmission
			х	У	Z	(vv/kg)	Distance (mm)		SAR Test
LTE Band 5	Back side	1.152	-46.90	-88.30	-0.14	2.25	100.74	0.034	SPLSR<0.04,
2.4 GHz WLAN	Dack Side	1.098	53.80	-86.60	-2.45	2.20	100.74	0.034	Not required

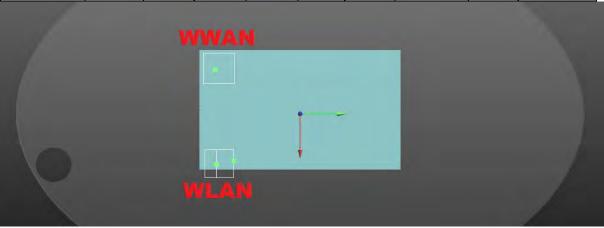

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 149 of 267

#### LTE FDD Band 12 + 2.4 GHz WLAN

	LIE I DD DUIM IZ I ZIF OIIZ WEAK											
No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN	SAR Sum	SPLSR					
		Back side	0	1.318	1.098	2.416	Analyzed as below					
4	LTE Band 12	Top side	0	0.281	0.192	0.473	ΣSAR<1.6, Not required					
4	LIE Band 12	Right side	0	0.400	0.127	0.527	ΣSAR<1.6, Not required					
		Left side	0	0.101	0.400	0.501	ΣSAR<1.6, Not required					

SPLSR analysis

Conditions	Position	SAR Value (W/kg)	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation	SPLSR	Simultaneous Transmission
			x	у	z	(vv/kg)	Distance (mm)		SAR Test
LTE Band 12	Back side	1.318	-45.40	-89.90	-0.14	2.416	99.28	0.038	SPLSR<0.04,
2.4 GHz WLAN	Dack Side	1.098	53.80	-86.60	-2.45	2.410	33.20	0.036	Not required

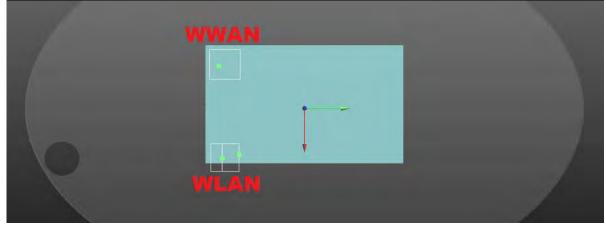

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 150 of 267

#### LTE FDD Band 25 + 2.4 GHz WLAN

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN	SAR Sum	SPLSR			
		Back side	0	1.192	1.098	2.290	Analyzed as below			
5	LTE Band 25	Top side	0	0.444	0.192	0.636	ΣSAR<1.6, Not required			
3	LIE Ballu 25	LTL Band 25	LTE Ballu 25	LIE Banu 25	Right side	0	0.400	0.127	0.527	ΣSAR<1.6, Not required
		Left side	0	0.386	0.400	0.786	ΣSAR<1.6, Not required			

SPLSR analysis

Conditions	Position	SAR Value (W/kg)	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation	SPLSR	Simultaneous Transmission
			х	у	Z	(vv/kg)	Distance (mm)		SAR Test
LTE Band 25	Back side	1.192	-48.60	-85.20	-1.18	2.29	102.42	0.034	SPLSR<0.04,
2.4 GHz WLAN	Dack Side	1.098	53.80	-86.60	-2.45	2.29	102.42	0.034	Not required



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 151 of 267

#### LTE FDD Band 26 + 2.4 GHz WLAN

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN	SAR Sum	SPLSR
		Back side	0	1.164	1.098	2.262	Analyzed as below
6	LTE Band 26	Top side	0	0.466	0.192	0.658	ΣSAR<1.6, Not required
	LIE Band 26	Right side	0	0.400	0.127	0.527	ΣSAR<1.6, Not required
		Left side	0	0.180	0.400	0.580	ΣSAR<1.6, Not required

SPLSR analysis

Conditions	Position	SAR Value (W/kg)	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation	SPLSR	Simultaneous Transmission
			х	У	Z	(vv/kg)	Distance (mm)		SAR Test
LTE Band 26	Back side	1.164	-45.30	-89.90	-0.81	2.262	99.17	0.034	SPLSR<0.04,
2.4 GHz WLAN	Dack Side	1.098	53.80	-86.60	-2.45	2.202	33.17	0.034	Not required

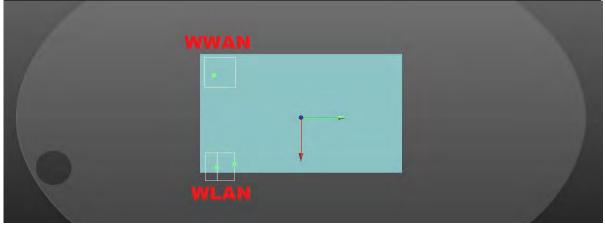

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 152 of 267

### LTE TDD Band 41 + 2.4 GHz WLAN

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN	SAR Sum	SPLSR		
		Back side	0	1.254	1.098	2.352	Analyzed as below		
7	LTE Band 41	Top side	0	0.504	0.192	0.696	ΣSAR<1.6, Not required		
,	LIE Band 41	Right side	0	0.400	0.127	0.527	ΣSAR<1.6, Not required		
		Left side	0	0.234	0.400	0.634	ΣSAR<1.6, Not required		

SPLSR analysis

Conditions	Position	SAR Value (W/kg)	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation	SPLSR	Simultaneous Transmission
			х	У	z	(vv/kg)	Distance (mm)		SAR Test
LTE Band 41	Back side	1.254	-49.40	-91.00	-0.85	2.352	103.31	0.035	SPLSR<0.04,
2.4 GHz WLAN	Back side	1.098	53.80	-86.60	-2.45	2.552	103.31	0.033	Not required

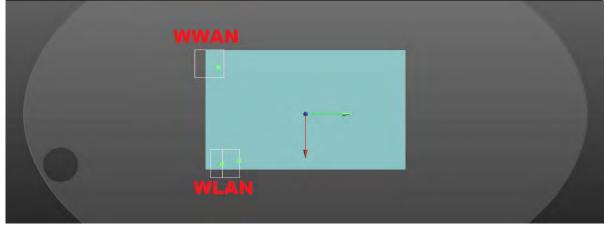

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 153 of 267

#### LTE FDD Band 2 + 5 GHz WLAN

	TE 1 DD Build E 1 O OHE WEAR											
No.	Conditions	Position Distance Max. Max. WLAN			SAR Sum	SPLSR						
		Back side	0	1.377	1.112	2.489	Analyzed as below					
8	LTE Band 2	Top side	0	0.459	0.187	0.646	ΣSAR<1.6, Not required					
	LIE Band 2	Right side	0	0.400	0.353	0.753	ΣSAR<1.6, Not required					
		Left side	0	0.403	0.400	0.803	ΣSAR<1.6, Not required					

SPLSR analysis

Conditions	Position	on SAR Value (W/kg)	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation	SPLSR	Simultaneous Transmission			
			х	У	Z	(vv/kg)	Distance (mm)		SAR Test			
LTE Band 2	Back side -	1.377	-47.00	-86.80	-1.14	2.489	102.39	0.038	SPLSR<0.04,			
5 GHz WLAN				-1.72	2.403	102.39	0.000	Not required				

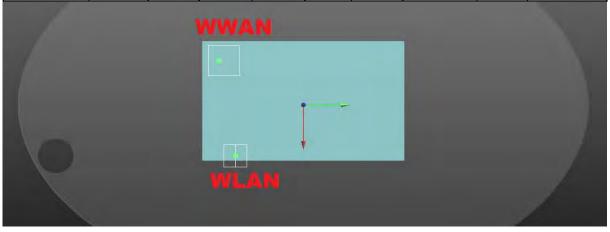

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 154 of 267

### LTE FDD Band 4 + 5 GHz WLAN

	TE 1 DD Build 4 1 0 OHZ WEAR											
No.	Conditions	Position Distance Max. Max. WLAN			SAR Sum	SPLSR						
		Back side	0	1.321	1.112	2.433	Analyzed as below					
9	LTE Band 4	Top side	0	0.717	0.187	0.904	ΣSAR<1.6, Not required					
9	LTE Band 4	Right side	0	0.400	0.353	0.753	ΣSAR<1.6, Not required					
		Left side	0	0.461	0.400	0.861	ΣSAR<1.6, Not required					

SPLSR analysis

Conditions	Position	SAR Value (W/kg)	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation	SPLSR	Simultaneous Transmission
			x	у	Z	(vv/kg)	Distance (mm)		SAR Test
LTE Band 4	Back side	1.321	-47.10	-82.10	-2.28	2.433	101.82	0.037	SPLSR<0.04,
5 GHz WLAN			54.00	-70.00	-1.72	2.400	101.02	0.037	Not required

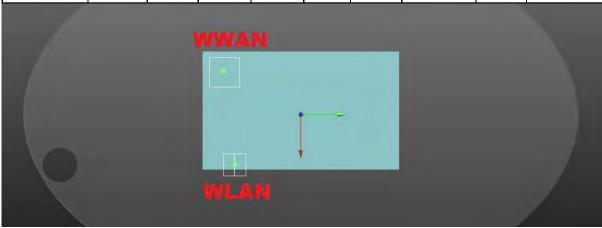

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 155 of 267

#### LTE FDD Band 5 + 5 GHz WLAN

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN	SAR Sum	SPLSR				
		Back side	0	1.152	1.112	2.264	Analyzed as below				
10	LTE Band 5	Top side	0	0.438	0.187	0.625	ΣSAR<1.6, Not required				
10	LTE Band 5	Right side	0	0.400	0.353	0.753	ΣSAR<1.6, Not required				
		Left side	0	0.161	0.400	0.561	ΣSAR<1.6, Not required				

SPLSR analysis

Conditions	Position	SAR Value (W/kg)	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation	SPLSR	Simultaneous Transmission
			х	У	Z	(vv/kg)	Distance (mm)		SAR Test
LTE Band 5	Back side	1.152	-46.90	-88.30	-0.14	2.264	102.56	0.033	SPLSR<0.04,
5 GHz WLAN	Back side -	1.112	54.00	-70.00	-1.72	2.204	102.30	0.000	Not required

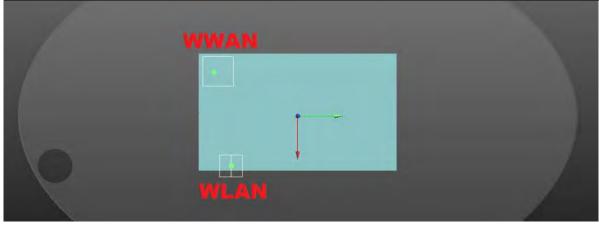

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 156 of 267

#### LTE FDD Band 12 + 5 GHz WLAN

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN	SAR Sum	SPLSR				
		Back side	0	1.318	1.112	2.430	Analyzed as below				
11	LTE Band 12	Top side	0	0.281	0.187	0.468	ΣSAR<1.6, Not required				
' '	LIL Dalla 12	Right side	0	0.400	0.353	0.753	ΣSAR<1.6, Not required				
	-	Left side	0	0.101	0.400	0.501	ΣSAR<1.6, Not required				

SPLSR analysis

Conditions	Position	SAR Value	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation	SPLSR	Simultaneous Transmission
		(W/kg)	х	У	Z	(vv/kg)	Distance (mm)		SAR Test
LTE Band 12	Back side	1.318	-45.40	-89.90	-0.14	2.43	101.38	0.037	SPLSR<0.04,
5 GHz WLAN	Dack Side	1.112	54.00	-70.00	-1.72	2.43	101.36	0.037	Not required

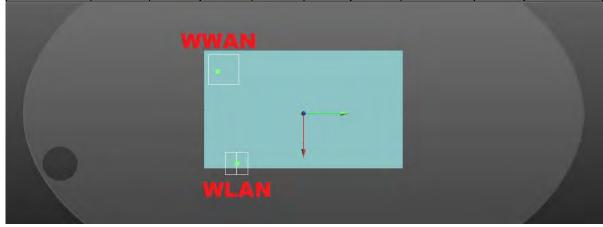

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 157 of 267

#### LTE FDD Band 25 + 5 GHz WLAN

	TE 1 DD Build 20 1 0 OHZ WEAR											
No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN	SAR Sum	SPLSR					
		Back side	0	1.192	1.112	2.304	Analyzed as below					
12	LTE Band 25	Top side	0	0.444	0.187	0.631	ΣSAR<1.6, Not required					
12	LIE Band 25	Right side	0	0.400	0.353	0.753	ΣSAR<1.6, Not required					
		Left side	0	0.386	0.400	0.786	ΣSAR<1.6, Not required					

SPLSR analysis

Conditions	Position	SAR Value	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation	SPLSR	Simultaneous Transmission
		(W/kg)	х	У	Z	(vv/kg)	Distance (mm)		SAR Test
LTE Band 25	Back side	1.192	-48.60	-85.20	-1.18	2.304	103.72	0.034	SPLSR<0.04,
5 GHz WLAN	Dack Side	1.112	54.00	-70.00	-1.72	2.504	103.72	0.034	Not required



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 158 of 267

#### LTE FDD Band 26 + 5 GHz WLAN

	TE 1 DD Band 20 1 0 OHZ WEAR								
No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN	SAR Sum	SPLSR		
		Back side	0	1.164	1.112	2.276	Analyzed as below		
13	LTE Band 26	Top side	0	0.466	0.187	0.653	ΣSAR<1.6, Not required		
13	LTL Ballu 20	Right side	0	0.400	0.353	0.753	ΣSAR<1.6, Not required		
		Left side	0	0.180	0.400	0.580	ΣSAR<1.6, Not required		

SPLSR analysis

Conditions	Position	SAR Value	alue		ΣSAR (M/kg)	Peak Location Separation	SPLSR	Simultaneous Transmission	
		(W/kg)	х	У	Z	(W/kg)	Distance (mm)		SAR Test
LTE Band 26	Back side	1.164	-45.30	-89.90	-0.81	2.276	101.28	0.034	SPLSR<0.04,
5 GHz WLAN	Dack Side	1.112	54.00	-70.00	-1.72	2.270	101.20	0.034	Not required

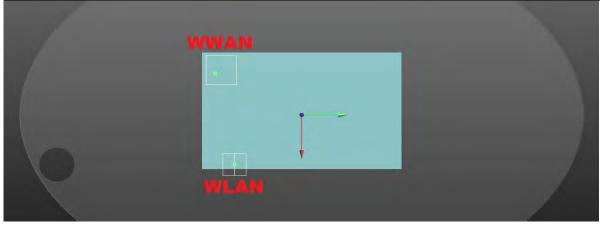

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 159 of 267

#### LTE TDD Band 41 + 5 GHz WLAN

	TE 100 Build 41 1 0 OHZ WEAR								
No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN	SAR Sum	SPLSR		
		Back side	0	1.254	1.112	2.366	Analyzed as below		
14	LTE Band 41	Top side	0	0.504	0.187	0.691	ΣSAR<1.6, Not required		
14	LIL Dallu 41	Right side	0	0.400	0.353	0.753	ΣSAR<1.6, Not required		
		Left side	0	0.234	0.400	0.634	ΣSAR<1.6, Not required		

SPLSR analysis

Conditions	Position	SAR Value	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation	SPLSR	Simultaneous Transmission
		(W/kg)	х	У	Z	(vv/kg)	Distance (mm)		SAR Test
LTE Band 41	Back side	1.254	-49.40	-91.00	-0.85	2.366	105.51	0.034	SPLSR<0.04,
5 GHz WLAN	Dack Side	1.112	54.00	-70.00	-1.72	2.300	103.51	0.034	Not required

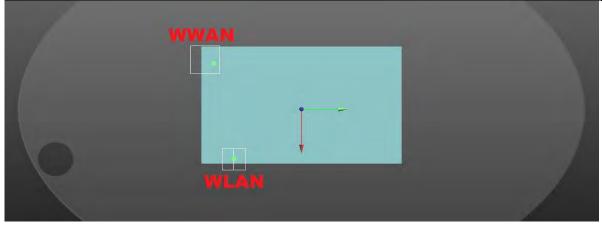

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 160 of 267

#### LTE FDD Band 2 + BT

No.	Conditions	Position	Distance (mm)	Max. WWAN	ВТ	SAR Sum	SPLSR			
		Back side	0	1.377	0.105	1.482	ΣSAR<1.6, Not required			
15	LTE Band 2	Top side	side 0 0.459 0.064	0.064	0.523	ΣSAR<1.6, Not required				
13	LTE Band 2	Right side	0	0.400	0.105	0.505	ΣSAR<1.6, Not required			
		Left side	0	0.403	0.400	0.803	ΣSAR<1.6, Not required			

#### LTE FDD Band 4 + BT

No.	Conditions	Position	Distance (mm)	Max. WWAN	ВТ	SAR Sum	SPLSR
		Back side	0	1.321	0.105	1.426	ΣSAR<1.6, Not required
16	LTE Band 4	Top side	0	0.717	0.064	0.781	ΣSAR<1.6, Not required
10	LTL Ballu 4	Right side	0	0.400	0.105	0.505	ΣSAR<1.6, Not required
		Left side	0	0.461	0.400	0.861	ΣSAR<1.6, Not required

#### LTE FDD Band 5 + BT

No.	Conditions	Position	Distance (mm)	Max. WWAN	ВТ	SAR Sum	SPLSR
		Back side	0	1.152	0.105	1.257	ΣSAR<1.6, Not required
17	LTE Band 5	Top side	0	0.438	0.064	0.502	ΣSAR<1.6, Not required
'	17 LIE Band 5	Right side	0	0.400	0.105	0.505	ΣSAR<1.6, Not required
		Left side	0	0.161	0.400	0.561	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 161 of 267

#### LTE FDD Band 12 + BT

	IL I DD Band 12 + B1									
No.	Conditions	Position	Distance (mm)	Max. WWAN	ВТ	SAR Sum	SPLSR			
		Back side	0	1.318	0.105	1.423	ΣSAR<1.6, Not required			
18	LTE Band 12	Top side	0	0.281	0.064	0.345	ΣSAR<1.6, Not required			
10		Right side	0	0.400	0.105	0.505	ΣSAR<1.6, Not required			
		Left side	0	0.101	0.400	0.501	ΣSAR<1.6, Not required			

#### LTE FDD Band 25 + BT

No.	Conditions	Position	Distance (mm)	Max. WWAN	ВТ	SAR Sum	SPLSR			
		Back side	0	1.192	0.105	1.297	ΣSAR<1.6, Not required			
19	LTE Band 25	Top side	0	0.444	0.064	0.508	ΣSAR<1.6, Not required			
19	LIE Ballu 25	Right side	0	0.400	0.105	0.505	ΣSAR<1.6, Not required			
		Left side	0	0.386	0.400	0.786	ΣSAR<1.6, Not required			

#### LTE FDD Band 26 + BT

	TET DD Band 20 1 D1									
No.	Conditions	Position	Distance (mm)	Max. WWAN	ВТ	SAR Sum	SPLSR			
		Back side	0	1.164	0.105	1.269	ΣSAR<1.6, Not required			
20	LTE Band 26	Top side	0	0.466	0.064	0.530	ΣSAR<1.6, Not required			
20	LIL Daliu 20	Right side	0	0.400	0.105	0.505	ΣSAR<1.6, Not required			
		Left side	0	0.180	0.400	0.580	ΣSAR<1.6, Not required			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 162 of 267

#### LTE TDD Band 41 + BT

	11 100 Build +1 1 B1									
No.	Conditions	Position	Distance (mm)	Max. WWAN	ВТ	SAR Sum	SPLSR			
		Back side	0	1.254	0.105	1.359	ΣSAR<1.6, Not required			
21	LTE Band 41	Top side	0	0.504	0.064	0.568	ΣSAR<1.6, Not required			
21		LIE Ballu 41	LIL Dalla 41	Right side	0	0.400	0.105	0.505	ΣSAR<1.6, Not required	
		Left side	0	0.234	0.400	0.634	ΣSAR<1.6, Not required			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 163 of 267

## 4. Instruments List

Manufacturer	Device	Туре	Serial number	Date of last calibration	Date of next calibration
Schmid & Partner Engineering AG	Dosimetric E-Field Probe	EX3DV4	3938	Nov.25,2016	Nov.24,2017
		D750V2	1015	Aug.30,2016	Aug.29,2017
		D835V2	4d063	Aug.25,2016	Aug.24,2017
Schmid & Partner Engineering AG	System	D1750V2	1008	Aug.31,2016	Aug.30,2017
	System Validation Dipole	D1900V2	5d027	Apr.25,2016	Apr.24,2017
	ырые	D2450V2	727	Apr.19,2016	Apr.18,2017
		D2600V2	1005	Jan.25,2017	Jan.24,2018
		D5GHzV2	1023	Jan.20,2017	Jan.19,2018
Schmid & Partner Engineering AG	Data acquisition Electronics	DAE4	1336	Nov.22,2016	Nov.21,2017
Schmid & Partner Engineering AG	Software	DASY 52 V52.8.8	N/A	Calibration not required	Calibration not required
Schmid & Partner Engineering AG	Phantom	ELI	N/A	Calibration not required	Calibration not required
Schmid & Partner Engineering AG	Vector Network Analyzer and Vector Reflect meter	DAKS VNA R140	0040513	Jan.24,2016	Jan.23,2018
Schmid & Partner Dielectric Engineering AG Probe Kit		DAKS-3.5	1053	Jan.24,2017	Jan.23,2018
Agilent	Dielectric Probe Kit	85070E	MY44300677	Calibration not required	Calibration not required
Agilent	Dual-directional	772D	MY46151242	Jul.11,2016	Jul.10,2017
/ ignorit	coupler	778D	MY48220468	Jul.06,2016	Jul.05,2017

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 164 of 267

Manufacturer	Device	Туре	Serial number	Date of last calibration	Date of next calibration
Agilent	RF Signal Generator	N5181A	MY50144143	Mar.01,2017	Feb.28,2018
Agilent	Power Meter	E4417A	MY52240003	Oct.17,2016	Oct.16,2017
Agilent	Power Sensor	E9301H	MY52200003	Oct.17,2016	Oct.16,2017
			MY52200004	Oct.17,2016	Oct.16,2017
TECPEL	Digital thermometer	DTM-303A	TP130078	May.30,2016	May.29,2017
Anritsu	Radio Communication Test	MT8820C	6201061049	Apr.08,2016	Apr.07,2017

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_and/conditions for Electronic Documents at www.sgs.com/terms\_and/conditions for Electronic Documents at www.sgs.com/terms\_and/conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined.

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 165 of 267

## 5. Measurements

Date: 2017/3/21

## LTE Band 2 (20MHz)\_Body\_Back side\_CH 18900\_QPSK\_1-50\_0mm

Communication System: LTE; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: f = 1880 MHz;  $\sigma = 1.499 \text{ S/m}$ ;  $\varepsilon_r = 52.011$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Ambient temperature: 22.9° C; Liquid temperature: 22.6° C

## **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(7.77, 7.77, 7.77); Calibrated: 2016/11/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2016/11/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Body/Area Scan (91x71x1):** Interpolated grid: dx=15 mm, dy=15 mm Maximum value of SAR (interpolated) = 2.12 W/kg


## Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,

dy=8mm, dz=5mm

Reference Value = 2.435 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 2.81 W/kg

**SAR(1 g) = 1.33 W/kg; SAR(10 g) = 0.624 W/kg** Maximum value of SAR (measured) = 1.98 W/kg

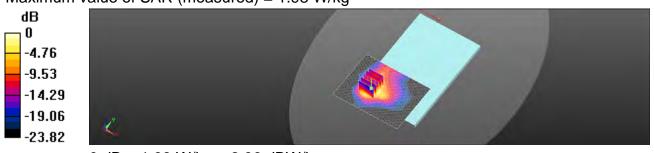

0 dB = 1.98 W/kg = 2.96 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 166 of 267

Date: 2017/3/23

## LTE Band 4 (20MHz)\_Body\_Back side\_CH 20300\_QPSK\_1-0\_0mm

Communication System: LTE; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: f = 1745 MHz;  $\sigma = 1.536 \text{ S/m}$ ;  $\varepsilon_r = 51.542$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Ambient temperature: 23.1° C; Liquid temperature: 22.3° C

#### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/11/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2016/11/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (91x71x1): Interpolated grid: dx=15 mm, dy=15 mm Maximum value of SAR (interpolated) = 1.94 W/kg


## Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,


dv=8mm. dz=5mm

Reference Value = 2.995 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 2.40 W/kg

SAR(1 g) = 1.24 W/kg; SAR(10 g) = 0.598 W/kgMaximum value of SAR (measured) = 1.78 W/kg



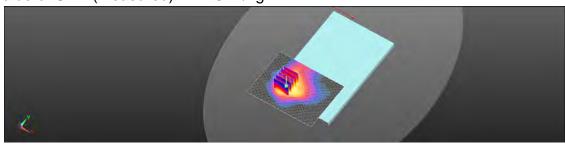

0 dB = 1.78 W/kg = 2.50 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 167 of 267

Date: 2017/3/28

## LTE Band 5 (10MHz)\_Body\_Back side\_CH 20525\_QPSK\_1-25\_0mm

Communication System: LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: f = 836.5 MHz;  $\sigma = 1.009 \text{ S/m}$ ;  $\varepsilon_r = 53.297$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Ambient temperature: 23.5° C; Liquid temperature: 22.4° C

#### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(9.33, 9.33, 9.33); Calibrated: 2016/11/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2016/11/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (91x71x1): Interpolated grid: dx=15 mm, dy=15 mm Maximum value of SAR (interpolated) = 1.53 W/kg


## Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,


dv=8mm. dz=5mm

Reference Value = 4.509 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.27 W/kg

SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.563 W/kg



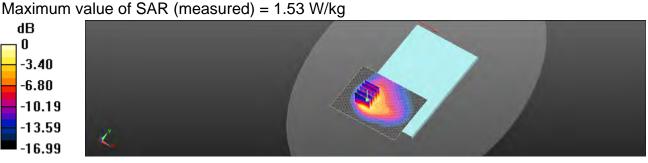

0 dB = 1.53 W/kg = 1.85 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 168 of 267

Date: 2017/3/30

## LTE Band 12 (10MHz)\_Body\_Back side\_CH 23095\_QPSK\_1-25\_0mm

Communication System: LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: f = 707.5 MHz;  $\sigma = 0.937 \text{ S/m}$ ;  $\varepsilon_r = 54.727$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Ambient temperature: 23.8° C; Liquid temperature: 22.1° C

#### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(9.51, 9.51, 9.51); Calibrated: 2016/11/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2016/11/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (91x71x1): Interpolated grid: dx=15 mm, dy=15 mm Maximum value of SAR (interpolated) = 1.87 W/kg

## Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,


dv=8mm, dz=5mm

Reference Value = 6.447 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.83 W/kg

SAR(1 g) = 1.29 W/kg; SAR(10 g) = 0.698 W/kg

Maximum value of SAR (measured) = 1.87 W/kg

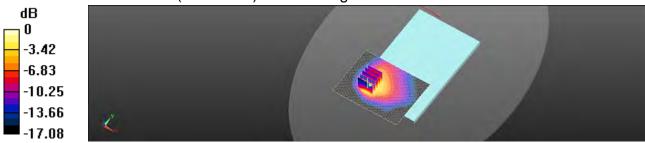

0 dB = 1.87 W/kg = 2.72 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 169 of 267

Date: 2017/3/21

## LTE Band 25 (20MHz)\_Body\_Back side\_CH 26365\_QPSK\_1-0\_0mm

Communication System: LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium parameters used: f = 1882.5 MHz;  $\sigma = 1.5 \text{ S/m}$ ;  $\epsilon_r = 51.995$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Ambient temperature: 22.9° C; Liquid temperature: 22.6° C

#### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(7.77, 7.77, 7.77); Calibrated: 2016/11/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2016/11/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Body/Area Scan (91x71x1):** Interpolated grid: dx=15 mm, dy=15 mm Maximum value of SAR (interpolated) = 1.77 W/kg

## Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,


dy=8mm, dz=5mm

Reference Value = 3.678 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 2.31 W/kg

SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.516 W/kg

Maximum value of SAR (measured) = 1.63 W/kg

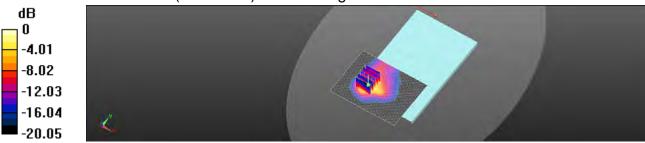

0 dB = 1.63 W/kg = 2.12 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 170 of 267

Date: 2017/3/28

## LTE Band 26 (15MHz)\_Body\_Back side\_CH 26865\_QPSK\_1-0\_0mm

Communication System: LTE; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used: f = 831.5 MHz;  $\sigma = 1.005 \text{ S/m}$ ;  $\varepsilon_r = 53.402$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Ambient temperature: 23.5° C; Liquid temperature: 22.4° C

#### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(9.33, 9.33, 9.33); Calibrated: 2016/11/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2016/11/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (91x71x1): Interpolated grid: dx=15 mm, dy=15 mm Maximum value of SAR (interpolated) = 1.58 W/kg


## Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,

dv=8mm. dz=5mm

Reference Value = 4.419 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.21 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.550 W/kg

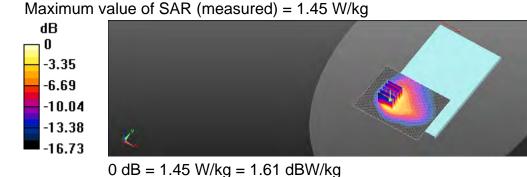

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 171 of 267

Date: 2017/3/17

## LTE Band 41 (20MHz)\_Body\_Back side\_CH 41490\_QPSK\_1-0\_0mm

Communication System: LTE; Frequency: 2680 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2680 MHz;  $\sigma = 2.287 \text{ S/m}$ ;  $\varepsilon_r = 50.777$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Ambient temperature: 22.7° C; Liquid temperature: 22.2° C

#### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(7.14, 7.14, 7.14); Calibrated: 2016/11/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2016/11/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

# Configuration/Body/Area Scan (121x91x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 2.21 W/kg

## Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,


dy=5mm, dz=5mm

Reference Value = 1.842 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 4.30 W/kg

SAR(1 g) = 1.2 W/kg; SAR(10 g) = 0.475 W/kg

Maximum value of SAR (measured) = 2.37 W/kg

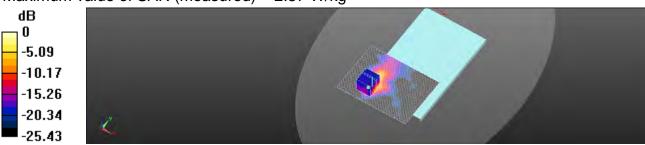

0 dB = 2.37 W/kg = 3.75 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 172 of 267

Date: 2017/3/20

## WLAN 802.11b\_Body\_Back side\_CH 6\_0mm

Communication System: WLAN(2.4G); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2437 MHz;  $\sigma = 1.995$  S/m;  $\varepsilon_r = 52.585$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient temperature: 22.5° C; Liquid temperature: 22.5° C

#### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(7.4, 7.4, 7.4); Calibrated: 2016/11/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2016/11/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

# Configuration/Body/Area Scan (121x71x1): Interpolated grid: dx=12 mm, dy=12

Maximum value of SAR (interpolated) = 2.08 W/kg

## Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,


dv=5mm, dz=5mm

Reference Value = 1.890 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.92 W/kg

## SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.433 W/kg

0 -4.69 -9.38-14.07 -18.76-23.45

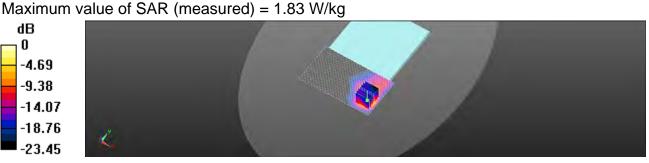

0 dB = 1.83 W/kg = 2.61 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 173 of 267

Date: 2017/3/15

## WLAN 802.11n(40M) 5.2G\_Body\_Back side\_CH 38\_0mm

Communication System: WLAN(5G); Frequency: 5190 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5190 MHz;  $\sigma = 5.41 \text{ S/m}$ ;  $\varepsilon_r = 48.327$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Ambient temperature: 22.8° C; Liquid temperature: 22.0° C

#### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(4.41, 4.41, 4.41); Calibrated: 2016/11/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2016/11/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

# Configuration/Body/Area Scan (141x81x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 2.55 W/kg

## Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 2.561 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 8.32 W/kg

## SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.228 W/kg

Maximum value of SAR (measured) = 2.65 W/kg

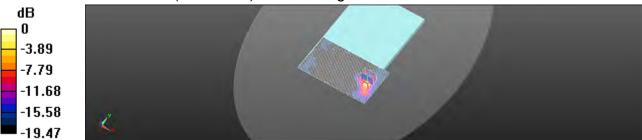

0 dB = 2.65 W/kg = 4.22 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 174 of 267

Date: 2017/3/13

## WLAN 802.11n(40M) 5.3G\_Body\_Back side\_CH 62\_0mm

Communication System: WLAN(5G); Frequency: 5310 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5310 MHz;  $\sigma = 5.544 \text{ S/m}$ ;  $\varepsilon_r = 48.287$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Ambient temperature: 22.6° C; Liquid temperature: 21.9° C

#### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(4.41, 4.41, 4.41); Calibrated: 2016/11/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2016/11/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

# Configuration/Body/Area Scan (141x81x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 1.79 W/kg

## Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 3.258 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 5.85 W/kg

SAR(1 g) = 0.843 W/kg; SAR(10 g) = 0.223 W/kg

Maximum value of SAR (measured) = 1.71 W/kg

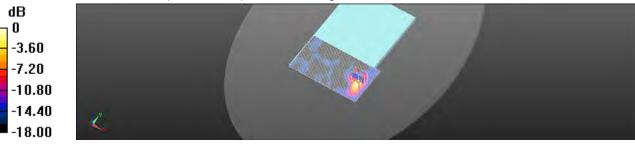

0 dB = 1.71 W/kg = 2.33 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 175 of 267

Date: 2017/3/10

## WLAN 802.11n(40M) 5.6G\_Body\_Top side\_CH 134\_5mm

Communication System: WLAN(5G); Frequency: 5670 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5670 MHz;  $\sigma = 5.954 \text{ S/m}$ ;  $\varepsilon_r = 48.676$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Ambient temperature: 23.1° C; Liquid temperature: 22.8° C

#### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(3.83, 3.83, 3.83); Calibrated: 2016/11/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2016/11/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

# Configuration/Body/Area Scan (71x171x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 2.39 W/kg

## Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 2.819 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 4.95 W/kg

SAR(1 g) = 1.15 W/kg; SAR(10 g) = 0.394 W/kg

Maximum value of SAR (measured) = 2.27 W/kg

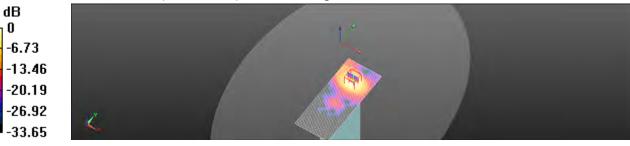

0 dB = 2.27 W/kg = 3.56 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



Page: 176 of 267

Date: 2017/3/8

## WLAN 802.11n(40M) 5.8G\_Body\_Back side\_CH 151\_0mm

Communication System: WLAN(5G); Frequency: 5755 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5755 MHz;  $\sigma = 6.141$  S/m;  $\varepsilon_r = 48.095$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient temperature: 23.0° C; Liquid temperature: 22.7° C

#### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(4.02, 4.02, 4.02); Calibrated: 2016/11/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2016/11/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

# Configuration/Body/Area Scan (141x81x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 2.48 W/kg

## Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 0.8830 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 7.51 W/kg

SAR(1 g) = 0.924 W/kg; SAR(10 g) = 0.198 W/kg

Maximum value of SAR (measured) = 2.48 W/kg

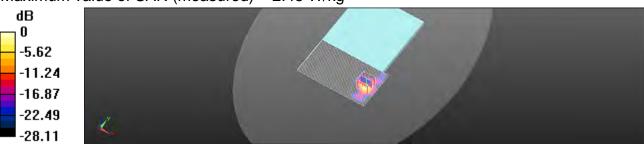

0 dB = 2.48 W/kg = 3.94 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 177 of 267

## 6. SAR System Performance Verification

Date: 2017/3/30

#### **Dipole 750 MHz SN:1015**

Communication System: CW; Frequency: 750 MHz; Duty Cycle:1:1

Medium parameters used: f = 750 MHz;  $\sigma = 0.982 \text{ S/m}$ ;  $\varepsilon_r = 54.338$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Ambient temperature: 23.8° C; Liquid temperature: 22.1° C

#### DASY5 Configuration:

Probe: EX3DV4 - SN3938; ConvF(9.51, 9.51, 9.51); Calibrated: 2016/11/25;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2016/11/22

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

## Configuration/Pin=250mW/Area Scan (51x141x1): Interpolated grid: dx=15 mm, dv=15 mm

Maximum value of SAR (interpolated) = 2.58 W/kg


## Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.43 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 3.27 W/kg

### SAR(1 g) = 2.24 W/kg; SAR(10 g) = 1.48 W/kgMaximum value of SAR (measured) = 2.75 W/kg

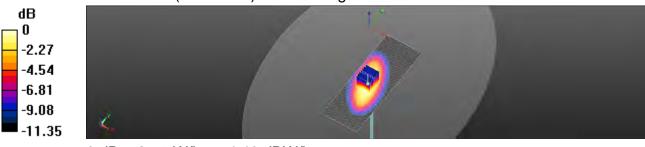

0 dB = 2.75 W/kg = 4.40 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 178 of 267

Date: 2017/3/28

## Dipole 835 MHz\_SN:4d063

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: f = 835 MHz;  $\sigma = 1.007 \text{ S/m}$ ;  $\varepsilon_r = 53.344$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Ambient temperature: 23.5° C; Liquid temperature: 22.4° C

#### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(9.33, 9.33, 9.33); Calibrated: 2016/11/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2016/11/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

# Configuration/Pin=250mW/Area Scan (61x121x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 2.93 W/kg


## Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.11 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.45 W/kg

SAR(1 g) = 2.41 W/kg; SAR(10 g) = 1.62 W/kg Maximum value of SAR (measured) = 2.93 W/kg

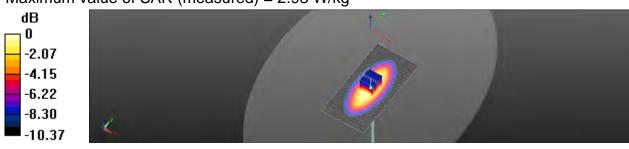

0 dB = 2.93 W/kg = 4.67 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 179 of 267

Date: 2017/3/23

## **Dipole 1750 MHz SN:1008**

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: f = 1750 MHz;  $\sigma = 1.537 \text{ S/m}$ ;  $\varepsilon_r = 51.536$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Ambient temperature: 23.1° C; Liquid temperature: 22.3° C

#### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/11/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2016/11/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=250mW/Area Scan (41x71x1): Interpolated grid: dx=15 mm, dv=15 mm

Maximum value of SAR (interpolated) = 13.7 W/kg


## Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 92.57 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 16.1 W/kg

SAR(1 g) = 9.27 W/kg; SAR(10 g) = 5.02 W/kgMaximum value of SAR (measured) = 13.0 W/kg

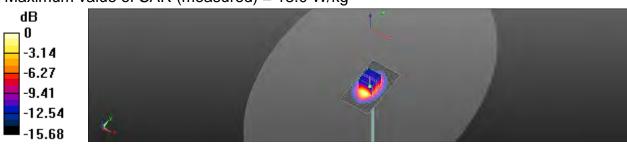

0 dB = 13.0 W/kg = 11.14 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 180 of 267

Date: 2017/3/21

## **Dipole 1900 MHz SN:5d027**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: f = 1900 MHz;  $\sigma = 1.52 \text{ S/m}$ ;  $\varepsilon_r = 51.985$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Ambient temperature: 22.9° C; Liquid temperature: 22.6° C

#### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(7.77, 7.77, 7.77); Calibrated: 2016/11/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2016/11/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

## Configuration/Pin=250mW/Area Scan (41x71x1): Interpolated grid: dx=15 mm, dv=15 mm

Maximum value of SAR (interpolated) = 14.8 W/kg


## Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.13 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 18.2 W/kg

SAR(1 g) = 9.73 W/kg; SAR(10 g) = 5.02 W/kgMaximum value of SAR (measured) = 14.1 W/kg

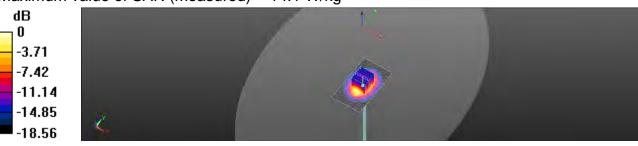

0 dB = 14.1 W/kg = 11.48 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 181 of 267

Date: 2017/3/20

### Dipole 2450 MHz SN:727

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2450 MHz;  $\sigma = 2.018 \text{ S/m}$ ;  $\varepsilon_r = 52.528$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Ambient temperature: 22.5° C; Liquid temperature: 22.5° C

### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(7.4, 7.4, 7.4); Calibrated: 2016/11/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2016/11/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

### Configuration/Pin=250mW/Area Scan (61x91x1): Interpolated grid: dx=12 mm, dv=12 mm

Maximum value of SAR (interpolated) = 20.6 W/kg


### Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 100.8 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 26.5 W/kg

SAR(1 g) = 12.8 W/kg; SAR(10 g) = 5.88 W/kgMaximum value of SAR (measured) = 19.6 W/kg

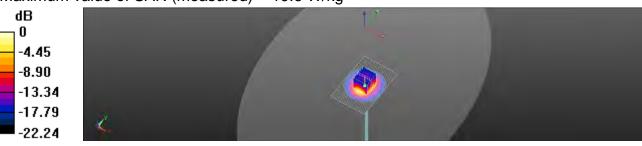

0 dB = 19.6 W/kg = 12.92 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

www.tw.sas.com



Page: 182 of 267

Date: 2017/3/17

### **Dipole 2600 MHz SN:1005**

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2600 MHz;  $\sigma = 2.216 \text{ S/m}$ ;  $\varepsilon_r = 51.119$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Ambient temperature: 22.7° C; Liquid temperature: 22.2° C

### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(7.14, 7.14, 7.14); Calibrated: 2016/11/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2016/11/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

### Configuration/Pin=250mW/Area Scan (61x71x1): Interpolated grid: dx=12 mm, dv=12 mm

Maximum value of SAR (interpolated) = 23.5 W/kg

### Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.22 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 29.2 W/kg

SAR(1 g) = 14 W/kg; SAR(10 g) = 6.28 W/kg

Maximum value of SAR (measured) = 21.6 W/kg

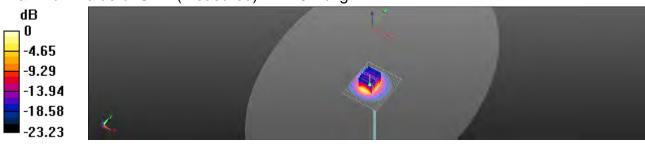

0 dB = 21.6 W/kg = 13.34 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 183 of 267

Date: 2017/3/15

### **Dipole 5200 MHz\_SN:1023**

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5200 MHz;  $\sigma = 5.484 \text{ S/m}$ ;  $\varepsilon_r = 48.367$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Ambient temperature: 22.8° C; Liquid temperature: 22.0° C

### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(4.41, 4.41, 4.41); Calibrated: 2016/11/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2016/11/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

# Configuration/Pin=100mW/Area Scan (51x71x1): Interpolated grid: dx=10 mm, dv=10 mm

Maximum value of SAR (interpolated) = 16.4 W/kg

### Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm

Reference Value = 57.88 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 27.7 W/kg

**SAR(1 g) = 7.2 W/kg; SAR(10 g) = 2.06 W/kg**Maximum value of SAR (measured) = 15.0 W/kg



0 dB = 15.0 W/kg = 11.76 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 184 of 267

Date: 2017/3/13

### **Dipole 5300 MHz SN:1023**

Communication System: CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5300 MHz;  $\sigma = 5.539 \text{ S/m}$ ;  $\varepsilon_r = 48.283$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Ambient temperature: 22.6° C; Liquid temperature: 21.9° C

### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(4.41, 4.41, 4.41); Calibrated: 2016/11/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2016/11/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

### Configuration/Pin=100mW/Area Scan (61x91x1): Interpolated grid: dx=10 mm, dv=10 mm

Maximum value of SAR (interpolated) = 16.3 W/kg

### Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm

Reference Value = 56.37 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 31.7 W/kg

SAR(1 g) = 7.36 W/kg; SAR(10 g) = 2.08 W/kgMaximum value of SAR (measured) = 15.2 W/kg



0 dB = 15.2 W/kg = 11.82 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

www.tw.sas.com



Page: 185 of 267

Date: 2017/3/10

### **Dipole 5600 MHz SN:1023**

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5600 MHz;  $\sigma = 5.855 \text{ S/m}$ ;  $\varepsilon_r = 48.838$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Ambient temperature: 23.1° C; Liquid temperature: 22.8° C

### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(3.83, 3.83, 3.83); Calibrated: 2016/11/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2016/11/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

### Configuration/Pin=100mW/Area Scan (61x91x1): Interpolated grid: dx=10 mm, dv=10 mm

Maximum value of SAR (interpolated) = 18.4 W/kg


### Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm

Reference Value = 60.31 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 36.5 W/kg

SAR(1 g) = 8.11 W/kg; SAR(10 g) = 2.21 W/kgMaximum value of SAR (measured) = 17.6 W/kg





0 dB = 17.6 W/kg = 12.46 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 186 of 267

Date: 2017/3/8

### **Dipole 5800 MHz SN:1023**

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5800 MHz;  $\sigma = 6.197 \text{ S/m}$ ;  $\varepsilon_r = 48.048$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Ambient temperature: 23.0° C; Liquid temperature: 22.7° C

### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(4.02, 4.02, 4.02); Calibrated: 2016/11/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2016/11/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

### Configuration/Pin=100mW/Area Scan (61x91x1): Interpolated grid: dx=10 mm, dv=10 mm

Maximum value of SAR (interpolated) = 19.2 W/kg


### Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm

Reference Value = 58.91 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 37.3 W/kg

SAR(1 g) = 7.87 W/kg; SAR(10 g) = 2.07 W/kgMaximum value of SAR (measured) = 17.6 W/kg





0 dB = 17.6 W/kg = 12.47 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 187 of 267

### 7. DAE & Probe Calibration Certificate

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Service suisse d'étalonnage C Servizio svizzero di taretura S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS). The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration pertificates

SGS - TW (Auden)

Accreditation No.: SCS 0108

S

Certificate No: DAE4-1336\_Nov16 **CALIBRATION CERTIFICATE** DAE4 - SD 000 D04 BM - SN: 1336 Object Calibration procedure(s) QA CAL-06.v29 Calibration procedure for the data acquisition electronics (DAE) November 22, 2016 Calibration date: This collection certificate documents the fracestriffy to national standards, which restize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate. All calibrations have been conducted in the closed laboratory tectify: environment temperature (22 + 30°C and humidity < 70% Calibration Equipment used (M&TE critical for calibration) ID # Cal Date (Certricate No.) Primery Standards Kethicy Multimeter Type 2001 SN: 0810278 09-Sep-16 (No:19065) Secondary Standards Check Date (in house) Scheduled Check SE UWS 063 AA 1001 05-Jan-15 (in house check) In house check: Jan 17 Calibrator Box V≥ 1 SE UMB 006 AA 1002 0G-Jan-16 (in house check) In house check, Jan-17 Function Tachnician Calibrated by: Deputy Technical Manager Fin Bomhelt Issued November 22, 2016 This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: DAE4-1336, Nov16

Page 1 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 188 of 267

### Calibration Laboratory of Schmid & Partner

Engineering AG Zeugheusstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdiens C Service suizee d'étalor myn Servizie svizzen ei teratura S Swies Calibration Service

Accreditation No.: SCS 0108

Accreding by the SWIs Accredition Service (SAS)
The SWIse Accreditation Service is one of the eignatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary

DAE data acquisition electronics

Connector angle Information used in DASY system to align probe sensor X to the robot

coordinate system.

#### Methods Applied and Interpretation of Parameters

- DC Voltage Measurement: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- Connector angle: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
  - DC Voltage Measurement Linearity: Verification of the Linearity at +10% and -10% of the nominal calibration voltage, Influence of offset voltage is included in this measurement.
  - Common mode sensitivity: Influence of a positive or negative common mode voltage on the differential measurement.
  - Channel separation: Influence of a voltage on the neighbor channels not subject to an input voltage.
  - AD Converter Values with inputs shorted: Values on the Internal AD converter corresponding to zero input voltage
  - Input Offset Measurement. Output voltage and statistical results over a large number of zero voltage measurements.
  - Input Offset Current: Typical value for information; Maximum channel input offset current, not considering the input resistance.
  - Input resistance: Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
  - Low Battery Alarm Voltage: Typical value for information. Below this voltage, a battery alarm signal is generated.
  - Power consumption: Typical value for information, Supply currents in various operating modes.

Dentificate No. OAE4-1335\_Nov16

Page 2 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com



Page: 189 of 267

### DC Voltage Measurement

A/D - Converter Resolution nominal High Range: 1LSB =

6.1µV full range = -100 ...+300 mV full minge = -1 .....+3mV 61nV Low Range TLSE = DASY measurement parameters. Auto Zero Time: 3 sec; Measuring time: 3 sec.

Calibration Factors	X	Ψ	2
High Range	403.332 ± 0.02% (k=2)	403.635 ± 0.02% (k=2)	403,121 ± 0.02% (fc=2)
Low Range	3.95216 ± 1.50% (k=2)	3.98718 ± 1.50% (k=2)	3.99680 ± 1.50% (k=2)

#### Connector Angle

Connector Angle to be used in DASY system:	122.0 °±1 °

Certificate No: DAE4-1336\_Nov16

Page 3 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 190 of 267

#### Appendix (Additional assessments outside the scope of SCS0108)

### 1. DC Voltage Linearity

High Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	199996.24	0.16	0.00
Channel X + Input	20001.25	-0.04	-0.00
Channel X - Input	-19999.81	1.35	-0.01
Channel Y + Input	199994.04	-1:BB	-0,00
Channel Y + Input	20000,69	-0.82	+0.00
Channel Y - Input	-20002.64	-1.77	0.01
Channel Z + Input	199997.44	1.49	0.00
Channel Z + Input	19999.78	-1.82	-0,01
Channel Z + Input	-20003.24	-2.19	0.01

Low Range	Reading (µV)	Difference (µV)	Ervor (%)
Channel X + Input	2001.87	0.66	0.03
Channel X + Input	201.39	-0.11	-0.06
Channel X - Input	-198.27	0.04	-0.02
Channel Y + Input	2001.34	-0.04	-0.00
Channel Y + Input	201.35	-0.36	-0.48
Channel Y - Input	-198.77	-0.62	0.31
Channel Z + Input	2001.30	0.10	70,0
Channel Z + Input	200,72	-0,71	+0.35
Channel Z - Input	-199.12	-0.78	0.39

### 2. Common mode sensitivity

	Common mode Input Voltage (mV)	High Renge Average Reading (μV)	Low Range Average Reading (µV)
Channel X	200	5.23	3.90
	: 200	-3.72	-5.31
Channel Y	300	-4.23	-3,73
	-300	2.71	18.5
Channel Z	500	20.93	21,36
-	-200	-23.91	-24.44

#### 3. Channel separation

DASY measurement parameters; Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (µV)	Channel Y (µV)	Channel Z (µV)
Channel X	200	9-1	fi.47	+1.27
Channel Y	200	7.97	-	6.72
Channel Z	200	7.94	5,96	2.00

Certificate No. DAE4-1336, Nov16

Page 4 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 191 of 267

#### 4. AD-Converter Values with inputs shorted

	High Range (LSB)	Low Range (LSB)
Channel X	15680	15881
Channel Y	15906	15597
Channel Z	(5853	15173

### 5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	1.4	

	Average (µV)	min. Offset (μV)	max. Offset (μV)	Std. Deviation (µV)
Channel X	-0.26	-1.07	0.37	0.33
Channel Y	-0.22	-0.92	0.62	0.34
Channel Z	-0.97	-1.73	0,29	0.36

#### 6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	500	200
Channel Z	200	200

#### B. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)	
Supply (+ Vcc)	+7,9	
Supply (- Vee)	-7.6	

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Ves)	-0.01	-8	-9

Cartificate No: DAE4-1996\_Nov16

Page 5 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 192 of 267

Calibration Laboratory of Schmid & Partner Engineering AG Zeughwisstrasse 43, \$904 Zurich, Switzerland





Schweizerlacher Kalibrierdenst. 5 Service suisse d'étalormage C Servizio svizzero di taratten Swiss Calibration Strivice

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatures to the EA Multilateral Agreement for the recognition of calibration partificates Accreditation No.: SCS 0108

SGS-TW (Anden)

Certificate No. EX3-3938\_Nov16

### CALIBRATION CERTIFICATE EX3DV4 - SN:3938 Object QA CAL-01, VB, QA CAL-14, V4, QA CAL-23, V5, QA CAL-25, V6 Calibration protectine(5) Calibration procedure for dosimetric E-field probes November 25, 2016 Californium core: This calibration pertilicate documents the trajectably to national standards, which realize the physical units of missionements (51). This measurements and the uncertainties with confidence probability and given unlife following pages and are part of the confidence All calibrations have been conducted in the closed laboratory facility: environment temperature CD = 37°C and humidity < 70%. Calibration Equipment used (MATE critical for calibration)

Firming Standards	ID	Cal Date (Geniticate No.)	Bulleting Calibration
Power meter NRP	SM 104778	06-Apr-16 (No. 217-02288002280)	Apr-17
Prover sensor NEP-291	SN 103244	06-April 6 (No. 217-02268)	Apr-17
Power sensor NEW-291	3N 103245	06-Apr-16 (No. 217-02289)	Apr.17
Reference 20 dB Attenuator	SN: 55277 (20x)	05-Apr-16 (No. 217-02293)	Apr-17
Reference Probe ES3DV2	SN. 3013	31-Dec-15 (No. E53-3013_Dec15)	Dev:16
DAE4	SN: 680	23-Dec-15 (No. DAE4-660_Dec15)	Deu-16
Secondary Standards	io .	Check Date (in house)	Scheduled Direct
Power meter Edd (SE)	SN. (3841293874	06-Apr-16 (in house check Jun-16)	In house check: Jan-16
Power sensor E4412A	SN:MY41498667	06-Apr-16 (in house check Jun-16)	In house check: Jue-18
Power sursor E4412A	SN: 000110210	DB-Apr-15 (in house check Jun-16)	In house theck: Jos-18.
RF generator HF 6648C	BN: US3642U01700	04-Aug-99 (in house check Jun-16)	In house check: Jun-18
Network Analyze HP 8753E	EN: US37390585	18-Oct-01 (in bouse check Oct-16)	In Fouse check: Oct-17

	Name	Fuyation	Signature
Calibrated by	Jenn Karrell	Laboratory Technicals	de for
Асциина by	Kartar Policy n	140/year Merwijes	Jan -
		l without written approval of the lucious	issued; Koyember 29, 2016

Dartificate No. EX3-3938, New 15.

Page 1 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 193 of 267

Calibration Laboratory of Schmid & Partner Engineering AG strasse 43, 1004 Zurich, Switzerland





Schweizenscher Kalibrierdierst Service suisse d'étulon Servizio avizzero di taratura S Swiss Calibration Service

Accreditation No.: SCS 0108

Apprehiment by the Swess Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

TBL NORMx.y.z ConviF DCP

tissun simulating liquid. sensitivity in free space sensitivity in TSL / NORMx,y,z diode compression point

crest factor (1/duty\_cycle) of the RF signal modulation dependent linearization parameters CF A.B.C.U

wrotation around probe axis Potarization #

A rotation around an axis that is in the plane normal to probe axis (at measurement center). Palarization 8

Le. 19 = 0 is normal to probe axis

Connector Angle information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific been set 1528-2013, Test recommended Practice for Determining the Practic Spaces-Averages Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices. Measurement Techniques', June 2013

b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for the horizontal devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010

VEB 455684, "ASA Mean respect Performance for 101 MHz to 8 GHz."

II) KDB 865664, 'SAR Measurement Requirements for 100 MHz to 8 GHz

Methods Applied and Interpretation of Parameters:

NORMx, y, z. Assessed for E-field potarization 9 = 0 (f < 900 MHz in TEM-cell, f > 1800 MHz; R22 waveguide) NORMx,y,z are only intermediate values, i.e., the uncertainties of NORMx,y,z closs not affect the E-field uncertainty inside TSL (see below ConvF).

NORM(fix.y,z = NORMx,y,z \* frequency\_response (see Frequency Response Chart). This limitarization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF

DQPx,y,z: DQP are numerical linearization parameters assessed based on the data of power sweep with QW signal (no uncertainty required). DCP does not depend on frequency nor media.

PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal

Ax.y.z. Bx.y.z. Cx.y.z.; Dx.y.z.; VRx.y.z. A. B. C. D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor modul. VR is the maximum calibration range expressed in RMS voltage across the diode.

Convir and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer

Standard for f < 900 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 100 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORMx, y, z \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent CONVF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz

Spherical isotropy (3D deviation from isotropy); in a field of low gradients realized using a flat phantom exposed by a patch antenna.

Sensor Offset. The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No talerance required.

Connector Angle: The angle is assessed using the information gained by determining the NORMs (no uncertainty required)

Ceittlicate No: EX3-3938, Nov16

Page 2 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 194 of 267

EX10W-5N 3896

Www.dur.25, 2016

# Probe EX3DV4

SN:3938

Manufactured: Calibrated:

May 2, 2013

November 25, 2016

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)

Destricate No. EX3-3938, Nov18

Prograf of 1

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 195 of 267

EX30V4- SN:3935

November 25, 2016

### DASY/EASY - Parameters of Probe: EX3DV4 - SN:3938

#### **Basic Calibration Parameters**

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm (µV/(V/m) <sup>2</sup> ) <sup>A</sup>	0.51	0.57	0.33	± 10.1 %
DCP (mV)"	100,5	101.3	104.0	

#### Modulation Calibration Parameters

UID	Communication System Name		A dB	B d⊞√µV	C	dB	VR mV	Unc (k=2)
0	CW	- 8	0.0	0.0	1.0	0.00	140.2	12.2 %
		- 4	0.0	0.0	1.0		129.7	
		Z	0.0	0.0	1.0		146.0	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Comficate No. EX3-3938\_Nov10

Flage # 10:11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

The uncertainties of form X,Y,Z do not affect the  $E^2$  field uncertainty inexts TSL (see Pages 5 and 8).

pardirete: ancereisty no required. ad using full mus. devalon from their response epolying rectargular astrophics and is expressed for the express



Page: 196 of 267

EXCID-V4-SN:3938

Neverbar 25, 2016

### DASY/EASY - Parameters of Probe: EX3DV4 - SN:3938

#### Calibration Parameter Determined in Head Tissue Simulating Media

· (Mitz)	Relative Permittivity	Conductivity (Sim)	ConvFX	ConvF Y	GonvF Z	Alpha <sup>ti</sup>	Depth <sup>©</sup> (mm)	Unc (k=2)
750	41.9	0.89	10.14	10:14	10,14	0.61	0.80	±120%
635	41.5	0.90	3,74	9.74	9.74	0.45	0,91	112.0%
900	41.5	0.97	9.64	9.64	9,64	0.51	0.80	± 12.0 %
1450	40.5	1.20	B 45	845	8.45	0.43	D.8.0	±1204
1750	40,1	1.37	B.20	8.20	8.20	0.31	0.63	± 12.0%
1900	40,0	1.40	8.15	8 15	8.15	0.38	0.80	± 12.6 %
2000	-40.0	1.40	9.06	8.06	8.06	0.35	0.80	± 12.0 %
2300	39.5	1:87	7.74	7.74	7.74	0.35	0.80	±12.0 %
2450	39.2	1.60	7.36	7.36	7:36	0,33	0.92	± 12.0 %
2600	39.0	1.96	7.09	7.09	7.09	0.44	0.80	± 12.0 %
5250	35.9	4.71	5.21	5,21	5.21	0,30	1.80	± 13.11
5600	35.5	5.07	4.53	4.53	4.53	0.40	1.80	€ 13.13
5750	35.4	522	4.79	4.79	4.79	0.40	1.80	= 13.1 3

Final survival to the RSS of the Const uncertainty of coloration frequency and the uncertainty to the RSS of the Const uncertainty of coloration frequency and the uncertainty for the indicated requency sand. Final product will be uncertainty for the indicated requency sand. Final product will be used to the indicated requency of the indicated requency will be used to the indicated requency will be used to the indicated and indicated beautiful be

Centilizaria No.: EX3-3938\_Nov10

Page 5 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

dismetal from the boundary.



Page: 197 of 267

EX3DV4- \$N.3938

Movember 25, 2016

### DASY/EASY - Parameters of Probe: EX3DV4 - SN:3938

#### Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity	Conductivity (S/m) <sup>1</sup>	ConvFX	ConvF Y	ConvF Z	Alpha*	Depth G	Unc (k=2)
750	55.5	0.96	9.51	9.51	9.51	0.38	D.93	± 12.0 %
B35	55.2	0.97	9.33	9:33	H.33	0.47	0.60	± 12.0 %
900	:55,0	1:05	9.23	B.28	9.23	0,35	0.98	± 12.0 %
1450	54.0	1.90	8.18	8.18	8.16	0.39	0.80	±120%
1750	53.4	1.49	7.98	7.96	7.98	0,43	0.81	±12.0%
1900	53.3	1.52	7.77	7.77	7.77	0.27	1.06	±12.0%
2000	53.3	1,52	7.63	7.63	7.63	0.40	0.80	± \$2,0 %
2500	52.9	Tat	7.58	7.56	7.56	0.42	0.80	± 12.0 %
2450	52.7	1.05	7:40	7.40	7,40	0.38	0.80	± 12.0 %
2600	52.5	2.10	7.14	7.14	7.14	0.34	0.80	± 12.0 %
5250	A6.9	5.36	4.41	4.41	4.41	0.40	1.90	213.19
5600	A6.5	5.77	3,83	3,83	3.83	0:50	1.90	± 03.1 %
5750	48.3	5.94	4.02	4.02	4.02	0.50	1.90	± 13.1 %

Frozumity well thy above 300 MHz of ± 100 MHz of 4 applies for DASY v4 ± and higher Issue Page 2), else 4 or restricted to a 50 MHz. The providintly at the RES of the ComF encertainty in call match heapting will the uncertainty for the indicated the page 20 MHz. Frogrammy which years 325 MHz is ± 10 S. 2.4.0.00 min 17 MHz for ComF encertaints at 30, 64, 128. 150 and 220 MHz respectively. Above 50 GHz frequency which years he estanded to ± 110 MHz.

\*All highernoses below 3 GHz, the yealthy of issue parameters (a and in) can be reliased to ± 30% if ignat compressed from transition from the indicated to ± 20%. If the uncertainty in the RES of the ComF or restrictly for indicated target table parameters is and ± 1 in restricted to ± 20%. The uncertainty in the RES of the ComF or restrictly for indicated target table parameters. All the transitions of the countery effect this indicated the parameters of the countery of the RES of the ComF or the RES of the ComF or the RES of the ComF or the RES of the Restriction of the RES of the Restriction o

Confiliante No; EX3-3938\_Nov10

Page 6 (K11)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 198 of 267

EX3DV4-SN:3938

November 25, 2016

# Frequency Response of E-Field (TEM-Cell:Ifi110 EXX, Waveguide: R22)

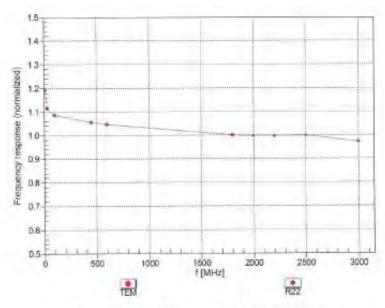

Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)

Certificate No: EX3-3938\_Nov16

Page 7 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號


www.tw.sas.com




Page: 199 of 267

November 25, 2016 EX3DV4-SN:3938

### Receiving Pattern (6), 9 = 0°

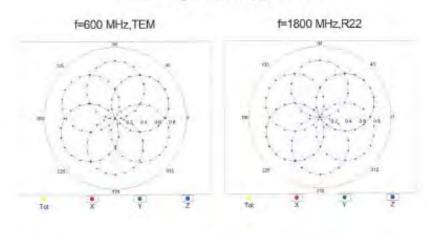

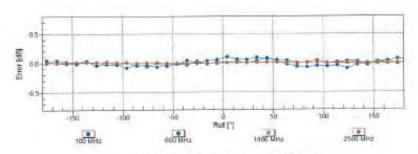

Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)

Page 8 of 11 Certificate No: EX3-3938\_Nov16

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.





Page: 200 of 267

EX3DV4-SN:3938

November 25, 2016

### Dynamic Range f(SAR<sub>head</sub>) (TEM cell , fovar 1900 MHz)

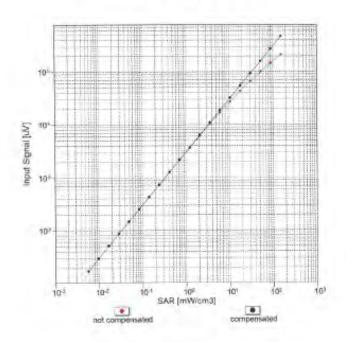

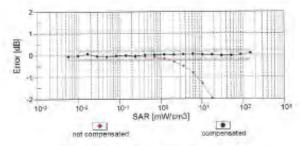

Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Certificate No: EX3-3938\_Nov16

Page 9 of 11


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 201 of 267

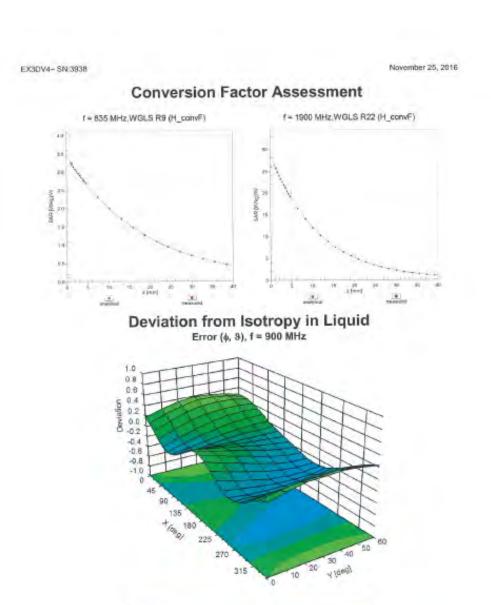

Certificate No: EX3-3938 Nov16

Page 10 of 11

Uncertainty of Spherical Isotropy Assessment: ± 2.6% (k=2)

-1.0 -0.8 -0.8 -0.4 -0.2 0.0 0.2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 202 of 267

EA3DV4-SN 3938

November 25, 2016

### DASY/EASY - Parameters of Probe: EX3DV4 - SN:3938

#### Other Probe Parameters

Triangular
-25,9
enabled
beldesb
337 mm
10 mm
a mm
2.5 mm
1 him
1 mm
1 mm
1.4 mm

Certificate No: EX3/3933 Nov16

Progr. 11 (f. 1 )

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 203 of 267

## 8. Uncertainty Budget

Measurement Uncertainty evaluation template for DUT SAR test (3-6G)

A	С	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probabilit v	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Vef
Measurement system									
Probe calibration	6.55%	N	1	1	1	1	6.55%	6.55%	œ
Isotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	œ
Isotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	œ
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	œ
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	œ
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	œ
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	œ
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	œ
RF ambient condition -	3.00%	R	√3	1.732	1	1	1.73%	1.73%	œ
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	œ
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	œ
Probe Positioning with respect to phantom	2.90%	R	√3	1.732	1	1	1.67%	1.67%	œ
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	00
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	œ
Liquid permittivity (mea.)	1.75%	N	1	1	0.64	0.43	1.12%	0.75%	М
Liquid Conductivity (mea.)	3.59%	N	1	1	0.6	0.49	2.15%	1.76%	М
Combined standard uncertainty		RSS					11.96%	11.86%	
Expant uncertainty (95% confidence							23.93%	23.72%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 204 of 267

#### Measurement Uncertainty evaluation template for DUT SAR test (0.3-3G)

A	С	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probabilit v	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.00%	N	1	1	1	1	6.00%	6.00%	∞
Isotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	∞
Isotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	∞
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	∞
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	∞
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	$\infty$
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	∞
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	∞
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	∞
Probe Positioning with respect to phantom	2.90%	R	√3	1.732	1	1	1.67%	1.67%	∞
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	∞
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	∞
Liquid permittivity (mea.)	3.59%	N	1	1	0.64	0.43	2.30%	1.54%	М
Liquid Conductivity (mea.)	3.82%	N	1	1	0.6	0.49	2.29%	1.87%	М
Combined standard uncertainty		RSS					11.87%	11.66%	
Expant uncertainty (95% confidence							23.74%	23.33%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 205 of 267

## 9. Phantom Description

Schmid & Partner Engineering AG

a

Zeughausstrasse 43, 8004 Zurich, Switzerland Phone +41 44 245 9700, Fax +41 44 245 9779 info@speag.com, http://www.speag.com

#### Certificate of Conformity / First Article Inspection

Item	Oval Flat Phantom ELI 5.0	
Type No	QD OVA 002 A	
Series No	1108 and higher	
Manufacturer	Untersee Composites Knebelstrasse 8, CH-8268 Mannenbach, Switzerland	

#### Tests

Complete tests were made on the prototype units QD OVA 001 A, pre-series units QD OVA 001 B as well as on some series units QD OVA 001 B. Some tests are made on all series units QD OVA 002 A.

Test	Requirement	Details	Units tested
Shape	Internal dimensions, depth and sagging are compatible with standards	Bottom elliptical 600 x 400 mm, Depth 190 mm, dimension compliant with [1] for f > 375 MHz	Prototypes
Material thickness	Bottom: 2.0mm +/- 0.2mm	dimension compliant with [3] for f > 800 MHz	all
Material parameters	rel. permittivity 2 – 5, loss tangent ≤ 0.05, at f ≤ 6 GHz	rel. permittivity 3.5 +/- 0.5 loss tangent ≤ 0.05	Material samples
Material resistivity	Compatibility with tissue simulating liquids .	Compatible with SPEAG liquids. **	Phantoms, Material sample
Sagging	Sagging of the flat section in tolerance when filled with tissue simulating liquid.	within tolerance for filling height up to 155 mm	Prototypes, samples

Note: Compatibility restrictions apply certain liquid components mentioned in the standard, containing e.g. DGBE, DGMHE or Triton X-100. Observe technical note on material compatibility.

#### Standards

- [1] OET Bulletin 65, Supplement C, "Evaluating Compliance with FCC Guidelines for Human Exposure
- to Radiofrequency Electromagnetic Fields\*, Edition 01-01

  [2] IEEE 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques, December 2003
- [3] IEC 62209–1 ed1.0, "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices Human models, instrumentation, and procedures Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close
- proximity to the ear (frequency range of 300 MHz to 3 GHz)\*, 2005-02-18 IEC 62209-2 ed1.0, "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)\*\*, 2010-03-30

Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of body-worn SAR measurements and system performance checks as specified in [1 - 4] and further standards.

Signature / Stamp

Doc No 881 - QD OVA 002 A - A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com



Page: 206 of 267

## 10. System Validation from Original Equipment Supplier

Calibration Laboratory of Schmid & Partner Engineering AG Zoughausstrasse 43, 9004 Zurich, Switzerland





Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration cartificates

SGS-TW (Auden)

Accreditation No.: SCS 0108

Certificate No: D750V3-1015 Aug 16

	ERTIFICATE		
Object	D750V3 - SN: 10	15	
Calibration procedure(s)	QA CAL-05.v9 Calibration proce	dure for dipole validation kits abo	ove 700 MHz
Contrainn date:	August 30, 2016		
	and the second second second	ional standards, which realize the physical or robability are given on the following pages an	and the second of the second second
All calibrations have been conduc	had in the closed laborato	ry facility: anvironment temperature (22 ± 3)*(	C and humidity < 70%.
Calibration Equipment used (M&T	E-critical for calibration)		
Primary Standards	ID#	Cal Date (Certificate No.)	Schaduled Calibration
Power meter NRP	SN: 104778	06-Apri-16 (No. 217-02288/02288)	Apr-17
Power sensor NRP-791	SN: 103244	06-Apr-15 (No. 217-02288)	Apr-17
ower sensor NRP-Z91	SN: 100245	06-Apr-16 (No. 217-02289)	Apr-17
Reference 20 cB Attenuator	SN: 5058 (20k)	05-Apr-16 (No. 217-02292)	Apr-17
Type-N mismatch combination	SN: 5047.2 / 06327	0G-Apr-16 (No. 217-02295)	Apr-17
Reference Probe EX3DV4	SN: 7349	15-Jun 16 (No. EX3-7349 Jun 16)	Jun-17
DAE4	SN: 601	30-Dec-15 (No. DAE4-601_Dec15)	Dac-16
	ND #	Check Date (in house)	Scheduled Check
Secondary Standards			Schedilled Check
	SN: G837460704	07-Oct-15 (No. 217-02222)	
Power Inder EPM-442A	SN: G837460704 SN: US37292783	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power meter EPM-442A Power stansor HP 8481A		07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222)	In house check Oct-16 In house check Oct-16
Power Inder EPM-442A Power statsor HP 8481A Power seasor HP 8481A	SN: US37292783 SN: MY41092317	07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223)	in house check: Oct-16 in house check: Oct-16 in house check: Oct-16
Power mater EPM-442A Power sunsor HP 8481A Power sensor HP 8481A RF generator R&S SMT-06	SN: US37292783	07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222)	in house check: Oct-16 in house check: Oct-16 in house check: Oct-16 in house check: Oct-16
Secondary Standards Power Indian EPM-442A Power Jansor HP 8481A Power sensor HP 8481A RF generator R&S SMT-06 Network Analyzer HP 8763E	SN: US37292783 SN: MY41092317 SN: 100972	07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223) 15-dún-15 (No. 217-02223)	in house check: Oct-16 in house check: Oct-16 in house check: Oct-16 in house check: Oct-16 in house check: Oct-16 Signature
Power motor EPM-442A Power agnor HP 8481A Power sensor HP 8481A HF generator R&S SMT-06 Network Analyzer HP 8763E	SN: US37292783 SN: MY41052317 SN: 100072 SN: US37390585	07-Oct-15 (No. 217-02222) 07-Oct-16 (No. 217-02222) 07-Oct-16 (No. 217-02223) 15-Jun-15 (In house check Jun-15) 18-Oct-01 (In house check Oct-15) Function	In house check: Oct-16 in house check: Oct-16 in house check: Oct-16 in house check: Oct-16 in house check: Oct-16
Power mater EPM-442A Power sonsor HP 8481A Power sensor HP 8481A RF generator R&S SMT-06	SN: US37292783 SN: MY41092317 SN: 100072 SN: US37390585	07-Oct-15 (No. 217-02222) 07-Oct-16 (No. 217-02222) 07-Oct-15 (No. 217-02223) 15-Jún-15 (In house check Jun-15) 18-Oct-01 (In house check Oct-15)	In house check: Oct-16 in house check: Oct-16 in house check: Oct-16 in house check: Oct-16 in house check: Oct-16
Power Index EPM-442A Power sensor HP 8481A Power sensor HP 8481A HF generalis R&S SMT-06 Metwork Analyzer HP 8763E	SN: US37292783 SN: MY41092317 SN: 100072 SN: US37390585	07-Oct-15 (No. 217-02222) 07-Oct-16 (No. 217-02222) 07-Oct-16 (No. 217-02223) 15-Jun-15 (In house check Jun-15) 18-Oct-01 (In house check Oct-15) Function	In house check: Oct-16 in house check: Oct-16 in house check: Oct-16 in house check: Oct-16 in house check: Oct-16
Power Instar EPM-442A Power sensor HP 8481A Power sensor HP 8481A Pf cenerator R&S SMT-06 Network Analyzer HP 8763E Calibrated by:	SN: US37292793 SN: MY41092317 SN: 100072 SN: US37390585 Name Michael Websr	07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223) 15-dim 15 (in house check Jun-15) 18-Oct-01 (in house check Oct-15) Function Laboratory Technicien	In house check Oct-16 in house check Oct-16 in house check Oct-16 in house check Oct-16 in house check Oct-16

Certificate No: D750V3-1015\_Aug16

Page 1 at 8:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com



Page: 207 of 267

Calibration Laboratory of Schmid & Partner Engineering AG Zeugheusernsse 43, 1004 Zurich, Switzerland





S Schweizenhohr Kalibrierdiess
C Service suisse d'étalonnage
Servicio avizzaro di tanature
S Swas Calibration Service

According by the Swiss Accordington Senice (SAS)

The Swiss Accordington Senice is one of the signatories to the EA

Multilisteral Agreement for the recognition of calibration continues

Glossary:

TSL tissue simulating liquid

ConvF sensitivity in TSL / NORM x.y.z N/A not applicable or not measured

Calibration is Performed According to the Following Standards.

a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) In the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013

 b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)". February 2005

 iEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010

d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

#### Additional Documentation:

e) DASY4/5 System Handbook

#### Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed
  point exactly below the center marking of the flat phantom section, with the arms oriented
  parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole
  positioned under the liquid filled phantom. The impedance stated is transformed from the
  measurement at the SMA connector to the feed point. The Return Loss ensures low
  reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point.
   No uncertainty required.
- . SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: D750V3 (015 Aug10

Page 2 of 6

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holed of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 208 of 267

#### Measurement Conditions

DASY system configuration, as far as not given on page 1

DASY Version	DASY5	V52.8.B
Extrapolation	Advanced Extrapolation	
Phanton	Modular Flat Phanton	
Distance Dipole Center - TSL.	19 mm.	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	750 MHz ± 1 MHz	

#### Head TSL parameters

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 m/no/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	42.4 ± 6 %	0.91 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	-	

#### SAR result with Head TSL

SAR averaged over 1 cm <sup>2</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.11 W/kg
SAR for nominal Head TSL parameters	normalized to 1V9	8.32 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.38 W/kg
SAR for nominal Head TSL parameters	Wr of busilsemen	5.45 W/kg ± 16.5 % (k=2)

#### **Body TSL parameters**

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22,0 °C	55.5	0,96 mho/m
Measured Body TSI, parameters	(22.0 ± 0.2) °C	54.9 ± 6 %	0,99 mha/m ± 5 %
Body TSL temperature change during tool	<0.5°C	-	-

### SAR result with Body TSL

SAR averaged over 1 cm2 (1 g) of Body TSL	Condition	
SAFI measured	250 mW input power	2,25 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	8.77 W/kg ± 17.0 % (k±2)

SAR averaged over 10 cm1 (10 g) of Body TSL	nontition	
SAFI measured	250 mW input power	1.47 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	5.76 W/kg ± 16.5 % (k±2)

Certificato No: 0750V3-1015\_Aug16

Page 3 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 209 of 267

#### Appendix (Additional assessments outside the scope of SCS 0108)

#### Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.1 Ω - 0.2 <u>β</u> Ω	
Heriun Loss	-30.5 dB	

#### Antenna Parameters with Body TSL

Impedance, transformed to feed point	49.0 0 - 2.0 10	
Return Loss	30.5 dB	

#### General Antenna Parameters and Design

Electrical Delay (one direction) (D3	ns
--------------------------------------	----

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard similigid coaxial cable. The center conductor of the leading line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the clipple arms in order to improve matching when leaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR date are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be explied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

#### Additional EUT Data

Manufactured by	SPEAG	
Manufactured on	March 22, 2010	

Cartilicate No. 0780V3-1015\_Aug16

Page 4 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 210 of 267

#### DASY5 Validation Report for Head TSL

Date: 30,08,2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1015

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: f = 750 MHz,  $\sigma = 0.91 \text{ S/m}$ ;  $\varepsilon_t = 42.4$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

#### DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(10.07, 10.07, 10.07); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12,2015
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

### Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 58.26 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 3.16 W/kg SAR(1 g) = 2.11 W/kg; SAR(10 g) = 1.38 W/kgMaximum value of SAR (measured) = 2.81 W/kg

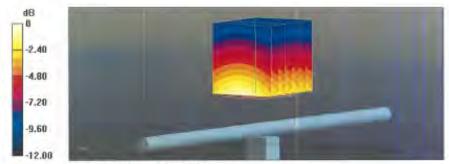

0 dB = 2.81 W/kg = 4.49 dBW/kg

Certificate No: D750V3-1015\_Aug16

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 211 of 267

#### DASY5 Validation Report for Body TSL

Date: 30.08.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1015

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: l = 750 MHz;  $\sigma = 0.99 \text{ S/m}$ ;  $\epsilon_r = 54.9$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

#### DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(9.99, 9.99, 9.99); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001.
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

#### Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 57.47 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 3.39 W/kg SAR(1 g) = 2.25 W/kg; SAR(10 g) = 1.47 W/kgMaximum value of SAR (measured) = 2.97 W/kg



0 dB = 2.97 W/kg = 4.73 dBW/kg

Certificate No: D750V3-1015\_Aug16

Page 7 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 212 of 267

#### Impedance Measurement Plot for Body TSL

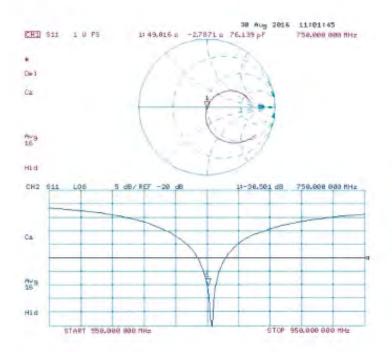

Certificate No: D750V3-1015\_Aug16

Page 8 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 213 of 267

Calibration Laboratory of Schmid & Partner Engineering AG Zeognasstrasse 43, 8004 Zurich, Switzerland





Schweizenscher Kalbrierdienet S Service suisse d'étalonnage C Servizio avizzero di taratura S Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swise Accreditation Service is one of the signaturies to the EA Multilateral Agreement for the recognition of calibration certificates.

SGS-TW (Auden)

Destroy No. D835V2-44063 Aug 16

	ERTIFICATE		
Dijoeli .	D835V2 - SN:4d0	290	
Sibratan procedure(s)	QA CAL-05.y9 Calibration proce	dure for dipole validation kits abo	ve 700 MHz
Continue date	August 25, 2016		
The magazinements and the once All calibrations have been conduc	rtainies with confidence p	conal standards , which makes the physical un evolutivity are given on the holiowing pages an my facility, environment temperature (22 ± 3)*0	d are part of the certificase.
Calibration Equipment issed (Mile) Primary Standards	TE emical for calibration)	Call Date (Certificatio No.)	Scitisduled Calibration
Power maser NHP	5N: 104778	D6 Apr 15 (No. 217-02288/02289)	Apr-17
Cower sensor NRF-291	SN: 103244	16-Ap/-16 (No. 217-02288)	Apr-17
CWHI DRIBLE WITH 201	SNL 103240	06-Apr-10 (No. 217-02289)	Apr-17
Marian Maria Maria		DOMEST OF BUILDING STATES	
	9-17-10-10-10-10-10-10-10-10-10-10-10-10-10-	DE Amoto Min 217 (1999)	Sec. 17
Reference 20 dB Attenuator	SN: 5058 (20k)	05 Apr-16 (No. 217-02292)	Apr-17
Reference 20 dB Attenuator Type-N mismatch combination	SN: 5058 (20k) SN: 5047.2 / 06327	(15-Apr-16 (No. 317-02295)	Apr-17
Reference 20 dB Attenuator Type-N mismatch combination Reference Probe EX3DV4	SN: 5058 (20k)		1.5
Power sensor NRP-Zút Reference 20 dB Attenuator Type-N mismatch combination Reference Probe EXSDV4 DAE4	SN: 5058 (20k) SN: 5047 2 / 06327 SN: 7349	(I5-Apr-16 (No. 317-02295) 15-Jun-16 (No. EX3-7340_Jun16)	Apr-17 Jun-17
Reference 20 dB Attenuator Type-N mismatch combination Reference Probe EX3DV4	EN: 5058 (20k) SN: 5047 2 / 06327 SN: 504 SN: 604	05-Apr-16 (No. 217-02295) 15-Jun-16 (No. EX3-7340_Jun16) 30-Dec-15 (No. DAE4-801_Dec15)	Apr-17 Jun-17 Dec-16
Reference 20 dB Atterus/or Type-N mismatch combination Reference Probe EXSDV4 DAE4	SN: 5058 (20k) SN: 5047 2 / 06327 SN: 7348 SN: 501	05-Apr-16 (No. 217-02295) 15-Jun-16 (No. EX3-7340_Jun16) 30-Dec-15 (No. DAE4-801_Dec15) Check Date (In house)	Apr-17 Jun-17 Dep-16 Begeduled Check
Reference 20 dB Attenuation Type-N mismatch combination Reference Probe EXSDV4 DAE4 Secondary Standards Powor mater EPM-442A	SN: 5058 (20k) SN: 5047 2 (106327 SN: 7348 SN: 601 ID # SN: GB37480704	(IS-Apr-16 (No. 317-02295) 15-Jun-16 (No. EXX-7340_Jun16) 30-Dec-15 (No. DAE4-B01_Dec15) Check Date (in neute) 07-Oct-16 (No. 217-02222)	Apr-17 Jun-17 Dec-16 Beneduled Check In house check: Oct-10
Reference 20 dB Attenuation Type-N mismatch combination Reference Probe EXSDV4 DAE4 Siscondary Standards Power meter EPN-142A Power sensor HP 8481A Power sensor HP 8481A	SN: 5058 (20k) SN: 5047 2 / 06327 SN: 7340 SN: 601 ID # SN: GB37480704 SN: US37292783	(IS-Apr-16 (No. 317-02295) 15-Jun-16 (No. EX3-7340_Jun16) 30-Dec-15 (No. DAE4-B01_Dec15) Check Date (In house) 07-Oct-15 (No. 217-02222) 07-Oct-16 (No. 217-02222)	Apr-17 Jun-17 Den-16 Benschilder Eheck In house check: Oct-16 In house check: Oct-16
Reference 20 dB Attenuator Type-N mismatch combination Reference Probe EXSDV4 DAE4  Siscondary Standards Power meter EPN1-42A Power sensor HP 3481A DE generalor FAS SMT-06	SN: 5058 (20k) SN: 5047 2 / 06327 SN: 7340 SN: 501 ID # SN: GB37480704 SN: US37292783 SN: MY41002317	05-Apr-16 (No. 317-02295) 15-Jun-16 (No. EX3-7940_Jun16) 30-Dec-15 (No. DAE-4-B01_Dec15) Check Date (in house) 07-Oct-16 (No. 217-02222) 07-Oct-16 (No. 217-02222) 07-Oct-16 (No. 217-02223)	Apr-17 Jun-17 Deb-16 Sepectated Check In house check: Oct-16 In house check: Oct-16 In house check: Oct-16
Reference 20 dB Attenuation Type-N internated combination Reference Profes EXSOV4 DAE4 Secondary Standards Power mater EFM-142A Power sensor HP 5481A	SN: 5058 (20k) SN: 5047 2 (10527 SN: 7348 SN: 501 ID # SN: GB37480704 SN: UB37252788 SN: MY41002317 SN: 100972	05-Apr-16 (No. 317-02295) 15-Jun-16 (No. EX3-7340_Jun16) 30-Dec-15 (No. DAE-4-BO1_Dec15) Check Date (in neuse) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-16 (No. 217-02222) 15-Jun-15 (in nouse check Jun-10) 18-Oct-01 (in house check Jun-15) Function	Apr-17 Jun-17 Dep-16 Sepectuled Check In house check Dct-16 In house check Dct-16 In house check Dct-16 In house check Dct-18
Reference 20 dB Attenuator Type-N mismatch combination Reference Probe EX3DV4 DAE4 Siscondary Standards Power meter EPN1-442A Power sensor HP 8481A Power sensor HP 8481A	SN: 5058 (20k) SN: 5047 2 / 06327 SN: 7348 SN: 661 ID # SN: GB37480704 SN: US37290783 SN: WY41007817 SN: 100972 SN: US37390505	05-Apr-16 (No. 317-02295) 15-Jun-16 (No. EX3-7340_Jun16) 30-Dec-15 (No. DAE-4801_Dec15) Check Date (in neuto) 07-Oct-16 (No. 217-02222) 07-Oct-16 (No. 217-02222) 07-Oct-16 (No. 217-02222) 15-Jun-15 (in house check Jun-10) 18-Oct-07 (in house check Jun-10)	Apr-17 Jun-17 Det-16  Beneduled Check In house check: Oct-16
Reference 20 dB Attenuation Type-N mismatch combination Reference Probe EXSDV4 DAE4 Secondary Standards Power meter EPM-42A Power sensor HP 8481A Power sensor HP 8481A DE generalor RAS SMT-06 Network Analyzen HP 8753E	SN: 5058 (20k) SN: 5047 2 / 06327 SN: 504 SN: 6637480704 SN: GB37480704 SN: US37292788 SN: MY41002317 SN: 100972 SN: US37390505	05-Apr-16 (No. 317-02295) 15-Jun-16 (No. EX3-7340_Jun16) 30-Dec-15 (No. DAE-4-BO1_Dec15) Check Date (in neuse) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-16 (No. 217-02222) 15-Jun-15 (in nouse check Jun-10) 18-Oct-01 (in house check Jun-15) Function	Apr-17 Jun-17 Det-16  Beneduled Check In house check: Oct-16

Certificate No: D835V2-4d953\_Aug16

Page | of 3

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 214 of 267

Celibration Laboratory of Schmid & Partner Engineering AG Zaughausstrasse 43, 8004 Zurich, Switzsnami





S Schwissertacher Kellbererten
G Service waters d'étalonnage
Services evezzere di tarotura.
S Swiss Carthration Service

Accreditation No.: SCS 0108

Acres and by the Swiss Accession Sewith (SAS)

The Swipe Accordination Service is one of the signalating to the EA Main world Agreement for the recognition of californion certificates

#### Glossary:

TSL tissue simulating tiquid

ConvF sensitivity in TSL / NORM x,y,z N/A not applicable or not measured

#### Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices. Measurement Techniques", June 2013.
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)". February 2005
- EC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

#### Additional Documentation:

e) DASY4/5 System Handbook

#### Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end
  of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL. The dipole is mounted with the spacer to position its feed
  point exactly below the center marking of the flat phantom section, with the arms oriented
  parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole
  positioned under the liquid filled phantom. The impedance stated is transformed from the
  measurement at the SMA connector to the feed point. The Return Loss ensures low
  reflected power, No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point.
   No uncertainty required.
- . SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Gertilipate No. Dea5V2-4tt068\_Aug16

Page Zol €

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司



Page: 215 of 267

#### Measurement Conditions

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL.	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz = 1 MHz	

#### Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Parmittivity	Conductivity
Nominal Head TSL parameters	22,0 °C	41.5	0,90 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	42.1 ± 6 %	0.93 mha/m ± 6 %
Head TSL lemperature change during test	< 0.5 °C		-

#### SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.40 W/kg
SAR for nominal Head TSL parameters	W of basilermon	9.40 W/kg = 17.0 % (k=2)

SAR averaged over 10 cm² (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.54 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.05 W/kg ± 16.5 % (k=2)

### **Body TSL parameters**

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mhoym
Measured Body TSL parameters	(22.0 ± 0.2) °C	54.7 ± 6.%	1.01 mbom = 5 %
Body TSL temperature change during test	< 0,5 °C	-	-

#### SAR result with Body TSL

SAR averaged over 1 cm <sup>2</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.47 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	9.57 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm2 (10 g) of Body TSL	candition	
SAR measured	250 mW input power	1.B1 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	8,28 W/kg ± 16,5 % (k=2)

Certificate No. D835V2-4d063\_Aug 16

Page 3 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 216 of 267

#### Appendix (Additional assessments outside the scope of SCS 0108)

#### Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.2 (Q - 2.8 ji)	
Hetum Loss	- 30.3 dB	

#### Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.3 Ω - 5.5 jΩ
Relum Loss	-24.0 dB

#### General Antenna Parameters and Design

Electrical Delay (pre-direction)	1.392 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The enterma is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when leaded according to the position as explained in the "Messurement Conditions" paragraph. The SAFI data are not affected by this change. The overall dipole length is still according to the Standard.

No excussive force must be applied to the dipole arms, because they might bend of the solidered connections near the feedpoint may be damaged.

#### Additional EUT Data

Manufactured by	SPEAG	
Manufactured on	November 27, 2006	

Certificate No. DB35V2-4d003\_Aug16

Page 4 of 6

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 217 of 267

## DASY5 Validation Report for Head TSL

Date: 25.08.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d063

Communication System: UID 0 - CW; Frequency: 835 MHz.

Medium parameters used: f = 835 MHz;  $\sigma = 0.93$  S/m;  $\epsilon_r = 42.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

# DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(9.72, 9.72, 9.72); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

## Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 61.75 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 3.65 W/kg SAR(1 g) = 2.4 W/kg; SAR(10 g) = 1.54 W/kg Maximum value of SAR (measured) = 3.24 W/kg

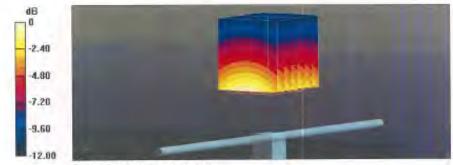

0 dB = 3,24 W/kg = 5,11 dBW/kg

Certificate No: D835V2-4d063\_Aug16

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined and independent of the company subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined to the limitation of liability.


therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 218 of 267

### Impedance Measurement Plot for Head TSL

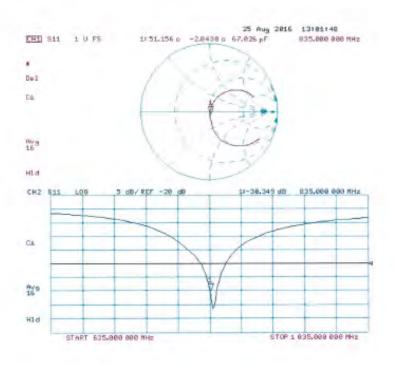

Certificate No: D635V2-4d063\_Aug16

Page 6 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 219 of 267

## **DASY5 Validation Report for Body TSL**

Date: 25.08.2016

Test Laboratory: SPEAG, Zurich, Switzerland

## DUT: Dipole 835 MHz; Type; D835V2; Serial; D835V2 - SN:4d063

Communication System: LTD 0 - CW; Frequency; 835 MHz

Medium parameters used: f = 835 MHz;  $\sigma = 1.01$  S/m;  $\epsilon_r = 54.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63 19-2011)

## DASY52 Configuration:


- Probe: EX3DV4 SN7349; ConvF(9.73, 9.73, 9.73); Calibrated: 15.06.2016;
- Sensor-Surface: L4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 4.9L.; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

# Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 59.83 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 3.63 W/kg

SAR(1 g) = 2.47 W/kg; SAR(10 g) = 1.61 W/kg Maximum value of SAR (measured) = 3.25 W/kg

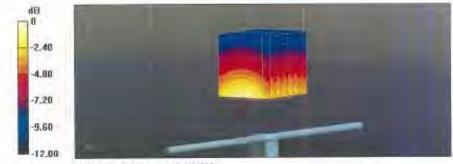

0 dB = 3.25 W/kg = 5.12 dBW/kg

Certificate No: DB35V2-4d003\_Aug16

Page 7 of B

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.


No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com



Page: 220 of 267

## Impedance Measurement Plot for Body TSL

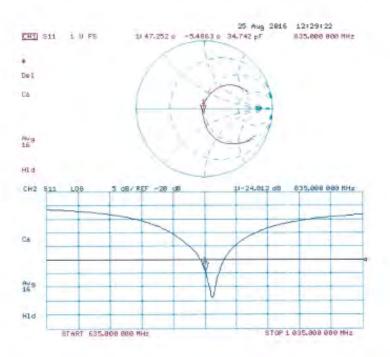

Certificate No: D835V2-4d063\_Aug16

Page 8 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 221 of 267

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizenscher Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
S Swiss Colibration Service

According by the Swiss According Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client SGS-TW (Auden)

Accreditation No.: SCS 0108

Certificate No: D1750V2-1008 Aug16

Dispect	D1750V2 - SN:10	900	
Calibration procedure(s)	QA CAL-05.v9 Calibration proce	dure for dipole validation kits abo	ove 700 MHz
Salibration date:	August 31, 2016		
		ional standards, which realize the physical un motebility are given on the following pages an	
Loaithrations have been condu	cted in the closed laborato	ry lecity; environment temperature (25° ± 3)*(	C and humidity < 70%.
Calibration Equipment used (MS	TE critical for calibration)		
rmary Standards	ID #	Cal Date (Certificate No.)	Schoduled Calibration
The state of the s	ID# SN: 164778	Cal Date (Certificate No.) 06-Api-16 (No. 217-02288/02299)	Scheduled Calibration Apr-17
ower meter NAP			
ower meter NAP ower sensor NAP-Z91	SN: 164778	06-Api-16 (No. 217-02288/02299)	Apr-17
ower meter NAP dower sensor NAP-Z91 dower sensor NAP-Z91	SN: 104778 SN: 103244	06-Api-16 (No. 217-02288/02299) 06-Api-16 (No. 217-02288)	Apr-17 Apr-17 Apr-17 Apr-17
ower meter NAP ower sensor NAP-Z91 ower sensor NAP-Z91 etimence 20 dB Attenuator ype-N mismatch combination	SN: 104778 SN: 103244 SN: 103245 SN: 5068 (20k) SN: 5047.2 / 06827	06-Api-16 (No. 217-02288/02269) 06-Api-16 (No. 217-02288) 06-Api-16 (No. 217-02289) 06-Api-16 (No. 217-02292) 05-Api-16 (No. 217-02296)	Apr-17 Apr-17 Apr-17 Apr-17 Apr-17
ower meter NAP ower sensor NAP-291 ower sensor NAP-291 telerence 20 dB Attenuator ype-N mismatch combination	SN: 104778 SN: 103244 SN: 103245 SN: 5058 (20k)	06-Api-16 (No. 217-02288/02269) 06-Api-16 (No. 217-02288) 06-Api-16 (No. 217-02293) 06-Api-16 (No. 217-02292) 06-Api-16 (No. 217-02295) 15-Jun-16 (No. EX3-7348_Jun16)	Apr-17 Apr-17 Apr-17 Apr-17 Apr-17 Jun-17
Power meter NRP Power sensor NRP Z91 Power N	SN: 104778 SN: 103244 SN: 103245 SN: 5068 (20k) SN: 5047.2 / 06827	06-Api-16 (No. 217-02288/02269) 06-Api-16 (No. 217-02288) 06-Api-16 (No. 217-02289) 06-Api-16 (No. 217-02292) 05-Api-16 (No. 217-02296)	Apr-17 Apr-17 Apr-17 Apr-17 Apr-17
Power meter NRP Power sensor NRP-Z91 Power NRP-Z91	SN: 164778 SN: 103244 SN: 103245 SN: 5058 (20k) SN: 5047.2 / 06327 SN: 7349	06-Api-16 (No. 217-02288/02289) 06-Api-16 (No. 217-02288) 06-Api-16 (No. 217-02289) 05-Api-16 (No. 217-02292) 05-Api-18 (No. 217-02292) 15-Jun-16 (No. EX3-7349_Jun16) 30-Dec-15 (No. DAE4-601_Dec15) Check Date (in house)	Apr-17 Apr-17 Apr-17 Apr-17 Apr-17 Jun-17 Dec-16 Scheduled Check
Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Peterence 20 de Attenuator (yoe-N mismatch combination Reference Probe EX3DV4 JAE4 Recordary Standards	SN: 104778 SN: 103244 SN: 103245 SN: 5058 (20%) SN: 5047.2 / 06827 SN: 7348 SN: 601	06-Api-16 (No. 217-02288/02289) 06-Api-16 (No. 217-02288) 06-Api-16 (No. 217-02299) 05-Api-16 (No. 217-02292) 05-Api-16 (No. 217-02292) 15-Jun-16 (No. EX3-7349_Jun16) 30-Dec-15 (No. DAE4-601_Dec15) Check Date (in house) 07-Oct-15 (No. 217-02282)	Apr-17 Apr-17 Apr-17 Apr-17 Apr-17 Jun-17 Dec-16 Scheduled Check In house check: Oct-16
Power meter NRP Power sensor NRP 291 Power sensor NRP 291 Power sensor NRP 291 Power sensor NRP 291 Power meter 20 dB Attenuator Power meter EPM-442A Power sensor HP 8481A	SN: 104778 SN: 103244 SN: 103245 SN: 5058 (20k) SN: 5047.2 / 06327 SN: 7348 SN: 601	06-Api-16 (No. 217-02288/02289) 06-Api-16 (No. 217-02288) 06-Api-16 (No. 217-02289) 06-Api-16 (No. 217-02292) 06-Api-16 (No. 217-02295) 15-Jun-16 (No. EX3-7349_Jun16) 30-Dec-15 (No. DAE4-601_Dec15) Chick Date (in house) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222)	Apr-17 Apr-17 Apr-17 Apr-17 Apr-17 Jun-17 Dec-16 Scheduled Check In house dheck: Oct-16 In house check: Oct-16
Cower meter NRP Cower sensor NRP-Z91 Cower sensor NRP-Z91 Cower sensor NRP-Z91 Indexence 20 dB Attenuator Comercia 20 dB A	SN: 104778 SN: 103244 SN: 103245 SN: 5058 (20t) SN: 5047.2 / 06827 SN: 7348 SN: 601 ID 4 SN: G837480704 SN: US37202783 SN: MY41092317	06-Api-16 (No. 217-02288/02289) 06-Api-16 (No. 217-02288) 06-Api-16 (No. 217-02289) 05-Api-16 (No. 217-02292) 05-Api-16 (No. 217-02296) 15-Jun-16 (No. EX3-7349_Jun16) 30-Dec-15 (No. DAE4-601_Dec15) Chick Date (in house) 07-Oct-16 (No. 217-02222) 07-Oct-16 (No. 217-02222)	Apr-17 Apr-17 Apr-17 Apr-17 Apr-17 Apr-17 Jun-17 Dec-16 Schieduled Check In house check: Oct-16 In house check: Oct-16 In house check: Oct-16
ower meter NRP ower sensor NRP-Z91 ower sensor NRP-Z91 elemence 20 d8 Attenuator yoe-N mismatch combination valuence Probe EX30V4 VAE4 secondary Standards treer meter EPN-442A rower sensor HP 8481A rower sensor HP 8481A	SN: 104778 SN: 103244 GN: 103245 SN: 5058 (20t) SN: 5047.2 / 06827 SN: 7948 SN: 601 (D 4 SN: GB37480704 SN: US37202783 SN: MY41032317 SN: 100972	06-Api-16 (No. 217-02288/02289) 06-Api-16 (No. 217-02288) 06-Api-16 (No. 217-02289) 06-Api-16 (No. 217-02289) 06-Api-16 (No. 217-02289) 05-Api-16 (No. 217-02289) 15-Jun-16 (No. DAS-7349_Jun16) 30-Dec-15 (No. DAS-601_Dec15) Check Date (In house) 07-Oct-15 (No. 217-02282) 07-Oct-15 (No. 217-02282) 07-Oct-15 (No. 217-02282) 15-Jun-15 (in house check Jun-15)	Apr-17 Apr-17 Apr-17 Apr-17 Apr-17 Jun-17 Dec-16 Schieduled Check In house check: Oct-16 In house check: Oct-16 In house check: Oct-16 In house check: Oct-16
Cower meter NRP Cower sensor NRP-Z91 Cower sensor NRP-Z91 beterence 20 de Attenuator yoe-N mismatch combination valanance Probe EX30V4 AAE4 Cocordary Standards Cower sensor HP 8481A Tower sensor HP 8481A Tower sensor HP 8481A Tower sensor HP 8481A	SN: 104778 SN: 103244 SN: 103245 SN: 5058 (20t) SN: 5047.2 / 06827 SN: 7348 SN: 601 ID 4 SN: G837480704 SN: US37202783 SN: MY41092317	06-Api-16 (No. 217-02288/02289) 06-Api-16 (No. 217-02288) 06-Api-16 (No. 217-02289) 05-Api-16 (No. 217-02292) 05-Api-16 (No. 217-02296) 15-Jun-16 (No. EX3-7349_Jun16) 30-Dec-15 (No. DAE4-601_Dec15) Chick Date (in house) 07-Oct-16 (No. 217-02222) 07-Oct-16 (No. 217-02222)	Apr-17 Apr-17 Apr-17 Apr-17 Apr-17 Apr-17 Jun-17 Dec-16 Schieduled Check In house check: Oct-16 In house check: Oct-16 In house check: Oct-16
Power meter NRP Aswer sensor NRP-Z91 Power sensor NRP-Z91 Power sensor NRP-Z91 Power meter 20 08 Attenuator Pype-N mismatch combination Police EX3DV4 DAE4 Power sensor NRP-M42A Power sensor NP 8481A RF generator RSS SMT-06	SN: 104778 SN: 103244 GN: 103245 SN: 5058 (20t) SN: 5047.2 / 06827 SN: 7948 SN: 601 (D 4 SN: GB37480704 SN: US37202783 SN: MY41032317 SN: 100972	06-Api-16 (No. 217-02288/02289) 06-Api-16 (No. 217-02288) 06-Api-16 (No. 217-02289) 06-Api-16 (No. 217-02289) 06-Api-16 (No. 217-02289) 05-Api-16 (No. 217-02289) 15-Jun-16 (No. DAS-7349_Jun16) 30-Dec-15 (No. DAS-601_Dec15) Check Date (In house) 07-Oct-15 (No. 217-02282) 07-Oct-15 (No. 217-02282) 07-Oct-15 (No. 217-02282) 15-Jun-15 (in house check Jun-15)	Apr-17 Apr-17 Apr-17 Apr-17 Apr-17 Jun-17 Dec-16 Schieduled Check In house check: Oct-16 In house check: Oct-16 In house check: Oct-16 In house check: Oct-16
Power meter NRP Power sensor NRP /291 Power sensor NRP /291 Power sensor NRP /291 Power sensor NRP /291 Power meter 20 dB Attenuator Power meter EPM 442A Power meter EPM 442A Power sensor HP 8491A	SN: 104778 SN: 103244 SN: 103245 SN: 5058 (20t) SN: 5058 (20t) SN: 5047.2 / 06827 SN: 7348 SN: 601	06-Api-16 (No. 217-02288/02289) 06-Api-16 (No. 217-02288) 06-Api-16 (No. 217-02289) 06-Api-16 (No. 217-02292) 06-Api-16 (No. 217-02292) 06-Api-16 (No. 217-02295) 15-Jun-16 (No. EX3-7349_Jun16) 30-Dec-15 (No. DAE-4-601_Dec15) Check Date (in house) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 15-Jun-15 (in house check Jun-15) 18-Oct-01 (in house check Jun-15)	Apr-17 Apr-17 Apr-17 Apr-17 Apr-17 Jun-17 Dec-16 Scheduled Check In house check: Cicl-16 In house check: Oct-16 In house check: Oct-16 In house check: Oct-16 In house check: Oct-16
Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Peterence 20 dB Attenuator Proper N mismatch combination Paterance Probe EX3DV4 DAE4 Secondary Standards Power meter EPN-442A Power sensor HP 8481A RF generator RS SMT-05 Network Analyzer HP 8753E Calibrated by.	SN: 104778 SN: 103244 SN: 103245 SN: 5058 (20t) SN: 5047.2 / 06327 SN: 7348 SN: 601 SN: GB37480704 SN: GB37480704 SN: US37292783 SN: MY41002317 SN: 100972 SN: US37390586	06-Api-16 (No. 217-02288/02289) 06-Api-16 (No. 217-02288) 06-Api-16 (No. 217-02289) 06-Api-16 (No. 217-02292) 06-Api-16 (No. 217-02295) 15-Jun-16 (No. EX3-7349_Jun16) 30-Dec-15 (No. DAE4-601_Dec15) Check Date (in house) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223) 15-Jun-15 (in house check Jun-15) 18-Oct-01 (in house check Dec-15) Function	Apr-17 Apr-17 Apr-17 Apr-17 Apr-17 Jun-17 Dec-16 Scheduled Check In house check: Cicl-16 In house check: Oct-16 In house check: Oct-16 In house check: Oct-16 In house check: Oct-16

Cereficate No: D1750V2-1008\_Aug16

Page 1 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 222 of 267

### Calibration Laboratory of

Schmid & Partner Engineering AG (eughsusstrasse 43, 80M Zunch, Switzerland





C

Schweizenscher Kallbrierd 
Service suisse d'étaionnage 
Servizie svizzere d'étaionnage 
Swas Calibration Service

Actrecitation No.: SCS 0108

Accredited by the Swise Accreditions Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration cortilicates

### Glossary:

TSL tissue simulating liquid
ConvF sensitivity in TSL / NORM x,y,z
N/A not applicable or not measured

### Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- EC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- iEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30) MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

e) DASY4/5 System Handbook

## Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are svailable from the Validation Report at the end
  of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Anterina Parameters with TSL: The dipole is mounted with the spacer to position its feed
  point exactly below the center marking of the flat phantom section, with the arms oriented
  parallel to the body axis.
- Feed Point Impedance and Return Loss; These parameters are measured with the dipole
  positioned under the liquid filled phantom. The impedance stated is transformed from the
  measurement at the SMA connector to the feed point. The Return Loss ensures low
  reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point.
   No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Gerthicate No. D1750V2-1008, Aun 16.

Page 2 of 9.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 223 of 267

#### Measurement Conditions

DASY5	V52.8.8
Advanced Extrapolation	
Modular Flat Phantom	
10 mm	with Spacer
dx, dy, dz = 5 mm	
1750 MHz ± 1 MHz	
	Advanced Extrapolation  Modular Flat Phantom  10 mm  dx, dy, dz = 5 mm

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	-40.1	1.37 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	40:3 ± 8 %	1.37 mha/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	-	

## SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.28 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	37.2 W/kg = 17.0 % (k=2)

SAR everaged over 10 cm3 (10 g) of Head TSL	condition	
SAR measured	250 mW input power	4.90 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	19.6 W/kg ± 16.5 % (k=2)

## Body TSL parameters

The following parameters and calculations were applied

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53,4	1,49 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	50.1 ± 6 %	1.49 mho/m ± 6.%
Body TSL temperature change during test	< 0.5 °C	-	-

## SAR result with Body TSL

SAR averaged over 1 cm2 (1 g) of Body TSL	Condition	
SAR measured	250 mW inpul power	9.34 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	37.3 W/kg + 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	4.96 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	19,9 W/kg ± 16.5 % (k=2)

Certificate No. D1750V2-1009\_Aug18

Page II of 9

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 224 of 267

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

Impedance, transformed to load point	51.0 Ω - 0.2 jΩ
Return Loss	-40.1 dB

## Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.7 Ω - 0.5 jΩ
Return Loss	→ 29,3 dB

## General Antenna Parameters and Design

Electrical Delay (one direction)	1.221 ris
the same of the sa	

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The entenna is therefore short-circulied for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR date are not affected by this change. The overell dipole length is still according to the Standard

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections pear the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	May 27, 2003

Cartillonie No: D1756V2-1008\_Aug16

Page 4 of B

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 225 of 267

## DASY5 Validation Report for Head TSL

Date: 24 08 2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN:1008

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: f = 1750 MHz;  $\sigma = 1.37 \text{ S/m}$ ;  $\epsilon_r = 40.3$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)


### DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(8.46, 8.46, 8.46); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52,8.8(1258); SEMCAD X 14.6.10(7372)

# Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 105.8 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 17.2 W/kg

SAR(1 g) = 9.28 W/kg; SAR(10 g) = 4.9 W/kgMaximum value of SAR (measured) = 14.3 W/kg

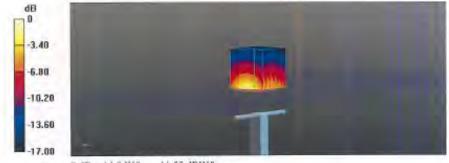

0 dB = 14.3 W/kg = 11.55 dBW/kg

Certificate No: D1750V2-1008\_Aug16

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 226 of 267

## Impedance Measurement Plot for Head TSL

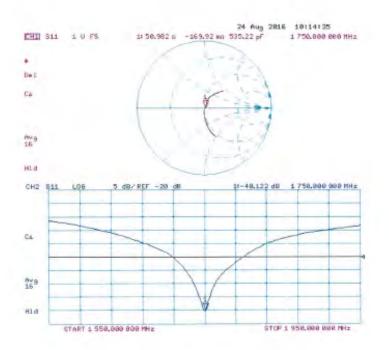

Certificate No: D1750V2-1008\_Aug16

Page 6 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 227 of 267

### DASY5 Validation Report for Body TSL

Date: 31.08.2016

Test Laboratory: SPEAG, Zurich, Switzerland

### DUT: Dipole 1750 MHz; Type: D1750V2; Serial; D1750V2 - SN:1008

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: f = 1750 MHz;  $\sigma = 1.49 \text{ S/m}$ ;  $\varepsilon_c = 53.1$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

# DASY52 Configuration:


- Probe: EX3DV4 SN7349; ConvF(8.25, 8.25, 8.25); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

# Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 100.8 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 16.4 W/kg

SAR(1 g) = 9.34 W/kg; SAR(10 g) = 4.98 W/kg

Maximum value of SAR (measured) = 13.9 W/kg

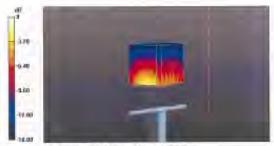

0 dB = 13.9 W/kg = 11.43 dBW/kg

Certificate No: D1750V2-1008\_Aug16

Page 7 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 228 of 267

# Impedance Measurement Plot for Body TSL

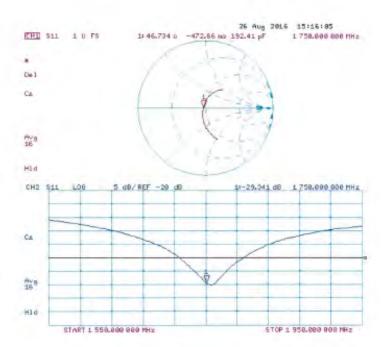

Certificate No: D1750V2-1008\_Aug16

Page B of B

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 229 of 267

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kallchierdienst
C Service suisse d'étalonnage
Servizio svizzero di faratura
S Swiss Calibration Service

Accredited by the Swise Accreditation Service (SAS)
The Swise Accreditation Service is one of the algostories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client SGS-TW (Auden)

Certificate No: D1900V2-5d027\_Apr16

Object	D1900V2 - SN: 5	d027	
Calibration procedure(s)	QA CAL-05.v9 Calibration proce	dure for dipole validation kits abo	ve 700 MHz
Calibration date	April 25, 2016		
		ional standards, which realize the physical un	
The measurements and the unce	rtainties with confidence p	robability are given on the following pages an	d are part of the certificate.
All calibrations have been conduc	sted in the closed laborato	ry facility: environment temperature (22 ± 3)*1	C and humidity < 70%.
Calibration Equipment used (M&T	TE entired Increalingation)		
Carcianos Equipinas E uses (veo	E cince for carefulary		
Primary Standards	ID#	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	06-Apr-16 (No. 217-02288/02389)	Apr-17
Power sensor NRP-Z91	SN: 103244	06-Apr-16 (No. 217-02288)	Apr.17
ower sensor NRP-Z91	SN: 103245	06-Apr-16 (No. 217-02289)	Apr-17.
Reference 20 dB Attenuator	5N: 5058 (20k)	05-Apr-16 (No. 217-02292)	Apr-37
	SN: 5047.2 / 06327	05-Apri-16 (No. 217-02295)	Apr-17
Type-N mismaich combination			Dec-15
Management of the second secon	SN: 7349	31-Dec-15 (No. EX3-7349_Dec15)	EARL-10
Reference Probe EX3DV4	SN: 7349 SN: 601	31-Dec-15 (No. EX3-7349_Dec15) 30-Dec-15 (No. DAE4-601_Dec15)	Dec-16
Reference Probe EX3DV4 DAE4	100000		W. Printer State
Reference Probe EX3DV4 DAE4 Secondary Standards	SN: 601	30-Dec-15 (No. DAE4-601, Dec15)	Dec-16 Scheduled Check
Reference Probe EX3DV4 DAE4 Secondary Standards Power meter EPM-442A	SN: 601	30-Dec-15 (No. DAE4-601, Dec15) Check Date (in kouse)	Dec-16 Scheduled Check In house check: Oct-16
Reforence Probe EX3DV4 DAE4 Secondary Standards Power meter EPM-442A Power sensor HP 8481A	SN: 601 IO # SN: GB37480704	30-Dec-15 (Nn. DAE4-601, Dec15)  Check Date (In house)  07-Oct-15 (No. 217-02222)	Scheduled Check in house check: Oct-16 in house check: Oct-16
Reforence Probe EX3DV4 DAE4 Secondary Standards Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A	SN: 601 ID # SN: GB37480704 SN: US37292783 SN: MY41092317	30-Dec-15 (No. DAE4-601, Dec15)  Check Date (In house)  07-Oct-15 (No. 217-02222)  07-Oct-15 (No. 2)7-02222)	Scheduled Check in house check: Oct-16 in house check: Oct-16 to house check: Oct-16
Refurence Probe EX3DV4 DAE4  Secondary Standards Power meter EFM-442A Power sensor HP 8481A Power sensor HP 8481A RF generator R&S SMT-06	SN: 601 IO # SN: GB374B0704 SN: US372927B3	30-Dec-15 (No. DAE4-601, Dec15)  Check Date (In house) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223)	Scheduled Check in house check: Oct-16 in house check: Oct-16 in house check: Oct-16 in nouse check: Oct-16
Reference Probe EX3DV4 DAE4  Secondary Standards Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A RF generator RAS SMT-06	SN: 601 IO # SN: GB37480704 SN: US37292783 SN: MY41032317 SN: 100972	30-Dec-15 (No. DAE4-601, Dec15)  Check Date (In house)  07-Oct-15 (No. 217-02222)  07-Oct-15 (No. 217-02222)  07-Oct-15 (No. 217-02223)  15-Jun-15 (in house check Jun-15)	Scheduled Check In house check: Oct-16 In house check: Oct-16 In house check: Oct-16 In nouse check: Oct-16
Reforence Probe EX3DV4 DAE4 Secondary Standards Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A RF generator R&S SMT-06 Network Analyzer HP 8753E	SN: 601 IO # SN: GBS7480704 SN: USS7292783 SN: MY41032317 SN: 109972 SN: USS7390685 Name	30-Dec-15 (No. DAE4-601, Dec15)  Check Date (In Incose)  07-Oct-15 (No. 217-02222)  07-Oct-15 (No. 217-02222)  07-Oct-15 (No. 217-02223)  15-Jun-15 (in Incuse check Jun-15)  16-Oct-01 (in Incuse check Oct-15)  Function	Scheduled Check in house check Oct-16
Type-N mismatch combination Reference Probe EX3DV4 DAE4  Secondary Standards Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A RF generals: R&S SMT-06 Network Analyzer HP 8753E  Calibrated by:	SN: 601 IO # SN: GB37480704 SN: US37292783 SN: MY41032317 SN: 100972 SN: US37390685	30-Dec-15 (No. DAE4-601, Dec15)  Check Date (In Incuse)  07-Oct-15 (No. 217-02222)  07-Oct-15 (No. 217-02223)  07-Oct-15 (No. 217-02223)  15-Jun-15 (in Incuse check Jun-15)  16-Oct-01 (in Incuse check Dot-15)	Scheduled Check in house check Oct-16
Reference Probe EX3DV4 DAE4  Secondary Standards Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A RF generalor R&S SMT-06 Network Analyzer HP 8753E	SN: 601 IO # SN: GBS7480704 SN: USS7292783 SN: MY41032317 SN: 109972 SN: USS7390685 Name	30-Dec-15 (No. DAE4-601, Dec15)  Check Date (In Incose)  07-Oct-15 (No. 217-02222)  07-Oct-15 (No. 217-02222)  07-Oct-15 (No. 217-02223)  15-Jun-15 (in Incuse check Jun-15)  16-Oct-01 (in Incuse check Oct-15)  Function	Scheduled Check in house check: Oct-16
Reference Probe EX3DV4 DAE4  Secondary Standards Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A RF generalor R&S SMT-66 Network Analyzer HP 8753E Calibrated by:	SN: 601 IO # SN: GB37480704 SN: US37292783 SN: MY41092317 SN: 100972 SN: US37390685 Name Michael Welber	30-Dec-15 (No. DAE4-601 Dec15)  Check Date (In house)  07-Oct-15 (No. 217-02222)  07-Oct-15 (No. 217-02222)  07-Oct-15 (No. 217-02223)  15-Jun-15 (in house check Jun-15)  16-Oct-01 (in house check Jun-15)  Function  Laboratory Technician	Scheduled Check In house check Cd-14

Certificate No: D1900V2-5d027\_Apr16

Page 1 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 230 of 267

Calibration Laboratory of Schmid & Partner Engineering AG Zaughausstrasse 43, 8004 Zurich, Switzerland





S Schweizenscher Kalibrierdiesen
C Service suisse d'étaloonage
Servizie svizzere di teratura
S Swiss Calibration Service

Accreditation No.: SCS 0108

Accepted by the Sweet Acceptation Service (SAS)

The Swiss Accreditation Service is one of the algosteries to the EA Multilatoral Agreement for the recognition of calibration certificates

Glossary:

TSL Ussue simulating liquid
ConvF sensitivity in TSL / NORM x,y,z
N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- EC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz Io 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

## Additional Documentation:

e) DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end
  of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed
  point exactly below the center marking of the flat phantom section, with the arms oriented
  parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole
  positioned under the liquid filled phantom. The impedance stated is transformed from the
  measurement at the SMA connector to the feed point. The Return Loss ensures low
  reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point.
   No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: D1900V2-5d027 April-

Page 2 of B

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司



Page: 231 of 267

#### Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz ± 1 MHz	

# Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	40.0 ± 6 %	1.37 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C		

### SAR result with Head TSL

SAR averaged over 1 cm3 (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.55 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	38.7 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.03 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	20.3 W/kg ± 16.5 % (k=2)

## **Body TSL parameters**

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.9 ± 6 %	1.49 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C		

# SAR result with Body TSL

SAR averaged over 1 cm3 (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.83 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	39.7 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.21 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.0 W/kg ± 16.5 % (k=2)

Certificate No: D1900V2-5d027\_Apr16

Page 3 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 232 of 267

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	50.8 Ω + 4.4 jΩ
Return Loss	- 27.0 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.5 Ω + 5.6 jΩ
Return Loss	- 23.3 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.196 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

## Additional EUT Data

Manufactured by	SPEAG
Manufactured on	December 17, 2002

Certificate No: D1900V2-5d027\_Apr16

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

Page 4 of 8

t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sas.com



Page: 233 of 267

## **DASY5 Validation Report for Head TSL**

Date: 25,04.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d027

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: f = 1900 MHz;  $\sigma = 1.37 \text{ S/m}$ ;  $\varepsilon_c = 40$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

### DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(8.2, 8.2, 8.2); Calibrated: 31.12,2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

## Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 106.9 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 17.2 W/kg SAR(1 g) = 9.55 W/kg; SAR(10 g) = 5.03 W/kgMaximum value of SAR (measured) = 14.3 W/kg

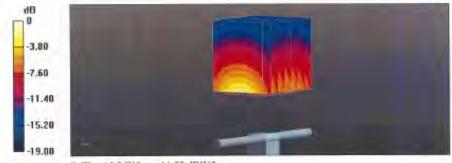

0 dB = 14.3 W/kg = 11.55 dBW/kg

Certificate No: D1900V2-6d027\_Apr16

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司


No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488

www.tw.sas.com



Page: 234 of 267

### Impedance Measurement Plot for Head TSL

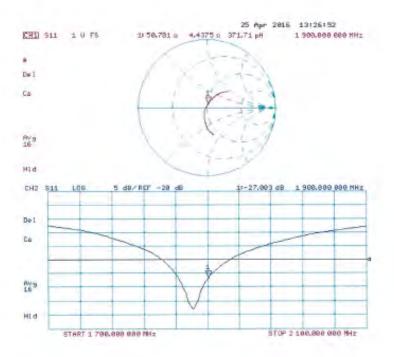

Certificate No: D1900V2-5d027\_Apr16

Page 6 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 235 of 267

## DASY5 Validation Report for Body TSL

Date: 25.04.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d027

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: f = 1900 MHz;  $\sigma = 1.49 \text{ S/m}$ ;  $\varepsilon_c = 52.9$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

### DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(8.03, 8.03, 8.03); Calibrated; 31.12.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002.
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372).

# Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 104.2 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 17.2 W/kg SAR(1 g) = 9.83 W/kg; SAR(10 g) = 5.21 W/kgMaximum value of SAR (measured) = 14.7 W/kg

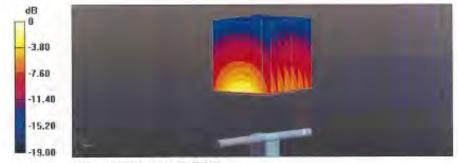

0 dB = 14.7 W/kg = 11.67 dBW/kg

Certificate No: D1900V2-5d027\_Apr16

Page 7 of E

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 236 of 267

# Impedance Measurement Plot for Body TSL

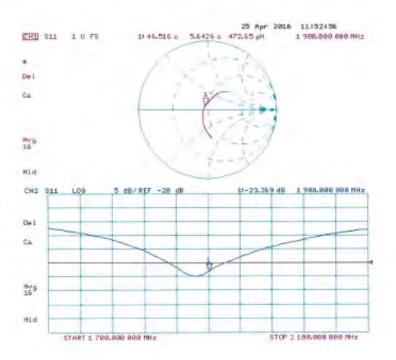

Certificate No: D1900V2-5d027\_Apr16

Page 8 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 237 of 267

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerlscher Kalibrierdienst C Service suisse d'étalonnage Servizilo svizzero di taratura S Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA.

Multilateral Agreement for the recognition of calibration certificates

Client SGS-TW (Auden)

Certificate No: D2450V2-727 Apr16

Allen A	ERTIFICATE		
Object	D2450V2 - SN:72	27	
Calibration procedure(s)	QA CAL-05.v9	dure for dipole validation kits abo	100 MHz
	Galibration proce	dure for dipole validation kits abo	VE 700 MITZ
Calibration date:	April 19, 2016		
		ional standards, which realize the physical un	
he measurements and the uncer	tainlies with confidence p	robability are given on the following pages an	d are part of the certificate.
All relibrations have been conduc	ted in the placed lehamen	ry facility; environment temperature (22 ± 3)*(	and humidity > 70%
in campitalitis have been conduc	tion in the chosen repolate	A remote environment removation (55 ± 3) (	and manifesty < 10 %
Calibration Equipment used (M&T	E critical for calibration)		
Primary Standards	ID#	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	06-Apr-16 (No. 217-02268/02289)	Apr-17
Power sensor NRP-Z91	SN: 103244	06-Apr-16 (No. 217-02288)	Apr-17
Power sensor NRP-Z91	SN: 103245	06-Apr-16 (No. 217-02289)	Apr-17
Reference 20 dB Attenuator	SN: 5058 (20k)	05-Apr-16 (No. 217-02292)	Apr-17
Type-N mismatch combination	SN: 5047.2 / 06327	05-Apr-16 (No. 217-02295)	Apr-17
Reference Probe EX3DV4	SN: 7349	31-Dec-15 (No. EX3-7349 Dec15)	Dec-16
DAE4	SN: 601	30-Dec-15 (No. DAE4-601_Dec15)	Dec-16
	ID.	Check Date (in house)	Scheduled Check
Secondary Standards			
Secondary Standards Power meter EPM-442A	SN: GB37480704	07-Oct-15 (No. 217-02222)	Im house check: Oct 15
Power meter EPM-442A	SN: GB37480704 SN: US37292783	07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222)	March Control of the
Power meter EPM-442A Power sensor HP 8481A	SN: US37292783	07-Oct-15 (No. 217-02222)	In house check: Oct-18
Power meler EPM-442A Power sensor HP 8481A Power sensor HP 8481A		07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223)	In house check: Oct-18 In house check: Oct-18
Power meler EPM-442A Power sensor HP 8481A Power sensor HP 8481A RF generator R&S SMT-06	SN: US37292783 SN: MY41092317	07-Oct-15 (No. 217-02222)	In house check: Oct-16 In house check: Oct-16 In house check: Oct-16
	SN: US37292783 SN: MY41092317 SN: 100972	07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223) 15-Jun-15 (in house check Jun-15)	In house check: Oct-18 In house check: Oct-18 In house check: Oct-18
Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A RF generator R&S SMT-06 Network Analyzer HP 8753E	SN: US37292783 SN: MY41092317 SN: 100972 SN: US37390585	07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223) 15-Jun-15 (in house check Jun-15) 18-Oct-01 (in house check Oct-15) Function	The American
Power meler EPM-442A Power sensor HP 8481A Power sensor HP 8481A RF generator R&S SMT-06	SN: US37292783 SN: MY41092317 SN: 100972 SN: US37390585	07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223) 15-Jun-15 (in house check Jun-15) 18-Oct-01 (in house check Oct-15)	In house check: Oct-16 In house check: Oct-16 In house check: Oct-16 In house check: Oct-16
Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A RF generator R&S SMT-06 Network Analyzer HP 8753E	SN: US37292783 SN: MY41092317 SN: 100972 SN: US37390585	07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223) 15-Jun-15 (in house check Jun-15) 18-Oct-01 (in house check Oct-15) Function	In house check: Oct-16 In house check: Oct-16 In house check: Oct-16 In house check: Oct-16 Signature
Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A RF generator R&S SMT-06 Network Analyzer HP 8753E Calibrated by:	SN: US37292783 SN: MY41092317 SN: 100972 SN: US37390585 Name Michael Weber	07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223) 15-Jun-15 (in house check Jun-15) 18-Oct-01 (in house check Oct-15)  Function Laboratory Technician	In house check: Oct-16 In house check: Oct-16 In house check: Oct-16 In house check: Oct-16 Signature

Certificate No. D2450V2-727\_Apr16

Page 1 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sgs.com



Page: 238 of 267

# Calibration Laboratory of

Schmid & Partner Engineering AG Zoughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst Service soisse d'étalonnage C Servizio svizzero di turatura Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (BAS)

The Swiss Accreditation Service is one of the signaturies to the EA Muttilateral Agreement for the recognition of calibration certificates

# Glossary:

TSL tissue simulating liquid

ConvF sensitivity in TSL / NORM x,y,z not applicable or not measured N/A

### Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless. Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- i) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

## Additional Documentation:

e) DASY4/5 System Handbook

## Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: D2450V2-727 Apr16

Page 2 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 239 of 267

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz ± 1 MHz	

# **Head TSL parameters**

the following parameters and calculations were applications	eu.		
	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	40.0 ± 6 %	1.83 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C		

#### SAR result with Head TSL

SAR averaged over 1 cm3 (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	12.8 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	51.0 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.93 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.7 W/kg ± 16.5 % (k=2)

## **Body TSL parameters**

The following parameters and calculations were applied.

•	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.7 ± 6 %	1.98 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C		

# SAR result with Body TSL

SAR averaged over 1 cm3 (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	12.5 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	49.6 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.86 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	23.3 W/kg ± 16.5 % (k=2)

Certificate No: D2450V2-727\_Apr16

Page 3 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 240 of 267

## Appendix (Additional assessments outside the scope of SCS 0108)

#### Antenna Parameters with Head TSL

Impedance, transformed to feed point	55.3 Ω + 2.0 jΩ
Return Loss	- 25.4 dB

## Antenna Parameters with Body TSL

Impedance, transformed to feed point	52.1 Ω + 4.8 jΩ
Return Loss	- 25.9 dB

## General Antenna Parameters and Design

Electrical Delay (one direction)	1.148 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	January 09, 2003

Page 4 of 8 Certificate No: D2450V2-727\_Apr16

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 241 of 267

# DASY5 Validation Report for Head TSL

Date: 19.04.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 727

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: f = 2450 MHz;  $\sigma = 1.83 \text{ S/m}$ ;  $\varepsilon_r = 40$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)


### DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(7.76, 7.76, 7.76); Calibrated: 31.12.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics; DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

## Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 112.1 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 25.7 W/kg

SAR(1 g) = 12.8 W/kg; SAR(10 g) = 5.93 W/kgMaximum value of SAR (measured) = 20.8 W/kg

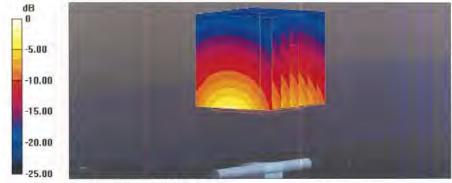

0 dB = 20.8 W/kg = 13.18 dBW/kg

Certificate No: D2450V2-727 Apr16

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司


No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488

www.tw.sas.com



Page: 242 of 267

## Impedance Measurement Plot for Head TSL

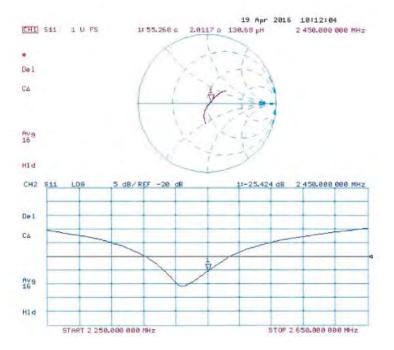

Certificate No: D2450V2-727\_Apr16

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Page 6 of 8

SGS Taiwan Ltd.



Page: 243 of 267

### DASY5 Validation Report for Body TSL

Date: 19.04.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 727

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: f = 2450 MHz;  $\sigma = 1.98 \text{ S/m}$ ;  $\epsilon_r = 52.7$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

### DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(7.79, 7.79, 7.79); Calibrated: 31.12.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30,12,2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

# Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0;

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 105.0 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 24.9 W/kg

SAR(1 g) = 12.5 W/kg; SAR(10 g) = 5.86 W/kgMaximum value of SAR (measured) = 20.2 W/kg



0 dB = 20.2 W/kg = 13.05 dBW/kg

Certificate No: D2450V2-727 Apr16

Page 7 of B

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 244 of 267

# Impedance Measurement Plot for Body TSL

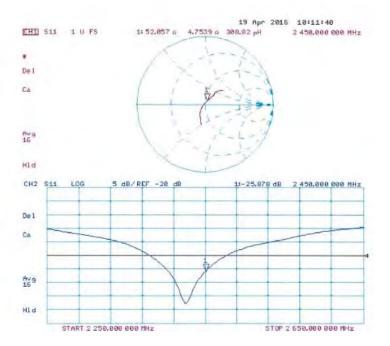

Certificate No: D2450V2-727\_Apr16

Page 8 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 245 of 267

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 5004 Zurion, Switzerland





S Schweizerischer Kalibi lerdiens C Service suisse d'étalonnage Servizio syizzero di taratura S Swiss Calibration Service

Accreditation No. SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client SGS-TW (Auden)

Certificate No: D2600V2-1005 Jan17

Object	D2600V2 - SN:10	005	
Calibration procedure(si	QA CAL-05.v9 Calibration proce	dure for dipole validation kits abo	ove 700 MHz
Calibration date:	January 25, 2017		
		ional standards, which realize the physical un rebability are given on the following pages an	
All calibrations have been conduc	Sed in the closed laborato	ry tackty: environment temperature (22 ± 3)/1	C and humidity < 70%.
Calibration Equipment used (MST	E cetical for calibration)		
Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Casumium
Power meter NRP	SN: 104778	06-Apr-16 (No. 217-02288/02289)	Apr-17
	SN: 103244	06-April 16 (No. 217-02288)	Apr-17
ower sensor NRP-Z91	201: 10/2/299		
Secretary of the Control of the Cont	SN: 103245	06-Apt-15 (No. 217-02289)	Apr-17
Power sensor NRP-Z91	Activities and an artist and a second		
Power sensor NRP-ZB1 Reference 20 dB Altenuator	SN: 103245	06-Apr-15 (No. 217-02289)	Apr-17
Power sensor NRP-ZB1 Pelenence 20 dB Attenuator Type-N mismatch combination	SN; 103245 SN; 5068 (20k)	06-Apr-16 (No. 217-02289) 05-Apr-16 (No. 217-02292)	Apr-17 Apr-17
Power sensor NRP-ZB1 Reference 20 dB Attenuator Type-N mismatch combination Reference Proce EX3DV4	SN: 100245 SN: 5068 (20k) SN: 5047.2 / 06327	06-Api-16 (No. 217-02288) 06-Api-16 (No. 217-02292) 05-Api-16 (No. 217-02296)	Apr-17 Apr-17 Apr-17
Pawer sensor NRP-ZB1 Reference 20 dB Attenue/or Type-14 mismissich combination Reference Proce EX3DV4 DAE4	SN: 103245 SN: 5066 (20k) SN: 5047.2 / 06327 SN: 7348	06-AµI-15 (No. 217-02288) 06-AµI-16 (No. 217-02292) 06-AµI-16 (No. 217-02296) 31-Dec-16 (No. EX3-7349_Dec16)	Apr-17 Apr-17 Apr-17 Dec-17
Tower sensor NRP-Z91 Seferance 20 dB Attenuator Type-N mismatch combination Seferance Proce EX3DV4 DAE4 Secondary Standards	SN: 103245 SN: 5056 (20k) SN: 5047.2 / 06327 SN: 7349 SN: 601	06-Api-16 (No. 217-02289) 06-Api-16 (No. 217-02292) 05-Api-16 (No. 217-02296) 31-Dec-16 (No. EX3-7349, Dec16) 04-Jun-17 (No. DAE4-601_Jan17)	Apr-17 Apr-17 Apr-17 Dec-17 Jan-18 Scheduled Check
Power sensor NRP-ZB1 Reference 20 dB Attenuator Type-N mismistich combination Reference Probe EX3DV4 DAE4 Secondary Standards Power motor EPM-442A	SN: 103245 SN: 5058 (20k) SN: 5047.2 / 05327 SN: 7348 SN: 601	06-Api-16 (No. 217-02289) 06-Api-16 (No. 217-02292) 05-Api-16 (No. 217-02296) 31-Dec-16 (No. EX3-7349_Dec16) 04-Jun-17 (No. DAE-4-601_Jan17) Check Date (in house)	Apr-17 Apr-17 Apr-17 Dec-17 Jan-18 Schedulod Check In nouse check: Oct-18
Pawer sensor NRP-Z91 Pelerence 20 dB Attenuator Pype-N mismatic combination Reference Proce EX3DV4 DAE4 Secondary Standards Power mater EPM-442A Power sensor HP 8431A	SN: 100245 SN: 5058 (20t) SN: 5047.2 / 06327 SN: 7548 SN: 801	06-Api-16 (No. 217-02289) 06-Api-16 (No. 217-02292) 05-Api-16 (No. 217-02296) 31-Dec-16 (No. EX3-7349, Dec16) 04-Jien-17 (No. DAE-4-601, Jan17) Check Date (in house) 07-Oct-15 (in house check Dct-16)	Apr-17 Apr-17 Apr-17 Dec-17 Jan-18 Scheduled Check In nouse check: Oct-18 In house check: Oct-18
Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Reference Proce EX3DV4 DAE4 Secondary Stendards Power motor EPM-442A Power sensor HP 8481A Power sensor HP 8481A	SN: 103245 SN: 5086 (20k) SN: 5047.2 / 06327 SN: 5047 SN: 504 SN: 6437480704 SN: GB37480704 SN: UB37292783	06-Apri-16 (No. 217-02289) 06-Apri-16 (No. 217-02292) 05-Apri-16 (No. 217-02292) 05-Apri-16 (No. 217-02296) 31-One-16 (No. EXX-7348, Dec16) 04-Jian-17 (No. DAE-4-601_Jan17) Check Date (in house) 07-Oct-15 (in house check Oct-16) 07-Oct-15 (in house check Oct-16)	Apr-17 Apr-17 Apr-17 Dec-17 Jan-18 Schedulod Chock In nouse check: Oct-18 In house check: Oct-18 In house check: Oct-18
Power sensor NRP-Z91 Reference 20 dB Attenuator Type-14 mismisch combination Reference Proce EX3DV4 DAE4 Secondary Standards Power motor EPM-142A Power sensor HP 8481A RF generator R&S SMT-06	SN: 103245 SN: 5058 (20h) SN: 5047.2 / 06327 SN: 5047.2 / 06327 SN: 601 ED 4 SN: GB37480/Y04 SN: US37292783 SN: MY41032317	06-Apr-16 (No. 217-02289) 06-Apr-16 (No. 217-02292) 06-Apr-16 (No. 217-02292) 06-Apr-16 (No. 217-02296) 31-Que-16 (No. EX3-7346, Dec16) 04-Jan-17 (No. DAE-4-601_Jan-17) Check Date (in house) 07-Oct-15 (in house check Oct-16) 07-Oct-15 (in house check Oct-16) 07-Oct-15 (in house check Oct-16)	Apr-17 Apr-17 Apr-17 Dec-17 Jan-18 Schedulod Chock In nouse check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-18
Power sensor NRP-ZB1 Reference 20 dB Attenuator Type-N mismisch combination Reference Proce EX3DV4 DAE4 Secondary Standards Power meter EPM-442A Power sensor HP 8481A PF generator R&S SMT-06	SN: 103245 SN: 5088 (20k) SN: 5047.2 / 06327 SN: 7548 SN: 501 D 4 SN: GB37480704 SN: GB37292783 SN: MY410k2317 SN: 100372	06-Api-16 (No. 217-02289) 06-Api-16 (No. 217-02292) 05-Api-16 (No. 217-02292) 31-Dec-16 (No. EX3-7349, Dec16) 04-Jan-17 (No. DAE4-601, Jan17) Chock Date (in house) 07-Oct-15 (in house check Oct-16) 07-Oct-15 (in house check Oct-16) 07-Oct-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-18)	Apr-17 Apr-17 Apr-17 Dec-17 Jan-18 Schedulod Check In nouse check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-18
Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Reference Proce EX3DV4 DAE4 Secondary Stendards Power mater EPM-442A Power sensor HP 8481A Prover sensor HP 8481A RF garantor R&S SMT-06 Network Analyzer HP 8753E	SN: 103245 SN: 5069 (20h) SN: 5047.2 / 06327 SN: 9047 SN: 901 SN: 901 SN: 901 SN: GB37480Y04 SN: US37292783 SN: MY41082317 SN: 100372 SN: US37380565	06-Apri-16 (No. 217-02289) 06-Apri-16 (No. 217-02292) 05-Apri-16 (No. 217-02292) 05-Apri-16 (No. 217-02296) 31-Ose-16 (No. EXX-7348, Dec15) 04-Jian-17 (No. DAE-4-601_Jan17) Check Date (in house) 07-Oct-15 (in house check Oct-16) 07-Oct-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) 18-Oct-01 (in house check Oct-18)	Apr-17 Apr-17 Apr-17 Dec-17 Jan-18 Scheduled Check In nouse check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-17 Signature
Power sensor NRP-Z91 Palversensor NRP-Z91 Palversensor NRP-Z91 Palversensor 20 dB Attenuation Type-N mismatch combination Reference Proce EX30V4 DAE4 Secondary Stendards Power mater EPM-442A Powers sensor HP 8481A Power sensor HP 8481A RF-generator R&S SMT-06 Network Analyzer HP 8753E Calibrated by:	SN: 103245 SN: 5086 (20k) SN: 5047.2 / 06327 SN: 5047.2 / 06327 SN: 601 SN: GB37480/04 SN: GB37480/04 SN: US37292783 SN: MV41082317 SN: 100372 SN: US37380565 Name	06-Apri-16 (No. 217-02289) 06-Apri-16 (No. 217-02292) 05-Apri-16 (No. 217-02292) 05-Apri-16 (No. 217-02296) 31-Ose-16 (No. EX3-7348, Dec16) 04-Jun-17 (No. DAE-4-601_Jun-17) Check Date (in house) 07-Oct-15 (in house check Oct-16) 07-Oct-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) 16-Oct-01 (in house check Oct-16)	Apr-17 Apr-17 Apr-17 Dec-17 Jan-18 Scheduled Check In nouse check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-17
Pawer sensor NRP-ZB1 Reference 20 dB Attenuator Type-N mismatic combination Reference Probe EX30V4 DAE4 Secondary Standards Pawer motor EPM-442A Power sensor HP 8481A Power sensor HP 8481A PF generator R&S SMT-06 Network Analyzer HP 8753E Calibrated by:	SN: 103245 SN: 5086 (20k) SN: 5047.2 / 06327 SN: 5047.2 / 06327 SN: 601 SN: GB37480/04 SN: GB37480/04 SN: US37292783 SN: MV41082317 SN: 100372 SN: US37380565 Name	06-Apri-16 (No. 217-02289) 06-Apri-16 (No. 217-02292) 05-Apri-16 (No. 217-02292) 05-Apri-16 (No. 217-02296) 31-Ose-16 (No. EX3-7348, Dec16) 04-Jun-17 (No. DAE-4-601_Jun-17) Check Date (in house) 07-Oct-15 (in house check Oct-16) 07-Oct-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) 16-Oct-01 (in house check Oct-16)	Apr-17 Apr-17 Apr-17 Dec-17 Jan-18 Scheduled Check In nouse check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-17 Signature
Pawer sensor NRP-ZB1 Reference 20 dB Attenuator Type-N mismistich comeination Reference Proce EX3DV4 DAE4 Secondary Stendards Power meter EPM-442A Power sensor HP 8481A Frower sensor HP 8481A RF generator R&S SMT-06 Network Analyzer HP 8753E	SN: 103245 SN: 5069 (20h) SN: 5047.2 / 06327 SN: 5047.2 / 06327 SN: 907 SN: 907 SN: 907 SN: 937292783 SN: MY41082317 SN: 100372 SN: US37390565 Name Johannes Kurikka	06-Apri-16 (No. 217-02289) 06-Apri-16 (No. 217-02292) 06-Apri-16 (No. 217-02292) 06-Apri-16 (No. 217-02296) 31-One-16 (No. EXX-7346, Dec15) 04-Jian-17 (No. DAE-4-601_Jan17) Check Eate (in house) 07-Oct-15 (in house check Oct-16) 07-Oct-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) 16-Oct-01 (in house check Oct-16) Function Laboratory Technician	Apr-17 Apr-17 Apr-17 Dec-17 Jan-18 Scheduled Check In nouse check: Oct-16 In house check: Oct-16 In house check: Oct-16 In house check: Oct-17 Signature

Certificate No: D2600V2-1005\_Jan17

Same t new

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 246 of 267

Calibration Laboratory of Schmid & Partner Engineering AG Zeugimusstrasse 43, 8004 Zurich, Switzerland





Schweizerlacher Kallbrierdie Service suisse d'étalornage C Servizio avazono di muni Swies Calibration Service

Acerecitation No.: SCS 0108

Accredies by the Swee Accreditation Service (SAS).

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

#### Glossary:

TSL tissue simulating liquid sensitivity in TSL / NORM x,y,z ConvE N/A not applicable or not measured

### Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- i) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless. communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)". March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

e) DASY4/5 System Handbook

#### Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%

Cermicate No: D96000VS-1006 Jan 17

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488

www.tw.sas.com



Page: 247 of 267

# Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2600 MHz ± 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.0	1.95 mho/m
Measured Head TSL parameters	(22,0 ± 0.2) °C	37.4 ± 6 %	2.05 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C		-

# SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	14.3 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	55.5 W/kg = 17.0 % (k=2)

SAR overaged over 10 cm <sup>8</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.32 W/kg
SAR for nominal Head TSL parameters	normalized to TW	24.8 W/kg ± 16.5 % (k=2)

# **Body TSL parameters**

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.8 °C	52.5	2.16 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.3 ± 6%	2.20 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	(1000)	

## SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.9 W/kg
SAR for nominal Body TSL parameters.	normalized to 1W	55.1 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm <sup>S</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW Input power	6.20 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	24.7 W/kg ± 16.5 % (k=2)

Certificate No: D2600V2-1005, Jan 17

Page 3 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 248 of 267

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	49.3 Ω - 4.7 JΩ	
Return Loss	- 26.5 dB	

## Antenna Parameters with Body TSL

Impedance, transformed to feed point	44.7 (3 - 3.2 j0
Return Loss	-23,7 dB

## General Antenna Parameters and Design

Electrical Delay (one direction)	1.154 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semitigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The entenne is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when leaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

#### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	December 23, 2006

Cemficate No: D2600V2-1005\_Jan17

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 249 of 267

### **DASY5 Validation Report for Head TSL**

Date: 25.01.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN:1005

Communication System: UID 0 - CW; Frequency: 2600 MHz

Medium parameters used: f = 2600 MHz;  $\sigma = 2.05 \text{ S/m}$ ;  $\epsilon_k = 37.4$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

### DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(7.56, 7.56, 7.56); Calibrated: 31.12.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.01.2017.
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

## Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 116.2 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 30.5 W/kg

SAR(1 g) = 14.3 W/kg; SAR(10 g) = 6.32 W/kg

Maximum value of SAR (measured) = 24.2 W/kg



0 dB = 25.2 W/kg = 13.84 dBW/kg

Certificate No: D2600V2-1005\_Jan17

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 250 of 267

### Impedance Measurement Plot for Head TSL

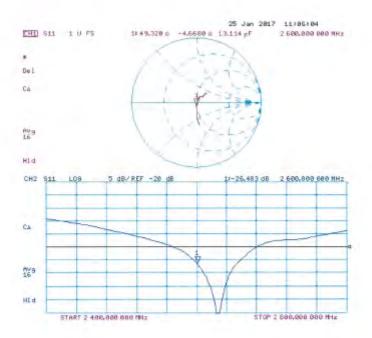

Certificate No: D2600V2-1005\_Jan17

Page 6 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 251 of 267

### DASY5 Validation Report for Body TSL

Date: 18.01.2017

Test Laboratory: SPEAG, Zurich, Switzerland

## DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN:1005

Communication System: UID 0 - CW; Frequency: 2600 MHz. Medium parameters used: f = 2600 MHz;  $\sigma = 2.2 \text{ S/m}$ ;  $z_c = 52.3$ ;  $p = 1000 \text{ kg/m}^3$ 

Medium parameters used: I = 2000 MHz, G = 2.2 S/m;  $z_0 = 32.3$ ; p = 1000 kg/m

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

### DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(7.48, 7.48, 7.48); Calibrated: 31.12.2016;
- · Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.01.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

## Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 108.8 V/m; Power Drift = -0.04 dB Peak SAR (extrapolated) = 28.8 W/kg

SAR(1 g) = 13.9 W/kg; SAR(10 g) = 6.2 W/kgMaximum value of SAR (measured) = 23.3 W/kg



0 dB = 23.3 W/kg = 13.67 dBW/kg

Certificate No: D2600V2-1005\_Jan17

Page 7 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.


No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com



Page: 252 of 267

### Impedance Measurement Plot for Body TSL

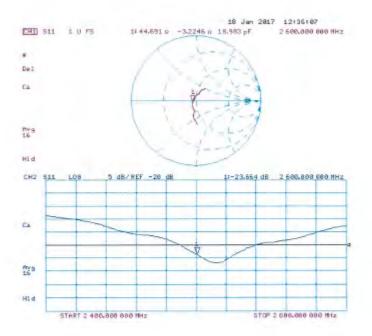

Certificate No: D2600V2-1005\_Jan17

Page 8 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 253 of 267

## Calibration Laboratory of Schmid & Partner

Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





- S Schweizerischer Kalibrierdienst
  C Service suisse d'étalonnage
  Servizio svizzero di taratura
  S Suise Calibration Service
- S Swiss Calibration Service

  Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client SGS-TW (Auden)

Certificate No: D5GHzV2-1023 Jan17

Object	D5GHzV2 - SN:1	023	
Carbraton persedurats)	QA CAL-22.v2 Calibration proce	dure for dipole validation kits bety	ween 3-6 GHz
Calibration date:	January 20, 2017		
The measurements and the unce	rtainses with confidence p	onel standards, which reelize the physical un robability are given on the following pages an ry facility, anwronment temperature (22 ± 3)°C	d are part of the certificate
All calibrations have been conduc Calibration Equipment used (M&)		у целну, в масяны в штрочаше (се ± а) с	, and same of the same
Primary Standards	ID #	Cal Date [Certificate No.]	Scheduled Calibration
Power meter MRP	SN: 104778	06-Apr-16 (No. 217-02269/02269)	Apr-17
Power sensor NEP-Z91	Sec. 103244	06-Apr-16 (No. 217-02288)	Apr-17
	The second second	The state of the s	Acr-17
	SN 103245	06-Apr-16 (No. 217-02289)	PROFESSION AND ADDRESS OF THE PERSON ADDRESS OF THE PERSON AND ADDRESS OF THE PERSON ADDRESS OF THE PERSON ADDRESS OF THE PERSON AND ADDRESS OF THE PERSON AND ADDRESS OF THE PERSON AND ADDRESS OF THE
ower sensor NRP-Z91	SN: 103245 SN: 5058 (20k)	06-Apr-16 (No. 217-02288) 05-Apr-16 (No. 217-02292)	Apr-17
Power sensor NRP-Z91 Reference 20 dB Attenuator			
Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N internation combination	SN: 5058 (20k)	05-Apr-16 (No. 217-02302) 05-Apr-16 (No. 217-02296) 31-Dec-16 (No. EXS-8503_Dec16)	Apr-17 Apr-17 Dec-17
Power sensor NRF-Z31 Reference 20 dB Attanuator Type-N internatch combination Reference Probe EX3DV4	SN: 5058 (20k) SN: 5047.2 / 86327	85-Apr-16 (No. 217-02292) 85-Apr-16 (No. 217-02295)	Apr-17 Apr-17
Power sensor NRP 4291 Reference 20 dB Attenuator Type-N internation combination Reference Probe EX3DV4 DAE4	SN: 5058 (20k) SN: 5047.2 / 06327 SN: 3503	05-Apr-16 (No. 217-02302) 05-Apr-16 (No. 217-02296) 31-Dec-16 (No. EXS-8503_Dec16)	Apr-17 Apr-17 Dec-17
Power sensor NRP 4291 Reference 20 dB Attenuator Type-N internation or bination Reference Probe EX3DV4 DAE4 Secondary Standards	SN: 5058 (20k) SN: 5047.2 / 06327 SN: 3603 SN: 601	05-Apr-16 (No. 217-02202) 05-Apr-16 (No. 217-02205) 31-Dec-16 (No. EXS-9503_Dec16) 04-Jen-17 (No. DAE4-601_Jan17)	Apr-17 Apr-17 Dec-17 Jan-18
Power sensor NRP 4291 Reference 20 dB Attanuator Type-N mamuatch combination Reference Probe EX30V4 DAE4 Secondary Stanuards Power master EPM-442A	SN: 5058 (25k) SN: 5047.2 / 06327 SN: 3503 SN: 801	85-Apr-16 (No. 217-02202) 85-Apr-16 (No. 217-02205) 31-Dec-16 (No. EXC-9503_Dec16) 04-Jen-17 (No. DAE4-601_Jan17) Check Data (in house)	Apr-17 Apr-17 Dec-17 Jan-18 Schedulet Check
Power sensor NRP /231 Reference 20 dB Attanuator (type-N mismatch combination) Reference Probe EX30V4 DAE4 Secondary Standards Power maker EPM-442A Power sonsor HP 8481A	SN: 5058 (20k) SN: 5047 2 / 06327 SN: 3603 SN: 801	85-Apr-16 (No. 217-02292) 85-Apr-16 (No. 217-02295) 31-Disc-16 (No. EXS-9503_Dec15) 04-Jen-17 (No. DAE4-601_Jan17) Check Date (in house) 07-Oct-16 (in house)	Acr-17 Acr-17 Dec-17 Jan-18 Scheduled Check In house check: Det-18
Power sensor NRP 4291 Reference 20 dB Attenuator Type-N internation combination Reference Probe EX30V4 DAE4  Docondary Stanzards Power maser EPM-442A Power sensor HP 8481A Power sensor HP 8481A	SN: 5086 (20k) SN: 5047.2 / 96327 SN: 3609 SN: 801 ID 8 SN: 6837480704 SN: US37282789	05-Apr-16 (No. 217-02202) 05-Apr-16 (No. 217-02295) 31-Dac-16 (No. EXS-9503, Dec-16) 04-Jen-17 (No. DAE4-GO1_Jan17) Check Date (in house) 07-Oct-16 (in house check Oct-16) 07-Oct-15 (in house check Oct-16)	Agr-17 Agr-17 Dec-17 Jan-18 Schedulet Check Inhouse check: Dch-18 Inhouse check, Okh-18
Power sensor NRP-231 Reference 20 dB Attenuator Type-9 internation combination Reference Probe EX3DV4 DAE4 Secondary Stanzards Power sensor HP 8481A Power sensor HP 8481A RE generator RRS SMT-08	SN: 5089 (20k) SN: 5047 2 / 06387 SN: 3608 SN: 861 ID 8 SN: 6897480704 SN: US37292789 SN: MY41082317	05-Apr-16 (No. 217-02202) 05-Apr-16 (No. 217-02205) 31-Dec-16 (No. EXS-9503, Dec-16) 04-Jen-17 (No. DAE4-601, Jan17) Check Date (In house) 07-Det-16 (in house check Oct-16) 07-Oct-15 (in house check Oct-16) 07-Oct-15 (in house check Oct-16)	Apr-17 Apr-17 Dec-17 Jan-18 Scheduled Check In house check: Dct-18 In house check: Dct-18 In house check: Dct-19
Power sensor NRP-Z31 Reference 20 dB Attenuator Type-N mismatch combination Reference Probe EX30V4	SN: 5087 (20k) SN: 5047 2 / 06327 SN: 3609 SN: 801 SN: 6837480704 SN: US37292789 SN: MY41082317 SN: 100972 SN: US37390585	05-Apr-16 (No. 217-02202) 05-Apr-16 (No. 217-02205) 31-106-16 (No. EXS-9503_Dec16) 04-Jen-17 (No. DAE4-601_Jan17) Check Date (in house) 07-0ct-15 (in house check Oct-16) 07-0ct-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16)	Agr-17 Agr-17 Dec-17 Jan-18 Scheduled Check In nouse check Oct-18 In house check Oct-18 In house check Oct-18 In house check Oct-18
Power sensor NRP 4291 Reference 20 dB Attenuator Type-N internation combination Reference Probe EX30V4 DAE4 Secondary Stanzands Power inser EPM-442A Power sensor I-P 8481A RF generator R&S SMT-08 Network Analyzer I-P 8753E	SN: 5089 (20k) SN: 5047 2 / 06387 SN: 3608 SN: 861 ID 8 SN: 6897480704 SN: US37292789 SN: MY41082317 SN: 100972 SN: US37390585	05-Apr-16 (No. 217-02202) 05-Apr-16 (No. 217-02205) 31-Dec-16 (No. EXS-9503, Dec-16) 04-Jen-17 (No. DAE4-G01, Jan17) Check Date (In house) 07-Det-16 (in house check Oct-16) 07-Oct-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16)	Agr-17 Agr-17 Dec-17 Jan-18 Scheduled Check In house check Dot-18 In house check Cot-18 In house check Cot-18 In house check Cot-18 In house check Cot-17
Power sensor NRP 4291 Reference 20 dB Attenuator Type-N internation combination Reference Probe EX30V4 DAE4 Secondary Stanzands Power inser EPM-442A Power sensor I-P 8481A RF generator R&S SMT-08 Network Analyzer I-P 8753E	SN: 5087 (20k) SN: 5047 2 / 06327 SN: 3609 SN: 801 SN: 6837480704 SN: US37292789 SN: MY41082317 SN: 100972 SN: US37390585	85-Apr-16 (No. 217-02292) 85-Apr-16 (No. 217-02295) 31-Dec-16 (No. EX5-9503, Dec-16) 04-Jen-17 (No. DAE4-601, Jan17) Check Date (in house) 07-Oct-16 (in house check Oct-16) 07-Oct-16 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) 18-Oct-01 (in house check Oct-16)	Agr-17 Agr-17 Dec-17 Jan-18 Spheduled Check In house check: Dct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-17
Power sensor NRP-Z31 Reference 20 dB Attenuator Type-N mismatch combination Reference Probe EX30V4 DAE4 Secondary Stanzants Power maser EPM-442A Power sonsor HP 8481A Power sonsor HP 8481A RF generator R&S SMT-00 Notwork Analyzer HP 8753E Celibrated by	SN: 5087 (20k) SN: 5047 2 / 06327 SN: 3609 SN: 801 SN: 6837480704 SN: US37282780 SN: MY41082317 SN: 100872 SN: US37390585 Name Jeton Kastrati	05-Apr-16 (No. 217-02202) 05-Apr-16 (No. 217-02205) 31-Dec-16 (No. EXS-9503, Dec-16) 04-Jen-17 (No. DAE4-G01, Jan17) Check Date (In house) 07-Det-16 (in house check Oct-16) 07-Oct-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16)	Agr-17 Agr-17 Dec-17 Jan-18 Scheduled Check In house check Dot-18 In house check Cot-18 In house check Cot-18 In house check Cot-18 In house check Cot-17
Power sensor NRP 4291 Reference 20 dB Attenuator Type-N internation combination Reference Probe EX30V4 DAE4 Secondary Stanzands Power inser EPM-442A Power sensor I-P 8481A RF generator R&S SMT-08 Network Analyzer I-P 8753E	SN: 5089 (20k) SN: 5047 2 / 06387 SN: 3608 SN: 861 ID 8 SN: 6897480704 SN: US37292789 SN: MY41082317 SN: 100972 SN: US37390585	85-Apr-16 (No. 217-02202) 85-Apr-16 (No. 217-02203) 91-Dec-16 (No. 217-02203) 91-Dec-16 (No. DAE-4501 Jen15) 04-Jen-17 (No. DAE-4501 Jen17) Check Date (in house) 07-Oct-15 (in house check Oct-16) 97-Oct-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) Function Lacoustory Technician	Agr-17 Agr-17 Dec-17 Jan-18 Scheduled Check In house check: Dich-18 In house check: Dich-18 In house check: Cot-18 In house check: Cot-18 In house check: Cot-18

Certificate No: D5GHzV2-1023\_Jan17

Page 1 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained berean reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions if any. The

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 254 of 267

Calibration Laboratory of Schmid & Panner Engineering AG Teastrophysics St. 1994 Zurich, Switzerland





Schweizerscher Kalibrierdiene Sarvice suisse dietalernage Sarvice evizere di territori Swiss Calibrillon Service

Accreditation No.: SCS 0108

Accretion by the Salar According to the Service (EAS)

The Serias Accreditation Service is one of the signalories to the EA Mustavaral Accoment for the recognition of calibration certificates

Glossary:

TSL tissue simulating liquid
ConvF sensitivity in TSL / NORM x.y.z.
N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- EEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Pate (SAR) in the Human Head from Wireless Communications Devices. Measurement Techniques", June 2013
- EC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30, MHz to 6 GHz)", March 2010
- b) KDB 865664; 'SAR Measurement Requirements for 100 MHz to 6 GHz'

#### Additional Documentation:

d) DASY4/5 System Handbook

#### Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end
  of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed
  point exactly below the center marking of the flat phantom section, with the arms oriented
  parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole
  positioned under the liquid filled phantom. The impedance stated is transformed from the
  measurement at the SMA connector to the feed point. The Return Loss ensures low
  reflected power. No Lincertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point.
   No uncortainty required.
- · SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Destricate No: D5GHz/2 (023 Jan17

Page 2 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 255 of 267

#### Measurement Conditions

m configuration, as far as not given on page 1

DASY Version	DASYS	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4,0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5200 MHz ± 1 MHz 5300 MHz ± 1 MHz 5600 MHz ± 1 MHz 5600 MHz ± 1 MHz	

## Head TSL parameters at 5200 MHz

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	38.0	4.66 mhp/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.4 ± 6 %	4.45 mho/m ± 6.%
Head TSL temperature change during test	< 0.5 °C		-

#### SAR result with Head TSL at 5200 MHz

SAR averaged over 1 cm3 (1 g) of Head TSL	Condition	
SAR meresured	100 mW input power	7.55 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	75.2 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.16 W/kg
SARI for nominal Head TSL parameters	normalized to 1W	21.5 W/kg ± 19.5 % (k=2)

Certificate No: D5GHzV2-1023\_Jan17

Page 3 of 16

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 256 of 267

#### Head TSL parameters at 5300 MHz

The following parameters and calculations were applied

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.76 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35,2 ± 6 %	4.55 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	-	

#### SAR result with Head TSL at 5300 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.22 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	81.8 W / kg ± 19.9 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.35 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.3 W/kg ± 19.5 % (k=2)

#### Head TSL parameters at 5600 MHz

The following parameters and calculations were applied

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	347 = 6%	4.85 mho/m ± 6 %
Head TSL temperature change during test	< 0.5°C	-	

#### SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm3 (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.22 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	81.7 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm2 (10 g) of Head TSL	condition	
SAR measured	100 mW Input power	2.33 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.1 W/kg ± 19.5 % (k=2)

Certificate No: D5GHzV2-1023\_Jan17

Page 4 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 257 of 267

#### Head TSL parameters at 5800 MHz

The following garamaters and calculations were applied

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	344±6%	5 05 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	-	_

#### SAR result with Head TSL at 5800 MHz

SAR averaged over 1 cm <sup>2</sup> (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.82 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	77.6 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm2 (10 g) of Head TSL	condition	
SAR measured	100 mW input powr≋	.2.22 W/kg
SAR for nominal Head TSL parameters.	normalized to 1W	22.0 W/kg ± 19.5 % (k=2)

Gertificate No: D5GHzV2-1025\_Jan17

Page 5 of 45

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 258 of 267

#### Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 %	49.0	5,30 mhis/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.5 ± 6 %	5.36 mho/m ± 6 %
Body TSL temperature change during test	<0.5 ℃		-

## SAR result with Body TSL at 5200 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7,32 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	72.8 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm2 (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.05 W/kg
SAR for nominal Body TSL parameters.	normalized to 1W	20.3 W/kg ± 19.5 % (k=2)

#### Body TSL parameters at 5300 MHz

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.9	5.42 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.3±6%	5.50 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	-400	-

#### SAR result with Body TSL at 5300 MHz

SAR averaged over 1 cm2 (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.68 W/kg
SAR for nominal Bedy TSL parameters	normalized to 1W	76.1 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm² (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.15 W/kg
SAR for nominal Body TSL parameters	Normalized to 1V/	21.3 W/kg = 19.5 % (k=2)

Sertilicate No: D5GHzV2-1023\_Jan17

Page B of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 259 of 267

## Body TSL parameters at 5600 MHz

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.5	5.77 mha/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.5 ± 6 %	5.90 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 €	_	

#### SAR result with Body TSL at 5600 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL.	Condition	
SAR measured	100 mW input power	8.02 W/kg
SAR for nominal Body TGL parameters	normalized to 1W	79.6 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm2 (10 g) of Body TSL	condition	
SAR measured	100 inv input power	2.26 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	22.4 W/kg ± 19.5 % (k=2)

## Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.2	6,00 mno/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	48.3 ± 6 %	6:17 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	-	

#### SAR result with Body TSL at 5800 MHz

SAR averaged over 1 cm3 (1 g) of Body TSL	Condition	
SAR measured	100 mW Input power	7.64 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	75.9 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR massured	100 mW input power	2.13 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.1 W/kg ± 19.5 % (k=2)

Certificate No: D5GHzV2-1023\_Jan17

Page 7 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 260 of 267

#### Appendix (Additional assessments outside the scope of SCS 0108)

#### Antenna Parameters with Head TSL at 5200 MHz

Impedance, transformed to feed point	49.6 Ω - 6.7  Ω	
Return Loss	- 23,4 dB	

#### Antenna Parameters with Head TSL at 5300 MHz

Impedance, transformed to feed point	49.0 Ω = 1.8 jΩ	
Return Loss	+33.5 dB	

#### Antenna Parameters with Head TSL at 5600 MHz

Impediancs, transformed to feed point	54.1 Ω - 0.2 JΩ
Fleturn Loss	- 28.2 dB

#### Antenna Parameters with Head TSL at 5800 MHz

Impedance, transformed to feed point	55.4 \O + 2.8 jQ	
Return Loss	-24.8 dB	

## Antenna Parameters with Body TSL at 5200 MHz

Impedance, transformed to feed point	48.9 Ω - 7.0 jΩ
Return Loss	- 22.9 dB

#### Antenna Parameters with Body TSL at 5300 MHz

Impedance, transformed to feed point	51.0 Ω - 1.0 μΩ
Return Loss	- 37.0 dB

#### Antenna Parameters with Body TSL at 5600 MHz

Impedance, transformed to feed point	55.6 Ω + 1.5 ½	
Return Loss	- 25.2 dB	

#### Antenna Parameters with Body TSL at 5800 MHz

Impedance, transformed to feed point	56.6 $\Omega$ + 2.7 $\Omega$	
Return Loss	= 23.6 dB	

Certificate No: D5GHzV2-1023 Jan17

Page 8 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 261 of 267

#### General Antenna Parameters and Design

Electrical Delay (one direction)	1.199 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

#### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	February 05, 2004

Certificate No: D5GHzV2-1023\_Jan17

Page 9 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The

Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

www.tw.sas.com



Page: 262 of 267

#### DASY5 Validation Report for Head TSL

Date: 20.01.2017

Test Laboratory: SPEAG, Zurich, Switzerland

#### DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1023

Communication System: UID 0 - CW;

Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used: f = 5200 MHz;  $\alpha = 4.45$  S/m;  $\epsilon_c = 35.4$ ;  $\rho = 1000$  kg/m

Medium parameters used: l = 5300 MHz;  $\sigma = 4.55 \text{ S/m}$ ;  $\tilde{\epsilon}_s = 35.2$ ;  $\rho = 1000 \text{ kg/m}^3$ .

Medium parameters used: l = 5600 MHz; n = 4.85 S/m;  $\epsilon_r = 34.7$ ;  $\rho = 1000 \text{ kg/m}^2$ .

Medium parameters used: f = 5800 MHz:  $\pi = 5.05$  S/m;  $\varepsilon_t = 34.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEBE/IEC/ANSI C63, 19-2011)

#### DASY52 Configuration:

- Probe: EX3DV4 SN3503; ConvF(5.76, 5.76, 5.76); Calibrated: 31.12.2016, ConvF(5.35, 5.35, 5,35); Calibrated. 31.12.2016, ConvF(5.09, 5.09, 5.09); Calibrated: 31.12.2016, ConvF(5.0). 5.01. 5.01); Calibrated: 31.12.2016;
- Sensor-Surface: L4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.01.2017
- Phantom: Flut Phuntom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

## Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan.

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 70.58 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 27.6 W/kg

SAR(1 g) = 7.55 W/kg; SAR(10 g) = 2.16 W/kg

Maximum value of SAR (measured) = 17.4 W/kg

## Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 73.01 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 31,6 W/kg

SAR(1 g) = 8.22 W/kg; SAR(10 g) = 2.35 W/kg

Maximum value of SAR (measured) = 19.3 W/kg

## Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 71.94 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 33.2 W/kg

SAR(1 g) = 8.22 W/kg; SAR(10 g) = 2,33 W/kg

Maximum value of SAR (measured) = 19.8 W/kg

Cemticate No: 05GHzV2-1023\_Jan17.

Page 10 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 263 of 267

# Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm Reference Value = 69.84 V/m; Power Drift = -0.08 dB

Reference Value = 69.84 V/m; Power Drift = -0.08 Peak SAR (extrapolated) = 32.7 W/kg

SAR(1 g) = 7.82 W/kg; SAR(10 g) = 2.22 W/kg

Maximum value of SAR (measured) = 19.5 W/kg

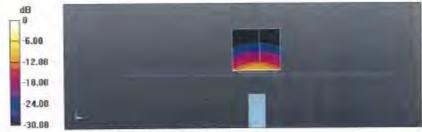

0 dB = 17.4 W/kg = 12.41 dBW/kg

Certificate No: D5GHzV2-1023\_Jan17

Page 11 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 264 of 267

## Impedance Measurement Plot for Head TSL

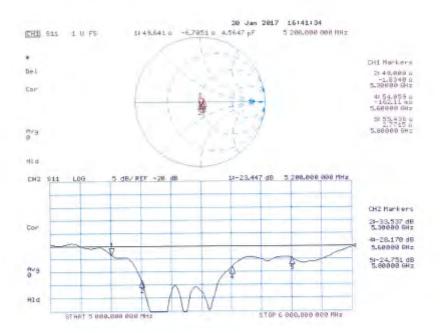

Certificate No: D5GHzV2-1023\_Jan17

Page 12 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 265 of 267

#### DASY5 Validation Report for Body TSL

Date: 19.01.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1023

Communication System: UID:0 - CW;

Frequency: 5200 MHz, Frequency: 5300 MHz, Prequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used: f = 5200 MHz;  $\sigma = 5.36$  S/m;  $\epsilon_r = 47.5$ ;  $\rho = 1000$  kg/m<sup>2</sup>

Medium parameters used; f = 5300 MHz;  $\sigma = 5.5$  S/m;  $\varepsilon_i = 47.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>.

Medium parameters used: f = 5600 MHz;  $\sigma = 5.9 \text{ S/m}$ ;  $v_r = 46.6$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Medium parameters used: f = 5800 MHz;  $\sigma = 6.17$  S/m;  $\varepsilon_r = 46.3$ ; p = 1000 kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard; DASY5 (IEEE/IEC/ANSI C63,19-2011)

#### DASY52 Configuration:

- Probe: EX3DV4 SN3503; ConvF(5.29, 5.29, 5.29); Calibrated: 31.12.2016, ConvF(5.04, 5.04, 5.04); Calibrated: 31.12.2016, ConvF(4.57, 4.57, 4.57); Calibrated: 31.12.2016, ConvF(4.48, 4.48, 4.48); Calibrated: 31.12.2016;
- · Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601, Calibrated: 04.01.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.54 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 28.1 W/kg

SAR(1 g) = 7.32 W/kg; SAR(10 g) = 2.05 W/kg

Maximum value of SAR (measured) = 16.6 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1,4mm

Reference Value = 66,93 V/m; Power Drift = -0.07 dB

Penk SAR (extrapolated) = 30.1 W/kg

SAR(1 g) = 7.66 W/kg; SAR(10 g) = 2.15 W/kg

Maximum value of SAR (measured) = 17.6 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 67.09 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 33.7 W/kg

SAR(1 g) = 8.02 W/kg; SAR(10 g) = 2.26 W/kg

Maximum value of SAR (measured) = 18.9 W/kg

Certificate No. D5GHzV2-1029 Jan17

Page 13 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 266 of 267

## Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan,


dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.14 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 34.0 W/kg

SAR(1 g) = 7.64 W/kg; SAR(10 g) = 2.13 W/kg

Maximum value of SAR (measured) = 18.3 W/kg

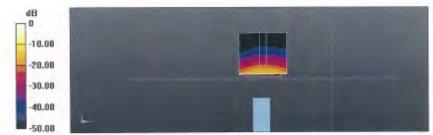

0 dB = 16.6 W/kg = 12.20 dBW/kg

Certificate No: D5GHzV2-1023\_Jan17

Page 14 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 267 of 267

#### Impedance Measurement Plot for Body TSL

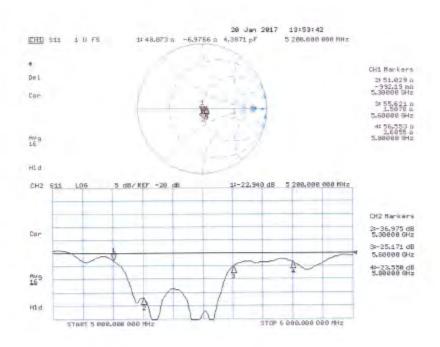

Certificate No: D5GHzV2-1023\_Jan17

Page 15 of 15

## - End of 1st part of report -

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.