

FCC PART 15 C
EMI MEASUREMENT AND TEST REPORT
For
SHENZHEN KINGSANYUAN ELECTRONICS CO., LTD

3/F., 3Blg., HuaRong Industrial Park DaLang LongHua Town, Bao'An District , ShenZhen, China

FCC ID: T63-KSY-BM01

April 28, 2006

This Report Concerns: <input type="checkbox"/> Original Report	Equipment Type: Sunglasses MP3 Player & Bluetooth
Test Engineer: <u>Jimmy Li</u>	
Report No.: <u>SE06D-160E</u>	
Test Date: <u>April 19~28, 2006</u>	
Reviewed By: <u>Tony Wu</u>	
Prepared By: S&E Technologies Laboratory Ltd Room407,Block A Shennan Garden,Hi-Tech Industrial Park, Shenzhen 518057, P.R. China . Tel: 86-755-26636573, 26630631 Fax: 86-755-26630557	

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior written consent of S&E Product Technology Service Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 OBJECTIVE	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
2. SYSTEM TEST CONFIGURATION	6
2.1 DESCRIPTION OF TEST CONFIGURATION	6
2.2 EQUIPMENT MODIFICATIONS	6
2.3 CONFIGURATION OF TEST SETUP	6
2.4 TEST SETUP DIAGRAM	6
2.5 LIST OF MEASURING EQUIPMENTS USED	7
3. SUMMARY OF TEST RESULTS.....	8
4. ANTENNA REQUIREMENT.....	9
4.1 STANDARD APPLICABLE	9
4.2 ANTENNA CONNECTED CONSTRUCTION.....	9
5. TEST OF CONDUCTED EMISSION.....	10
5.1 MEASUREMENT UNCERTAINTY.....	10
5.2 APPLICABLE STANDARD	10
5.3 EUT SETUP	10
5.4 INSTRUMENT SETTING.....	11
5.5 TEST EQUIPMENT LIST AND DETAILS.....	11
5.6 TEST PROCEDURE.....	11
5.7 TEST DATA	11
6. TEST OF HOPPING CHANNEL BANDWIDTH.....	14
6.1 MEASUREMENT UNCERTAINTY.....	14
6.2 APPLICABLE STANDARD	14
6.3 EUT SETUP	14
6.4 INSTRUMENT SETTING.....	14
6.5 TEST EQUIPMENT LIST AND DETAILS.....	14
6.6 TEST PROCEDURE.....	14
6.7 TEST DATA	15
7. TEST OF HOPPING CHANNEL SEPARATION.....	18
7.1 MEASUREMENT UNCERTAINTY.....	18
7.2 APPLICABLE STANDARD	18
7.3 EUT SETUP	18
7.4 INSTRUMENT SETTING.....	18
7.5 TEST EQUIPMENT LIST AND DETAILS.....	18
7.6 TEST PROCEDURE.....	18
7.7 TEST DATA	19
8. TEST OF NUMBER OF HOPPING FREQUENCY	21
8.1 APPLICABLE STANDARD	21
8.2 EUT SETUP	21
8.3 INSTRUMENT SETTING.....	21
8.4 TEST EQUIPMENT LIST AND DETAILS.....	21
8.5 TEST PROCEDURE.....	21
8.6 TEST DATA	22
9. TEST OF DWELL TIME OF EACH FREQUENCY	23
9.1 MEASUREMENT UNCERTAINTY.....	23
9.2 APPLICABLE STANDARD	23
9.3 EUT SETUP	23
9.4 INSTRUMENT SETTING.....	23

9.5 TEST EQUIPMENT LIST AND DETAILS.....	23
9.6 TEST PROCEDURE.....	23
9.7 TEST DATA	24
10. TEST OF MAXIMUM PEAK OUTPUT POWER	28
10.1 MEASUREMENT UNCERTAINTY	28
10.2 APPLICABLE STANDARD	28
10.3 EUT SETUP.....	28
10.4 INSTRUMENT SETTING.....	28
10.5 TEST EQUIPMENT LIST AND DETAILS.....	28
10.6 TEST PROCEDURE	28
10.7 TEST DATA	29
11. TEST OF BAND EDGES EMISSION.....	33
11.1 MEASUREMENT UNCERTAINTY	33
11.2 APPLICABLE STANDARD	33
11.3 EUT SETUP.....	33
11.4 INSTRUMENT SETTING.....	34
11.5 TEST EQUIPMENT LIST AND DETAILS.....	34
11.6 TEST PROCEDURE	34
11.7 TEST DATA	35
12. TEST OF SPURIOUS RADIATED EMISSION.....	38
12.1 MEASUREMENT UNCERTAINTY	38
12.2 APPLICABLE STANDARD	38
12.3 EUT SETUP.....	38
12.4 INSTRUMENT SETTING.....	39
12.5 TEST EQUIPMENT LIST AND DETAILS.....	39
12.6 TEST PROCEDURE	39
12.7 TEST DATA	40

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: **SHENZHEN KINGSANYUAN ELECTRONICS CO., LTD**

Address of applicant: 3/F., 3B1g., HuaRong Industrial Park DaLang LongHua Town, Bao'An District , ShenZhen, China

Tel: 86-755-61561566 Fax: 86-755-61561578

Manufacturer: **SHENZHEN KINGSANYUAN ELECTRONICS CO., LTD**

Address of manufacturer: 3/F., 3B1g., HuaRong Industrial Park DaLang LongHua Town, Bao'An District , ShenZhen, China

Tel: 86-755-61561566 Fax: 86-755-61561578

General Description of E.U.T

The **SHENZHEN KINGSANYUAN ELECTRONICS CO., LTD.**'s product, model number: **KSY-BM01** or the "EUT" as referred to in this report is a **Sunglasses MP3 Player & Bluetooth**.

The technical data has been listed following:

Items	Description
Type of Modulation	GFSK(FHSS)
Frequency Band	2401 MHz ~ 2478 MHz
Bluetooth Specification	V1.2
Number of Channels	33
Channel Bandwidth	2 MHz
Range of operation	Max 10m line of sight
Antenna Type	Built-in Antenna
Temperature Range (Operating)	-20 ~ 55 °C
Output Power Class	Class 2
Battery Type	Built-in Lithium Ion Polymer
Battery Capacity	150mAh
Battery Voltage	3.7V DC
Dimension / Weight	172 *160*40mm /52g

Remark: * The test data gathered are from the production sample provided by the manufacturer.

General Description of Test Auxiliary

EUT Description:	Manufacturer	Model No.	Certificate
Notebook	IBM	1843-LC1	CE, FCC

1.2 Objective

This document is a test report based on the Electromagnetic Interference (EMI) tests performed on the EUT. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4 - 2003.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.207, and 15.247 rules.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4 - 2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. All measurement required was performed at laboratory of the following:

Shenzhen Huatongwei International Inspection Co., Ltd at Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China and the radiated testing was performed at an antenna-to-EUT distance of 3 meters.

SGS-CSTC Standards Technical Services Co., Ltd, Shenzhen Branch, EMC Lab at No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China.

1.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC – Registration No.: 662850

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 662850, November 17, 2003.

FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd, Shenzhen Branch, EMC Lab has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 556682, August 04, 2005.

2. SYSTEM TEST CONFIGURATION

2.1 Description of Test Configuration

The EUT was configured for testing according to ANSI C63.4-2003.

The final qualification test was performed with the EUT operating at normal mode

2.2 Equipment Modifications


No modifications were made to the EUT.

2.3 Configuration of Test Setup



EUT

2.4 Test Setup Diagram

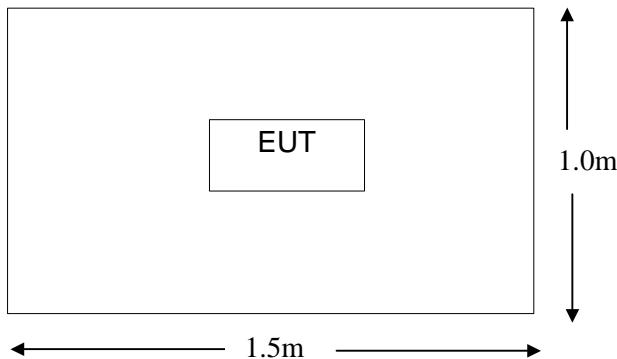

2.5 List of Measuring Equipments Used

Items	Equipment	Manufacturer	Model No.	Serial No.	Last Cal	Calibration Period
For Radiated Spurious Emission (18~25GHz) test: SGS-CSTC Shenzhen Branch						
1	EMI Test Receiver	ROHDE & SCHWARZ	ESI 26	100079	2005/6	1 year
2	Horn Antenna	R/S	CH14-H052	1091698	2006/2	1 year
3	3m Semi- Anechoic Chamber	ETS	N/A	N/A	2005/6	1 year
For other test: Shenzhen Huatongwei International Inspection Co., Ltd						
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCS30	100038	2005/11	1 year
2	EMI Test Receiver	ROHDE & SCHWARZ	ESI 26	100009	2005/11	1 year
3	Receiver/ Spectrum Analyzer	ROHDE & SCHWARZ	ESCI	100106	2005/3	1 year
4	Spectrum Analyzer	HP	8593EM	3536A00107	2005/11	1 year
5	Spectrum Analyzer	HP	7405	US39440156	2005/11	1 year
6	Artificial Mains	ROHDE & SCHWARZ	ESH2-Z5	100028	2005/11	1 year
7	Pulse Limiter	ROHDE & SCHWARZ	ESHSZ2	100044	2005/11	1 year
8	LISN	COM Power	LI-200	12212	2005/11	1 year
9	LISN	COM Power	LI-200	12019	2005/11	1 year
10	3m/5m Semi- Anechoic Chamber	ETS	N/A	N/A	2005/11	1 year
11	Ultra-Broadband Antenna	R/S	HL562	100015	2005/11	1 year
12	Horn Antenna	R/S	HF906	100039	2005/11	1 year
13	Horn Antenna	R/S	CH14-H052	1091698	2006/2	1 year
14	RF Test Panel	R/S	TS / RSP	335015/ 0017	N/A	N/A
15	Turntable	ETS	2088	2149	N/A	N/A
16	Antenna Mast	ETS	2075	2346	N/A	N/A

3. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
15.203/15.247(b)/(c)	Antenna Requirement	Pass
15.207	AC Power Line Conducted Emission	Pass
15.247(a)(1)	Hopping Channel Bandwidth	Pass
15.247(a)(1)	Hopping Channel Separation	Pass
15.247(a)(1)	Number of Hopping Frequency Used	Pass
15.247(a)(1)(iii)	Dwell Time of Each Frequency	Pass
15.247(b)(1)	Maximum Peak Output Power	Pass
15.247(d)	Band Edges Emission	Pass
15.247(d)	Spurious Radiated Emission	Pass

4. ANTENNA REQUIREMENT

4.1 Standard Applicable

Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Section 15.247(b)/(c):

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

If the intentional radiator is used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

4.2 Antenna Connected Construction

The antenna connector is designed with permanent attachment and no consideration of replacement.

5. TEST OF CONDUCTED EMISSION

5.1 Measurement Uncertainty


All test results complied with Section 15.207 requirements. Measurement Uncertainty is 2.4 dB.

5.2 Applicable Standard

Section 15.207: For a Low-power Radio-frequency Device is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency Range (MHz)	Limits (dBuV)	
	Quasi-Peak	Average
0.150 ~ 0.500	66 ~ 56	56 ~ 46
0.500 ~ 5.000	56	46
5.000 ~ 30.00	60	50

5.3 EUT Setup

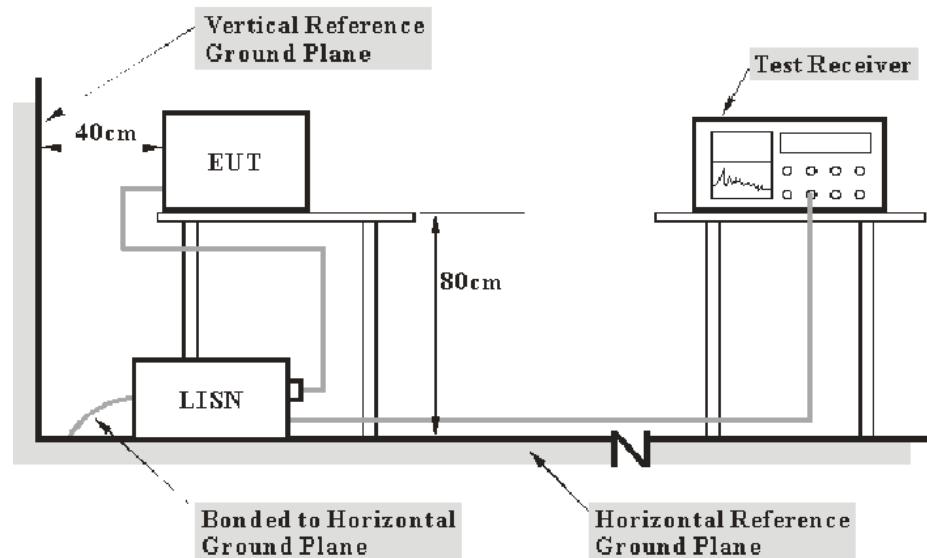

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMIN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC 15.207 limits.

The EUT was connected to a 120 VAC/ 60Hz power source

5.4 Instrument Setting

The test receiver was set with the following configurations:

Test Receiver Setting:

Frequency Range.....150 KHz to 30 MHz
Detector.....Peak & Quasi-Peak & Average
Sweep Speed.....Auto
IF Band Width.....9 KHz

5.5 Test Equipment List and Details

See section 2.6.

5.6 Test Procedure

1. Configure the EUT according to ANSI C63.4.
2. The EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN)
4. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
5. The frequency range from 150 KHz to 30 MHz was searched.
6. Use the Channel & Power Controlling software to make the EUT working on selected channel and expected output power, then use the "H" Patter Generator software to make the supporting equipments stay on working condition.
7. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
8. The measurement has to be done between each power line and ground at the power terminal for each RF channel. Only one RF channel has to be investigated since this test is independent with the RF channel selection.

5.7 Test Data


Temperature ()	22~23
Humidity (%RH)	50~54
Barometric Pressure (mbar)	950~1000
EUT	Sunglasses MP3 Player & Bluetooth
M/N	KSY-BM01
Operation Condition	GFSK(FHSS)
Testing Engineer	Jimmy Li

CONDUCTED EMISSION TEST DATA

EUT: Sunglasses MP3 Player & Bluetooth
 Operating Condition: Charging Mode
 Test Site: HTW 3# Shielded Room
 Operator: Andy
 Test Specification: DC 5V from adaptor (AC 120V/60Hz)
 Comment: Live Line
 Start of Test: 4/22/06 / 2:47:21PM

SCAN TABLE: "Voltage (150K-30M)QP"

Short Description:		150K-30M Voltage					
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	ESH2-Z5_1000280	
Average							

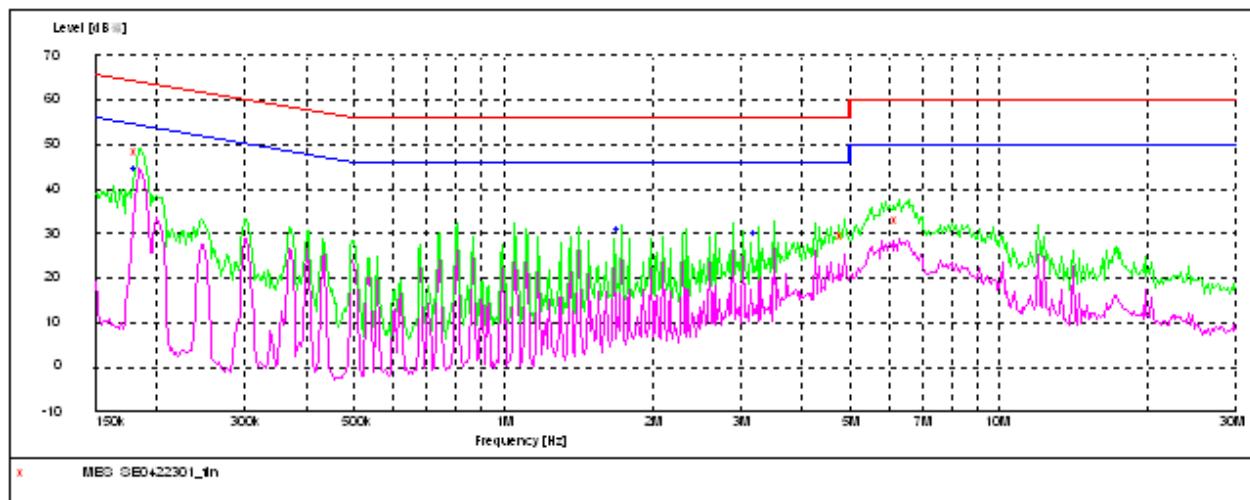

MEASUREMENT RESULT: "SE0422301_fin"

4/22/06 2:51PM								
Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	
MHz	dB μ V	dB	dB μ V	dB				
0.184524	48.20	11.1	64	16.1	QP	L1	GND	
4.879143	29.40	10.4	56	26.6	QP	L1	GND	
6.296230	32.90	10.6	60	27.1	QP	L1	GND	

MEASUREMENT RESULT: "SE0422301_fin2"


4/22/06 2:51PM								
Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	
MHz	dB μ V	dB	dB μ V	dB				
0.184524	44.40	11.1	54	9.9	AV	L1	GND	
1.731704	30.60	10.5	46	15.4	AV	L1	GND	
3.275798	29.70	10.5	46	16.3	AV	L1	GND	

CONDUCTED EMISSION TEST DATA

EUT: Sunglasses MP3 Player & Bluetooth
 Operating Condition: Charging Mode
 Test Site: HTW 3# Shielded Room
 Operator: Andy
 Test Specification: DC 5V from adaptor(AC 120V/60Hz)
 Comment: Neutral Line
 Start of Test: 4/22/06 / 2:53:37PM

SCAN TABLE: "Voltage (150K-30M)QP"

Short Description:		150K-30M Voltage					
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	ESH2-Z5_1000280	
Average							

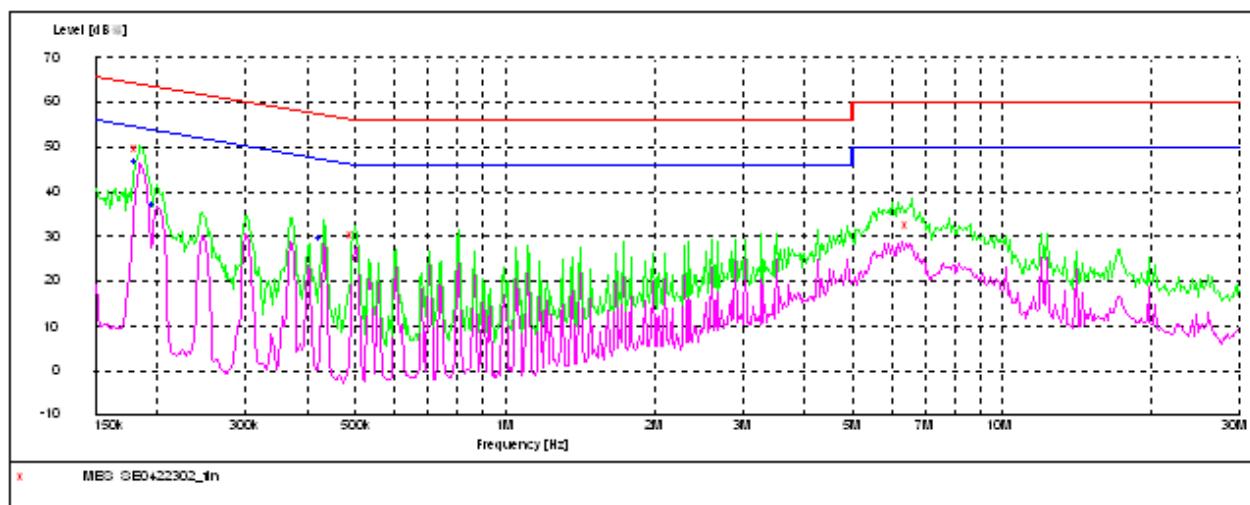

MEASUREMENT RESULT: "SE0422302_fin"

4/22/06 2:56PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.184524	49.50	11.1	64	14.8	QP	N	GND
0.499605	30.10	10.5	56	25.9	QP	N	GND
6.552140	32.60	10.6	60	27.4	QP	N	GND

MEASUREMENT RESULT: "SE0422302_fin2"

4/22/06 2:56PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.184524	46.40	11.1	54	7.9	AV	N	GND
0.199826	36.60	10.9	54	17.0	AV	N	GND
0.432845	29.30	10.5	47	17.9	AV	N	GND

6. Test of Hopping Channel Bandwidth

6.1 Measurement Uncertainty


All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer and cable loss.

All test results complied with Section 15.247(a)(1) requirements. Measurement Uncertainty is 1×10^{-5} dB.

6.2 Applicable Standard

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

6.3 EUT Setup

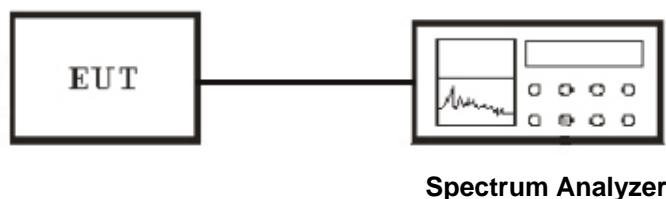

6.4 Instrument Setting

Refer to section 6.6 Test Procedure.

6.5 Test Equipment List and Details

See section 2.6.

6.6 Test Procedure


1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 30KHz and VBW to 100KHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is Auto.
4. The spectrum width with level higher than 20dB below the peak level.
5. Repeat above 1~3 points for the middle and highest channel of the EUT.

6.7 Test Data

Temperature ()	22~23
Humidity (%RH)	50~54
Barometric Pressure (mbar)	950~1000
EUT	Sunglasses MP3 Player & Bluetooth
M/N	KSY-BM01
Operation Condition	GFSK(FHSS)
Testing Engineer	Jimmy Li


Modulation Type	Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)	Min. Limit (kHz)
GFSK(FHSS)	Low	2401.54	1108	>25
GFSK(FHSS)	MID	2440.65	1078	>25
GFSK(FHSS)	HIG	2478.56	1079	>25

Channel Low :

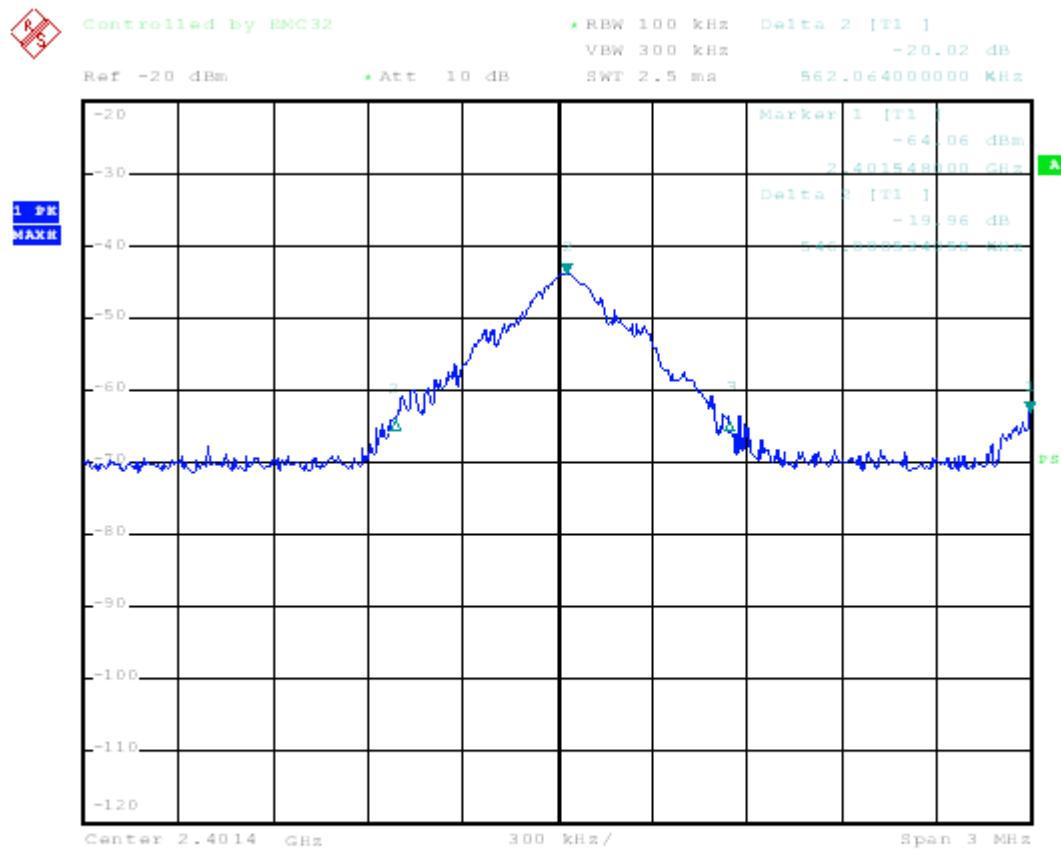


Date: 21.APR.2006 14:33:15

Channel MID :

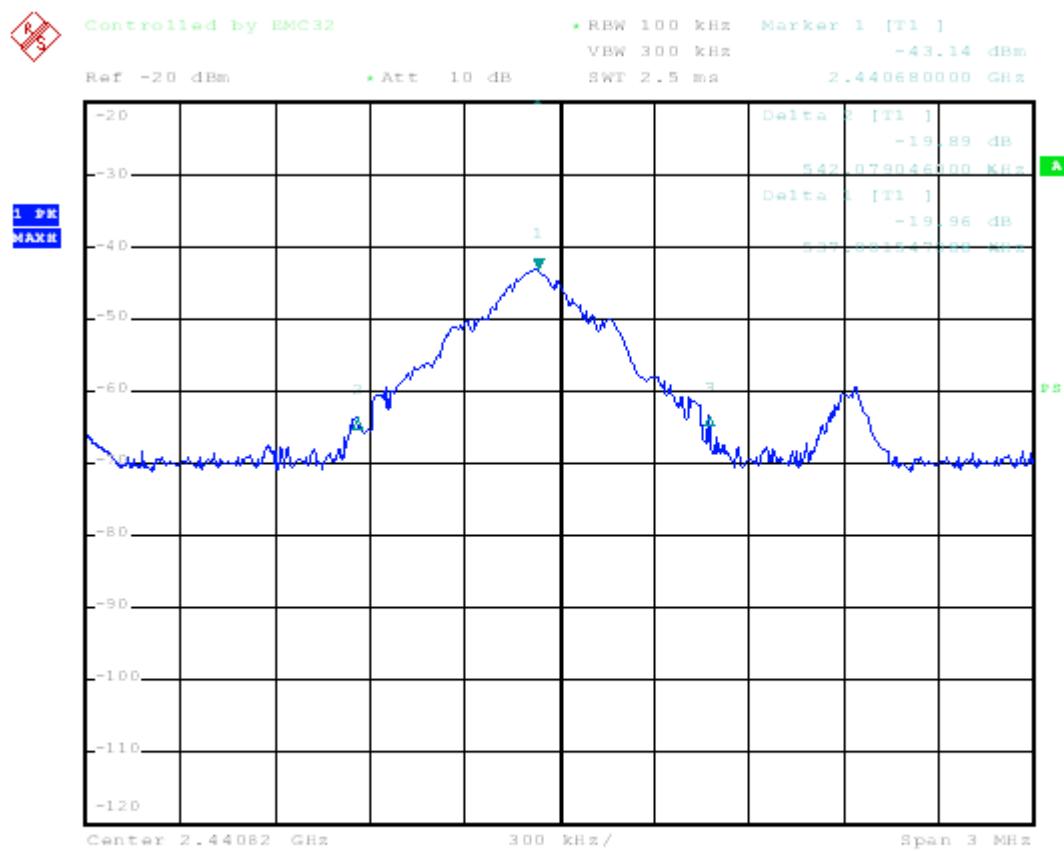

Date: 21.APR.2006 14:30:07

Channel HIG :

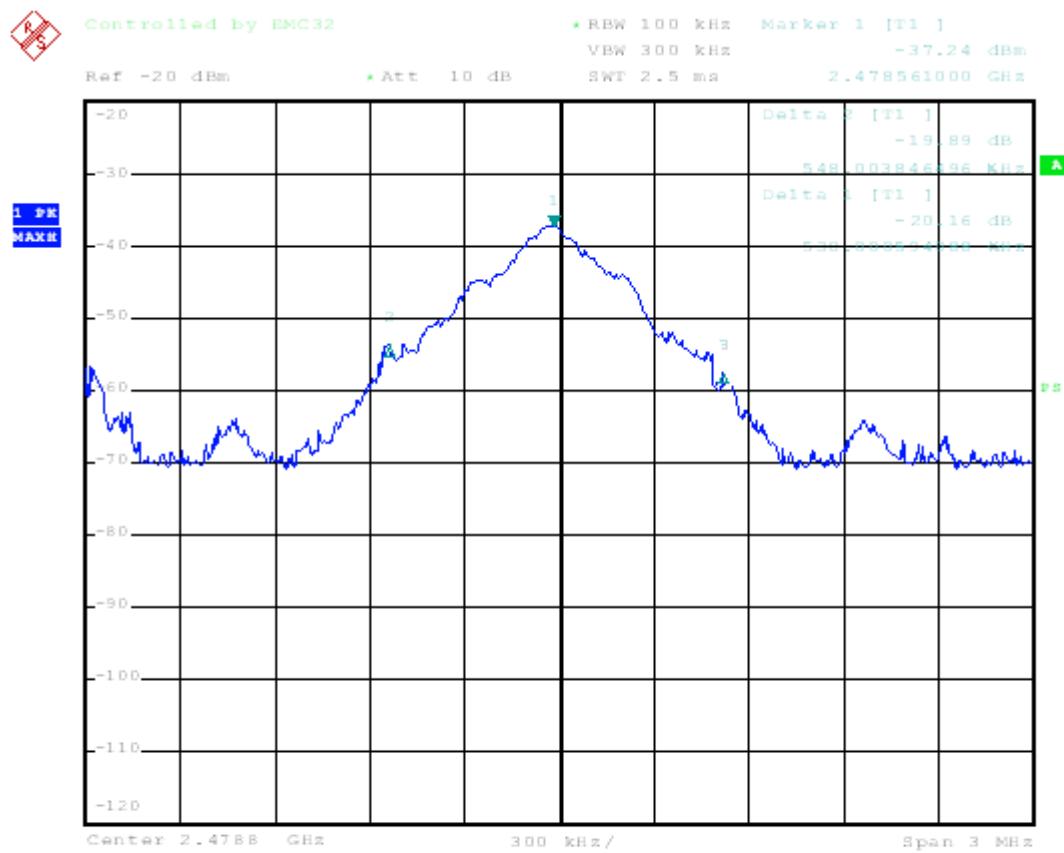

Date: 21.APR.2006 14:27:26

7. Test of Hopping Channel Separation

7.1 Measurement Uncertainty


All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer and cable loss.

All test results complied with Section 15.247(a)(1) requirements. Measurement Uncertainty is 1×10^{-5} dB.

7.2 Applicable Standard

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

7.3 EUT Setup

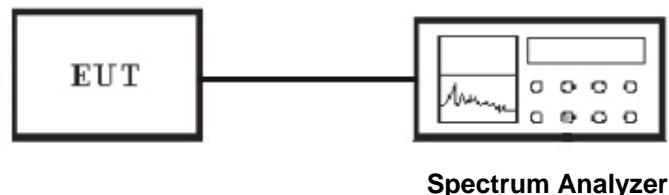

7.4 Instrument Setting

Refer to section 7.6 Test Procedure.

7.5 Test Equipment List and Details

See section 2.6.


7.6 Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is Auto.
4. The Hopping Channel Separation is defined as the separation between 2 neighboring hopping frequencies.
5. Repeat above 1~3 points for the middle and highest channel of the EUT.

7.7 Test Data


Temperature ()	22~23
Humidity (%RH)	50~54
Barometric Pressure (mbar)	950~1000
EUT	Sunglasses MP3 Player & Bluetooth
M/N	KSY-BM01
Operation Condition	GFSK(FHSS)
Testing Engineer	Jimmy Li

Channel Low :

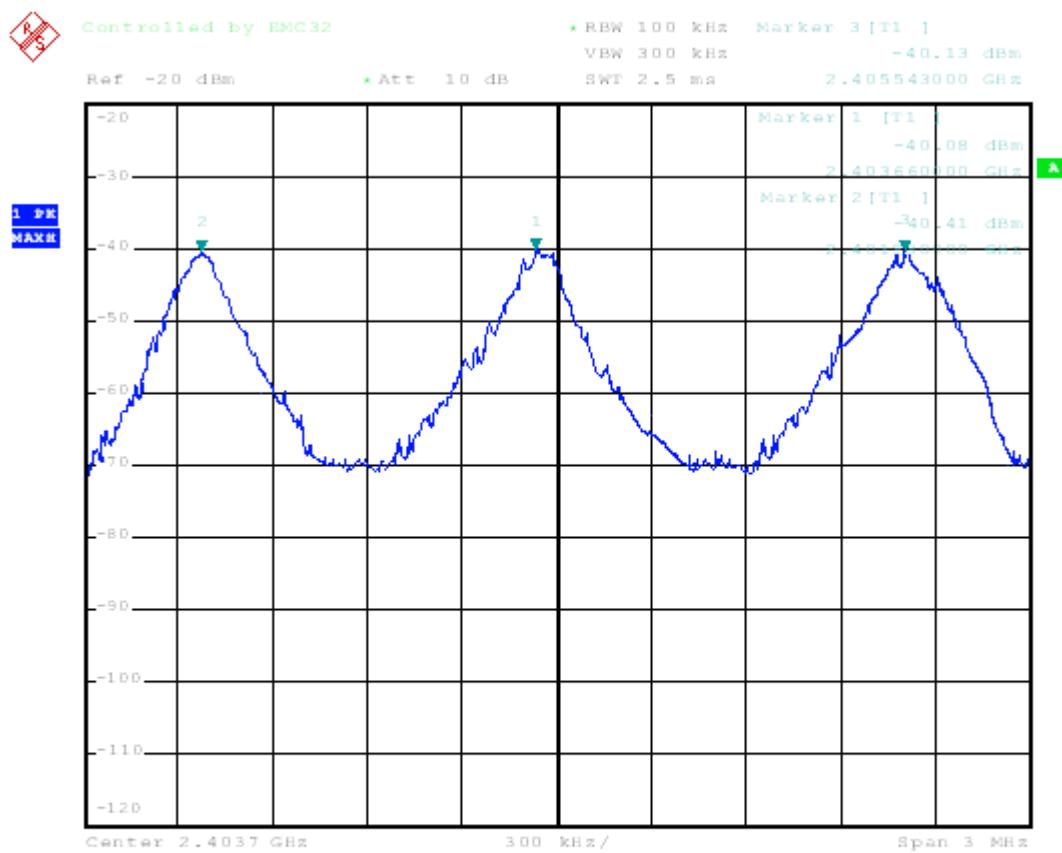

Date: 21.APR.2006 17:35:12

Channel MID :

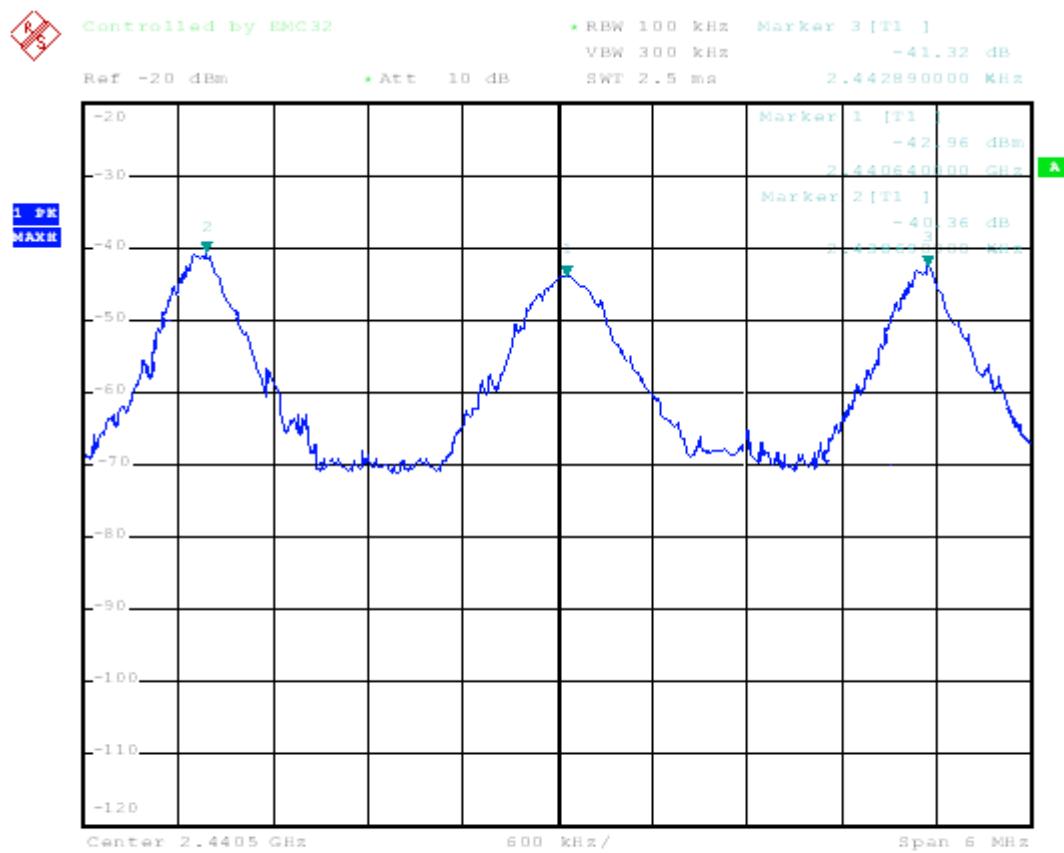


Date: 21.APR.2006 17:22:25

8. Test of Number of Hopping Frequency

8.1 Applicable Standard

Section 15.247(a)(1)(iii): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 15 non-overlapping hopping channels. Frequency hopping system which use fewer than 75 hopping frequencies may employ intelligent hopping techniques to avoid interference to other transmissions. Frequency hopping system may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels are used.

8.2 EUT Setup

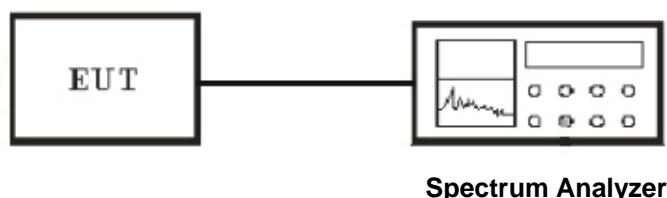

8.3 Instrument Setting

Refer to section 8.6 Test Procedure.

8.4 Test Equipment List and Details

See section 2.6.


8.5 Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is Auto.
4. Observe frequency hopping in 2400MHz~2483.5MHz, there are at least 32 non-overlapping channels.
5. Repeat above 1~3 points for the middle and highest channel of the EUT.

8.6 Test Data

Temperature ()	22~23
Humidity (%RH)	50~54
Barometric Pressure (mbar)	950~1000
EUT	Sunglasses MP3 Player & Bluetooth
M/N	KSY-BM01
Operation Condition	GFSK(FHSS)
Testing Engineer	Jimmy Li

Modulation Type	Frequency (MHz)	Number of Hopping Channel (Channels)	Min. Limit (kHz)
GFSK(FHSS)	2401.5~2478.6	33	>15

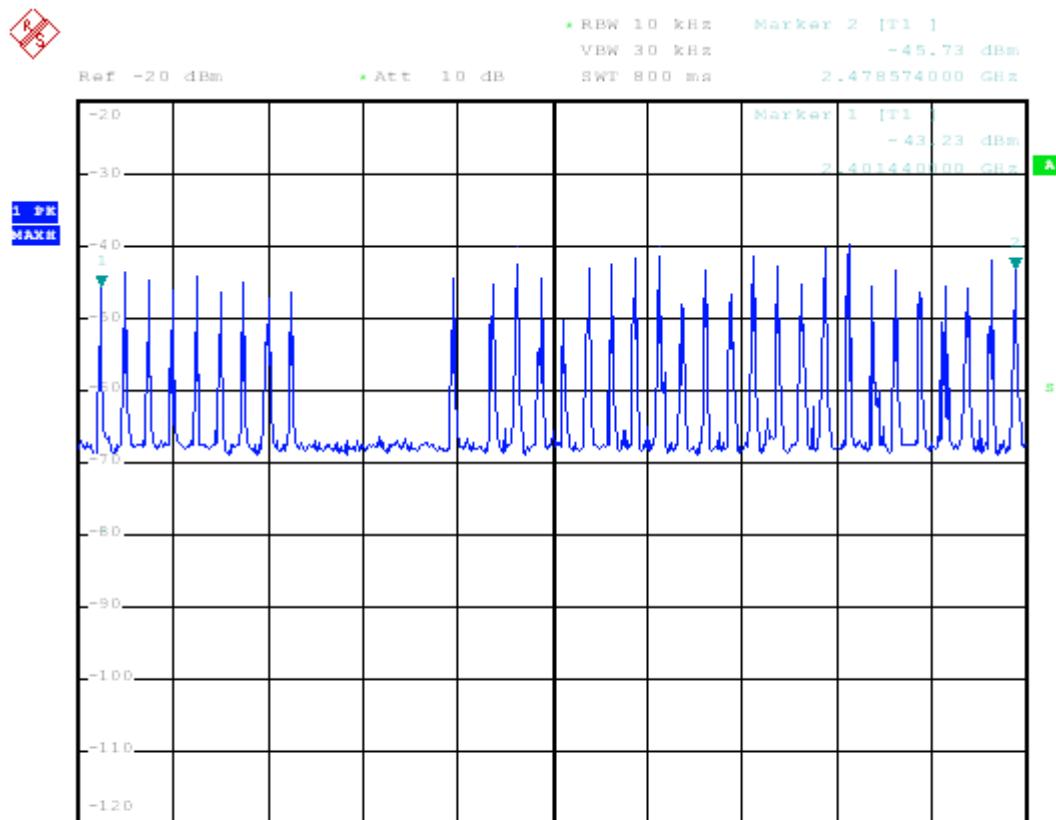

Date: 20.APR.2006 19:47:11

9. Test of Dwell Time of Each Frequency

9.1 Measurement Uncertainty


All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer and cable loss.

All test results complied with Section 15.247(a)(1)(iii) requirements. Measurement Uncertainty is 1×10^{-5} .

9.2 Applicable Standard

Section 15.247(a)(1)(iii): For frequency hopping systems operating in the 2400-2483.5 MHz band The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4seconds multiplied by the number of hopping channels employed.

9.3 EUT Setup

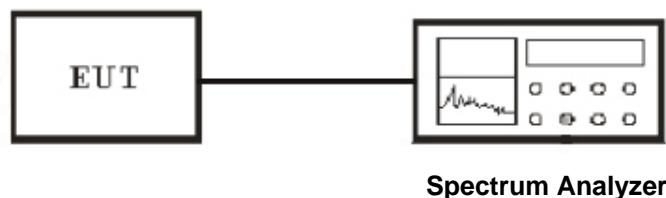

9.4 Instrument Setting

Refer to section 9.6 Test Procedure.

9.5 Test Equipment List and Details

See section 2.6.

9.6 Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 1000kHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is more than once pulse time.
4. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
5. Measure the maximum time duration of one single pulse.

9.7 Test Data

Temperature ()	22~23
Humidity (%RH)	50~54
Barometric Pressure (mbar)	950~1000
EUT	Sunglasses MP3 Player & Bluetooth
M/N	KSY-BM01
Operation Condition	GFSK(FHSS)
Testing Engineer	Jimmy Li

Modulation Type	Channel No.	Frequency (MHz)	Dwell Time (ms)	Min. Limit (ms)
GFSK(FHSS)	Low	2401.54	152	400
GFSK(FHSS)	MID	2440.65	149	400
GFSK(FHSS)	HIG	2478.56	145	400

The period is $0.4(\text{Sec}) * 33(\text{Channels}) = 13.2\text{sec}$

$13.2(\text{Sec}) * 10(\text{hoping/sec}) = 132(\text{hops})$

Per one period of On time is: 1.15ms(Channel Low), 1.13ms (Channel MID),
1.10ms(Channel HIG)


The Result is:

Channel Low the dwell time is $1.15 * 132 = 152\text{ms}$

Channel MID the dwell time is $1.13 * 132 = 149\text{ms}$


Channel HIG the dwell time is $1.10 * 132 = 145\text{ms}$

Channel Low :

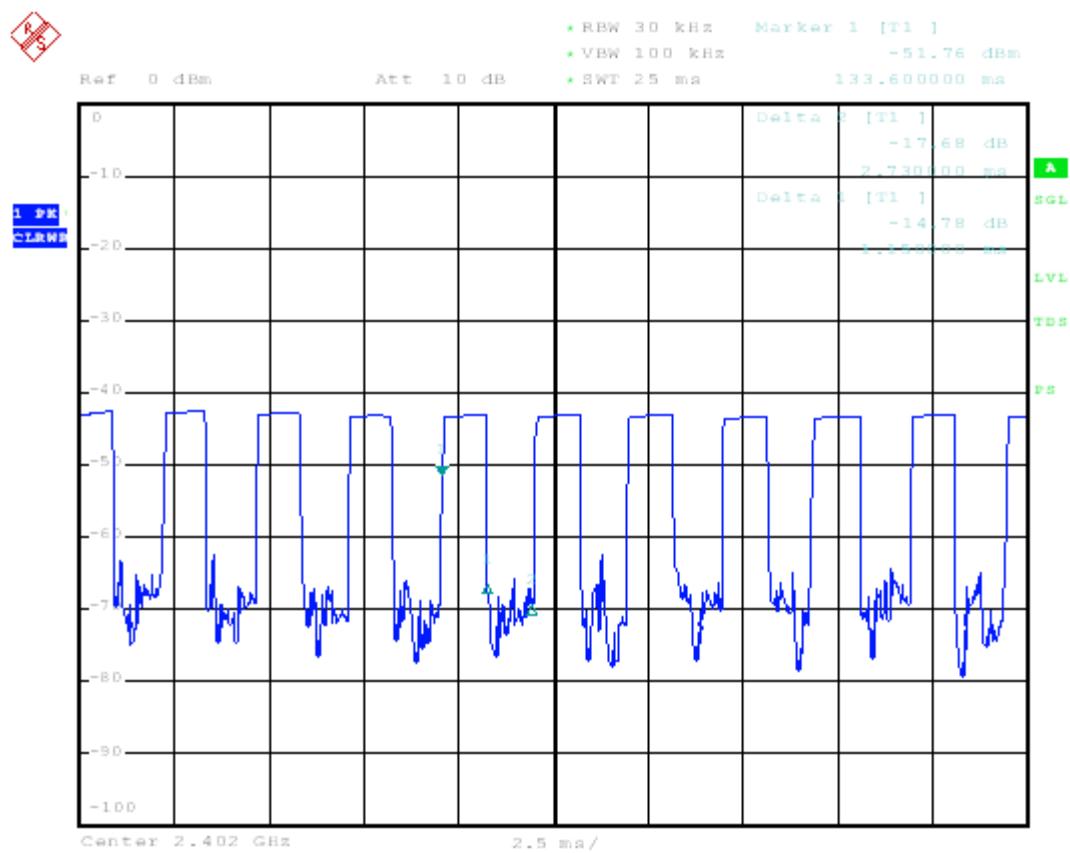


Date: 21.APR.2006 09:33:53

Channel MID :

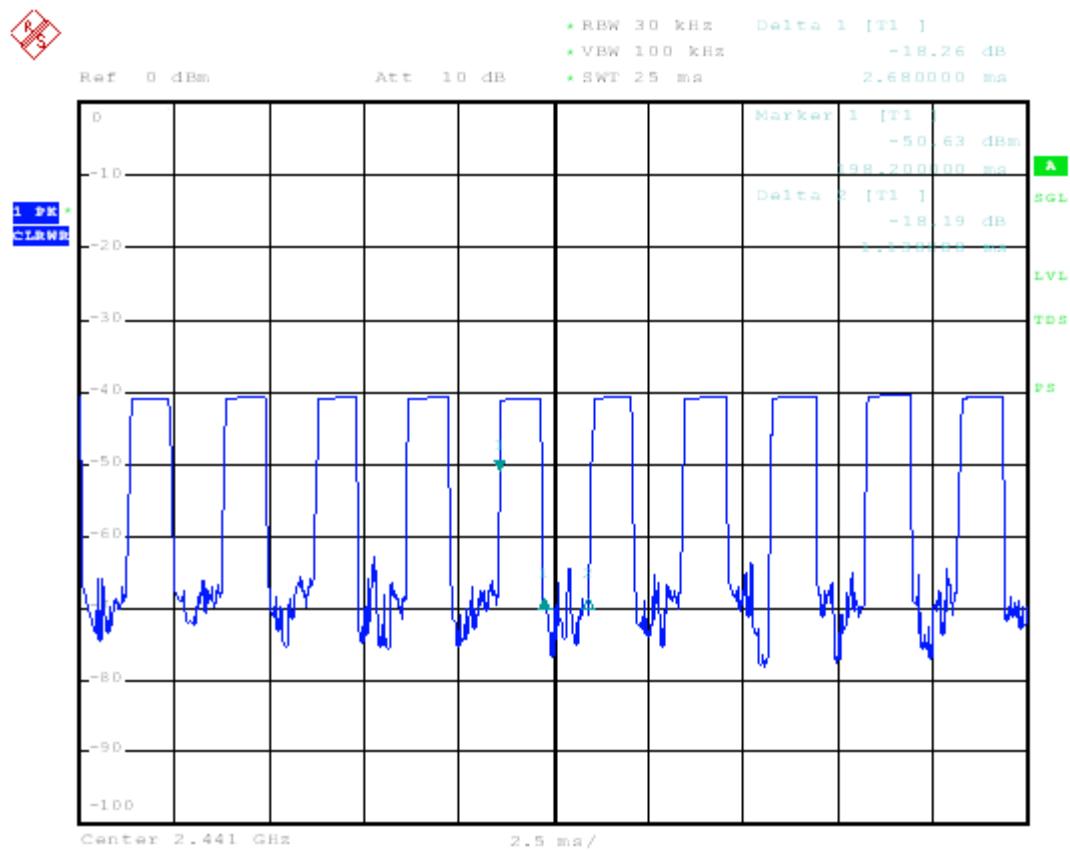

Date: 21.APR.2006 09:36:38

Channel HIG :

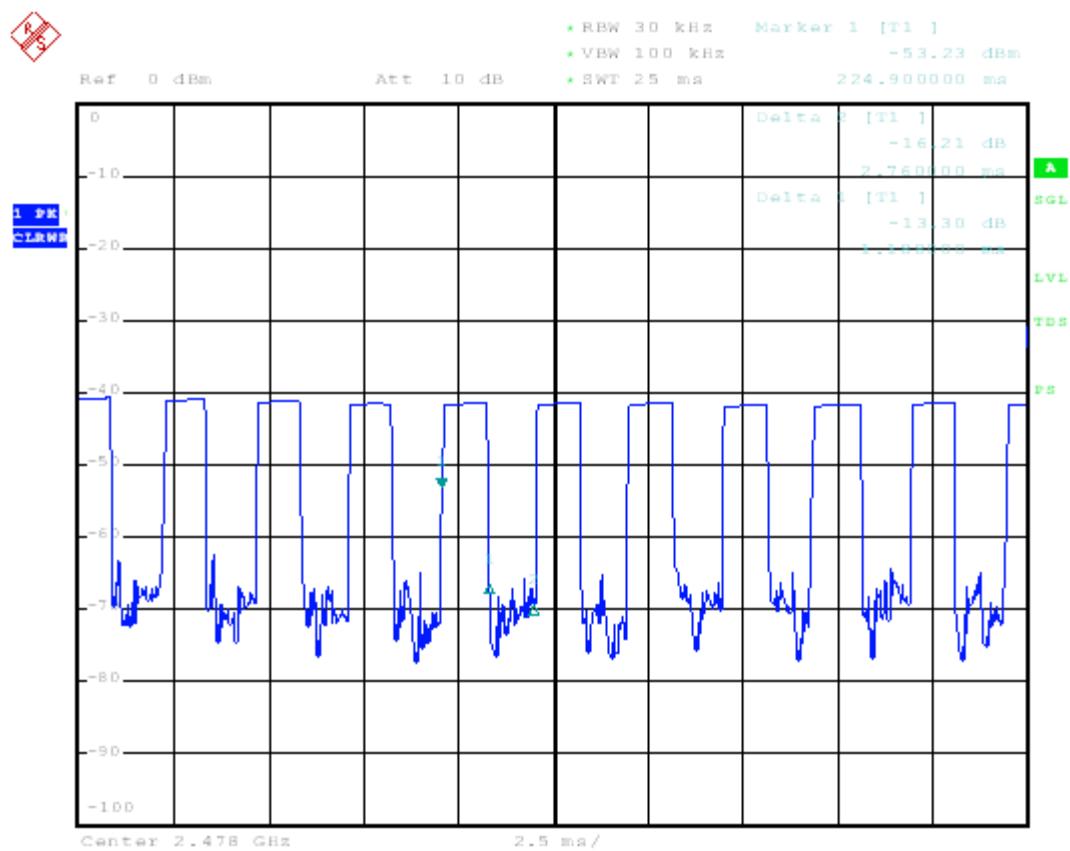

Date: 21.APR.2006 09:40:29

10. Test of Maximum Peak Output Power

10.1 Measurement Uncertainty


All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer and cable loss.

All test results complied with Section 15.247(b)(1) requirements. Measurement Uncertainty is 1.5dB.

10.2 Applicable Standard

Section 15.247(b)(1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels and The maximum peak output power shall not exceed 1 watt. For all other frequency hopping systems in this frequency band, The maximum peak output power shall not exceed 0.125 watt.

10.3 EUT Setup

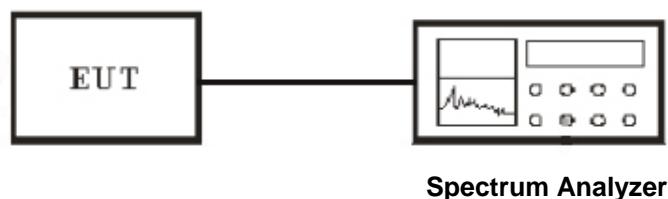

10.4 Instrument Setting

Refer to section 10.6 Test Procedure.

10.5 Test Equipment List and Details

See section 2.6.

10.6 Test Procedure


1. The transmitter output was connected to the peak power meter and recorded the peak value.
2. Peak power meter parameter set to auto attenuator and filter is the same as.
3. Repeated the 1 for the middle and highest channel of the EUT.

10.7 Test Data

Temperature ()	22~23
Humidity (%RH)	50~54
Barometric Pressure (mbar)	950~1000
EUT	Sunglasses MP3 Player & Bluetooth
M/N	KSY-BM01
Operation Condition	GFSK(FHSS)
Testing Engineer	Jimmy Li


Modulation Type	Channel No.	Frequency (MHz)	Output Power (dBm)	Limits (dBm)	Margin (dBm)
GFSK(FHSS)	Low	2401.54	-39.98	20.9	60.9
GFSK(FHSS)	MID	2440.68	-37.47	20.9	58.4
GFSK(FHSS)	HIG	2478.54	-38.83	20.9	59.7

Channel Low :

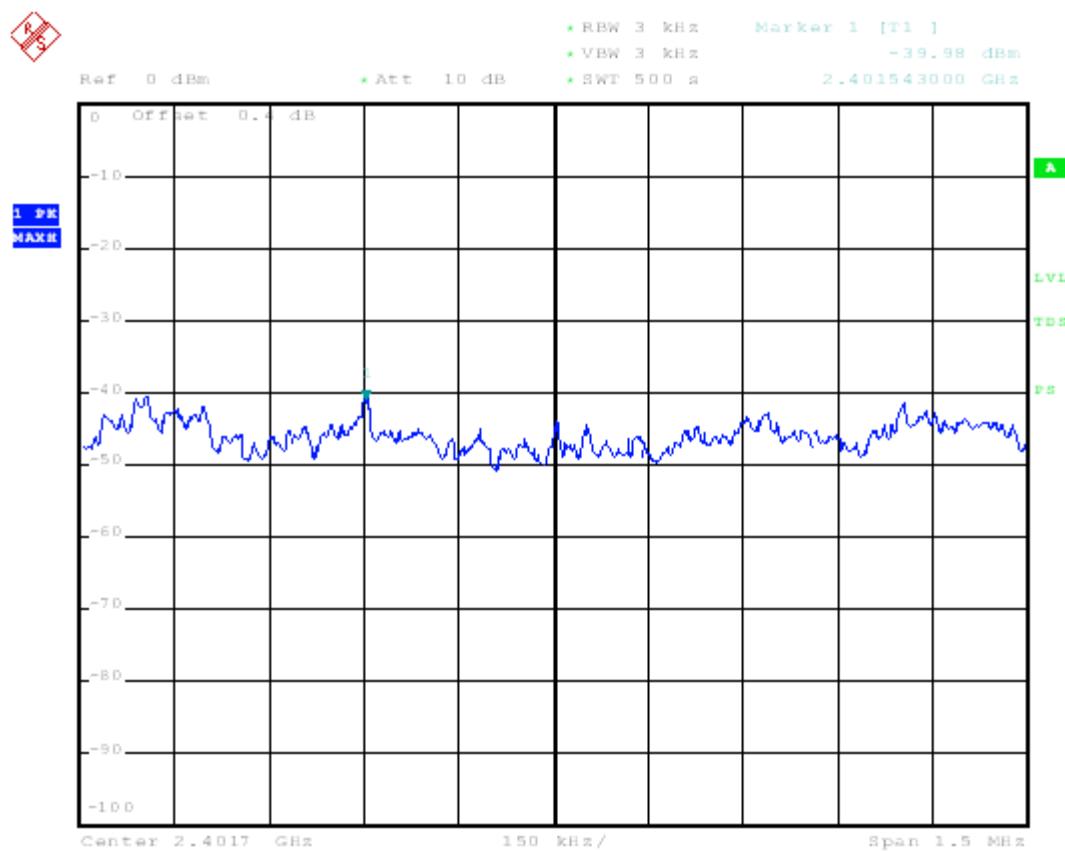


Date: 22.APR.2006 14:40:23

Channel MID :

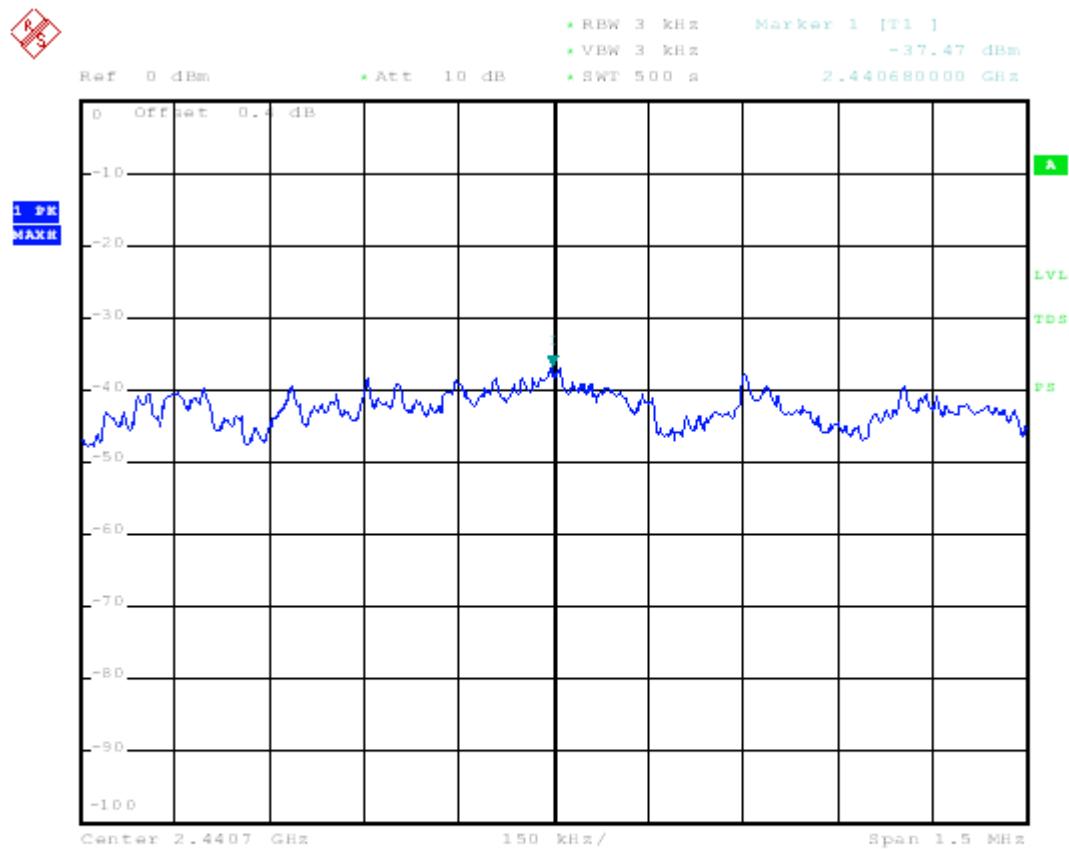

Date: 22.APR.2006 14:45:52

Channel HIG :

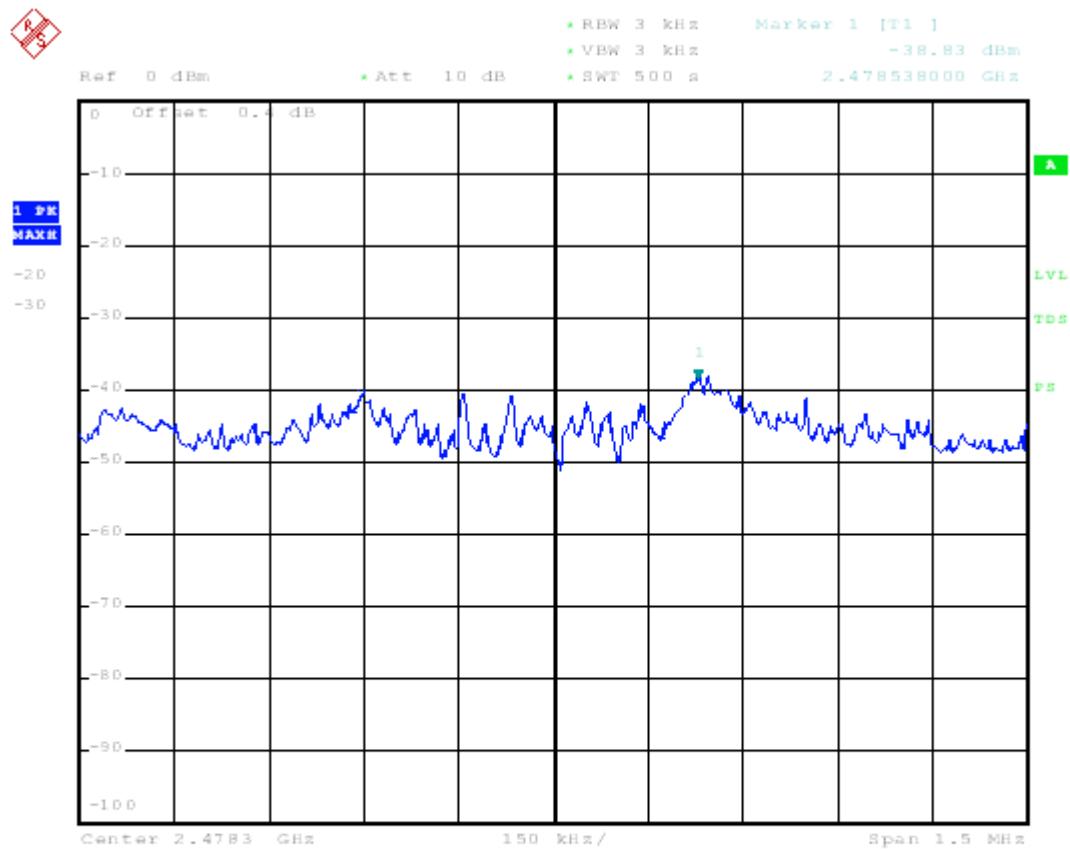

Date: 22.APR.2006 14:39:46

11. Test of Band Edges Emission

11.1 Measurement Uncertainty


All test results complied with Section 15.247(d) requirements. Measurement Uncertainty is 2.6 dB.

11.2 Applicable Standard


Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

11.3 EUT Setup

Radiated Measurement Setup

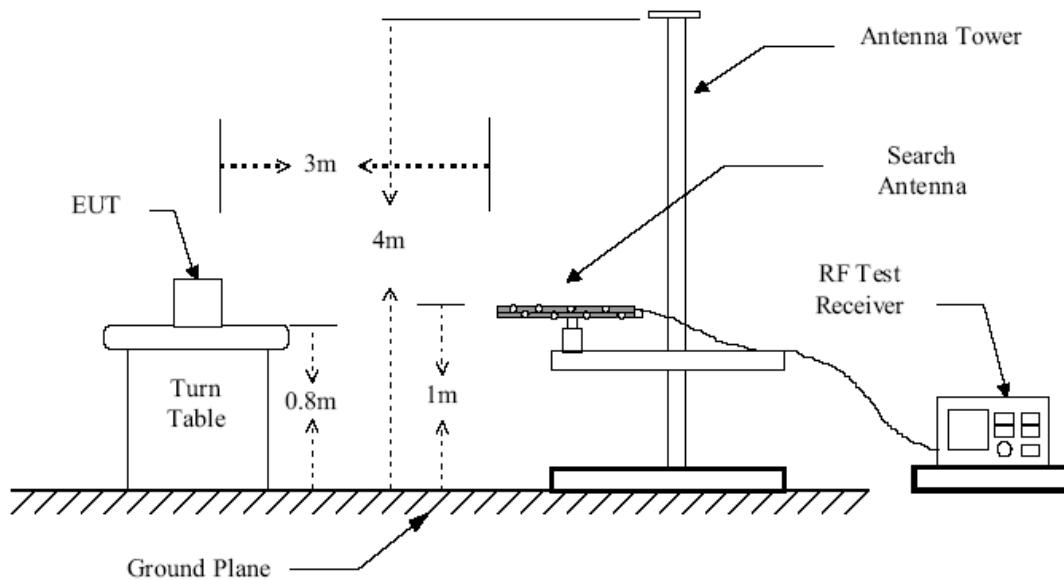

Conducted Measurement Setup

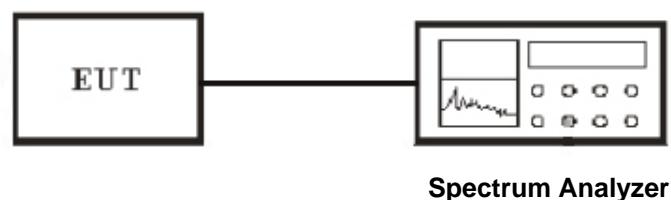

11.4 Instrument Setting

Refer to section 11.6 Test Procedure.

11.5 Test Equipment List and Details

See section 2.6.

11.6 Test Procedure

Conducted Measurement

1. The transmitter is set to the lowest channel.
2. The transmitter output was connected to the spectrum analyzer via a cable and cable loss is used as the offset of the spectrum analyzer.
3. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span including 100MHz bandwidth from lower band edge. Then detector set to peak and max hold this trace.
4. The lowest band edges emission was measured and recorded.
5. The transmitter set to the highest channel and repeated 2~4.

Radiated Measurement

1. Configure the EUT according to ANSI C63.4.
2. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
4. For band edge emission, the antenna tower was scan (from 1 M to 4 M) and then the turn table was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. For band edge emission, use 10Hz VBW and 1MHz RBW for reading under AV and use 1MHz VBW and 1MHz RBW for reading under PK.


11.7 Test Data

Temperature ()	22~23
Humidity (%RH)	50~54
Barometric Pressure (mbar)	950~1000
EUT	Sunglasses MP3 Player & Bluetooth
M/N	KSY-BM01
Operation Condition	GFSK(FHSS)
Testing Engineer	Jimmy Li


Radiated Test Result

Frequency (MHz)	Antenna Polarization	Emission Read Value (dB μ V/m)	Limits (dB μ V/m)
<2400	H	35.78	54
>2483.5	H	38.42	54

Conducted Test Result

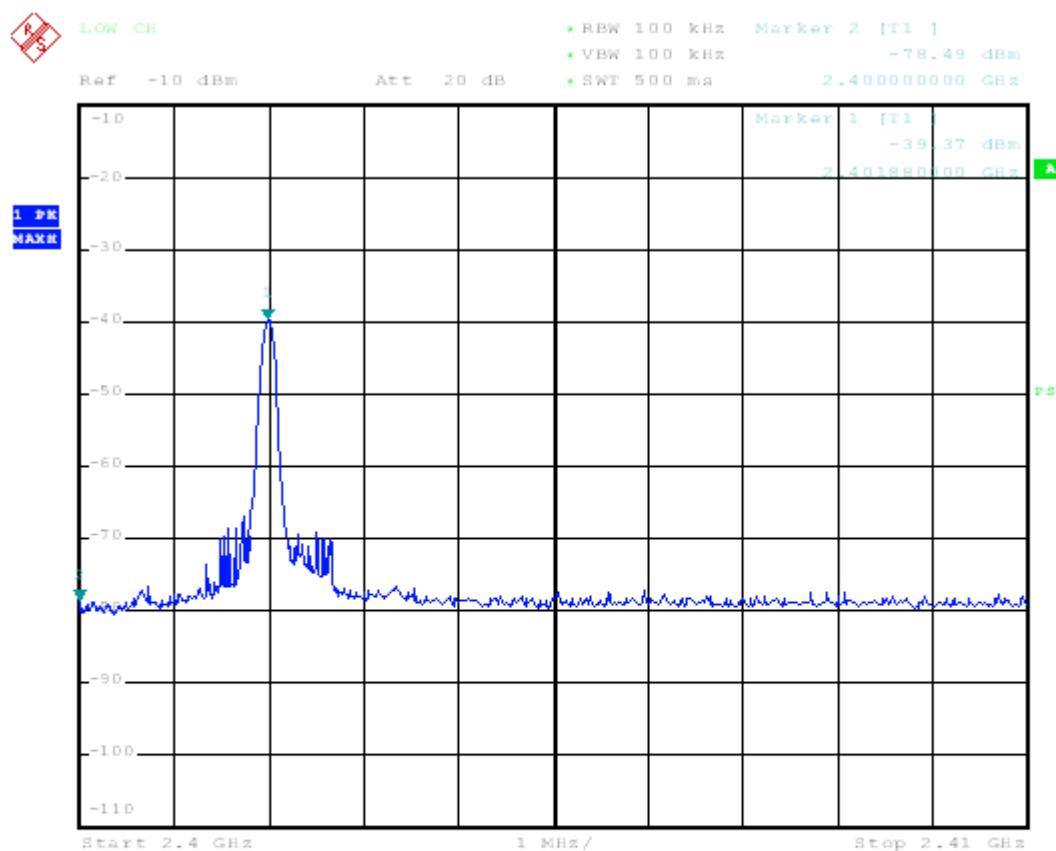

Date: 24.APR.2006 15:51:34

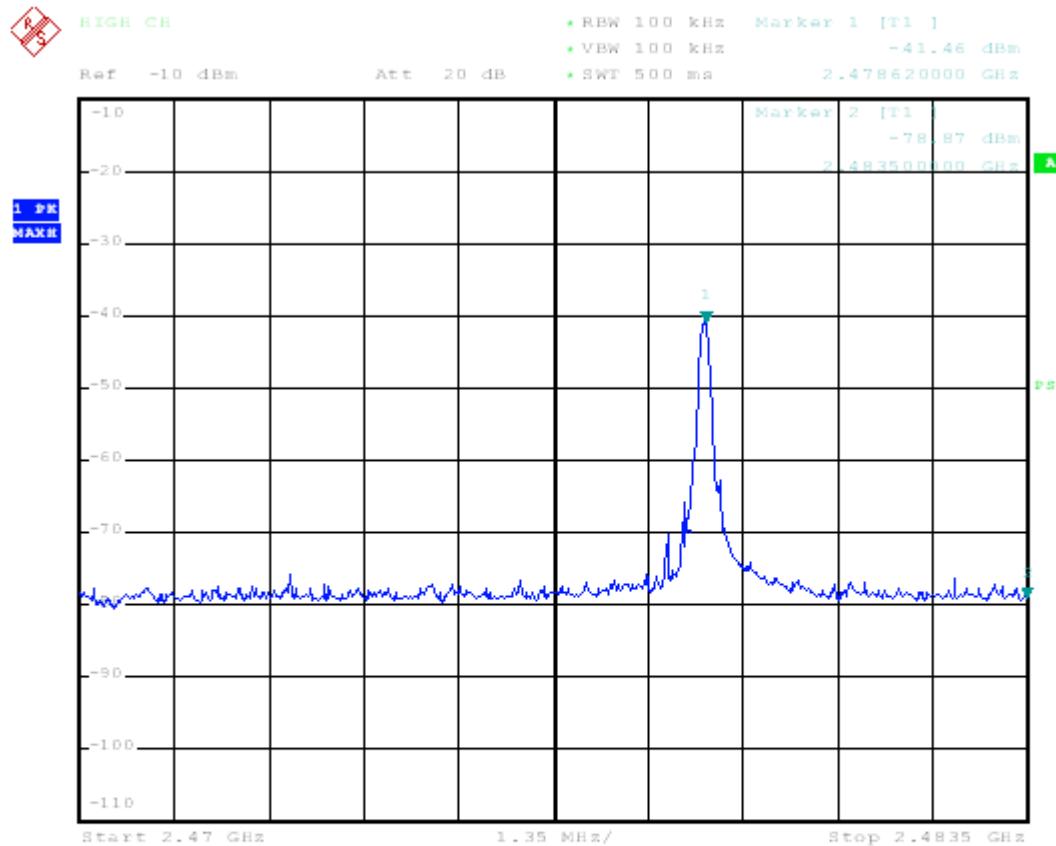

Date: 24.APR.2006 17:22:01

12. Test of Spurious Radiated Emission

12.1 Measurement Uncertainty

All test results complied with Section 15.247(d) requirements. Measurement Uncertainty is 2.6 dB.

12.2 Applicable Standard

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

12.3 EUT Setup

Radiated Measurement Setup

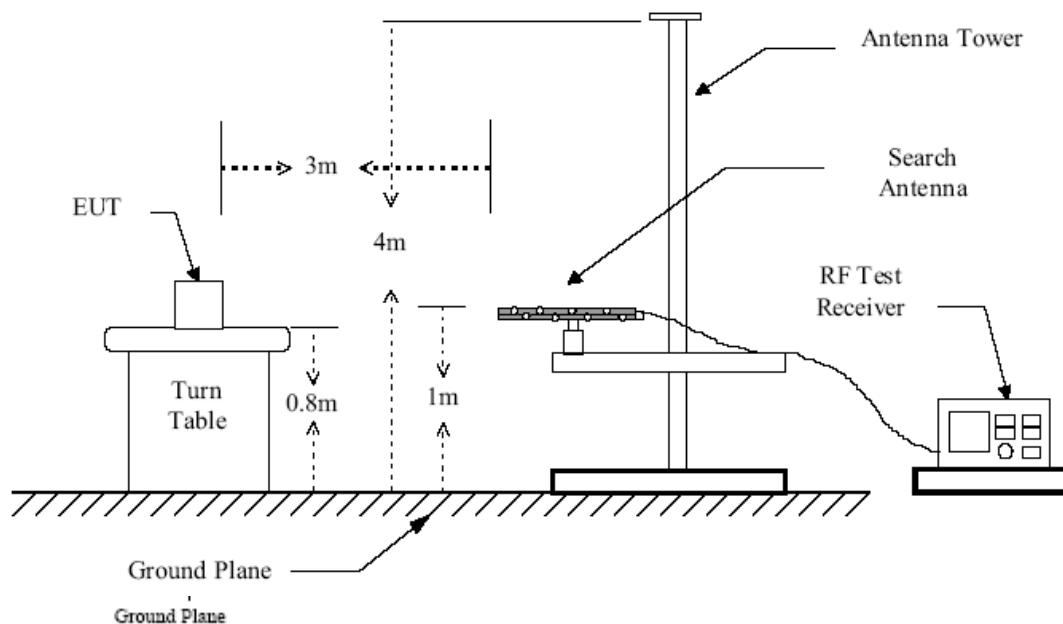


Figure 1 : Frequencies measured below 1 GHz configuration


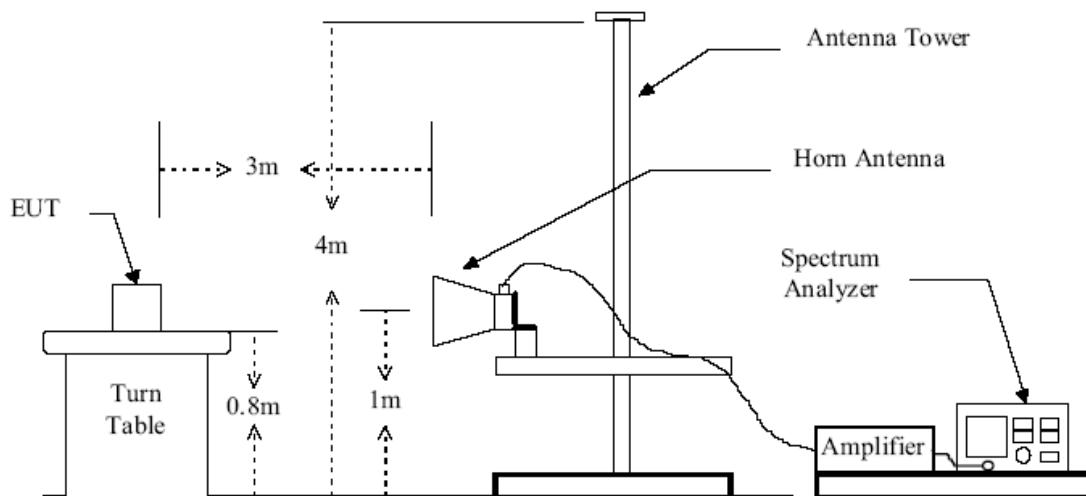


Figure 2 : Frequencies measured above 1 GHz configuration

Conducted Measurement Setup

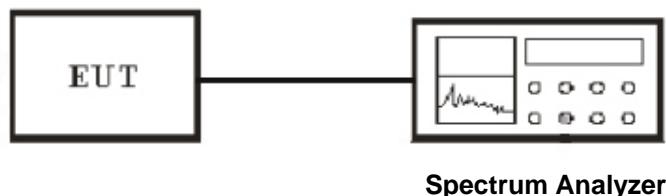

12.4 Instrument Setting

Refer to section 12.6 Test Procedure.

12.5 Test Equipment List and Details

See section 2.6.

12.6 Test Procedure

Radiated Measurement

1. Configure the EUT according to ANSI C63.4.
2. The EUT was placed on the top of the turntable 0.8 meter above ground.
3. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
4. Power on the EUT and all the supporting units.

5. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
6. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
7. For each suspected emission, the antenna tower was scanned (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
8. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.

Conducted Measurement

1. For emission above 1GHz, conducted measurement method is used.
2. The transmitter is set to the lowest channel.
3. The transmitter output was connected to the spectrum analyzer via a cable and cable loss is used as the offset of the spectrum analyzer.
4. Set RBW to 1 MHz and VBW to 3 MHz, Then detector set to peak and max hold this trace.
5. The lowest band edges emission was measured and recorded.
6. The transmitter set to the highest channel and repeated 2~4.

12.7 Test Data

Temperature ()	22~23
Humidity (%RH)	50~54
Barometric Pressure (mbar)	950~1000
EUT	Sunglasses MP3 Player & Bluetooth
M/N	KSY-BM01
Operation Condition	GFSK(FHSS)
Testing Engineer	East Wang

Remark: (1) During the test, the EUT was respectively set to transmitting mode, MP3 playing mode, communicating with PC and charging mode, and only the worst test result was recorded and then presented.

(2) When PK reading is less than relevant limit 30dB, the QP reading and AV reading will not be recorded.


(3) Where QP reading is less than relevant AV limit, the AV reading will not be measured.

Radiated Emission Test Data (30~1000MHz)

EUT: Sunglasses MP3 Player & Bluetooth
 Operating Condition: MP3 Playing
 Test Site: 3m CHAMBER
 Operator: Jacky
 Test Specification: DC 3.7V from build-in battery
 Comment: Polarisation: Horizontal
 Start of Test: 4/24/06 / 7:08:40PM

SCAN TABLE: "test (30M-1G)"

Short Description:		Field Strength				
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer	
30.0 MHz	1.0 GHz	Quasi-Peak	1s	120 kHz	HL562new	

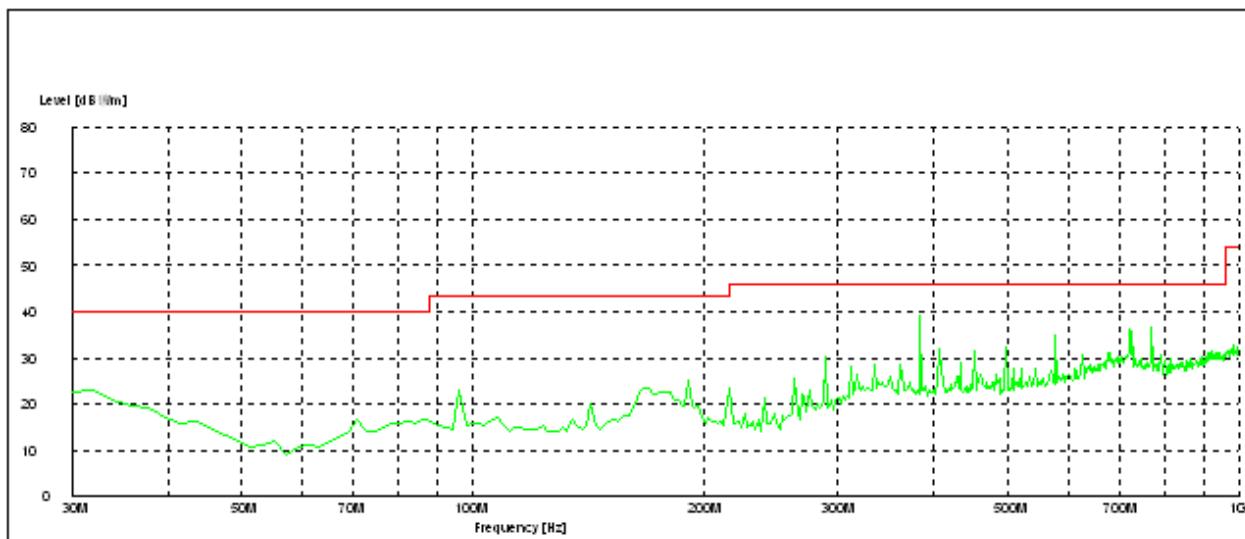**MEASUREMENT RESULT: "SE0424413_fin QP"**

4/24/06 7:12PM


Frequency MHz	Level dB μ V/m	Azimuth deg	Height cm	Polarisation	Transd dB	Limit dB μ V/m	Margin dB
383.787575	38.96	110.00	198.0	HOR	19.2	46.0	7.0
496.533066	32.36	242.00	323.0	HOR	20.1	46.0	13.6
576.232465	35.00	0.00	285.0	HOR	22.3	46.0	11.0
768.677355	37.62	87.00	342.0	HOR	24.5	46.0	8.4

Radiated Emission Test Data (30~1000MHz)

EUT: Sunglasses MP3 Player & Bluetooth
Operating Condition: MP3 Playing
Test Site: 3m CHAMBER
Operator: Jacky
Test Specification: DC 3.7V from build-in battery
Comment: Polarisation: Vertical
Start of Test: 4/24/06 / 7:13:34PM

SCAN TABLE: "test (30M-1G)"

Short Description:	Field Strength				
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
30.0 MHz	1.0 GHz	Quasi-Peak	1s	120 kHz	HL562new

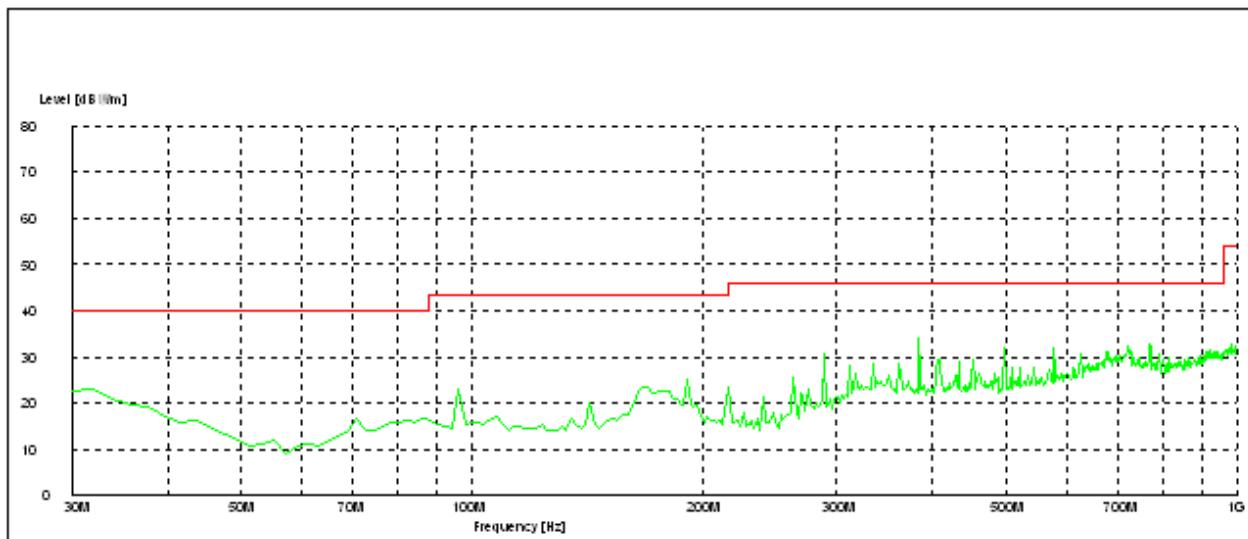**MEASUREMENT RESULT: "SE0424414_fin QP"**

4/24/06 7:17PM


Frequency MHz	Level dB μ V/m	Azimuth deg	Height cm	Polarisation	Transd dB	Limit dB μ V/m	Margin dB
383.787575	34.53	183.00	108.0	VER	19.2	46.0	11.5
496.533066	31.85	342.00	100.0	VER	20.1	46.0	14.1
576.232465	31.05	31.00	111.0	VER	22.3	46.0	14.9

Radiated Emission Test Data (30~1000MHz)

EUT: Sunglasses MP3 Player & Bluetooth
 Operating Condition: Communicating with PC
 Test Site: 3m CHAMBER
 Operator: Jacky
 Test Specification: DC 5V from PC System (AC 120V/60Hz)
 Comment: Polarisation: Horizontal
 Start of Test: 4/24/06 / 7:20:52PM

SCAN TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
30.0 MHz	1.0 GHz	Quasi-Peak	1s	120 kHz	HL562new

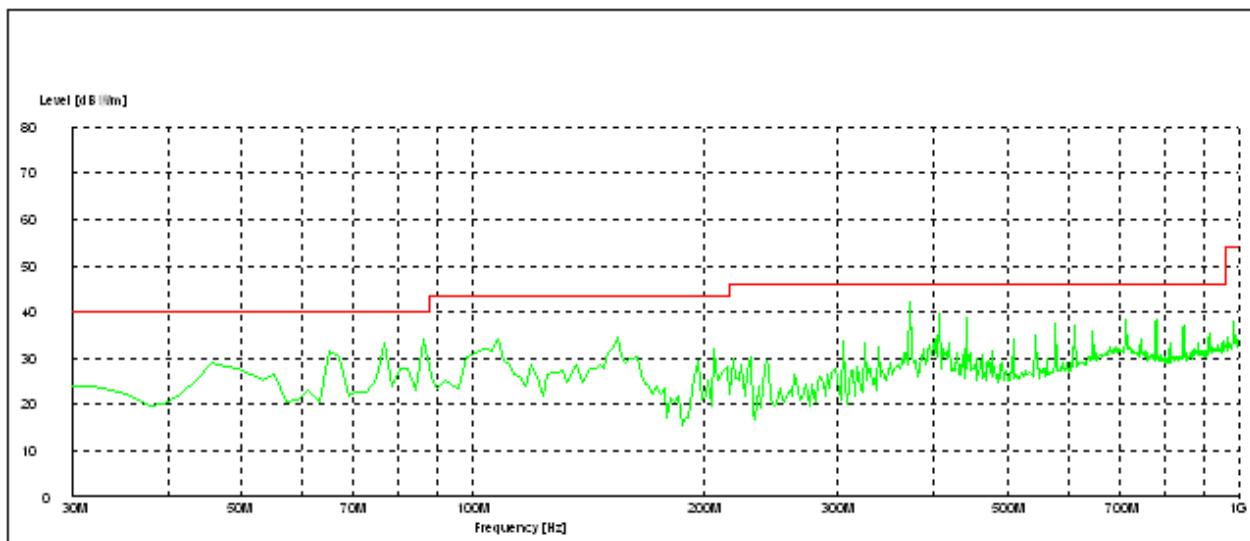**MEASUREMENT RESULT: "SE0424415_fin QP"**

4/24/06 7:25PM


Frequency MHz	Level dB μ V/m	Azimuth deg	Height cm	Polarisation	Transd dB	Limit dB μ V/m	Margin dB
76.653307	33.11	314.00	323.0	HOR	11.5	40.0	6.9
86.372745	34.05	137.00	265.0	HOR	11.8	40.0	5.9
107.755511	34.18	137.00	339.0	HOR	11.7	43.5	9.3
154.408818	34.46	97.00	313.0	HOR	11.0	43.5	9.0
372.124248	42.80	309.00	187.0	HOR	18.5	46.0	3.2
407.114228	39.53	331.00	120.0	HOR	20.2	46.0	6.5

Radiated Emission Test Data (30~1000MHz)

EUT: Sunglasses MP3 Player & Bluetooth
 Operating Condition: Communicating with PC
 Test Site: 3m CHAMBER
 Operator: Jacky
 Test Specification: DC 5V from PC System (AC 120V/60Hz)
 Comment: Polarisation:Vertical
 Start of Test: 4/24/06 / 7:26:18PM

SCAN TABLE: "test Field(30M-1G)"

Short Description:		Field Strength(30M-1G)		Detector	Meas. Time	IF Bandw.	Transducer
Start Frequency	Stop Frequency	Step Width	QuasiPeak				
30.0 MHz	1.0 GHz	60.0 kHz	QuasiPeak	1.0 s	120 kHz	HL562new	

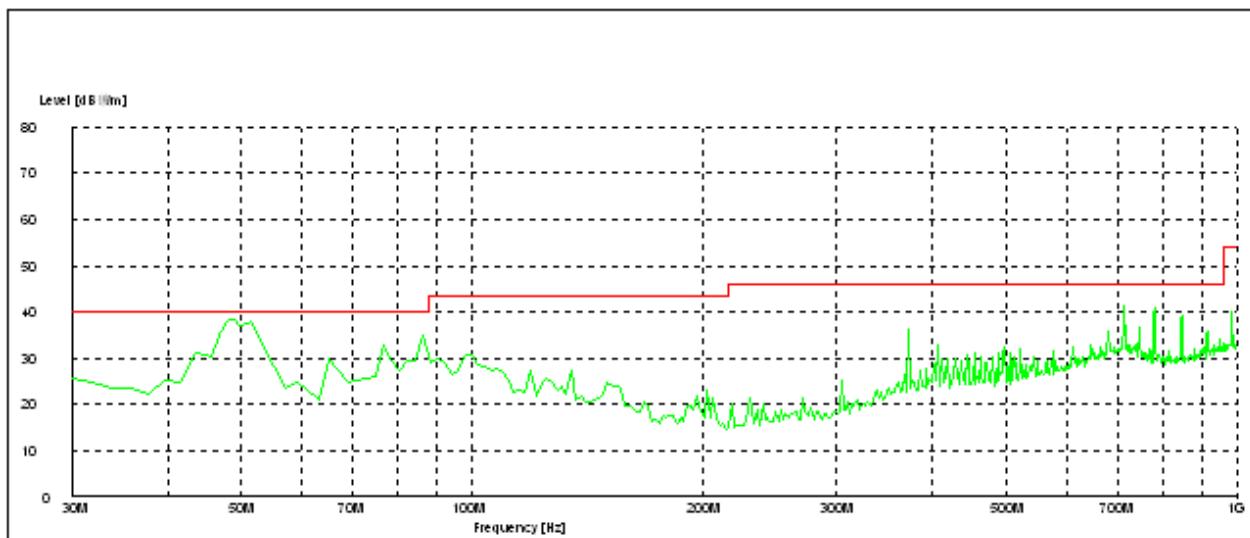**MEASUREMENT RESULT: "SE0424416_fin QP"**


4/24/06 7:31PM	Frequency MHz	Level dB μ V/m	Azimuth deg	Height cm	Polarisation	Transd dB	Limit dB μ V/m	Margin dB
	51.382766	36.58	0.00	140.0	VER	8.9	40.0	3.4
	86.372745	34.93	36.00	169.0	VER	11.8	40.0	5.1
	712.304609	41.33	358.00	108.0	VER	26.5	46.0	4.7
	780.340681	40.75	87.00	109.0	VER	24.2	46.0	5.3
	848.376754	39.30	87.00	111.0	VER	24.5	46.0	6.7
	982.505010	40.01	169.00	119.0	VER	26.9	46.0	6.0

Radiated Emission Test Data (30~1000MHz)

EUT: Sunglasses MP3 Player & Bluetooth
Operating Condition: Transmitting
Operator: Jimmy
Test Specification: DC 3.7V from build-in battery
Comment: Polarisation: Horizontal
Start of Test: 4/24/06 / 7:35:54PM

SCAN TABLE: "test Field(30M-1G)"

Short Description:		Field Strength(30M-1G)					
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer	
30.0 MHz	1.0 GHz	60.0 kHz	QuasiPeak	1.0 s	120 kHz	HL562new	

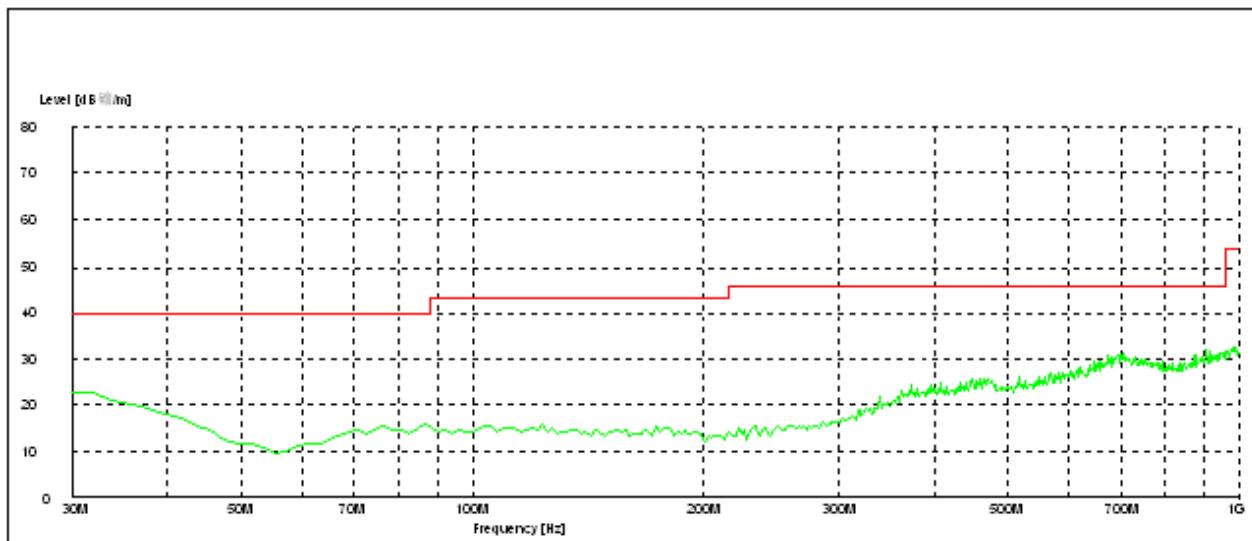


Radiated Emission Test Data (30~1000MHz)

EUT: Sunglasses MP3 Player & Bluetooth
Operating Condition: Transmitting
Operator: Jimmy
Test Specification: DC 3.7V from build-in battery
Comment: Polarisation: Vertical
Start of Test: 4/24/06 / 7:38:08PM

SCAN TABLE: "test Field(30M-1G)"

Short Description:		Field Strength(30M-1G)					
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer	
30.0 MHz	1.0 GHz	60.0 kHz	QuasiPeak	1.0 s	120 kHz	HL562new	

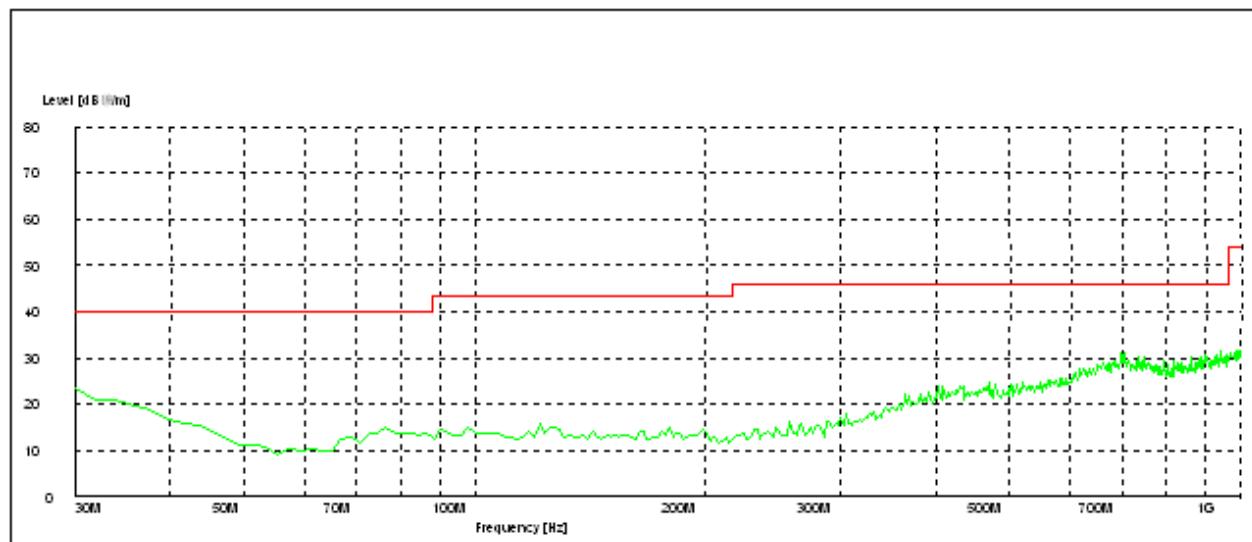


RADIATED EMISSION TEST DATA (1~18GHz)

EUT: Sunglasses MP3 Player & Bluetooth
Operating Condition: Transmitting
Test Site: 3m CHAMBER
Operator: Jimmy
Test Specification: DC 3.7V from build-in battery
Comment: Polarisation: Horizontal
Start of Test: 4/24/06 / 7:46:36PM

SCAN TABLE: "test Field(1G -18G)"

Short Description:		Field Strength(1G -18G)			Meas. Time	IF Bandw.	Transducer
Start Frequency	Stop Frequency	Step Width	Detector				
1GHz	18.0 GHz	60.0 kHz	Peak	1.0 s	1MHz	HF906new	

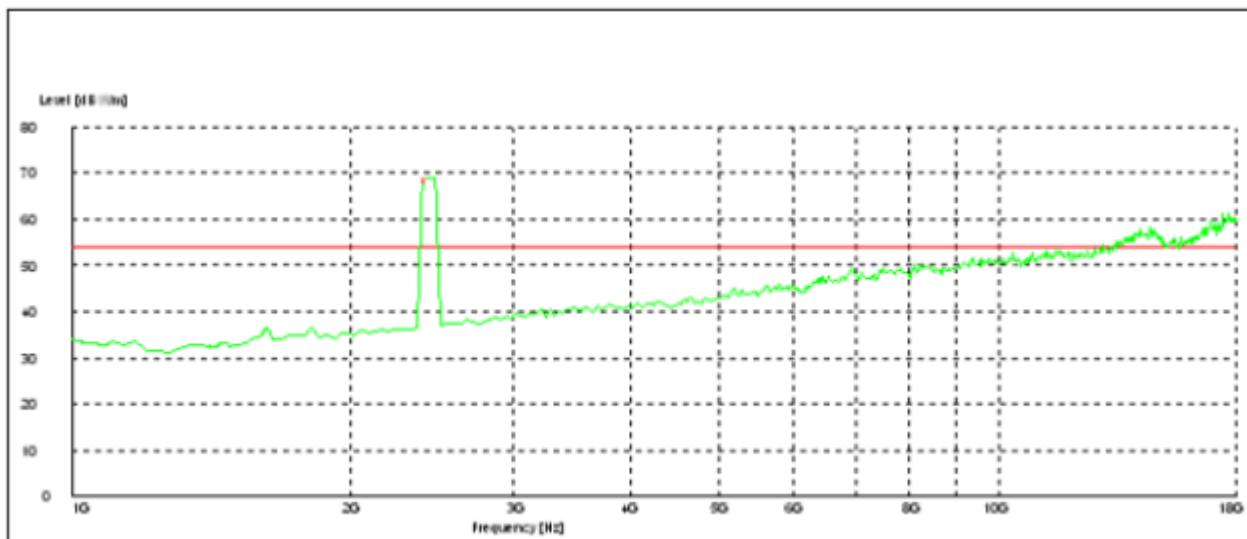**MEASUREMENT RESULT: "SE0424421_pre PK"**

4/24/06 7:50PM


Frequency MHz	Level dBµV/m	Azimuth deg	Height cm	Polarisation	Transd dB	Limit dBµV/m	Margin dB
2408.057852	68.92	102.00	100.0	HOR	-3.3	54.0	-18.9

RADIATED EMISSION TEST DATA (1~18GHz)

EUT: Sunglasses MP3 Player & Bluetooth
Operating Condition: Transmitting
Test Site: 3m CHAMBER
Operator: Jimmy
Test Specification: DC 3.7V from build-in battery
Comment: Polarisation: Vertical
Start of Test: 4/24/06 / 7:51:47PM

SCAN TABLE: "test Field(1G -18G)"

Short Description:		Field Strength(1G -18G)			Meas. Time	IF Bandw.	Transducer
Start Frequency	Stop Frequency	Step Width	Detector				
1GHz	18.0 GHz	60.0 kHz	iPeak	1.0 s	1MHz	HF906new	

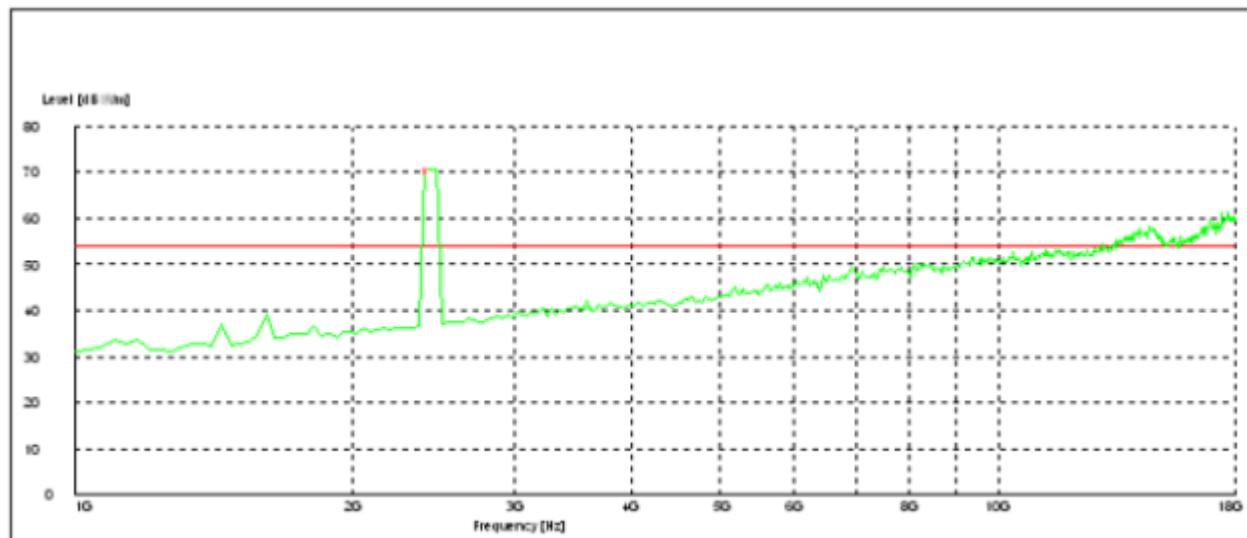
**MEASUREMENT RESULT: "SE0424422_pre PK"**

4/24/06 7:55PM

Frequency MHz	Level dB μ V/m	Azimuth deg	Height cm	Polarisation	Transd dB	Limit dB μ V/m	Margin dB
2414.929860	70.23	177.00	100.0	VER	-3.4	54.0	-16.2

RADIATED EMISSION TEST DATA (18~25GHz)


EUT: Sunglasses MP3 Player & Bluetooth
Operating Condition: Transmitting
Test Site: 3m CHAMBER
Operator: Jimmy
Test Specification: DC 3.7V from build-in battery
Comment: Polarisation: Horizontal

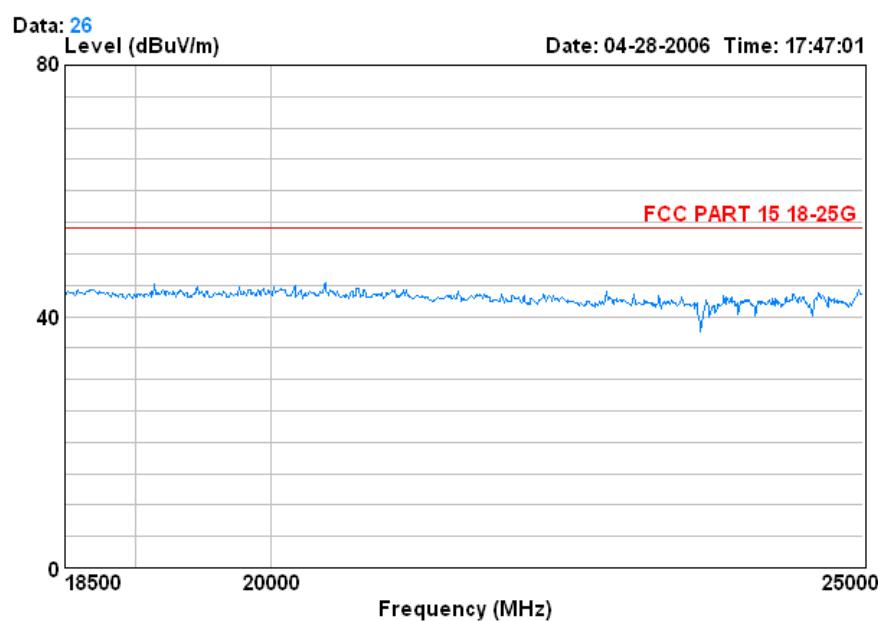


Site : 3m-chamber site
Condition : FCC PART 15 18-25G 3m HORIZONTAL
EUT : blue tooth

RADIATED EMISSION TEST DATA (18~25GHz)


EUT: Sunglasses MP3 Player & Bluetooth
Operating Condition: Transmitting
Test Site: 3m CHAMBER
Operator: Jimmy
Test Specification: DC 3.7V from build-in battery
Comment: Polarisation: Vertical

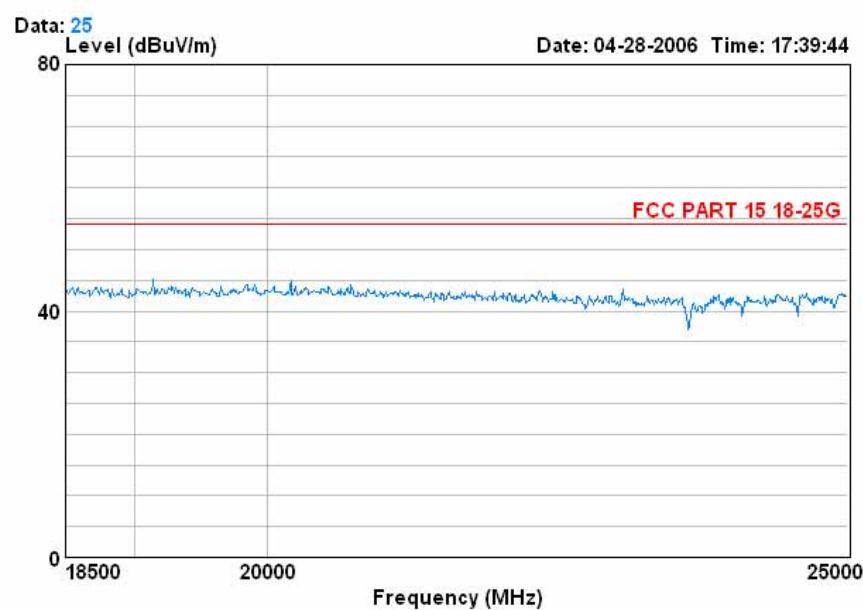

Site : 3m-chamber site
Condition : FCC PART 15 18-25G 3m VERTICAL
EUT : blue tooth

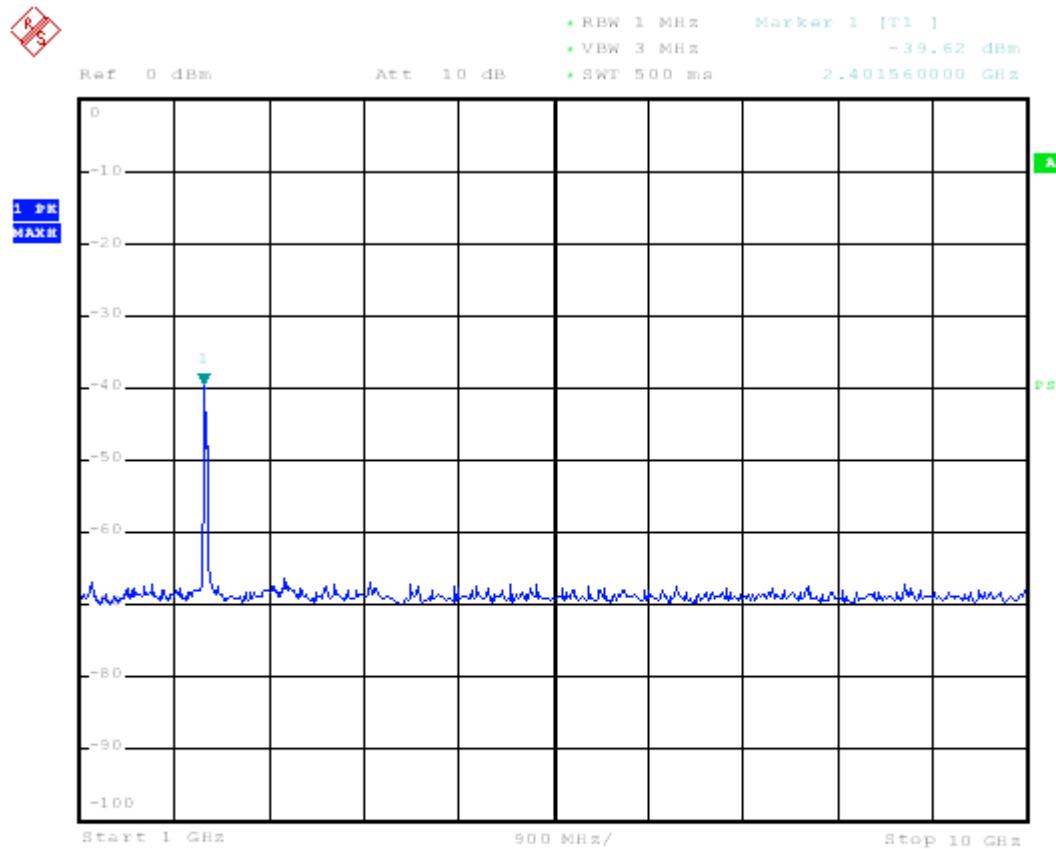
CONDUCTED TEST RESULT**Channel Low :**

Date: 21.APR.2006 10:43:13

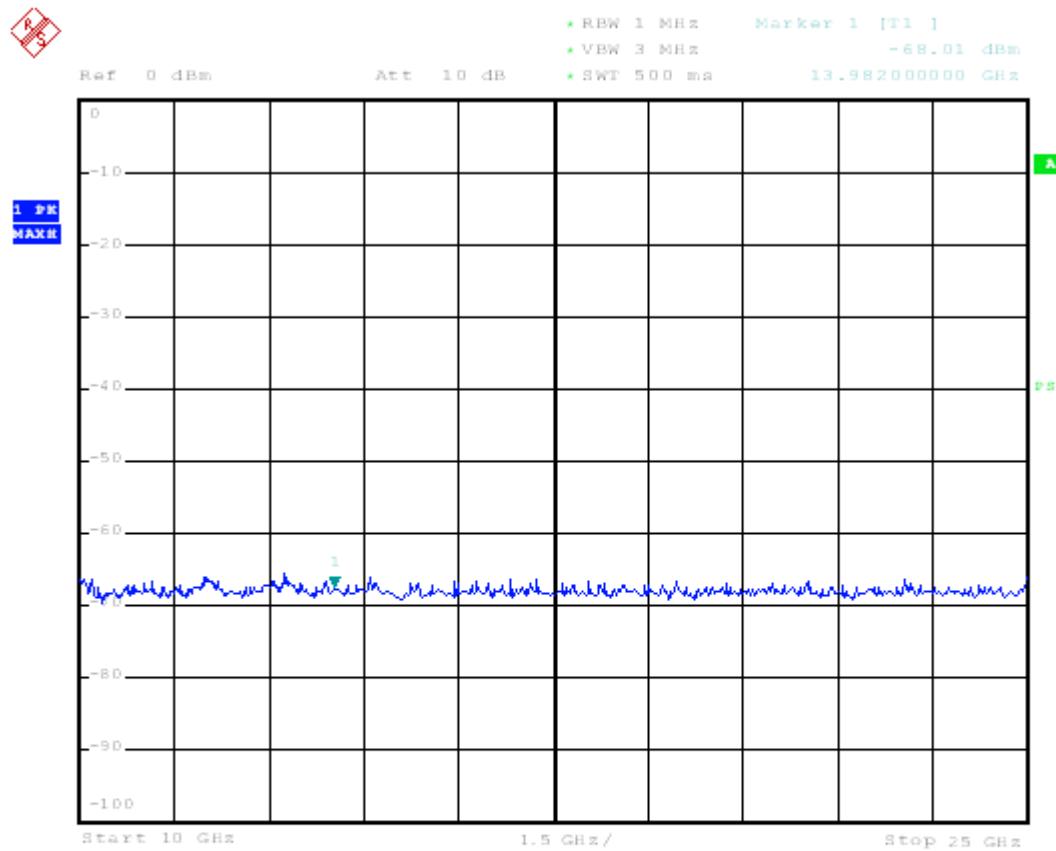


Date: 21.APR.2006 11:37:45

Channel MID :

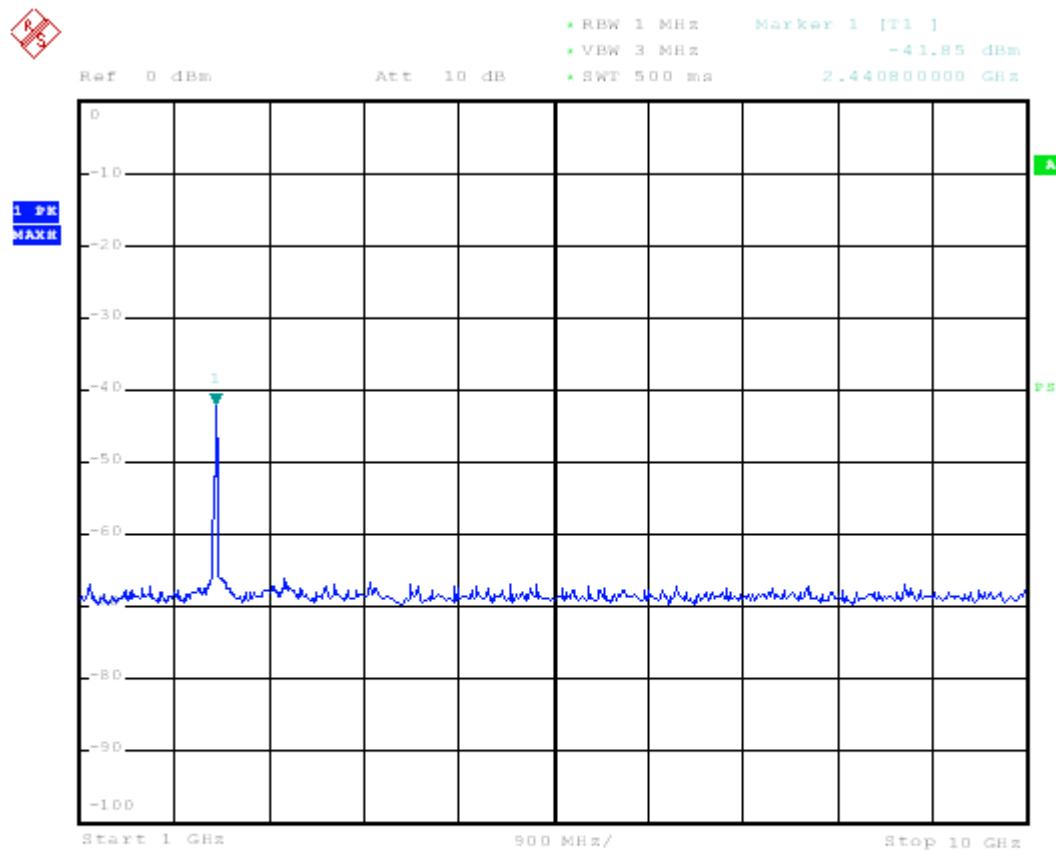


Date: 21.APR.2006 10:37:24

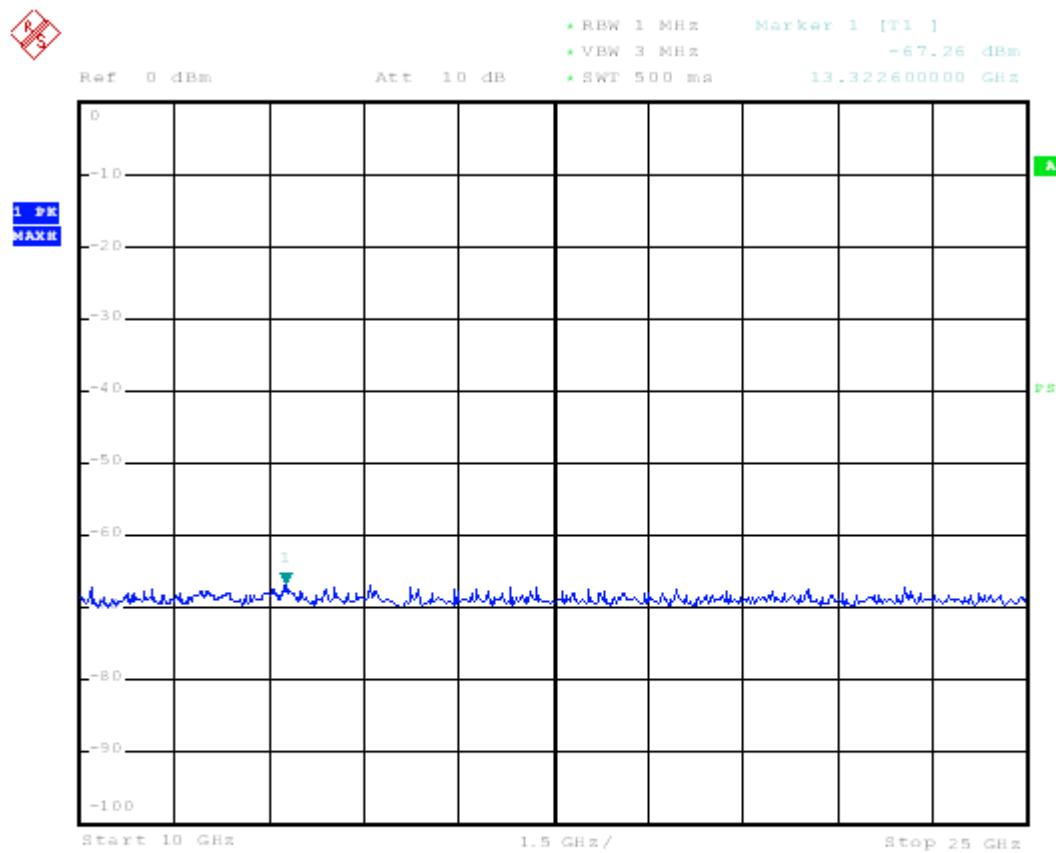


Date: 21.APR.2006 12:01:39

Channel HIG :

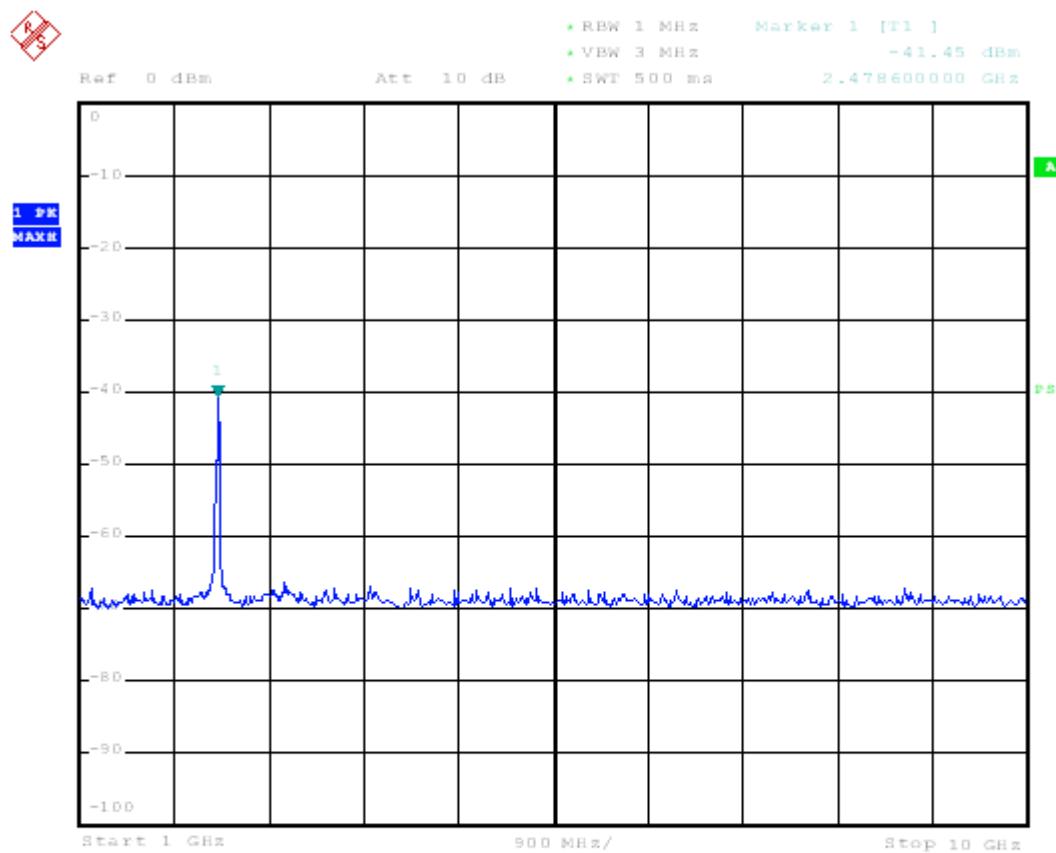

Date: 21.APR.2006 10:35:54

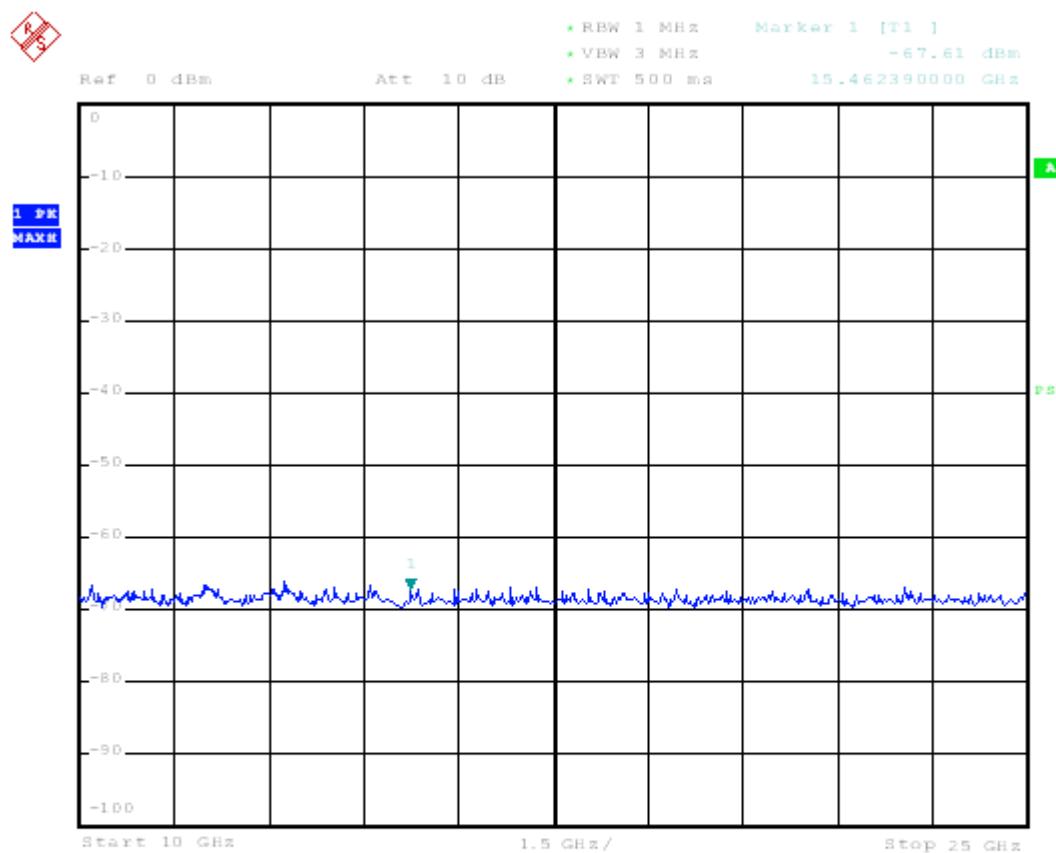

Date: 21.APR.2006 11:34:01