

FCC TEST REPORT

FCC ID : T6ITC1509

Applicant : ShenZhen Techco Industry Co.,Ltd.
Zhiwu Yuan Road 364#,Longgang Town ShenZhen City,China

Equipment Under Test (EUT) :


Product description : Remote Controller

Model No. : TC1509

Standards : FCC 15 Paragraph 15.205, Paragraph 15.209, Paragraph 15.231,
Paragraph 15.31, Paragraph 15.33, Paragraph 15.35.

Date of Test : April 25,2006

Test Engineer : Tiger Su

Reviewed By : 

PERPARED BY:
Waltek Services (Shenzhen) Co., Ltd.

8C,West Tower, Aidi Building, No.5003 Binhe Rd, Futian District, Shenzhen518045,
Guangdong, China.

Tel: 86-755-83551033

Fax: 86-755-83552400

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS	2
3 TEST SUMMARY.....	5
4 GENERAL INFORMATION.....	6
4.1 CLIENT INFORMATION	6
4.2 GENERAL DESCRIPTION OF E.U.T.....	6
4.3 DETAILS OF E.U.T.....	6
4.4 DESCRIPTION OF SUPPORT UNITS	6
4.5 STANDARDS APPLICABLE FOR TESTING.....	6
4.6 TEST FACILITY.....	7
4.7 TEST LOCATION.....	7
5 EQUIPMENT USED DURING TEST	8
6 CONDUCTED EMISSION TEST	9
6.1 TEST EQUIPMENT.....	9
6.2 TEST PROCEDURE	9
6.3 CONDUCTED TEST SETUP	10
6.4 EUT OPERATING CONDITION	10
6.5 CONDUCTED EMISSION LIMITS	11
6.6 CONDUCTED EMISSION TEST RESULT.....	11
7 RADIATION EMISSION TEST.....	12
7.1 TEST EQUIPMENT.....	12
7.2 MEASUREMENT UNCERTAINTY.....	12
7.3 TEST PROCEDURE	12
7.4 RADIATED TEST SETUP.....	13
7.5 SPECTRUM ANALYZER SETUP.....	13
7.6 CORRECTED AMPLITUDE & MARGIN CALCULATION	14
7.7 SUMMARY OF TEST RESULTS.....	14
7.8 EUT OPERATING CONDITION	15
7.9 RADIATED EMISSIONS LIMIT.....	15
7.10 RADIATED EMISSIONS TEST RESULT.....	17
8 PERIODIC OPERATION.....	19
9 BAND EDGE	20
9.1 TEST PROCEDURE	20
9.2 BAND EDGE	20
9.3 BAND EDGE TEST RESULT.....	21
10 PHOTOGRAPHS OF TESTING.....	22
10.1 RADIATION EMISSION TEST VIEW FOR 30MHz-1GHz	22
10.2 RADIATION EMISSION TEST VIEW FOR 1GHz-4GHz.....	22

11	PHOTOGRAPHS - CONSTRUCTIONAL DETAILS	23
11.1	EUT -FRONT VIEW	23
11.2	EUT - BACK VIEW	23
11.3	PCB - COMPONENT VIEW	24
10.4	PCB – SOLDER VIEW	24
12	FCC ID LABEL.....	25

3 Test Summary

Test	Test Requirement	Test Method	Class / Severity	Result
Radiated Emission (30MHz to 4GHz)	FCC PART 15: 2003	ANSI C63.4: 2003	Class B	PASS
Conducted Emission (150KHz to 30MHz)	FCC PART 15: 2003	ANSI C63.4: 2003	Class B	N/A

4 General Information

4.1 Client Information

Applicant: ShenZhen Techco Industry Co.,Ltd.
Address: Zhiwu Yuan Road 364#,Longgang Town ShenZhen City,China

Manufacturer: ShenZhen Techco Industry Co.,Ltd.
Address: Zhiwu Yuan Road 364#,Longgang Town ShenZhen City,China

4.2 General Description of E.U.T.

Product description: Remote Controller
Model No.: TC1509

4.3 Details of E.U.T.

Power Supply: 3.0V DC Battery

4.4 Description of Support Units

The EUT has been tested as an independent device unit.

4.5 Standards Applicable for Testing

The customer requested FCC tests for a Remote Controller. The standards used were FCC 15 Paragraph 15.205, Paragraph 15.209, Paragraph 15.231,Paragraph 15.31,Paragraph 15.33, Paragraph 15.35.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd ShenZhen Branch EMC Lab, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 556682.

- **IC – Registration No.: IC6002**

SGS-CSTC Standards Technical Services Co., Ltd ShenZhen Branch EMC Lab, EMC Laboratory has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration IC6002.

4.7 Test Location

All Emissions tests were performed at:-

No.1 Workshop, M-10, Middle Section, Science & Technology Park, ShenZhen, China 518057

5 Equipment Used during Test

Equipment	Brand Name	Model	Cal. Int Months	Last Cal. Date
3m Anechoic chamber				
EMC Analyzer	Agilent	E7402A	12	2005-08
EMI Test Receiver	R&S	ESS	12	2005-08
Pre Amplifier	Anritsu	MH648A	12	2005-08
Bilog Antenna	SCHAFFNER	CBL6111C	12	2005-08
Horn Antenna	R&S	HF906	12	2005-08
AM/FM Stereo Signal Generator	Panasonic	VP-8122A	12	2005-08
Signal Generator	R&S	SMG	12	2005-08
RF Selector	TOYO	NS4901A	-	-
Turn Disc	HD	DS4150S	-	-
Antenna Mast	HD	MA2400	-	-
EMI Shielded Room				
Spectrum analyzer	ADVANTEST	R3261C	12	2005-08
EMI Test Receiver	R&S	ESS	12	2005-08
Pre Amplifier	Anritsu	MH648A	12	2005-08
LISN	Kyoritsu	KNW-403D	12	2005-08
Absorbing Clamp	R&S	MDS-21	12	2005-08
Absorbing Clamp	R&S	MDS-21	12	2005-08
Absorbing Clamp	Kyoritsu	KT-20	12	-
Distortion Meter	MEGURO	MAK-6578A	12	2005-08
AM/FM Stereo Signal Generator	Panasonic	VP-8122A	12	2005-08
Oscilloscope	LEADER	LS1020	12	2005-08
Function Generator	National	VP-7422A	12	2005-08
Signal Generator	R&S	SMG	12	2005-08

6 Conducted Emission Test

Product:	Remote Controller
Test Requirement:	FCC Part15 Paragraph 15.207
Test Method:	Based on FCC Part15 Paragraph 15.207
Test Date:
Frequency Range:	150kHz to 30MHz
Class:	Class B
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

6.1 Test Equipment


Please refer to Section 5 this report.

6.2 Test Procedure

1. The EUT was tested according to ANSI C63.4:2003. The frequency spectrum from 150kHz to 30MHz was investigated.
2. The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.3 Conducted Test Setup


The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 Paragraph 15.207 limits.

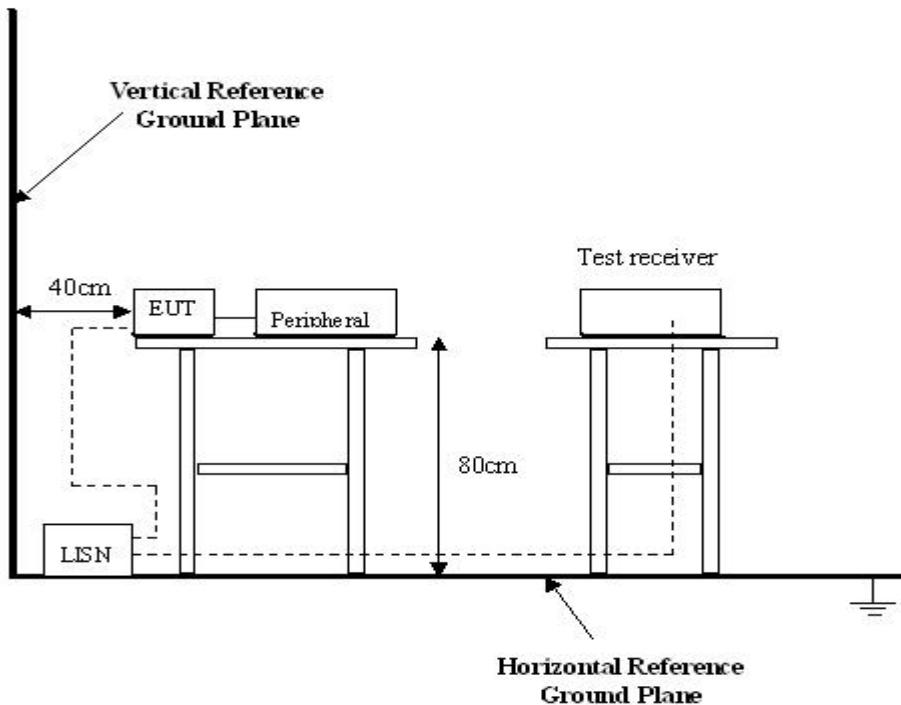

6.4 EUT Operating Condition

Operating condition is according to ANSI C63.4:2003.

- A. Setup the EUT and simulators as shown on follow.
- B. Enable RF signal and confirm EUT active.
- C. Modulate output capacity of EUT up to specification.

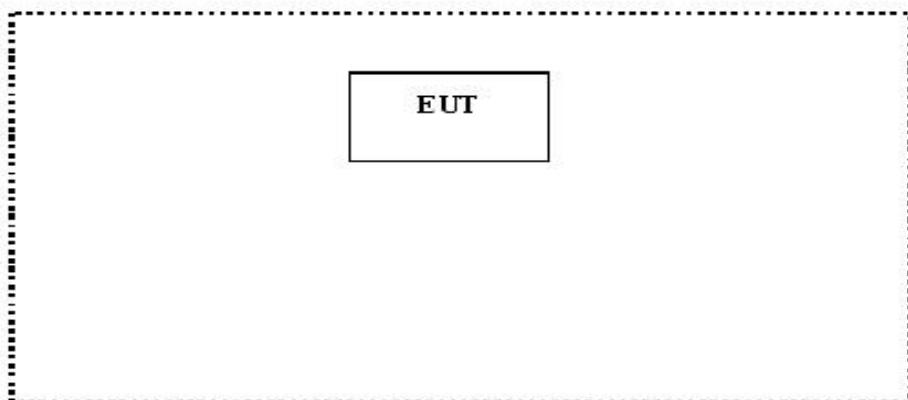

6.5 Conducted Emission Limits

66-56 dB μ V/m between 0.15MHz & 0.5MHz

56 dB μ V/m between 0.5MHz & 5MHz

60 dB μ V/m between 5MHz & 30MHz

Note: In the above limits, the tighter limit applies at the band edges.

6.6 Conducted Emission Test Result

Owing to the DC operation of EUT, this test is not performed.

7 Radiation Emission Test

Product:	Remote Controller
Test Requirement:	FCC Part15 Paragraph 15.209, Paragraph 15.231
Test Method:	Based on FCC Part15 Paragraph 15.33
Test Date:	April 25,2006
Frequency Range:	30MHz to 4GHz
Measurement Distance:	3m
Detector:	Peak for pre-scan (120kHz resolution bandwidth) Quasi-Peak if maximised peak within 6dB of limit

7.1 Test Equipment

Please refer to Section 5 this report.

7.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on ANSI C63.4:2003, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at SGS EMC Lab is +4.0 dB.

7.3 Test Procedure

1. For the radiated emissions test, since the EUT does not have a power source, there was no connection to AC outlets.
2. Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combinations.
3. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB μ V of specification limits), and are distinguished with a "Qp" in the data table.
4. The EUT was under normal mode during the final qualification test and the configuration was used to represent the worst case results.

7.4 Radiated Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 Paragraph 15.209, Paragraph 15.231 limits.

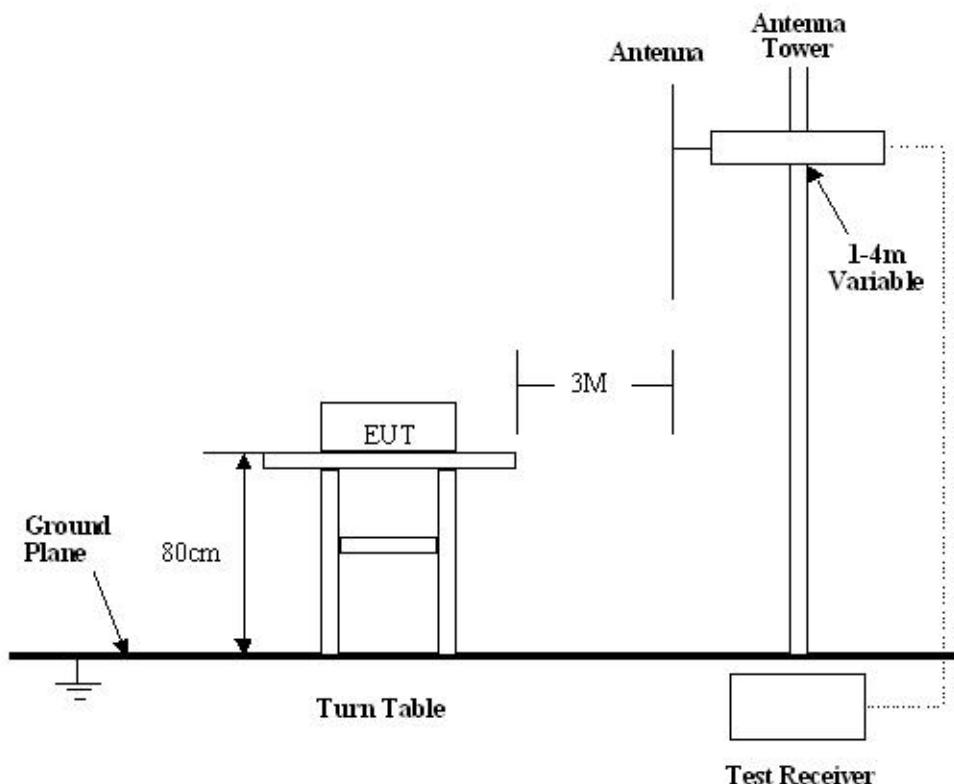

7.5 Spectrum Analyzer Setup

According to FCC Part15 Paragraph 15.209, Paragraph 15.231 Rules, the system was tested to 4000 MHz.

Start Frequency	30 MHz
Stop Frequency	4000 MHz
Sweep Speed	Auto
IF Bandwidth	100 kHz
Video Bandwidth	1 MHz
Quasi-Peak Adapter Bandwidth	120 kHz
Quasi-Peak Adapter Mode	Normal
Resolution Bandwidth	1MHz

7.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of $-7\text{dB}\mu\text{V}$ means the emission is $7\text{dB}\mu\text{V}$ below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$

7.7 Summary of Test Results

According to the data in section 7.10, the EUT complied with the FCC Part15 Paragraph 15.209 and Paragraph 15.231 standards.

7.8 EUT Operating Condition

Same as section 6.4 of this report.

7.9 Radiated Emissions Limit

A. FCC Part 15 subpart C Paragraph 15.231 Limit

Fundamental Frequency(MHZ)	Field Strength of Fundamental	
	uV/m	dBuV/m
315.0	6041.68	75.62

Note: (1) RF Voltage(dBuV)=20 log RF Voltage(uV)

(2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

(3) The emission limit in this paragraph is based on measurementinstrumentaion employing an average detector. Measurement using instrumentation with a peak detector function,corresponding to 20dB above the maximum permitted average limit.

B. Frequencies in restricted band are complied to limit on Paragraph 15.209

Frequency(MHZ)	Distance(m)	Field strength(dBuV/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note: (1) RF Voltage(dBuV)=20 log RF Voltage(uV)
(2) In the Above Table, the tighter limit applies at the band edges.
(3) Distance refers to the distance in meters between the measuring instrument antenna.

7.10 Radiated Emissions Test Result

Formula of conversion factors: the field strength at 3m was established by adding The meter reading of the spectrum analyser (which is set to read in units of dBuV) To the antenna correction factor supplied by the antenna manufacturer. The antenna Correction factors are stated in terms of dB. The gain of the preselector was accounted For in the spectrum analyser meter reading.

Example:

Freq(MHz) Meter Reading +ACF=FS

33 20dBuV+10.36dB=30.36dBuV/m @3m

A. Fundamental Radiated Emission Data for 315MHz

Test Item:	Fundamental Radiated Emission Data
Test Voltage:	3.0V DC Battery
Test Mode:	On
Temperature:	24 °C
Humidity:	52%RH
Test Result:	PASS

Frequency (MHz)	Antenna Polarization	Emission Level (dBuV/m)	FCC 15 Subpart C Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Turntable Angle (°)
314.957	Vertical	58.27	75.62	17.35	1.5	60
314.957	Horizontal	61.75	75.62	13.87	1.5	120

B. General Radiated Emission Data

Test Item: General Radiated Emission Data

Test Voltage: 3.0V DC Battery

Test Mode: TXOn


Temperature: 24 °C

Humidity: 52%RH

Test Result: PASS

Frequency (MHz)	Antenna Polarization	Emission Level (dBuV/m)	FCC 15 Subpart C Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Turntable Angle (°)
629.984	Horizontal	23.80	46.0	22.20	1.8	30
944.864	Horizontal	28.12	46.0	17.82	1.8	60
1259.983	Horizontal	36.40	54.0	17.60	1.8	180
629.984	Vertical	23.43	46.0	22.57	1.5	45
944.864	Vertical	28.56	46.0	17.44	1.5	180
1259.983	Vertical	34.58	54.0	19.42	1.5	60

8 Periodic Operation

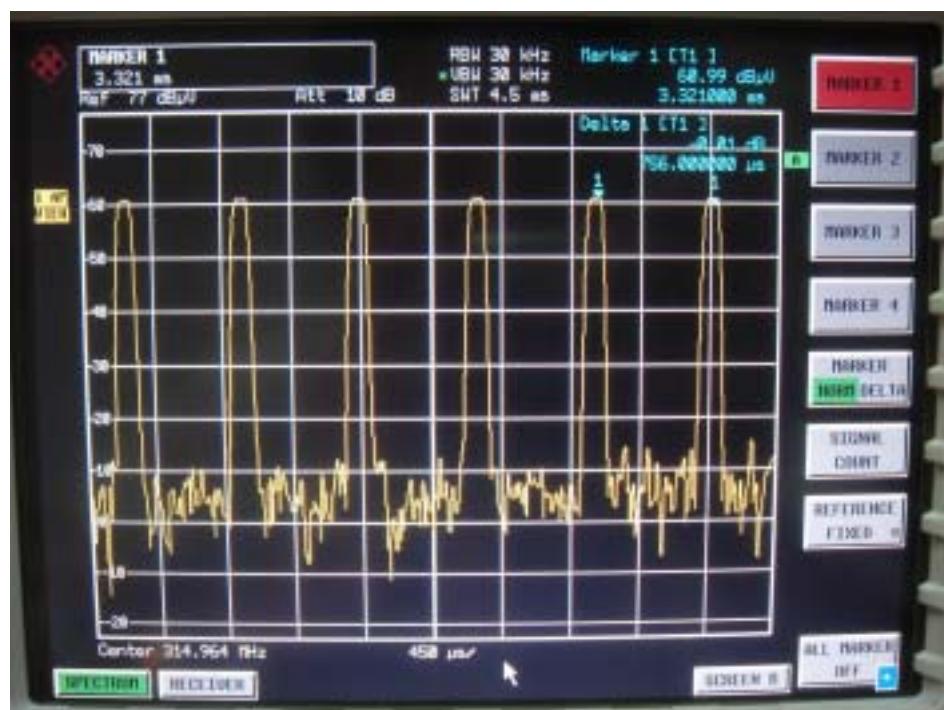

9 Band Edge

Test Requirement:	FCC Part15 C
Test Method:	Based on FCC Part15 Paragraph 15.231
Test Date:	April 25,2006
Test mode:	TXOn
Temperature:	24 °C
Humidity:	52%RH

9.1 Test Procedure

1. The EUT, peripherals were put on the turntable which table size is 1mX1.5m, table high 0.8m. All set up is according to ANSI C63.4:2003.
2. With the EUT's antenna attached, The EUT's radiated emission power was received by the test antenna which was connected to the spectrum analyser with the START and STOP frequencies set to the EUT's operation band. Measurements were made at 3 meters.
3. The antenna high were varied from 1m to 4m high to find the maximum emission for each frequency.
4. The bandwidth of the fundamental frequency was measure by spectrum analyser with 20KHz RBW and 200KHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power 20dB.

9.2 Band Edge

Requirements: Paragraph 15.231, The emission power at the START and STOP frequencies shall be at least 50dB below the level of the fundamental or to the general radiated emission limits in FCC 15.209.


9.3 Band Edge Test Result

315MHz TX



10 Photographs of Testing

10.1 Radiation Emission Test View For 30MHz-1GHz

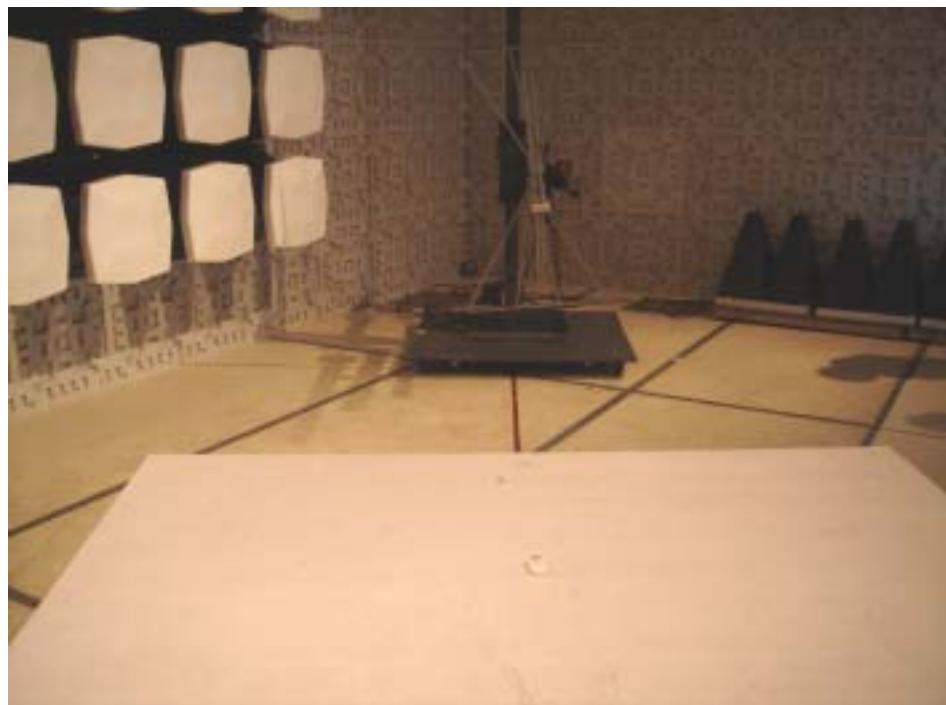

10.2 Radiation Emission Test View For 1GHz-4GHz



11 Photographs - Constructional Details


11.1 EUT -Front View




11.2 EUT – Back View



11.3 PCB – Component View

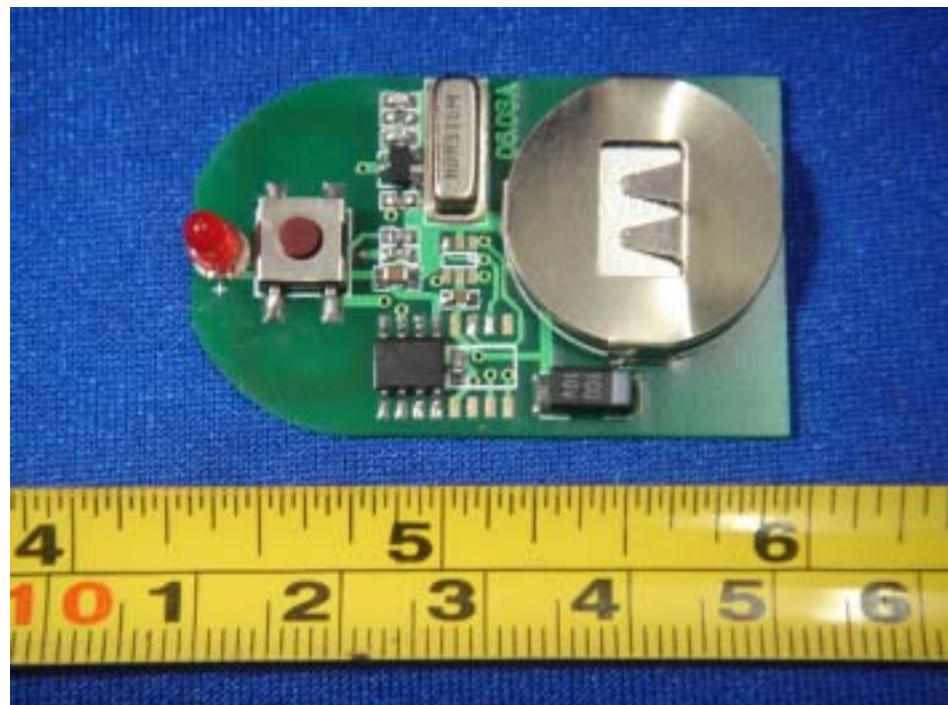

10.4 PCB – Solder View

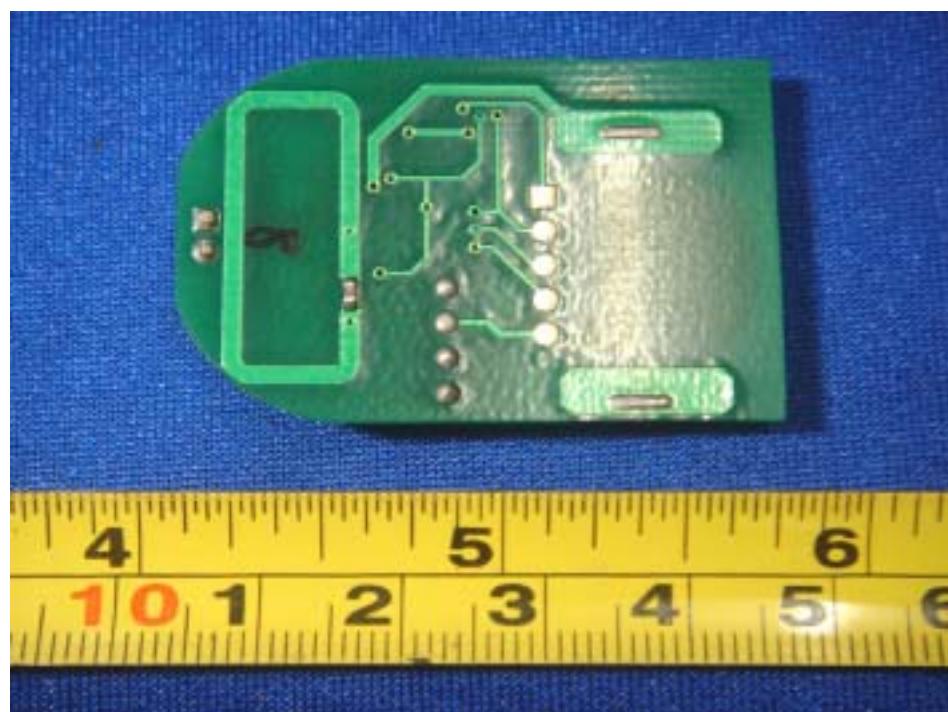

12 FCC ID Label

This device complies with Part 15 of the FCC Rules. The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT

EUT Bottom View/proposed FCC Mark Location

