



## 47 CFR PART 24 SUBPART E

# TEST REPORT

of

### **Quad-band multimedia GSM phone**

Model Name: N120  
Trade Name: (n.a.)  
Report No.: SZ07020053E02  
FCC ID: T6QN120

*prepared for*


### **KCMobile Co., Ltd.**

3F., Seochoworld Officetel, 1355-3, SeoCho-Dong,  
SeoCho-Gu, Seoul 137-862, Korea

*prepared by*

### **Shenzhen Electronic Product Quality Testing Center Morlab Laboratory**

3/F, Electronic Testing Building, Shafe Road, Xili,  
Nanshan District, Shenzhen, 518055 P. R. China  
Tel: +86 755 86130398  
Fax: +86 755 86130218



**NOTE:** This test report can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen Electronic Product Quality Testing Center Morlab Laboratory. Any objections should be raised to us within thirty workdays since the date of issue.

## TABLE OF CONTENTS

<b>1. TEST CERTIFICATION .....</b>	<b>4</b>
<b>2. GENERAL INFORMATION .....</b>	<b>5</b>
<b>2.1 EUT Description .....</b>	<b>5</b>
<b>2.2 Test Standards and Results .....</b>	<b>6</b>
<b>2.3 Facilities and Accreditations .....</b>	<b>7</b>
2.3.1 Facilities .....	7
2.3.2 Test Environment Conditions.....	7
<b>3. 47 CFR PART 2, PART 24E REQUIREMENTS.....</b>	<b>8</b>
<b>3.1 Frequencies.....</b>	<b>8</b>
3.1.1 Requirement .....	8
3.1.2 Test Description .....	8
3.1.3 Test Result.....	9
<b>3.2 Conducted RF Output Power.....</b>	<b>11</b>
3.2.1 Requirement .....	11
3.2.2 Test Description .....	11
3.2.3 Test Result.....	11
<b>3.3 20dB Occupied Bandwidth .....</b>	<b>14</b>
3.3.1 Definition .....	14
3.3.2 Test Description .....	14
3.3.3 Test Verdict.....	14
<b>3.4 Frequency Stability.....</b>	<b>17</b>
3.4.1 Requirement .....	17
3.4.2 Test Description .....	17
3.4.3 Test Verdict.....	17
<b>3.5 Conducted Out of Band Emissions .....</b>	<b>19</b>
3.5.1 Requirement .....	19
3.5.2 Test Description .....	19
3.5.3 Test Result.....	19
<b>3.6 Band Edge .....</b>	<b>23</b>
3.6.1 Requirement .....	23

3.6.2	Test Description .....	23
3.6.3	Test Result .....	23
<b>3.7</b>	<b>Transmitter Radiated Power (EIRP/ERP) .....</b>	<b>25</b>
3.7.1	Requirement .....	25
3.7.2	Test Description .....	25
3.7.3	Test Result .....	26
<b>3.8</b>	<b>Radiated Out of Band Emissions .....</b>	<b>28</b>
3.8.1	Requirement .....	28
3.8.2	Test Description .....	28
3.8.3	Test Result .....	28

## 1. TEST CERTIFICATION

Equipment under Test: Quad-band multimedia GSM phone

Trade Name: (n.a.)

Model Name: N120

FCC ID: T6QN120

Applicant: KCMobile Co., Ltd.

3F., Seochoworld Officetel, 1355-3, SeoCho-Dong, SeoCho-Gu, Seoul 137-862, Korea

Manufacturer: KCMobile Co., Ltd.

3F., Seochoworld Officetel, 1355-3, SeoCho-Dong, SeoCho-Gu, Seoul 137-862, Korea

Test Standards: 47 CFR Part 2

47 CFR Part 24 Subpart E

EUT Received Date: February 14, 2007

Test Date(s): February 14, 2007 - March 5, 2007


Test Result: PASS

### \* We Hereby Certify That:


The equipment under test was tested by Shenzhen Electronic Product Quality Testing Center Morlab Laboratory. The test data, data evaluation, test procedures and equipment configurations shown in this report were made in accordance with the requirement of related FCC rules.

The test results of this report only apply for the tested sample equipment identified above. The test report shall be invalid without all the signatures of the test engineer, the reviewer and the approver.


Tested by:

 Zhang Weimin  Dated: 2007.03.08

Reviewed by:

 Yang Bo  Dated: 2007.03.08

Approved by:

 Shu Luan  Dated: 2007.03.08

## 2. GENERAL INFORMATION

### 2.1 EUT Description

EUT Type.....: Quad-band multimedia GSM phone  
Model Name .....: N120  
Serial No.....: (n.a., marked #1 by test site)  
IMEI .....: (n.a.)  
Hardware Version .....: J2\_MAIN\_Rev02  
Software Version .....: N120\_155MXTC  
Emission Designator.....: 300KGXW  
Modulation Type.....: GMSK  
Frequency Range .....: Tx: 1850.20 - 1909.80MHz (at intervals of 200kHz);  
Rx: 1930.20 - 1989.80MHz (at intervals of 200kHz)  
Output Power.....: 1Watt (Typical)  
Power Supply.....: Lithium-ion Battery (Rated Voltage 3.7VDC.);  
The Highest and Lowest extreme voltages are separately 4.1VDC  
and 3.6VDC, which are specified by the applicant.  
Ancillary Equipments.....: AC Adapter Charger for the Lithium-ion Battery

*Note 1:* The transmitter (Tx) frequency arrangement of the PCS 1900MHz band used by the EUT can be represented with the formula  $F(n)=1850.2+0.2*(n-512)$ ,  $512 \leq n \leq 810$ ; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 512 (1850.2MHz), 661 (1880.0MHz) and 810 (1909.8MHz).

*Note 2:* For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

## 2.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 2, Part 24 for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 2 (10-1-05 Edition)	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	47 CFR Part 24 (10-1-05 Edition)	Personal Communications Services

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result	Date of Test
1	2.106 24.229	Frequencies	PASS	2007-03-02
2	2.1046	Conducted RF Output Power	PASS	2007-03-02
3	2.1049	20dB Occupied Bandwidth	(n.a.)	2007-03-02
4	2.1055 24.235	Frequency Stability	PASS	2007-03-03
5	2.1051 2.1057 24.238	Conducted Out of Band Emissions	PASS	2007-03-02
6	2.1051 2.1057 24.238	Band Edge	PASS	2007-03-02
7	24.232	Transmitter Radiated Power (EIPR/ERP)	PASS	2007-03-02
8	2.1053 2.1057 24.238	Radiated Out of Band Emissions	PASS	2007-03-05

## 2.3 Facilities and Accreditations

### 2.3.1 Facilities

Shenzhen Electronic Product Quality Testing Center Morlab Laboratory is a testing organization accredited by China National Accreditation Board for Laboratories (CNAL) according to ISO/IEC 17025. The accreditation certificate number is L1659.

All measurement facilities used to collect the measurement data are located at Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen 518055 CHINA. The test site is constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22; the FCC registration number is 741109.

### 2.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	20 - 25
Relative Humidity (%):	40 - 60
Atmospheric Pressure (kPa):	960

### 3. 47 CFR PART 2, PART 24E REQUIREMENTS

#### 3.1 Frequencies


##### 3.1.1 Requirement

According to FCC section 24.229, the frequencies available in the Broadband PCS services are listed as below, in accordance with the frequency allocations table of FCC section 2.106.

- (a) The following frequency blocks are available for assignment on an MTA basis:
  - Block A: 1850 - 1865MHz paired with 1930 - 1945MHz;
  - Block B: 1870 - 1885MHz paired with 1950 - 1965MHz.
- (b) The following frequency blocks are available for assignment on a BTA basis:
  - Block C: 1895 - 1910 MHz paired with 1975 - 1990MHz;
  - Block D: 1865 - 1870 MHz paired with 1945 - 1950MHz;
  - Block E: 1885 - 1890 MHz paired with 1965 - 1970MHz;
  - Block F: 1890 - 1895 MHz paired with 1970 - 1975MHz.

##### 3.1.2 Test Description

###### 1. Test Setup:

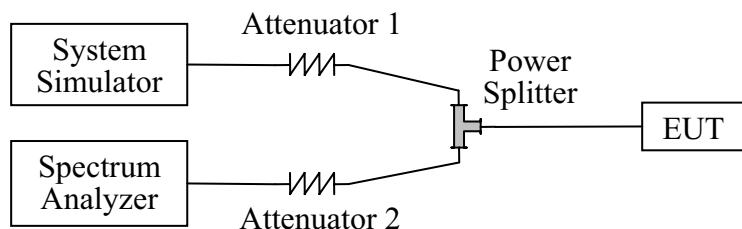

The EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 0 and Power Class = 1. A call is established between the EUT and the SS.

###### 2. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Agilent	E5515C	GB43130131	2006.06	1year
Spectrum Analyzer	Agilent	E7405A	US44210471	2006.07	1year
Power Splitter	Weinschel	1506A	NW521	(n.a.)	(n.a.)

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Attenuator 1	Resnet	20dB	(n.a.)	(n.a.)	(n.a.)
Attenuator 2	Resnet	3dB	(n.a.)	(n.a.)	(n.a.)

### 3.1.3 Test Result


The Tx frequency arrangement of the PCS 1900MHz band employed by the EUT should be from 1850.2MHz to 1909.8MHz (the corresponding frequency block is from 1850MHz to 1910MHz). Here the lowest and highest channels are tested to verify the EUT's using the frequency block required.

#### 1. Test Verdict:


The required frequency block is employed legally, the verdict is PASS.

Channel	Frequency (MHz)	Measured Carrier (dBm)	Refer to Plot
512	1850.2	21.99	Plot A
810	1909.8	24.52	Plot B

#### 2. Test Plot:

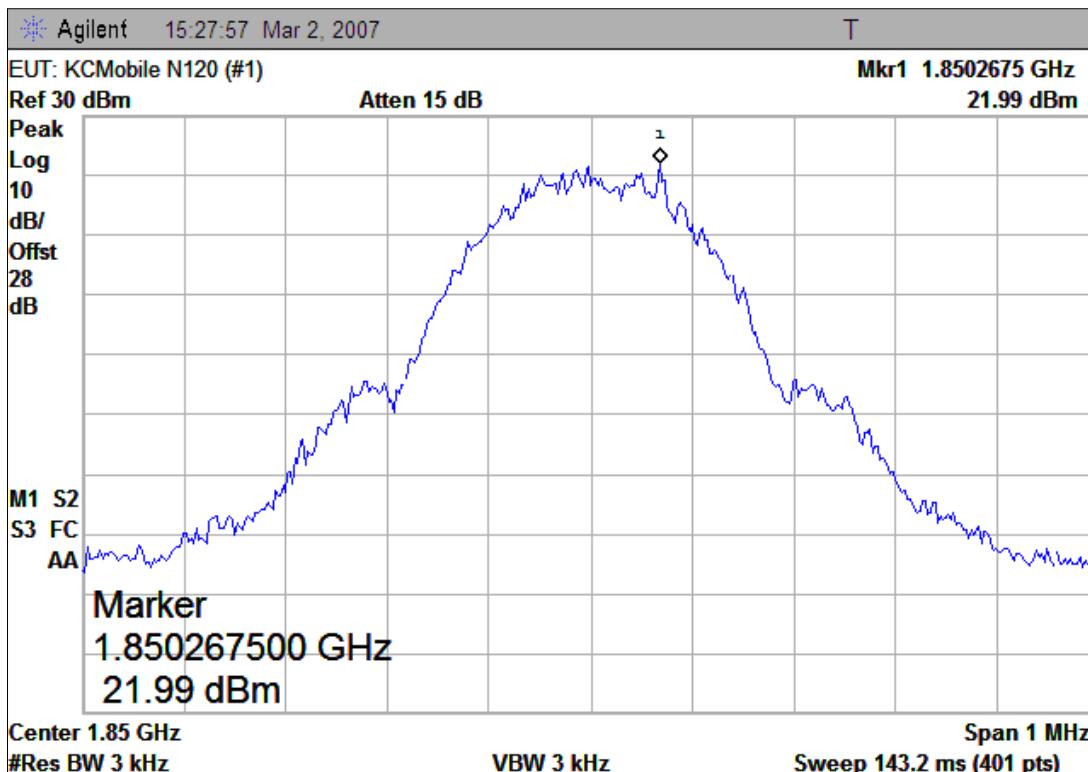

(Plot A: Channel = 512)

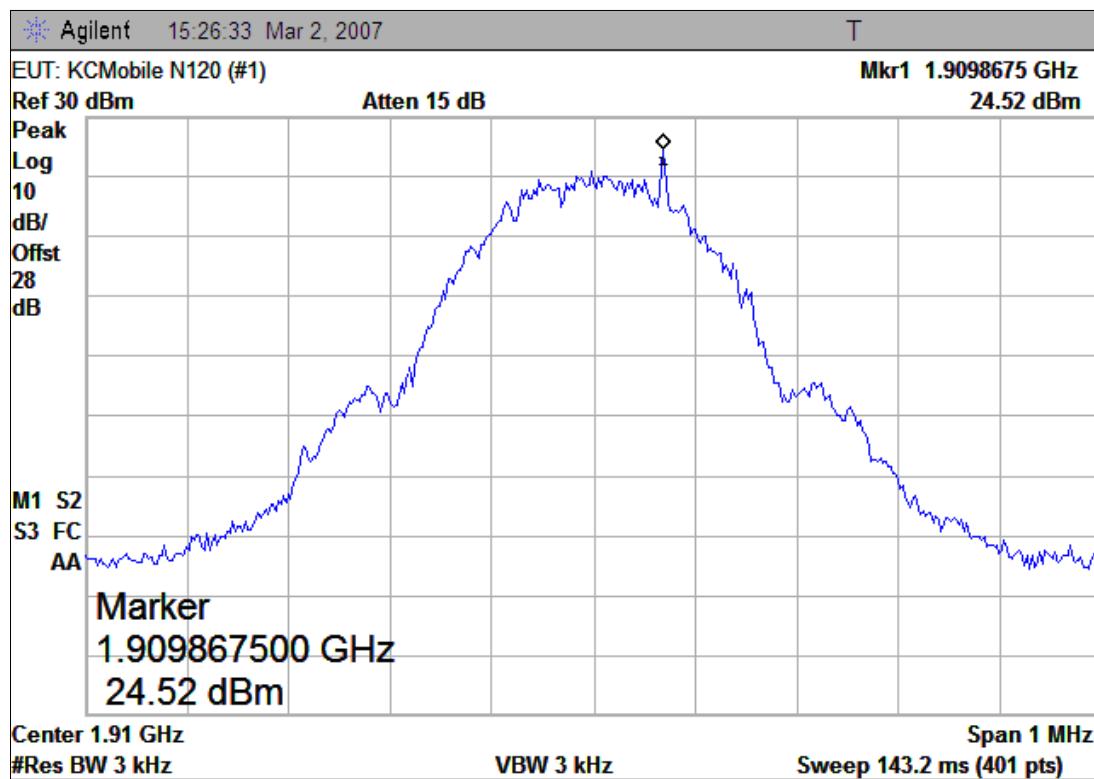

(Plot B: Channel = 810)

## 3.2 Conducted RF Output Power

### 3.2.1 Requirement

According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

### 3.2.2 Test Description

See section 3.1.2 of this report.


### 3.2.3 Test Result

Here the lowest, middle and highest channels are selected to perform testing to verify the conducted RF output power of the EUT. For the mobile phone operates at PCL=0 (when Power Class is 1), the rated conducted RF output power is 30dBm within the tolerance of  $\pm 3$ dB.


#### 1. Test Verdict:

Channel	Frequency (MHz)	Measured Output Power		Rated Output Power		Verdict
		dBm	Refer to Plot	dBm	Tolerance (dB)	
512	1850.2	29.21	Plot A	30	$\pm 3$	PASS
661	1880.0	29.64	Plot B			PASS
810	1909.8	29.43	Plot C			PASS


#### 2. Test Plot:

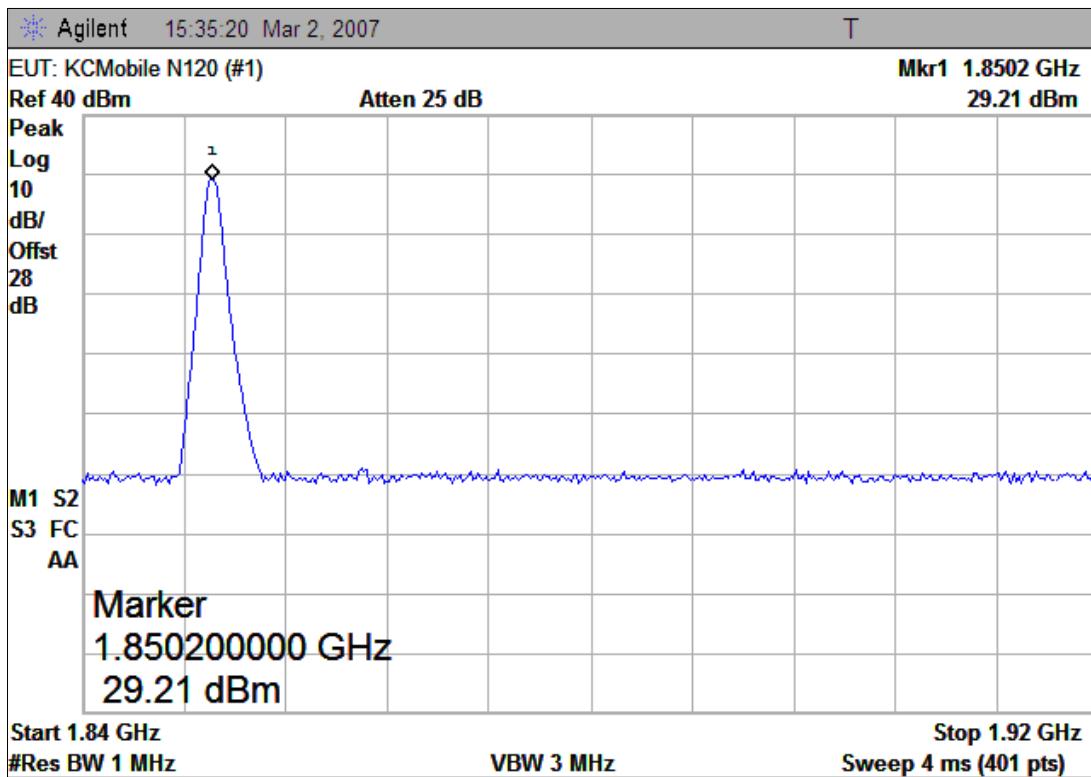

(Plot A: Channel = 512)

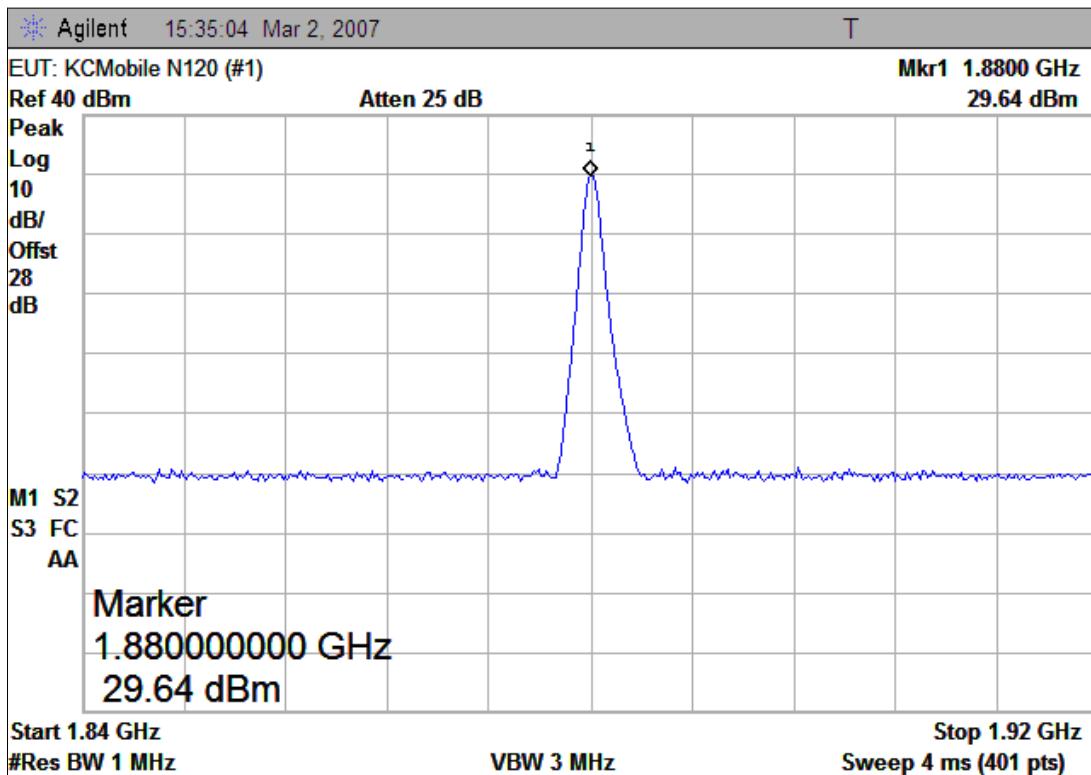

(Plot B: Channel = 661)

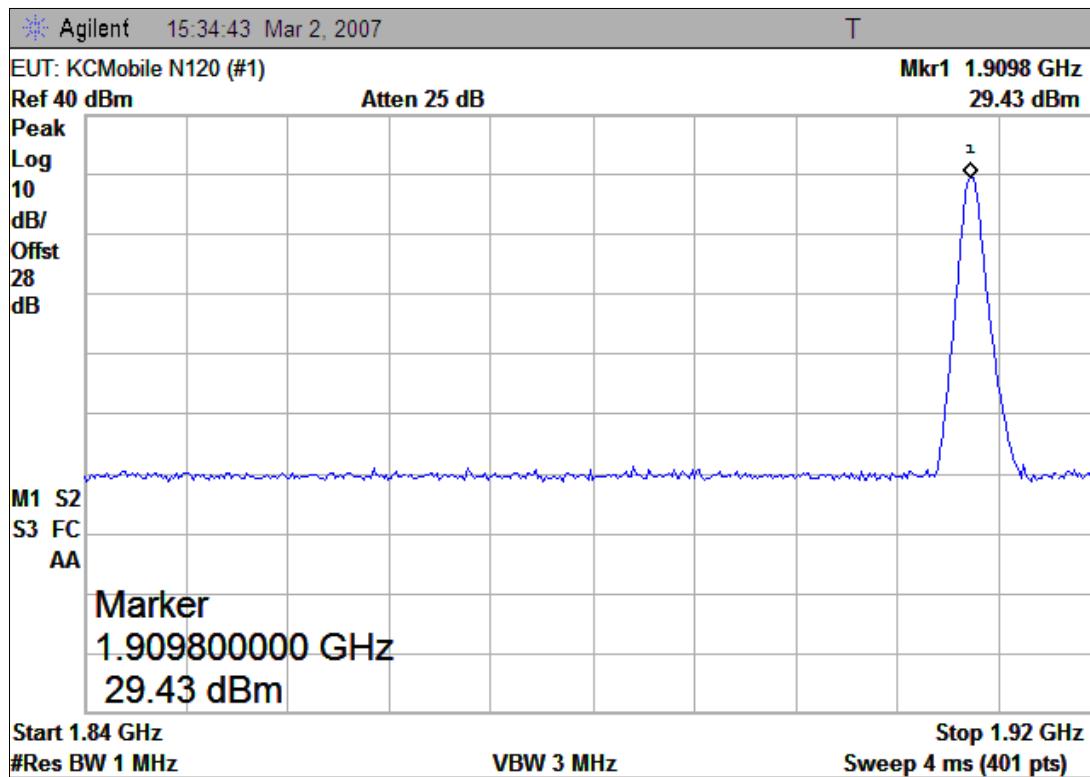

(Plot C: Channel = 810)

### 3.3 20dB Occupied Bandwidth

#### 3.3.1 Definition

According to FCC section 2.1049, the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

Occupied bandwidth is also known as the 99% emission bandwidth, or 20dB bandwidth ( $10 \log 1\% = 20\text{dB}$ ) taking the total RF output power as reference.

#### 3.3.2 Test Description

See section 3.1.2 of this report.


#### 3.3.3 Test Verdict

Here the lowest, middle and highest channels are tested to record the 20dB occupied bandwidth, it's about 300kHz.


1. Test Verdict:

Channel	Frequency (MHz)	Measured 20dB Occupied Bandwidth (kHz)	Refer to Plot
512	1850.2	282.5	Plot A
661	1880.0	265.0	Plot B
810	1909.8	282.5	Plot C


2. Test Plot:

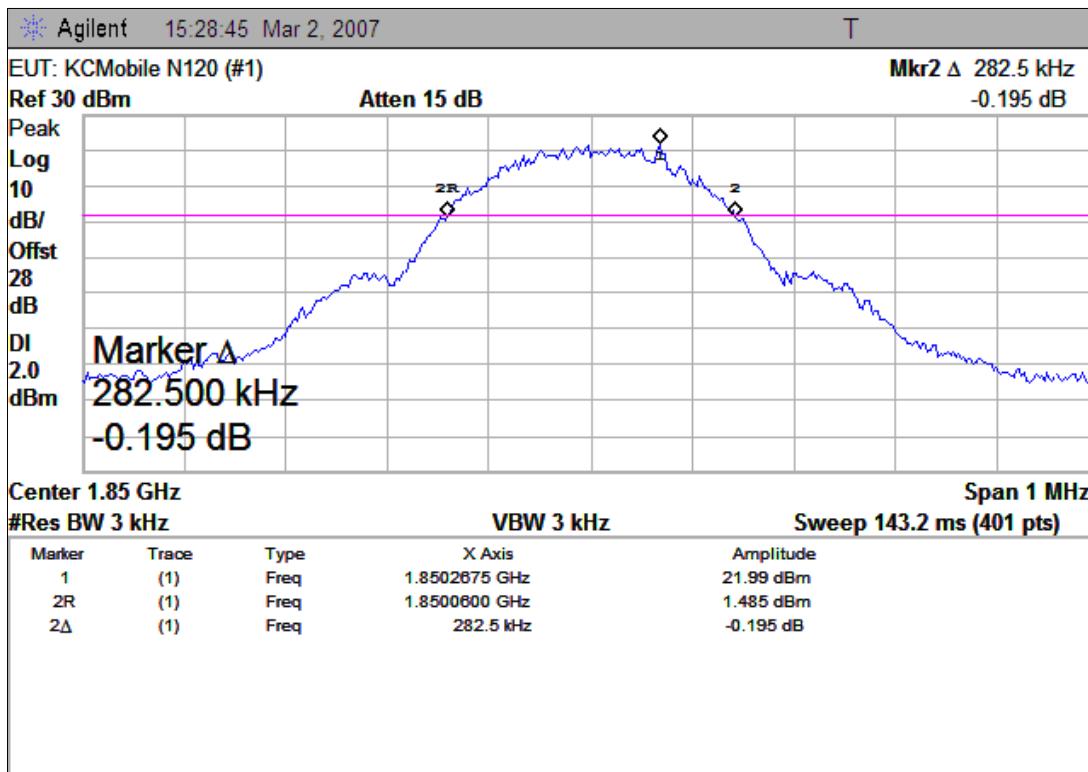

(Plot A: Channel = 512)

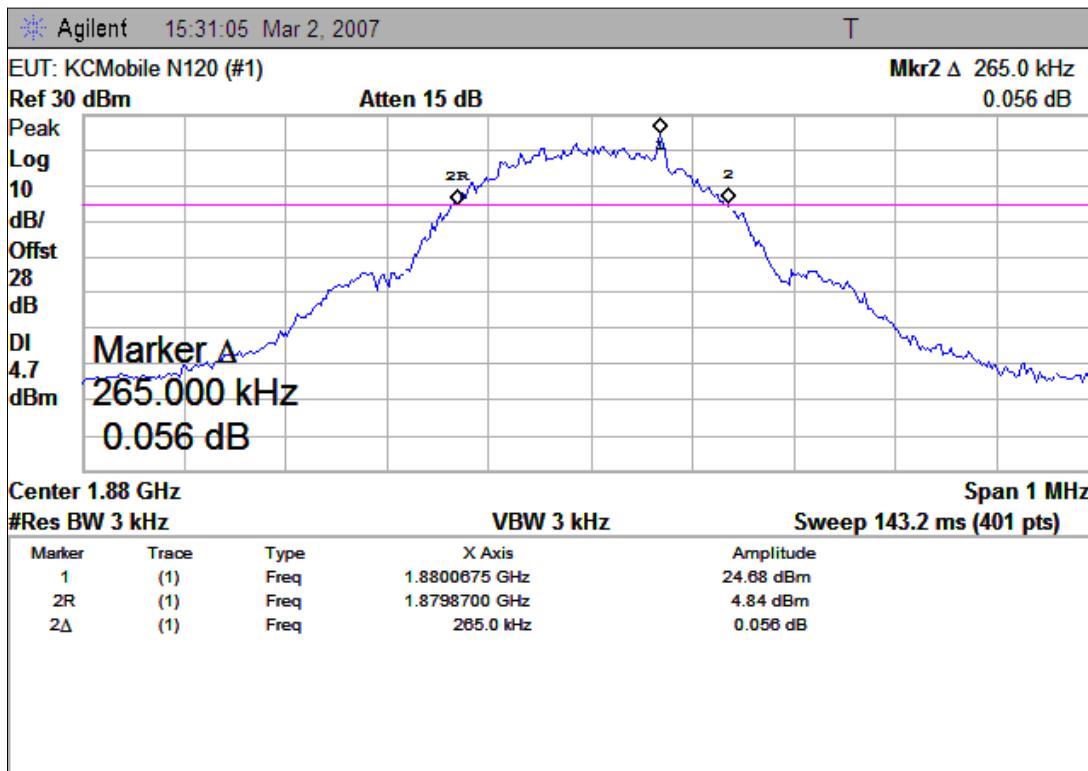

(Plot B: Channel = 661)

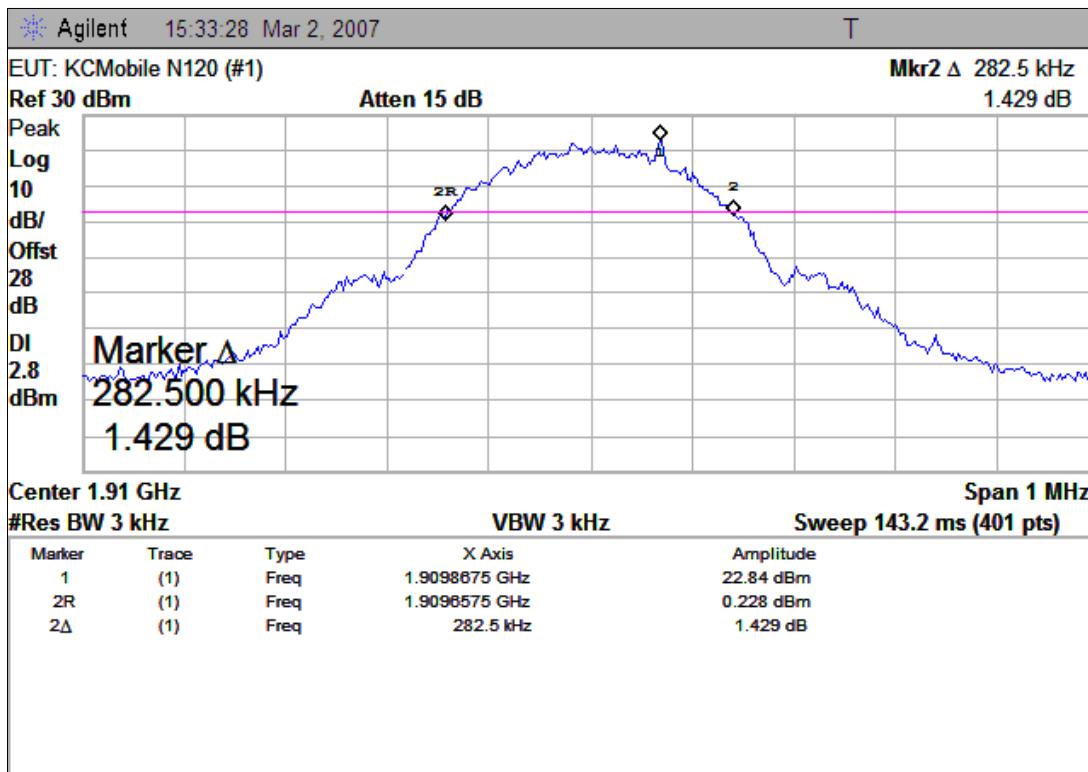

(Plot C: Channel = 810)

### 3.4 Frequency Stability


#### 3.4.1 Requirement

According to FCC section 24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. According to FCC section 2.1055, the test conditions are:

- (a) The temperature is varied from -30°C to +50°C at intervals of not more than 10°C.
- (b) For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

#### 3.4.2 Test Description

##### 1. Test Setup:

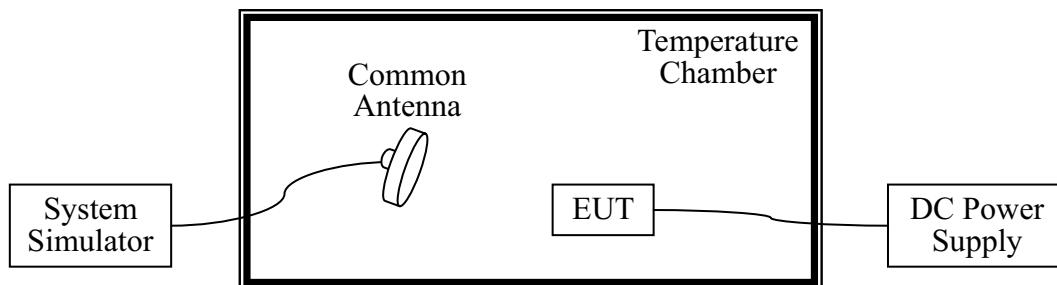

The EUT, which is powered by the DC Power Supply directly, is located in the Temperature Chamber. The EUT is commanded by the System Simulator (SS) to operate at the maximum output power i.e. Power Control Level (PCL) = 0 and Power Class = 1. A call is established between the EUT and the SS via a Common Antenna.

##### 2. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Agilent	E5515C	GB43130131	2006.06	1year
DC Power Supply	Good Will	GPS-3030DD	EF920938	2006.06	2year
Temperature Chamber	YinHe Experimental Equip.	HL4003T	(n.a.)	2006.03	1year

#### 3.4.3 Test Verdict

The nominal, highest and lowest extreme voltages are separately 3.7VDC, 4.1VDC and 3.6VDC, which are specified by the applicant; the normal temperature here used is 25°C. The frequency

deviation limit is  $\pm 1\text{ppm}$ .

Test Conditions		Frequency Deviation						Verdict	
Power (VDC)	Temperature (°C)	Channel = 512 (1850.2MHz)		Channel = 661 (1880.0MHz)		Channel = 810 (1909.8MHz)			
		Hz	Limit	Hz	Limit	Hz	Limit		
3.7	-30	-104.27	±1850.2	-51.89	±1880.0	-74.91	±1909.8	PASS	
	-20	-104.83		-39.09		-74.31			
	-10	-44.56		-30.94		-37.48			
	0	-41.25		-37.34		-44.36			
	+10	-29.57		-55.93		-71.27			
	+20	-36.14		-59.89		-86.38			
	+30	-50.77		-61.82		-74.57			
	+40	-41.83		-53.48		-92.98			
	+50	43.93		57.61		-71.87			
	4.1	+25		-14.32		-31.96			
3.6	+25	-28.20		-17.00		-22.19			

## 3.5 Conducted Out of Band Emissions

### 3.5.1 Requirement

According to FCC section 24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43+10\log(P)$  dB. This calculated to be -13dBm.

### 3.5.2 Test Description

See section 3.1.2 of this report.

### 3.5.3 Test Result


The measurement frequency range is from 30MHz to the 10<sup>th</sup> harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the out of band emissions.

#### 1. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Spurious Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
512	1850.2	---	Plot A.1/A.2	-13	PASS
661	1880.0	---	Plot B.1/B.2		PASS
810	1909.8	---	Plot C.1/C.2		PASS

#### 2. Test Plot for the Whole Measurement Frequency Range:


Note: the power of the EUT transmitting frequency should be ignored.

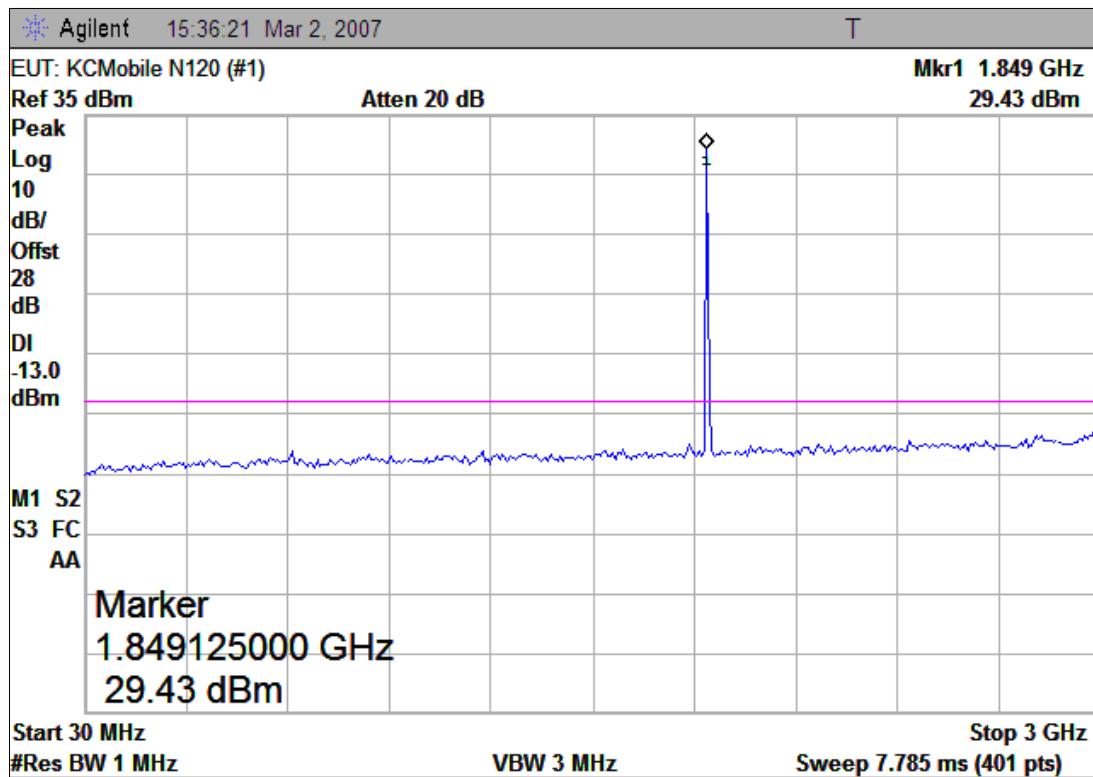


(Plot A.1: Channel = 512, 30MHz to 3GHz)

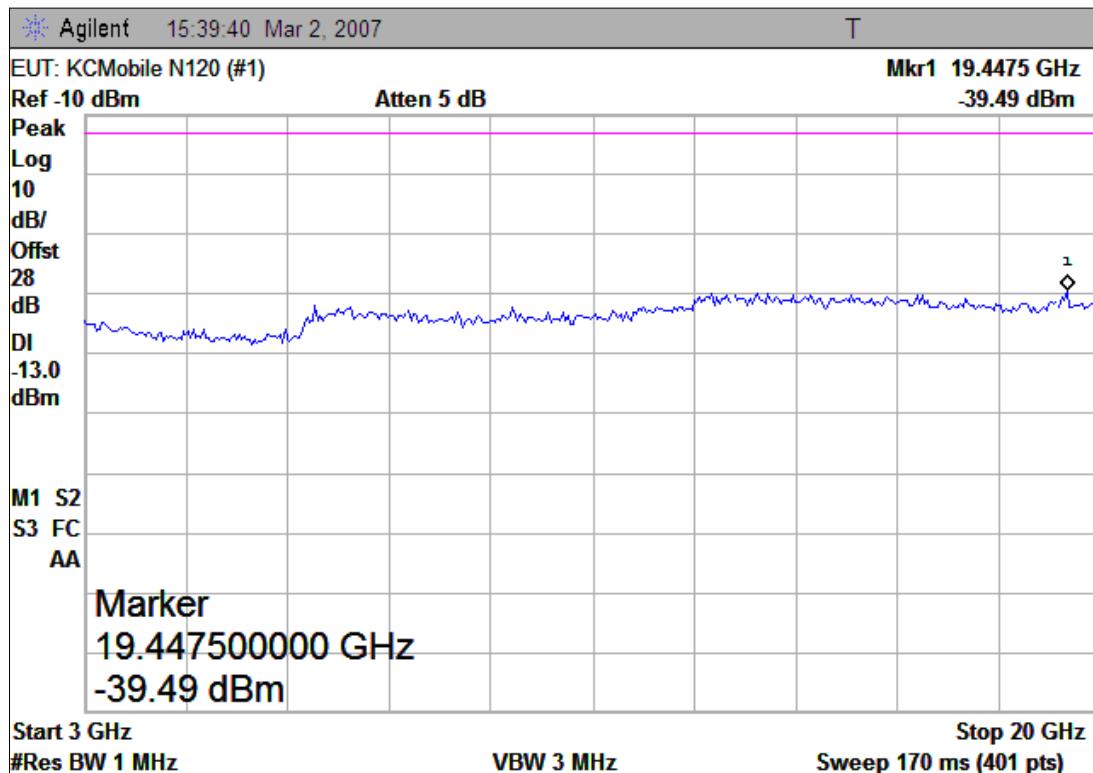


(Plot A.2: Channel = 512, 3GHz to 20GHz)

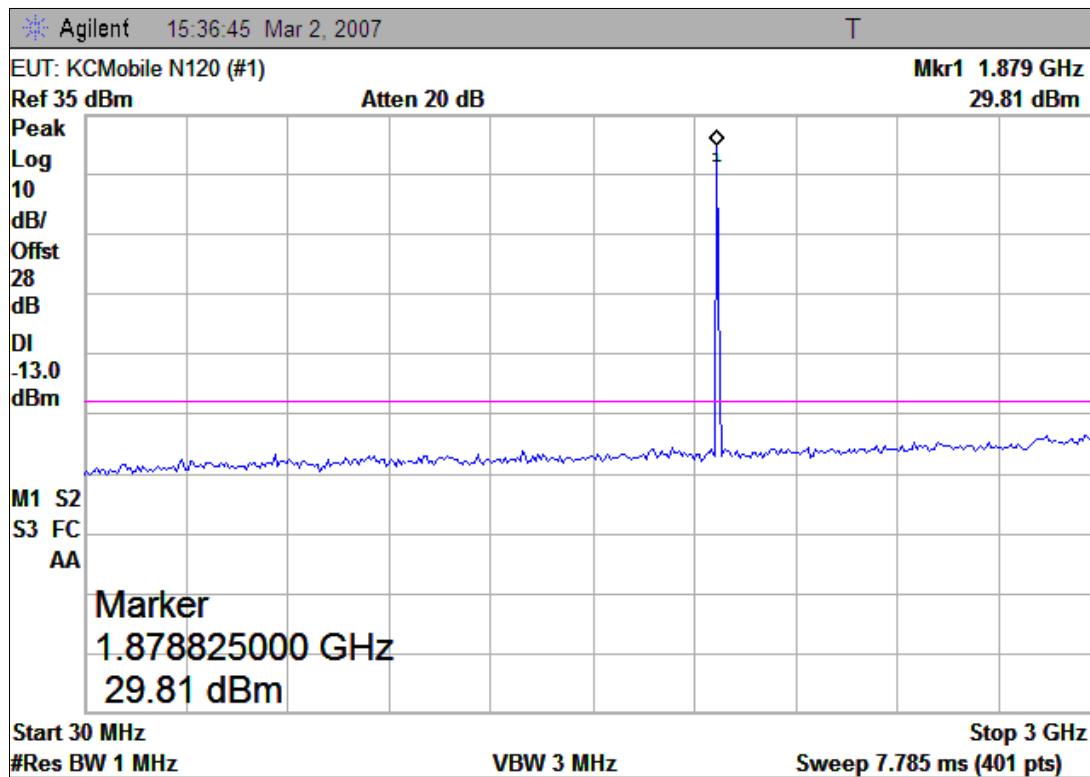


(Plot B.1: Channel = 661, 30MHz to 3GHz)

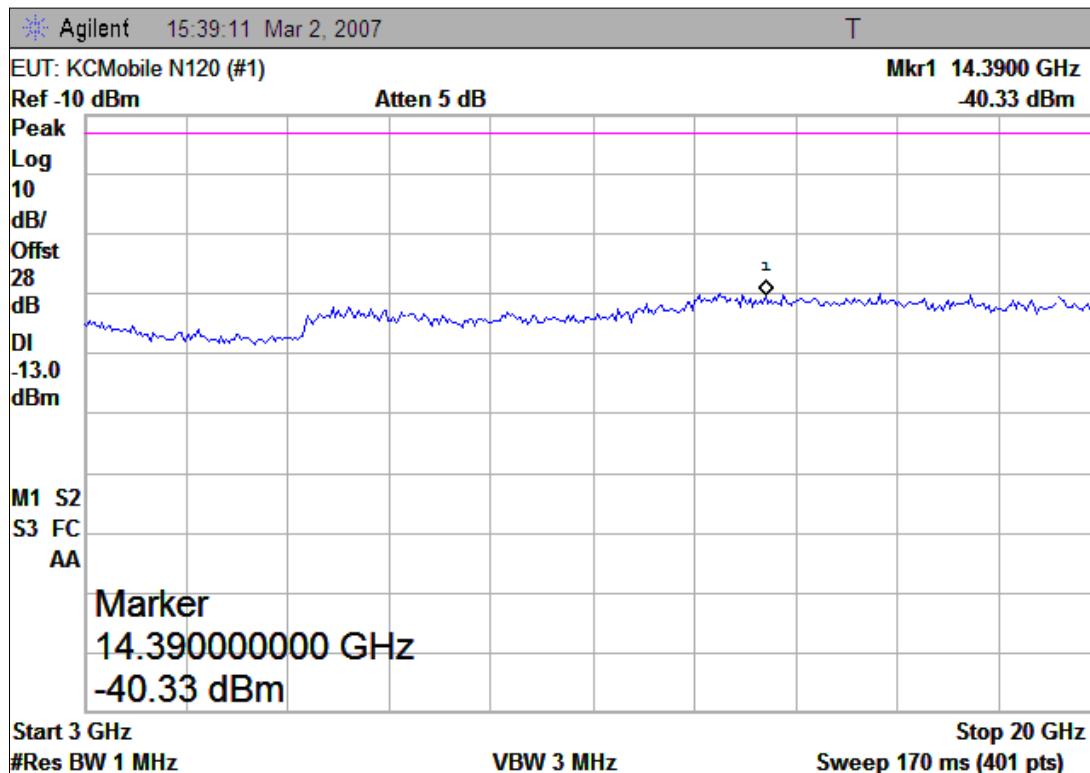

(Plot B.2: Channel = 661, 3GHz to 20GHz)

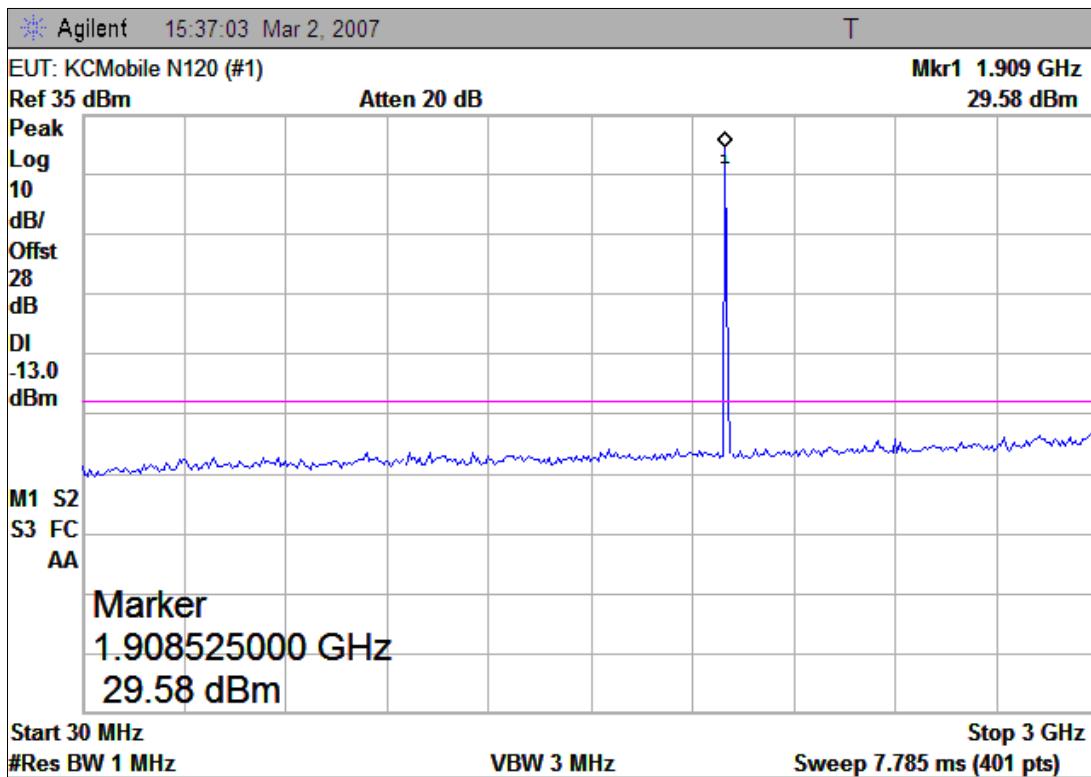

(Plot C.1: Channel = 810, 30MHz to 3GHz)

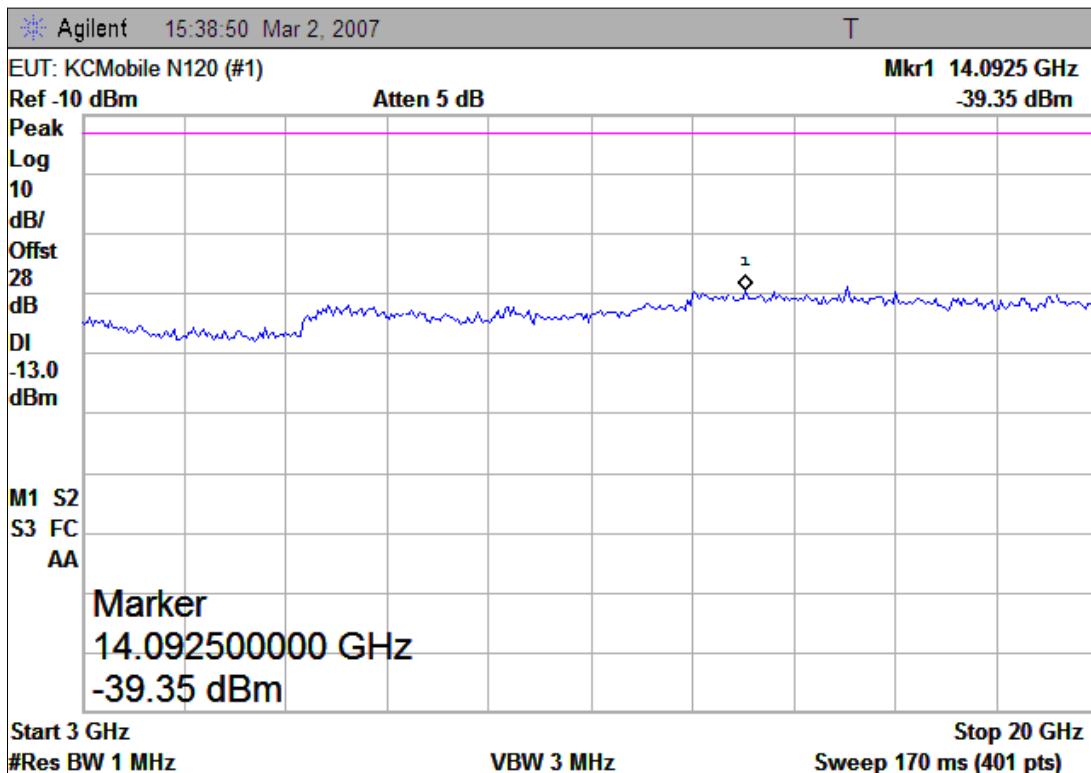

(Plot C.2: Channel = 810, 3GHz to 20GHz)

## 3.6 Band Edge

### 3.6.1 Requirement

According to FCC section 24.238(b), in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth (26dB emission bandwidth) of the fundamental emission of the transmitter may be employed.

### 3.6.2 Test Description

See section 3.1.2 of this report.


### 3.6.3 Test Result

The lowest and highest channels are tested to verify the band edge emissions.


1. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Band Edge Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
512	1850.2	-14.34	Plot A	-13	PASS
810	1909.8	-14.81	Plot B		PASS

2. Test Plot:

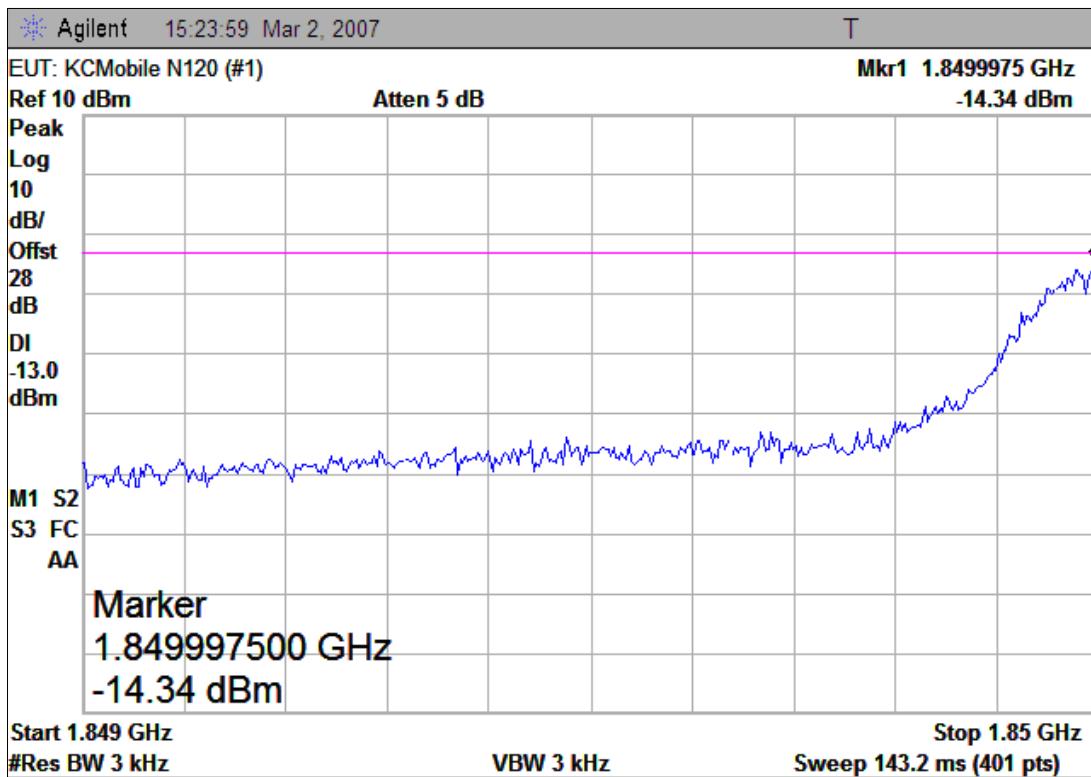

(Plot A: Channel = 512)

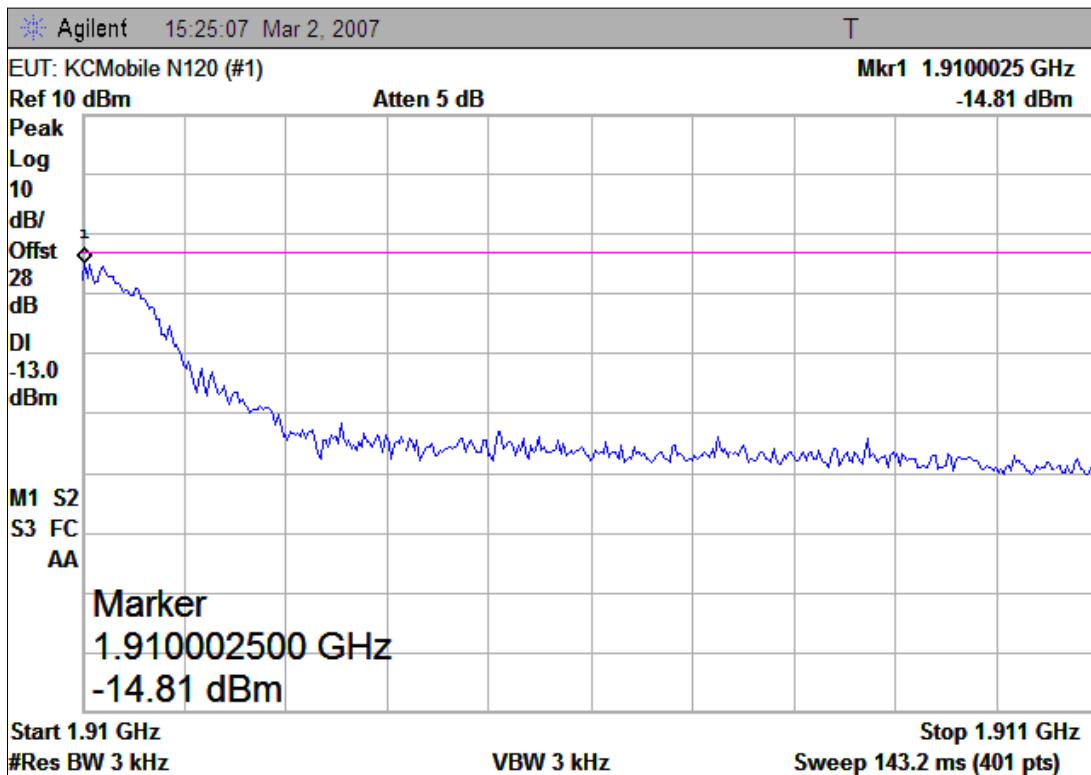

(Plot B: Channel = 810)


### 3.7 Transmitter Radiated Power (EIRP/ERP)

#### 3.7.1 Requirement

According to FCC section 24.232, the broadband PCS mobile station is limited to 2Watts e.i.r.p. peak power.

#### 3.7.2 Test Description

##### 1. Test Setup:

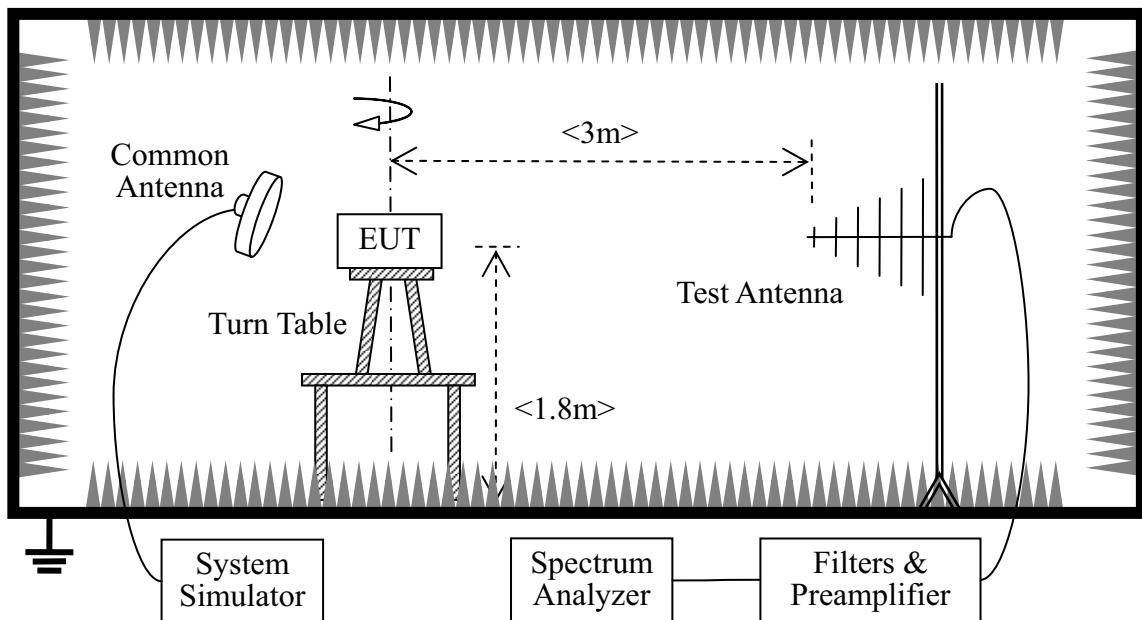

The EUT, which is powered by the Battery charged with the AC Adapter, is located in a 3m Full-Anechoic Chamber; the cable loss, air loss and so on of the site as factors are pre-calibrated using the "Substitution" method, and are calculated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 0 and Power Class = 1; and a call is established between the EUT and the SS via a Common Antenna.

The Test Antenna is a Bi-Log one (used for 30MHz to 1GHz) or a Horn one (used for above 3GHz), and it's located at the same height as the EUT. The Filters consists of Notch Filters and High Pass Filter.

##### 2. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Agilent	E5515C	GB43130131	2006.06	1year
Spectrum Analyzer	Agilent	E7405A	US44210471	2006.07	1year
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2006.08	2year

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-274	2006.07	1year
Test Antenna - Horn	Schwarzbeck	BBHA 9120C	9120C-384	2006.07	1year


### 3.7.3 Test Result

The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. The lowest, middle and highest channels are tested.


#### 1. Test Verdict:

Channel	Frequency (MHz)	Measured ERP			Limit		Verdict
		dBm	W	Refer to Plot	dBm	W	
512	1850.2	26.05	0.40	Plot A	33	2	PASS
661	1880.0	27.79	0.60	Plot B			PASS
810	1909.8	26.46	0.44	Plot C			PASS


#### 2. Test Plot:

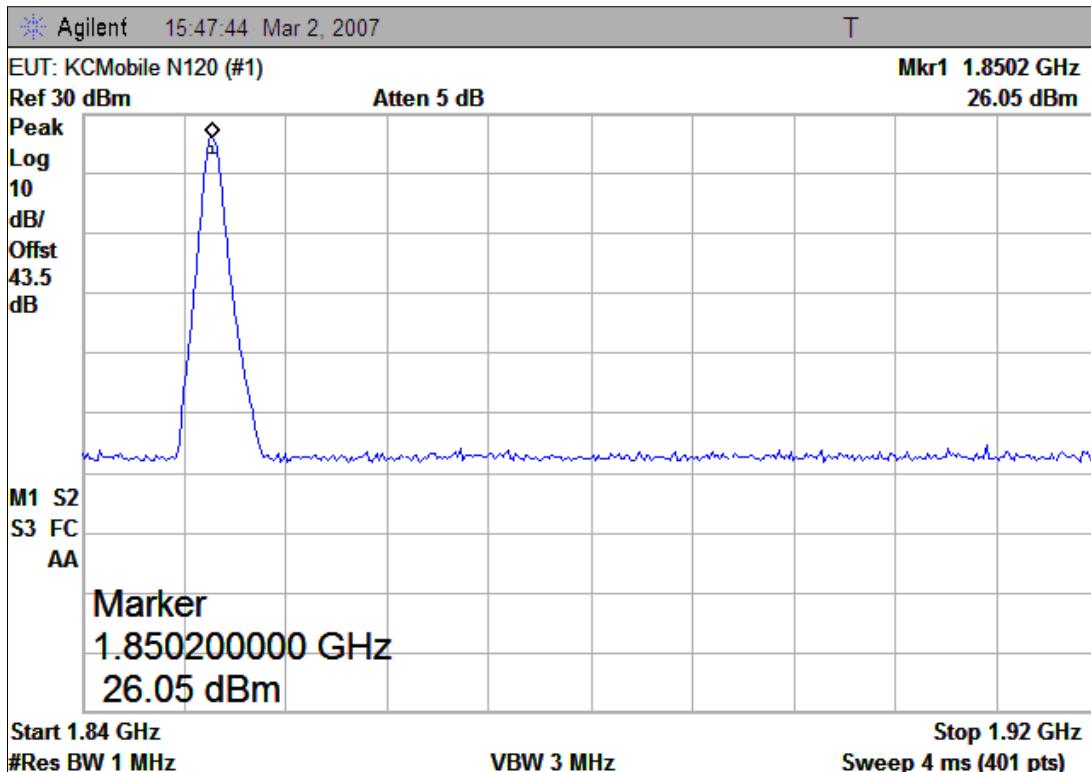

(Plot A: Channel = 512)

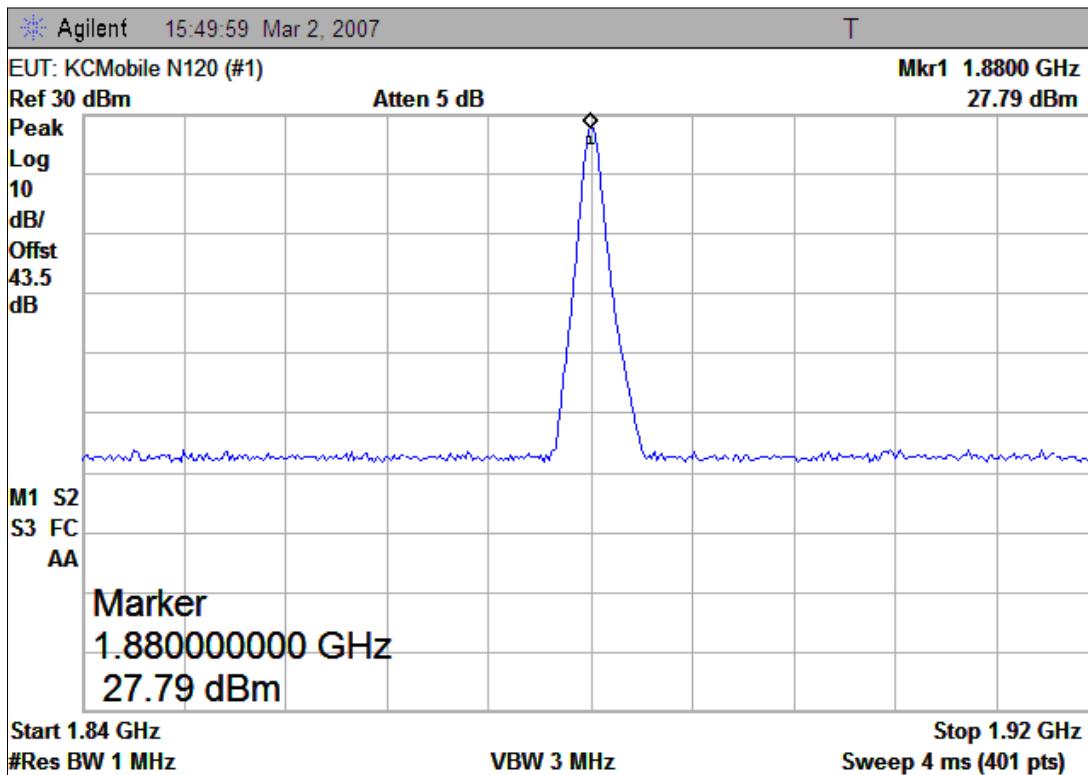

(Plot B: Channel = 661)

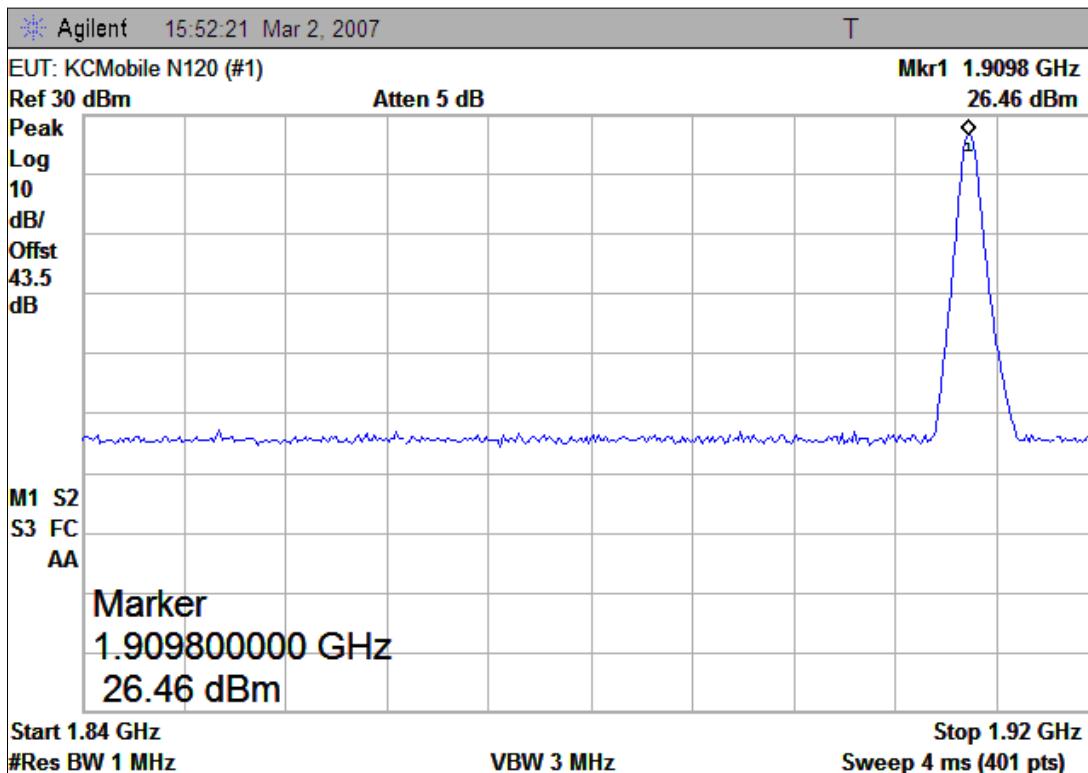

(Plot C: Channel = 810)

## 3.8 Radiated Out of Band Emissions

### 3.8.1 Requirement

According to FCC section 24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43+10*\log(P)$ dB. This calculated to be -13dBm.

### 3.8.2 Test Description

See section 3.7.2 of this report.

### 3.8.3 Test Result


The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. The lowest, middle and highest channels are tested to verify the out of band emissions.

#### 1. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Spurious Emission (dBm)		Refer to Plot	Limit (dBm)	Verdict
		Test Antenna Horizontal	Test Antenna Vertical			
512	1850.2	< -20	< -20	Plot A.1/A.2	-13	PASS
661	1880.0	< -20	< -20	Plot B.1/B.2		PASS
810	1909.8	< -20	< -20	Plot C.1/C.2		PASS

#### 2. Test Plot for the Whole Measurement Frequency Range:


Note: the power of the EUT transmitting frequency should be ignored.

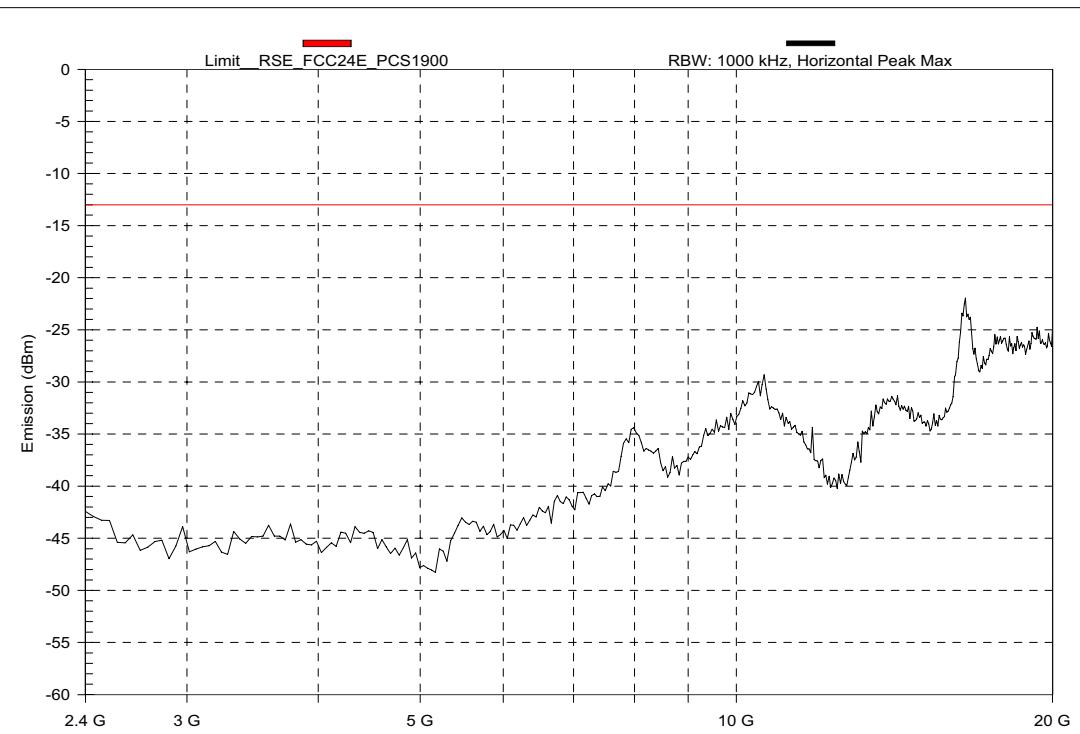


(Plot A.1: Channel = 512, Test Antenna Horizontal)

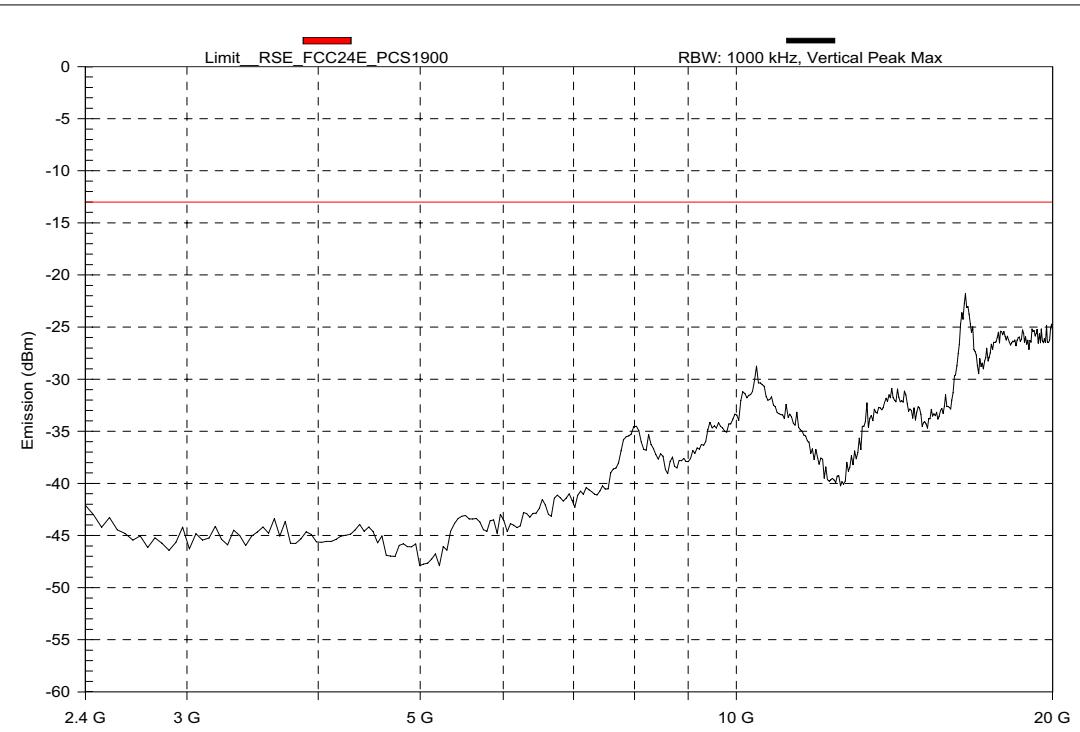


(Plot A.2: Channel = 512, Test Antenna Vertical)

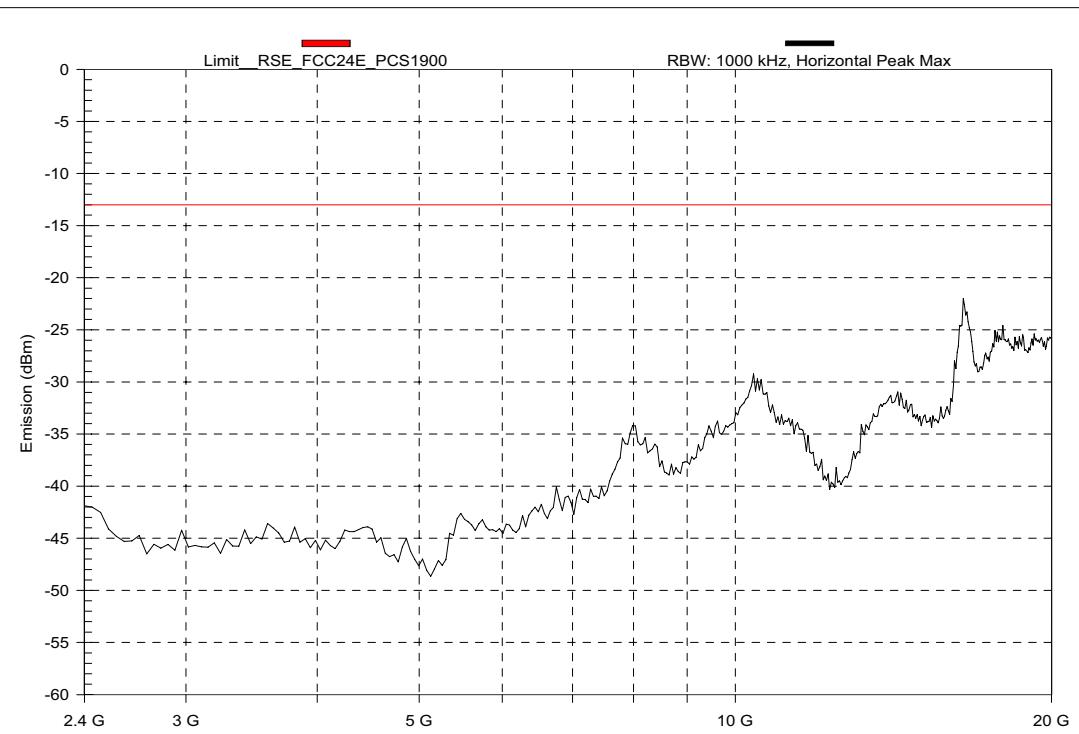


(Plot B.1: Channel = 661, Test Antenna Horizontal)

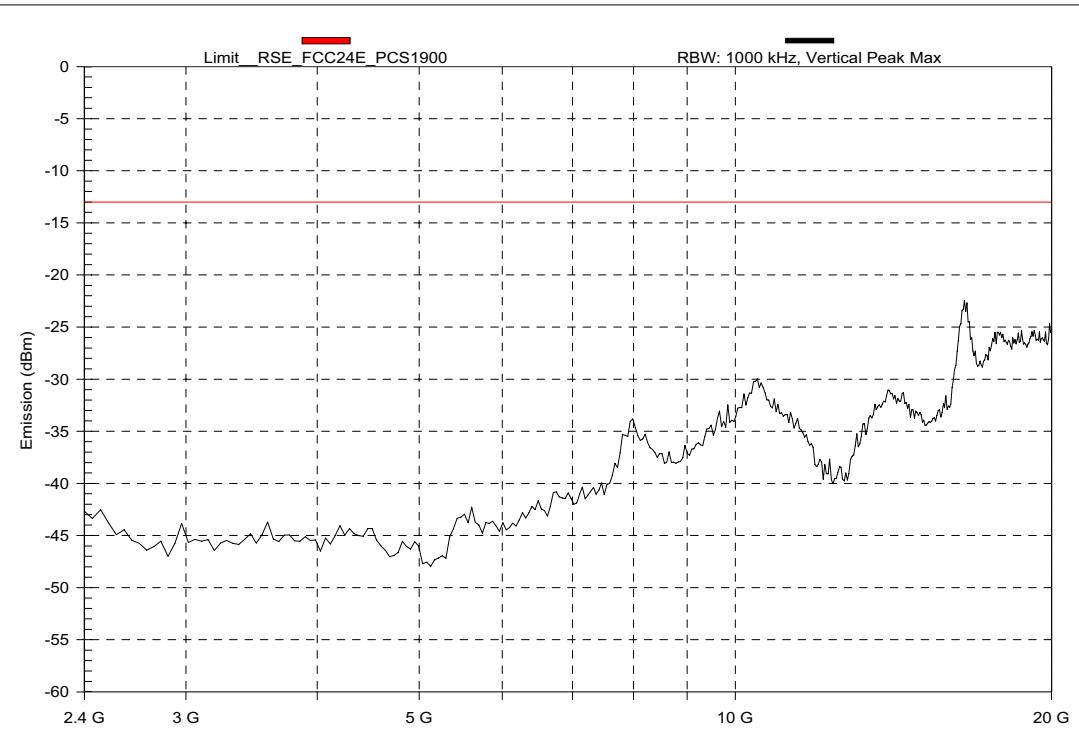

(Plot B.2: Channel = 661, Test Antenna Vertical)

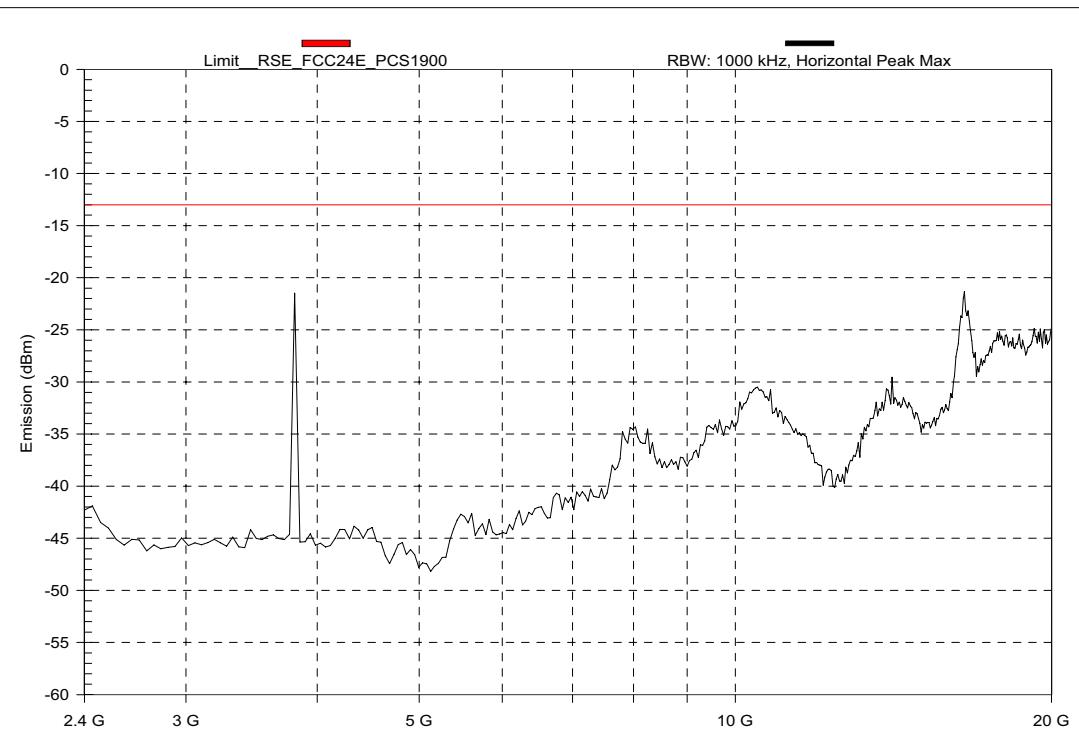

(Plot C.1: Channel = 810, Test Antenna Horizontal)

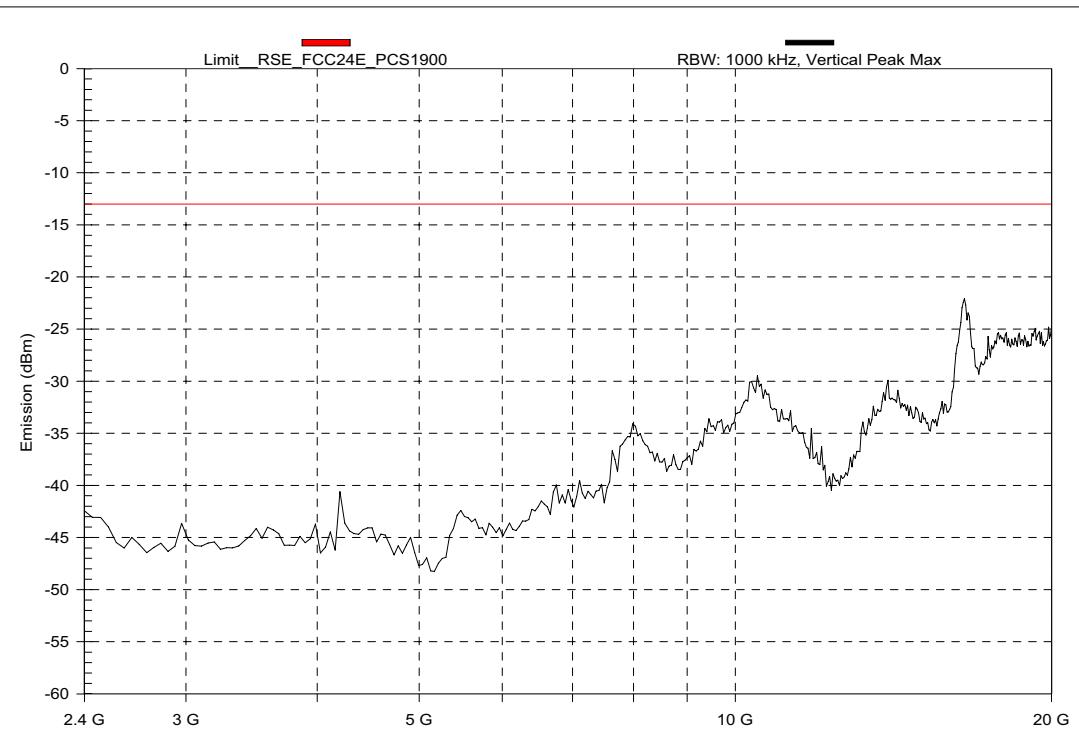

(Plot C.2: Channel = 810, Test Antenna Vertical)



Report No.: SZ07020053E02

\*\* END OF REPORT \*\*