



683-3, Yubang-Dong, Yongin-Si, Kyunggi-Do, Korea. 449-080
 Tel: +82-31-321-2664 Fax: +82-31-321-1664
<http://www.digitalemc.com>

CERTIFICATE OF COMPLIANCE
FCC Part 22 & 24 Certification

Dates of Tests: December 01~ 05, 2008
 Test Report S/N:DR50110812H
 Test Site : DIGITAL EMC CO., LTD.

FCC ID.

T6QS14

APPLICANT

KCMobile Co., Ltd.

Classification	:	Licensed Portable Transmitter Held to Ear (PCE)
FCC Rule Part(s)	:	§22(H), §24(E), §2
EUT Type	:	Quad-Band GSM/GPRS Handset
Model name	:	S14
Serial number	:	Identical prototype
TX Frequency Range	:	824.2 ~ 848.8 MHz (GSM850) / 1850.2 ~ 1909.8 MHz (PCS1900)
RX Frequency Range	:	869.2 ~ 893.8 MHz (GSM850) / 1930.2 ~ 1989.8 MHz (PCS1900)
Max. RF Output Power	:	0.771 W ERP GSM850
	:	0.984 W EIRP PCS1900
Max. SAR Measurement	:	0.669mW/g GSM850 Head SAR // 0.027mW/g GSM850 GPRS Body SAR
	:	1.250mW/g PCS1900 Head SAR // 0.049mW/g PCS1900 GPRS Body SAR
Date of Issue	:	December 09, 2008

TABLE OF CONTENTS

◆ CONFIDENTIALITY LETTER(S)	
◆ AUTHORIZATION LETTER	
◆ TEST REPORT	
1 SCOPE	3
2 INTRODUCTION	4
3 TEST REPORT	5
3.1 SUMMARY OF TEST	5
3.2 POWER OUTPUT	6
3.3 OCCUPIED BANDWIDTH	13
3.4 OCCUPIED BANDWIDTH EMISSION LIMIT	17
3.5 SPURIOUS EMISSION AT ANT. TERMINAL	23
3.6 FIELD STRENGTH OF SPURIOUS RADIATION	33
3.7 FREQUENCY STABILITY	40
4 TEST EQUIPMENT	45
5 EMISSION DESIGNATOR	47
6 CONCLUSION	48
◆ PART LOCATION	
◆ FCC ID LABEL & LOCATION	
◆ TEST SETUP PHOTOGRAPHS	
◆ EXTERNAL PHOTOGRAPHS	
◆ INTERNAL PHOTOGRAPHS	
◆ BLOCK DIAGRAM(S)	
◆ SCHEMATIC DIAGRAM(S)	
◆ OPERATIONAL DESCRIPTION	
◆ PARTS LIST	
◆ USER'S MANUAL	
◆ SAR TEST REPORT	
◆ SAR VALIDATION AND TEST PLOTS	
◆ SAR TEST SETUP PHOTOGRAPHS	
◆ PROBE CALIBRATION	
◆ DIPOLE CALIBRATION	

MEASUREMENT REPORT

1. Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

§2.1033 General Information

Applicant: KCMobile Co., Ltd.

Address: No. 303 AcetechnoTower 3rd, 197-48 Guro 3 Dong, Guro Gu, Seoul, 152-779, Korea

Attention: Sung Kyu Lee (Marketing Manager)

- FCC ID: T6QS14
- Quantity: The mass product
- Tx Freq. Range: 824.2 ~ 848.8 MHz (GSM850) / 1850.2 ~ 1909.8 MHz (PCS1900)
- Rx Freq. Range: 869.2 ~ 893.8 MHz (GSM850) / 1930.2 ~ 1989.8 MHz (PCS1900)
- Max. Power Rating: 0.771 W ERP GSM850
0.984 W EIRP PCS1900
- FCC Classification(s): Licensed Portable Transmitter Held to Ear (PCE)
- Equipment (EUT) Type: Quad-Band GSM/GPRS Handset
- Modulation(s): GMSK
- Frequency Tolerance: ± 0.00025 % (2.5ppm)
- FCC Rule Part(s): §22(H), §24(E), §2
- Dates of Tests: December 01 ~ 05, 2008
- Place of Tests: DIGITAL EMC
- Test Report S/N: DR50110812H

2. General Information

This report contains the result of tests performed by:

DIGITAL EMC CO., LTD.

Address: 683-3, Yubang-Dong, Yongin-Si, Kyunggi-Do, Korea. 449-080

<http://www.digitalemc.com> E-mail: demc@unitel.co.kr

Tel: +82-31-321-2664 Fax: +82-31-321-1664

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the "General requirements for the competents of calibration and testing laboratory".

This laboratory is accredited by NVLAP for NVLAP Lab. Code: 200559-0.

Test operator: engineer



December 09, 2008

D.C. Cha

Data

Name

Signature

Report Reviewed By: manager



December 09, 2008

Harvey Sung

Data

Name

Signature

Ordering party:

Company name	:	KCMobile Co., Ltd.
Address	:	No. 303 AcetechnoTower 3rd, 197-48 Guro 3 Dong, Guro Gu
P.O. Box	:	152-779
City	:	Seoul
Country	:	Korea
Date of order	:	November 26, 2008

3. Test Report

3.1 Summary of test

FCC Part Section(s)	Parameter	Status (note 1)
22.913(a) / 24.232(b), 2.1046	Power Output	C
22.917 / 24.238, 2.1049(h)(i)	Occupied Bandwidth	C
22.917(b) / 24.238(b)	Emission Bandwidth	C
22.917 / 24.238 2.1051	Emission Limits Transmitter	C
2.1053 (a)	Field Strength of Spurious Radiation	C
2.1055	Frequency Stability	C

Note 1: C= Complies NC=Not Complies NT=Not Tested NA=Not Applicable

- The sample was tested according to the following specification:

FCC Parts §22(H), §24(E), §2; ANSI/TIA/EIA-603-C 2004

- This device was also tested and approved by FCC DOC and Verification

3.2 Power Output

FCC ID : **T6QS14**
Specification : 47 CFR 2.1046 (a)
Tested Frequency : 824.2MHz, 836.6MHz and 848.8MHz for GSM850
1850.2MHz, 1880.0MHz and 1909.8MHz for PCS1900

Measurement Procedure:

- During the process of testing, the EUT was controlled via Radio Communication tester to ensure max. power transmission and proper modulation.
 - Power output was measured at the RF output terminals when the transmitter is adjusted in accordance with Communication tester (or the tune-up procedure).

Measurement Data:


GSM850

Channel	Frequency (MHz)	TEST CONDITIONS	
		Power Step: 5	
128	824.2		29.12
190	836.6		29.12
251	848.8		29.08


PCS1900

Channel	Frequency (MHz)	TEST CONDITIONS	Power Step: 0
		(dBm)	
512	1850.2		28.59
661	1880.0		28.76
810	1909.8		28.85


POWER OUT. GSM850 Ch.128

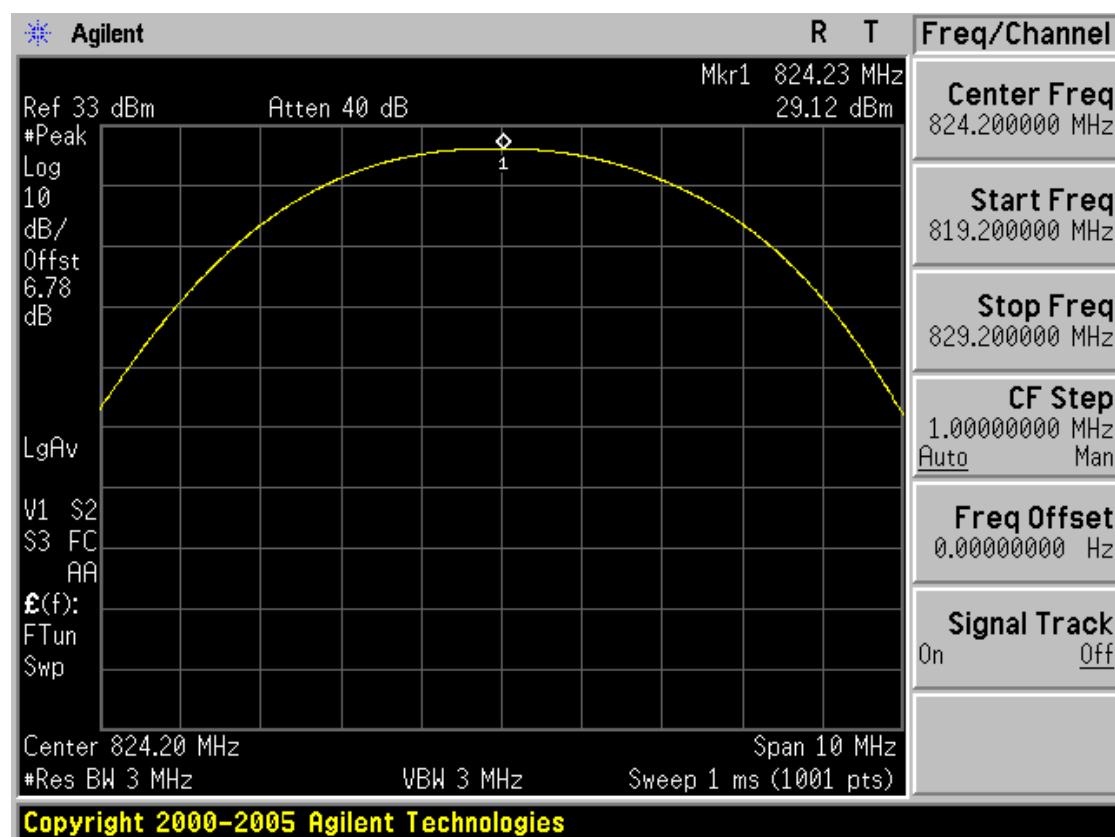


POWER OUT. GSM850 Ch.190

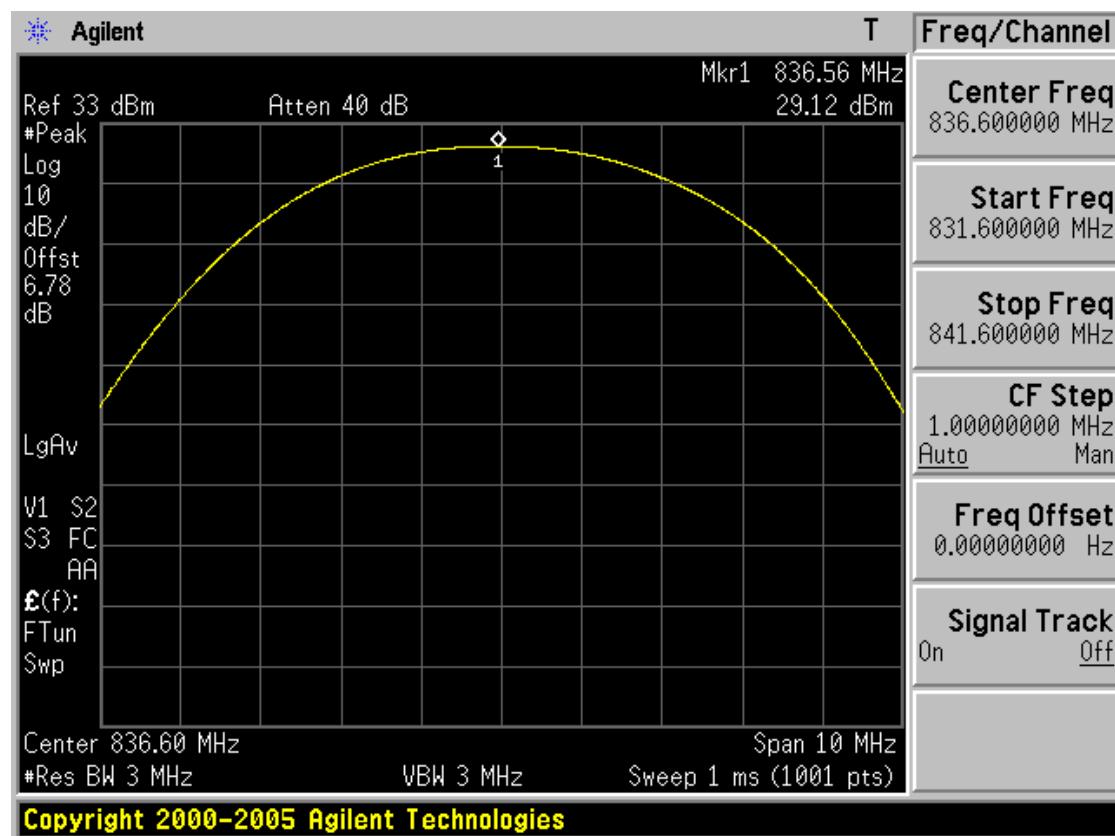


POWER OUT. GSM850 Ch.251

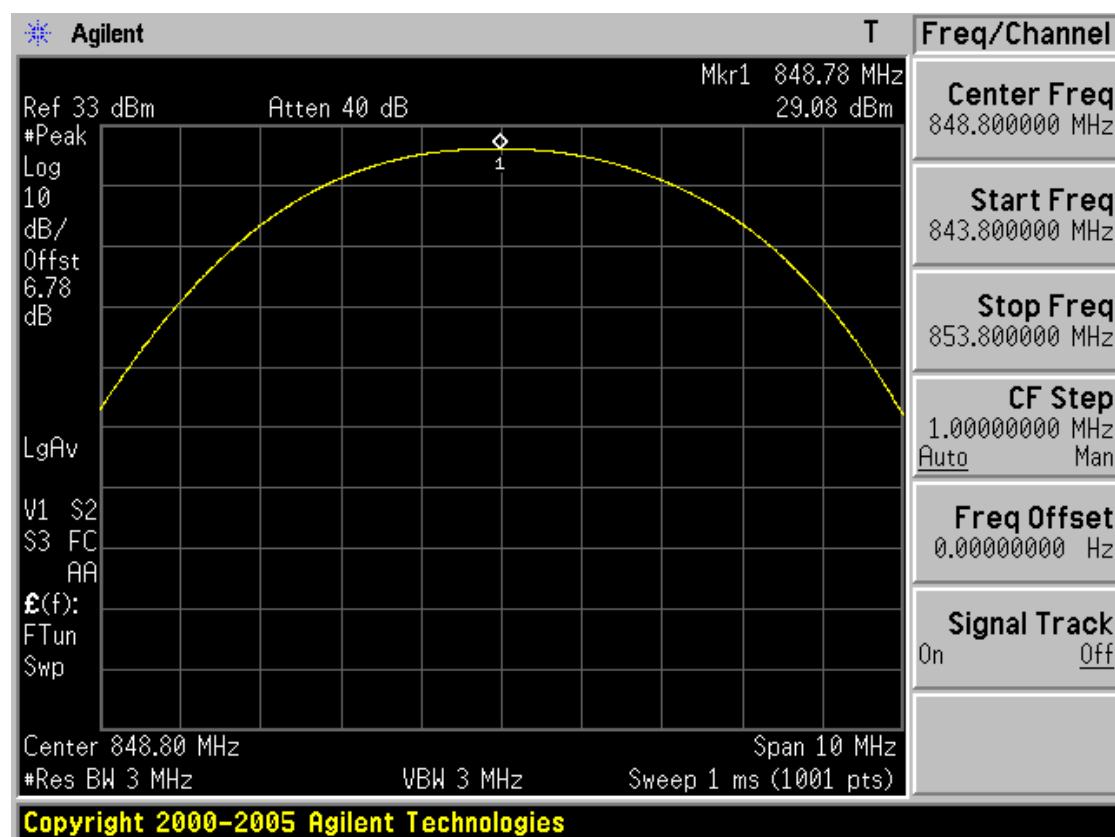


POWER OUT. PCS1900 Ch.512

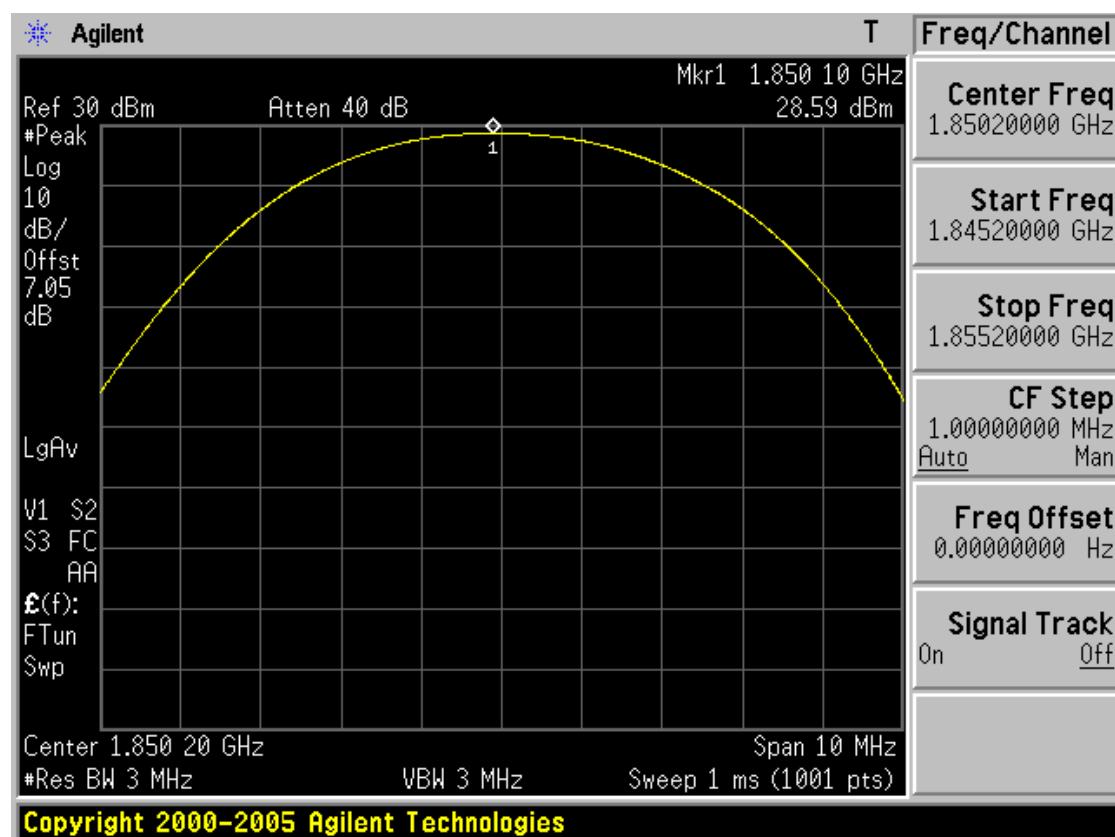

POWER OUT. PCS1900 Ch.661

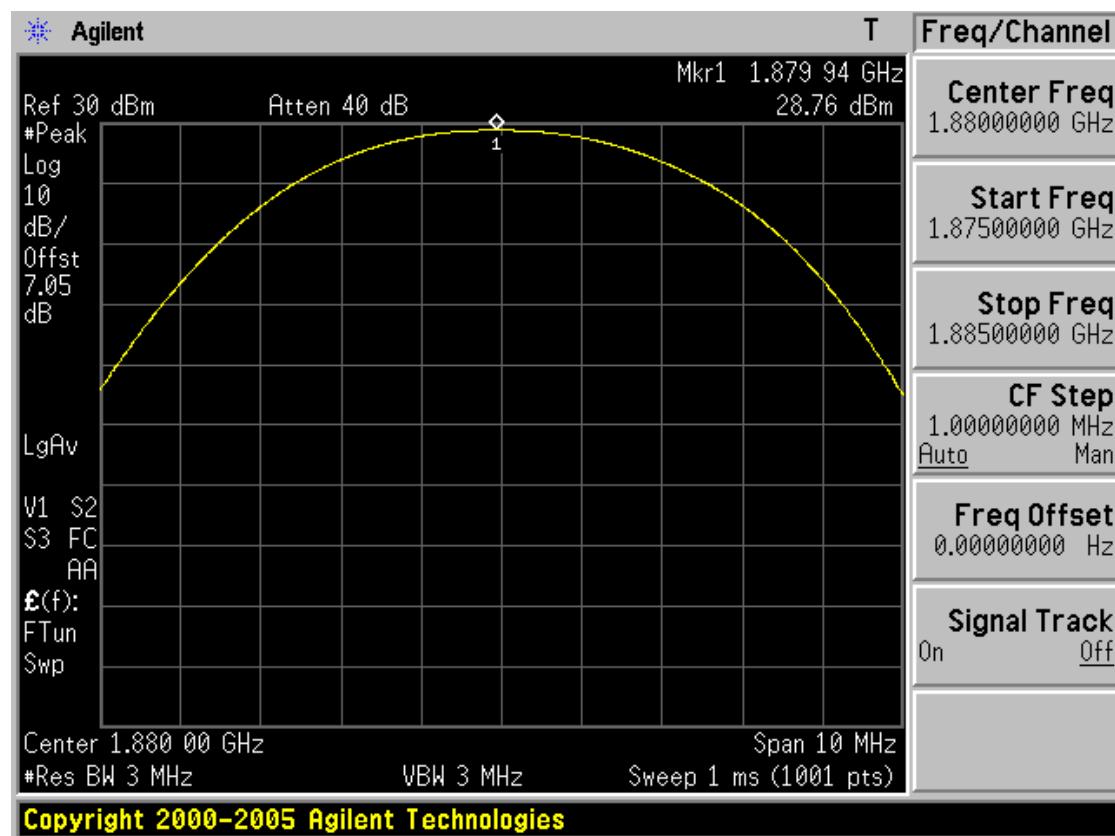

POWER OUT. PCS1900 Ch.810

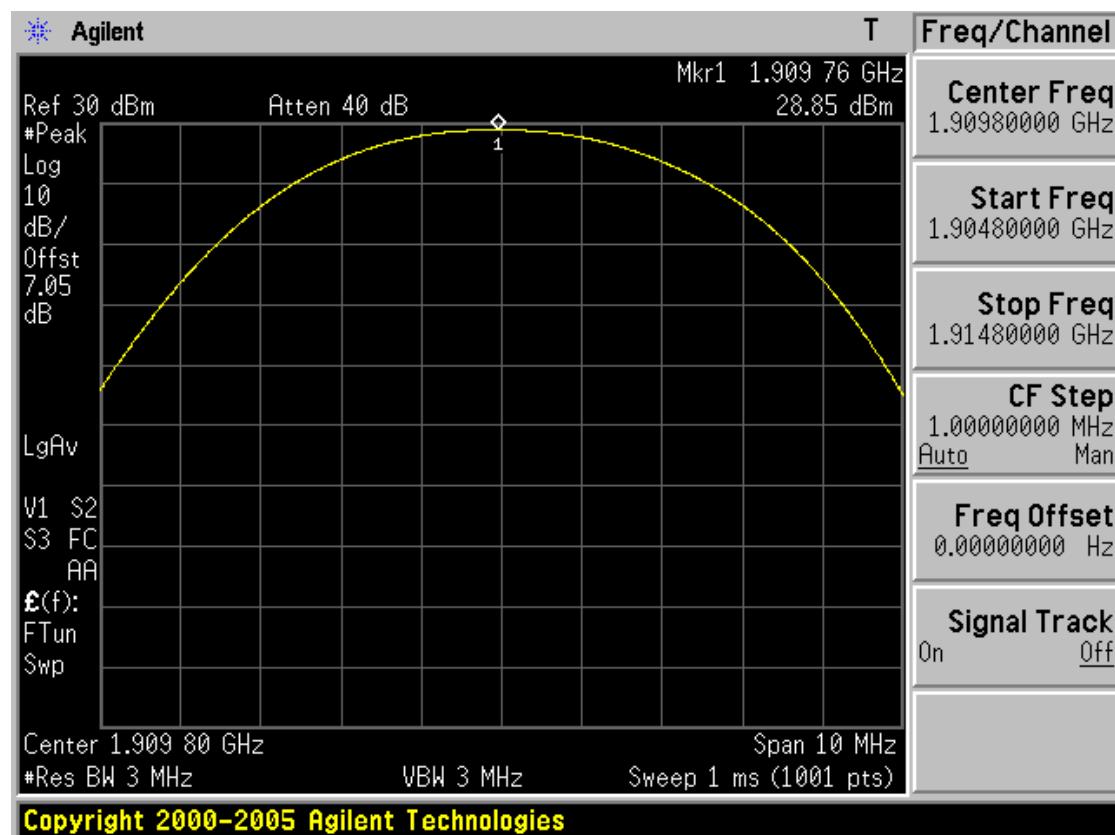

ERP (GSM850)

FCC ID : **T6QS14**
 Specification : 47 CFR 22.913(a)
 Tested Frequency : 824.2MHz, 836.6MHz and 848.8MHz for GSM850
 RBW=VBW : 3MHz

Measurement Procedure:Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C 2004

The EUT was placed on a wooden turntable 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

Measurement Data:

Channel	Frequency (MHz)	TEST CONDITIONS			Power Step: 5		
		Ref. level (dBm)	Pol. (H/V)	ERP (dBm)	ERP (W)	Power Supply	Note.
128	824.2	-9.96	H	28.35	0.684	Battery	-
190	836.6	-9.76	H	28.87	0.771	Battery	-
251	848.8	-10.05	H	28.65	0.733	Battery	-

EIRP (PCS1900)

FCC ID : **T6QS14**
 Specification : 47 CFR 24.232(b)
 Tested Frequency : 1850.2MHz, 1880.0MHz and 1909.8MHz for PCS1900
 RBW=VBW : 3MHz

Measurement Procedure:

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C 2004

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

Measurement Data:

Channel	Frequency (MHz)	TEST CONDITIONS				Power Step: 0		Note
		Ref. level (dBm)	Pol. (H/V)	ANT GAIN	EIRP (dBm)	EIRP (W)	Power Supply	
512	1850.20	-10.32	V	8.55	29.17	0.826	Battery	-
661	1880.00	-11.02	V	8.39	29.45	0.881	Battery	-
810	1909.80	-11.03	V	8.37	29.93	0.984	Battery	-

3.3 Occupied Bandwidth

FCC ID : **T6QS14**
Specification : 47 CFR 2.1049 (h)(i)
Tested Frequency : 824.2MHz, 836.6MHz and 848.8MHz for GSM850
1850.2MHz, 1880.0MHz and 1909.8MHz for PCS1900

Measurement Procedure:

- The 99% power bandwidth was measured with a calibrated spectrum analyzer.
 - Spectrum analyzer plots are included on the following pages.

Measurement Data:

GSM850

Channel	Frequency (MHz)	99% Bandwidth
		(kHz)
128	824.2	249.4378
190	836.6	247.8550
251	848.8	249.5590

PCS1900

Channel	Frequency (MHz)	99% Bandwidth	
		(kHz)	
512	1850.2		247.1483
661	1880.0		250.8999
810	1909.8		251.0841

GSM850


99 % Bandwidth Ch. 128



Copyright 2000-2005 Agilent Technologies

GSM850


99 % Bandwidth Ch. 190

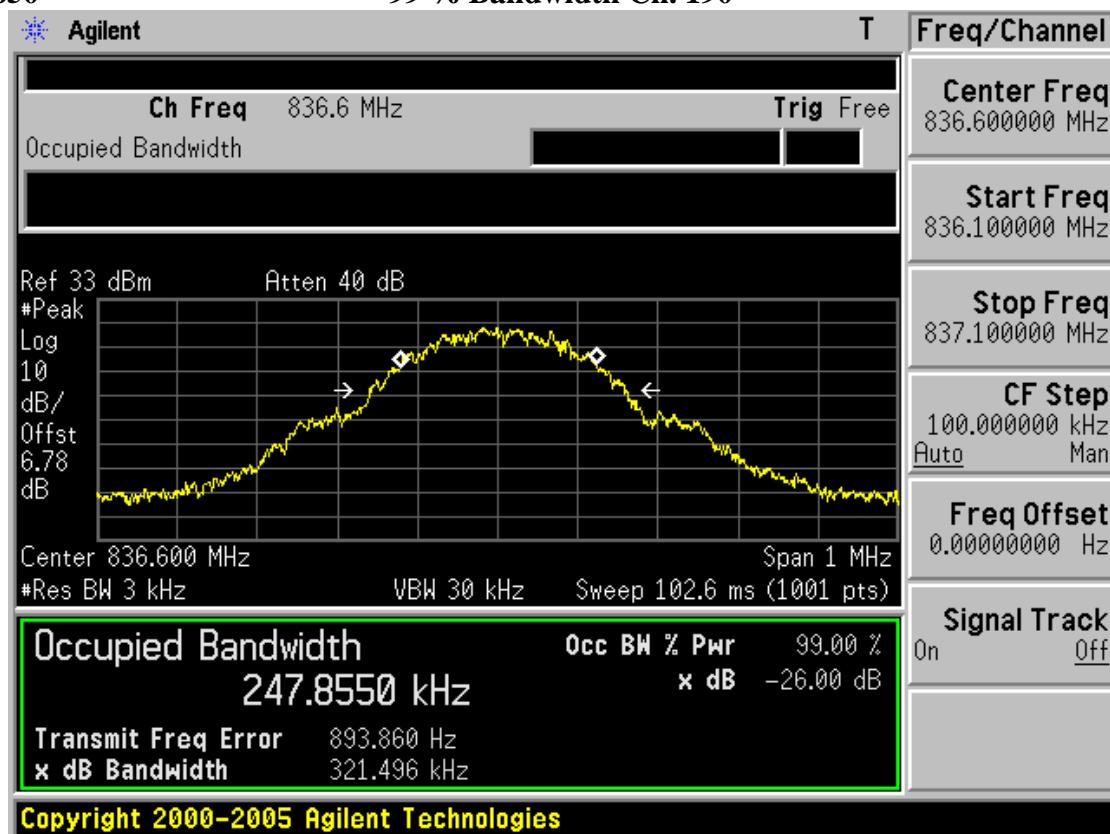

Copyright 2000-2005 Agilent Technologies

GSM850

99 % Bandwidth Ch. 251

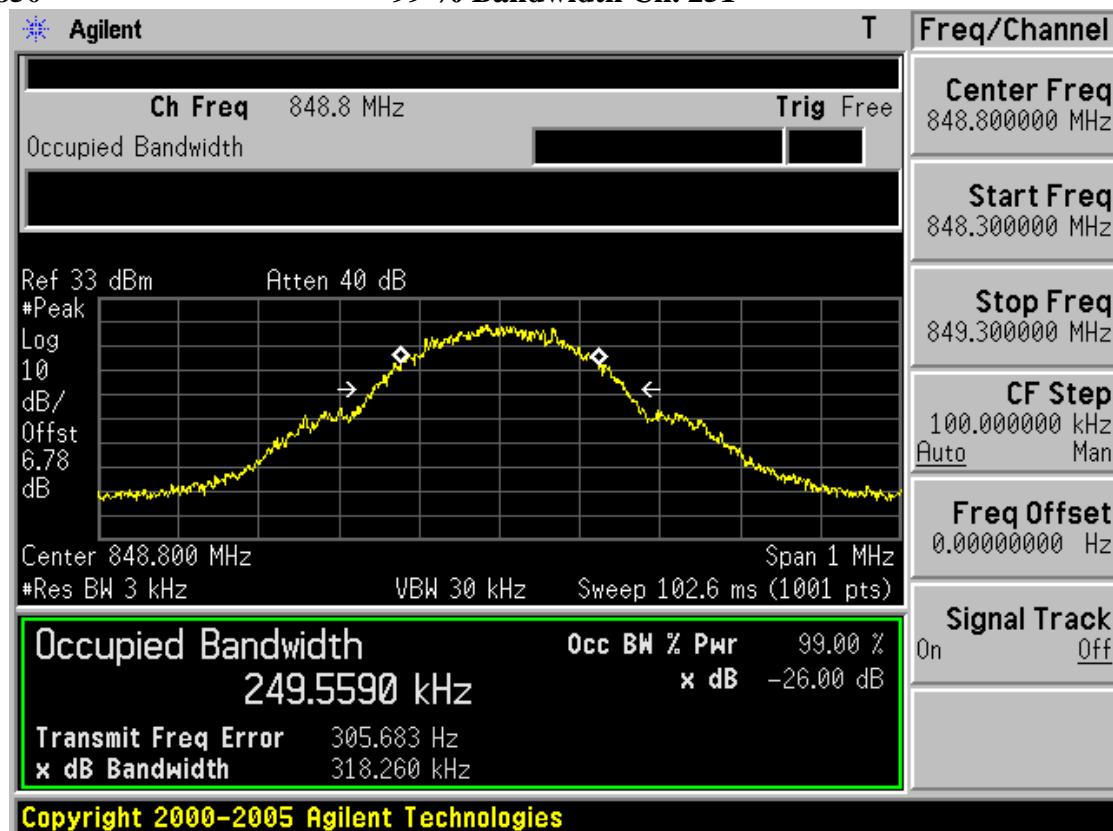

PCS1900

99 % Bandwidth Ch. 512




PCS1900

99 % Bandwidth Ch. 661



PCS1900

99 % Bandwidth Ch. 810

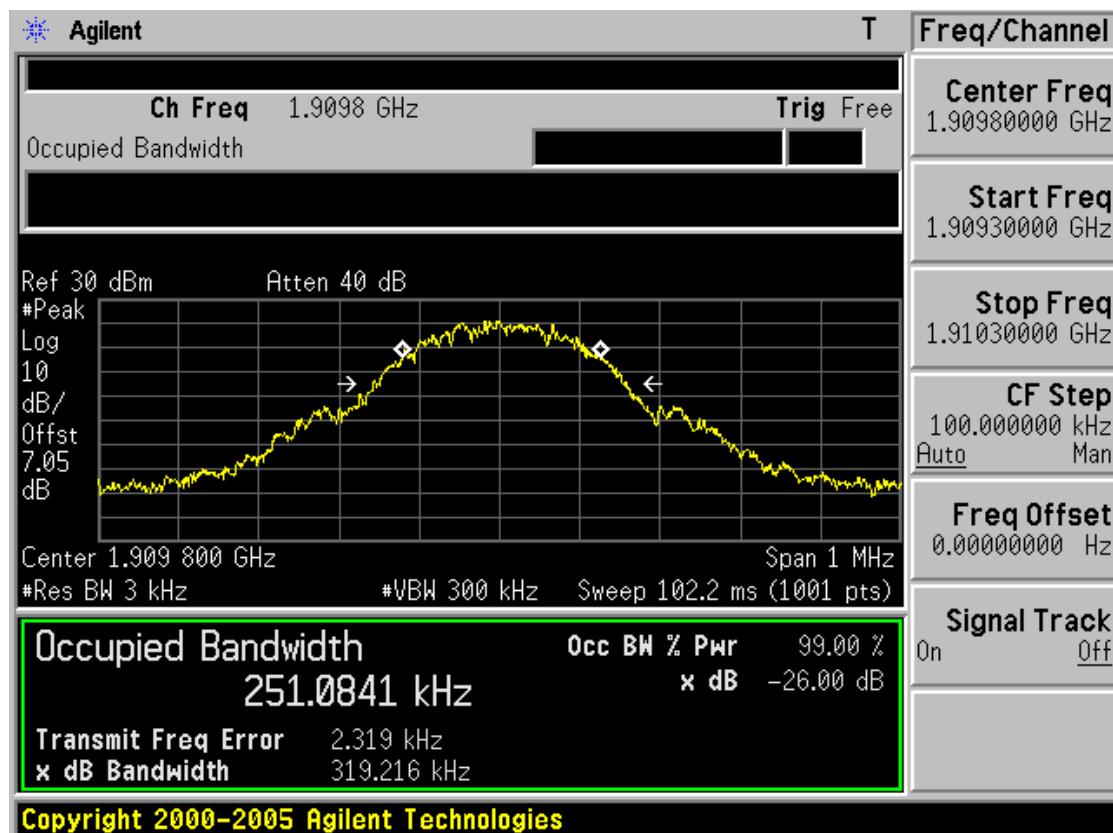

3.4 Occupied Bandwidth Emission Limit

FCC ID : **T6QS14**
Specification : 47 CFR 24.238(b)
Tested Frequency : 824.2MHz, 836.6MHz and 848.8MHz for GSM850
1850.2MHz, 1880.0MHz and 1909.8MHz for PCS1900

Measurement Procedure:

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43+10\log(P)$ dB.
 - (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26dB below the transmitter power.
 - (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
 - The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.
 - Spectrum analyzer plots are included on the following pages.

Measurement Data:

GSM850


Channel	Frequency (MHz)	-26dBc Bandwidth	
		(kHz)	
128	824.2		319
190	836.6		317
251	848.8		315

PCS1900

Channel	Frequency (MHz)	-26dBc Bandwidth	
		(kHz)	
512	1850.2		312
661	1880.0		316
810	1909.8		317


GSM850

-26dBc Bandwidth Ch. 128

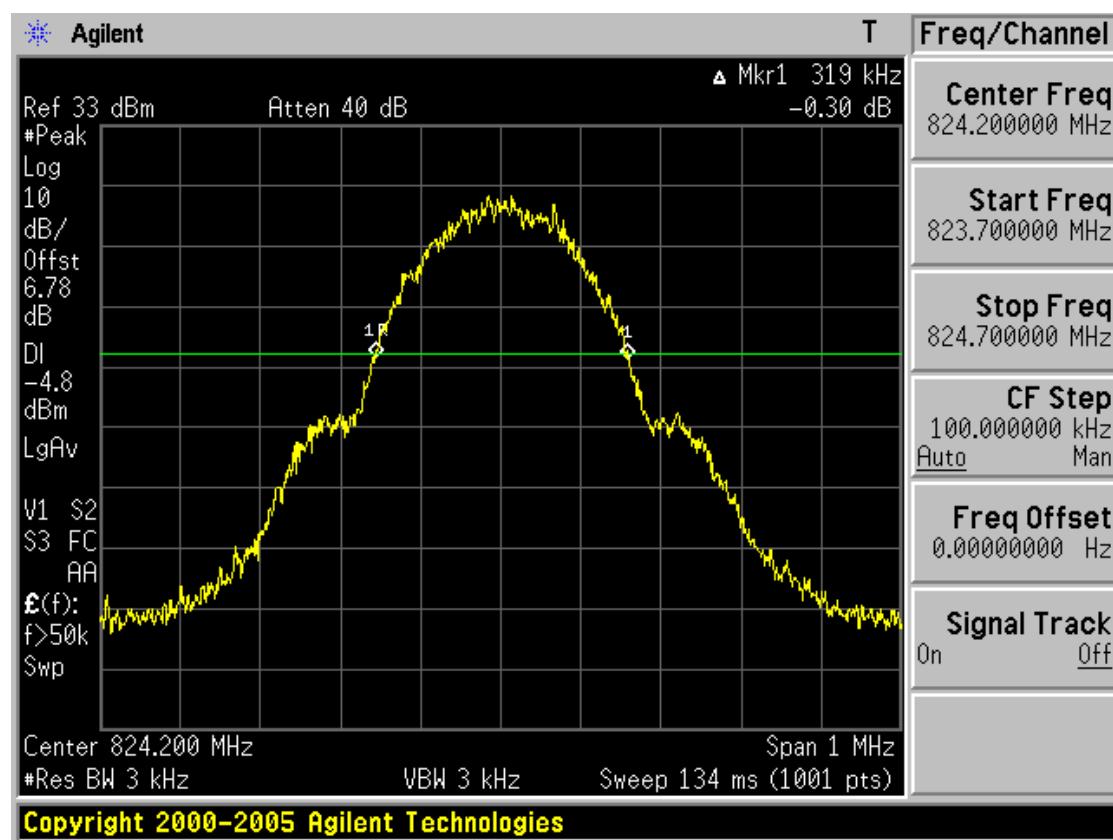


GSM850

-26dBc Bandwidth Ch. 190

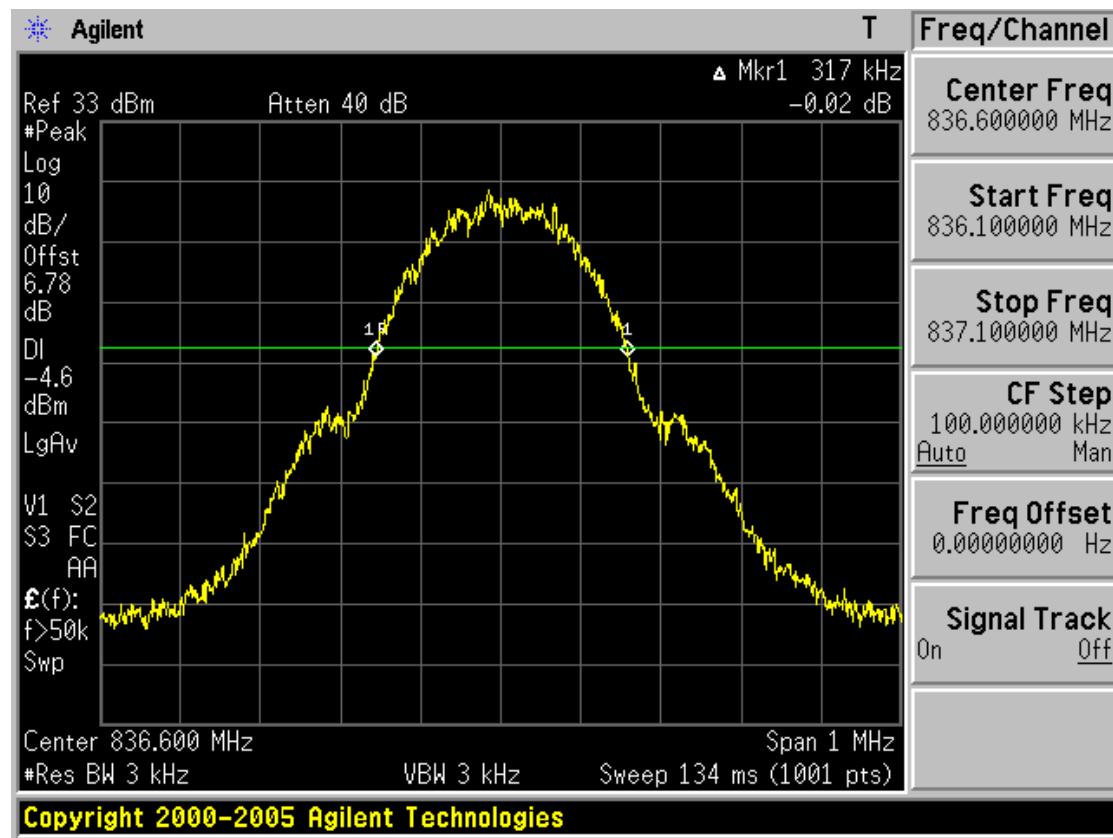


GSM850

-26dBc Bandwidth Ch. 251

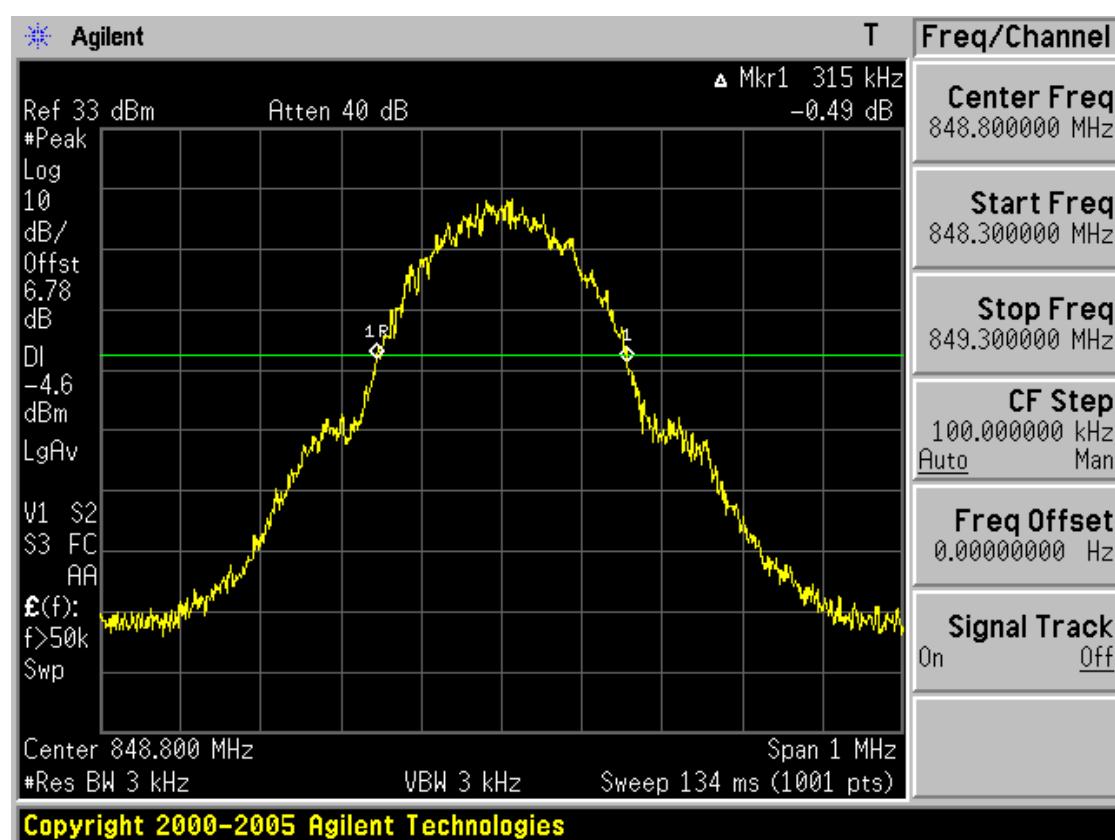


PCS1900

-26dBc Bandwidth Ch. 512

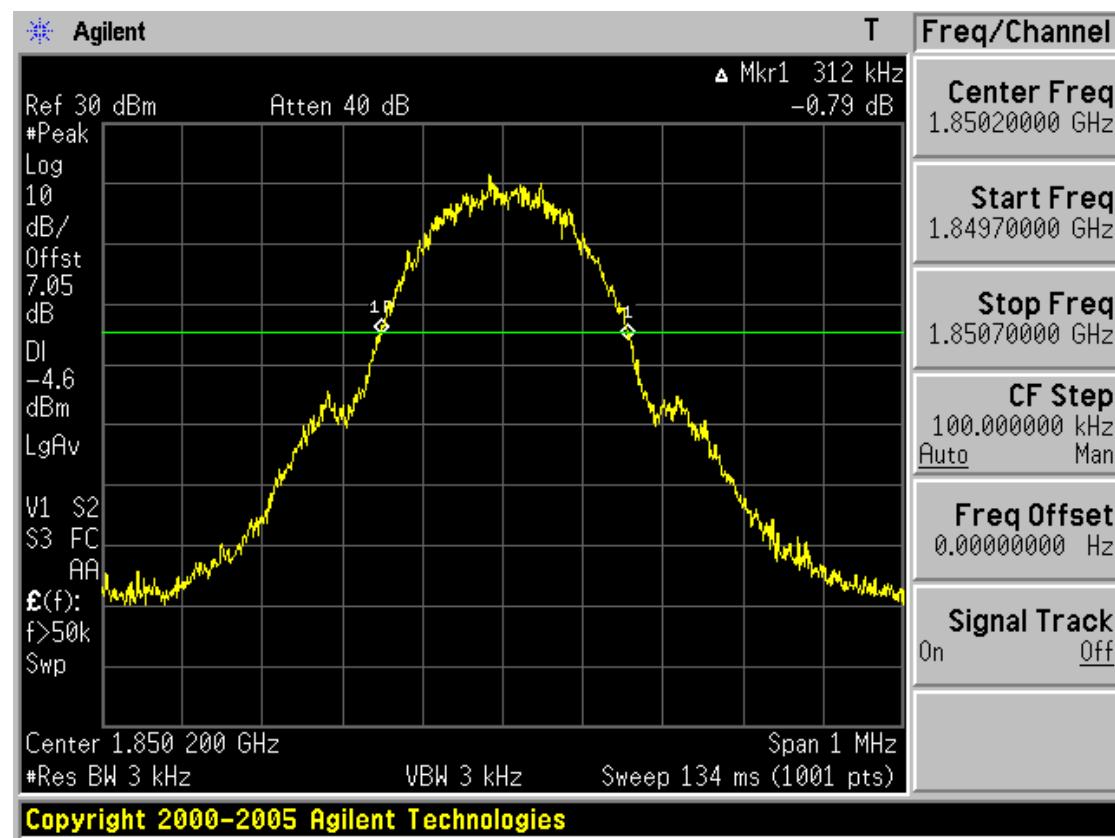


PCS1900

-26dBc Bandwidth Ch. 661

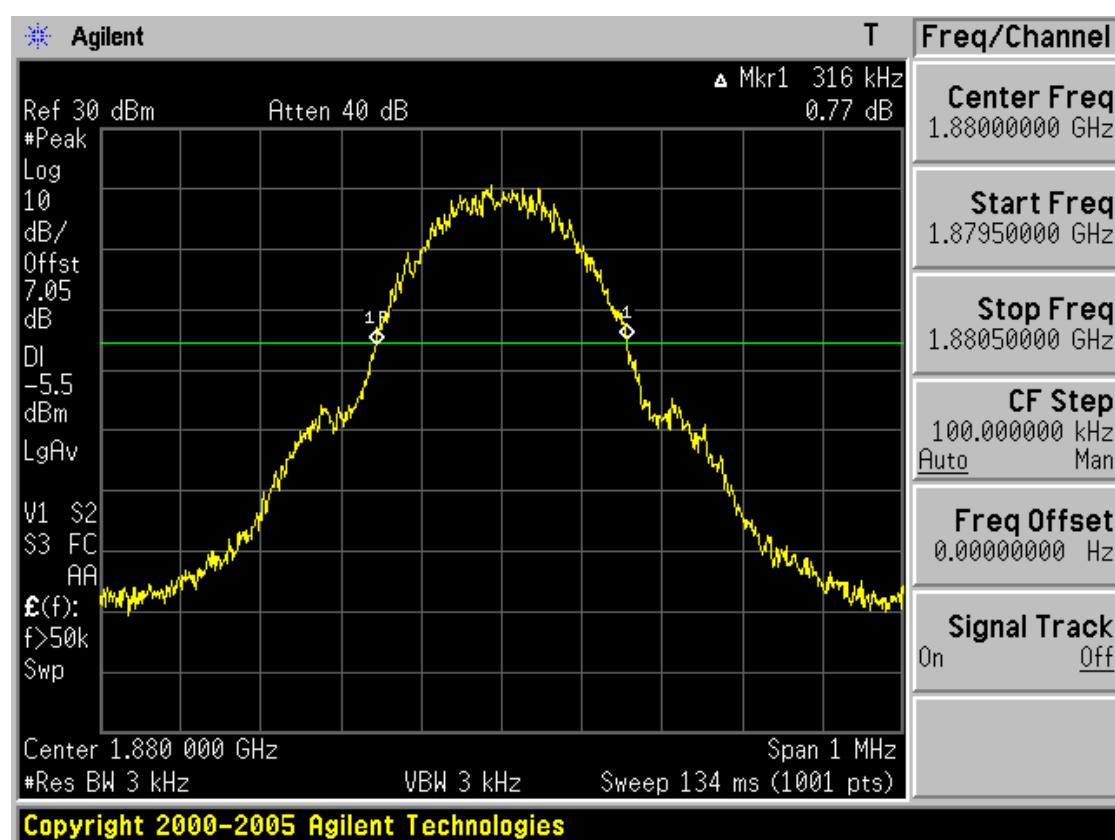


PCS1900

-26dBc Bandwidth Ch. 810

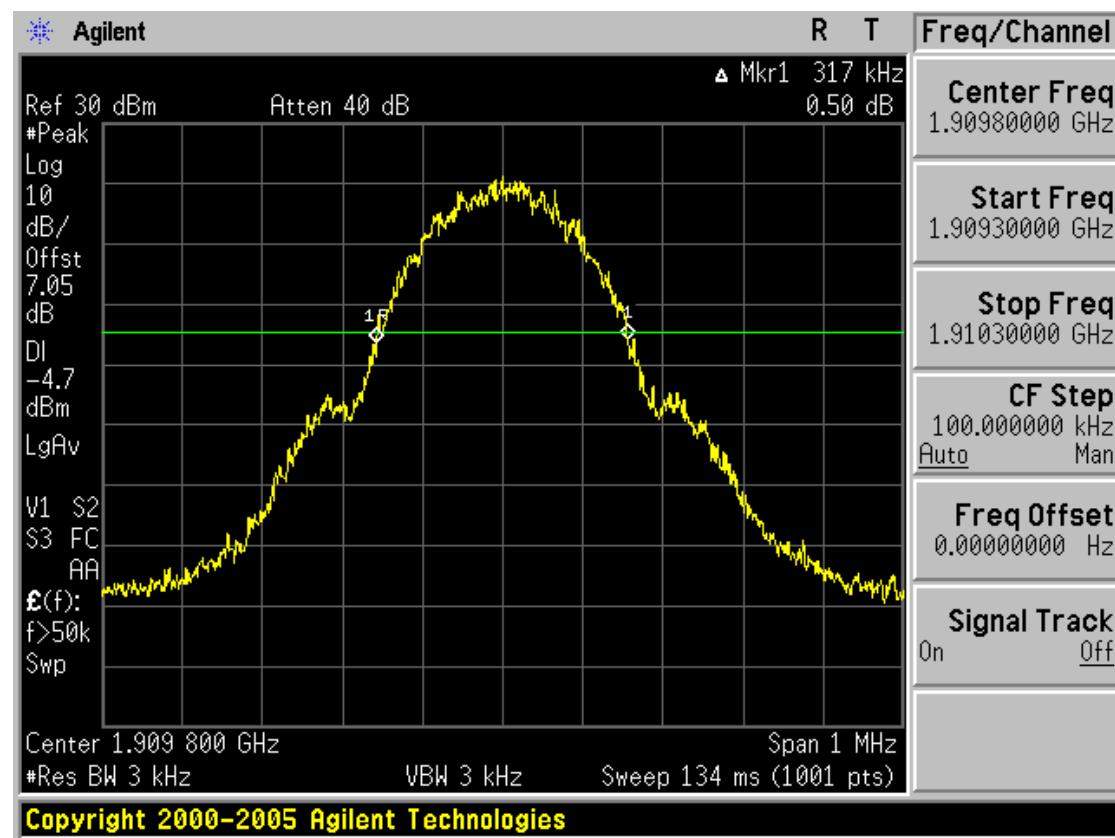


GSM850

Band Edge Ch. 128

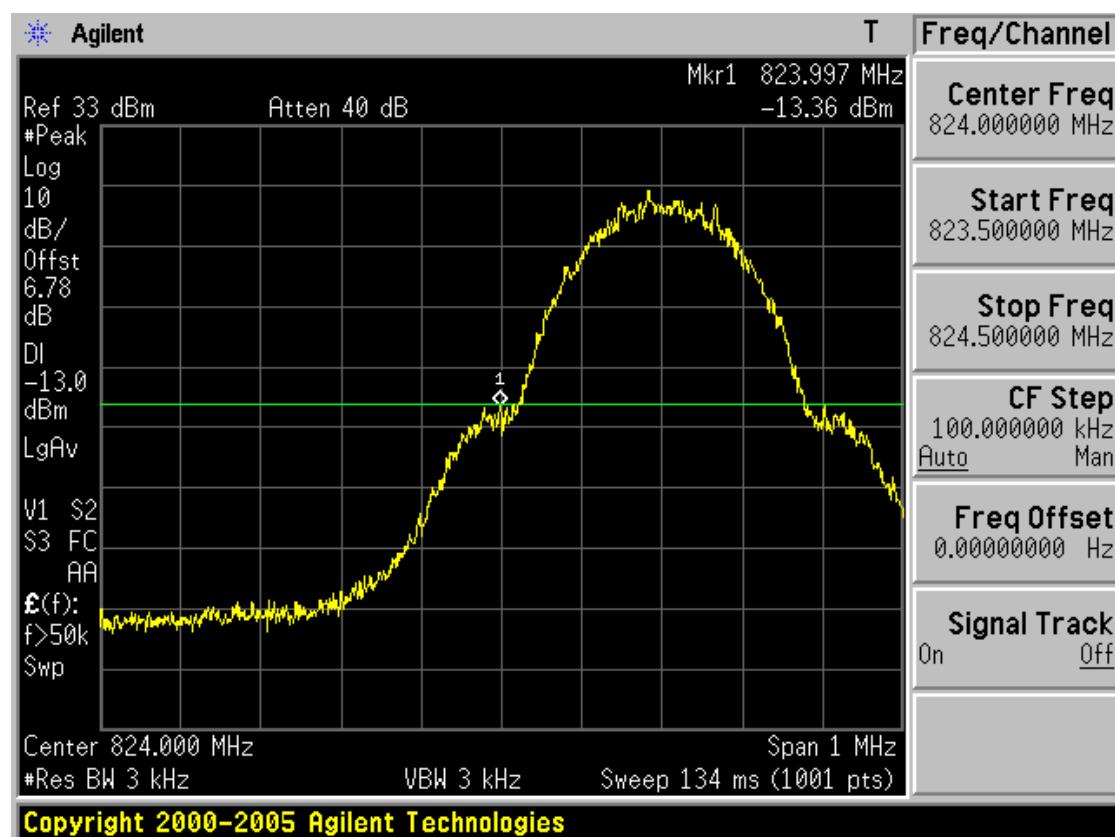


GSM850

Band Edge Ch. 251

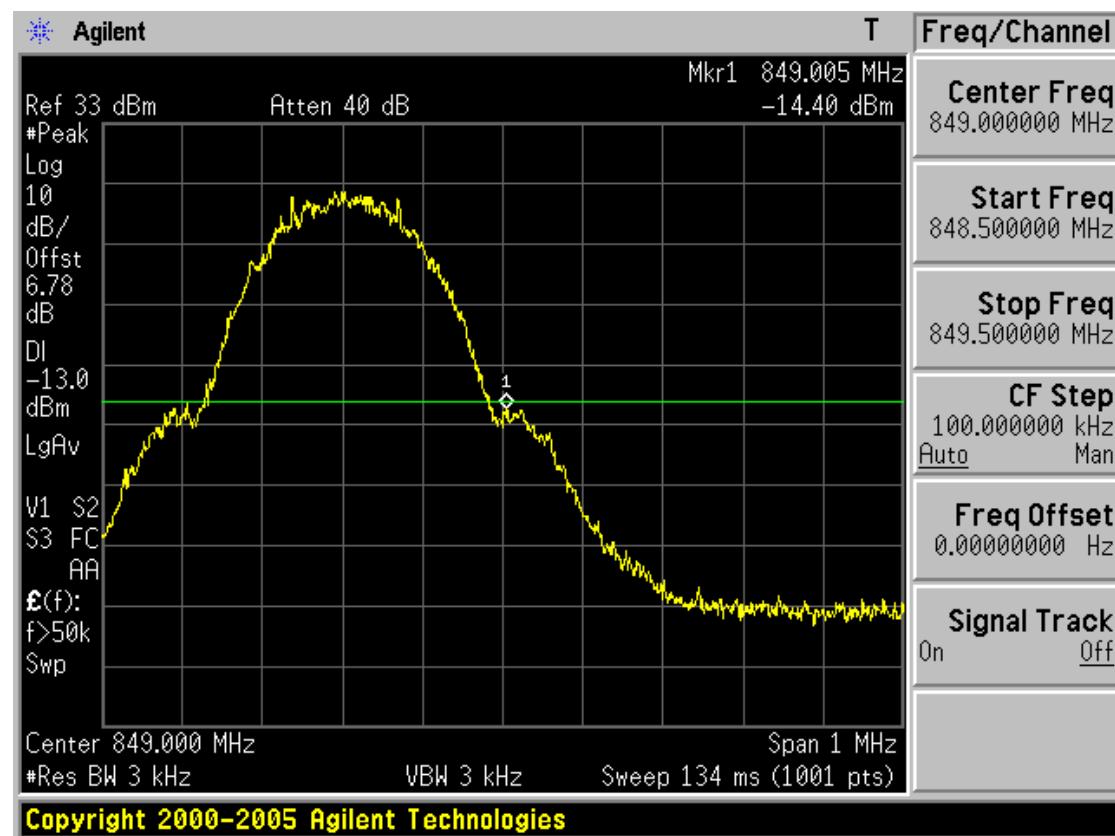


PCS1900

Band Edge Ch. 512

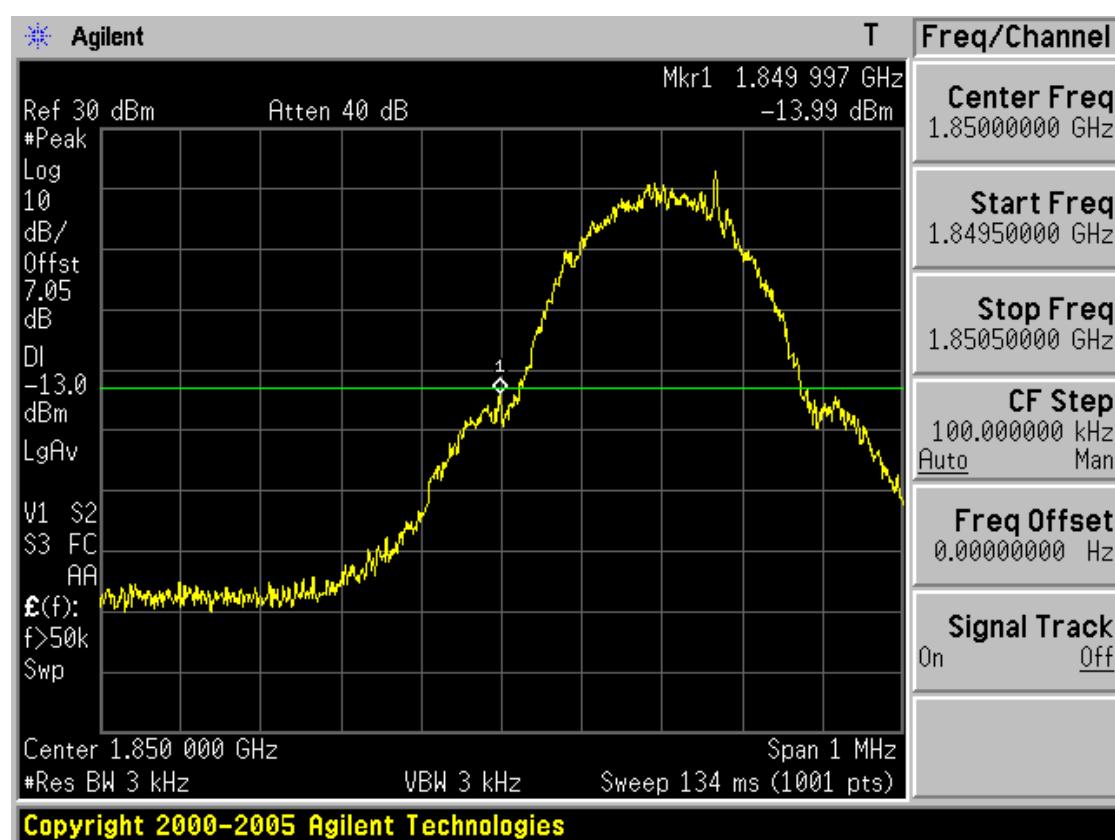

PCS1900

Band Edge Ch. 810

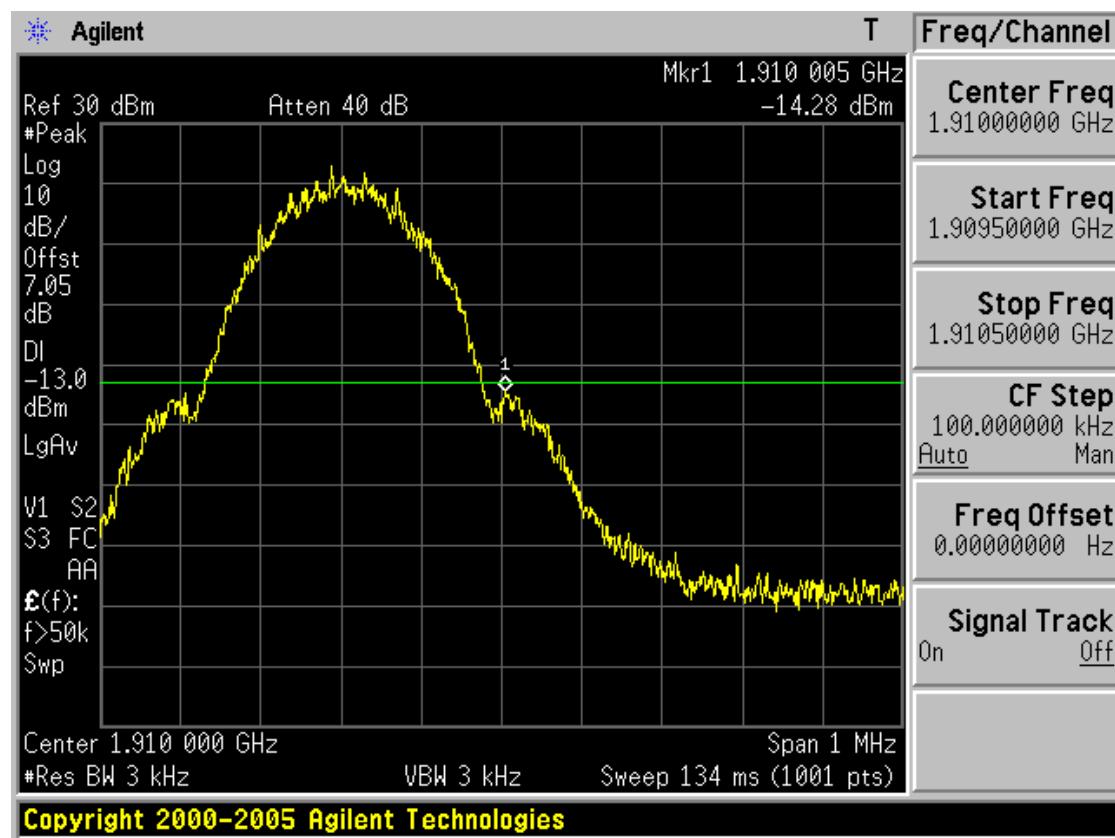

3.5 Spurious and Harmonic Emissions at Antenna Terminal


FCC ID	: T6QS14
Specification	: 47 CFR 2.1051, 24.238(a)
Tested Frequency	: 824.2MHz, 836.6MHz and 848.8MHz for GSM850 1850.2MHz, 1880.0MHz and 1909.8MHz for PCS1900

Measurement Procedure:

- The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.
- The spectrum is scanned from the lowest frequency generated in the equipment up to 10th harmonics of the highest Frequency.
- Spectrum analyzer plots are included on the following pages.


GSM850

Spurious Emissions at Antenna Terminal / Ch.128 -1

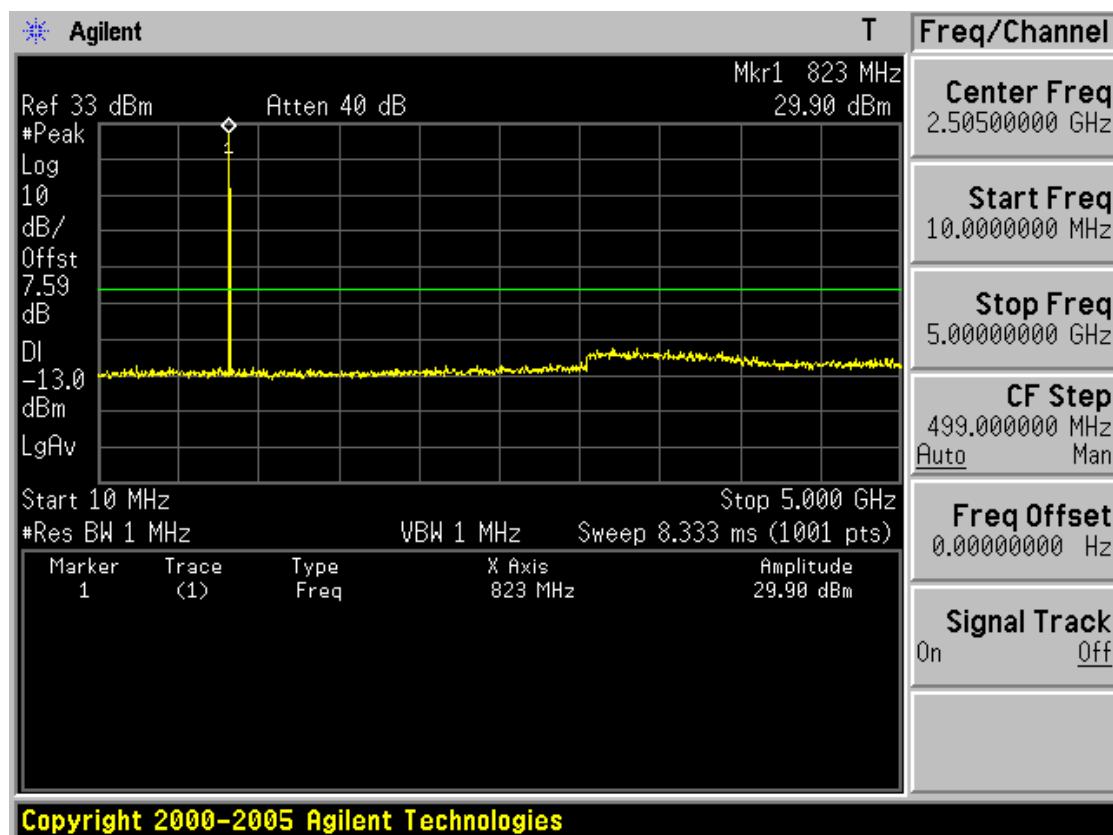


GSM850

Spurious Emissions at Antenna Terminal / Ch.128 -2

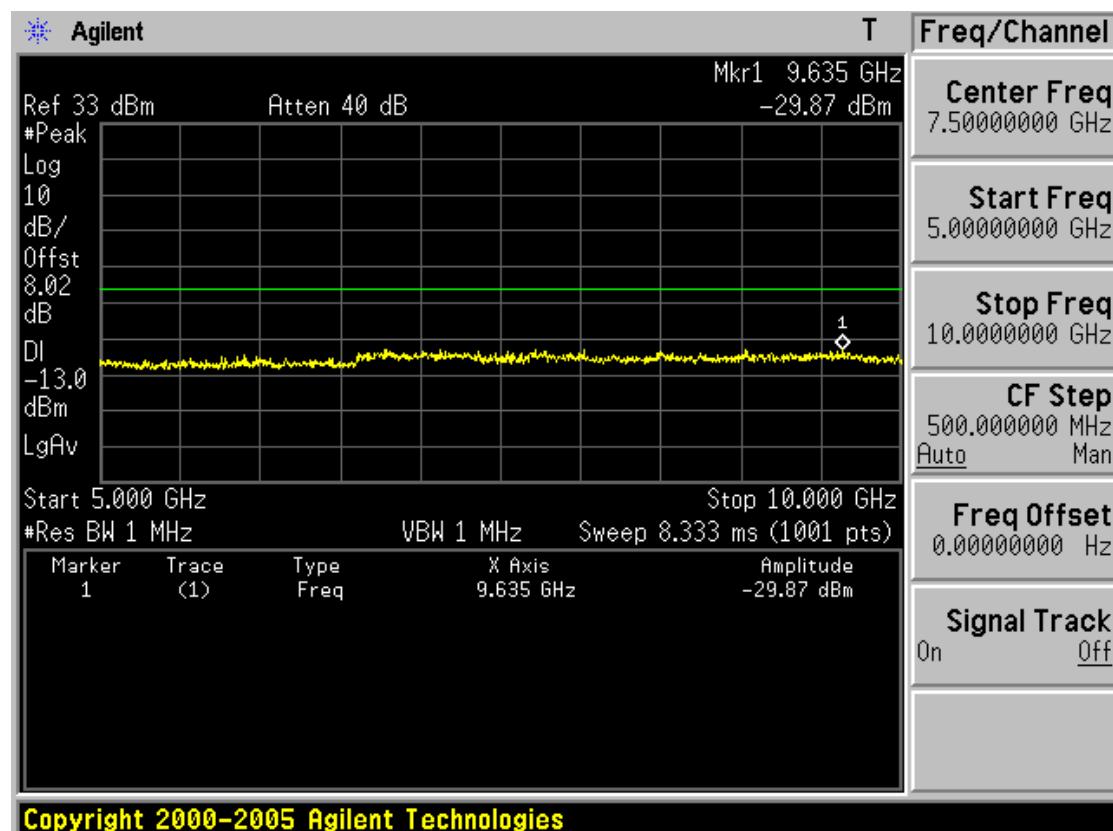


GSM850

Spurious Emissions at Antenna Terminal / Ch.190 -1

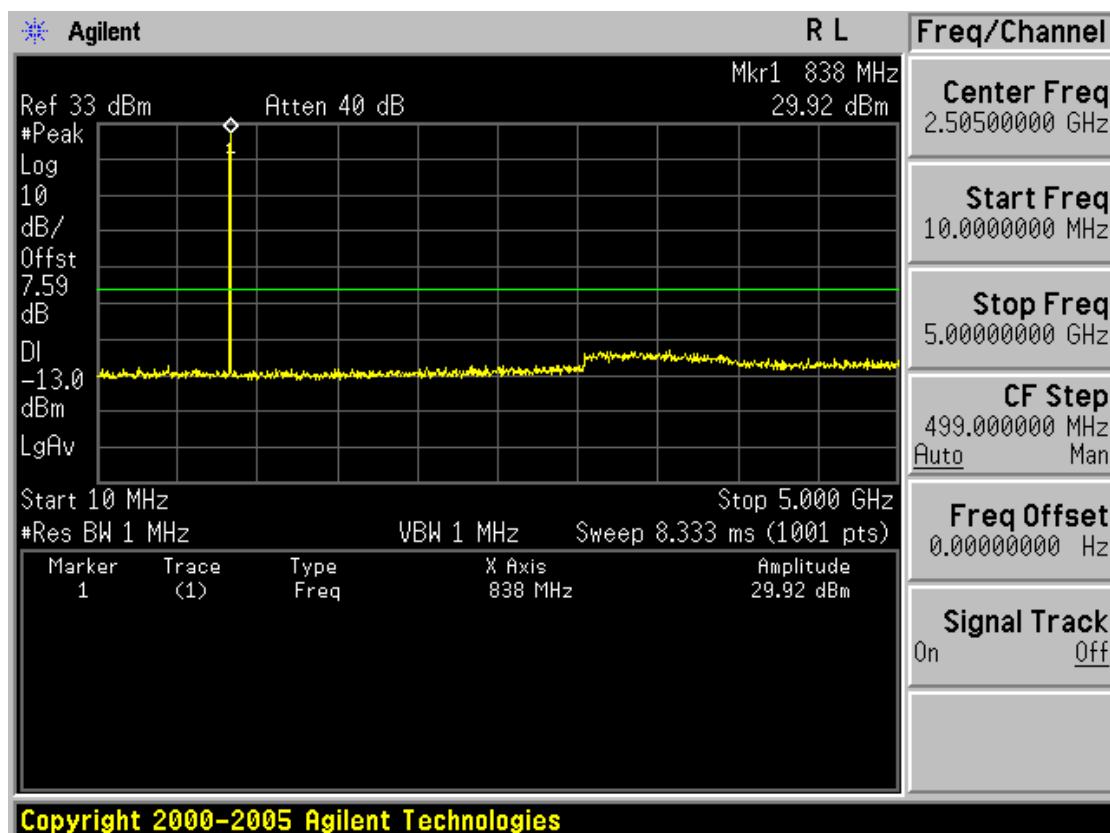


GSM850

Spurious Emissions at Antenna Terminal / Ch.190 -2

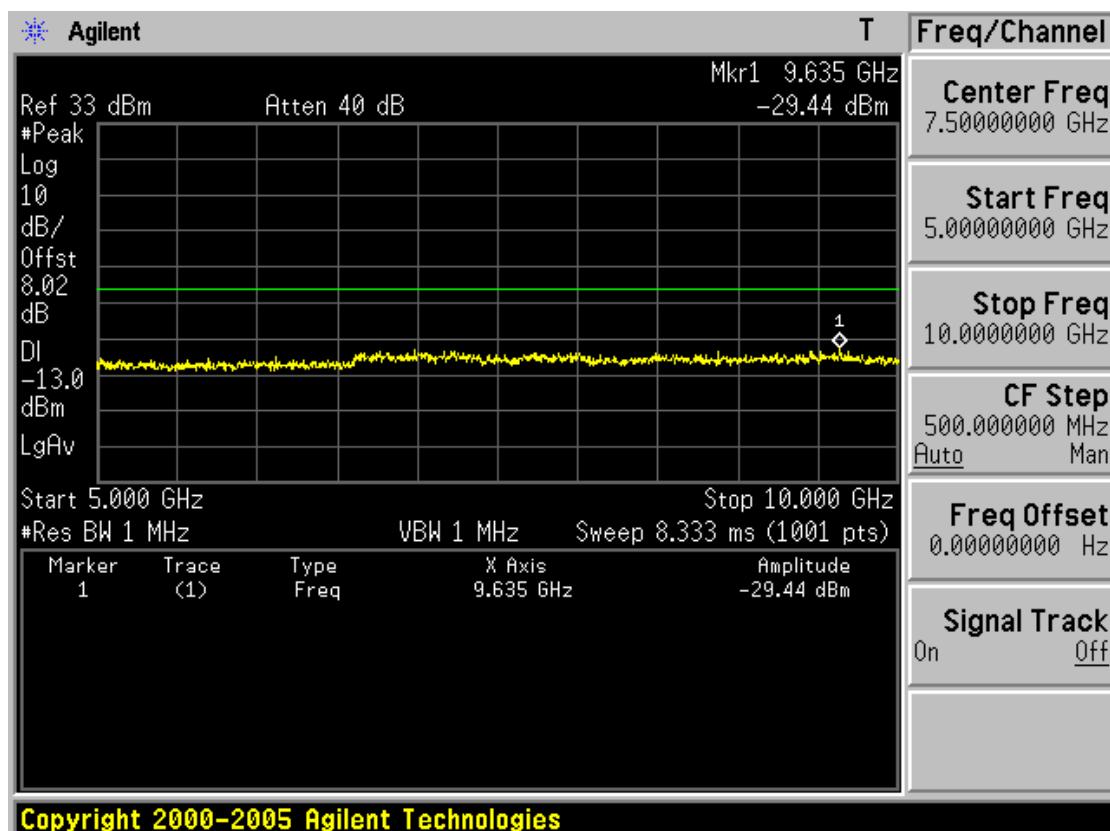


GSM850

Spurious Emissions at Antenna Terminal / Ch.251 -1

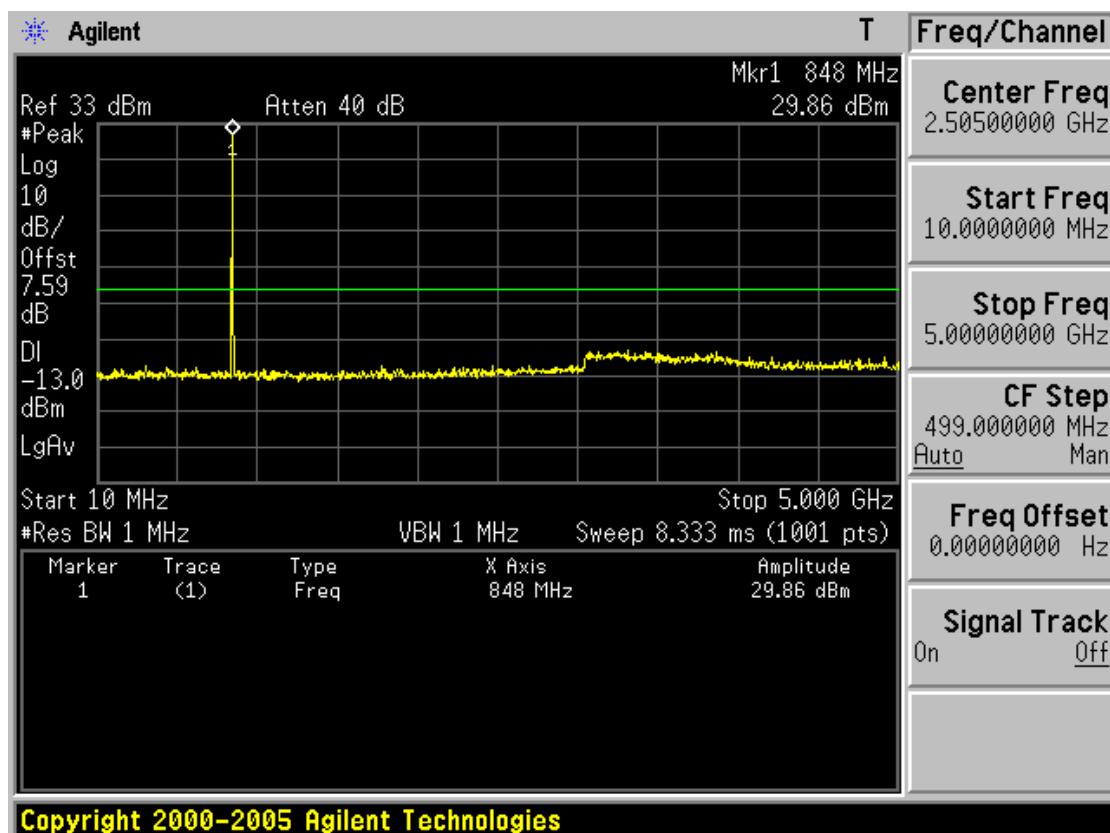


GSM850

Spurious Emissions at Antenna Terminal / Ch.251-2

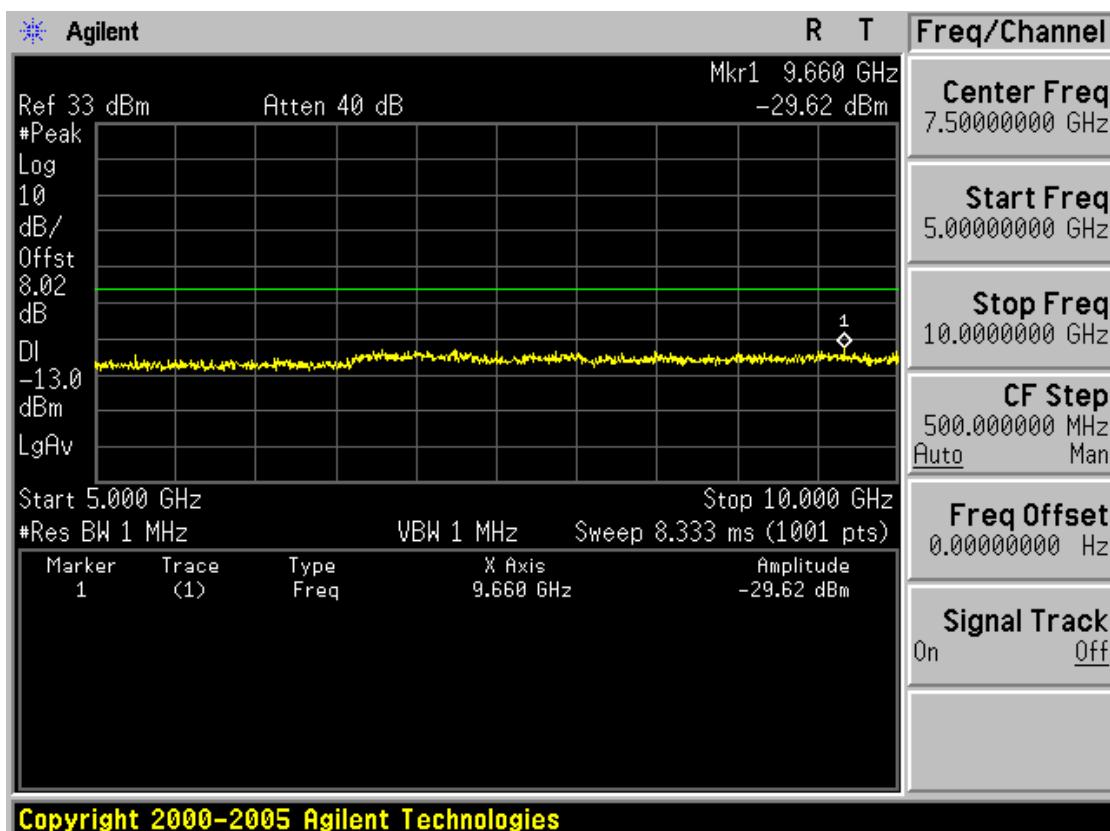


PCS1900

Spurious Emissions at Antenna Terminal / Ch.512 -1

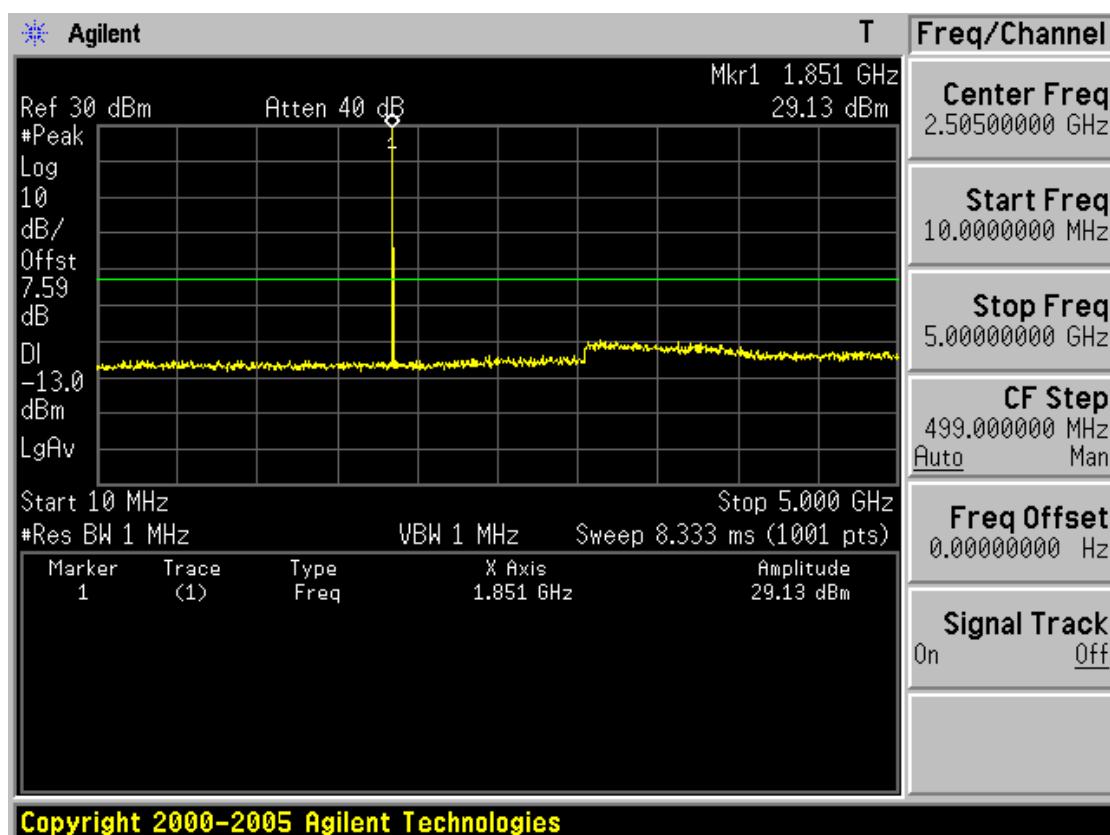


PCS1900

Spurious Emissions at Antenna Terminal / Ch.512 -2

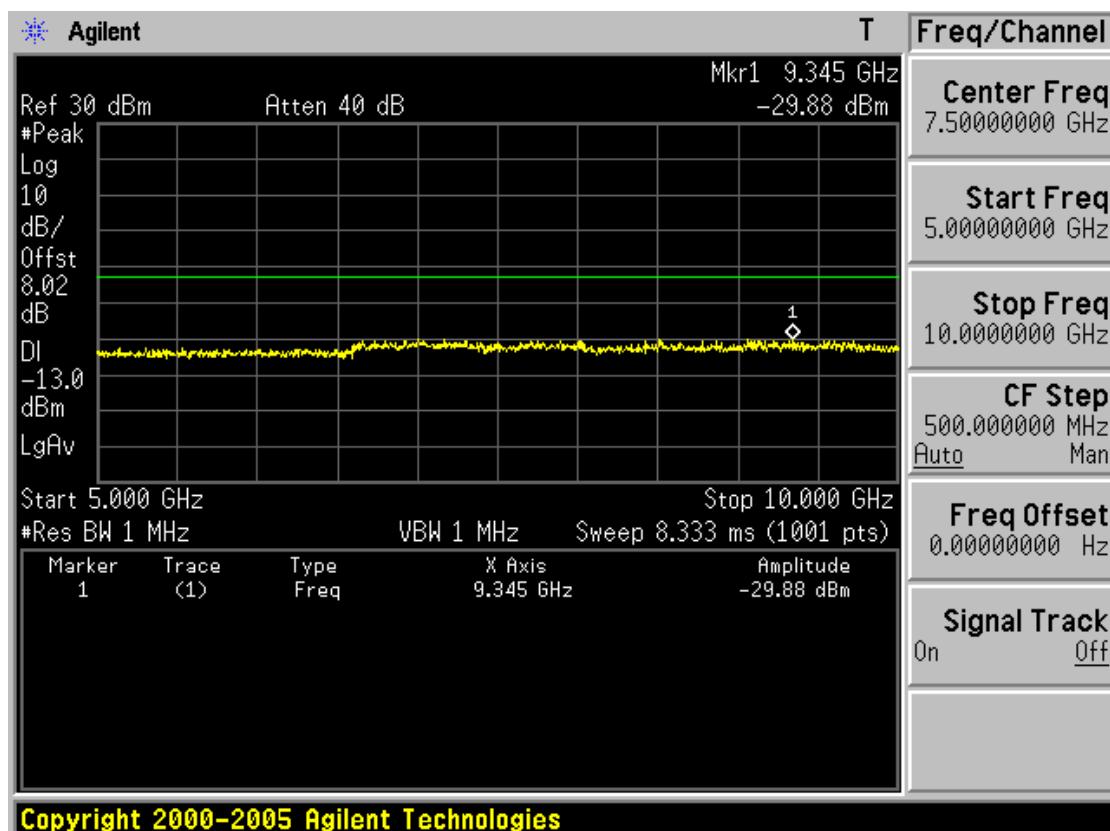


PCS1900

Spurious Emissions at Antenna Terminal / Ch.512 -3

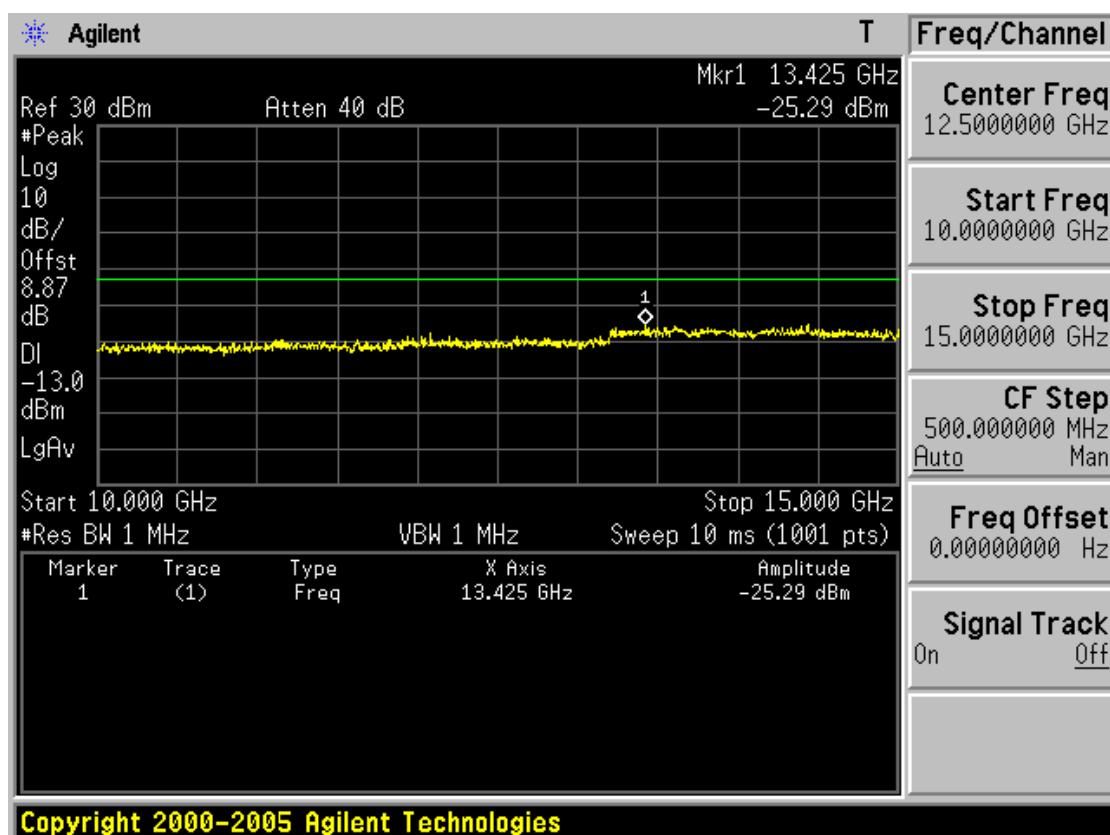


PCS1900

Spurious Emissions at Antenna Terminal / Ch.512 -4

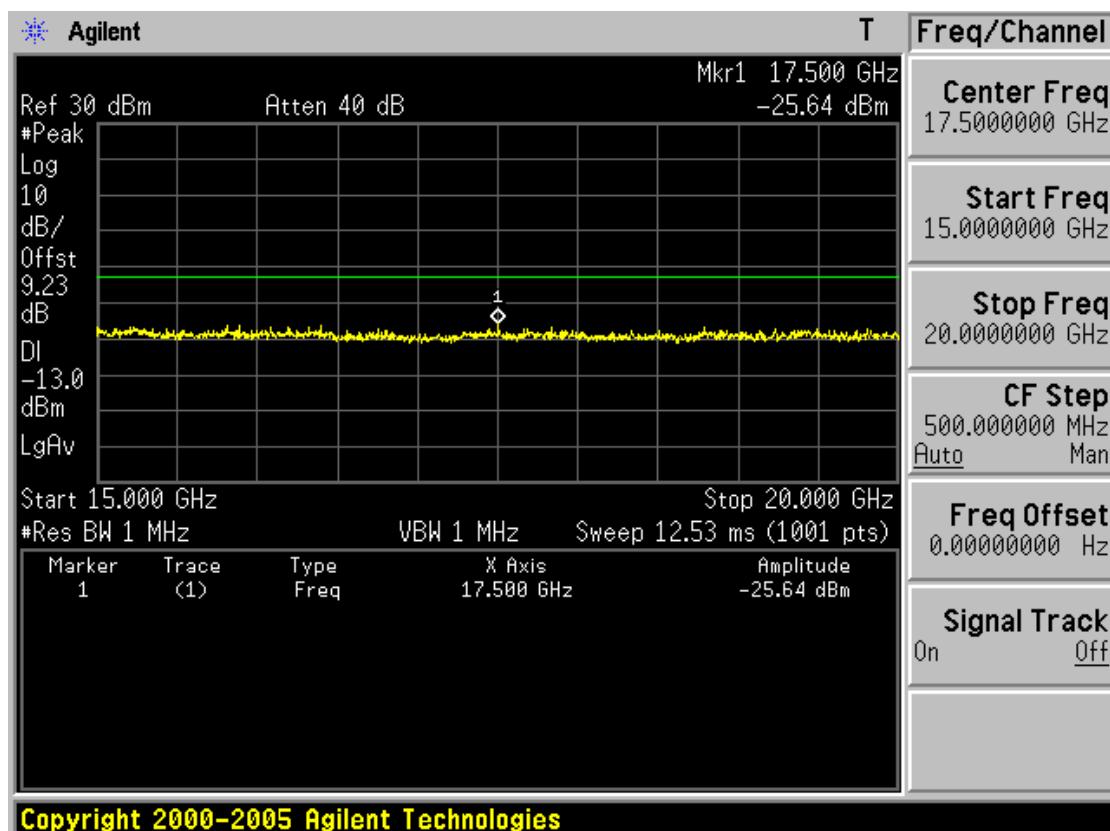


PCS1900

Spurious Emissions at Antenna Terminal / Ch.661 -1

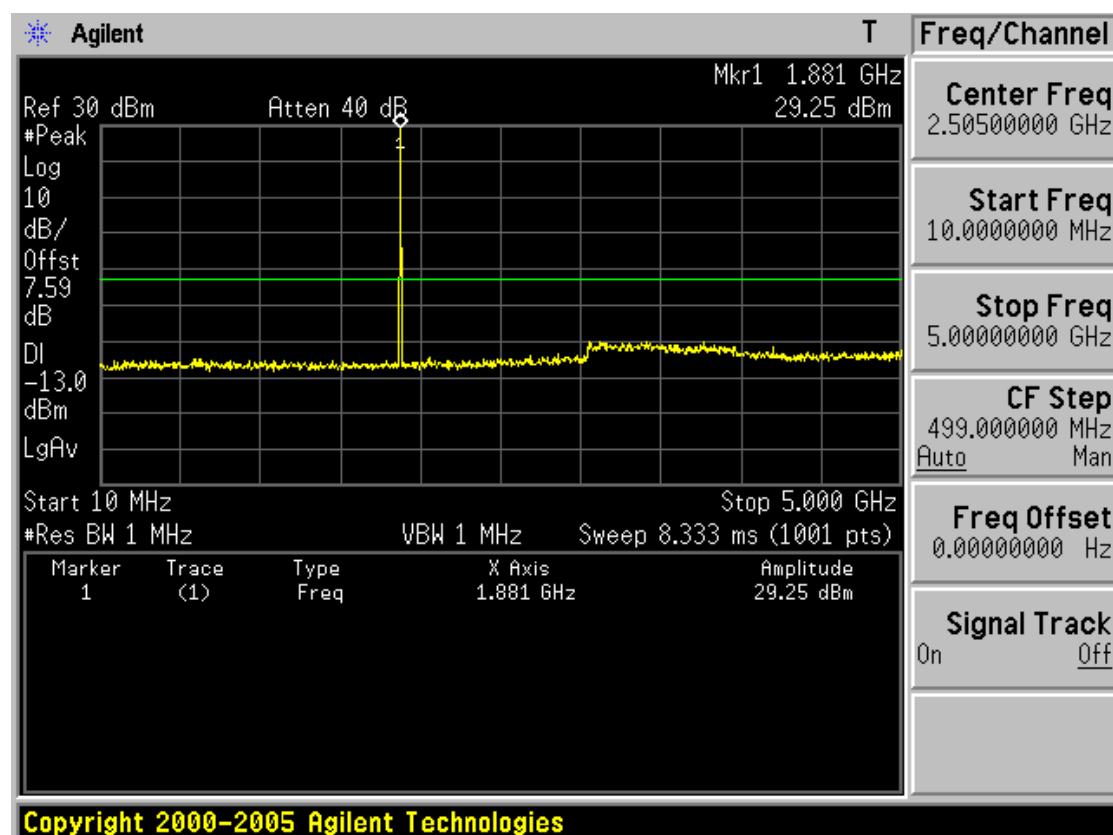


PCS1900

Spurious Emissions at Antenna Terminal / Ch.661 -2

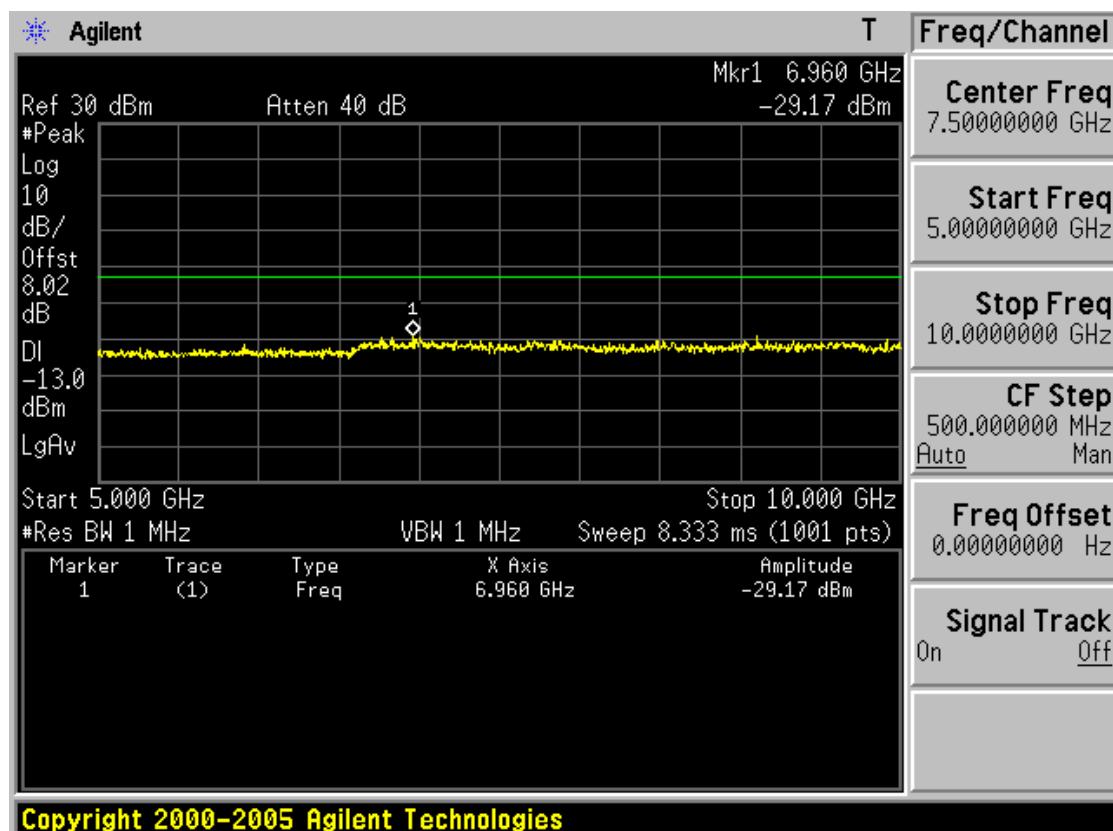


PCS1900

Spurious Emissions at Antenna Terminal / Ch.661 -3

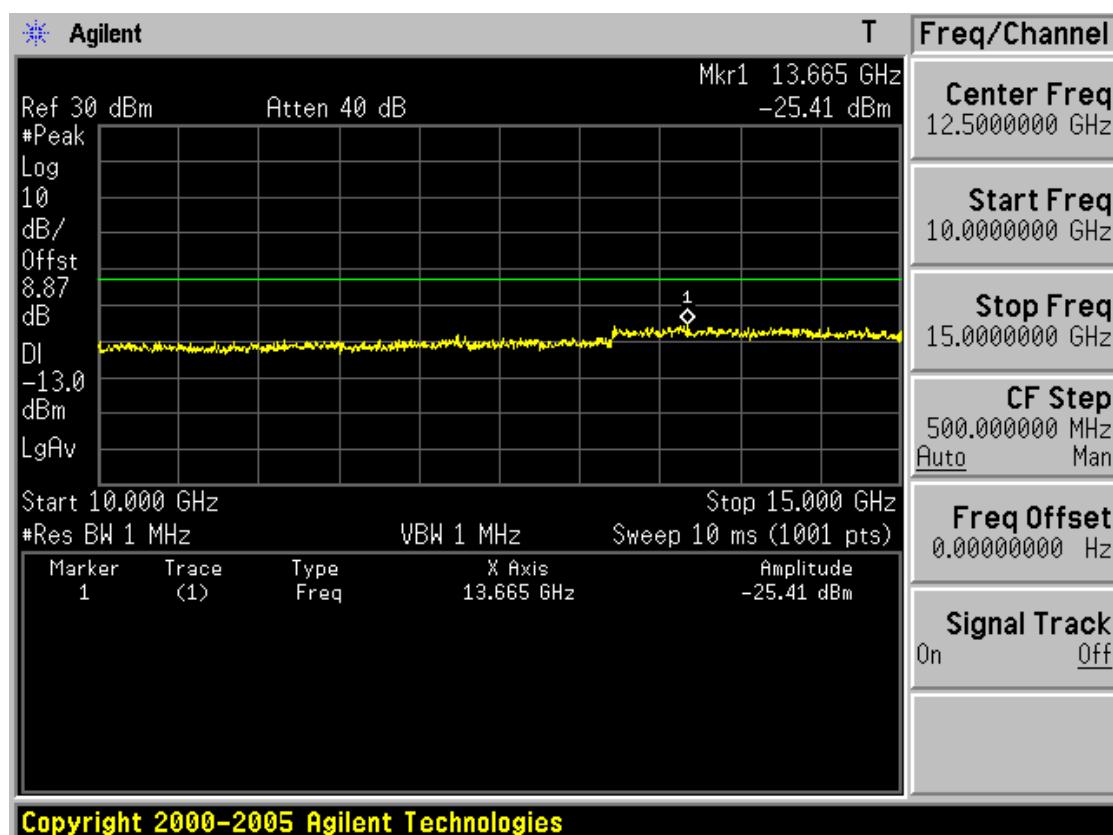


PCS1900

Spurious Emissions at Antenna Terminal / Ch.661 -4

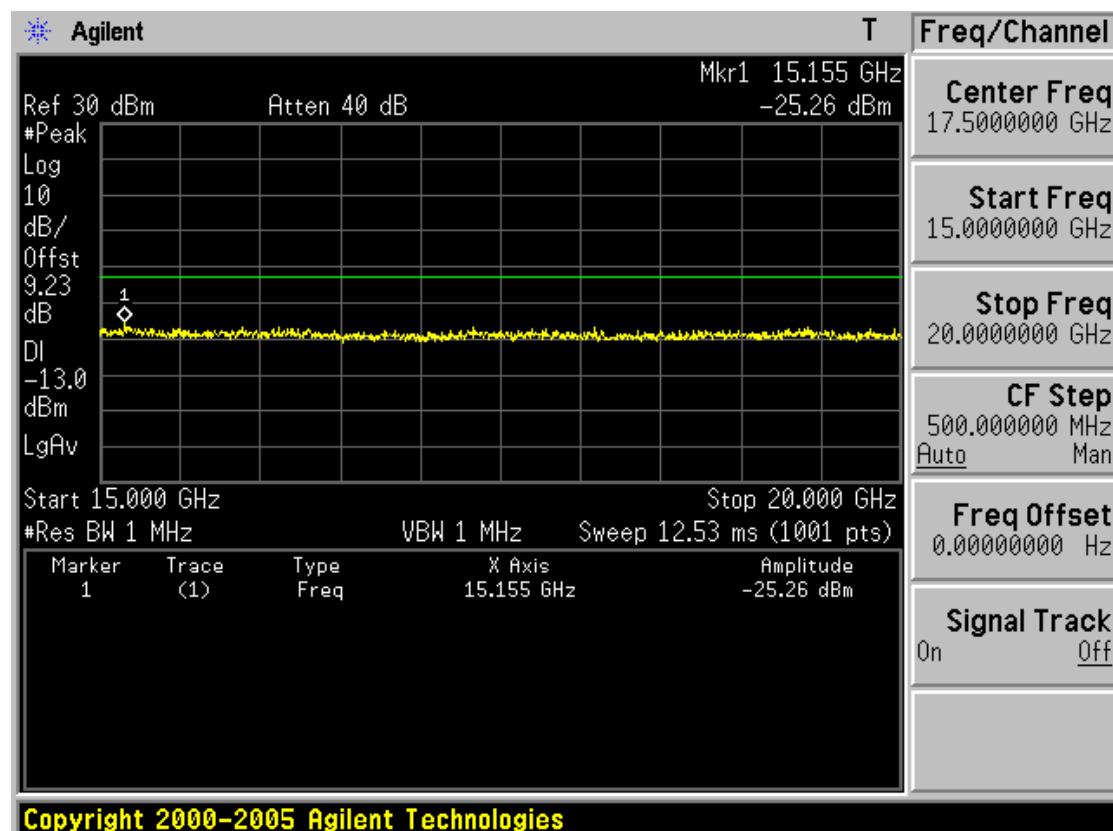


PCS1900

Spurious Emissions at Antenna Terminal / Ch.810 -1

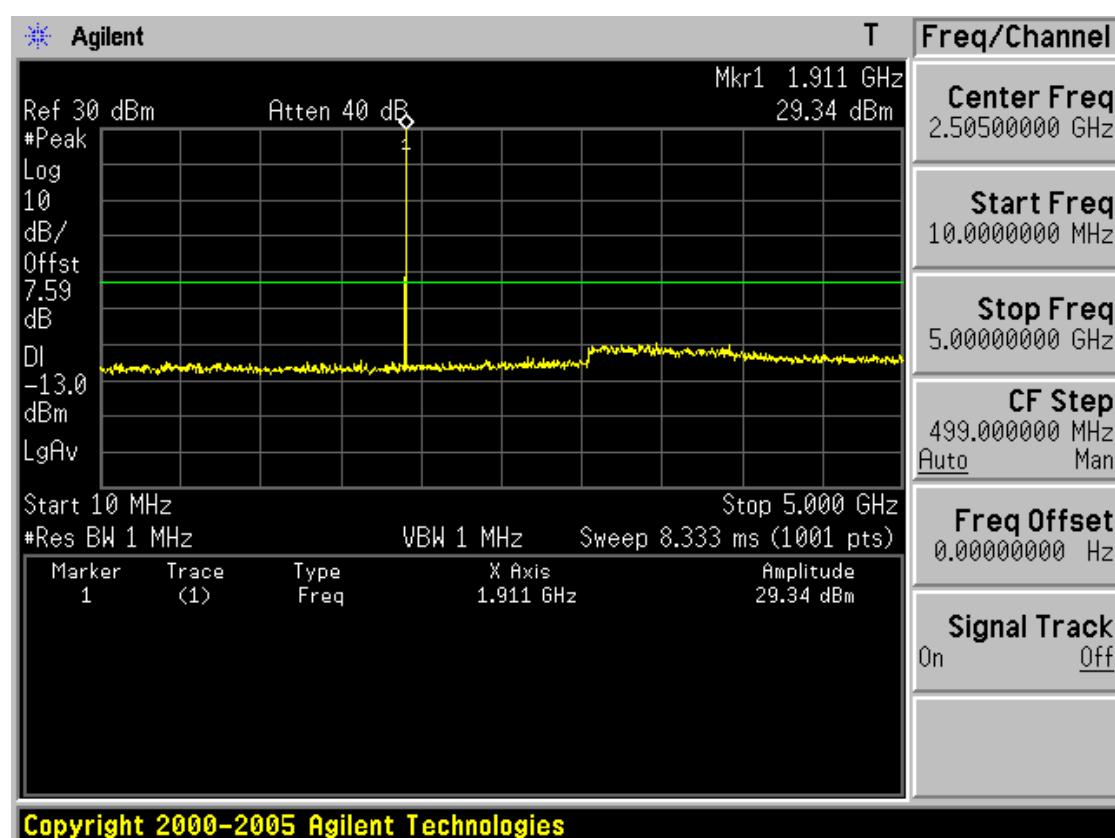


PCS1900

Spurious Emissions at Antenna Terminal / Ch.810 -2

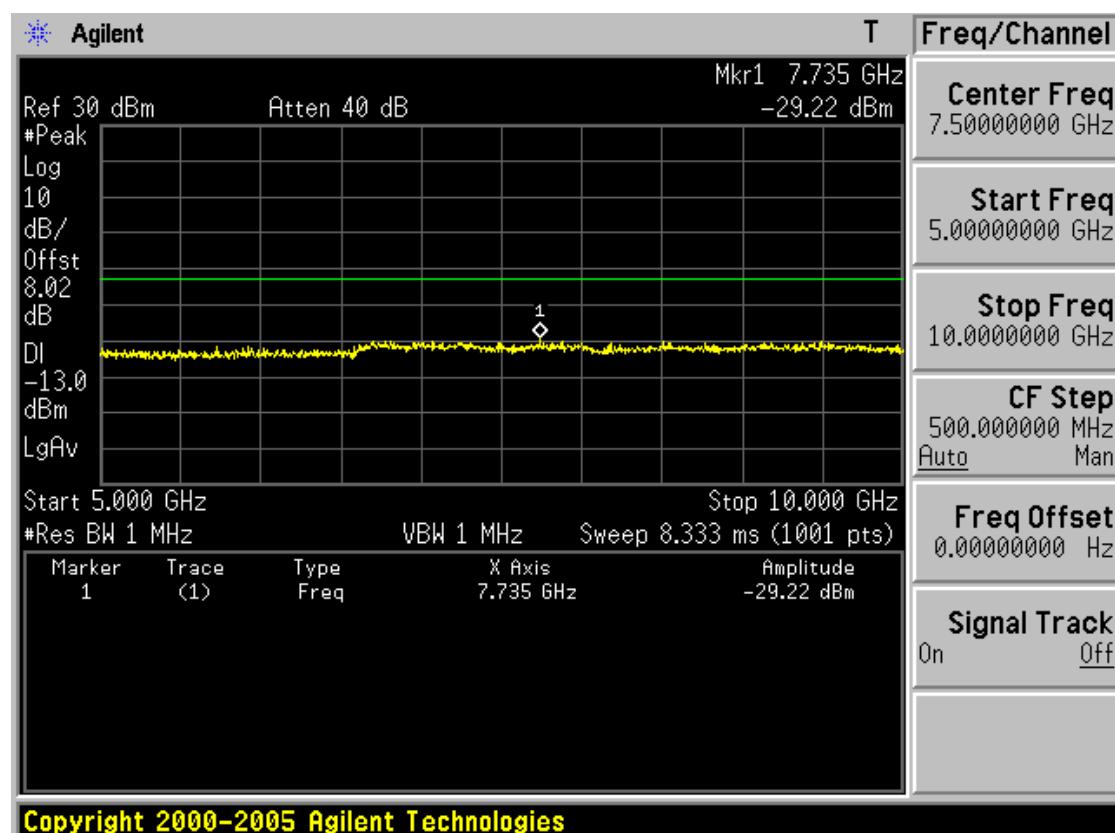


PCS1900

Spurious Emissions at Antenna Terminal / Ch.810 -3

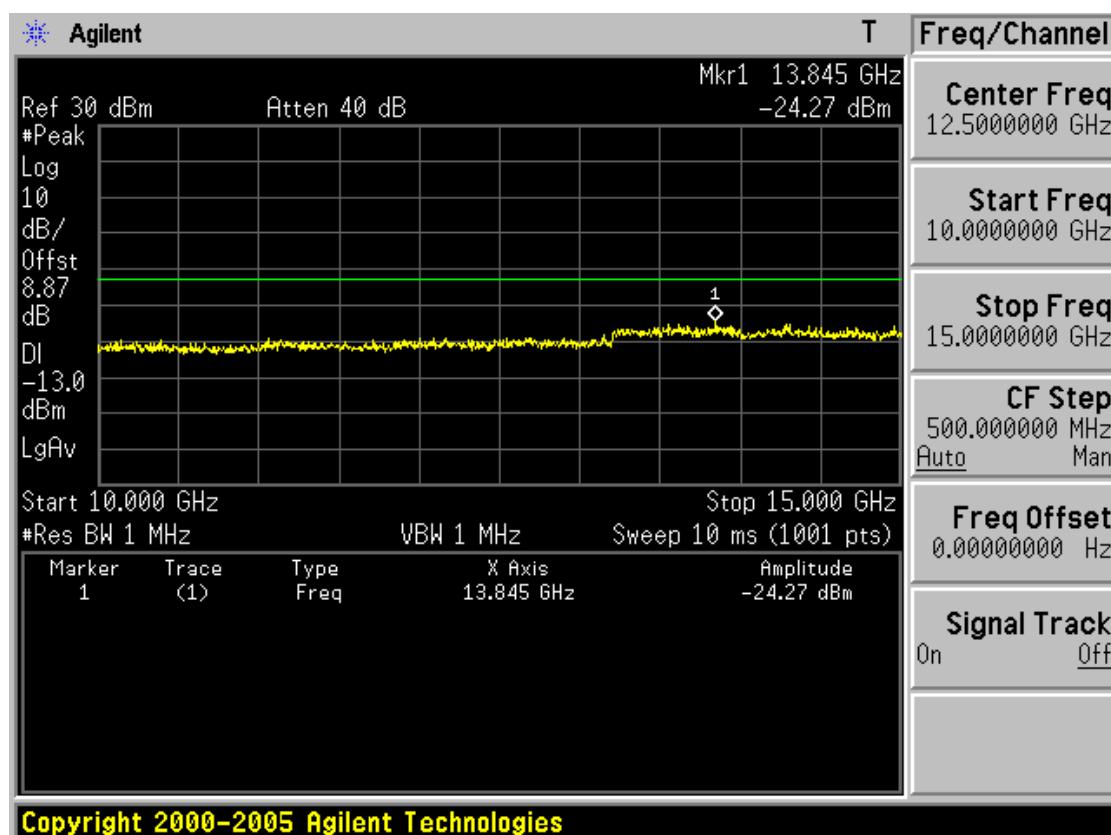

PCS1900

Spurious Emissions at Antenna Terminal / Ch.810 -4

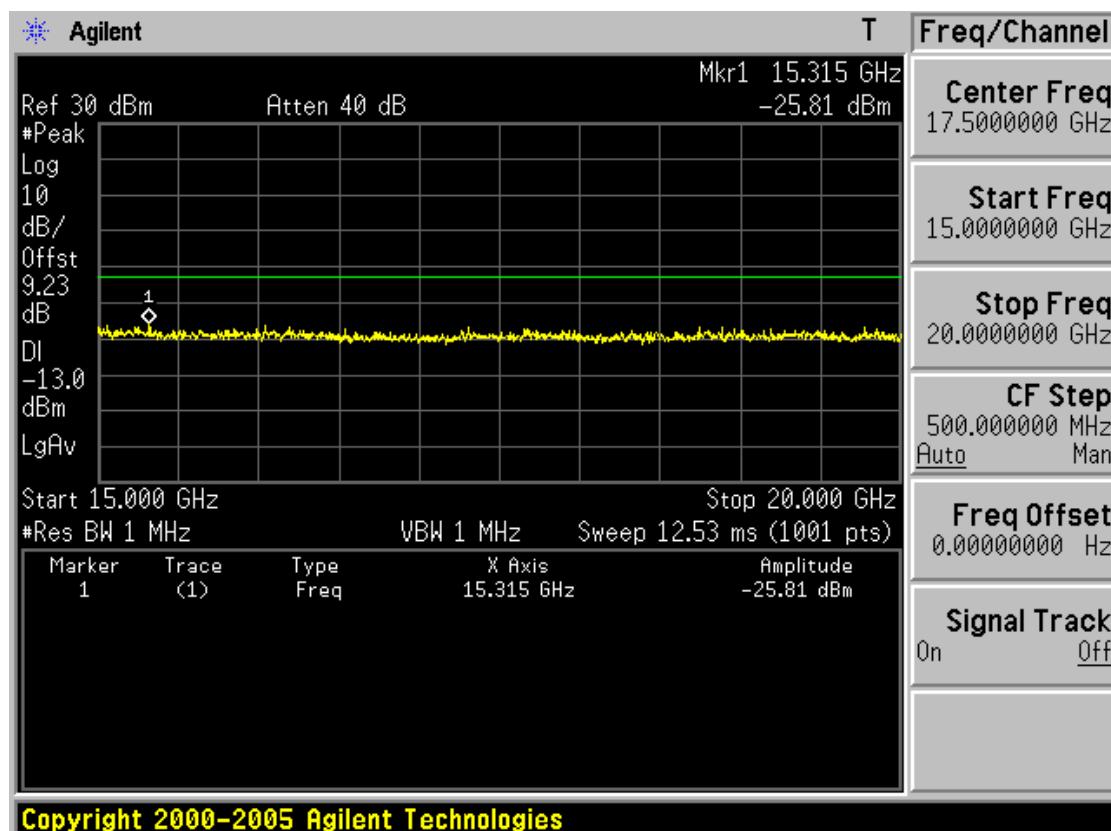

3.6 Field Strength of Spurious Radiation

FCC ID	:	T6QS14
Specification	:	47 CFR 2.1053(a)
Tested Frequency	:	824.2MHz, 836.6MHz and 848.8MHz for GSM850 1850.2MHz, 1880.0MHz and 1909.8MHz for PCS1900

Measurement Procedure:

- Radiation and harmonic emissions are measured outdoors at our 3-meter test range. The equipment under test is placed on a wooden turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer reading. This level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

GSM850 Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY : 824.2 MHz
 CHANNEL : 128(Low)
 MEASURED OUTPUT POWER : 28.35 dBm = 0.684 W
 MODULATION SIGNAL : GSM (Internal)
 DISTANCE : 3 meters
 LIMIT : $43 + 10 \log_{10} (W) =$ 41.35 dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1648.4	-40.57	5.91	-34.66	V	63.01
1648.4	-41.52	5.91	-35.61	H	63.96
2472.6	-51.82	7.38	-44.44	V	72.79
2472.6	-50.41	7.38	-43.03	H	71.38

NOTE

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

GSM850 Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY : 836.6 MHz
 CHANNEL : 190(Mid)
 MEASURED OUTPUT POWER : 28.87 dBm = 0.771 W
 MODULATION SIGNAL : GSM (Internal)
 DISTANCE : 3 meters
 LIMIT : $43 + 10 \log_{10} (W) = 41.87$ dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1673.2	-39.89	6.01	-33.88	V	62.75
1673.2	-43.07	6.01	-37.06	H	65.93
2509.8	-50.94	7.39	-43.55	V	72.42
2509.8	-51.17	7.39	-43.78	H	72.65

NOTE

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

GSM850 Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY : 848.8 MHz
 CHANNEL : 251(High)
 MEASURED OUTPUT POWER : 28.65 dBm = 0.733 W
 MODULATION SIGNAL : GSM (Internal)
 DISTANCE : 3 meters
 LIMIT : $43 + 10 \log_{10} (W) = 41.65$ dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1697.6	-42.05	6.11	-35.94	V	64.59
1697.6	-44.25	6.11	-38.14	H	66.79
2546.4	-50.33	7.39	-42.94	V	71.59
2546.4	-50.14	7.39	-42.75	H	71.40

NOTE

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

GSM1900 Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY : 1850.2 MHz
 CHANNEL : 512(Low)
 MEASURED OUTPUT POWER : 29.17 dBm = 0.826 W
 MODULATION SIGNAL : GSM (Internal)
 DISTANCE : 3 meters
 LIMIT : $43 + 10 \log_{10} (W) = 42.17$ dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3700.40	-46.88	9.56	-37.32	V	66.49
3700.40	-40.77	9.56	-31.21	H	60.38
5550.60	-45.82	11.17	-34.65	V	63.82
5550.60	-46.23	11.17	-35.06	H	64.23

NOTE

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

GSM1900 Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY : 1880.0 MHz
 CHANNEL : 661(Mid)
 MEASURED OUTPUT POWER : 29.45 dBm = 0.881 W
 MODULATION SIGNAL : GSM (Internal)
 DISTANCE : 3 meters
 LIMIT : $43 + 10 \log_{10} (W) =$ 42.45 dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3760.00	-47.35	9.55	-37.80	V	67.25
3760.00	-42.04	9.55	-32.49	H	61.94
5640.00	-45.27	11.29	-33.98	V	63.43
5640.00	-46.69	11.29	-35.40	H	64.85

NOTE

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

GSM1900 Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY : 1909.8 MHz
 CHANNEL : 810(High)
 MEASURED OUTPUT POWER : 29.93 dBm = 0.984 W
 MODULATION SIGNAL : GSM (Internal)
 DISTANCE : 3 meters
 LIMIT : $43 + 10 \log_{10} (W) = 42.93$ dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3819.60	-45.16	9.55	-35.61	V	65.54
3819.60	-43.58	9.55	-34.03	H	63.96
5729.40	-45.07	11.41	-33.66	V	63.59
5729.40	-47.33	11.41	-35.92	H	65.85

NOTE

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

3.7 Frequency Stability/Temperature Variation.

FCC ID	: T6QS14
Specification	: 47 CFR 2.1055
Tested Frequency	: 836.6MHz for GSM850 1880.0MHz for PCS1900

Measurement Procedure:

The frequency stability of the transmitter is measured by:

- a) **Temperature** :The temperature is varied from -30°C to + 50°C using an environmental chamber.
- b) **Primary Supply Voltage** :The primary supply voltage is varied from 85% to 115% of the voltage Normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification — The minimum frequency stability shall be +/- 0.00025% at any time during normal operation.

Specification — The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025 (\pm 2.5 \text{ ppm})$ of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25°C to 27 °C to provide a reference)
2. The equipment is subjected to an overnight "soak" at -30°C without any power applied.
3. After the overnight "soak" at -30°C(usually 14-16 hours),the equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency to the transmitter and the individual oscillators is made within a three minute interval after applying power to the transmitter.
4. Frequency measurements are made at 10°C interval up to room temperature. At least a period of one and one half hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency were made at 10 intervals starting at -30°C up to +50°C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.



Frequency Stability (GSM850)

OPERATING FREQUENCY : 836,599,978 Hz
 CHANNEL : 190(Mid)
 REFERENCE VOLTAGE : 3.7 V DC
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (V DC)	TEMP (dB)	FREQ (Hz)	Deviation (%)
100%	3.7	+25(Ref)	836,599,978	0.000000
100%		-30	836,599,981	0.000000
100%		-20	836,599,979	0.000000
100%		-10	836,599,977	0.000000
100%		0	836,599,978	0.000000
100%		+10	836,599,980	0.000000
100%		+20	836,599,981	0.000000
100%		+25	836,599,978	0.000000
100%		+30	836,599,976	0.000000
100%		+40	836,599,981	0.000000
100%		+50	836,599,984	0.000001
85%	3.145	+25	-	-
115%	4.255	+25	836,599,977	0.000000
BATT.ENDPOINT	3.245	+25	836,599,987	0.000001

Frequency Stability(GSM850)



(Continued...)

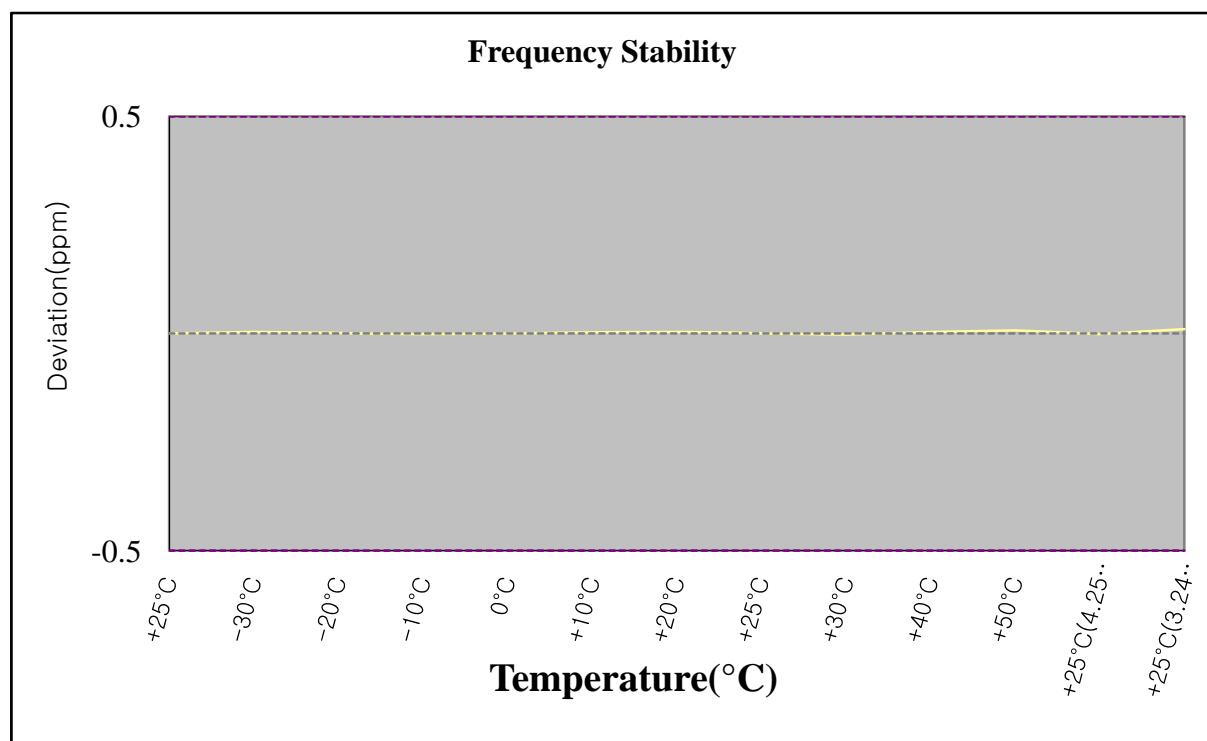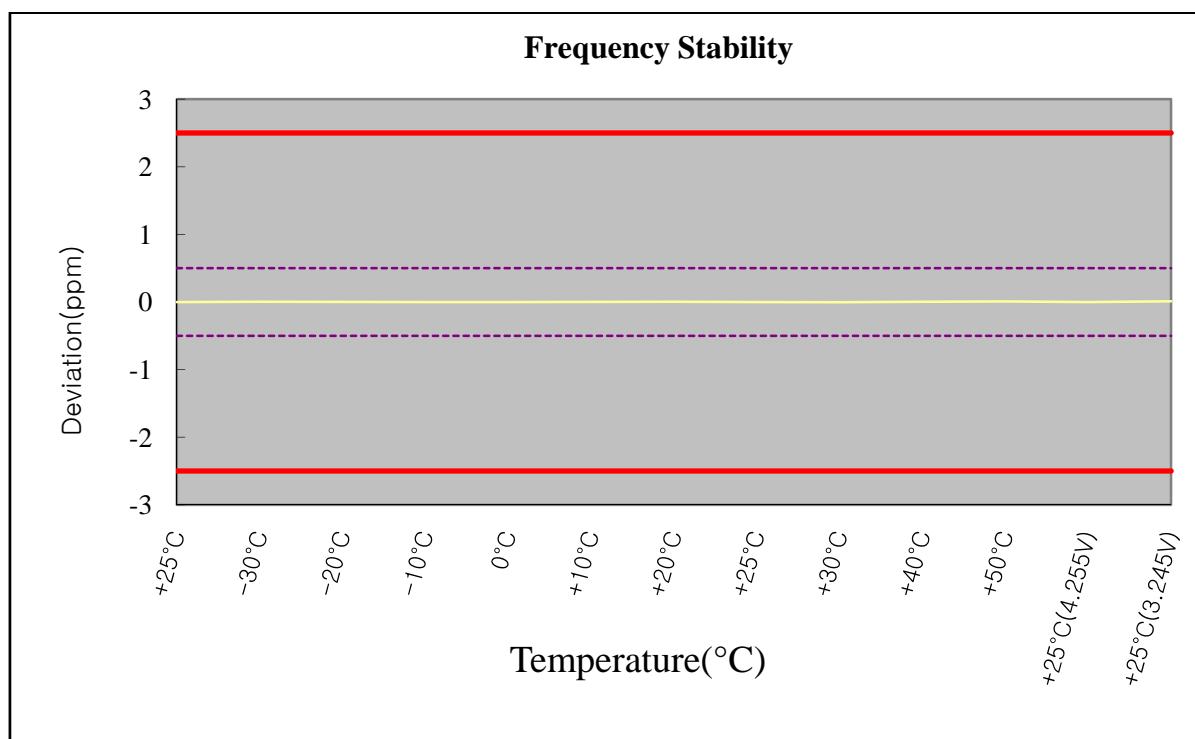

Frequency Stability (PCS1900)

OPERATING FREQUENCY : 1,879,999,976 Hz
 CHANNEL : 661(Mid)
 REFERENCE VOLTAGE : 3.7 V DC
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (V DC)	TEMP (dB)	FREQ (Hz)	Deviation (%)
100%	3.7	+25(Ref)	1,879,999,976	0.000000
100%		-30	1,879,999,964	-0.000001
100%		-20	1,879,999,966	-0.000001
100%		-10	1,879,999,965	-0.000001
100%		0	1,879,999,968	0.000000
100%		+10	1,879,999,964	-0.000001
100%		+20	1,879,999,972	0.000000
100%		+25	1,879,999,976	0.000000
100%		+30	1,879,999,974	0.000000
100%		+40	1,879,999,976	0.000000
100%		+50	1,879,999,974	0.000000
85%	3.145	+25	-	-
115%	4.255	+25	1,879,999,968	0.000000
BATT.ENDPOINT	3.245	+25	1,879,999,977	0.000000

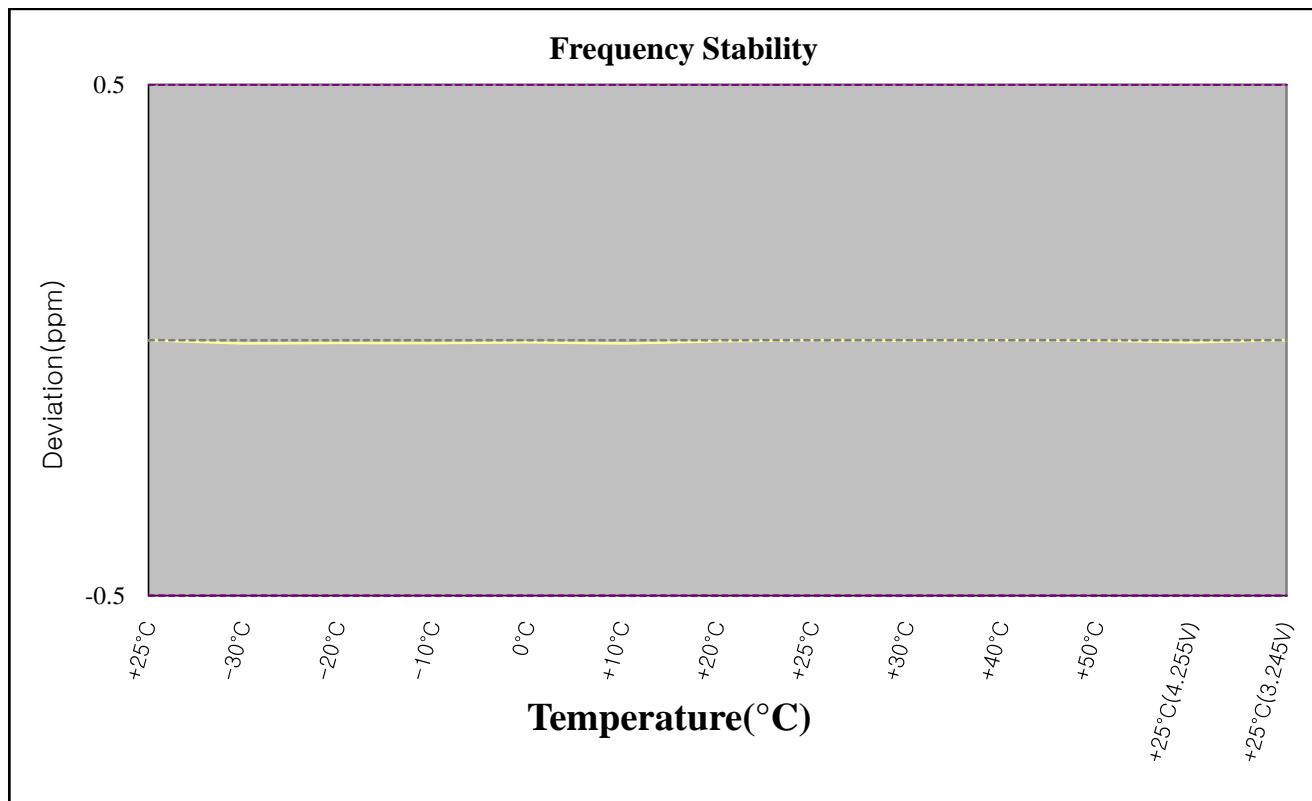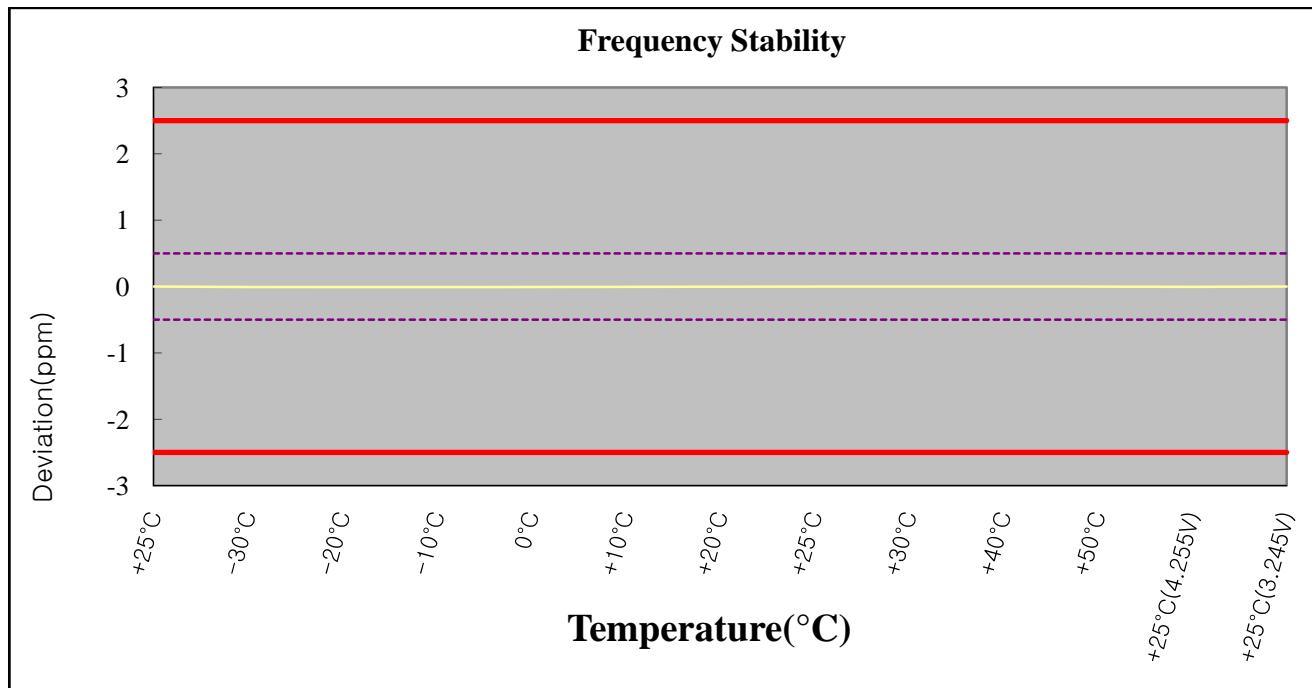

4. TEST EQUIPMENT

	Type	Manufacturer	Model	Cal.Due.Date (dd/mm/yy)	Next.Due.Date (dd/mm/yy)	S/N
01	Spectrum Analyzer	Agilent	E4404B	21/03/08	21/03/09	US41061134
02	Spectrum Analyzer	Agilent	E4440A	06/11/08	06/11/09	MY45304199
03	Spectrum Analyzer	H.P	8563E	13/10/08	13/10/09	3551A04634
04	Spectrum Analyzer	H.P	8591E	26/04/08	26/04/09	3649A05889
05	Spectrum Analyzer	Rohde Schwarz	FSP	09/09/08	09/09/09	100385
06	EMI TEST RECEIVER	R&S	ESU	11/01/08	11/01/09	100014
07	EMI TEST RECEIVER	R&S	ESCI	13/05/08	13/05/09	100364
08	Power Meter	H.P	EMP-442A	10/07/08	10/07/09	GB37170413
09	Power Sensor	H.P	8481A	11/03/08	11/03/09	3318A96566
10	Power Divider	Agilent	11636B	17/12/07	17/12/08	56471
11	Frequency Counter	H.P	5342A	16/09/08	16/09/09	2119A04450
12	Signal Generator	Rohde Schwarz	SMR20	02/04/08	02/04/09	101251
13	Signal Generator	H.P	ESG-3000A	09/07/08	09/07/09	US37230529
14	Vector Signal Generator	Rohde Schwarz	SMJ100A	17/01/08	17/01/09	100148
15	Audio Analyzer	H.P	8903B	09/07/08	09/07/09	3011A09448
16	Modulation Analyzer	H.P	8901B	18/07/08	18/07/09	3028A03029
17	Oscilloscope	Tektronix	TDS3052	07/10/08	07/10/09	B016821
18	8960 Series 10 Wireless Comms. Test Set	Agilent	E5515C	31/07/08	31/07/09	GB43461134
19	Universal Radio communication Tester	Rohde Schwarz	CMU 200	02/04/08	02/04/09	107631
20	Bluetooth Tester	TESCOM	TC-3000A	16/12/08	16/12/09	3000A4A0121
21	Power Splitter	Anritsu	K241B	14/10/08	14/10/09	020611
22	BAND Reject Filter	Microwave Circuits	N0308372	06/10/08	06/10/09	3125-01DC0352
23	BAND Reject Filter	Wainwright	WRCG1750	06/10/08	06/10/09	2
24	AC Power supply	DAEKWANG	5KVA	20/03/08	20/03/09	20060321-1
25	DC Power Supply	H.P	6622A	20/03/08	20/03/09	3448A03760
26	DC Power Supply	HP	6633A	20/03/08	20/03/09	3524A06634
27	HORN ANT	ETS	3115	13/06/08	13/06/09	6419
28	HORN ANT	ETS	3115	10/09/08	10/09/09	21097
29	HORN ANT	A.H.Systems	SAS-574	13/06/08	13/06/09	154
30	HORN ANT	A.H.Systems	SAS-574	13/06/08	13/06/09	155
31	Dipole Antenna	Schwarzbeck	VHA9103	25/11/08	25/11/09	2116

4. TEST EQUIPMENT

	Type	Manufacturer	Model	Cal.Due.Date (dd/mm/yy)	Next.Due.Date (dd/mm/yy)	S/N
32	Dipole Antenna	Schwarzbeck	VHA9103	25/11/08	25/11/09	2117
33	Dipole Antenna	Schwarzbeck	UHA9105	25/11/08	25/11/09	2261
34	Dipole Antenna	Schwarzbeck	UHA9105	25/11/08	25/11/09	2262
35	TEMP & HUMIDITY Chamber	JISCO	J-RHC2	10/10/08	10/10/09	021031
36	Log Periodic Antenna	Schwarzbeck	UHALP9108A1	30/09/08	30/09/09	1098
37	Biconical Antenna	Schwarzbeck	VHA9103	13/06/08	13/06/09	2233
38	Digital Multimeter	H.P	34401A	20/03/08	20/03/09	3146A13475,US36122178
39	Attenuator (10dB)	WEINSCHEL	23-10-34	01/10/08	01/10/09	BP4386
40	Attenuator (10dB)	WEINSCHEL	23-10-34	30/01/08	30/01/09	BP4387
41	High-Pass Filter	ANRITSU	MP526D	06/10/08	06/10/09	MP27756
42	Attenuator (3dB)	Agilent	8491B	01/08/08	01/08/09	MY39260700
43	Attenuator (20dB)	Aeroflex/Weinschel	86-20-11	06/10/08	06/10/09	432
44	Attenuator (10dB)	Aeroflex/Weinschel	86-10-11	06/10/08	06/10/09	446
45	Attenuator (10dB)	Aeroflex/Weinschel	86-10-11	06/10/08	06/10/09	408
46	Attenuator(40dB)	WEINSCHEL	57-40-33	01/10/08	01/10/09	NN837
47	Type N Coaxial CIRCULATOR	NOVA MICROWAVE	0088CAN	11/07/08	11/07/09	788
48	Type N Coaxial CIRCULATOR	NOVA MICROWAVE	0185CAN	11/07/08	11/07/09	790
49	Type N Coaxial CIRCULATOR	NOVA MICROWAVE	0215CAN	11/07/08	11/07/09	112
50	Amplifier (25dB)	Agilent	8447D	21/05/08	21/05/09	2944A10144
51	Amplifier (30dB)	Agilent	8449B	13/10/08	13/10/09	3008A01590
52	Amplifier (22dB)	H.P	8447E	27/02/08	27/02/09	2945A02865
53	Position Controller	TOKIN	5901T	N/A	N/A	14173
54	Driver	TOKIN	5902T2	N/A	N/A	14174
55	LISN	Kyorits	KNW-407	04/08/08	04/08/09	8-317-8
56	LISN	Kyorits	KNW-242	13/10/08	13/10/09	8-654-15
57	CVCF	NF Electronic	4420	21/03/08	21/03/09	304935/337980
58	Software	ToYo EMI	EP5/RE	N/A	N/A	Ver 2.0.800
59	Software	ToYo EMI	EP5/CE	N/A	N/A	Ver 2.0.801
60	Software	AUDIX	e3	N/A	N/A	Ver 3.0
61	Software	Agilent	Benchlink	N/A	N/A	A.01.09 021211
62	RFI/FIELD Intensity Meter	Kyorits	KNW-2402	11/09/08	11/09/09	4N-170-3

5. EMISSION DESIGNATOR

GSM850

Emission Designator = 250KGXW

GSM BW = 249.5590 KHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

(Measured at the 99.75% power bandwidth)

PCS1900

Emission Designator = 251KGXW

GSM BW = 251.0841 KHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

(Measured at the 99.75% power bandwidth)

6. CONCLUSION

The data collected shows that the **KCMobile Co., Ltd.** Quad-Band GSM/GPRS Handset (**FCC ID: T6QS14**) complies with all the requirements of Parts 2, 22 and 24 of the FCC rules.