




Report No.: HK08061117-1
Speakerphone with Charger Mode
Charger's AC Mains "L"

Scan Settings (1 Range)

Frequencies				Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF 60dB

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2 1	9k	30M	EW0700
12	9k	30M	EW0090

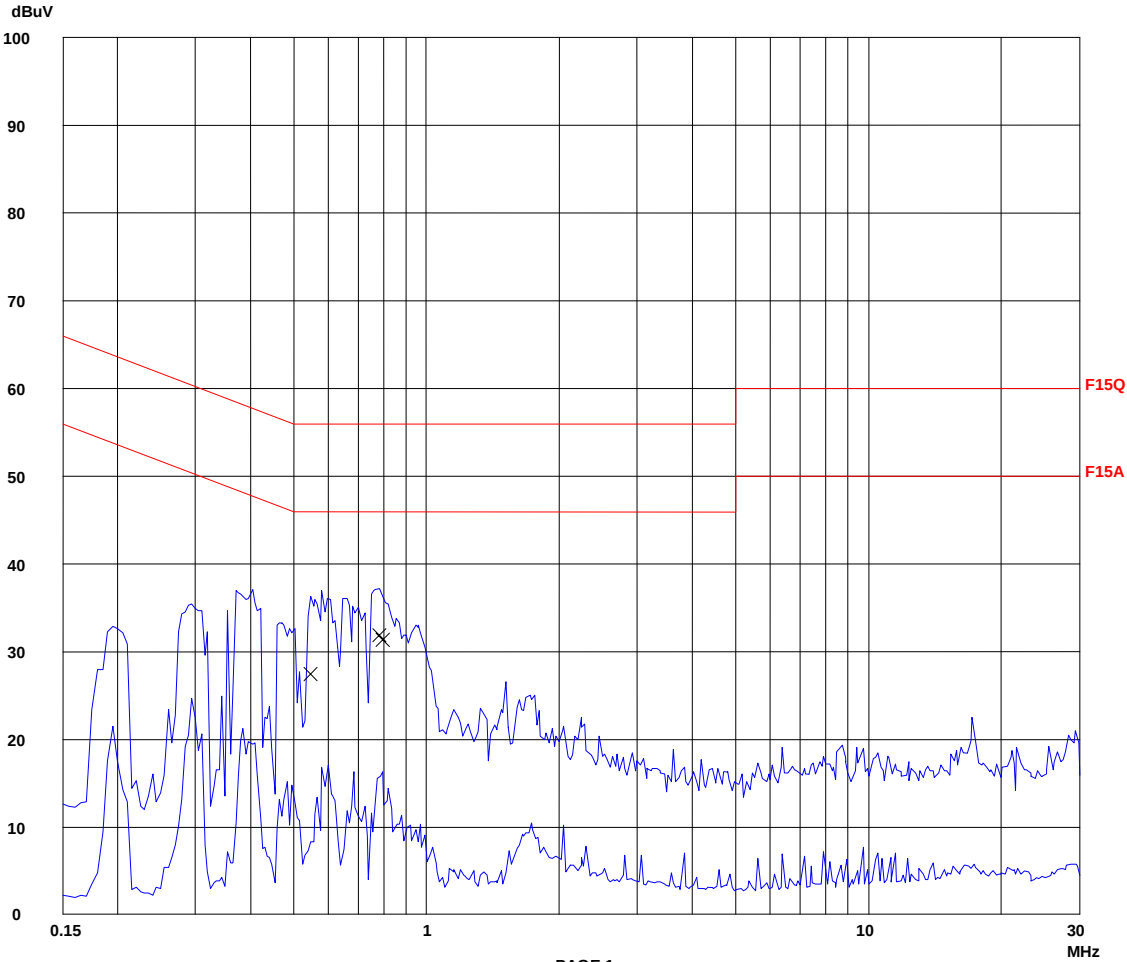



Report No.: HK08061117-1
Speakerphone with Charger Mode
Charger's AC Mains "L"

Scan Settings (1 Range)
|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 5k 10k PK+AV 10ms AUTO LN OFF 60dB
Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB
0.54500	27.3	56.0	-28.7
0.78000	31.8	56.0	-24.2
0.79500	31.3	56.0	-24.7

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB

no Results

* limit exceed