


FCC PART 15.247 TEST REPORT

For

RTX Hong Kong Ltd.

8/F Corporation Square, 8 Lam Lok Street, Kowloon Bay, Hong Kong

FCC ID: T7HCT8131

Report Type: Original Report	Product Type: 8252 Smart DECT Handset
Test Engineer: Rocky Kang	
Report Number: RSZ130427005-00A	
Report Date: 2013-06-28	
Reviewed By: Alvin Huang	
Prepared By: RF Leader	
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION	5
DESCRIPTION OF TEST CONFIGURATION	5
EQUIPMENT MODIFICATIONS	5
EUT EXERCISE SOFTWARE	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
EXTERNAL I/O CABLE.....	5
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §15.247 (i) & §2.1093 – RF EXPOSURE	8
APPLICABLE STANDARD	8
RESULT	8
FCC §15.203 – ANTENNA REQUIREMENT	9
APPLICABLE STANDARD	9
ANTENNA CONNECTOR CONSTRUCTION	9
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	10
APPLICABLE STANDARD	10
MEASUREMENT UNCERTAINTY	10
EUT SETUP	10
EMI TEST RECEIVER SETUP.....	11
TEST PROCEDURE	11
TEST EQUIPMENT LIST AND DETAILS.....	11
CORRECTED FACTOR & MARGIN CALCULATION	11
TEST RESULTS SUMMARY	12
TEST DATA	12
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	15
APPLICABLE STANDARD	15
MEASUREMENT UNCERTAINTY	15
EUT SETUP	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	16
TEST PROCEDURE	16
CORRECTED AMPLITUDE & MARGIN CALCULATION	16
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST RESULTS SUMMARY	17
TEST DATA	17
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	20
APPLICABLE STANDARD	20
TEST PROCEDURE	20
TEST EQUIPMENT LIST AND DETAILS.....	20
TEST DATA	20
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....	27

APPLICABLE STANDARD	27
TEST PROCEDURE	27
TEST EQUIPMENT LIST AND DETAILS.....	27
TEST DATA	27
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	33
APPLICABLE STANDARD	33
TEST PROCEDURE	33
TEST EQUIPMENT LIST AND DETAILS.....	33
TEST DATA	33
FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME).....	36
APPLICABLE STANDARD	36
TEST PROCEDURE	36
TEST EQUIPMENT LIST AND DETAILS.....	36
TEST DATA	36
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	52
APPLICABLE STANDARD	52
TEST PROCEDURE	52
TEST EQUIPMENT LIST AND DETAILS.....	52
TEST DATA	52
FCC §15.247(d) - BAND EDGES TESTING	58
APPLICABLE STANDARD	58
TEST PROCEDURE	58
TEST EQUIPMENT LIST AND DETAILS.....	58
TEST DATA	58

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *RTX Hong Kong Ltd.*'s product, model number: *8252 Smart DECT Handset (FCC ID: T7HCT8131)* or the "EUT" in this report was named as *8252 Smart DECT Handset by the applicant*, which was measured approximately: 14.1 cm (L) x 5.1 cm (W) x 2.5 cm (H), rated with input voltage: DC 3.7V rechargeable Li-ion battery or DC 5.0V charging from adapter.

Adapter Information:

Model: FW7713

Input: 100-240V~50/60Hz, 0.15A

Output: DC 5.0V, 1.0A

** All measurement and test data in this report was gathered from production sample serial number: RTXYWXXXXXX (Assigned by the applicant). The EUT supplied by the applicant was received on 2013-04-27.*

Objective

This test report is prepared on behalf of *RTX Hong Kong Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DTS, FCC Part 15B JBP and FCC Part 15D PUE submission with FCC ID: T7HCT8131

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode which was controlled by the equipment Bluetooth tester.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

No exercise software was used.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
TESCOM	Bluetooth Tester	TC-3000B	3000B630010

External I/O Cable

Cable Description	Length (m)	From Port	To
Unshielded Detachable USB Cable	2.0	Adapter	EUT

Block Diagram of Test Setup

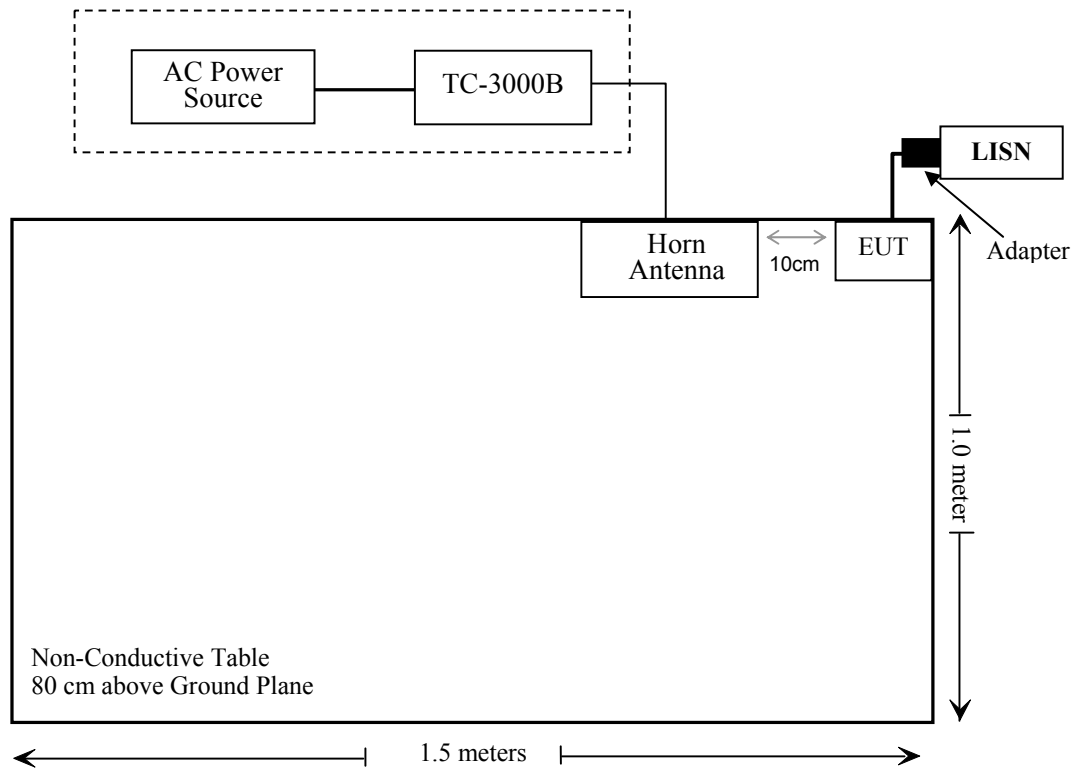

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

FCC §15.247 (i) & §2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance v05

Result

According to FCC KDB 447498 D01 General RF Exposure Guidance v05 generic portable criteria

The distance between antenna and test point is 5 mm

The max output power: $5.6\text{dBm} + 0.5\text{dBi} = 6.1\text{dBm} = 4.07\text{mW}$

According to the Appendix A of KDB 447498, the exclusion thresholds for 2450 MHz is 10 mW.

Conclusion:

The time-averaged output power is 4.07 mW < the exclusion thresholds 10 mW, so stand-alone SAR evaluation is not required.

Other data please refer to the SAR report RSZ130427005-20A

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has an integrated antenna arrangement for bluetooth, which was permanently attached and the gain was 0.5 dBi, fulfill the requirement of this section. Please refer to the internal photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)


Measurement Uncertainty

Input quantities to be considered for conducted disturbance measurements may be receiver reading, attenuation of the connection between AMN/ISN and receiver, AMN/ISN voltage division factor, AMN/ISN VDF frequency interpolation and receiver related input quantities, etc.

Based on CISPR 16-4-2:2011, the expanded combined standard uncertainty of conducted disturbance test at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown as below. And the uncertainty will not be taken into consideration for the test data recorded in the report

Port	Measurement uncertainty
AC Mains	3.26 dB (k=2, 95% level of confidence)
CAT 3	3.70 dB (k=2, 95% level of confidence)
CAT 5	3.86 dB (k=2, 95% level of confidence)
CAT 6	4.64 dB (k=2, 95% level of confidence)

EUT Setup

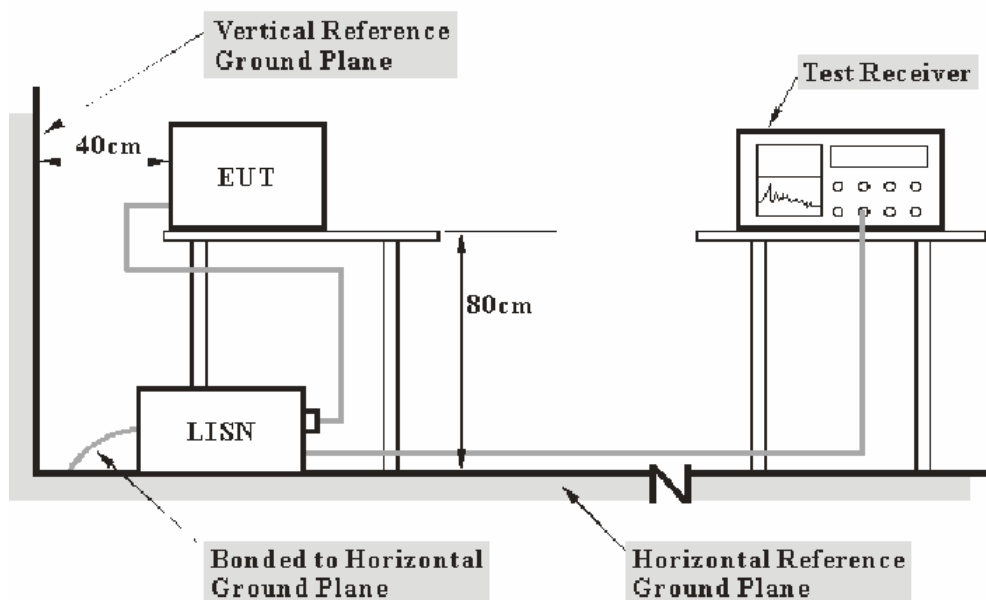

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.4-2009. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2013-05-09	2014-05-09
Rohde & Schwarz	LISN	ESH2-Z5	892107/021	2012-08-22	2013-08-22
Rohde & Schwarz	Transient limiter	ESH3Z2	DE25985	2012-08-09	2013-08-09
BACL	CE Test software	BACL-CE	V1.0	-	-

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Transient limiter Attenuation. The basic equation is as follows:

Correction Factor = LISN VDF + Cable Loss + Transient limiter Attenuation

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, with the worst margin reading of:

12.1 dB at 0.326 MHz in the **Neutral** conducted mode

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in compliance with the limit if

$$L_m + U_{(L_m)} \leq L_{lim} + U_{cispr}$$

In BACL, $U_{(L_m)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.


Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Rocky Kang on 2013-06-27.

EUT operation mode: Charging & Transmitting

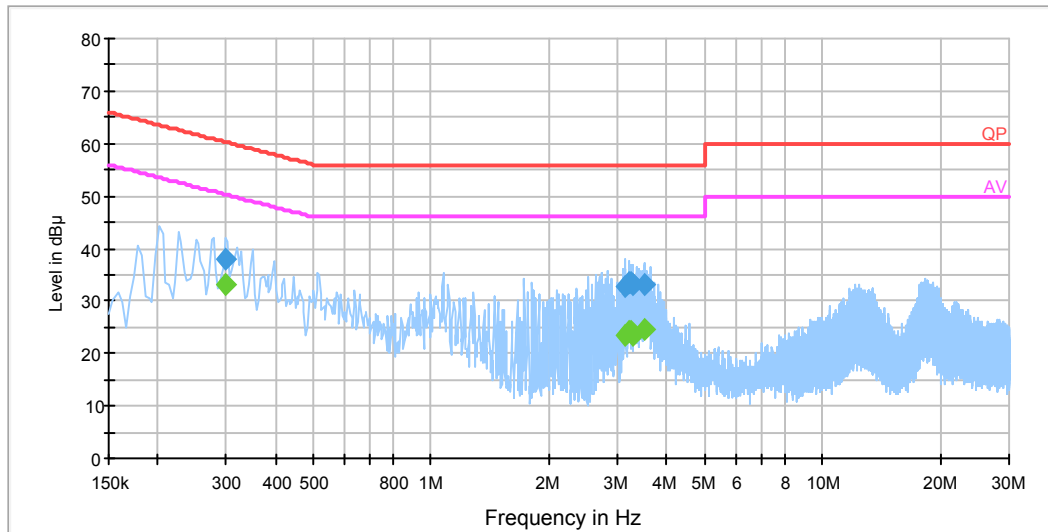AC 120V/60 Hz, Line

Frequency (MHz)	Corrected Amplitude (dBμV)	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Remark (PK/QP/Ave.)
0.298000	33.1	19.5	50.3	17.2	Ave.
3.526000	24.5	19.6	46.0	21.5	Ave.
3.198000	24.1	19.6	46.0	21.9	Ave.
3.250000	24.0	19.6	46.0	22.0	Ave.
0.298000	37.9	19.5	60.3	22.4	QP
3.198000	33.5	19.6	56.0	22.5	QP
3.250000	33.5	19.6	56.0	22.5	QP
3.294000	23.5	19.6	46.0	22.5	Ave.
3.294000	33.3	19.6	56.0	22.7	QP
3.142000	23.3	19.6	46.0	22.7	Ave.
3.526000	33.0	19.6	56.0	23.0	QP
3.142000	32.9	19.6	56.0	23.1	QP

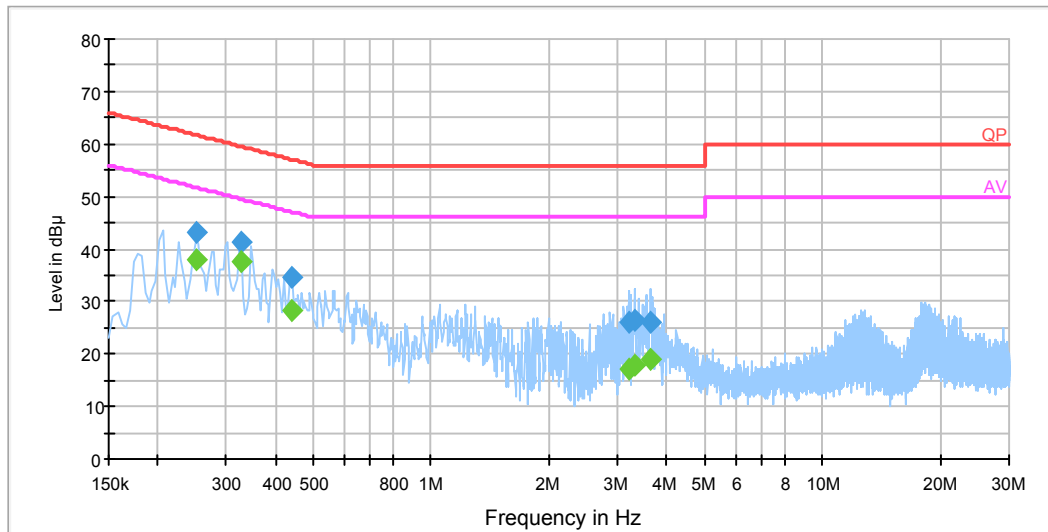AC 120V/60 Hz, Neutral

Frequency (MHz)	Corrected Amplitude (dBμV)	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Remark (PK/QP/Ave.)
0.326000	37.4	19.5	49.6	12.1	Ave.
0.250000	38.1	19.5	51.8	13.7	Ave.
0.326000	41.4	19.5	59.6	18.2	QP
0.250000	43.1	19.5	61.8	18.6	QP
0.442000	28.3	19.5	47.0	18.7	Ave.
0.442000	34.7	19.5	57.0	22.4	QP
3.622000	18.9	19.6	46.0	27.1	Ave.
3.326000	17.8	19.6	46.0	28.2	Ave.
3.194000	17.3	19.6	46.0	28.7	Ave.
3.326000	26.4	19.6	56.0	29.6	QP
3.194000	26.2	19.6	56.0	29.8	QP
3.622000	26.2	19.6	56.0	29.8	QP

Note:

- 1) Correction Factor = LISN/ISN VDF (Voltage Division Factor) + Cable Loss + Transient limiter Attenuation
The corrected factor has been input into the transducer of the test software.
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS**Applicable Standard**


FCC §15.205; §15.209; §15.247(d)

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown in below table. And the uncertainty will not be taken into consideration for the test data recorded in the report

Frequency	Polarity	Measurement uncertainty
30MHz~200MHz	Horizontal	4.62 dB (k=2, 95% level of confidence)
	Vertical	4.54 dB (k=2, 95% level of confidence)
200MHz~1GHz	Horizontal	4.84 dB (k=2, 95% level of confidence)
	Vertical	5.91 dB (k=2, 95% level of confidence)
1 GHz~6 GHz	Horizontal/Vertical	4.68 dB (k=2, 95% level of confidence)
Above 6 GHz	Horizontal/Vertical	4.92 dB (k=2, 95% level of confidence)

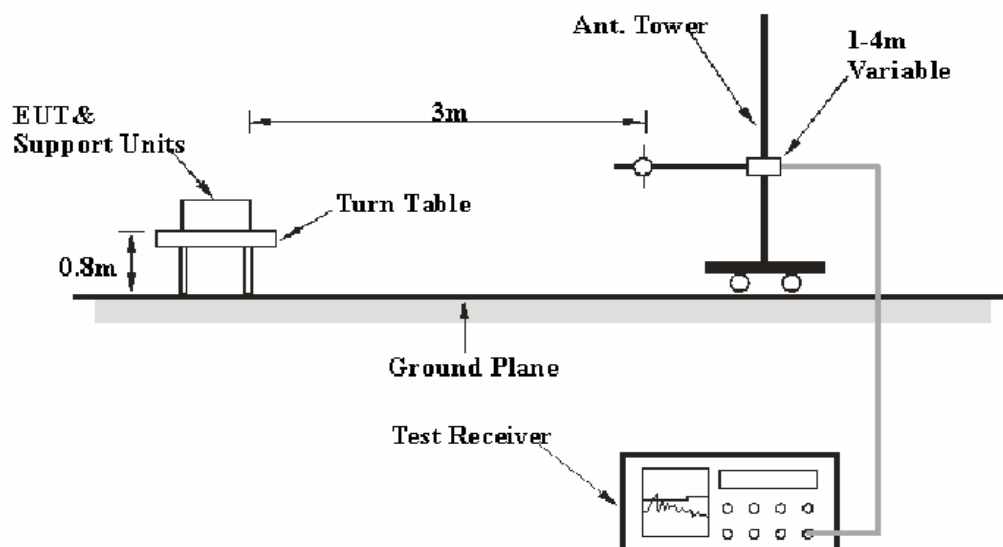EUT Setup

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Corrected Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	8447E	1937A01046	2012-08-09	2013-08-09
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2013-05-09	2014-05-09
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2014-11-27
SUPER ULTRA	Amplifier	ZVA-213+	N/A	2012-11-24	2013-11-23
Sunol Sciences	Horn Antenna	DRH-118	A052304	2011-12-01	2014-11-30
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23
the electro-Mechanics Co.	Horn Antenna	3116	9510-2270	2010-10-14	2013-10-13

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, with the worst margin reading of:

10.23 dB at 7323.0 MHz in the Vertical polarization

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in compliance with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Rocky Kang on 2013-06-27.

EUT operation mode: Transmitting

30 MHz -25 GHz: (Scan with GFSK, $\pi/4$ -DQPSK, 8-DPSK, the worst case is BDR Mode (GFSK))

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2402 MHz)									
2402.0	89.94	PK	275	1.4	H	6.13	96.07	/	/
2402.0	78.19	Ave.	275	1.4	H	6.13	84.32	/	/
2402.0	94.30	PK	118	1.3	V	6.13	100.43	/	/
2402.0	83.75	Ave.	118	1.3	V	6.13	89.88	/	/
7206.0	26.66	Ave.	176	1.2	V	17.06	43.72	54	10.28
9608.0	24.37	Ave.	212	1.4	V	19.28	43.65	54	10.35
178.4	48.62	QP	78	1.5	H	-16	32.62	43.5	10.88
7206.0	40.99	PK	176	1.2	V	17.06	58.05	74	15.95
4804.0	25.57	Ave.	134	1.3	V	12.40	37.97	54	16.03
9608.0	38.14	PK	212	1.4	V	19.28	57.42	74	16.58
2385.2	27.13	Ave.	84	1.2	V	6.13	33.26	54	20.74
2475.3	25.99	Ave.	160	1.4	V	7.21	33.20	54	20.80
2318.5	27.29	Ave.	119	1.4	V	5.48	32.77	54	21.23
4804.0	39.60	PK	134	1.3	V	12.40	52.00	74	22.00
2475.3	40.99	PK	160	1.4	V	7.21	48.20	74	25.80
2385.2	41.72	PK	84	1.2	V	6.13	47.85	74	26.15
2318.5	41.84	PK	119	1.4	V	5.48	47.32	74	26.68
Middle Channel (2441 MHz)									
2441.0	90.22	PK	230	1.3	H	7.21	97.43	/	/
2441.0	77.58	Ave.	230	1.3	H	7.21	84.79	/	/
2441.0	94.76	PK	233	1.4	V	7.21	101.97	/	/
2441.0	83.53	Ave.	233	1.4	V	7.21	90.74	/	/
7323.0	27.28	Ave.	83	1.2	V	16.49	43.77	54	10.23
178.4	49.24	QP	241	1.3	H	-16	33.24	43.5	10.26
9764.0	23.23	Ave.	272	1.2	H	19.40	42.63	54	11.37
7323.0	41.42	PK	83	1.2	V	16.49	57.91	74	16.09
4882.0	25.24	Ave.	185	1.2	V	12.46	37.70	54	16.30
9764.0	37.58	PK	272	1.2	H	19.40	56.98	74	17.02
2473.8	26.19	Ave.	353	1.3	H	7.21	33.40	54	20.60
2488.2	26.17	Ave.	210	1.2	H	7.21	33.38	54	20.62
2380.6	26.98	Ave.	345	1.4	V	6.13	33.11	54	20.89
4882.0	39.35	PK	185	1.2	V	12.46	51.81	74	22.19
2473.8	41.02	PK	353	1.3	H	7.21	48.23	74	25.77
2488.2	40.82	PK	210	1.2	H	7.21	48.03	74	25.97
2380.6	41.75	PK	345	1.4	V	6.13	47.88	74	26.12

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2480 MHz)									
2480.0	88.82	PK	201	1.3	H	7.21	96.03	/	/
2480.0	78.19	Ave.	201	1.3	H	7.21	85.40	/	/
2480.0	95.02	PK	322	1.3	V	7.21	102.23	/	/
2480.0	83.47	Ave.	322	1.3	V	7.21	90.68	/	/
9920.0	24.14	Ave.	190	1.4	H	19.38	43.52	54	10.48
178.4	48.10	QP	124	1.2	H	-16	32.10	43.5	11.40
7440.0	26.17	Ave.	231	1.4	V	15.90	42.07	54	11.93
4960.0	25.62	Ave.	209	1.3	V	12.50	38.12	54	15.88
9920.0	38.24	PK	190	1.4	H	19.38	57.62	74	16.38
7440.0	40.31	PK	231	1.4	V	15.90	56.21	74	17.79
2483.5	27.90	Ave.	13	1.4	H	7.21	35.11	54	18.89
2485.6	26.82	Ave.	155	1.5	V	7.21	34.03	54	19.97
4960.0	40.28	PK	209	1.3	V	12.50	52.78	74	21.22
2327.4	26.68	Ave.	25	1.4	H	5.48	32.16	54	21.84
2483.5	40.36	PK	13	1.4	H	7.21	47.57	74	26.43
2485.6	39.66	PK	155	1.5	V	7.21	46.87	74	27.13
2327.4	40.89	PK	25	1.4	H	5.48	46.37	74	27.63

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST**Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB emission bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25°C
Relative Humidity:	56%
ATM Pressure:	100.0 kPa

The testing was performed by Rocky Kang on 2013-06-27.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots


Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	$\geq$ Limit (MHz)	Result
BDR (GFSK)	Low	2402	1.004	0.625	Pass
	Adjacent	2403			
	Middle	2441	1.010	0.645	Pass
	Adjacent	2440			
	High	2480	1.004	0.649	Pass
	Adjacent	2479			
EDR ($\pi/4$-DQPSK)	Low	2402	1.004	0.850	Pass
	Adjacent	2403			
	Middle	2441	1.004	0.850	Pass
	Adjacent	2440			
	High	2480	1.004	0.850	Pass
	Adjacent	2479			
EDR (8DPSK)	Low	2402	1.004	0.829	Pass
	Adjacent	2403			
	Middle	2441	1.004	0.842	Pass
	Adjacent	2440			
	High	2480	1.004	0.834	Pass
	Adjacent	2479			

Note: Limit = 20 dB bandwidth *2/3


BDR (GFSK): Low Channel

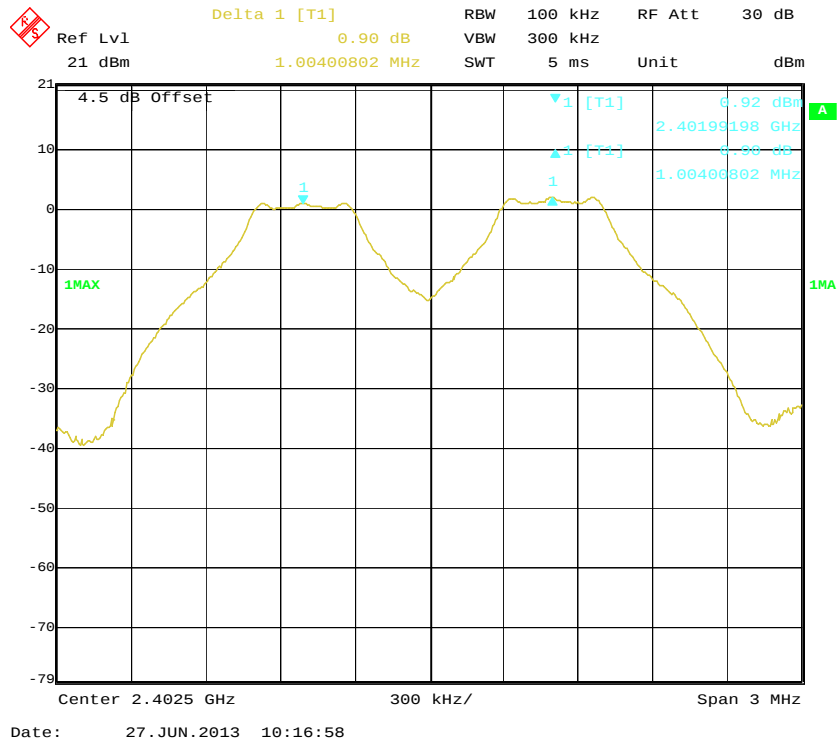


BDR (GFSK): Middle Channel

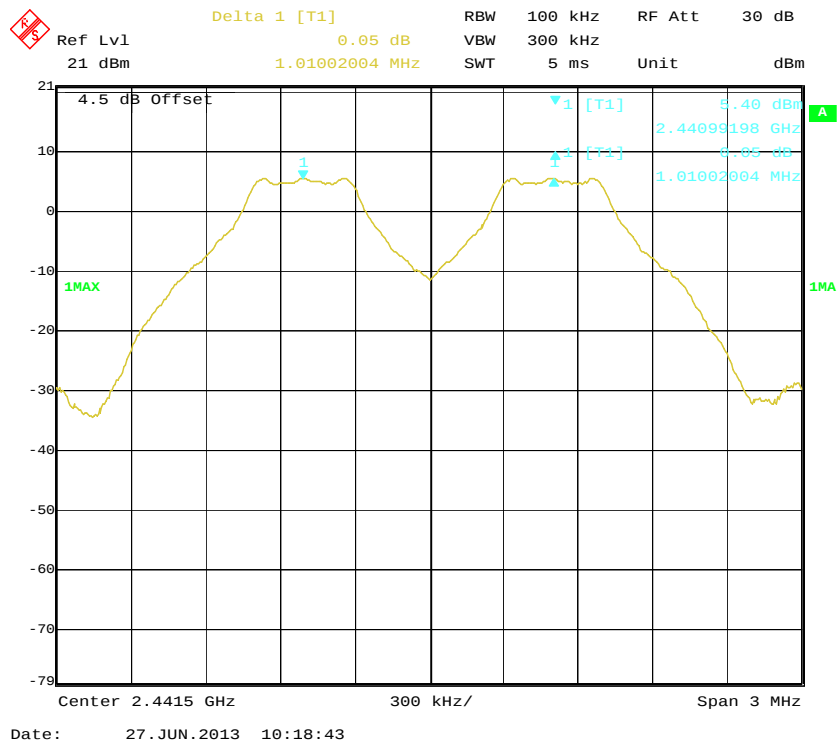


BDR (GFSK): High Channel

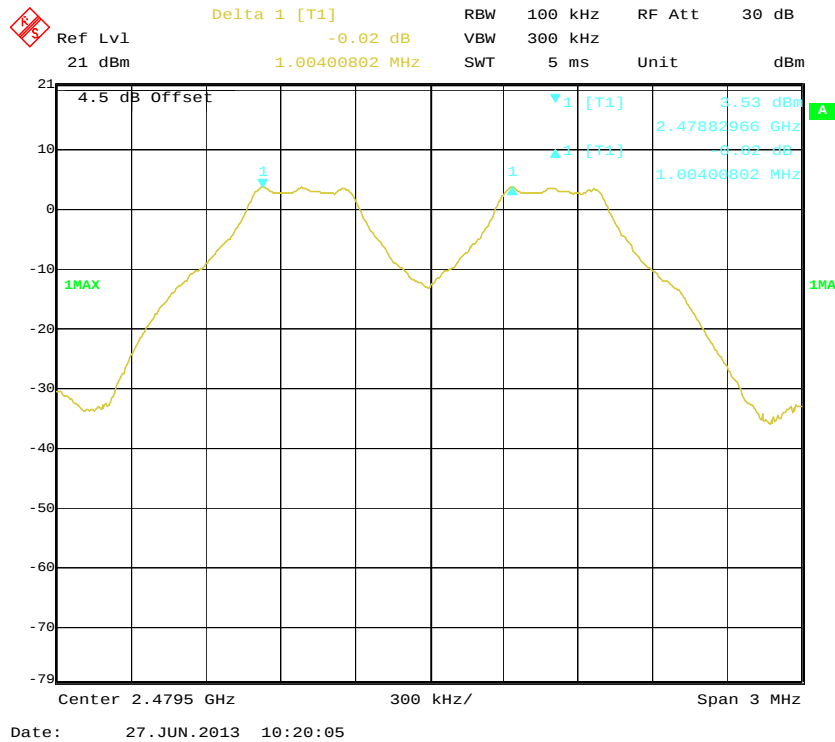


EDR ($\pi/4$ -DQPSK): Low Channel

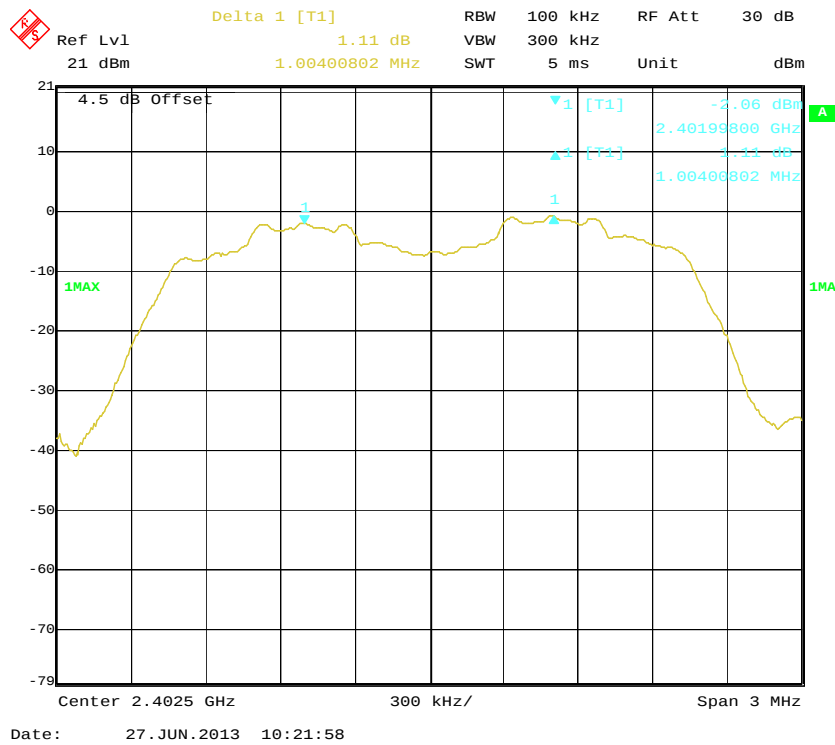


EDR ($\pi/4$ -DQPSK): Middle Channel

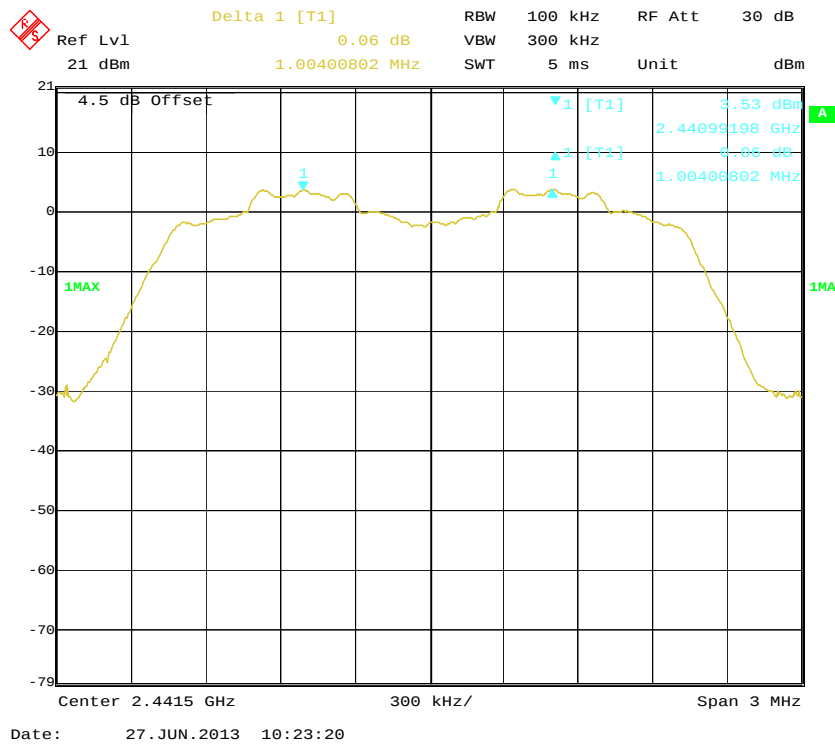


EDR ($\pi/4$ -DQPSK): High Channel

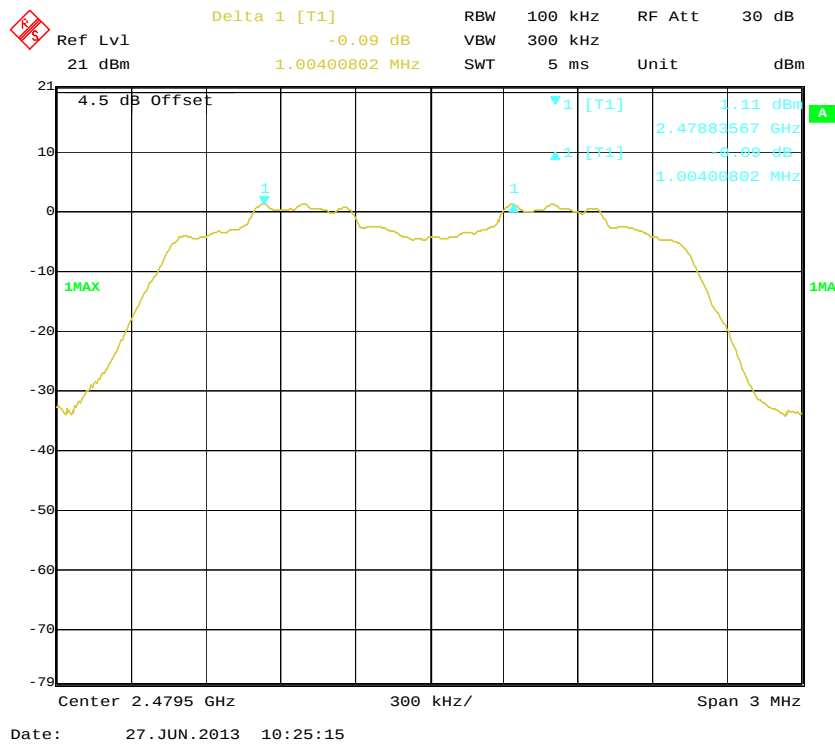


EDR (8DPSK): Low Channel

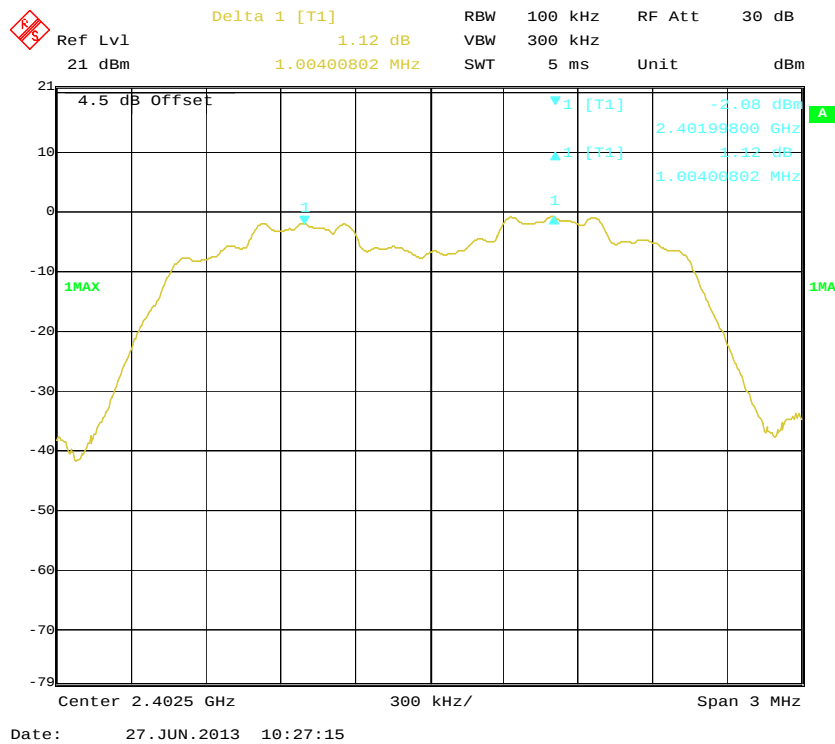

EDR (8DPSK): Middle Channel

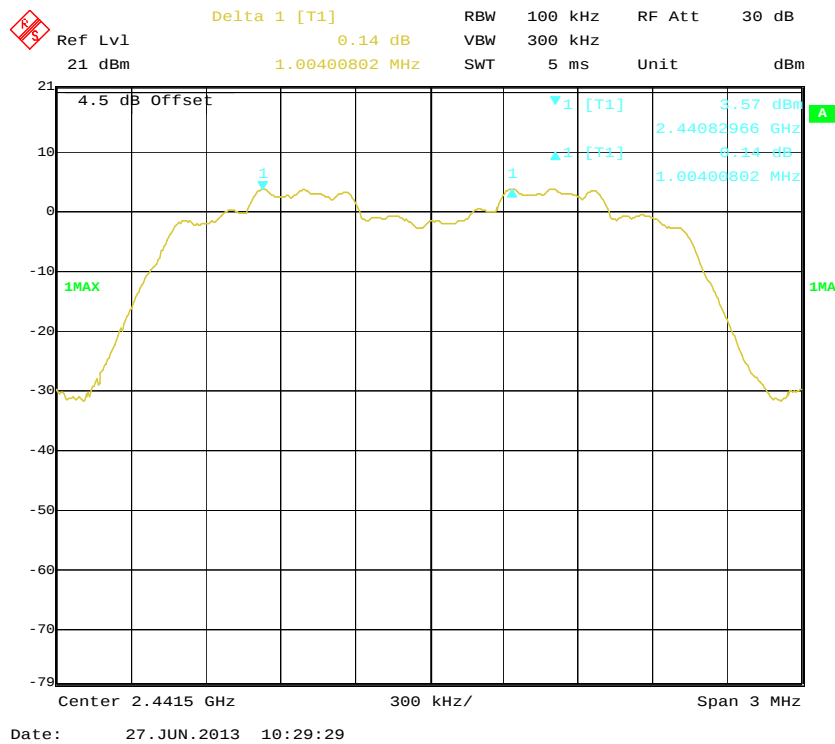

EDR (8DPSK): High Channel

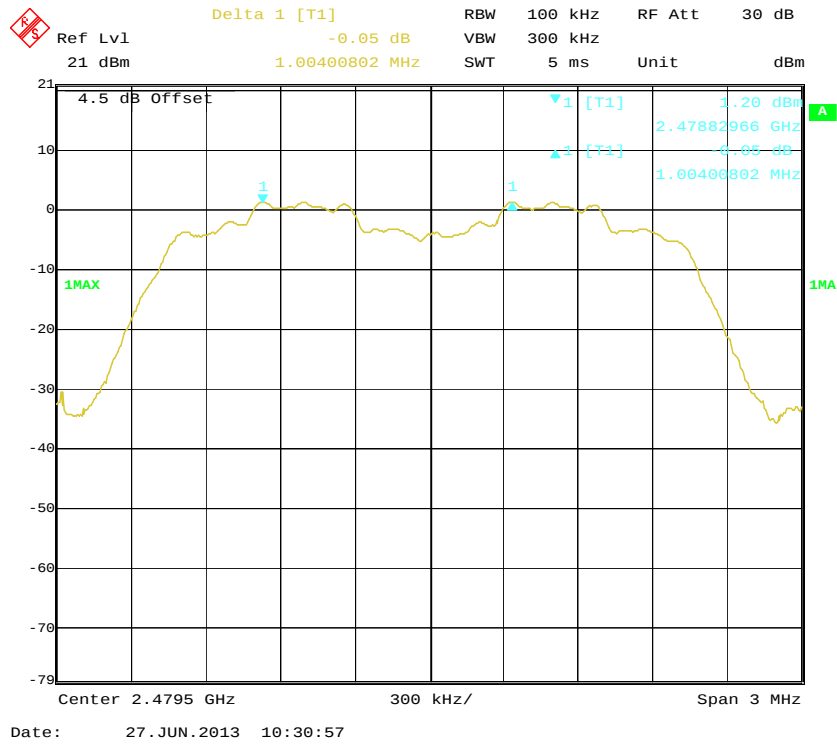

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH**Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	25°C
Relative Humidity:	56%
ATM Pressure:	100.0 kPa



The testing was performed by Rocky Kang on 2013-06-27 and 2013-06-28.



EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following tables and plots

Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
BDR (GFSK)	Low	2402	0.938
	Middle	2441	0.968
	High	2480	0.974
EDR ($\pi/4$-DQPSK)	Low	2402	1.275
	Middle	2441	1.275
	High	2480	1.275
EDR (8DPSK)	Low	2402	1.244
	Middle	2441	1.263
	High	2480	1.251

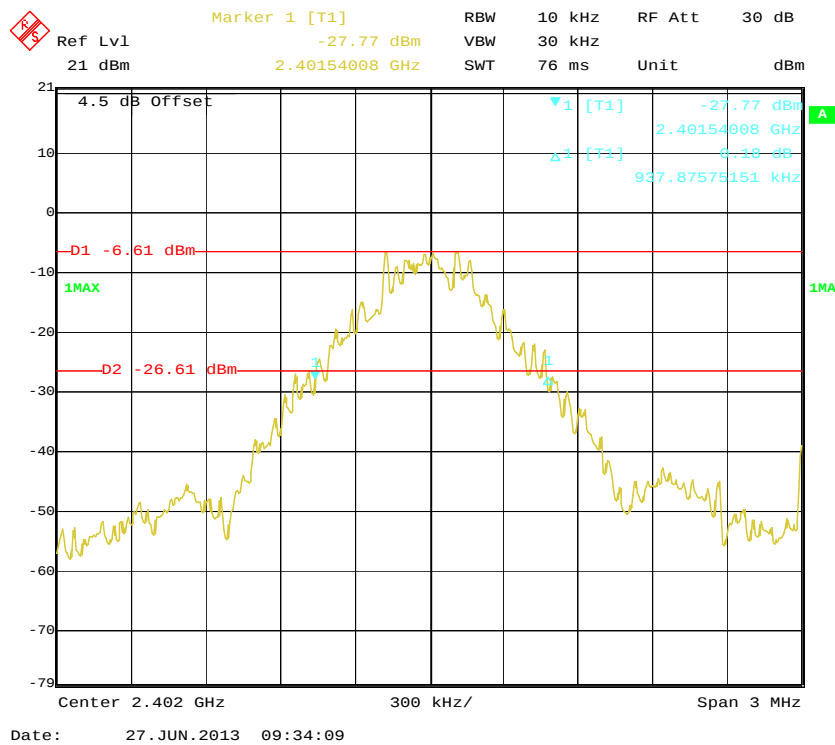
BDR (GFSK): Low Channel

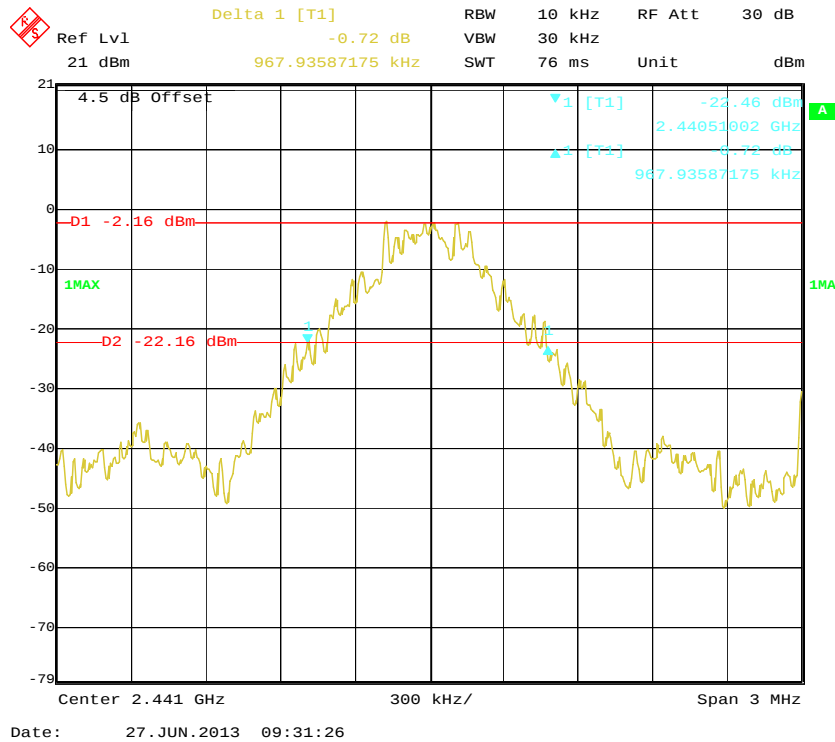
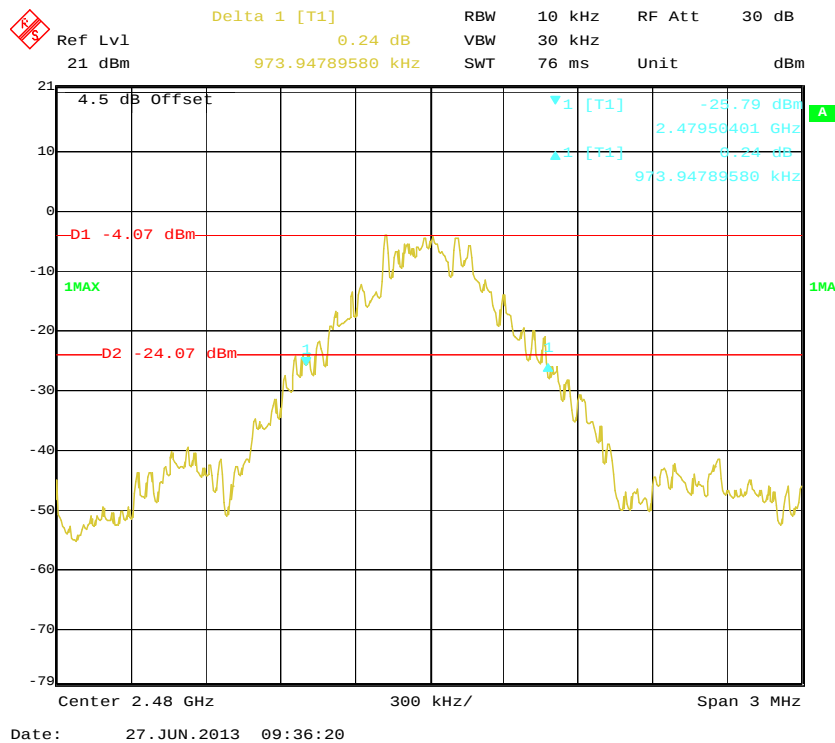
BDR (GFSK): Middle Channel**BDR (GFSK): High Channel**

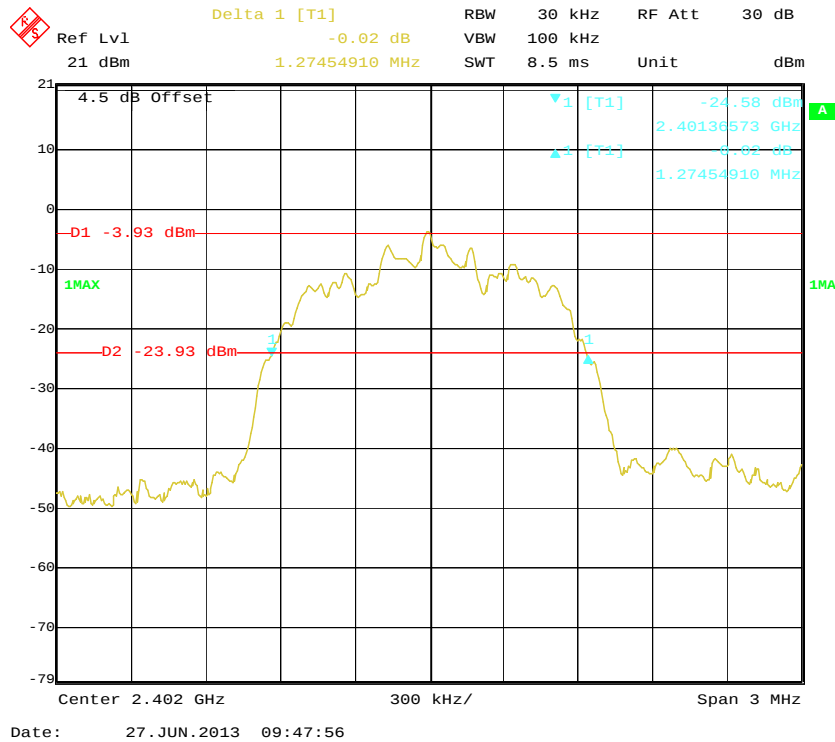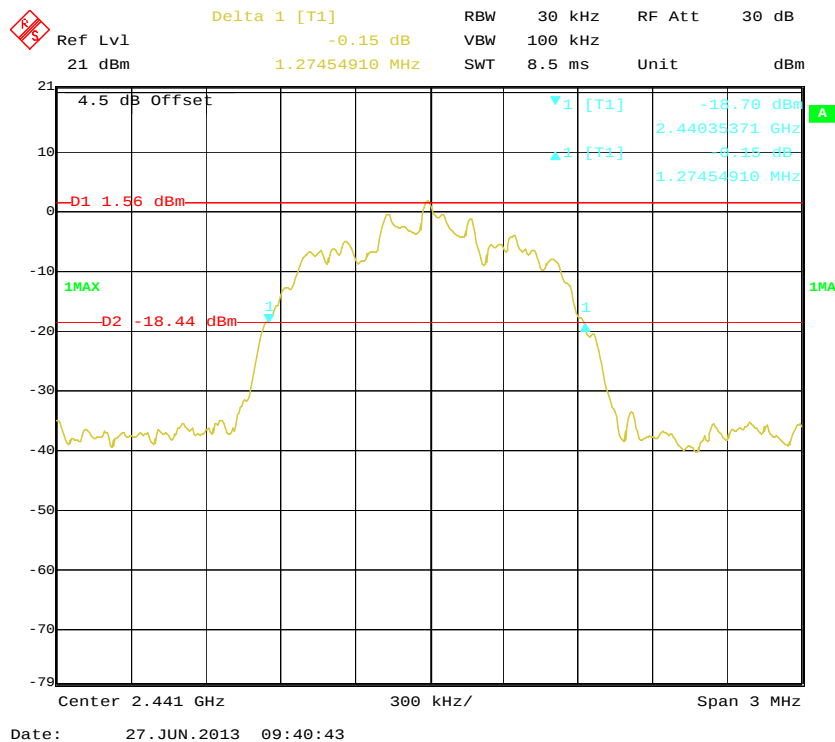EDR ($\pi/4$ -DQPSK): Low ChannelEDR ($\pi/4$ -DQPSK): Middle Channel

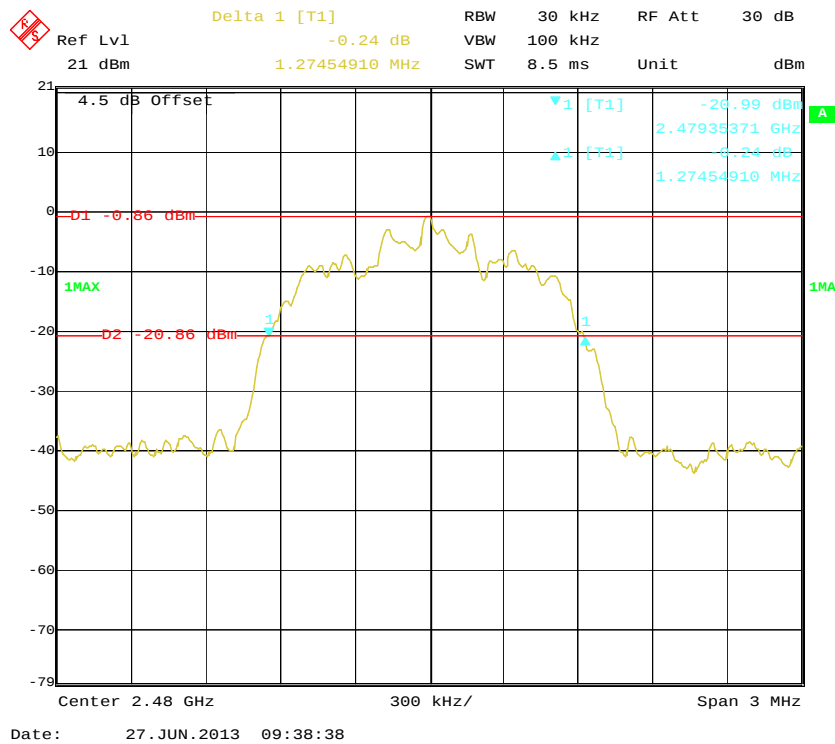EDR ($\pi/4$ -DQPSK): High Channel

EDR (8DPSK): Low Channel

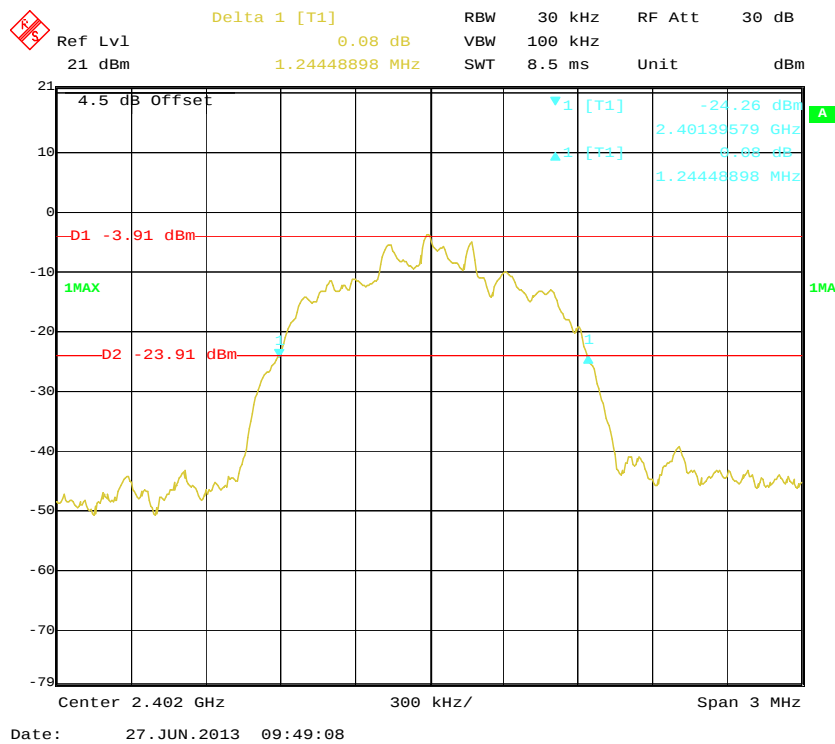

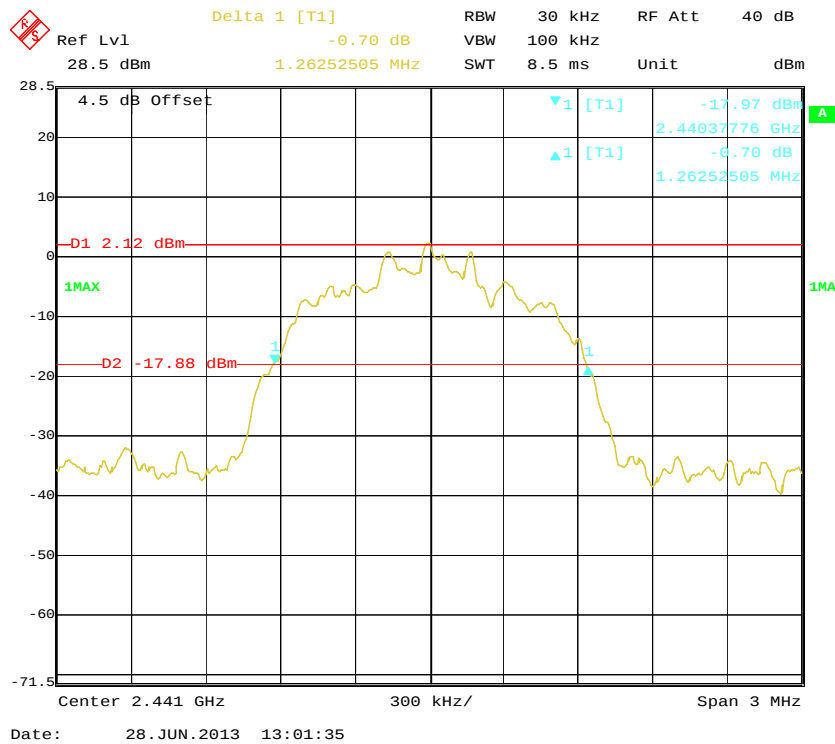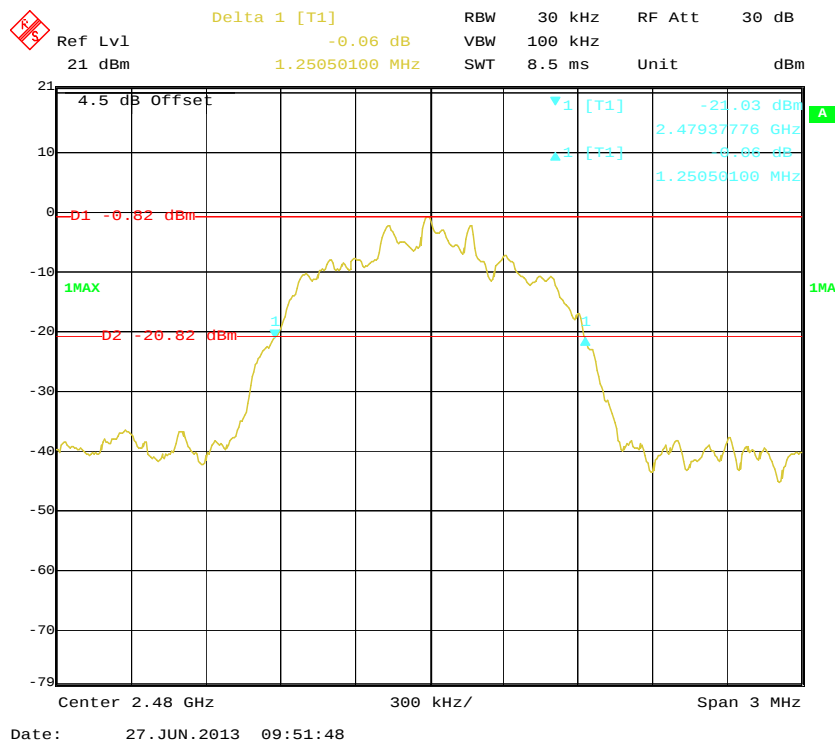EDR (8DPSK): Middle Channel**EDR (8DPSK): High Channel**

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	25°C
Relative Humidity:	56%
ATM Pressure:	100.0 kPa

The testing was performed by Rocky Kang on 2013-06-27.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots


Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥15
EDR (π/4-DQPSK)		79	≥15
EDR (8DPSK)		79	≥15

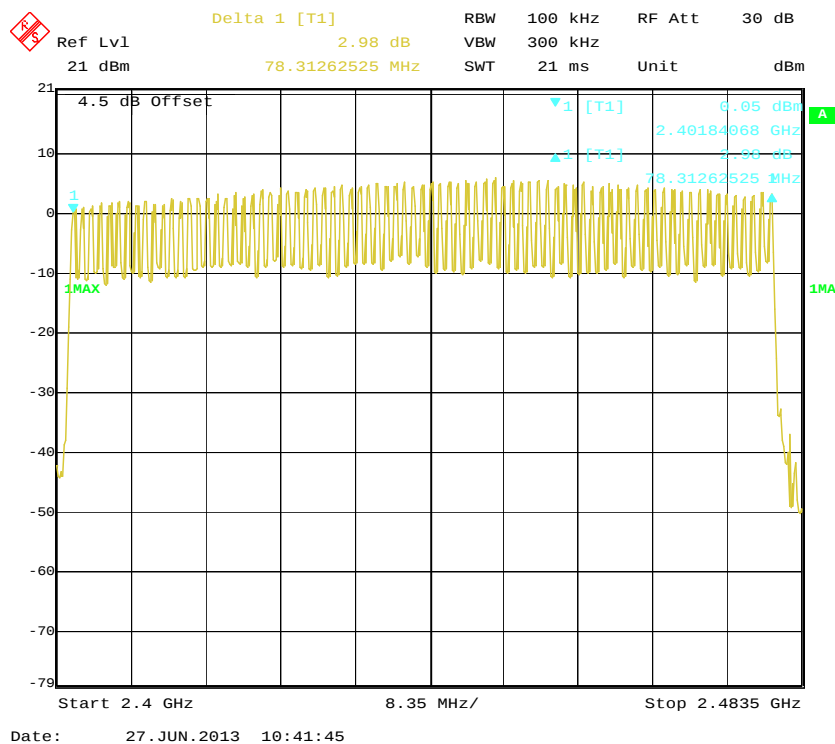BDR (GFSK): Number of Hopping Channels

EDR ($\pi/4$ -DQPSK): Number of Hopping Channels

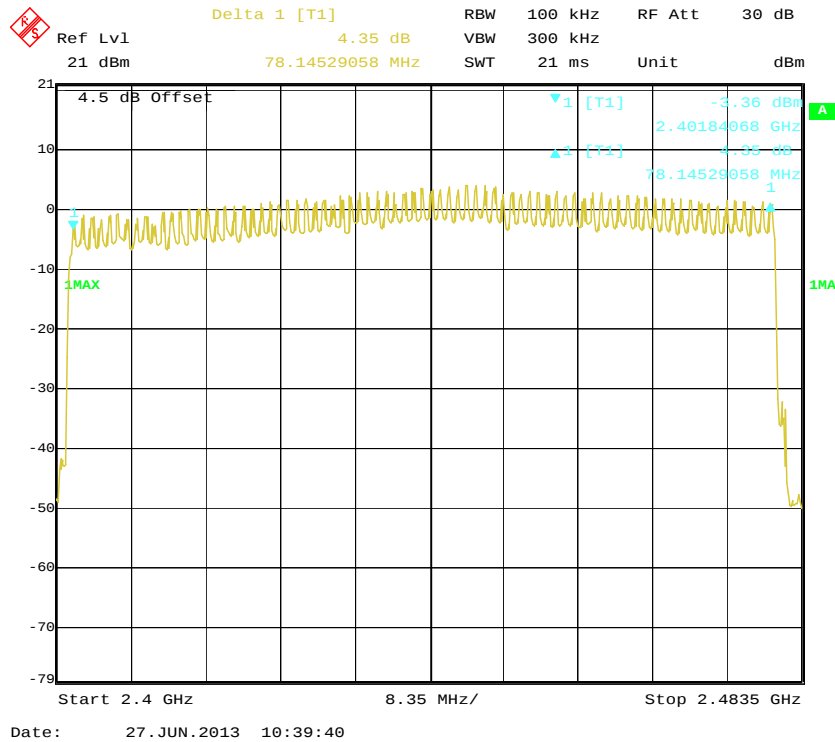

(8DPSK): Number of Hopping Channels

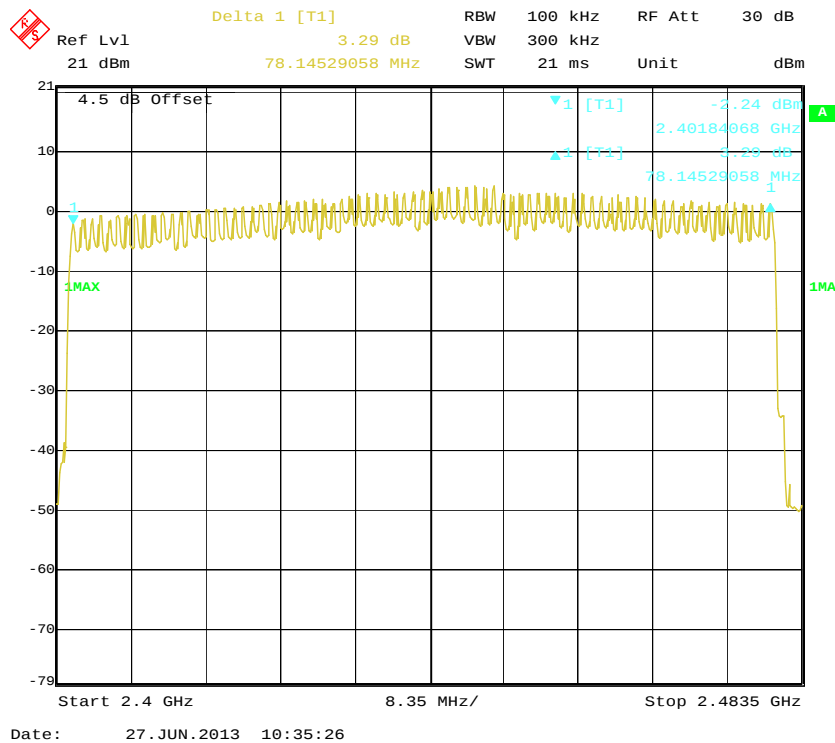

FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell time = Pulse time*hop rate/number of hopping channels*31.6S

Hop rate=1600/S

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25°C
Relative Humidity:	56%
ATM Pressure:	100.0 kPa


The testing was performed by Rocky Kang on 2013-06-27 and 2013-06-28.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots

Mode		Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result
BDR (GFSK)	DH 1	Low	0.435	0.139	0.4	Pass
		Middle	0.427	0.137	0.4	Pass
		High	0.421	0.135	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH 3	Low	1.683	0.269	0.4	Pass
		Middle	1.688	0.270	0.4	Pass
		High	1.695	0.271	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH 5	Low	2.964	0.316	0.4	Pass
		Middle	2.964	0.316	0.4	Pass
		High	2.974	0.317	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR ($\pi/4$ -DQPSK)	DH 1	Low	0.435	0.139	0.4	Pass
		Middle	0.435	0.139	0.4	Pass
		High	0.437	0.140	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH 3	Low	1.689	0.270	0.4	Pass
		Middle	1.731	0.277	0.4	Pass
		High	1.701	0.272	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH 5	Low	2.954	0.315	0.4	Pass
		Middle	2.984	0.318	0.4	Pass
		High	2.974	0.317	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR (8DPSK)	DH 1	Low	0.433	0.139	0.4	Pass
		Middle	0.439	0.140	0.4	Pass
		High	0.439	0.140	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH 3	Low	1.701	0.272	0.4	Pass
		Middle	1.701	0.272	0.4	Pass
		High	1.701	0.272	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH 5	Low	2.964	0.316	0.4	Pass
		Middle	2.984	0.318	0.4	Pass
		High	2.974	0.317	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				

Pulse time, Low Channel, DH1

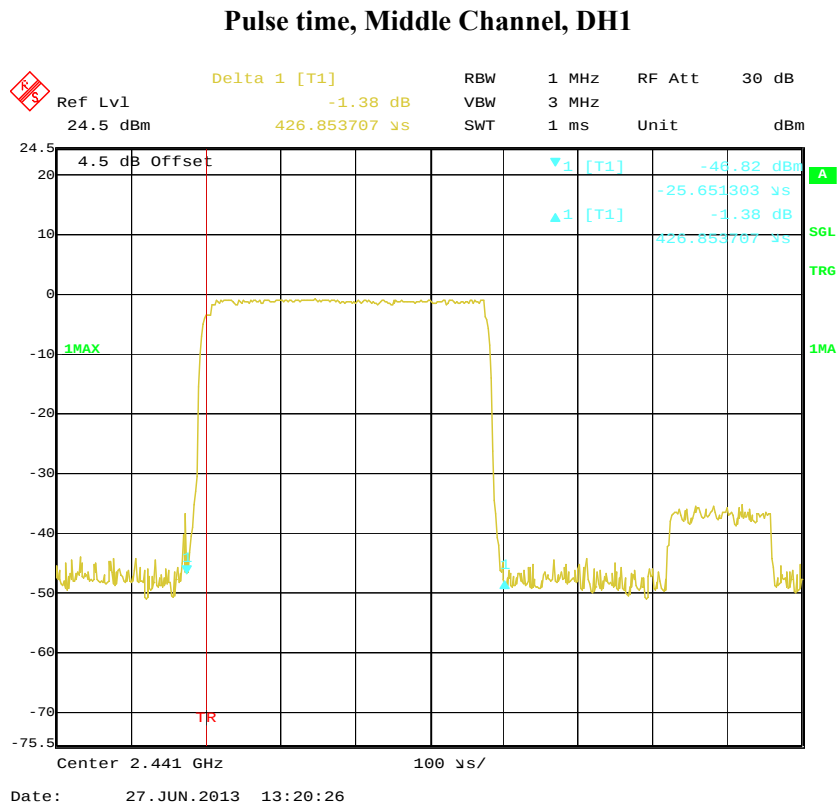

Ref Lvl 24.5 dBm Delta 1 [T1] -3.00 dB RBW 1 MHz RF Att 30 dB

4.5 dB Offset 420.841683 μ s SWT 1 ms Unit dBm

Center 2.48 GHz 100 μ s/

1MAX

TR

1 [T1] -47.15 dBm

1 [T1] -15.631263 μ s

1 [T1] -3.00 dB

420.841683 μ s

1A


SGL

TRG


1MA

Date: 27.JUN.2013 13:20:59


Pulse time, Middle Channel, DH3

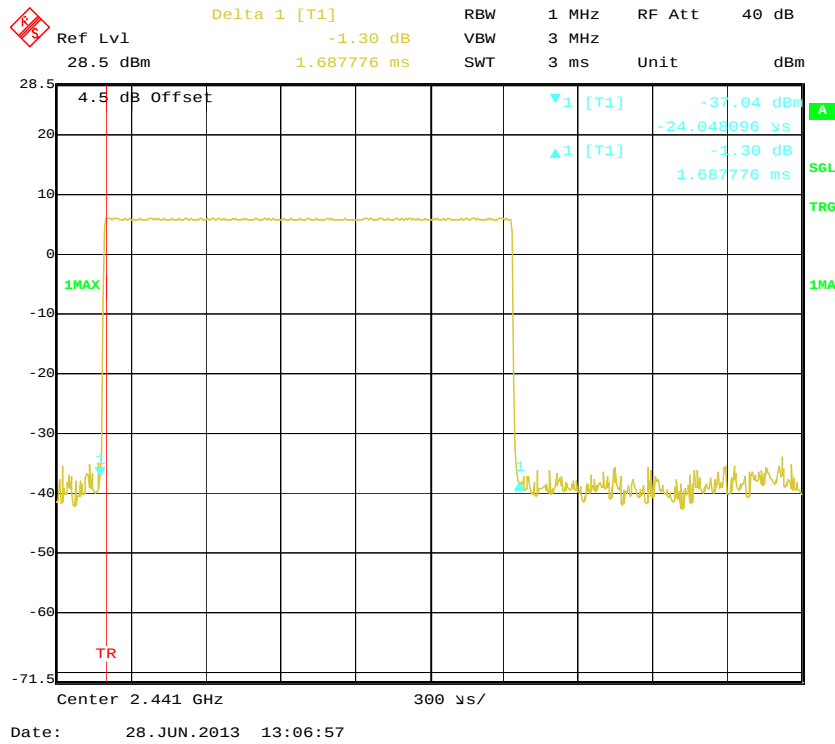


Pulse time, High Channel, DH3

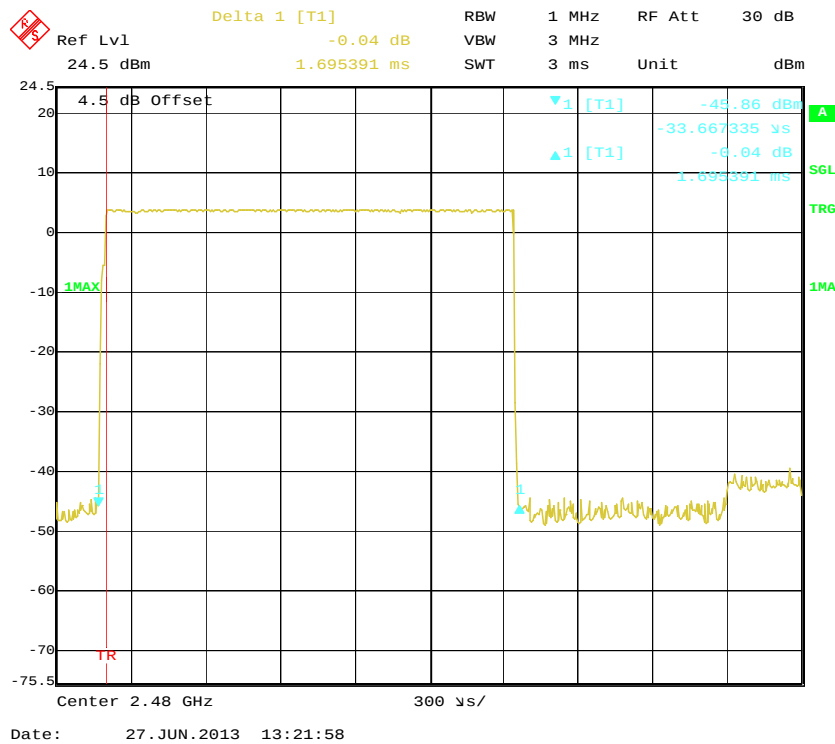

Pulse time, Low Channel, DH5

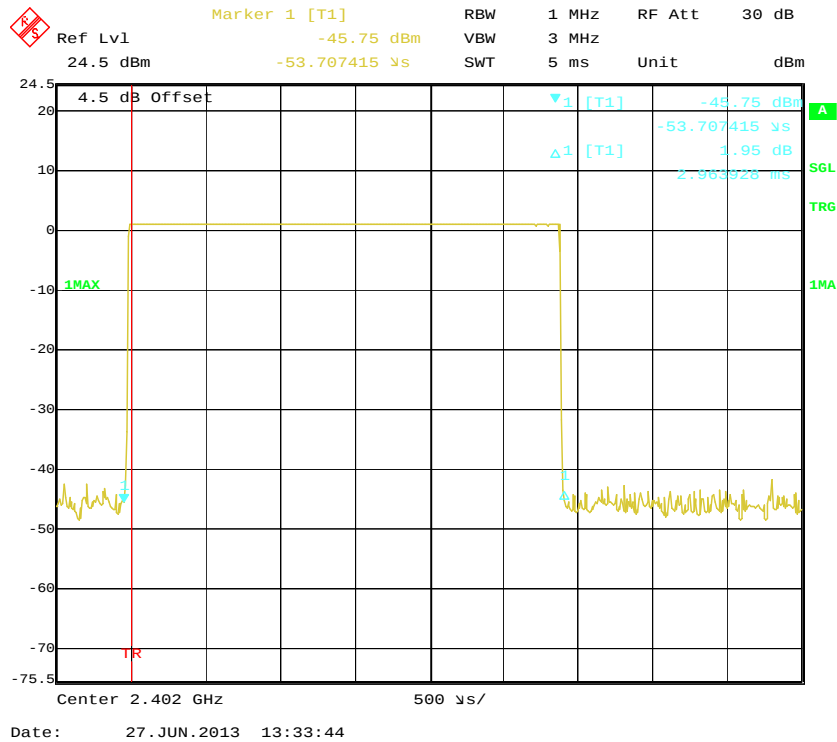

Pulse time, Middle Channel, DH5

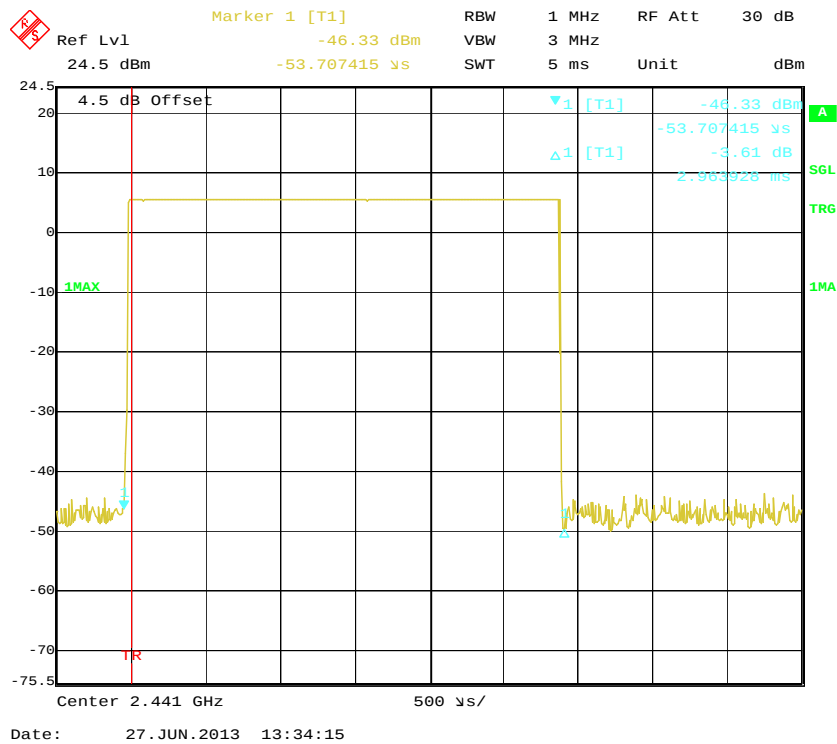

Ref Lvl 24.5 dBm Delta 1 [T1] -1.96 dB RBW 1 MHz RF Att 30 dB
 2.973948 ms SWT 3 MHz Unit dBm

4.5 dB Offset


Center 2.48 GHz 500 μ s/div

-47.02 dBm
 -63.727455 μ s
 -1.96 dB
 2.973948 ms


1MAX
 TR

A
 SGL
 TRG
 1MA


Pulse time, Low Channel, DH1

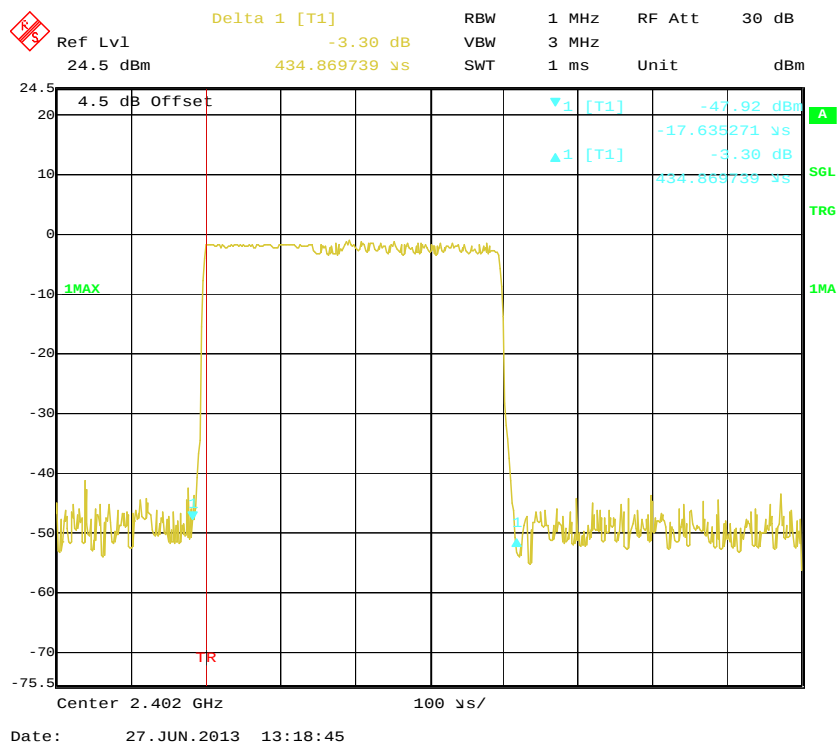


Pulse time, Middle Channel, DH1

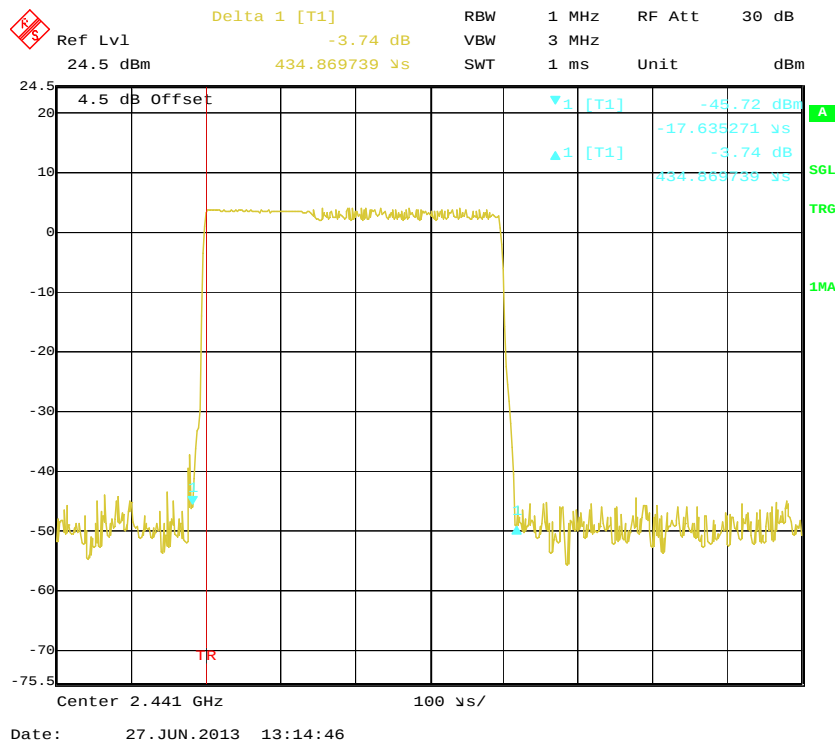


Pulse time, High Channel, DH1

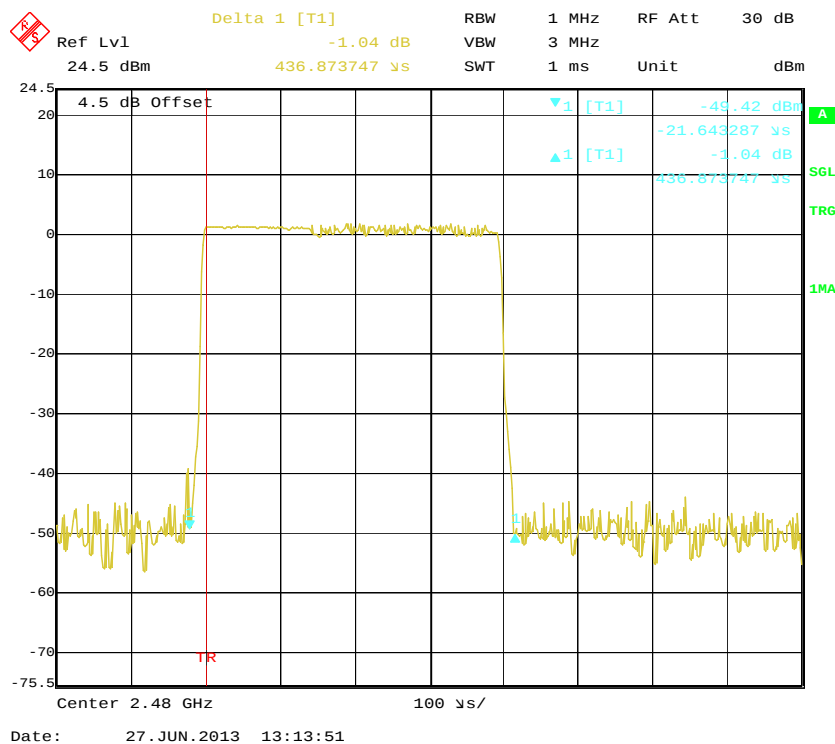


Pulse time, Low Channel, DH3

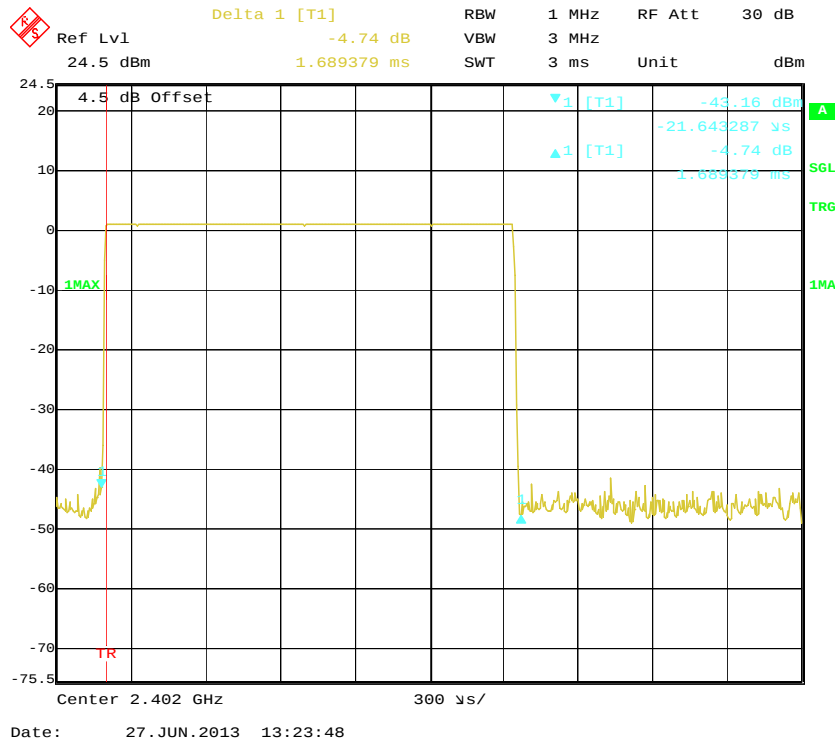


Pulse time, Middle Channel, DH3

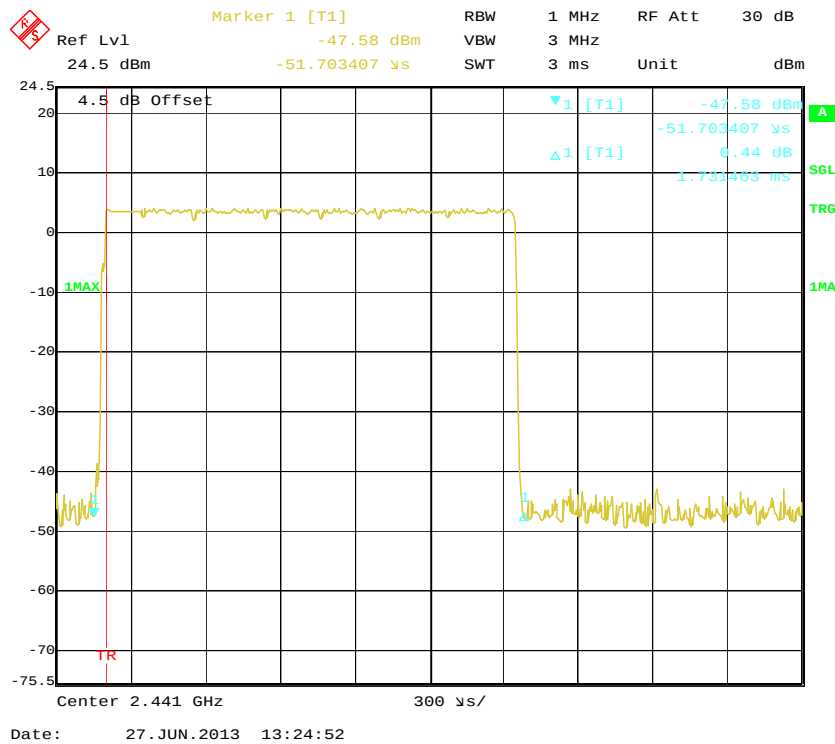

Pulse time, High Channel, DH3

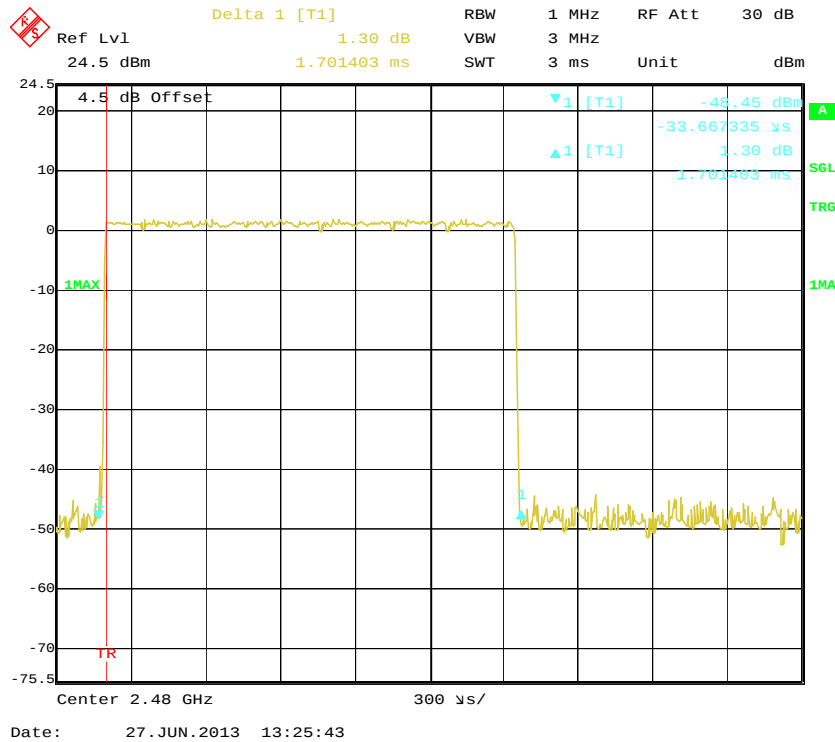

Pulse time, Low Channel, DH5

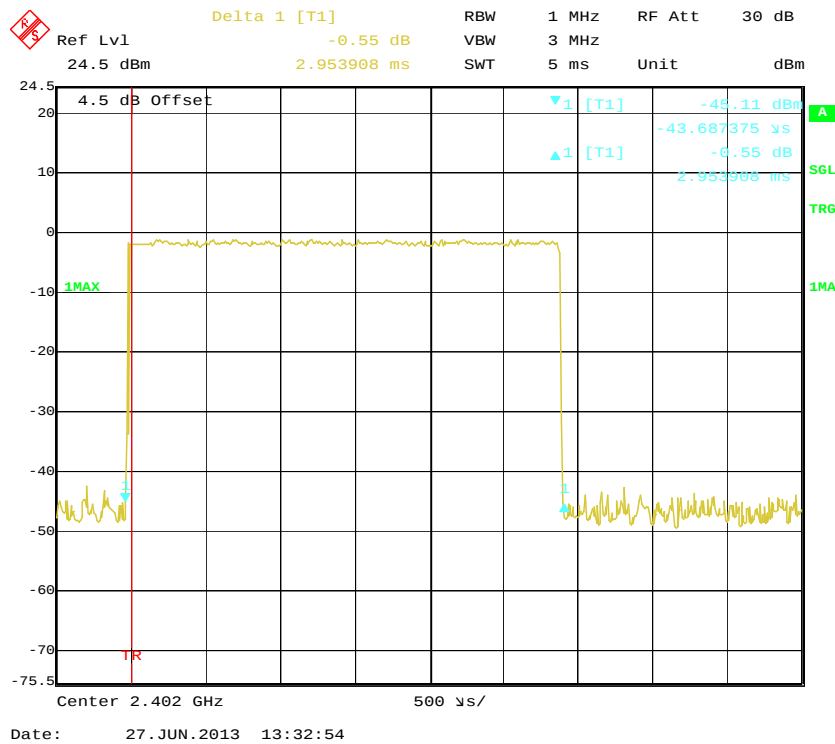

Ref Lvl: 24.5 dBm
 Delta 1 [T1]: -0.52 dB
 RBW: 1 MHz
 VBW: 3 MHz
 SWT: 5 ms
 RF Att: 30 dB
 Unit: dBm

4.5 dB Offset

1MAX

1R

1 [T1]

1 [T1]

Center 2.441 GHz

500 us

Ref Lvl 24.5 dBm

Marker 1 [T1] -46.54 dBm

RBW 1 MHz RF Att 30 dB

VBW 3 MHz

SWT 5 ms Unit dBm

4.5 dB Offset

1MAX


1MA

Center 2.48 GHz


500 μs/

Date: 27.JUN.2013 13:31:50


Pulse time, Low Channel, DH1

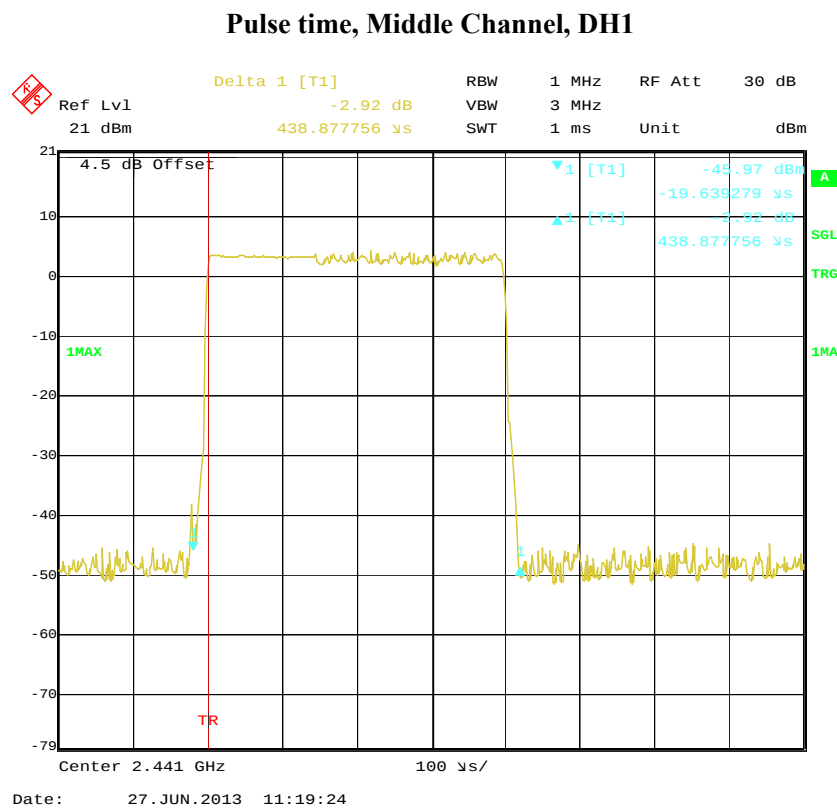

Pulse time, High Channel, DH1

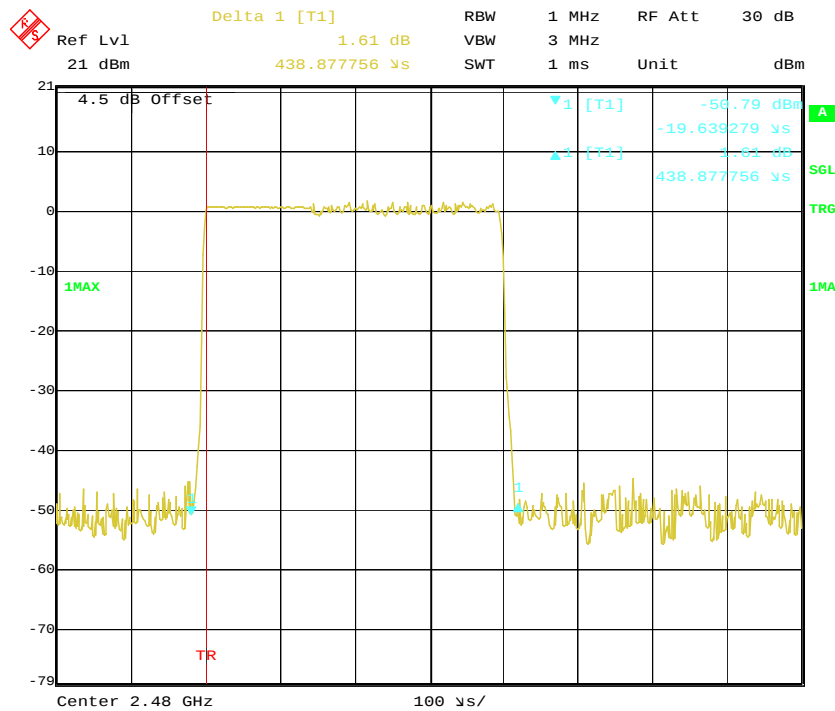

Pulse time, Low Channel, DH3

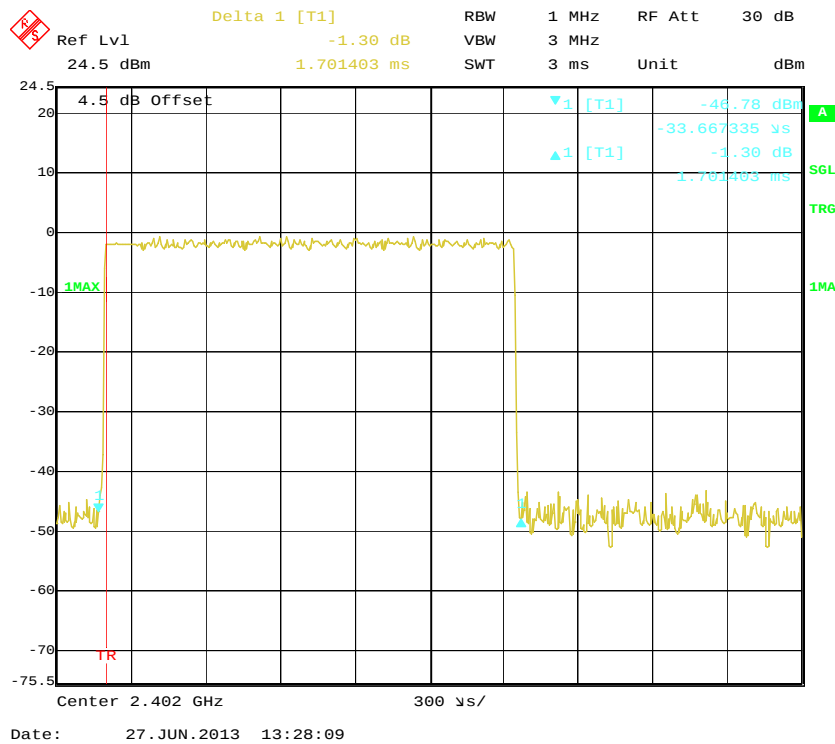

Ref Lvl 24.5 dBm Delta 1 [T1] 2.01 dB RBW 1 MHz RF Att 30 dB

24.5 dB Offset 1.701403 ms VSWR 3 ms Unit dBm

4.5 dB Offset

1MAX

TR


Center 2.441 GHz 300 MHz

Date: 27.JUN.2013 13:27:44


Spectrum Analyzer Data:

Parameter	Value
Ref Lvl	24.5 dBm
Delta 1 [T1]	-2.93 dB
RBW	1 MHz
VBW	3 MHz
Unit	dBm
Center Frequency	2.48 GHz
Span	300 kHz
Peak Level	-46.48 dBm
Marker 1 [T1]	-33.667335 dB
Marker 2 [T1]	-2.93 dB
Marker 3 [T1]	1.701403 ms

Pulse time, Low Channel, DH5

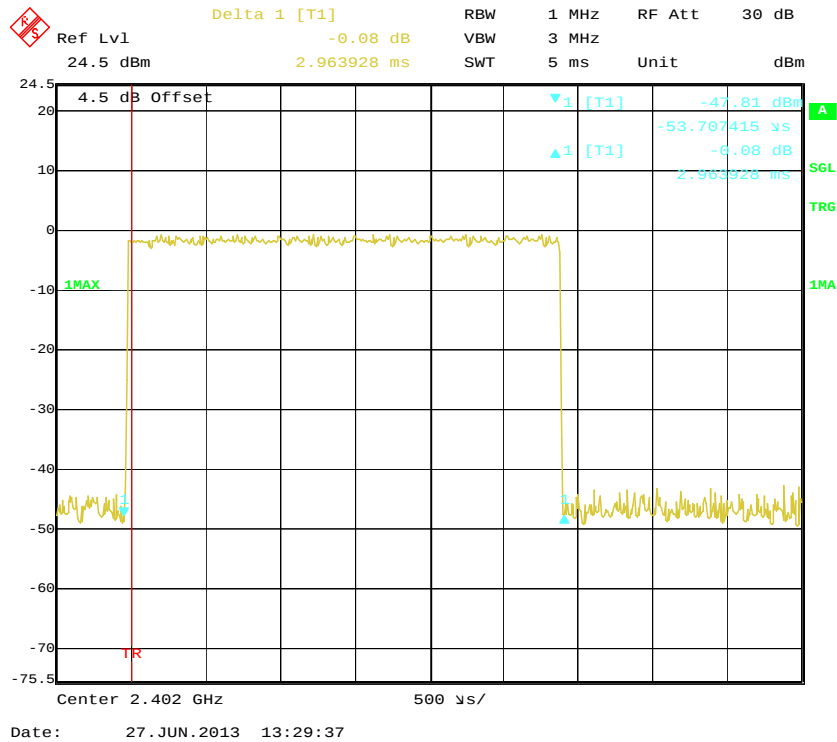

Pulse time, Middle Channel, DH5

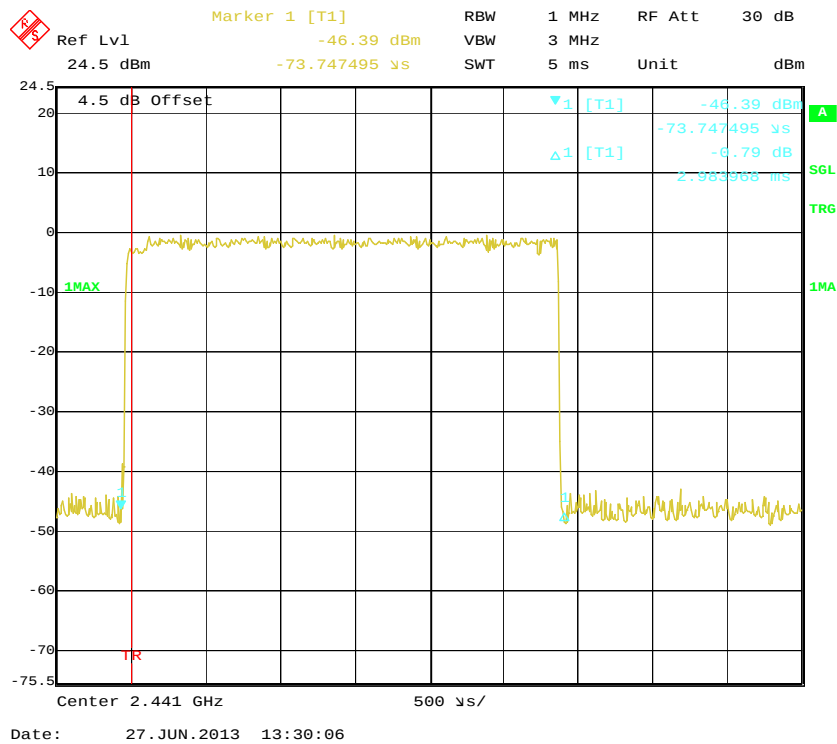

Ref Lvl: 24.5 dBm
 Marker 1 [T1]: -47.57 dBm
 RBW: 1 MHz
 RF Att: 30 dB
 VBW: 3 MHz
 SWT: 5 ms
 Unit: dBm

4.5 dB Offset
 -53.707415 μ s
 -6.50 dB
 2.973948 ms

1MAX
 1A
 SGL
 TRG

Center 2.48 GHz
 500 μ s/

Date: 27.JUN.2013 13:31:09

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT**Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	25°C
Relative Humidity:	56%
ATM Pressure:	100.0 kPa

The testing was performed by Rocky Kang on 2013-06-27.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots


Mode	Channel	Frequency (MHz)	Conducted Output Power		Limit (mW)
			(dBm)	(mW)	
BDR (GFSK)	Low	2402	1.25	1.33	1000
	Middle	2441	5.60	3.63	1000
	High	2480	3.74	2.37	1000
EDR ($\pi/4$-DQPSK)	Low	2402	-0.69	0.85	1000
	Middle	2441	4.55	2.85	1000
	High	2480	2.18	1.65	1000
EDR (8DPSK)	Low	2402	-0.31	0.93	1000
	Middle	2441	4.74	2.98	1000
	High	2480	2.54	1.79	1000

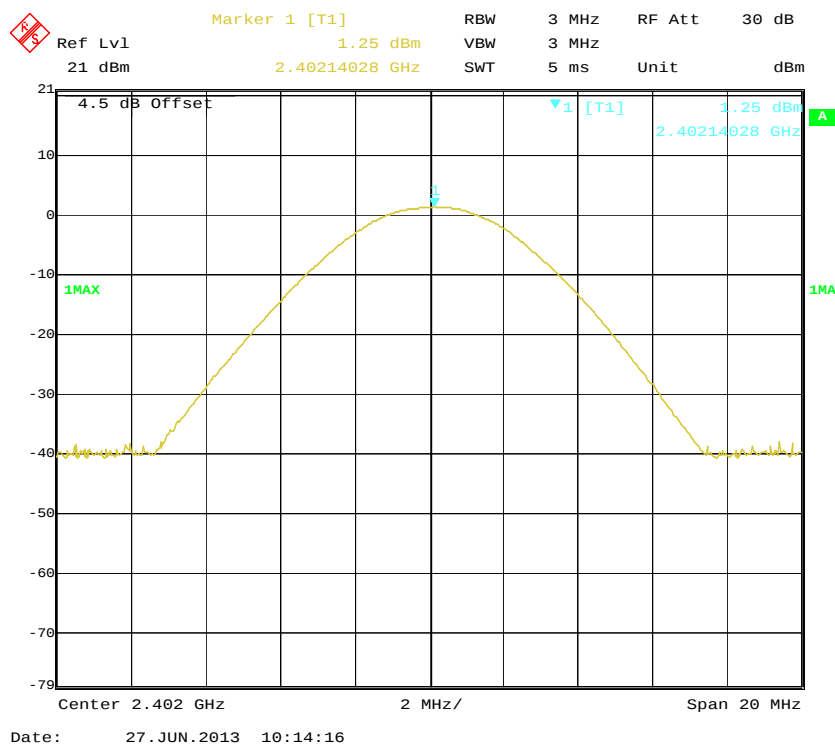BDR (GFSK): Low Channel


BDR (GFSK): Middle Channel

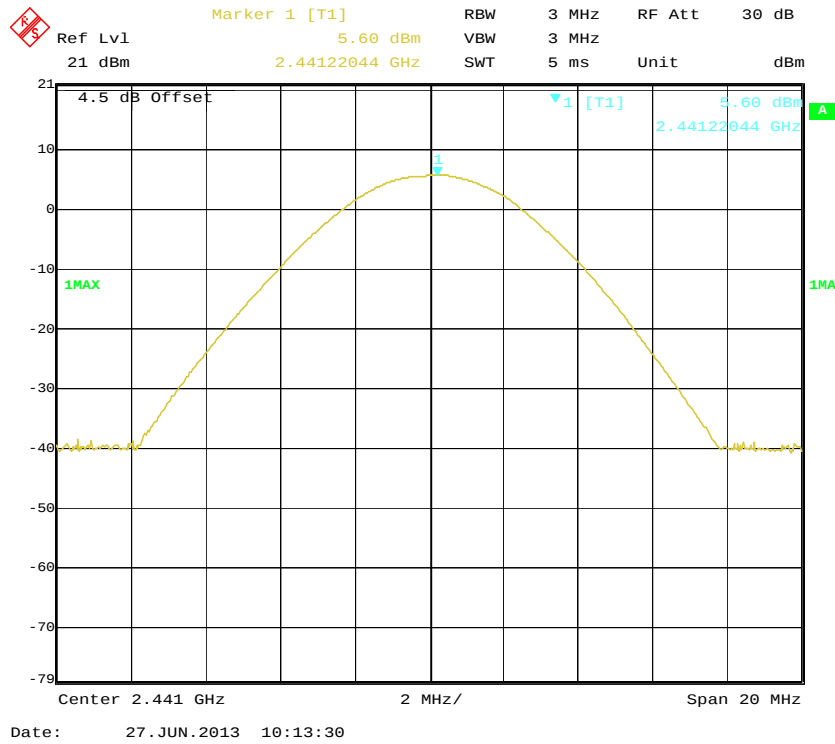


BDR (GFSK): High Channel

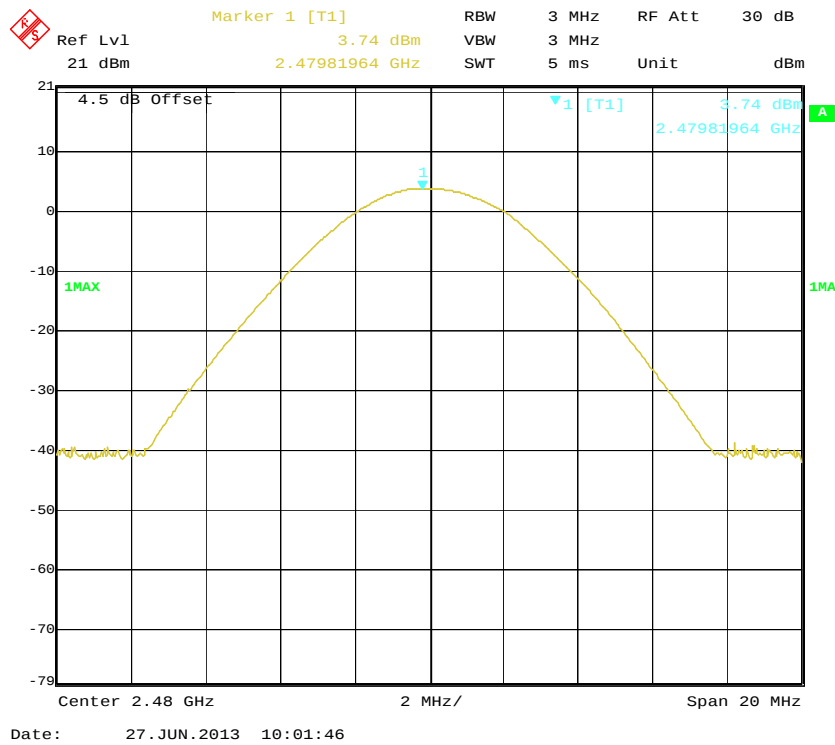


EDR($\pi/4$ -DQPSK): Low Channel

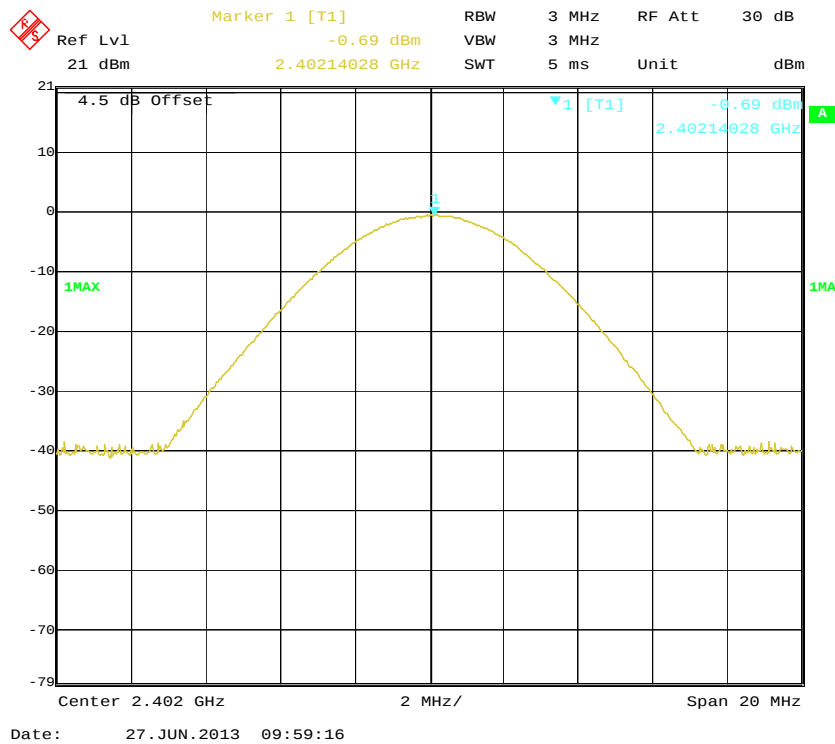


EDR($\pi/4$ -DQPSK): Middle Channel

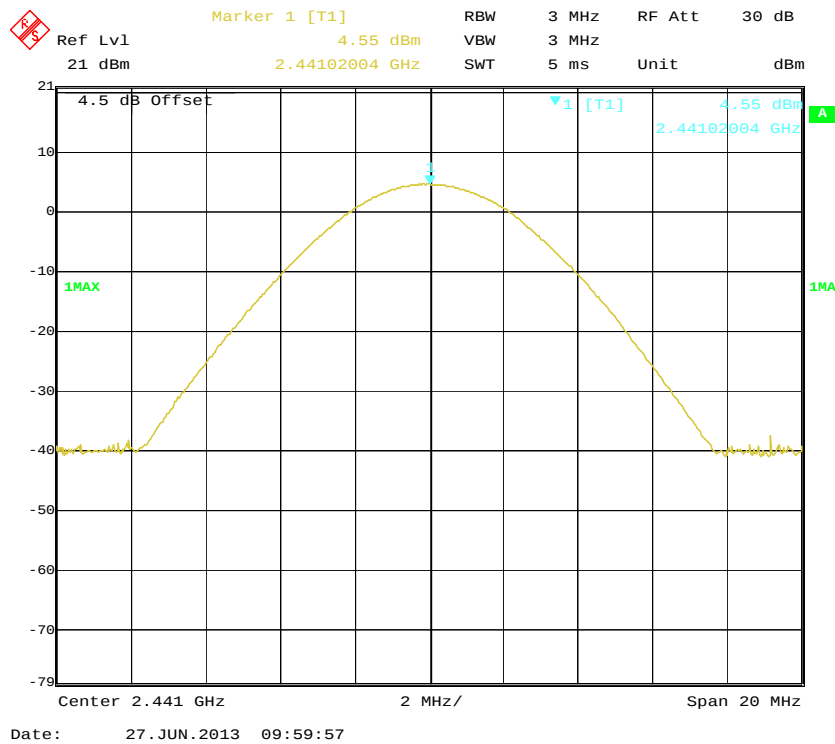


EDR($\pi/4$ -DQPSK): High Channel

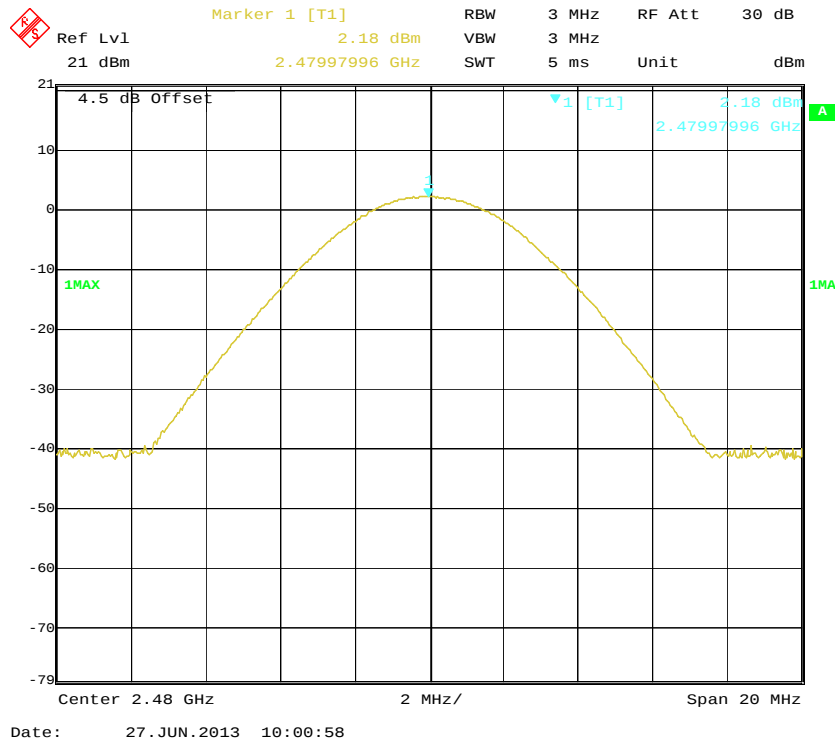


EDR(8DPSK): Low Channel

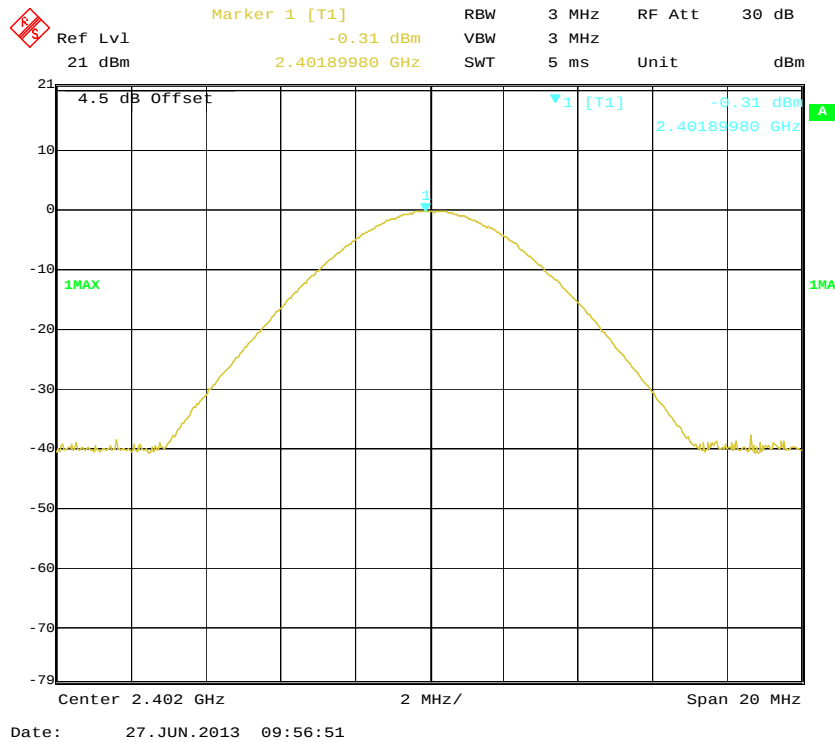

EDR(8DPSK): Middle Channel

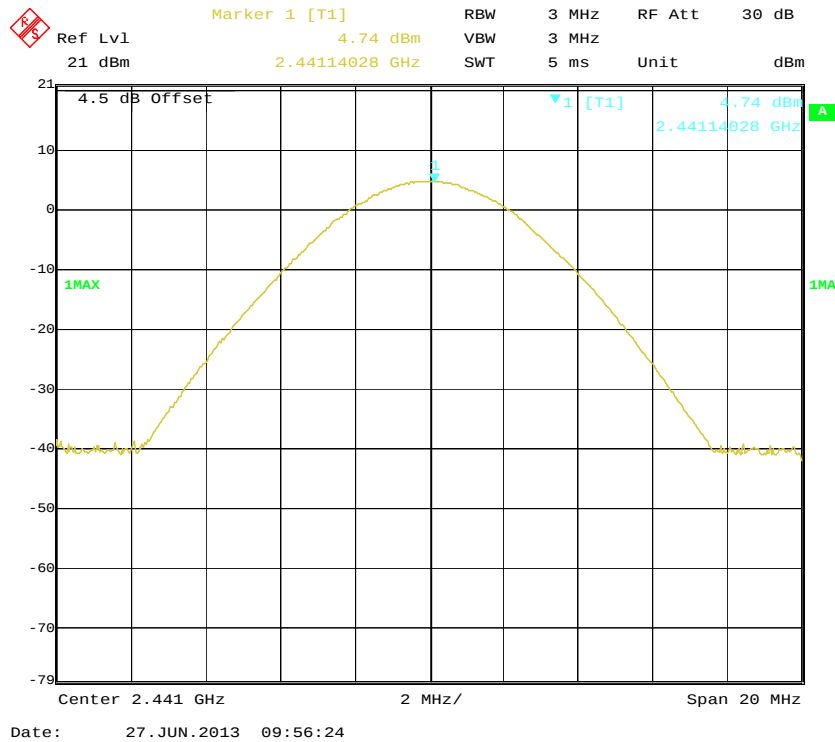

EDR(8DPSK): High Channel

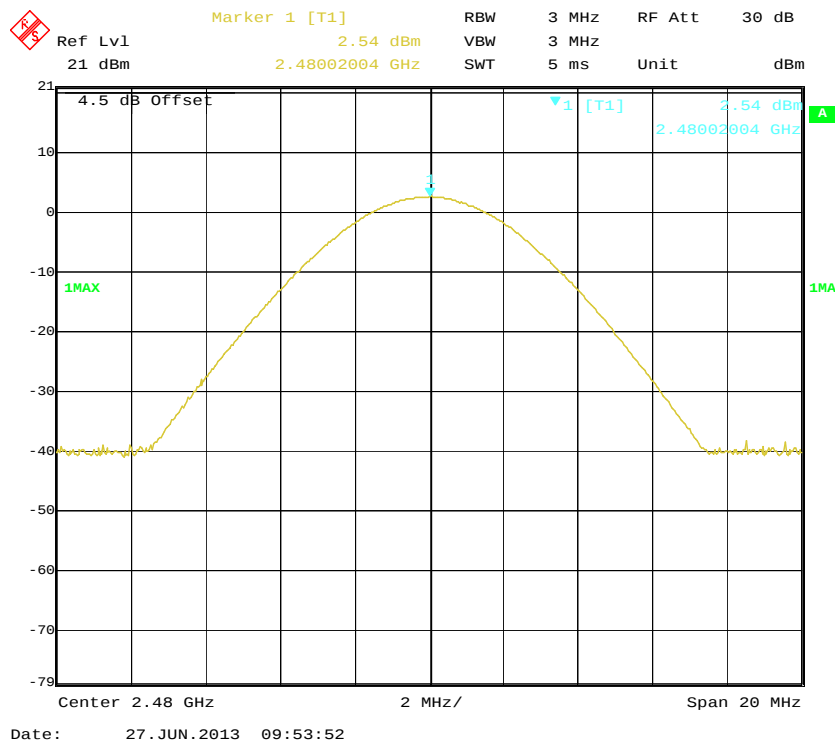

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25°C
Relative Humidity:	56%
ATM Pressure:	100.0 kPa


The testing was performed by Rocky Kang on 2013-06-27.



EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots

Frequency Band	Delta Peak to band emission (dBc)	≥Limit (dBc)	Result
BDR mode (GFSK)			
Left-band	43.78	20	Pass
Right-band	51.49	20	Pass
EDR Mode ($\pi/4$ -DQPSK)			
Left-band	46.21	20	Pass
Right-band	49.69	20	Pass
EDR Mode (8 DPSK)			
Left-band	46.26	20	Pass
Right-band	49.81	20	Pass

BDR (GFSK): Band Edge-Left Side

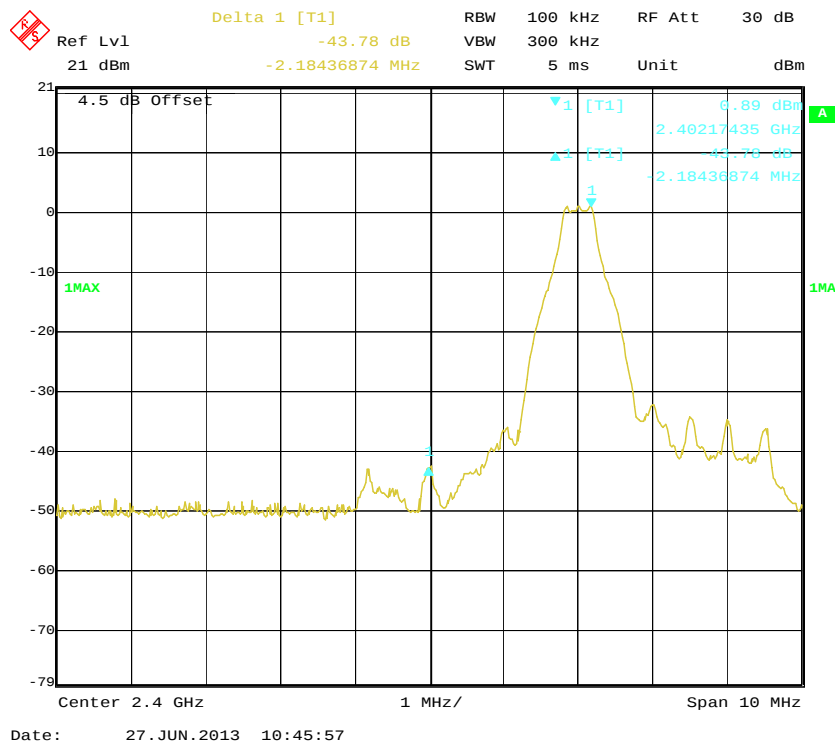

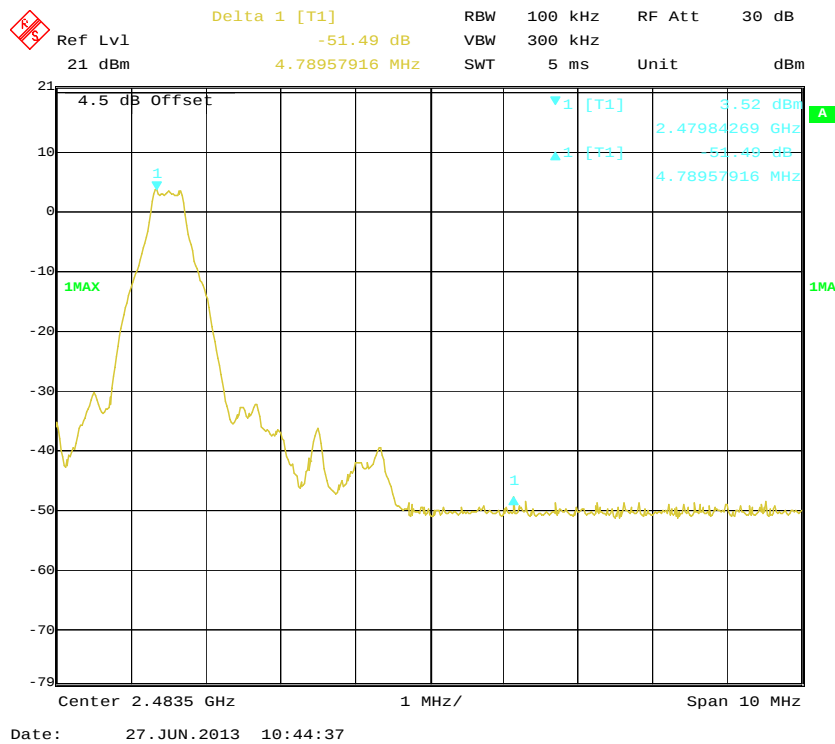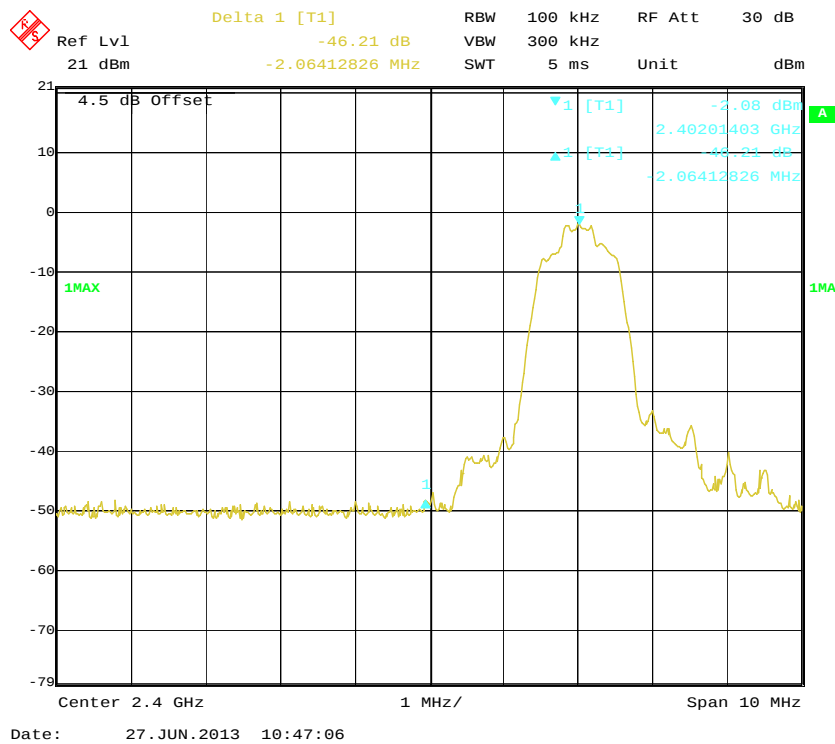BDR (GFSK): Band Edge-Right Side**EDR ($\pi/4$ -DQPSK): Band Edge-Left Side**

Ref Lvl 21 dBm Delta 1 [T1] -49.69 dB RBW 100 kHz RF Att 30 dB
 21 dBm 4.80961924 MHz SWT 5 ms Unit dBm

4.5 dB Offset


1.04 dBm
 2.48006301 GHz
 -49.69 dB
 4.80961924 MHz

1MAX

Center 2.4835 GHz 1 MHz/ Span 10 MHz

[illegible]

BDR (8DPSK): Band Edge-Right Side

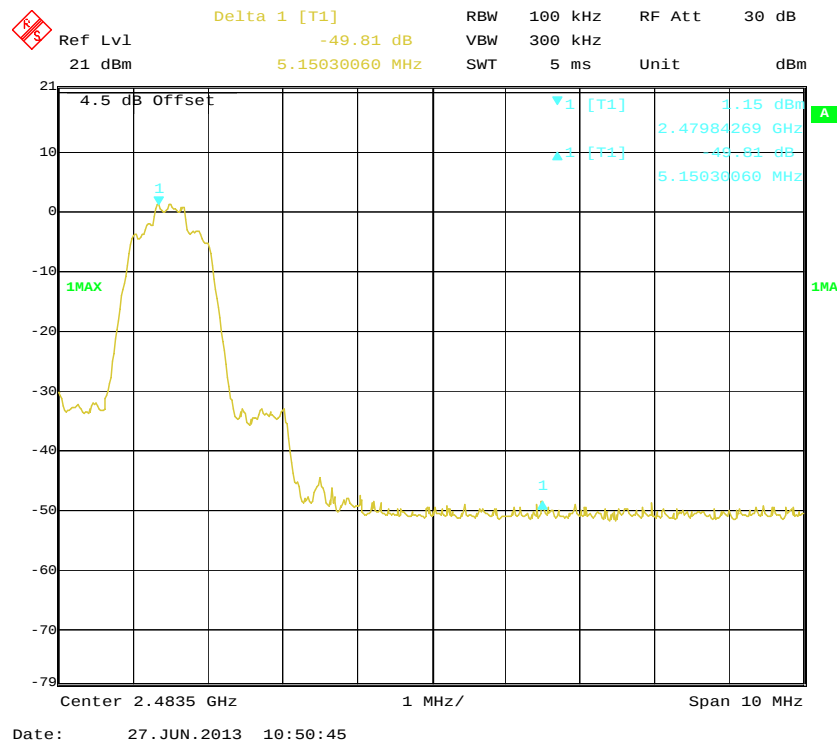

***** END OF REPORT *****