

FCC PART 15.247

TEST REPORT

For

RTX Hong Kong Ltd.

8/F Corporation Square, 8 Lam Lok Street, Kowloon Bay, Hong Kong

FCC ID: T7HCT8631


Report Type: Original Report	Product Type: DECT Cordless Phone
Report Number: RSZ180308010-00D	
Report Date: 2018-04-03	
Rocky Kang 	
Reviewed By: RF Engineer	
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
DUTY CYCLE	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS.....	9
TEST EQUIPMENT LIST	10
FCC§15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE	12
APPLICABLE STANDARD	12
FCC §15.203 - ANTENNA REQUIREMENT.....	13
APPLICABLE STANDARD	13
ANTENNA CONNECTOR CONSTRUCTION	13
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	14
APPLICABLE STANDARD	14
EUT SETUP	14
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE	15
CORRECTED FACTOR & MARGIN CALCULATION	15
TEST RESULTS SUMMARY	15
TEST DATA	15
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	22
APPLICABLE STANDARD	22
EUT SETUP	22
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	23
TEST PROCEDURE	23
CORRECTED AMPLITUDE & MARGIN CALCULATION	23
TEST RESULTS SUMMARY	23
TEST DATA	24
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	36
APPLICABLE STANDARD	36
TEST PROCEDURE	36
TEST DATA	36
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	39

APPLICABLE STANDARD	39
TEST PROCEDURE	39
TEST DATA	39
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	40
APPLICABLE STANDARD	40
TEST PROCEDURE	40
TEST DATA	40
FCC §15.247(e) - POWER SPECTRAL DENSITY	42
APPLICABLE STANDARD	42
TEST PROCEDURE	42
TEST DATA	42

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *RTX Hong Kong Ltd.* 's product, model number: *RTX8631 Handset (FCC ID: T7HCT8631)* or the "EUT" in this report was a *DECT Cordless Phone*, which was measured approximately: 11.7 cm (L) x 4.5 cm (W) x 2.2 cm (H) and measured approximately: 12.2 cm (L) x 4.9 cm (W) x 2.2 cm (H) for series model *RTX8632 Handset*, 12.2 cm (L) x 4.9 cm (W) x 2.2 cm (H) for *RTX8633 Handset*, rated input voltage: DC 3.7V from battery or DC 5.0V from charger adapter.

Adapter 1 Information:

Model: S008ACM0500100

Input: AC 100-240V, 50/60Hz, 300mA

Output: DC 5.0V, 1000mA

Adapter 2 Information:

Model: S008ACM0500200

Input: AC 100-240V, 50/60Hz, 300mA

Output: DC 5.0V, 2000mA

Adapter 3 Information:

Model: S010WU0500200

Input: AC 100-240V, 50/60Hz, 400mA

Output: DC 5.0V, 2000mA

Notes: This series products model: RTX8632 Handset, RTX8633 Handset and RTX8631 Handset are electrically identical. Model RTX8631 Handset was selected for fully testing, the detailed information can be referred to the declaration which was stated and guaranteed by the applicant.

**All measurement and test data in this report was gathered from production sample serial number: 1800282-1 for model RTX8631 Handset, 1800282-2 for model RTX8632 Handset, 1800282-3 for model RTX8633 Handset. (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2018-03-08.*

Objective

This report is prepared on behalf of *RTX Hong Kong Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

Part 15.247 DSS, Part 15D PUE submissions with FCC ID: T7HCT8631.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 DTS Meas Guidance v04.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF Output Power with Power meter		±0.5dB
RF conducted test with spectrum		±1.5dB
AC Power Lines Conducted Emissions		±1.95dB
Emissions, Radiated	Below 1GHz	±4.75dB
	Above 1GHz	±4.88dB
Temperature		±3 °C
Humidity		±6%
Supply voltages		±0.4%

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For BLE mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

Equipment Modifications


No modification was made to the EUT tested.

EUT Exercise Software

“Bluetest.exe” software was used for BLE test in the engineer mode.

The device was tested with worst case as below:

Mode	Data rate	Power level		
		Low channel	Middle channel	High channel
BLE	/	Default	Default	Default

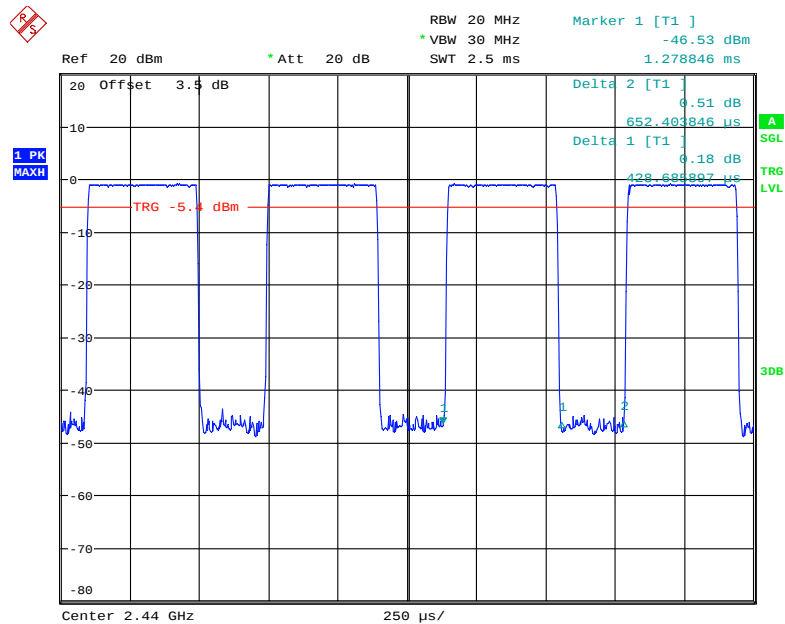Duty cycle**BLE Mode**

Date: 15.MAR.2018 20:14:52

Band	Duty Cycle (%)	T(us)	1/T(kHz)	VBW Setting	10log(1/ Duty Cycle)
BLE	66	429	2.33	3kHz	1.8


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
N/A	3 Ω Resister	N/A	N/A

External I/O Cable

Cable Description	Length (m)	From/Port	To
Un-shielded Un-detachable AC Cable	1.0	Mains	Socket
Shielded Un-detachable USB Cable	2.0	Charger	Adapter
Un-shielded Un-detachable USB Cable	0.5	3 Ω Resister	Charger

Block Diagram of Test Setup

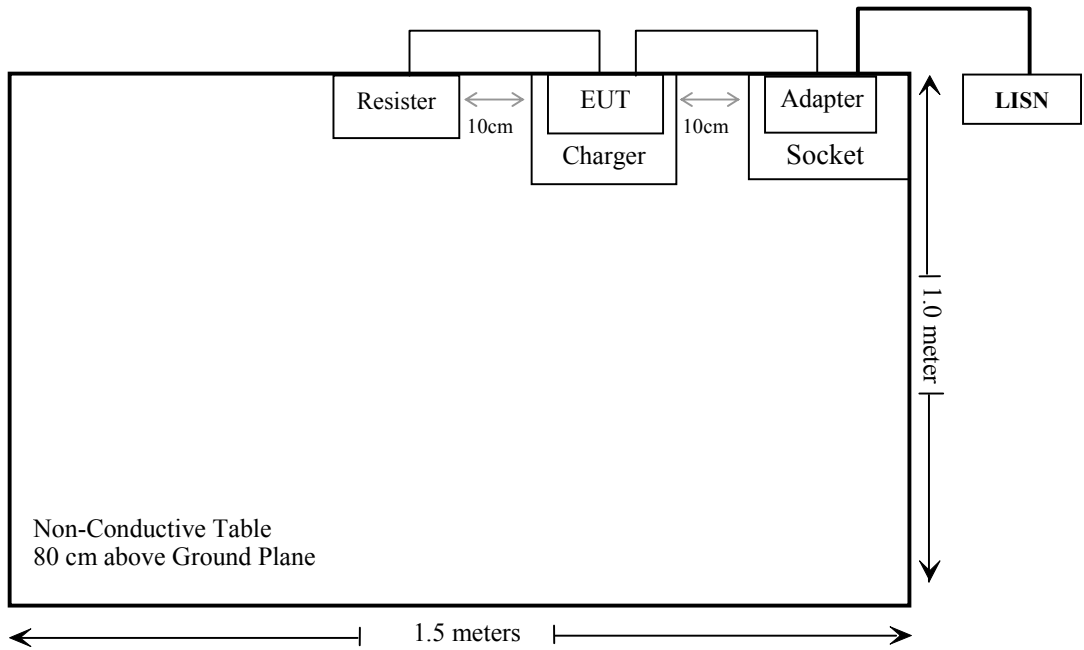

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (1)& §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2017-08-04	2018-08-04
Rohde & Schwarz	LISN	ENV216	3560.6650.12-101613-Yb	2017-12-21	2018-12-21
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2017-11-19	2018-05-17
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
N/A	Conducted Emission Cable	N/A	UF A210B-1-0720-504504	2017-11-12	2018-05-12
Radiated Emission Test					
A.H.System	Horn Antenna	SAS-200/571	135	2015-08-18	2018-08-17
Rohde & Schwarz	Signal Analyzer	FSEM	845987/005	2017-04-24	2018-04-24
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2017-05-21	2018-05-21
HP	Amplifier	HP8447E	1937A01046	2017-11-19	2018-05-21
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2017-12-17	2020-12-16
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2018-01-11	2019-01-11
Ducommun technologies	RF Cable	UFA210A-1-4724-30050U	MFR64369 223410-001	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	104PEA	218124002	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	RG-214	1	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	RG-214	2	2017-11-22	2018-05-22
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-04	2017-12-29	2020-12-28
Ducommun Technologies	Pre-amplifier	ALN-22093530-01	991373-01	2017-08-03	2018-08-03
Sinoscite	Notch Filter	BSF2402-2480MN-0898-001	N/A	2017-05-21	2018-05-21
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Agilent	P-Series Power Meter	N1912A	MY5000448	2018-01-02	2019-01-02
Agilent	Wideband Power Sensor	N1921A	MY54210016	2018-01-02	2019-01-02
WEINSCHTEL	3dB Attenuator	N/A	N/A	Each Time	
Rohde & Schwarz	SPECTRUM ANALYZER	FSU26	200120	2017-12-24	2018-12-24
Ducommun technologies	RF Cable	RG-214	3	Each Time	

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot$

$[\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.

2. Power and distance are rounded to the nearest mW and mm before calculation.

3. The result is rounded to one decimal place for comparison.

4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Measurement Result

For worst case:

Mode	Frequency (MHz)	Max Tune-up Conducted Power (dBm)	Max Tune-up Conducted Power (mW)	Calculated Distance (mm)	Calculated value	Threshold (1-g SAR)	SAR Test Exclusion
BLE	2480	0	1	5	0.3	3.0	Yes

Result: No SAR test is required

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has an internal antenna arrangement, which was permanently attached and the antenna gain is 1.0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup



Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207,

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{\text{lim}} + U_{\text{cisp}}r$$

In BACL, $U_{(Lm)}$ is less than $U_{\text{cisp}}r$, if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa


The testing was performed by Jacob Kong on 2018-04-02.

EUT operation mode: Transmitting & Charging


BLE Mode: (worst case for Low channel)

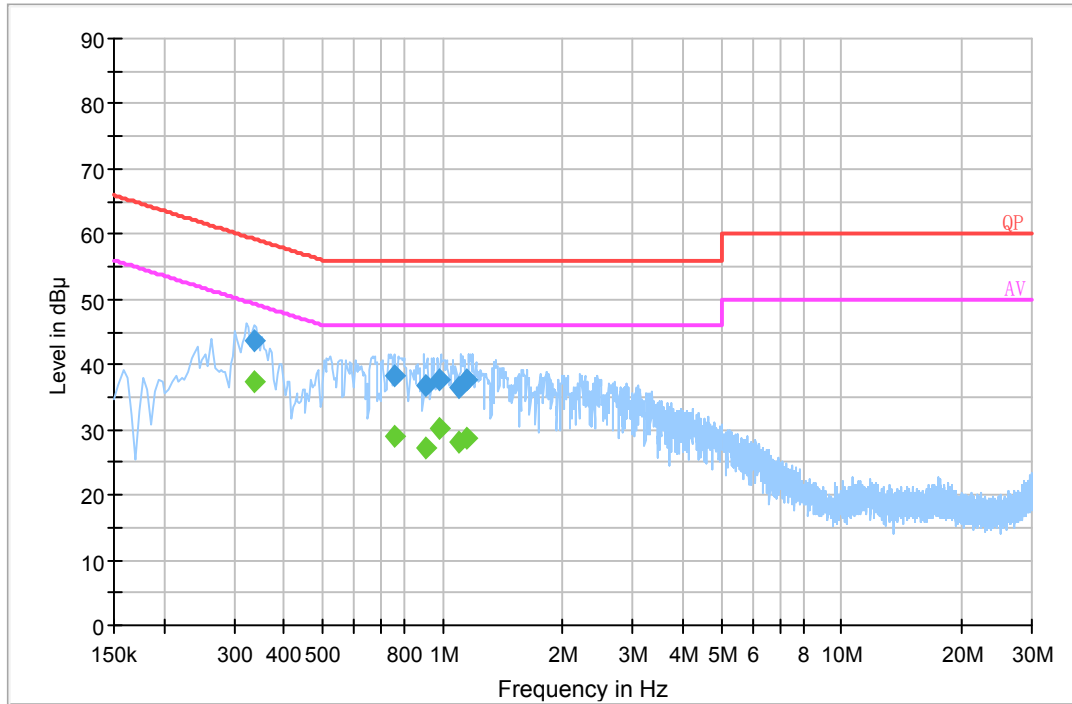Adapter 1:**AC 120V/60 Hz, Line**


Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.336930	43.5	20.1	59.3	15.8	QP
0.754690	38.2	19.9	56.0	17.8	QP
0.904530	36.8	20.0	56.0	19.2	QP
0.983150	37.7	20.0	56.0	18.3	QP
1.097350	36.5	20.0	56.0	19.5	QP
1.148570	37.6	20.0	56.0	18.4	QP
0.336930	37.3	20.1	49.3	12.0	Ave.
0.754690	29.1	19.9	46.0	16.9	Ave.
0.904530	27.2	20.0	46.0	18.8	Ave.
0.983150	30.1	20.0	46.0	15.9	Ave.
1.097350	28.1	20.0	46.0	18.0	Ave.
1.148570	28.7	20.0	46.0	17.3	Ave.

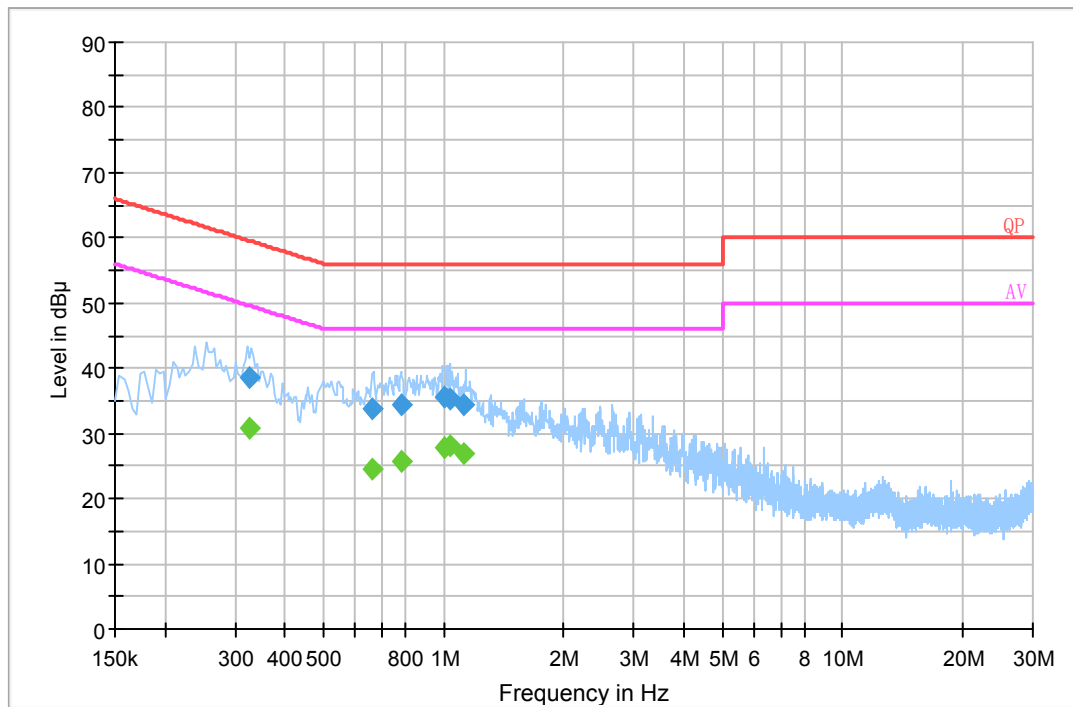AC 120V/60 Hz, Neutral


Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.325050	38.6	20.1	59.6	20.9	QP
0.660010	33.7	19.9	56.0	22.3	QP
0.786270	34.3	19.9	56.0	21.7	QP
0.999030	35.7	20.0	56.0	20.3	QP
1.034430	35.2	20.0	56.0	20.8	QP
1.124990	34.4	20.0	56.0	21.6	QP
0.325050	30.7	20.1	49.6	18.9	Ave.
0.660010	24.4	19.9	46.0	21.6	Ave.
0.786270	25.6	19.9	46.0	20.4	Ave.
0.999030	27.7	20.0	46.0	18.3	Ave.
1.034430	28.1	20.0	46.0	17.9	Ave.
1.124990	27.0	20.0	46.0	19.0	Ave.

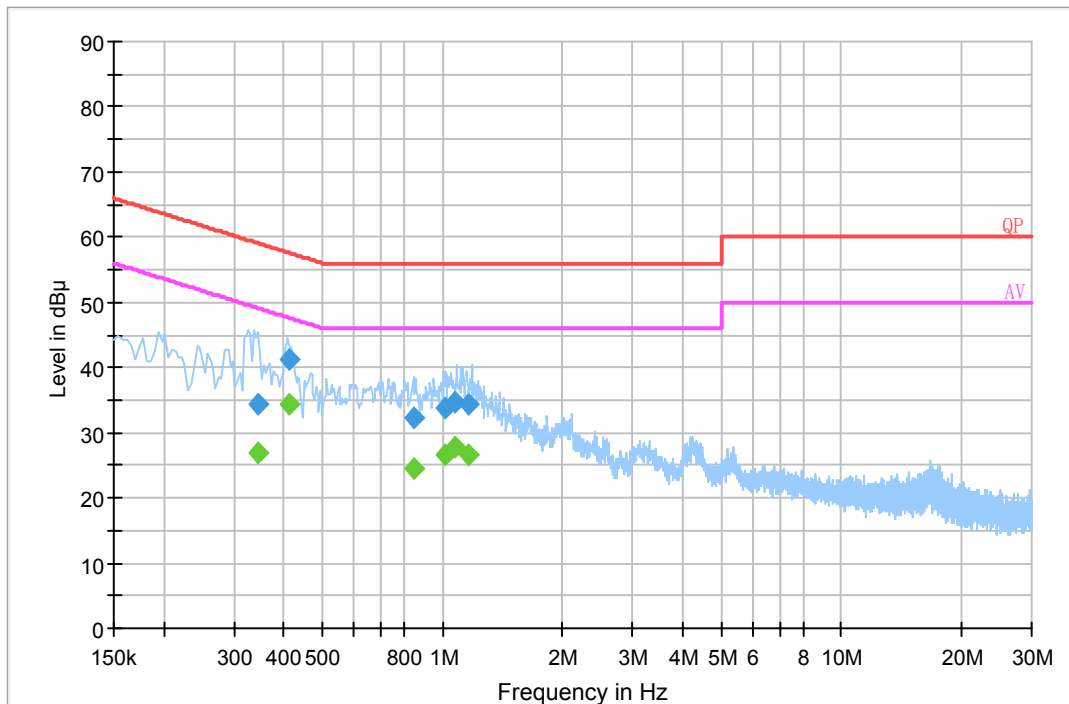Adapter 2:**AC 120V/60 Hz, Line**


Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.343070	34.3	20.2	59.1	24.8	QP
0.411850	41.3	20.2	57.6	16.3	QP
0.849310	32.4	20.0	56.0	23.6	QP
1.014910	33.7	20.1	56.0	22.3	QP
1.069710	34.6	20.1	56.0	21.4	QP
1.168210	34.2	20.1	56.0	21.8	QP
0.343070	27.0	20.2	49.1	22.1	Ave.
0.411850	34.3	20.2	47.6	13.3	Ave.
0.849310	24.4	20.0	46.0	21.6	Ave.
1.014910	26.7	20.1	46.0	19.3	Ave.
1.069710	27.9	20.1	46.0	18.1	Ave.
1.168210	26.6	20.1	46.0	19.4	Ave.

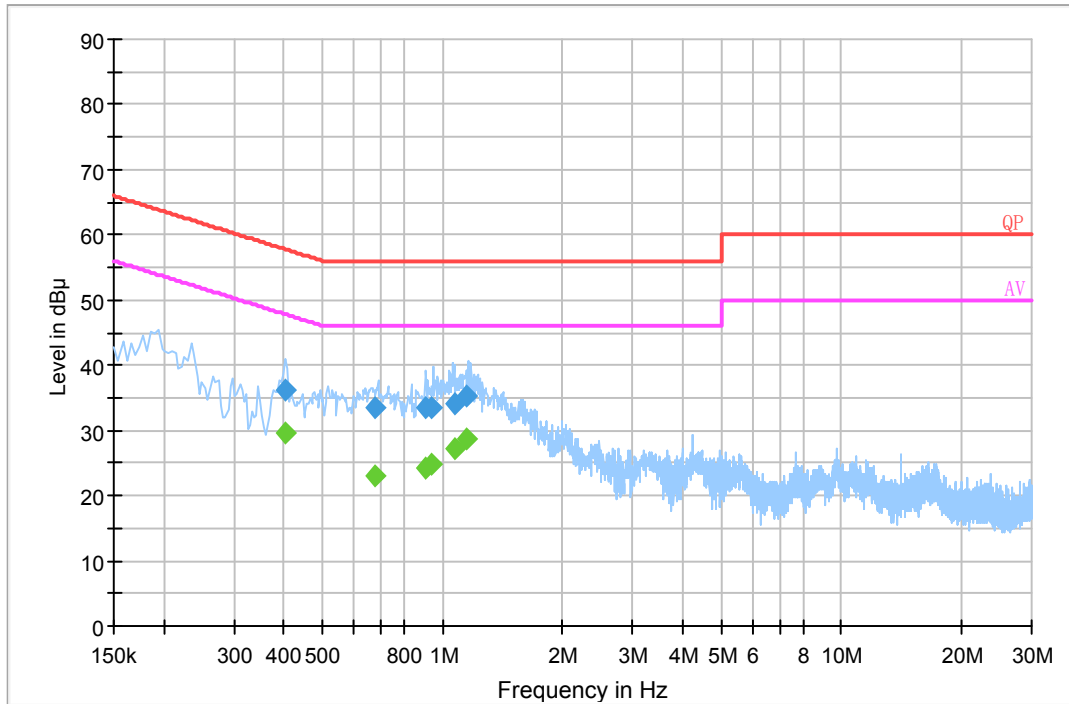AC 120V/60 Hz, Neutral

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.403970	36.3	20.2	57.8	21.5	QP
0.679650	33.4	20.0	56.0	22.6	QP
0.908410	33.5	20.1	56.0	22.5	QP
0.935750	33.4	20.1	56.0	22.6	QP
1.070070	34.1	20.1	56.0	21.9	QP
1.148630	35.3	20.1	56.0	20.7	QP
0.403970	29.5	20.2	47.8	18.3	Ave.
0.679650	23.1	20.0	46.0	22.9	Ave.
0.908410	24.2	20.1	46.0	21.8	Ave.
0.935750	24.9	20.1	46.0	21.1	Ave.
1.070070	27.3	20.1	46.0	18.7	Ave.
1.148630	28.7	20.1	46.0	17.3	Ave.

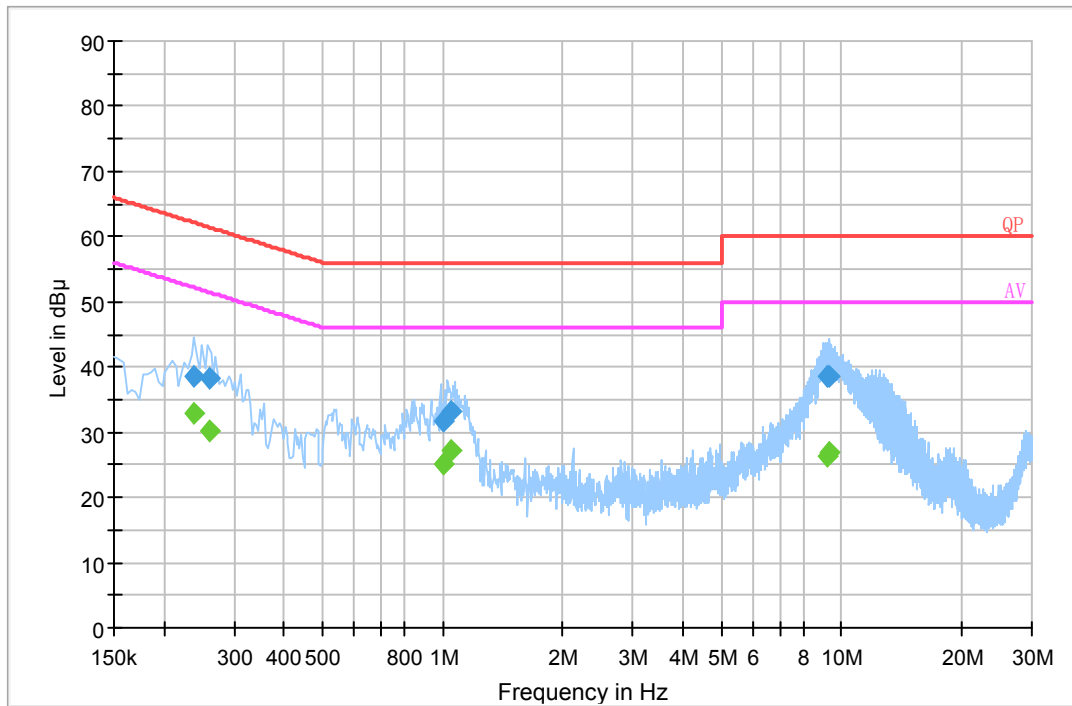Adapter 3:**AC 120V/60 Hz, Line**

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.237500	38.6	20.1	62.2	23.6	QP
0.261500	38.3	20.1	61.4	23.1	QP
0.999150	31.8	20.0	56.0	24.2	QP
1.045450	33.0	20.0	56.0	23.0	QP
9.241690	38.4	19.9	60.0	21.6	QP
9.285870	38.5	19.9	60.0	21.5	QP
0.237500	33.0	20.1	52.2	19.2	Ave.
0.261500	30.2	20.1	51.4	21.2	Ave.
0.999150	25.2	20.0	46.0	20.8	Ave.
1.045450	27.2	20.0	46.0	18.8	Ave.
9.241690	26.4	19.9	50.0	23.6	Ave.
9.285870	26.8	19.9	50.0	23.2	Ave.

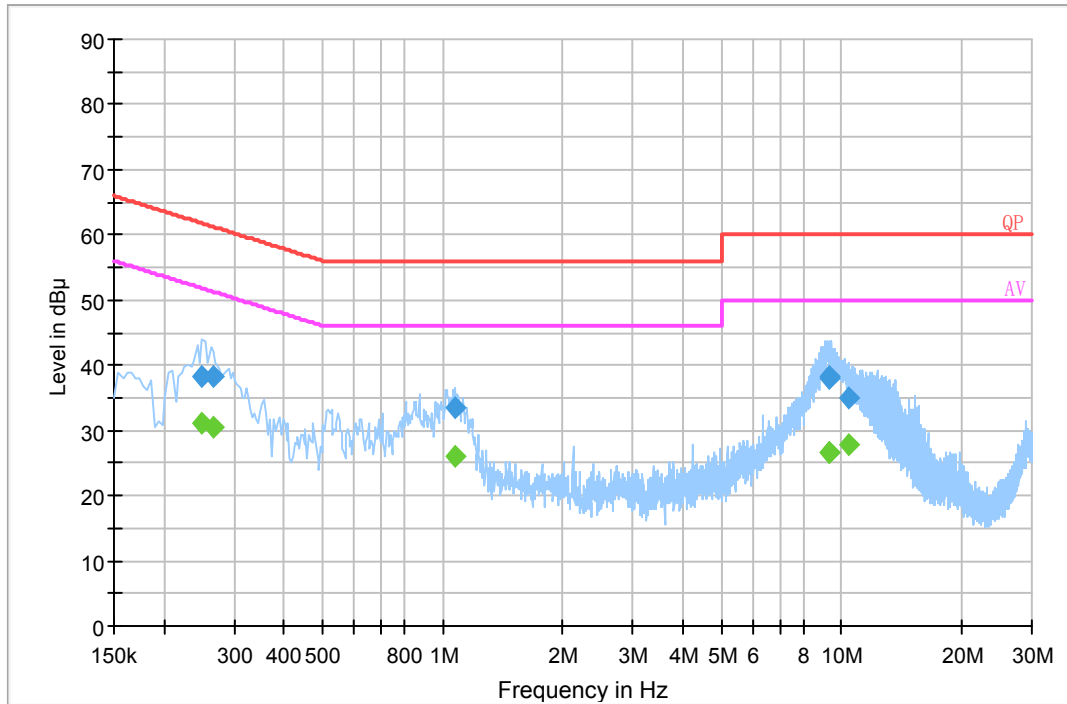AC 120V/60 Hz, Neutral

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.249500	38.2	20.1	61.8	23.6	QP
0.266500	38.3	20.1	61.2	23.0	QP
1.073890	33.5	20.0	56.0	22.5	QP
9.326650	38.3	19.9	60.0	21.7	QP
9.340610	38.0	19.9	60.0	22.0	QP
10.429430	35.0	19.9	60.0	25.0	QP
0.249500	31.2	20.1	51.8	20.6	Ave.
0.266500	30.5	20.1	51.2	20.7	Ave.
1.073890	26.0	20.0	46.0	20.0	Ave.
9.326650	26.7	19.9	50.0	23.3	Ave.
9.340610	26.6	19.9	50.0	23.4	Ave.
10.429430	27.8	19.9	50.0	22.2	Ave.

Note:


- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:

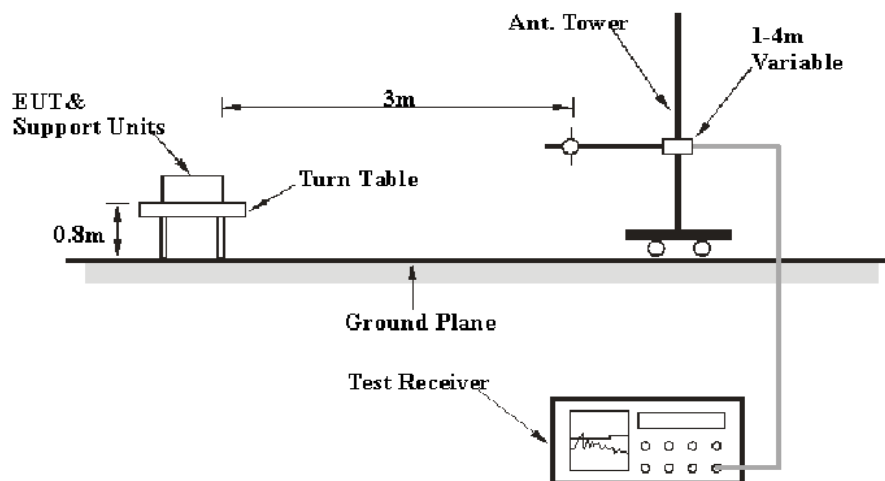

Above 1GHz:

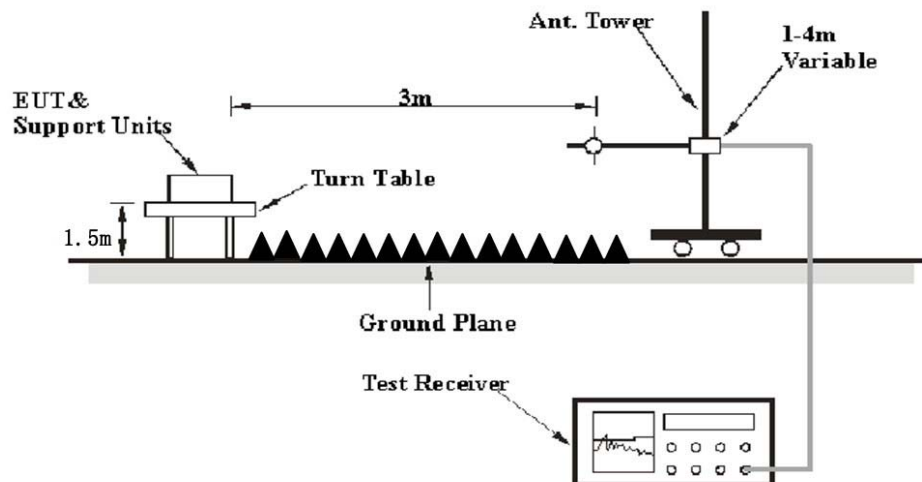

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	> 1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.


Test Data**Environmental Conditions**

Temperature:	25~26 °C
Relative Humidity:	55~56 %
ATM Pressure:	101.0~101.2 kPa

The testing was performed by Jacob Kong on 2018-03-29 and 2018-03-30.

EUT operation mode: Transmitting

For Model: RTX8631 Handset

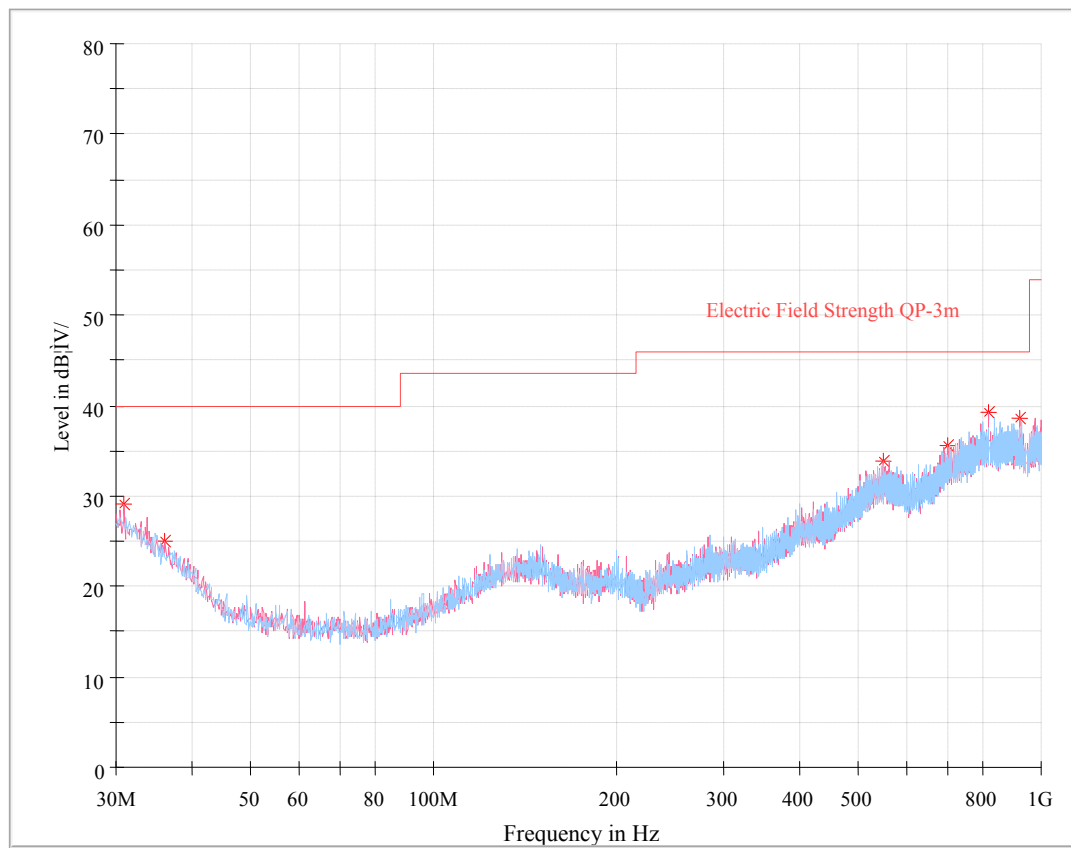30 MHz~1 GHz:


Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
551.617500	33.92	102.0	V	15.0	4.8	46.00	12.08
36.183750	24.93	102.0	V	135.0	-3.7	40.00	15.07
30.970000	29.06	102.0	V	210.0	-0.4	40.00	10.94
924.340000	38.64	102.0	V	210.0	9.0	46.00	7.36
818.246250	39.17	102.0	V	344.0	9.0	46.00	6.83
701.361250	35.67	202.0	V	90.0	6.7	46.00	10.33

1 GHz – 25 GHz:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2402 MHz)									
2402.00	58.86	PK	110	1.4	H	33.92	92.78	/	/
2402.00	52.41	Ave.	110	1.4	H	33.92	86.33	/	/
2402.00	57.23	PK	281	2.1	V	33.92	91.15	/	/
2402.00	51.09	Ave.	281	2.1	V	33.92	85.01	/	/
2353.92	27.21	PK	224	2.2	H	33.92	61.13	74	12.87
2353.92	13.48	Ave.	224	2.2	H	33.92	47.40	54	6.60
2486.55	26.77	PK	304	2.4	H	34.08	60.85	74	13.15
2486.55	13.12	Ave.	304	2.4	H	34.08	47.20	54	6.80
4804.00	47.32	PK	87	1.3	H	5.84	53.16	74	20.84
4804.00	34.59	Ave.	87	1.3	H	5.84	40.43	54	13.57
Middle Channel (2440 MHz)									
2440.00	57.35	PK	162	2.0	H	33.92	91.27	/	/
2440.00	51.91	Ave.	162	2.0	H	33.92	85.83	/	/
2440.00	56.59	PK	191	1.7	V	33.92	90.51	/	/
2440.00	51.58	Ave.	191	1.7	V	33.92	85.50	/	/
4880.00	45.38	PK	118	2.0	H	6.21	51.59	74	22.41
4880.00	32.16	Ave.	118	2.0	H	6.21	38.37	54	15.63

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
High Channel (2480 MHz)									
2480.00	63.77	PK	40	2.3	H	34.08	97.85	/	/
2480.00	58.65	Ave.	40	2.3	H	34.08	92.73	/	/
2480.00	60.97	PK	226	1.3	V	34.08	95.05	/	/
2480.00	54.59	Ave.	226	1.3	V	34.08	88.67	/	/
2326.03	26.59	PK	349	2.4	H	33.83	60.42	74	13.58
2326.03	13.10	Ave.	349	2.4	H	33.83	46.93	54	7.07
2483.79	27.32	PK	122	1.5	H	34.08	61.40	74	12.60
2483.79	16.36	Ave.	122	1.5	H	34.08	50.44	54	3.56
4960.00	48.33	PK	334	1.1	H	7.82	56.15	74	17.85
4960.00	36.14	Ave.	334	1.1	H	7.82	43.96	54	10.04

For Model: RTX8632 Handset

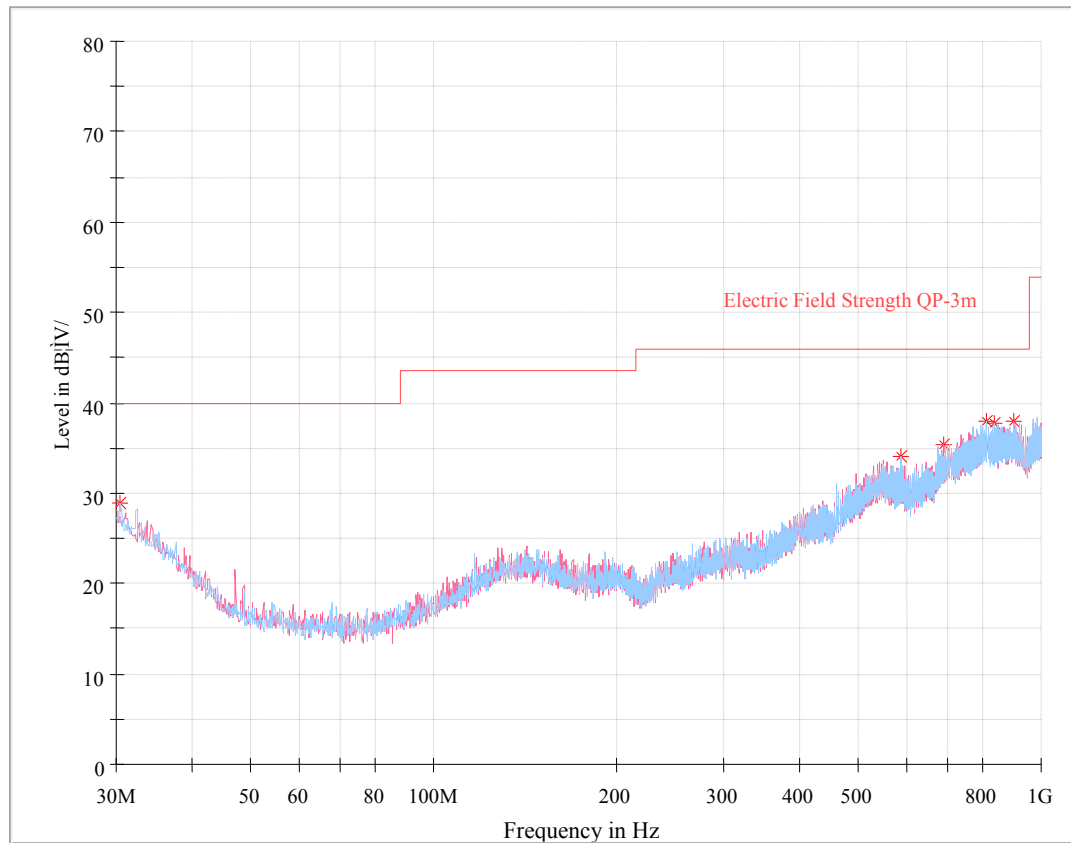
30 MHz~1 GHz:

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
30.485000	28.81	202.0	H	0.0	0.0	40.00	11.19
586.780000	34.02	102.0	H	0.0	3.9	46.00	11.98
690.206250	35.39	202.0	V	170.0	6.2	46.00	10.61
812.790000	37.92	102.0	H	59.0	9.0	46.00	8.08
837.161250	37.70	202.0	H	0.0	9.0	46.00	8.30
900.332500	37.95	202.0	V	271.0	9.7	46.00	8.05

1 GHz – 25 GHz:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2402 MHz)									
2402.00	62.23	PK	208	2.4	H	33.92	96.15	/	/
2402.00	56.86	Ave.	208	2.4	H	33.92	90.78	/	/
2402.00	61.90	PK	336	2.2	V	33.92	95.82	/	/
2402.00	56.06	Ave.	336	2.2	V	33.92	89.98	/	/
2330.68	26.97	PK	45	2.3	H	33.83	60.80	74	13.20
2330.68	13.12	Ave.	45	2.3	H	33.83	46.95	54	7.05
2486.35	27.15	PK	350	1.2	H	34.08	61.23	74	12.77
2486.35	13.28	Ave.	350	1.2	H	34.08	47.36	54	6.64
4804.00	47.58	PK	238	2.3	H	5.84	53.42	74	20.58
4804.00	35.61	Ave.	238	2.3	H	5.84	41.45	54	12.55
Middle Channel (2440 MHz)									
2440.00	61.74	PK	172	1.7	H	33.92	95.66	/	/
2440.00	56.67	Ave.	172	1.7	H	33.92	90.59	/	/
2440.00	60.84	PK	26	1.8	V	33.92	94.76	/	/
2440.00	55.72	Ave.	26	1.8	V	33.92	89.64	/	/
4880.00	48.35	PK	201	1.9	H	6.21	54.56	74	19.44
4880.00	35.45	Ave.	201	1.9	H	6.21	41.66	54	12.34
High Channel (2480 MHz)									
2480.00	65.11	PK	325	1.9	H	34.08	99.19	/	/
2480.00	59.74	Ave.	325	1.9	H	34.08	93.82	/	/
2480.00	63.16	PK	285	1.5	V	34.08	97.24	/	/
2480.00	58.16	Ave.	285	1.5	V	34.08	92.24	/	/
2327.95	26.78	PK	35	2.0	H	33.83	60.61	74	13.39
2327.95	13.22	Ave.	35	2.0	H	33.83	47.05	54	6.95
2483.56	28.75	PK	48	1.0	H	34.08	62.83	74	11.17
2483.56	16.75	Ave.	48	1.0	H	34.08	50.83	54	3.17
4960.00	51.47	PK	259	2.0	H	7.82	59.29	74	14.71
4960.00	39.54	Ave.	259	2.0	H	7.82	47.36	54	6.64

For Model: RTX8633 Handset

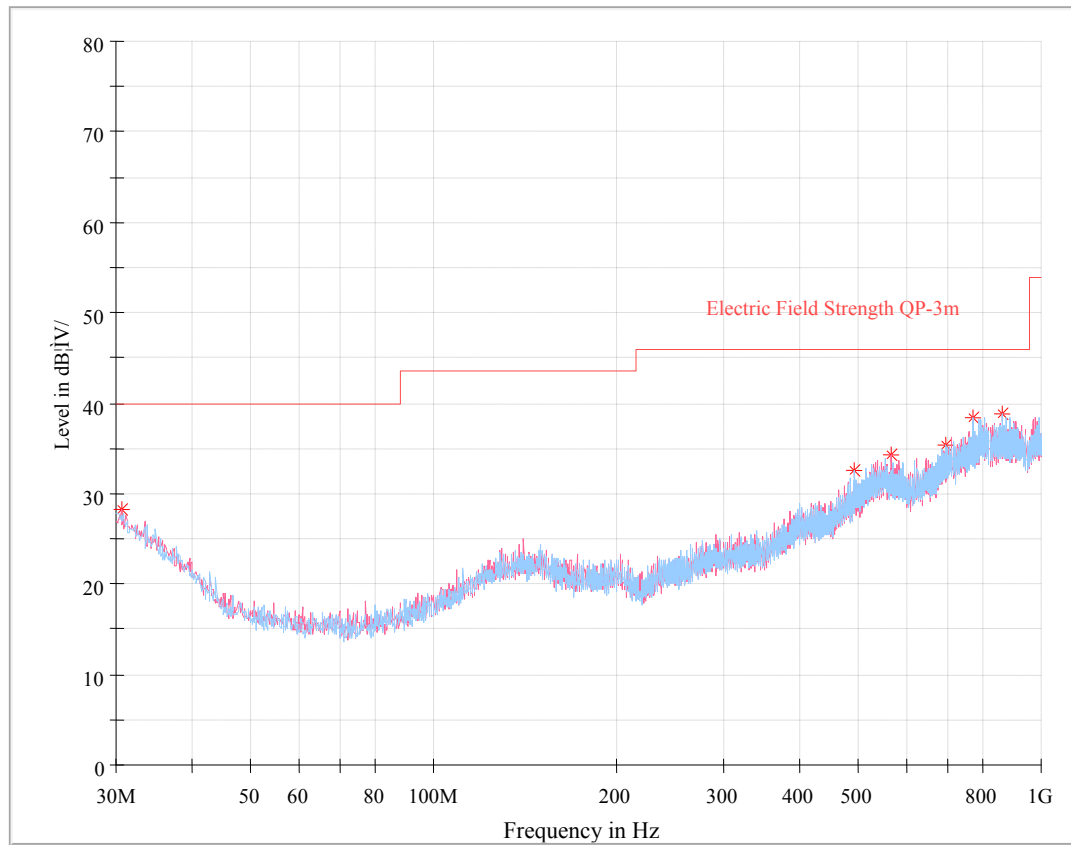30 MHz~1 GHz:

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
698.815000	35.27	202.0	H	31.0	6.6	46.00	10.73
862.866250	38.79	202.0	H	31.0	9.2	46.00	7.21
773.747500	38.30	202.0	H	148.0	8.3	46.00	7.70
494.023750	32.57	202.0	H	193.0	2.6	46.00	13.43
567.743750	34.24	102.0	V	283.0	4.4	46.00	11.76
30.606250	28.26	202.0	V	66.0	-0.1	40.00	11.74

1 GHz – 25 GHz:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2402 MHz)									
2402.00	58.11	PK	208	1.8	H	33.92	92.03	/	/
2402.00	52.56	Ave.	208	1.8	H	33.92	86.48	/	/
2402.00	57.79	PK	26	2.0	V	33.92	91.71	/	/
2402.00	52.04	Ave.	26	2.0	V	33.92	85.96	/	/
2344.94	26.57	PK	55	1.2	H	33.83	60.40	74	13.60
2344.94	13.21	Ave.	55	1.2	H	33.83	47.04	54	6.96
2485.25	27.13	PK	235	1.1	H	34.08	61.21	74	12.79
2485.25	13.34	Ave.	235	1.1	H	34.08	47.42	54	6.58
4804.00	43.38	PK	126	2.1	H	5.84	49.22	74	24.78
4804.00	29.23	Ave.	126	2.1	H	5.84	35.07	54	18.93
Middle Channel (2440 MHz)									
2440.00	59.54	PK	177	2.1	H	33.92	93.46	/	/
2440.00	54.61	Ave.	177	2.1	H	33.92	88.53	/	/
2440.00	59.12	PK	27	1.5	V	33.92	93.04	/	/
2440.00	54.14	Ave.	27	1.5	V	33.92	88.06	/	/
4880.00	49.46	PK	341	1.1	H	6.21	55.67	74	18.33
4880.00	37.73	Ave.	341	1.1	H	6.21	43.94	54	10.06
High Channel (2480 MHz)									
2480.00	62.80	PK	183	1.7	H	34.08	96.88	/	/
2480.00	57.18	Ave.	183	1.7	H	34.08	91.26	/	/
2480.00	62.21	PK	78	2.4	V	34.08	96.29	/	/
2480.00	55.83	Ave.	78	2.4	V	34.08	89.91	/	/
2347.65	27.54	PK	326	1.9	H	33.83	61.37	74	12.63
2347.65	13.88	Ave.	326	1.9	H	33.83	47.71	54	6.29
2483.59	27.37	PK	152	2.3	H	34.08	61.45	74	12.55
2483.59	15.80	Ave.	152	2.3	H	34.08	49.88	54	4.12
4960.00	48.62	PK	122	1.8	H	7.82	56.44	74	17.56
4960.00	36.73	Ave.	122	1.8	H	7.82	44.55	54	9.45

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor



Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude



The other spurious emission which is 20dB to the limit was not recorded.

And for the pre-scan is performed with the 2400-2483.5MHz band filter.



Pre-scan with 2480 MHz Horizontal

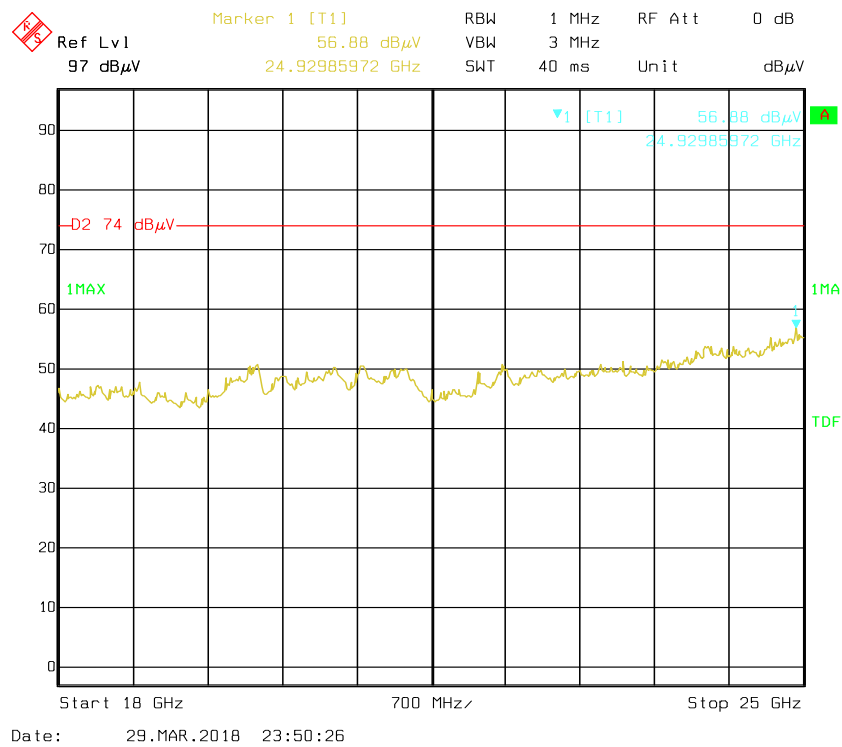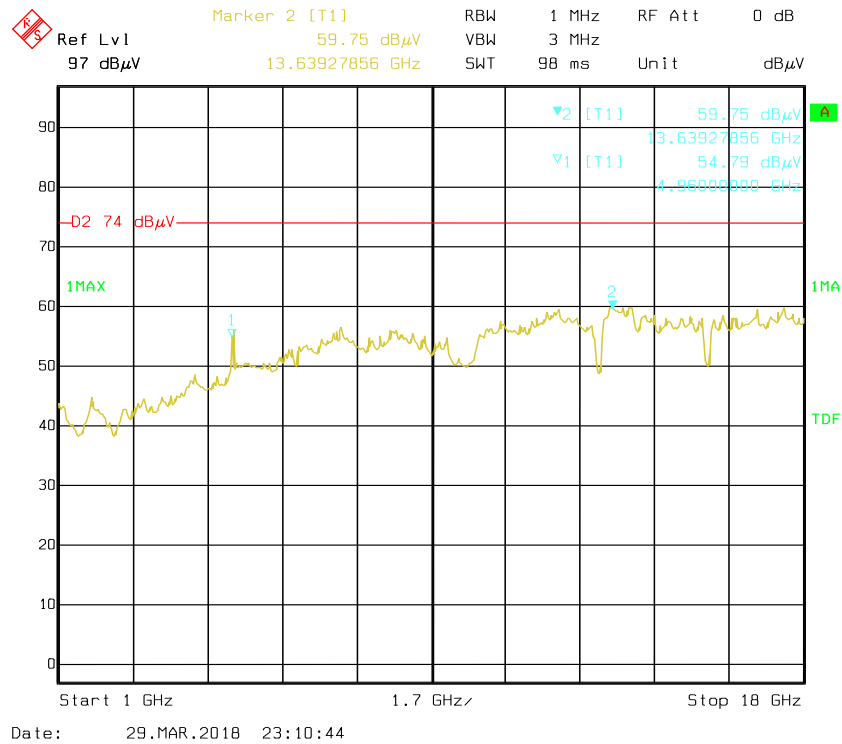


Vertical

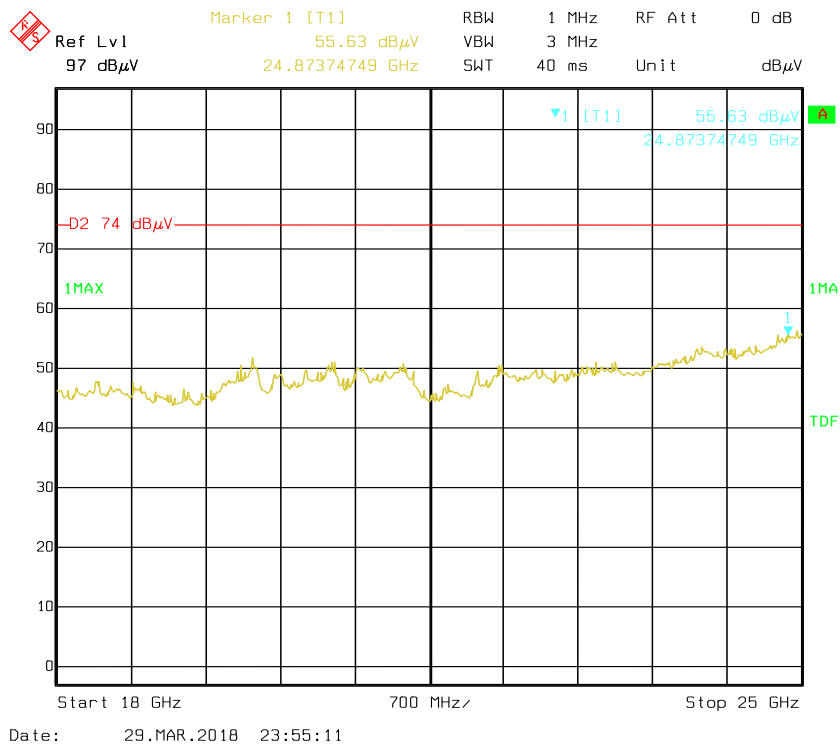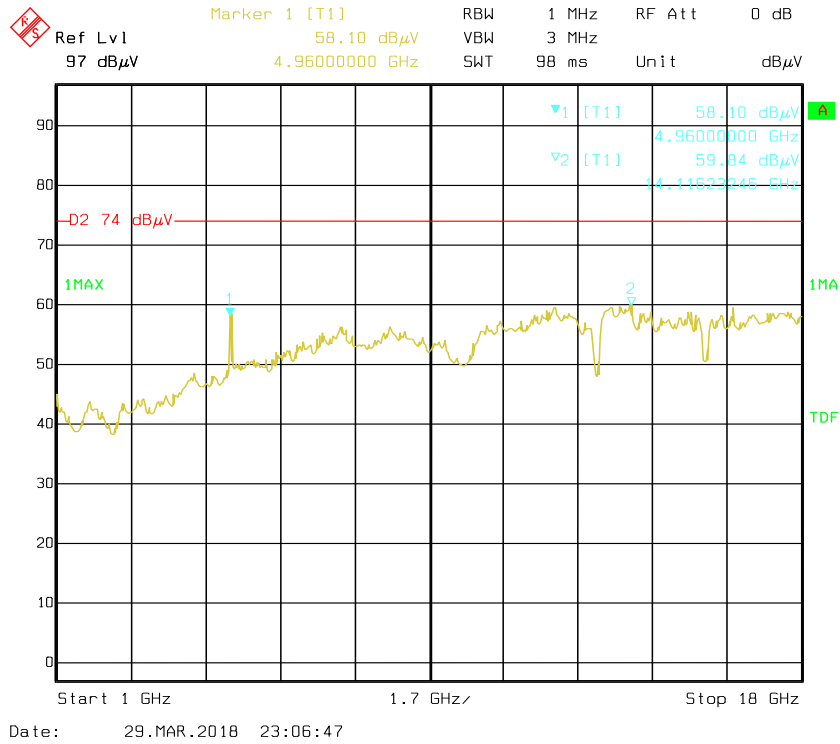




Pre-scan for Average Horizontal

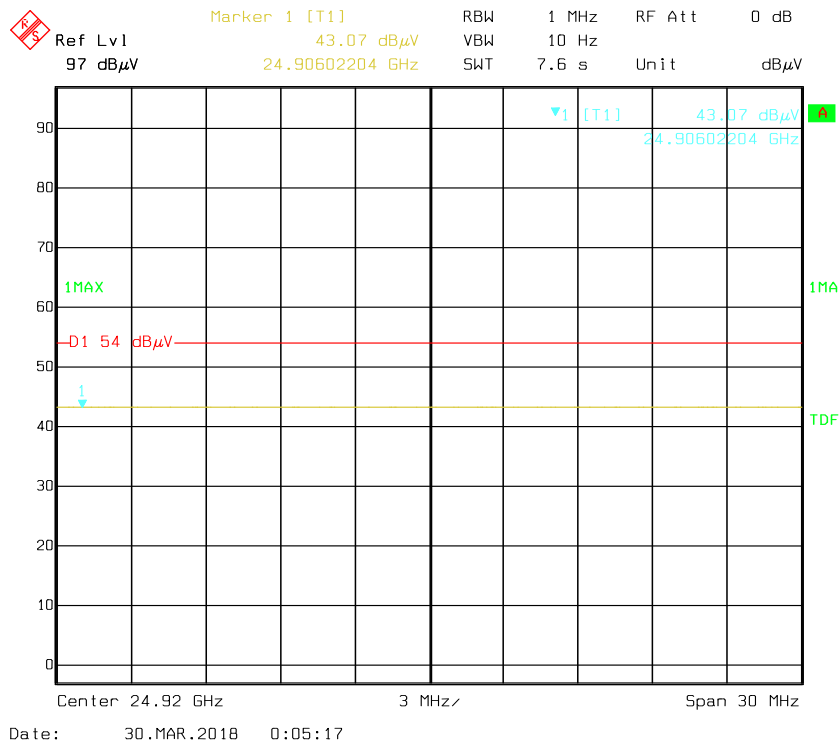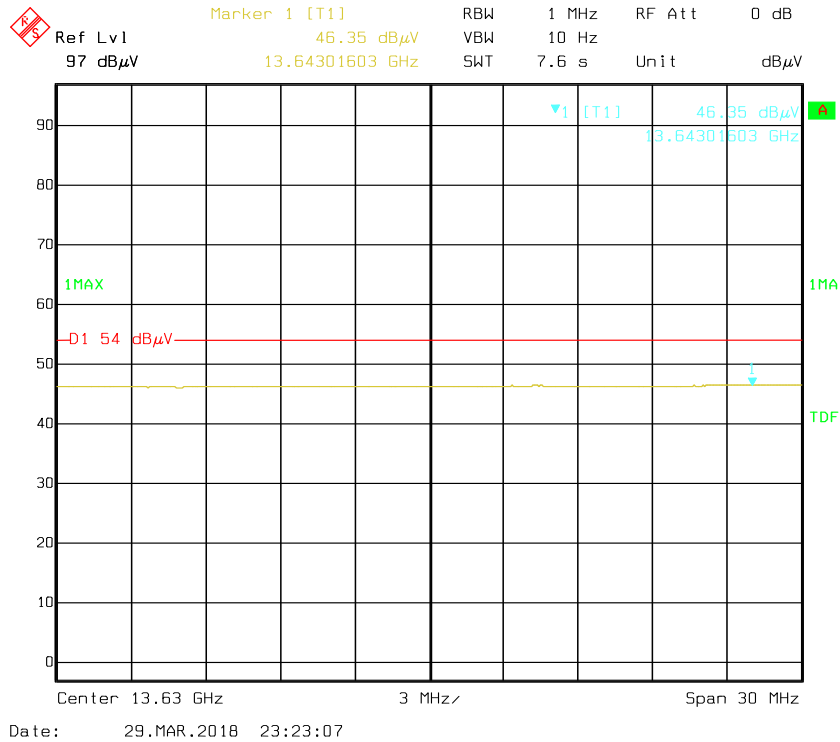

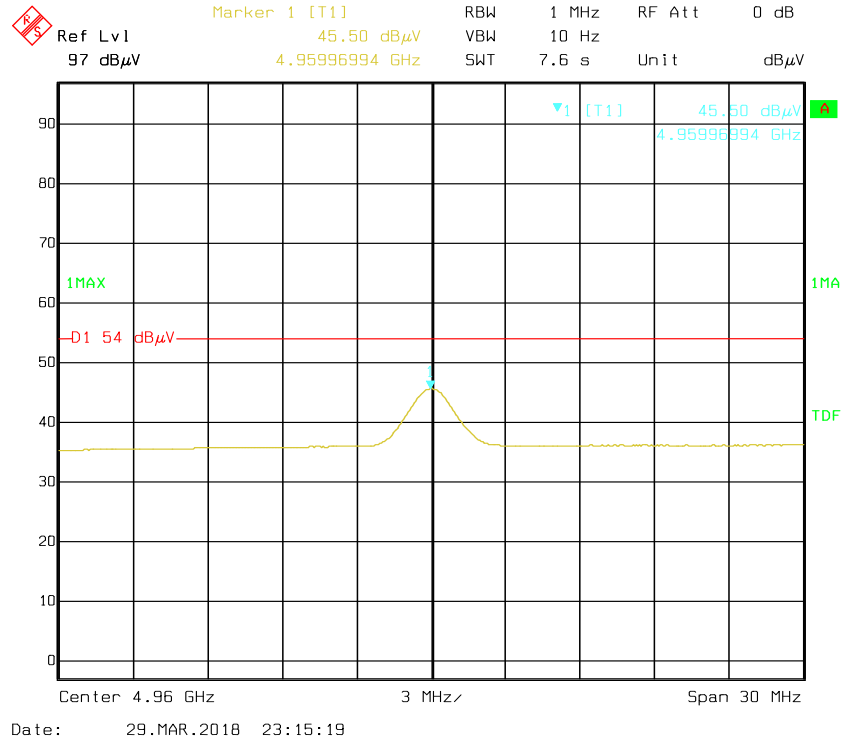

Vertical

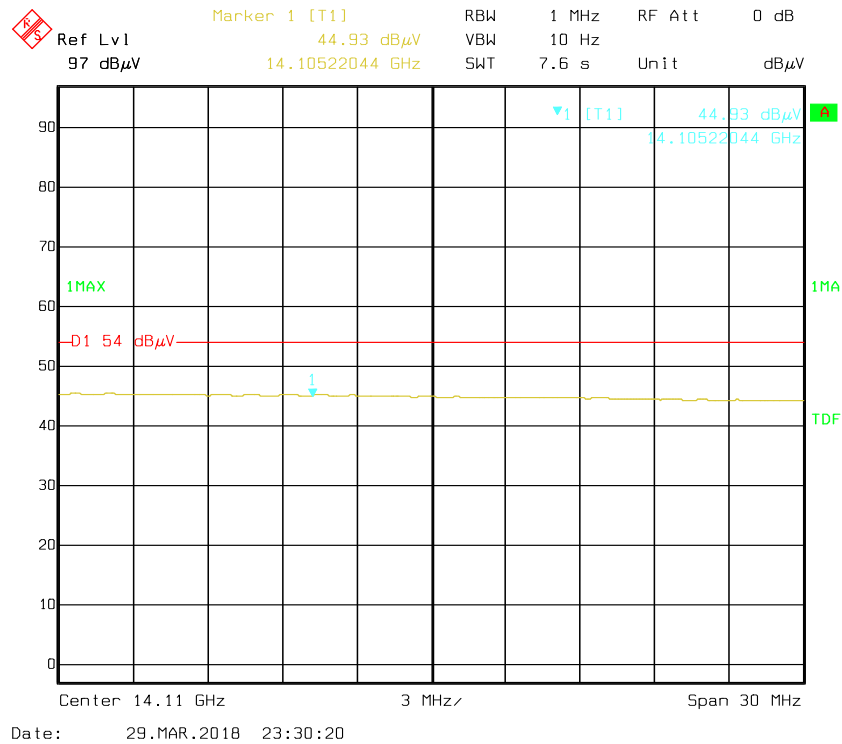

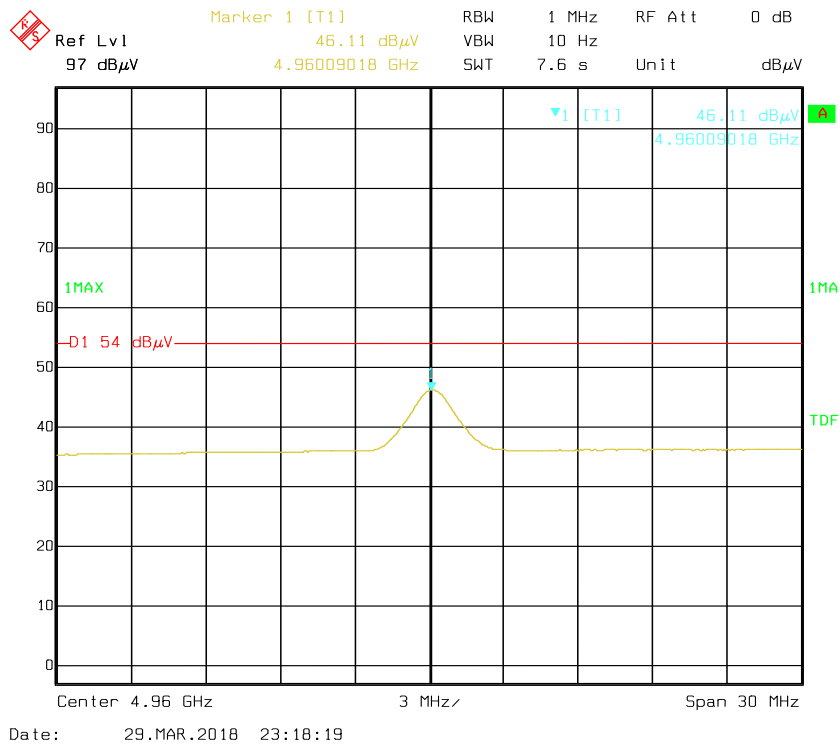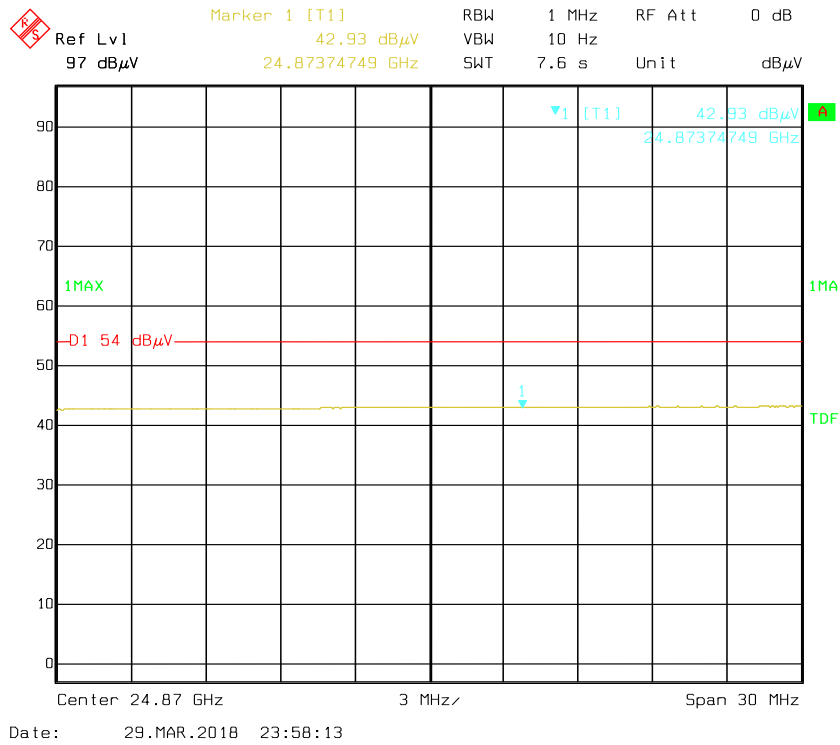


FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH**Applicable Standard**

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

**Test Data****Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Jacob Kong on 2018-03-15.


Test Result: Pass.

Please refer to the following table and plots.

EUT operation mode: Transmitting


Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (kHz)
BLE mode			
Low	2402	0.696	≥500
Middle	2440	0.699	≥500
High	2480	0.702	≥500

Low Channel

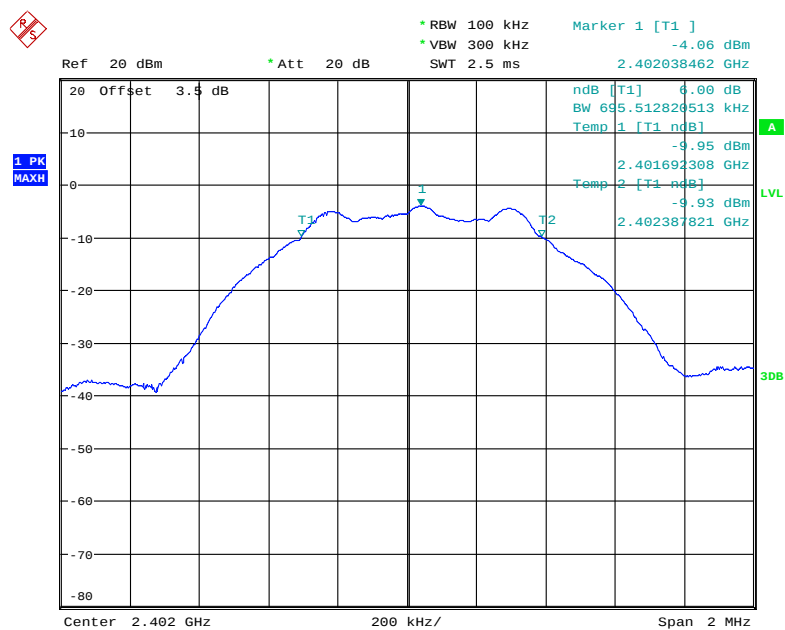


Date: 15.MAR.2018 20:10:18

Middle Channel

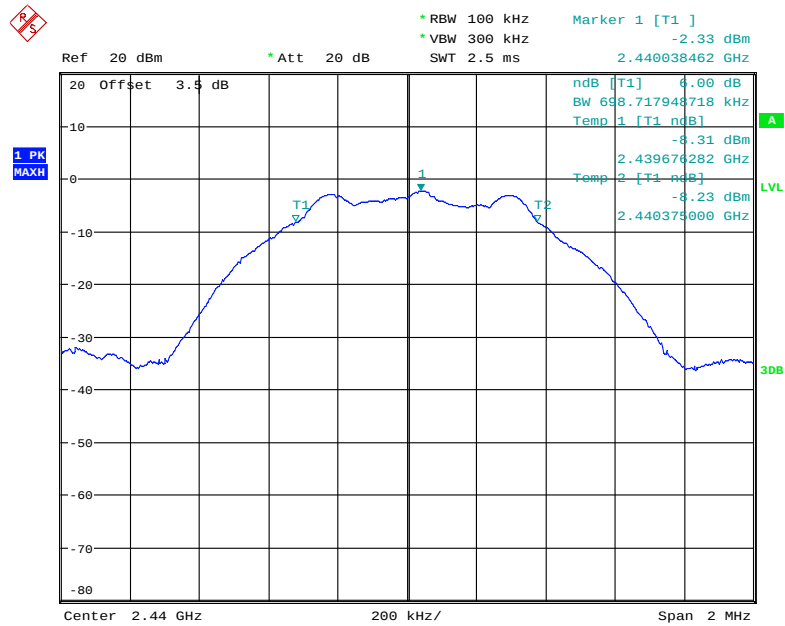

Date: 15.MAR.2018 20:09:59

High Channel

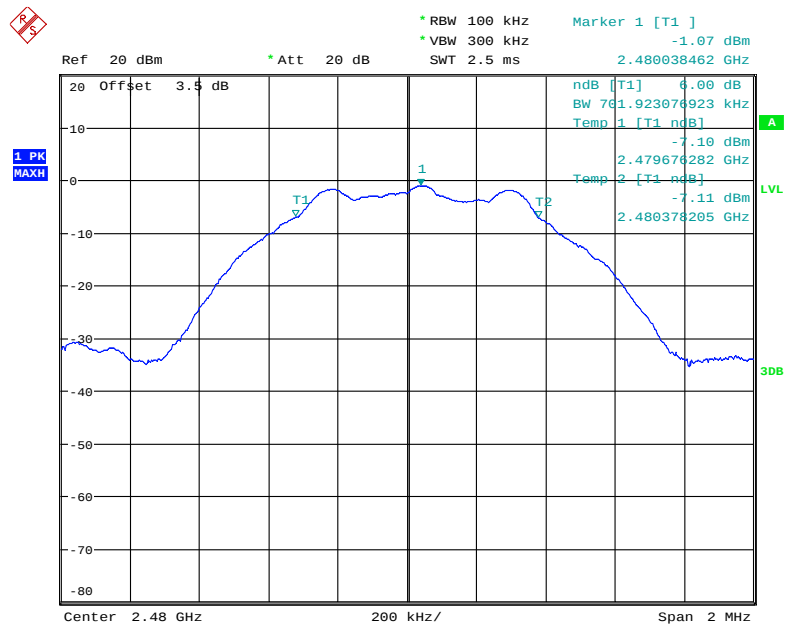

Date: 15.MAR.2018 20:09:34


FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Jacob Kong on 2018-03-15.

EUT operation mode: Transmitting

BLE mode


Channel	Frequency (MHz)	Max Peak Output Power (dBm)	Limit (dBm)	Result
Low	2402	-3.66	30	Pass
Middle	2440	-1.94	30	Pass
High	2480	-0.68	30	Pass

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

**Test Data****Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa


The testing was performed by Jacob Kong on 2018-03-15.

EUT operation mode: Transmitting

Test Result: Compliance


Please refer to the following plots.

BLE: Band Edge, Left Side

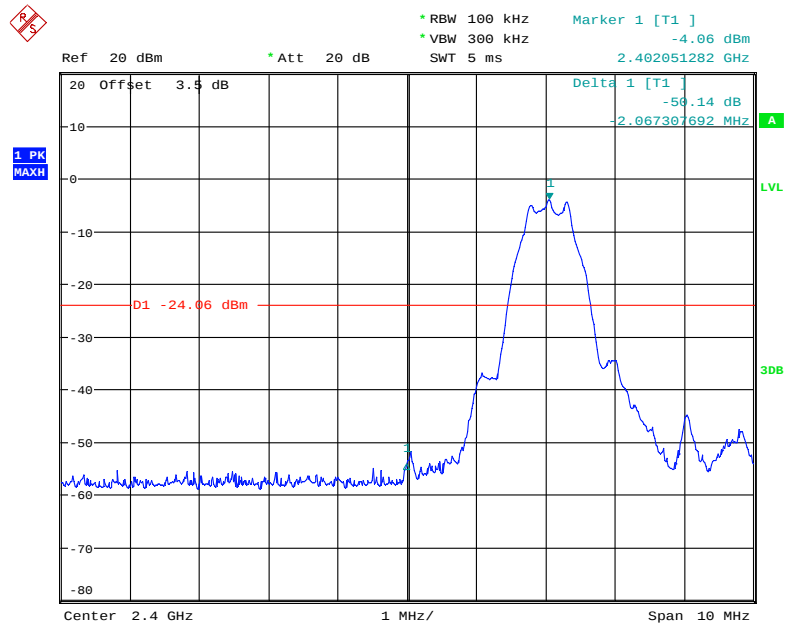

Date: 15.MAR.2018 20:11:18

BLE: Band Edge, Right Side

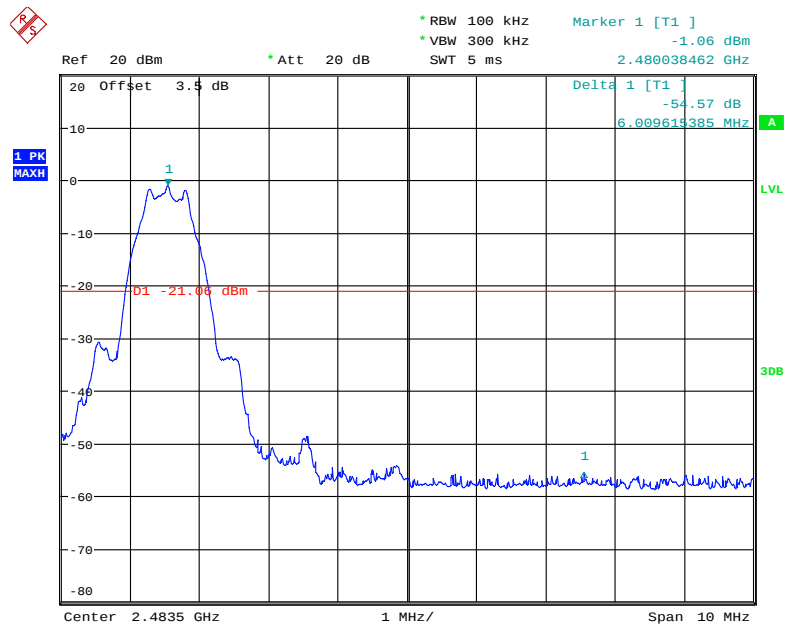

Date: 15.MAR.2018 20:12:05


FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa


The testing was performed by Jacob Kong on 2018-03-15.

EUT operation mode: Transmitting

Test Result: Pass


Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
BLE mode			
Low	2402	-19.58	≤ 8
Middle	2440	-17.68	≤ 8
High	2480	-16.35	≤ 8

Power Spectral Density, BLE Low Channel

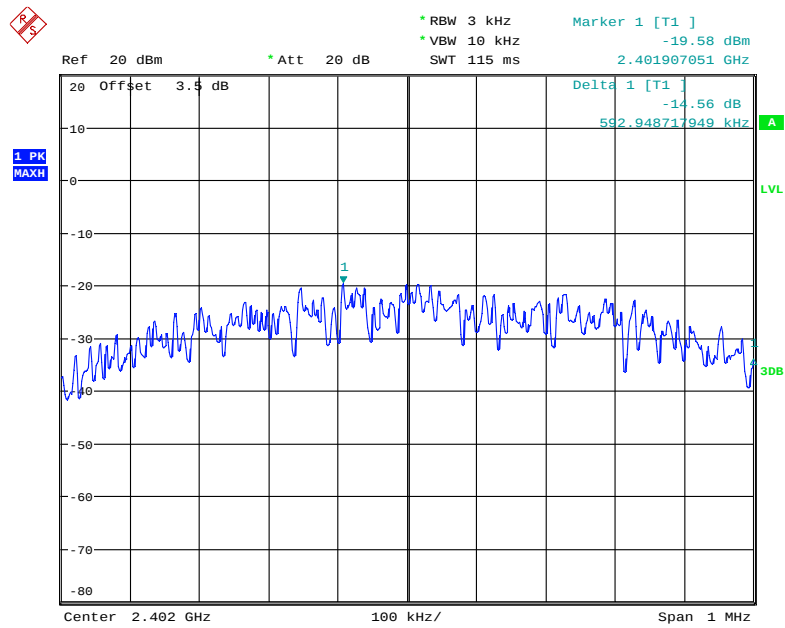


Date: 15.MAR.2018 20:13:06

Power Spectral Density, BLE Middle Channel

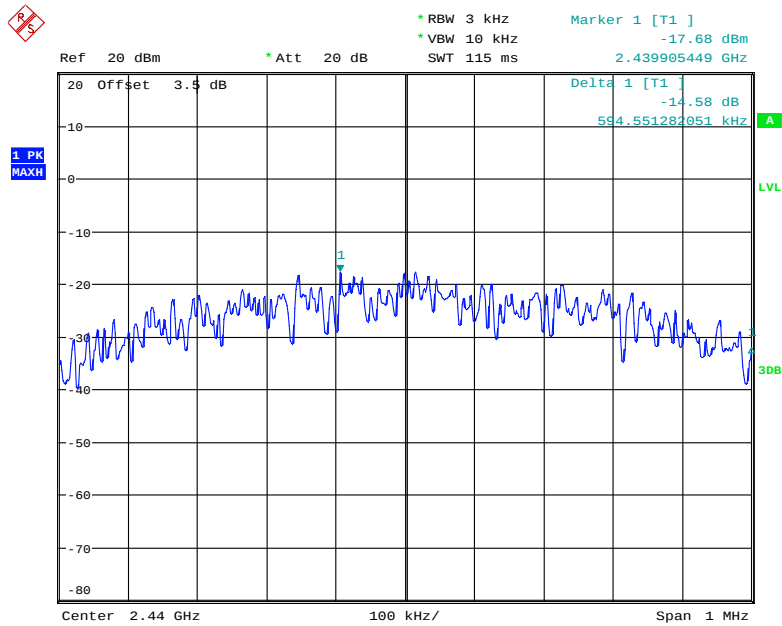

Date: 15.MAR.2018 20:12:52

Power Spectral Density, BLE High Channel

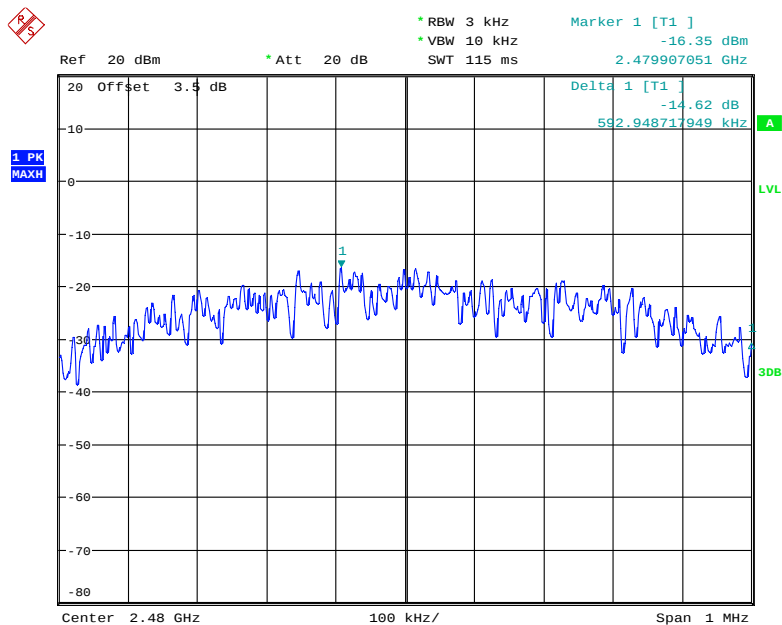

Date: 15.MAR.2018 20:12:30

***** END OF REPORT *****