

Test Plot 1#: DECT_Head Left Cheek_Middle Channel_Antenna 0**DUT: DECT Cordless Phone; Type: RTX 8631 Handset; Serial: 18030801121**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:22.7

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.355$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.9, 7.9, 7.9); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0379 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.617 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0400 W/kg

SAR(1 g) = 0.034 W/kg; SAR(10 g) = 0.030 W/kg

Maximum value of SAR (measured) = 0.0367 W/kg

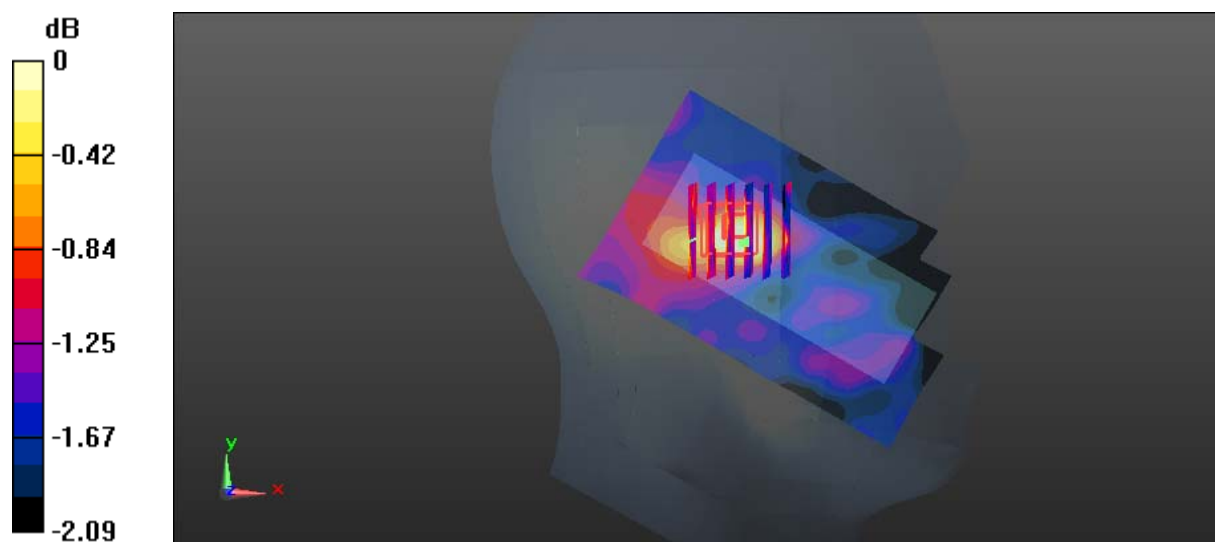

0 dB = 0.0367 W/kg = -14.35 dBW/kg

Test Plot 2#: DECT_Head Left Tilt_Middle Channel_Antenna 0**DUT: DECT Cordless Phone; Type: RTX 8631 Handset; Serial: 18030801121**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:22.7

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.355$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.9, 7.9, 7.9); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0333 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.661 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0400 W/kg

SAR(1 g) = 0.030 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.0359 W/kg

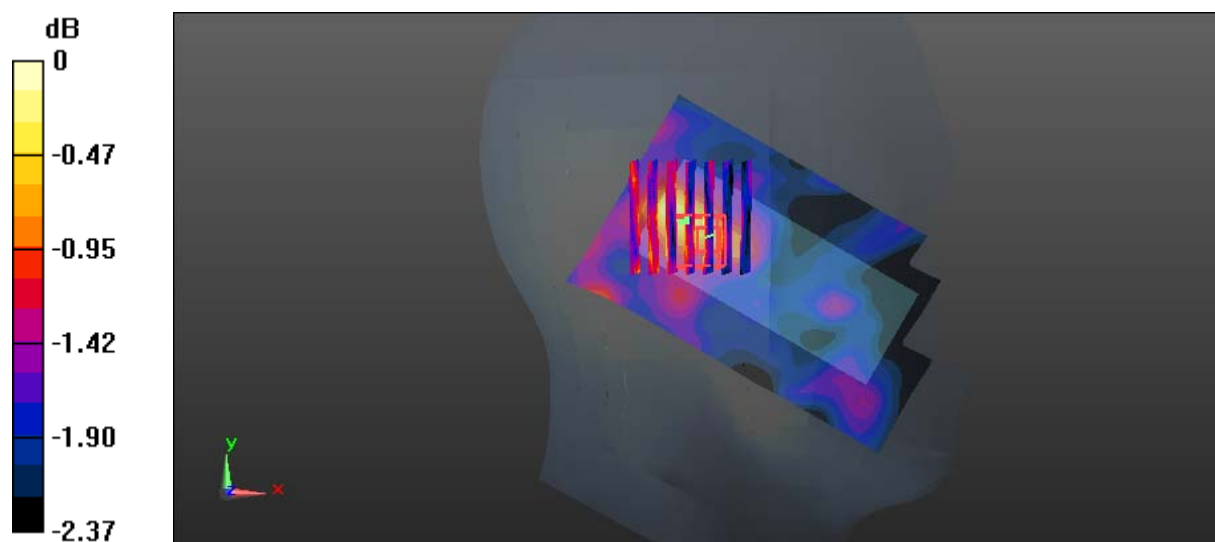

0 dB = 0.0359 W/kg = -14.45 dBW/kg

Test Plot 3#: DECT_Head Right Cheek_Middle Channel_Antenna 0**DUT: DECT Cordless Phone; Type: RTX 8631 Handset; Serial: 18030801121**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:22.7

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.355$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.9, 7.9, 7.9); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0257 W/kg


Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.695 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.0290 W/kg

SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.016 W/kg

Maximum value of SAR (measured) = 0.0260 W/kg

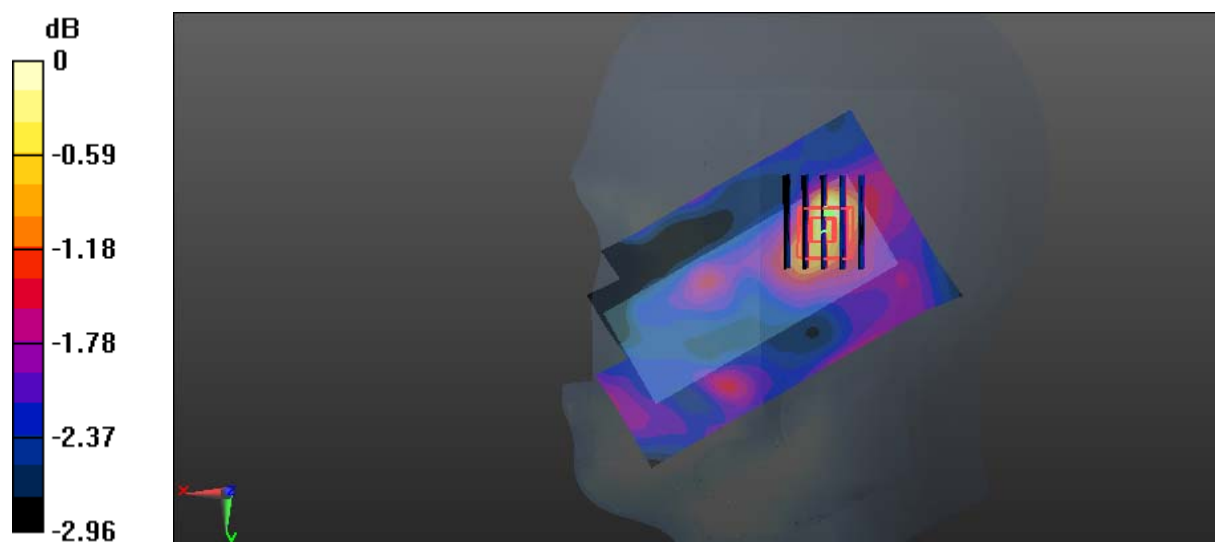

0 dB = 0.0260 W/kg = -15.85 dBW/kg

Test Plot 4#: DECT_Head Right Tilt_Middle Channel_Antenna 0**DUT: DECT Cordless Phone; Type: RTX 8631 Handset; Serial: 18030801121**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:22.7

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.355$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.9, 7.9, 7.9); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0289 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.941 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0290 W/kg

SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0265 W/kg

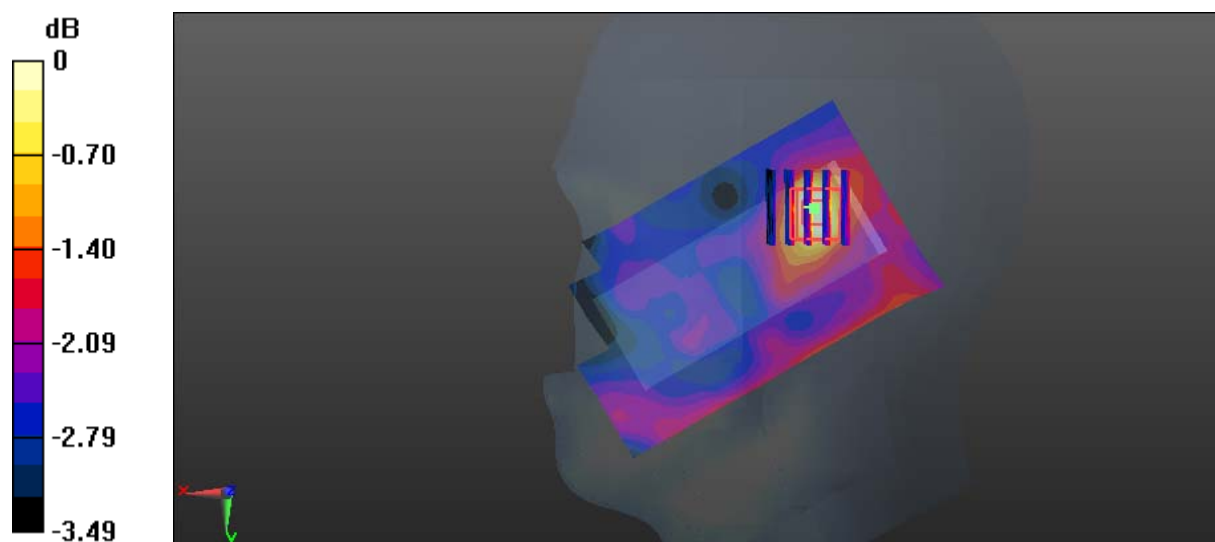

0 dB = 0.0265 W/kg = -15.77 dBW/kg

Test Plot 5#: DECT_Body Back_Middle Channel_Antenna 0**DUT: DECT Cordless Phone; Type: RTX 8631 Handset; Serial: 18030801121**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:22.7

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.544$ S/m; $\epsilon_r = 54.118$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.79, 7.79, 7.79); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0388 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.430 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.0430 W/kg

SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.0362 W/kg

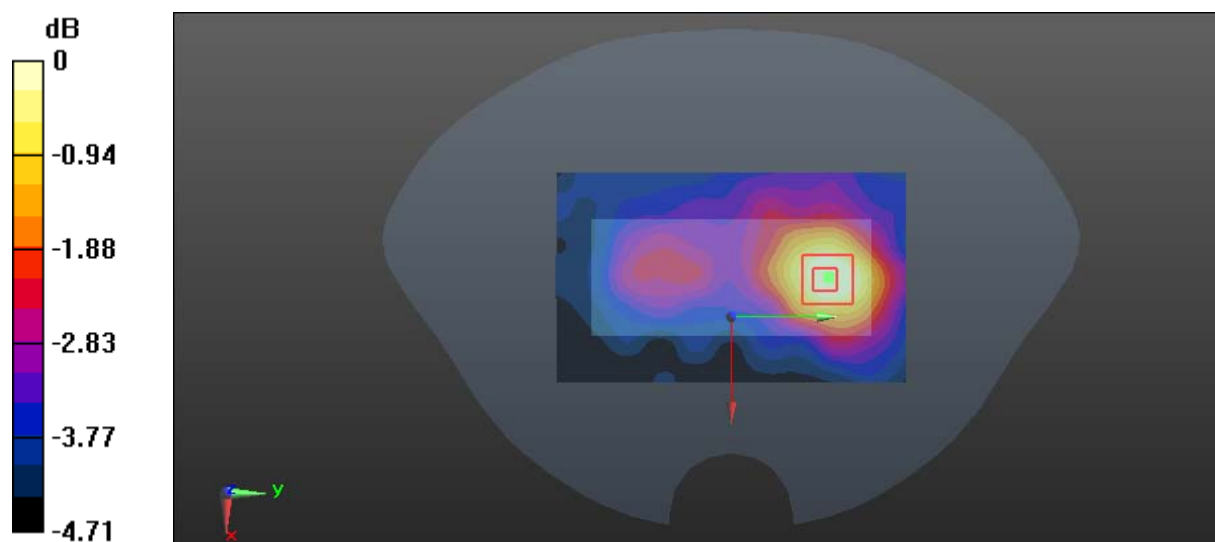

0 dB = 0.0362 W/kg = -14.41 dBW/kg

Test Plot 6#: DECT_Head Left Cheek_Middle Channel_Antenna 1**DUT: DECT Cordless Phone; Type: RTX 8631 Handset; Serial: 18030801121**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:22.7

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.355$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.9, 7.9, 7.9); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0414 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.362 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.0440 W/kg

SAR(1 g) = 0.033 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.0397 W/kg

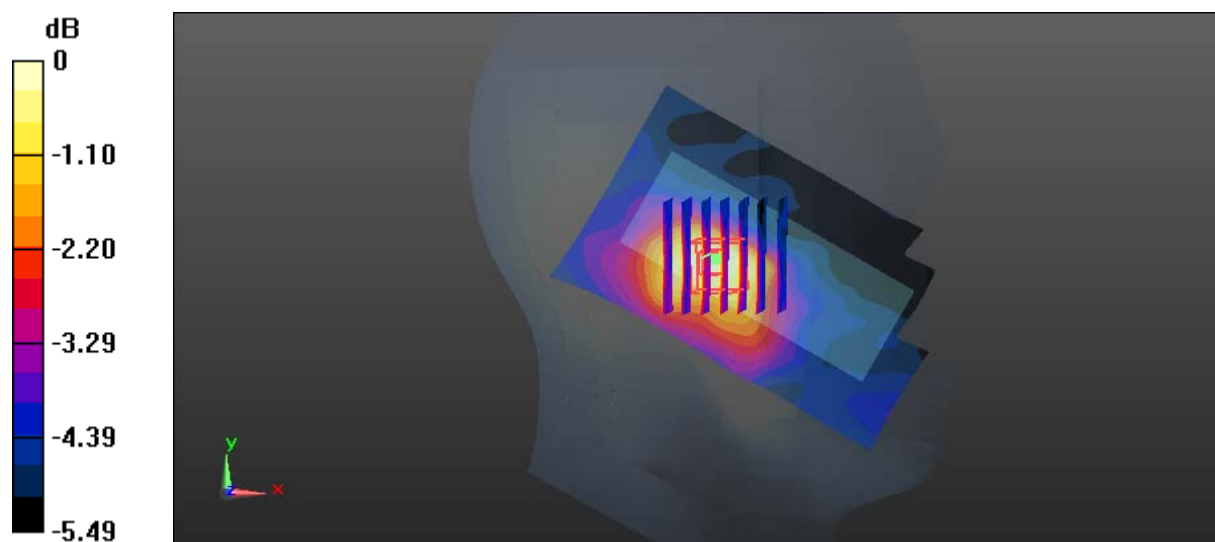

0 dB = 0.0397 W/kg = -14.01 dBW/kg

Test Plot 7#: DECT_Head Left Tilt_Middle Channel_Antenna 1**DUT: DECT Cordless Phone; Type: RTX 8631 Handset; Serial: 18030801121**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:22.7

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.355$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.9, 7.9, 7.9); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0371 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.634 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.0420 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.0380 W/kg

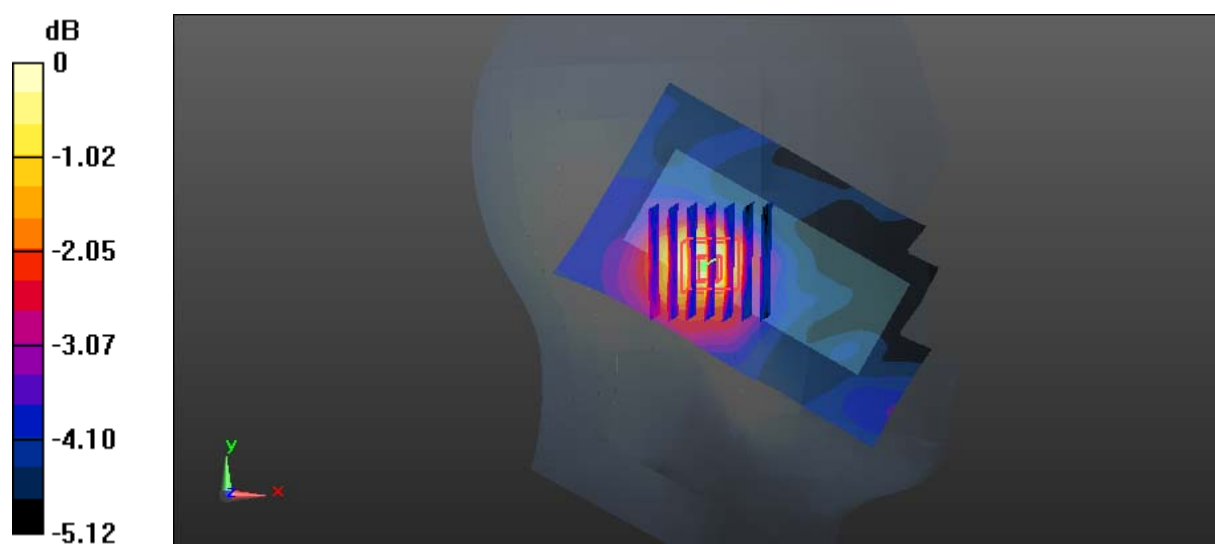

0 dB = 0.0380 W/kg = -14.20 dBW/kg

Test Plot 8#: DECT_Head Right Cheek_Middle Channel_Antenna 1**DUT: DECT Cordless Phone; Type: RTX 8631 Handset; Serial: 18030801121**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:22.7

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.355$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.9, 7.9, 7.9); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0386 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.205 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.0430 W/kg

SAR(1 g) = 0.030 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.0388 W/kg

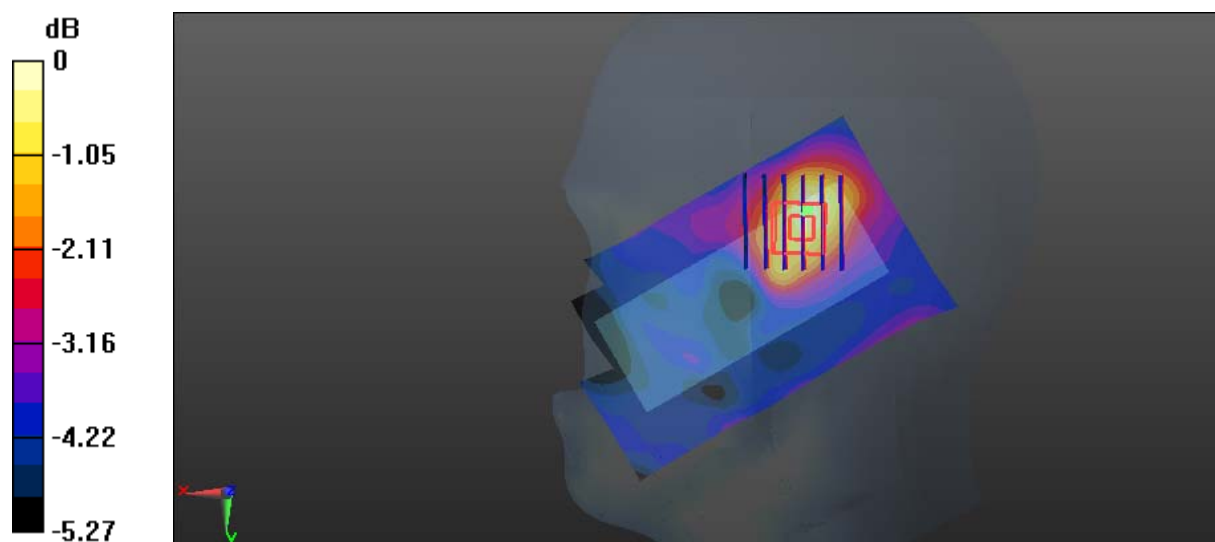

0 dB = 0.0388 W/kg = -14.11 dBW/kg

Test Plot 9#: DECT_Head Right Tilt_Middle Channel_Antenna 1**DUT: DECT Cordless Phone; Type: RTX 8631 Handset; Serial: 18030801121**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:22.7

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.355$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.9, 7.9, 7.9); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0304 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.694 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0380 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0323 W/kg

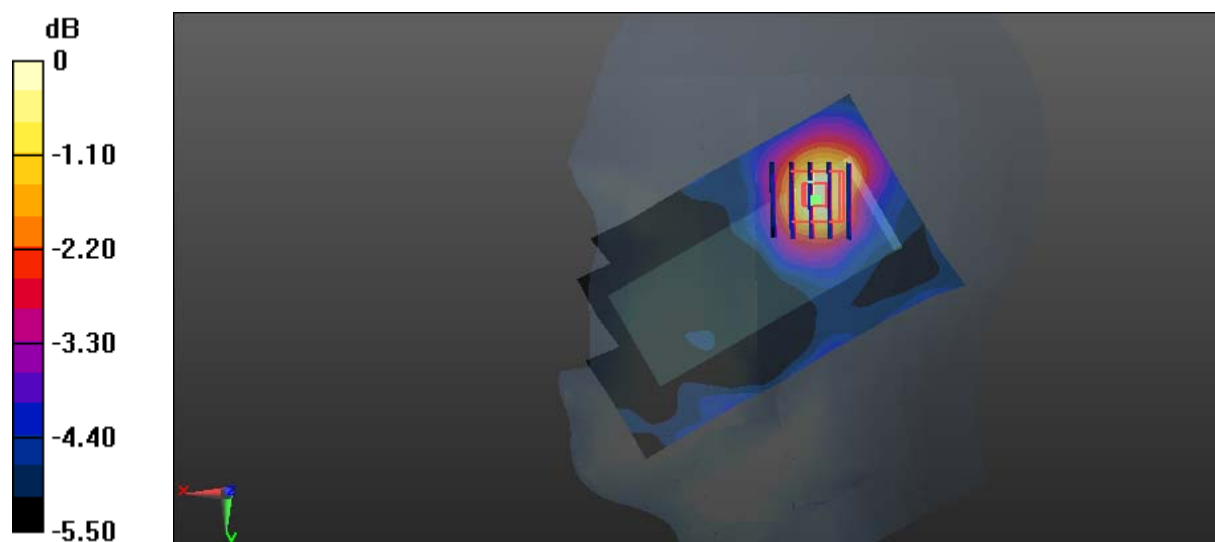

0 dB = 0.0323 W/kg = -14.91 dBW/kg

Test Plot 10#: DECT_Body Back_Middle Channel_Antenna 1**DUT: DECT Cordless Phone; Type: RTX 8631 Handset; Serial: 18030801121**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:22.7

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.544$ S/m; $\epsilon_r = 54.118$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.79, 7.79, 7.79); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0281 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.724 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.0280 W/kg

SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.0253 W/kg

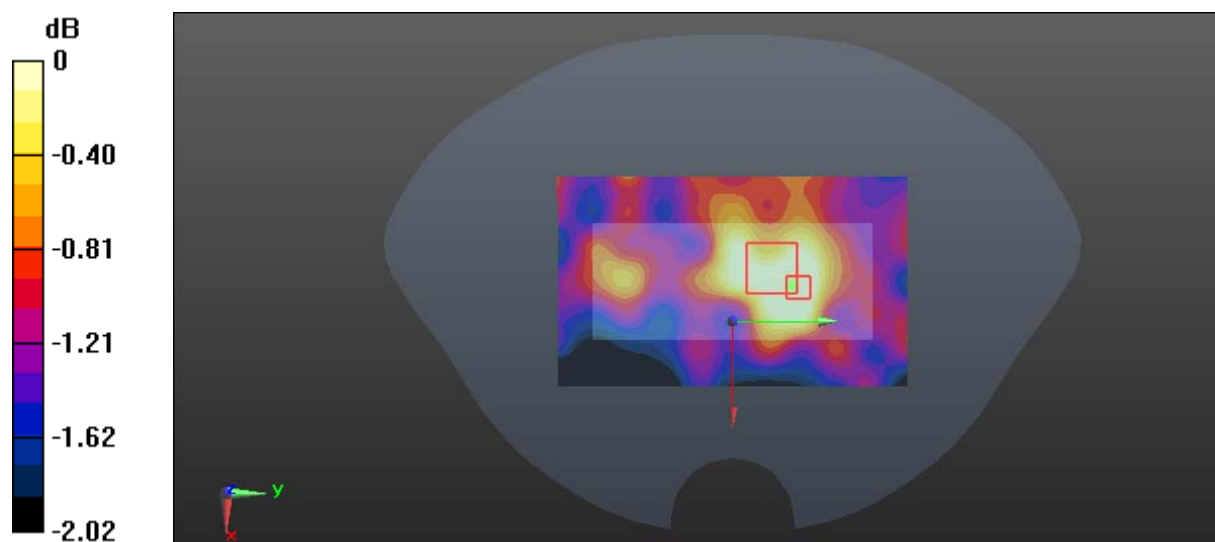

0 dB = 0.0253 W/kg = -15.97 dBW/kg

Test Plot 11#: DECT_Head Left Cheek_Middle Channel_Antenna 0**DUT: DECT Cordless Phone; Type: RTX 8632 Handset; Serial: 18030801122**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:22.7

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.355$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.9, 7.9, 7.9); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0359 W/kg


Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.747 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0360 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.0344 W/kg

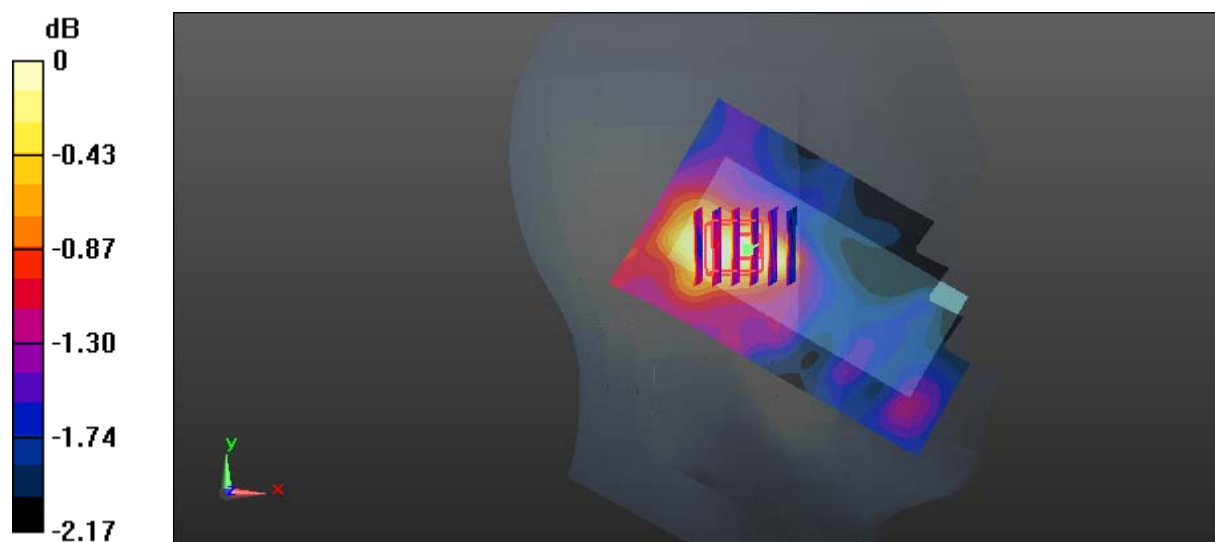

0 dB = 0.0344 W/kg = -14.63 dBW/kg

Test Plot 12#: DECT_Head Left Tilt_Middle Channel_Antenna 0**DUT: DECT Cordless Phone; Type: RTX 8632 Handset; Serial: 18030801122**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:22.7

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.355$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.9, 7.9, 7.9); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0273 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.215 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.0310 W/kg

SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0268 W/kg

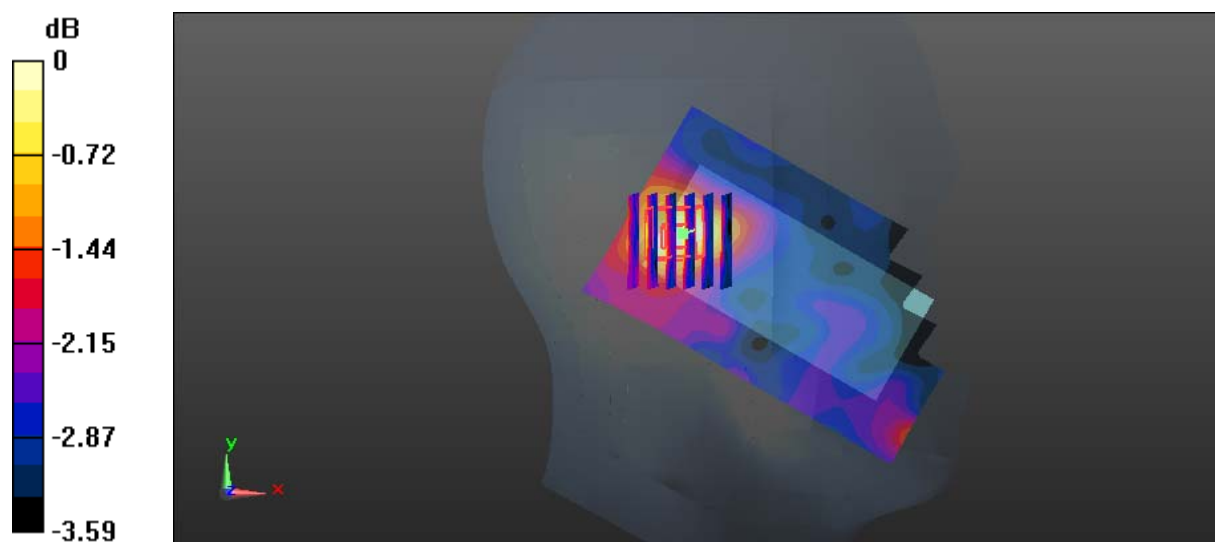

0 dB = 0.0268 W/kg = -15.72 dBW/kg

Test Plot 13#: DECT_Head Right Cheek_Middle Channel_Antenna 0**DUT: DECT Cordless Phone; Type: RTX 8632 Handset; Serial: 18030801122**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:22.7

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.355$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.9, 7.9, 7.9); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0352 W/kg


Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.513 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0400 W/kg

SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.022 W/kg

Maximum value of SAR (measured) = 0.0356 W/kg

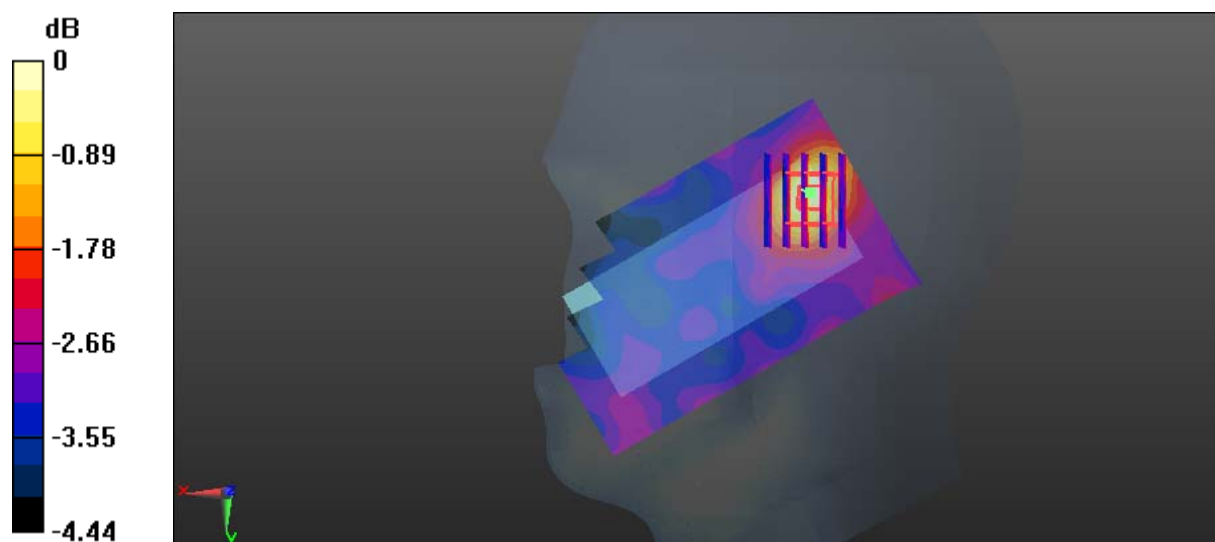

Test Plot 14#: DECT_Head Right Tilt_Middle Channel_Antenna 0**DUT: DECT Cordless Phone; Type: RTX 8632 Handset; Serial: 18030801122**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:22.7

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.355$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.9, 7.9, 7.9); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0319 W/kg


Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.946 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0370 W/kg

SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.0341 W/kg

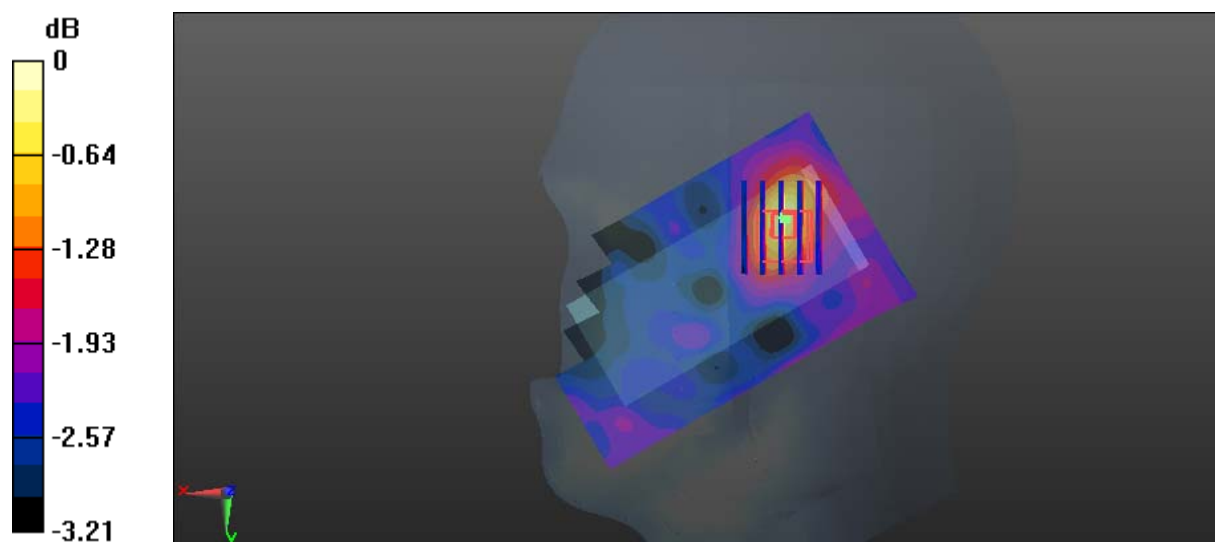

0 dB = 0.0341 W/kg = -14.67 dBW/kg

Test Plot 15#: DECT_Body Back_Middle Channel_Antenna 0**DUT: DECT Cordless Phone; Type: RTX 8632 Handset; Serial: 18030801122**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:22.7

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.544$ S/m; $\epsilon_r = 54.118$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.79, 7.79, 7.79); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0398 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.391 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0470 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.0398 W/kg

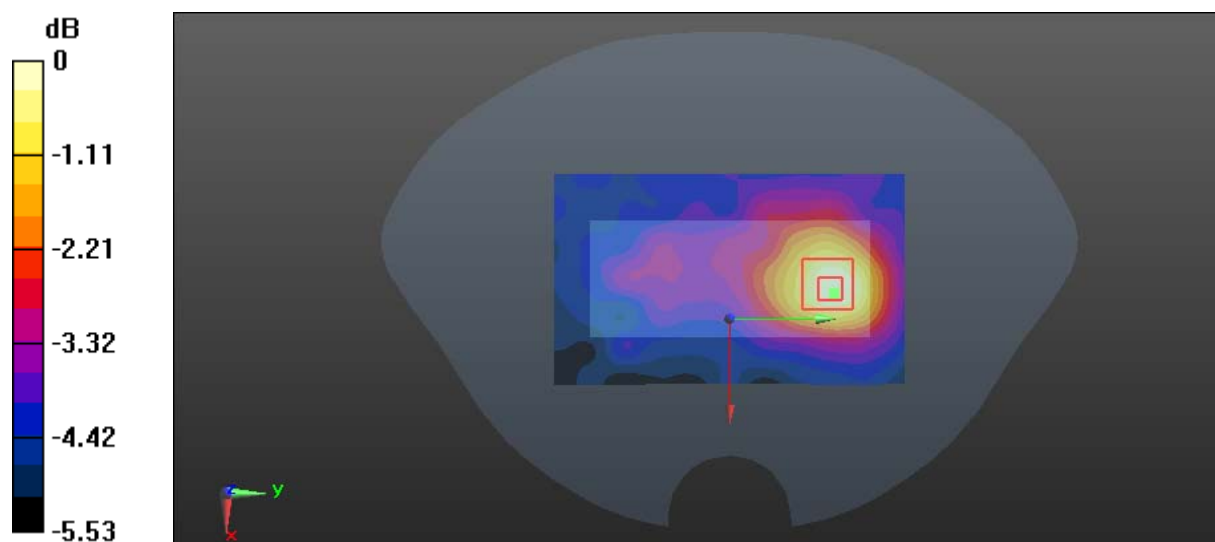

0 dB = 0.0398 W/kg = -14.00 dBW/kg

Test Plot 16#: DECT_Head Left Cheek_Middle Channel_Antenna 1**DUT: DECT Cordless Phone; Type: RTX 8632 Handset; Serial: 18030801122**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:22.7

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.355$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.9, 7.9, 7.9); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0315 W/kg


Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.532 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.0340 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0298 W/kg

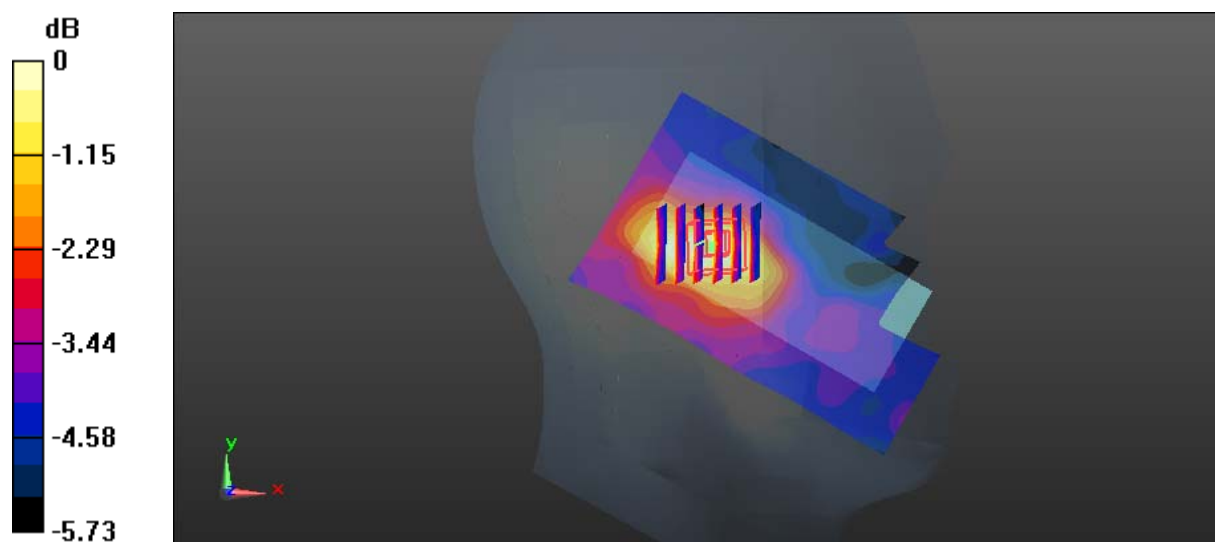

0 dB = 0.0298 W/kg = -15.26 dBW/kg

Test Plot 17#: DECT_Head Left Tilt_Middle Channel_Antenna 1**DUT: DECT Cordless Phone; Type: RTX 8632 Handset; Serial: 18030801122**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:22.7

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.355$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.9, 7.9, 7.9); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0287 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.748 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0300 W/kg

SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.016 W/kg

Maximum value of SAR (measured) = 0.0268 W/kg

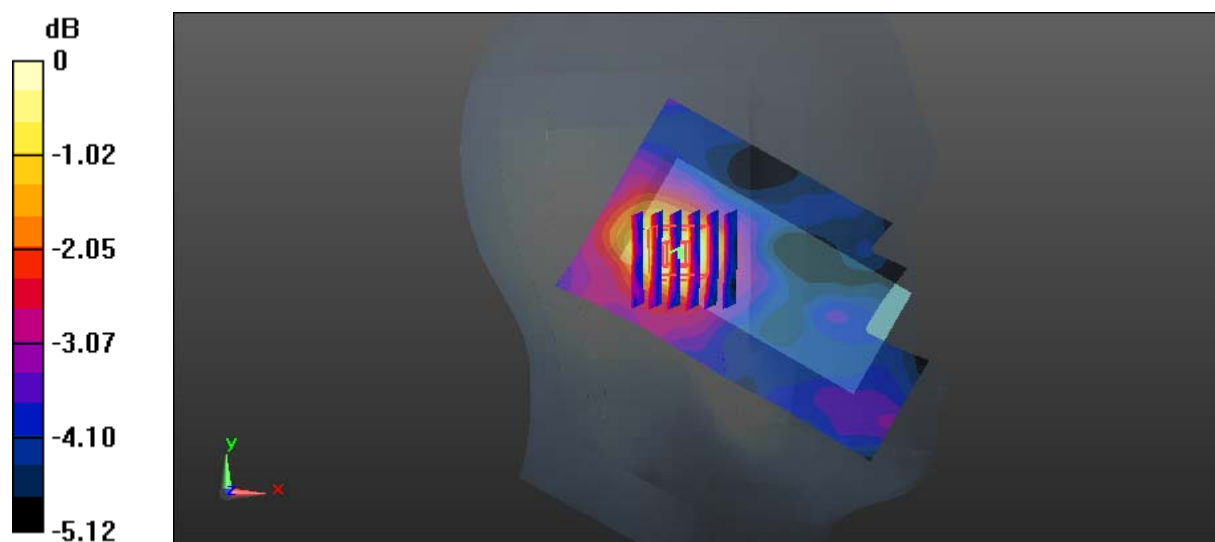

0 dB = 0.0268 W/kg = -15.72 dBW/kg

Test Plot 18#: DECT_Head Right Cheek_Middle Channel_Antenna 1**DUT: DECT Cordless Phone; Type: RTX 8632 Handset; Serial: 18030801122**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:22.7

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.355$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.9, 7.9, 7.9); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0480 W/kg


Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.615 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0570 W/kg

SAR(1 g) = 0.036 W/kg; SAR(10 g) = 0.024 W/kg

Maximum value of SAR (measured) = 0.0471 W/kg

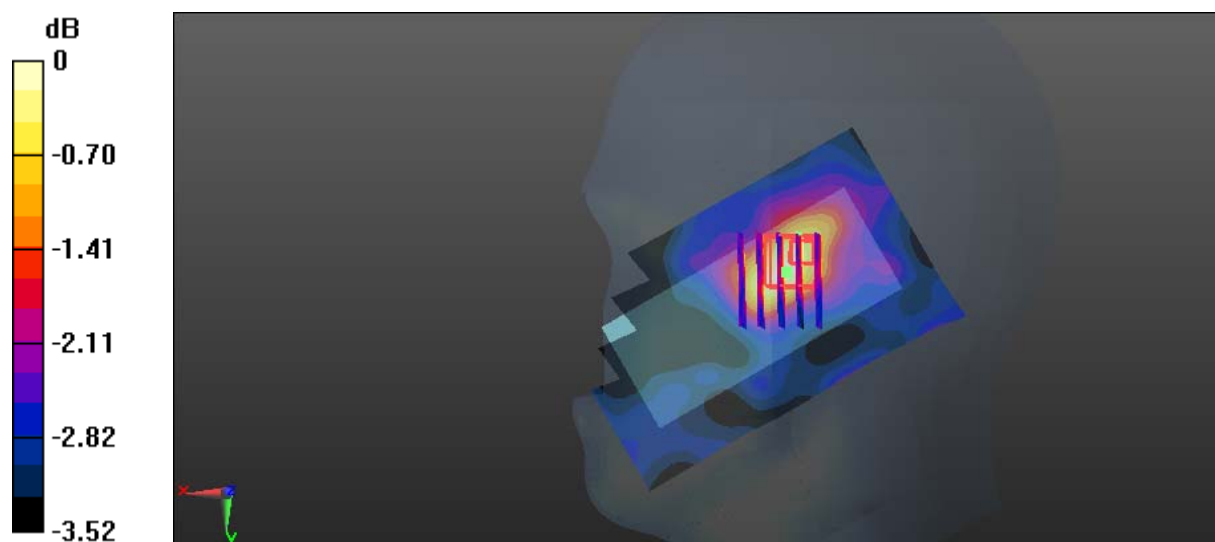

Test Plot 19#: DECT_Head Right Tilt_Middle Channel_Antenna 1**DUT: DECT Cordless Phone; Type: RTX 8632 Handset; Serial: 18030801122**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:22.7

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.355$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.9, 7.9, 7.9); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0396 W/kg


Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.281 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.0430 W/kg

SAR(1 g) = 0.033 W/kg; SAR(10 g) = 0.028 W/kg

Maximum value of SAR (measured) = 0.0400 W/kg

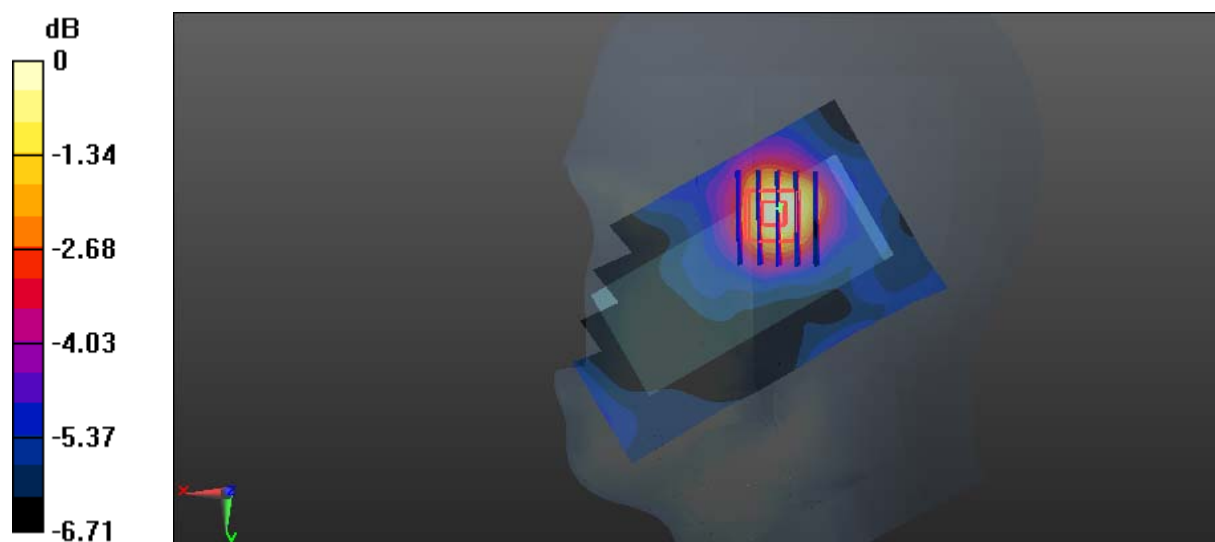

0 dB = 0.0400 W/kg = -13.98 dBW/kg

Test Plot 20#: DECT_Body Back_Middle Channel_Antenna 1**DUT: DECT Cordless Phone; Type: RTX 8632 Handset; Serial: 18030801122**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:22.7

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.544$ S/m; $\epsilon_r = 54.118$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.79, 7.79, 7.79); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0254 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.552 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.0260 W/kg

SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0240 W/kg

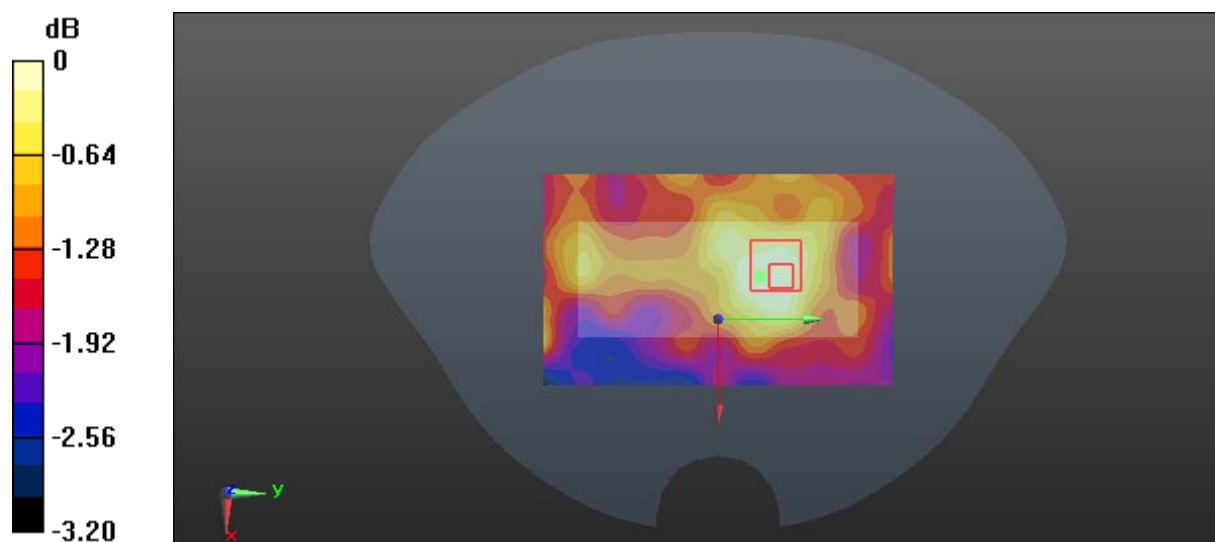

Test Plot 21#: DECT_Head Left Cheek_Middle Channel_Antenna 0**DUT: DECT Cordless Phone; Type: RTX 8633 Handset; Serial: 18030801123**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:22.7

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.355$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.9, 7.9, 7.9); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0462 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.417 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.0490 W/kg

SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.031 W/kg

Maximum value of SAR (measured) = 0.0443 W/kg

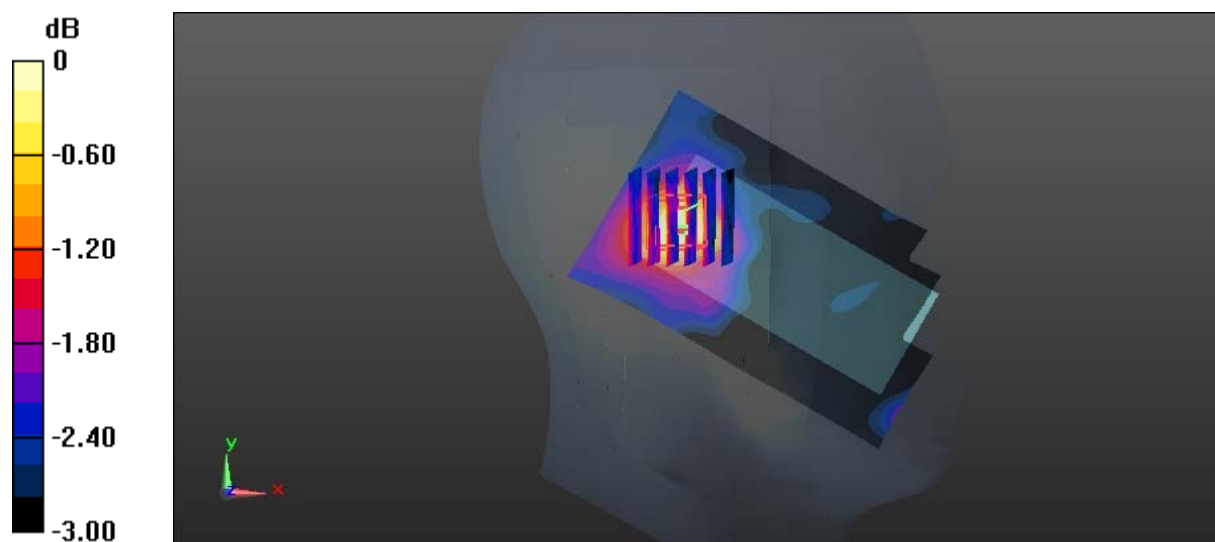

0 dB = 0.0443 W/kg = -13.54 dBW/kg

Test Plot 22#: DECT_Head Left Tilt_Middle Channel_Antenna 0**DUT: DECT Cordless Phone; Type: RTX 8633 Handset; Serial: 18030801123**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:22.7

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.355$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.9, 7.9, 7.9); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0382 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.118 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0430 W/kg

SAR(1 g) = 0.033 W/kg; SAR(10 g) = 0.028 W/kg

Maximum value of SAR (measured) = 0.0377 W/kg

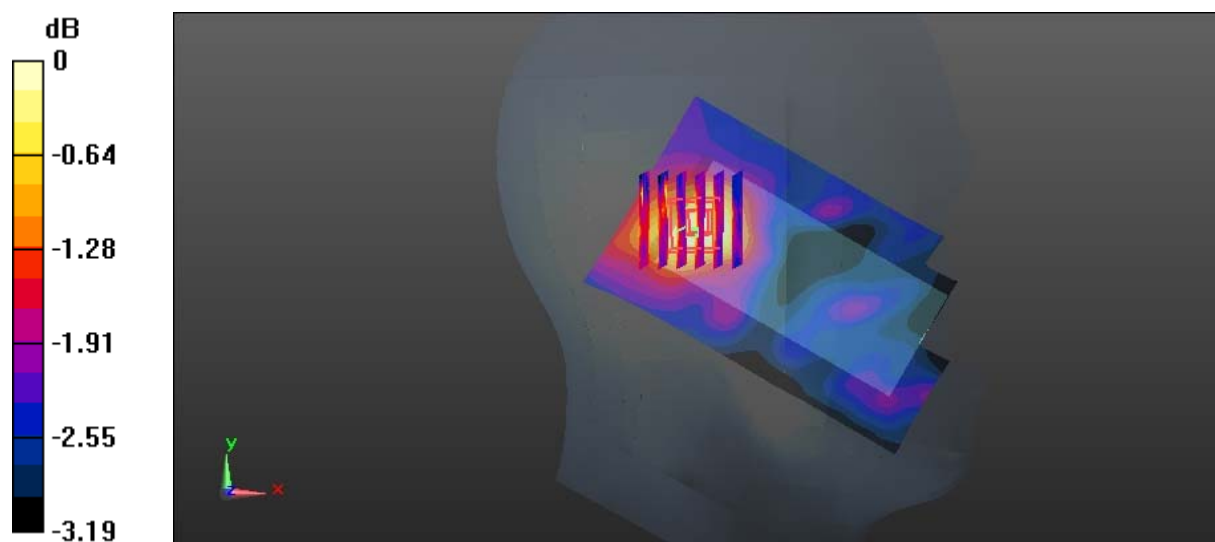

0 dB = 0.0377 W/kg = -14.24 dBW/kg

Test Plot 23#: DECT_Head Right Cheek_Middle Channel_Antenna 0**DUT: DECT Cordless Phone; Type: RTX 8633 Handset; Serial: 18030801123**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:22.7

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.355$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.9, 7.9, 7.9); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0457 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.286 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.0520 W/kg

SAR(1 g) = 0.036 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.0458 W/kg

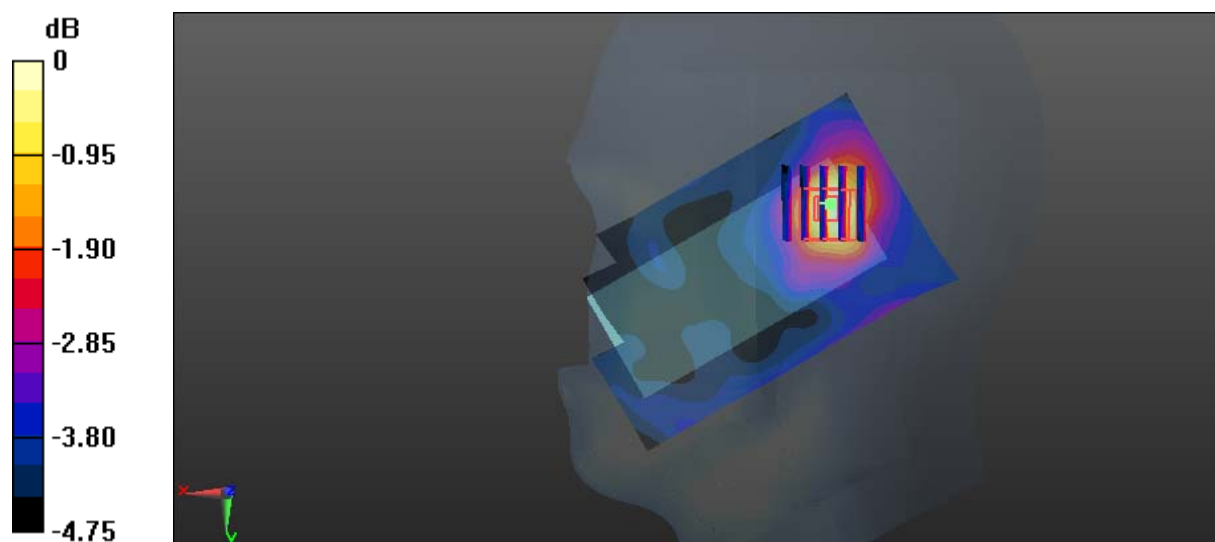

0 dB = 0.0458 W/kg = -13.39 dBW/kg

Test Plot 24#: DECT_Head Right Tilt_Middle Channel_Antenna 0**DUT: DECT Cordless Phone; Type: RTX 8633 Handset; Serial: 18030801123**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:22.7

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.355$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.9, 7.9, 7.9); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0348 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.072 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0450 W/kg

SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.0360 W/kg

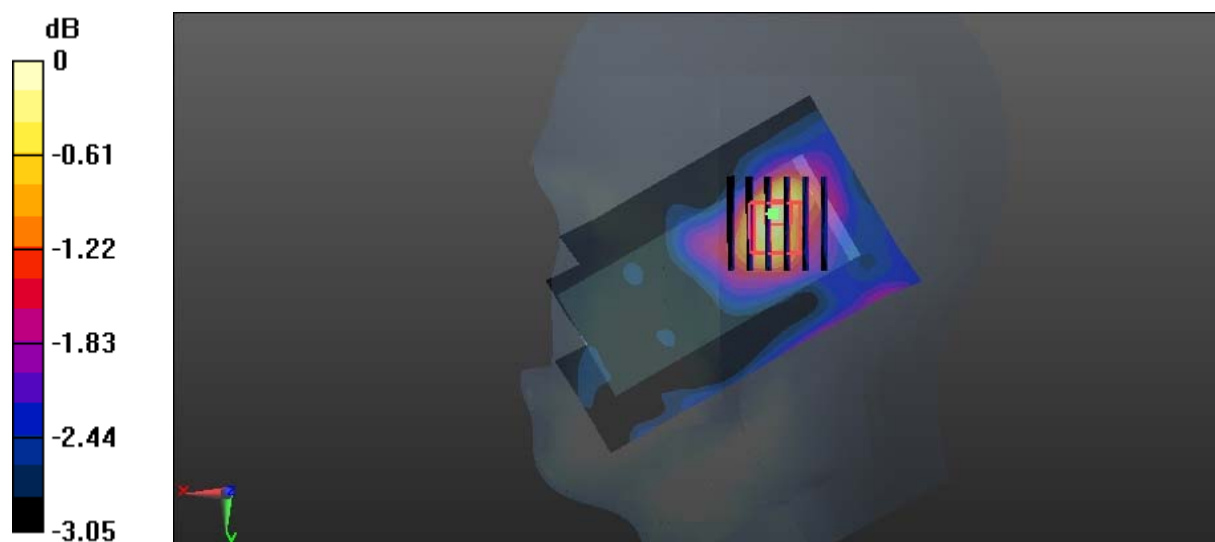

0 dB = 0.0360 W/kg = -14.44 dBW/kg

Test Plot 25#: DECT_Body Back_Middle Channel_Antenna 0**DUT: DECT Cordless Phone; Type: RTX 8633 Handset; Serial: 18030801123**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:22.7

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.544$ S/m; $\epsilon_r = 54.118$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.79, 7.79, 7.79); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0505 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.222 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.0580 W/kg

SAR(1 g) = 0.034 W/kg; SAR(10 g) = 0.024 W/kg

Maximum value of SAR (measured) = 0.0465 W/kg

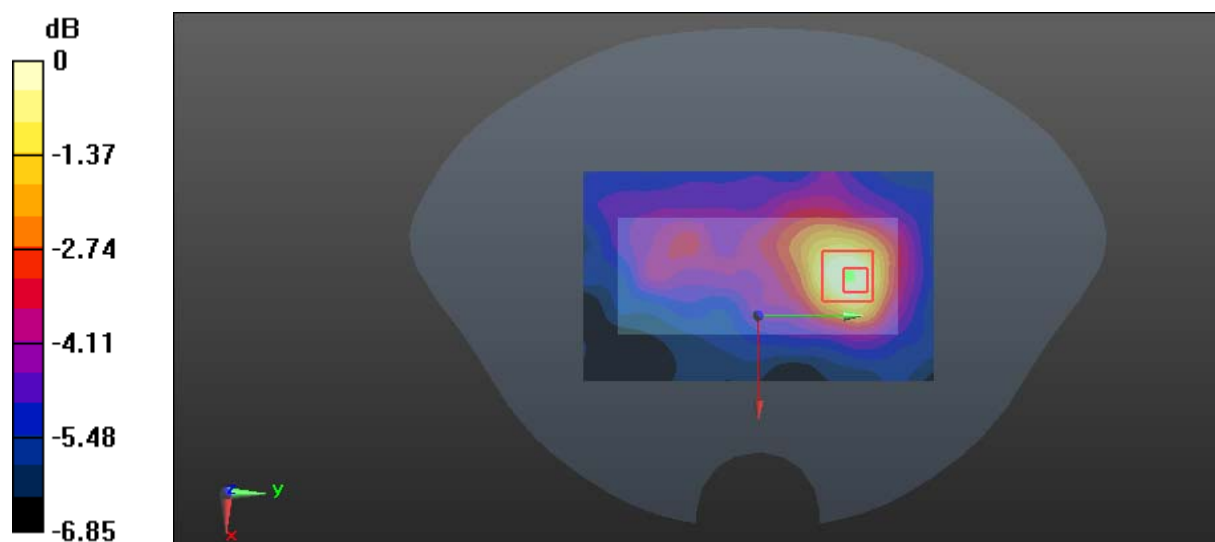

0 dB = 0.0465 W/kg = -13.33 dBW/kg

Test Plot 26#: DECT_Head Left Cheek_Middle Channel_Antenna 1**DUT: DECT Cordless Phone; Type: RTX 8633 Handset; Serial: 18030801123**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:22.7

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.355$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.9, 7.9, 7.9); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0325 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.840 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0350 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.017 W/kg

Maximum value of SAR (measured) = 0.0298 W/kg

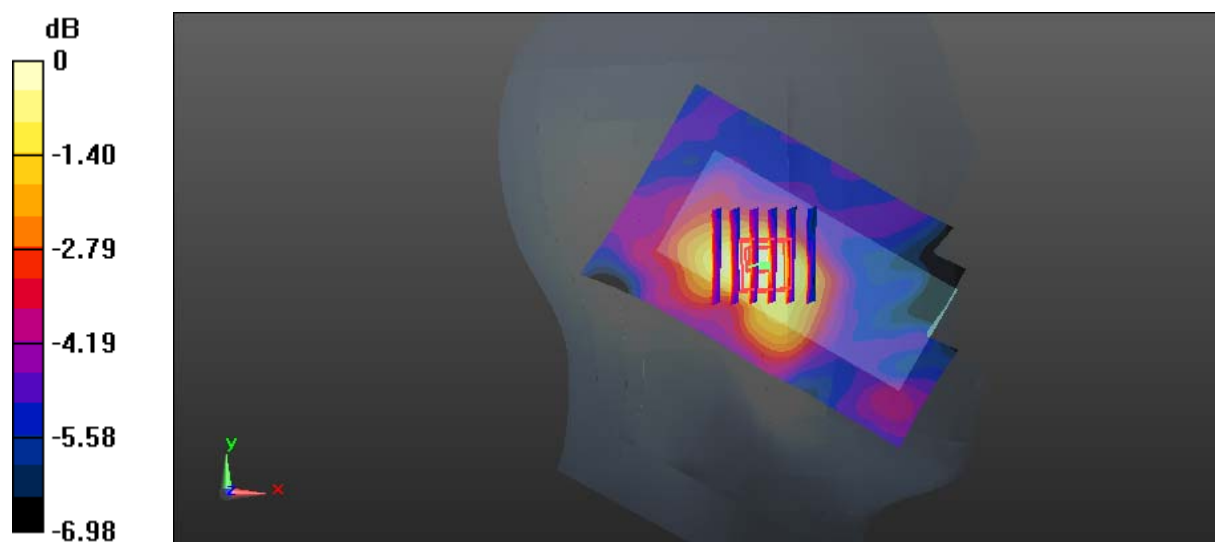

0 dB = 0.0298 W/kg = -15.26 dBW/kg

Test Plot 27#: DECT_Head Left Tilt_Middle Channel_Antenna 1**DUT: DECT Cordless Phone; Type: RTX 8633 Handset; Serial: 18030801123**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:22.7

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.355$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.9, 7.9, 7.9); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0297 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.705 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.0310 W/kg

SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.016 W/kg

Maximum value of SAR (measured) = 0.0268 W/kg

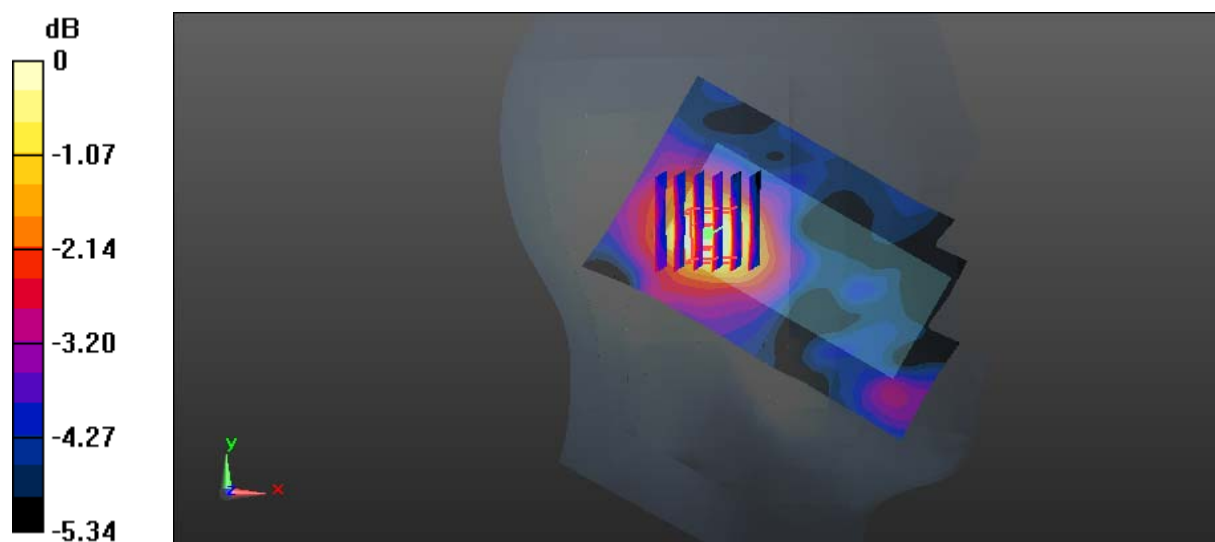

0 dB = 0.0268 W/kg = -15.72 dBW/kg

Test Plot 28#: DECT_Head Right Cheek_Middle Channel_Antenna 1**DUT: DECT Cordless Phone; Type: RTX 8633 Handset; Serial: 18030801123**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:22.7

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.355$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.9, 7.9, 7.9); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0408 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.349 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0510 W/kg

SAR(1 g) = 0.033 W/kg; SAR(10 g) = 0.024 W/kg

Maximum value of SAR (measured) = 0.0427 W/kg

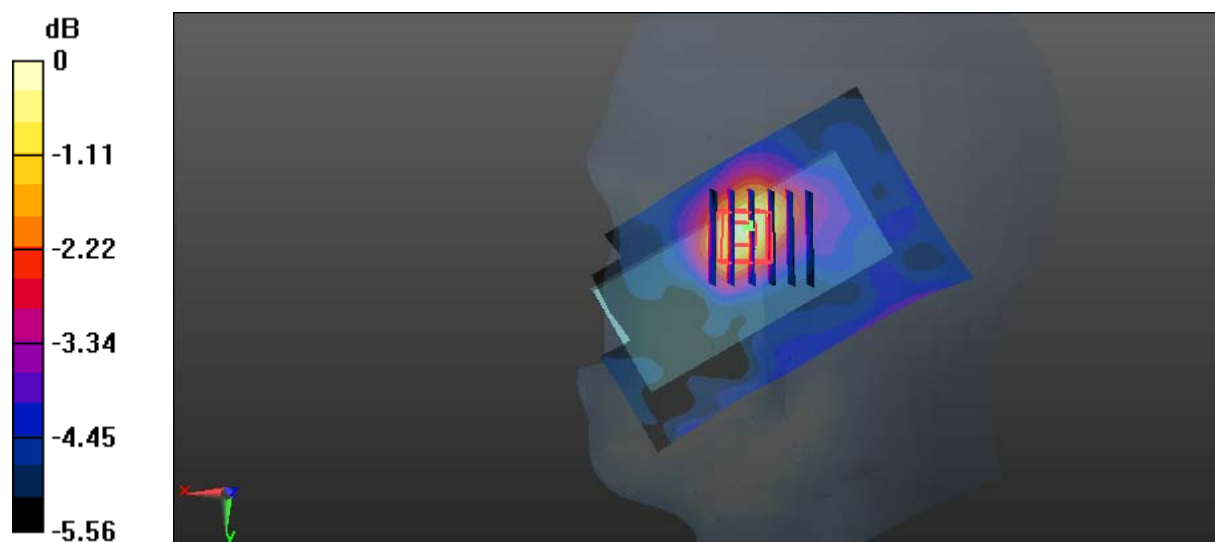

0 dB = 0.0427 W/kg = -13.70 dBW/kg

Test Plot 29#: DECT_Head Right Tilt_Middle Channel_Antenna 1**DUT: DECT Cordless Phone; Type: RTX 8633 Handset; Serial: 18030801123**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:22.7

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.355$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.9, 7.9, 7.9); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0447 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.535 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.0560 W/kg

SAR(1 g) = 0.030 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.0429 W/kg

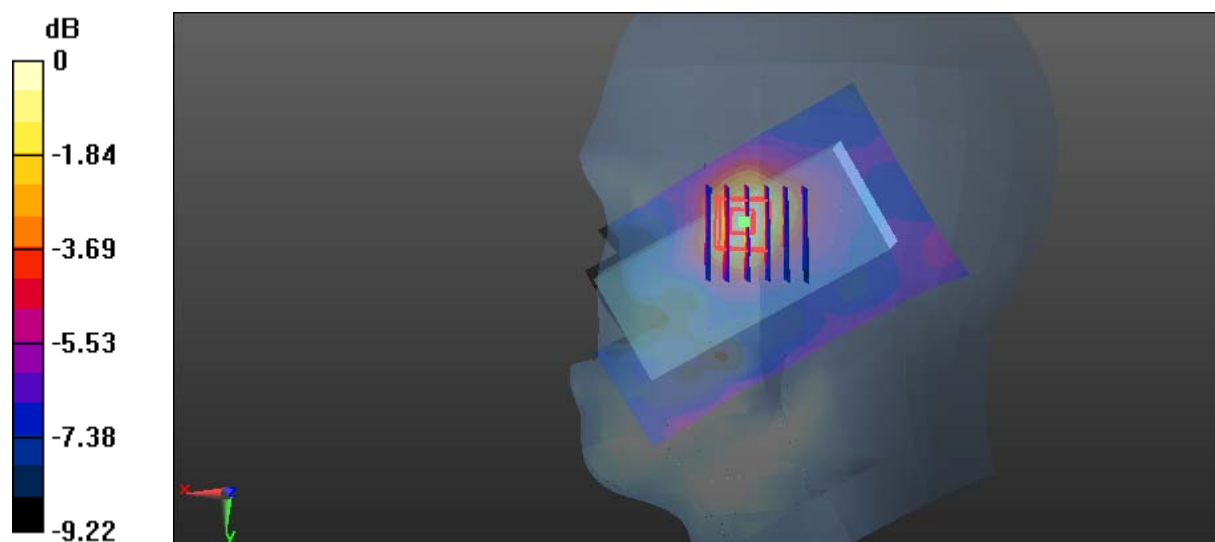

0 dB = 0.0429 W/kg = -13.68 dBW/kg

Test Plot 30#: DECT_Body Back_Middle Channel_Antenna 1**DUT: DECT Cordless Phone; Type: RTX 8633 Handset; Serial: 18030801123**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:22.7

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.544$ S/m; $\epsilon_r = 54.118$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.79, 7.79, 7.79); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0254 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.606 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.0260 W/kg

SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.017 W/kg

Maximum value of SAR (measured) = 0.0234 W/kg

