

**FCC PART 15.247
TEST REPORT**

For

RTX Hong Kong Ltd.

8/F Corporation Square, 8 Lam Lok Street, Kowloon Bay, Hong Kong

FCC ID: T7HHT7144

Report Type: Original Report	Product Type: Wired Headset
Report Number: RSZ171026004-00	
Report Date: 2017-11-08	
Reviewed By: RF Engineer	Rocky Kang <i>Rocky Kang</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP* or any agency of the Federal Government. * This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk “*”.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
TEST EQUIPMENT LIST	9
FCC§15.247 (i), §1.1307 (b) (1) &§2.1093 – RF EXPOSURE	10
APPLICABLE STANDARD	10
FCC §15.203 – ANTENNA REQUIREMENT	11
APPLICABLE STANDARD	11
ANTENNA CONNECTOR CONSTRUCTION	11
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	12
APPLICABLE STANDARD	12
EUT SETUP.....	12
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE	12
CORRECTED FACTOR & MARGIN CALCULATION	13
TEST RESULTS SUMMARY	13
TEST DATA	13
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	16
APPLICABLE STANDARD	16
EUT SETUP	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	17
TEST PROCEDURE	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	17
TEST RESULTS SUMMARY	17
TEST DATA	18
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	27
APPLICABLE STANDARD	27
TEST PROCEDURE	27
TEST DATA	27

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....	33
APPLICABLE STANDARD	33
TEST PROCEDURE	33
TEST DATA	33
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	39
APPLICABLE STANDARD	39
TEST PROCEDURE	39
TEST DATA	39
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	42
APPLICABLE STANDARD	42
TEST PROCEDURE	42
TEST DATA	42
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT.....	58
APPLICABLE STANDARD	58
TEST PROCEDURE	58
TEST DATA	58
FCC §15.247(d) - BAND EDGES TESTING	59
APPLICABLE STANDARD	59
TEST PROCEDURE	59
TEST DATA	59

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *RTX Hong Kong Ltd.* 's product, model number: *RTX7144 (FCC ID: T7HHT7144)* or the "EUT" in this report was *Wired Headset*, which was measured approximately: 178 mm (L) × 149 mm (W) × 51 mm (H), rated with input voltage: DC 5V from USB port.

Notes: This series products model: RTX7143 and RTX7144 are identical; they have the same structure, PCB, Material and function. Model RTX7144 was selected for fully testing, the detailed information can be referred to the declaration which was stated and guaranteed by the applicant.

**All measurement and test data in this report was gathered from production sample serial number: 1702319 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2017-10-26.*

Objective

This test report is prepared on behalf of *RTX Hong Kong Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No related submittal(s)/grant(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter	uncertainty
Occupied Channel Bandwidth	±5%
RF Output Power with Power meter	±0.5dB
RF conducted test with spectrum	±1.5dB
AC Power Lines Conducted Emissions	±1.95dB
All emissions, radiated	±4.88dB
Temperature	±3℃
Humidity	±6%
Supply voltages	±0.4%

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 382179, the FCC Designation No. : CN5001.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

EUT Exercise Software

“RTX AEI PORT SERVER” was used.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
HP	Laptop	CQ45-m02TX	N/A
HP	Laptop Adapter	PPP012H-S	N/A

External I/O Cable

Cable Description	Length (m)	From Port	To
Un-Shielding Un-Detachable USB Cable	2.5	EUT	Laptop
Un-Shielding Un-Detachable DC Cable	1.5	Laptop Adapter	Laptop

Block Diagram of Test Setup

For conducted emission:

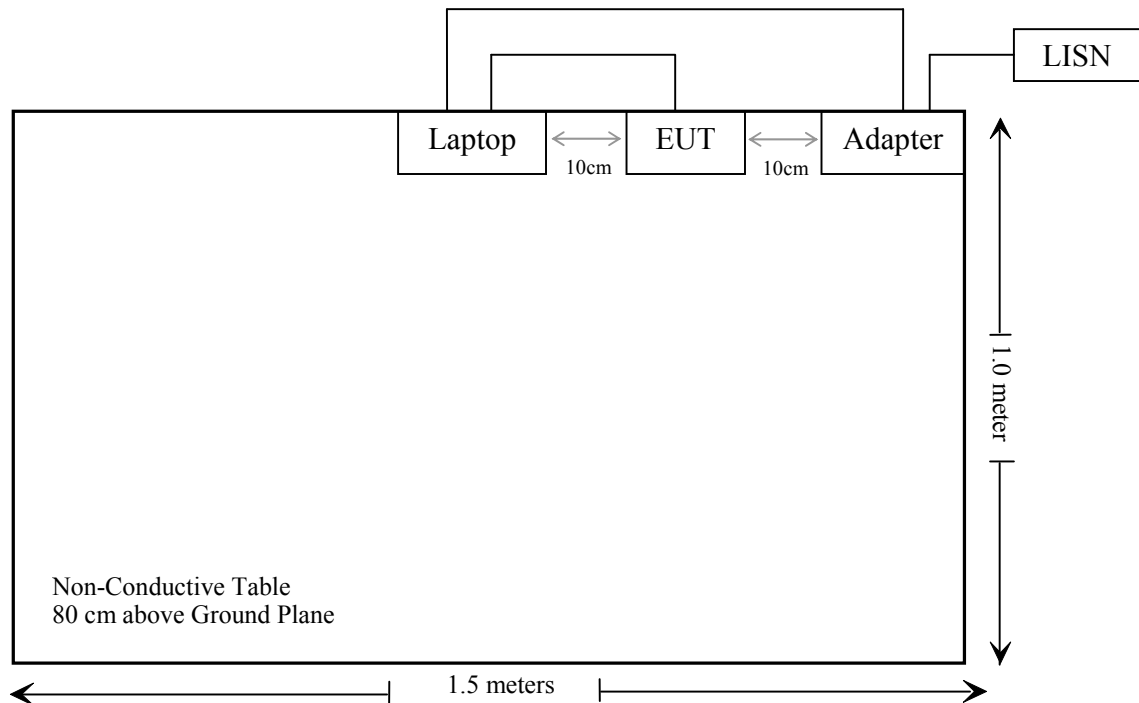

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2017-08-04	2018-08-04
Rohde & Schwarz	LISN	ENV216	3560.6650.12-101613-Yb	2016-12-07	2017-12-07
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2017-05-21	2017-11-19
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
N/A	Conducted Emission Cable	N/A	UF A210B-1-0720-504504	2017-05-12	2017-11-12
Radiated Emission Test					
Sunol Sciences	Horn Antenna	DRH-118	A052604	2014-12-29	2017-12-28
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2017-04-24	2018-04-24
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2017-02-14	2018-02-14
HP	Amplifier	HP8447E	1937A01046	2017-05-21	2017-11-19
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2014-12-17	2017-12-16
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2016-12-07	2017-12-07
Ducommun technologies	RF Cable	UFA210A-1-4724-30050U	MFR64369 223410-001	2017-05-21	2017-11-19
Ducommun technologies	RF Cable	104PEA	218124002	2017-05-21	2017-11-19
Ducommun technologies	RF Cable	RG-214	1	2017-05-21	2017-11-19
Ducommun technologies	RF Cable	RG-214	2	2017-05-22	2017-11-22
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-04	2014-12-29	2017-12-28
Ducommun Technologies	Pre-amplifier	ALN-22093530-01	991373-01	2017-08-03	2018-08-03
Sinoscite	Band Reject Filter	BSF2402-2480MN-0898-001	N/A	2017-05-21	2018-05-21
RF Conducted Test					
Agilent	P-Series Power Meter	N1912A	MY5000448	2016-12-05	2017-12-05
Agilent	Wideband Power Sensor	N1921A	MY54210016	2016-12-05	2017-12-05
WEINSCHTEL	10dB Attenuator	N/A	N/A	2017-05-23	2017-11-22
Rohde & Schwarz	SPECTRUM ANALYZER	FSU26	200120	2016-12-05	2017-12-05
Ducommun technologies	RF Cable	RG-214	3	2017-05-22	2017-11-22

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i), §1.1307 (b) (1) &§2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot$

$[\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.

2. Power and distance are rounded to the nearest mW and mm before calculation.

3. The result is rounded to one decimal place for comparison.

4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

For worst case:

Frequency (MHz)	Maximum conducted Tune-up power		Calculated Distance (mm)	Calculated value	Threshold (1-g SAR)	SAR Test Exclusion
	Power (dBm)	Power (mW)				
2480	3.5	2.24	5	0.71	3.0	Yes

Result: No SAR test is required

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna arrangement, which was permanently attached and the antenna gain is 1.0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup



Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207,

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{\text{lim}} + U_{\text{cispr}}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.


Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Vincent Zheng on 2017-11-01.

EUT operation mode: Transmitting

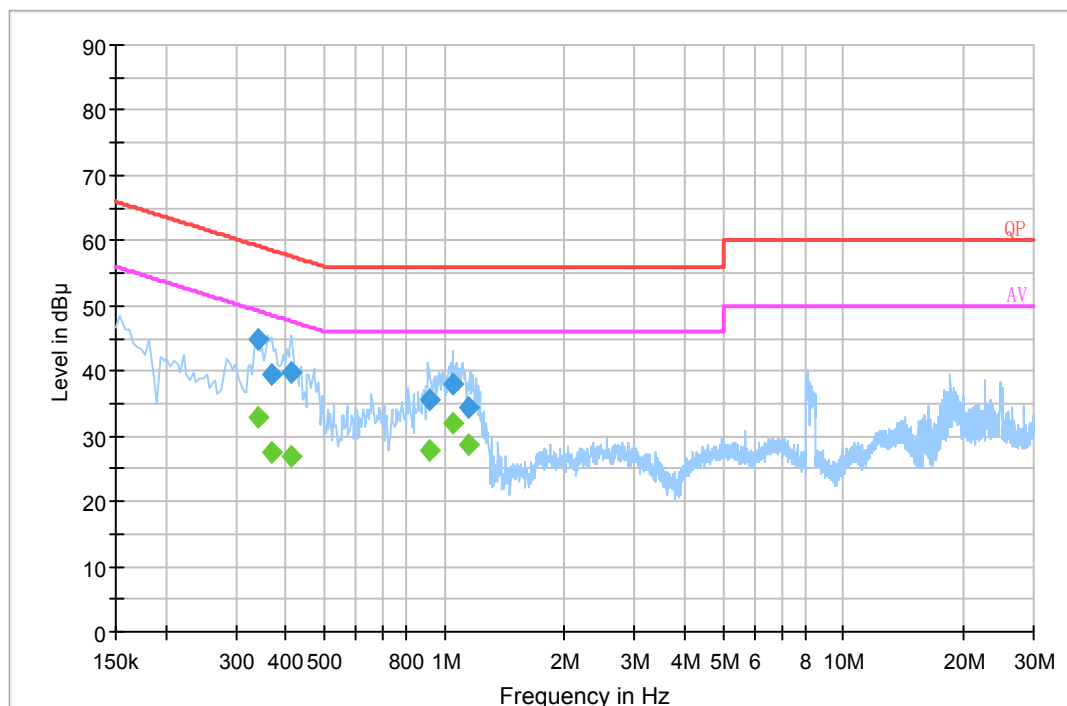AC 120V/60 Hz, Line

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.340930	44.9	20.2	59.2	14.3	QP
0.368450	39.6	20.2	58.5	18.9	QP
0.411790	39.7	20.2	57.6	17.9	QP
0.916350	35.6	20.1	56.0	20.4	QP
1.046250	38.0	20.1	56.0	18	QP
1.148630	34.5	20.1	56.0	21.5	QP
0.340930	33.0	20.2	49.2	16.2	Ave.
0.368450	27.4	20.2	48.5	21.1	Ave.
0.411790	26.8	20.2	47.6	20.8	Ave.
0.916350	27.9	20.1	46.0	18.1	Ave.
1.046250	32.0	20.1	46.0	14	Ave.
1.148630	28.7	20.1	46.0	17.3	Ave.

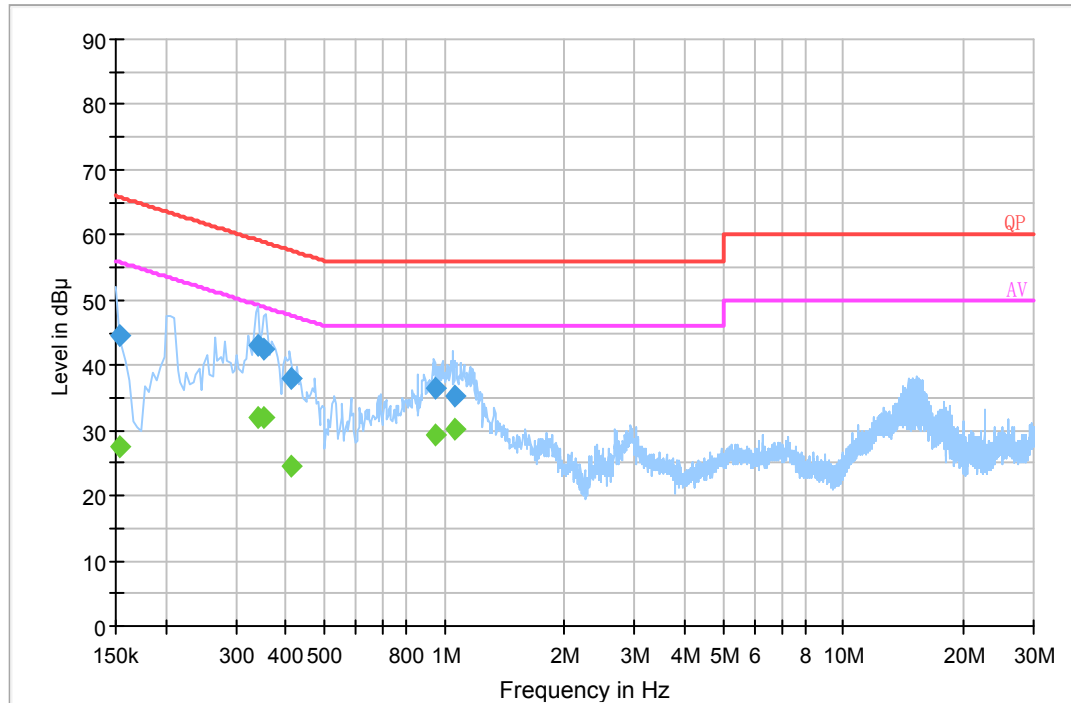AC 120V/60 Hz, Neutral

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.154000	44.5	20.2	65.8	21.3	QP
0.340870	43.2	20.2	59.2	16.0	QP
0.352630	42.4	20.2	58.9	16.5	QP
0.411850	38.0	20.2	57.6	19.6	QP
0.943870	36.3	20.1	56.0	19.7	QP
1.065750	35.2	20.1	56.0	20.8	QP
0.154000	27.6	20.2	55.8	28.2	Ave.
0.340870	32.0	20.2	49.2	17.2	Ave.
0.352630	31.9	20.2	48.9	17.0	Ave.
0.411850	24.4	20.2	47.6	23.2	Ave.
0.943870	29.5	20.1	46.0	16.5	Ave.
1.065750	30.1	20.1	46.0	15.9	Ave.

Note:

- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS**Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	Peak
	1 MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(L_m)} \leq L_{\text{lim}} + U_{\text{cispr}}$$

In BAEL, $U_{(L_m)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data**Environmental Conditions**


Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Vincent Zheng on 2017-11-01.

EUT operation mode: Transmitting (Scan with GFSK, $\pi/4$ -DQPSK, 8-DPSK mode, the worst case was GFSK mode)

For Model RTX7144:

30MHz – 1 GHz:

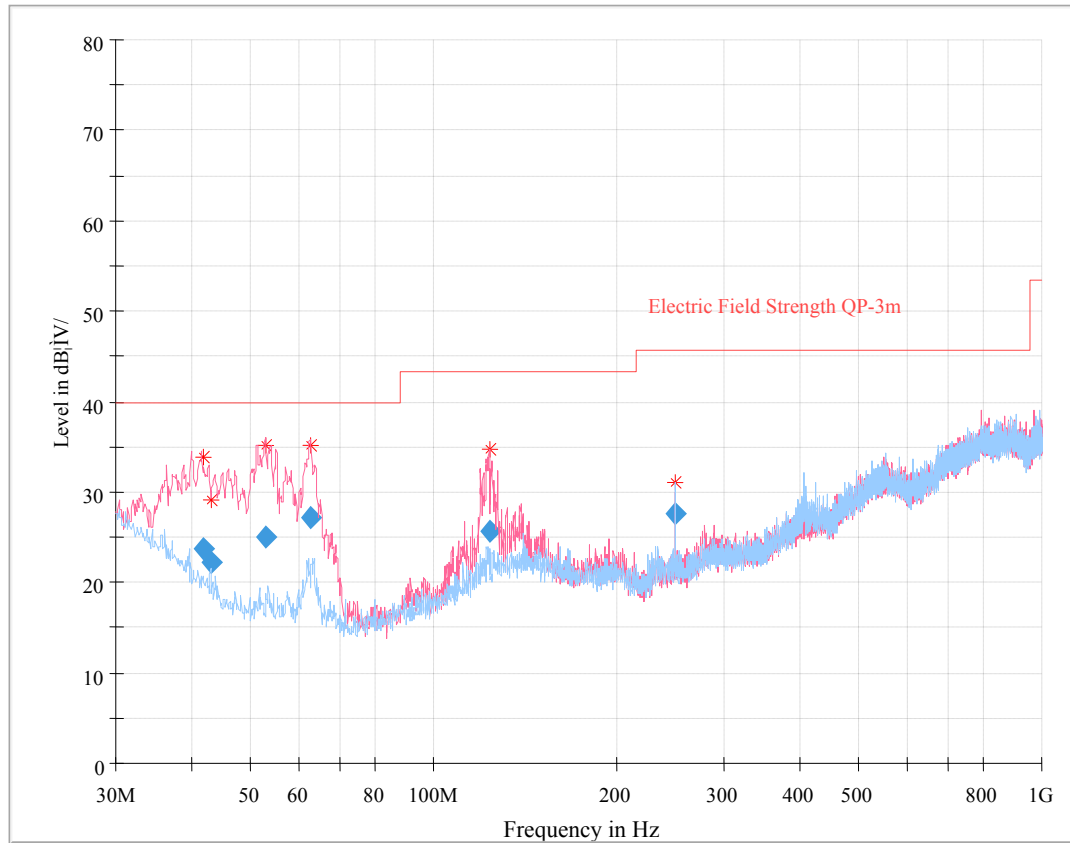


Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBuV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H / V)			Limit (dBuV/m)	Margin (dB)
41.953125	31.4	QP	282.0	108.0	V	-7.6	23.80	40.00	16.20
43.027875	30.7	QP	126.0	211.0	V	-8.4	22.30	40.00	17.70
52.946375	36.16	QP	357.0	105.0	V	-11.2	24.96	40.00	15.04
62.991750	39.16	QP	53.0	100.0	V	-11.9	27.26	40.00	12.74
123.582000	31.17	QP	274.0	109.0	V	-5.6	25.57	43.50	17.93
249.642375	32.23	QP	232.0	109.0	H	-4.6	27.63	46.00	18.37


1000 MHz - 25 GHz:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2402 MHz)									
2402.00	58.11	PK	319	1.3	H	33.92	92.03	/	/
2402.00	46.89	Ave.	319	1.3	H	33.92	80.81	/	/
2402.00	56.34	PK	201	2.1	V	33.92	90.26	/	/
2402.00	44.93	Ave.	201	2.1	V	33.92	78.85	/	/
2354.67	26.89	PK	33	1.3	H	33.92	60.81	74	13.19
2354.67	13.11	Ave.	33	1.3	H	33.92	47.03	54	6.97
2376.33	27.28	PK	168	1.4	H	33.92	61.20	74	12.80
2376.33	13.46	Ave.	168	1.4	H	33.92	47.38	54	6.62
2486.21	26.78	PK	155	1.8	H	34.08	60.86	74	13.14
2486.21	13.24	Ave.	155	1.8	H	34.08	47.32	54	6.68
4804.00	45.36	PK	285	2.3	H	5.84	51.20	74	22.80
4804.00	31.58	Ave.	285	2.3	H	5.84	37.42	54	16.58
Middle Channel (2441 MHz)									
2441.00	60.24	PK	99	1.2	H	33.92	94.16	/	/
2441.00	50.47	Ave.	99	1.2	H	33.92	84.39	/	/
2441.00	57.94	PK	188	1.6	V	33.92	91.86	/	/
2441.00	48.13	Ave.	188	1.6	V	33.92	82.05	/	/
2334.28	27.34	PK	145	1.6	H	33.83	61.17	74	12.83
2334.28	13.55	Ave.	145	1.6	H	33.83	47.38	54	6.62
2356.74	26.94	PK	113	1.2	H	33.92	60.86	74	13.14
2356.74	13.12	Ave.	113	1.2	H	33.92	47.04	54	6.96
2486.92	27.46	PK	165	1.7	H	34.08	61.54	74	12.46
2486.92	13.68	Ave.	165	1.7	H	34.08	47.76	54	6.24
4882.00	46.92	PK	138	2.4	H	6.21	53.13	74	20.87
4882.00	33.21	Ave.	138	2.4	H	6.21	39.42	54	14.58
High Channel (2480 MHz)									
2480.00	62.32	PK	100	2.1	H	34.08	96.40	/	/
2480.00	50.86	Ave.	100	2.1	H	34.08	84.94	/	/
2480.00	60.14	PK	16	2.3	V	34.08	94.22	/	/
2480.00	49.93	Ave.	16	2.3	V	34.08	84.01	/	/
2375.28	26.96	PK	135	2.4	H	33.92	60.88	74	13.12
2375.28	13.24	Ave.	135	2.4	H	33.92	47.16	54	6.84
2483.65	27.48	PK	68	2.1	H	34.08	61.56	74	12.44
2483.65	13.66	Ave.	68	2.1	H	34.08	47.74	54	6.26
2485.78	27.27	PK	324	1.7	H	34.08	61.35	74	12.65
2485.78	13.49	Ave.	324	1.7	H	34.08	47.57	54	6.43
4960.00	47.68	PK	153	1.8	H	7.82	55.50	74	18.50
4960.00	33.64	Ave.	153	1.8	H	7.82	41.46	54	12.54


1 GHz- 18 GHz, Middle Channel – H

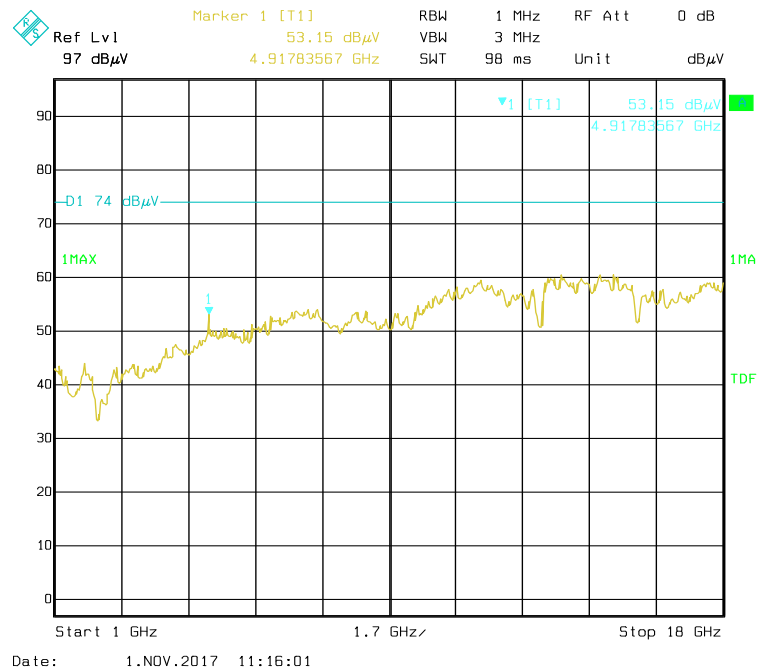


1 GHz- 18 GHz, Middle Channel – V

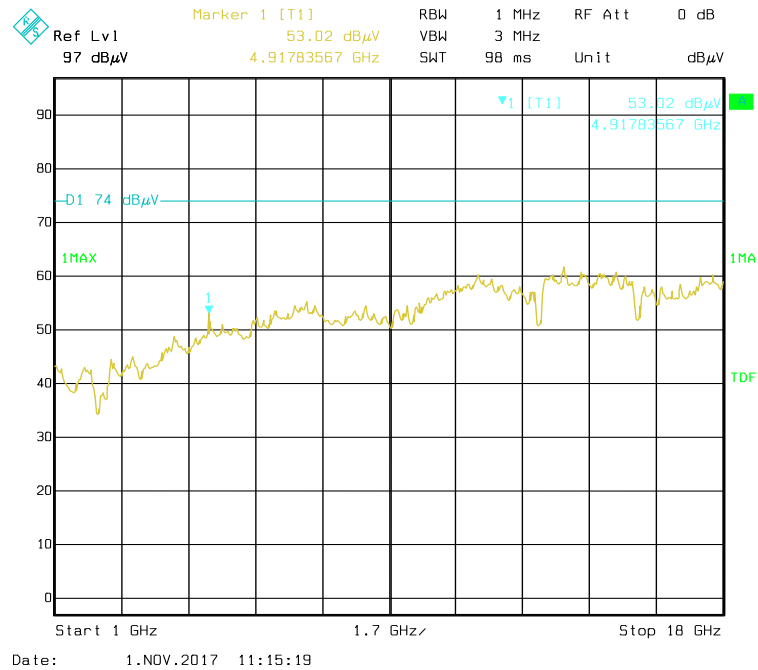

18 GHz- 25 GHz, Middle Channel – H

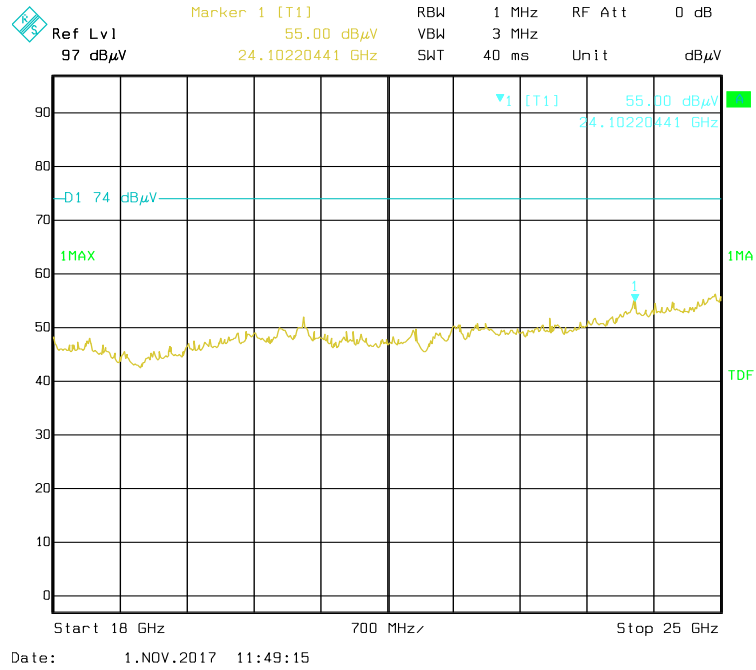


18 GHz- 25 GHz, Middle Channel – V

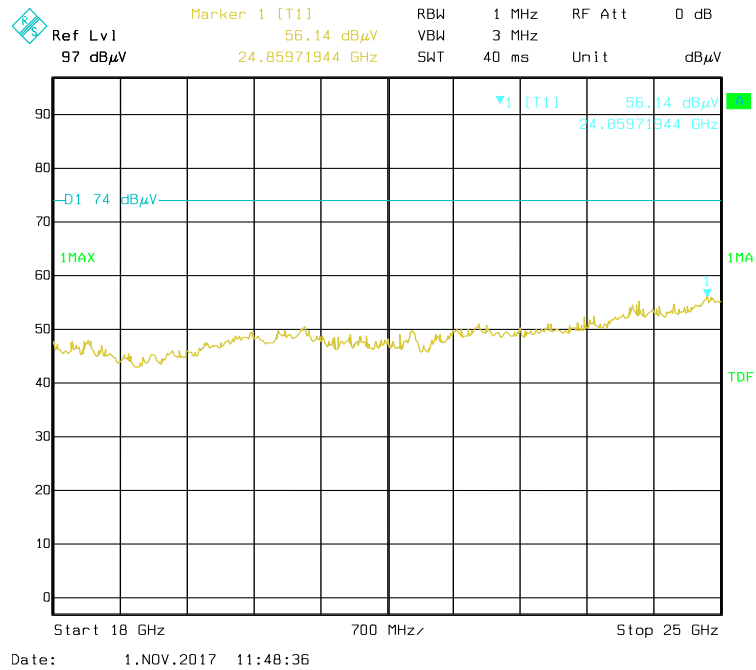

For Model RTX7143:

30 MHz - 1GHz:

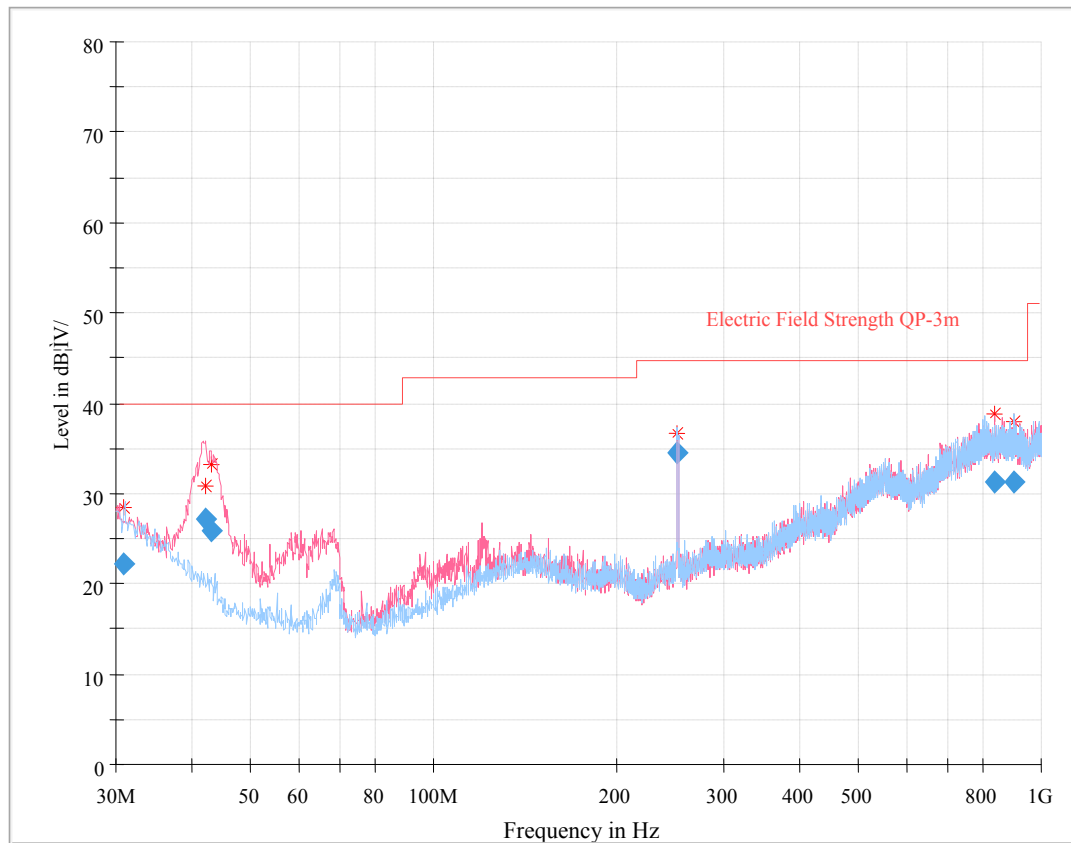

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
30.864375	22.13	193.0	H	103.0	-0.3	40.00	17.87
42.170750	27.17	107.0	V	86.0	-7.7	40.00	12.83
42.998375	25.81	100.0	V	77.0	-8.4	40.00	14.19
251.137250	34.40	141.0	H	69.0	-4.6	46.00	11.60
838.056750	31.20	225.0	V	0.0	9.0	46.00	14.80
900.354125	31.35	353.0	H	318.0	9.7	46.00	14.65

Note:

Corrected Amplitude = Corrected Factor + Reading

Corrected Factor = Antenna factor (RX) + cable loss - amplifier factor



Margin = Limit - Corr. Amplitude

1 GHz - 25 GHz:



Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2402 MHz)									
2402.00	57.21	PK	326	1.1	H	33.92	91.13	/	/
2402.00	46.25	Ave.	326	1.1	H	33.92	80.17	/	/
2402.00	55.95	PK	247	1.3	V	33.92	89.87	/	/
2402.00	44.84	Ave.	247	1.3	V	33.92	78.76	/	/
2383.42	27.99	PK	230	1.7	H	33.92	61.91	74	12.09
2383.42	13.78	Ave.	230	1.7	H	33.92	47.70	54	6.30
2370.84	27.98	PK	215	1.3	H	33.92	61.90	74	12.10
2370.84	13.79	Ave.	215	1.3	H	33.92	47.71	54	6.29
2490.14	27.14	PK	198	1.8	H	34.08	61.22	74	12.78
2490.14	13.31	Ave.	198	1.8	H	34.08	47.39	54	6.61
4824.00	44.10	PK	310	1.8	H	5.84	49.94	74	24.06
4824.00	31.05	Ave.	310	1.8	H	5.84	36.89	54	17.11
Middle Channel (2441 MHz)									
2441.00	63.73	PK	43	1.4	H	33.92	97.65	/	/
2441.00	53	Ave.	43	1.4	H	33.92	86.92	/	/
2441.00	61.57	PK	159	1.7	V	33.92	95.49	/	/
2441.00	51.16	Ave.	159	1.7	V	33.92	85.08	/	/
2370.56	27.75	PK	224	2.0	H	33.92	61.67	74	12.33
2370.56	13.78	Ave.	224	2.0	H	33.92	47.70	54	6.30
2374.64	27.76	PK	289	1.9	H	33.92	61.68	74	12.32
2374.64	13.77	Ave.	289	1.9	H	33.92	47.69	54	6.31
2490.14	26.65	PK	337	1.2	H	34.08	60.73	74	13.27
2490.14	13.33	Ave.	337	1.2	H	34.08	47.41	54	6.59
4882.00	47.39	PK	5	1.5	H	6.21	53.60	74	20.40
4882.00	33.27	Ave.	5	1.5	H	6.21	39.48	54	14.52
High Channel (2480 MHz)									
2480.00	64.27	PK	315	2.1	H	34.08	98.35	/	/
2480.00	53.13	Ave.	315	2.1	H	34.08	87.21	/	/
2480.00	62.94	PK	151	2.2	V	34.08	97.02	/	/
2480.00	52.15	Ave.	151	2.2	V	34.08	86.23	/	/
2370.72	27.47	PK	288	2.1	H	33.92	61.39	74	12.61
2370.72	13.75	Ave.	288	2.1	H	33.92	47.67	54	6.33
2496.32	27.18	PK	139	2.3	H	34.08	61.26	74	12.74
2496.32	13.56	Ave.	139	2.3	H	34.08	47.64	54	6.36
2485.61	27.84	PK	353	2.3	H	34.08	61.92	74	12.08
2485.61	13.72	Ave.	353	2.3	H	34.08	47.80	54	6.20
4960.00	48.33	PK	169	1.6	H	7.82	56.15	74	17.85
4960.00	34.10	Ave.	169	1.6	H	7.82	41.92	54	12.08

Prescan with worst case for 2441 MHz

Horizontal

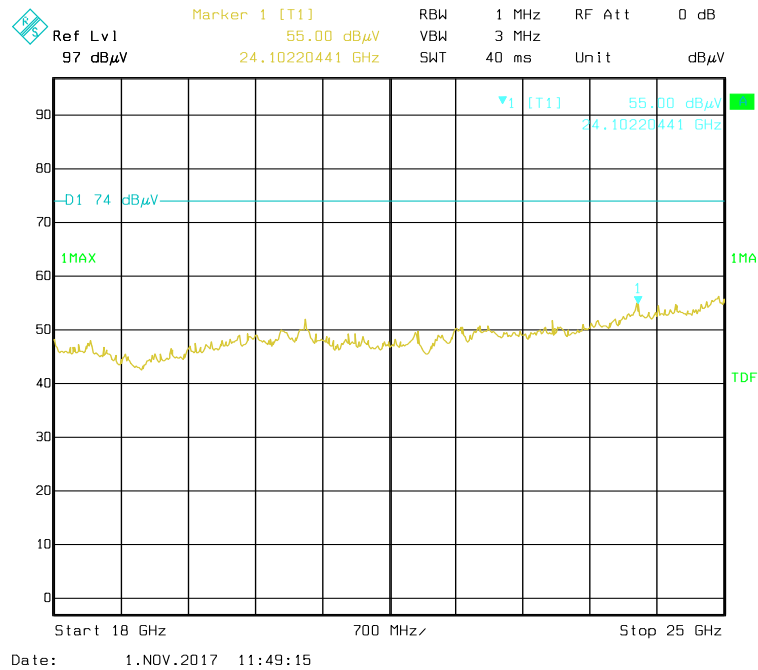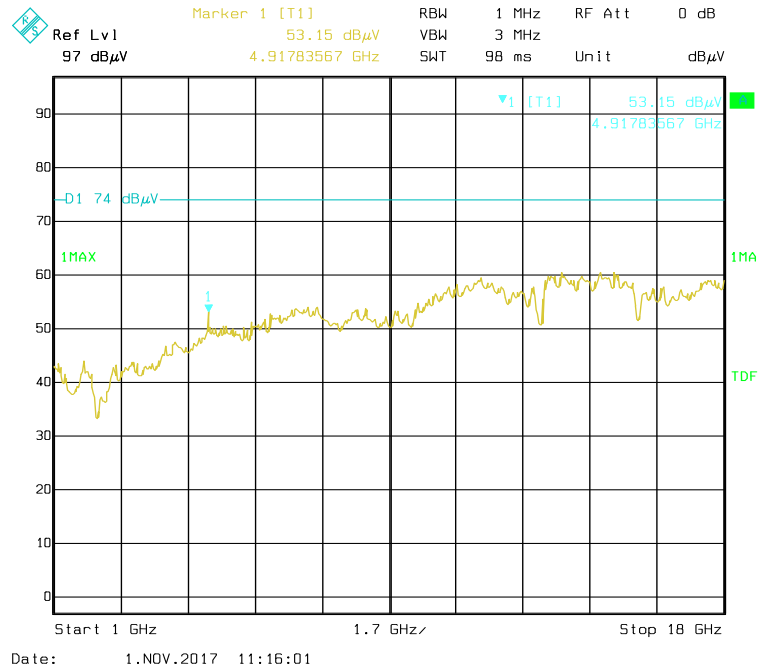

Vertical

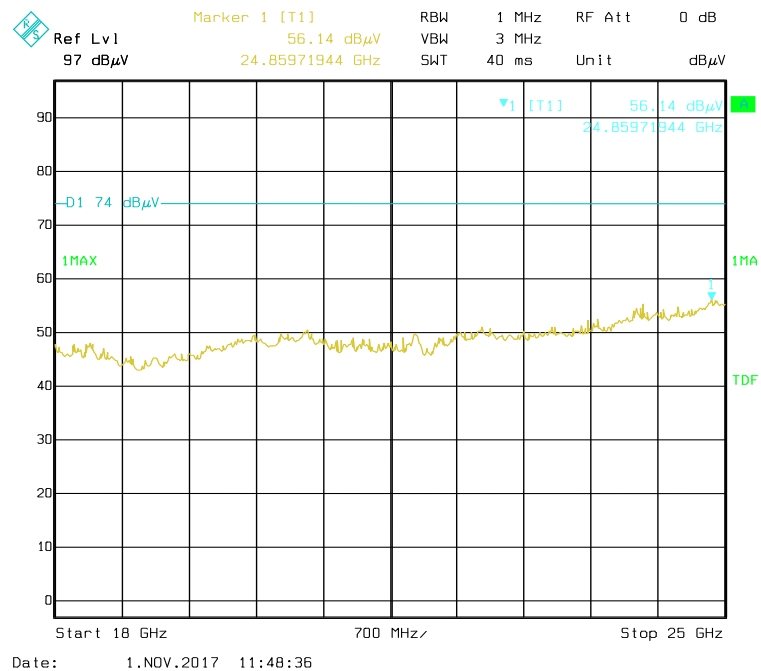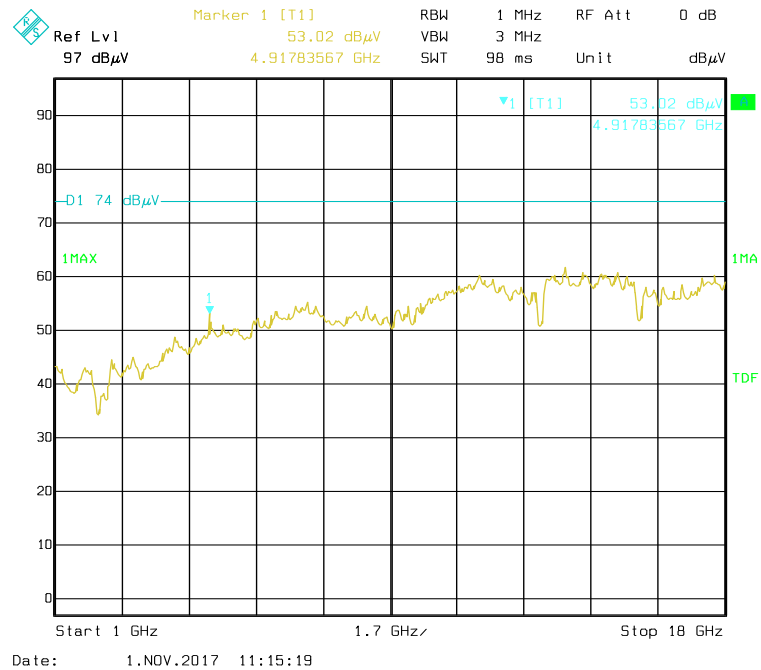

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected Amplitude

The other spurious emission which is 20dB to the limit was not recorded.

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Vincent Zheng on 2017-10-30.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	≥Limit (MHz)	Result
BDR (GFSK)	Low	2402	1.000	0.615	Pass
	Middle	2441	1.005	0.631	Pass
	High	2480	1.000	0.626	Pass
EDR (π/4-DQPSK)	Low	2402	1.005	0.856	Pass
	Middle	2441	1.005	0.862	Pass
	High	2480	1.000	0.865	Pass
EDR (8DPSK)	Low	2402	1.005	0.846	Pass
	Middle	2441	1.005	0.843	Pass
	High	2480	1.005	0.843	Pass


Note: Limit = 20 dB bandwidth *2/3

BDR (GFSK): Low Channel

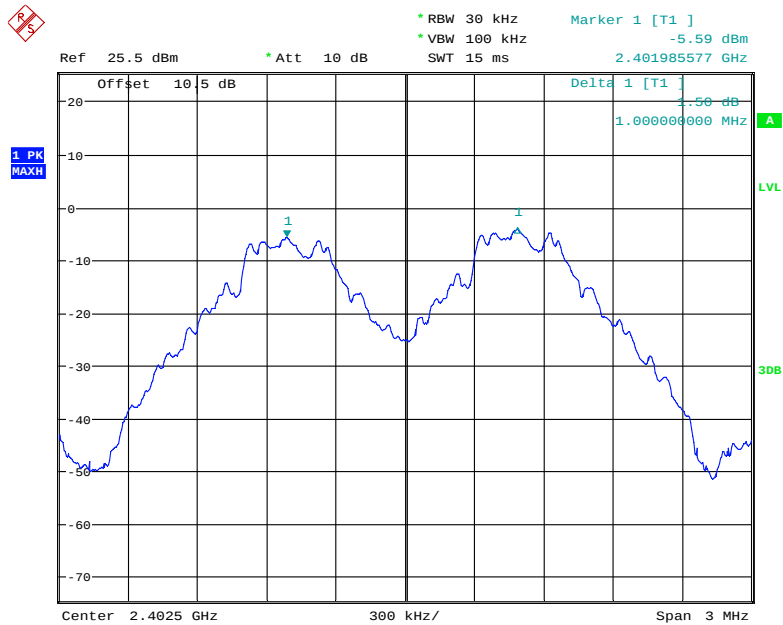


Date: 30.OCT.2017 18:43:14

BDR (GFSK): Middle Channel

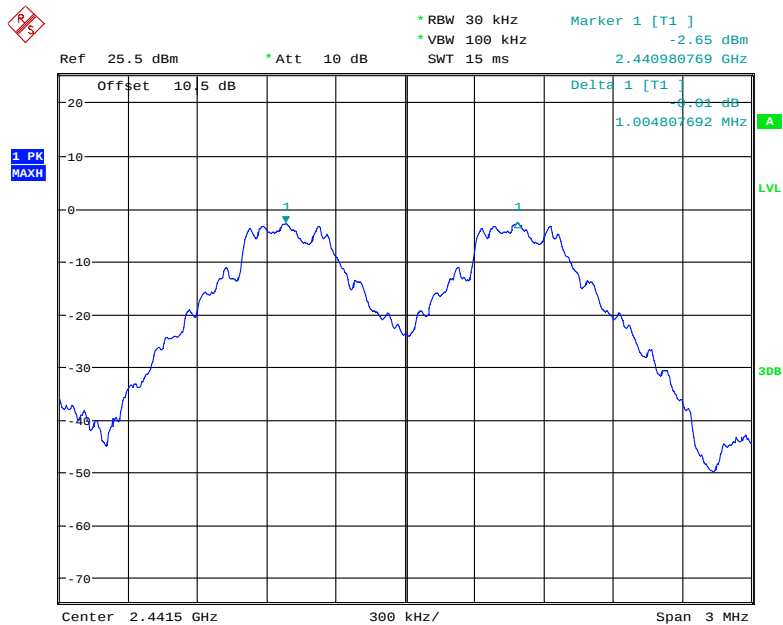


Date: 30.OCT.2017 18:44:07

BDR (GFSK): High Channel

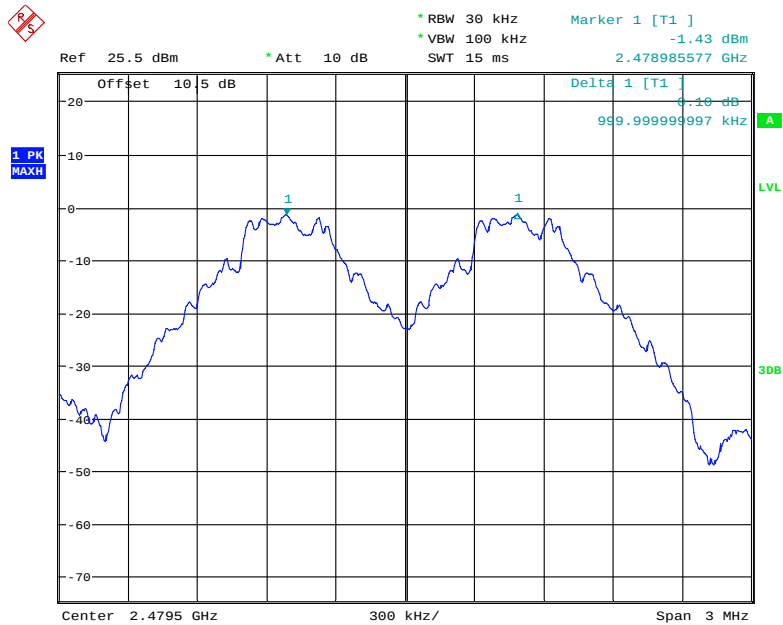


Date: 30.OCT.2017 18:45:06

EDR ($\pi/4$ -DQPSK): Low Channel

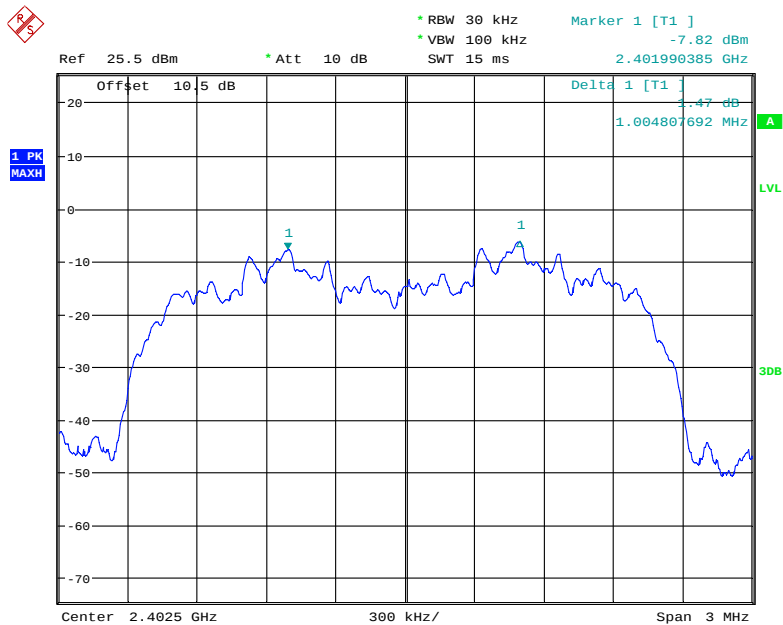


Date: 30.OCT.2017 18:41:53

EDR ($\pi/4$ -DQPSK): Middle Channel

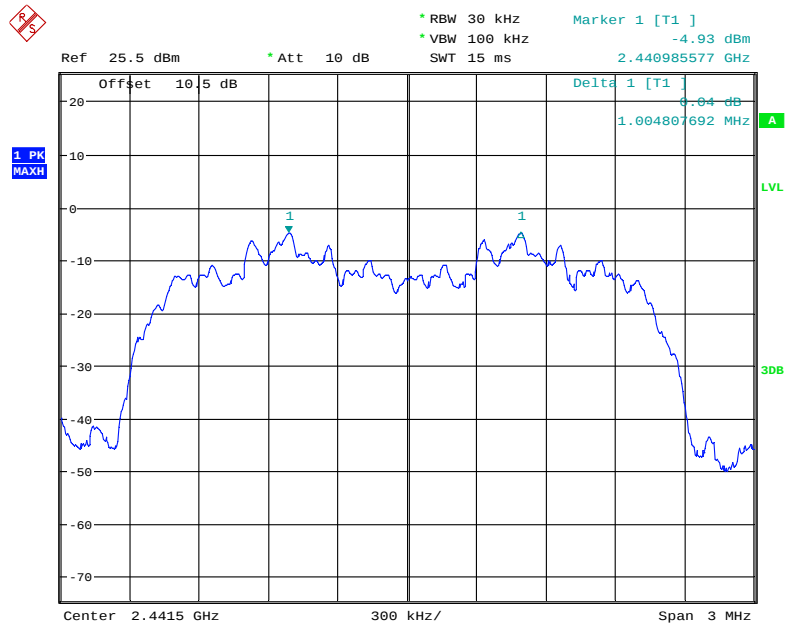


Date: 30.OCT.2017 18:41:07

EDR ($\pi/4$ -DQPSK): High Channel

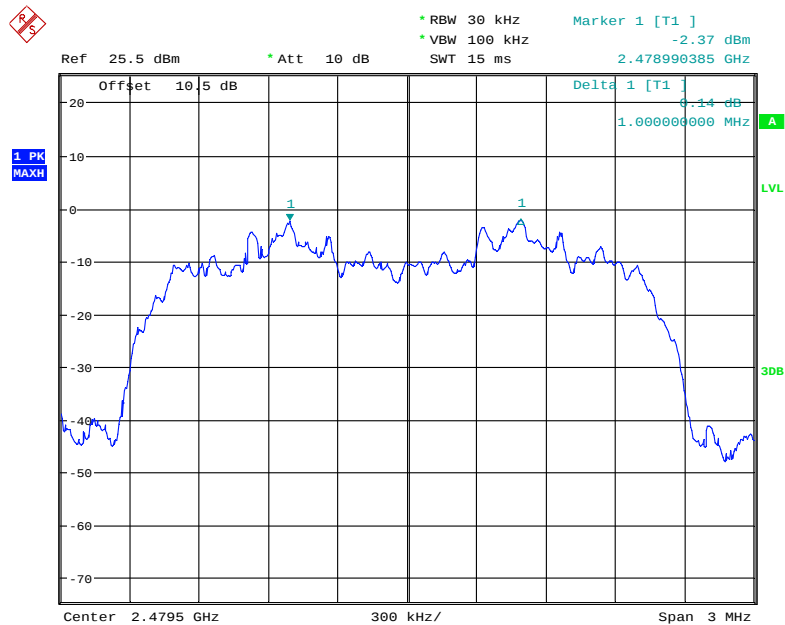


Date: 30.OCT.2017 18:39:25

EDR (8DPSK): Low Channel

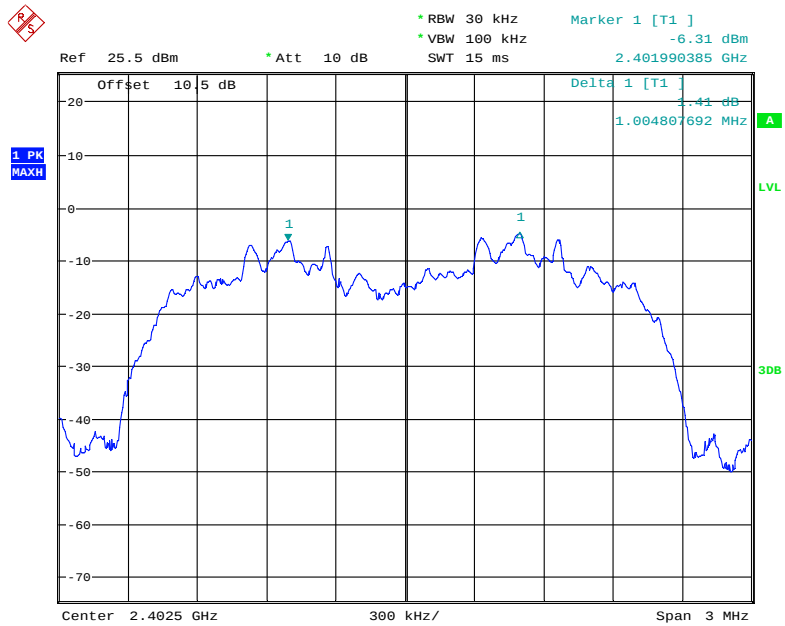


Date: 30.OCT.2017 18:37:13

EDR (8DPSK): Middle Channel

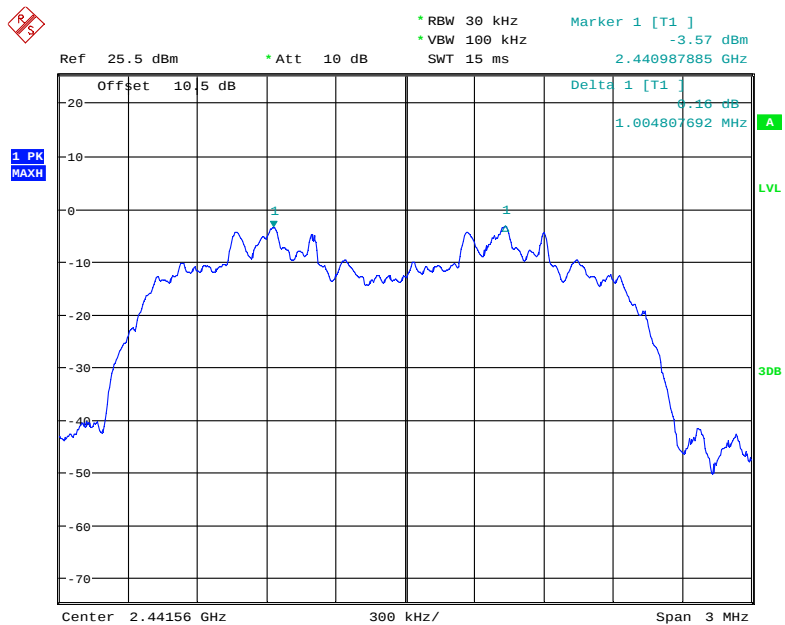

Date: 30.OCT.2017 18:37:47

EDR (8DPSK): High Channel

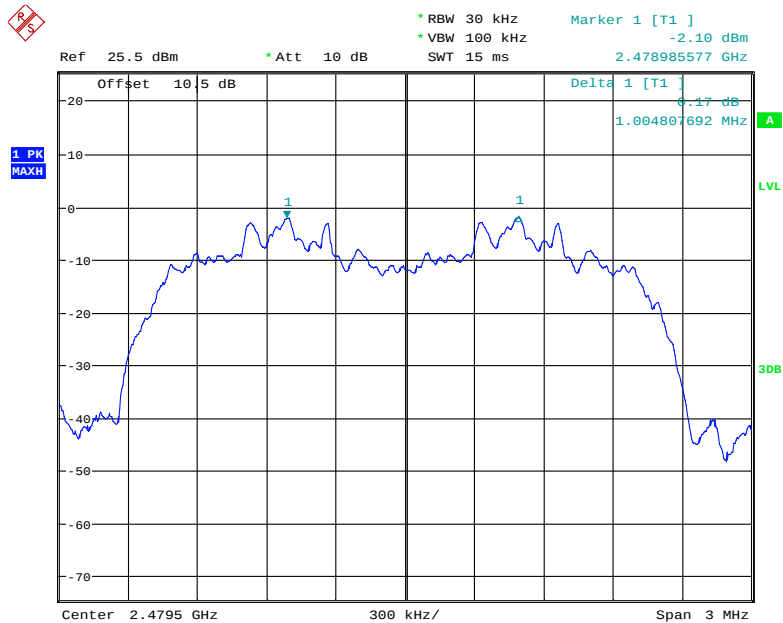

Date: 30.OCT.2017 18:38:25

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions


Temperature:	24~25 °C
Relative Humidity:	55~56 %
ATM Pressure:	101.0~101.5 kPa

The testing was performed by Vincent Zheng on 2017-10-30 and 2017-11-01.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots

Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
BDR (GFSK)	Low	2402	0.923
	Middle	2441	0.946
	High	2480	0.939
EDR ($\pi/4$-DQPSK)	Low	2402	1.284
	Middle	2441	1.293
	High	2480	1.298
EDR (8DPSK)	Low	2402	1.269
	Middle	2441	1.264
	High	2480	1.264

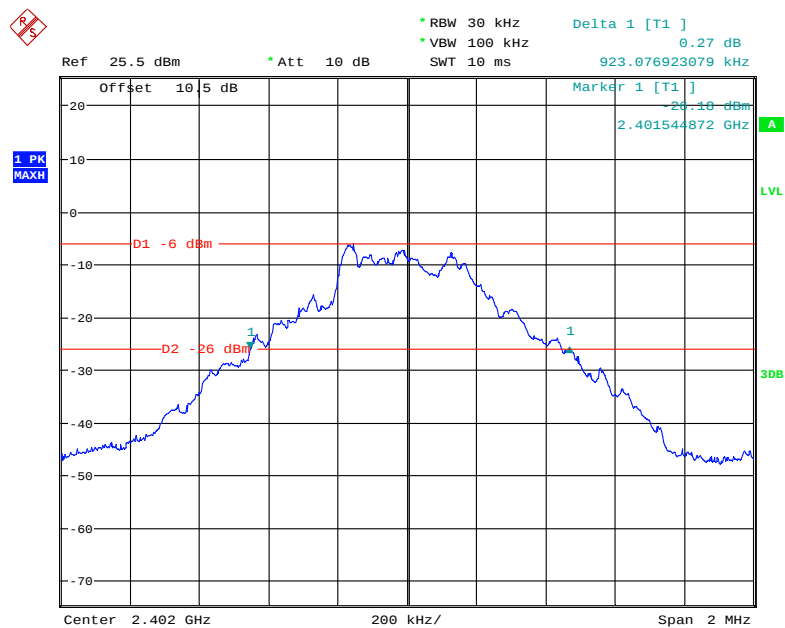BDR (GFSK): Low Channel

Date: 1.NOV.2017 23:58:15

Ref 25.5 dBm * Att 10 dB

* RBW 30 kHz * VBW 100 kHz

SWT 10 ms

Marker 1 [T1] -21.62 dBm

2.440535256 GHz

Offset 10.5 dB

Delta 1 [T1] 0.23 dB

945.512820513 kHz

1 PK MAXH

D1 -1 dBm


D2 -21 dBm

Center 2.441 GHz

200 kHz/


Span 2 MHz

BDR (GFSK): High Channel

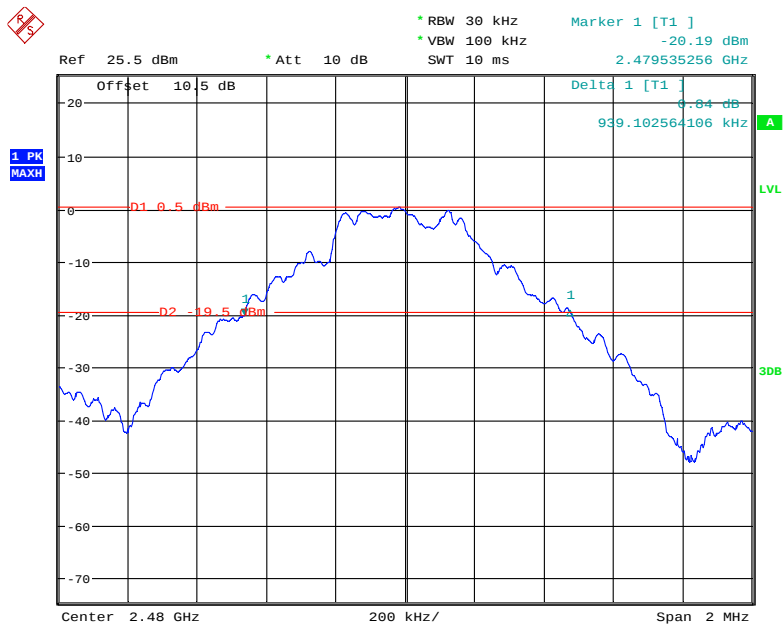


Page 35 of 62

EDR ($\pi/4$ -DQPSK): Low Channel

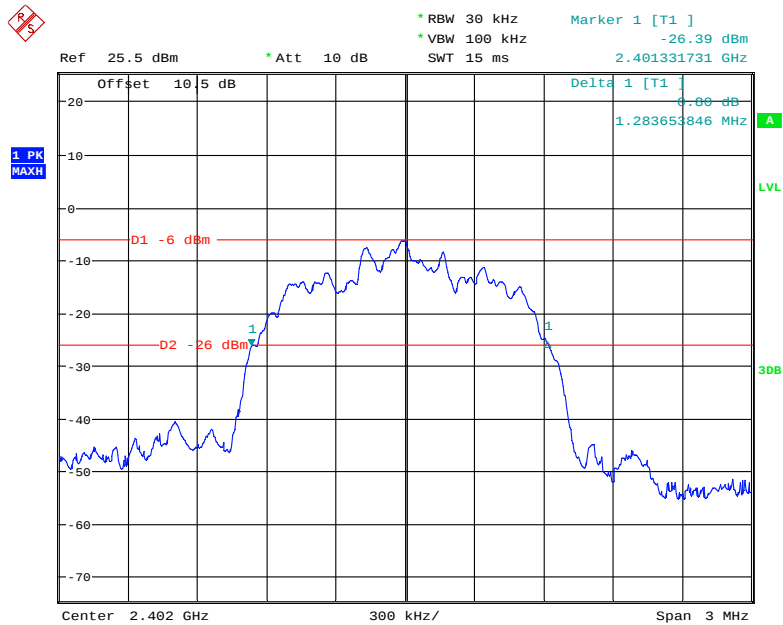


Date: 30.OCT.2017 18:32:51

EDR ($\pi/4$ -DQPSK): Middle Channel

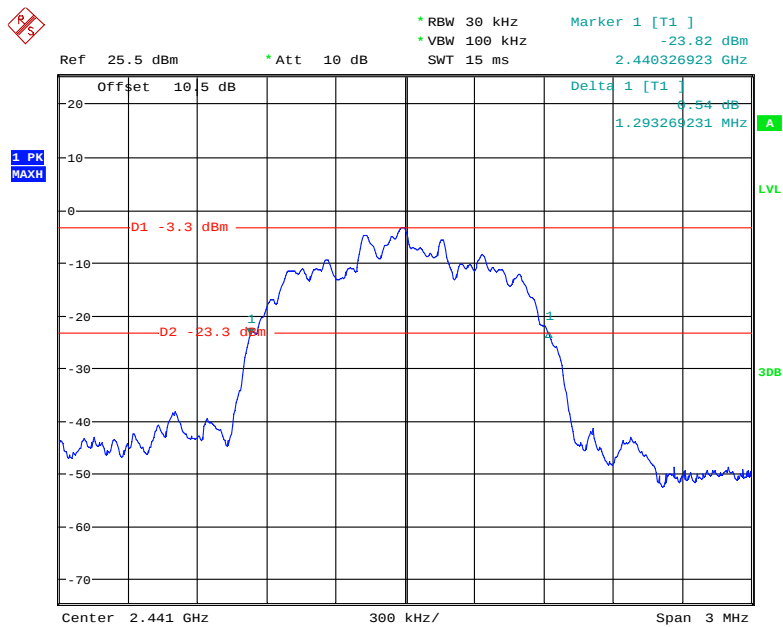


Date: 30.OCT.2017 18:33:49

EDR ($\pi/4$ -DQPSK): High Channel

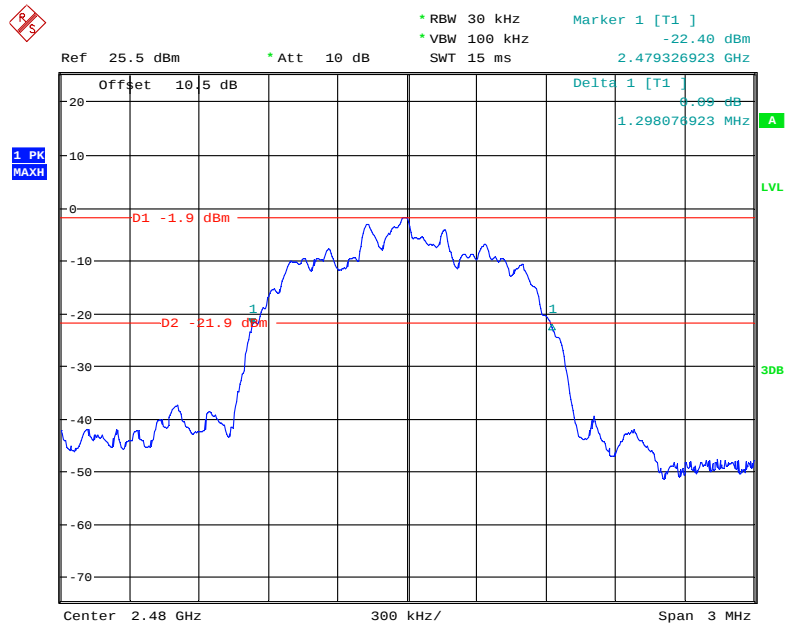

Date: 30.OCT.2017 18:34:40

EDR (8DPSK): Low Channel

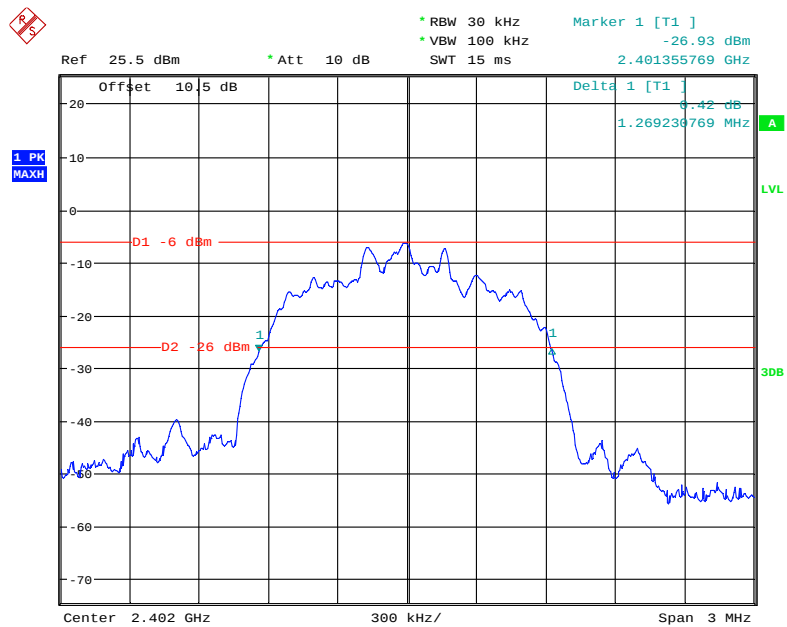

Date: 30.OCT.2017 18:36:38

Ref 25.5 dBm Att 10 dB RBW 30 kHz VBW 100 kHz SWT 15 ms

Marker 1 [T1] -23.96 dBm 2.440355769 GHz


Offset 10.5 dB Delta 1 [T1] 0.91 dB 1.264423077 MHz

1 PK MAXH

D1 -3.3 dBm D2 -23.3 dBm

Center 2.441 GHz 300 kHz/ Span 3 MHz

EDR (8DPSK): High Channel

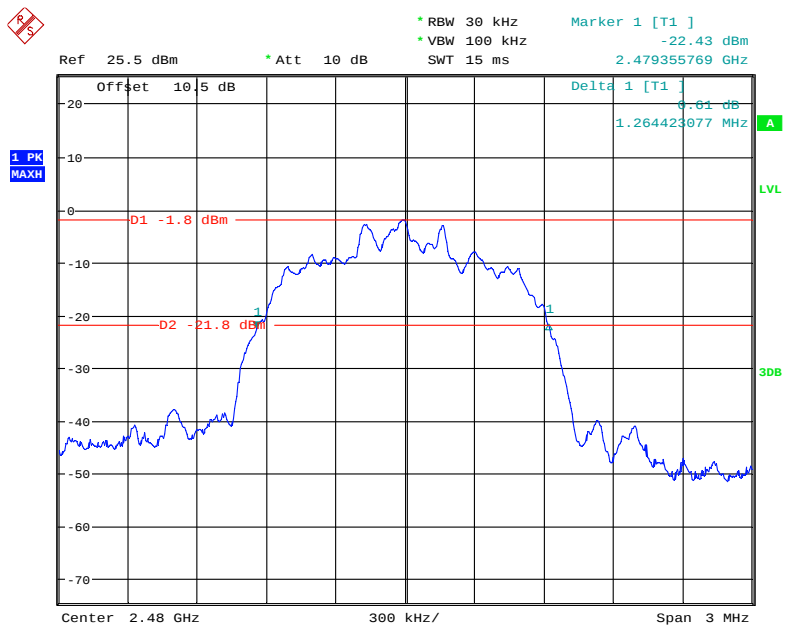

Page 38 of 62

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Data**Environmental Conditions**


Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Vincent Zheng on 2017-10-30.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following table and plots

Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥ 15
EDR ($\pi/4$ -DQPSK)	2400-2483.5	79	≥ 15
EDR (8DPSK)	2400-2483.5	79	≥ 15

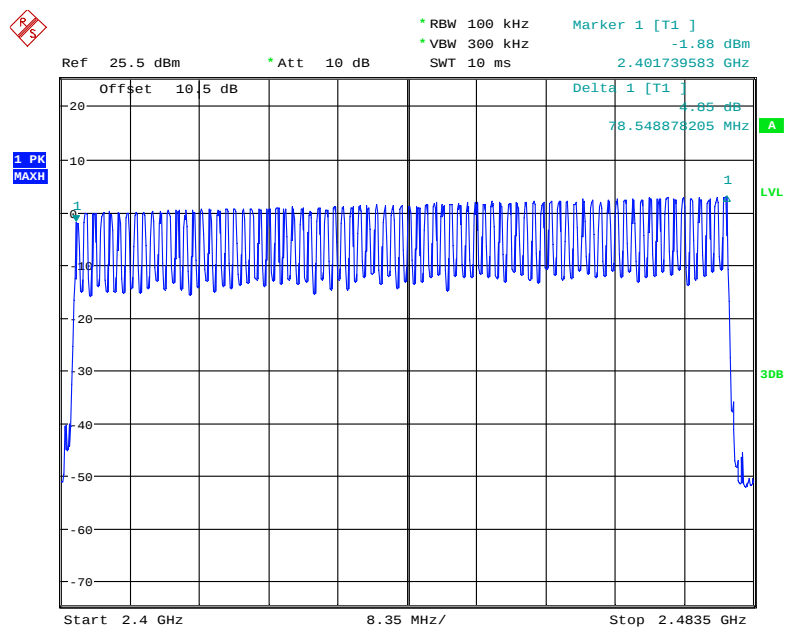BDR (GFSK): Number of Hopping Channels


Date: 30.OCT.2017 19:23:28

EDR ($\pi/4$ -DQPSK): Number of Hopping Channels

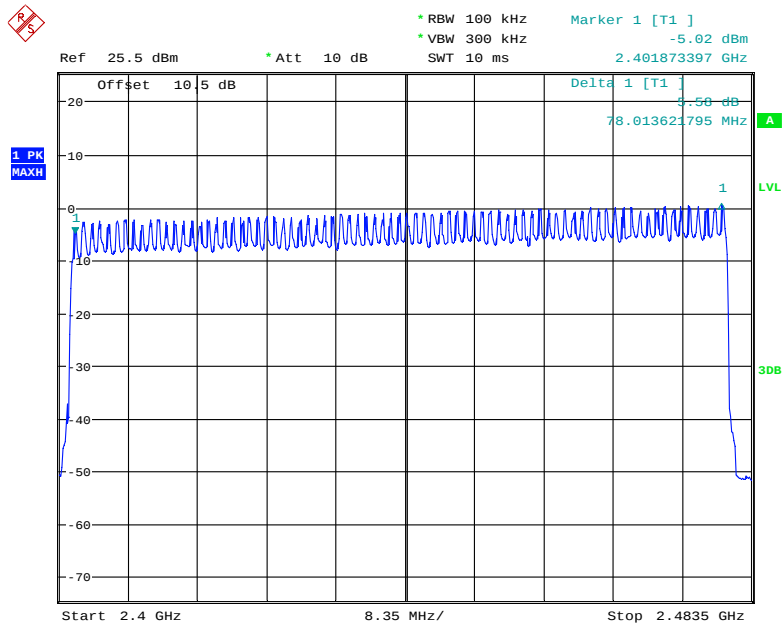

Date: 30.OCT.2017 19:15:15

EDR (8DPSK): Number of Hopping Channels

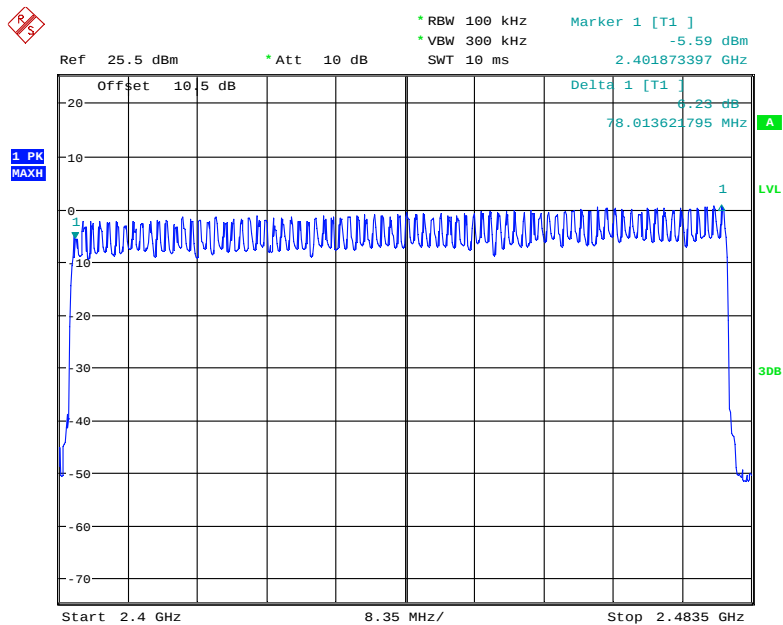

Date: 30.OCT.2017 19:08:43

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWEELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa


The testing was performed by Vincent Zheng on 2017-10-30.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots


Mode		Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result
BDR (GFSK)	DH 1	Low	0.423	0.135	0.4	Pass
		Middle	0.421	0.135	0.4	Pass
		High	0.423	0.135	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH 3	Low	1.694	0.271	0.4	Pass
		Middle	1.694	0.271	0.4	Pass
		High	1.694	0.271	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH 5	Low	2.936	0.313	0.4	Pass
		Middle	2.936	0.313	0.4	Pass
		High	2.936	0.313	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR ($\pi/4$ -DQPSK)	2DH 1	Low	0.434	0.139	0.4	Pass
		Middle	0.434	0.139	0.4	Pass
		High	0.434	0.139	0.4	Pass
		Note: 2DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	2DH 3	Low	1.694	0.271	0.4	Pass
		Middle	1.694	0.271	0.4	Pass
		High	1.694	0.271	0.4	Pass
		Note: 2DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	2DH 5	Low	2.952	0.315	0.4	Pass
		Middle	2.952	0.315	0.4	Pass
		High	2.952	0.315	0.4	Pass
		Note: 2DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR (8DPSK)	3DH 1	Low	0.434	0.139	0.4	Pass
		Middle	0.434	0.139	0.4	Pass
		High	0.434	0.139	0.4	Pass
		Note: 3DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	3DH 3	Low	1.694	0.271	0.4	Pass
		Middle	1.694	0.271	0.4	Pass
		High	1.694	0.271	0.4	Pass
		Note: 3DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	3DH 5	Low	2.96	0.316	0.4	Pass
		Middle	2.96	0.316	0.4	Pass
		High	2.96	0.316	0.4	Pass
		Note: 3DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				

BDR (GFSK): **Pulse time, Low Channel, DH1**

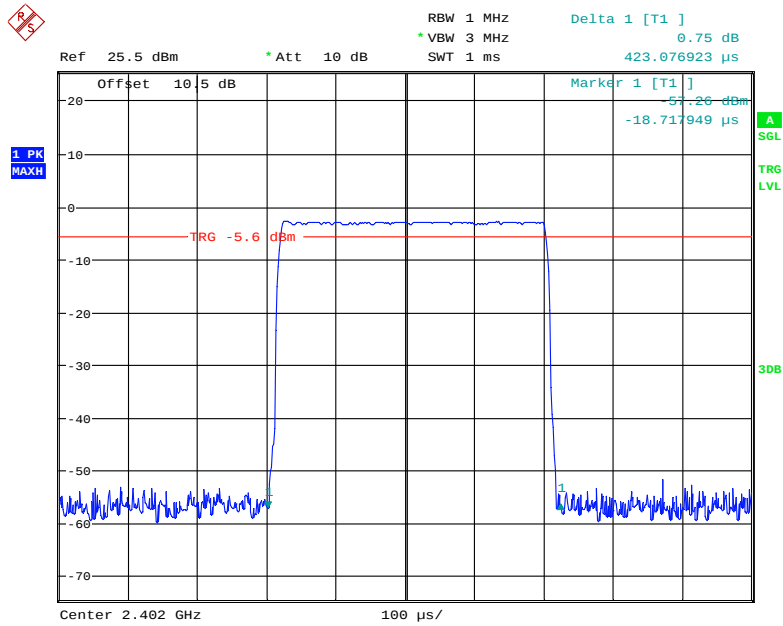


Date: 30.OCT.2017 20:28:48

Pulse time, Middle Channel, DH1

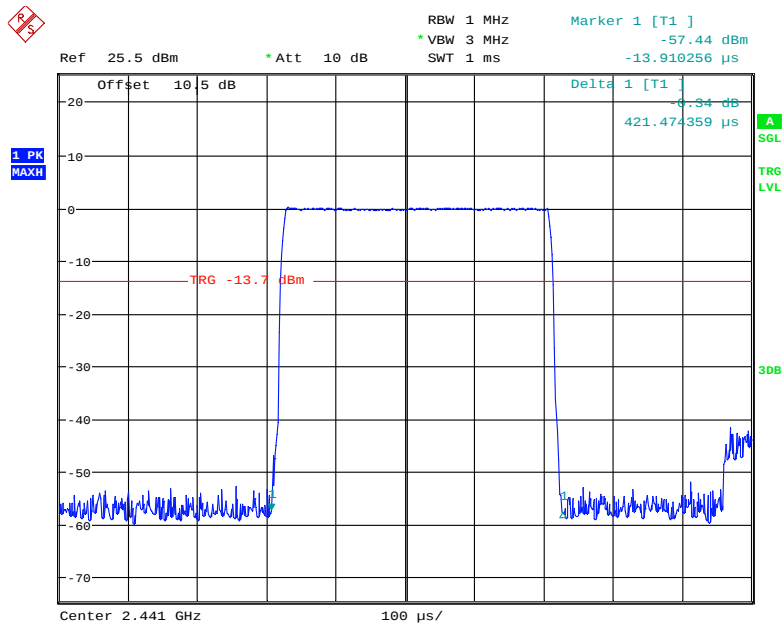


Date: 30.OCT.2017 20:27:21

Pulse time, High Channel, DH1

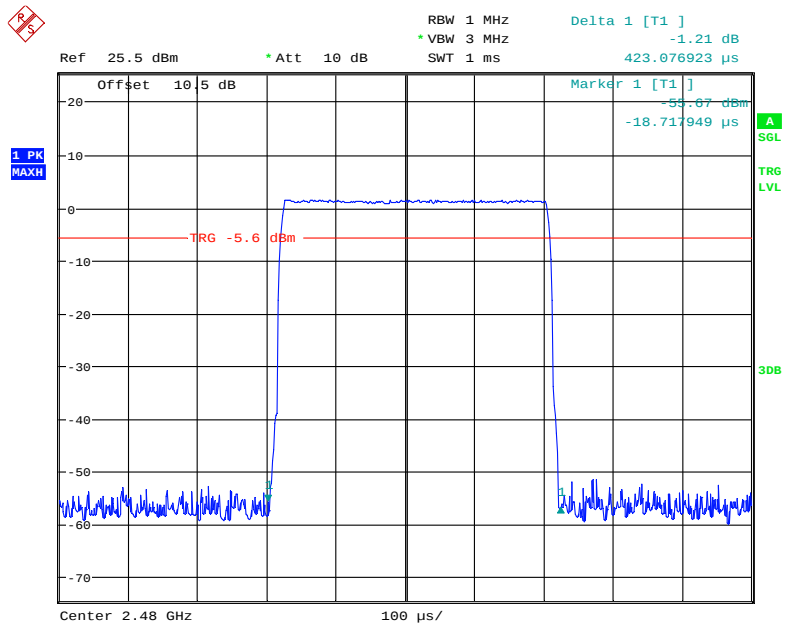


Date: 30.OCT.2017 20:28:39

Pulse time, Low Channel, DH3

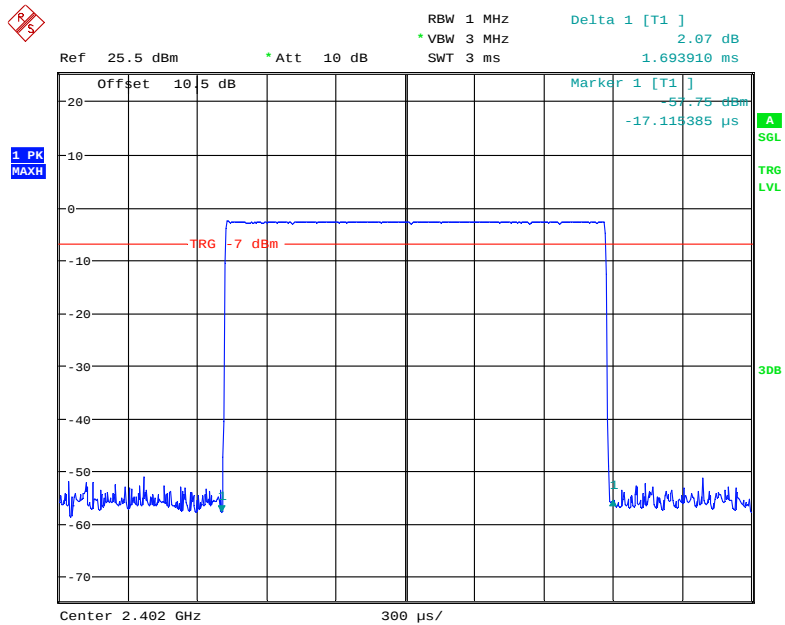


Date: 30.OCT.2017 20:33:29

Pulse time, Middle Channel, DH3

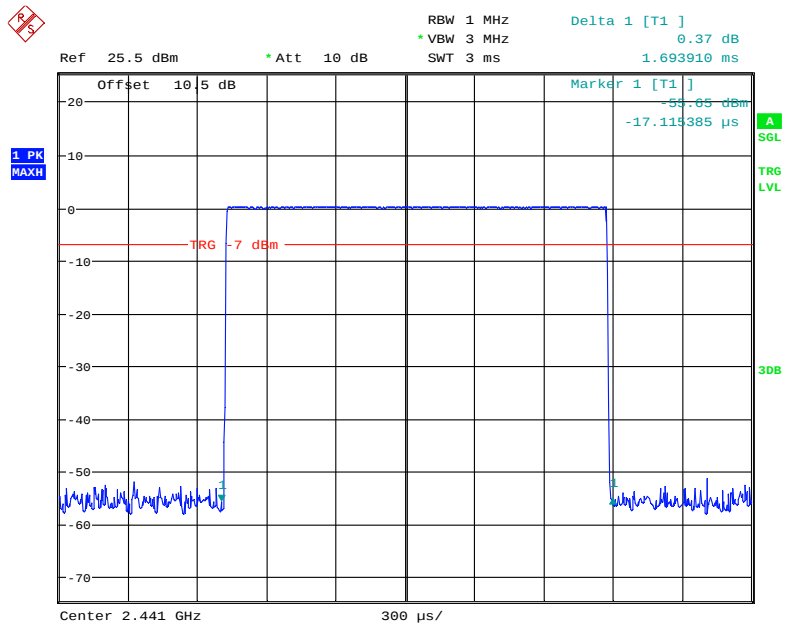


Date: 30.OCT.2017 20:33:38

Pulse time, High Channel, DH3

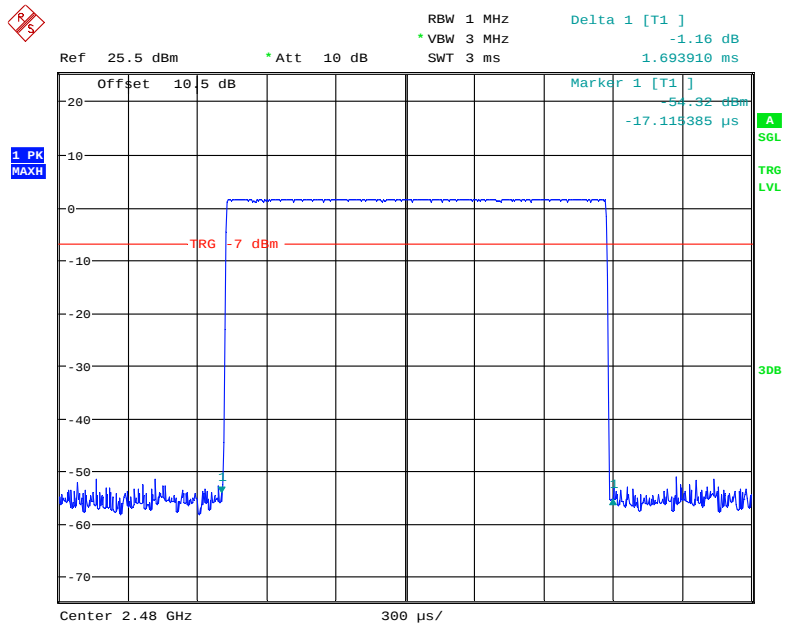


Date: 30.OCT.2017 20:33:45

Pulse time, Low Channel, DH5

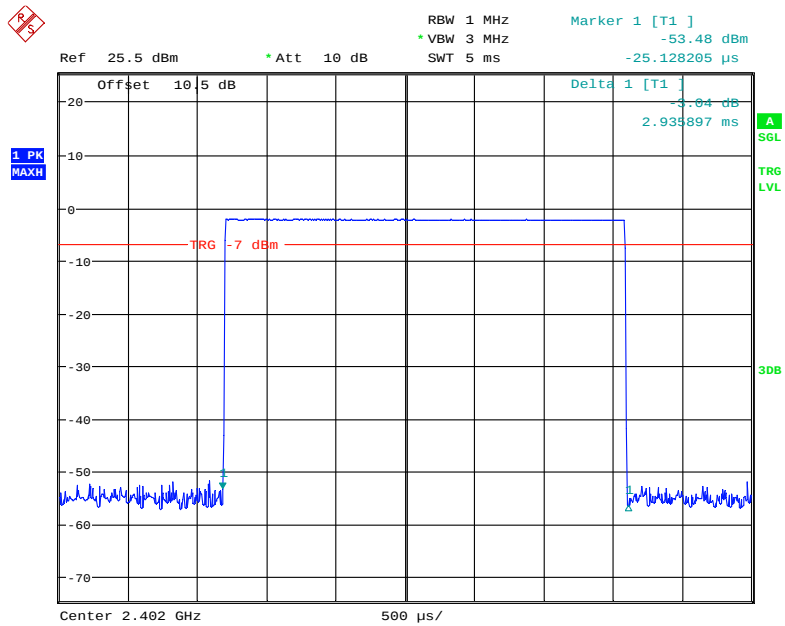


Date: 30.OCT.2017 20:35:16

Pulse time, Middle Channel, DH5

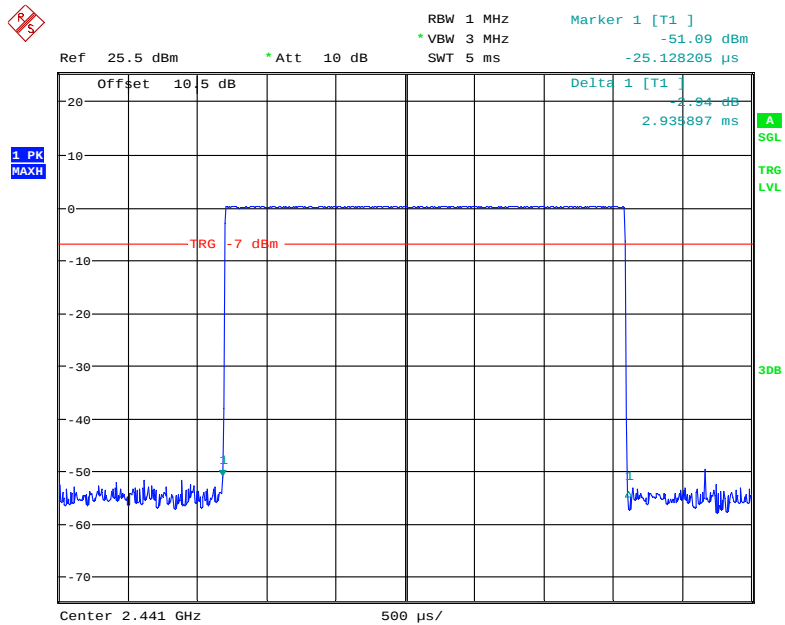

Date: 30.OCT.2017 20:35:07


Pulse time, High Channel, DH5

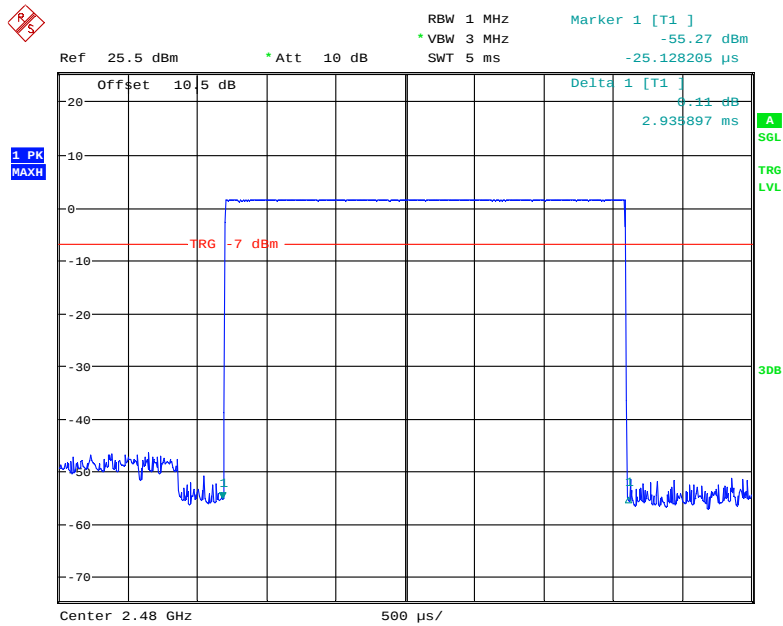

Date: 30.OCT.2017 20:34:41


EDR ($\pi/4$ -DQPSK):

Pulse time, Low Channel, 2DH1

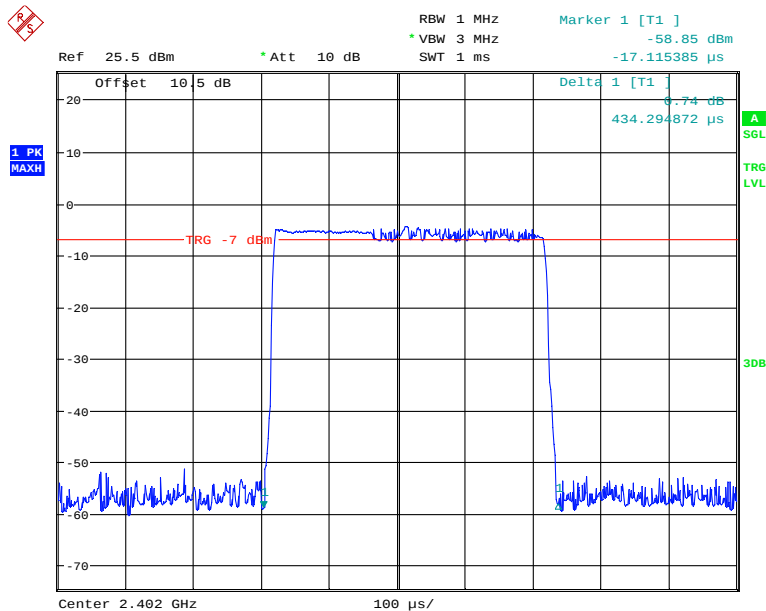


Date: 30.OCT.2017 20:29:40

Pulse time, Middle Channel, 2DH1

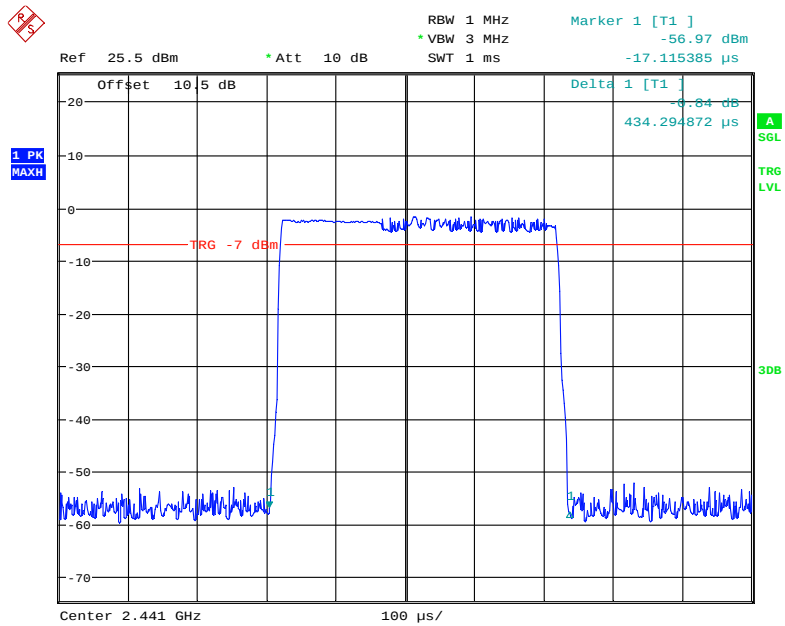


Date: 30.OCT.2017 20:29:53

Pulse time, High Channel, 2DH1

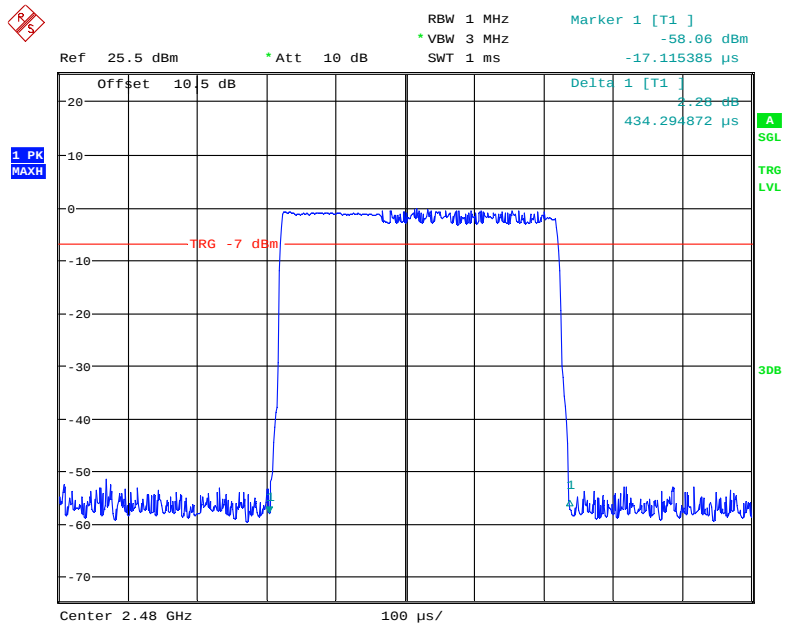


Date: 30.OCT.2017 20:30:03

Pulse time, Low Channel, 2DH3

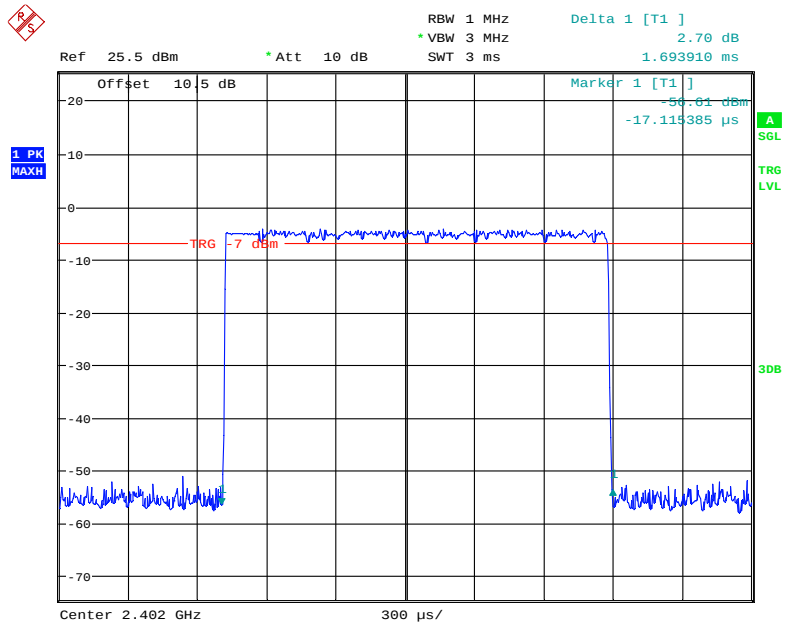


Date: 30.OCT.2017 20:33:12

Pulse time, Middle Channel, 2DH3

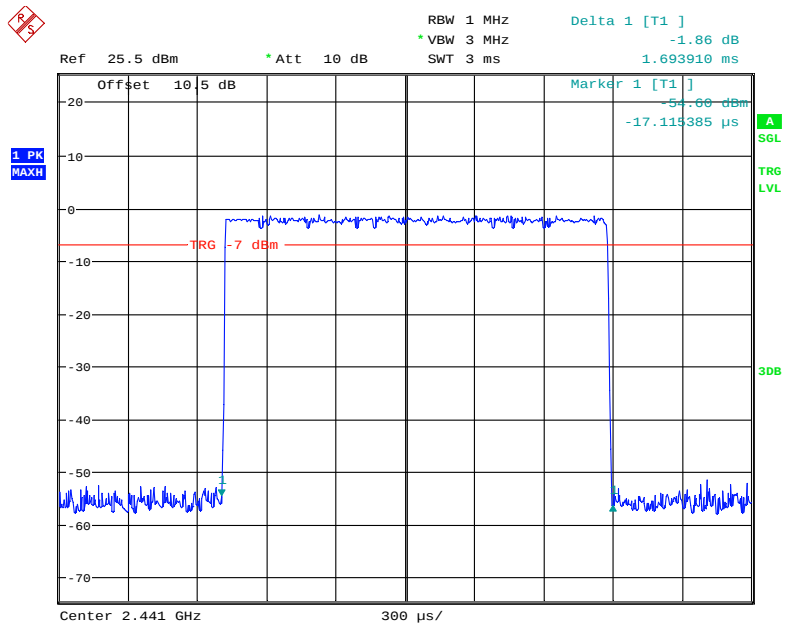


Date: 30.OCT.2017 20:33:03

Pulse time, High Channel, 2DH3

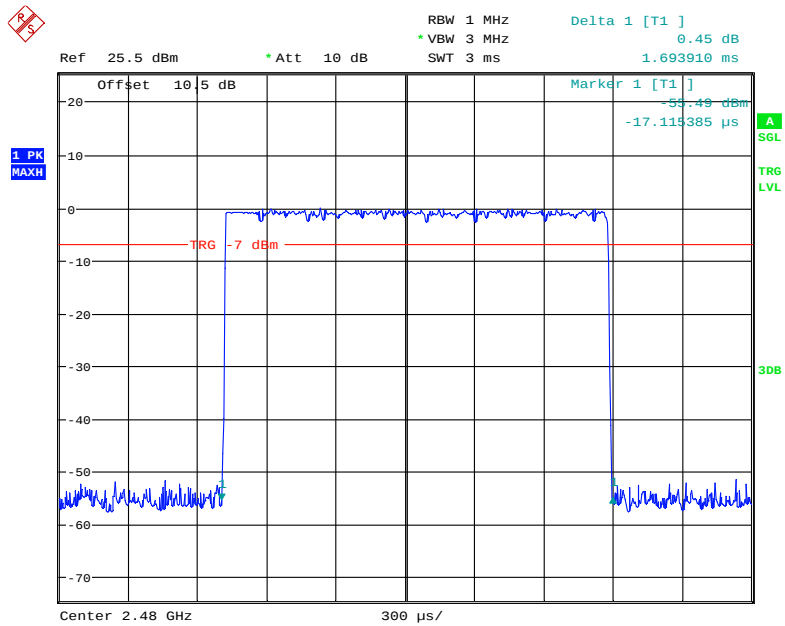


Date: 30.OCT.2017 20:32:54

Pulse time, Low Channel, 2DH5

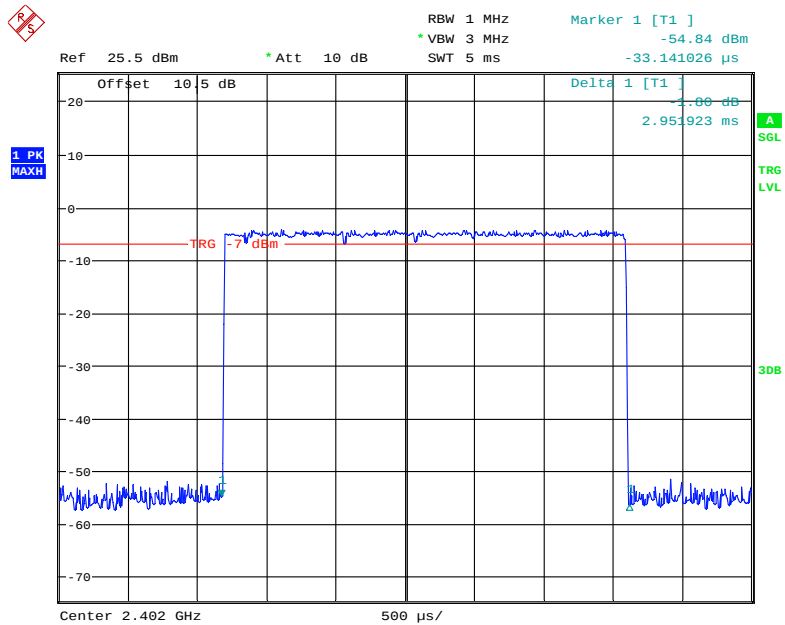


Date: 30.OCT.2017 20:35:54

Pulse time, Middle Channel, 2DH5

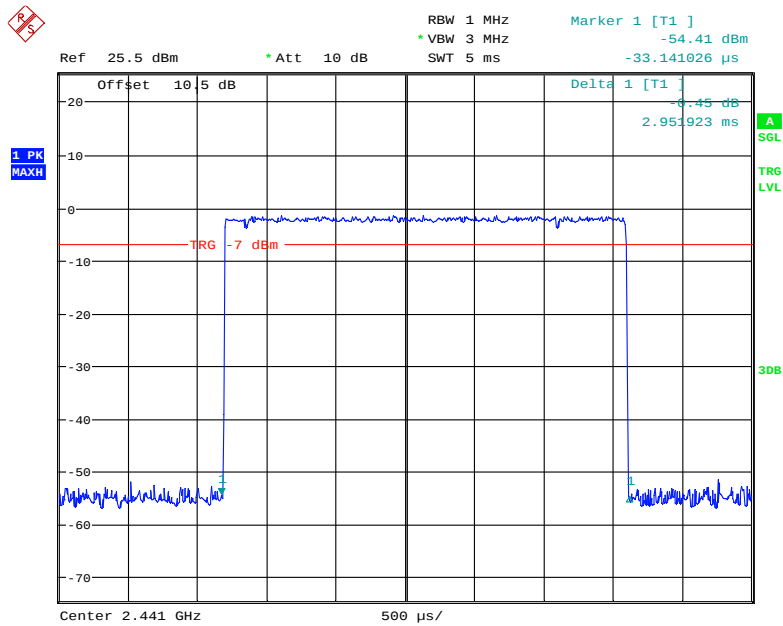


Date: 30.OCT.2017 20:36:04

Pulse time, High Channel, 2DH5

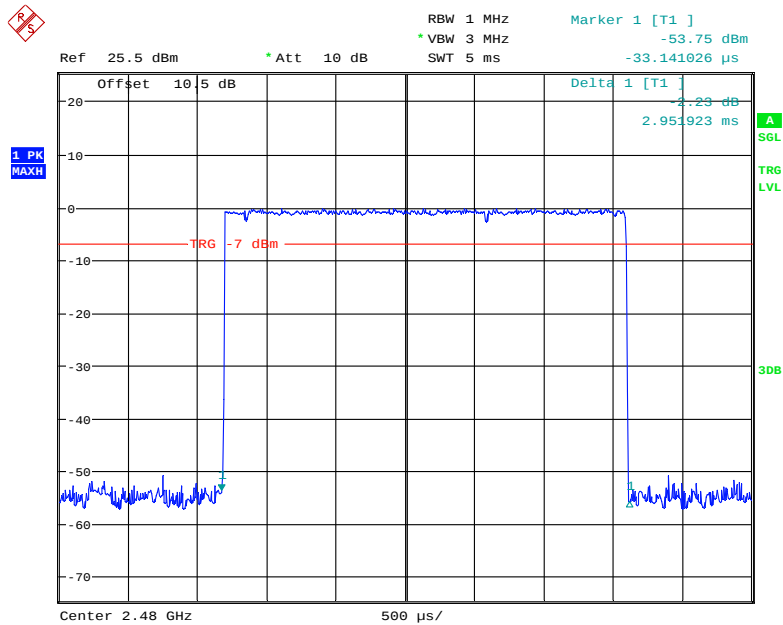


Date: 30.OCT.2017 20:38:36

EDR (8DPSK): Pulse time, Low Channel, 3DH1

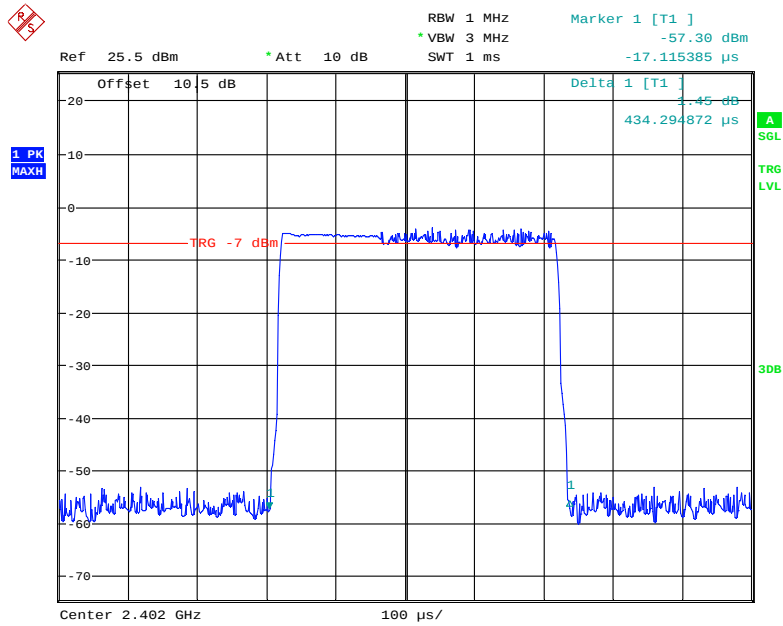


Date: 30.OCT.2017 20:30:47

Pulse time, Middle Channel, 3DH1

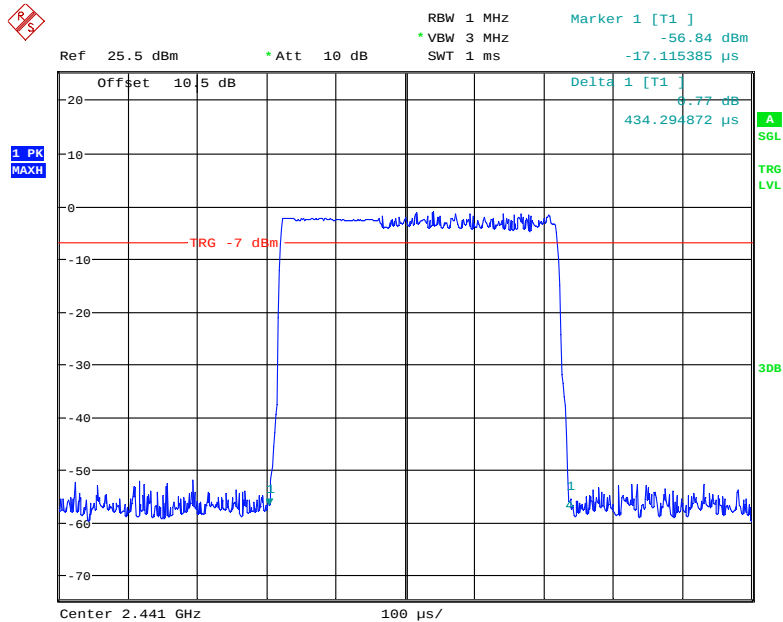


Date: 30.OCT.2017 20:30:36

Pulse time, High Channel, 3DH1

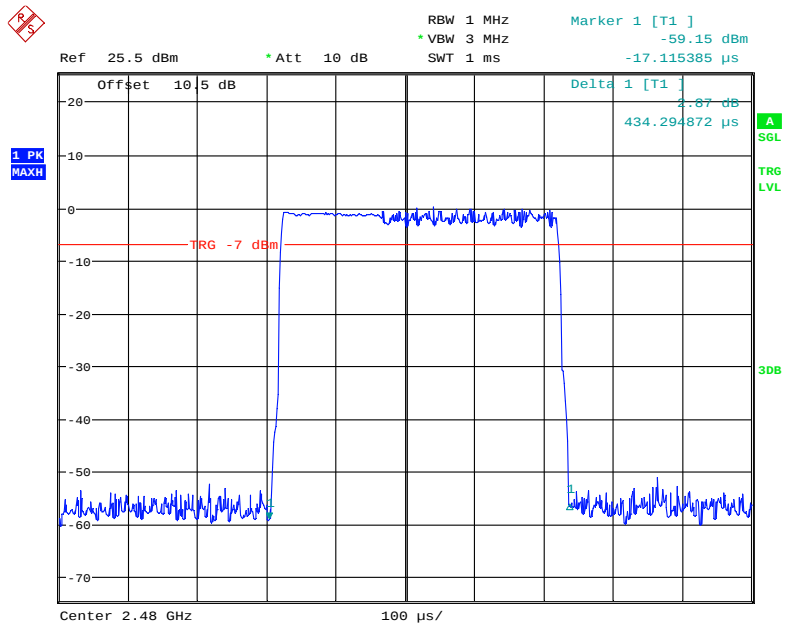


Date: 30.OCT.2017 20:30:25

Pulse time, Low Channel, 3DH3

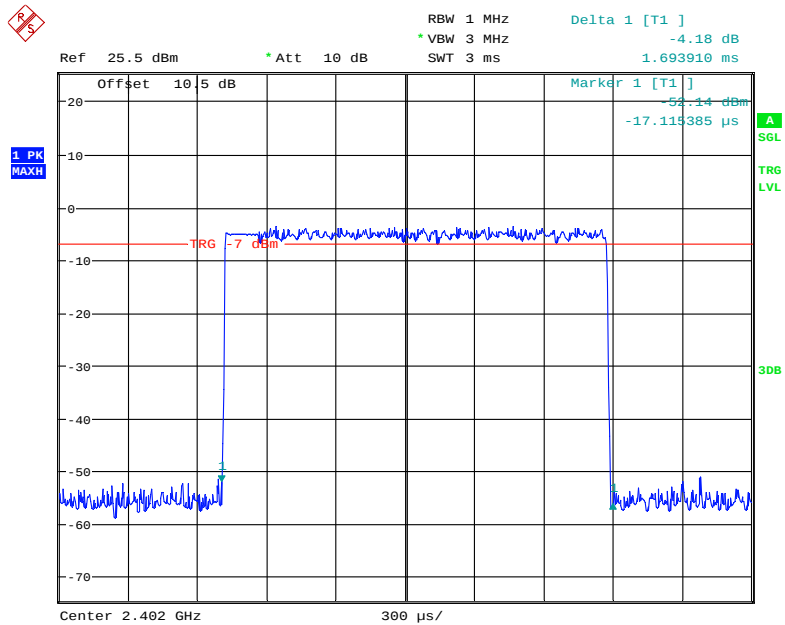


Date: 30.OCT.2017 20:32:21

Pulse time, Middle Channel, 3DH3

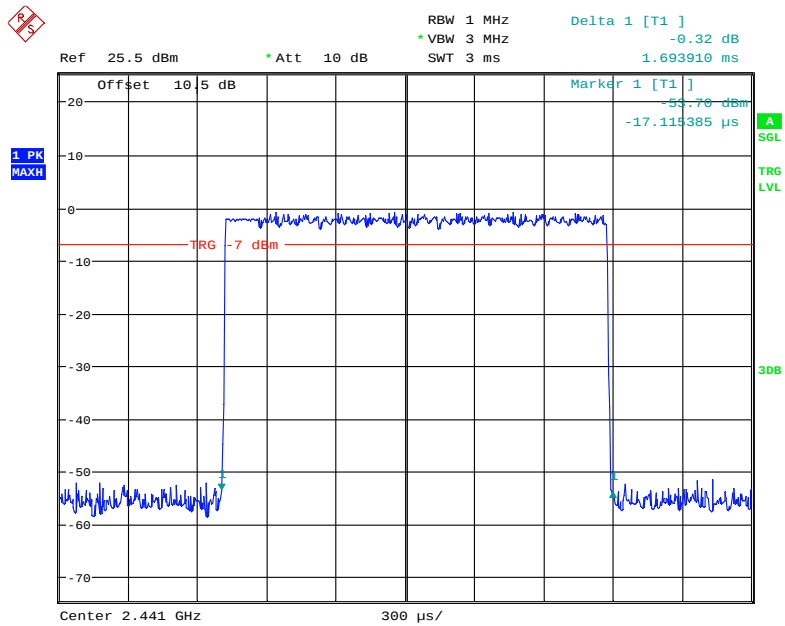


Date: 30.OCT.2017 20:32:34

Pulse time, High Channel, 3DH3

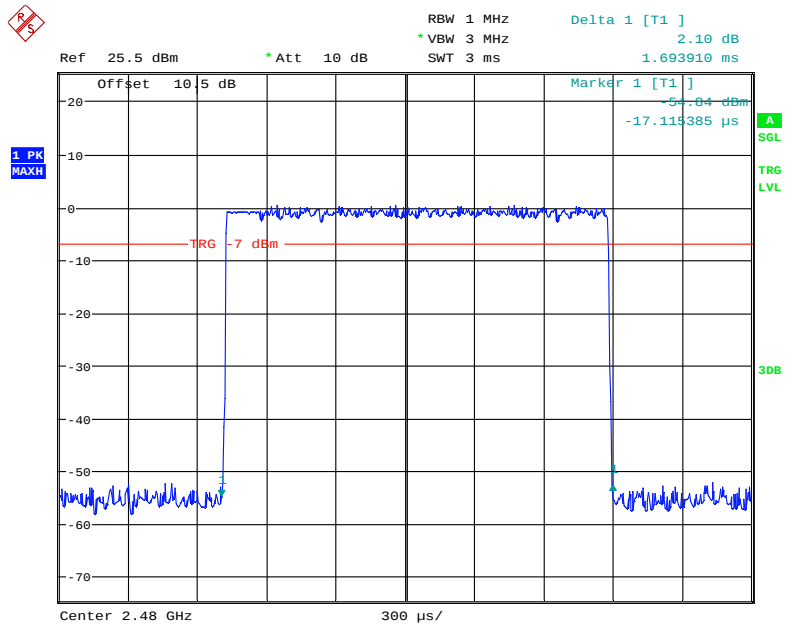


Date: 30.OCT.2017 20:32:44

Pulse time, Low Channel, 3DH5

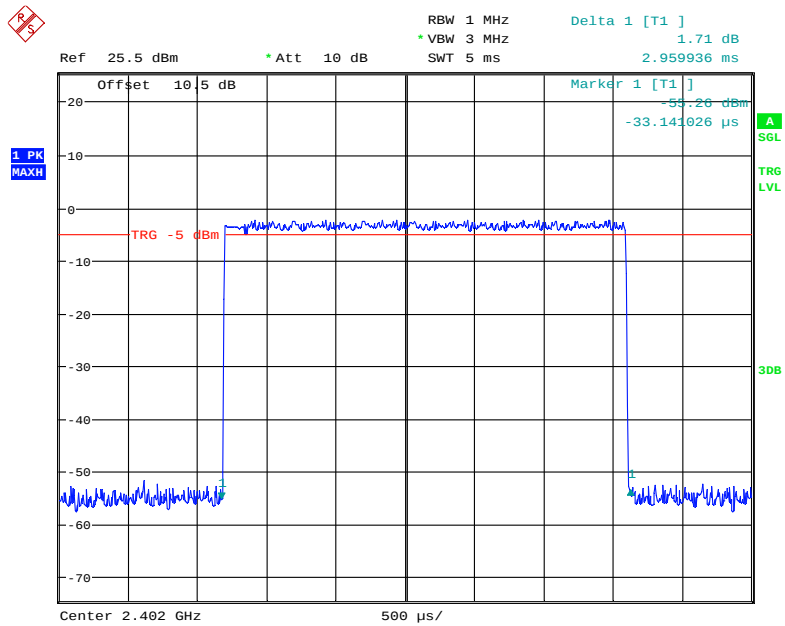


Date: 30.OCT.2017 20:42:35

Pulse time, Middle Channel, 3DH5

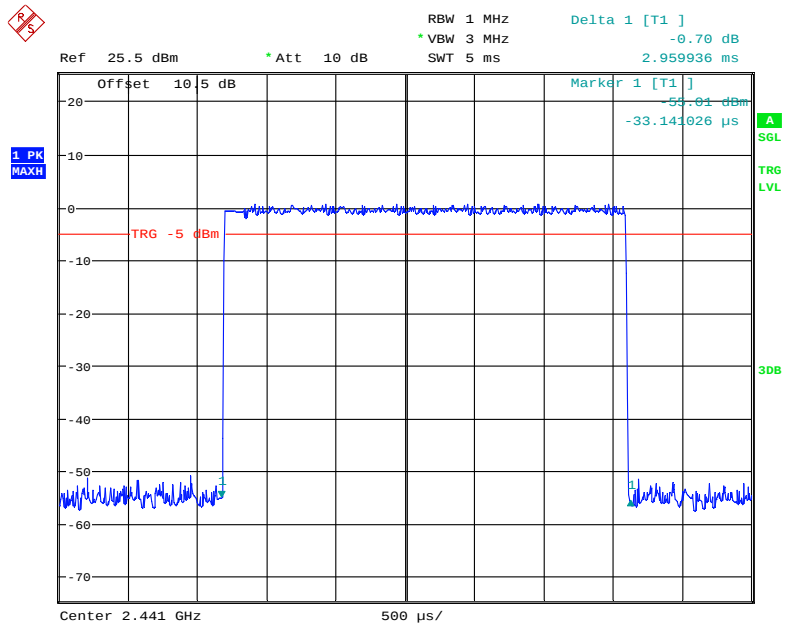

Date: 30.OCT.2017 20:42:24

Pulse time, High Channel, 3DH5

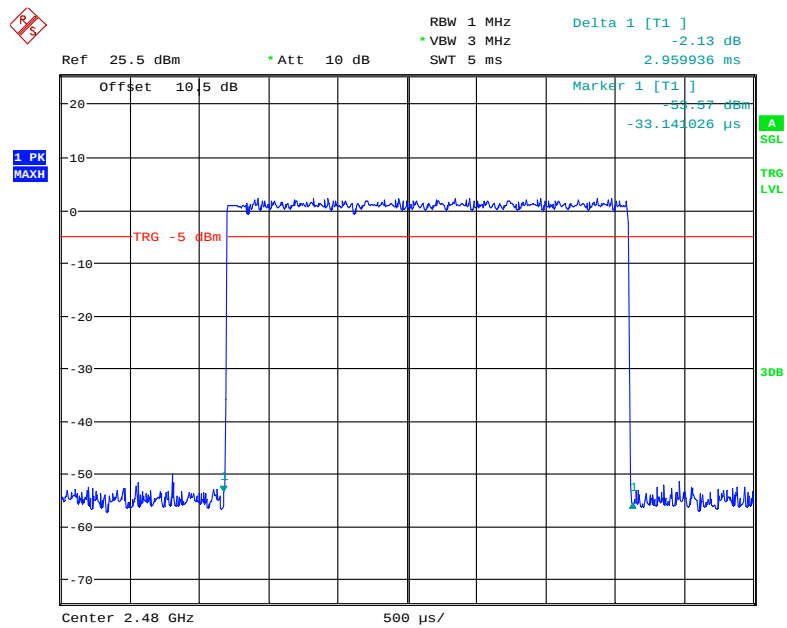

Date: 30.OCT.2017 20:42:08

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Vincent Zheng on 2017-10-30.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table.

Mode	Channel	Frequency (MHz)	Peak Output Power		Limit (mW)
			(dBm)	(mW)	
BDR (GFSK)	Low	2402	-0.77	0.84	1000
	Middle	2441	2.17	1.65	1000
	High	2480	3.41	2.19	1000
EDR ($\pi/4$-DQPSK)	Low	2402	-1.87	0.65	1000
	Middle	2441	1.03	1.27	1000
	High	2480	2.51	1.78	1000
EDR (8DPSK)	Low	2402	-1.44	0.72	1000
	Middle	2441	1.41	1.38	1000
	High	2480	2.96	1.98	1000

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Vincent Zheng on 2017-10-30.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following plots.

BDR (GFSK): Band Edge-Left Side

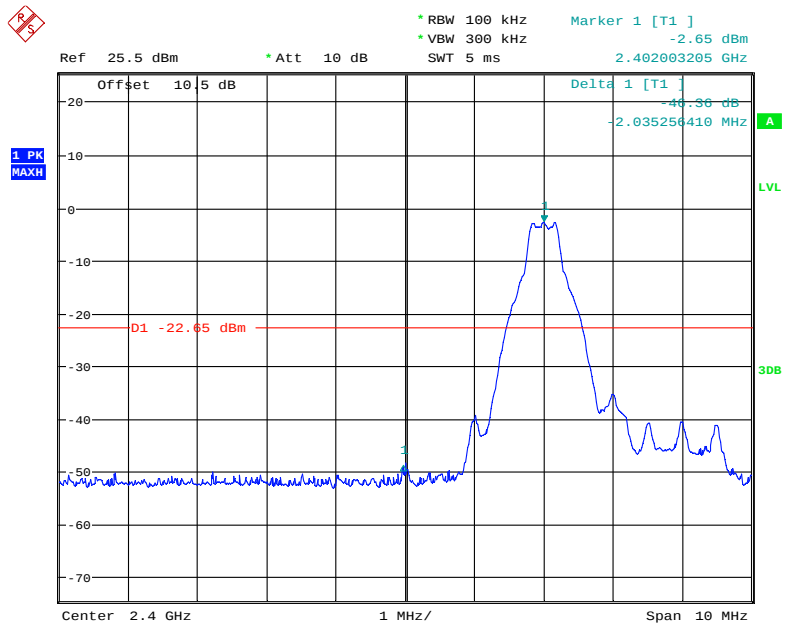


Date: 30.OCT.2017 18:48:53

BDR (GFSK): Band Edge-Right Side

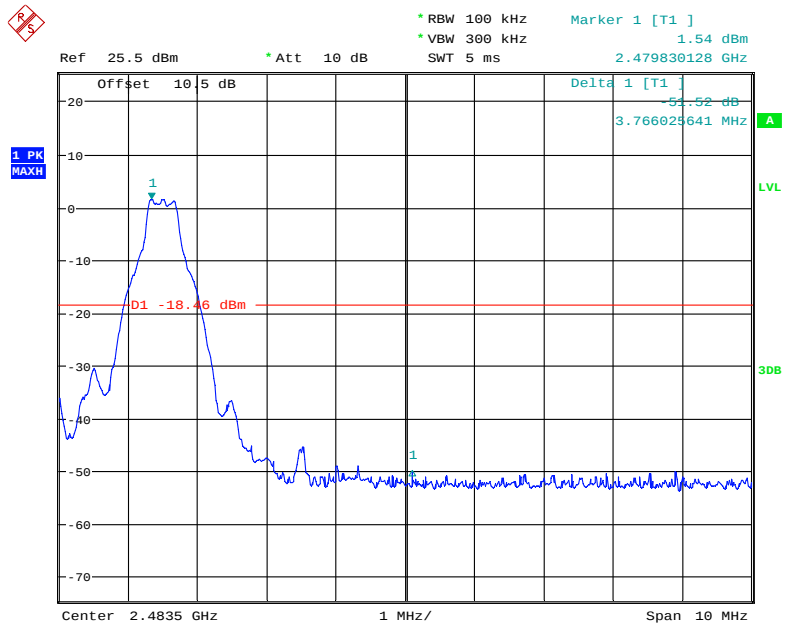


Date: 30.OCT.2017 18:46:52

EDR ($\pi/4$ -DQPSK): Band Edge-Left Side

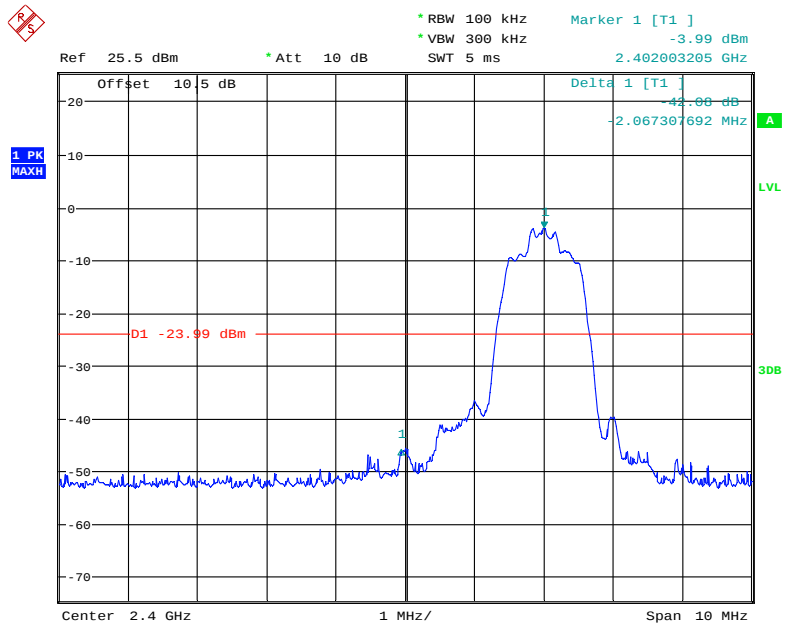


Date: 30.OCT.2017 18:50:07

EDR ($\pi/4$ -DQPSK): Band Edge-Right Side

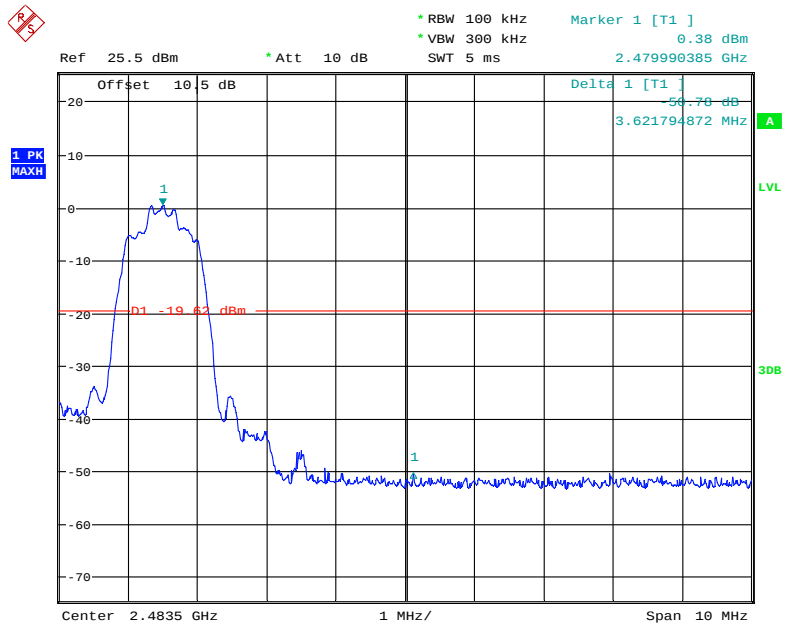


Date: 30.OCT.2017 18:51:14

EDR (8DPSK): Band Edge-Left Side

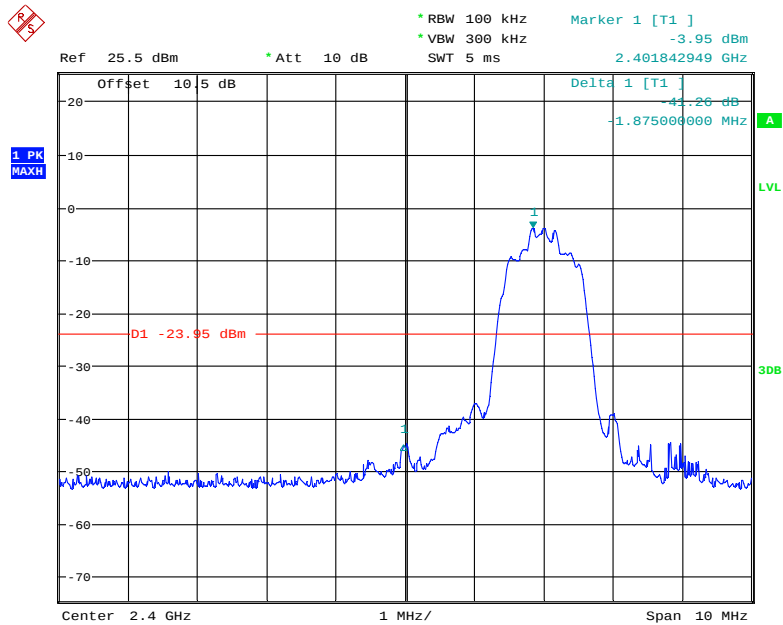

Date: 30.OCT.2017 18:54:00

EDR (8DPSK): Band Edge-Right Side

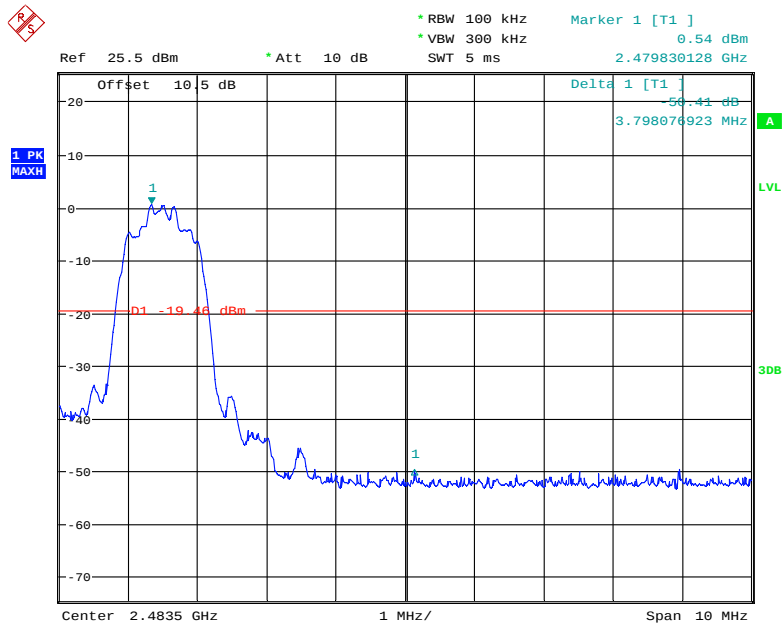

Date: 30.OCT.2017 18:52:32

***** END OF REPORT *****