



4:1

2D Barcode need (Size 6.4mm x 6.4mm):
 2D Barcode information shows horizontally after scanned:
 YYWWSSSSSS; 0EEEEZZZZ; 0EEEEXXXXY

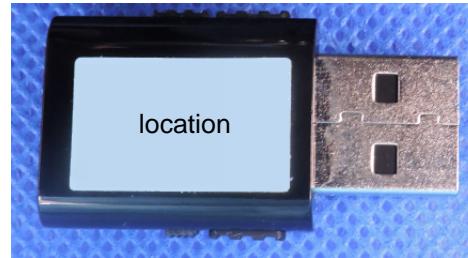

1:1

SIZE : W18mmx H 11mm
 MATERIAL : PET
 COLOR : Black text on white background
 BARCODE FORMAT : 2D barcode
 POSITIONING : Affix on product appointed area

REMARK:

Serial number format (YYWWSSSSSS):

YY: Year of manufacturing (e.g. 10=2010)

WW: Week of manufacturing

SSSSSS: Progressive serial number. Serial starting number is 000001, the serial number will only reset to 000001 if under the following condition:

a) The start of new PO production lot, plus the production week "WW" increment to a new week.

Otherwise the serial number will continuous the previous lot of production.

IPEI format:

0EEEEZZZZZ IPEI code in text (HEX format)

0: this is a fix digit

EEEE: EMC code

ZZZZZ: start from 00001, this five digits cannot be all zero, that's mean 00000 is not allowed

RFPI format:

0EEEEXXXXY RFPI code in text (HEX format):

0: fix digit

EEEE: EMC code

XXXX: start from 0000

Y: This number should be either 0 or 8

Total 10 digits

(The serial number, IPEI code and RFPI code on products must be match with the one on packing box).

RTX Hong Kong Limited	
RTX3741 USB-A DECT Dongle Product Label (EMEA)	
50004679	
REV. C	05-Mar-2020

IMPORTANT! Above information shows relative size and boldness only.
 Adjustment may be required at time of production by factories due to incline surface.