

TEST REPORT

Applicant Name : RTX Hong Kong Ltd.
Address : 8/F Corporation Square, 8 Lam Lok Street, Kowloon Bay,
Kowloon, Hong Kong
Report Number : SZNS220727-34190E-RFB
FCC ID: T7HX7452
IC: 4979B-X7452

Test Standard (s)

FCC PART 15.247; RSS-GEN ISSUE 5, FEBRUARY 2021 AMENDMENT 2; RSS-247, ISSUE 2,
FEBRUARY 2017

Sample Description

Product Type: Wireless headset base station
Model No.: CB8421
Multiple Model(s) No.: N/A
Trade Mark: poly
Date Received: 2022/07/27
Report Date: 2022/12/02

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Roger Ling

Roger Ling
EMC Engineer

Approved By:

Candy Li

Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "★". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS.....	8
TEST EQUIPMENT LIST	9
FCC §15.247 (I) & §1.1307 (B) (3) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	11
APPLICABLE STANDARD	11
RSS-102 § 2.5.2 –EXEMPTION LIMITS FOR ROUTINE EVALUATION-RF EXPOSURE EVALUATION	13
APPLICABLE STANDARD	13
FCC §15.203 & RSS-GEN §6.8 – ANTENNA REQUIREMENT.....	14
APPLICABLE STANDARD	14
ANTENNA CONNECTOR CONSTRUCTION	14
FCC §15.207 (A) & RSS-GEN § 8.8 – AC LINE CONDUCTED EMISSIONS	15
APPLICABLE STANDARD	15
EUT SETUP	15
EMI TEST RECEIVER SETUP.....	15
TEST PROCEDURE	15
TRANSD FACTOR & MARGIN CALCULATION.....	16
TEST DATA	16
FCC §15.209, §15.205 & §15.247(D) & RSS-247§ 5.5 - SPURIOUS EMISSIONS	23
APPLICABLE STANDARD	23
EUT SETUP	23
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	24
TEST PROCEDURE	24
FACTOR & MARGIN CALCULATION	24
TEST DATA	24
FCC §15.247(A) (1) & RSS-247 § 5.1 (B) -CHANNEL SEPARATION TEST	36
APPLICABLE STANDARD	36
TEST PROCEDURE	36
TEST DATA	37

FCC §15.247(A) (1) & RSS-247 § 5.1 (A), RSS-GEN § 6.7 – 20 DB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST DATA	39
FCC §15.247(A) (1) (III) & RSS-247 § 5.1 (D) - QUANTITY OF HOPPING CHANNEL TEST.....	40
APPLICABLE STANDARD	40
TEST PROCEDURE	40
TEST DATA	41
FCC §15.247(A) (1) (III) & RSS-247 § 5.1 (D) - TIME OF OCCUPANCY (DWELL TIME)	42
APPLICABLE STANDARD	42
TEST PROCEDURE	42
TEST DATA	43
FCC §15.247(B) (1) & RSS-247§ 5.1(B) & § 5.4(B) - PEAK OUTPUT POWER MEASUREMENT	44
APPLICABLE STANDARD	44
TEST PROCEDURE	44
TEST DATA	44
FCC §15.247(D) & RSS-247 § 5.5 - BAND EDGES TESTING	45
APPLICABLE STANDARD	45
TEST PROCEDURE	45
TEST DATA	46
APPENDIX	47
APPENDIX A: 20dB EMISSION BANDWIDTH.....	47
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	51
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	55
APPENDIX D: CARRIER FREQUENCY SEPARATION	59
APPENDIX E: TIME OF OCCUPANCY	61
APPENDIX F: NUMBER OF HOPPING CHANNELS	68
APPENDIX G: BAND EDGE MEASUREMENTS	70

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

HVIN	CB8421
Frequency Range	Bluetooth: 2402~2480MHz
Transmit Peak Power	3.98dBm
Modulation Technique	Bluetooth: GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Specification*	-1dBi (It is provided by the applicant)
Voltage Range	DC 9.0V from adapter
Sample serial number	Conducted and Radiated Emissions: SZNS220727-34190E-RF-S1 for IC7, SZNS220727-34190E-RF-S3 for IC12, SZNS220727-34190E-RF-S5 for IC10 RF Conducted Test: SZNS220727-34190E-RF-S2 (Assigned by ATC)
Sample/EUT Status	Good condition
Adapter Information	Model: SSA-090100 Input: AC 100-240V, 50/60Hz, 0.3A Output: DC 9.0V, 1.0A, 9.0W

Note: For poly LCD board, the device has three IC options in the MCU-PIC16LF1516: IC7, IC10 and IC12. They are made by the same IC manufacturer Microchip and they are used the same software. The different is about the IC package only, the IC7 is QFN28, the IC10 is SSOP28 and the IC12 is SOIC28.

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules and RSS-247, Issue 2, February 2017, RSS-GEN Issue 5, Feb. 2021 Amendment 2 of the Innovation, Science and Economic Development Canada rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and RSS-247, Issue 2, February 2017, RSS-GEN Issue 5, Feb. 2021 Amendment 2 of the Innovation, Science and Economic Development Canada rules.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF Frequency		0.082×10^{-7}
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	9kHz - 30MHz	2.66dB
	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
	26.5GHz- 40GHz	4.72dB
Temperature		1℃
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189.

Accredited by American Association for Laboratory Accreditation (A2LA). The Certificate Number is 4297.01

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0016. The Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

EUT Exercise Software

“BLUETEST3”* exercise software was used and the power level is 4*. The software and power level was provided by the applicant.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	PC	Latitude	11429208685
poly	Wireless Headset	Savi 7320	Unknown
poly	IP Phone	VVX 150	Unknown

External I/O Cable


Cable Description	Length (m)	From Port	To
Un-shielding Un-Detachable DC Cable	1.8	Adapter	EUT
Un-shielding Detachable Audio-RJ45 Cable	1.0	EUT	IP Phone
Un-shielding Detachable Type-C Cable	1.0	EUT	PC

Block Diagram of Test Setup

For conducted emission:

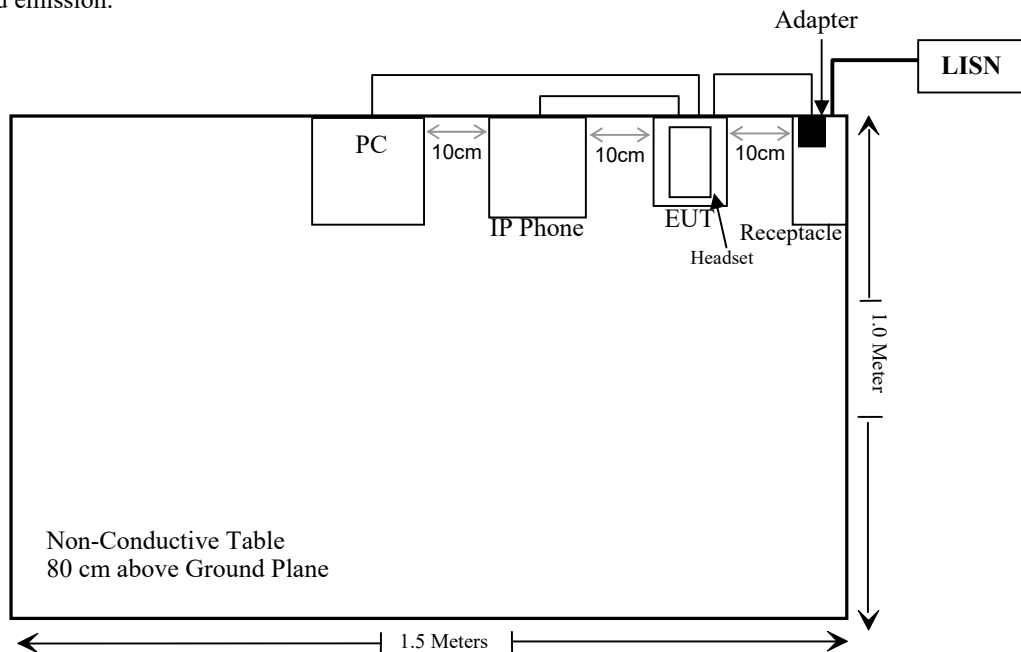

For radiated emission:

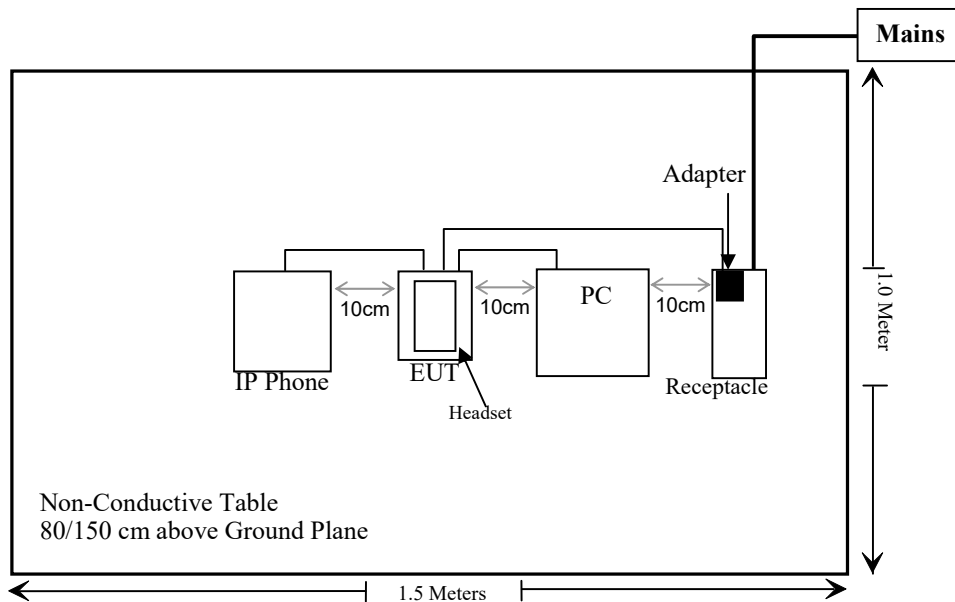

SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC §15.247 (i) & §1.1307 (b) (3) & §2.1091	MAXIMUM PERMISSIBLE EXPOSURE (MPE)	Compliant
RSS-102 § 2.5.2	Exemption Limits For Routine Evaluation-RF Exposure Evaluation	Compliant
FCC §15.203 RSS-Gen §6.8	Antenna Requirement	Compliant
FCC §15.207(a) RSS-Gen §8.8	AC Line Conducted Emissions	Compliant
FCC §15.205, §15.209, §15.247(d) RSS-247 § 5.5, RSS-GEN § 8.10	Radiated Emissions	Compliant
FCC §15.247(a)(1) RSS-247 § 5.1(a), RSS-GEN § 6.7	20 dB Emission Bandwidth & 99% Occupied Bandwidth	Compliant
FCC §15.247(a)(1) RSS-247 § 5.1 (b)	Channel Separation Test	Compliant
FCC §15.247(a)(1)(iii) RSS-247 § 5.1 (d)	Time of Occupancy (Dwell Time)	Compliant
FCC §15.247(a)(1)(iii) RSS-247 § 5.1 (d)	Quantity of hopping channel Test	Compliant
FCC §15.247(b)(1) RSS-247 § 5.1(b) & § 5.4(b)	Peak Output Power Measurement	Compliant
FCC §15.247(d) RSS-247 § 5.5	Band edges	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde& Schwarz	EMI Test Receiver	ESCI	100784	2021/12/13	2022/12/12
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2021/12/13	2022/12/12
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2021/12/13	2022/12/12
Unknown	RF Coaxial Cable	No.17	N0350	2021/12/14	2022/12/13
Conducted Emission Test Software: e3 19821b (V9)					
Radiated Emissions Test (30MHz-1GHz)					
Rohde& Schwarz	Test Receiver	ESR	102725	2021/12/13	2022/12/12
SONOMA INSTRUMENT	Amplifier	310 N	186131	2021/11/09	2022/11/08
SONOMA INSTRUMENT	Amplifier	310 N	186131	2022/11/08	2023/11/07
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Unknown	RF Coaxial Cable	No.12	N040	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.13	N300	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.14	N800	2021/12/14	2022/12/13
Radiated Emission Test Software: e3 19821b (V9)					
Radiated Emissions Test (Above 1GHz)					
Rohde&Schwarz	Spectrum Analyzer	FSV40	101949	2021/12/13	2022/12/12
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2021/11/09	2022/11/08
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2021/11/11	2022/11/10
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Unknown	RF Coaxial Cable	No.10	N050	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.11	N1000	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.15	N600	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.16	N650	2021/12/14	2022/12/13
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2021/12/14	2022/12/13
Radiated Emission Test Software: e3 19821b (V9)					

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101948	2021/12/13	2022/12/12
Tonscend	RF Control Unit	JS0806-2	19G8060182	2021/10/26	2022/10/25
Tonscend	RF Control Unit	JS0806-2	19G8060182	2022/10/24	2023/10/23
WEINSCHL	10dB Attenuator	5324	AU 3842	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.31	RF-01	Each time	

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) & §1.1307 (b) (3) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to KDB 447498 D04 Interim General RF Exposure Guidance v01, clause 2.1.4 –MPE-Based Exemption:

An alternative to the SAR-based exemption is provided in § 1.1307(b)(3)(i)(C), for a much wider frequency range, from 300 kHz to 100 GHz, applicable for separation distances greater or equal to $\lambda/2\pi$, where λ is the free-space operating wavelength in meters. The MPE-based test exemption condition is in terms of ERP, defined as the product of the maximum antenna gain and the delivered maximum time-averaged power. For this case, a RF source is an RF exempt device if its ERP (watts) is no more than a frequency-dependent value, as detailed tabular form in Appendix B. These limits have been derived based on the basic specifications on Maximum Permissible Exposure (MPE) considered for the FCC rules in § 1.1310(e)(1).

Table to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2 f$.
1,500-100,000	$19.2 R^2$.

f = frequency in MHz;

R = minimum separation distance from the body of a nearby person (appropriate units, e.g., m);

For multiple RF sources: Multiple RF sources are exempt if:

in the case of fixed RF sources operating in the same time-averaging period, or of multiple mobile or portable RF sources within a device operating in the same time averaging period, if the sum of the fractional contributions to the applicable thresholds is less than or equal to 1 as indicated in the following equation.

$$\sum_{i=1}^a \frac{P_i}{P_{th,i}} + \sum_{j=1}^b \frac{ERP_j}{ERP_{th,j}} + \sum_{k=1}^c \frac{Evaluated_k}{Exposure Limit_k} \leq 1$$

Where:

a = number of fixed, mobile, or portable RF sources claiming exemption using paragraph (b)(3)(i)(B) of this section for P_{th}, including existing exempt transmitters and those being added.

b = number of fixed, mobile, or portable RF sources claiming exemption using paragraph (b)(3)(i)(C) of this section for Threshold ERP, including existing exempt transmitters and those being added.

c = number of existing fixed, mobile, or portable RF sources with known evaluation for the specified minimum distance including existing evaluated transmitters.

P_i = the available maximum time-averaged power or the ERP, whichever is greater, for fixed, mobile, or portable RF source i at a distance between 0.5 cm and 40 cm (inclusive).

$P_{th,i}$ = the exemption threshold power (P_{th}) according to paragraph (b)(3)(i)(B) of this section for fixed, mobile, or portable RF source i.

ERP_j = the ERP of fixed, mobile, or portable RF source j.

ERP_{th,j} = exemption threshold ERP for fixed, mobile, or portable RF source j, at a distance of at least $\lambda/2\pi$ according to the applicable formula of paragraph (b)(3)(i)(C) of this section.

Evaluated_k = the maximum reported SAR or MPE of fixed, mobile, or portable RF source k either in the device or at the transmitter site from an existing evaluation at the location of exposure.

Exposure Limit_k = either the general population/uncontrolled maximum permissible exposure (MPE) or specific absorption rate (SAR) limit for each fixed, mobile, or portable RF source k, as applicable from § 1.1310 of this chapter.

Test result

For worst case:

Mode	Frequency (MHz)	Tune up conducted power	Antenna Gain		ERP		Evaluation Distance (m)	ERP Limit (mW)
		(dBm)	(dBi)	(dBd)	(dBm)	(mW)		
BT	2402-2480	4.0	-1.0	-3.15	0.85	1.216	0.2	768
DECT	1920-1930	20.0	-3.0	-5.15	14.85	30.55	0.2	768

Note 1: The tune-up power was declared by the applicant.

Note 2: 0dBd=2.15dBi.

Note 3: The DECT function can transmit at the same time with the BT function.

Simultaneous transmitting consideration (worst case):

The ratio= $ERP_{DECT}/limit + ERP_{BT}/limit = 30.55/768 + 1.216/768 = 0.041 < 1.0$

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant.

RSS-102 § 2.5.2 –EXEMPTION LIMITS FOR ROUTINE EVALUATION-RF EXPOSURE EVALUATION

Applicable Standard

According to RSS-102 § (2.5.2):

2.5.2 Exemption Limits for Routine Evaluation — RF Exposure Evaluation

RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:

- below 20 MHz⁶ and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 1 W (adjusted for tune-up tolerance);
- at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $22.48/f^{0.5}$ W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance);
- at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $1.31 \times 10^{-2} f^{0.6834}$ W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 5 W (adjusted for tune-up tolerance).

In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the e.i.r.p. was derived.

Calculated Data:

For worst case:

Mode	Frequency (MHz)	Maximum tune-up conducted power	Antenna Gain (dBi)	Maximum tune-up EIRP		Evaluation Distance (cm)	Limit (W)
		(dBm)		(dBm)	(W)		
BT	2402-2480	4.0	-1.0	3.0	0.002	20	2.68

Result: The RF Exposure evaluation can be exempted.

FCC §15.203 & RSS-GEN §6.8 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

According to FCC § 15.203, the applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Connector Construction

The EUT has one internal antenna arrangement which was permanently attached and the maximum antenna gain is -1dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Antenna Type	Antenna Gain	Impedance	Frequency Range
PCB	-1dBi	50 Ω	2.4~2.5GHz


Result: Compliance

FCC §15.207 (a) & RSS-GEN § 8.8 – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a), RSS-GEN § 8.8

EUT Setup

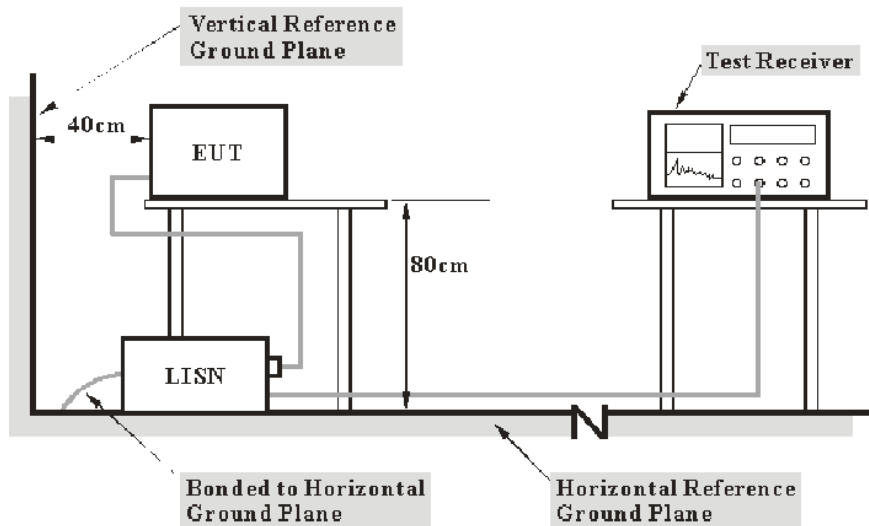

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207 & RSS-Gen.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Transd Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Transd Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a over limit of -7 dB means the emission is 7 dB below the limit. The equation for over limit calculation is as follows:

$$\begin{aligned}\text{Over limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Reading level} + \text{Transd Factor}\end{aligned}$$

Test Data

Environmental Conditions


Temperature:	23 °C
Relative Humidity:	40~49%
ATM Pressure:	101~101.2kPa

The testing was performed by Jason Liu from 2022-10-08 to 2022-11-25.

EUT operation mode: Transmitting (worst case is 8DPSK, low channel)


For IC7 (QFN28):

AC 120V/60 Hz, Line

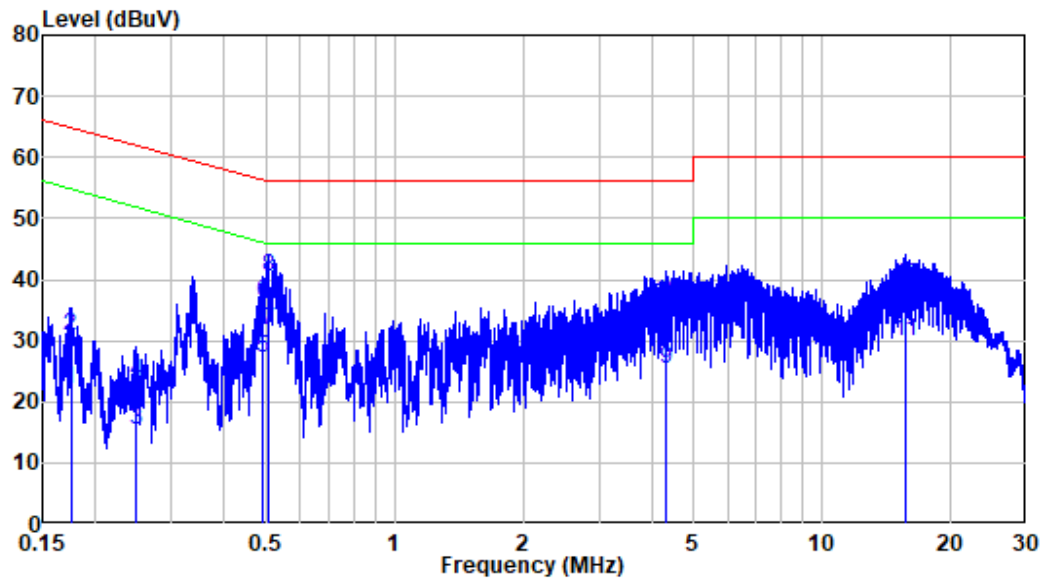

Site : Shielding Room
 Condition: Line
 Job No. : SZNS220727-34190E-RF
 Mode : BT
 Power : AC 120V 60Hz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.175	9.80	12.23	22.03	54.73	-32.70	Average
2	0.175	9.80	20.91	30.71	64.73	-34.02	QP
3	0.248	9.80	5.59	15.39	51.83	-36.44	Average
4	0.248	9.80	13.46	23.26	61.83	-38.57	QP
5	0.493	9.80	17.46	27.26	46.11	-18.85	Average
6	0.493	9.80	26.45	36.25	56.11	-19.86	QP
7	0.506	9.80	21.76	31.56	46.00	-14.44	Average
8	0.506	9.80	30.64	40.44	56.00	-15.56	QP
9	4.317	9.84	15.58	25.42	46.00	-20.58	Average
10	4.317	9.84	26.39	36.23	56.00	-19.77	QP
11	15.614	9.96	19.85	29.81	50.00	-20.19	Average
12	15.614	9.96	29.03	38.99	60.00	-21.01	QP

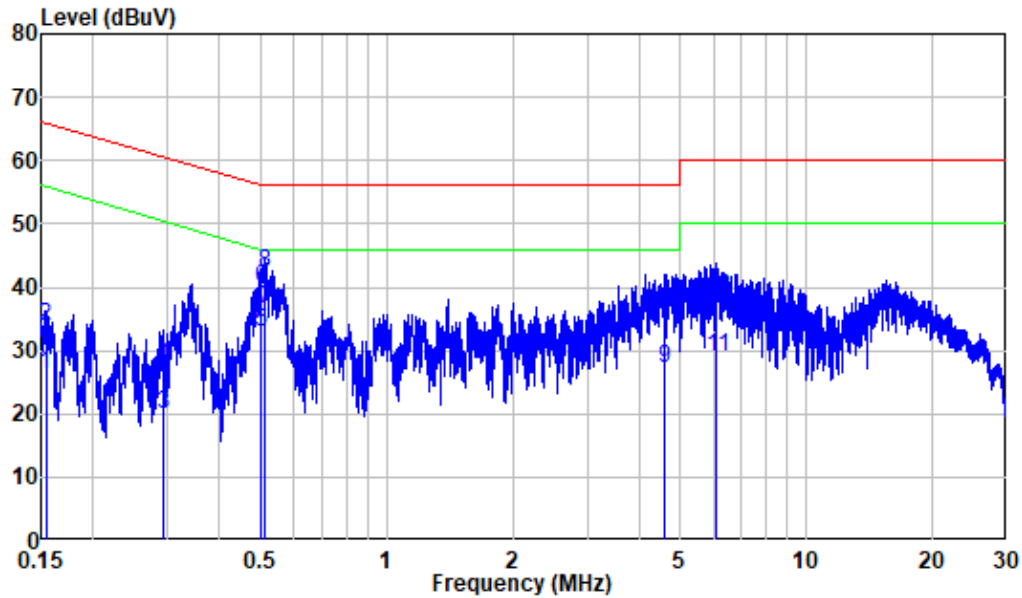AC 120V/60 Hz, Neutral

Site : Shielding Room
 Condition: Neutral
 Job No. : SZNS220727-34190E-RF
 Mode : BT
 Power : AC 120V 60Hz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.154	9.80	16.32	26.12	55.78	-29.66	Average
2	0.154	9.80	23.99	33.79	65.78	-31.99	QP
3	0.293	9.80	9.99	19.79	50.43	-30.64	Average
4	0.293	9.80	17.79	27.59	60.43	-32.84	QP
5	0.499	9.80	23.23	33.03	46.02	-12.99	Average
6	0.499	9.80	30.13	39.93	56.02	-16.09	QP
7	0.512	9.81	26.80	36.61	46.00	-9.39	Average
8	0.512	9.81	32.58	42.39	56.00	-13.61	QP
9	4.610	9.88	17.36	27.24	46.00	-18.76	Average
10	4.610	9.88	26.28	36.16	56.00	-19.84	QP
11	6.109	9.94	19.11	29.05	50.00	-20.95	Average
12	6.109	9.94	28.33	38.27	60.00	-21.73	QP

For IC12 (SOIC28):

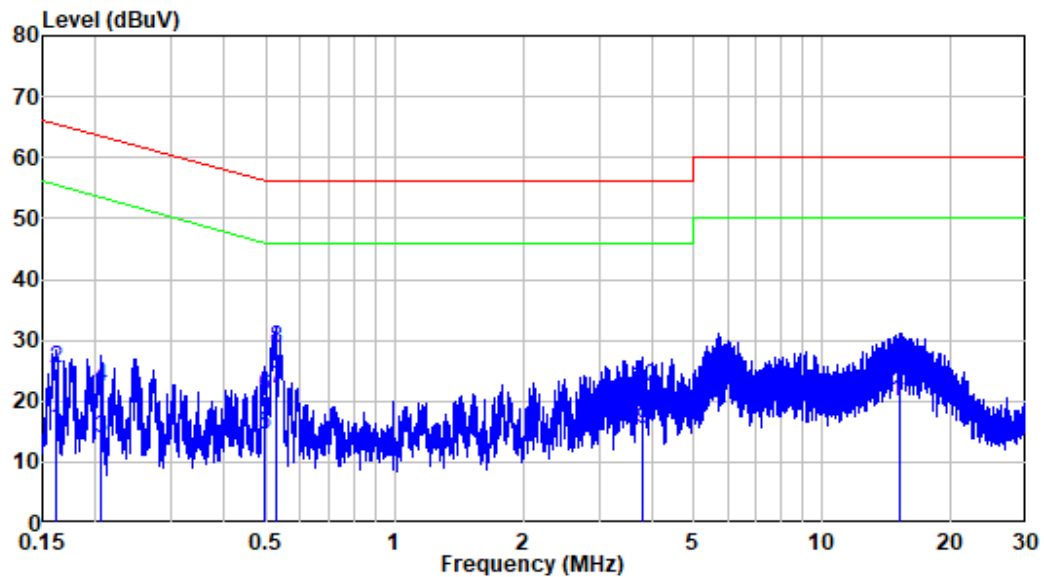AC 120V/60 Hz, Line

Site : Shielding Room
 Condition: Line
 Job No. : SZNS220727-34190E-RF
 Mode : BT
 Power : AC 120V 60Hz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.162	9.80	5.62	15.42	55.37	-39.95	Average
2	0.162	9.80	15.63	25.43	65.37	-39.94	QP
3	0.205	9.80	4.06	13.86	53.40	-39.54	Average
4	0.205	9.80	12.43	22.23	63.40	-41.17	QP
5	0.495	9.80	4.67	14.47	46.08	-31.61	Average
6	0.495	9.80	11.08	20.88	56.08	-35.20	QP
7	0.527	9.81	12.13	21.94	46.00	-24.06	Average
8	0.527	9.81	18.97	28.78	56.00	-27.22	QP
9	3.810	9.84	5.55	15.39	46.00	-30.61	Average
10	3.810	9.84	12.41	22.25	56.00	-33.75	QP
11	15.246	9.95	9.83	19.78	50.00	-30.22	Average
12	15.246	9.95	16.40	26.35	60.00	-33.65	QP

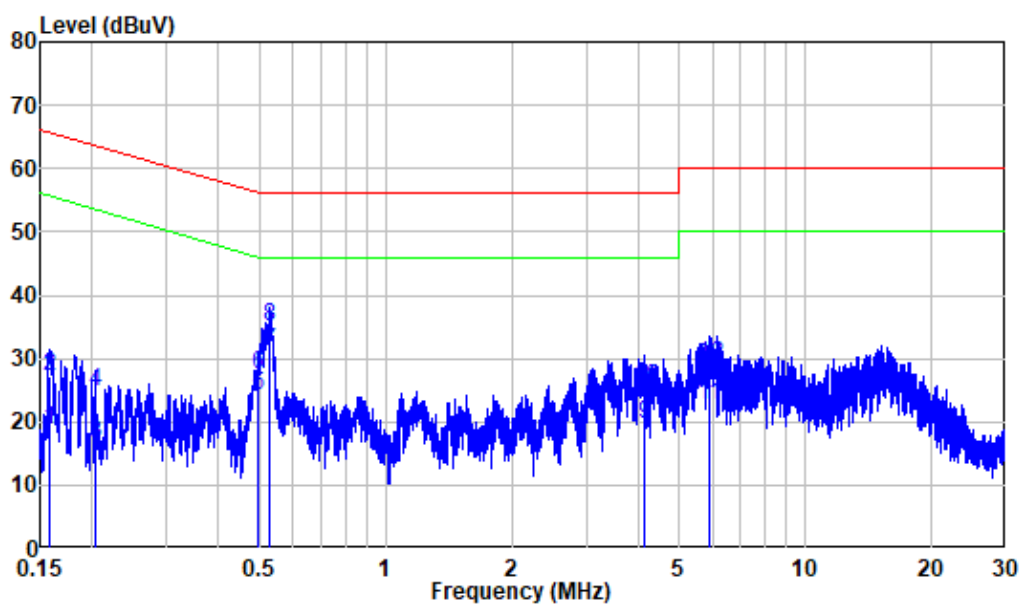AC 120V/60 Hz, Neutral

Site : Shielding Room
 Condition: Neutral
 Job No. : SZNS220727-34190E-RF
 Mode : BT
 Power : AC 120V 60Hz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.158	9.80	8.97	18.77	55.59	-36.82	Average
2	0.158	9.80	17.49	27.29	65.59	-38.30	QP
3	0.203	9.80	6.66	16.46	53.50	-37.04	Average
4	0.203	9.80	14.85	24.65	63.50	-38.85	QP
5	0.497	9.80	14.24	24.04	46.05	-22.01	Average
6	0.497	9.80	17.73	27.53	56.05	-28.52	QP
7	0.527	9.81	21.21	31.02	46.00	-14.98	Average
8	0.527	9.81	25.17	34.98	56.00	-21.02	QP
9	4.130	9.85	9.87	19.72	46.00	-26.28	Average
10	4.130	9.85	15.61	25.46	56.00	-30.54	QP
11	5.886	9.93	12.66	22.59	50.00	-27.41	Average
12	5.886	9.93	19.06	28.99	60.00	-31.01	QP

For IC10 (SSOP28):

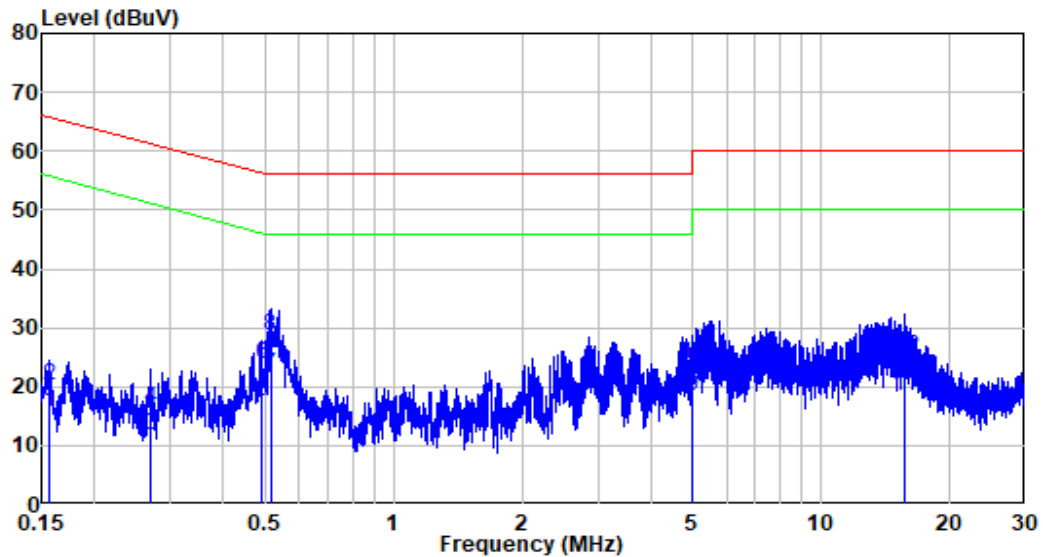AC 120V/60 Hz, Line

Site : Shielding Room
 Condition: Line
 Job No. : SZNS220727-34190E-RF
 Mode : BT
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.157	9.80	5.86	15.66	55.63	-39.97	Average
2	0.157	9.80	10.33	20.13	65.63	-45.50	QP
3	0.269	9.80	1.89	11.69	51.14	-39.45	Average
4	0.269	9.80	6.44	16.24	61.14	-44.90	QP
5	0.489	9.80	7.61	17.41	46.19	-28.78	Average
6	0.489	9.80	14.00	23.80	56.19	-32.39	QP
7	0.515	9.81	12.26	22.07	46.00	-23.93	Average
8	0.515	9.81	18.75	28.56	56.00	-27.44	QP
9	5.001	9.85	8.48	18.33	50.00	-31.67	Average
10	5.001	9.85	13.91	23.76	60.00	-36.24	QP
11	15.594	9.96	8.47	18.43	50.00	-31.57	Average
12	15.594	9.96	15.07	25.03	60.00	-34.97	QP

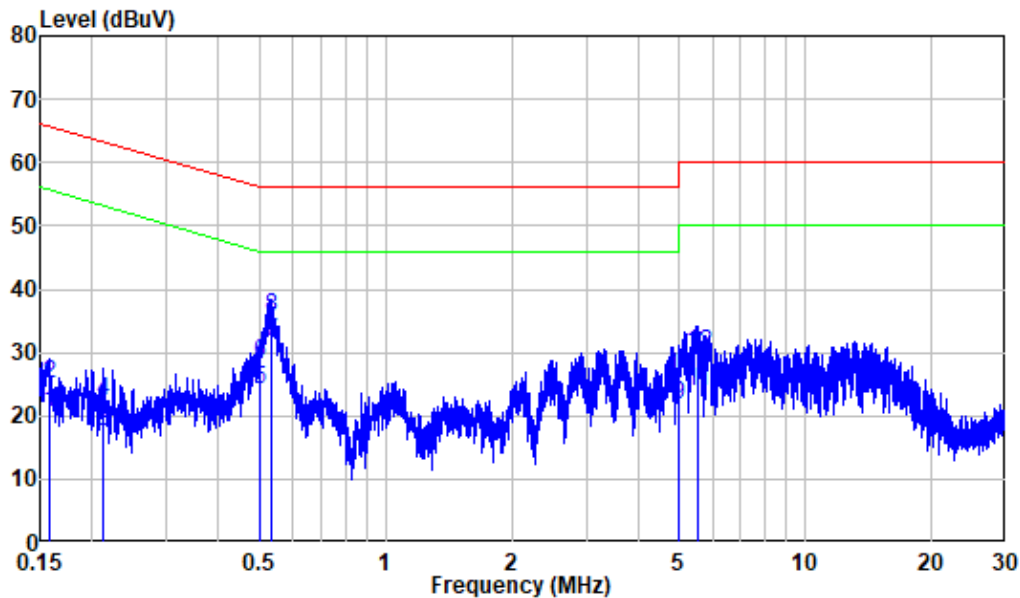AC 120V/60 Hz, Neutral

Site : Shielding Room
 Condition: Neutral
 Job No. : SZNS220727-34190E-RF
 Mode : BT
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.157	9.80	10.62	20.42	55.60	-35.18	Average
2	0.157	9.80	15.29	25.09	65.60	-40.51	QP
3	0.211	9.80	7.68	17.48	53.15	-35.67	Average
4	0.211	9.80	12.48	22.28	63.15	-40.87	QP
5	0.499	9.80	14.44	24.24	46.02	-21.78	Average
6	0.499	9.80	18.59	28.39	56.02	-27.63	QP
7	0.535	9.81	21.93	31.74	46.00	-14.26	Average
8	0.535	9.81	25.74	35.55	56.00	-20.45	QP
9	4.978	9.89	11.85	21.74	46.00	-24.26	Average
10	4.978	9.89	16.27	26.16	56.00	-29.84	QP
11	5.527	9.92	13.94	23.86	50.00	-26.14	Average
12	5.527	9.92	19.96	29.88	60.00	-30.12	QP


FCC §15.209, §15.205 & §15.247(d) & RSS-247§ 5.5 - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.205; §15.209; §15.247(d); RSS-247§ 5.5; RSS-GEN § 8.10

EUT Setup

Below 1 GHz:

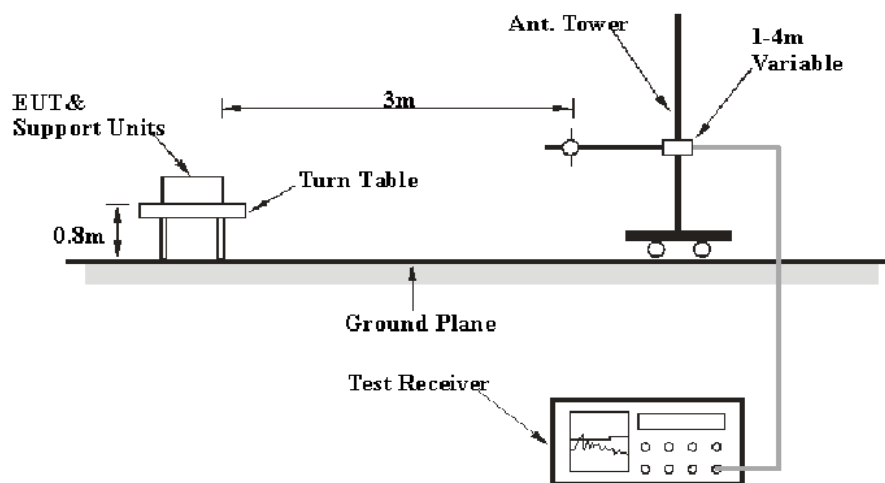

Above 1GHz:

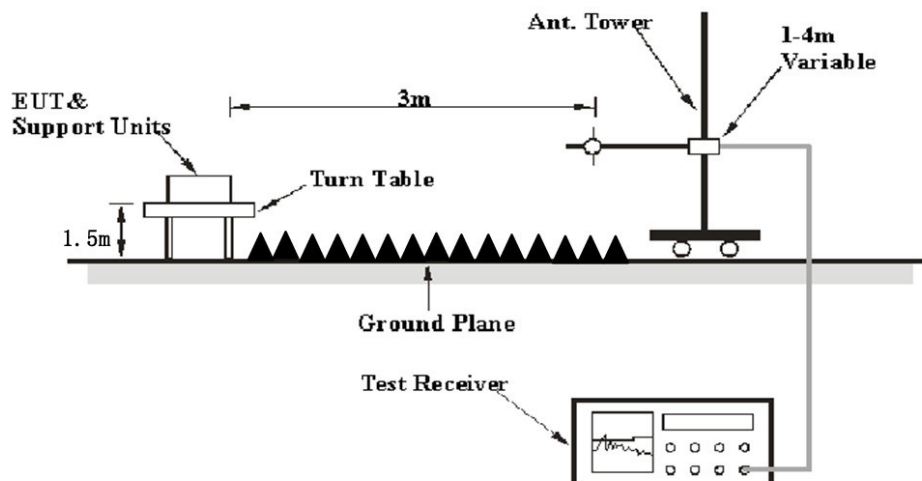

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013 & RSS-Gen. The specification used was the FCC 15.209, and FCC 15.247/RSS-247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK

For average measurement:

Use the duty cycle factor correction factor method per 15.35(c).

Duty cycle=On time/100milliseconds, On time= $N_1 \cdot L_1 + N_2 \cdot L_2 + \dots + N_{n-1} \cdot L_{n-1} + N_n \cdot L_n$,

where N_1 is number of type 1 pulses, L_1 is length of type 1 pulse, etc.

Average Emission Level=Peak Emission Level+20*log(Duty cycle)

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level / Corrected Amplitude} - \text{Limit} \\ \text{Level / Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions

Temperature:	24~25.6 °C
Relative Humidity:	50~60 %
ATM Pressure:	101.0 kPa

The testing was performed by Level Li from 2022-10-08 to 2022-10-27 and Jason Liu on 2022-11-24 for below 1GHz, Zeki Ma from 2022-09-27 to 2022-10-09 for above 1GHz.


EUT operation mode: Transmitting (Pre-scan in the X,Y and Z axes of orientation, the worst case of X-axes orientation was recorded)

For IC 7(QFN28):

30MHz-1GHz: (the worst case is 8DPSK Mode, High channel)

Note: When the test result of Peak was more than 6dB below the limit of QP, just the Peak value was recorded.


Horizontal

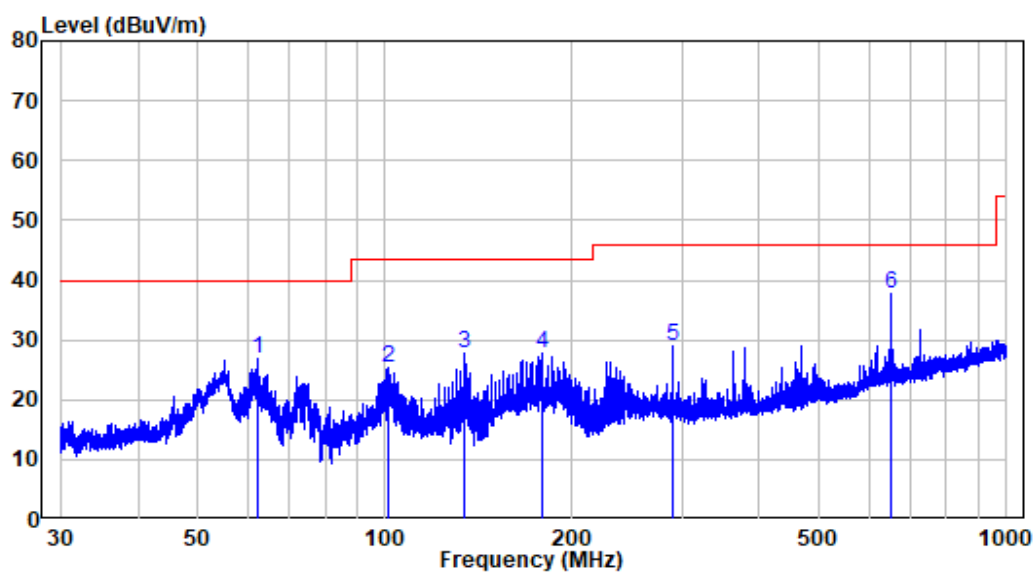

Site : chamber
Condition: 3m HORIZONTAL
Job No. : SZNS220727-34190E-RF
Test Mode: BT

	Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	62.186	-11.50	38.31	26.81	40.00	-13.19	Peak
2	100.978	-11.69	37.04	25.35	43.50	-18.15	Peak
3	134.500	-15.00	42.65	27.65	43.50	-15.85	Peak
4	179.072	-12.86	40.64	27.78	43.50	-15.72	Peak
5	290.272	-9.30	38.21	28.91	46.00	-17.09	Peak
6	653.372	-1.63	39.43	37.80	46.00	-8.20	Peak

Vertical

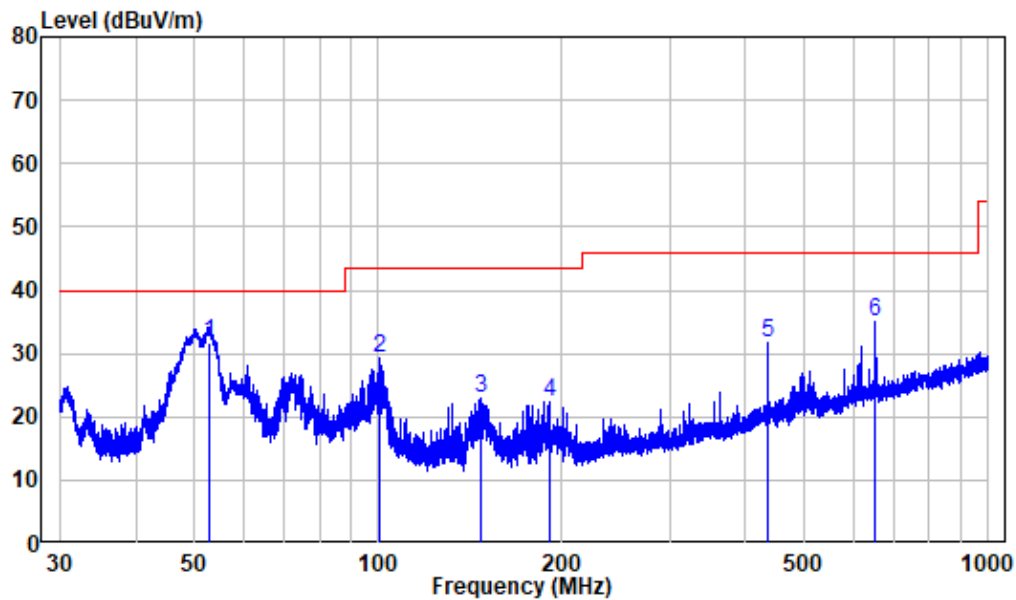


Site : chamber
Condition: 3m VERTICAL
Job No. : SZNS220727-34190E-RF
Test Mode: BT

	Freq	Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	52.790	-10.13	41.71	31.58	40.00	-8.42	QP
2	100.229	-11.78	41.12	29.34	43.50	-14.16	Peak
3	147.662	-15.40	38.37	22.97	43.50	-20.53	Peak
4	191.158	-11.39	33.79	22.40	43.50	-21.10	Peak
5	435.590	-5.70	37.48	31.78	46.00	-14.22	Peak
6	653.372	-1.63	36.72	35.09	46.00	-10.91	Peak

For IC12 (SOIC28):

30MHz-1GHz:


Horizontal

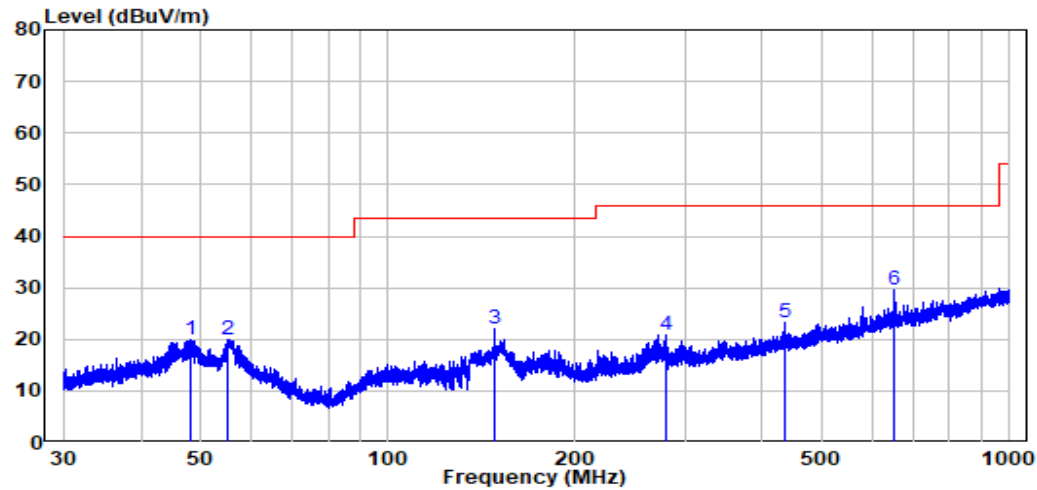

Site : chamber
Condition: 3m HORIZONTAL
Job No. : SZNS220727-34190E-RF
Test Mode: BT

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	47.931	-10.00	29.98	19.98	40.00	-20.02	Peak
2	55.245	-10.26	30.28	20.02	40.00	-19.98	Peak
3	148.376	-15.36	37.54	22.18	43.50	-21.32	Peak
4	280.638	-9.57	30.41	20.84	46.00	-25.16	Peak
5	435.399	-5.70	28.98	23.28	46.00	-22.72	Peak
6	653.372	-1.63	31.31	29.68	46.00	-16.32	Peak

Vertical

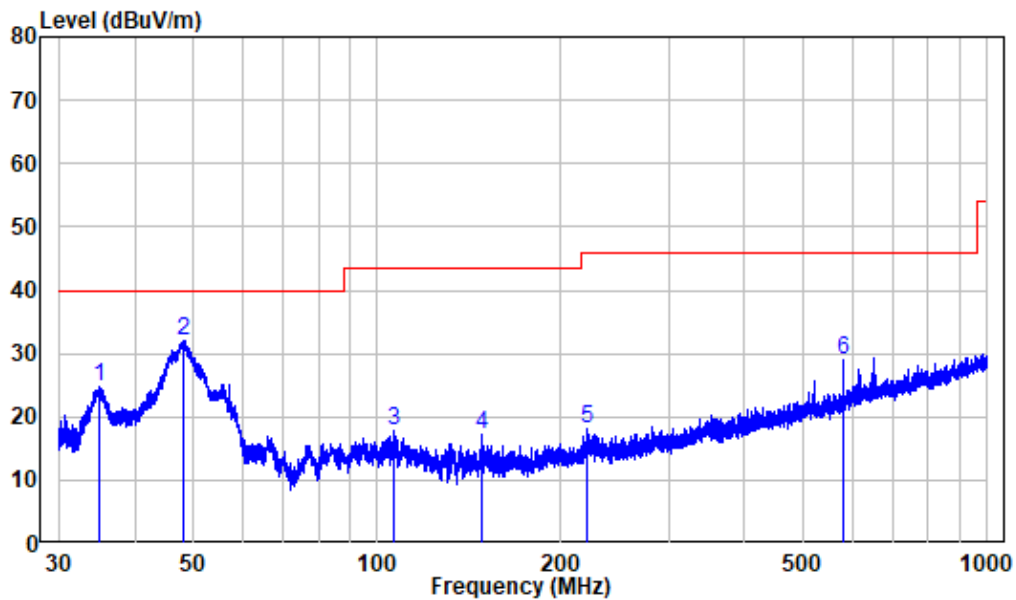


Site : chamber
Condition: 3m VERTICAL
Job No. : SZNS220727-34190E-RF
Test Mode: BT

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	34.928	-11.56	36.39	24.83	40.00	-15.17	Peak
2	48.226	-9.99	41.89	31.90	40.00	-8.10	Peak
3	106.152	-11.93	29.87	17.94	43.50	-25.56	Peak
4	148.246	-15.37	32.45	17.08	43.50	-26.42	Peak
5	221.004	-11.38	29.37	17.99	46.00	-28.01	Peak
6	580.703	-3.31	32.36	29.05	46.00	-16.95	Peak

For IC10 (SSOP28):

30MHz-1GHz:

Horizontal

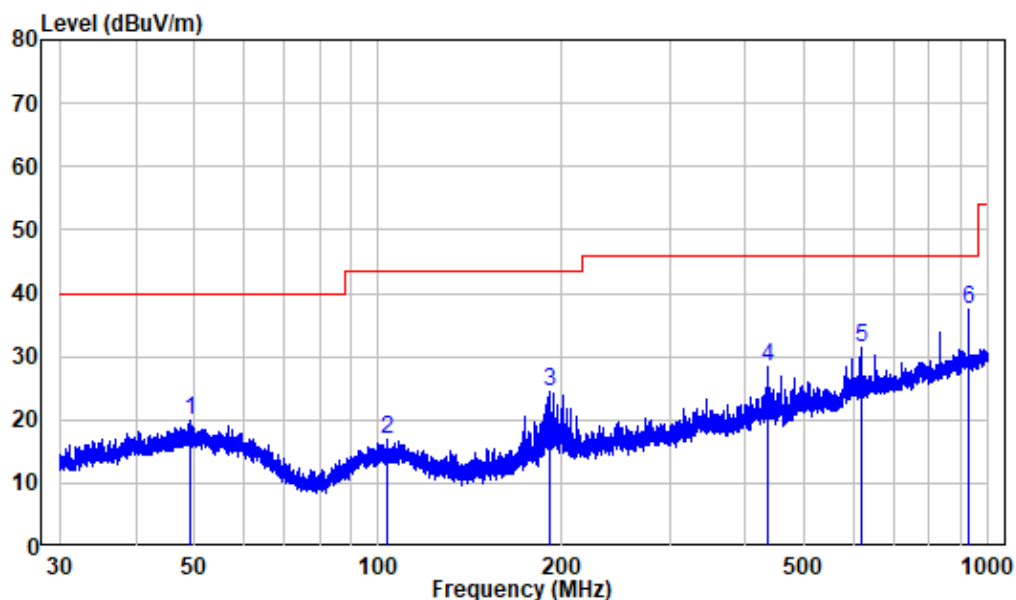

Site : chamber


Condition: 3m HORIZONTAL

Job No. : SZNS220727-34190E-RF

Test Mode: BT

	Freq	Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	49.079	-9.96	30.00	20.04	40.00	-19.96	Peak
2	103.125	-11.66	28.67	17.01	43.50	-26.49	Peak
3	191.493	-11.34	35.66	24.32	43.50	-19.18	Peak
4	435.590	-5.70	34.22	28.52	46.00	-17.48	Peak
5	619.079	-2.52	33.86	31.34	46.00	-14.66	Peak
6	931.046	1.75	35.65	37.40	46.00	-8.60	Peak

Vertical

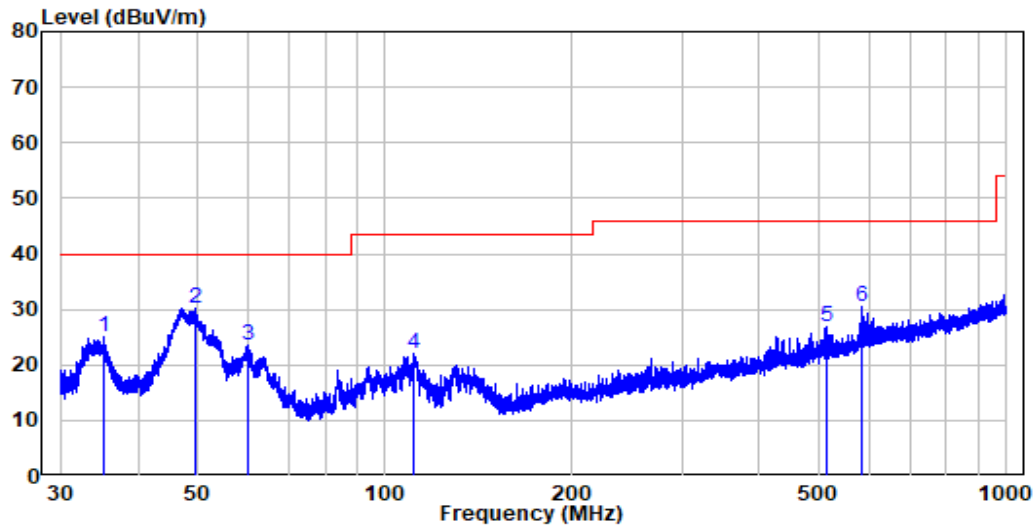

Site : chamber
 Condition: 3m VERTICAL
 Job No. : SZNS220727-34190E-RF
 Test Mode: BT

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	35.329	-11.43	36.54	25.11	40.00	-14.89	Peak
2	49.359	-9.94	40.25	30.31	40.00	-9.69	Peak
3	60.043	-10.64	34.22	23.58	40.00	-16.42	Peak
4	111.054	-12.11	34.01	21.90	43.50	-21.60	Peak
5	514.084	-4.28	31.00	26.72	46.00	-19.28	Peak
6	585.559	-2.97	33.47	30.50	46.00	-15.50	Peak

Above 1GHz: (worst case is 8DPSK, 3DH5 mode, with IC7 (QFN28))

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
Low Channel(2402MHz)									
2310	67.27	PK	296	1.2	H	-7.24	60.03	74	-13.97
2310	67.49	PK	167	1.2	V	-7.24	60.25	74	-13.75
2390	68.34	PK	237	1.6	H	-7.22	61.12	74	-12.88
2390	67.61	PK	224	2.4	V	-7.22	60.39	74	-13.61
4804	53.67	PK	324	2.3	H	-3.51	50.16	74	-23.84
4804	53.68	PK	300	2.3	V	-3.51	50.17	74	-23.83
Middle Channel(2441MHz)									
4882	53.73	PK	147	2.3	H	-3.37	50.36	74	-23.64
4882	53.83	PK	254	2.3	V	-3.37	50.46	74	-23.54
High Channel(2480 MHz)									
2483.5	69.83	PK	240	1.9	H	-7.20	62.63	74	-11.37
2483.5	69.25	PK	311	2.3	V	-7.20	62.05	74	-11.95
2500	68.63	PK	102	2.1	H	-7.18	61.45	74	-12.55
2500	68.68	PK	260	1.7	V	-7.18	61.50	74	-12.50
4960	53.52	PK	312	2.3	H	-3.01	50.51	74	-23.49
4960	53.14	PK	242	2.3	V	-3.01	50.13	74	-23.87

Field Strength of Average						
Frequency (MHz)	Peak Measurement @3m (dBμV/m)	Polar (H/V)	Duty Cycle Correction Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/RSS-247	
					Limit (dBμV/m)	Margin (dB)
Low Channel(2402MHz)						
2310	60.03	H	-24.82	35.21	54	-18.79
2310	60.25	V	-24.82	35.43	54	-18.57
2390	61.12	H	-24.82	36.30	54	-17.70
2390	60.39	V	-24.82	35.57	54	-18.43
4804	50.16	H	-24.82	25.34	54	-28.66
4804	50.17	V	-24.82	25.35	54	-28.65
Middle Channel(2441MHz)						
4882	50.36	H	-24.82	25.54	54	-28.46
4882	50.46	V	-24.82	25.64	54	-28.36
High Channel(2480MHz)						
2483.5	62.63	H	-24.82	37.81	54	-16.19
2483.5	62.05	V	-24.82	37.23	54	-16.77
2500	61.45	H	-24.82	36.63	54	-17.37
2500	61.5	V	-24.82	36.68	54	-17.32
4960	50.51	H	-24.82	25.69	54	-28.31
4960	50.13	V	-24.82	25.31	54	-28.69

Note:

Absolute Level = Corrected Factor + Reading

Margin = Corrected. Amplitude - Limit


Average level= Peak level+ Duty Cycle Corrected Factor

The worst case duty cycle as below:

Duty cycle = Ton/100ms = 2.87*2/100=0.0574


Duty Cycle Corrected Factor = 20lg (Duty cycle) = 20lg0.0574 = -24.82

Pulse length: 2.87ms

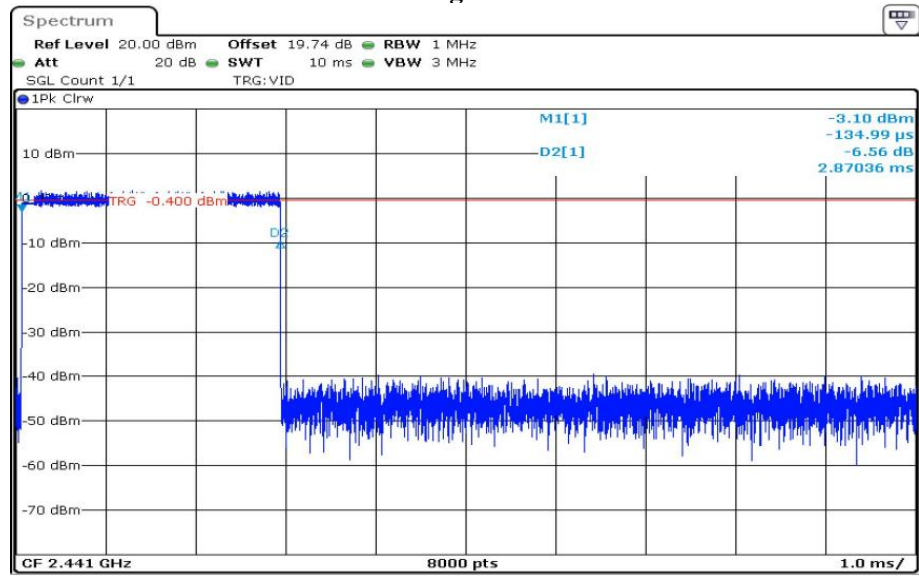

Date: 27.SEP.2022 01:20:32

Maximum Pulse number in 100ms: 2

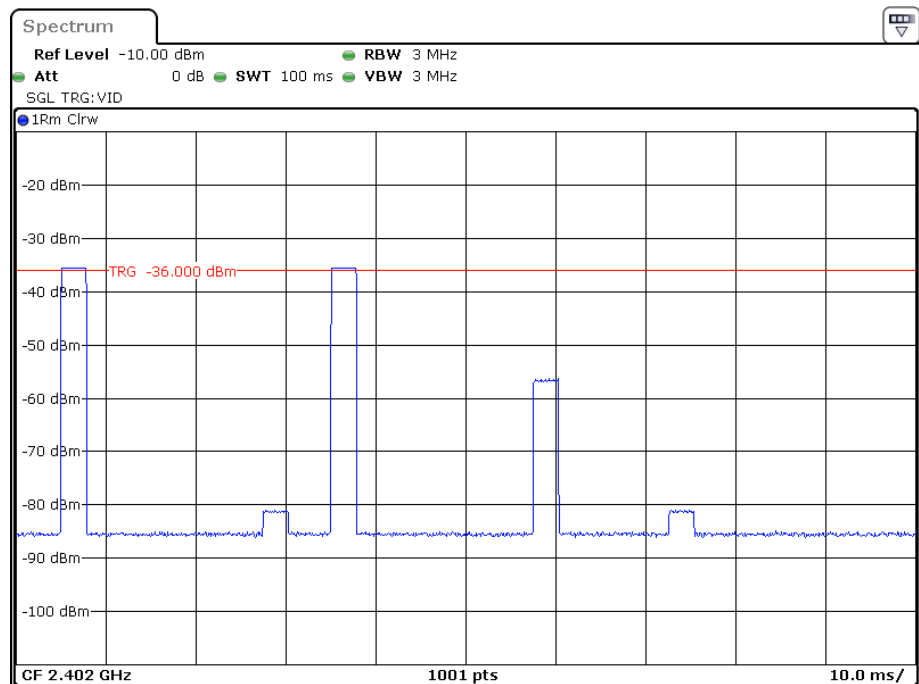


Date: 9.OCT.2022 09:23:47


1-18GHz

Pre-scan for High channel

Horizontal

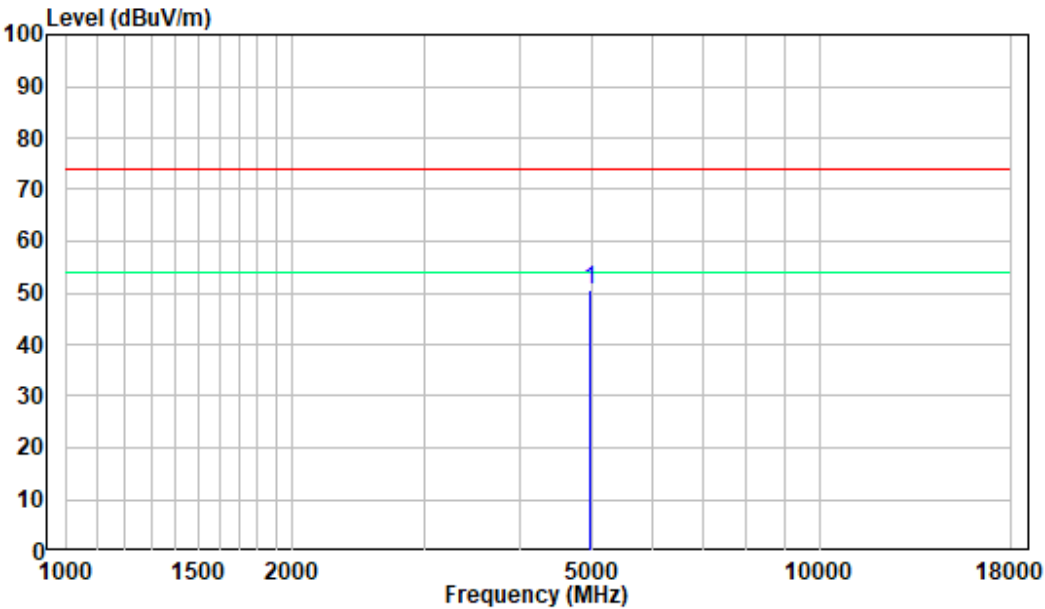


Vertical

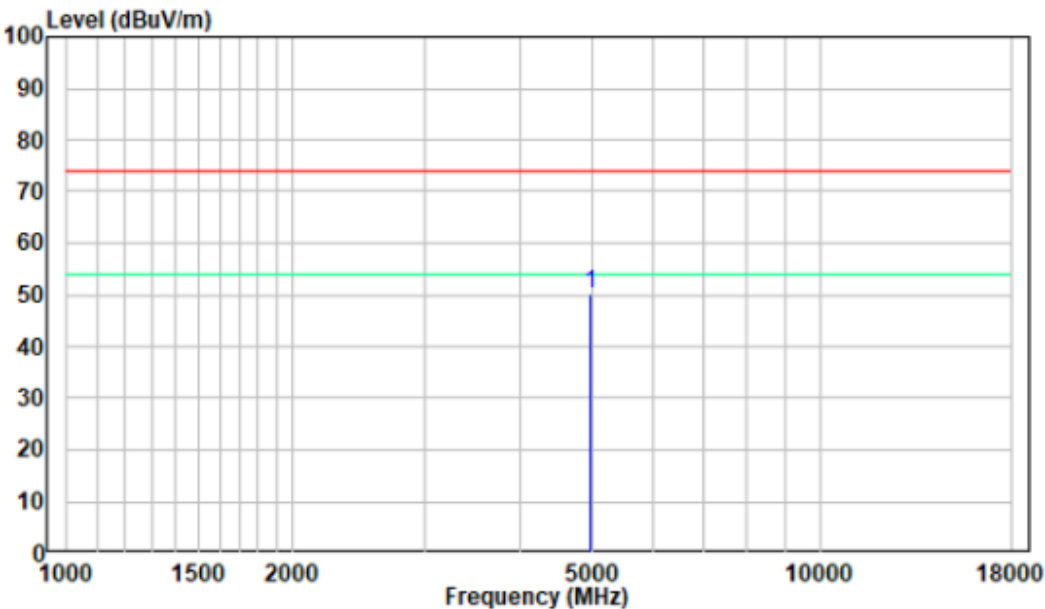


18-25GHz:

Pre-scan for High channel

Horizontal

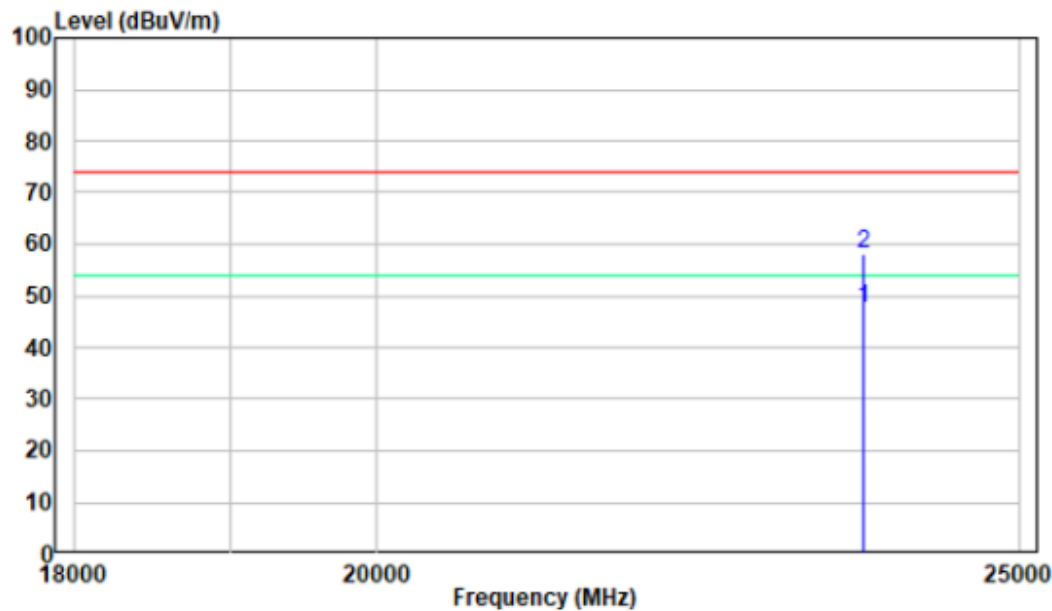

Vertical

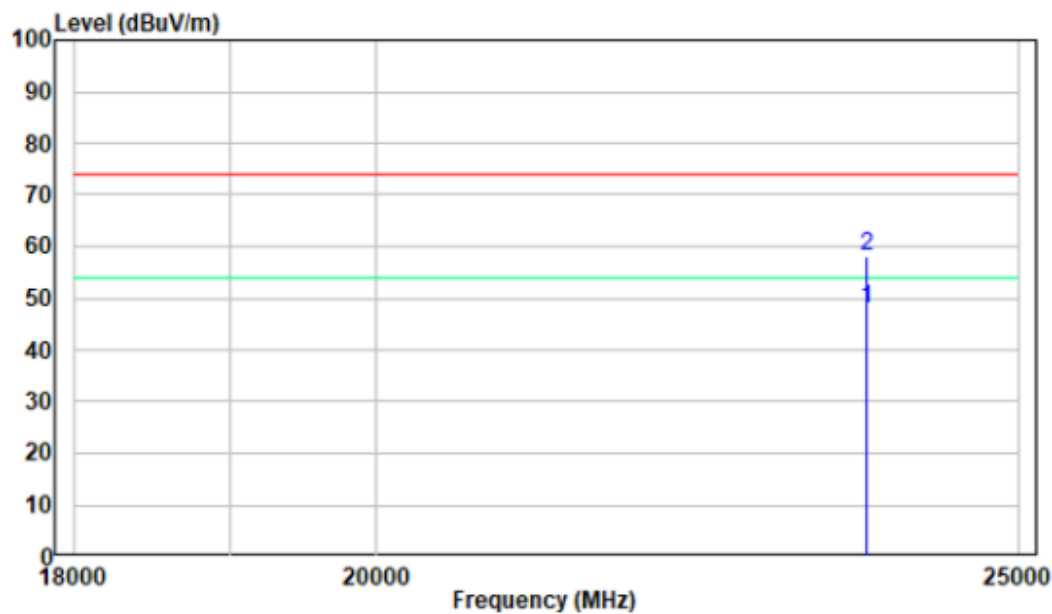

FCC §15.247(a) (1) & RSS-247 § 5.1 (b) -CHANNEL SEPARATION TEST

Applicable Standard

According to FCC §15.247(a) (1):


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

According to RSS-247 § 5.1 (b):

Frequency hopping systems (FHSs) shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the -20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the -20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Procedure

Set the EUT in transmitting mode, max hold the channel.
Set the adjacent channel of the EUT and max hold another trace.
Measure the channel separation.

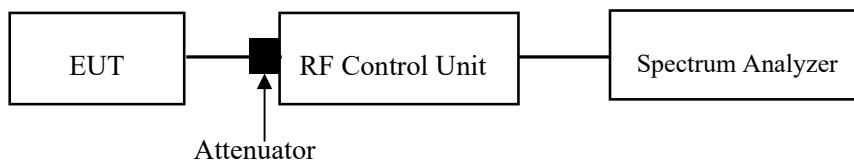

Test Data**Environmental Conditions**

Temperature:	25.2℃
Relative Humidity:	57%
ATM Pressure:	101.0 kPa

The testing was performed by Cat Kang on 2022-09-27 and 2022-11-08.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(a) (1) & RSS-247 § 5.1 (a), RSS-GEN § 6.7 – 20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH

Applicable Standard

According to FCC §15.247(a) (1):

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

According to RSS-247 § 5.1 (a), RSS-GEN § 6.7:

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “20 dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated 20 dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.


Test Procedure

The following conditions shall be observed for measuring the occupied bandwidth and 20 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 20 dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 20 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

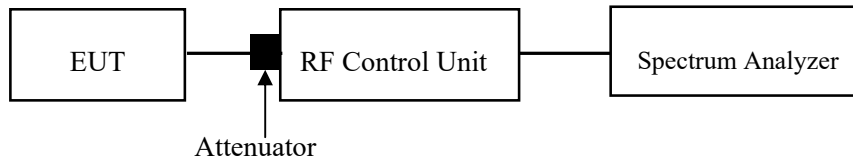

Test Data

Environmental Conditions

Temperature:	25.2℃
Relative Humidity:	57%
ATM Pressure:	101.0 kPa

The testing was performed by Cat Kang on 2022-09-27.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix

FCC §15.247(a) (1) (iii) & RSS-247 § 5.1 (d) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

According to FCC §15.247(a) (1) (iii):

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

According to RSS-247 § 5.1 (d):


Frequency hopping systems (FHSS) operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that at least 15 hopping channels are used.

Test Procedure

Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.

Set the EUT in hopping mode from first channel to last.

By using the max-hold function record the quantity of the channel.

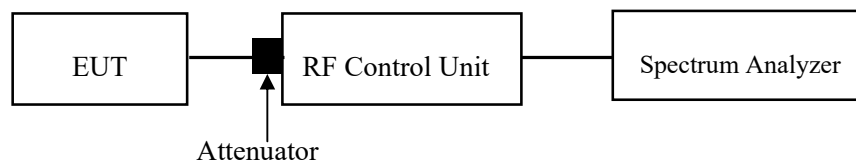

Test Data**Environmental Conditions**

Temperature:	25.2℃
Relative Humidity:	57%
ATM Pressure:	101.0 kPa

The testing was performed by Cat Kang on 2022-09-27.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(a) (1) (iii) & RSS-247 § 5.1 (d) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

According to FCC §15.247(a) (1) (iii):

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

According to RSS-247 § 5.1 (d):

Frequency hopping systems (FHSs) operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that at least 15 hopping channels are used.

Test Procedure

The EUT was worked in channel hopping.

Set the RBW to: 1MHz.

Set the VBW $\geq 3 \times$ RBW.

Set the span to 0Hz.


Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Recorded the time of single pulses

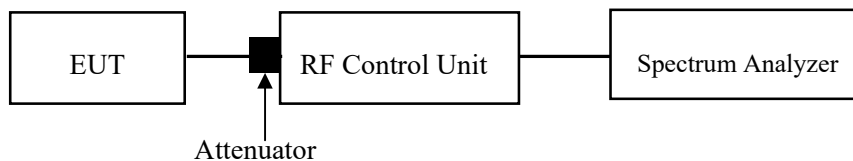

Test Data**Environmental Conditions**

Temperature:	25.2℃
Relative Humidity:	57%
ATM Pressure:	101.0 kPa

The testing was performed by Cat Kang on 2022-09-27 and 2022-10-11.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(b) (1) & RSS-247§ 5.1(b) &§ 5.4(b) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to FCC §15.247(b) (1):

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.


According to RSS-247§ 5.1(b) &§ 5.4(b):

For frequency hopping systems (FHSs) operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W (see Section 5.4(e) for exceptions).

Frequency hopping systems (FHSs) shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the -20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the -20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

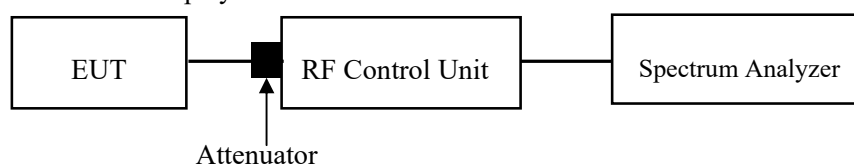

Test Data

Environmental Conditions

Temperature:	25.2℃
Relative Humidity:	57%
ATM Pressure:	101.0 kPa

The testing was performed by Cat Kang on 2022-09-27.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(d) & RSS-247 § 5.5 - BAND EDGES TESTING

Applicable Standard

According to FCC §15.247(d).

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to RSS-247 § 5.5.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(e), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Test Procedure


Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.

Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.

Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.

Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.

Repeat above procedures until all measured frequencies were complete.

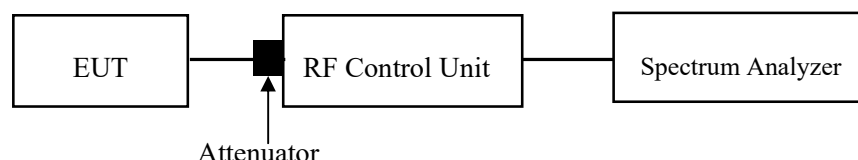

Test Data**Environmental Conditions**

Temperature:	25.2℃
Relative Humidity:	57%
ATM Pressure:	101.0 kPa

The testing was performed by Cat Kang on 2022-09-27.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

APPENDIX


Appendix A: 20dB Emission Bandwidth Test Result

Test Mode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	0.94	2401.54	2402.49	---	---
		2441	0.94	2440.54	2441.49	---	---
		2480	0.94	2479.54	2480.48	---	---
2DH1	Ant1	2402	1.34	2401.33	2402.67	---	---
		2441	1.34	2440.33	2441.67	---	---
		2480	1.34	2479.33	2480.67	---	---
3DH1	Ant1	2402	1.30	2401.36	2402.66	---	---
		2441	1.30	2440.36	2441.66	---	---
		2480	1.31	2479.36	2480.66	---	---

Test Graphs



2DH1_Ant1_2402

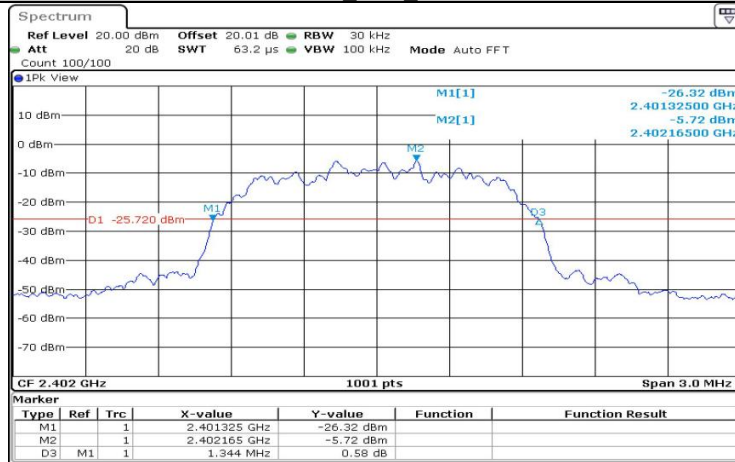


Date: 27.SEP.2022 00:47:57

2DH1_Ant1_2441




Date: 27.SEP.2022 00:49:27

2DH1_Ant1_2480

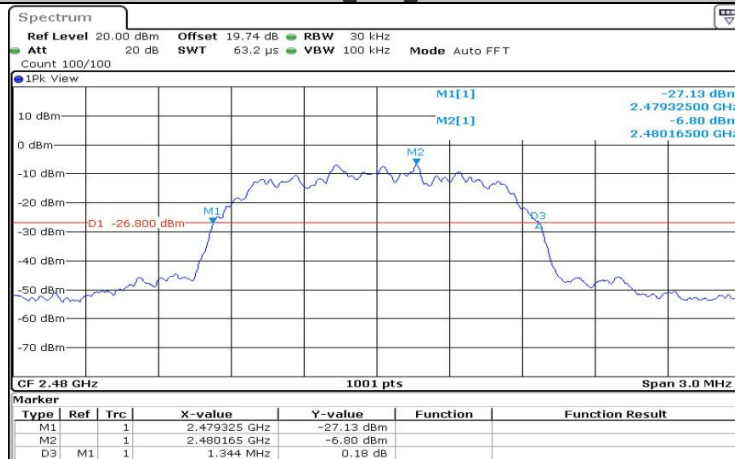

Date: 27.SEP.2022 00:50:47

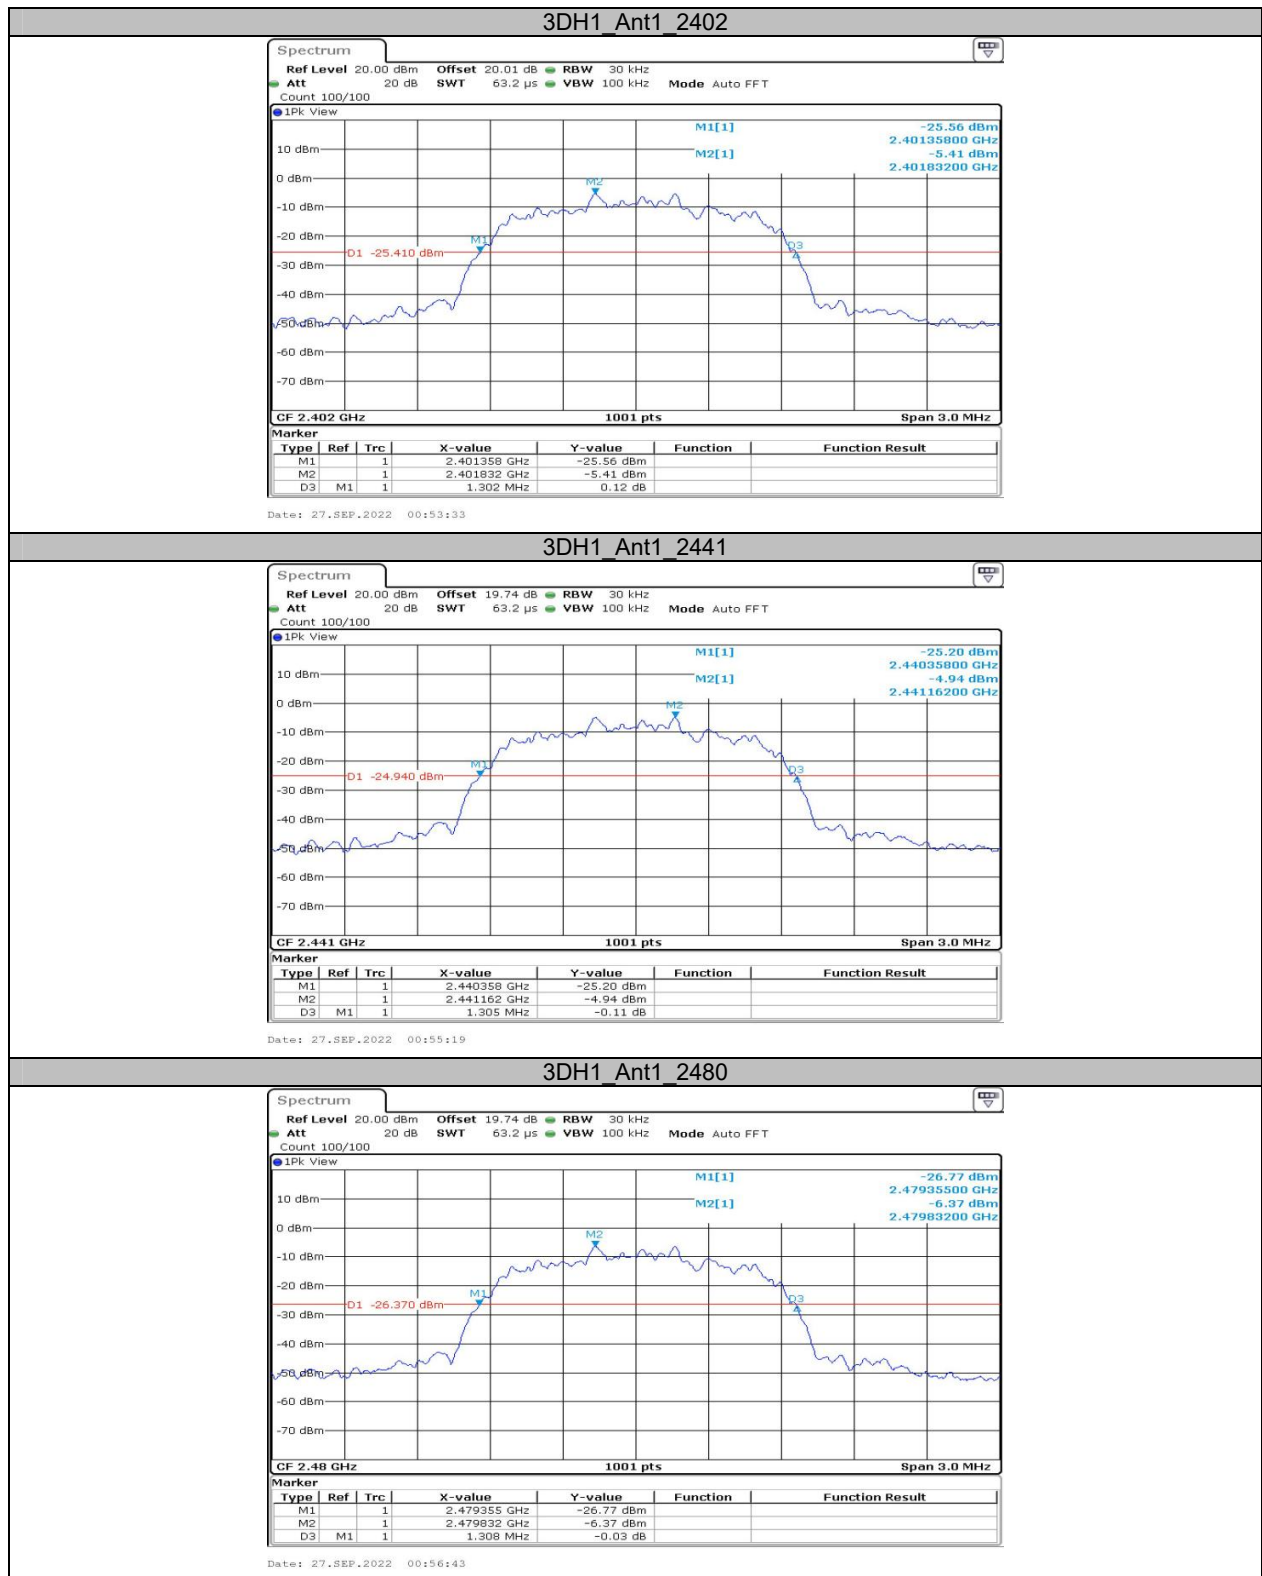


**Appendix B: Occupied Channel Bandwidth
Test Result**

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	0.857	2401.574	2402.432	---	---
		2441	0.860	2440.571	2441.432	---	---
		2480	0.857	2479.571	2480.429	---	---
2DH1	Ant1	2402	1.181	2401.407	2402.587	---	---
		2441	1.184	2440.404	2441.587	---	---
		2480	1.181	2479.404	2480.584	---	---
3DH1	Ant1	2402	1.166	2401.428	2402.593	---	---
		2441	1.166	2440.428	2441.593	---	---
		2480	1.169	2479.425	2480.593	---	---

Test Graphs



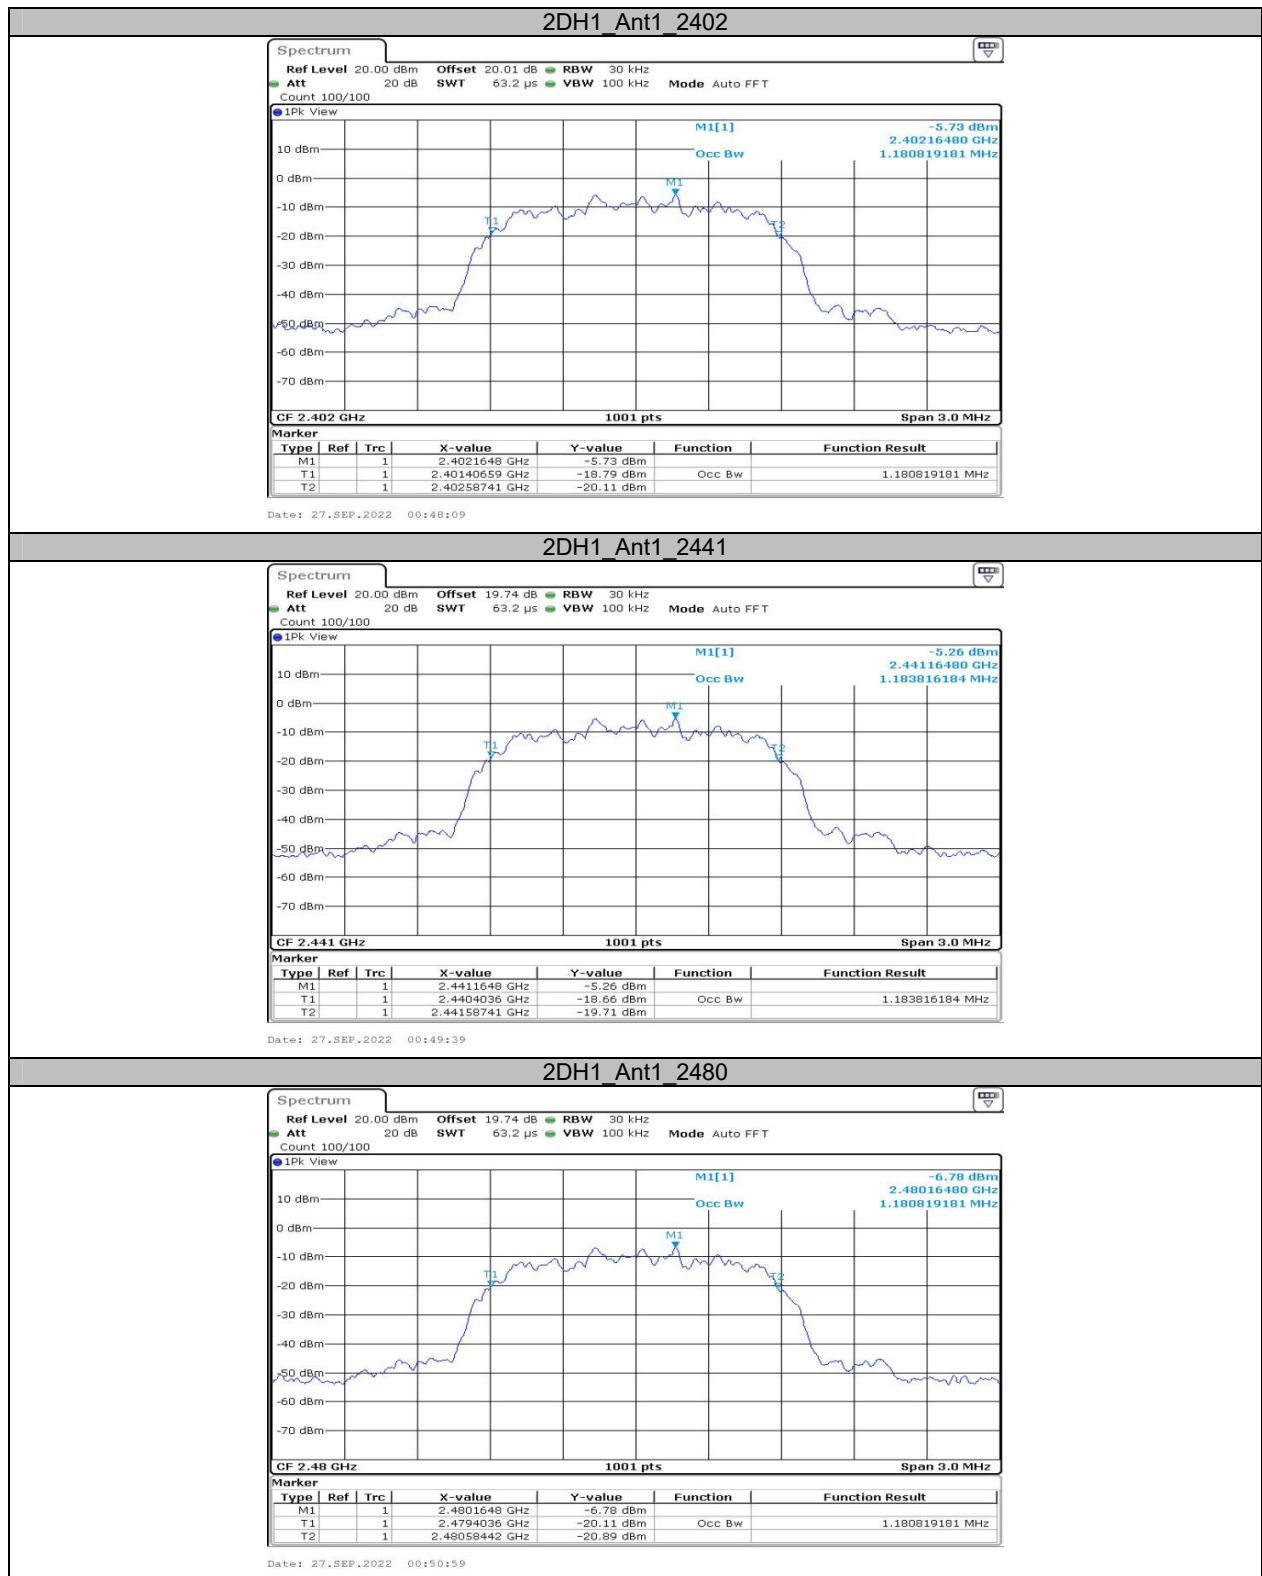





Appendix C: Maximum conducted output power**Test Result**

Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power [dBm]	Conducted Limit [dBm]	Verdict
DH1	Ant1	2402	3.42	≤20.97	PASS
		2441	3.98	≤20.97	PASS
		2480	2.81	≤20.97	PASS
2DH1	Ant1	2402	1.48	≤20.97	PASS
		2441	2.06	≤20.97	PASS
		2480	0.87	≤20.97	PASS
3DH1	Ant1	2402	2.09	≤20.97	PASS
		2441	2.67	≤20.97	PASS
		2480	1.45	≤20.97	PASS

Note: the antenna gain=-1dBi, the maximum EIRP= 2.98dBm<36dBm

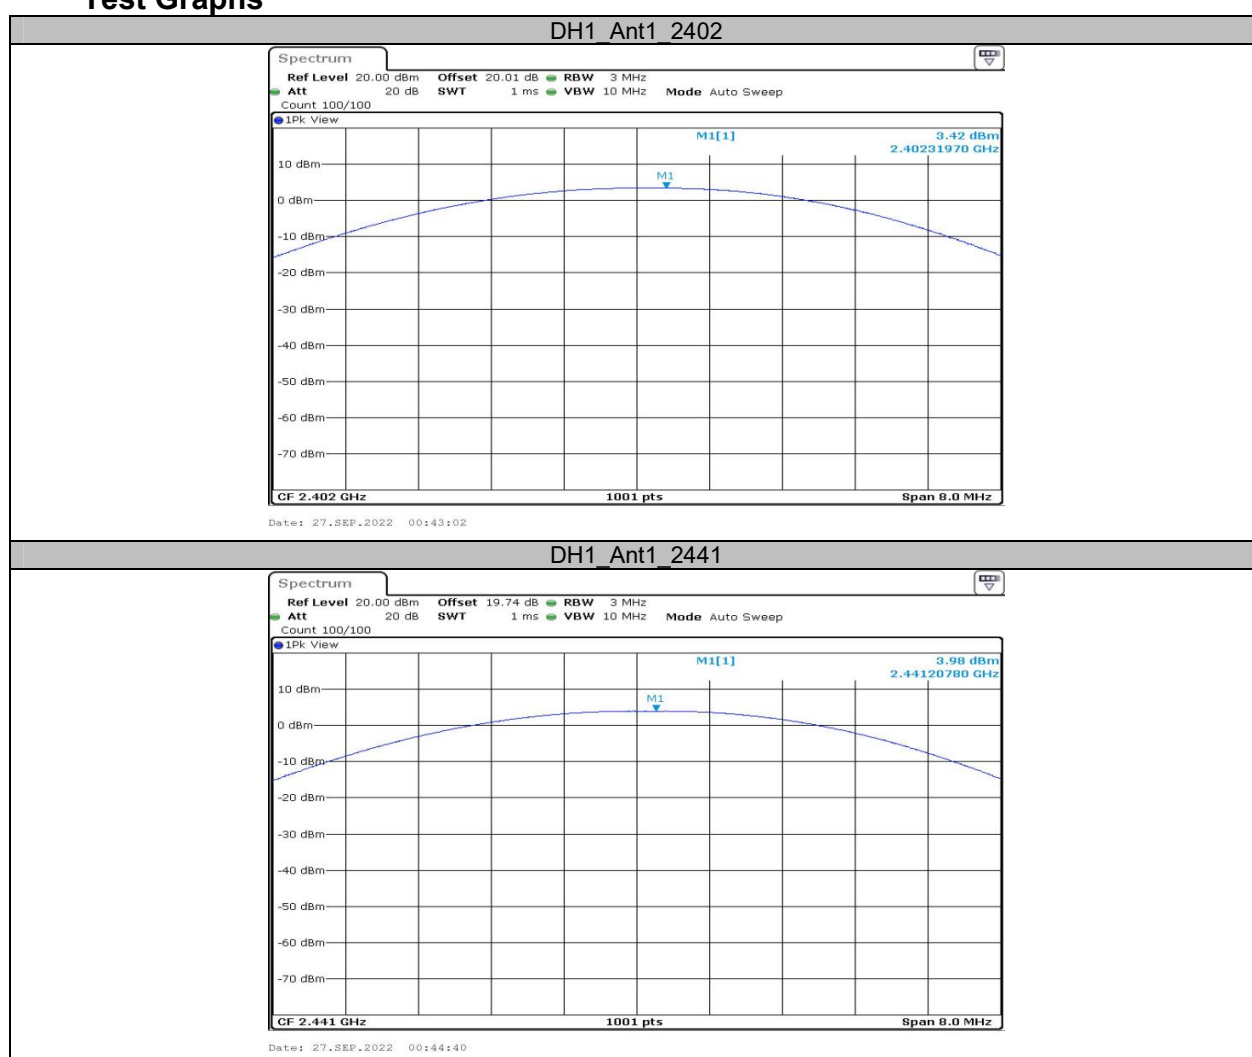Test Graphs


DH1_Ant1_2480

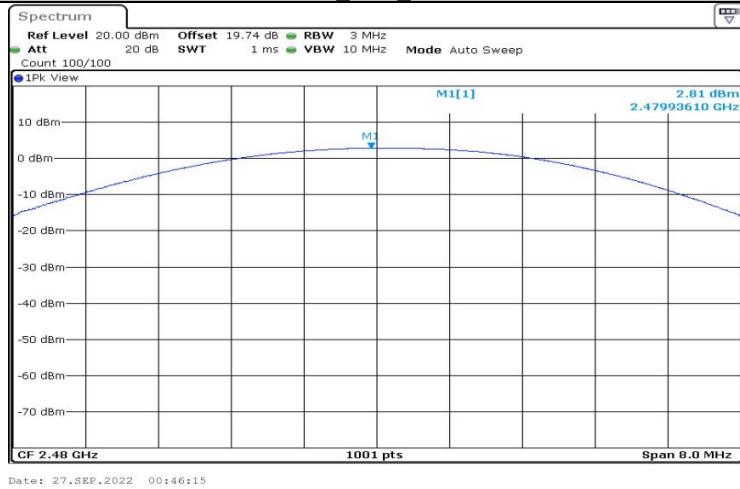

2DH1_Ant1_2402



2DH1_Ant1_2441

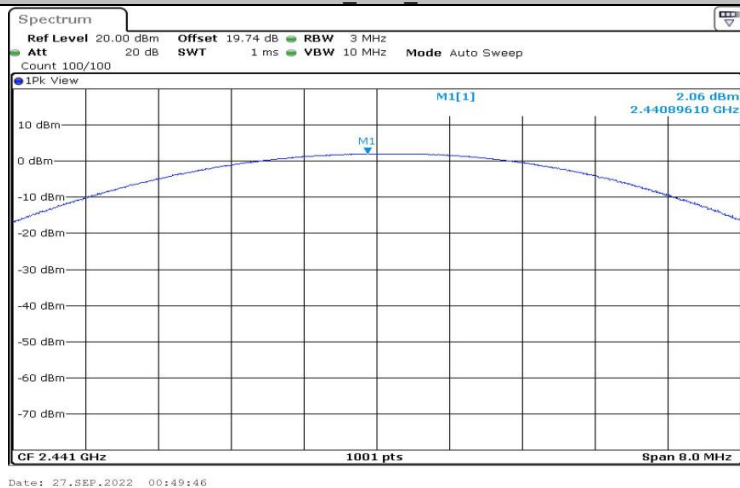

2DH1_Ant1_2480




3DH1_Ant1_2402



3DH1_Ant1_2441



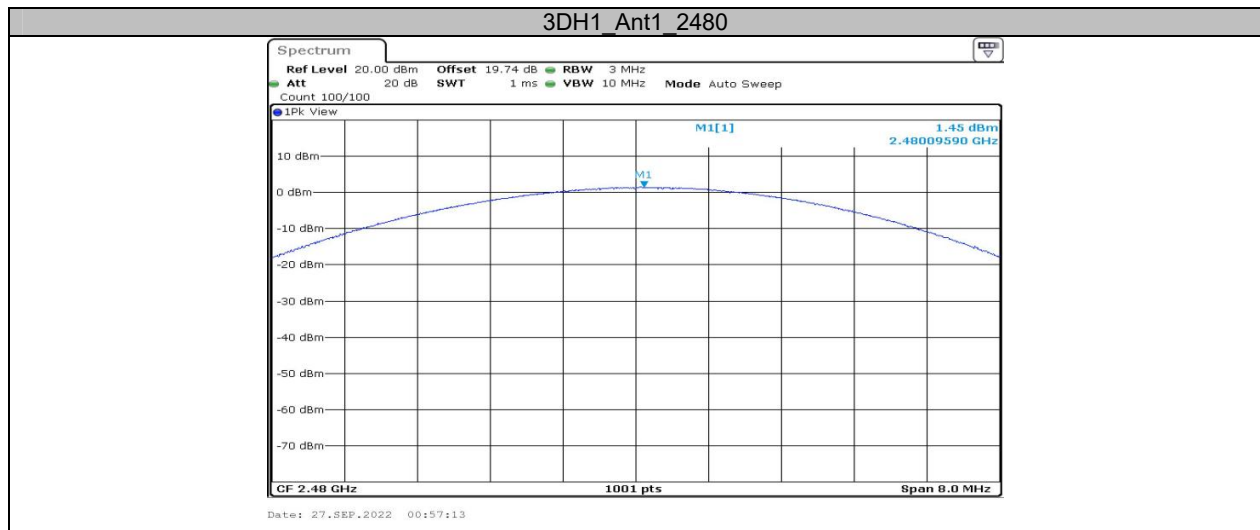

**Appendix D: Carrier frequency separation
Test Result**

Test Mode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH1	Ant1	Hop	1	≥ 0.627	PASS
2DH1	Ant1	Hop	1	≥ 0.893	PASS
3DH1	Ant1	Hop	1	≥ 0.873	PASS

Test Graphs




**Appendix E: Time of occupancy
Test Result**


Test Mode	Antenna	Frequency[MHz]	Burst Width [ms]	Total Hops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.38	330	0.125	≤0.4	PASS
DH3	Ant1	Hop	1.63	180	0.293	≤0.4	PASS
DH5	Ant1	Hop	2.86	120	0.343	≤0.4	PASS
2DH1	Ant1	Hop	0.38	330	0.125	≤0.4	PASS
2DH3	Ant1	Hop	1.63	180	0.293	≤0.4	PASS
2DH5	Ant1	Hop	2.87	120	0.344	≤0.4	PASS
3DH1	Ant1	Hop	0.38	330	0.125	≤0.4	PASS
3DH3	Ant1	Hop	1.63	160	0.261	≤0.4	PASS
3DH5	Ant1	Hop	2.87	120	0.344	≤0.4	PASS

Note 1: A period time= $0.4 \times 79 = 31.6(S)$, Result=Burst Width*Total hops



Note 2: Total hops=Hopping Number in $3.16s \times 10$


Note 3: Hopping Number in $3.16s$ =Total of highest signals in $3.16s$ (Second high signals were other channel)

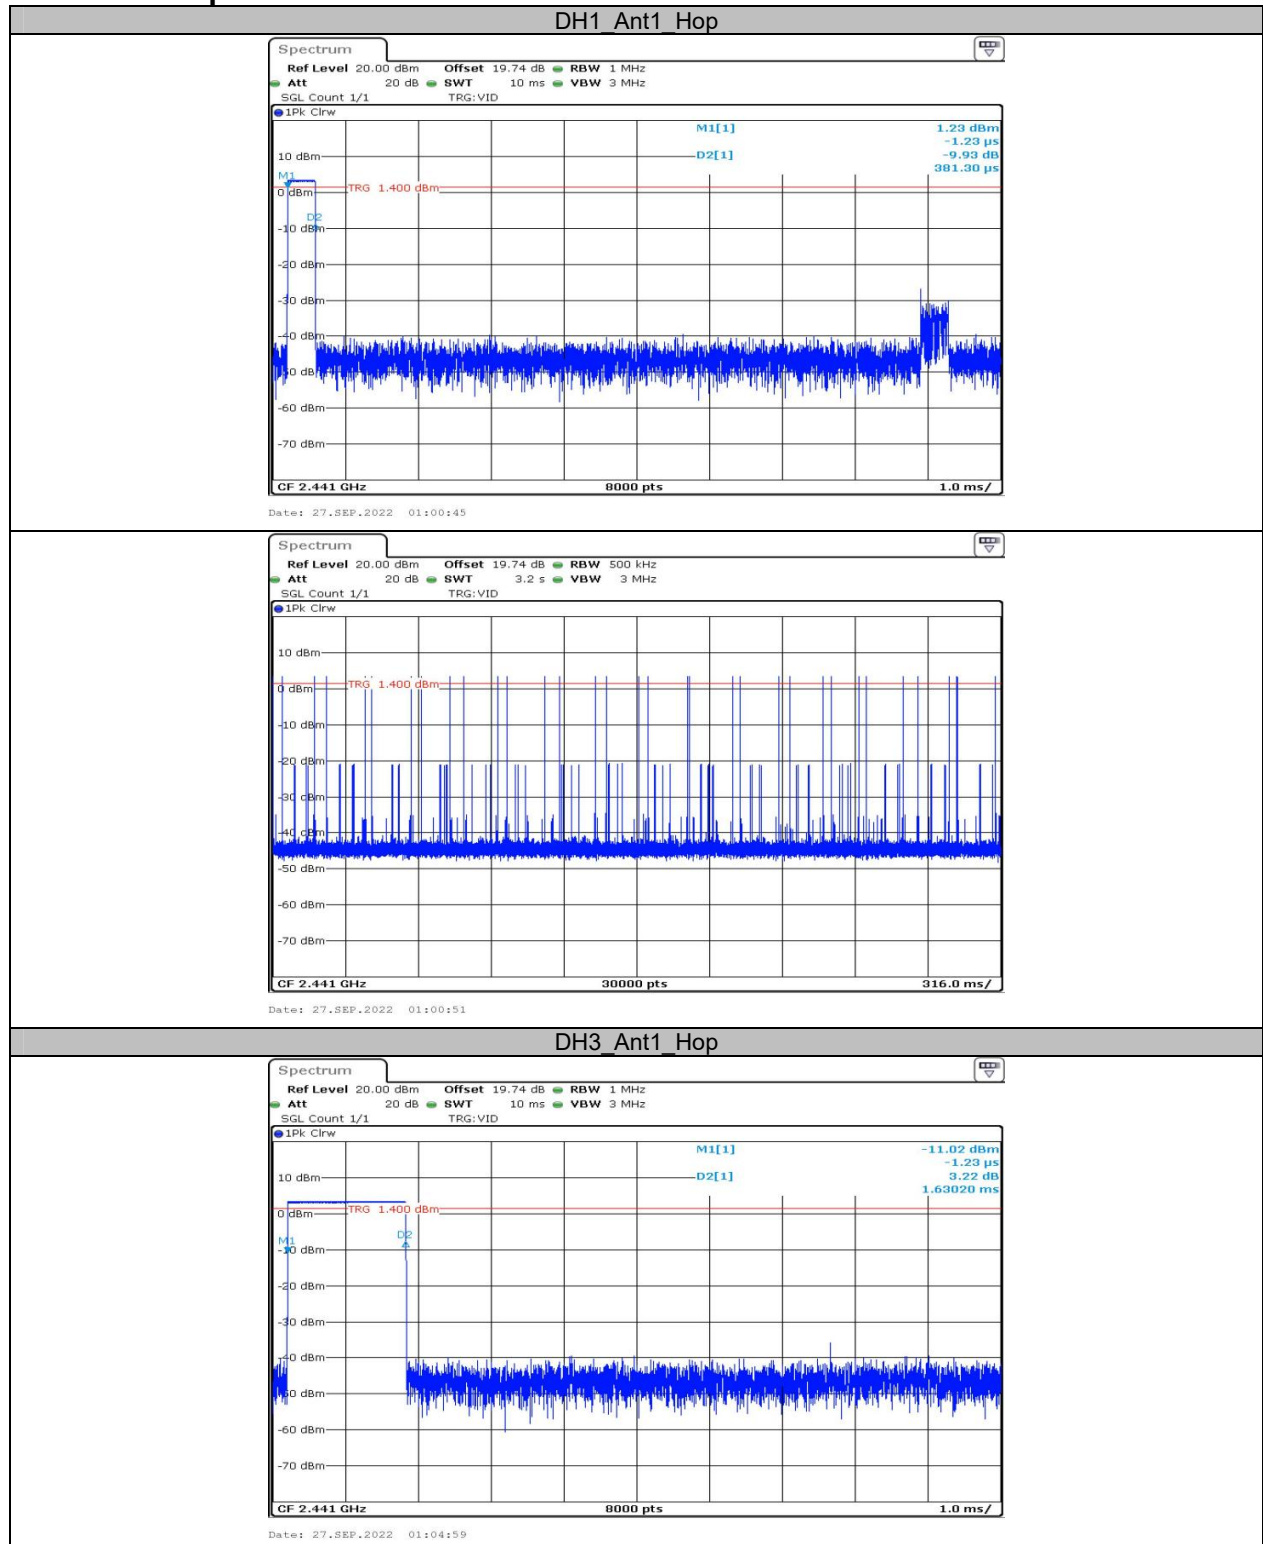
Test Graphs

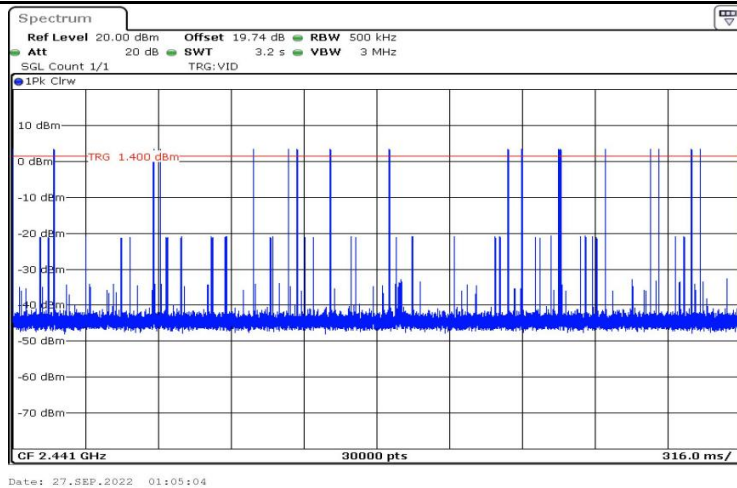



DH5_Ant1_Hop

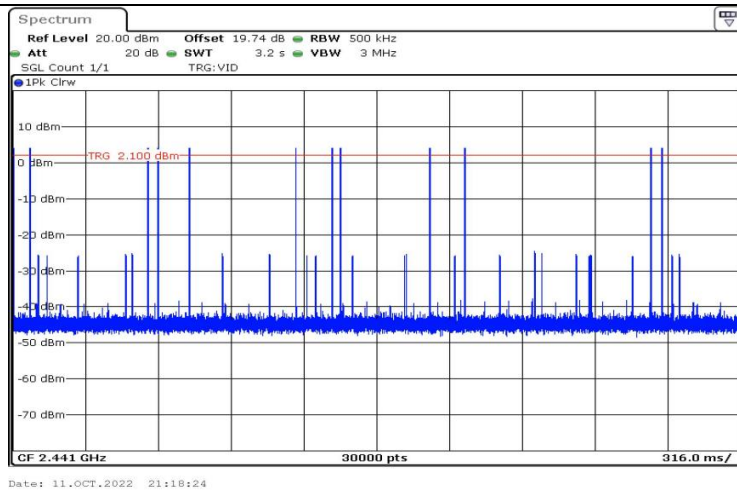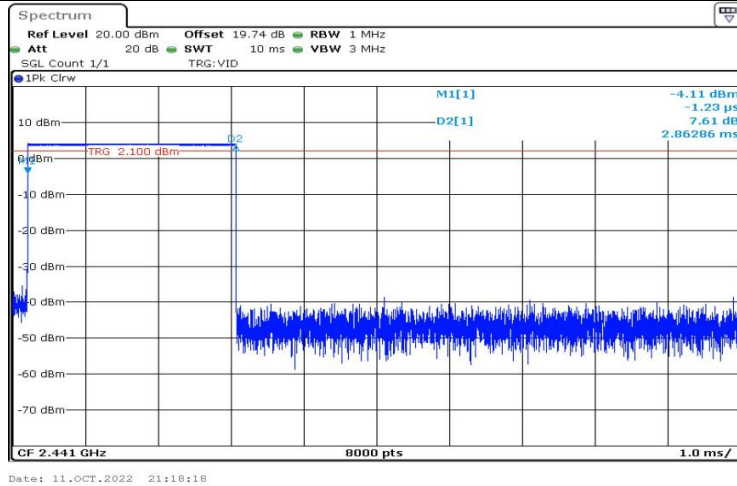


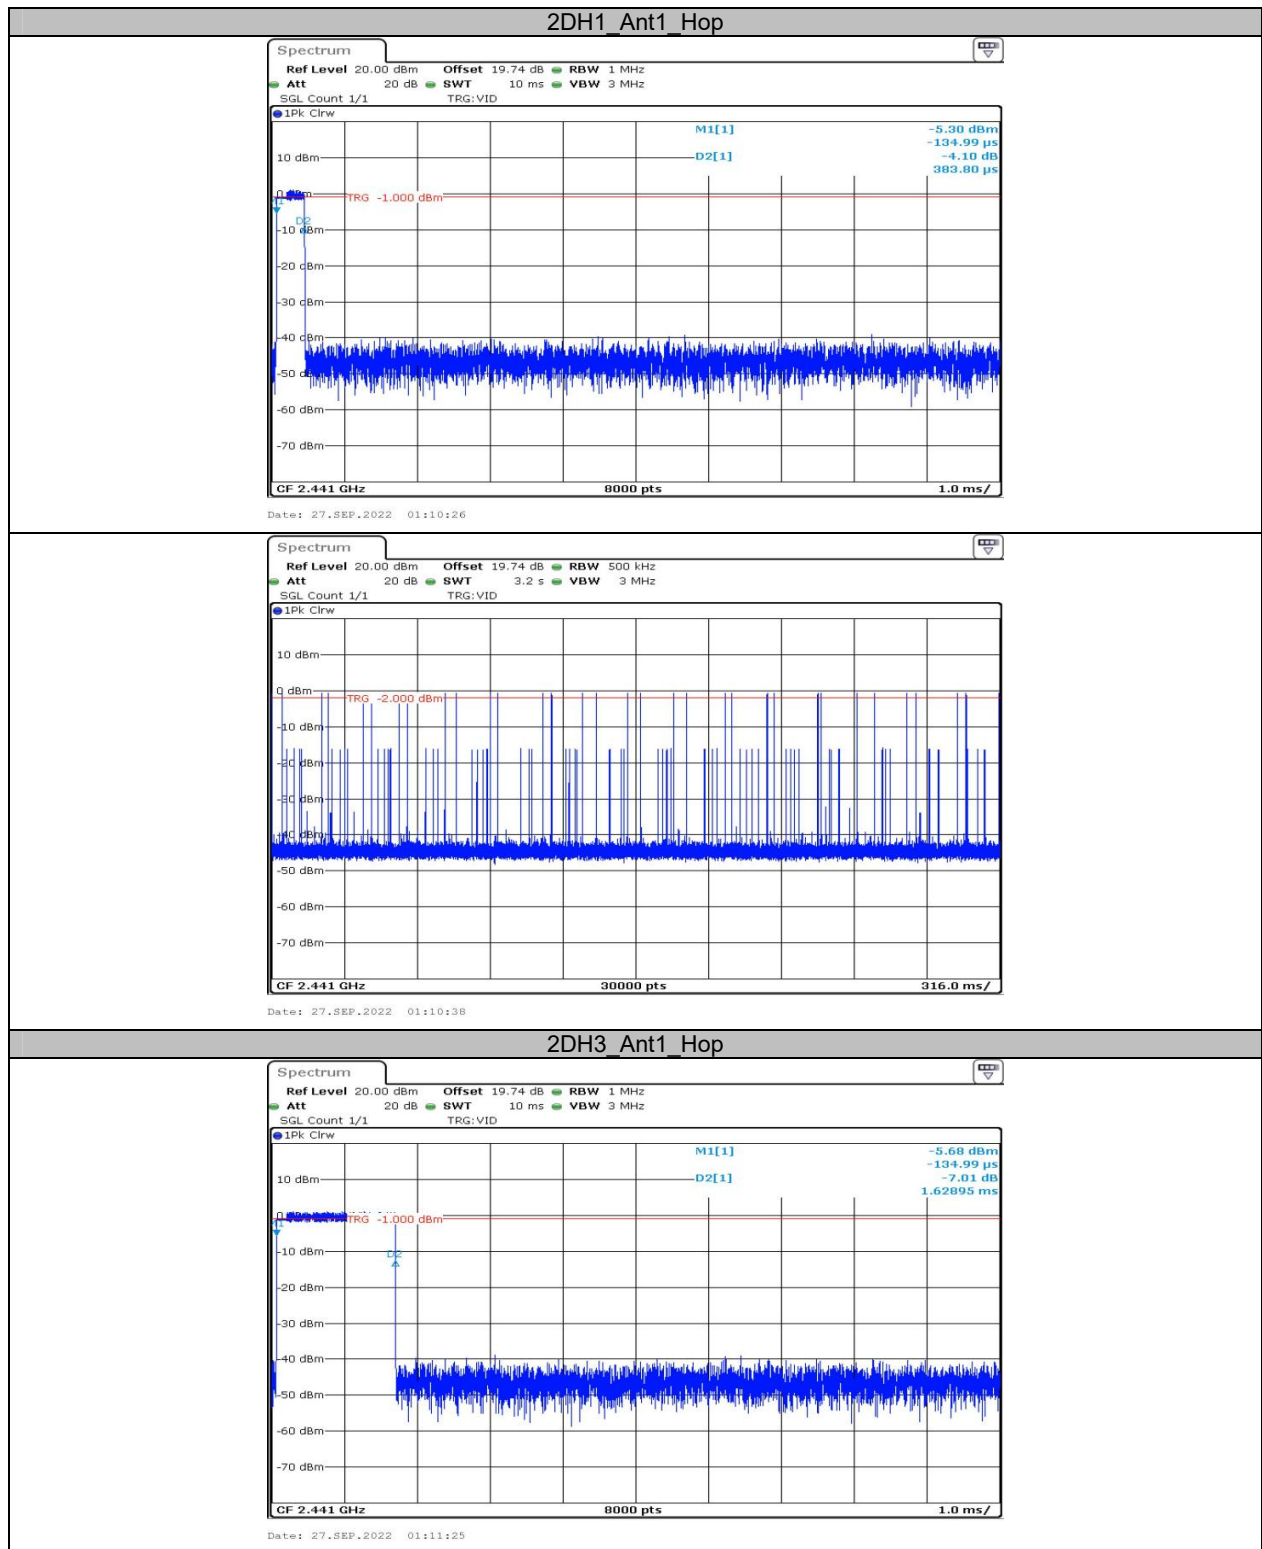


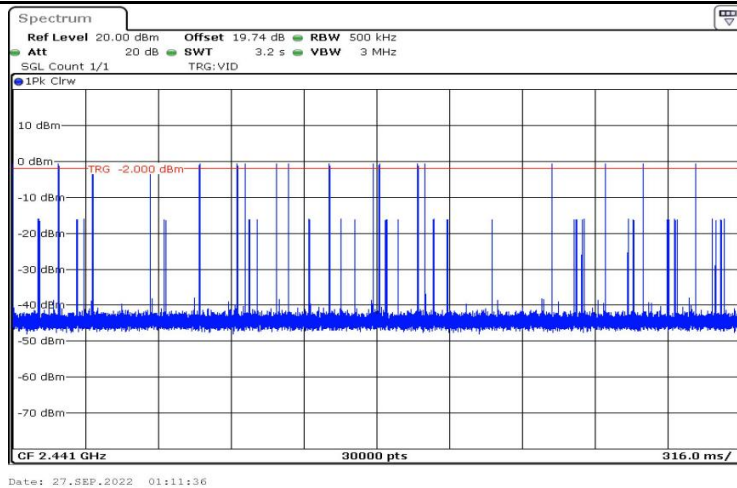



2DH5_Ant1_Hop

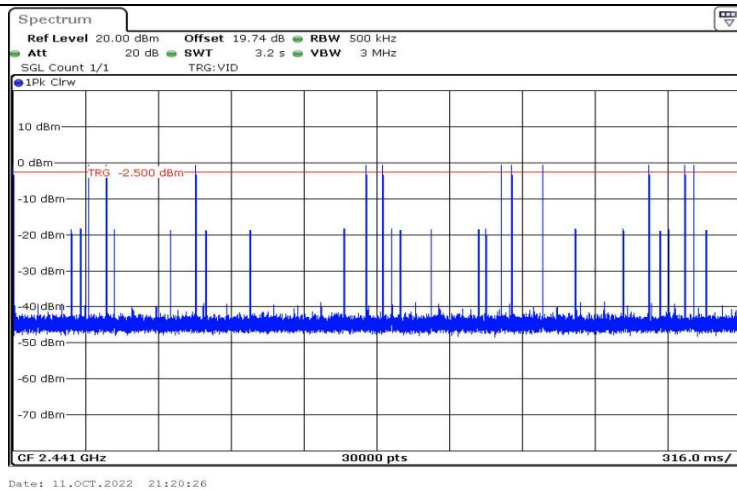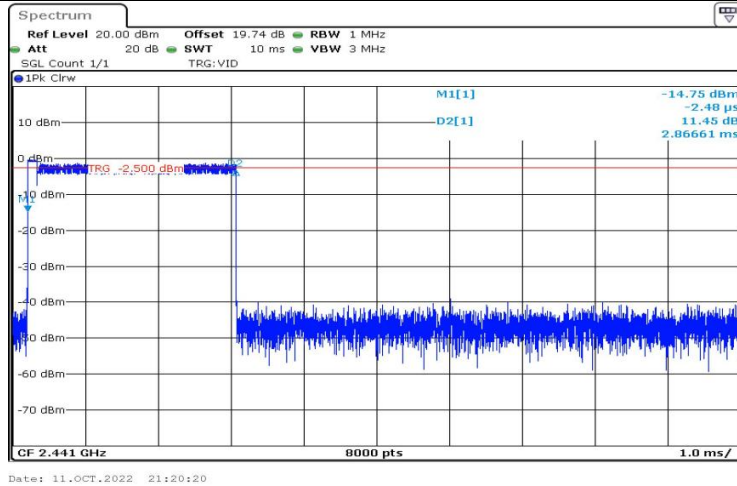

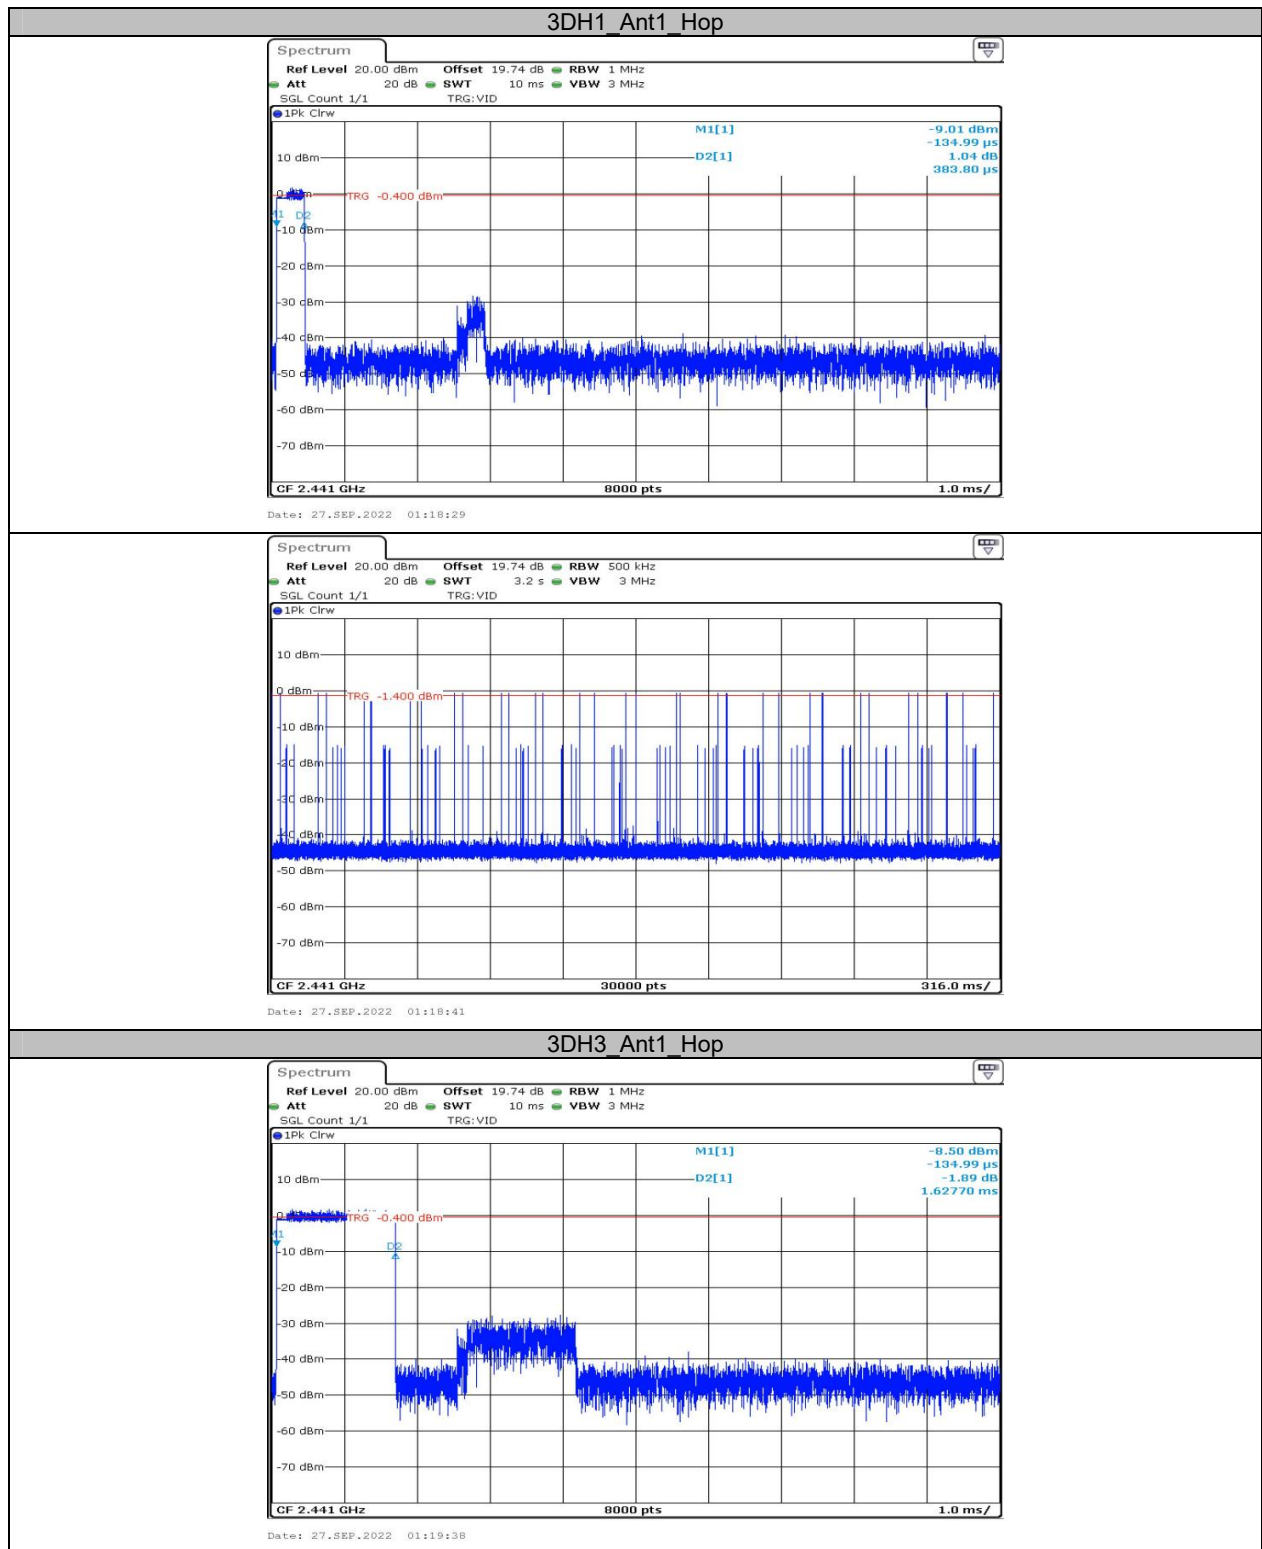

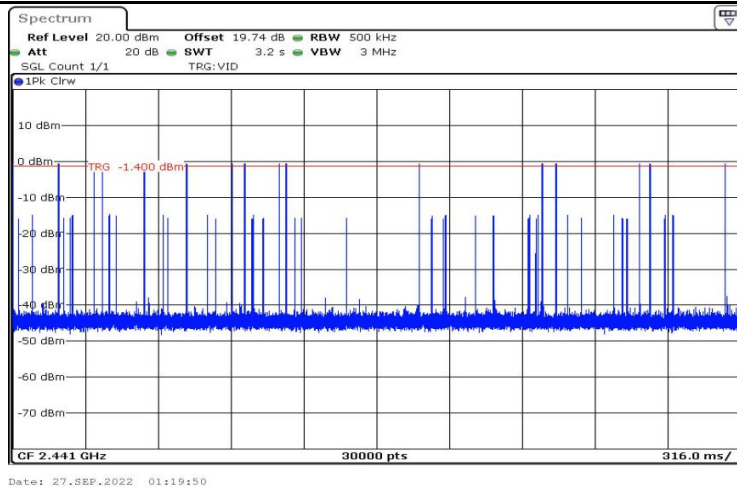


3DH5_Ant1_Hop

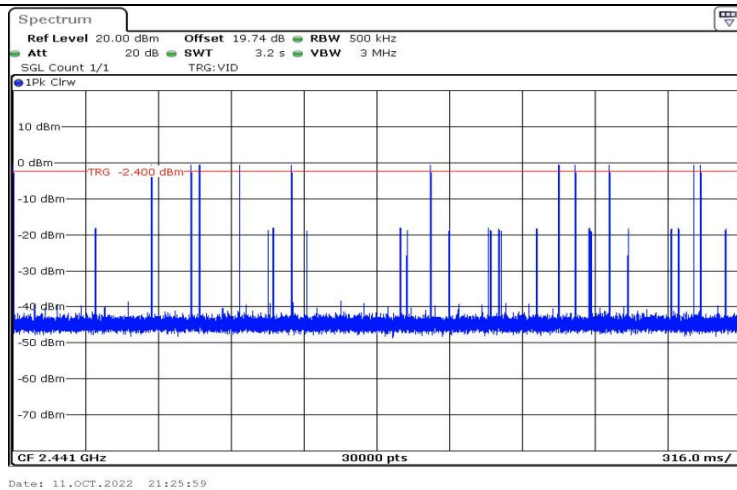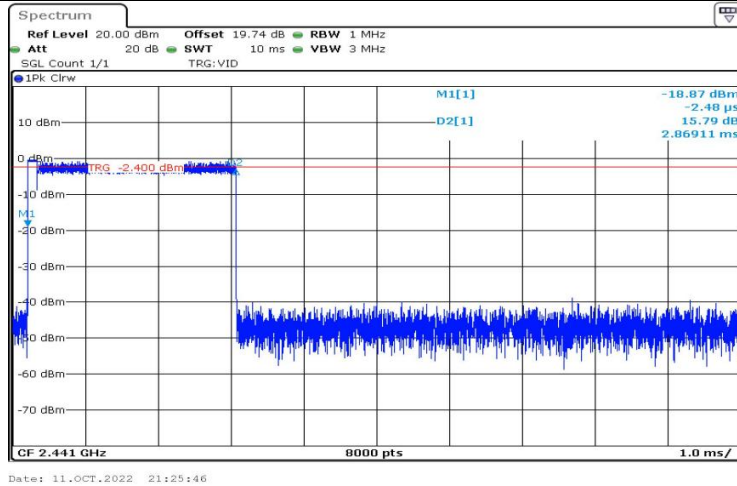

**Appendix F: Number of hopping channels
Test Result**

Test Mode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH1	Ant1	Hop	79	≥15	PASS
2DH1	Ant1	Hop	79	≥15	PASS
3DH1	Ant1	Hop	79	≥15	PASS


Test Graphs

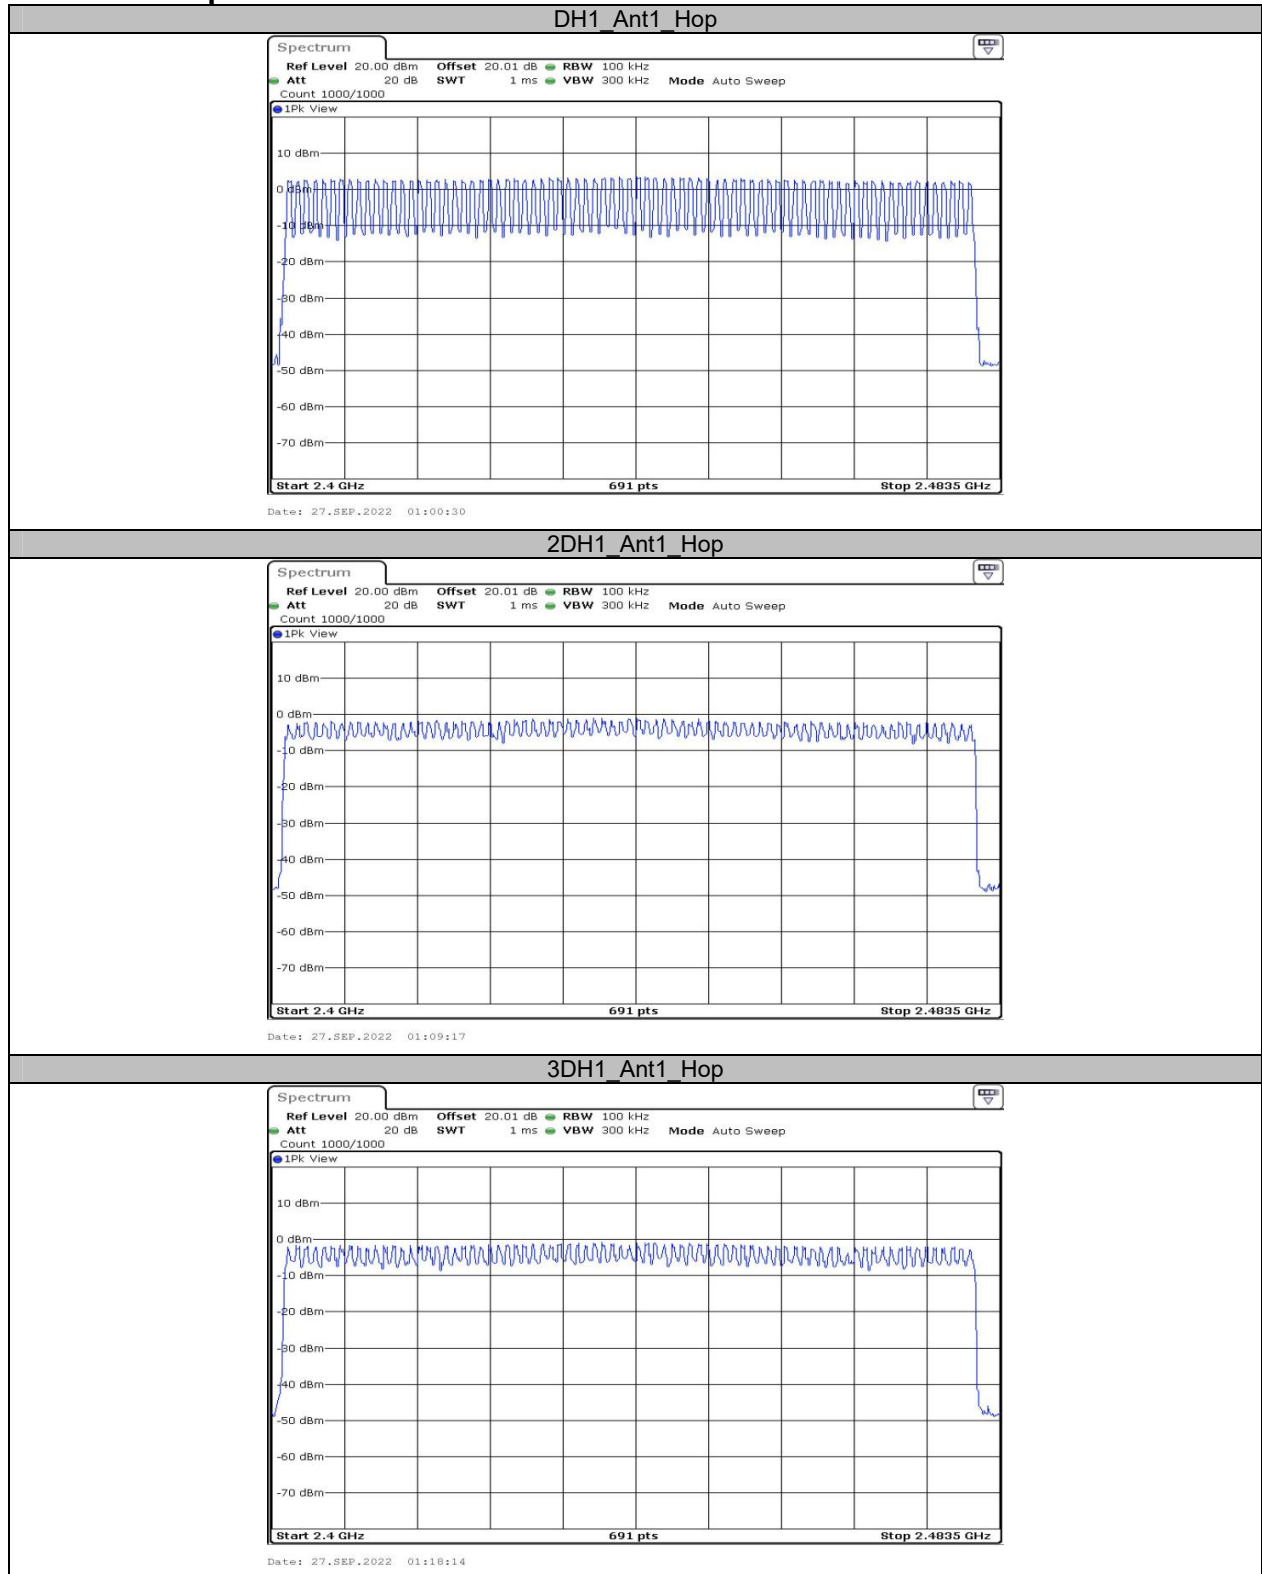


Appendix G: Band edge measurements

Test Graphs


DH1_Ant1_Low_2402

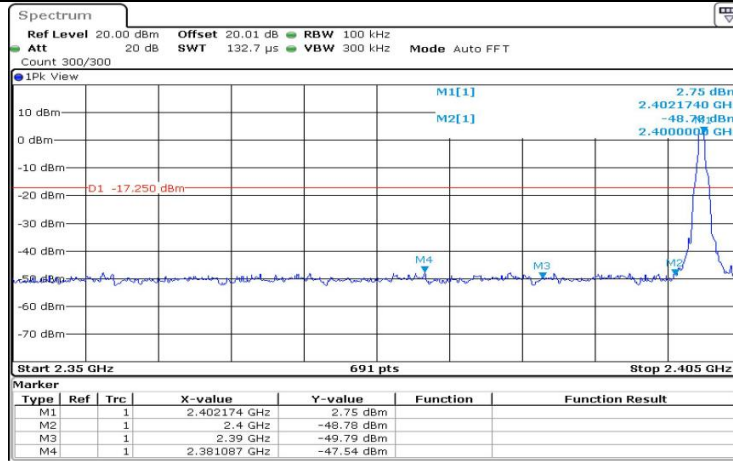


DH1_Ant1_High_2480

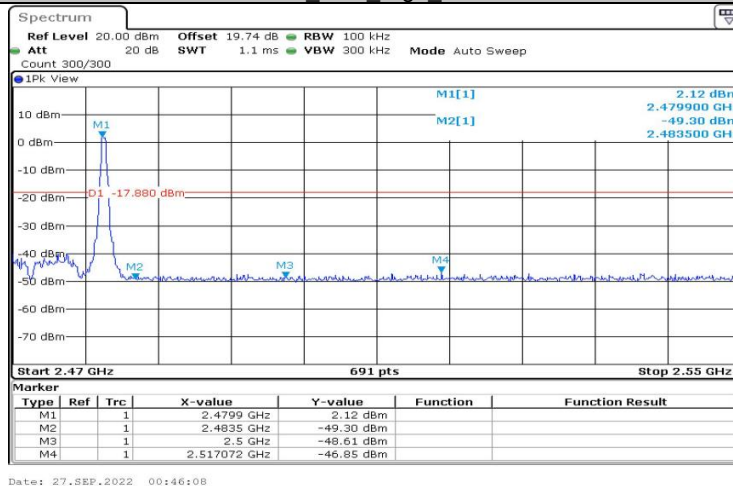


DH1_Ant1_Low_Hop_2402

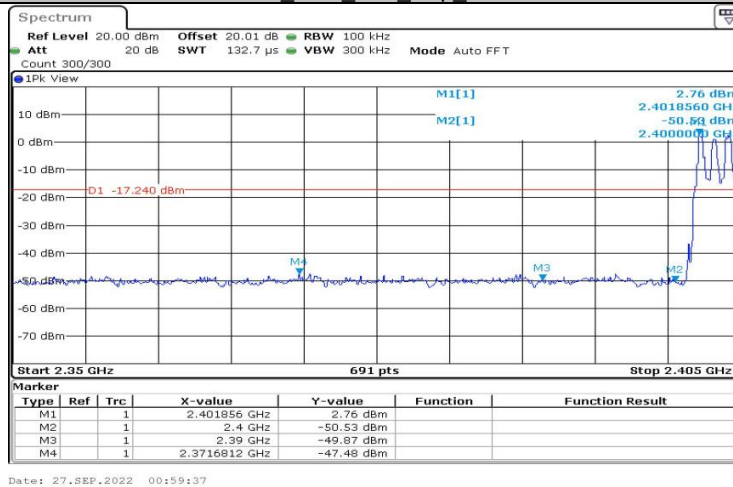



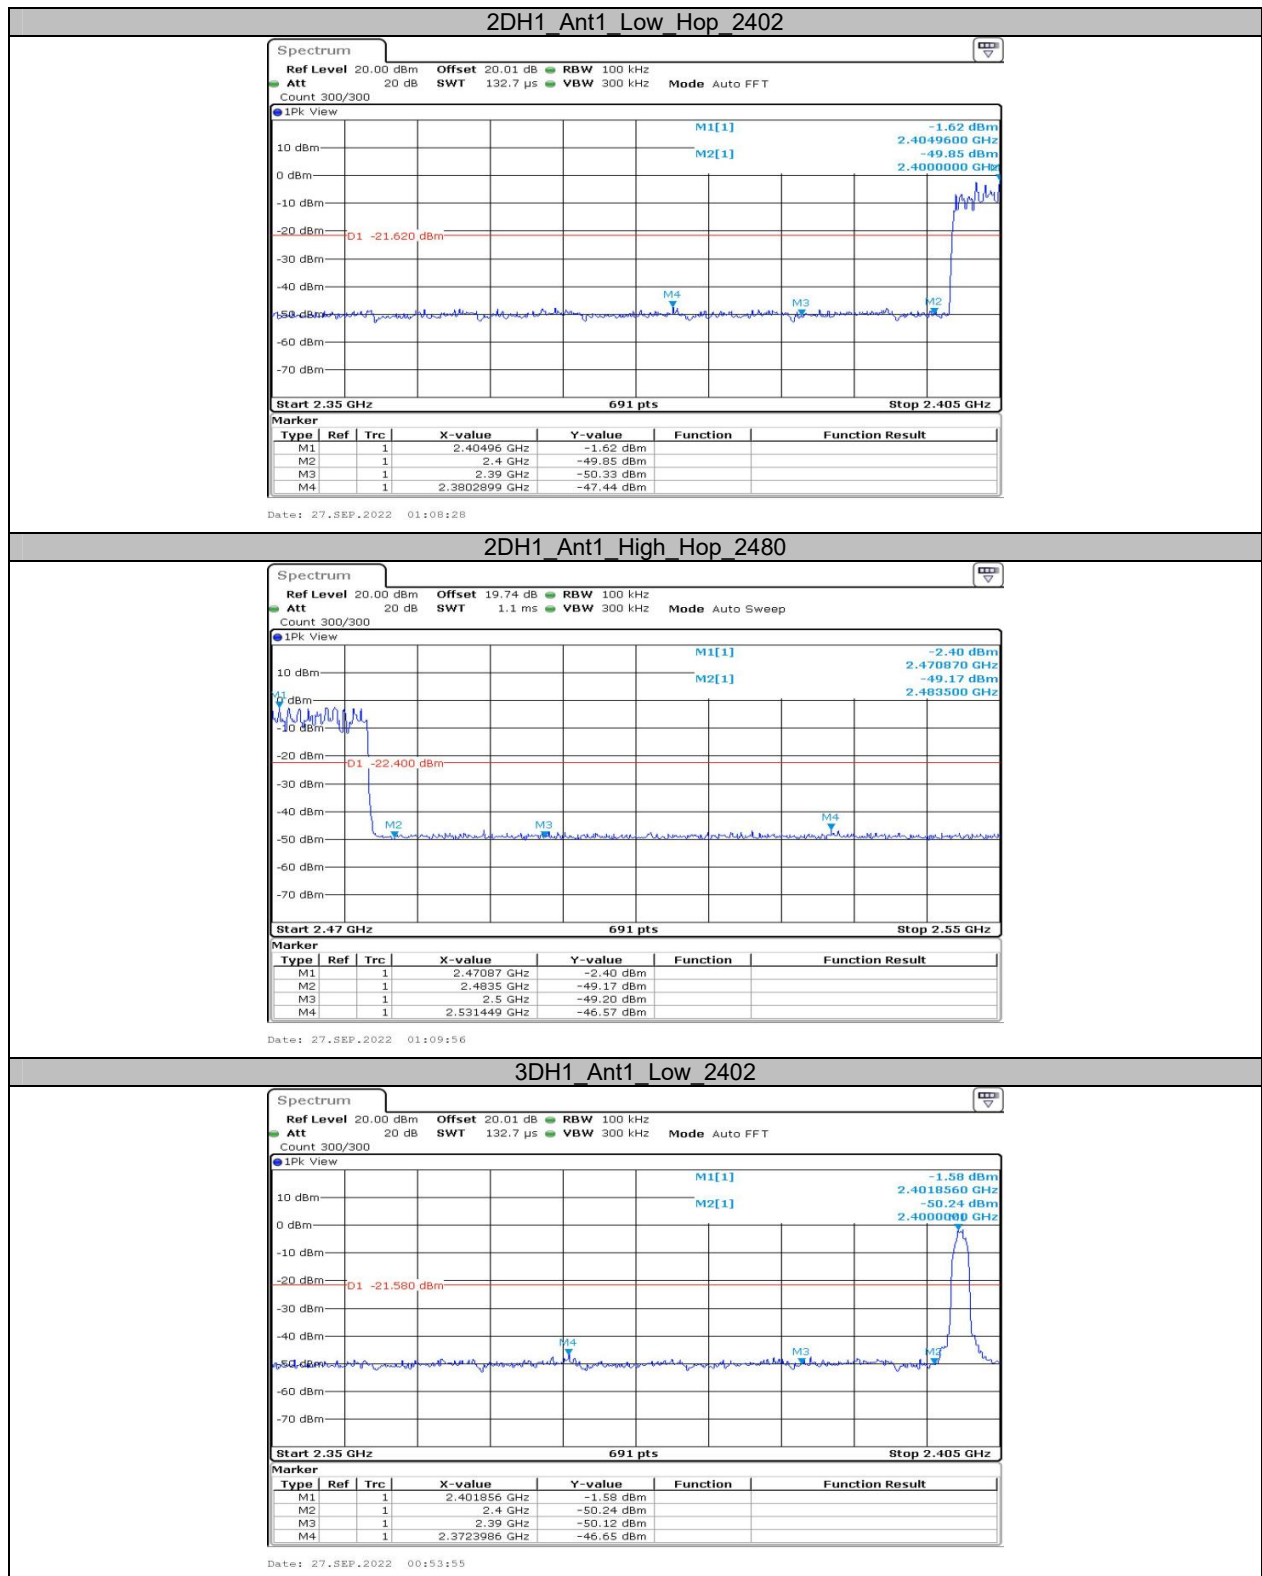


3DH1_Ant1_High_2480

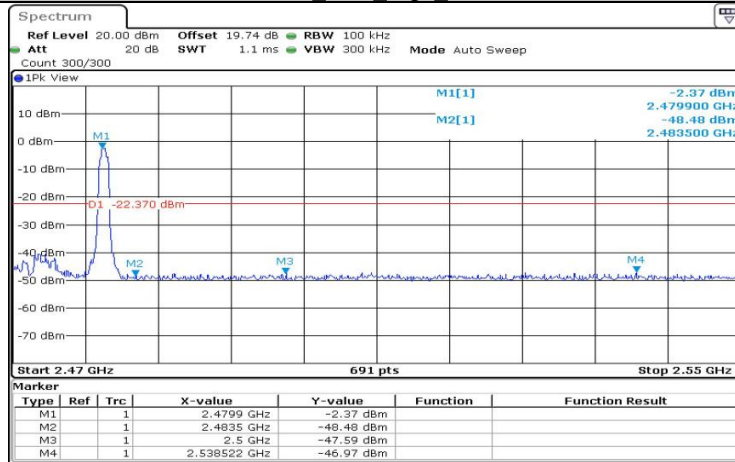


Date: 27.SEP.2022 00:57:05

3DH1_Ant1_Low_Hop_2402

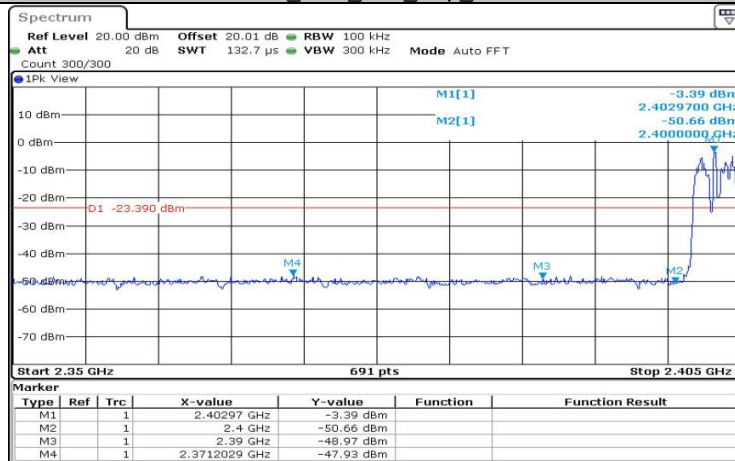

Date: 27.SEP.2022 01:17:06

3DH1_Ant1_High_Hop_2480

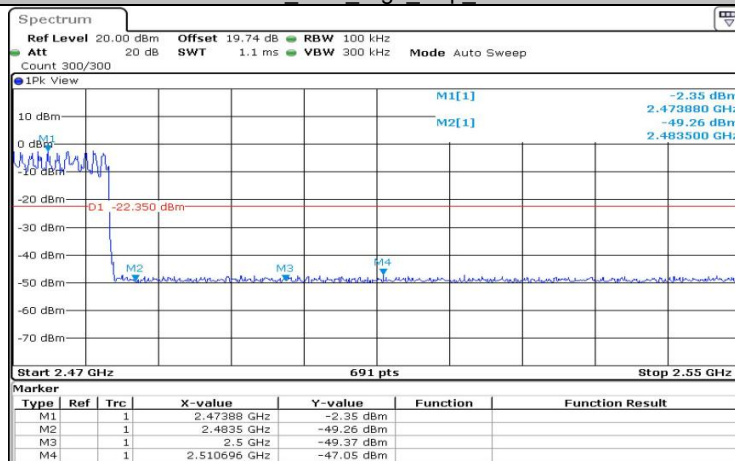

Date: 27.SEP.2022 01:18:55

***** END OF REPORT *****