

Nemko Korea CO., Ltd.

300-2, Osan-Ri, Mohyun-Myun, Yongin-City, Gyeonggi-Do, KOREA

TEL:+82 31 322 2333 FAX:+82 31 322 2332

FCC EVALUATION REPORT FOR CERTIFICATION**Applicant :**

KISAN TELECOM CO., LTD

2F, Segi Bldg., Bangyi-Dong, SongPa-Gu, Seoul,
138-828, Korea

Dates of Issue : September,16, 2006

Test Report No. : NK2GR186

Test Site : Nemko Korea Co., Ltd.

FCC ID**T7MCP-800****Brand Name**

AnyCess+

CONTACT PERSON2F, Segi Bldg., Bangyi-Dong, SongPa-Gu, Seoul,
138-828, Korea
Mr. Pan Soo Kim
Telephone No. : +82 02 3433 8316

Applied Standard:

FCC 47 CFR Part 15 & 2

FCC 47 CFR Part 22H

Equipment Class:

Licensed Non-Broadcast Station Transmitter

EUT Type:


Cellular Booster

The device bearing the brand name and FCC ID specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement


procedures specified in ANSI C63.4-2003.

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under

my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Tested By : Minchul Shin
Engineer



Reviewed By : H.H. Kim
Manager & Chief Engineer

TABLE OF CONTENTS

| | |
|---|-----------|
| 1. Scope | 4 |
| 2. Introduction (Site Description) | 5 |
| 3. Test Conditions & EUT Information | 6 |
| 4. Measuring Instrument Calibration | 8 |
| 5. Summary of Test Results | 9 |
| 6. Recommendation / Conclusion | 9 |
| 7. Test Equipment | 10 |
| 8. Description of Test | 11 |
| 8.1 Conducted Emissions | 11 |
| 8.2 Radiated Emissions | 12 |
| 8.3 Field Strength of Spurious Emissions | 13 |
| 8.4 RF Power Output | 14 |
| 8.5 Occupied Bandwidth | 15 |
| 8.6 Spurious Emissions at Antenna Terminals and Two-Tone test | 16 |
| 8.7 Band Edge | 17 |
| 9. Test Data | 18 |
| 9.1 Conducted Emissions | 18 |
| 9.2 Radiated Emissions | 32 |
| 9.3 Field Strength of Spurious Emissions | 34 |
| 9.4 RF Power Output | 37 |
| 9.5 Occupied Bandwidth | 38 |
| 9.6 Spurious Emissions at Antenna Terminals and Two-Tone test | 45 |
| 9.7 Band Edge | 67 |
| 9.8 Maximum Permissible Exposure | 74 |

| | |
|---|-----------|
| Appendix A: Labelling Requirement | 76 |
| Appendix B: Photographs of Test Set-up | 77 |
| Appendix C: EUT Photographs | 78 |
| Appendix D: Schematic Diagram | 89 |
| Appendix E: Block Diagram | 90 |
| Appendix F: USER'S Manual | 91 |
| Appendix G: Operational Description | 92 |
| Appendix H: Turn up Procedure | 93 |

1. Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission under FCC Part 15 & Part 22.

| | |
|---------------------------|--|
| Responsible Party: | Kisan Telecom Co.,Ltd. |
| Contact Person: | Mr. Pansoo Kim |
| | Tel : +82 2 3433-8316 |
| Manufacturer: | Kisan Telecom Co.,Ltd. 2F, Segi Bldg., Bangyi-Dong, SongPa-Gu, Seoul, 138-828, Korea |

- FCC ID: T7MCP-800
- Model: CP-800
- Brand Name: AnyCess+
- EUT Type: Cellular Booster
- Electric Rating: Adapter(Input: AC100V-240V, 0.3A
Output: DC5V, 1.5A)
- Equipment Class: Licensed Non-Broadcast Station Transmitter
- Applied Standard: FCC 47 CFR Part 15 & 2
FCC 47 CFR Part 22H
- Test Procedure(s): ANSI C63.4 (2003), TIA/EIA603
- Dates of Test: September 12, 2006 to September 15, 2006
- Place of Tests: Nemko Korea Co., Ltd.

2. Introduction (Site Description)

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-2003) was used in determining radiated and conducted emissions emanating from **Kisan Telecom Co., Ltd**
FCC ID : **T7MCP-800**

These measurement tests were conducted at **Nemko Korea Co., Ltd.**

The site address is 300-2, Osan-Ri, Mohyun-Myun, Yongin-City, GyungGi-Do, KOREA

The area of Nemko Korea Corporation Ltd. Test Site is located in a mountain area at 80 kilometers (48 miles) southeast and Incheon International Airport (Incheon Airport), 30 kilometers (18miles) south-southeast from central Seoul.

It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures.

The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4 2003.



Nemko Korea Co., Ltd.
300-2, Osan-Ri, Mohyun-Myun,
Yongin-City GyungGi-Do, KOREA
449-852
Tel)+82-31-322-2333
Fax)+82-31-322-2332

Fig. 1. The map above shows the Seoul in Korea vicinity area.
The map also shows Nemko Korea Corporation Ltd. and Incheon Airport.

3. Test Conditions & EUT Information

Operating During Test

The EUT was configured and tested utilizing the maximum input drive level resulting in maximum gain conditions for all tests. If the maximum input drive level is exceeded, internal attenuators are activated to produce a level RF output and eliminate the device from operating beyond the maximum RF output power that is below the saturated RF output power.

Environmental Conditions

| | |
|-------------------|-----------|
| Temperature | 22 ~ 25 |
| Relative Humidity | 35% ~ 65% |

Description of EUT

| | | |
|------------------------|--|--|
| Frequency Range | Tx : 824MHz ~ 849MHz Rx : 869MHz ~ 894MHz | |
| Output Power | Uplink | F9W: 2.99dBm DXW: 4.82dBm GXW,F1D: 6.05dBm |
| | Downlink | F9W: 3.23dBm DXW: 4.30dBm GXW,F1D: 5.51dBm |
| Emission Designator | F9W,DXW,GXW,F1D | |
| Modulation(s) | CDMA,TDMA,GSM,AMPS | |
| Antenna Type | Patch, Dipole antenna | |
| Dimensions (L X W X H) | 140mm X 110 mm X 30 mm | |
| Weight | 255g | |
| Voltage | Adapter(Input:100V-240Vac, 0.3A Output: 5Vdc, 1.5A) | |

Support Equipment

| | | |
|------------------------|--|-----------------|
| Cellular Booster (EUT) | Kisan Telecom Co., Ltd. FCC ID: T7MCP-800 | S/N: N/A |
| Adaptor | HONOR ELECTRONICS CO.,LTD. Model : ADS-10W-06 0508PCU 2.0m unshielded dc power cable | S/N: N/A |
| Spectrum Analyzer | Agilent Model : E4440A | S/N: MY44022567 |
| Signal Generator | Agilent Model: E4438C | S/N: MY45092564 |
| Signal Generator | R&S Model: SMP02 | S/N: 833286/003 |
| Attenuator | HP 8491B | S/N: 57773 |

4. Measuring Instrument Calibration

All measurements were made with instruments calibrated according to the recommendation by manufacturer. Measurement of radiated emissions and conducted emissions were made with instruments conforming to American National Standards Institute, ANSI C63.4-2003.

The calibration of measuring instrument, including any accessories that may affect test results, were performed according to the recommendation by manufacturer.

- End of page -

5. Summary of Test Results

The EUT has been tested according to the following specification:

| Description of Test | FCC Rule | Result |
|--|-----------------------|----------|
| Modulation Characteristics | §2.1047 | N/A |
| Two Tone Test | §2.1051 | Complies |
| RF Output Power | §2.1046 §22.913(a) | Complies |
| Occupied Bandwidth | §2.1049 | Complies |
| Spurious Emission at antenna Terminals | §2.1051 §22.917 | Complies |
| Radiated Spurious Emissions | §2.1053 §22.917 | Complies |
| Frequency Stability / Temperature Variation | §2.1055 §22.355 | N/A |
| Band Edge | §22.917 | Complies |
| Conducted Emission | §15.207 | Complies |

6. Recommendation / Conclusion

The data collected shows that Kisan Telecom Co.,Ltd.'s Cellular Booster (FCC ID : T7MCP-800) complies with all the requirements of Parts 2 & 22 of the FCC Rules.

7. Test Equipment List

| No. | Instrument | Manufacturer | Model | Serial No. | Calibration Date | Calibration Interval |
|-----|---|---------------|-------------|------------|------------------|----------------------|
| 1 | *Test Receiver | R & S | ESCS 30 | 833364/020 | Aug. 17 2006 | 1year |
| 2 | *Test Receiver | R & S | ESCS 30 | 100302 | Dec. 06 2005 | 1year |
| 3 | Amplifier | Agilent | 8447F | 3113A04549 | Aug. 17 2006 | 1year |
| 4 | Amplifier | HP | 8447F | 2944A03956 | Aug. 17 2006 | 1year |
| 5 | *Amplifier | HP | 8447F | 2805A03351 | Oct. 25 2005 | 1year |
| 6 | *Amplifier | HP | 8449B | 3008A00107 | Mar. 15 2006 | 1year |
| 7 | Spectrum Analyzer | HP | 8566B | 267A03469 | Mar.10 2006 | 1year |
| 8 | *Spectrum Analyzer | Advantest | R3265A | 45060401 | Dec.06 2005 | 1year |
| 9 | Spectrum Analyzer | HP | 8568B | 1912A00573 | Oct.25 2005 | 1year |
| 10 | *Biconical Log- Perio. Antenna | ARA | LBP-2520/A | 1203 | May. 18 2006 | 1year |
| 11 | *Double Ridged Broadband Horn Antenna | Schwarzbeck | BBHA 9120 D | 9120D-474 | Apr. 05 2006 | 1year |
| 12 | *Biconical Log Antenn | ARA | LPB-2520/A | 1180 | Mar. 06 2006 | 1year |
| 13 | Signal Generator | R & S | SMP02 | 833286/003 | Aug. 17 2006 | 1year |
| 14 | *LISN | R & S | ESH3-Z5 | 833874/006 | Oct. 25 2005 | 1year |
| 15 | *LISN | Kyoritsu | KNW-407 | 8-1034-10 | Mar. 10 2006 | 1year |
| 16 | *Position Controller | DAEIL EMC | N/A | N/A | N/A | N/A |
| 17 | *Turn Table | DAEIL EMC | N/A | N/A | N/A | N/A |
| 18 | *Antenna Mast | DAEIL EMC | N/A | N/A | N/A | N/A |
| 19 | *Anechoic Chamber | EM Eng. | N/A | N/A | N/A | N/A |
| 20 | *Shielded Room | EM Eng. | N/A | N/A | N/A | N/A |
| 21 | *Position Controller | Seo-Young EMC | N/A | N/A | N/A | N/A |
| 22 | *Turn Table | Seo-Young EMC | N/A | N/A | N/A | N/A |
| 23 | *Antenna Mast | Seo-Young EMC | N/A | N/A | N/A | N/A |
| 24 | *Anechoic Chamber | Seo-Young EMC | N/A | N/A | N/A | N/A |
| 25 | *Double Ridged Broadband Horn Antenna | Schwarzbeck | BBHA 9120 D | 9120D-508 | Oct. 12 2005 | 1year |
| 26 | *10dB ATTenuator | HP | 8491B | 57773 | Dec.06 2005 | 1year |
| 27 | *Spectrum Analyzer | Agilent | E4440A | MY44022567 | Dec.31 2005 | 1year |
| 28 | *Signal Generator | Agilent | E4438C | MY45092564 | Apr.09 2006 | 1year |

*) Test equipment used during the test

8. Description of Tests

8.1 Conducted Emissions

The Line conducted emission test facility is located inside a 4 X 7 X 2.5 meter shielded enclosure.

It is manufactured by EM engineering. The shielding effectiveness of the shielded room is in accordance with MIL-STD-285 or NSA 65-6.

A 1m X 1.5m wooden table 0.8m height is placed 0.4m away from the vertical wall and 1.5m away from the side of wall of the shielded room

Rohde & Schwarz (ESH3-Z5) and Kyoritsu (KNW-407) of the 50ohm/50uH Line Impedance Stabilization Network(LISN) are bonded to the shielded room.

The EUT is powered from the Rohde & Schwarz LISN and the support equipment is powered from the Kyoritsu LISN. Power to the LISN s are filtered by high-current high insertion loss Power line filters. The purpose of filter is to attenuate ambient signal interference and this filter is also bonded to shielded enclosure. All electrical cables are shielded by tinned copper zipper tubing with inner diameter of 1/2".

If DC power device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the LISNs,

All interconnecting cables more than 1 meter were shortened by non inductive bundling (serpentine fashion) to a 1 meter length.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT. The spectrum was scanned from 150kHz to 30MHz with 20msec sweep time.

The frequency producing the maximum level was re-examined using the EMI test receiver. (Rohde & Schwarz ESCS30).

The detector function were set to CISPR quasi-peak mode & average mode.

The bandwidth of receiver was set to 9KHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

Each emission was maximized by; switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and of support equipment, and powering the monitor from the floor mounted outlet box and computer aux AC outlet, if applicable; which ever determined the worst case emission.

Each EME reported was calibrated using the R&S signal generator.

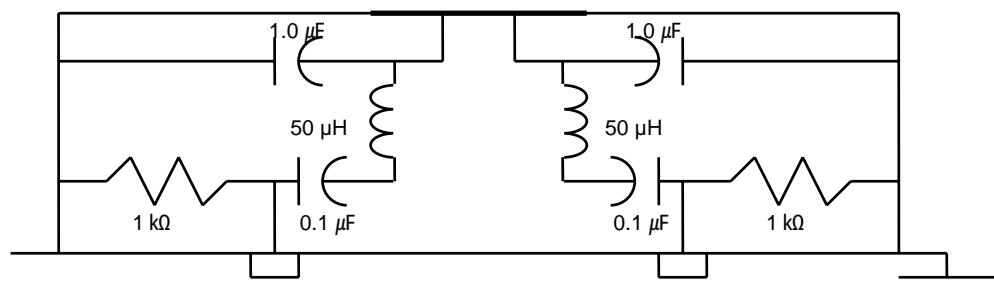


Fig. 2. LISN Schematic Diagram

8.2 Radiated Emissions

Preliminary measurement were made indoors at 3 meter using broad band antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The Technology configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna was note for each frequency found. The spectrum was scanned from 30 to 1000MHz using Biconical log Antenna (ARA, LPB-2520/A).

Final Measurements were made outdoors at 3 or 10m test range using Logbicon Super Antenna (Schwarzbeck, VULB 9166).

The test equipment was placed on a wooden table.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during pre-scan measurements was reexamined and investigated using EMI test receiver.(ESCS30)

The detector function were set to CISPR quasi-peak and peak mode and the bandwidth of the receiver were set to 120KHz and 1MHz depending on the frequency or type of signal.

The half wave dipole antenna was tuned to the frequency found during preliminary radiated measurements.

The EUT support equipment and interconnecting cables were re configured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8m high non- metallic 1.0X 1.5 meter table.

The EUT, support equipment and interconnecting cables were re-arranged and manipulated to maximize each EME emission.

The turn table containing the Technology was rotated; the antenna height was varied 1 to 4meter and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by : switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and of support equipment, and powering the monitor from the floor mounted outlet box and computer aux AC outlet, if applicable; which ever determined the worst case emission.

Each EME reported was calibrated using the R/S signal generator.

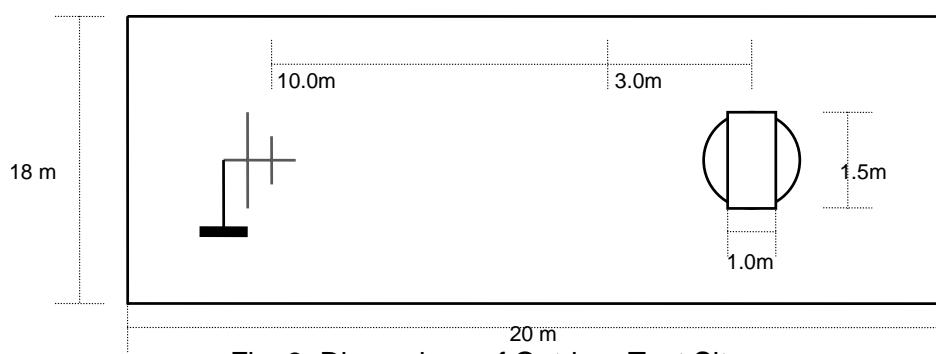


Fig. 3. Dimensions of Outdoor Test Site

8.3 Field Strength of Spurious Emissions

Test Method

The EUT was set on a non-conductive turntable in a semi anechoic chamber. For testing each spurious emission, The antenna mast is raised and lowered from one to four meters and the turntables is rotated 360° and maximum reading on the spectrum analyzer is recorded. This repeated for both horizontal and vertical polarizations of the receive antenna.

The EUT is then replaced with a substitution antenna which is connected with a signal generator. The signal generator's frequency is set to that of the spurious emission record from the equipment under test. The antenna mast is raised and lowered from one to four meters to obtain a maximum reading on the spectrum analyzer. The output of the signal generator is then adjusted until the reading on the spectrum analyzer matches that obtained from the EUT. The signal generator level is recorded.

The power in dBm of each spurious emission is calculated by correcting the signal generator level for the cable loss and gain of the substitution antenna referenced to a dipole. The spectrum was investigated in accordance to CFR 47 Part 2.1057. A CW was used for both uplink and downlink for low, middle and high channels. The worst case emissions are reported of both uplink and downlink configurations. All emissions not reported were below the noise floor of the measurement equipment.

CALCULATION

The formula below was used to calculate the ERP/EIRP of the EUT.

$P_{\text{subst_TX[dBm]}}$, $P_{\text{subst_RX[dBm]}}$, $L_{\text{Cable[dB]}}$ and $G_{\text{substitute_antenna[dBd]/[dBi]}}$ factors are combined in one correction factor.

$$P_{\text{ERP[W]}} = \frac{10^{(P_{\text{subst_Tx[dBm]}} + P_{\text{EUT[dBm]}} - P_{\text{subst_Rx[dBm]}} + G_{\text{substitute_antenna[dBd]/[dBi]}} - L_{\text{cable[dB]}})/10}}{1000}$$

where the variables are as follows:


| | |
|--|---|
| $P_{\text{EUT [dBm]}}$ | Measured power level from the EUT |
| $P_{\text{Subst_TX [dBm]}}$ | Power fed to the substituting antenna |
| $P_{\text{Subst_RX [dBm]}}$ | Power received with the spectrum analyzer |
| $G_{\text{Substitute_antenna [dBd]}}$ | Gain of the substitutive antenna over dipole (dBi) |
| $L_{\text{Cable [dB]}}$ | Loss of the cable between signal generator and the substituting antenna |

8.4 RF Power Output

Test Method

The EUT's the RF output terminals was connected with Power meter through a attenuator. This test was performed in all applicable modulations.

Test Setup

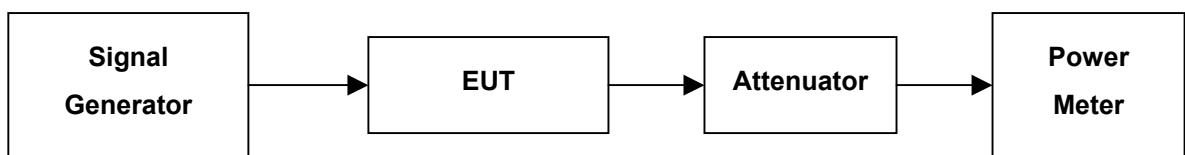

8.5 Occupied Bandwidth

Test Method

The EUT which was setup to maximum output power at it's the middle channel was directly connected to the input of the Spectrum Analyzer.


The Spectrum Analyzer's RBW and VBW were set to 1% the emission bandwidth.

The Spectrum Analyzer was set for max hold using a peak detector.

Both the input and output bandwidths were evaluated to show similar characteristics of the emissions.

Occupied bandwidth's Plots of the Uplink and Downlink are shown.

Test Setup

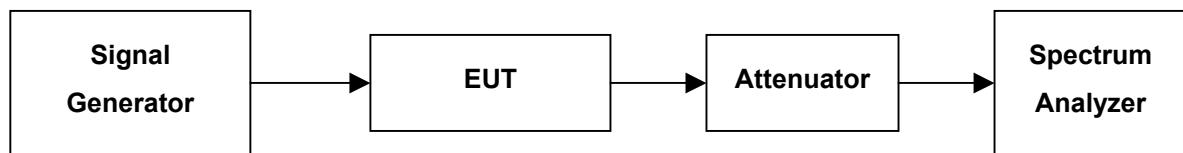

8.6 Spurious Emissions at Antenna Terminals and Two-Tone Test


Test Method

The RF output of the EUT was directly connected to the input of the Spectrum Analyzer. The two tone test method was used with the device operating at maximum drive levels. Two tones were placed at both lower and upper band-edges and adjusted such that the third order harmonics were maximized and within the operating frequency band.

For in band measurements the spectrum analyzer resolution and video bandwidths were set to 1% the emission bandwidth. For out of band emissions the spectrum analyzer resolution and video bandwidths were set to 1MHz according to Section 22.917 (b). The spectrum was investigated for the 30MHz to 10GHz in accordance to CFR 47 Part 2.1057 . The analyzer was set for max hold using a peak detector. In band inter-modulation data was collected at the lower band edge and upper band edge for uplink and downlink configurations using the two tone method. CW covers FM (GSM and F1D) for inter-modulation products.

GSM modulation was included to show compliance for spurious emissions.

Test Setup

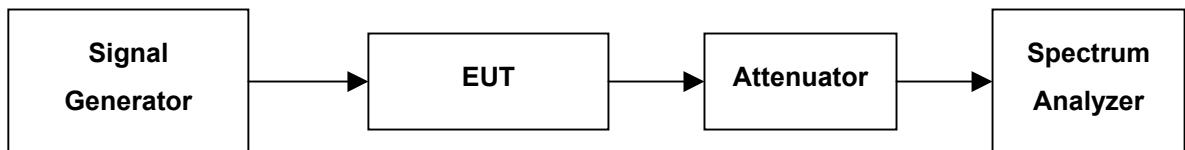


8.7 Band-edge Compliance

Test method

The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer. The Spectrum Analyzer RBW and VBW were set to 1% the emission bandwidth. The Spectrum Analyzer was set for max hold using a peak detector. The center frequency was set to both the upper and lower cellular frequency block edges.

Test Setup

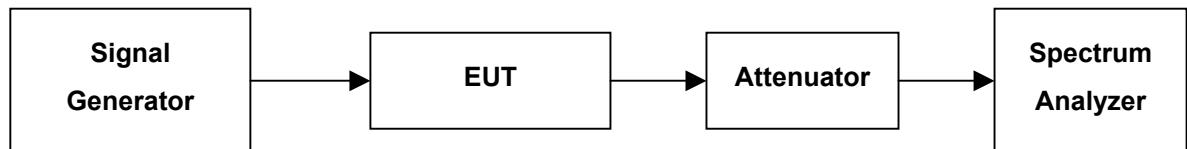

9. Test Data

9.1 Power LINE Conducted Emission

Measurement Result :

UP Link – Low Channel

| Frequency (MHz) | Level(dB μ V) | | Line | Limit(dB μ V) | | Margin(dB) | |
|--------------------|-------------------|---------|------|-------------------|---------|------------|---------|
| | Q-Peak | Average | | Q-Peak | Average | Q-Peak | Average |
| 0.15 | 45.4 | 34.0 | N | 66.0 | 56.0 | 20.6 | 22.0 |
| 0.20 | 43.2 | 33.9 | N | 63.6 | 53.6 | 20.4 | 19.7 |
| 0.24 | 46.4 | 37.4 | L | 62.1 | 52.1 | 15.7 | 14.7 |
| 0.29 | 44.9 | 38.0 | L | 60.5 | 50.5 | 15.6 | 12.5 |
| 0.34 | 39.0 | 29.4 | N | 59.2 | 49.2 | 20.2 | 19.8 |
| 0.59 | 33.2 | 29.8 | L | 56.0 | 46.0 | 22.8 | 16.2 |

Table 1. Line Conducted Emissions Tabulated Data

UP Link - Middle Channel

| Frequency (MHz) | Level(dB μ V) | | Line | Limit(dB μ V) | | Margin(dB) | |
|--------------------|-------------------|---------|------|-------------------|---------|------------|---------|
| | Q-Peak | Average | | Q-Peak | Average | Q-Peak | Average |
| 0.15 | 45.4 | 33.8 | N | 66.0 | 56.0 | 20.6 | 22.2 |
| 0.20 | 43.8 | 33.7 | N | 63.6 | 53.6 | 19.8 | 19.9 |
| 0.24 | 46.9 | 38.0 | L | 62.1 | 52.1 | 15.2 | 14.1 |
| 0.30 | 44.3 | 35.9 | L | 60.2 | 50.2 | 15.9 | 14.3 |
| 0.54 | 34.1 | 29.3 | L | 56.0 | 46.0 | 21.9 | 16.7 |
| 10.23 | 33.9 | 24.4 | N | 60.0 | 50.0 | 26.1 | 25.6 |

Table 2. Line Conducted Emissions Tabulated Data

UP Link - High Channel

| Frequency (MHz) | Level(dB μ V) | | Line | Limit(dB μ V) | | Margin(dB) | |
|--------------------|-------------------|---------|------|-------------------|---------|------------|---------|
| | Q-Peak | Average | | Q-Peak | Average | Q-Peak | Average |
| 0.15 | 44.9 | 34.1 | N | 66.0 | 56.0 | 21.1 | 21.9 |
| 0.20 | 43.1 | 34.2 | N | 63.6 | 53.6 | 20.5 | 19.4 |
| 0.24 | 46.2 | 37.9 | L | 62.1 | 52.1 | 15.9 | 14.2 |
| 0.30 | 44.3 | 37.8 | L | 60.2 | 50.2 | 15.9 | 12.4 |
| 0.54 | 32.2 | 22.2 | N | 56.0 | 46.0 | 23.8 | 23.8 |
| 10.23 | 28.5 | 20.1 | N | 60.0 | 50.0 | 31.5 | 29.9 |

Table 3. Line Conducted Emissions Tabulated Data

DOWN Link - Low Channel

| Frequency (MHz) | Level(dB μ V) | | Line | Limit(dB μ V) | | Margin(dB) | |
|--------------------|-------------------|---------|------|-------------------|---------|------------|---------|
| | Q-Peak | Average | | Q-Peak | Average | Q-Peak | Average |
| 0.24 | 46.1 | 37.9 | N | 62.1 | 52.1 | 16.0 | 14.2 |
| 0.29 | 44.9 | 38.2 | N | 60.5 | 50.5 | 15.6 | 12.3 |
| 0.59 | 31.5 | 24.8 | L | 56.0 | 46.0 | 24.5 | 21.2 |
| 1.09 | 30.4 | 26.4 | L | 56.0 | 46.0 | 25.6 | 19.6 |
| 2.12 | 27.3 | 19.2 | N | 56.0 | 46.0 | 28.7 | 26.8 |
| 23.13 | 34.1 | 29.9 | N | 60.0 | 50.0 | 25.9 | 20.1 |

Table 4. Line Conducted Emissions Tabulated Data
DOWN Link - Middle Channel

| Frequency (MHz) | Level(dB μ V) | | Line | Limit(dB μ V) | | Margin(dB) | |
|--------------------|-------------------|---------|------|-------------------|---------|------------|---------|
| | Q-Peak | Average | | Q-Peak | Average | Q-Peak | Average |
| 0.24 | 46.5 | 38.4 | L | 62.1 | 52.1 | 15.6 | 13.7 |
| 0.30 | 44.8 | 38.2 | L | 60.2 | 50.2 | 15.4 | 12.0 |
| 0.54 | 34.3 | 29.6 | L | 56.0 | 46.0 | 21.7 | 16.4 |
| 1.13 | 29.1 | 20.4 | L | 56.0 | 46.0 | 26.9 | 25.6 |
| 2.38 | 28.1 | 19.2 | N | 56.0 | 46.0 | 27.9 | 26.8 |
| 23.12 | 34.8 | 30.5 | N | 60.0 | 50.0 | 25.2 | 19.5 |

Table 5. Line Conducted Emissions Tabulated Data
DOWN Link - High Channel


| Frequency (MHz) | Level(dB μ V) | | Line | Limit(dB μ V) | | Margin(dB) | |
|--------------------|-------------------|---------|------|-------------------|---------|------------|---------|
| | Q-Peak | Average | | Q-Peak | Average | Q-Peak | Average |
| 0.25 | 46.5 | 38.3 | L | 61.8 | 51.8 | 15.3 | 13.5 |
| 0.30 | 44.9 | 38.3 | L | 60.2 | 50.2 | 15.3 | 11.9 |
| 0.54 | 34.2 | 29.5 | L | 56.0 | 46.0 | 21.8 | 16.5 |
| 1.13 | 29.1 | 21.5 | L | 56.0 | 46.0 | 26.9 | 24.5 |
| 2.38 | 28.1 | 18.0 | N | 56.0 | 46.0 | 27.9 | 28.0 |
| 23.11 | 34.3 | 30.1 | N | 60.0 | 50.0 | 25.7 | 19.9 |

Table 6. Line Conducted Emissions Tabulated Data
NOTES:

1. Measurements using CISPR quasi-peak mode & average mode.
2. All modes of operation were investigated and the worst -case emission are reported. See attached Plots.
3. LINE : L =Line , N = Neutral
4. The limit is on the FCC Part section 15.207(a).


PLOTS OF EMISSIONS

- **Conducted Emission at the Mains port (UP Link - Low mode, Line)**

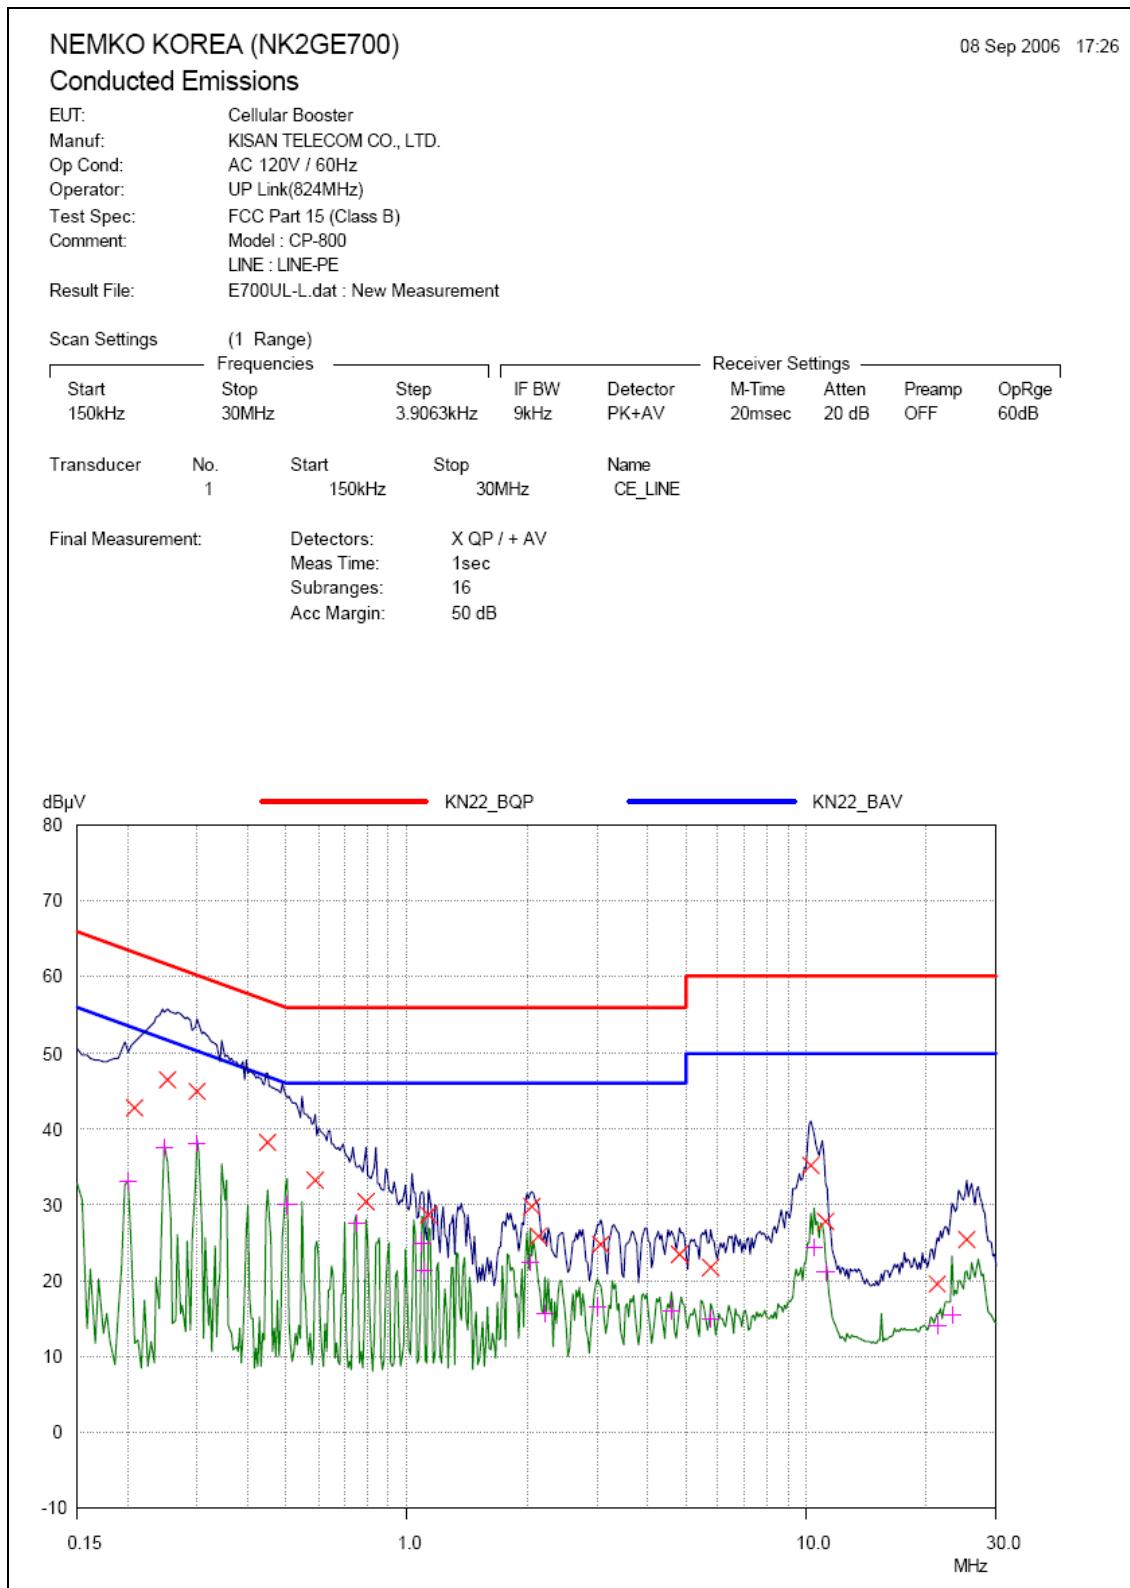


PLOTS OF EMISSIONS

- **Conducted Emission at the Mains port (UP Link - Low mode, Neutral)**

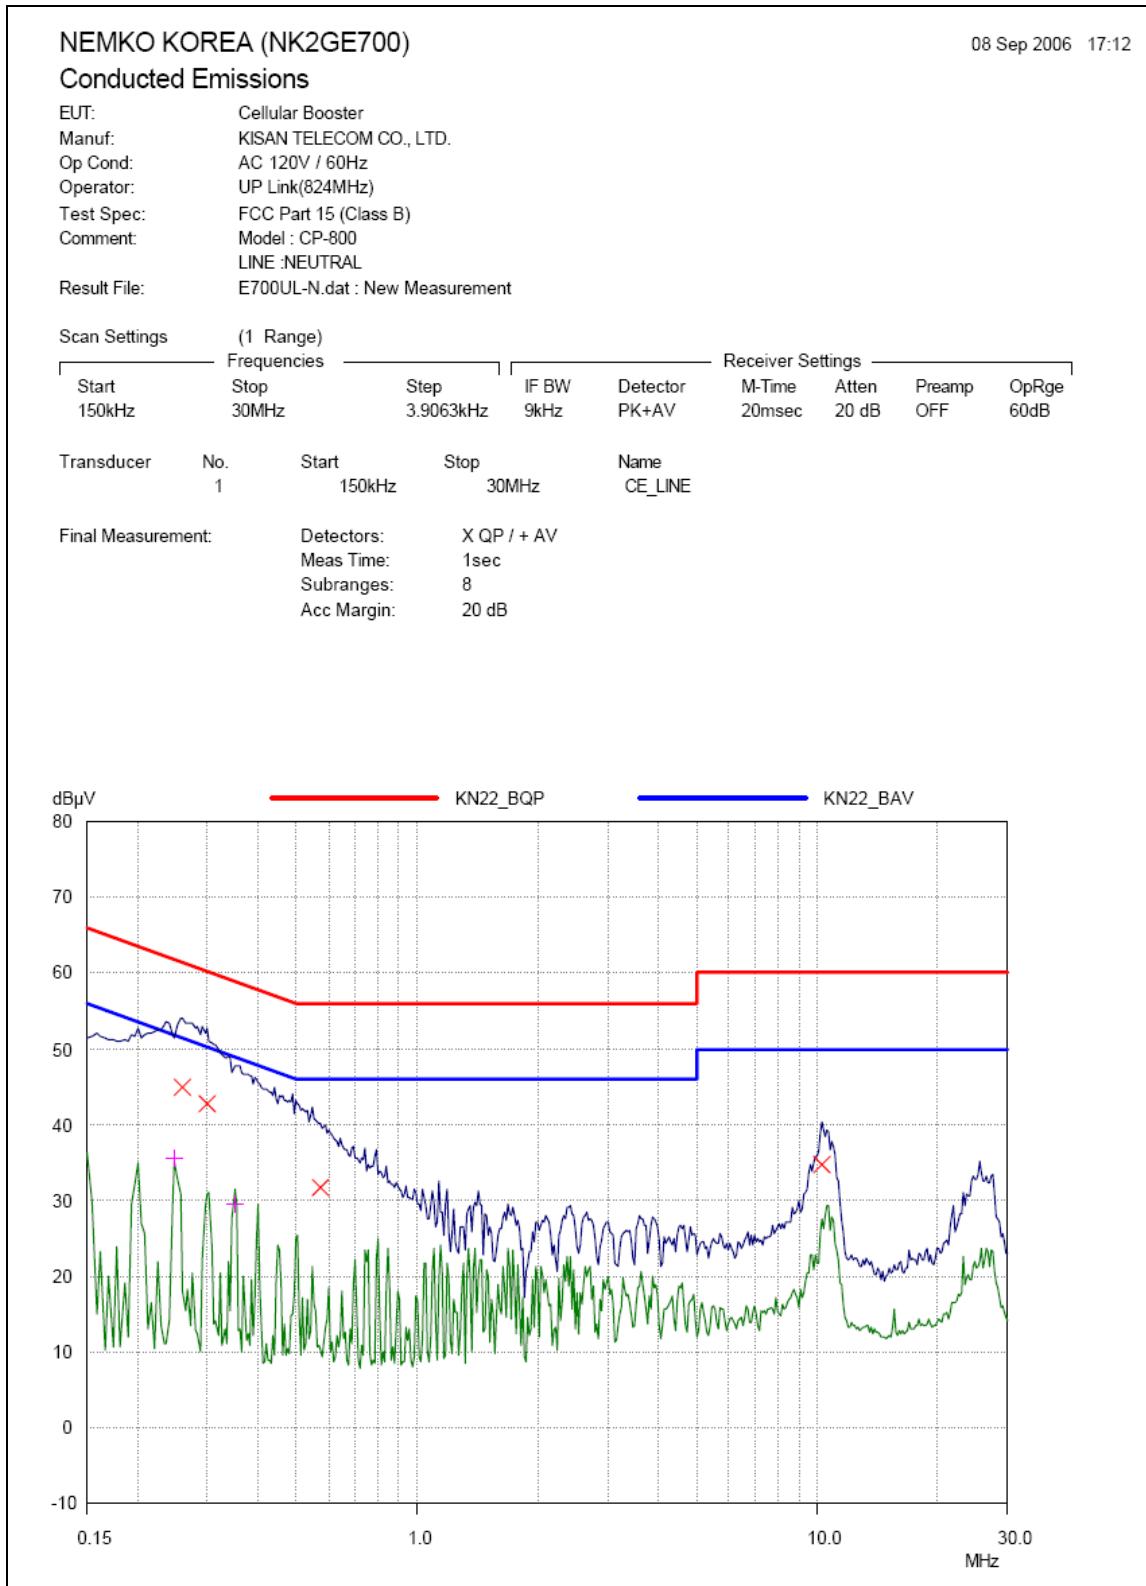


PLOTS OF EMISSIONS

- **Conducted Emission at the Mains port (UP Link - Middle mode, Line)**

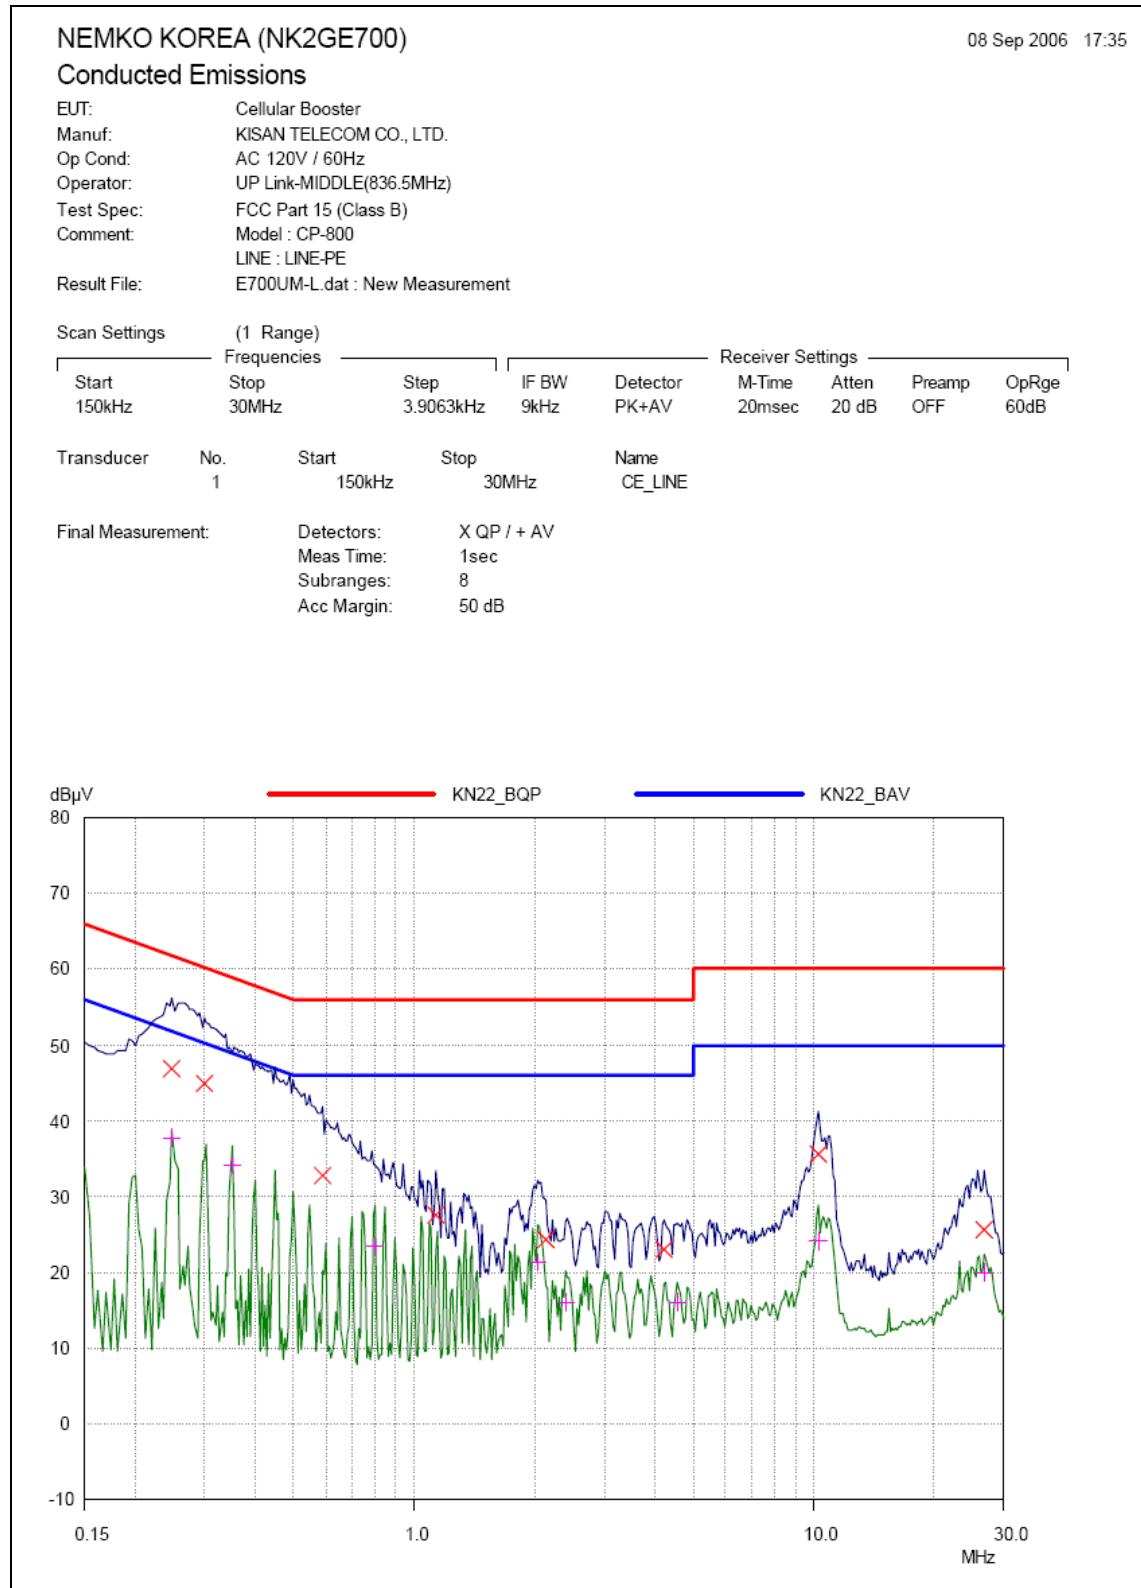


PLOTS OF EMISSIONS

- **Conducted Emission at the Mains port (UP Link - Middle mode, Neutral)**

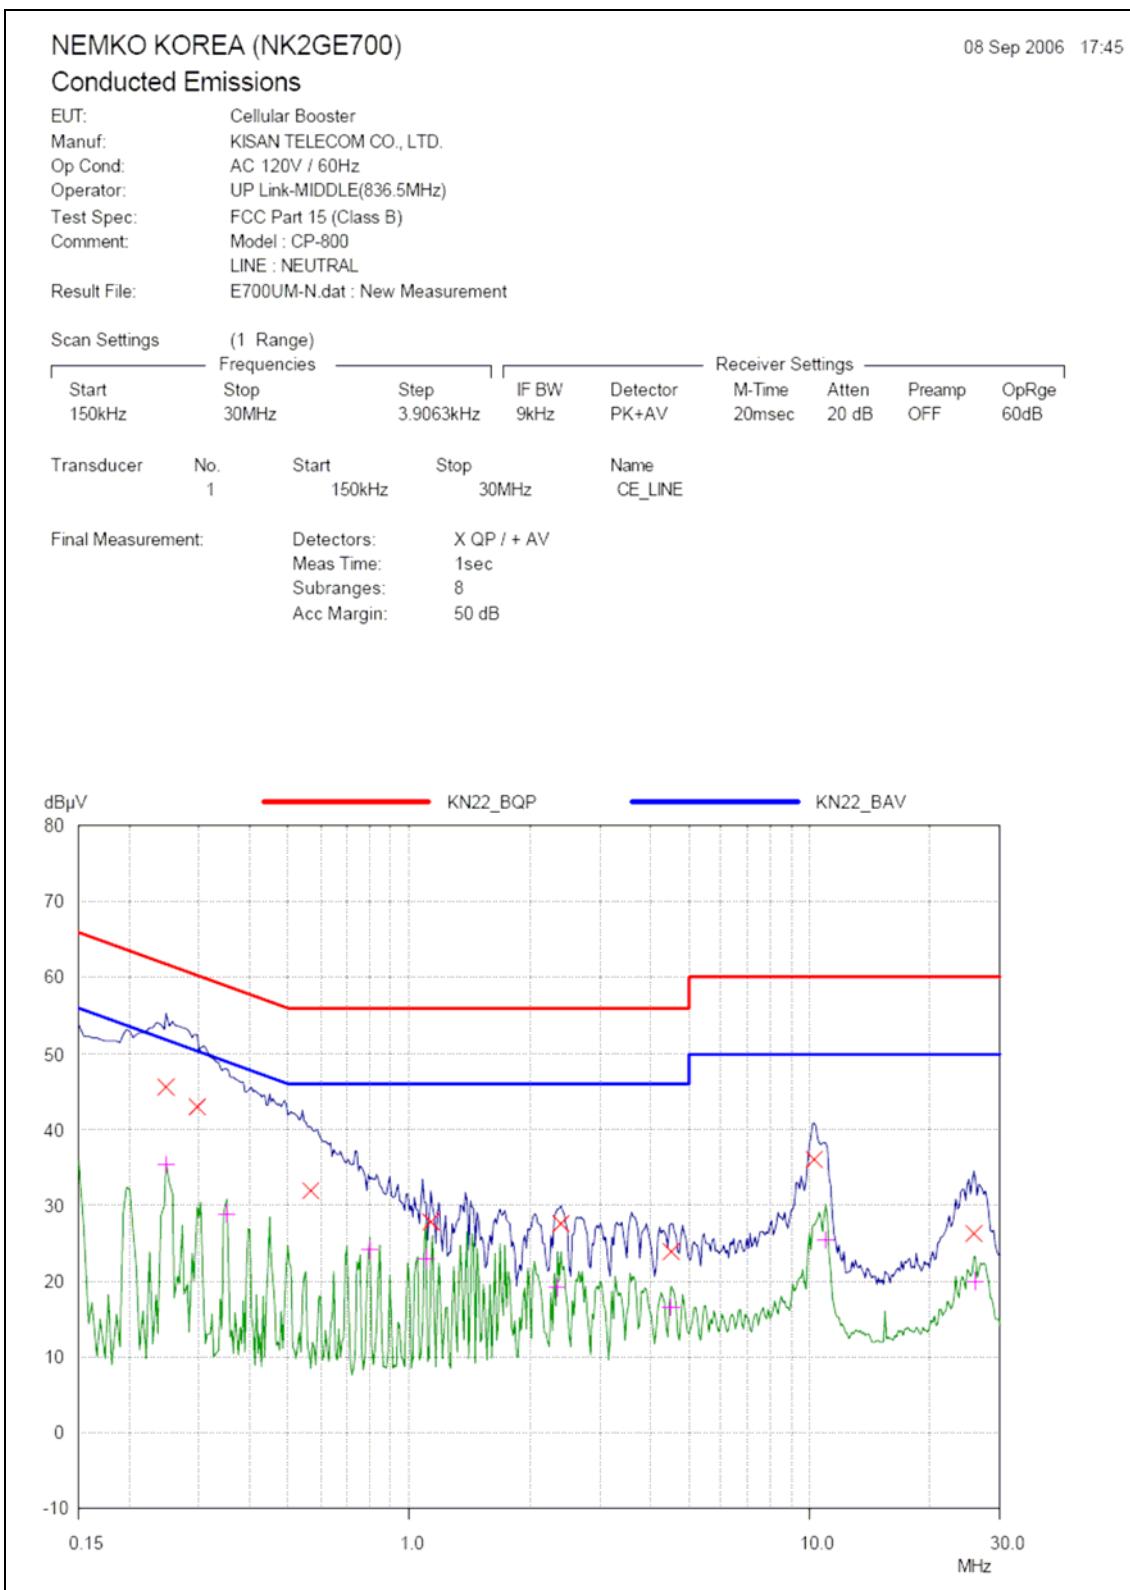


PLOTS OF EMISSIONS

- **Conducted Emission at the Mains port (UP Link - High mode, Line)**

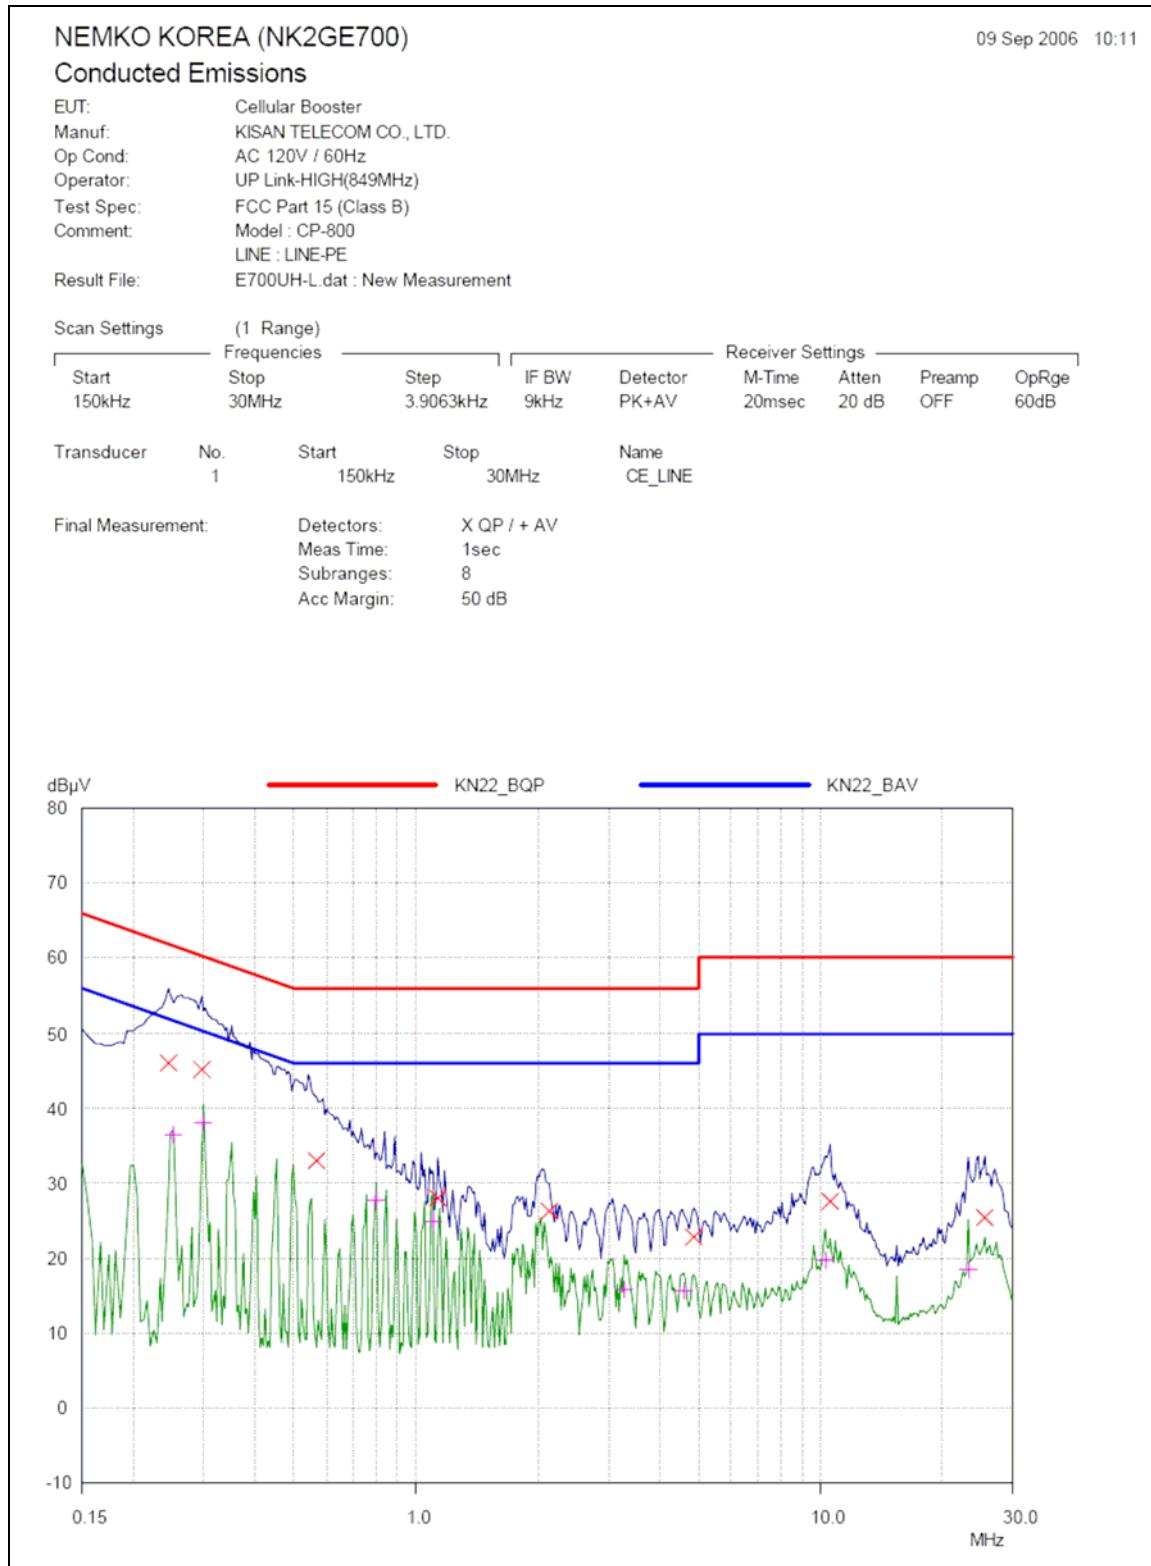


PLOTS OF EMISSIONS

- **Conducted Emission at the Mains port (UP Link - High mode, Neutral)**

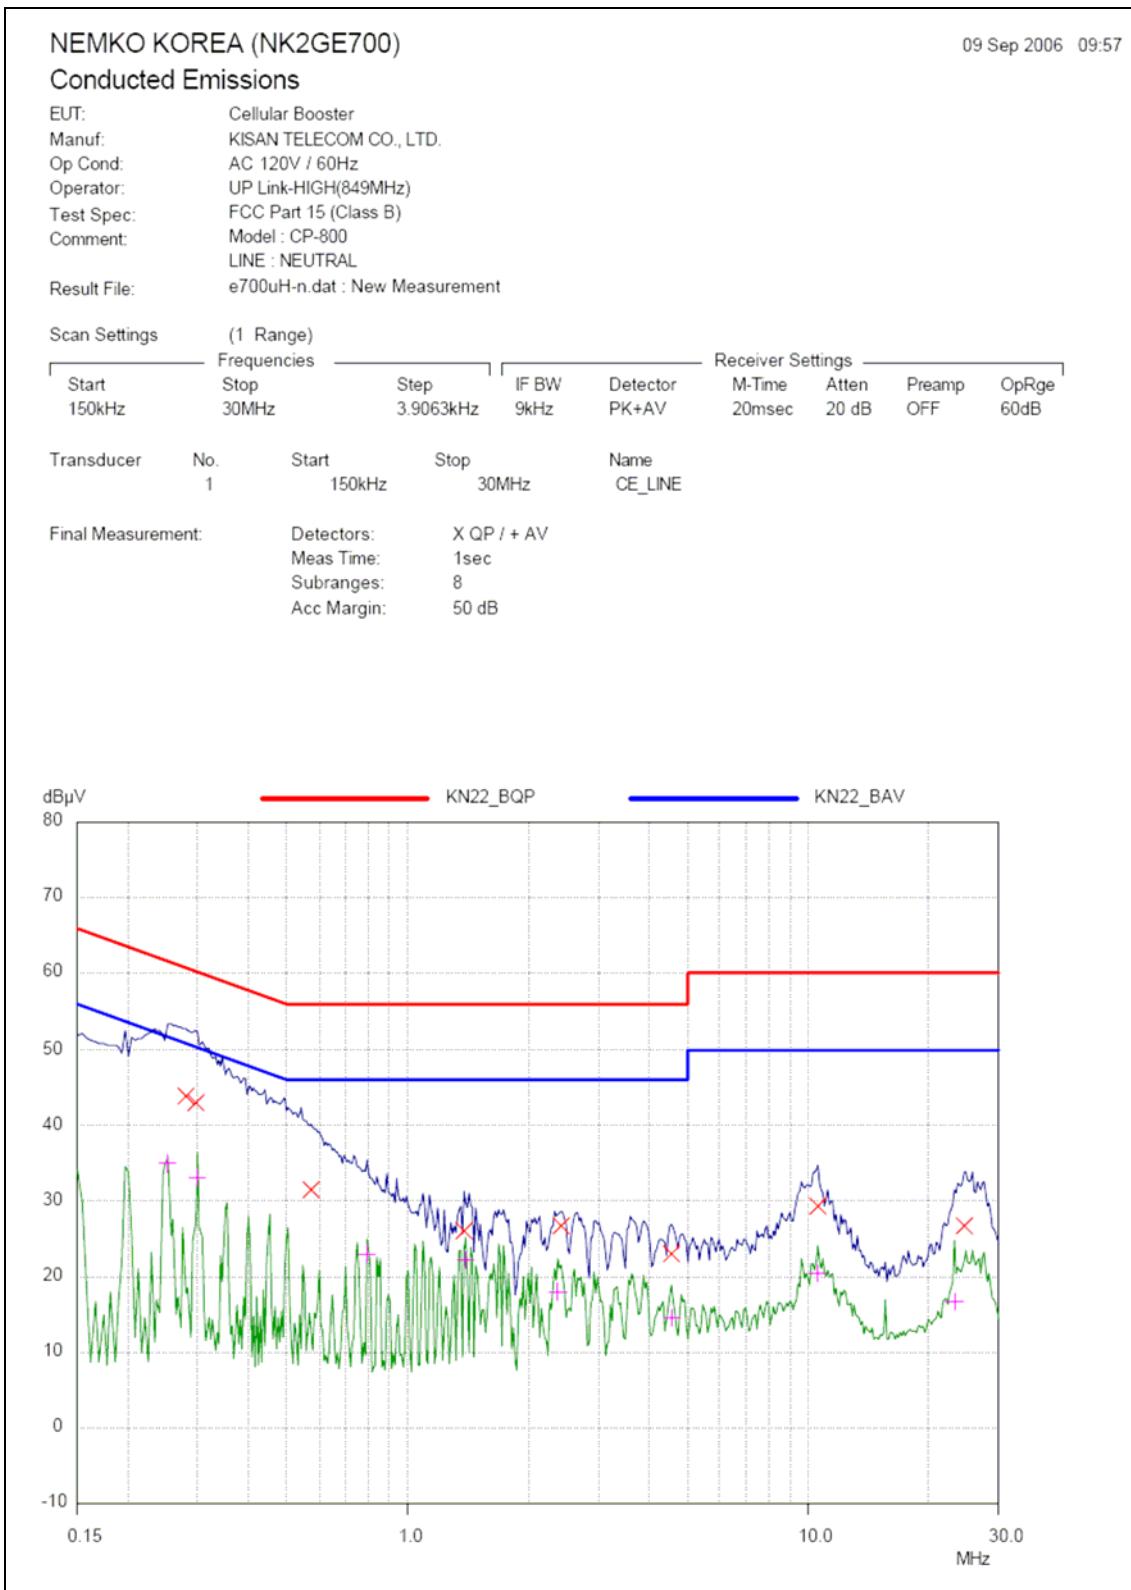


PLOTS OF EMISSIONS

- **Conducted Emission at the Mains port (DOWN Link - Low mode, Line)**

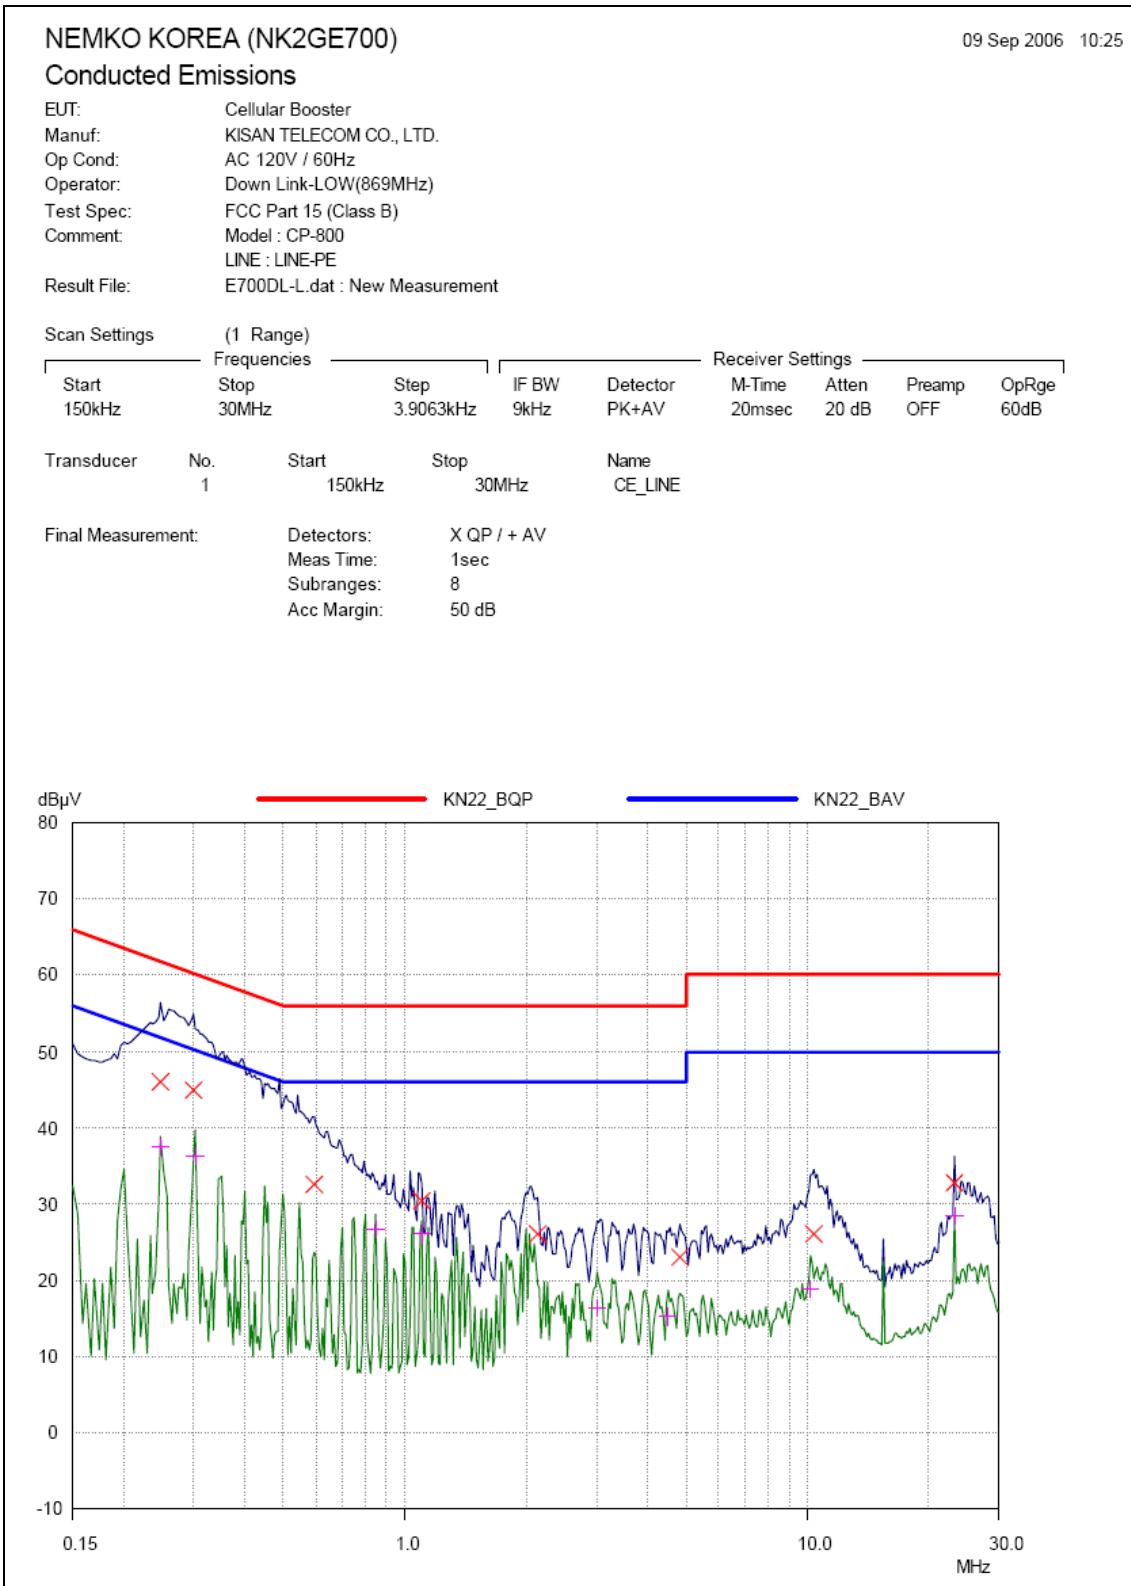


PLOTS OF EMISSIONS

- **Conducted Emission at the Mains port (DOWN Link - Low mode, Neutral)**

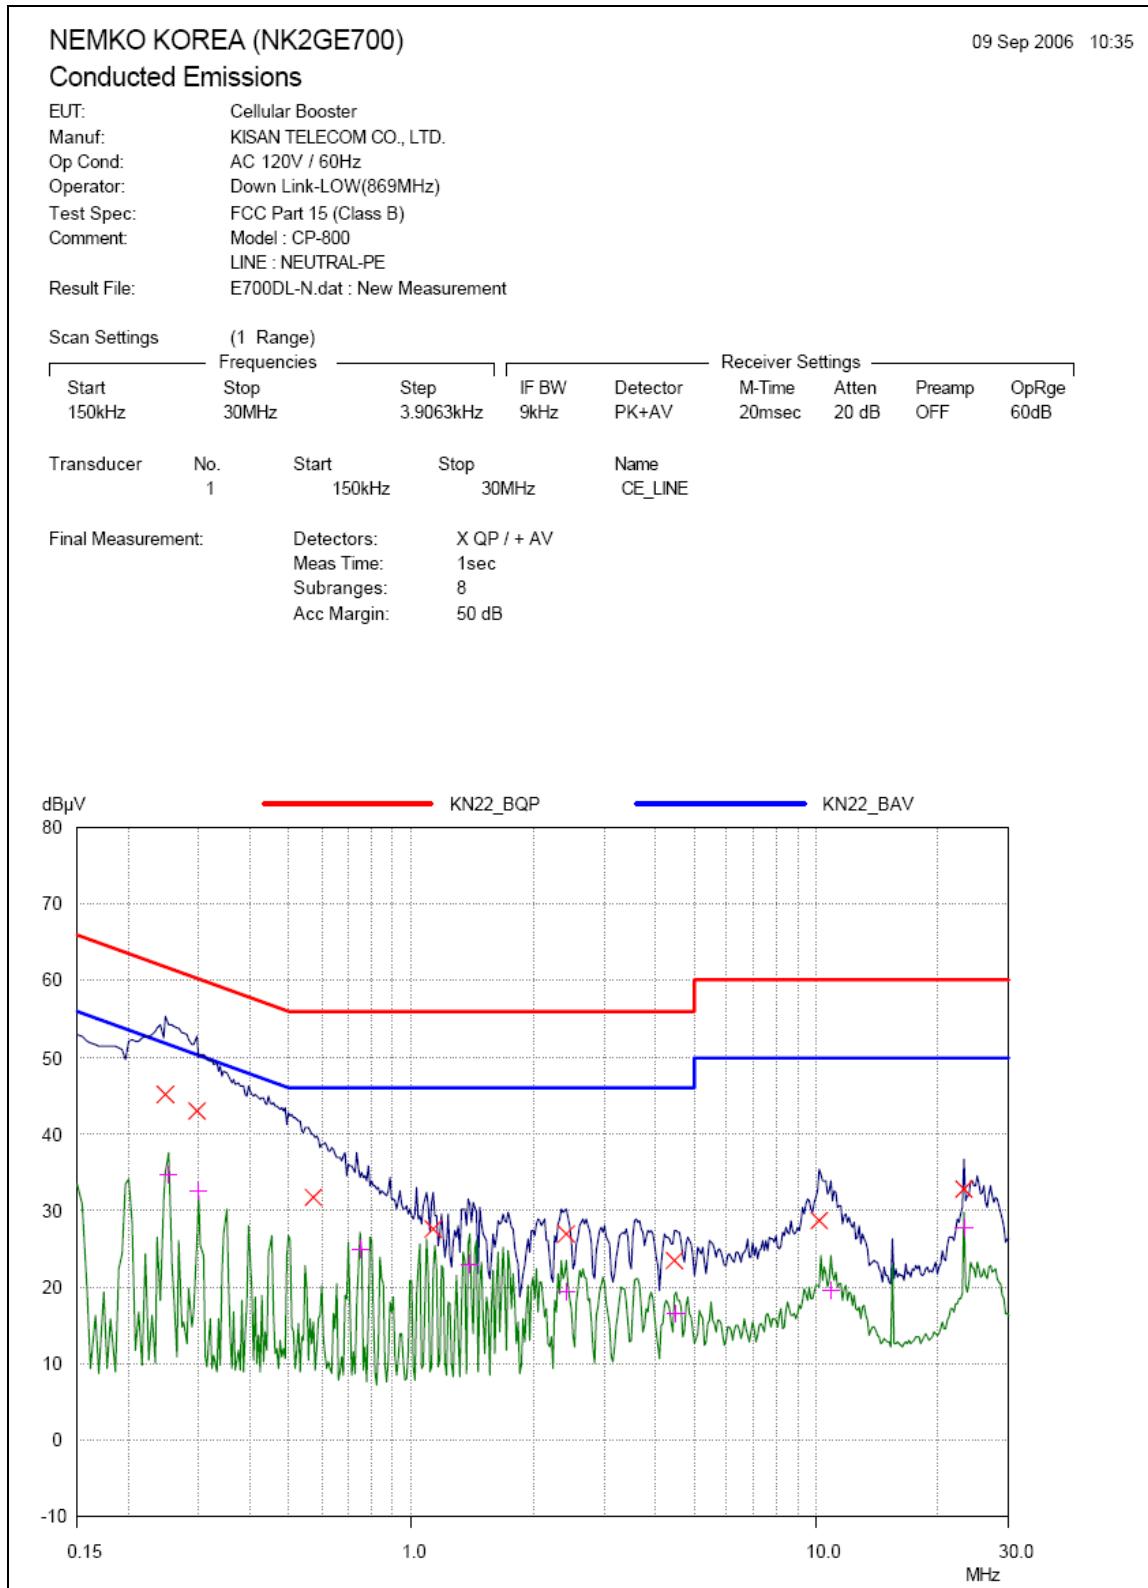


PLOTS OF EMISSIONS

- **Conducted Emission at the Mains port (DOWN Link - Middle mode, Line)**

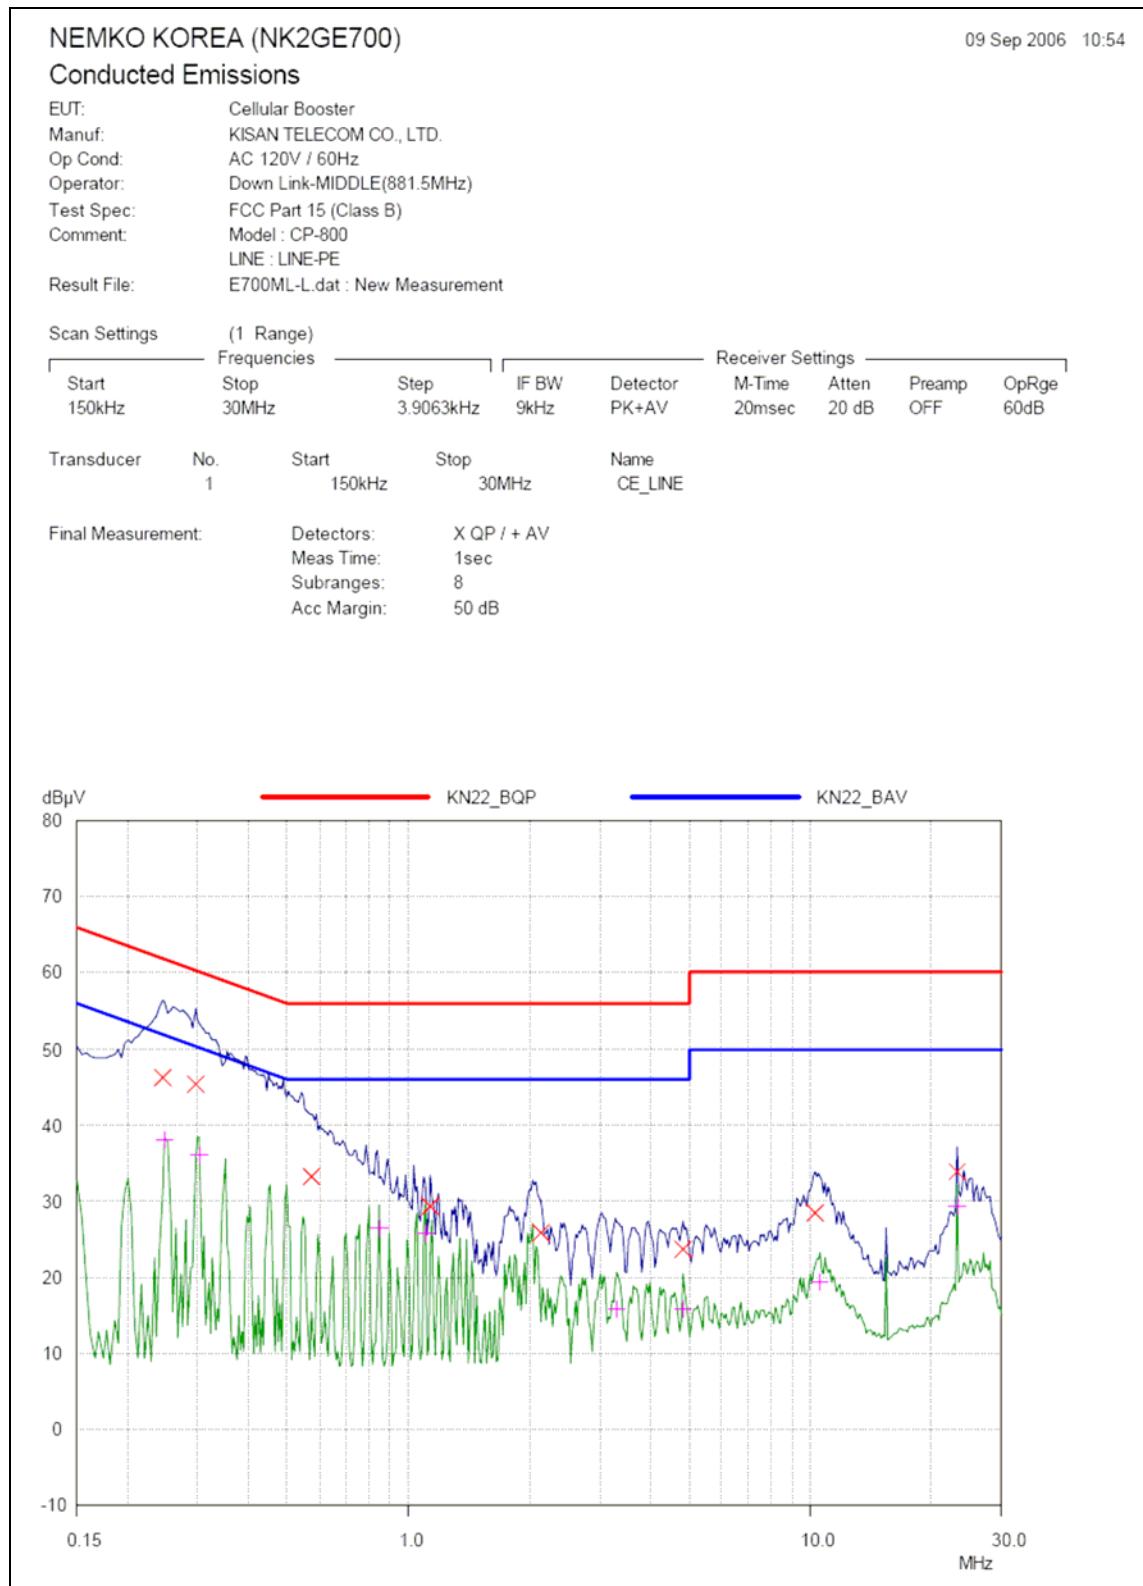


PLOTS OF EMISSIONS

- **Conducted Emission at the Mains port (DOWN Link - Middle mode, Neutral)**

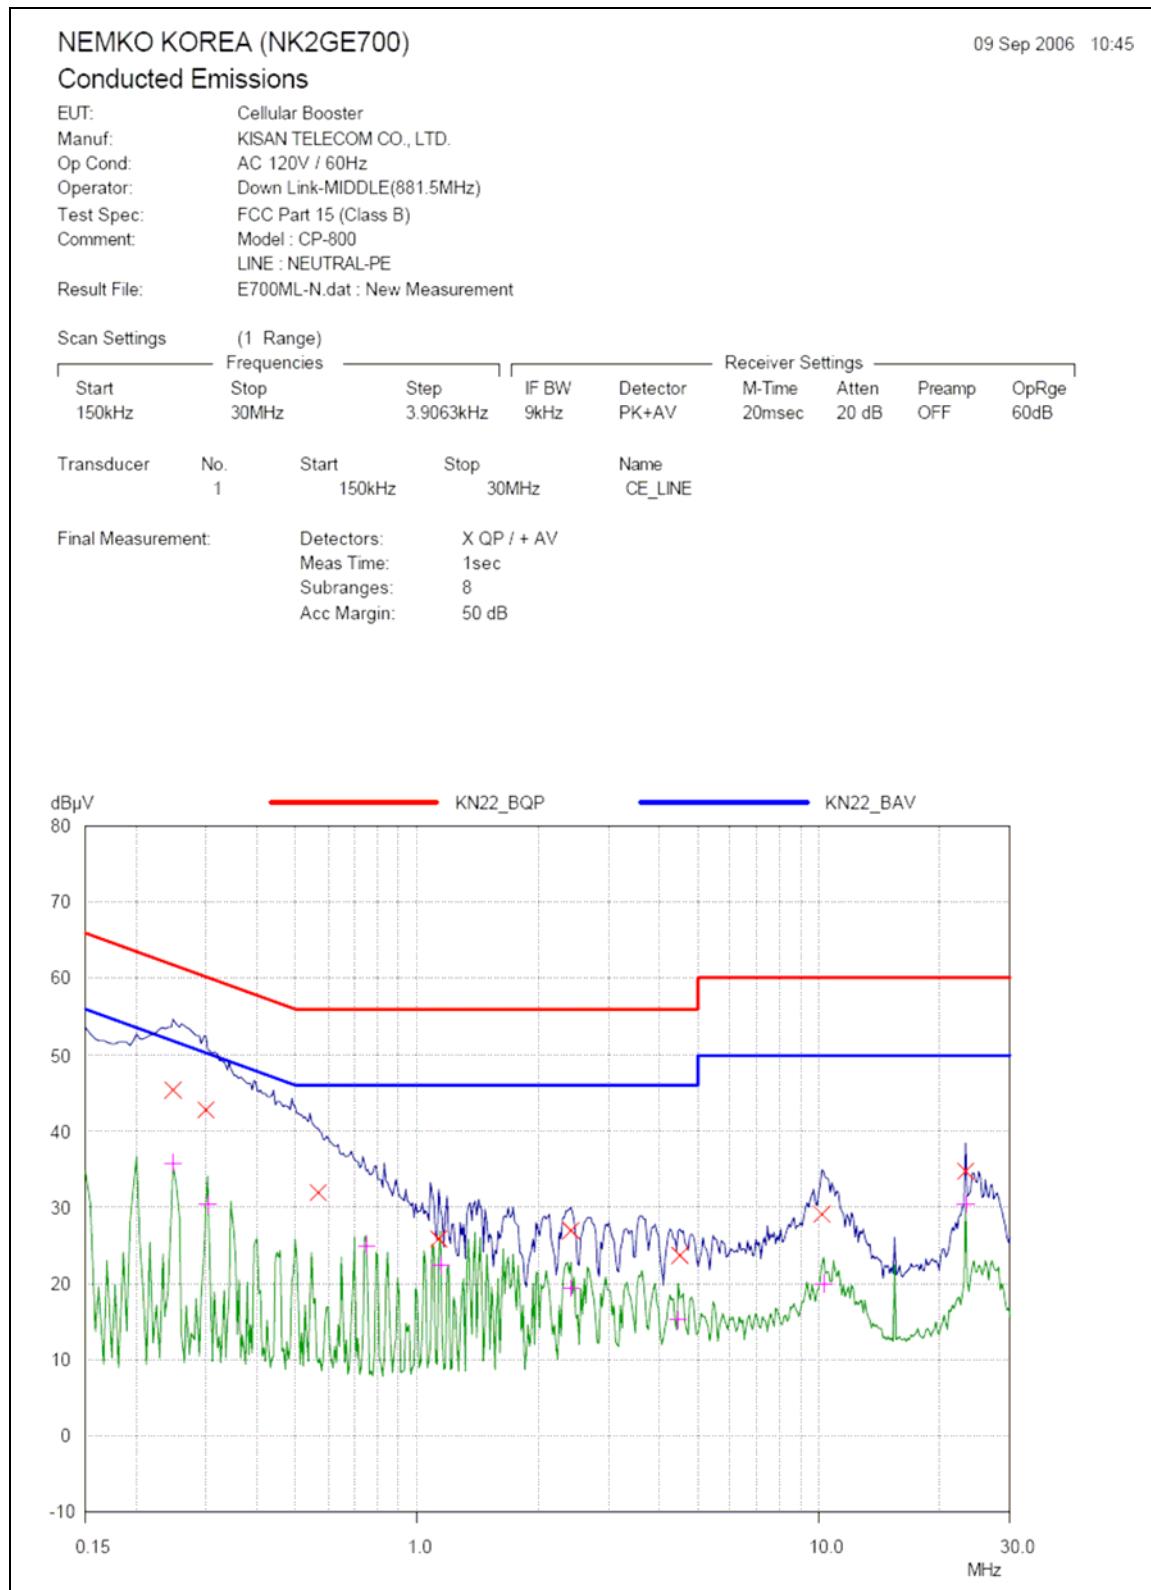


PLOTS OF EMISSIONS

- **Conducted Emission at the Mains port (DOWN Link - High mode, Line)**

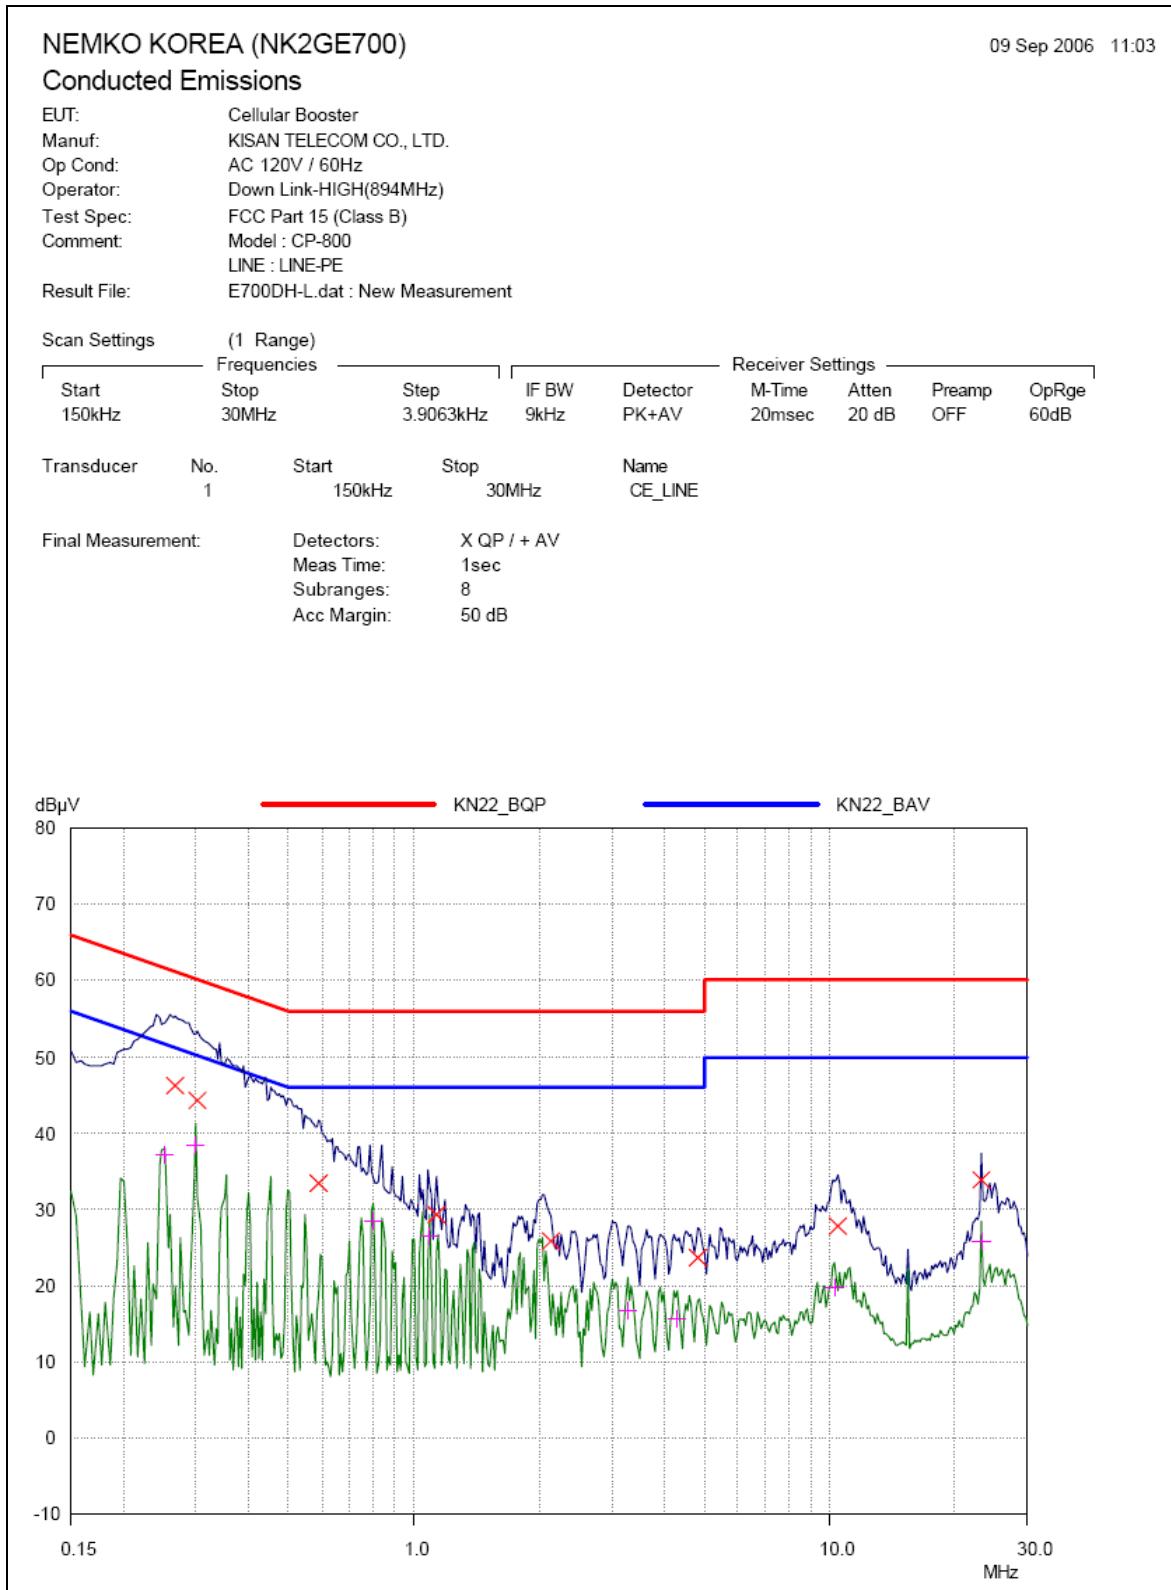

PLOTS OF EMISSIONS

- **Conducted Emission at the Mains port (DOWN Link - High mode, Neutral)**

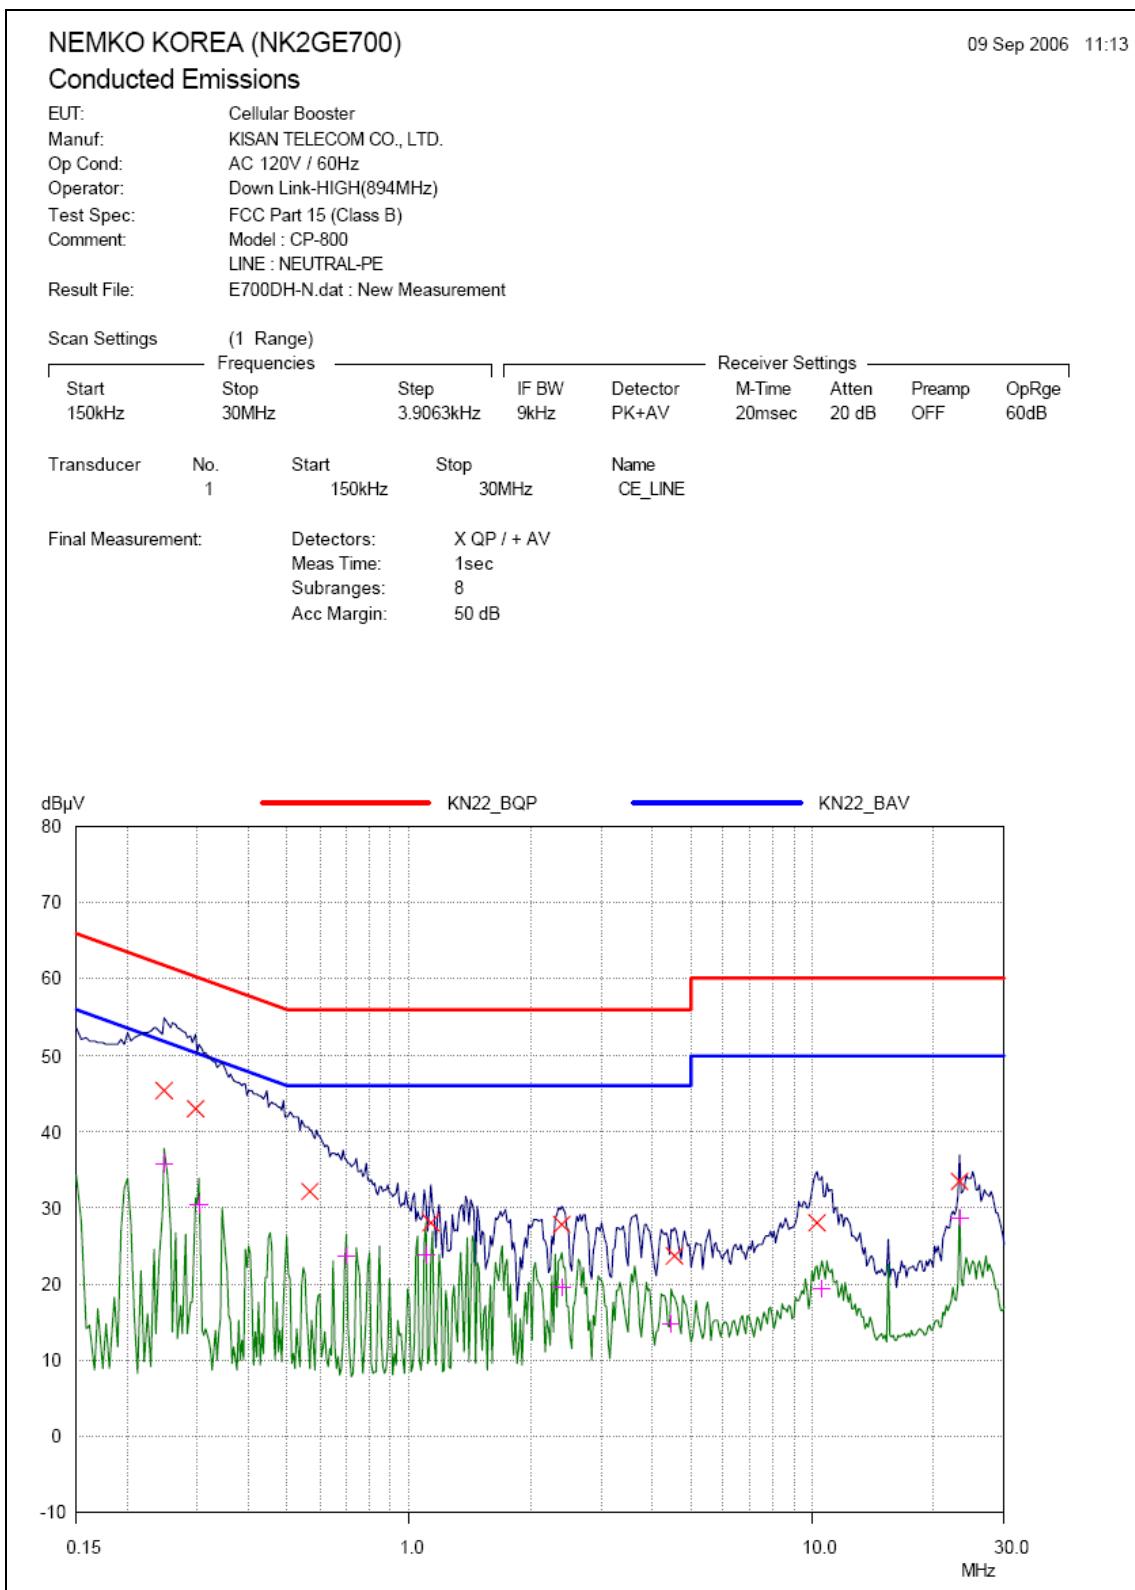

9.2 Radiated Emissions

Measurement Result :

UP Link – Low Channel

| Frequency (MHz) | Reading (dB μ V) | Pol* (H/V) | AF+CL+Amp (dB)** | Result (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|-----------------|----------------------|------------|------------------|-----------------------|----------------------|-------------|
| 206.31 | 48.2 | V | -11.0 | 37.2 | 43.5 | 6.3 |
| 303.97 | 42.8 | V | -9.4 | 33.4 | 46.0 | 12.6 |
| 412.63 | 46.5 | V | -7.4 | 39.1 | 46.0 | 6.9 |
| 512.06 | 39.4 | V | -5.3 | 34.1 | 46.0 | 11.9 |
| 618.97 | 32.9 | V | -2.8 | 30.1 | 46.0 | 15.9 |
| 826.97 | 37.4 | V | 1.1 | 38.5 | 46.0 | 7.5 |

Table 7. Radiated Measurements at 3meters

UP Link – Middle Channel

| Frequency (MHz) | Reading (dB μ V) | Pol* (H/V) | AF+CL+Amp (dB)** | Result (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|-----------------|----------------------|------------|------------------|-----------------------|----------------------|-------------|
| 206.31 | 48.1 | V | -11.0 | 37.1 | 43.5 | 6.4 |
| 303.97 | 42.3 | V | -9.4 | 32.9 | 46.0 | 13.1 |
| 412.63 | 46.8 | V | -7.4 | 39.4 | 46.0 | 6.6 |
| 512.06 | 37.8 | V | -5.3 | 32.5 | 46.0 | 13.5 |
| 618.97 | 33.2 | V | -2.8 | 30.4 | 46.0 | 15.6 |
| 826.91 | 37.3 | V | 1.1 | 38.4 | 46.0 | 7.6 |

Table 8. Radiated Measurements at 3meters

UP Link – High Channel

| Frequency (MHz) | Reading (dB μ V) | Pol* (H/V) | AF+CL+Amp (dB)** | Result (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|-----------------|----------------------|------------|------------------|-----------------------|----------------------|-------------|
| 207.21 | 47.4 | V | -11.0 | 36.4 | 43.5 | 7.1 |
| 304.24 | 39.6 | V | -9.4 | 30.2 | 46.0 | 15.8 |
| 412.63 | 47.5 | V | -7.4 | 40.1 | 46.0 | 5.9 |
| 512.24 | 37.9 | V | -5.3 | 32.6 | 46.0 | 13.4 |
| 619.97 | 39.0 | V | -2.7 | 36.3 | 46.0 | 9.7 |
| 826.91 | 35.1 | V | 1.1 | 36.2 | 46.0 | 9.8 |

Table 9. Radiated Measurements at 3meters

DOWN Link – Low Channel

| Frequency (MHz) | Reading (dB μ V) | Pol* (H/V) | AF+CL+Amp (dB)** | Result (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|--------------------|-------------------------|---------------|---------------------|--------------------------|-------------------------|----------------|
| 154.30 | 39.9 | H | -9.2 | 30.7 | 43.5 | 12.8 |
| 191.90 | 41.8 | H | -11.6 | 30.2 | 43.5 | 13.3 |
| 207.50 | 47.5 | H | -11.0 | 36.5 | 43.5 | 7.0 |
| 304.10 | 42.1 | H | -9.4 | 32.7 | 46.0 | 13.3 |
| 320.10 | 43.7 | H | -9.4 | 34.3 | 46.0 | 11.7 |
| 415.37 | 49.0 | H | -7.3 | 41.7 | 46.0 | 4.3 |

Table 10. Radiated Measurements at 3meters
DOWN Link – Middle Channel

| Frequency (MHz) | Reading (dB μ V) | Pol* (H/V) | AF+CL+Amp (dB)** | Result (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|--------------------|-------------------------|---------------|---------------------|--------------------------|-------------------------|----------------|
| 128.00 | 41.0 | V | -12.6 | 28.4 | 43.5 | 15.1 |
| 208.00 | 43.7 | H | -11.0 | 32.7 | 43.5 | 10.8 |
| 320.00 | 42.5 | V | -9.4 | 33.1 | 46.0 | 12.9 |
| 416.22 | 45.7 | V | -7.3 | 38.4 | 46.0 | 7.6 |
| 512.00 | 45.3 | V | -5.3 | 40.0 | 46.0 | 6.0 |
| 624.33 | 38.9 | V | -2.6 | 36.3 | 46.0 | 9.7 |

Table 11. Radiated Measurements at 3meters
DOWN Link – High Channel

| Frequency (MHz) | Reading (dB μ V) | Pol* (H/V) | AF+CL+Amp (dB)** | Result (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|--------------------|-------------------------|---------------|---------------------|--------------------------|-------------------------|----------------|
| 128.00 | 41.3 | V | -12.6 | 28.7 | 43.5 | 14.8 |
| 208.00 | 41.1 | V | -11.0 | 30.1 | 43.5 | 13.4 |
| 320.00 | 42.6 | V | -9.4 | 33.2 | 46.0 | 12.8 |
| 416.90 | 47.2 | V | -7.3 | 39.9 | 46.0 | 6.1 |
| 512.00 | 37.0 | V | -5.3 | 31.7 | 46.0 | 14.3 |
| 833.80 | 37.4 | V | 1.2 | 38.6 | 46.0 | 7.4 |

Table 12. Radiated Measurements at 3meters

9.3 Field Strength of Spurious Emissions

Measurement Result:

UP Link – Low Channel

| Freq. (MHz) | Ant. Pol. | P _{EUT} (dBm) | P _{TX} (dBm) | P _{RX} (dBm) | G _{antenna} (dBi) | L _{Cable} (dB) | EIRP (dBm) | Limit (dBm) | Margi n (dB) |
|----------------|--------------|---------------------------|--------------------------|--------------------------|-------------------------------|----------------------------|---------------|----------------|--------------------|
| 1649.40 | H | -65.61 | 0.00 | -1.15 | 9.66 | 2.28 | -57.08 | -13 | 44.08 |
| | V | -64.17 | 0.00 | -1.11 | 9.66 | 2.28 | -55.68 | -13 | 42.68 |
| 2474.10 | H | -65.97 | 0.00 | -3.57 | 10.49 | 3.03 | -54.94 | -13 | 41.94 |
| | V | -64.93 | 0.00 | -3.70 | 10.49 | 3.03 | -53.77 | -13 | 40.77 |
| 3298.80 | H | -65.65 | 0.00 | -5.23 | 12.54 | 3.62 | -51.50 | -13 | 38.50 |
| | V | -64.38 | 0.00 | -5.06 | 12.54 | 3.62 | -50.40 | -13 | 37.40 |
| 4123.50 | H | -67.01 | 0.00 | -8.80 | 12.66 | 4.16 | -49.71 | -13 | 36.71 |
| | V | -65.32 | 0.00 | -8.77 | 12.66 | 4.16 | -48.05 | -13 | 35.05 |
| 4948.20 | H | -67.41 | 0.00 | -10.86 | 12.63 | 4.60 | -48.08 | -13 | 35.08 |
| | V | -66.99 | 0.00 | -10.80 | 12.63 | 4.60 | -48.16 | -13 | 35.16 |
| 5772.90 | H | -67.31 | 0.00 | -10.55 | 13.10 | 5.17 | -48.83 | -13 | 35.83 |
| | V | -66.28 | 0.00 | -11.47 | 13.10 | 5.17 | -46.88 | -13 | 33.88 |

Table 13. Field Strength of Spurious Emissions

UP Link – Middle Channel

| Freq. (MHz) | Ant. Pol. | P _{EUT} (dBm) | P _{TX} (dBm) | P _{RX} (dBm) | G _{antenna} (dBi) | L _{Cable} (dB) | EIRP (dBm) | Limit (dBm) | Margi n (dB) |
|----------------|--------------|---------------------------|--------------------------|--------------------------|-------------------------------|----------------------------|---------------|----------------|--------------------|
| 1649.40 | H | -63.89 | 0.00 | -1.22 | 9.77 | 2.30 | -55.20 | -13 | 42.20 |
| | V | -65.14 | 0.00 | -1.15 | 9.77 | 2.30 | -56.52 | -13 | 43.52 |
| 2474.10 | H | -64.26 | 0.00 | -3.74 | 10.57 | 3.04 | -52.99 | -13 | 39.99 |
| | V | -64.68 | 0.00 | -3.78 | 10.57 | 3.04 | -53.37 | -13 | 40.37 |
| 3298.80 | H | -65.78 | 0.00 | -5.02 | 12.72 | 3.63 | -51.67 | -13 | 38.67 |
| | V | -64.07 | 0.00 | -4.87 | 12.72 | 3.63 | -50.11 | -13 | 37.11 |
| 4123.50 | H | -66.67 | 0.00 | -8.62 | 12.69 | 4.17 | -49.53 | -13 | 36.53 |
| | V | -66.17 | 0.00 | -8.55 | 12.69 | 4.17 | -49.10 | -13 | 36.10 |
| 4948.20 | H | -68.23 | 0.00 | -11.08 | 12.67 | 4.77 | -49.25 | -13 | 36.25 |
| | V | -68.20 | 0.00 | -10.84 | 12.67 | 4.77 | -49.46 | -13 | 36.46 |
| 5772.90 | H | -67.61 | 0.00 | -10.99 | 13.07 | 5.22 | -48.77 | -13 | 35.77 |
| | V | -67.93 | 0.00 | -11.83 | 13.07 | 5.22 | -48.25 | -13 | 35.25 |

Table 14. Field Strength of Spurious Emissions

UP Link – High Channel

| Freq. (MHz) | Ant. Pol. | P _{EUT} (dBm) | P _{TX} (dBm) | P _{RX} (dBm) | G _{antenna} (dBi) | L _{Cable} (dB) | EIRP (dBm) | Limit (dBm) | Margi n (dB) |
|----------------|--------------|---------------------------|--------------------------|--------------------------|-------------------------------|----------------------------|---------------|----------------|--------------------|
| 1649.40 | H | -64.58 | 0.00 | -1.30 | 9.88 | 2.32 | -55.72 | -13 | 42.72 |
| | V | -64.82 | 0.00 | -1.19 | 9.88 | 2.32 | -56.07 | -13 | 43.07 |
| 2474.10 | H | -65.12 | 0.00 | -3.92 | 10.65 | 3.04 | -53.59 | -13 | 40.59 |
| | V | -65.29 | 0.00 | -3.87 | 10.65 | 3.04 | -53.81 | -13 | 40.81 |
| 3298.80 | H | -65.04 | 0.00 | -4.78 | 12.93 | 3.64 | -50.97 | -13 | 37.97 |
| | V | -65.25 | 0.00 | -4.65 | 12.93 | 3.64 | -51.31 | -13 | 38.31 |
| 4123.50 | H | -67.12 | 0.00 | -8.80 | 12.70 | 4.21 | -49.83 | -13 | 36.83 |
| | V | -66.78 | 0.00 | -8.68 | 12.70 | 4.21 | -49.61 | -13 | 36.61 |
| 4948.20 | H | -68.84 | 0.00 | -10.87 | 12.74 | 4.75 | -49.98 | -13 | 36.98 |
| | V | -67.14 | 0.00 | -10.66 | 12.74 | 4.75 | -48.49 | -13 | 35.49 |
| 5772.90 | H | -68.03 | 0.00 | -11.64 | 13.03 | 5.24 | -48.60 | -13 | 35.60 |
| | V | -68.03 | 0.00 | -12.09 | 13.03 | 5.24 | -48.15 | -13 | 35.15 |

Table 15. Field Strength of Spurious Emissions
DOWN Link – Low Channel

| Freq. (MHz) | Ant. Pol. | P _{EUT} (dBm) | P _{TX} (dBm) | P _{RX} (dBm) | G _{antenna} (dBi) | L _{Cable} (dB) | EIRP (dBm) | Limit (dBm) | Margi n (dB) |
|----------------|--------------|---------------------------|--------------------------|--------------------------|-------------------------------|----------------------------|---------------|----------------|--------------------|
| 1649.40 | H | -64.61 | 0.00 | -1.42 | 10.07 | 2.36 | -55.48 | -13 | 42.48 |
| | V | -64.27 | 0.00 | -1.25 | 10.07 | 2.36 | -55.31 | -13 | 42.31 |
| 2474.10 | H | -65.08 | 0.00 | -4.25 | 10.80 | 3.05 | -53.08 | -13 | 40.08 |
| | V | -63.81 | 0.00 | -4.07 | 10.80 | 3.05 | -51.99 | -13 | 38.99 |
| 3298.80 | H | -65.99 | 0.00 | -5.31 | 12.80 | 3.64 | -51.52 | -13 | 38.52 |
| | V | -65.01 | 0.00 | -5.20 | 12.80 | 3.64 | -50.65 | -13 | 37.65 |
| 4123.50 | H | -66.83 | 0.00 | -9.44 | 12.71 | 4.28 | -48.96 | -13 | 35.96 |
| | V | -65.57 | 0.00 | -9.26 | 12.71 | 4.28 | -47.88 | -13 | 34.88 |
| 4948.20 | H | -66.41 | 0.00 | -10.55 | 12.88 | 4.75 | -47.26 | -13 | 34.26 |
| | V | -67.13 | 0.00 | -10.39 | 12.88 | 4.75 | -48.61 | -13 | 35.61 |
| 5772.90 | H | -67.59 | 0.00 | -12.27 | 12.93 | 5.30 | -47.69 | -13 | 34.69 |
| | V | -67.93 | 0.00 | -12.35 | 12.93 | 5.30 | -47.95 | -13 | 34.95 |

Table 16. Field Strength of Spurious Emissions

DOWN Link –Middle Channel

| Freq. (MHz) | Ant. Pol. | P _{EUT} (dBm) | P _{TX} (dBm) | P _{RX} (dBm) | G _{antenna} (dBi) | L _{Cable} (dB) | EIRP (dBm) | Limit (dBm) | Margi n (dB) |
|----------------|--------------|---------------------------|--------------------------|--------------------------|-------------------------------|----------------------------|---------------|----------------|--------------------|
| 1649.40 | H | -64.63 | 0.00 | -1.49 | 10.18 | 2.38 | -55.34 | -13 | 42.34 |
| | V | -64.00 | 0.00 | -1.28 | 10.18 | 2.38 | -54.92 | -13 | 41.92 |
| 2474.10 | H | -62.32 | 0.00 | -4.47 | 10.92 | 3.07 | -50.00 | -13 | 37.00 |
| | V | -60.25 | 0.00 | -4.29 | 10.92 | 3.07 | -48.11 | -13 | 35.11 |
| 3298.80 | H | -66.20 | 0.00 | -5.64 | 12.71 | 3.63 | -51.48 | -13 | 38.48 |
| | V | -66.10 | 0.00 | -5.54 | 12.71 | 3.63 | -51.48 | -13 | 38.48 |
| 4123.50 | H | -65.48 | 0.00 | -9.71 | 12.71 | 4.31 | -47.37 | -13 | 34.37 |
| | V | -66.40 | 0.00 | -9.52 | 12.71 | 4.31 | -48.48 | -13 | 35.48 |
| 4948.20 | H | -67.32 | 0.00 | -10.47 | 12.98 | 4.85 | -48.72 | -13 | 35.72 |
| | V | -67.10 | 0.00 | -10.36 | 12.98 | 4.85 | -48.61 | -13 | 35.61 |
| 5772.90 | H | -67.45 | 0.00 | -12.42 | 12.85 | 5.34 | -47.52 | -13 | 34.52 |
| | V | -67.12 | 0.00 | -12.42 | 12.85 | 5.34 | -47.19 | -13 | 34.19 |

Table 17. Field Strength of Spurious Emissions
DOWN Link –High Channel

| Freq. (MHz) | Ant. Pol. | P _{EUT} (dBm) | P _{TX} (dBm) | P _{RX} (dBm) | G _{antenna} (dBi) | L _{Cable} (dB) | EIRP (dBm) | Limit (dBm) | Margi n (dB) |
|----------------|--------------|---------------------------|--------------------------|--------------------------|-------------------------------|----------------------------|---------------|----------------|--------------------|
| 1649.40 | H | -65.36 | 0.00 | -1.56 | 10.29 | 2.41 | -55.92 | -13 | 42.92 |
| | V | -64.15 | 0.00 | -1.32 | 10.29 | 2.41 | -54.95 | -13 | 41.95 |
| 2474.10 | H | -65.58 | 0.00 | -4.68 | 11.04 | 3.09 | -52.95 | -13 | 39.95 |
| | V | -62.63 | 0.00 | -4.68 | 11.04 | 3.09 | -50.00 | -13 | 37.00 |
| 3298.80 | H | -66.30 | 0.00 | -5.98 | 12.61 | 3.63 | -51.34 | -13 | 38.34 |
| | V | -64.96 | 0.00 | -5.88 | 12.61 | 3.63 | -50.10 | -13 | 37.10 |
| 4123.50 | H | -66.11 | 0.00 | -9.50 | 12.69 | 4.29 | -48.21 | -13 | 35.21 |
| | V | -65.65 | 0.00 | -9.41 | 12.69 | 4.29 | -47.84 | -13 | 34.84 |
| 4948.20 | H | -67.21 | 0.00 | -10.39 | 13.08 | 4.95 | -48.69 | -13 | 35.69 |
| | V | -67.44 | 0.00 | -10.34 | 13.08 | 4.95 | -48.97 | -13 | 35.97 |
| 5772.90 | H | -68.54 | 0.00 | -12.83 | 12.70 | 5.37 | -48.38 | -13 | 35.38 |
| | V | -67.61 | 0.00 | -12.79 | 12.70 | 5.37 | -47.49 | -13 | 34.49 |

Table 18. Field Strength of Spurious Emissions

Note: 1. All modes of operation were investigated and the worst -case emission are reported.

9.4 RF Power Output

Measurement Result:

| Up/Down Link | Modulation | Channel | Frequency (MHz) | RF Output Power (dBm) |
|--------------|------------|---------|-----------------|-----------------------|
| Uplink | CDMA | Low | 824.70 | 4.11 |
| | | Middle | 836.52 | 4.66 |
| | | High | 848.31 | 4.75 |
| | TDMA | Low | 824.04 | 5.61 |
| | | Middle | 836.52 | 6.76 |
| | | High | 848.97 | 6.83 |
| | GSM | Low | 824.20 | 6.78 |
| | | Middle | 836.60 | 7.80 |
| | | High | 848.80 | 7.82 |
| Downlink | CDMA | Low | 824.70 | 5.09 |
| | | Middle | 836.52 | 4.52 |
| | | High | 848.31 | 4.94 |
| | TDMA | Low | 824.04 | 6.14 |
| | | Middle | 836.52 | 6.33 |
| | | High | 848.97 | 6.20 |
| | GSM | Low | 824.20 | 7.21 |
| | | Middle | 836.60 | 7.28 |
| | | High | 848.80 | 7.41 |


Table 19. RF Output power

9.5 Occupied Bandwidth


Measurement Result:

| Up/Down Link | Modulation | Channel | Frequency (MHz) | Plots number |
|--------------|------------|---------|-----------------|-------------------|
| Uplink | CDMA | Middle | 836.52 | Plot 1 ~ Plot 2 |
| | TDMA | Middle | 836.52 | Plot 3 ~ Plot 4 |
| | GSM | Middle | 836.60 | Plot 5 ~ Plot 6 |
| Downlink | CDMA | Middle | 836.52 | Plot 7 ~ Plot 8 |
| | TDMA | Middle | 836.52 | Plot 9 ~ Plot 10 |
| | GSM | Middle | 836.60 | Plot 11 ~ Plot 12 |



Table 20. Occupied Bandwidth

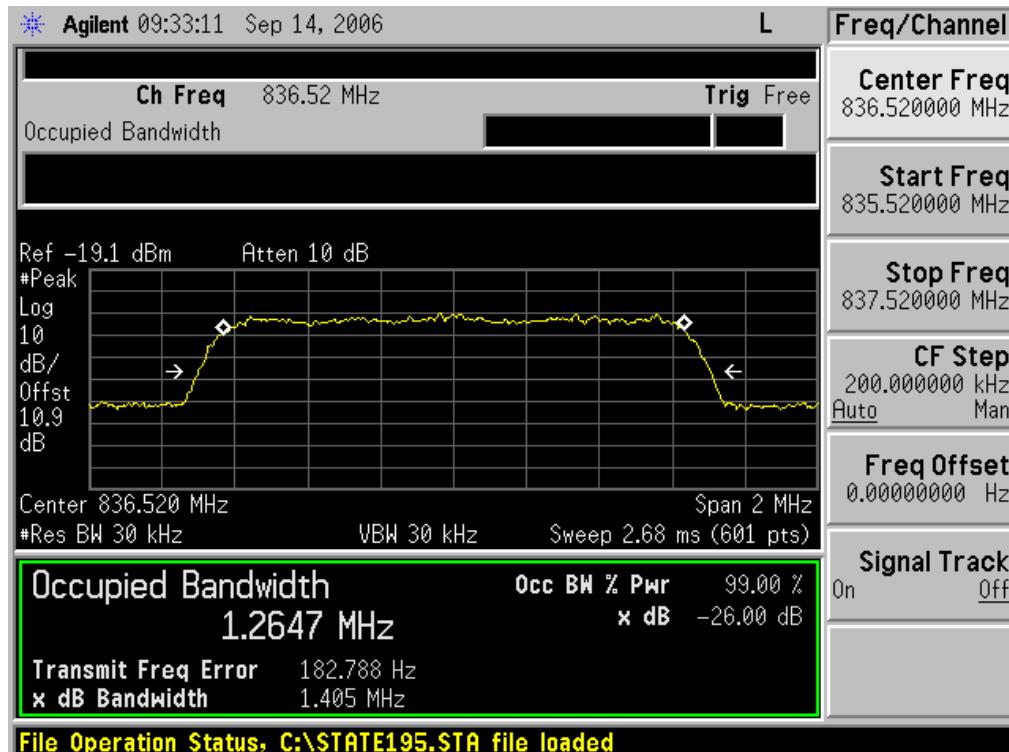


Plot 1. CDMA Uplink Input

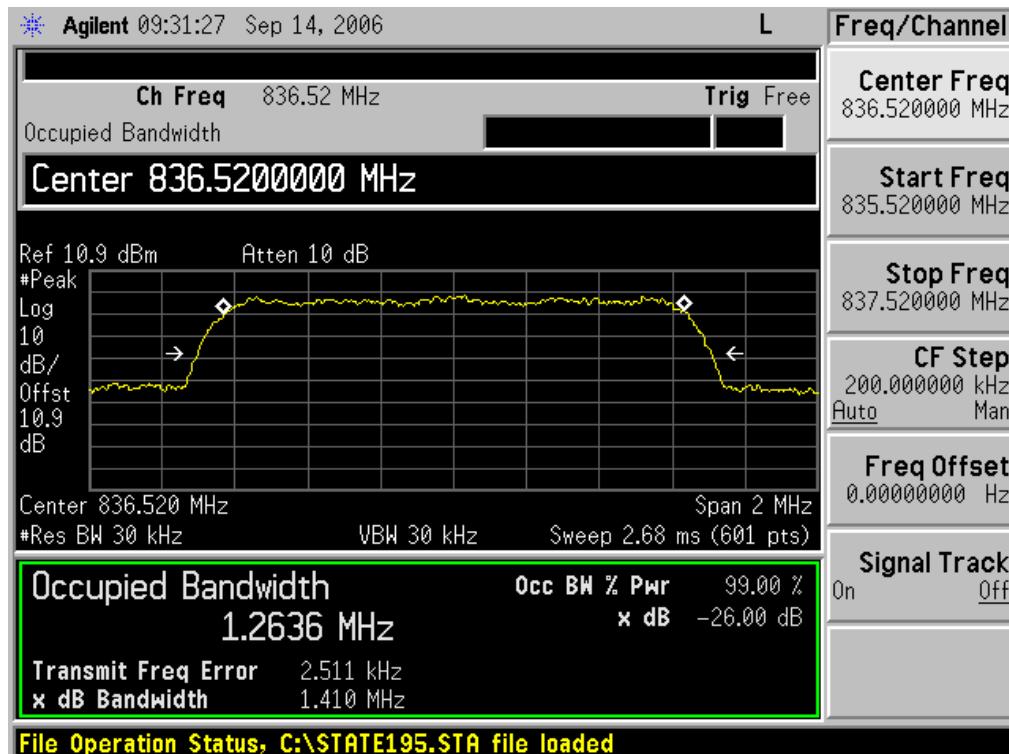


Plot 2. CDMA UplinkOutput

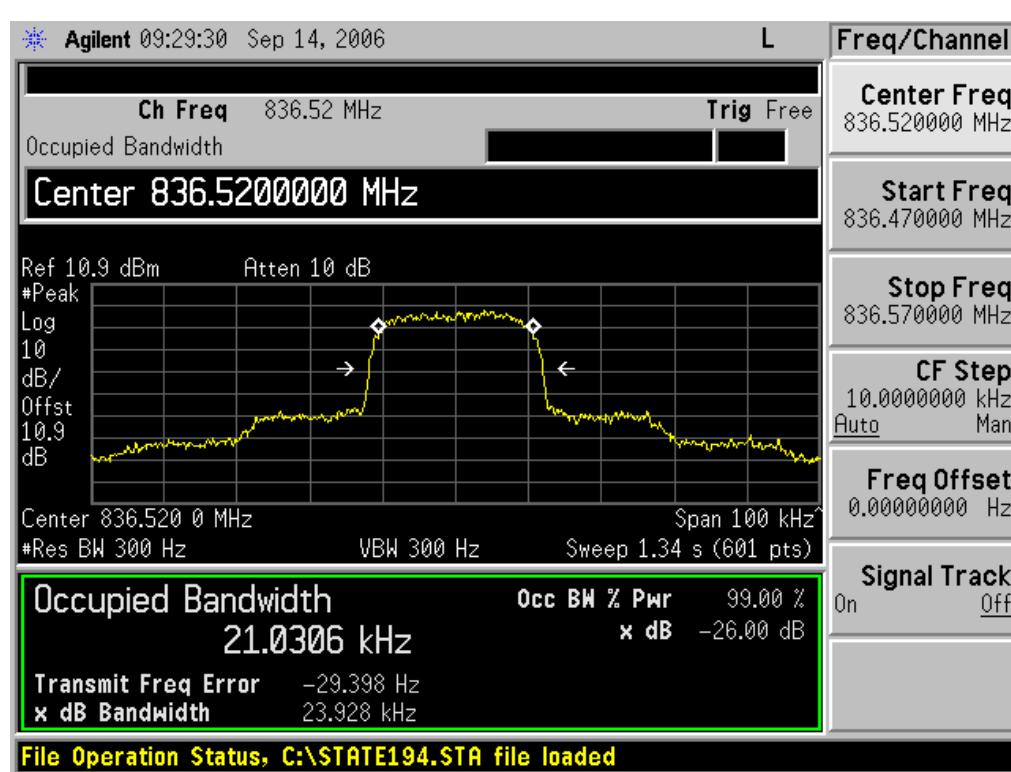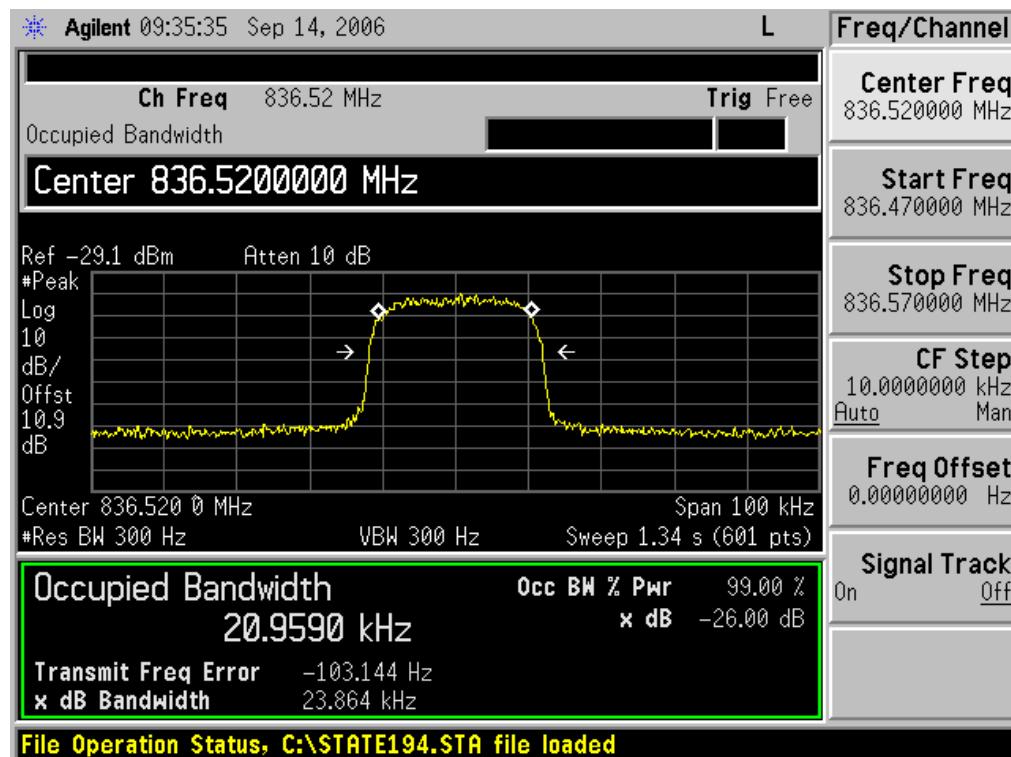


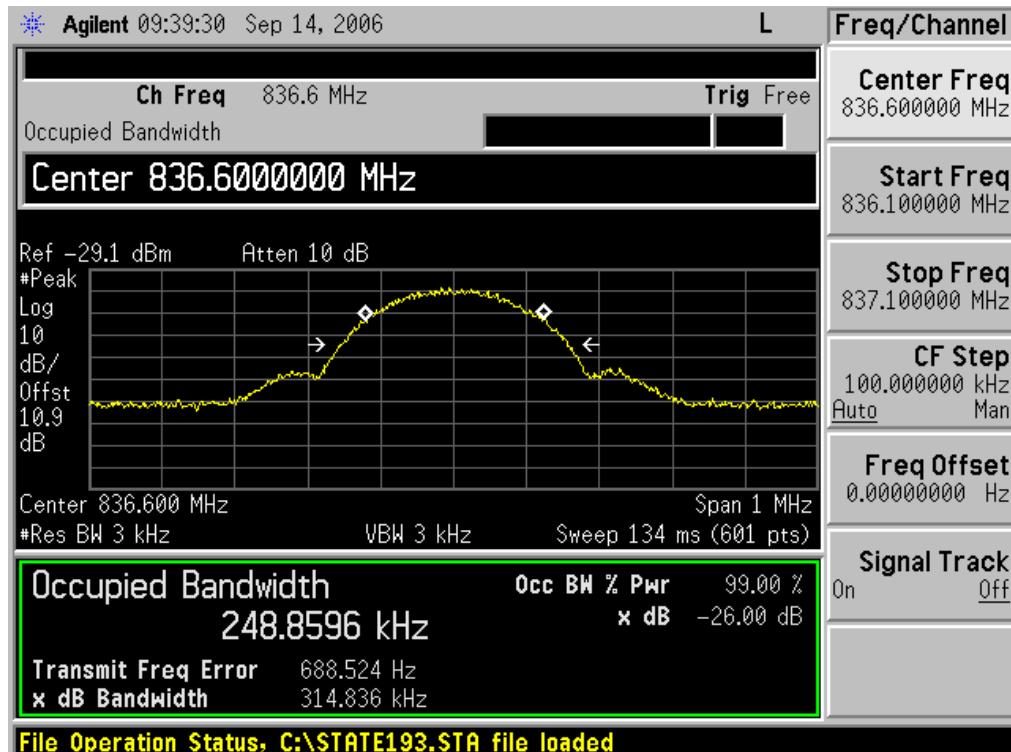


Plot 5. GSM Uplink Input

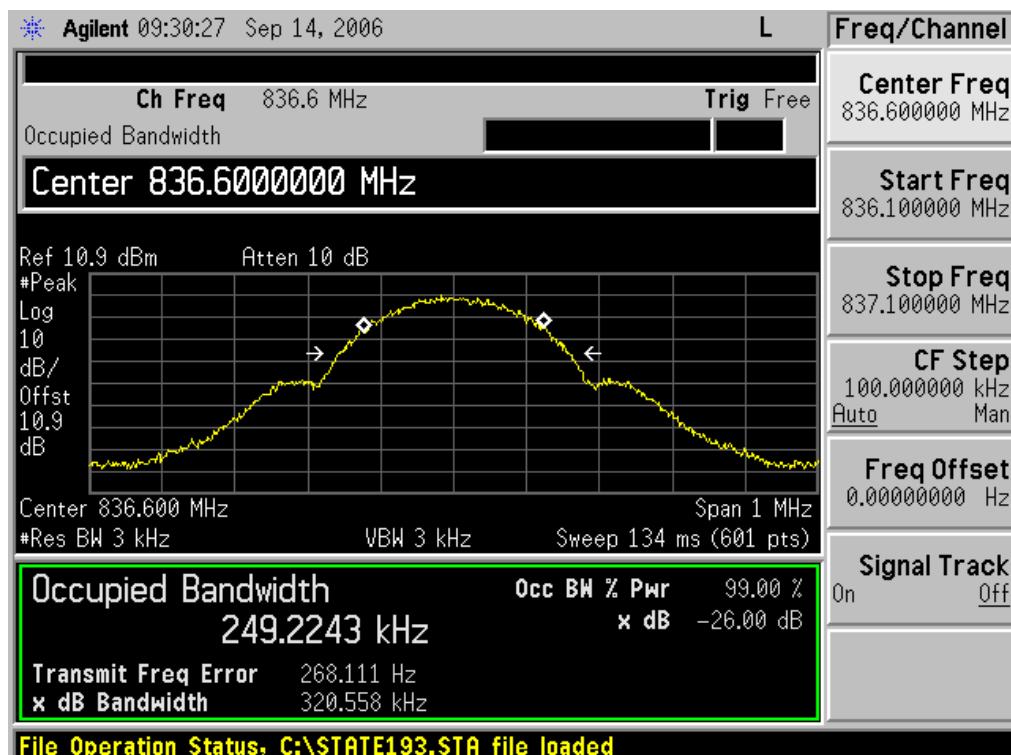


Plot 6. GSM Uplink Output

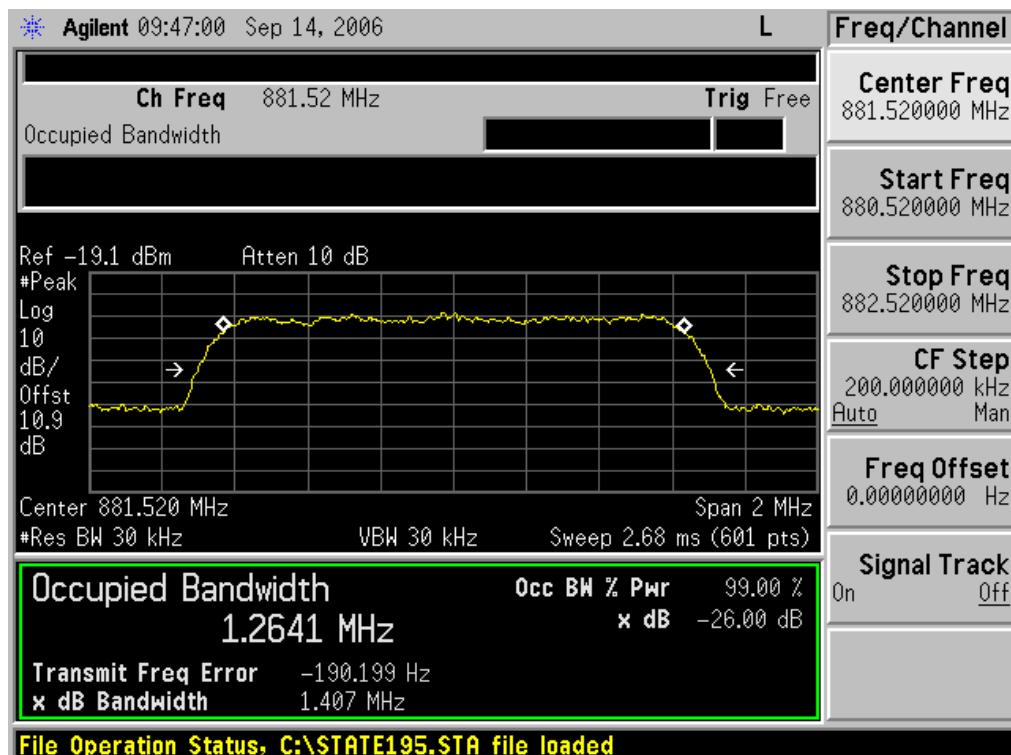


Plot 7. CDMA Downlink input

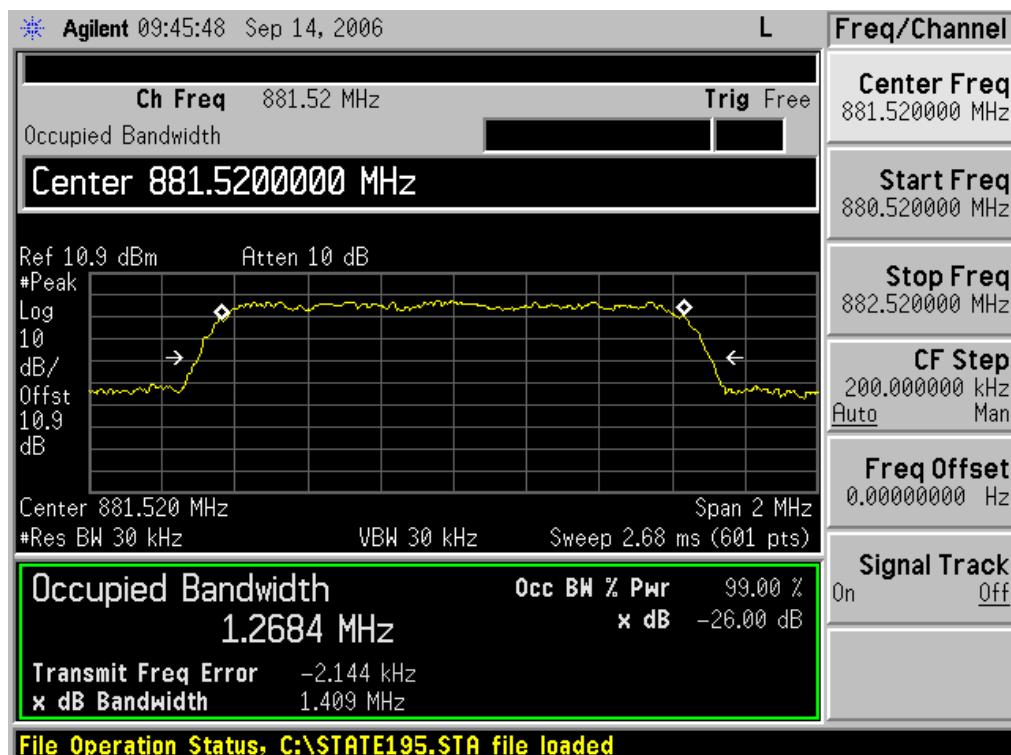



Plot 8. CDMA Downlink input

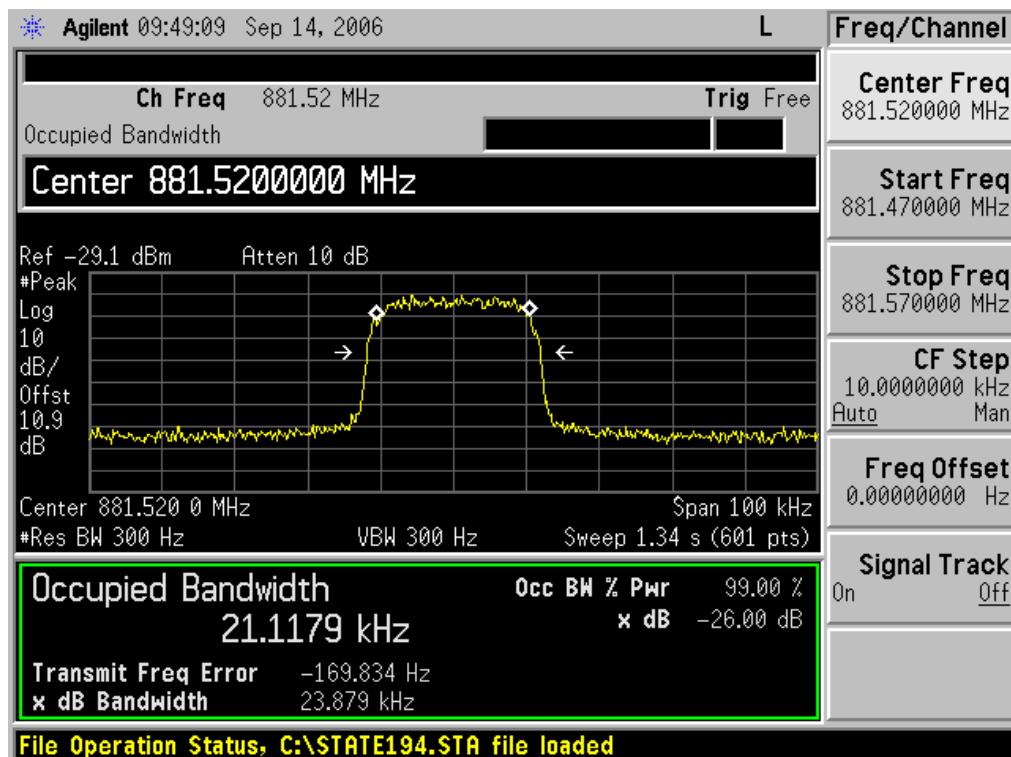

Plot 9. TDMA Downlink input

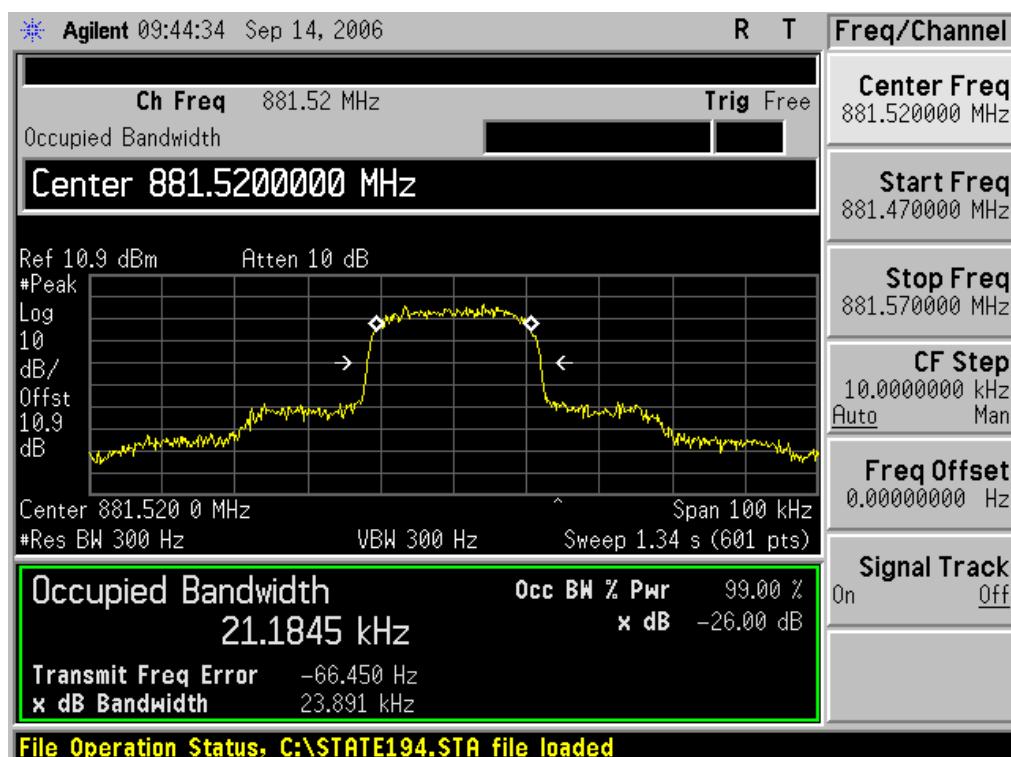

Plot 10. TDMA Downlink Output

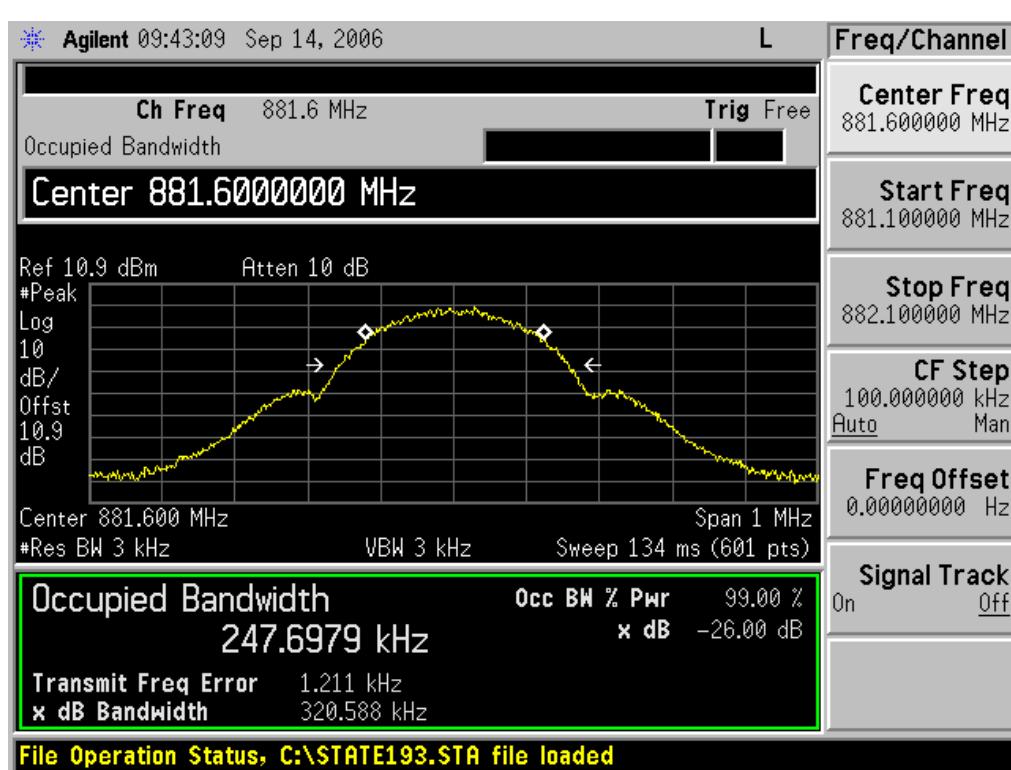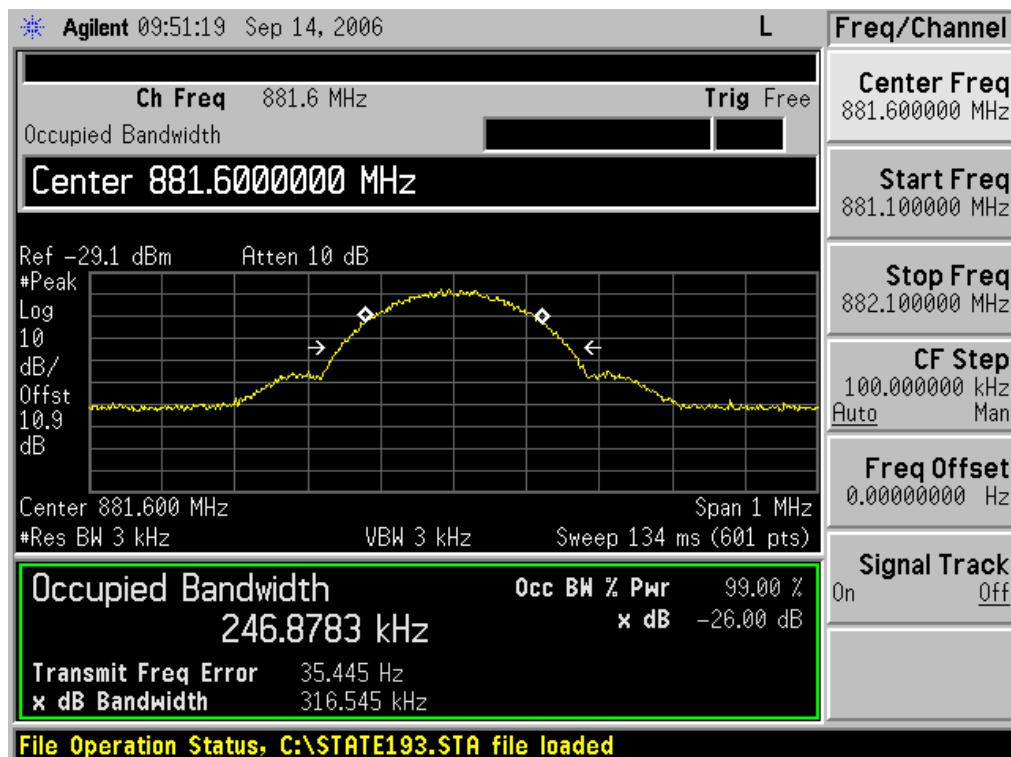

9.6 Spurious Emissions at Antenna Terminals and Two-Tone Test


Measurement Result:

| Up/Down Link | Modulation | Channel | Frequency Range (MHz) | Plots number |
|--------------|------------|---------|-----------------------|--------------|
| Uplink | CDMA | Low | Inband | Plot 13 |
| | | | 30-1000 | Plot 14 |
| | | | 1000-10000 | Plot 15 |
| | | Middle | 30-1000 | Plot 16 |
| | | | 1000-10000 | Plot 17 |
| | | High | Inband | Plot 18 |
| | | | 30-1000 | Plot 19 |
| | | | 1000-10000 | Plot 20 |
| | TDMA | Low | Inband | Plot 21 |
| | | | 30-1000 | Plot 22 |
| | | | 1000-10000 | Plot 23 |
| | | Middle | 30-1000 | Plot 24 |
| | | | 1000-10000 | Plot 25 |
| | | High | Inband | Plot 26 |
| | | | 30-1000 | Plot 27 |
| | | | 1000-10000 | Plot 28 |
| | CW | Low | Inband | Plot 29 |
| | | | 30-1000 | Plot 30 |
| | | | 1000-10000 | Plot 31 |
| | | Middle | 30-1000 | Plot 32 |
| | | | 1000-10000 | Plot 33 |
| | | High | Inband | Plot 34 |
| | | | 30-1000 | Plot 35 |
| | | | 1000-10000 | Plot 36 |
| | GSM | Low | 30-1000 | Plot 37 |
| | | | 1000-10000 | Plot 38 |
| | | Middle | 30-1000 | Plot 39 |
| | | | 1000-10000 | Plot 40 |
| | | High | 30-1000 | Plot 41 |
| | | | 1000-10000 | Plot 42 |


Table 21. Spurious Emissions at antenna terminals – Uplink

| Up/Down Link | Modulation | Channel | Frequency Range (MHz) | Plots number |
|--------------|------------|---------|-----------------------|--------------|
| Downlink | CDMA | Low | Inband | Plot 43 |
| | | | 30-1000 | Plot 44 |
| | | | 1000-10000 | Plot 45 |
| | | Middle | 30-1000 | Plot 46 |
| | | | 1000-10000 | Plot 47 |
| | | High | Inband | Plot 48 |
| | | | 30-1000 | Plot 49 |
| | | | 1000-10000 | Plot 50 |
| | TDMA | Low | Inband | Plot 51 |
| | | | 30-1000 | Plot 52 |
| | | | 1000-10000 | Plot 53 |
| | | Middle | 30-1000 | Plot 54 |
| | | | 1000-10000 | Plot 55 |
| | | High | Inband | Plot 56 |
| | | | 30-1000 | Plot 57 |
| | | | 1000-10000 | Plot 58 |
| | CW | Low | Inband | Plot 59 |
| | | | 30-1000 | Plot 60 |
| | | | 1000-10000 | Plot 61 |
| | | Middle | 30-1000 | Plot 62 |
| | | | 1000-10000 | Plot 63 |
| | | High | Inband | Plot 64 |
| | | | 30-1000 | Plot 65 |
| | | | 1000-10000 | Plot 66 |
| | GSM | Low | 30-1000 | Plot 67 |
| | | | 1000-10000 | Plot 68 |
| | | Middle | 30-1000 | Plot 69 |
| | | | 1000-10000 | Plot 70 |
| | | High | 30-1000 | Plot 71 |
| | | | 1000-10000 | Plot 72 |


Table 22. Spurious Emissions at antenna terminals - Downlink

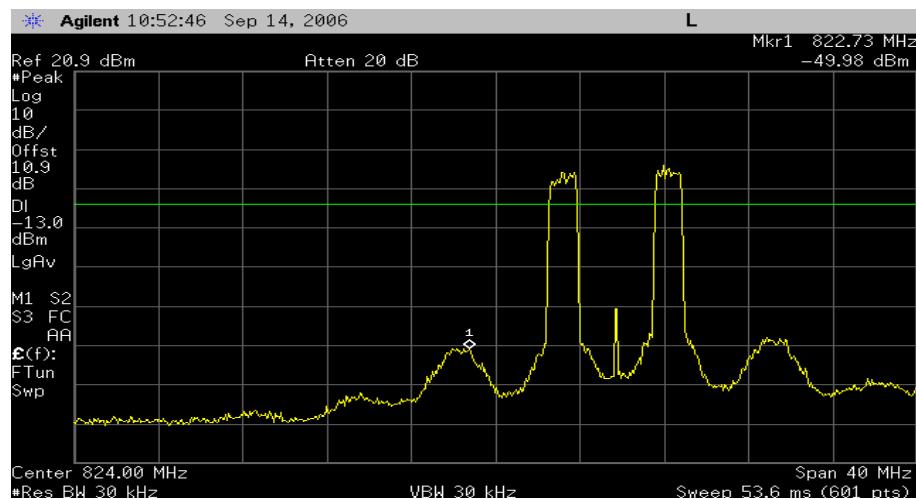


Plot 13. Uplink CDMA Low Channel(Inband)

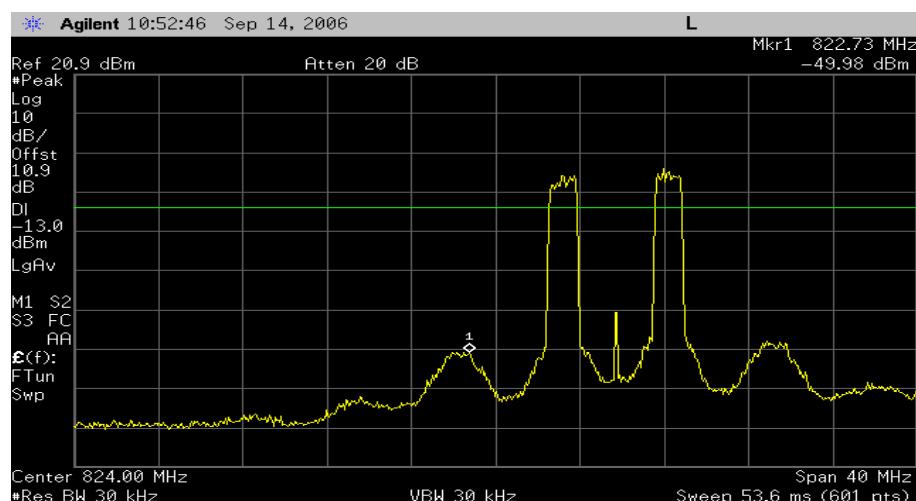


Plot 14. Uplink CDMA Low Channel(30MHz~1GHz)

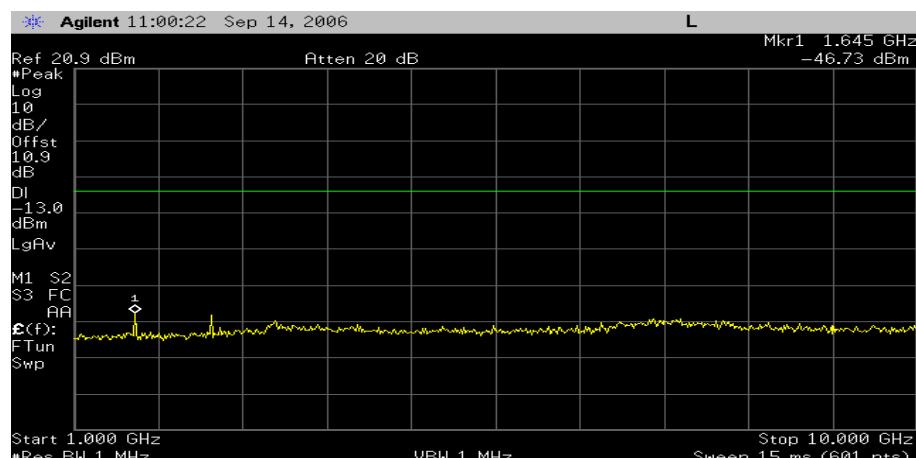


Plot 15. Uplink CDMA Low Channel(1GHz~10GHz)

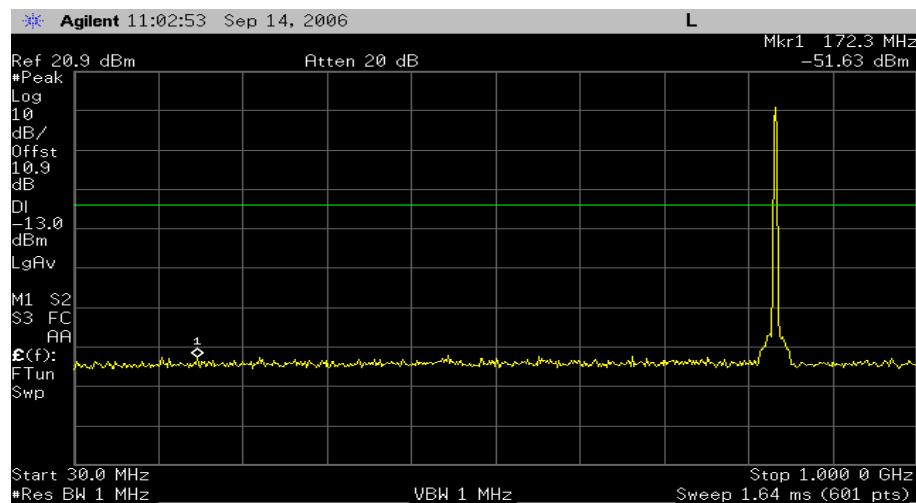


Plot 16. Uplink CDMA Middle Channel(30MHz~1GHz)

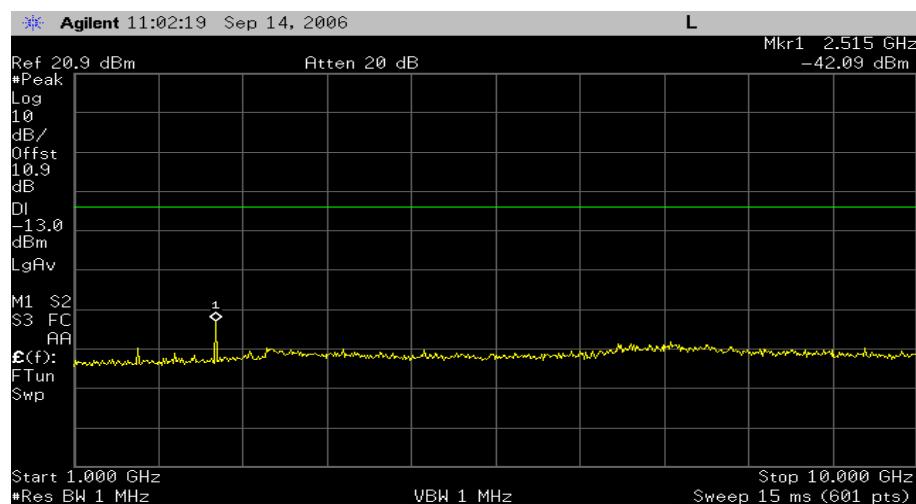


Plot 17. Uplink CDMA Middle Channel(1GHz~10GHz)

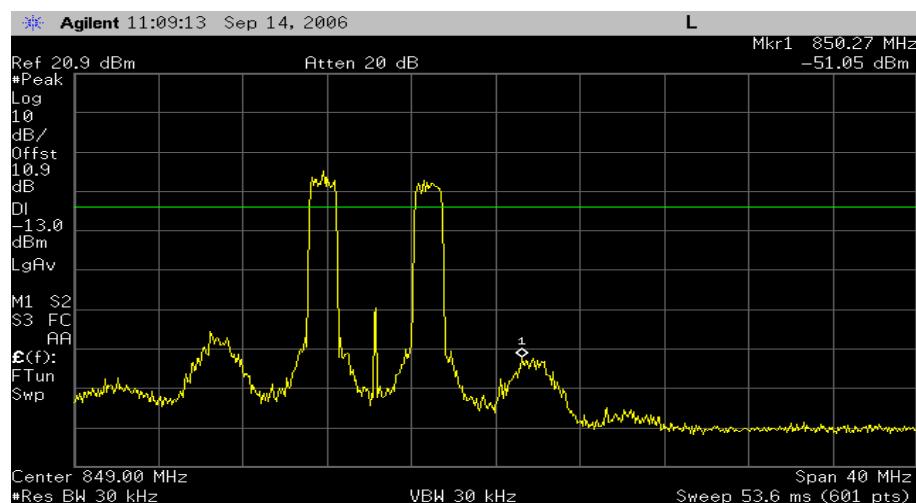


Plot 18. Uplink CDMA High Channel(Inband)

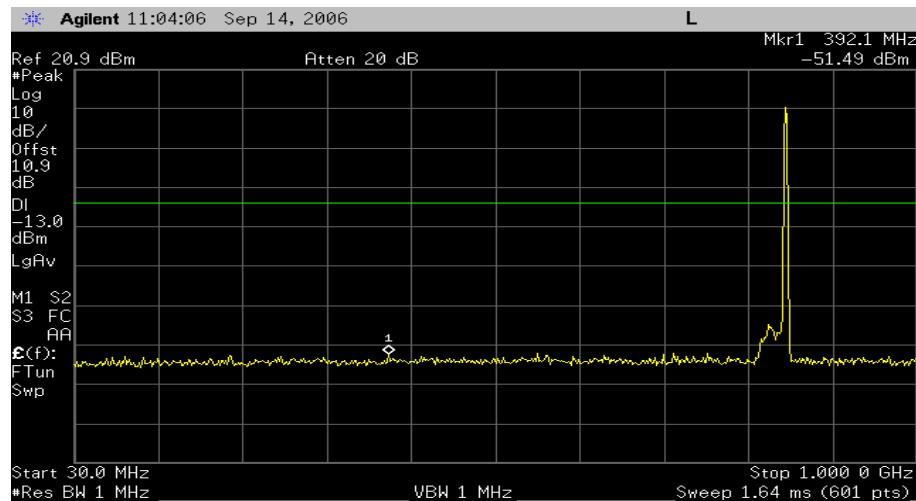


Plot 19. Uplink CDMA High Channel(30MHz~1GHz)

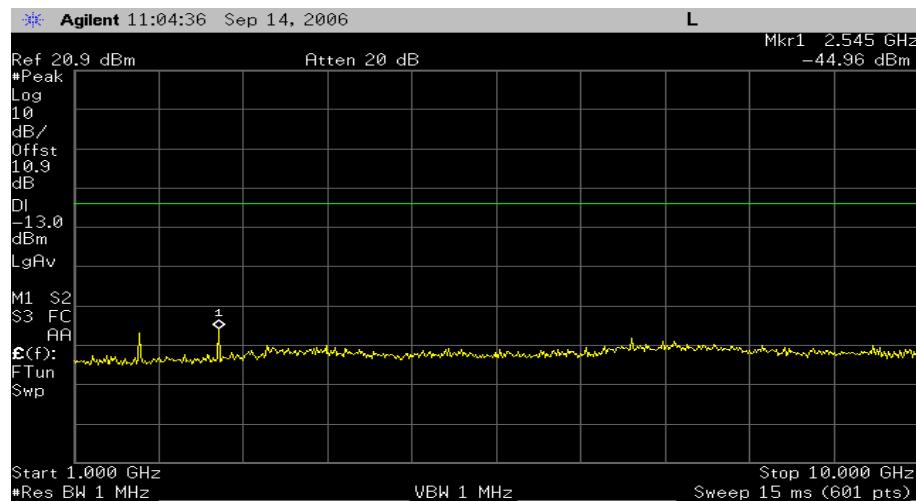


Plot 20. Uplink CDMA High Channel(1GHz~10GHz)

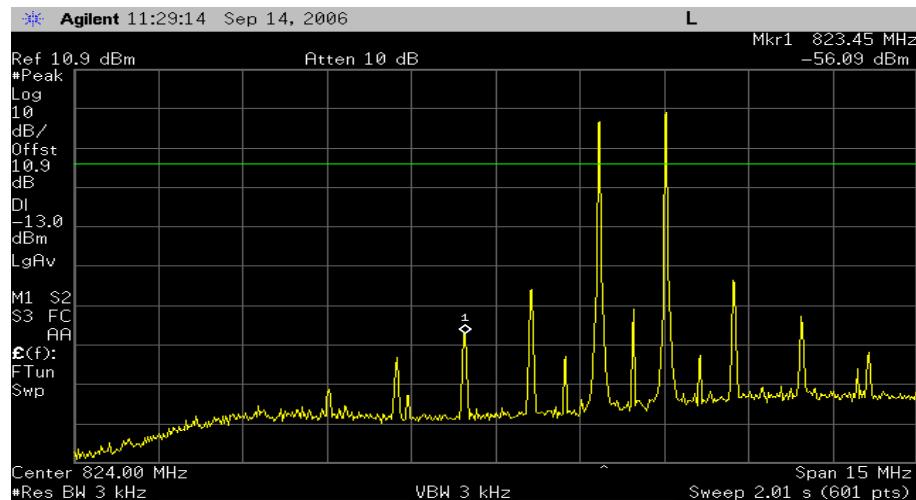


Plot 21. Uplink TDMA Low Channel(Inband)

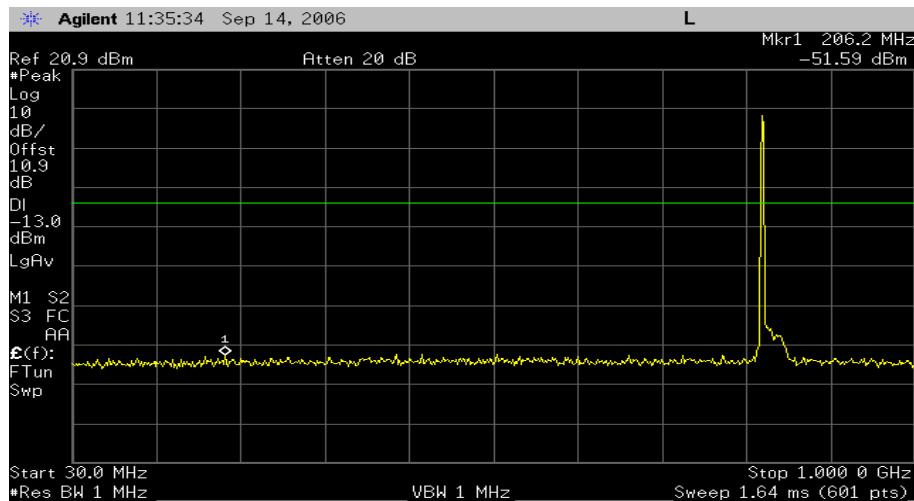


Plot 22. Uplink TDMA Low Channel(30MHz~1GHz)

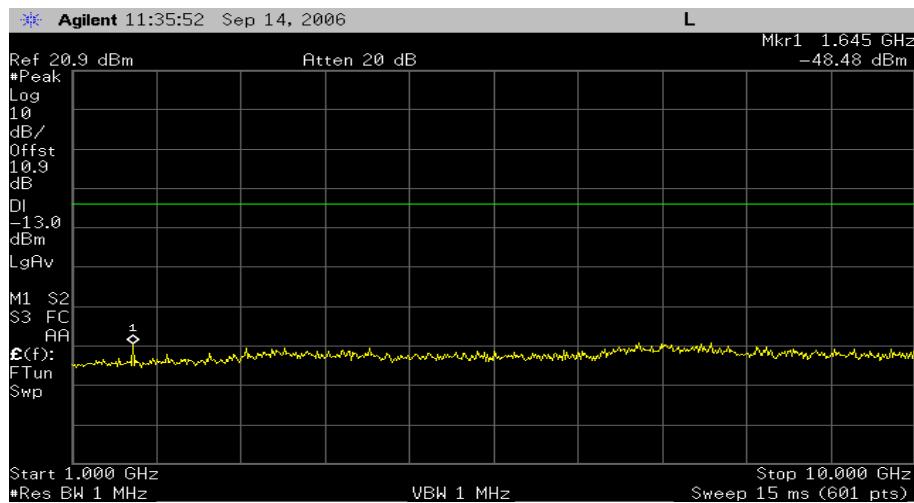


Plot 23. Uplink TDMA Low Channel(1GHz~10GHz)

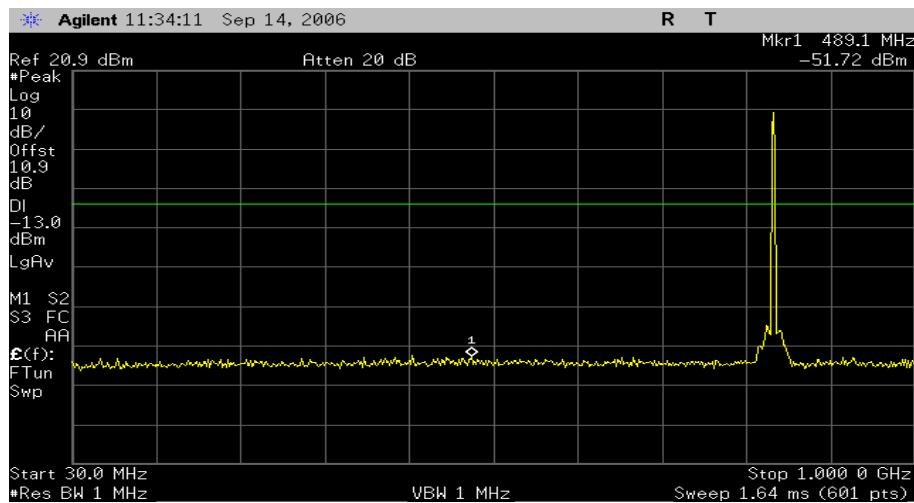


Plot 24. Uplink TDMA Middle Channel(30MHz~1GHz)

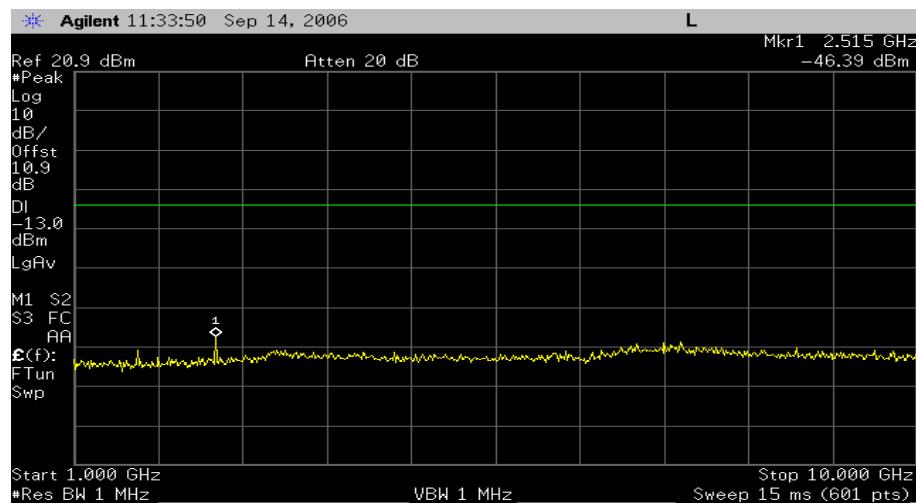


Plot 25. Uplink TDMA Middle Channel(1GHz~10GHz)

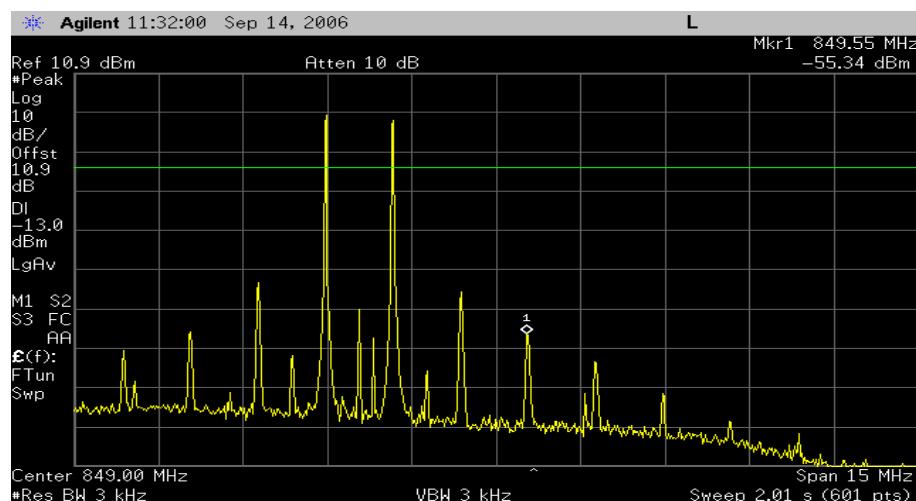


Plot 26. Uplink TDMA High Channel(Inband)

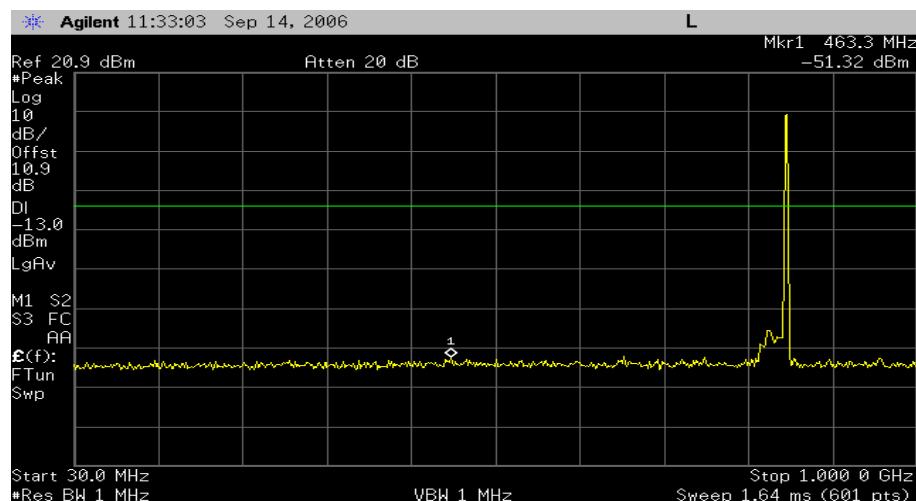


Plot 27. Uplink TDMA High Channel(30MHz~1GHz)

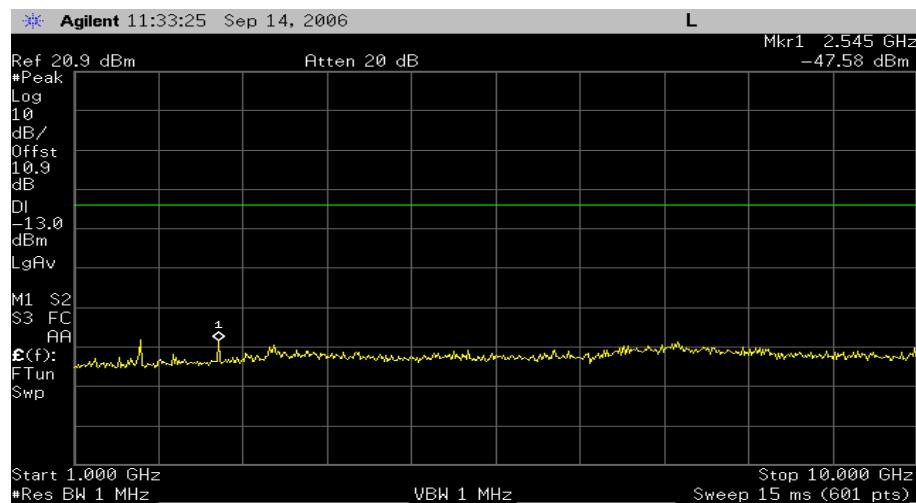


Plot 28. Uplink TDMA High Channel(1GHz~10GHz)

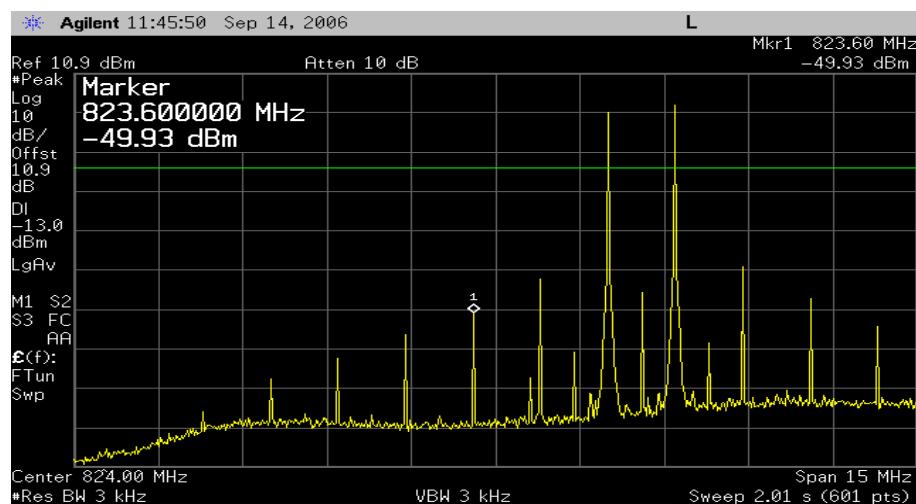


Plot 29. Uplink CW Low Channel(Inband)

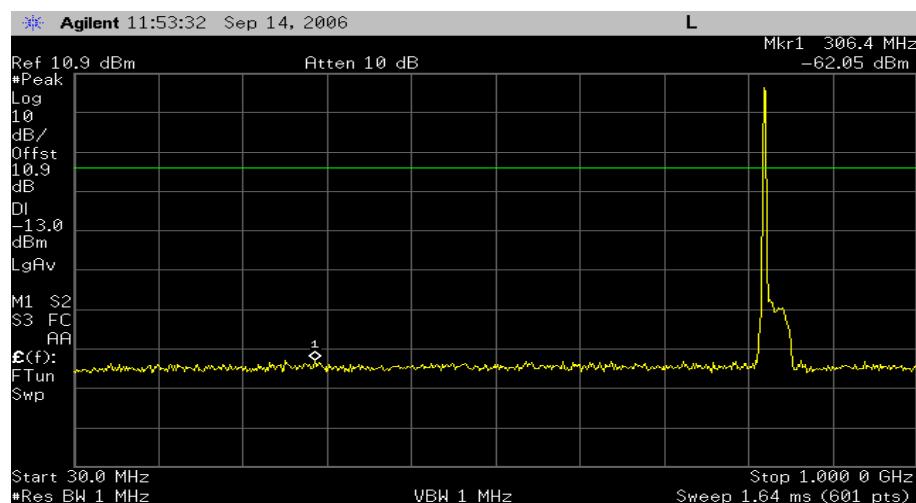


Plot 30. Uplink CW Low Channel(30MHz~1GHz)

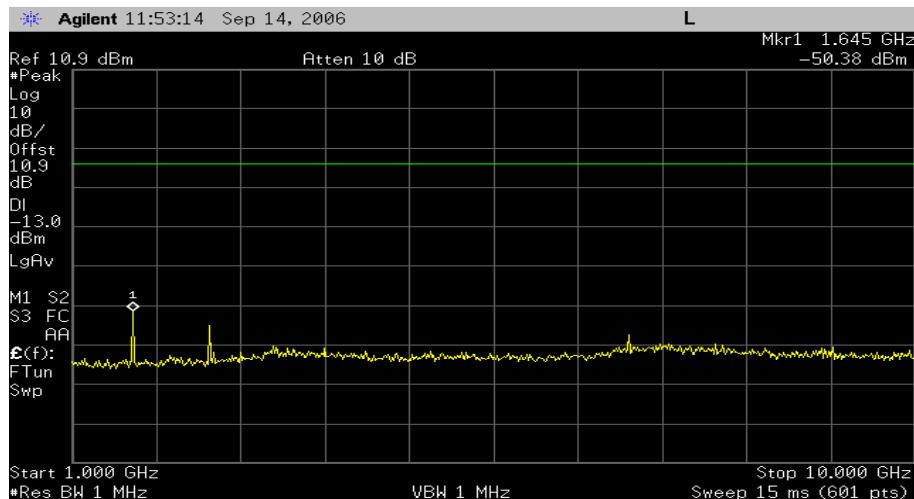


Plot 31. Uplink CW Low Channel(1GHz~10GHz)

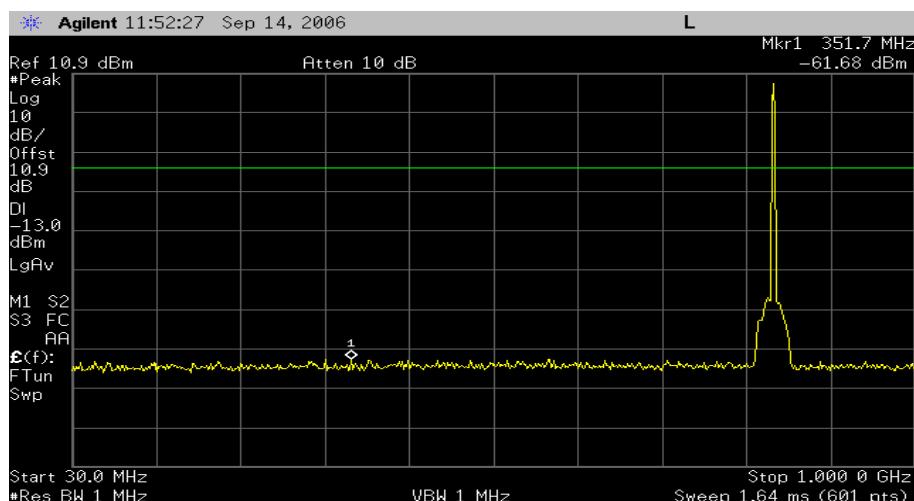


Plot 32. Uplink CW Middle Channel(30MHz~1GHz)

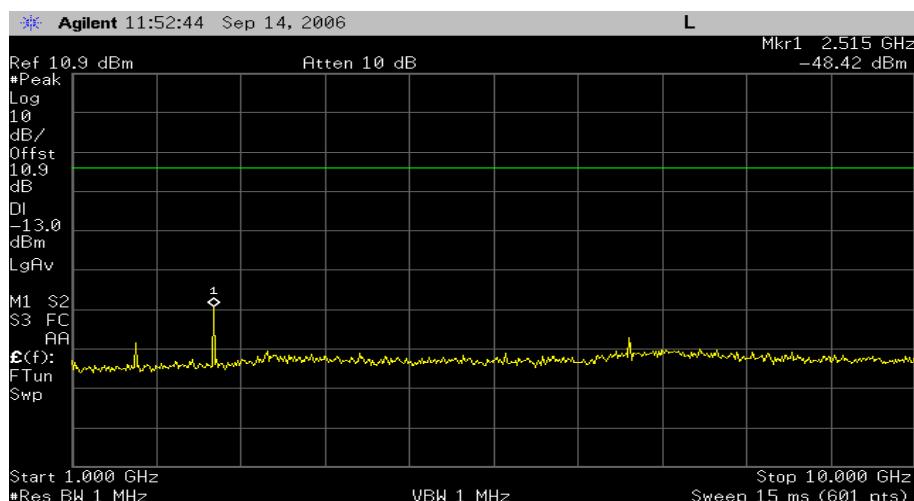


Plot 33. Uplink CW Middle Channel(1GHz~10GHz)

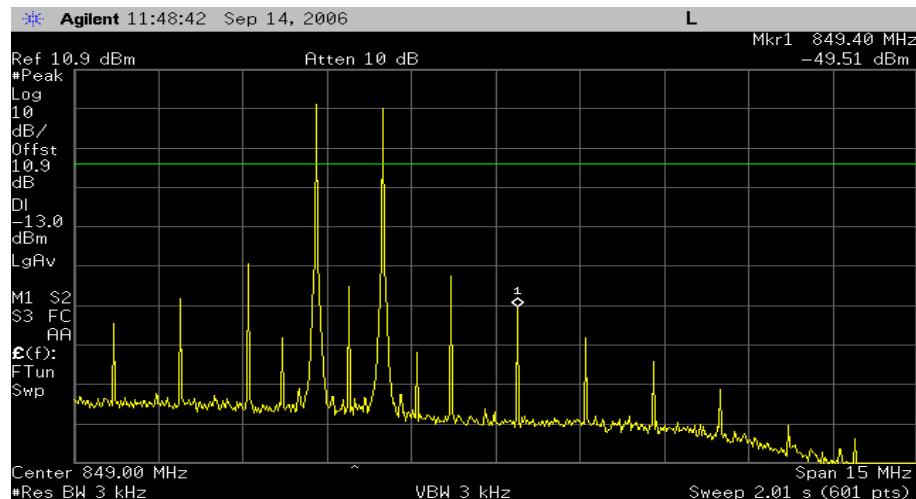


Plot 34. Uplink CW High Channel(Inband)

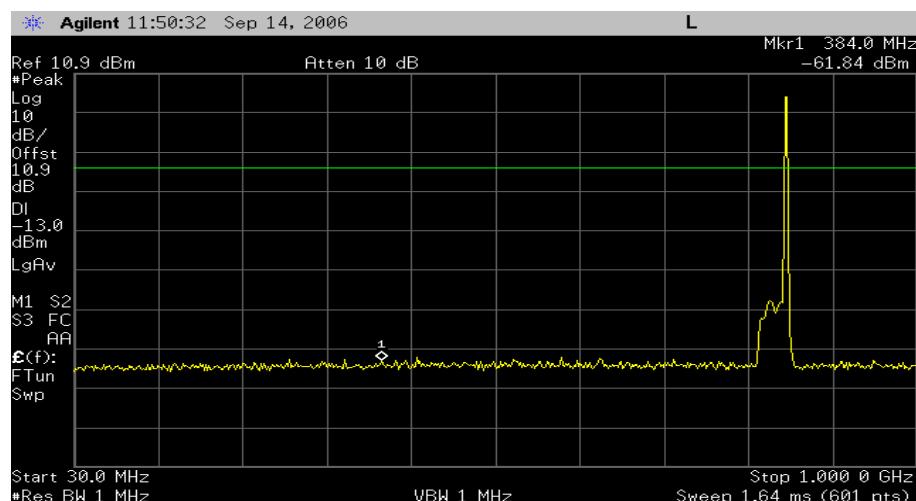


Plot 35. Uplink CW High Channel(30MHz~1GHz)

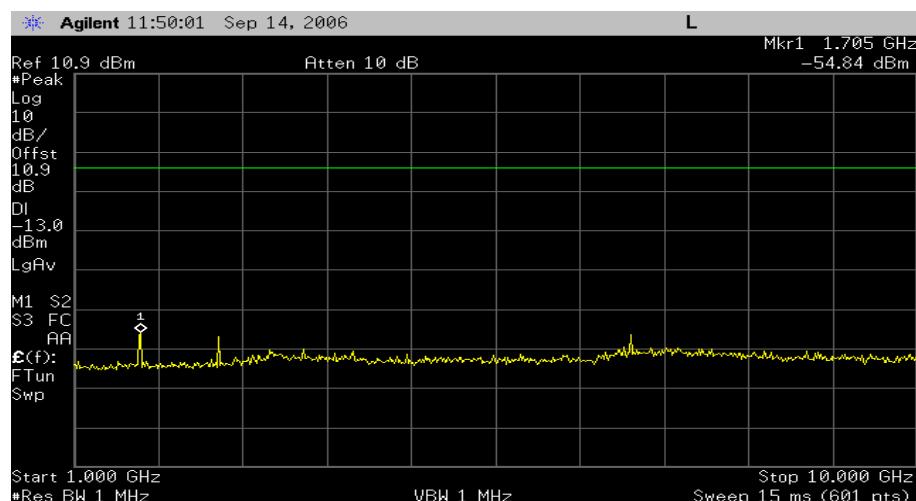


Plot 36. Uplink CW High Channel(1GHz~10GHz)

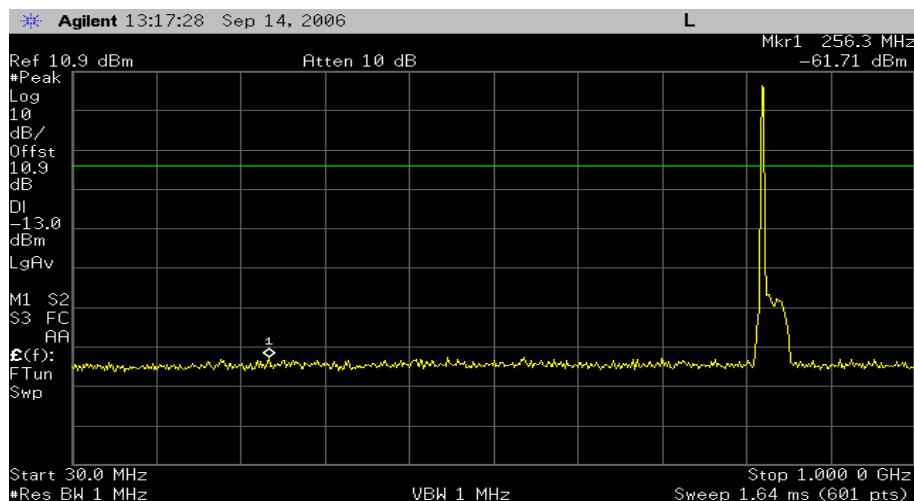


Plot 37. Uplink GSM Low Channel(30MHz~1GHz)

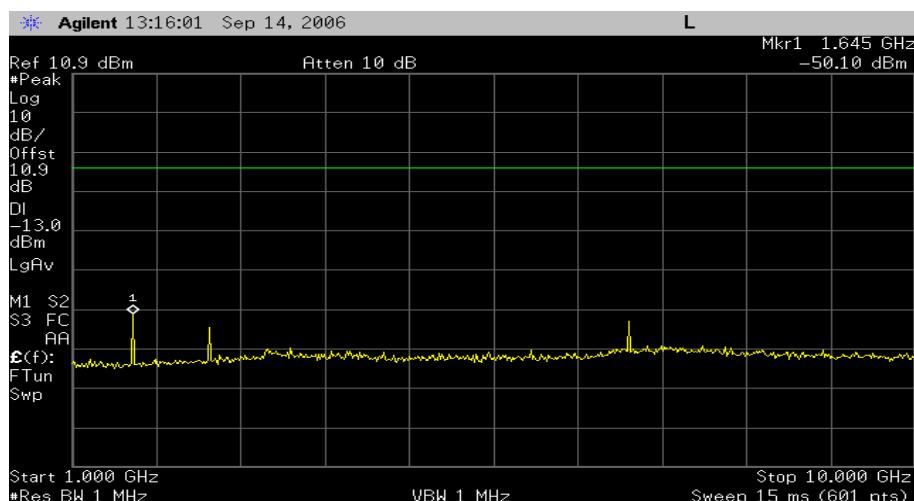


Plot 38. Uplink GSM Low Channel(1GHz~10GHz)

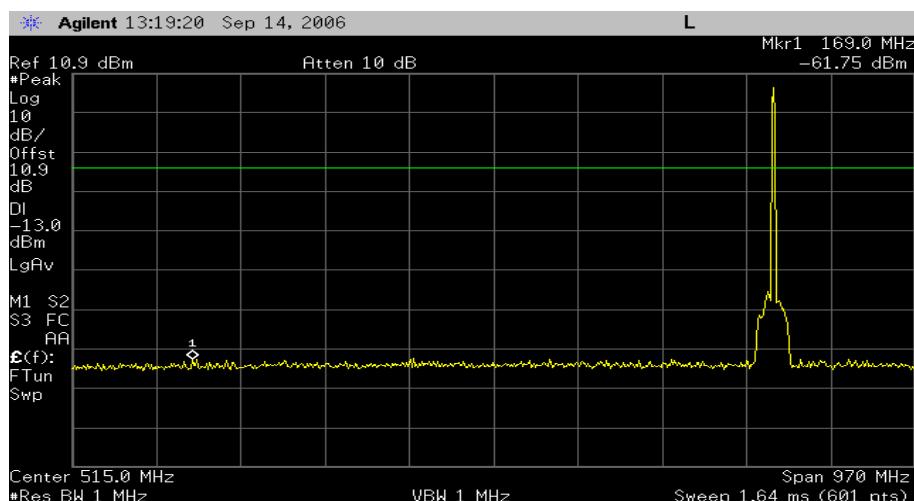


Plot 39. Uplink GSM Middle Channel(30MHz~1GHz)

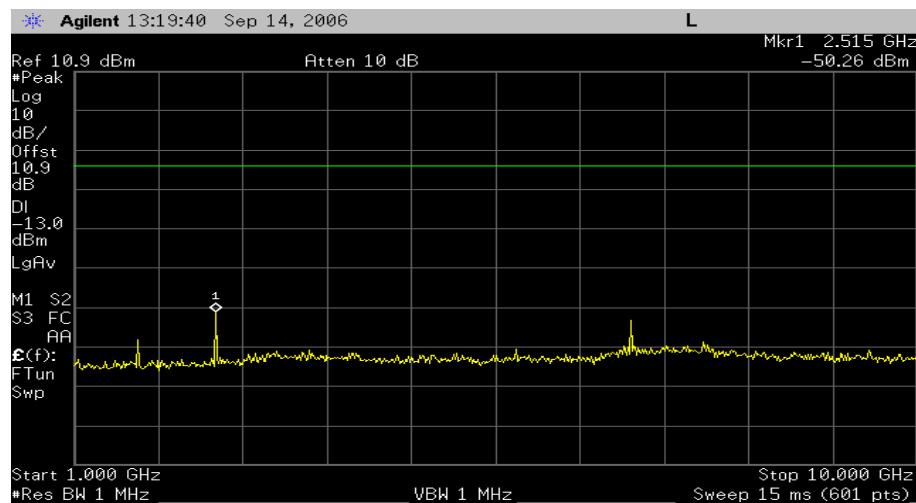


Plot 40. Uplink GSM Middle Channel(1GHz~10GHz)

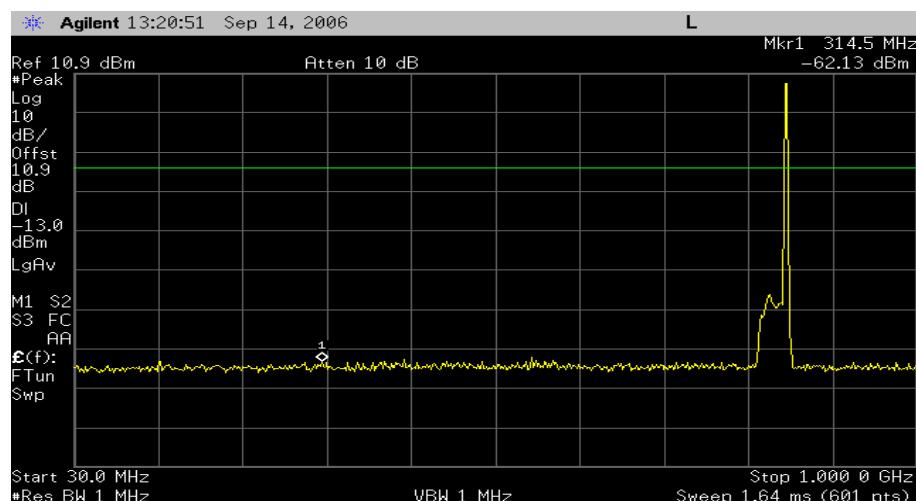


Plot 41. Uplink GSM High Channel(30MHz~1GHz)

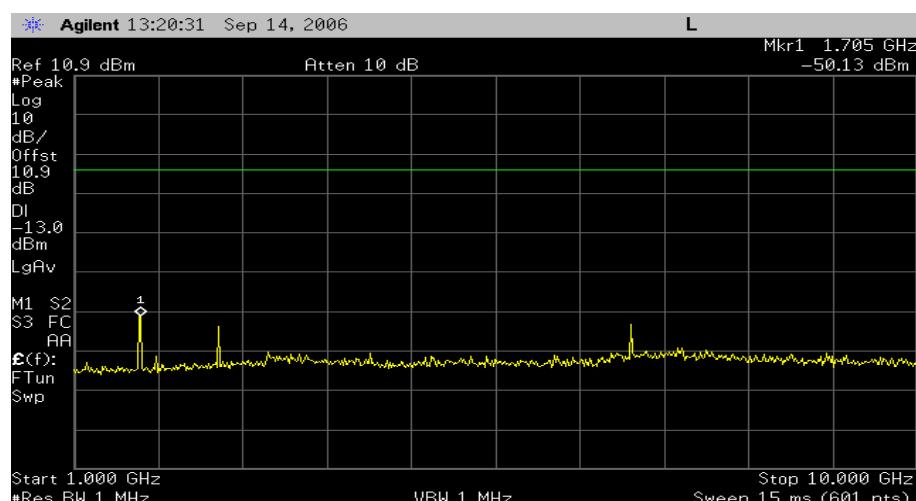


Plot 42. Uplink GSM High Channel(1GHz~10GHz)

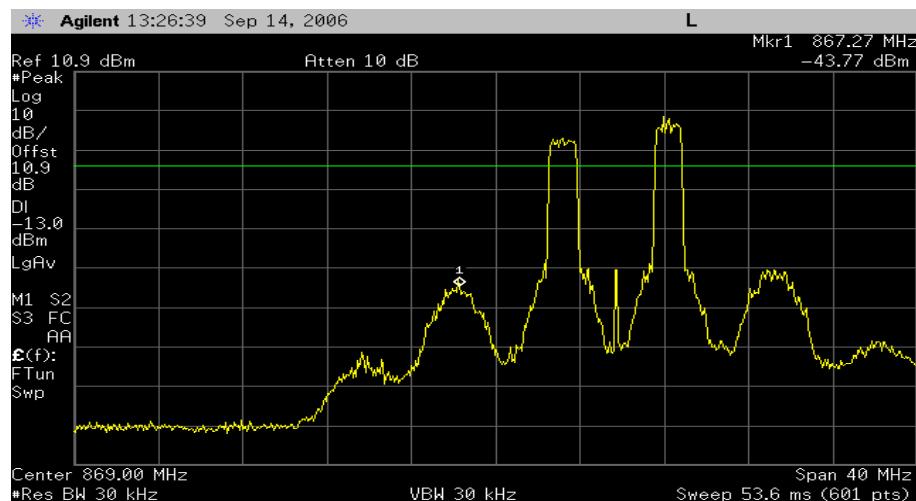


Plot 43. Downlink CDMA Low Channel(Inband)

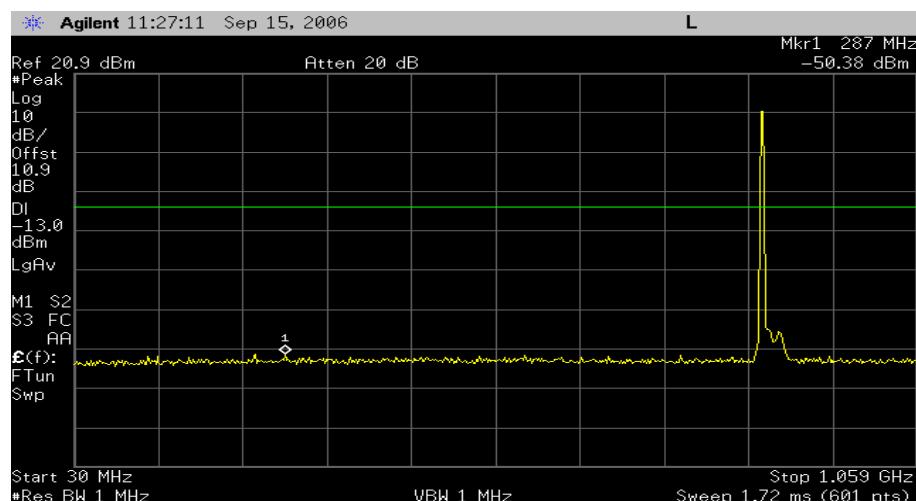


Plot 44. Downlink CDMA Low Channel(30MHz~1GHz)

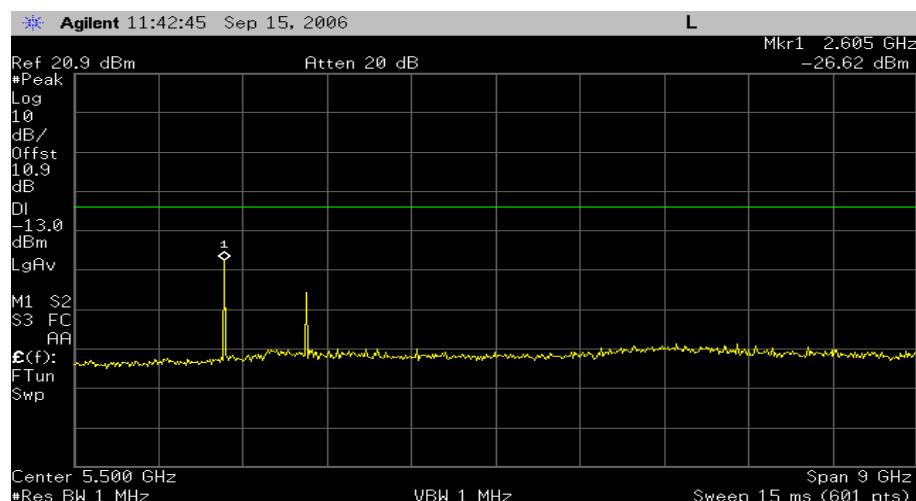


Plot 45. Downlink CDMA Low Channel(1GHz~10GHz)

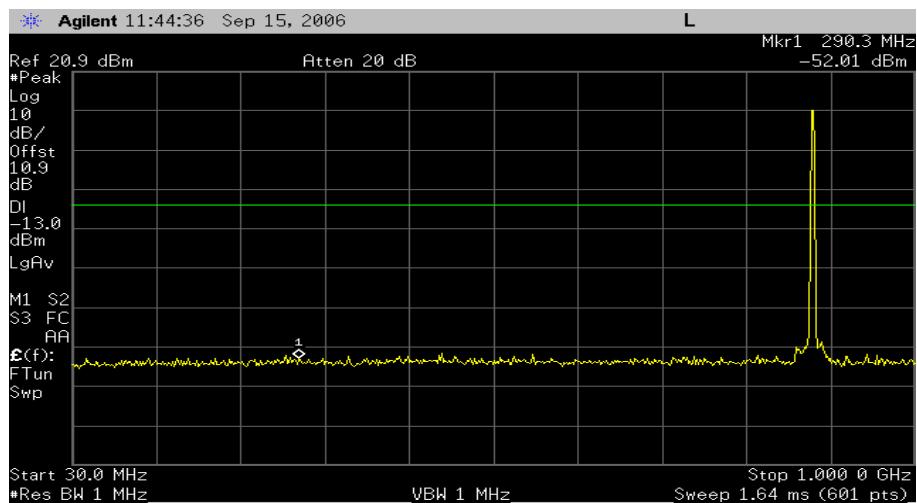


Plot 46. Downlink CDMA Middle Channel(30MHz~1GHz)

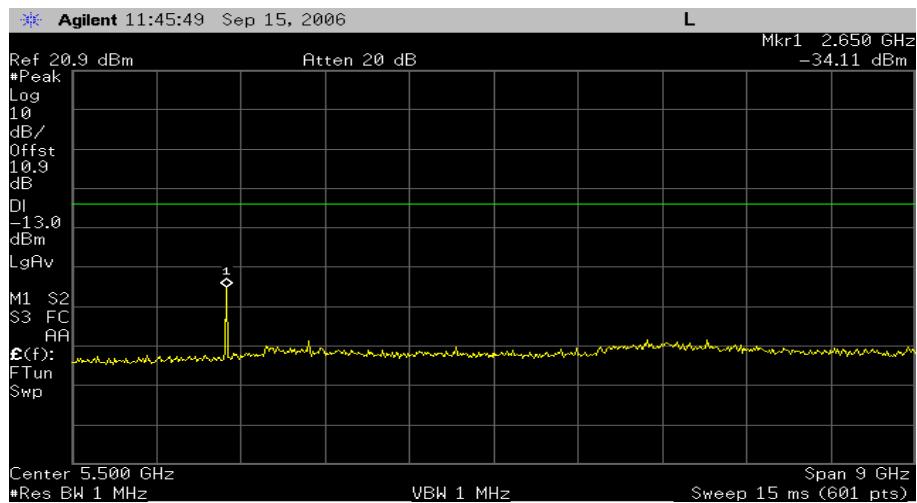


Plot 47. Downlink CDMA Middle Channel(1GHz~10GHz)

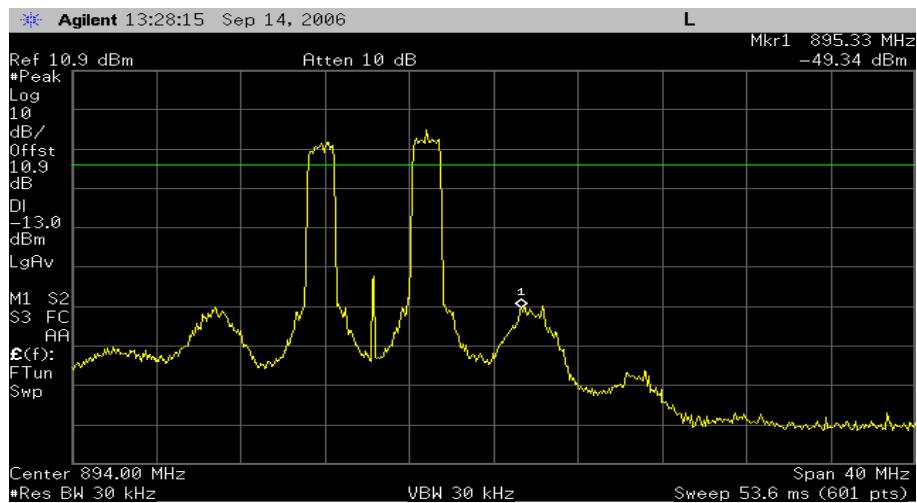


Plot 48. Downlink CDMA High Channel(Inband)

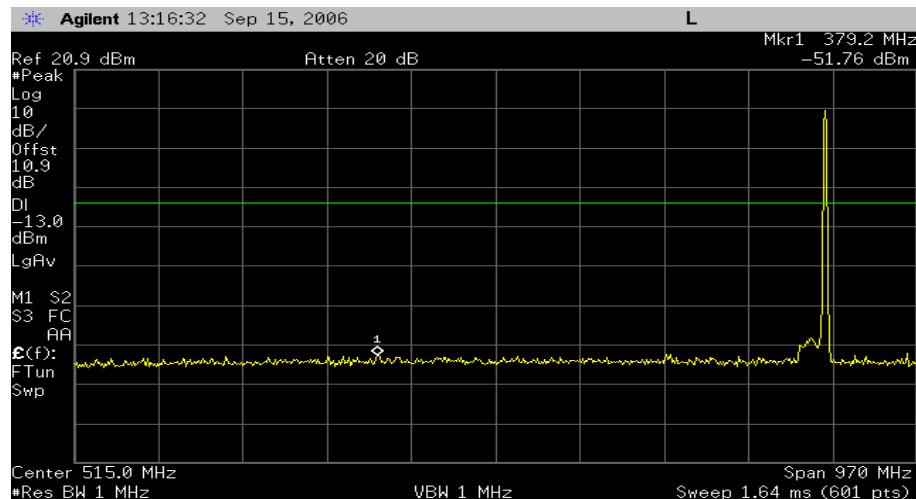


Plot 49. Downlink CDMA High Channel(30MHz~1GHz)

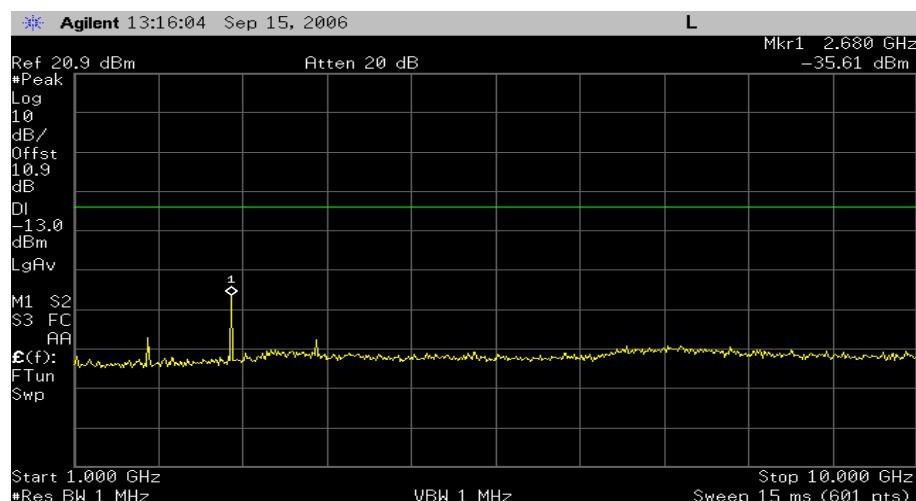


Plot 50. Downlink CDMA High Channel(1GHz~10GHz)

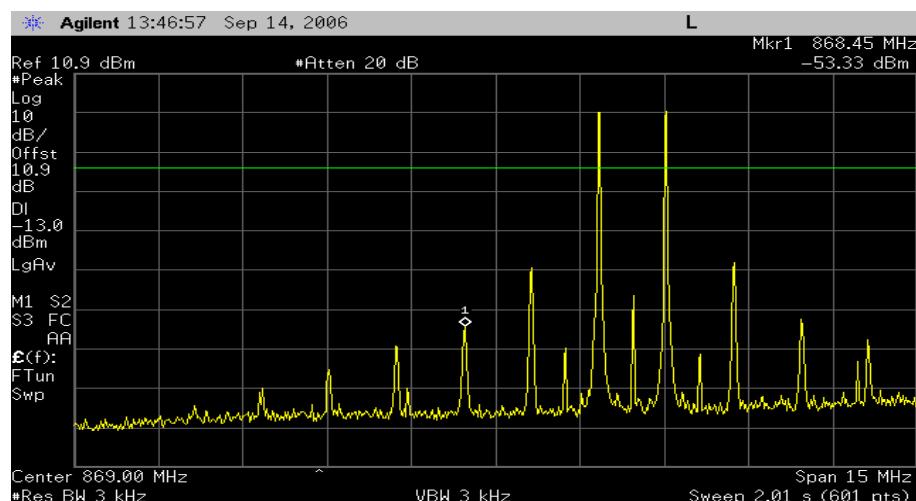


Plot 51. Downlink TDMA Low Channel(Inband)

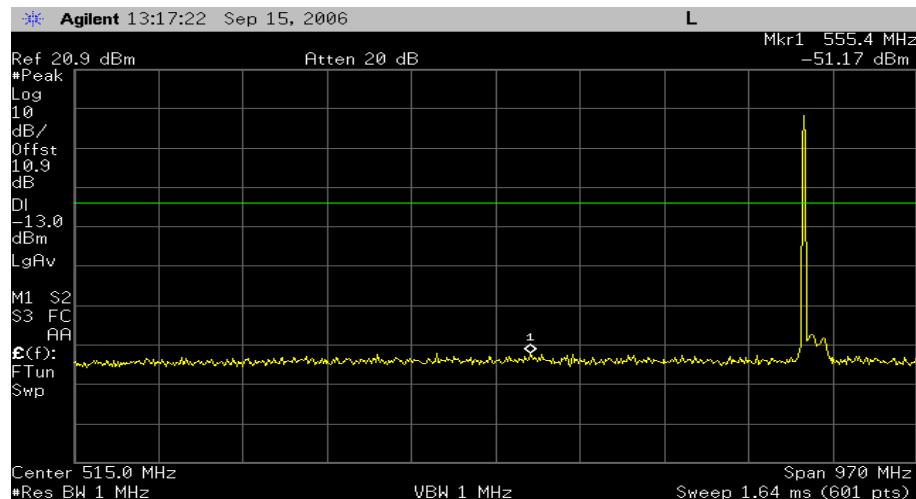


Plot 52. Downlink TDMA Low Channel(30MHz~1GHz)

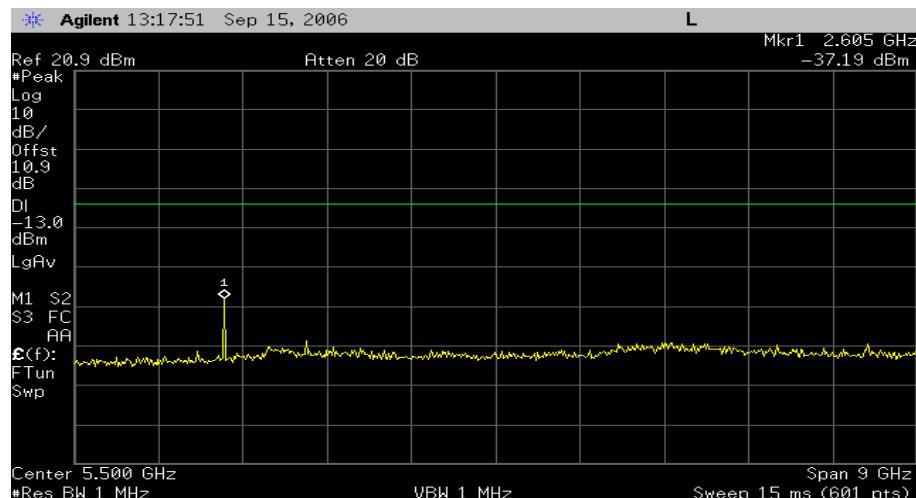


Plot 53. Downlink TDMA Low Channel(1GHz~10GHz)

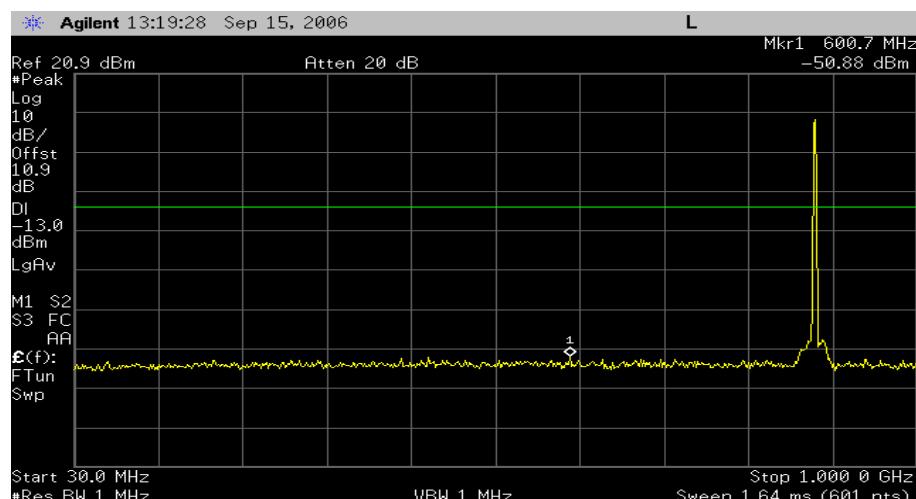


Plot 54. Downlink TDMA Middle Channel(30MHz~1GHz)

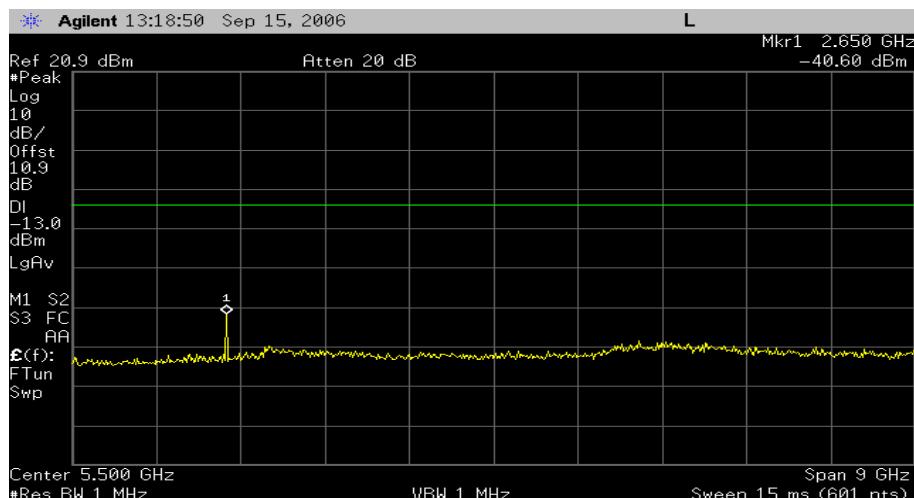


Plot 55. Downlink TDMA Middle Channel(1GHz~10GHz)

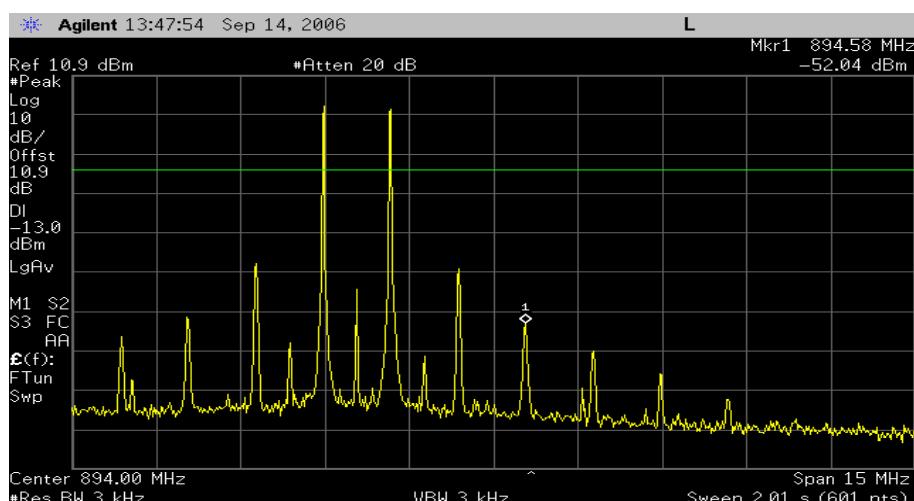


Plot 56. Downlink TDMA High Channel(Inband)

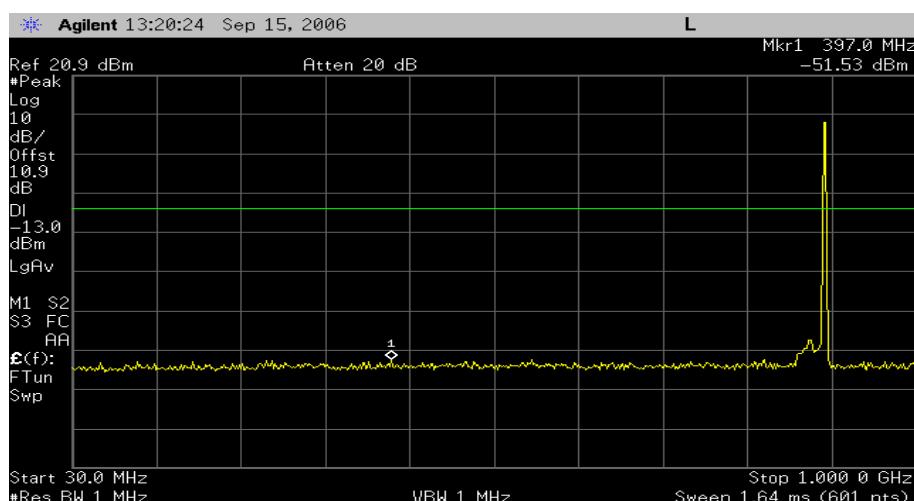


Plot 57. Downlink TDMA High Channel(30MHz~1GHz)

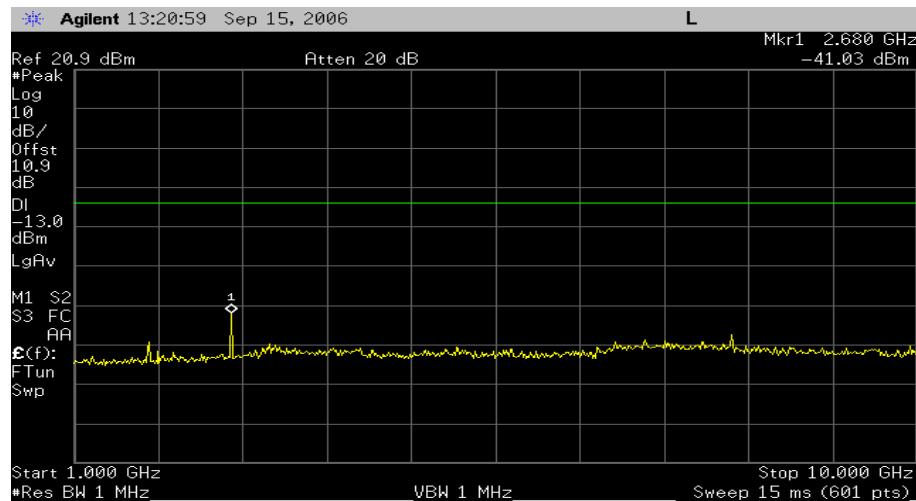


Plot 58. Downlink TDMA High Channel(1GHz~10GHz)

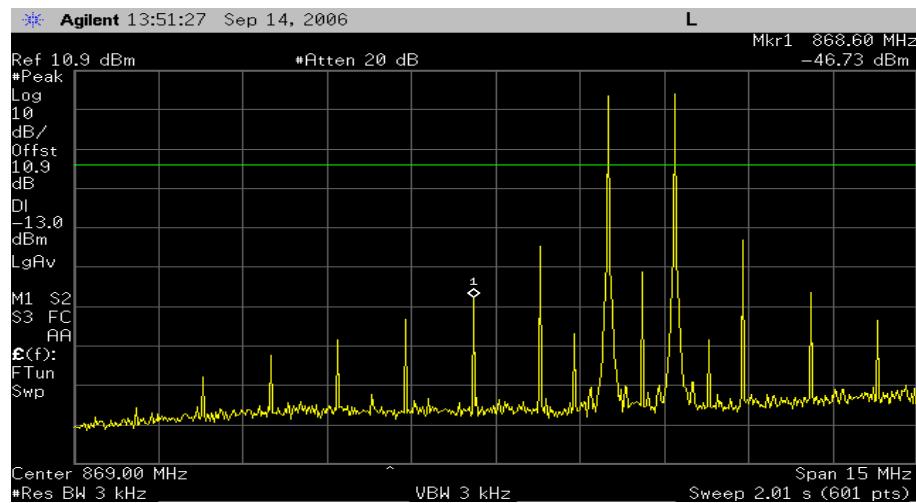


Plot 59. Downlink CW Low Channel(Inband)

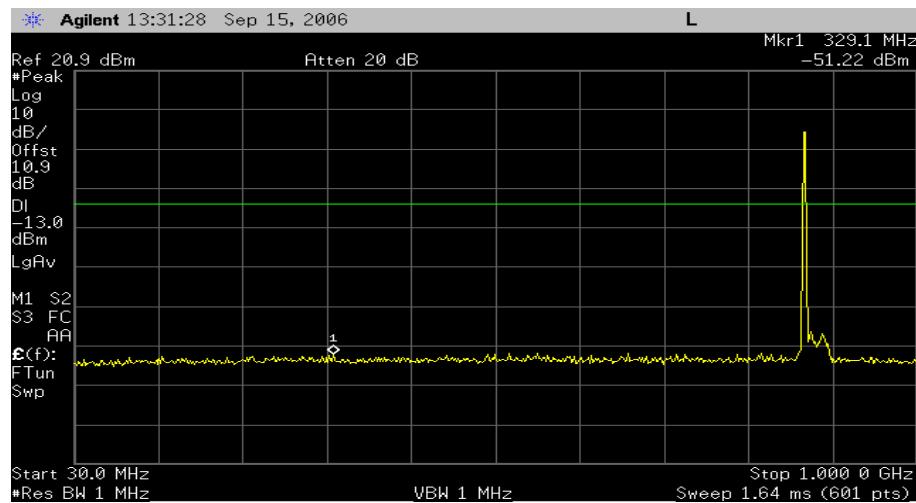


Plot 60. Downlink CW Low Channel(30MHz~1GHz)

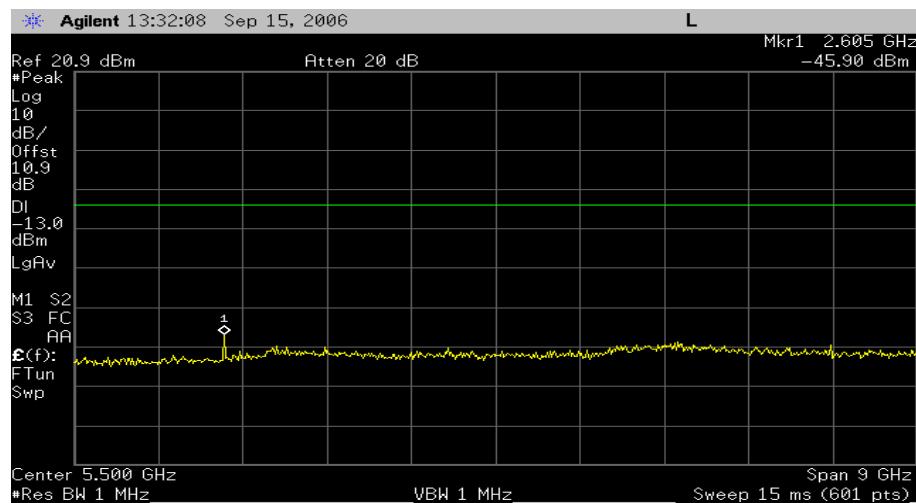


Plot 61. Downlink CW Low Channel(1GHz~10GHz)

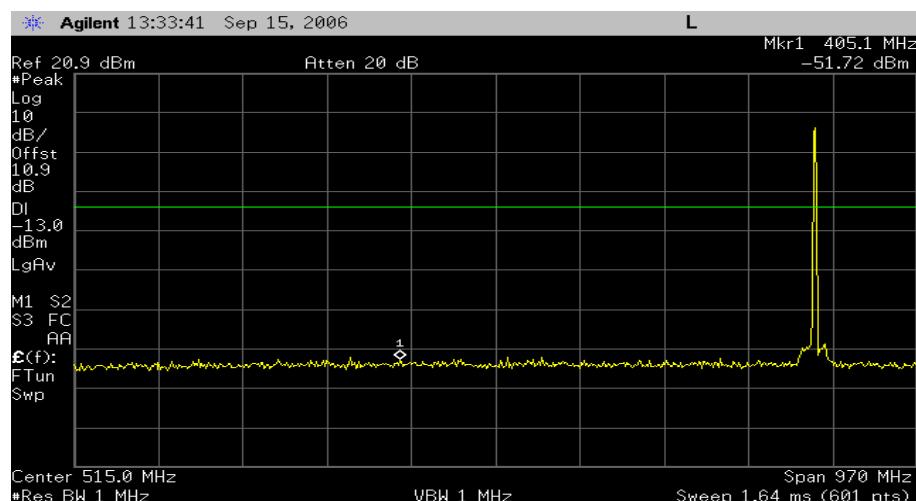


Plot 62. Downlink CW Middle Channel(30MHz~1GHz)

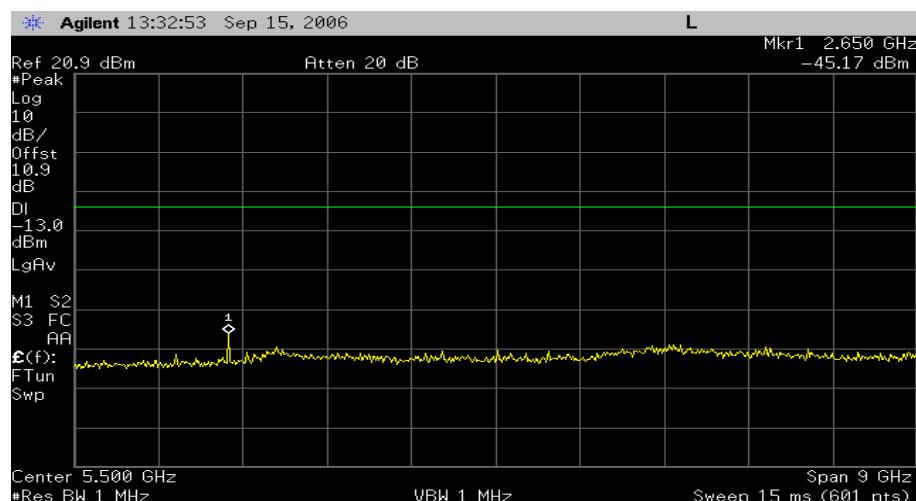


Plot 63. Downlink CW Middle Channel(1GHz~10GHz)

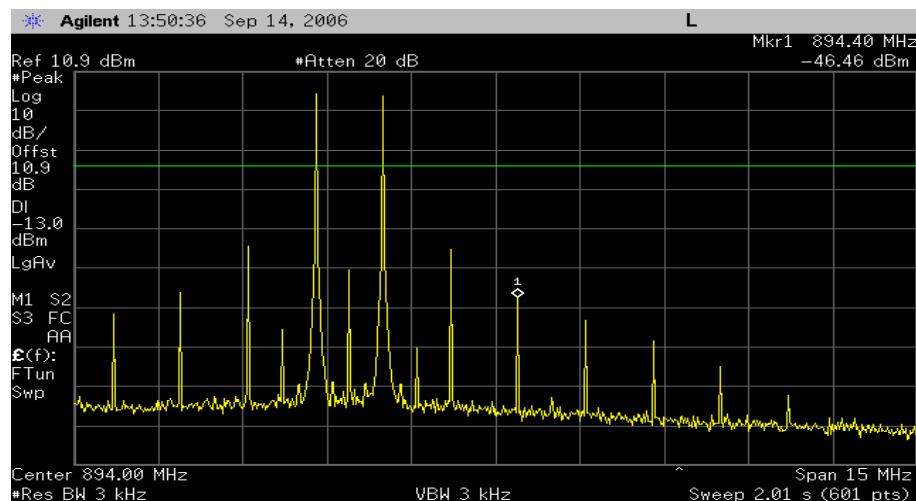


Plot 64. Downlink CW High Channel(Inband)

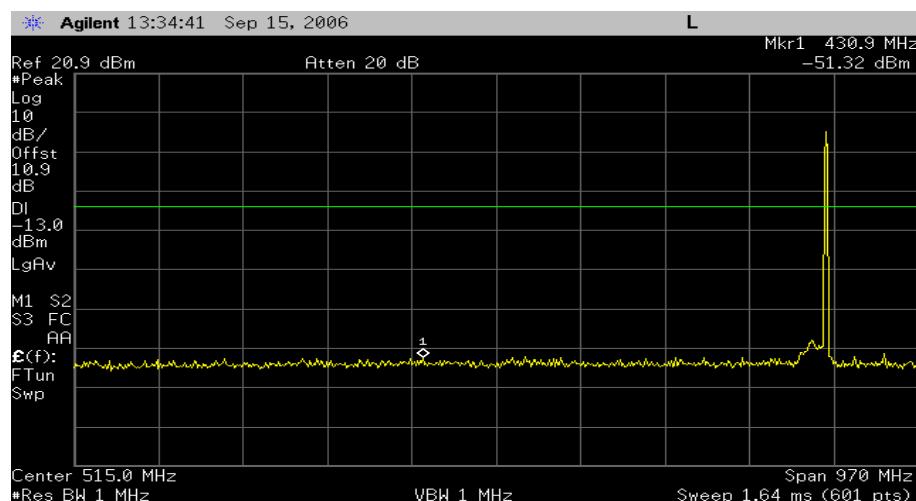


Plot 65. Downlink CW High Channel(30MHz~1GHz)

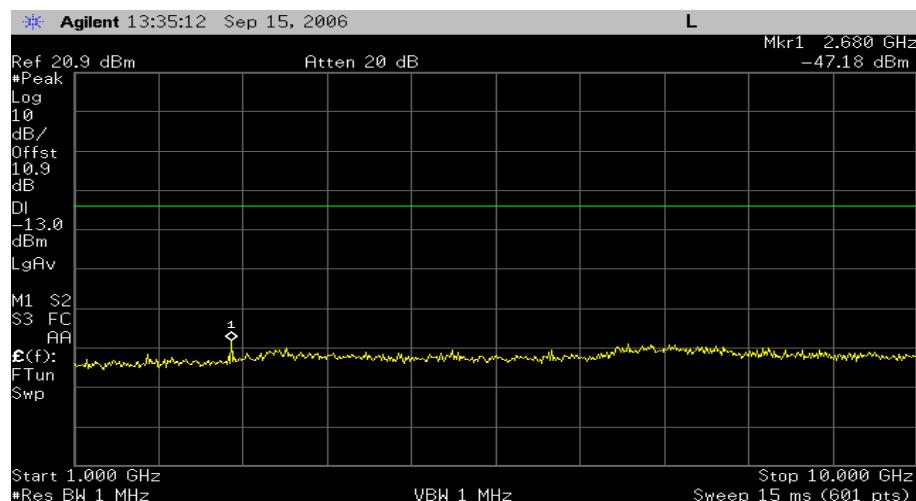


Plot 66. Downlink CW High Channel(1GHz~10GHz)

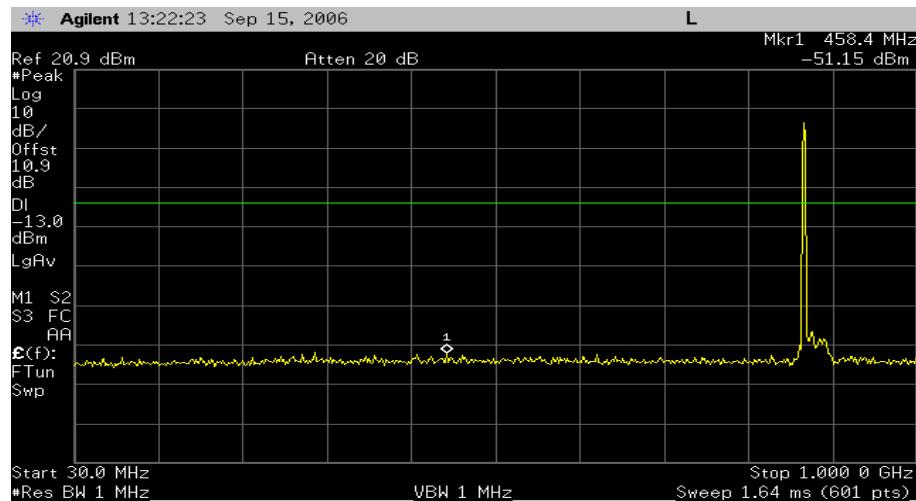


Plot 67. Downlink GSM Low Channel(30MHz~1GHz)

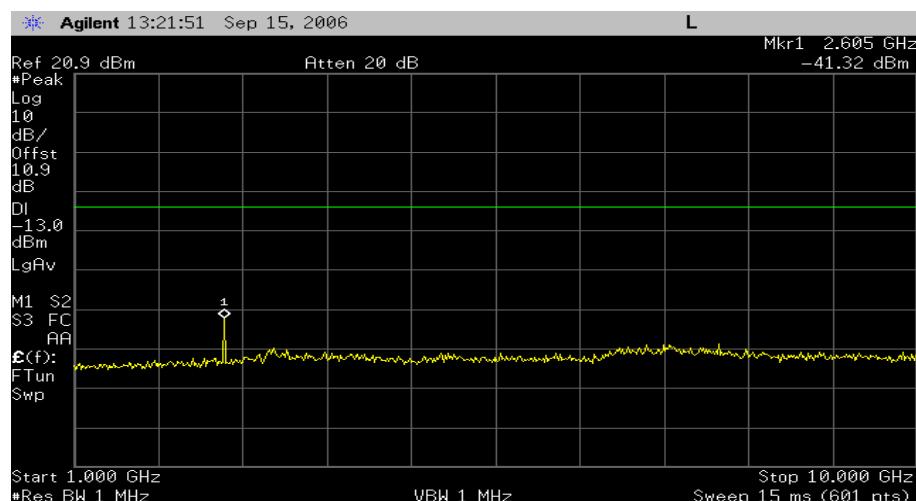


Plot 68. Downlink GSM Low Channel(1GHz~10GHz)

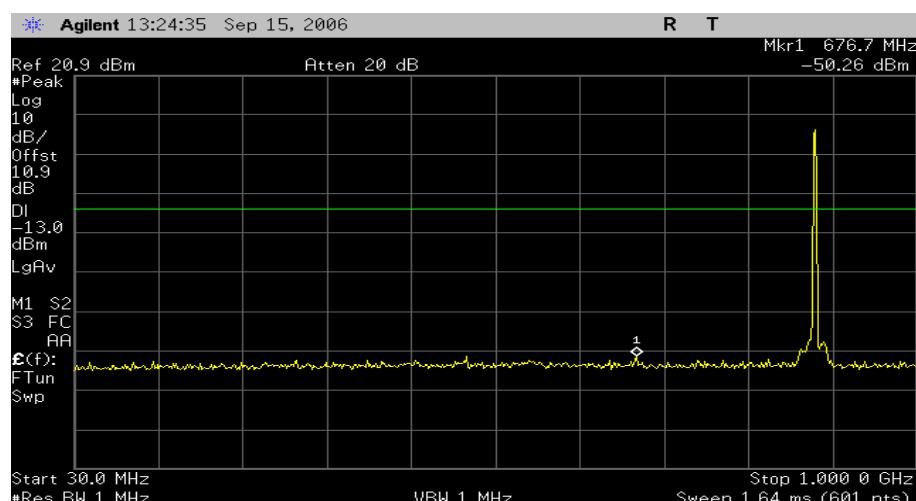


Plot 69. Downlink GSM Middle Channel(30MHz~1GHz)

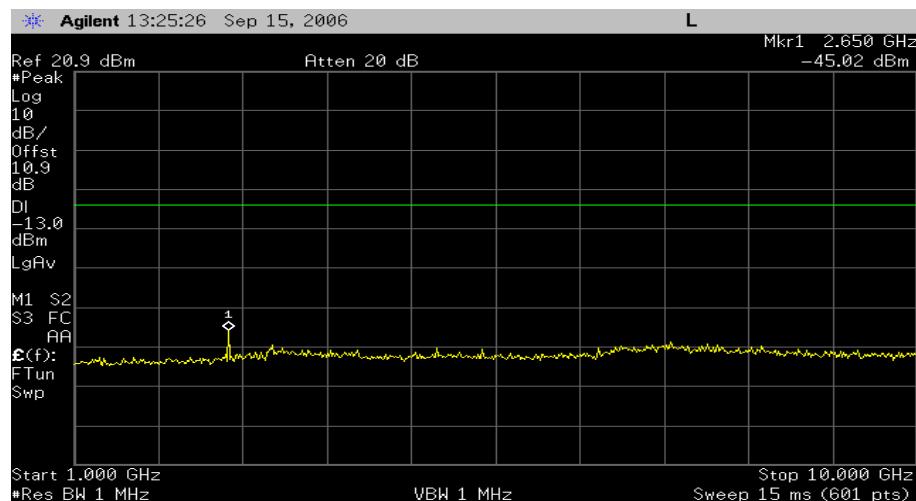

Plot 70. Downlink GSM Middle Channel(1GHz~10GHz)

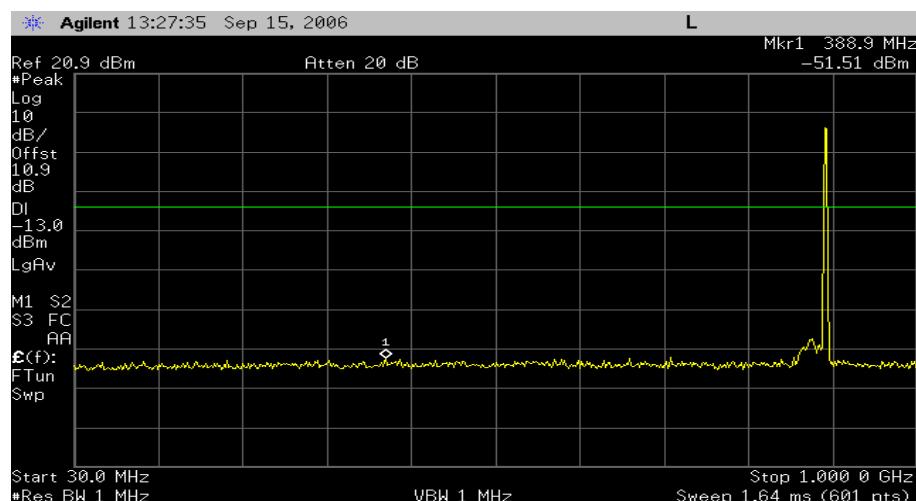

Plot 71. Downlink GSM High Channel(30MHz~1GHz)

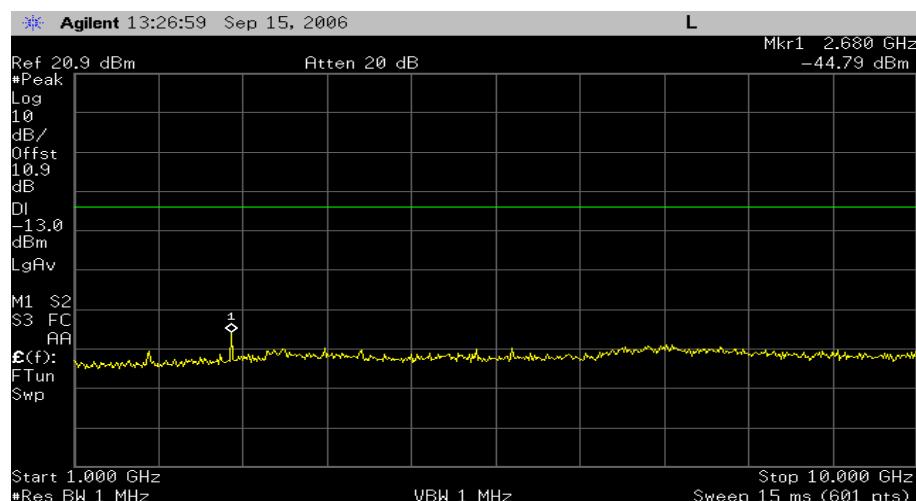


Plot 72. Uplink GSM High Channel(1GHz~10GHz)

9.7 Band-edge Compliance


Measurement Result:

| Up/Down Link | Modulation | Channel | Frequency (MHz) | Plots number |
|--------------|------------|---------|-----------------|--------------|
| Uplink | CDMA | Low | 824.70 | Plot 73 |
| | | High | 848.31 | Plot 74 |
| | TDMA | Low | 824.04 | Plot 75 |
| | | High | 848.97 | Plot 76 |
| | GSM | Low | 824.20 | Plot 77 |
| | | High | 848.80 | Plot 78 |
| Downlink | CDMA | Low | 824.70 | Plot 79 |
| | | High | 848.31 | Plot 80 |
| | TDMA | Low | 824.04 | Plot 81 |
| | | High | 848.97 | Plot 82 |
| | GSM | Low | 824.20 | Plot 83 |
| | | High | 848.80 | Plot 84 |


Table 23. Band-edge

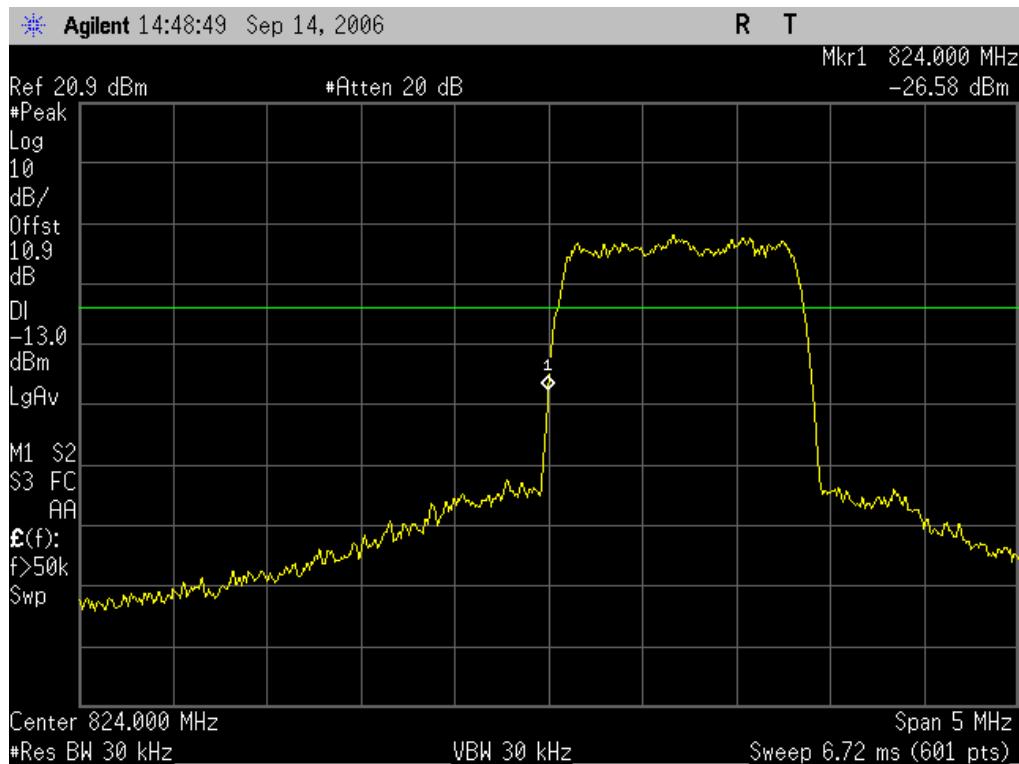


Plot 73. Uplink CDMA Low Channel

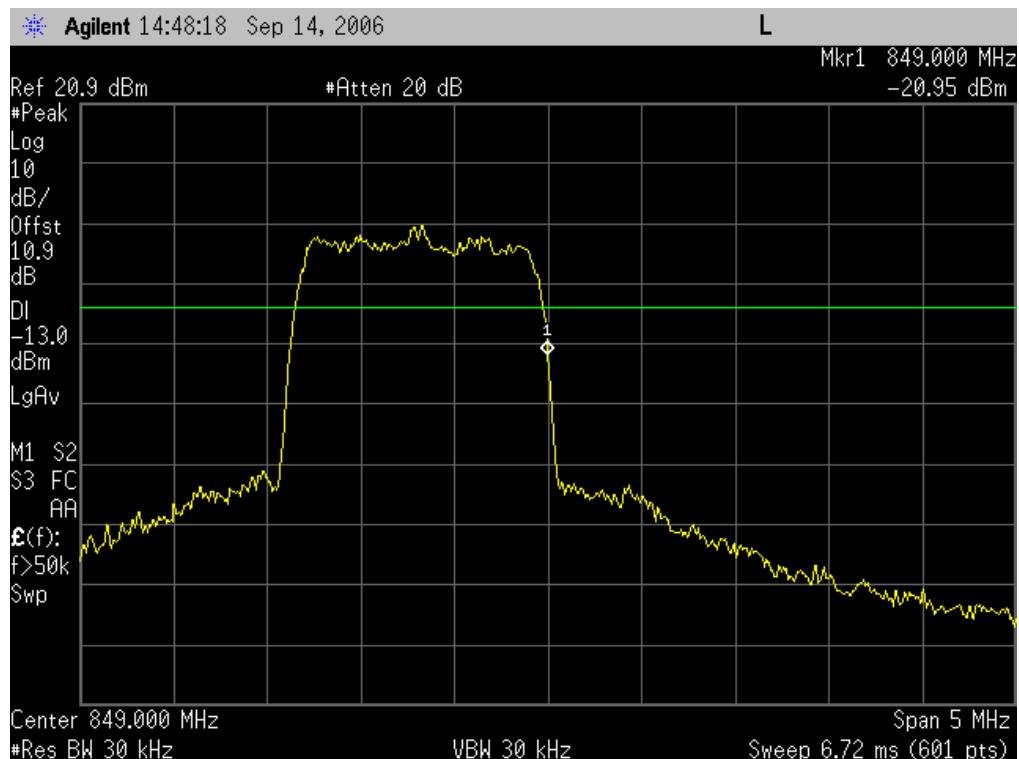


Plot 74. Uplink CDMA High Channel

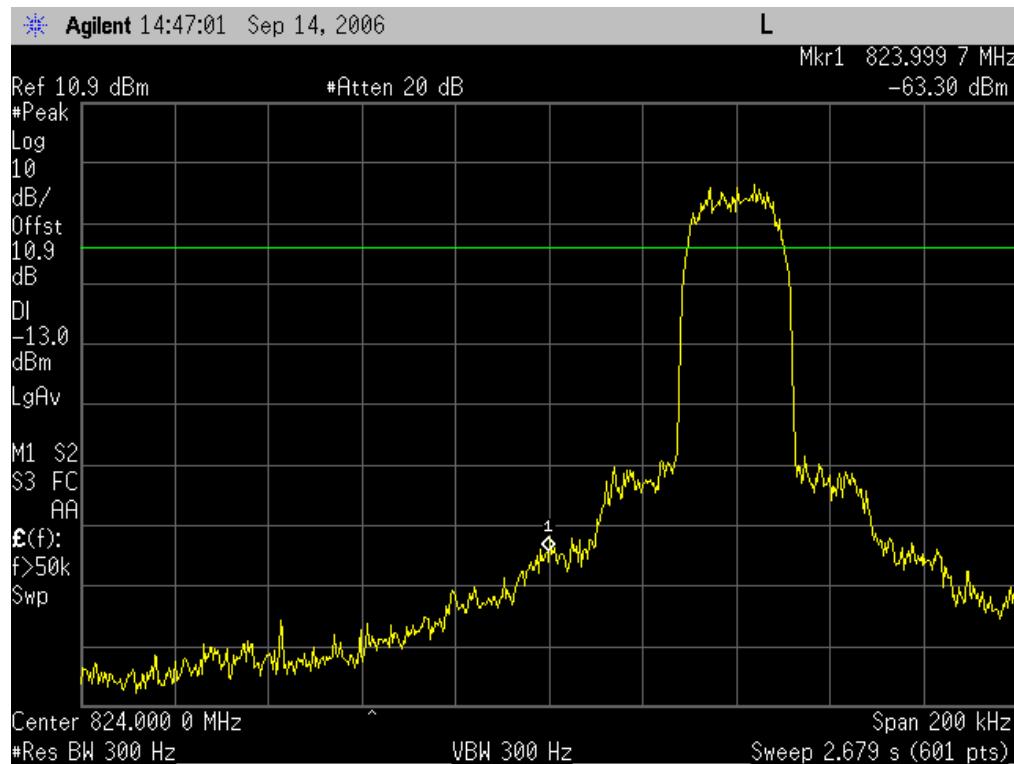


Plot 75. Uplink TDMA Low Channel

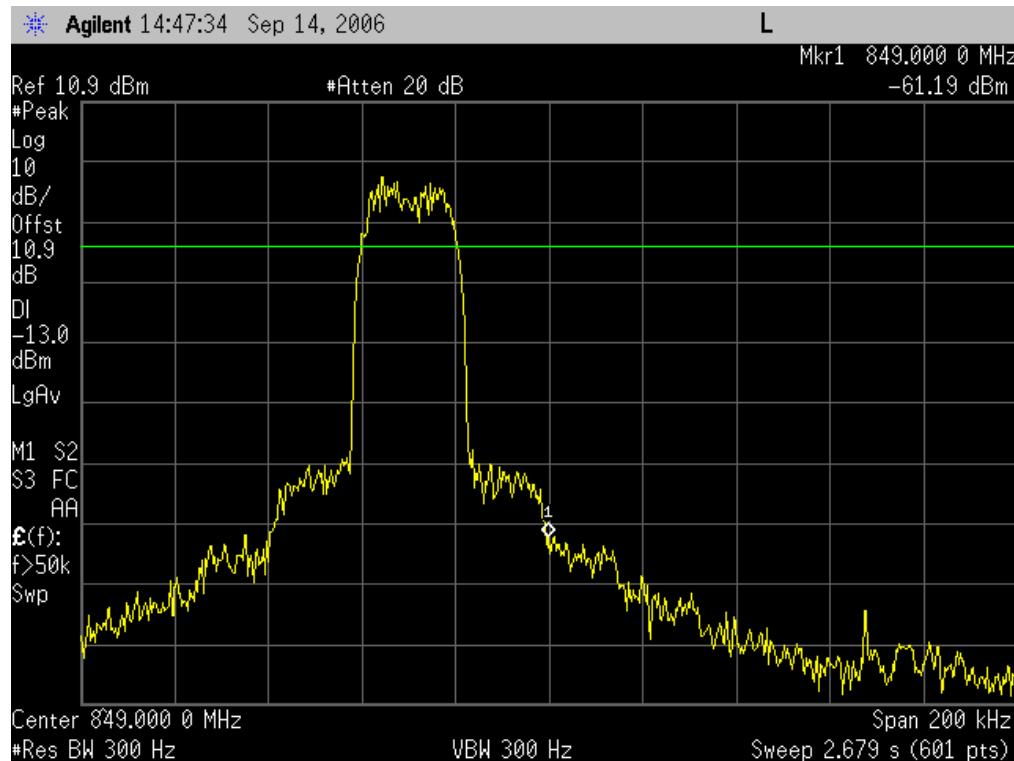


Plot 76. Uplink TDMA High Channel

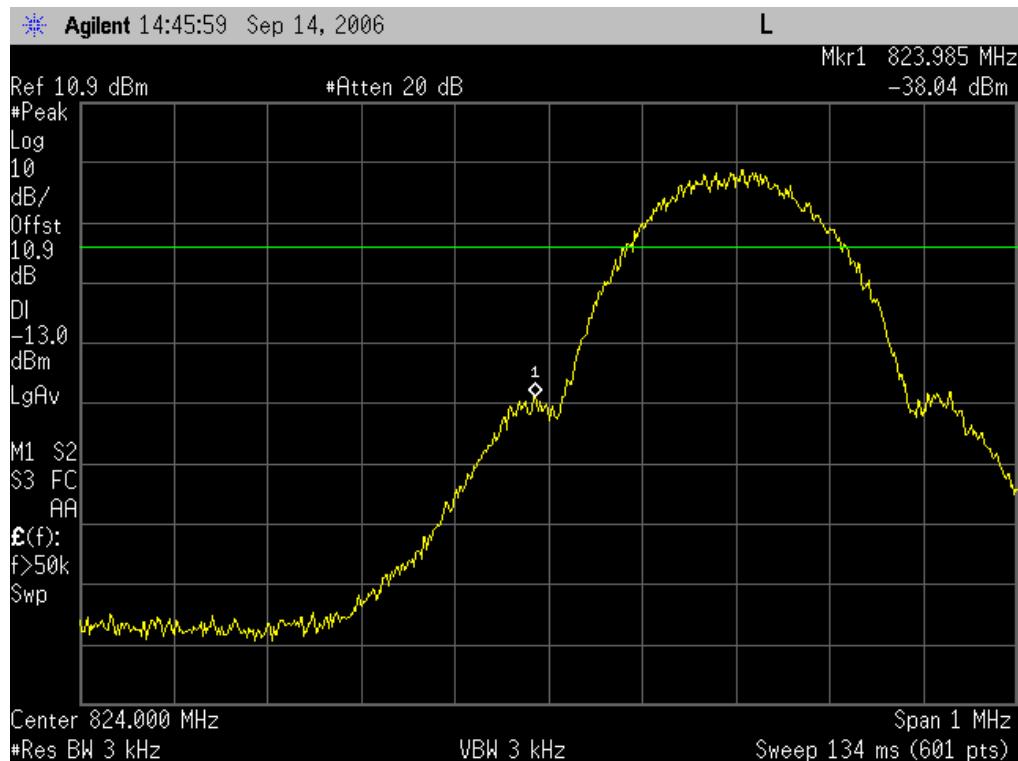


Plot 77. Uplink GSM Low Channel

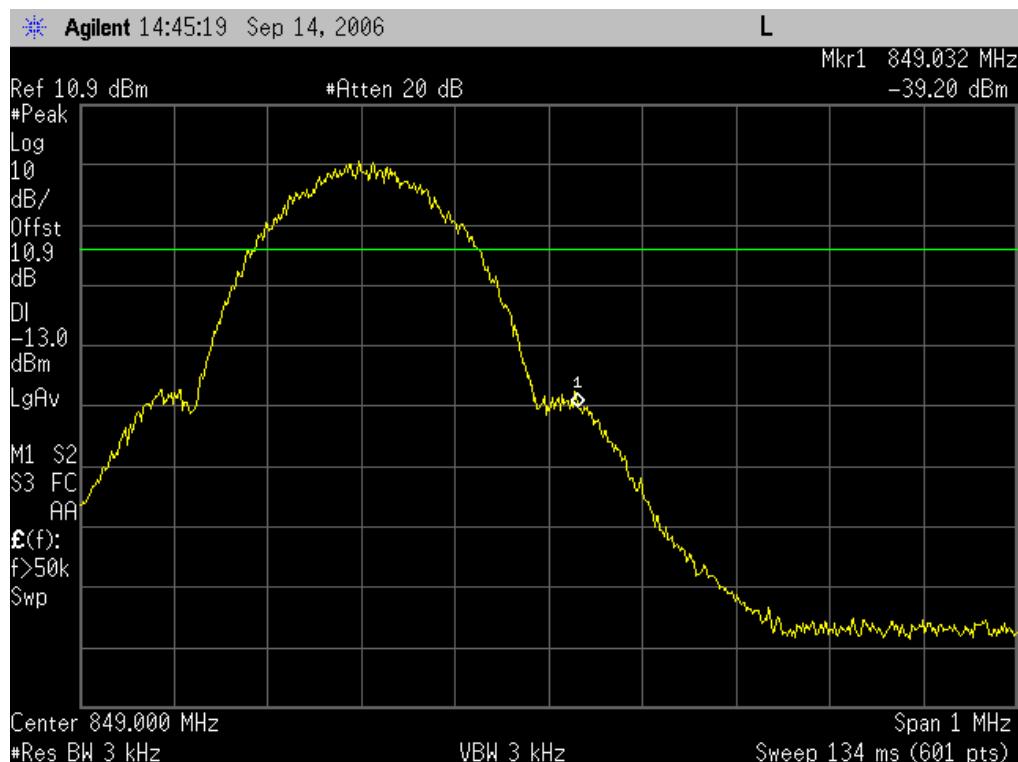


Plot 78. Uplink GSM High Channel

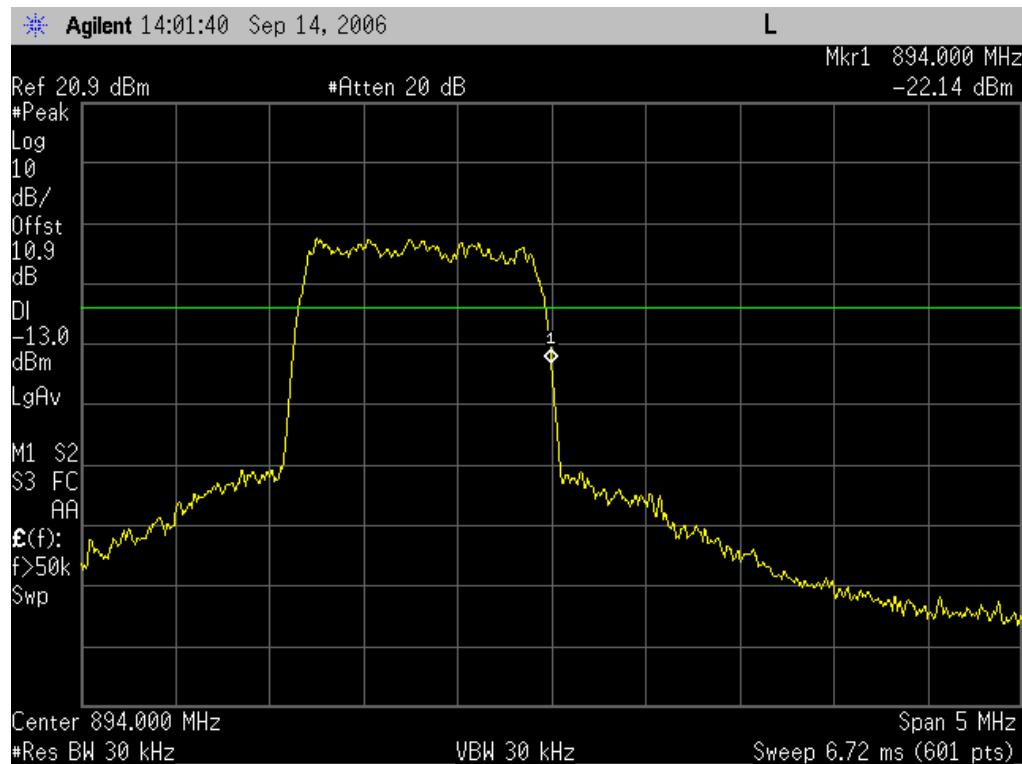


Plot 79. Downlink CDMA Low Channel

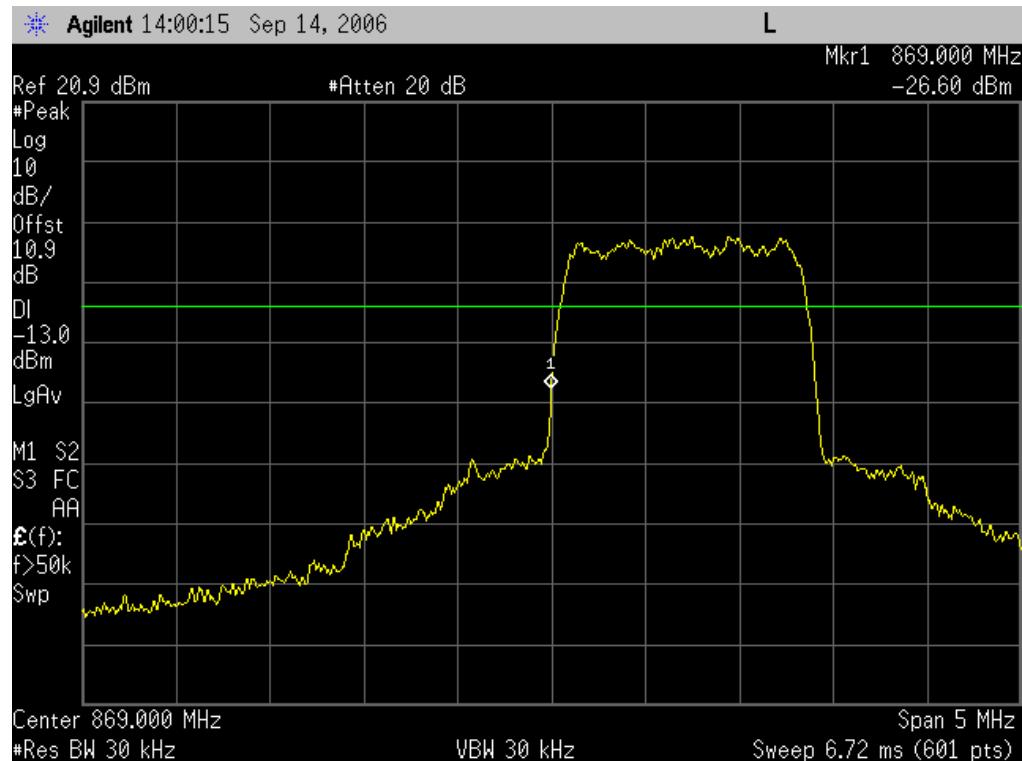


Plot 80. Downlink CDMA High Channel

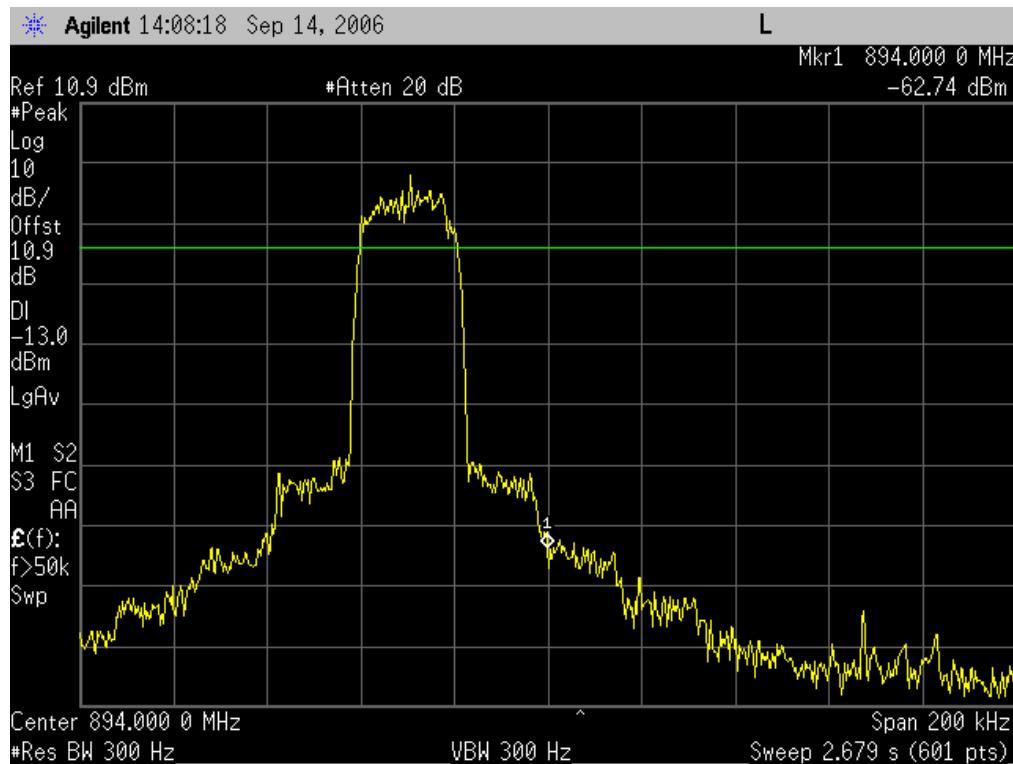


Plot 81. Downlink TDMA Low Channel

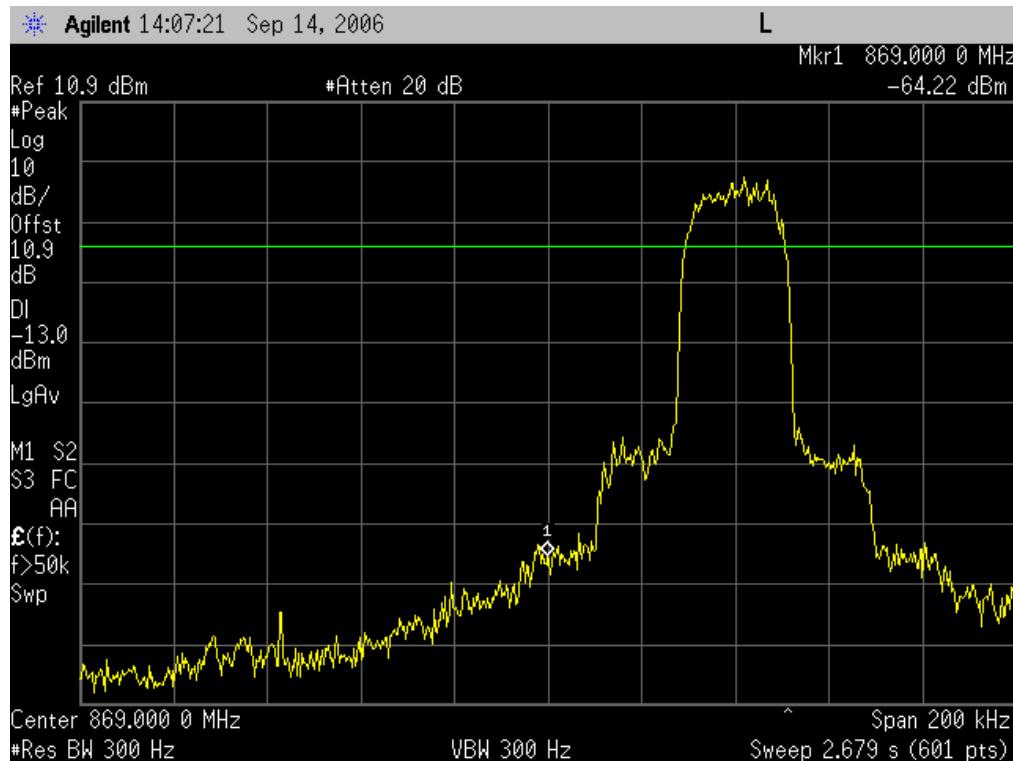

Plot 82. Downlink TDMA High Channel

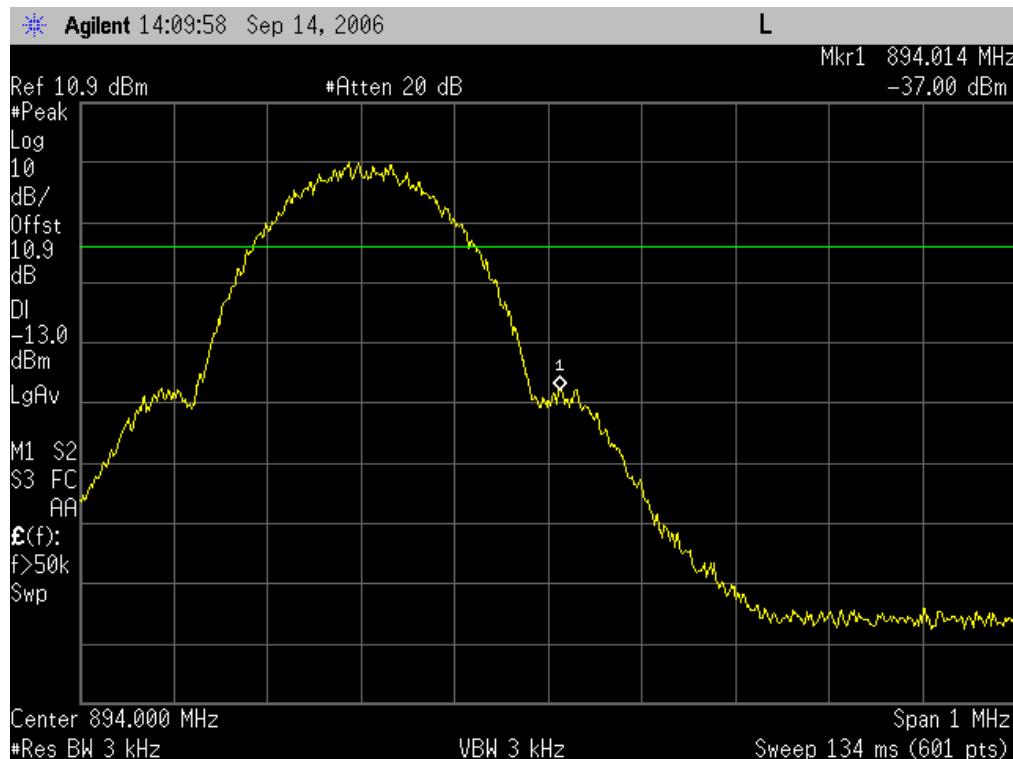

Plot 83. Downlink GSM Low Channel

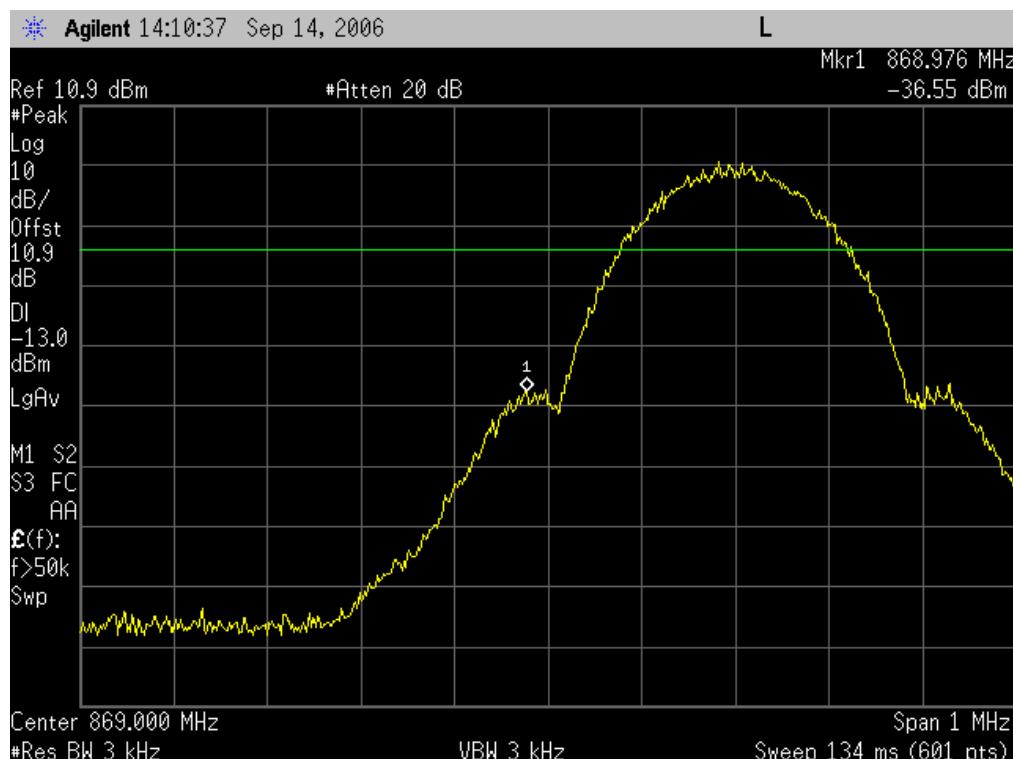

Plot 84. Downlink GSM High Channel

9.8 Maximum Permissible Exposure

RF Exposure Limit:

According to FCC 1.1310: The criteria listed in the following table shall be used to evaluate the

Environmental of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)

Limits for Maximum Permissible Exposure (MPE)

| Frequency Range(MHz) | Electric Field Strength(V/m) | Magnetic Field Strength(A/m) | Power Density (mW/cm ²) | Averaging Time (Minutes) |
|--|------------------------------|------------------------------|-------------------------------------|--------------------------|
| (A) Limits for occupational / Contral Exposure | | | | |
| 30 - 300 | 61.4 | 0.163 | 1 | 6 |
| 300 - 1500 | ... | ... | F/300 | 6 |
| 1500 - 100000 | ... | ... | 5 | 6 |
| (B) Limits for General Population / Uncontrolled Exposure | | | | |
| 30 - 300 | 27.5 | 0.073 | 0.2 | 30 |
| 300 - 1500 | ... | ... | F/1500 | 30 |
| 1500 - 100000 | ... | ... | 1 | 30 |

F = Frequency (MHz)

Fries formula

$$\text{Fries transmission formula : } Pd = (Pout * G) / (4 * \pi * r^2)$$

$$r = ((Pout * G) / 4 * \pi * Pd)^{1/2}$$

Where

Pd = Power density in mW/cm²

Pout = Output power to antenna in mW

G = Gain of antenna in linear scale

= 3.1416

r = Distance between observation point center of the radiator in cm

Pd is the limit of MPE, F/1500 mW/cm². If we know the Maximum Gain of the antenna and the total power input to the antenna, through the calculation, we will know the distance where the MPE limit is reached.

Test Result :

The maximum Downlink antenna gain is 2dBi or 1.58(Numeric) and Uplink antenna gain is 5dBi or 3.16(Numeric).

RF Exposure Distance

| Configuration | Frequency (MHz) | Output Power to Antenna (mW) | Power Density Limit (mW/cm ²) | Antenna Gain | RF Exposure Distance (cm) |
|---------------|-----------------|------------------------------|---|--------------|---------------------------|
| Uplink | 848.8 | 6.05 | 0.57 | 3.16 | 1.63 |
| Downlink | 893.8 | 5.51 | 0.60 | 1.58 | 1.07 |

Conclusion:

MPE Safe Distance is 1.63cm (Uplink) and 1.07cm (Downlink).