



243 Jubug-Ri, Yangji-Myeon, Yongin-Si, Gyeonggi-Do, Korea 449-822
Tel: +82-31-323-6008 Fax: +82-31-323-6010
<http://www.ltlab.com>



Dates of Tests: July 1~ 16 2010
Test Report S/N: LR500191007D
Test Site : LTA CO., LTD.

FCC ID

T7MPWDBGWA

APPLICANT

Kisan Telecom Co., Ltd.

TEST REPORT

FCC Part 22(H)/Part 24(E) Certification

Classification	:	PCS Licensed Transmitter
Manufacturing Description	:	Dual Optical DAS Repeater
Manufacturer	:	Kisan Telecom Co., Ltd.
Model name	:	PWDB-GW
Test Device Serial No.:	:	Identification
FCC Rule Part(s)	:	§22(H), §24(E), §2
Downlink	:	869~894MHz (GSM 850 / WCDMA 850) 1930~1990MHz (GSM 1900 / WCDMA 1900)
Uplink	:	N/A (Optical)
Rated RF Output Power	:	10W (40dBm)
Type Modulation	:	GSM / WCDMA
Emission Designators:	:	GXW / F9W
Data of issue	:	July 16, 2010

This test report is issued under the authority of:

The test was supervised by:

W. J. C.

John

Kyung-Taek LEE, Technical Manager

Hyun-Chae You, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. This report must not be used by the applicant to claim product endorsement by any agency.

NVLAB®

NVLAP LAB Code.: 200723-0

TABLE OF CONTENTS

1. GENERAL INFORMATION'S -----	3
2. INFORMATION'S ABOUT TEST ITEM -----	4
3. TEST REPORT	
3.1 SUMMARY OF TESTS -----	5
3.2 DESCRIPTION OF TESTS -----	6
3.2.1 RF Rower Output -----	7
3.2.2 Occupied Bandwidth, Input/Output Comparison -----	8
3.2.3 Out-of-Band Emissions at antenna terminal -----	13
3.2.4 Intermodultion Test -----	32
3.2.5 Transmitter Spurious Radiation -----	38
3.2.6 Out-of-Band Rejection -----	40
3.2.7 FREQUENCY STABILITY -----	42
3.2.8 AC Conducted Emissions -----	44
3.3 CONCLUSION -----	53
APPENDIX	
APPENDIX 1 TEST EQUIPMENT USED FOR TESTS -----	54

1. General information's

1-1 Test Performed

Company name : LTA Co., Ltd.
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 449-822
 Web site : <http://www.ltalab.com>
 E-mail : chahn@ltalab.com
 Telephone : +82-31-323-6008
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2010-09-30	ECT accredited Lab.
RRL	KOREA	KR0049	2011-06-20	EMC accredited Lab.
FCC	U.S.A	610755	2011-04-22	FCC filing
VCCI	JAPAN	R2133, C2307	2011-06-21	VCCI registration
IC	CANADA	IC5799	2012-05-14	IC filing

2. Information's about test item

2-1 Client

Company name : Kisan Telecom Co., Ltd.
 Address : 2F, Segi Bldg., 66-2 Bangyi-Dong Songpa-Gu, Seoul, 138-828, Korea
 Telephone : +82 2-3433-8341
 Facsimile : +82 2-3433-8316

2-2 Equipment Under Test (EUT)

Classification : PCS Licensed Transmitter
 Trade name : Dual Optical DAS Repeater
 Model name : PWDB-GW
 Serial number : Identification
 Date of receipt : July 1, 2010
 EUT condition : Pre-production, not damaged
 Downlink : 869~894MHz (GSM 850 / WCDMA 850)
 1930~1990MHz (GSM 1900 / WCDMA 1900)
 Uplink : N/A (Optical)
 Max gain : 50dB
 Frequency Tolerance : ± 0.0002 ppm
 Emission Designators : GSM(GXW), WCDMA(F9W)
 Power Input : 120Vac

2-3 The dc voltages applied to and dc currents

Module name	The current consumption of each module (mA)							
	29	Vdc	9	Vdc	6.5	Vdc	5.5	Vdc
1 HPA 16W	2900							
2 SOU					500			
3 FSK MODEM			110					
4 RRBS / RRCHS					1000			
5 RFBS / RFCHS					1000		1800	
6 NMS B'D			700					
Supply current for each voltage (A)	5.8		0.81		4.5		3.6	

2-4 Tested frequency

Mode	Frequency (CH)	TX (MHz)
GSM 850	Low (129)	869.4
	Mid (190)	881.6
	High (250)	893.6
GSM 1900	Low (513)	1930.4
	Mid (661)	1960
	High (809)	1989.6
WCDMA 850	Low (4357)	871.4
	Mid (4407)	881.4
	High (4458)	891.6
WCDMA 1900	Low (9662)	1932.4
	Mid (9800)	1960
	High (9938)	1987.6

2.5 Mode of Operation

The EUT was powered by 120VAC. The EUT was configured for maximum gain, 50dB. Repeater simulators were used to provide the input signals to the EUT. Tests were performed with GSM and WCDMA modulations. The input power was the maximum declared by the manufacturer.

3. Test Report

3.1 Summary of tests

Parameter	Status
Transmitter Requirements	
RF Power Output	C
Occupied Bandwidth, Input/Output Comparison	C
Out-of-Band Emissions at antenna terminal	C
Intermodulation Test	C
Transmitter Spurious Radiation	C
Out of Band Rejection	-
Frequency Stability	C
AC Conducted Emissions	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are to be tested to the ANSI/TIA-603-C-2004 standard

3.2 Results Of Tests

3.2.1 RF Power Output

1. Test Procedure

The EUT RF output was connected to Powermeter. The EUT was setup to transmit continuously with maximum power. A spectrum analyzer was setup to measure peak power. Measurements were performed at three frequencies (low, middle, and high channels) with all modulations.

2. Test Results

Modulation : GSM 850

	Freq. Tuned (MHz)	Power Input (dBm)	Power output (dBm)	Power Output (W)
Low	869.4	-10.53	39.95	9.89
Middlw	881.6	-10.35	40.11	10.26
High	893.6	-9.98	39.97	9.93

Modulation : GSM 1900

	Freq. Tuned (MHz)	Power Input (dBm)	Power output (dBm)	Power Output (W)
Low	1930.4	-10.35	39.65	9.23
Middlw	1960	-10.53	40.41	10.99
High	1989.6	-10.24	39.45	8.81

Modulation : WCDMA 850

	Freq. Tuned (MHz)	Power Input (dBm)	Power output (dBm)	Power Output (W)
Low	871.4	-10.53	39.64	9.20
Middlw	881.6	-10.82	40.24	10.57
High	891.6	-10.24	39.29	8.49

Modulation : WCDMA 1900

	Freq. Tuned (MHz)	Power Input (dBm)	Power output (dBm)	Power Output (W)
Low	1932.4	-10.24	39.64	9.20
Middlw	1960	-10.52	40.24	10.57
High	1987.4	-10.72	39.74	9.42

3.2.2 Occupied Bandwidth, Input/Output Comparison



1. Test Procedure

The EUT RF ports were connected to Spectrum analyzer. The EUT was setup to transmit maximum power. The spectrum analyzer was setup to measure the Occupied Bandwidth (defined as the 99% Power Bandwidth). The Occupied Bandwidth was measured at the input and output ports of the EUT at the middle channels for each type of modulation



2. Test Results : Complies

Refer to the following Graphs.



Input/Output Bandwidth Comparison – GSM 850

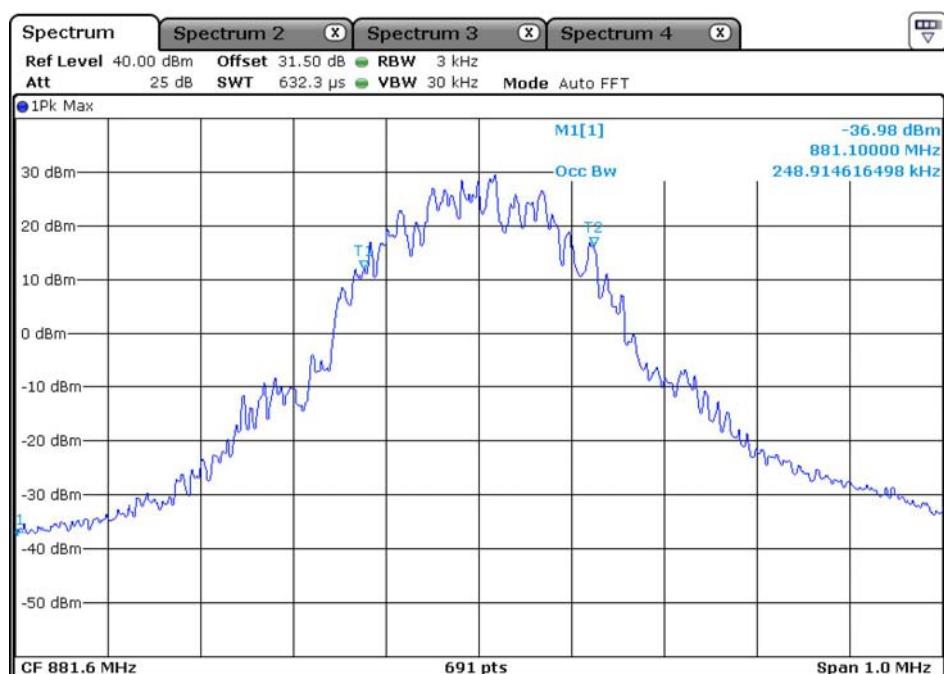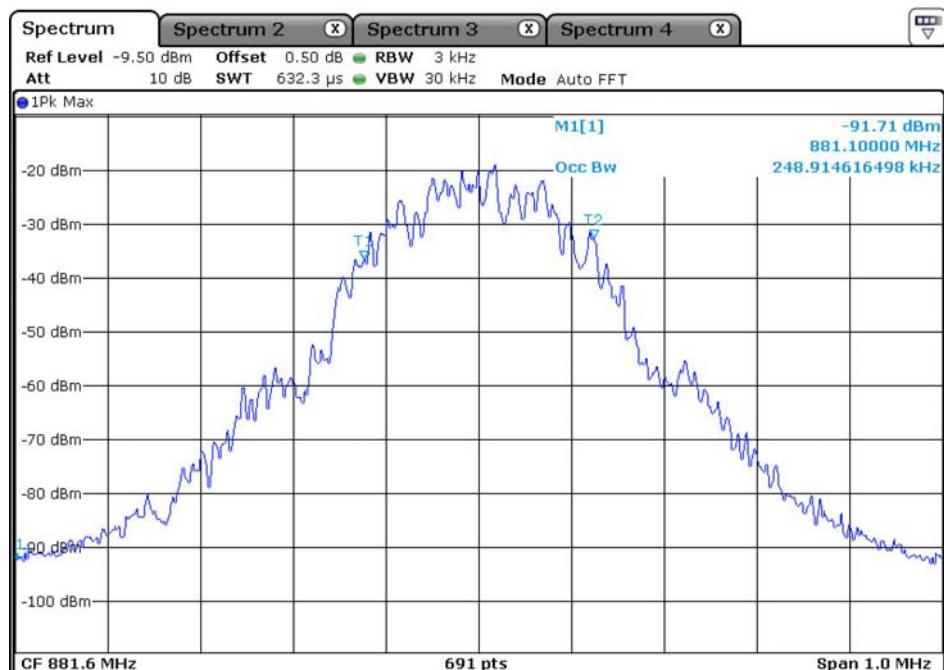



Input/Output Bandwidth Comparison – GSM 1900

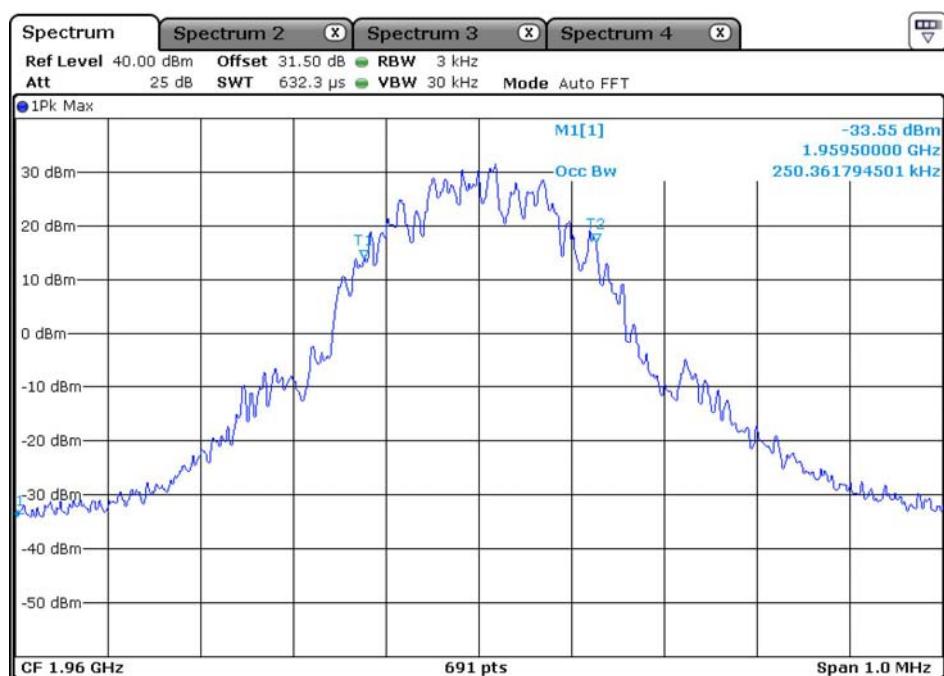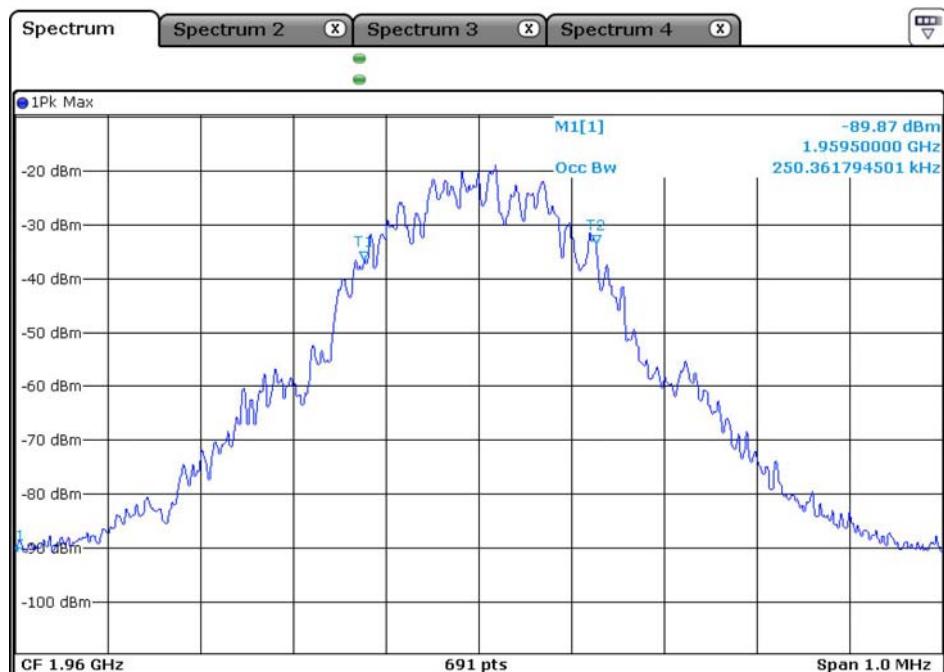

Input/Output Bandwidth Comparison – WCDMA 850

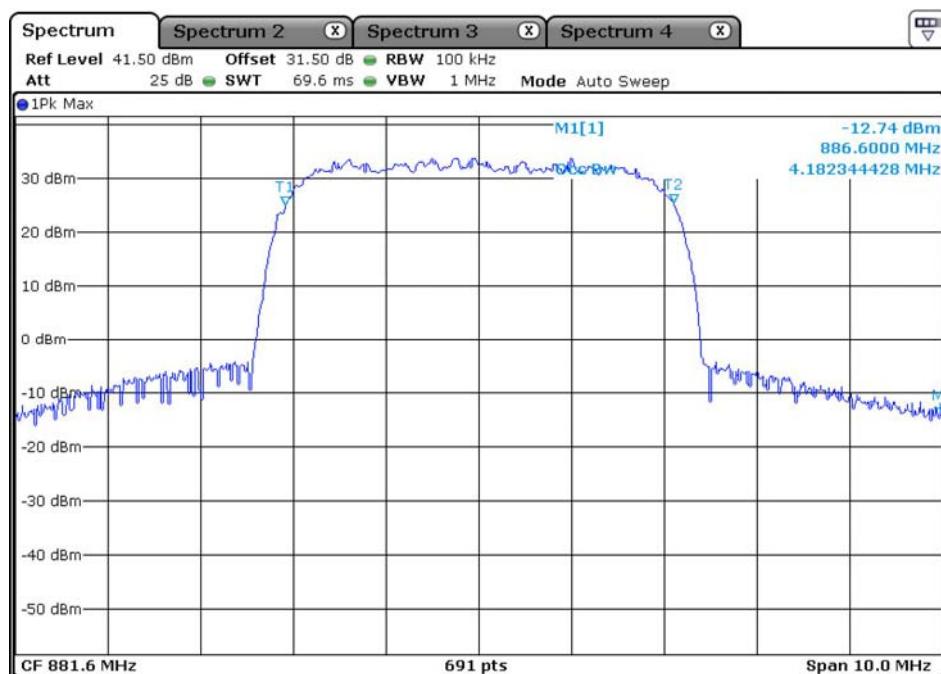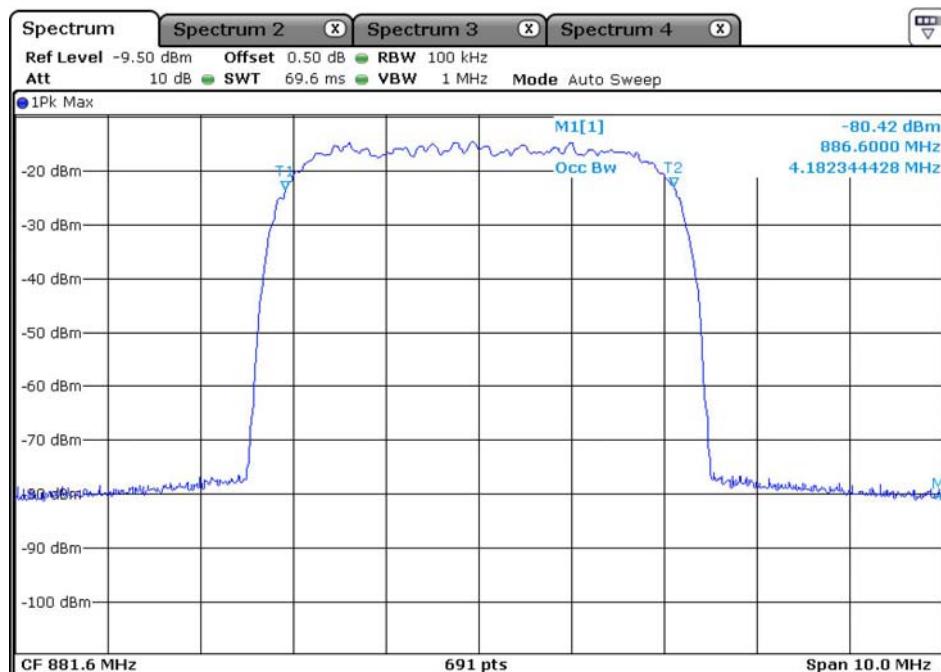

Input/Output Bandwidth Comparison – WCDMA 1900

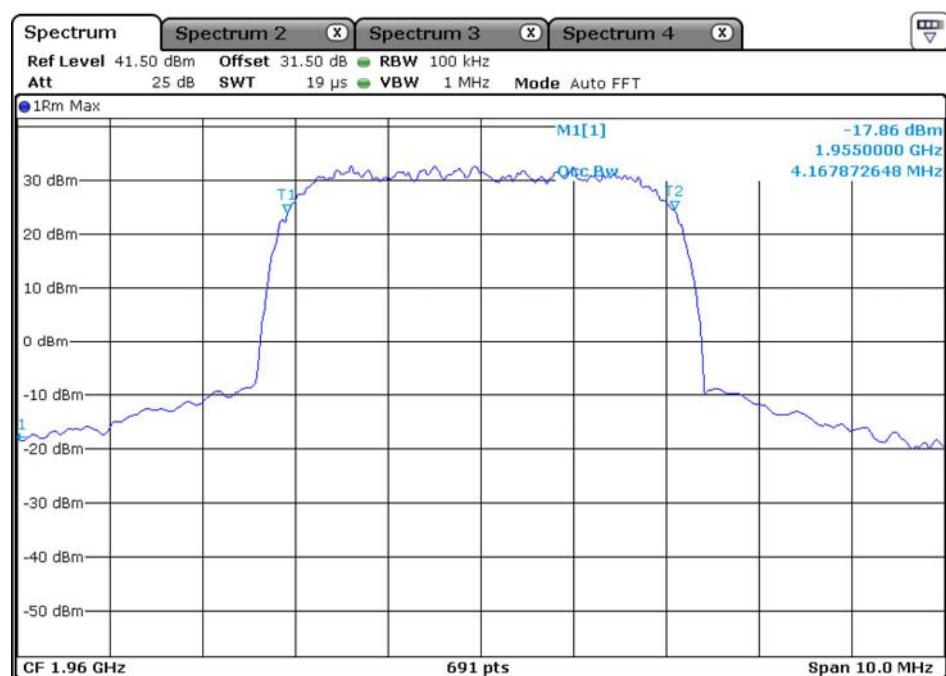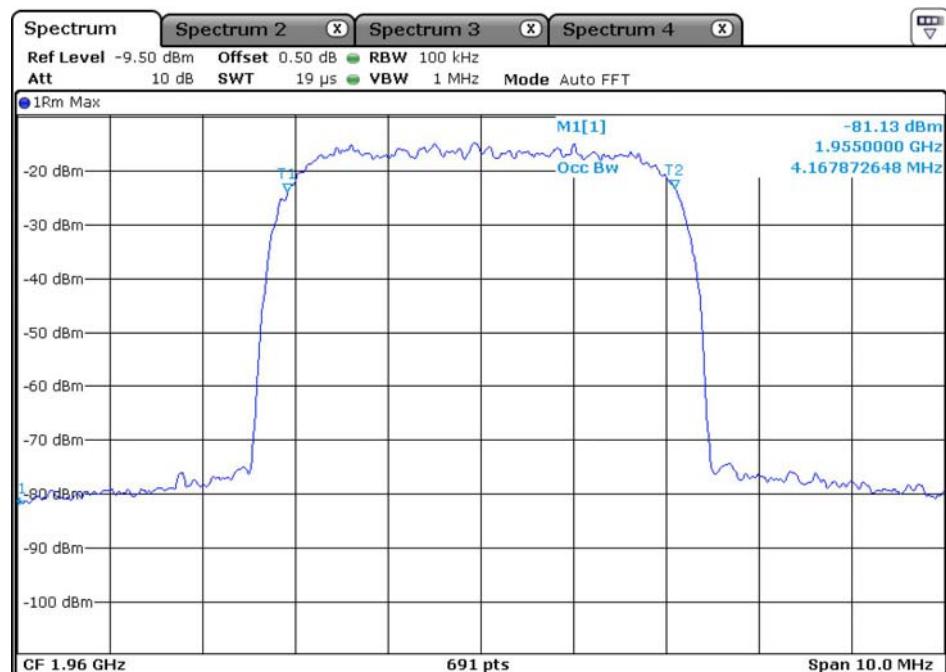

3.2.3 Out-of-Band Emissions at antenna terminal

1. Requirement

The power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $(43 + 10 \log P)$ dB. Note: That corresponds to the level of -13 dBm for any out-of-band and spurious emissions.

2. Test Procedure

The EUT RF output was connected to spectrum analyzer. The EUT was setup to transmit the maximum power. The spectrum analyzer resolution bandwidth (RBW) was set to 1 MHz in the PCS band and 100 kHz in the Cell band. For measurements at the band edges, the resolution bandwidth (RBW) was set to 100 kHz. Measurements were performed at three frequencies at the low, middle, and high channels for all modulations types. Intermodulation was performed by injecting two modulated signals into the EUT. One signal was set at the bandedge of either the Up Link or Down Link band and the other signal was set 6 MHz away.

3. Test Results : Complies

Refer to the following Graphs.

GSM 850 (Spurious Emission : Out of Band)

	Freq. Tuned (MHz)	Result (dBm)	Limit (dBm)	Magin (W)
Low	869.4	-26.60	-13.00	13.60
Middlw	881.6	-23.38	-13.00	10.38
High	893.6	-31.47	-13.00	18.47

GSM 1900 (Spurious Emission : Out of Band)

	Freq. Tuned (MHz)	Result (dBm)	Limit (dBm)	Magin (W)
Low	1930.4	-	-	-
Middlw	1960	-	-	-
High	1989.6	-	-	-

*note : No other emissions were detected at a level greater than 20dB below limit.

WCDMA 850 (Spurious Emission : Out of Band)

	Freq. Tuned (MHz)	Result (dBm)	Limit (dBm)	Magin (W)
Low	871.4	-	-	-
Middlw	881.6	-	-	-
High	891.6	-	-	-


*note : No other emissions were detected at a level greater than 20dB below limit.

WCDMA 1900 (Spurious Emission : Out of Band)


	Freq. Tuned (MHz)	Result (dBm)	Limit (dBm)	Magin (W)
Low	1932.4	-	-	-
Middlw	1960	-	-	-
High	1987.4	-	-	-

*note : No other emissions were detected at a level greater than 20dB below limit.


Antenna Terminal Spurious Emissions, GSM 850, Low

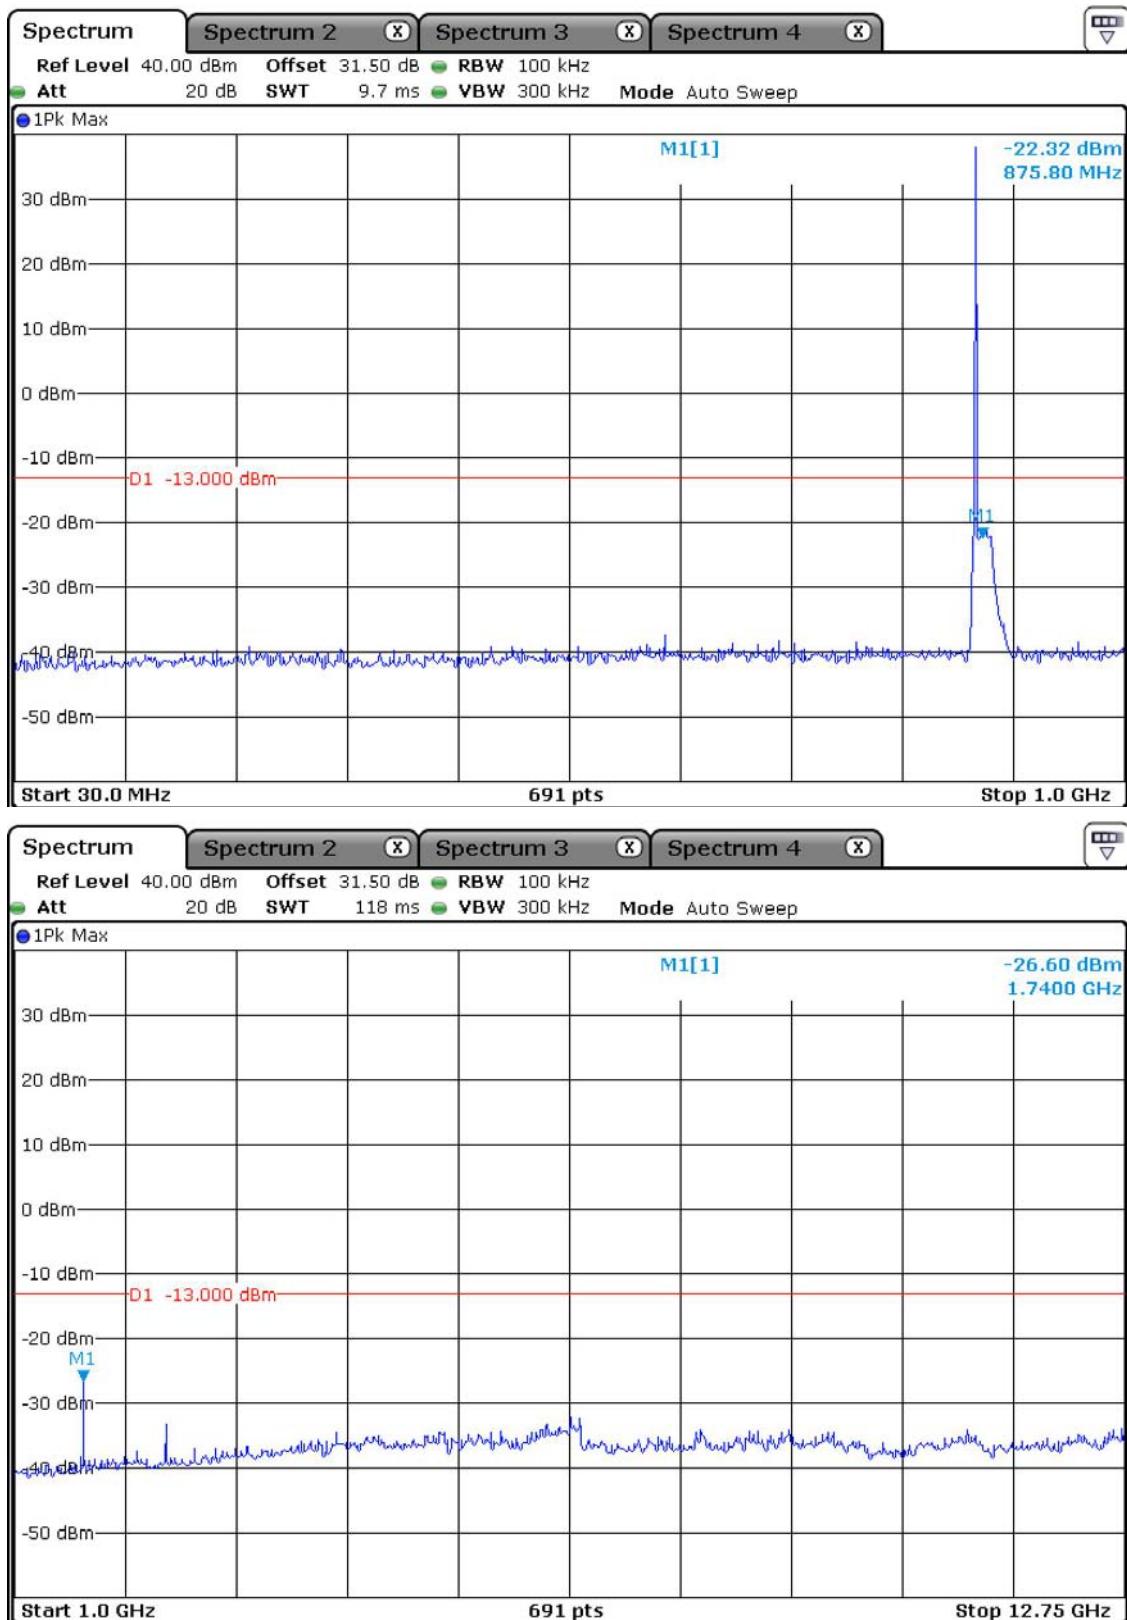


Antenna Terminal Spurious Emissions, GSM 850, Middle

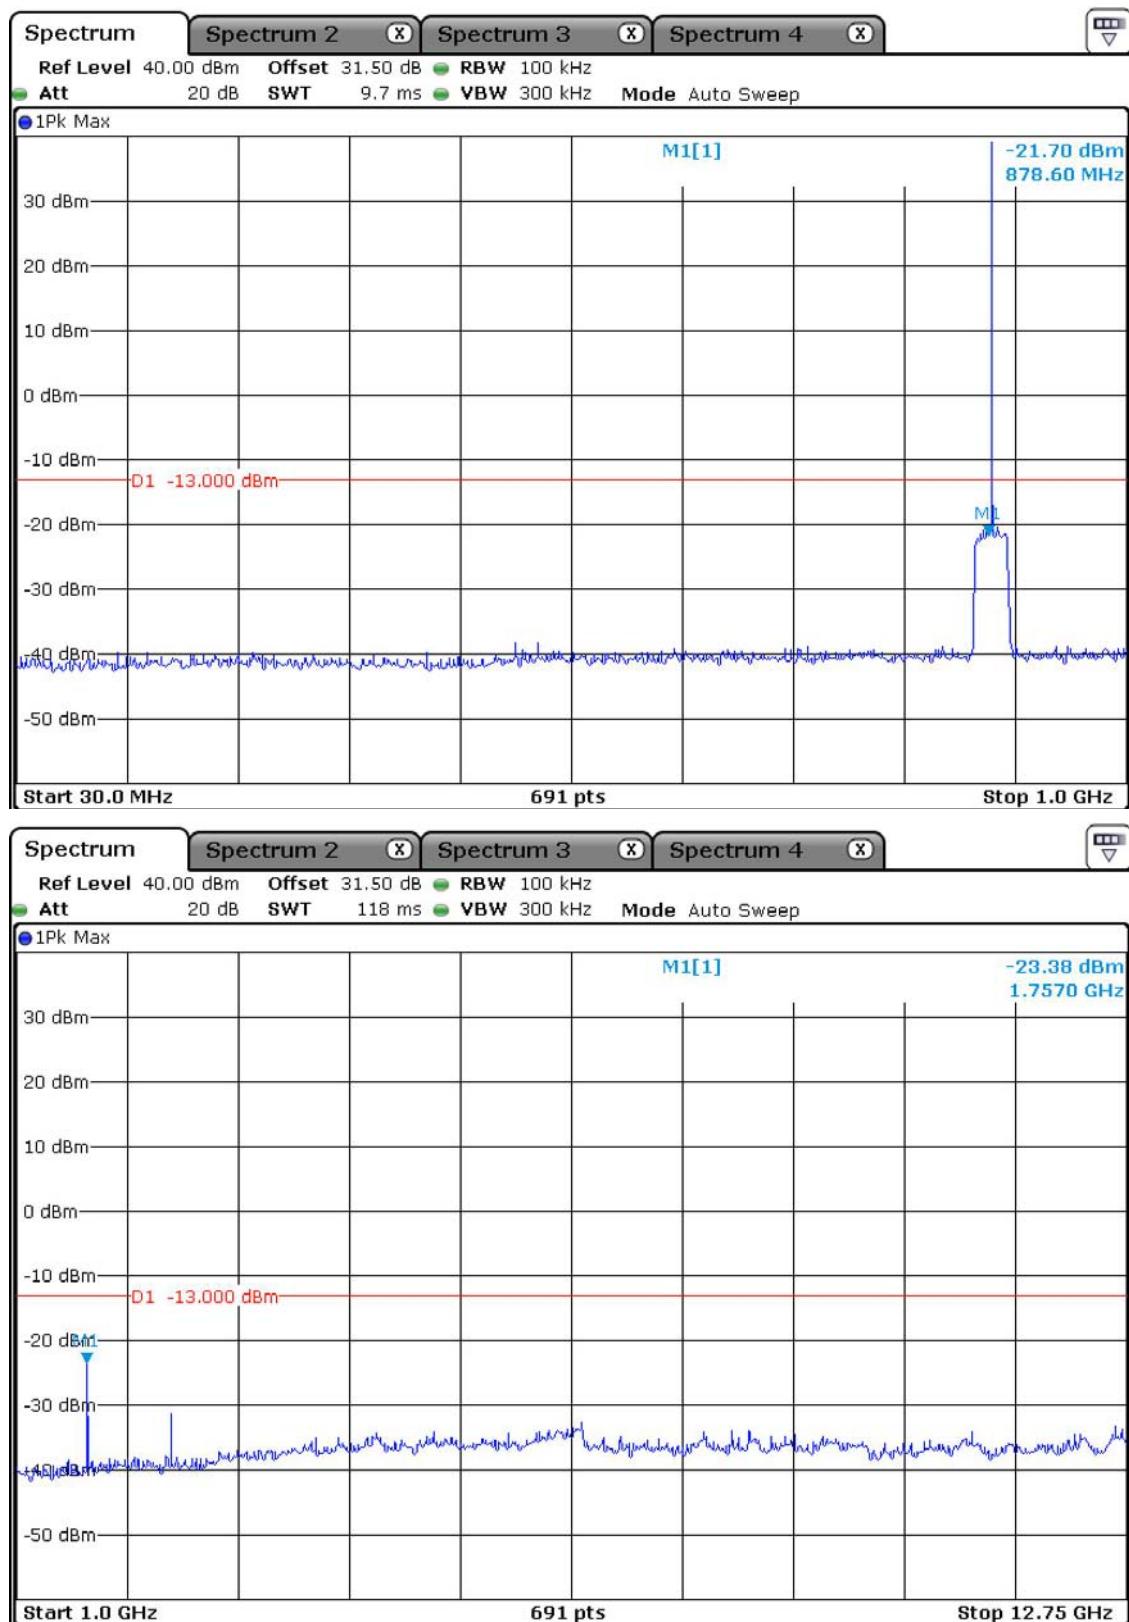


Antenna Terminal Spurious Emissions, GSM 850, High

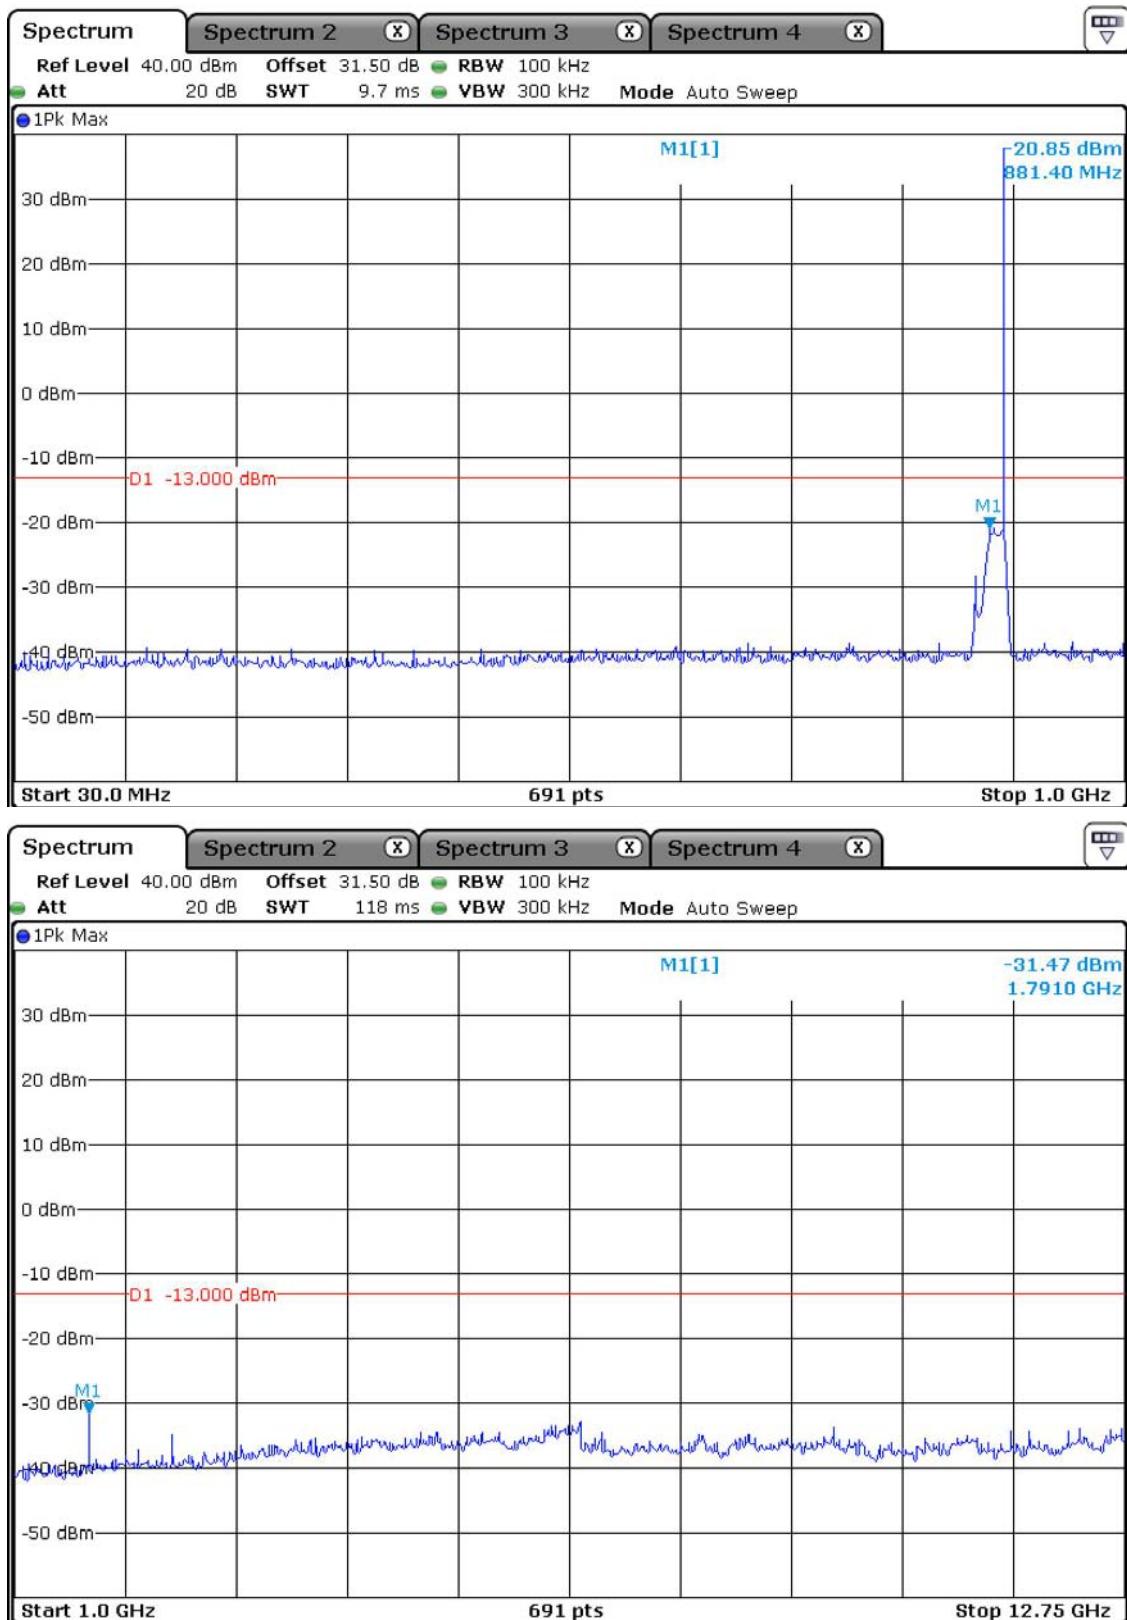


Antenna Terminal Spurious Emissions, GSM 1900, Low

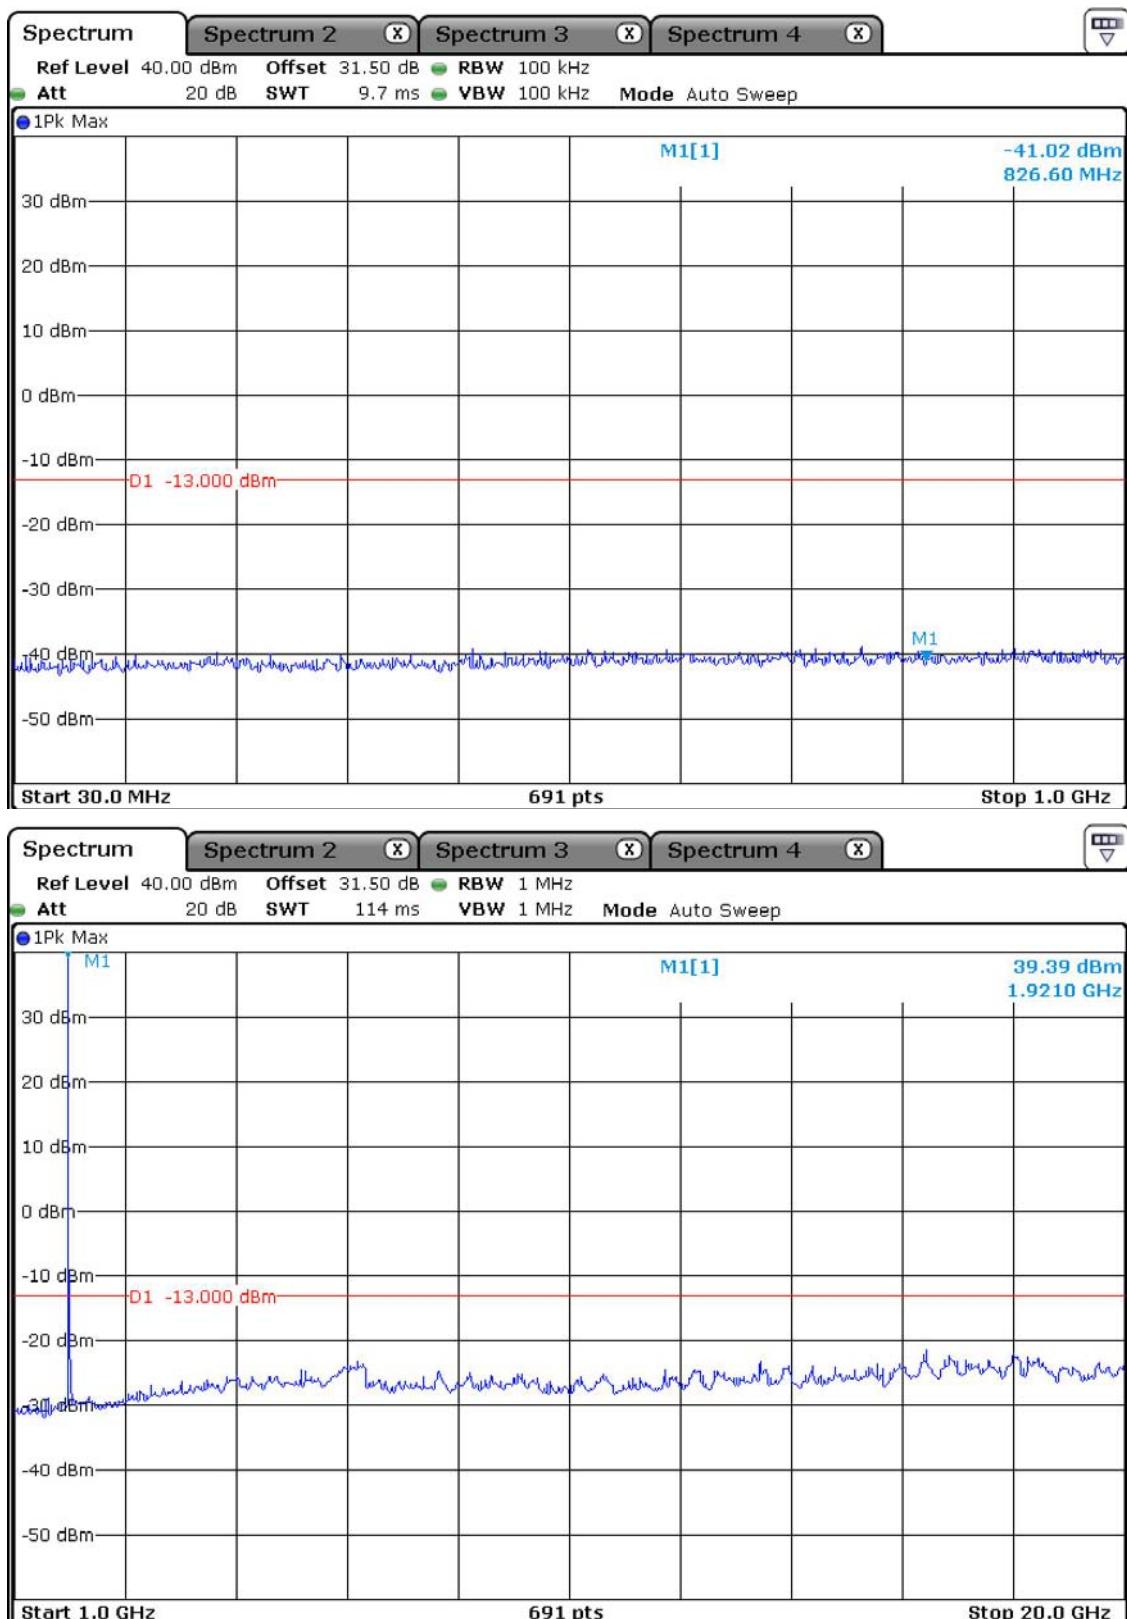


Antenna Terminal Spurious Emissions, GSM 1900, Middle

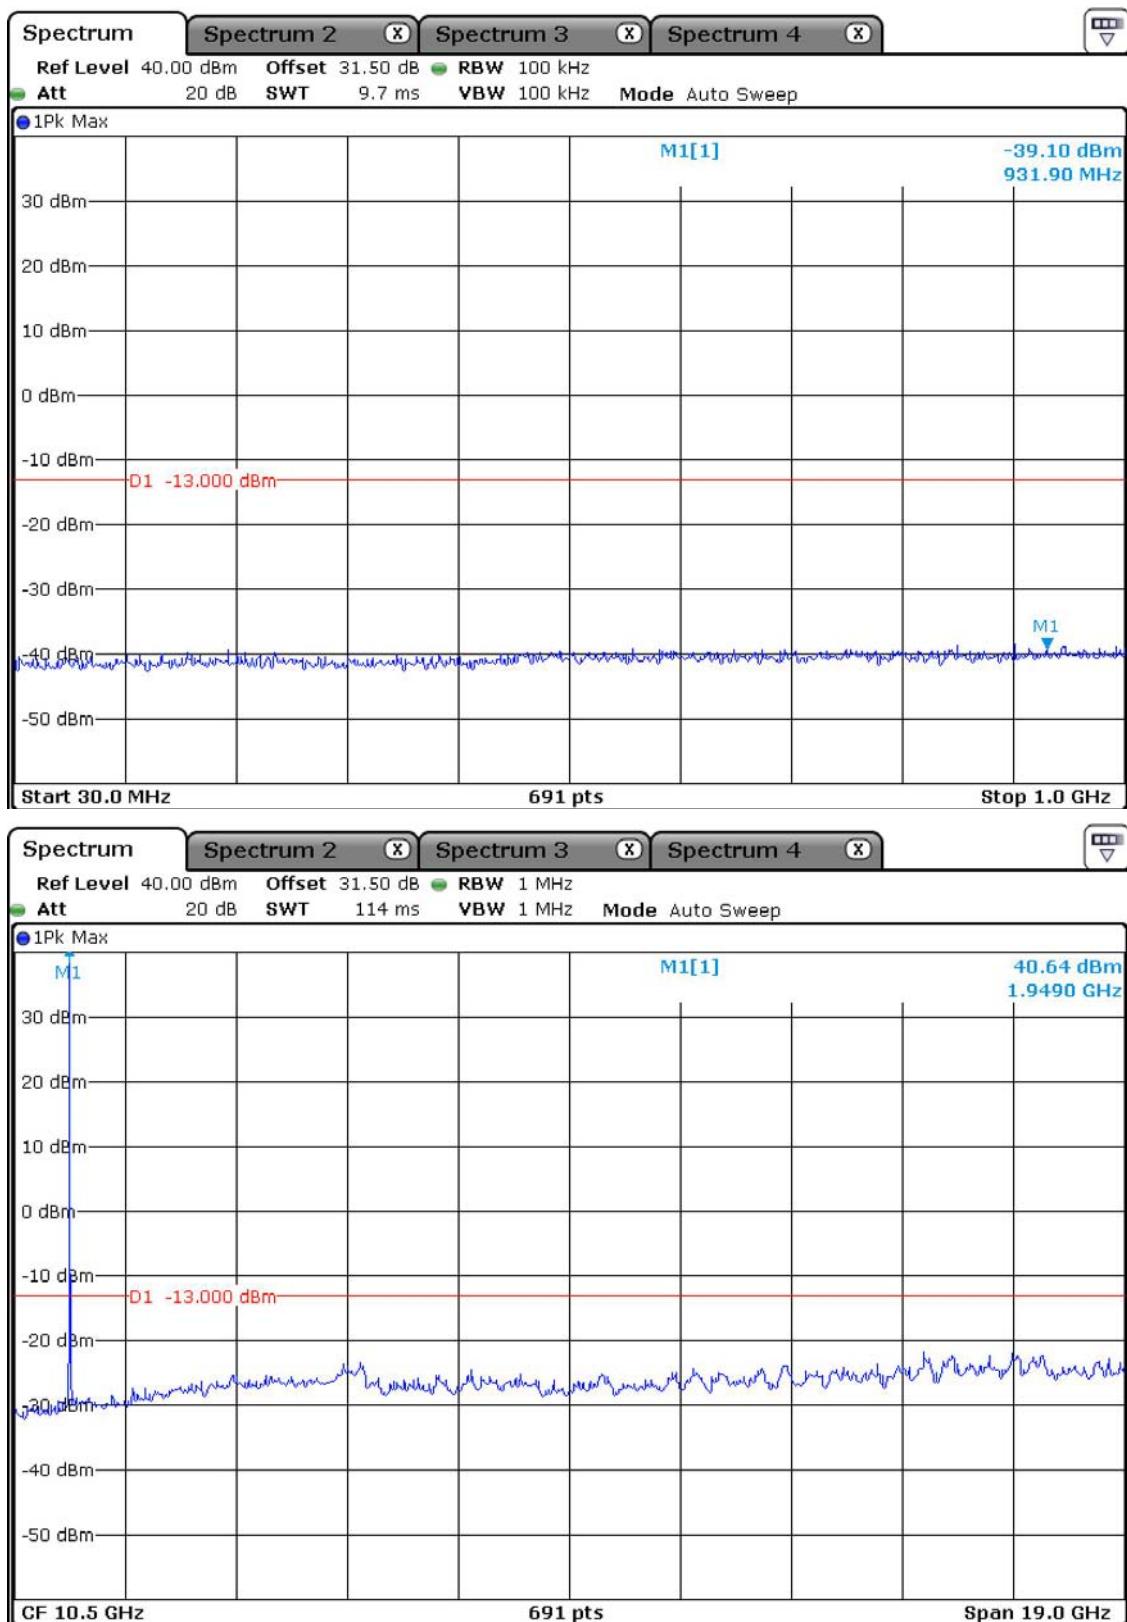


Antenna Terminal Spurious Emissions, GSM 1900, High

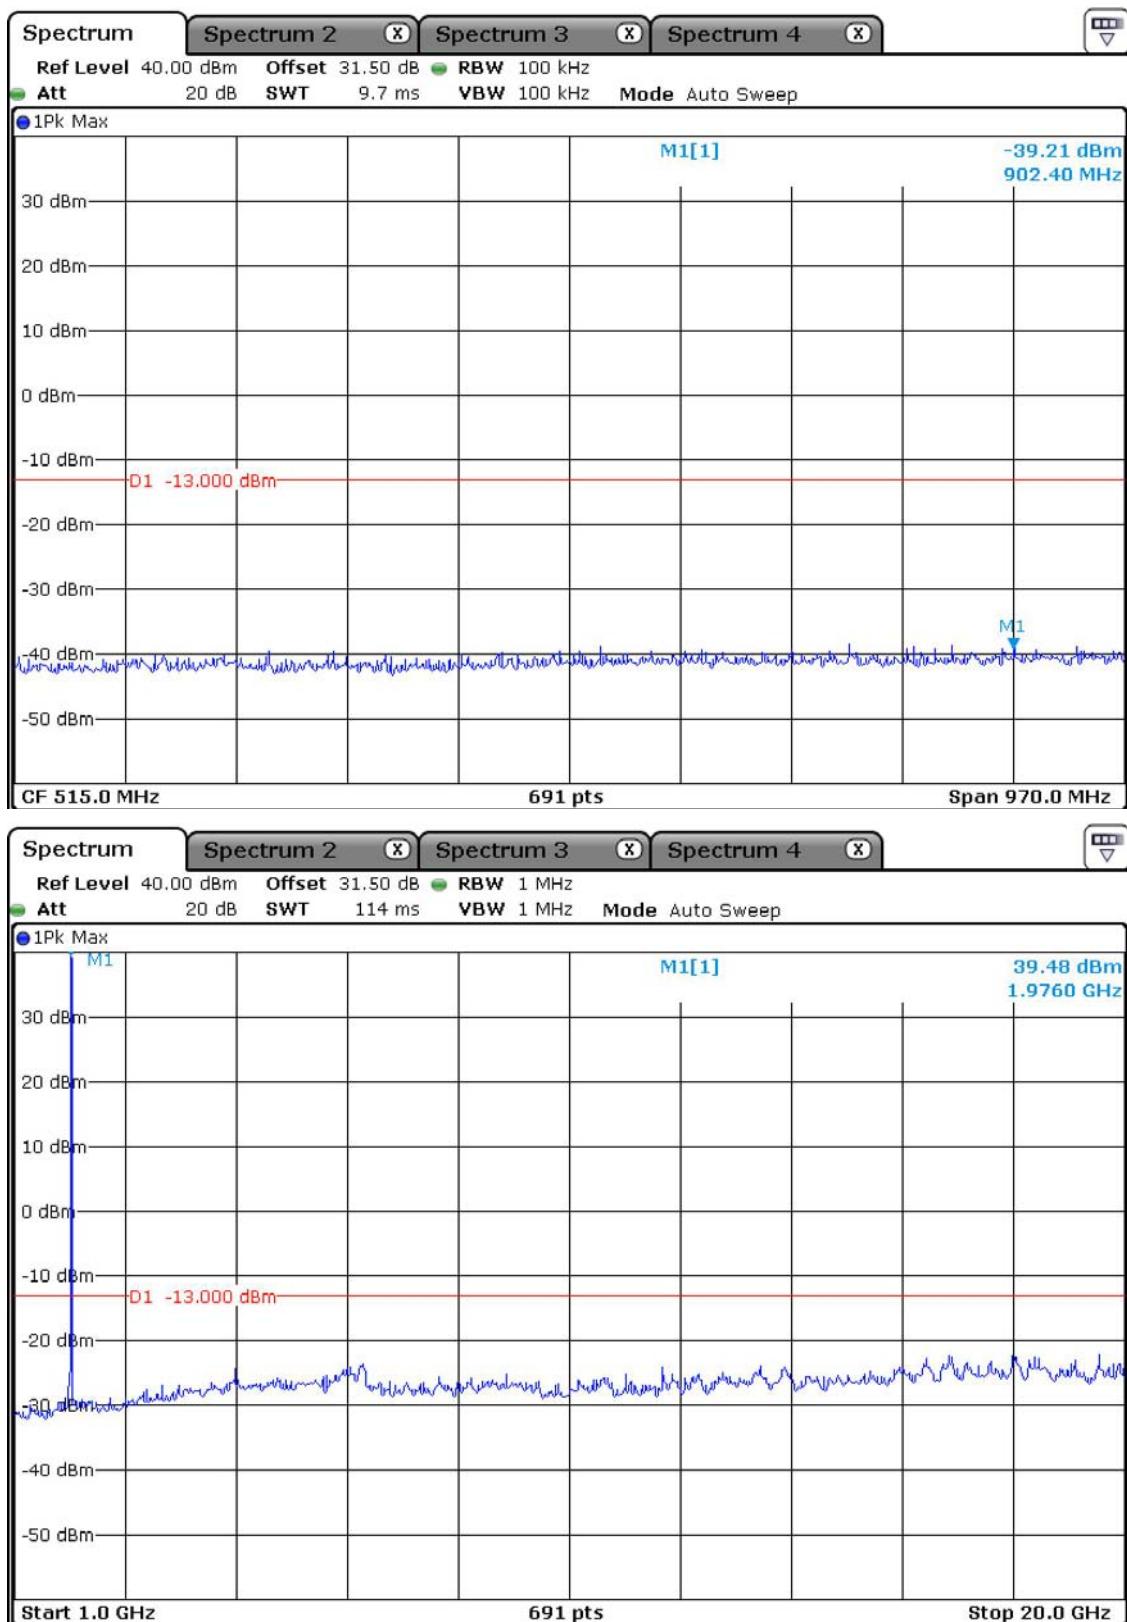


Antenna Terminal Spurious Emissions, WCDMA 850, Low

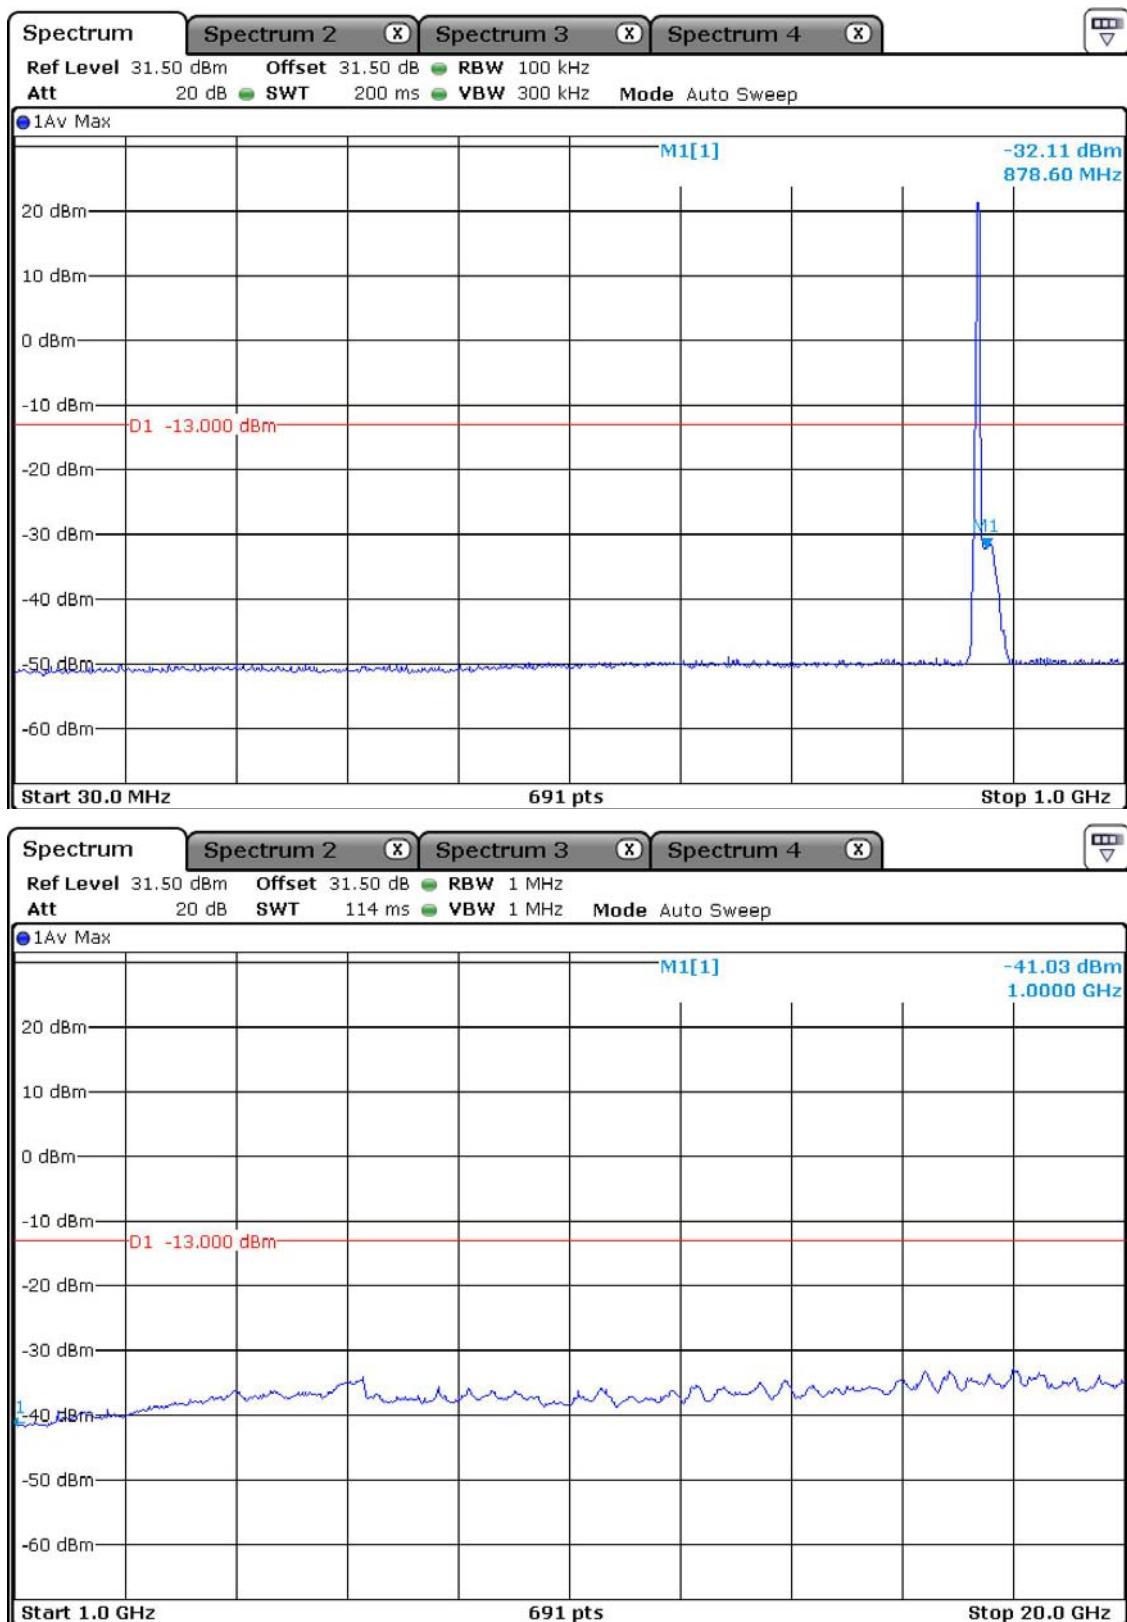


Antenna Terminal Spurious Emissions, WCDMA 850, Middle

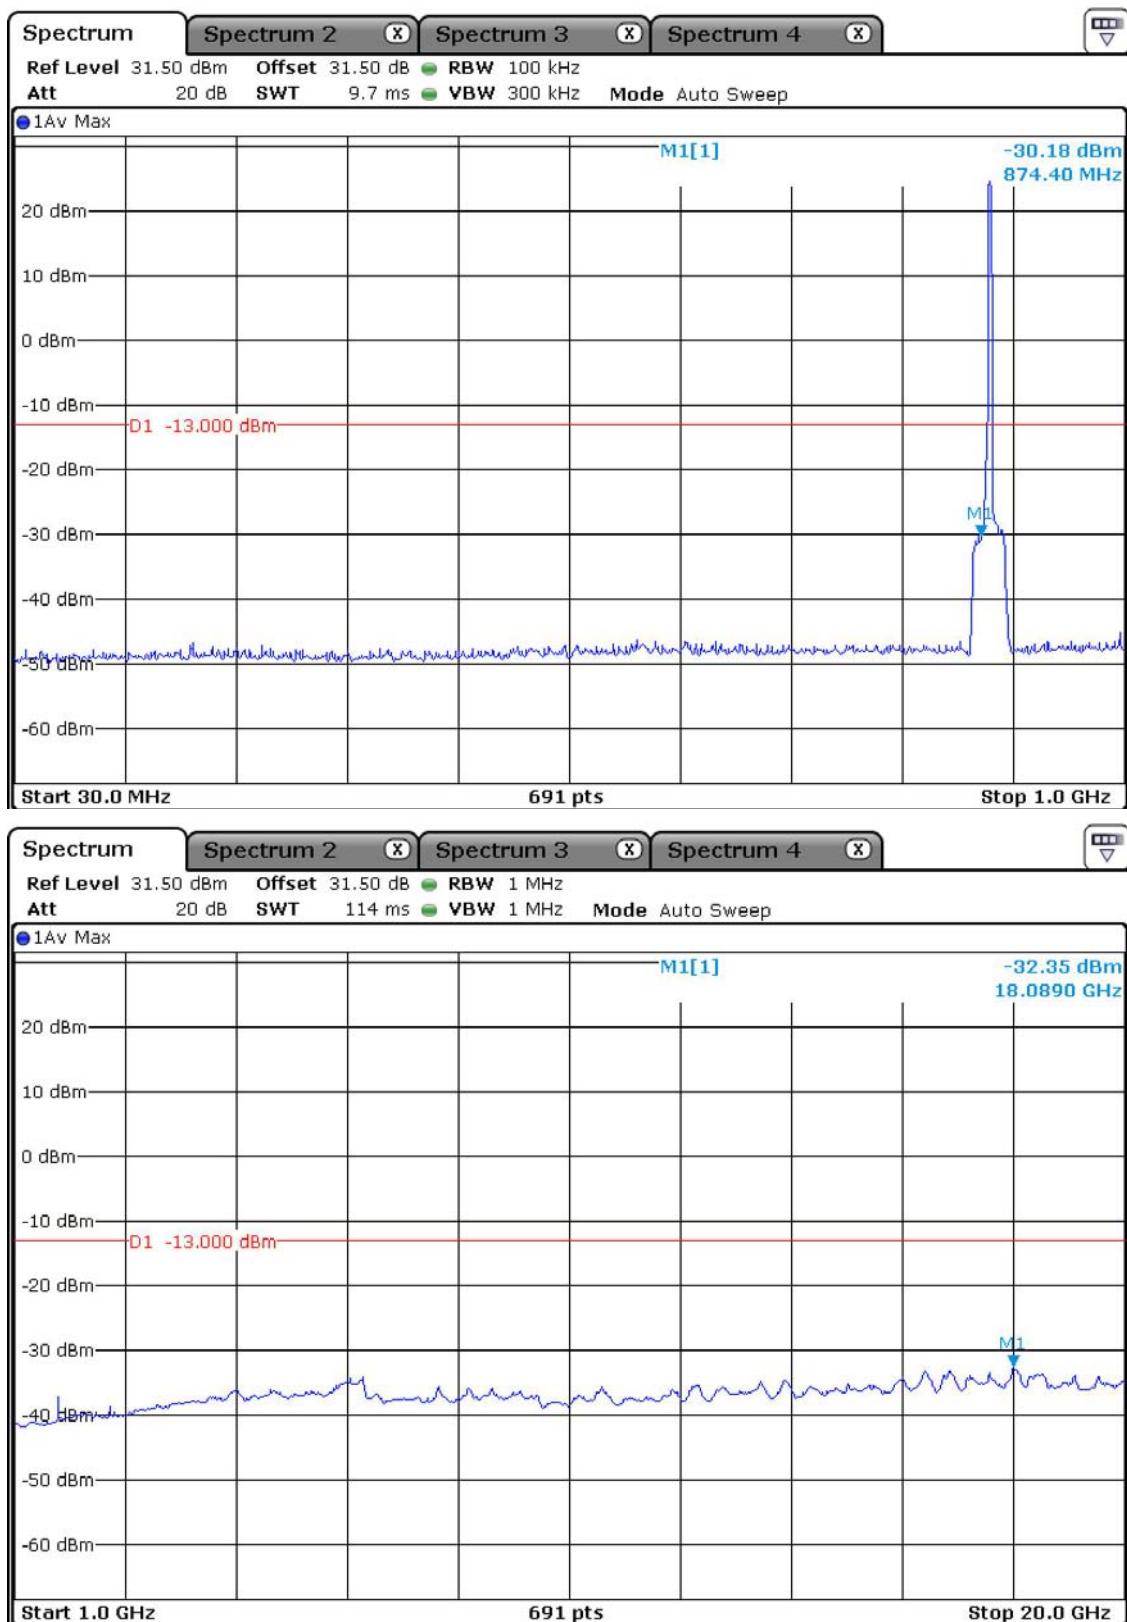


Antenna Terminal Spurious Emissions, WCDMA 850, High

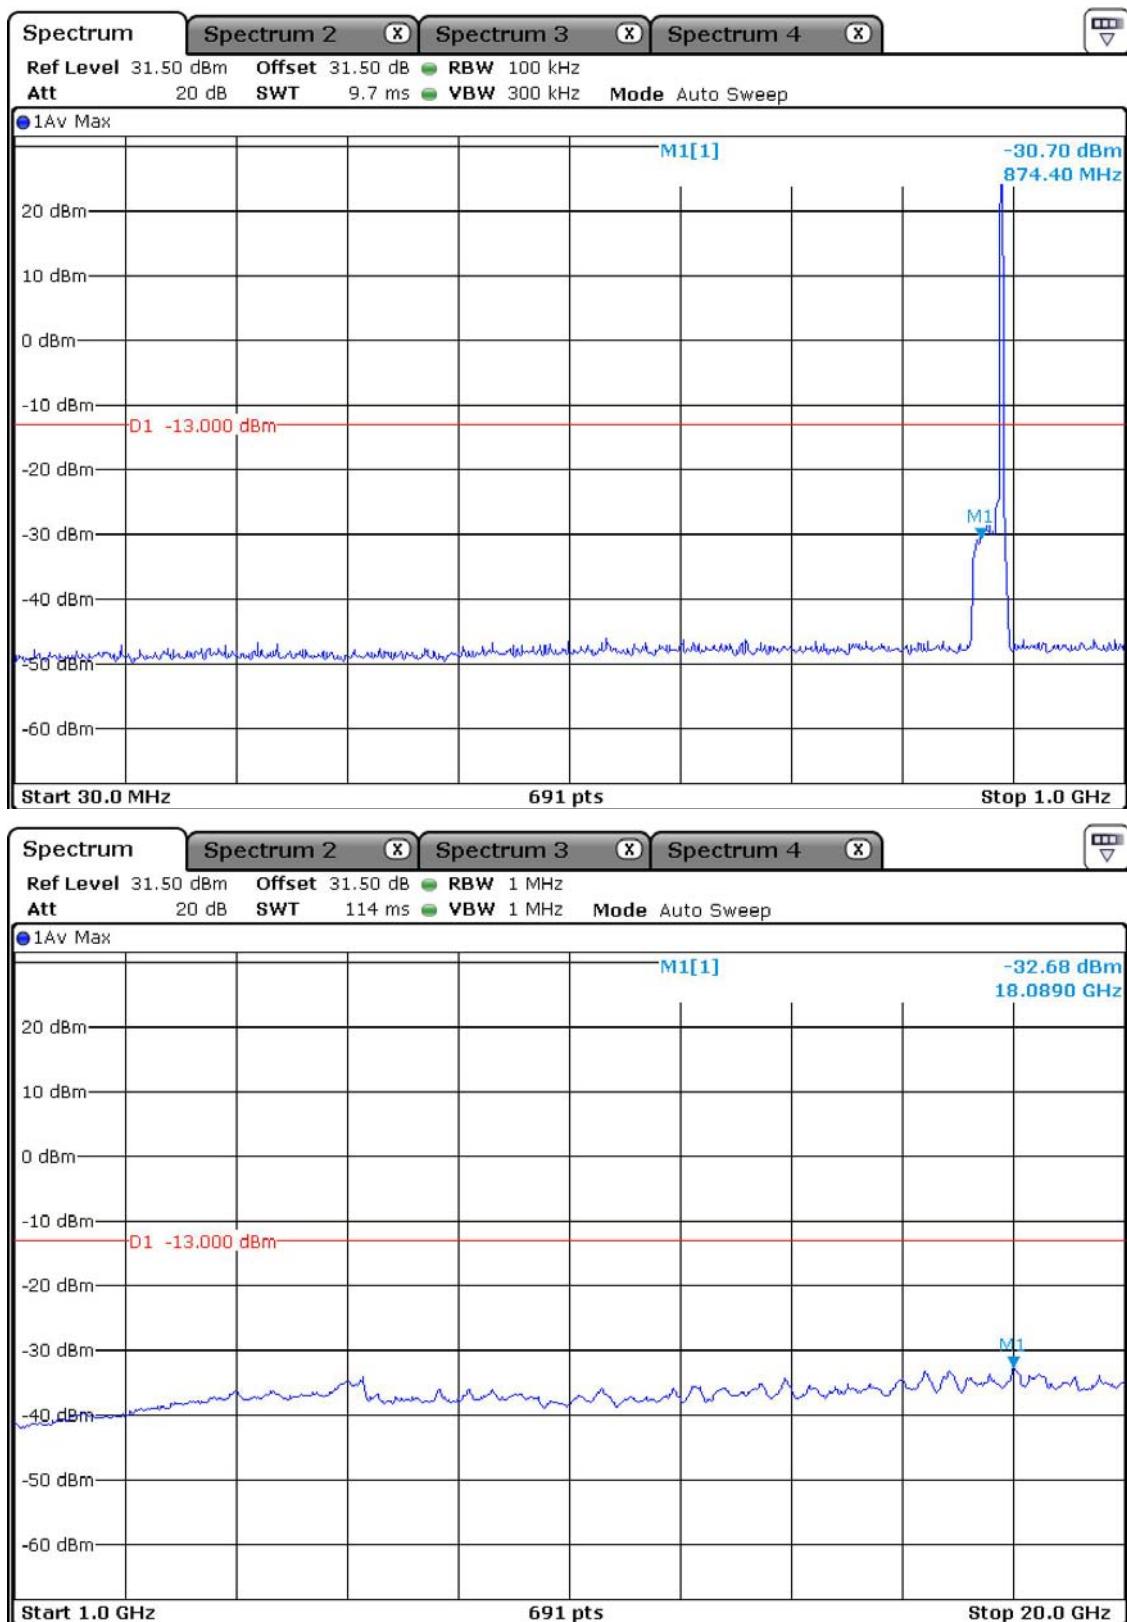


Antenna Terminal Spurious Emissions, WCDMA 1900, Low

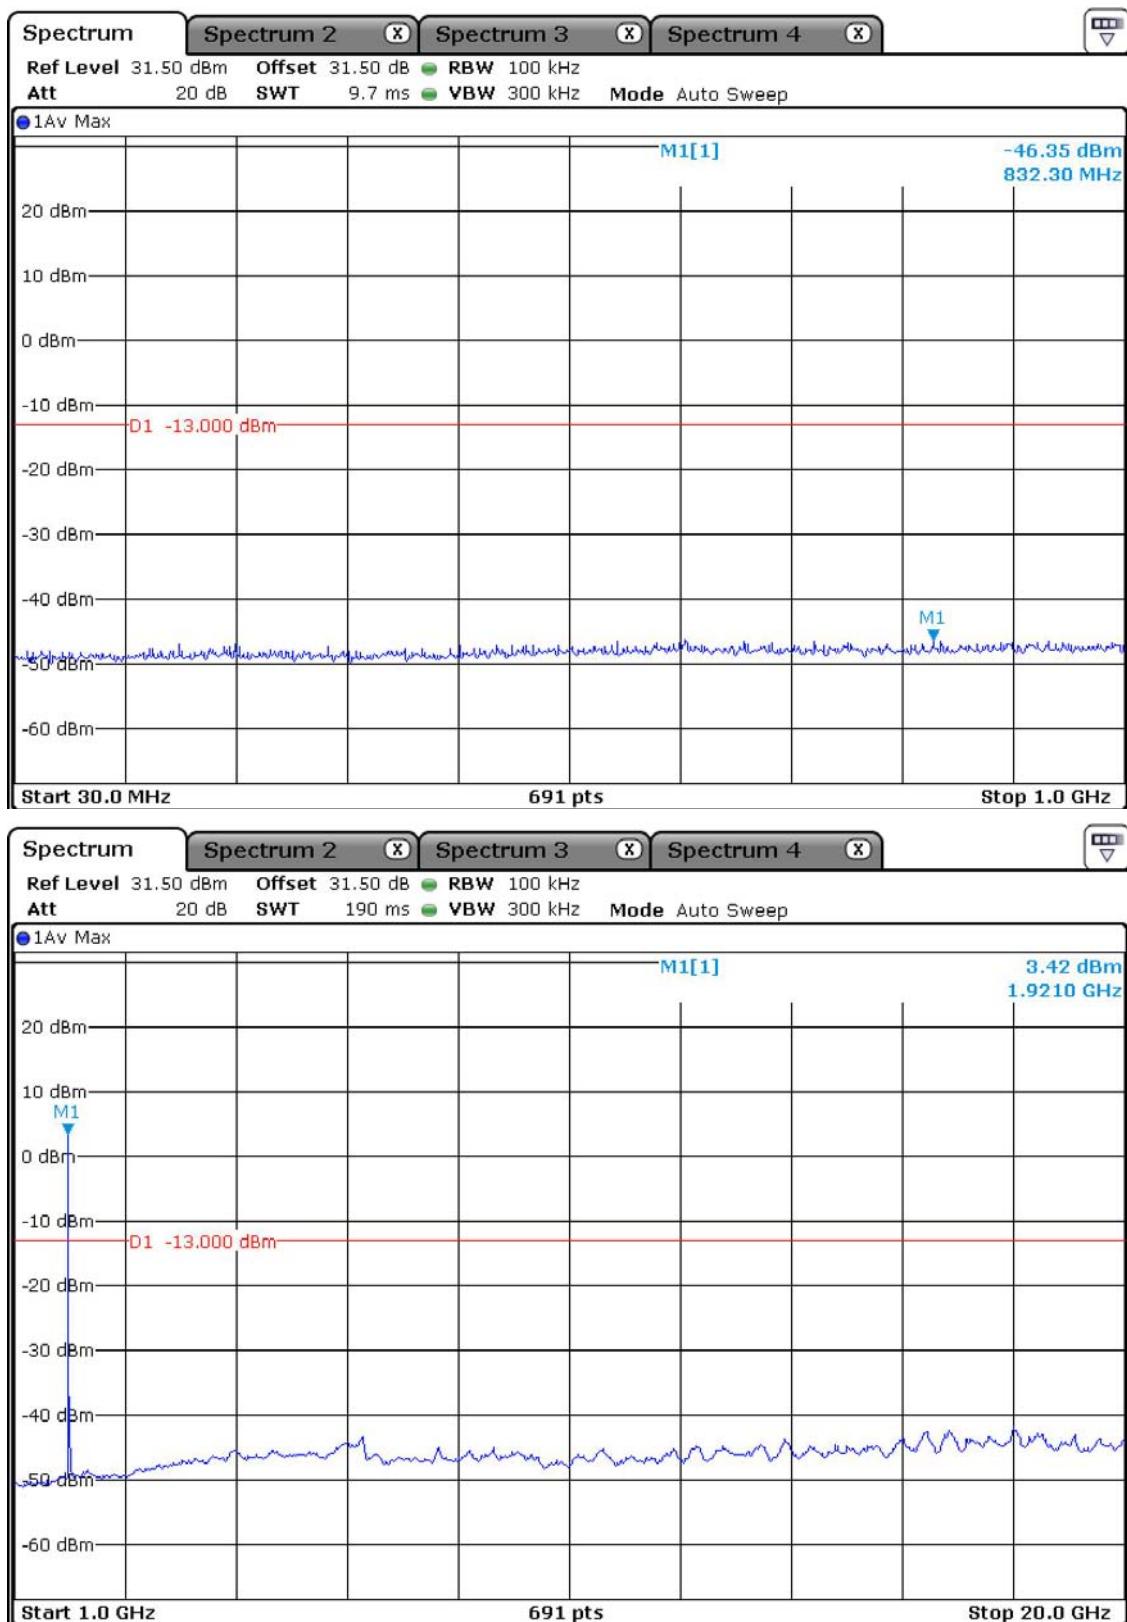

Antenna Terminal Spurious Emissions, WCDMA 1900, Middle

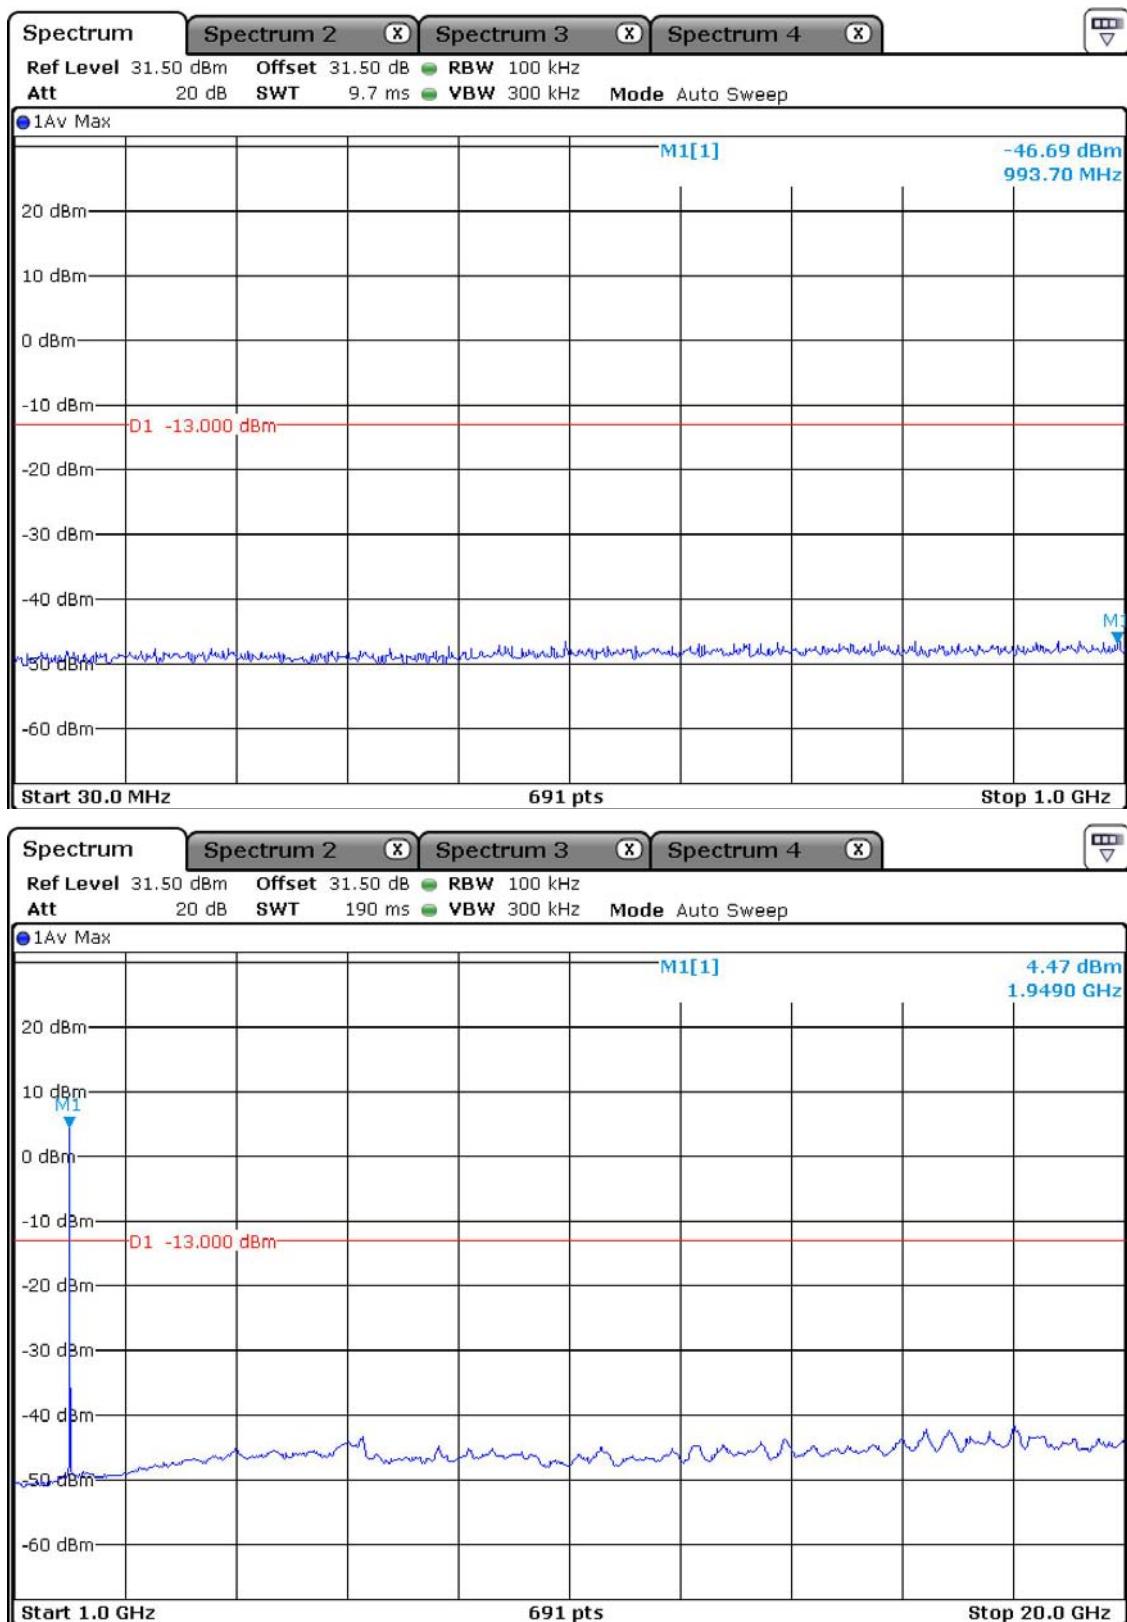

Antenna Terminal Spurious Emissions, WCDMA 1900, High

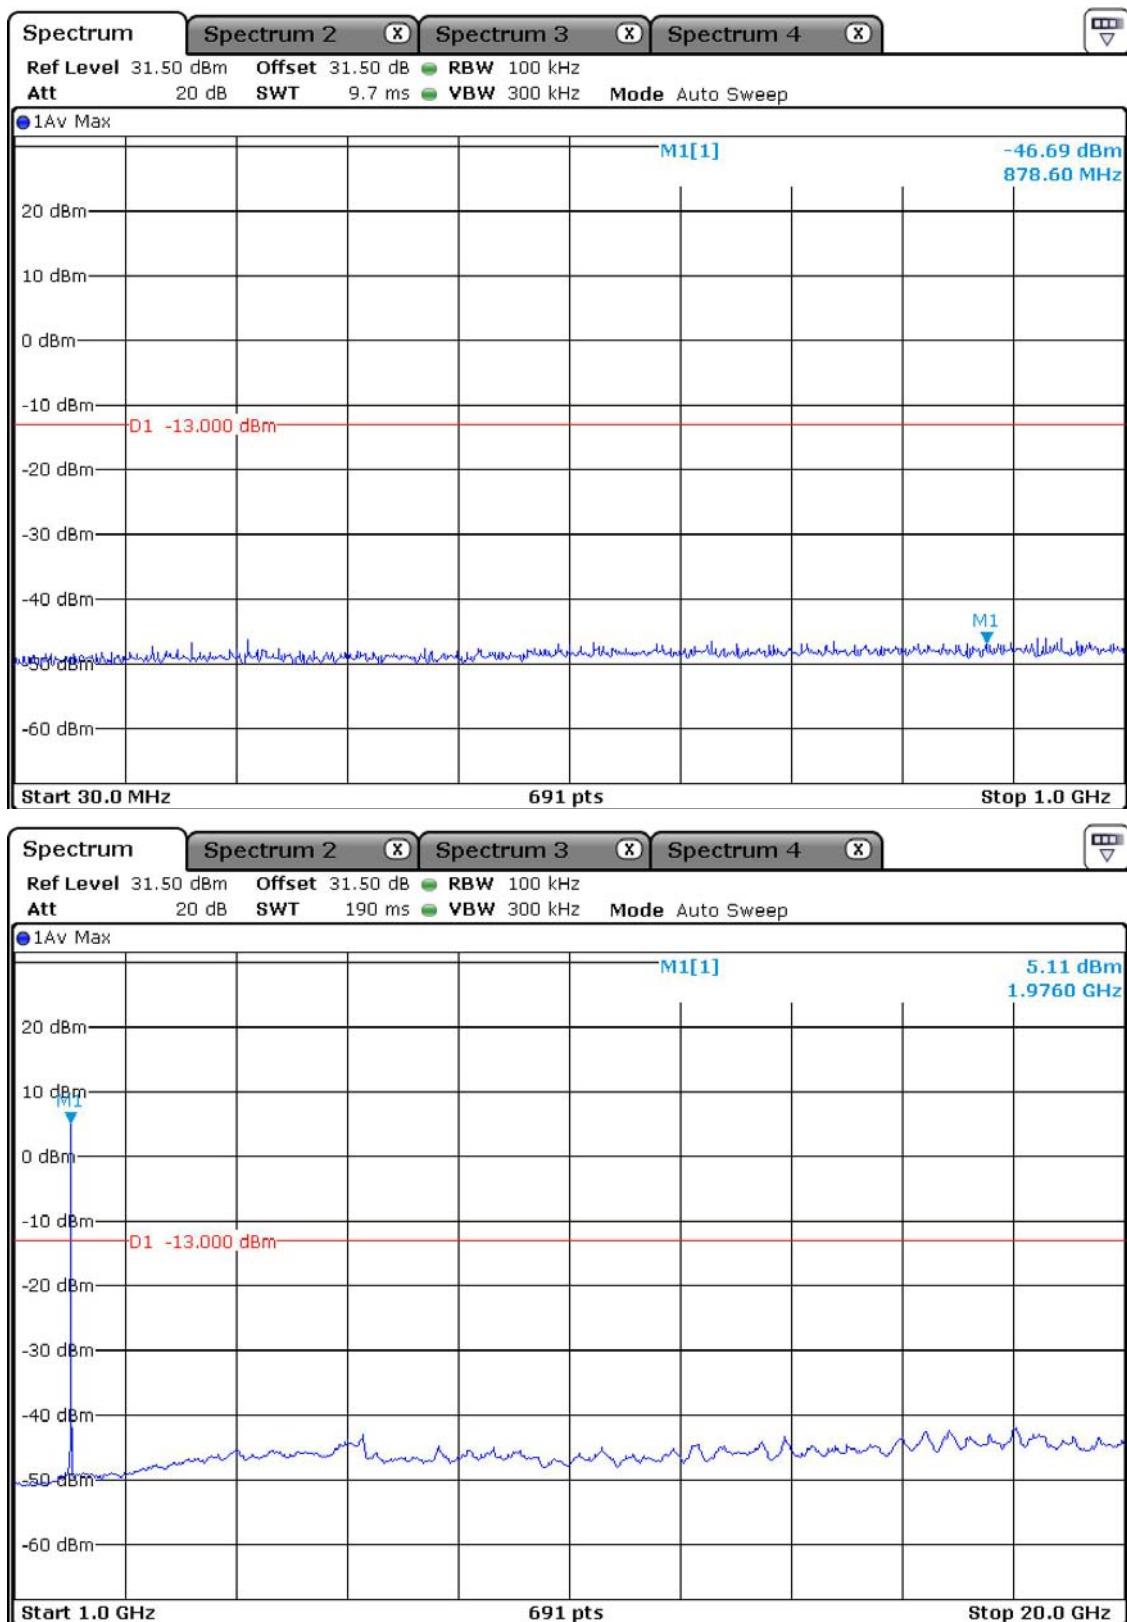

GSM 850 (Spurious Emission : Band Edge)

	Freq. Tuned (MHz)	Result (dBm)	Limit (dBm)	Magin
Low	869.4	-35.94	-13.00	22.94
High	893.6	-32.77	-13.00	29.77

GSM 1900 (Spurious Emission : Band Edge)

	Freq. Tuned (MHz)	Result (dBm)	Limit (dBm)	Magin
Low	1930.4	-33.79	-13.00	20.79
High	1989.6	-32.68	-13.00	19.68


WCDMA 850 (Spurious Emission : Band Edge)

	Freq. Tuned (MHz)	Result (dBm)	Limit (dBm)	Magin
Low	871.4	-26.82	-13.00	13.82
High	891.6	-29.88	-13.00	16.88


WCDMA 1900 (Spurious Emission : Band Edge)

	Freq. Tuned (MHz)	Result (dBm)	Limit (dBm)	Magin
Low	1932.4	-29.44	-13.00	16.44
High	1987.4	-30.24	-13.00	17.24


Band Edge Emissions, GSM 850, Low

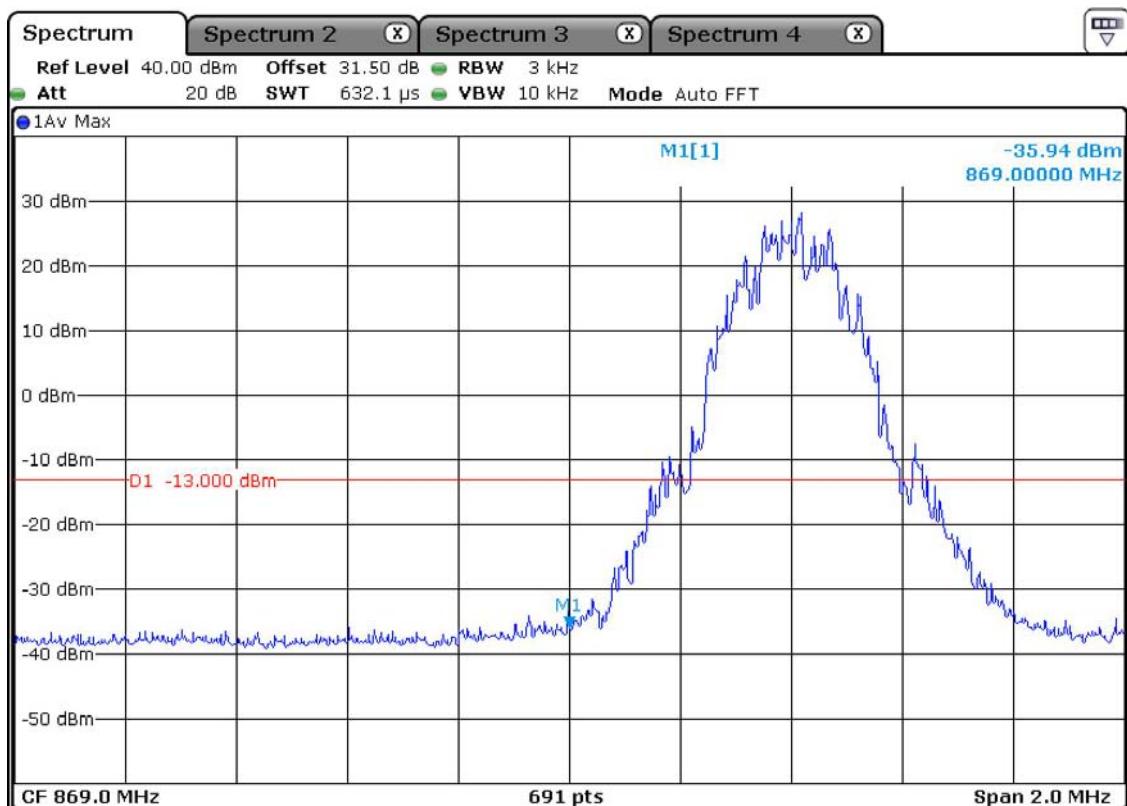


Band Edge Emissions, GSM 850, High

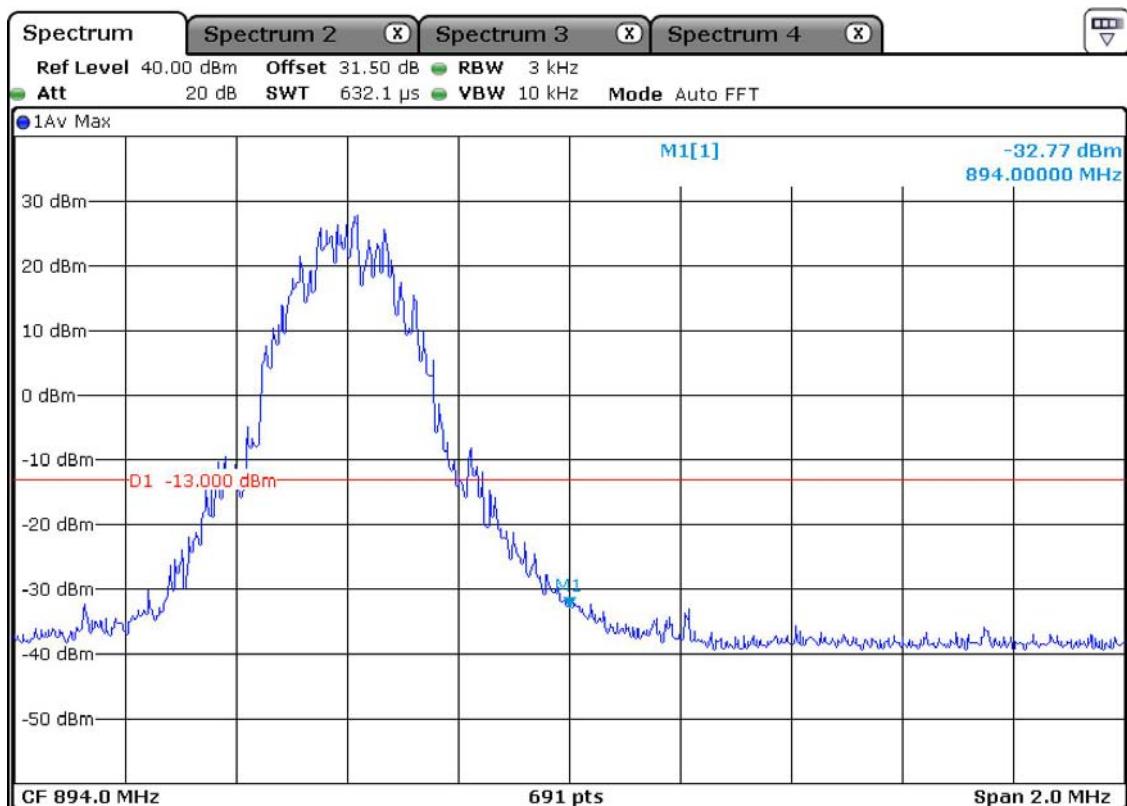


Band Edge Emissions, GSM 1900, Low

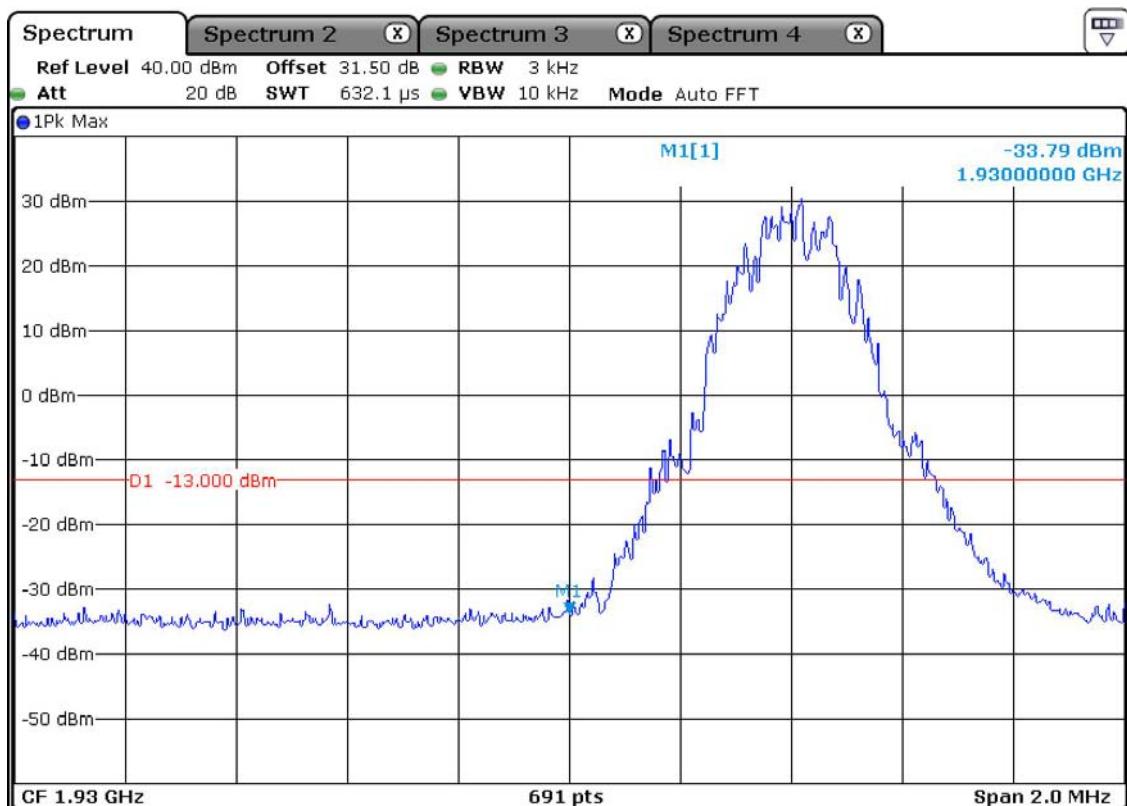


Band Edge Emissions, GSM 1900, High

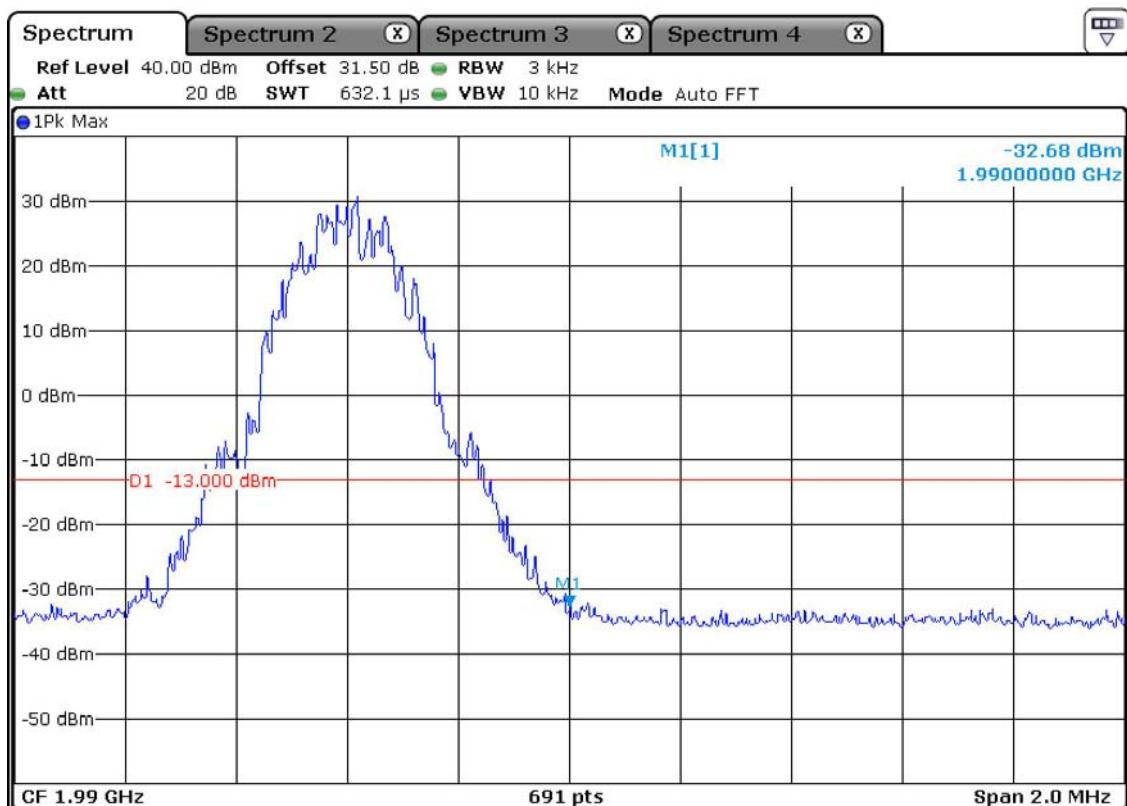


Band Edge Emissions, WCDMA 850, Low

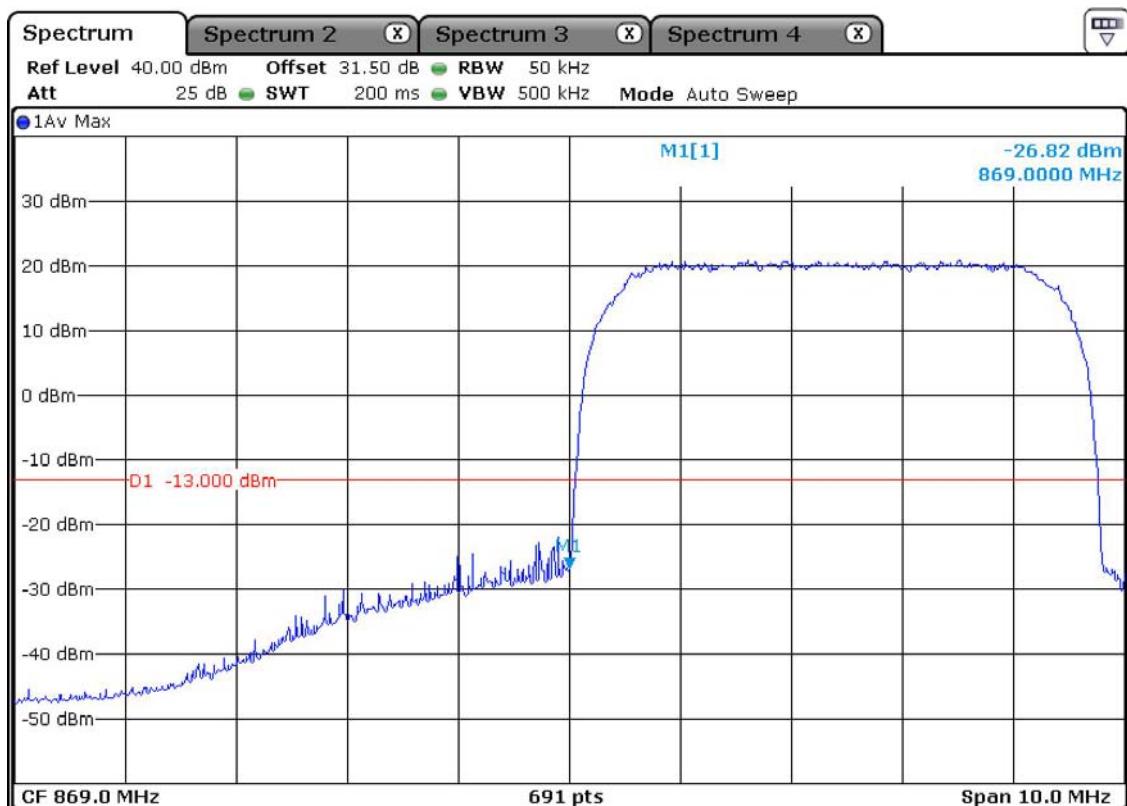


Band Edge Emissions, WCDMA 850, High

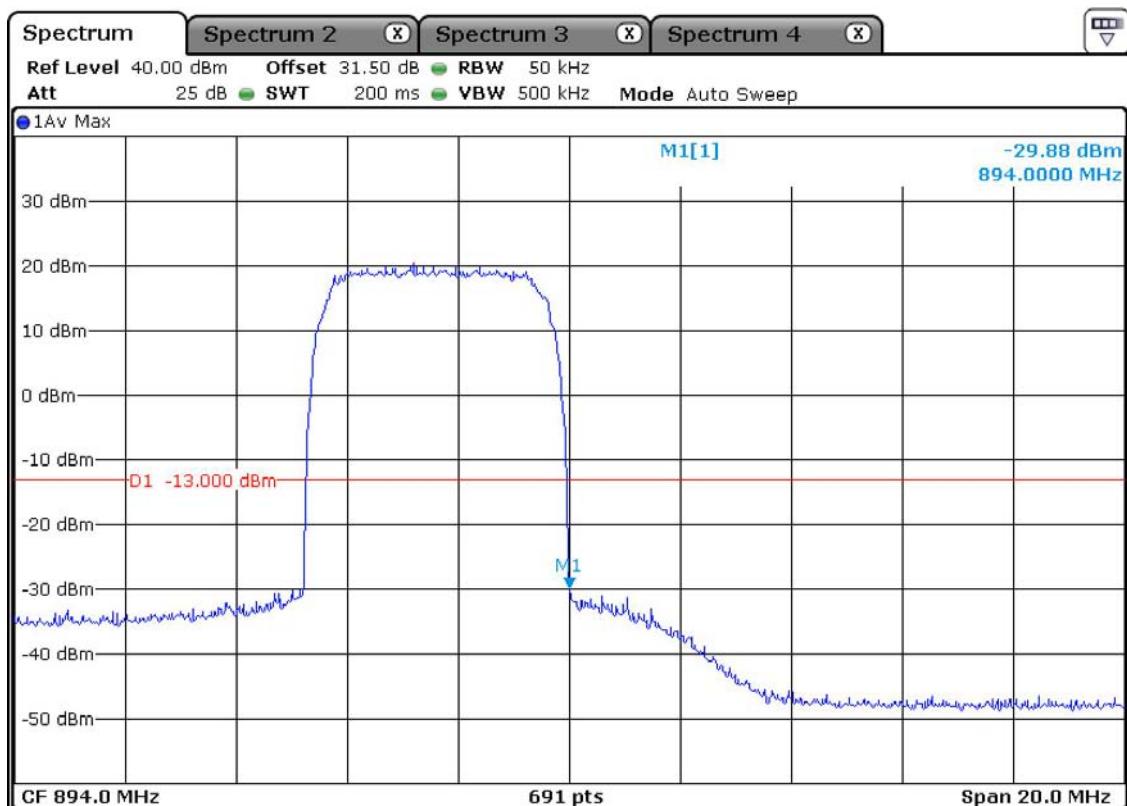

Band Edge Emissions, WCDMA 1900, Low

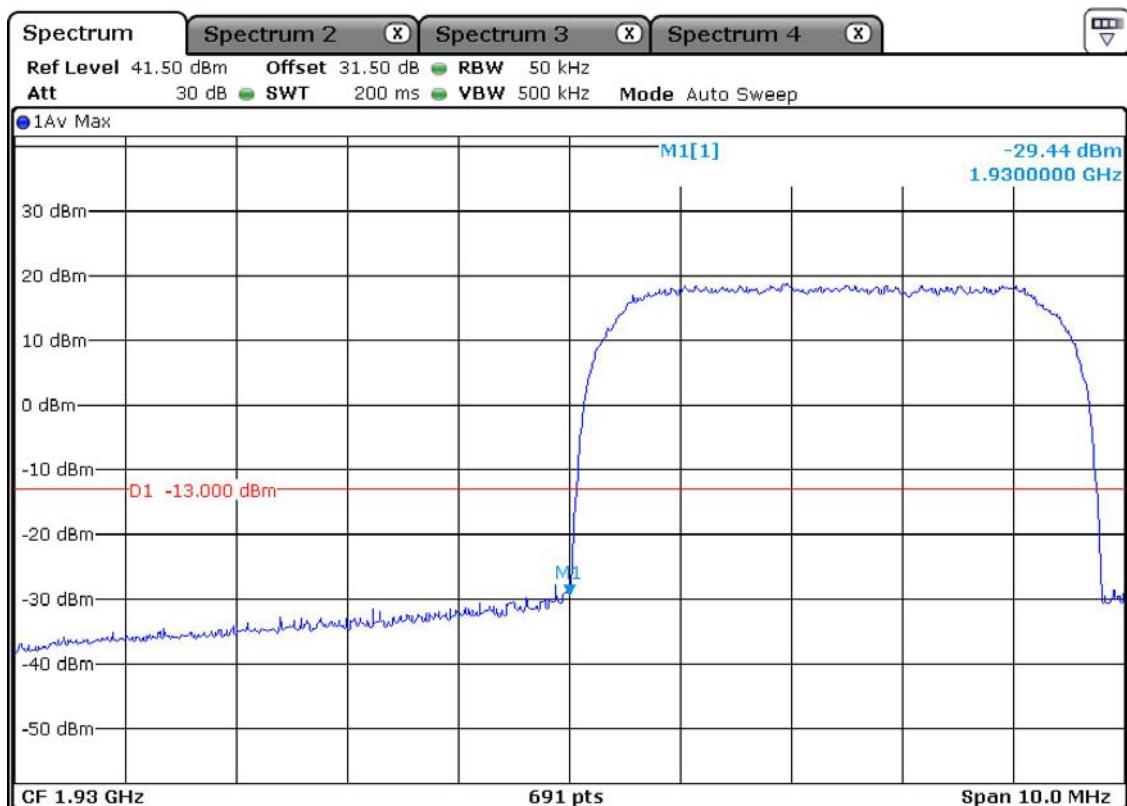

Band Edge Emissions, WCDMA 1900, High

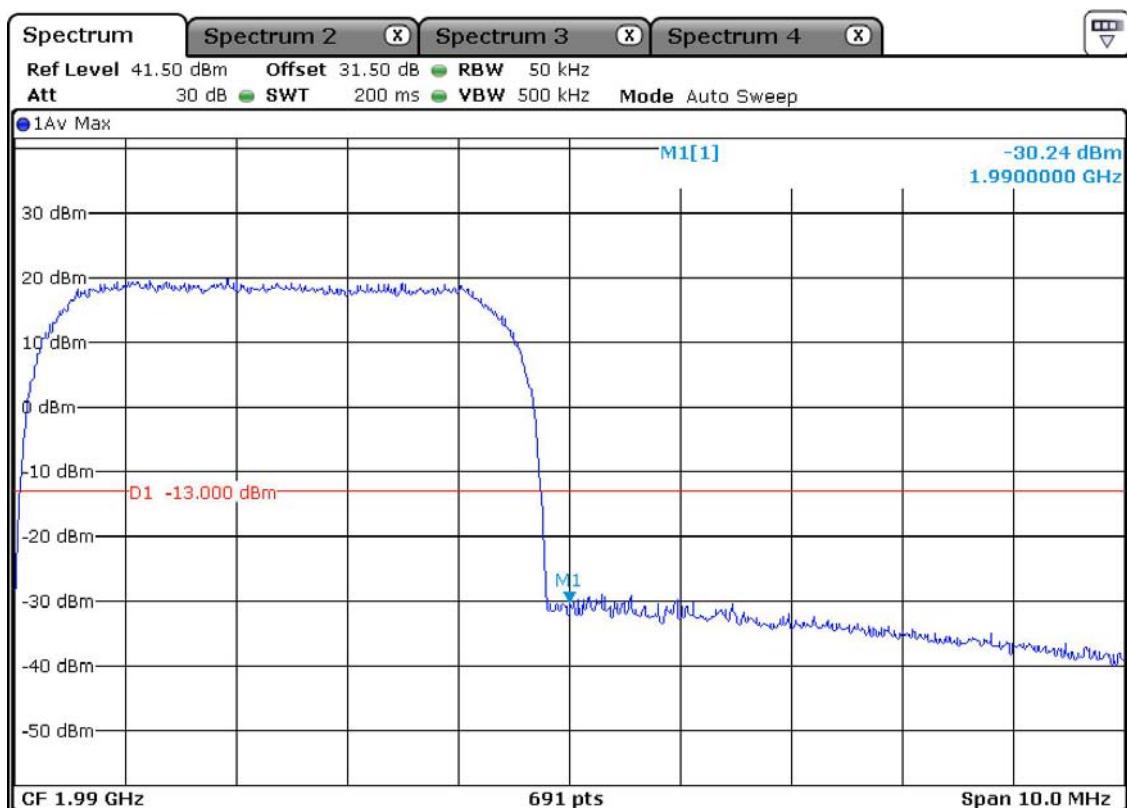

3.2.4 Intermodulation

1. Requirement



the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The limit of emission equal to -13 dBm..



2. Test Procedure



Two RF signals set as inputs. The frequencies of both RF signals shall be within the repeater's operating band. The spacing between both RF signals shall be the minimum possible spacing applied in a network. The level of both RF input signals shall be increased, until the maximum rated output power per channel, as declared by the manufacturer, is reached.



3. Test Results : Complies

Refer to the following Graphs.

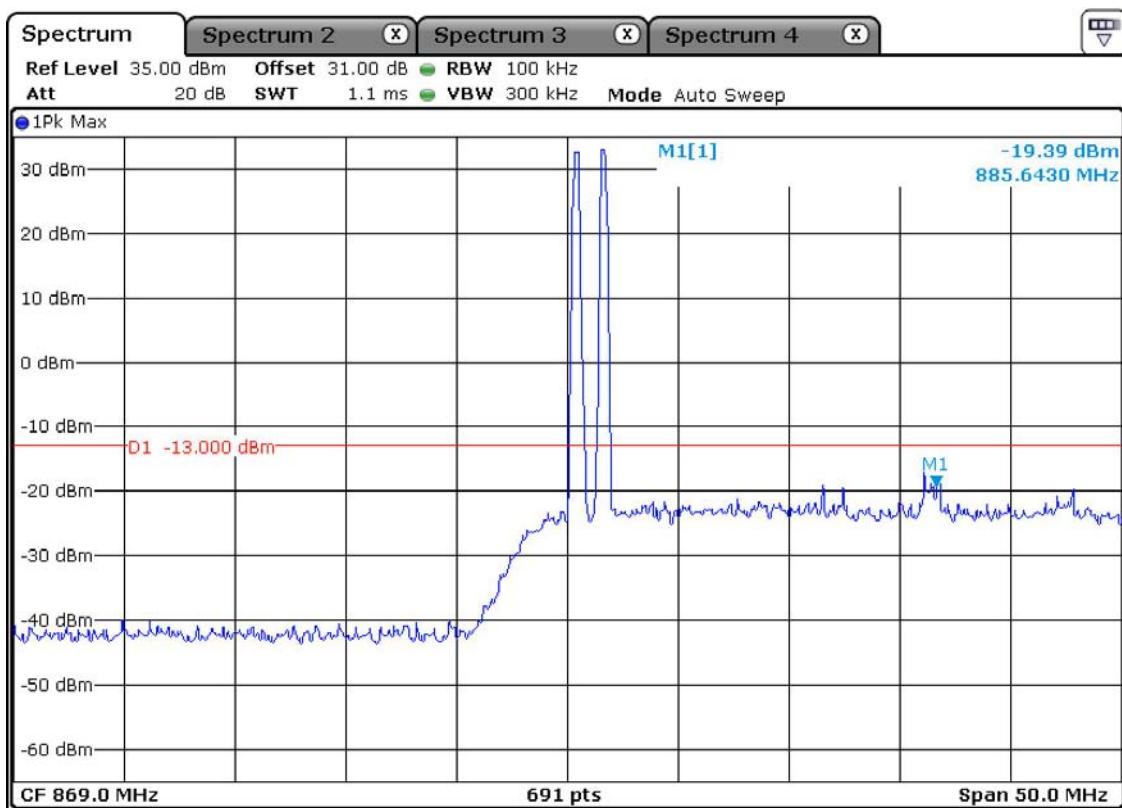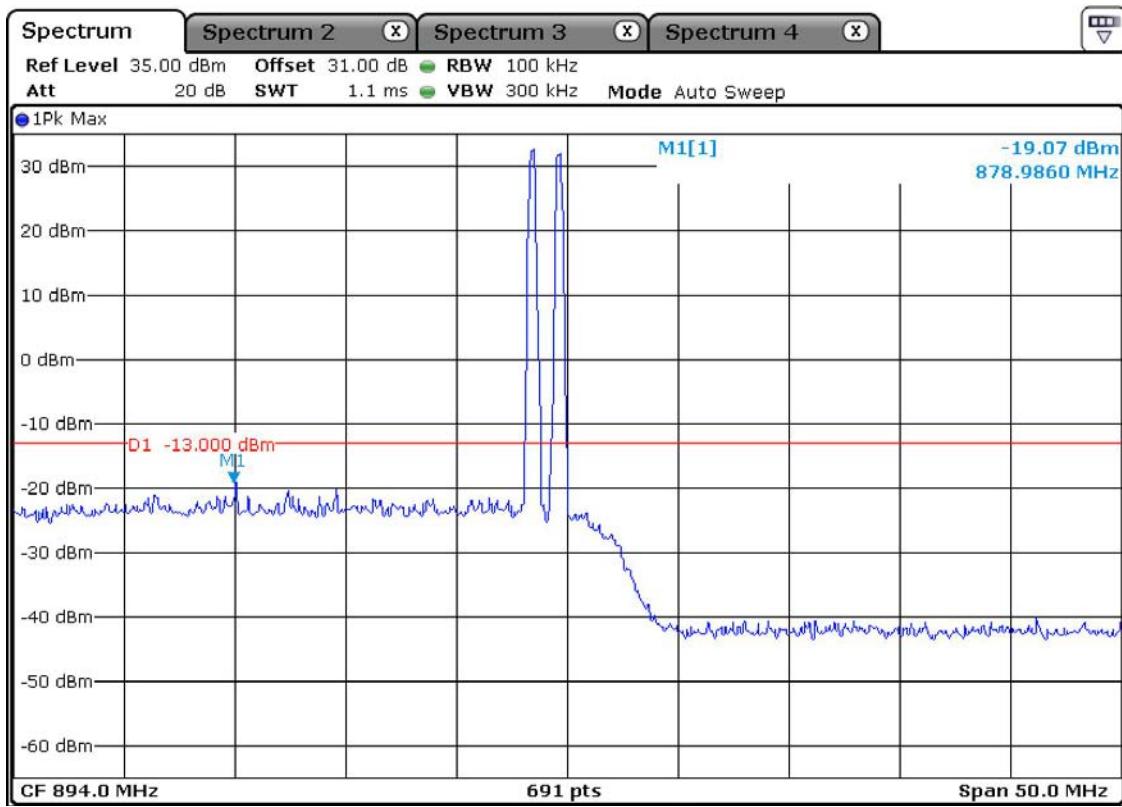GSM 850 LowGSM 850 High

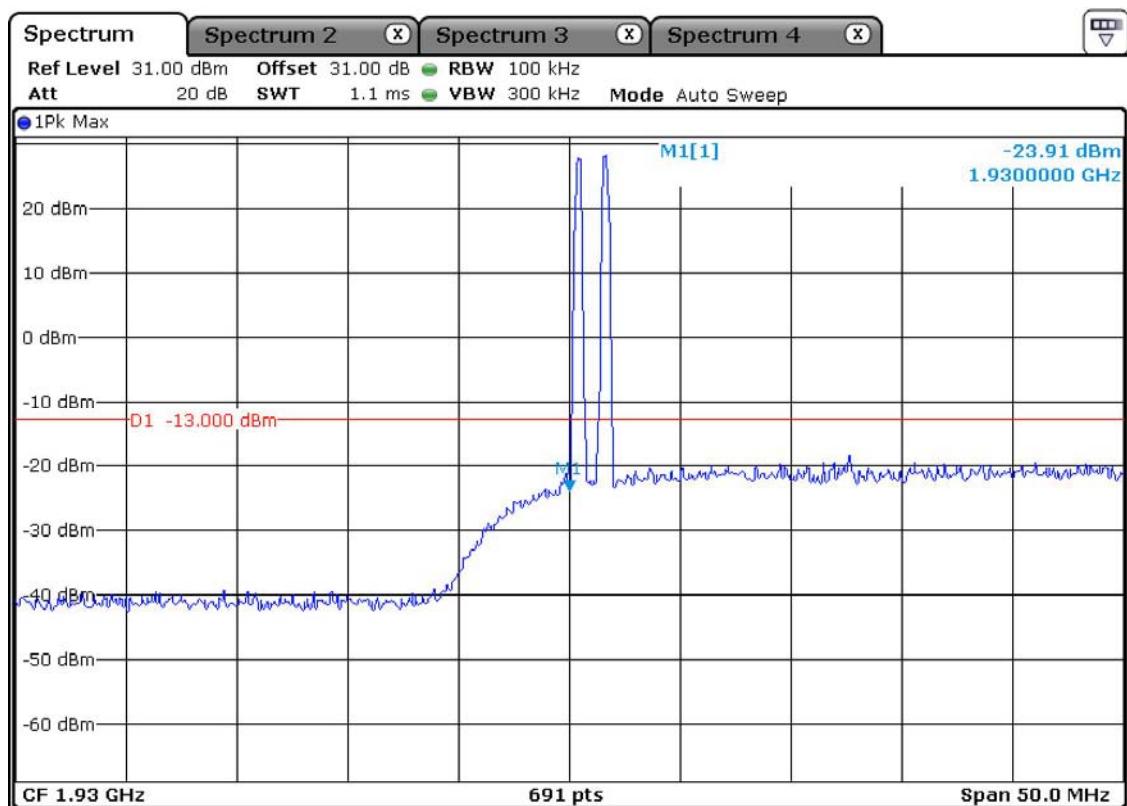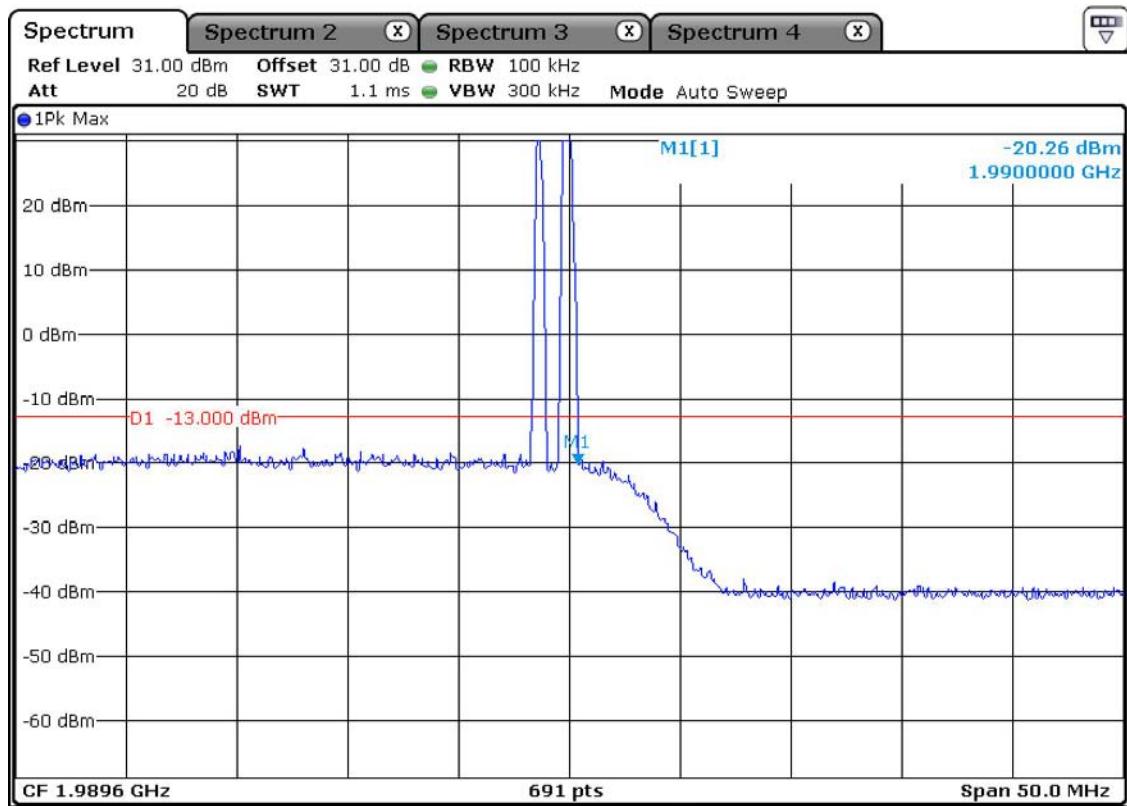GSM 1900 Low**GSM 1900 High**

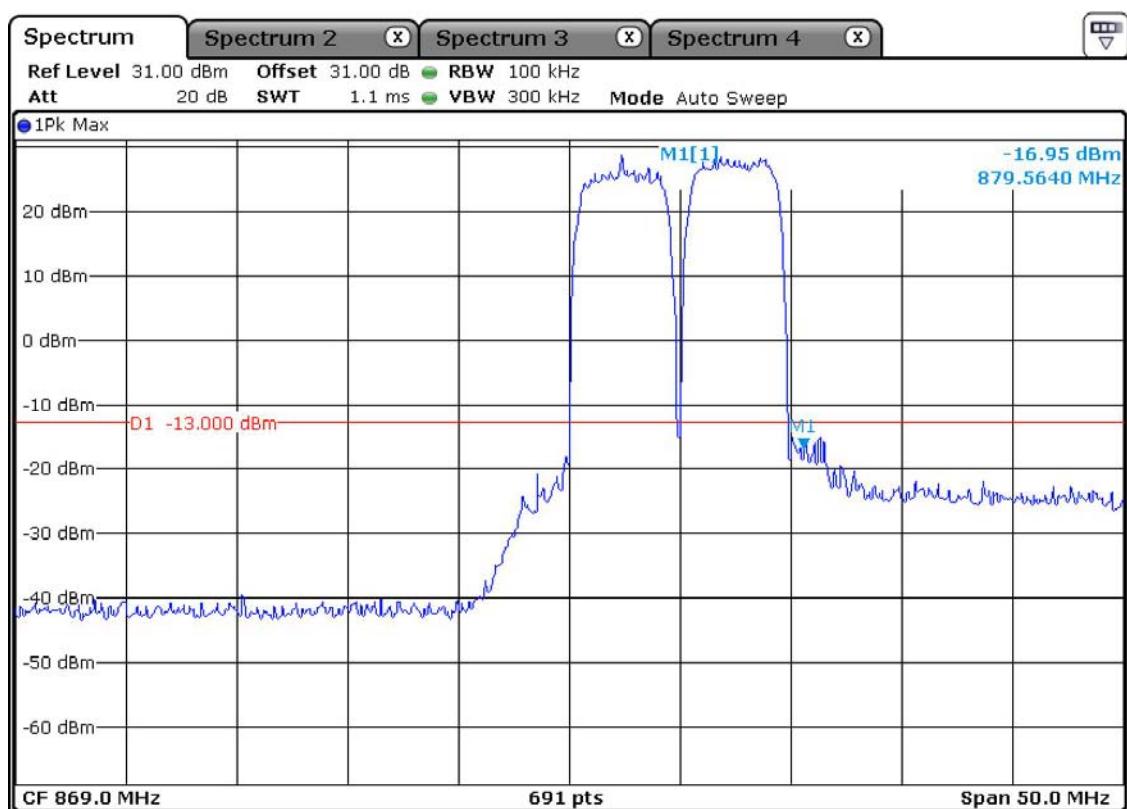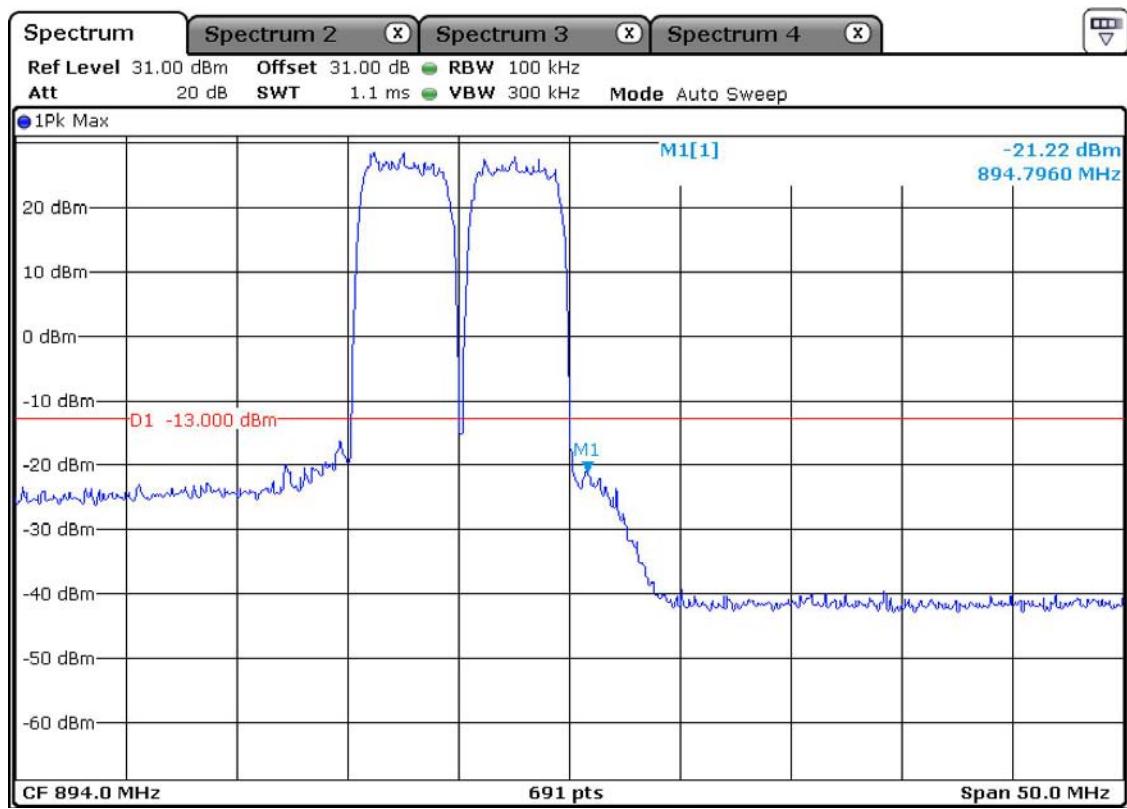WCDMA 850 Low**WCDMA 850 High**

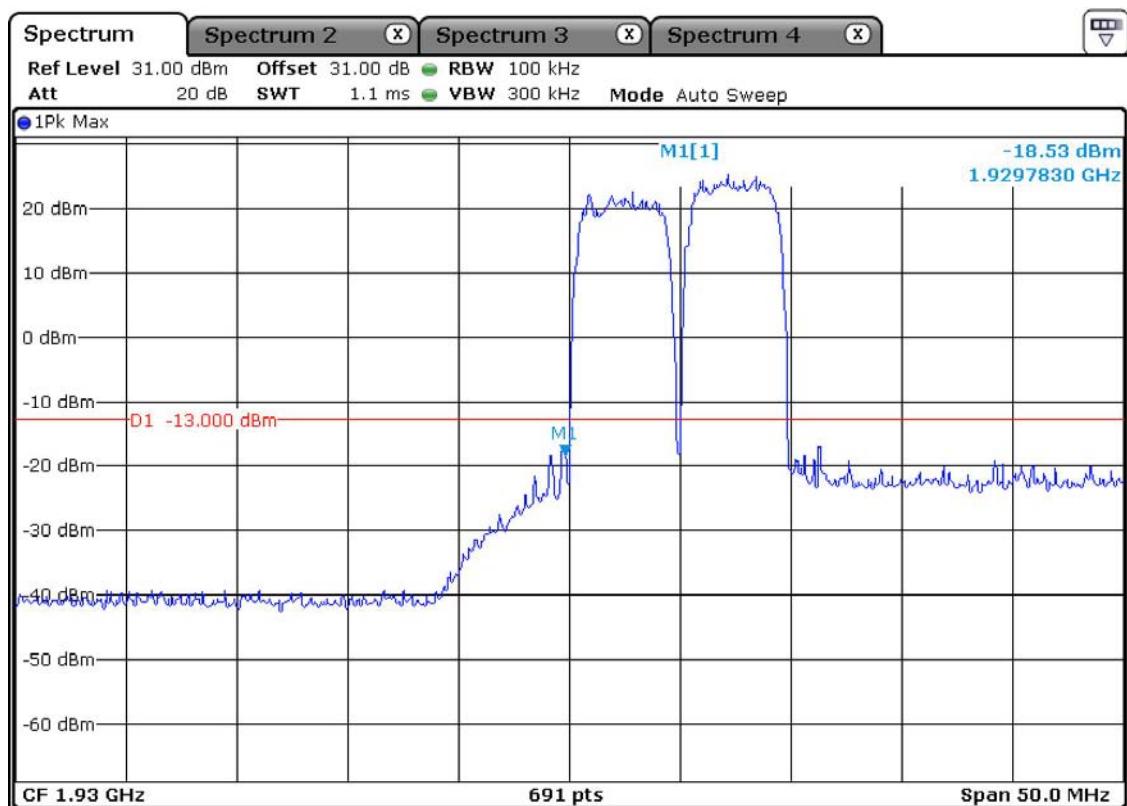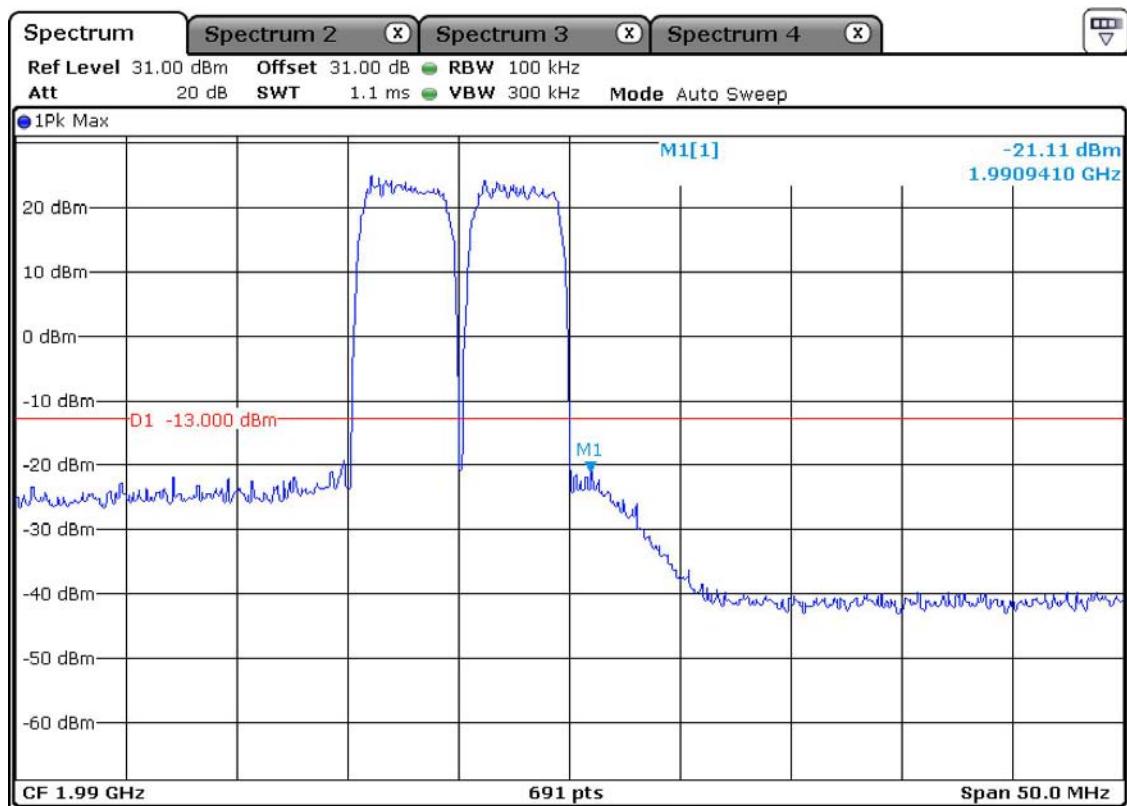WCDMA 1900 Low**WCDMA 1900 High**

3.2.5 Transmitter Spurious Radiation

4. Requirement

The power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $(43 + 10 \log P)$ dB. Note: That corresponds to the level of -13 dBm for any radiated out-of-band and spurious emissions.

5. Test Procedure

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The frequency range up to 10-th harmonic of each of the three fundamental frequencies (low, middle, and high channels) was investigated. The worst case of emissions are reported. For spurious emissions attenuation, the substitution method was used. The EUT was substituted by a reference antenna (half-wave dipole - below 1 GHz, or Horn antenna - above 1GHz), connected to a signal generator. The signal generator output level (V_g in dBm) was adjusted to obtain the same reading as from EUT. The EIRP at the spurious emissions frequency was calculated as follows.

$$\text{EIRP(dBm)} = V_g + G \text{ (dBi)}$$

The EUT output port was connected to a 50Ω termination load.

6. Test Results : Complies

Transmitter Spurious Radiated Emissions – GSM 850

Frequency [MHz]	SA Reading [dBuV/m]	Signal Generator Output required to have the same SA Reading as from EUT [dBm]	EIRP [dBm]	Limit [dBm]	Margin [dB]
Downlink , Low					
1740	51.1	-59.7	-49.44	-13	36.44
2549	41.5	-65.1	-53.83	-13	40.83
Downlink , Middle					
1757	51.3	-59.8	-49.54	-13	36.54
2617	41.4	-66.0	-54.73	-13	41.73
Downlink , High					
1791	51.4	-58.6	-48.34	-13	35.34
2684	41.8	-65.2	-53.93	-13	40.93

* EIRP is calculated as: $\text{EIRP(dBm)} = V_g(\text{dBm}) + G \text{ (dBi)}$

All other emissions not reported are more than 20 dB below the limit.

Transmitter Spurious Radiated Emissions – GSM 1900

Frequency [MHz]	SA Reading [dBuV/m]	Signal Generator Output required to have the same SA Reading as from EUT [dBm]	EIRP [dBm]	Limit [dBm]	Margin [dB]
All other emissions not reported are more than 20 dB below the limit.					

Transmitter Spurious Radiated Emissions – WCDMA 850


Frequency [MHz]	SA Reading [dBuV/m]	Signal Generator Output required to have the same SA Reading as from EUT [dBm]	EIRP [dBm]	Limit [dBm]	Margin [dB]
All other emissions not reported are more than 20 dB below the limit.					

Transmitter Spurious Radiated Emissions – WCDMA 1900


Frequency [MHz]	SA Reading [dBuV/m]	Signal Generator Output required to have the same SA Reading as from EUT [dBm]	EIRP [dBm]	Limit [dBm]	Margin [dB]
All other emissions not reported are more than 20 dB below the limit.					



3.2.6 Out-of-Band Rejection

Downlink Band Pass – GSM 850 mode

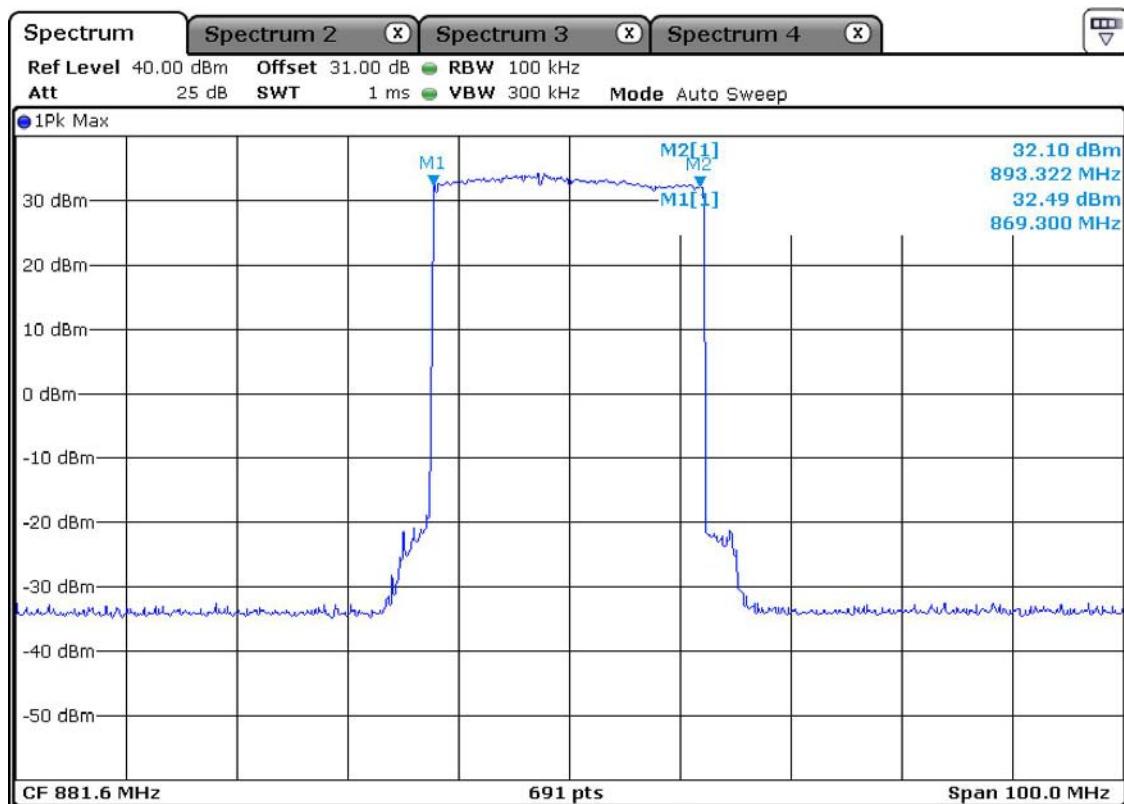

Downlink Band Pass – WCDMA 850 mode

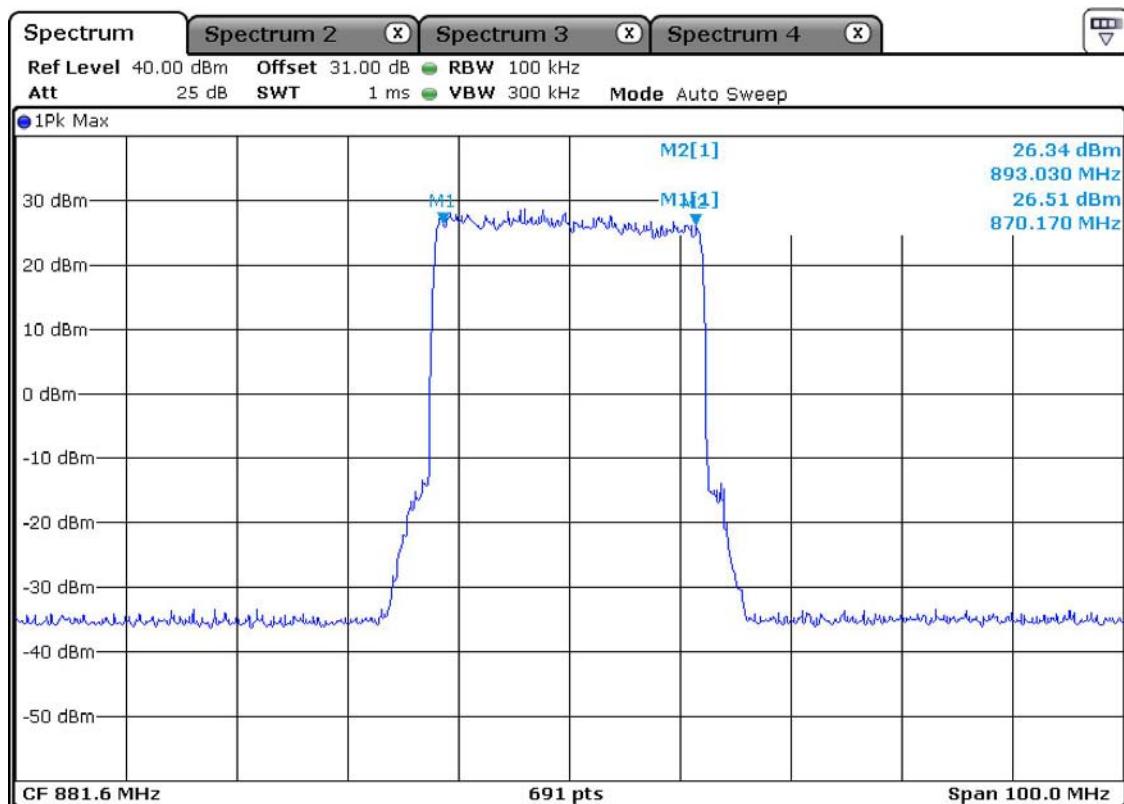

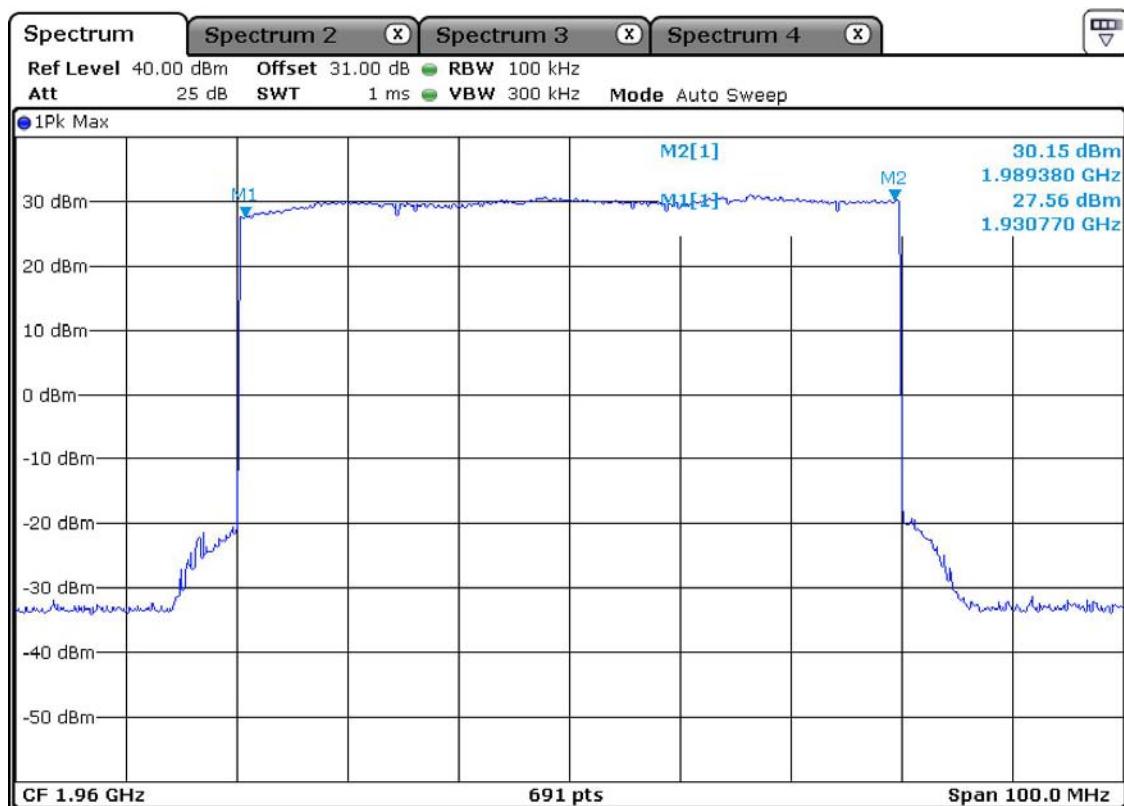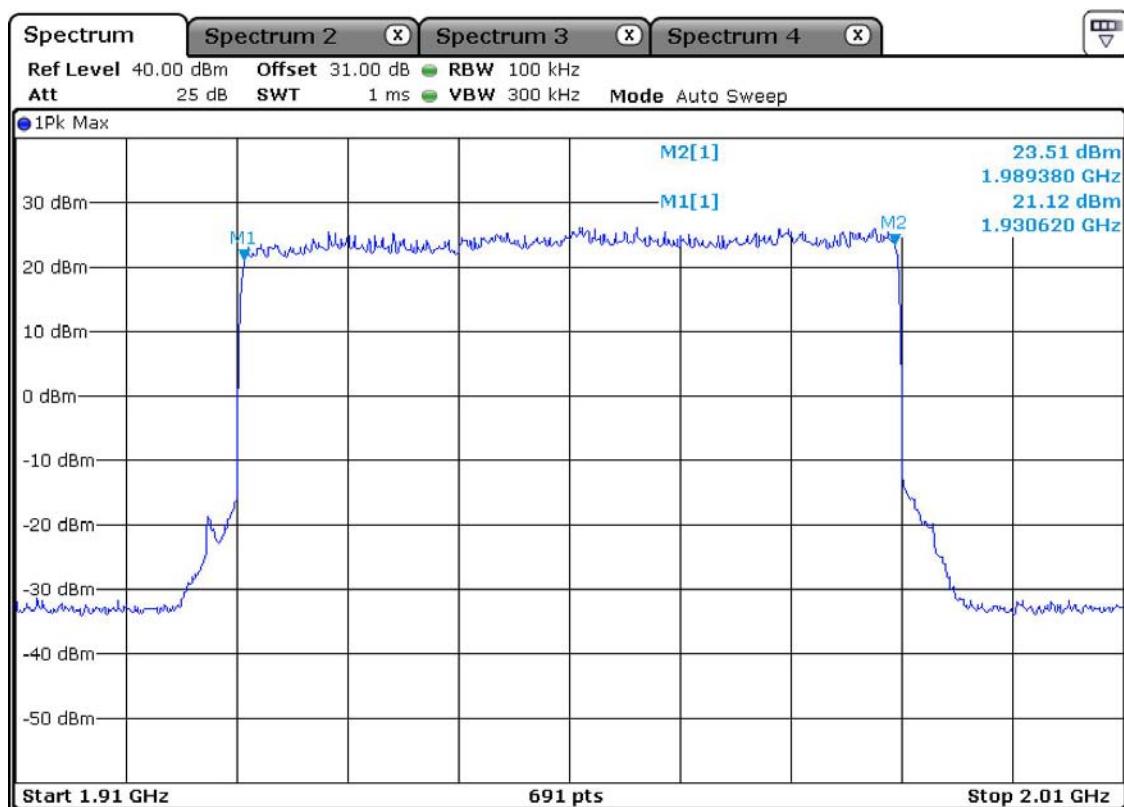Downlink Band Pass – GSM 1900 modeDownlink Band Pass – WCDMA 1900 mode

3.2.7 Frequency Stability

1. Requirement

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

2. Test Procedure


The EUT was placed inside the temperature chamber. The RF output port was connected to a spectrum analyzer. The EUT was setup to transmit the maximum power. After the temperature stabilized for approximately 20 minutes, the transmitting frequency was measured by the spectrum analyzer and recorded. At room temperature, the frequency was measured when the EUT was powered with the nominal voltage and with 85% and 115% of the nominal voltage.

3. Test Results : Complies

-refer to the next page

OPERATING FREQUENCY : 1,960,000,830 Hz
 CHANNEL : 661(Mid)
 REFERENCE VOLTAGE : 120 VAC
 DEVIATION LIMIT : ± 0.00010 % or 1 ppm

VOLTAGE (%)	POWER (VAC)	TEMP (dB)	FREQ (Hz)	Deviation (%)
100%	120	+20(Ref)	1,960,000,830	Ref
100%		-30	1,960,000,015	-0.000042
100%		-20	1,960,000,215	-0.000031
100%		-10	1,960,000,393	-0.000022
100%		0	1,960,000,478	-0.000018
100%		+10	1,960,000,674	-0.000008
100%		+20	1,960,000,830	-
100%		+25	1,960,000,927	0.000005
100%		+30	1,960,001,045	0.000011
100%		+40	1,960,001,091	0.000013
100%		+50	1,960,001,132	0.000015
100%		+60	1,960,001,287	0.000023
85%	102	+20	1,960,001,032	0.000010
115%	138	+20	1,960,001,167	0.000017

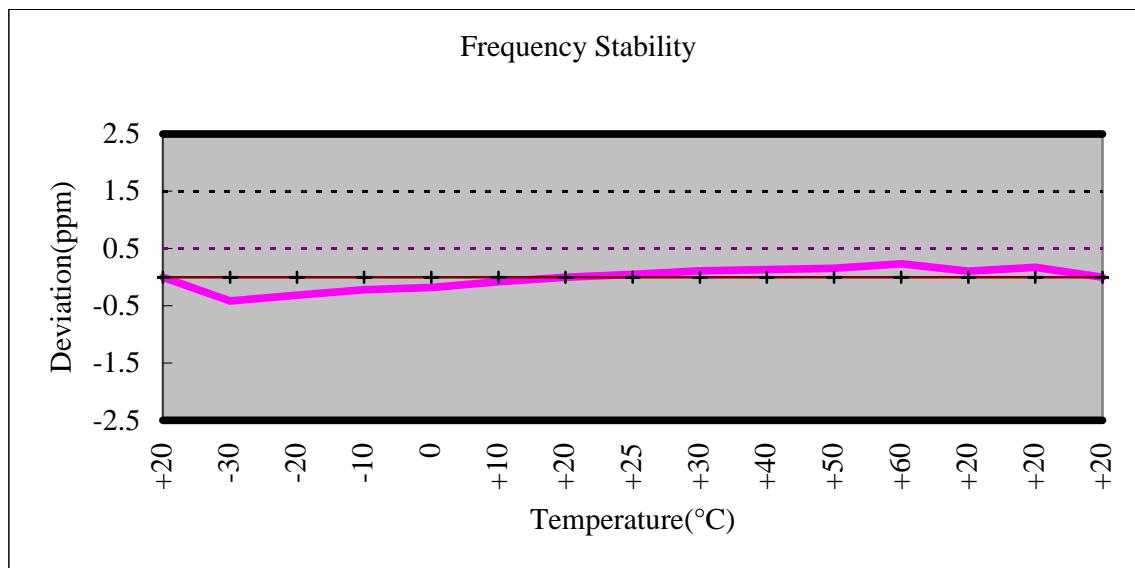

3.2.8 AC Conducted Emissions

1. Requirement

The following conducted emission limits apply to Class A unintentional radiators:

Radiation emission limit : FCC Part 15.107 Class A

Frequency Range	quasi-peak	Average
0.15 ~ 0.5 MHz	79 dBuV	66 dBuV
0.5 ~ 30 MHz	73 dBuV	60 dBuV

2. Test Procedure

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

3. Test Results : Complies

- See next pages for actual measured spectrum plots.
- No emissions were detected at a level greater than 10dB below limit.


AC Conducted Emissions – GSM 850 mode -line

243 Jibug-ri, yangi-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel: +82-31-3236008,9
Fax: +82-31-3236010

EUT / Model No. : PWDB-GW Phase : LINE

Test Mode : GSM 850 Mode Test Power : 120 / 60

Temp./Humid. : 25 / 67 Test Engineer : PARK H W

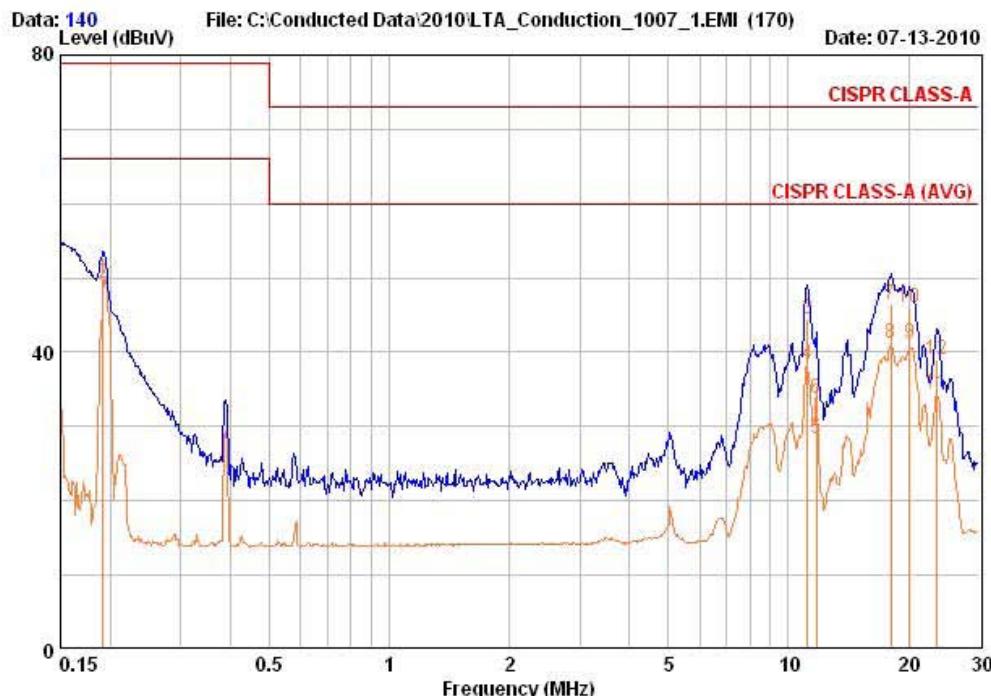


Freq MHz	RD QP		RD AV		C.F dB	Result dBuV	Result dBuV	Limit dBuV		Margin dB	
	QP	AV	QP	AV				QP	AV	QP	AV
0.192	40.36	39.66	9.65	50.01	49.31	79.00	66.00	28.99	16.69		
11.189	34.19	28.19	10.21	44.40	38.40	73.00	60.00	28.60	21.60		
11.741	23.59	18.09	10.25	33.84	28.34	73.00	60.00	39.16	31.66		
18.040	35.92	30.72	10.52	46.45	41.25	73.00	60.00	26.55	18.75		
20.162	35.33	30.53	10.59	45.92	41.12	73.00	60.00	27.08	18.88		
23.512	28.26	23.76	10.66	38.92	34.42	73.00	60.00	34.08	25.58		

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

AC Conducted Emissions – GSM 850 mode -Neutral

243 Jibug-ri, yangi-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel. +82-31-3236008,9
Fax: +82-31-3236010

EUT / Model No. : PWDB-GW Phase : NEUTRAL
 Test Mode : GSM 850 Mode Test Power : 120 / 60
 Temp./Humid. : 25 / 67 Test Engineer : PARK H W

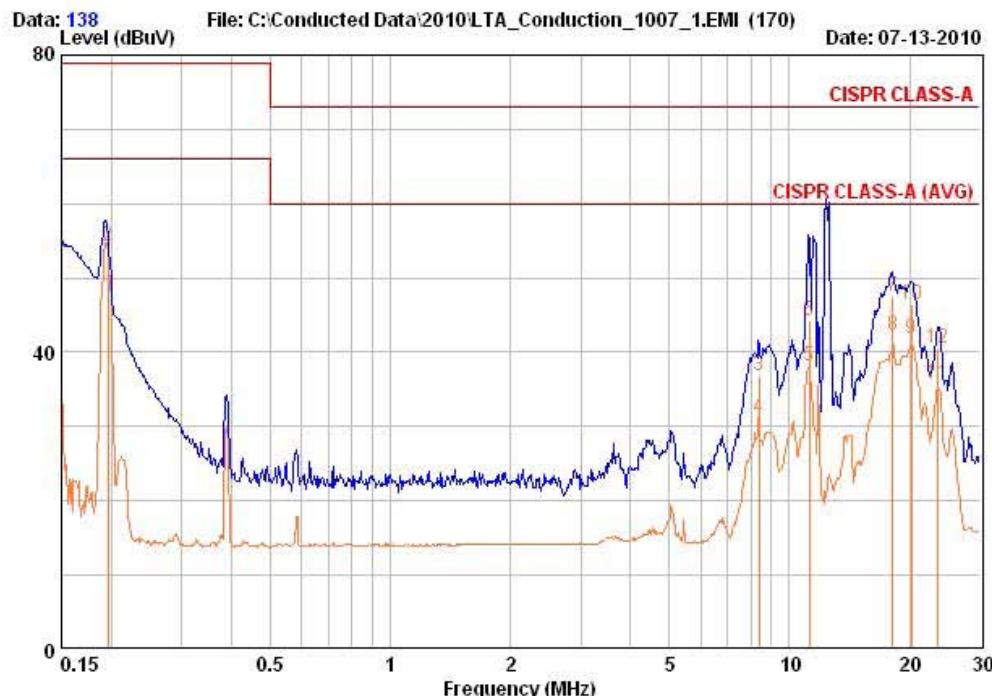


Freq MHz	RD QP		RD AV		C.F dB	Result dBuV	Result dBuV	Limit dBuV		Margin dB	
	QP	AV	QP	AV				QP	AV	QP	AV
0.196	45.46	44.66	9.66	55.12	54.32	79.00	66.00	23.88	11.68		
8.395	26.88	21.08	10.05	36.92	31.12	73.00	60.00	36.08	28.88		
11.198	33.99	27.99	10.21	44.20	38.20	73.00	60.00	28.80	21.80		
18.132	37.02	31.82	10.53	47.56	42.36	73.00	60.00	25.44	17.64		
20.257	35.93	31.23	10.61	46.54	41.84	73.00	60.00	26.46	18.16		
23.636	29.86	25.16	10.68	40.54	35.84	73.00	60.00	32.46	24.16		

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

AC Conducted Emissions – GSM 1900 mode –Line

243 Jibug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010

EUT / Model No. : PWDB-GW Phase : LINE
 Test Mode : GSM 1900 Mode Test Power : 120 / 60
 Temp./Humid. : 25 / 67 Test Engineer : PARK H W

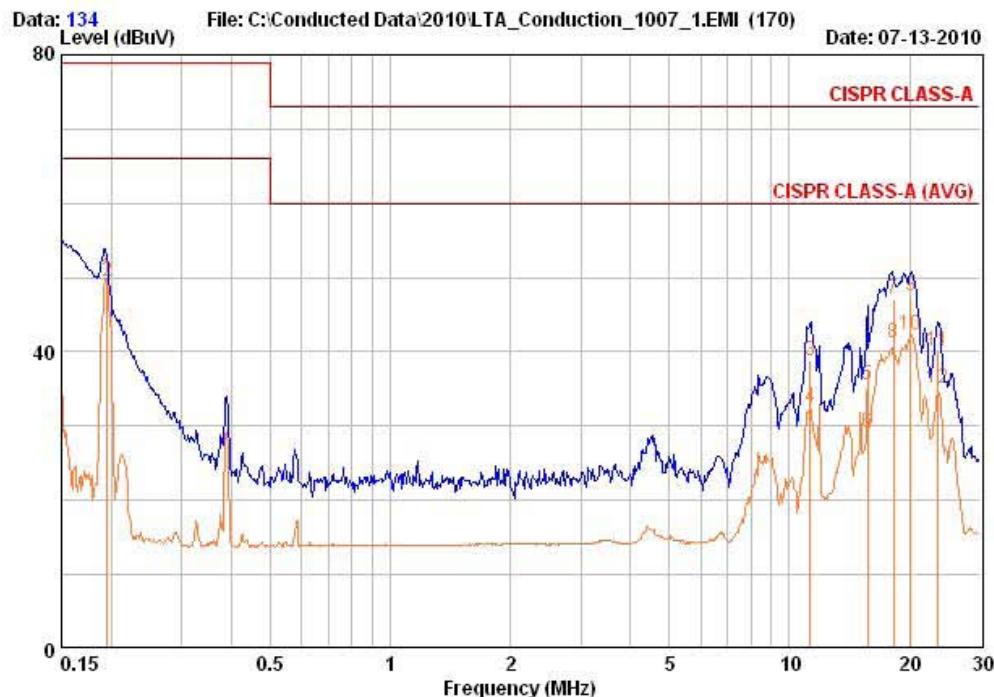


Freq MHz	RD QP	RD AV	C. F	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV
	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dB
0.195	40.46	39.86	9.65	50.11	49.51	79.00	66.00	28.89	16.49
11.255	28.69	22.29	10.22	38.91	32.51	73.00	60.00	34.09	27.49
15.715	25.01	18.71	10.44	35.45	29.15	73.00	60.00	37.55	30.85
18.232	36.52	30.62	10.53	47.05	41.15	73.00	60.00	25.95	18.85
20.159	36.93	31.73	10.59	47.52	42.32	73.00	60.00	25.48	17.68
23.636	29.46	24.46	10.66	40.12	35.12	73.00	60.00	32.88	24.88

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

AC Conducted Emissions – GSM 1900 mode -Neutral

243 Jibug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel +82-31-3236008,9
Fax +82-31-3236010

EUT / Model No. : PWDB-GW Phase : LINE
 Test Mode : GSM 1900 Mode Test Power : 120 / 60
 Temp./Humid. : 25 / 67 Test Engineer : PARK H W

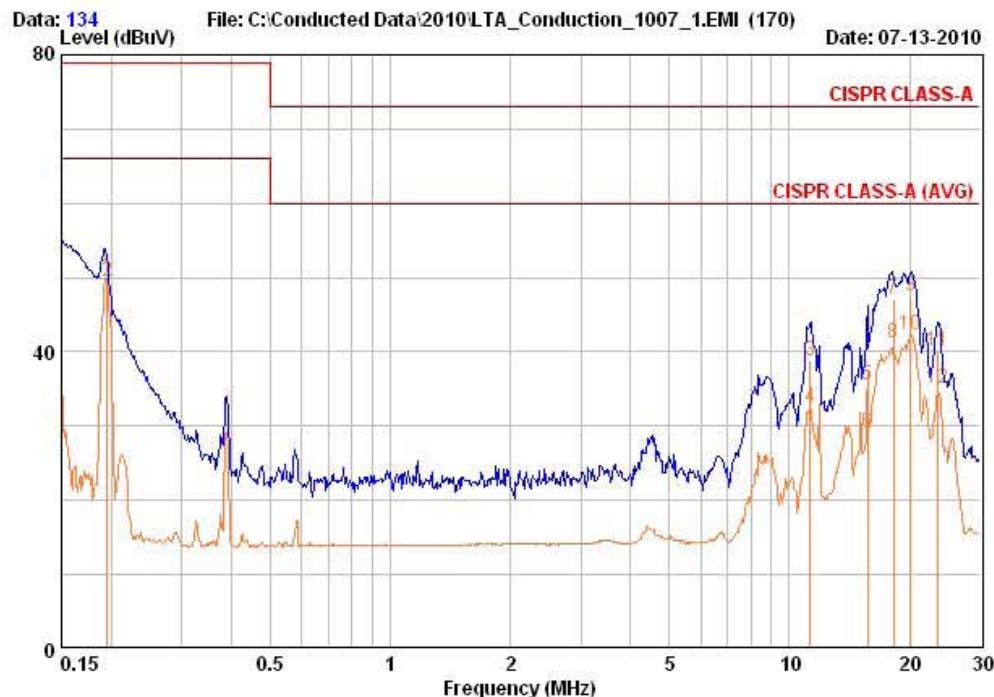


Freq MHz	RD QP	RD AV	C. F	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV
	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dB
0.195	40.46	39.86	9.65	50.11	49.51	79.00	66.00	28.89	16.49
11.255	28.69	22.29	10.22	38.91	32.51	73.00	60.00	34.09	27.49
15.715	25.01	18.71	10.44	35.45	29.15	73.00	60.00	37.55	30.85
18.232	36.52	30.62	10.53	47.05	41.15	73.00	60.00	25.95	18.85
20.159	36.93	31.73	10.59	47.52	42.32	73.00	60.00	25.48	17.68
23.636	29.46	24.46	10.66	40.12	35.12	73.00	60.00	32.88	24.88

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

AC Conducted Emissions – WCDMA 850 mode –Line

243 Jibug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010

EUT / Model No. : PWDB-GW Phase : LINE
 Test Mode : WCDMA 850 Mode Test Power : 120 / 60
 Temp./Humid. : 25 / 67 Test Engineer : PARK H W

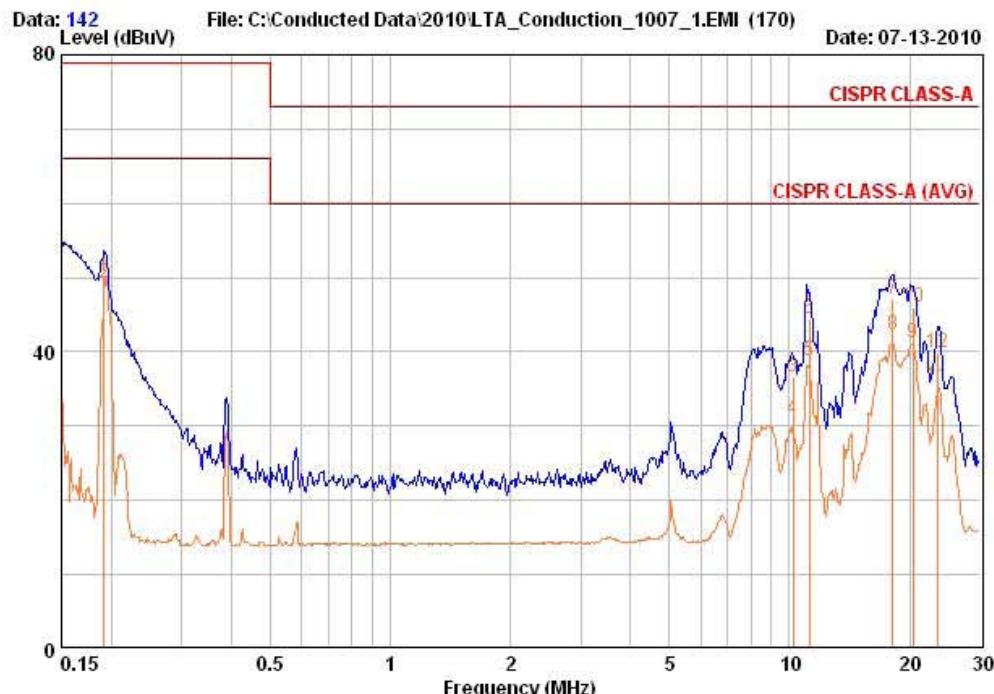


Freq MHz	RD QP		RD AV		C. F		Result dBuV	Result dBuV	Limit dBuV	Limit dBuV	Margin dB	Margin dB
	dBuV	dBuV	dB	dB	dB	dB						
0.192	40.46	39.66	9.65		50.11	49.31	79.00	66.00	28.89	16.69		
10.231	26.38	20.78	10.16		36.54	30.94	73.00	60.00	36.46	29.06		
11.194	34.19	28.69	10.21		44.40	38.90	73.00	60.00	28.60	21.10		
18.134	36.62	31.72	10.53		47.15	42.25	73.00	60.00	25.85	17.75		
20.376	35.43	30.63	10.60		46.03	41.23	73.00	60.00	26.97	18.77		
23.632	29.26	24.66	10.66		39.92	35.32	73.00	60.00	33.08	24.68		

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

AC Conducted Emissions – WCDMA 850 mode -Neutral

243 Jibug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel. +82-31-3236008,9
Fax. +82-31-3236010

EUT / Model No. : PWDB-GW Phase : NEUTRAL
Test Mode : WCDMA 850 Mode Test Power : 120 / 60
Temp./Humid. : 25 / 67 Test Engineer : PARK H W

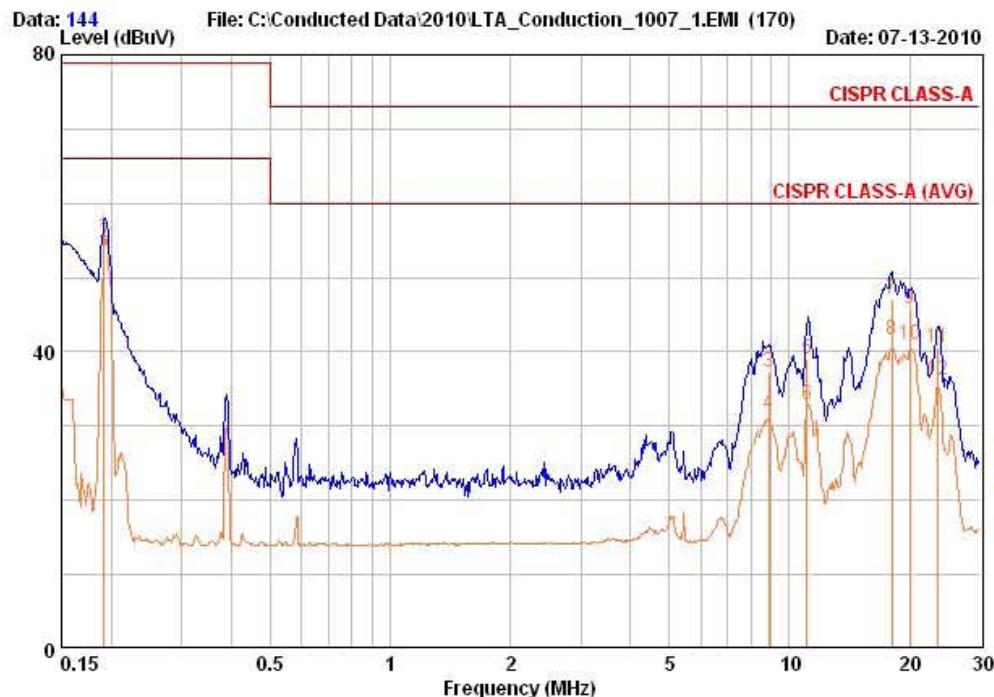


Freq MHz	RD dBuV	RD dBuV	C. F dB	Result dBuV	Result dBuV	Limit dBuV	Limit dBuV	Margin dB	Margin dB
	QP	AV	dB	QP	AV	QP	AV	QP	AV
0.192	45.96	45.06	9.66	55.62	54.72	79.00	66.00	23.38	11.28
8.866	27.18	21.58	10.07	37.25	31.65	73.00	60.00	35.75	28.35
11.047	28.79	22.79	10.20	38.99	32.99	73.00	60.00	34.01	27.01
18.035	36.52	31.12	10.53	47.05	41.65	73.00	60.00	25.95	18.35
20.058	35.23	30.33	10.60	45.83	40.93	73.00	60.00	27.17	19.07
23.634	29.96	25.56	10.68	40.64	36.24	73.00	60.00	32.36	23.76

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

AC Conducted Emissions – WCDMA 1900 mode –Line

243 Jibug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010

EUT / Model No. : PWDB-GW Phase : LINE
 Test Mode : WCDMA 1900 Mode Test Power : 120 / 60
 Temp./Humid. : 25 / 67 Test Engineer : PARK H W

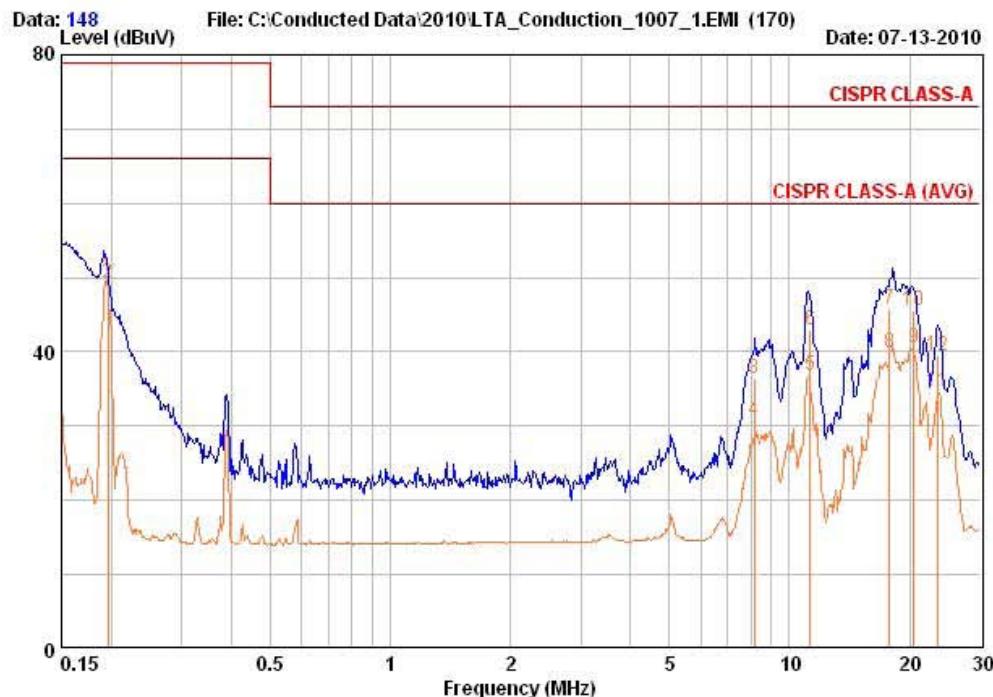


Freq MHz	RD dBuV		RD dBuV		C. F dB	Result dBuV	Result dBuV		Limit dBuV	Limit dBuV	Margin dB	Margin dB
	QP	AV	QP	AV			QP	AV				
0.196	40.56	39.66	9.65		50.21	49.31	79.00	66.00	28.79	28.79	16.69	
8.184	26.27	20.77	10.04		36.32	30.82	73.00	60.00	36.68	36.68	29.18	
11.259	32.69	26.69	10.22		42.91	36.91	73.00	60.00	30.09	30.09	23.09	
17.850	35.22	29.32	10.52		45.74	39.84	73.00	60.00	27.26	27.26	20.16	
20.485	35.03	29.93	10.60		45.63	40.53	73.00	60.00	27.37	27.37	19.47	
23.637	28.86	24.06	10.66		39.52	34.72	73.00	60.00	33.48	33.48	25.28	

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

AC Conducted Emissions – WCDMA 1900 mode -Neutral

243 Jibug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010

EUT / Model No. : PWDB-GW Phase : NEUTRAL
Test Mode : WCDMA 1900 Mode Test Power : 120 / 60
Temp./Humid. : 25 / 67 Test Engineer : PARK H W

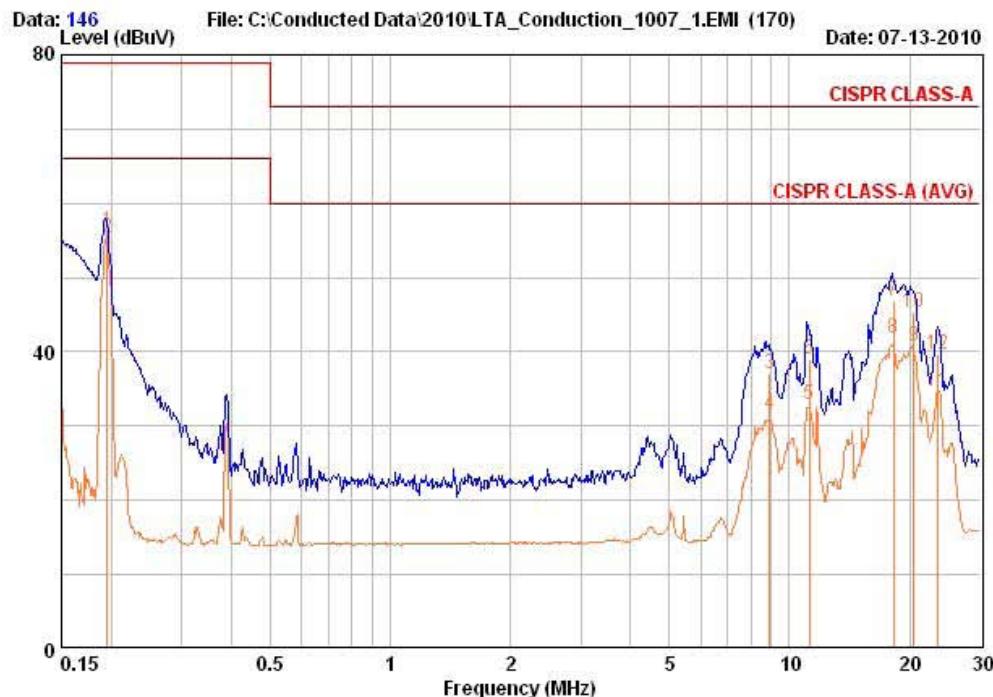

Freq MHz	RD dBuV		RD dBuV		C. F dB	Result dBuV	Result dBuV	Limit dBuV	Limit dBuV	Margin dB	Margin dB
	QP	AV	QP	AV							
0.195	46.56	45.76	9.66	56.22	55.42	79.00	66.00	22.78	10.58		
8.917	26.88	21.58	10.08	36.95	31.65	73.00	60.00	36.05	28.35		
11.198	28.89	22.69	10.21	39.10	32.90	73.00	60.00	33.90	27.10		
18.232	36.32	31.22	10.54	46.86	41.76	73.00	60.00	26.14	18.24		
20.486	34.73	30.23	10.61	45.35	40.85	73.00	60.00	27.65	19.15		
23.512	28.96	24.06	10.68	39.63	34.73	73.00	60.00	33.37	25.27		

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

3.3 CONCLUSION

The data collected shows that the **Kisan Telecom Co., Ltd. Dual Optical DAS Repeater FCC ID: T7MPWDBGWA** complies with all the requirements of Parts 2,22, 24 of the FCC Rules.

--- Blank ---

APPENDIX 1

TEST EQUIPMENT USED FOR TESTS

	Description	Model No.	Serial No.	Manufacturer	Next Cal. Date
1	Spectrum Analyzer	FSV-30	100757	R&S	Feb-11
2	Spectrum Analyzer	8563E	3425A02505	HP	Mar-11
3	Spectrum Analyzer	8594E	3710A04074	HP	Oct-10
4	Signal Generator	8648C	3623A02597	HP	Mar-11
5	Signal Generator	83711B	US34490456	HP	Mar-11
6	Attenuator (3dB)	8491A	37822	HP	Oct-10
7	Attenuator (10dB)	8491A	63196	HP	Oct-10
8	Attenuator (30dB)	8498A	1801A06689	HP	Oct-10
9	EMI Test Receiver	ESVD	843748/001	R&S	Mar-11
10	Horn Antenna(18 ~ 40GHz)	SAS-574	154	Schwarzbeck	Nov-10
11	Horn Antenna(18 ~ 40GHz)	SAS-574	155	Schwarzbeck	Nov-10
12	RF Amplifier	8447D	2949A02670	HP	Oct-10
13	RF Amplifier	8449B	3008A02126	HP	Mar-11
14	Test Receiver	ESHS10	828404/009	R&S	Mar-11
15	TRILOG Antenna	VULB 9160	9160-3212	SCHWARZBECK	Apr-11
16	Log.-Per. Antenna	VULP 9118	9118 A 401	SCHWARZBECK	Apr-11
17	Biconical Antenna	BBA 9106	VHA 9103-2315	SCHWARZBECK	Apr-11
18	Horn Antenna	3115	00055005	ETS LINDGREN	Mar-11
19	Horn Antenna	BBHA 9120D	9120D122	SCHWARZBECK	Dec-11
20	Dipole Antenna	VHA9103	2116	SCHWARZBECK	Nov-10
21	Dipole Antenna	VHA9103	2117	SCHWARZBECK	Nov-10
22	Dipole Antenna	VHA9105	2261	SCHWARZBECK	Nov-10
23	Dipole Antenna	VHA9105	2262	SCHWARZBECK	Nov-10
24	Hygro-Thermograph	THB-36	0041557-01	ISUZU	Mar-11
25	Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	-
26	RF Switch	MP59B	6200414971	ANRITSU	-
27	Power Divider	11636A	6243	HP	Oct-10
28	DC Power Supply	6622A	3448A03079	HP	Oct-10
29	Frequency Counter	5342A	2826A12411	HP	Mar-11
30	Power Meter	EPM-441A	GB32481702	HP	Mar-11
31	Power Sensor	8481A	2702A64048	HP	Mar-11
32	Audio Analyzer	8903B	3729A18901	HP	Oct-10
33	Modulation Analyzer	8901B	3749A05878	HP	Oct-10
34	TEMP & HUMIDITY Chamber	YJ-500	LTAS06041	Jin Young Tech	Oct-10
36	Stop Watch	HS-3	601Q09R	CASIO	Mar-11
37	LISN	ENV216	100408	R&S	Oct-10
38	UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106243	R&S	May-12