



243 Jubug-Ri, Yangji-Myeon, Yongin-Si, Gyeonggi-Do, Korea 449-822
 Tel: +82-31-323-6008 Fax: +82-31-323-6010
<http://www.ltalab.com>



Dates of Tests: June 14~23, 2011
 Test Report S/N: LR500111106J
 Test Site : LTA CO., LTD.

FCC ID

T7MSTR250R01C

APPLICANT

Kisan Telecom Co., Ltd.

TEST REPORT

FCC Part 22(H)/Part 24(E) Certification

Classification : PCS Licensed Transmitter
Manufacturing Description : Dual Optical DAS Repeater
Manufacturer : Kisan Telecom Co., Ltd.
Model name : STR250R01C
Test Device Serial No.: : Identification
FCC Rule Part(s) : §22(H), §24(E), §2
Downlink : 869~894MHz (CDMA 850)
 : 1930~1990MHz (PCS 1900)
Uplink : 824~849MHz (CDMA 850)
 : 1850~1910MHz (PCS 1900)
Rated RF Output Power : 27dBm (Uplink) / 40dBm (Downlink)
Type Modulation : CDMA / PCS CDMA
Emission Designators: : F9W
Data of issue : June 24, 2011

This test report is issued under the authority of:

The test was supervised by:

Hyun-Chae You, Manager

Il-Shin kim, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.



TABLE OF CONTENTS

1. GENERAL INFORMATION'S	3
2. INFORMATION'S ABOUT TEST ITEM	4
3. TEST REPORT	
3.1 SUMMARY OF TESTS	6
3.2 DESCRIPTION OF TESTS	7
3.2.1 RF Rower Output	7
3.2.2 Occupied Bandwidth, Input/Output Comparison	8
3.2.3 Out-of-Band Emissions at antenna terminal	13
3.2.4 Intermodulation Test	30
3.2.5 Transmitter Spurious Radiation	35
3.2.6 Out-of-Band Rejection	37
3.2.7 FREQUENCY STABILITY	39
3.3 CONCLUSION	44
 APPENDIX	
APPENDIX 1 TEST EQUIPMENT USED FOR TESTS	45

1. General information's

1-1 Test Performed

Company name : LTA Co., Ltd.
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 449-822
 Web site : <http://www.ltalab.com>
 E-mail : chahn@ltalab.com
 Telephone : +82-31-323-6008
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2011-09-30	ECT accredited Lab.
KCC	KOREA	KR0049	2013-04-24	EMC accredited Lab.
FCC	U.S.A	610755	2014-04-27	FCC filing
FCC	U.S.A	649054	2013-04-13	FCC CAB
VCCI	JAPAN	R-2133, C-2307	2014-06-21	VCCI registration
VCCI	JAPAN	T-2009	2013-12-23	VCCI registration
IC	CANADA	5799A	2012-05-14	IC filing

2-1 Client & Manufacturer

- RHU (Dual Band)

Module name		The current consumption of each module (mA)							
		29	V	9	V	6.5	V	5.5	V
1	HPA 1W(850/1900)	1200							
2	SOU(Optic)					500			
3	FSK MODEM			110					
4	RHU 19T					1200		1600	
5	RHU 85T					1200		1600	
4	RHU 19R					1000		1600	
5	RHU 85R					1000		1600	
6	NMS B'D			700					
	-								
Supply current for each voltage (A)		2.4		0.81		4.9		6.4	

2-4 Tested frequency

Mode	TX (MHz)
CDMA 850_DL	869.88
	881.52
	893.31
CDMA 850_UL	824.88
	836.52
	848.31
PCS 1900_DL	1931.25
	1960.00
	1987.50
PCS 1900_UL	1851.25
	1880.00
	1907.50

2.5 Mode of Operation

The EUT was powered by 120VAC. The EUT was configured for maximum gain, 95dB. Repeater simulators were used to provide the input signals to the EUT. Tests were performed with CDMA modulations. The input power was the maximum declared by the manufacturer.

3. Test Report

3.1 Summary of tests

Parameter	Status
Transmitter Requirements	
RF Power Output	C
Occupied Bandwidth, Input/Output Comparison	C
Out-of-Band Emissions at antenna terminal	C
Intermodulation Test	C
Transmitter Spurious Radiation	C
Out of Band Rejection	C
Frequency Stability	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are to be tested to the ANSI/TIA-603-C-2004 standard

3.2 Results Of Tests

3.2.1 RF Power Output

1. Test Procedure

The EUT RF output was connected to Powermeter. The EUT was setup to transmit continuously with maximum power. A spectrum analyzer was setup to measure peak power. Measurements were performed at three frequencies (low, middle, and high channels) with all modulations.

2. Test Results

Modulation : CDMA 850 DL

	Freq. Tuned (MHz)	Power Input (dBm)	Power output (dBm)	Power Output (W)
Low	869.88	-56.01	39.61	9.14
Middle	881.52	-55.95	39.69	9.31
High	893.31	-55.92	39.37	8.65

Modulation : CDMA 850 UL

	Freq. Tuned (MHz)	Power Input (dBm)	Power output (dBm)	Power Output (W)
Low	824.88	-70.07	25.85	0.38
Middle	836.52	-70.83	25.34	0.34
High	848.31	-70.57	25.44	0.35

Modulation : PCS 1900 DL

	Freq. Tuned (MHz)	Power Input (dBm)	Power output (dBm)	Power Output (W)
Low	1931.25	-55.05	39.15	8.22
Middle	1960.00	-55.31	39.33	8.57
High	1987.50	-55.69	39.11	8.15

Modulation : PCS 1900 UL

	Freq. Tuned (MHz)	Power Input (dBm)	Power output (dBm)	Power Output (W)
Low	1851.25	-69.11	26.47	0.44
Middle	1880.00	-69.46	26.40	0.44
High	1907.50	-69.21	26.30	0.43

3.2.2 Occupied Bandwidth, Input/Output Comparison



1. Test Procedure

The EUT RF ports were connected to Spectrum analyzer. The EUT was setup to transmit maximum power. The spectrum analyzer was setup to measure the Occupied Bandwidth (defined as the 99% Power Bandwidth). The Occupied Bandwidth was measured at the input and output ports of the EUT at the middle channels for each type of modulation



2. Test Results : Complies

Refer to the following Graphs.



Input/Output Bandwidth Comparison – CDMA850_DL

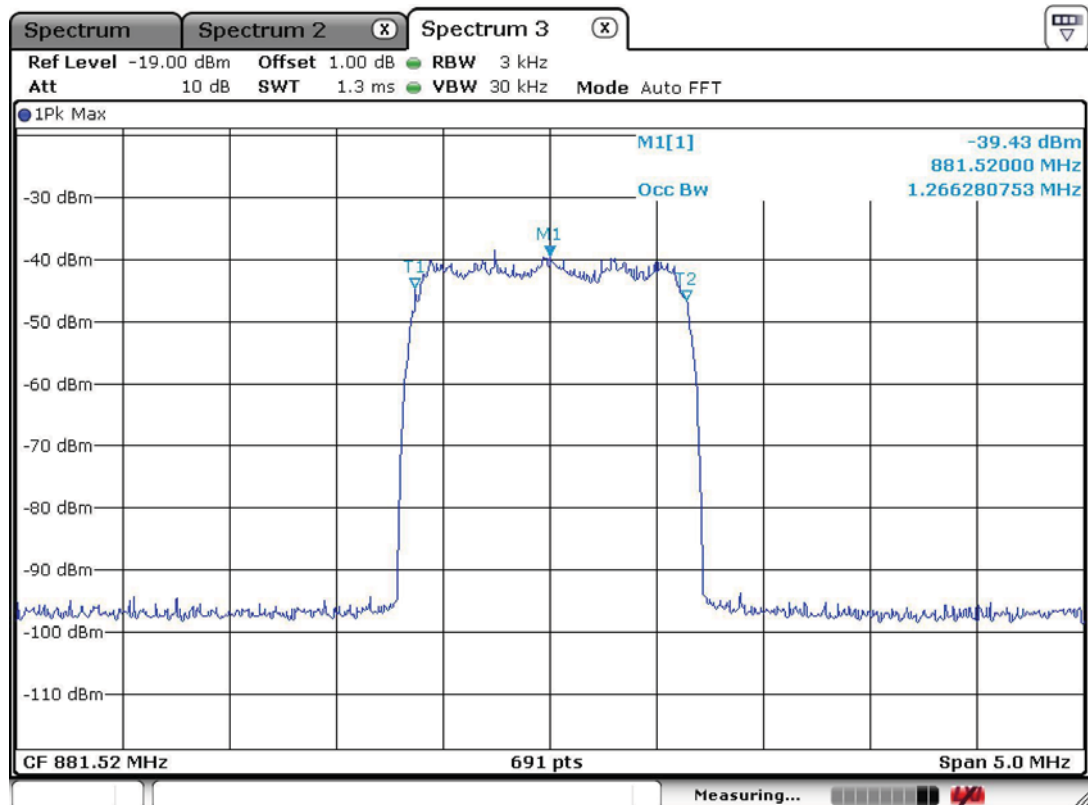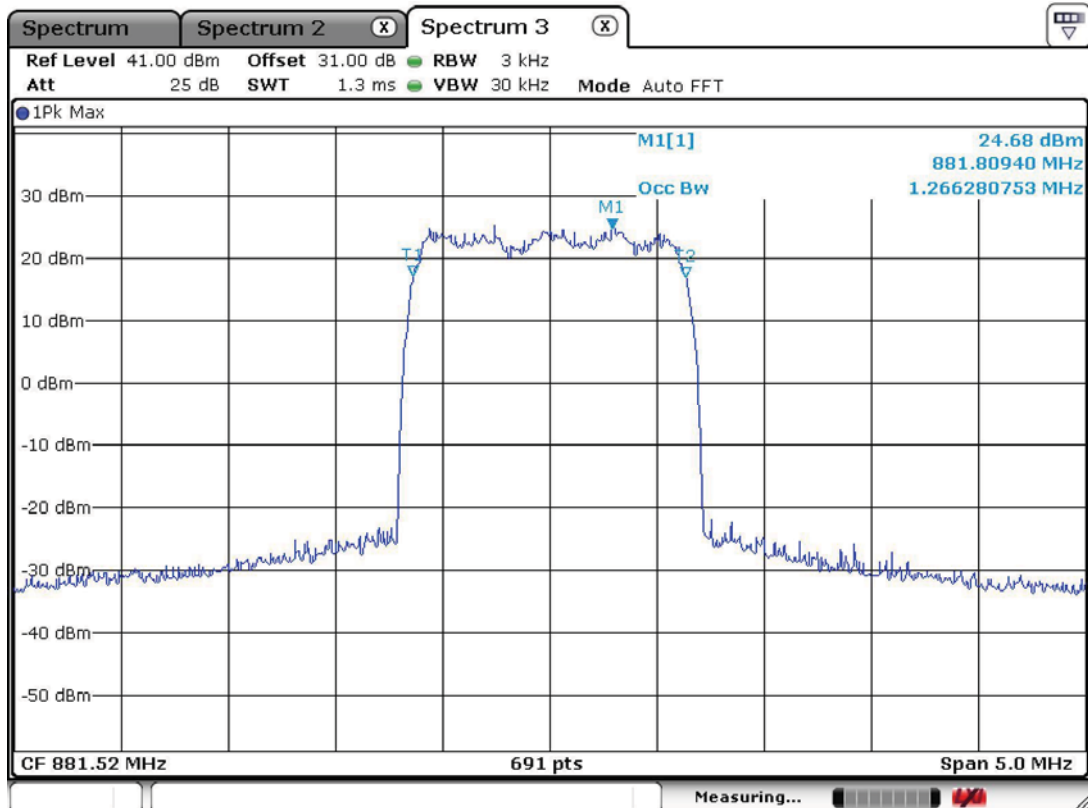



Input/Output Bandwidth Comparison – CDMA850_UL

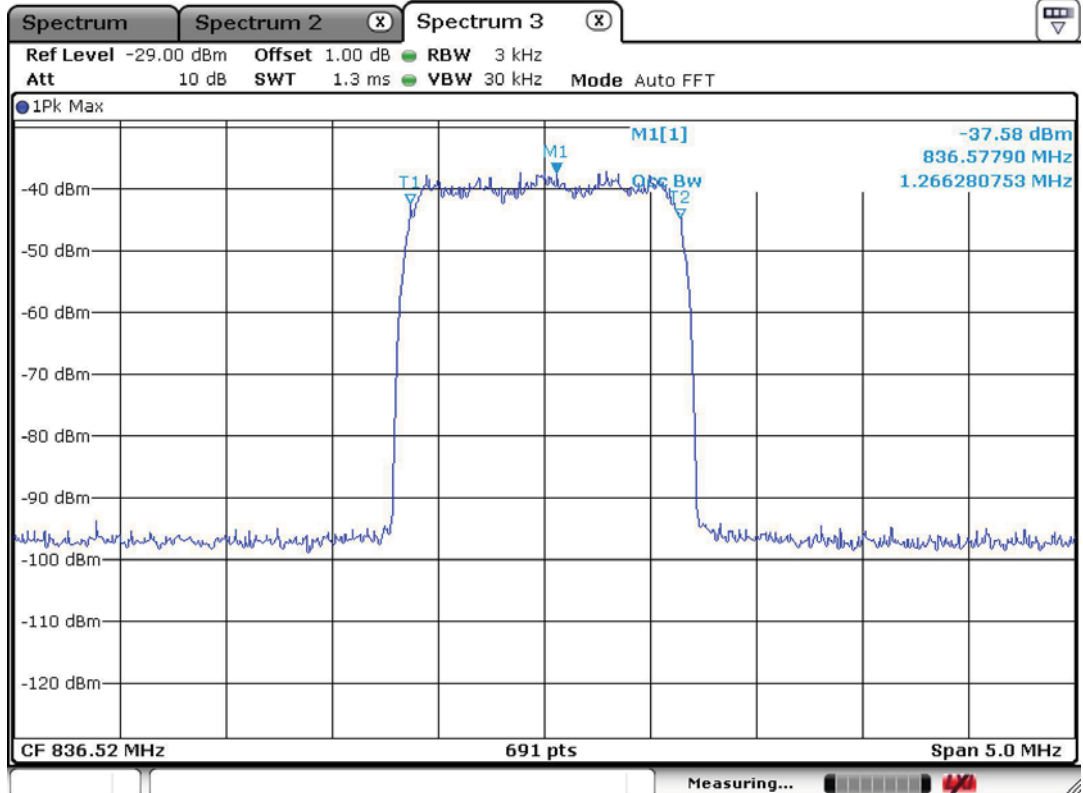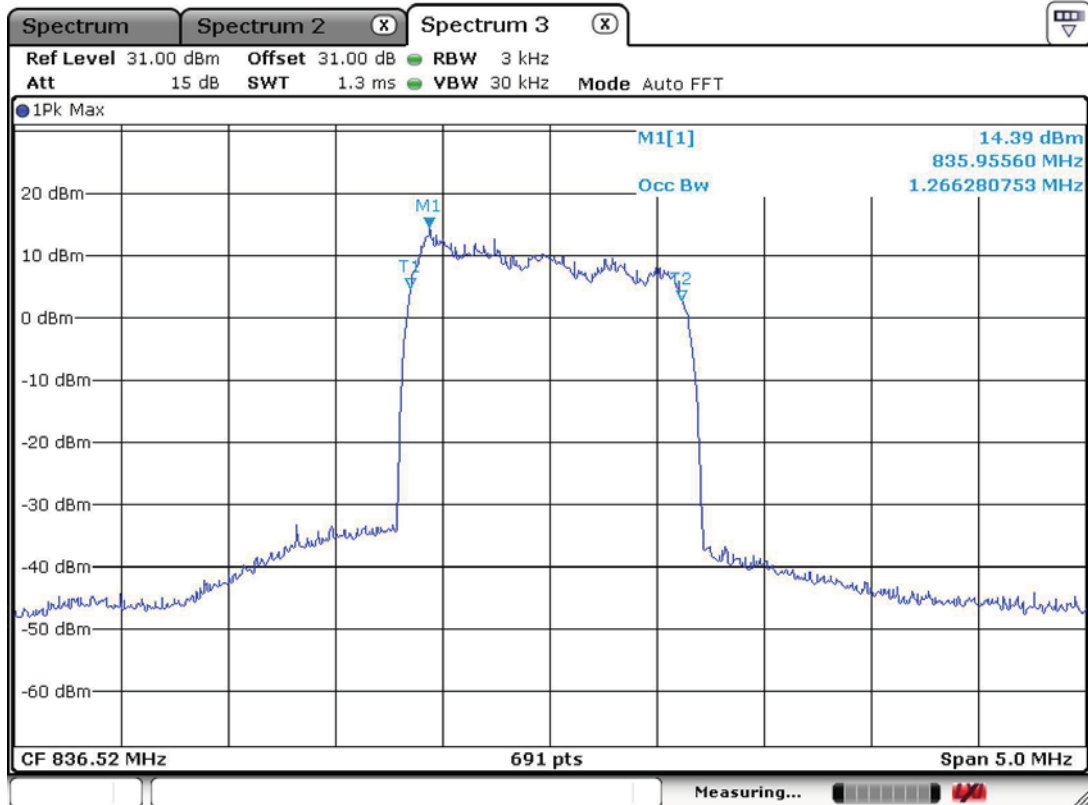

Input/Output Bandwidth Comparison – PCS 1900_DL

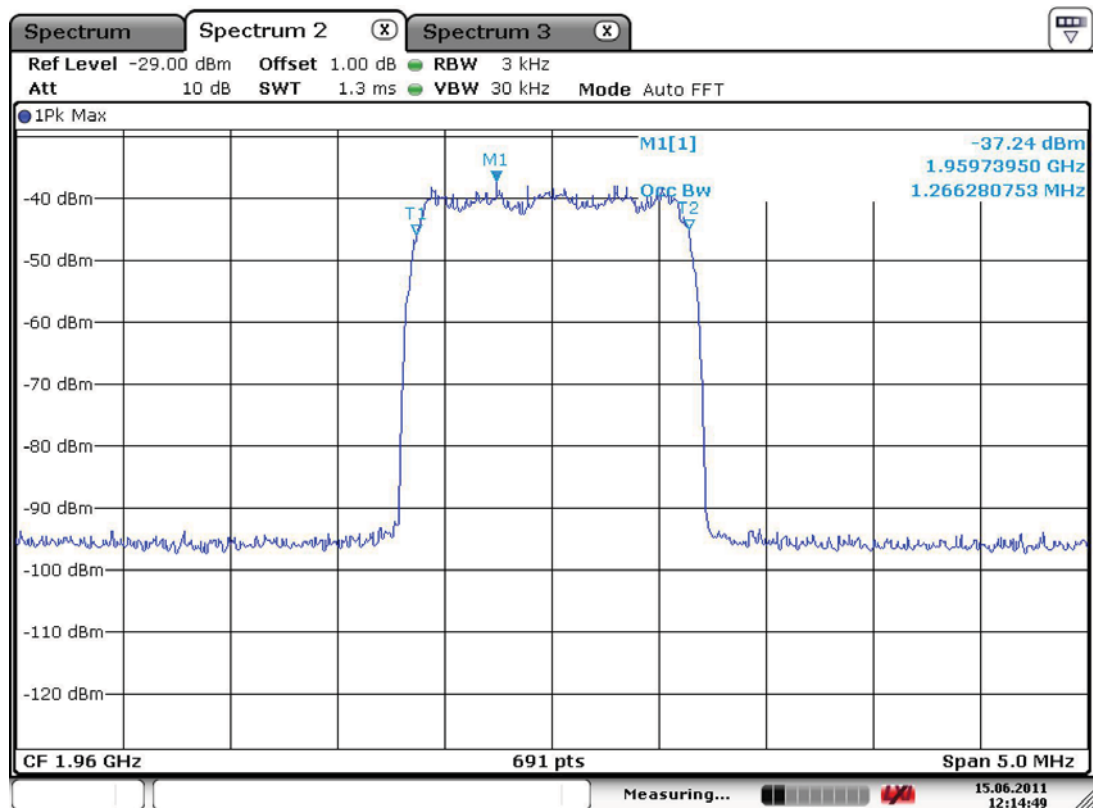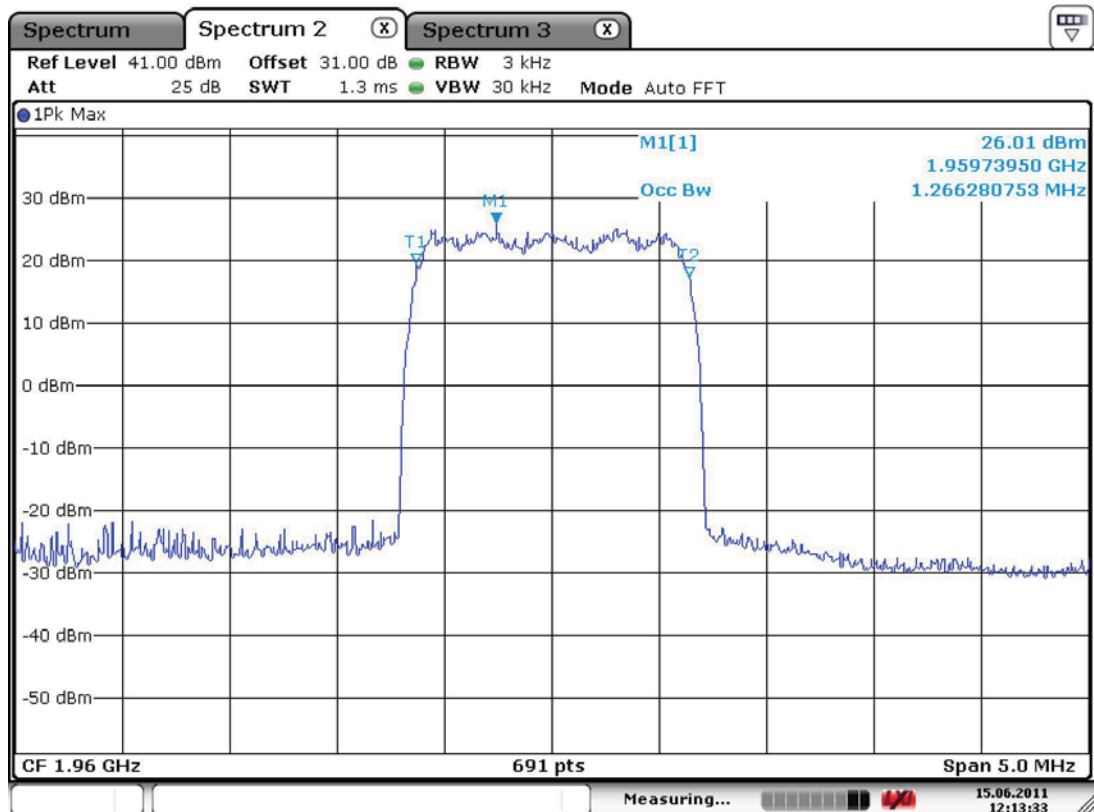

Input/Output Bandwidth Comparison – PCS 1900_UL

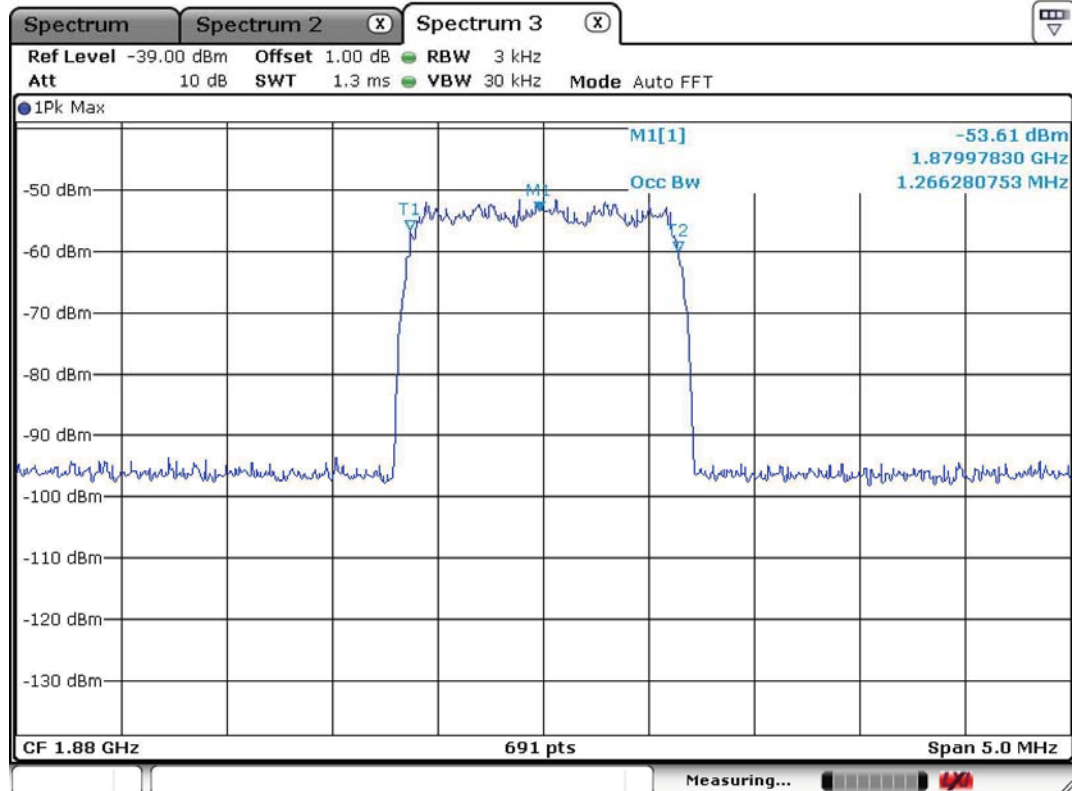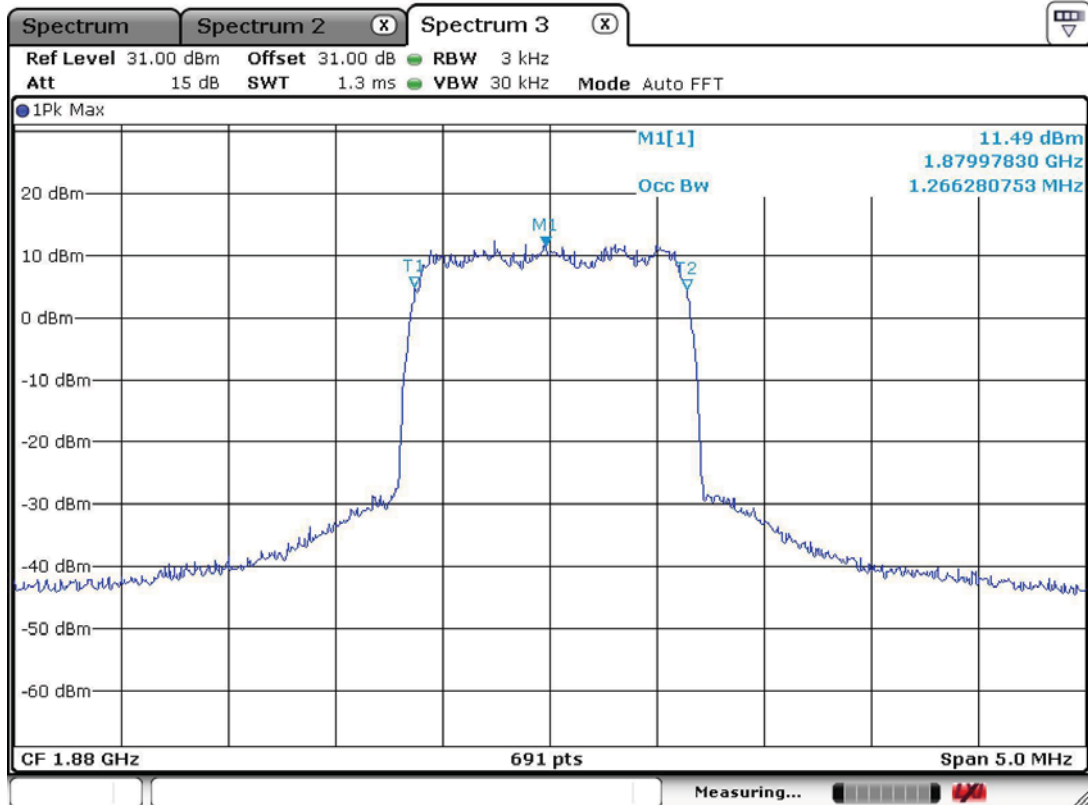

3.2.3 Out-of-Band Emissions at antenna terminal

1. Requirement

The power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $(43 + 10 \log P)$ dB. Note: That corresponds to the level of -13 dBm for any out-of-band and spurious emissions.



2. Test Procedure

The EUT RF output was connected to spectrum analyzer. The EUT was setup to transmit the maximum power. The spectrum analyzer resolution bandwidth (RBW) was set to 1 MHz in the PCS band and 100 kHz in the Cell band. For measurements at the band edges, the resolution bandwidth (RBW) was set to 100 kHz. Measurements were performed at three frequencies at the low, middle, and high channels for all modulations types. Intermodulation was performed by injecting two modulated signals into the EUT. One signal was set at the bandedge of either the Up Link or Down Link band and the other signal was set 6 MHz away.



3. Test Results : Complies

Refer to the following Graphs.



Antenna Terminal Spurious Emissions, CDMA 850, Low_DL

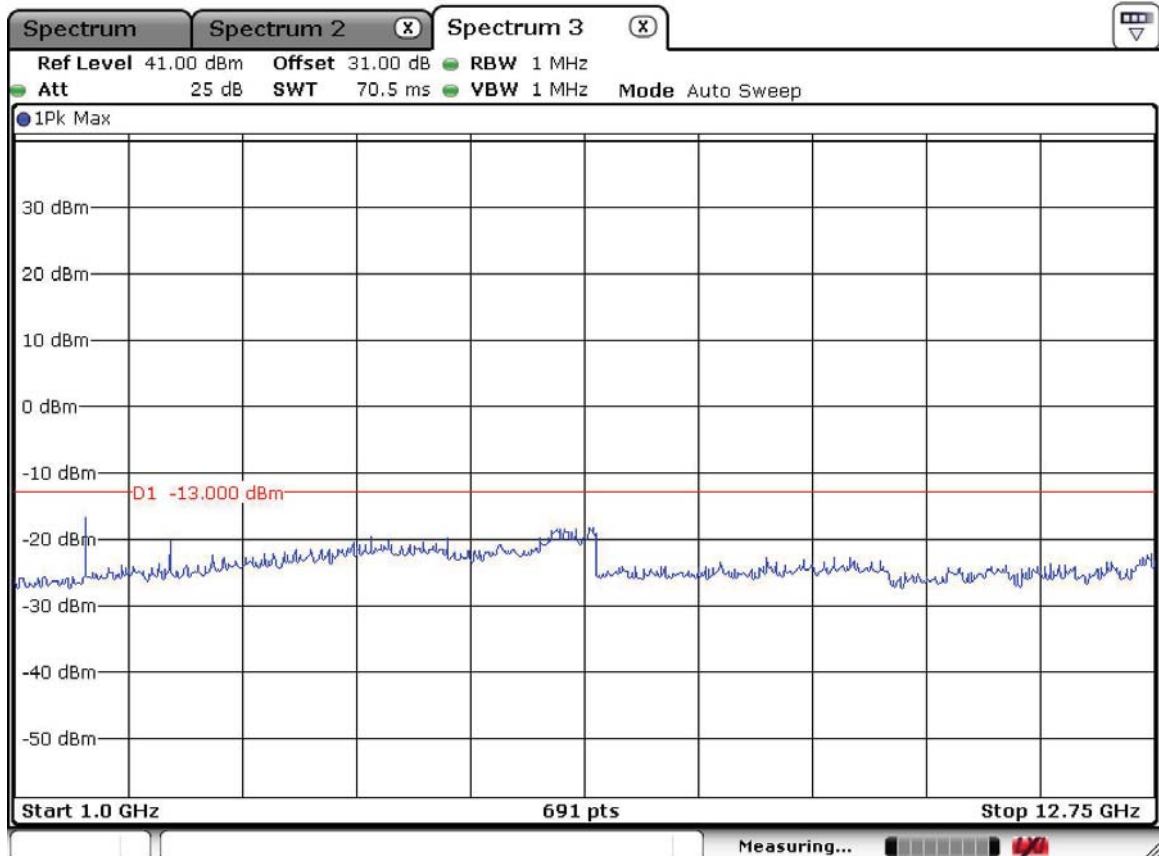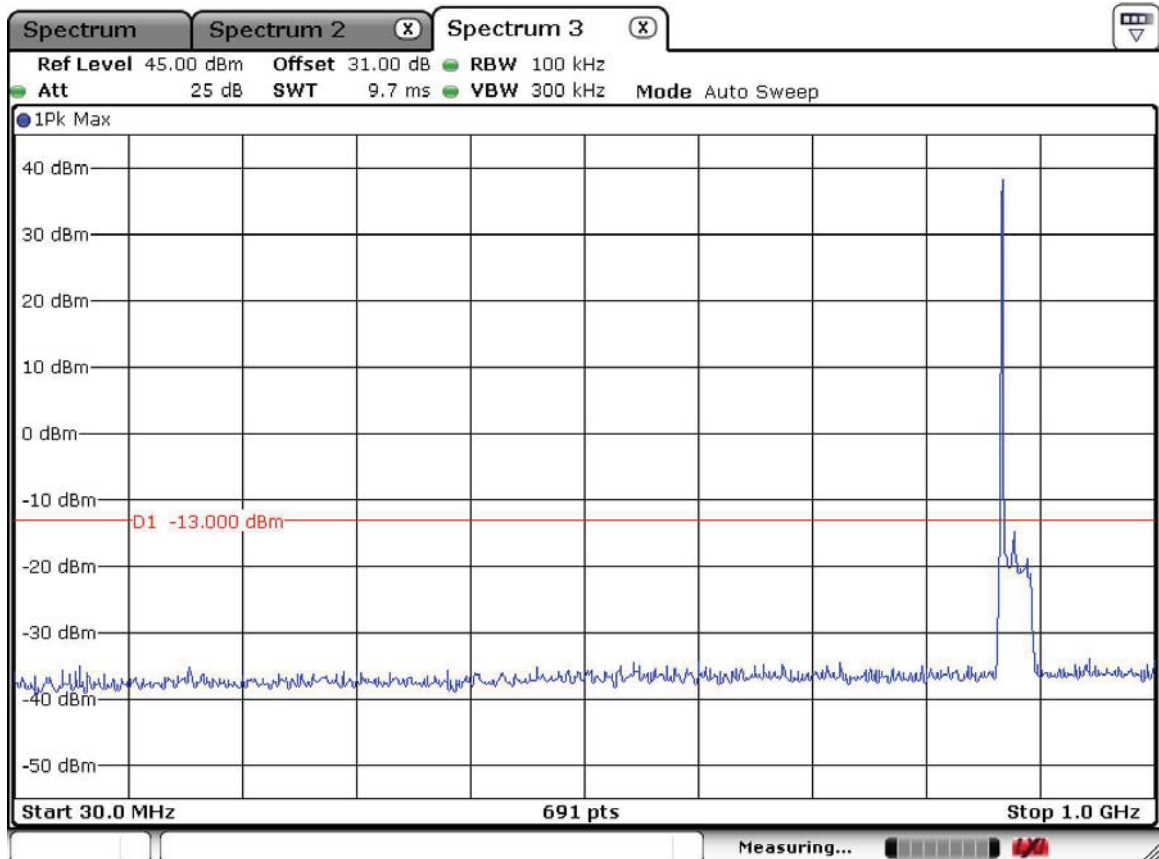



Antenna Terminal Spurious Emissions, CDMA 850, Mid_DL

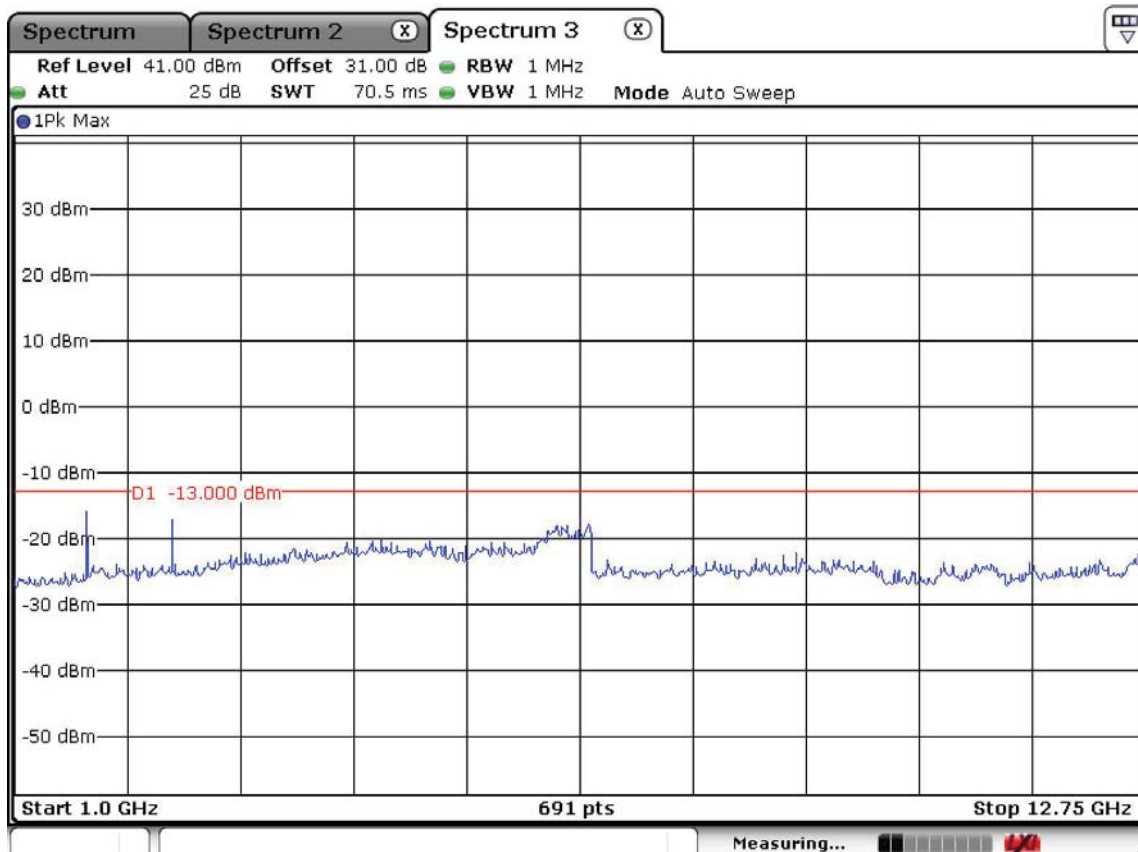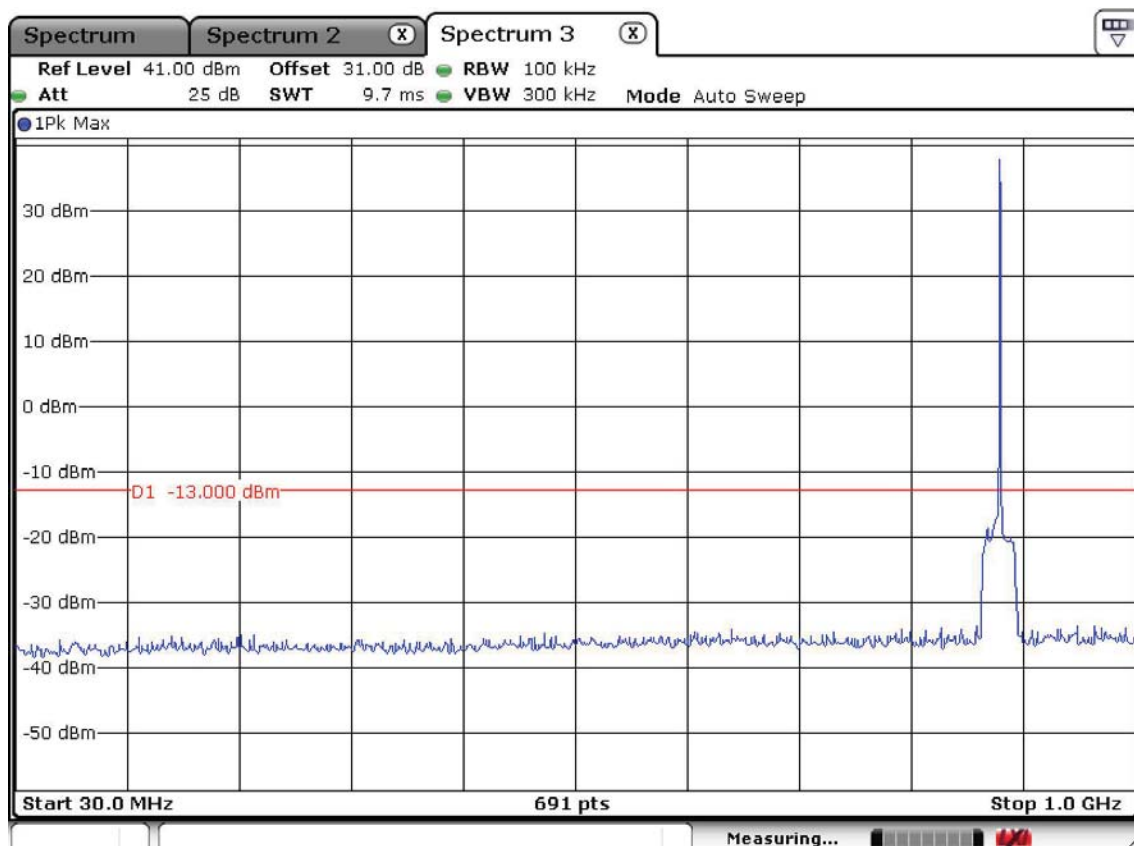



Antenna Terminal Spurious Emissions, CDMA 850, High_DL

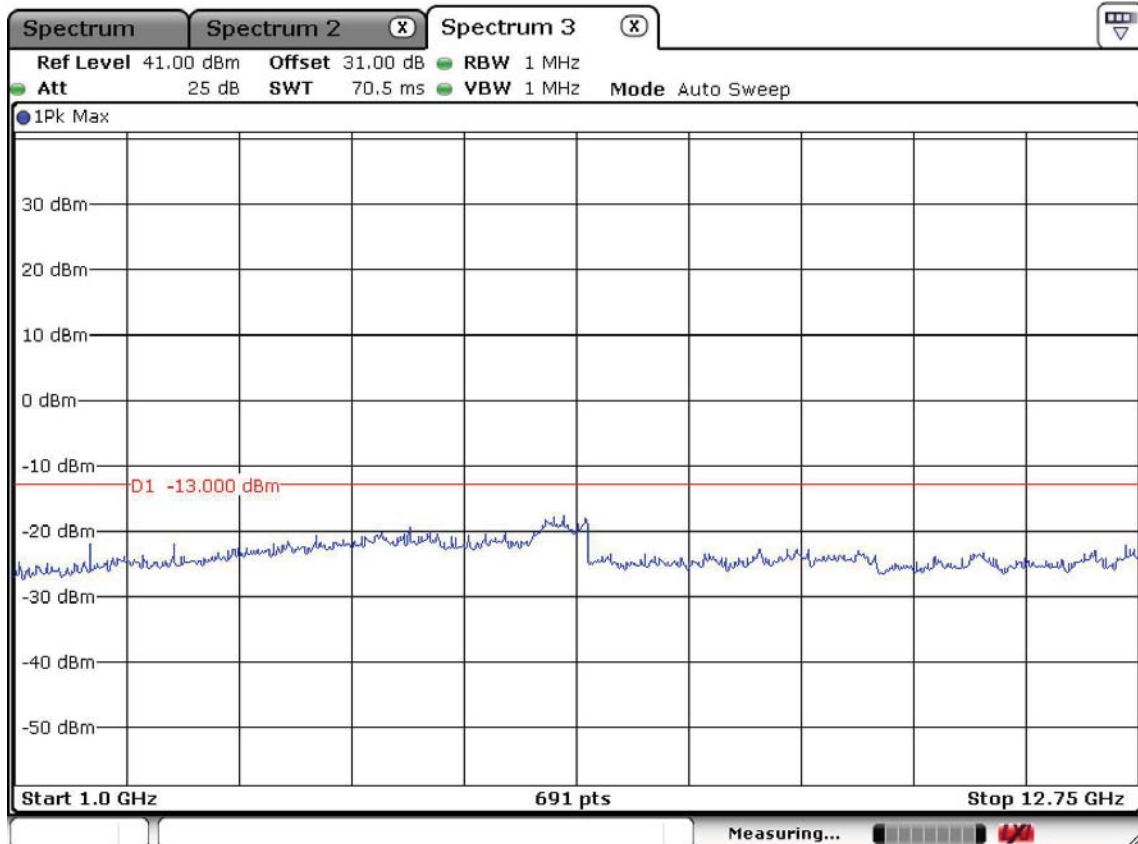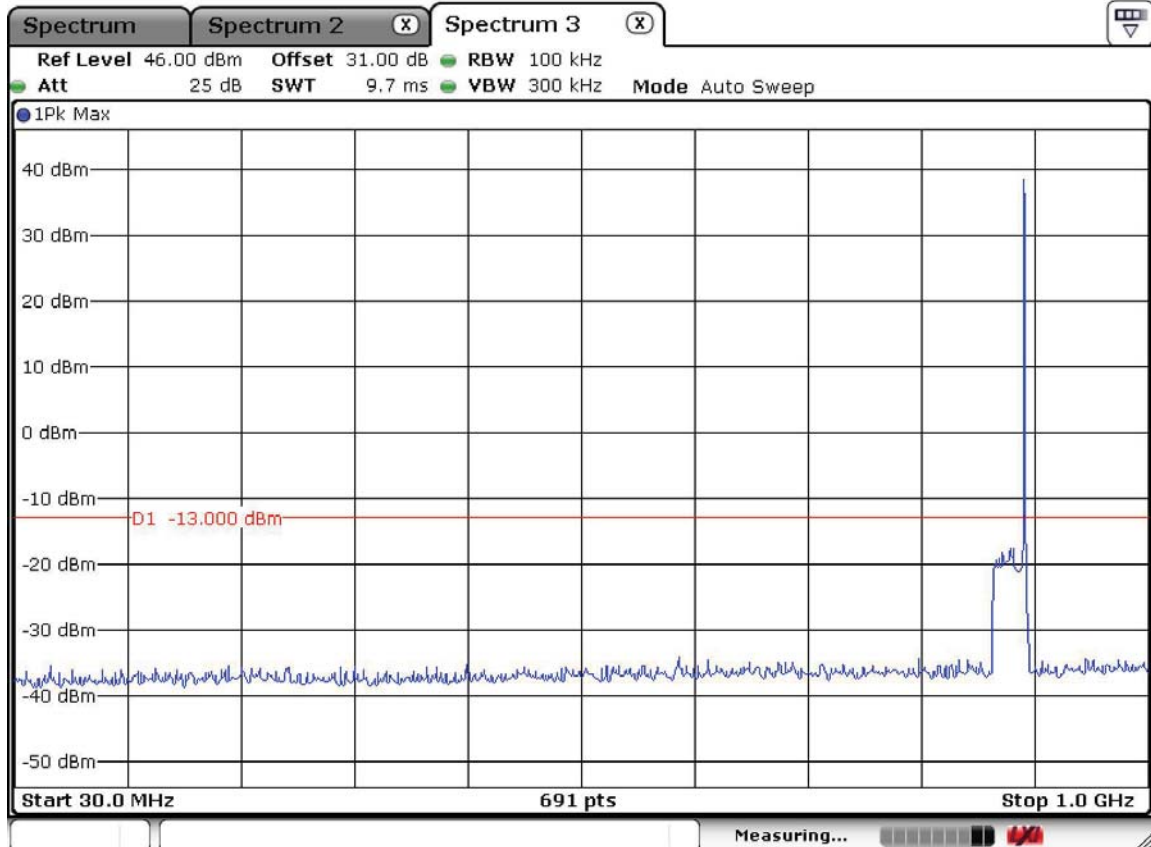



Antenna Terminal Spurious Emissions, CDMA 850, Low_UL

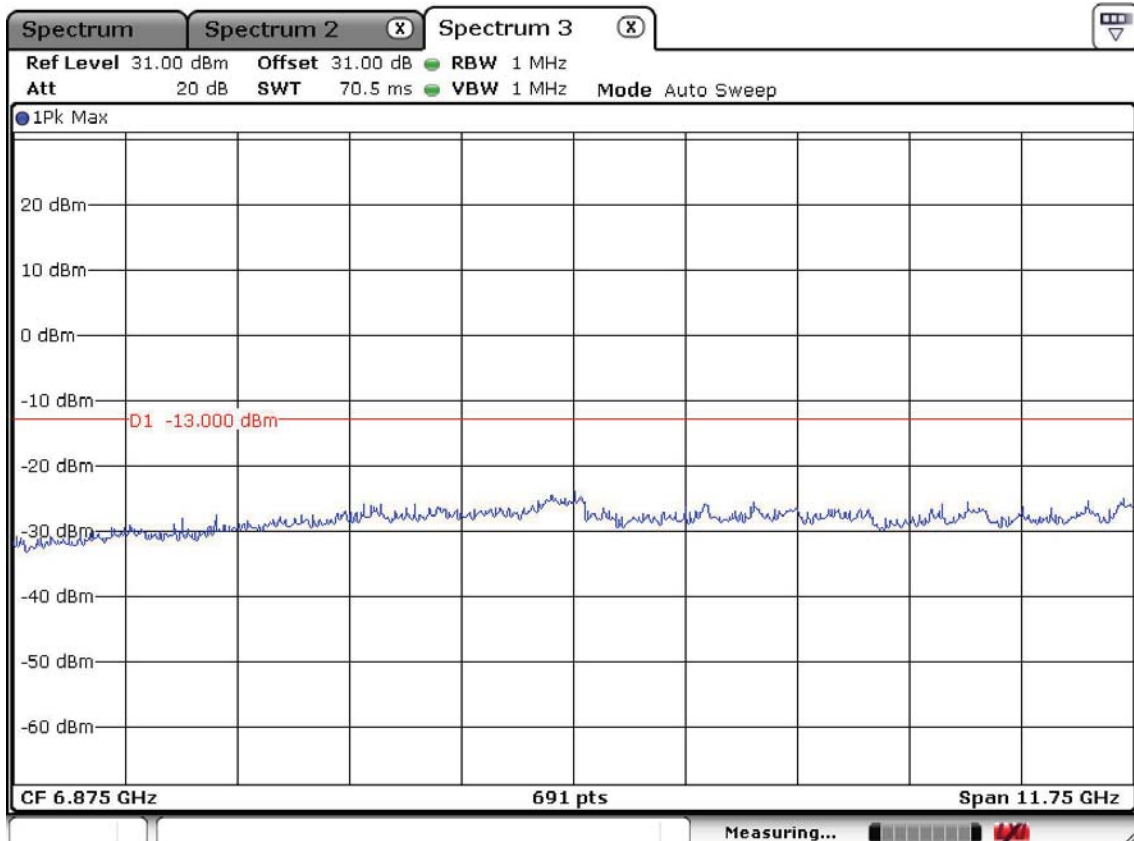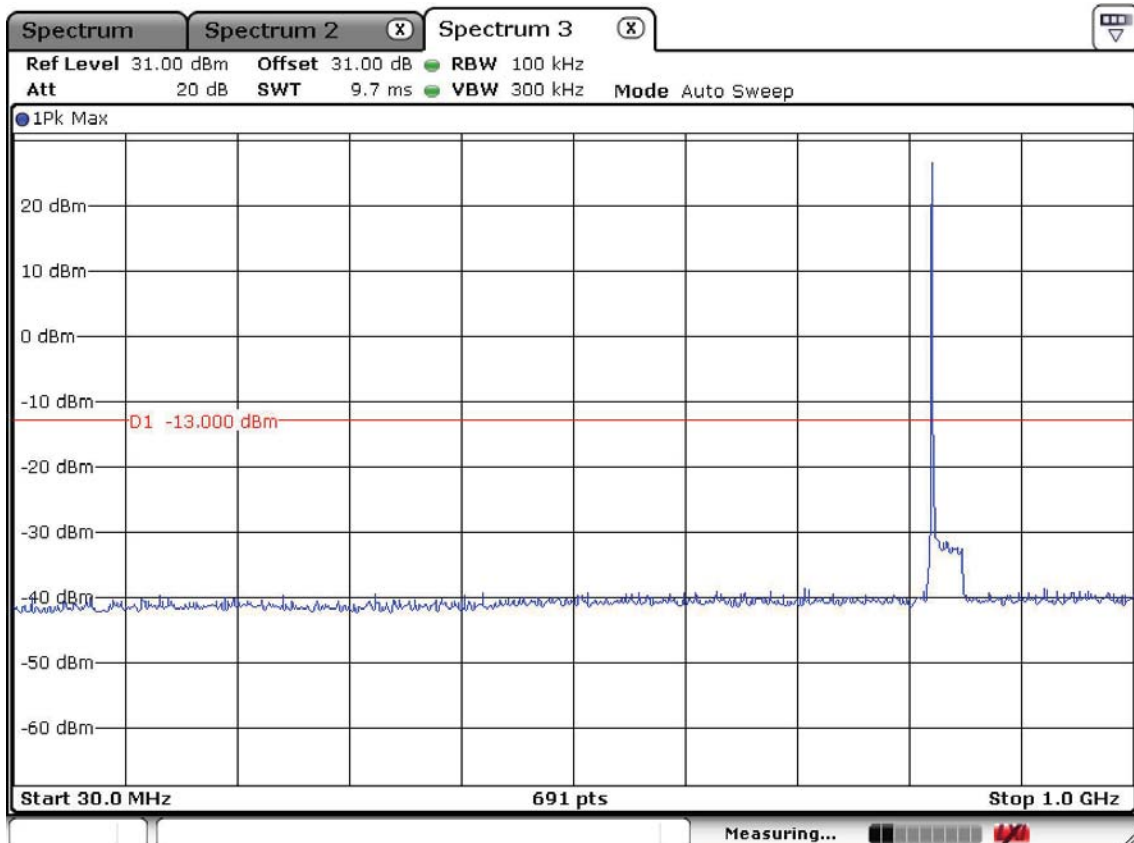



Antenna Terminal Spurious Emissions, CDMA 850, Mid_UL

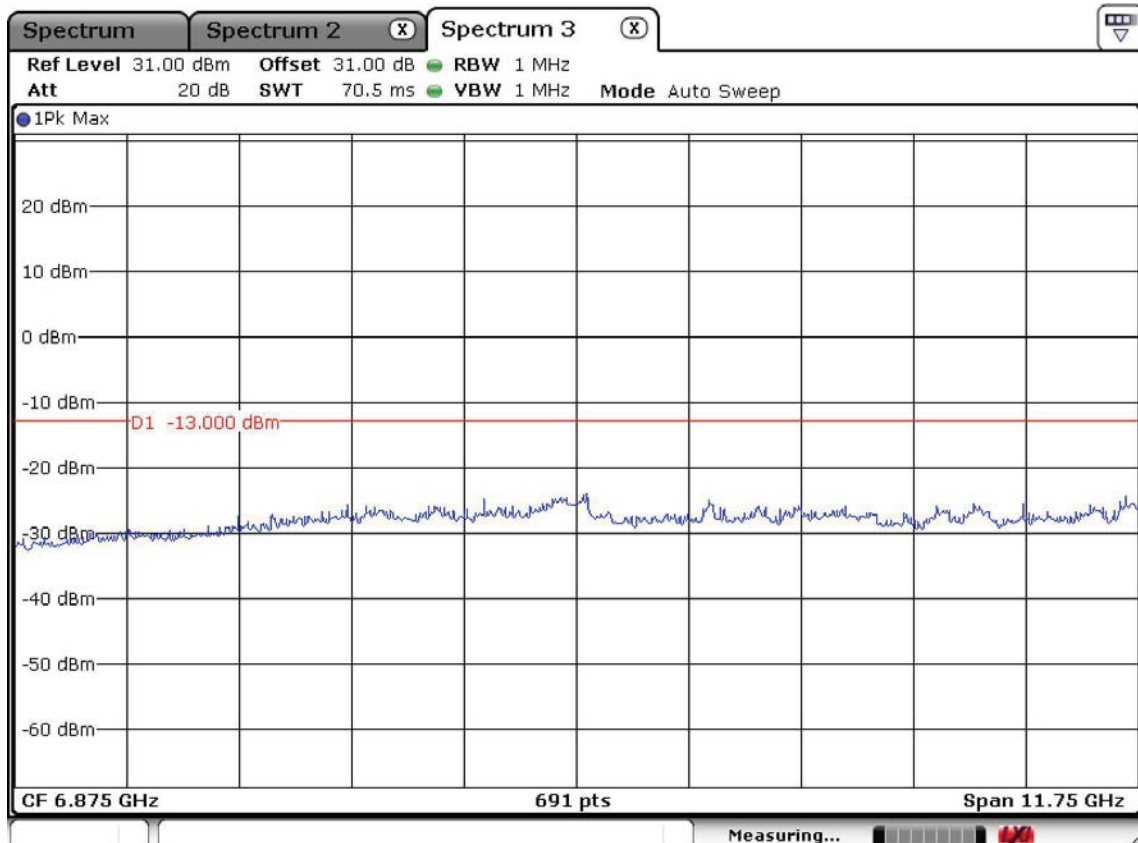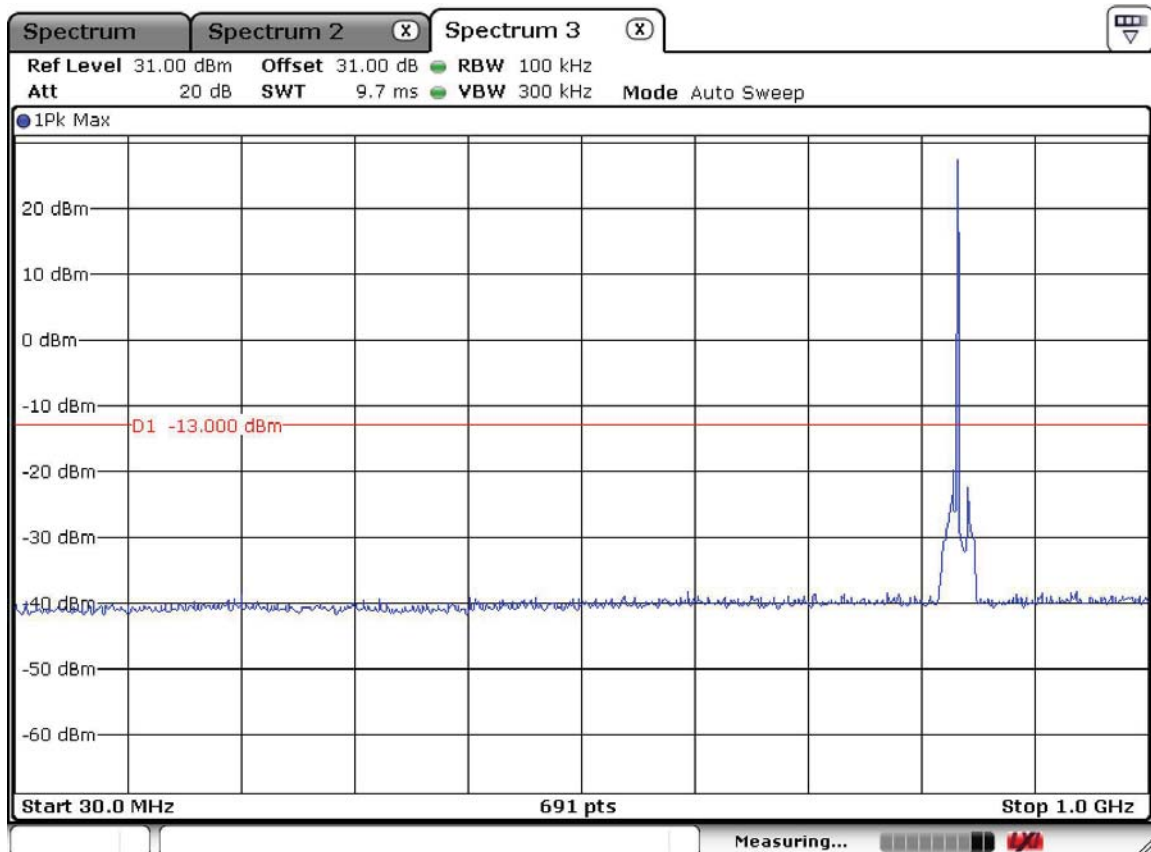



Antenna Terminal Spurious Emissions, CDMA 850, High_UL

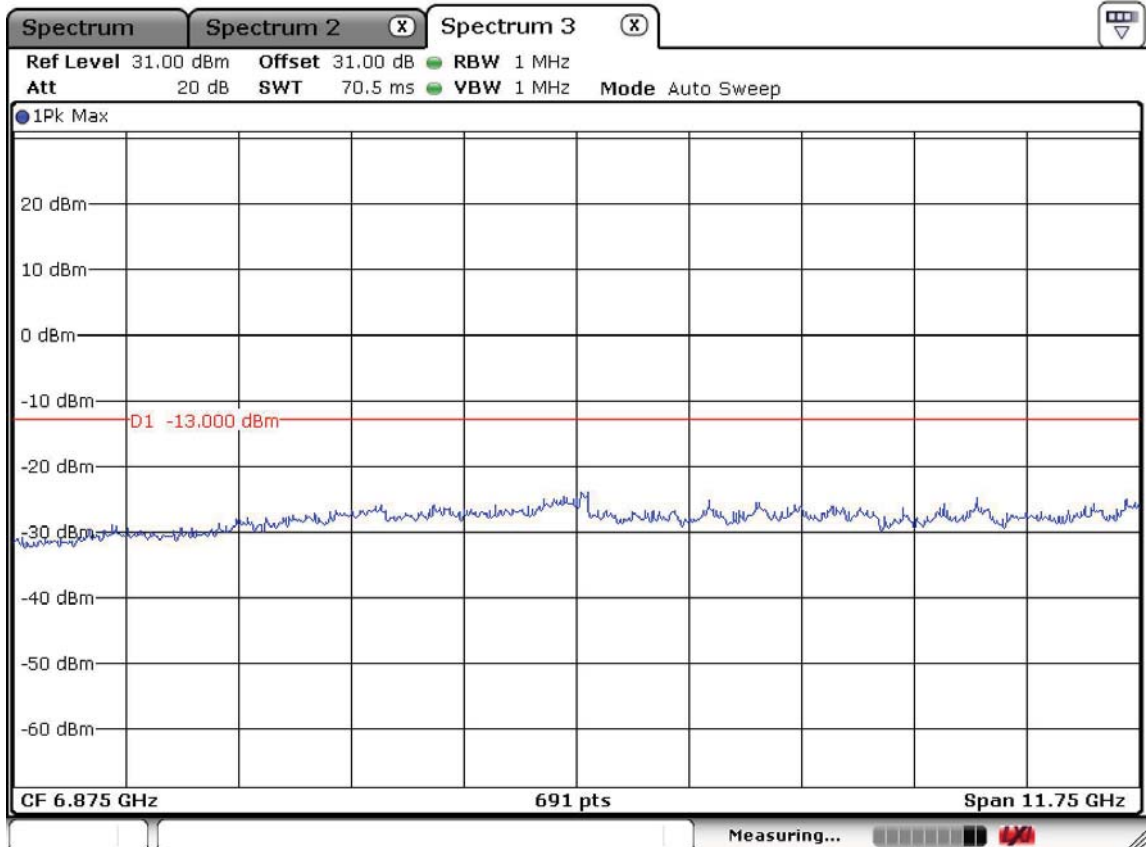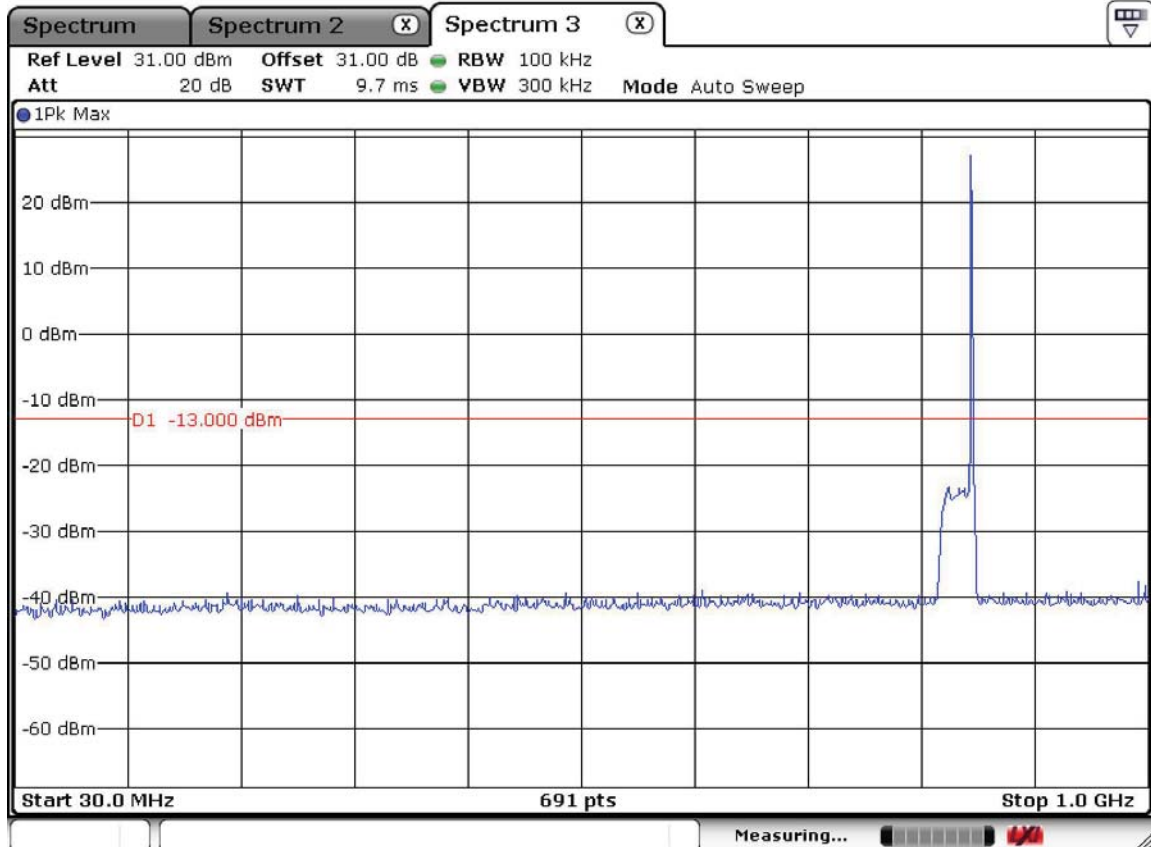



Antenna Terminal Spurious Emissions, PCS 1900, Low_DL

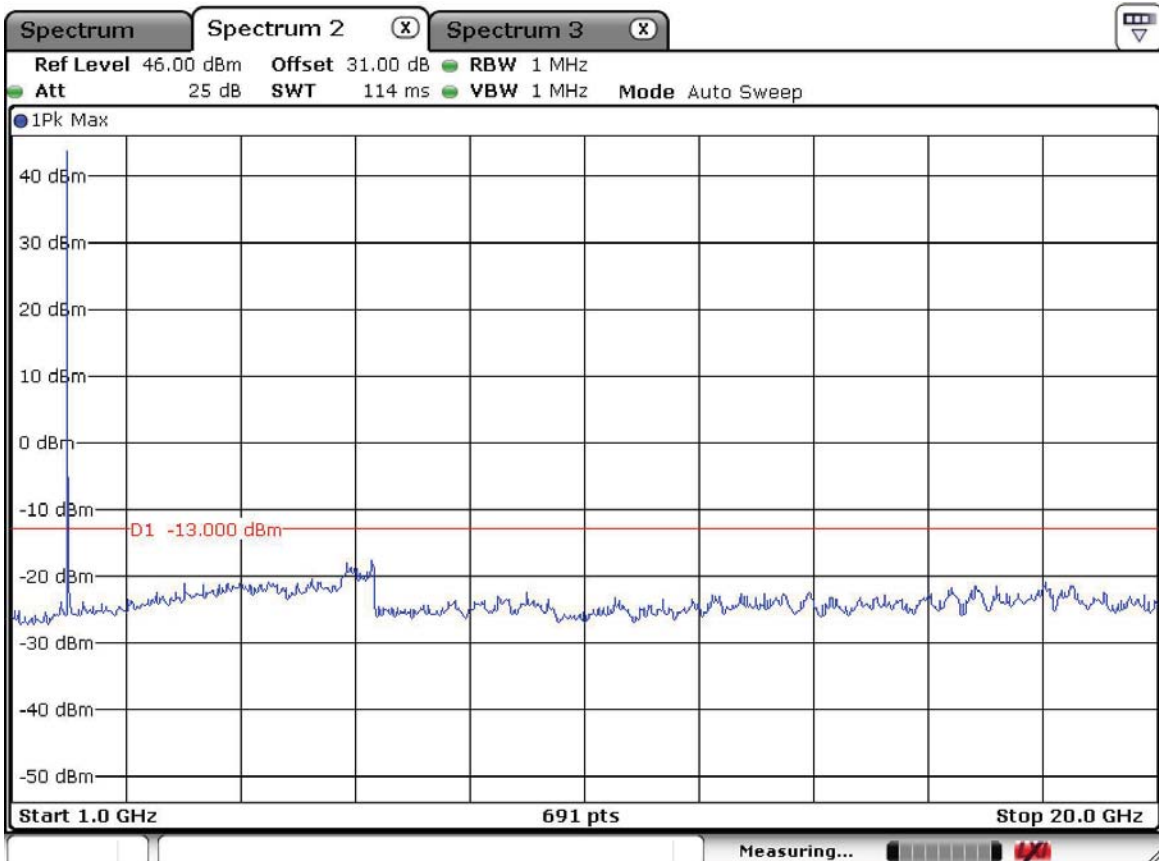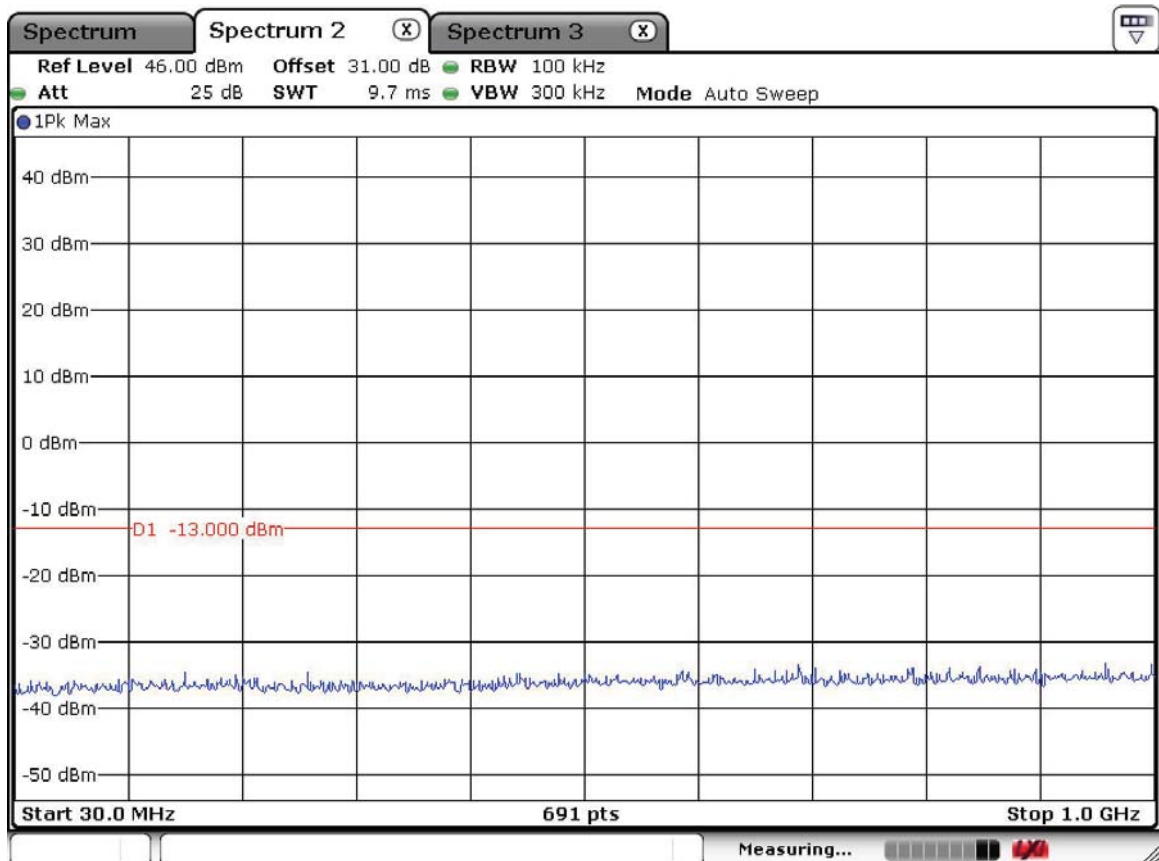



Antenna Terminal Spurious Emissions, PCS 1900, Mid_DL

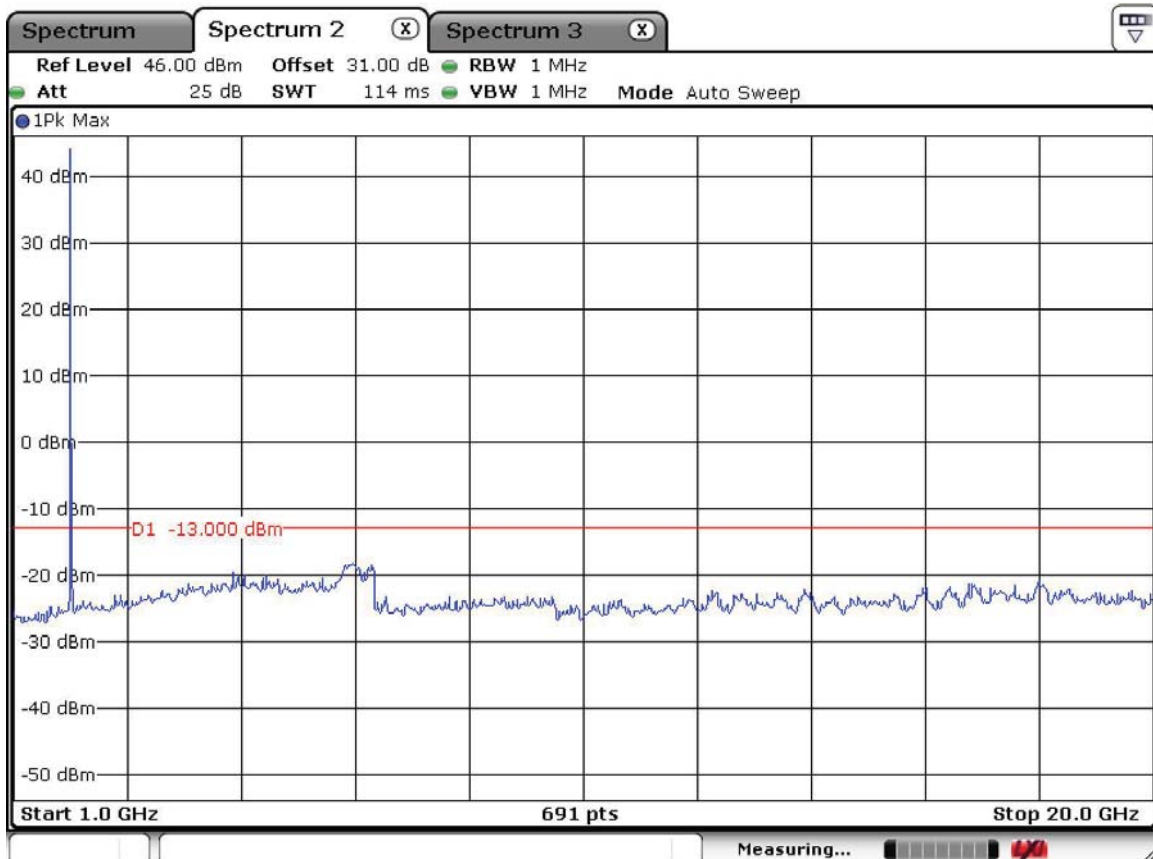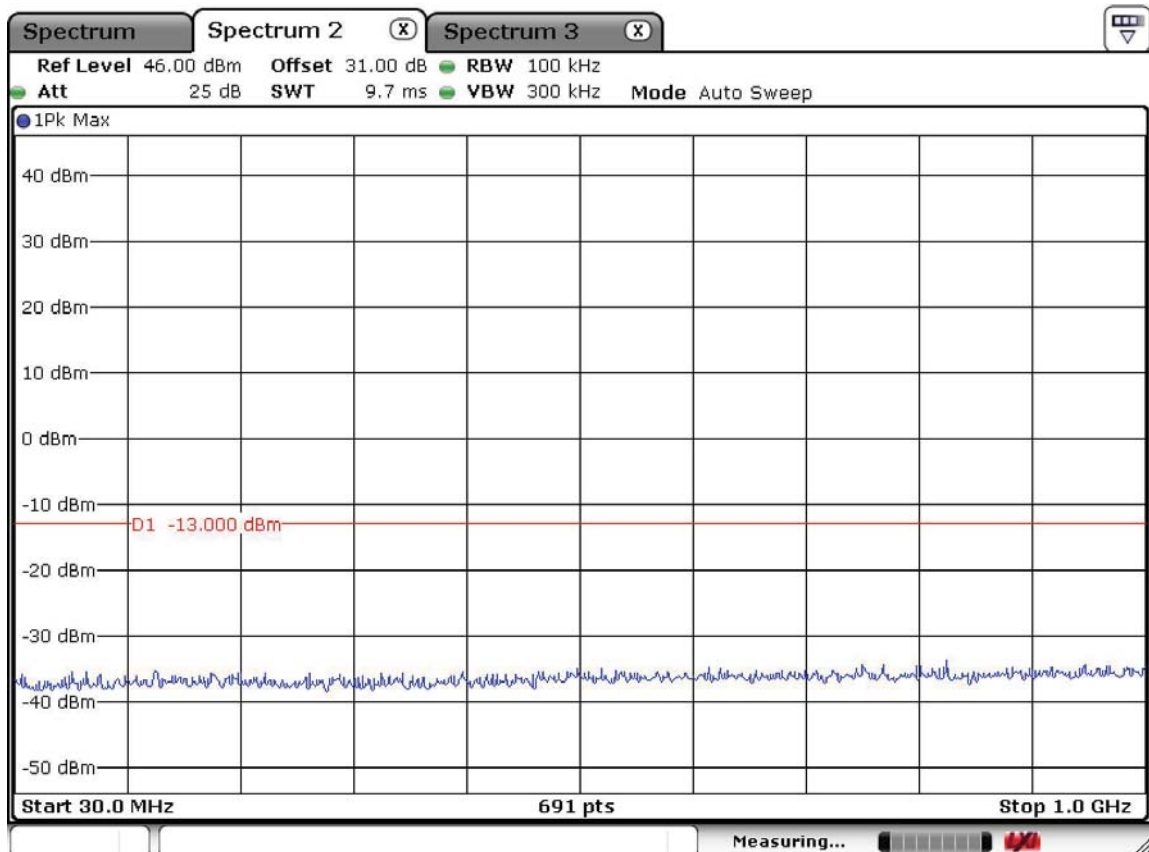



Antenna Terminal Spurious Emissions, PCS 1900, High_DL

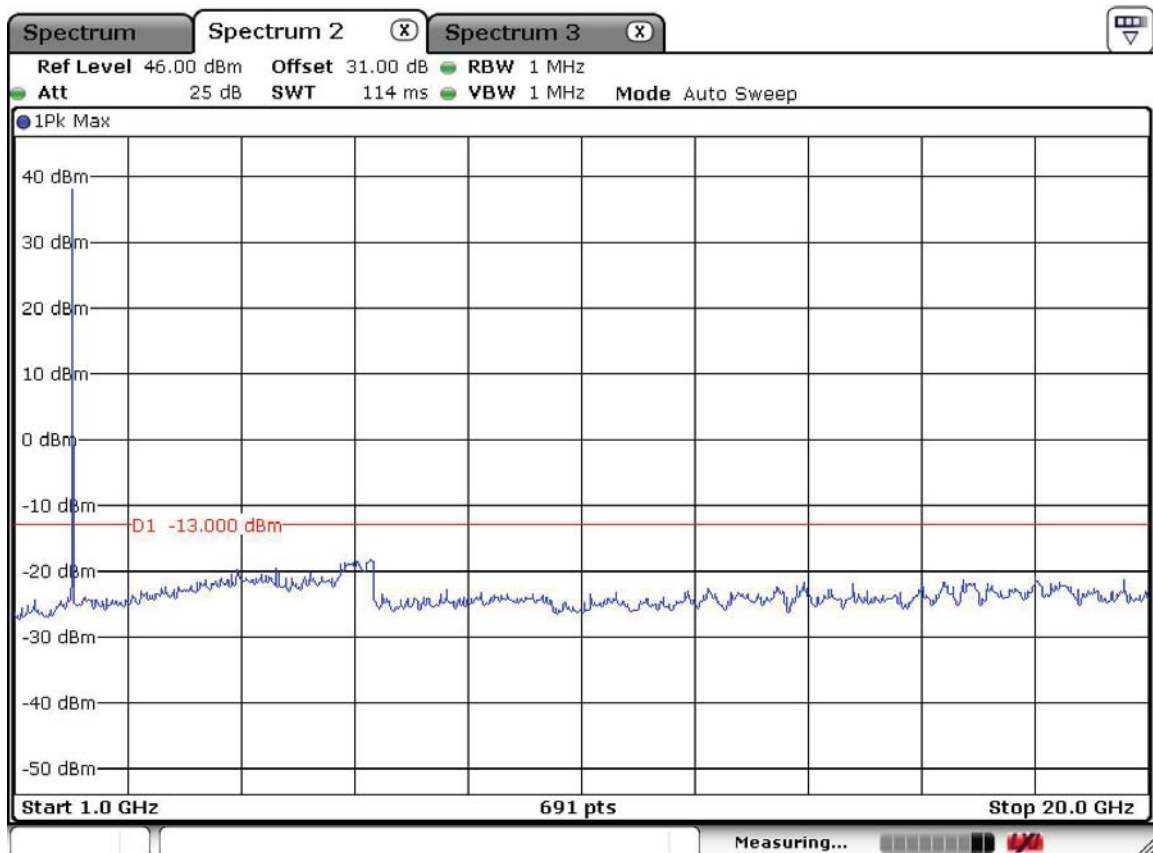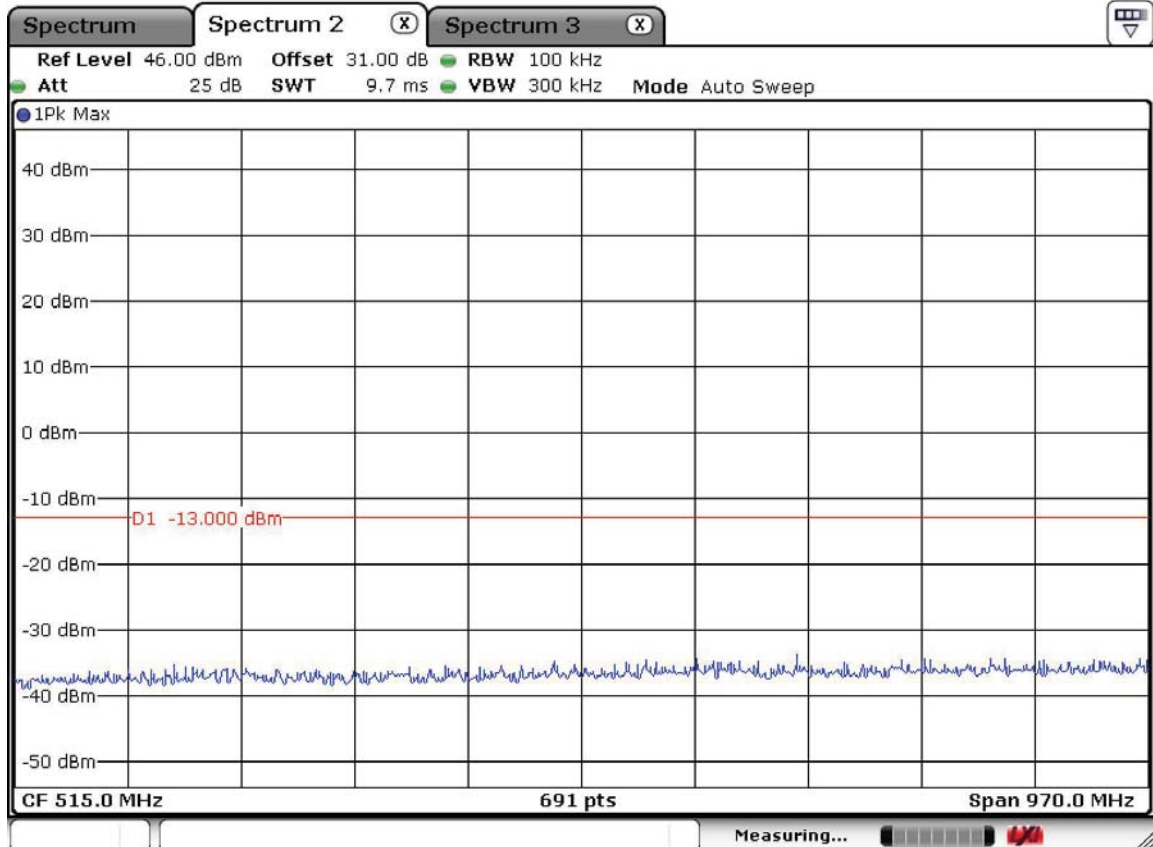



Antenna Terminal Spurious Emissions, PCS 1900, Low_UL

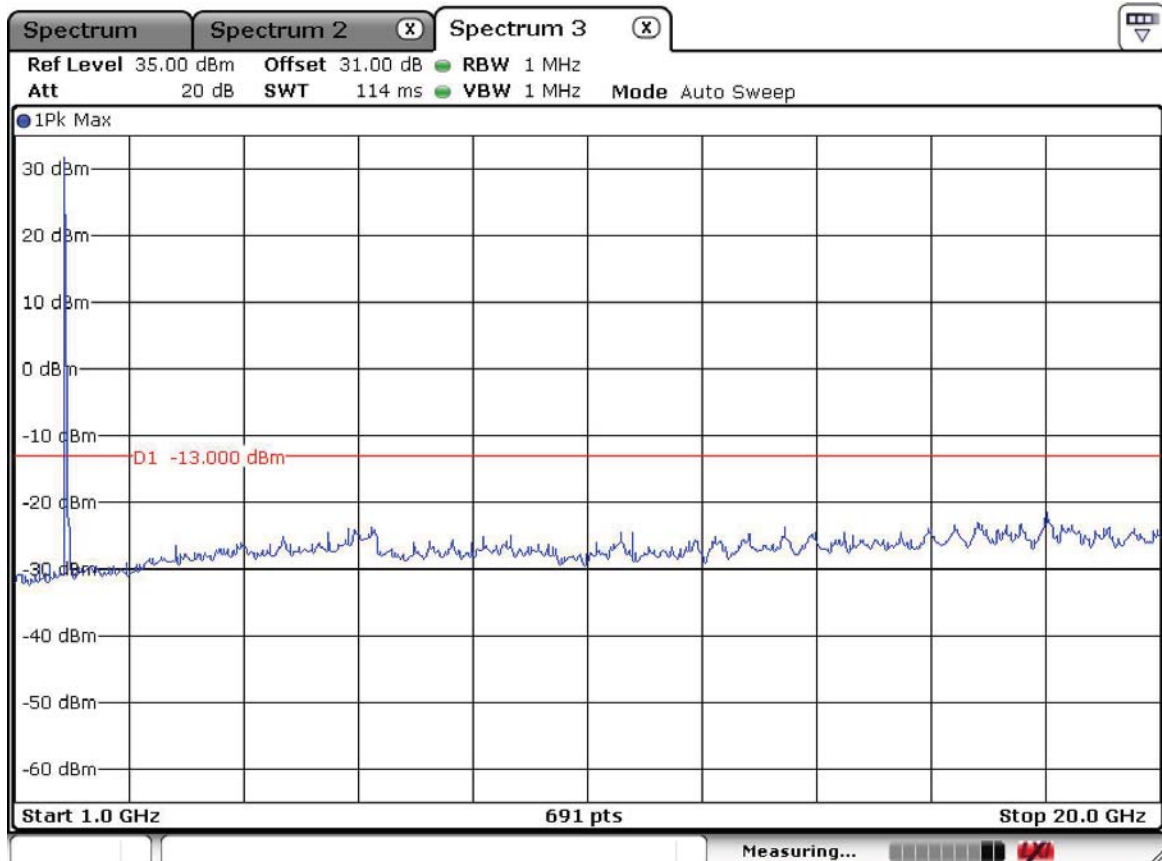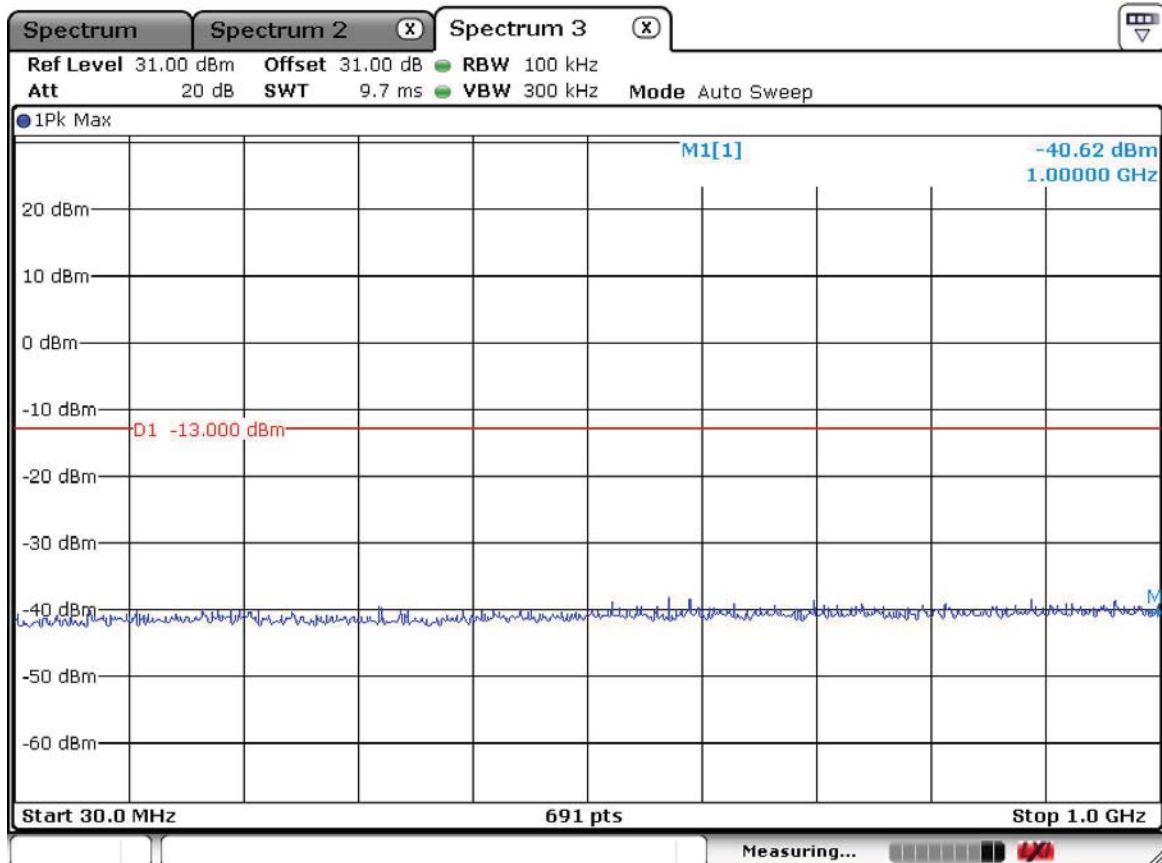


Antenna Terminal Spurious Emissions, PCS 1900, Mid_UL

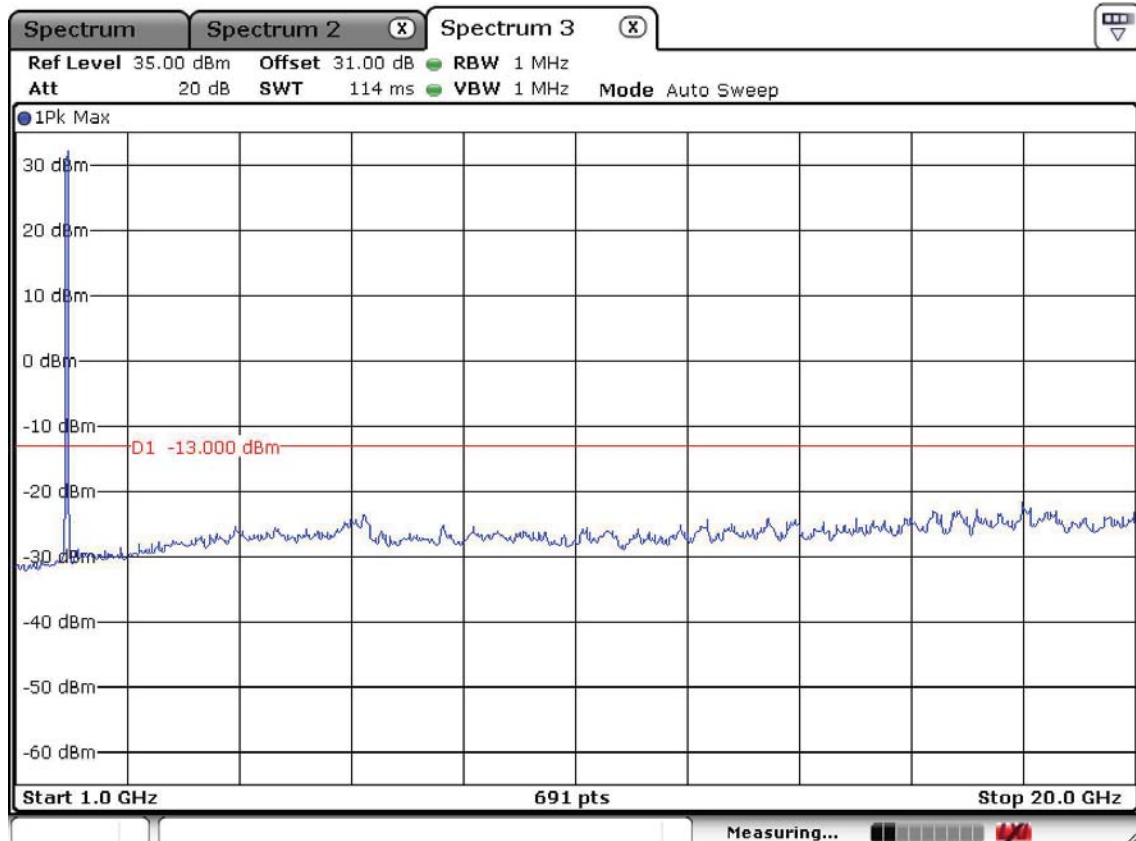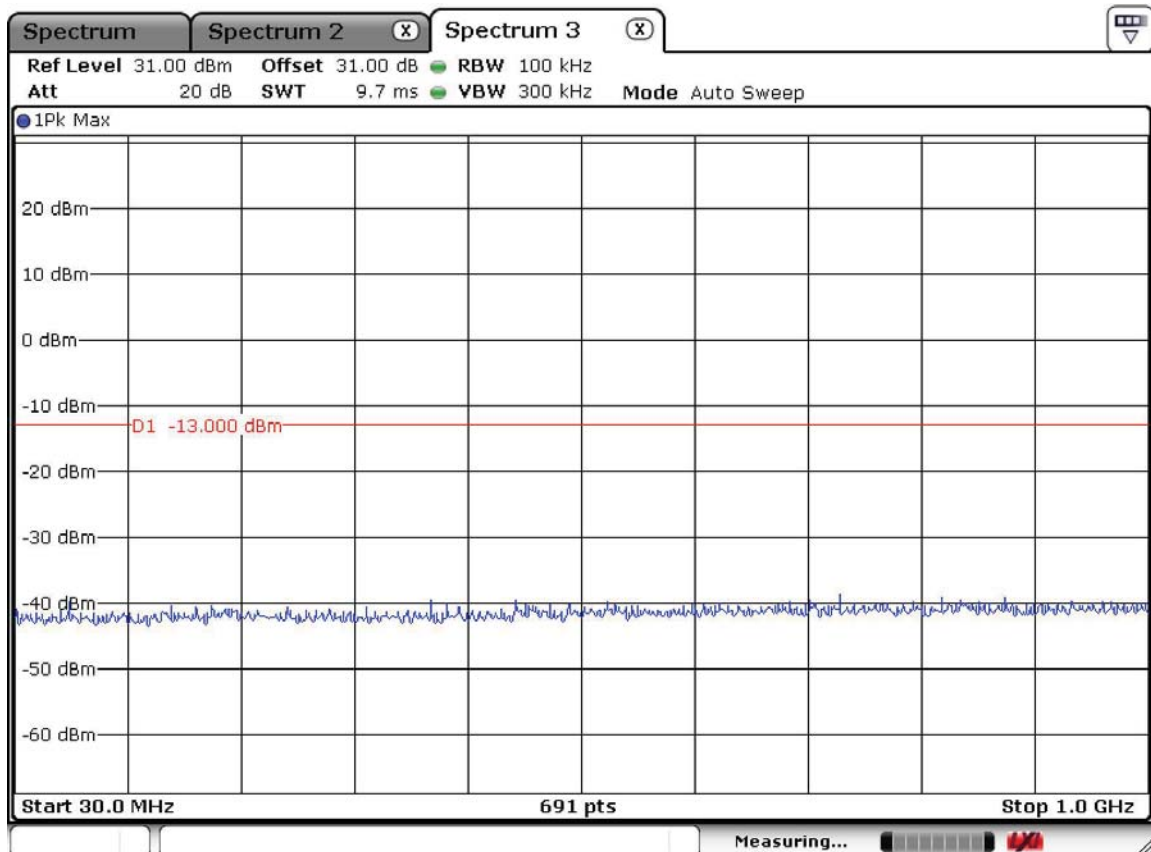


Antenna Terminal Spurious Emissions, PCS 1900, High_UL

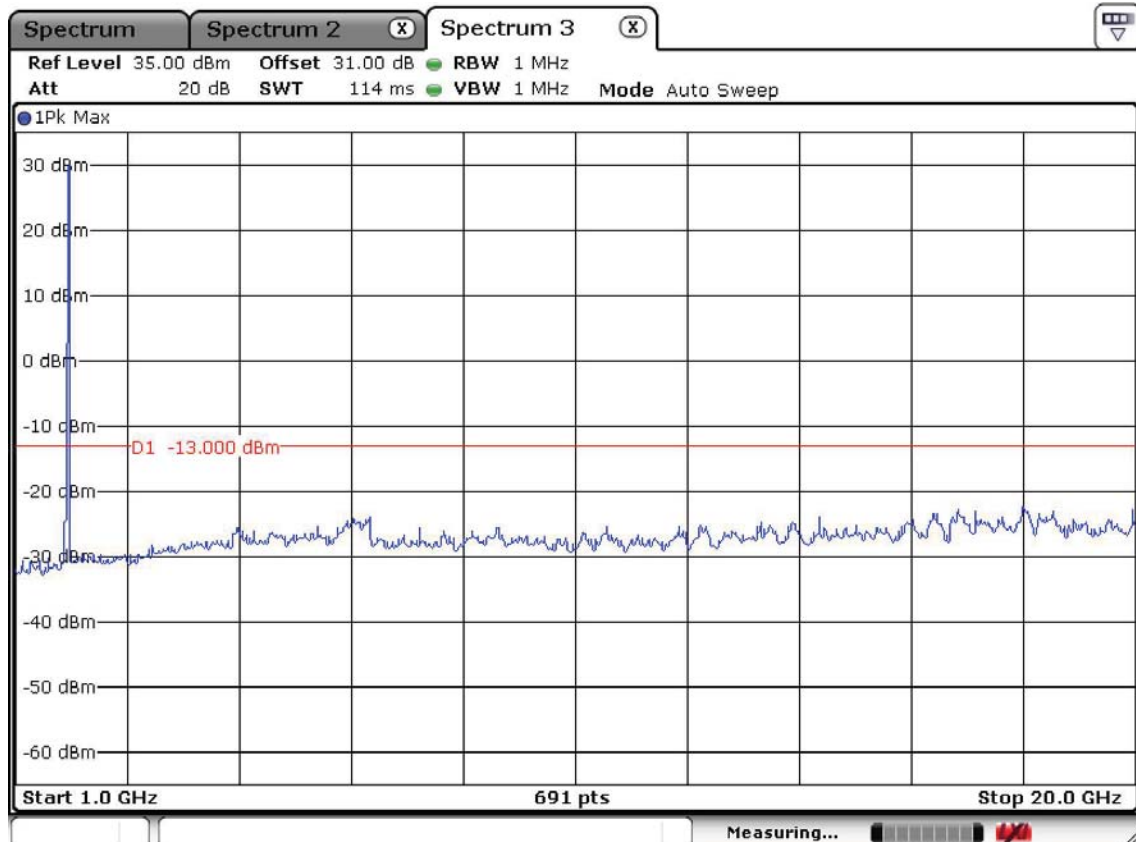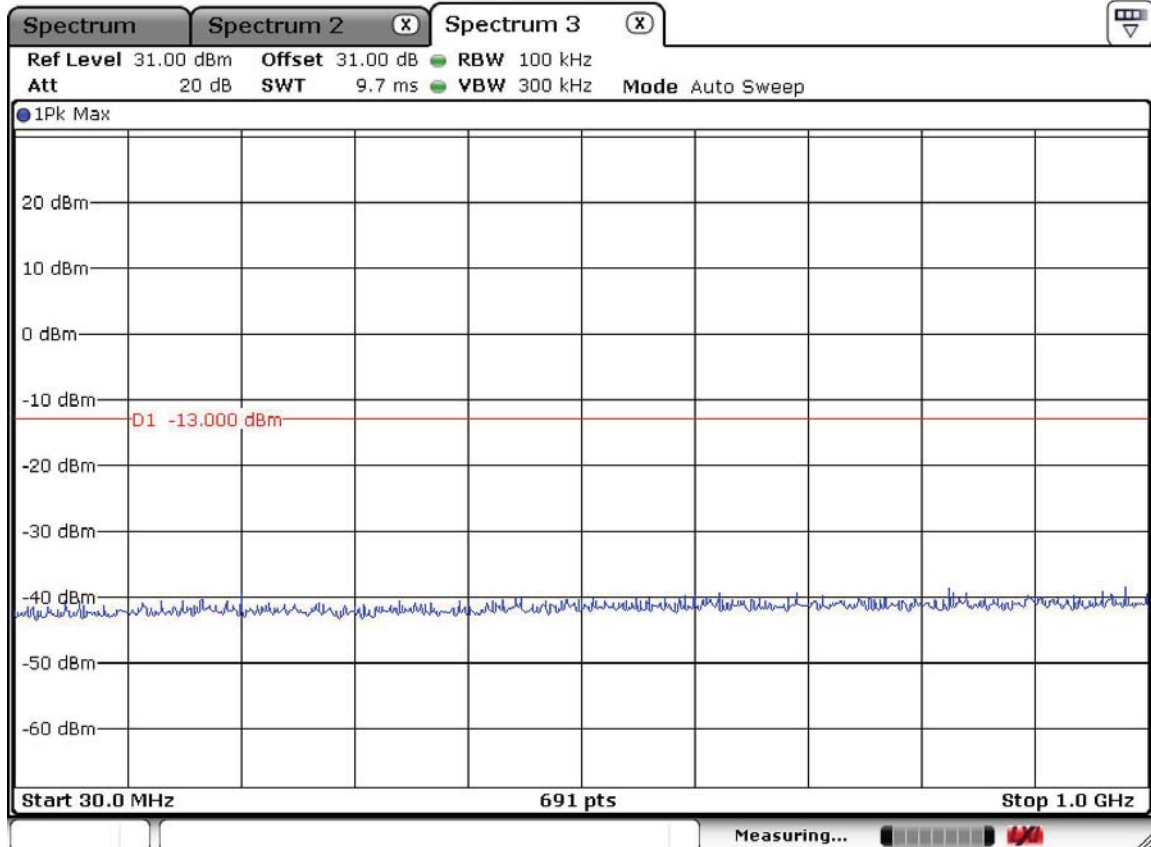


Band Edge Emissions, CDMA 850, Low_DL

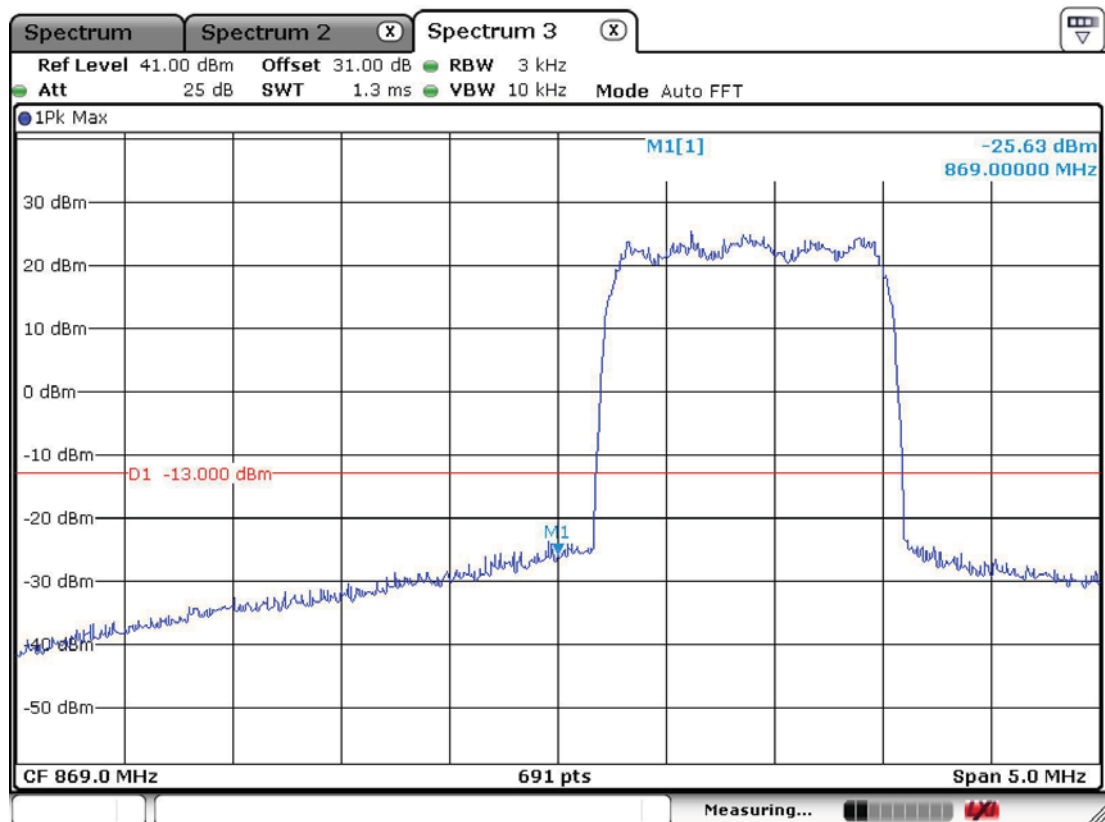


Band Edge Emissions, CDMA 850, High_DL

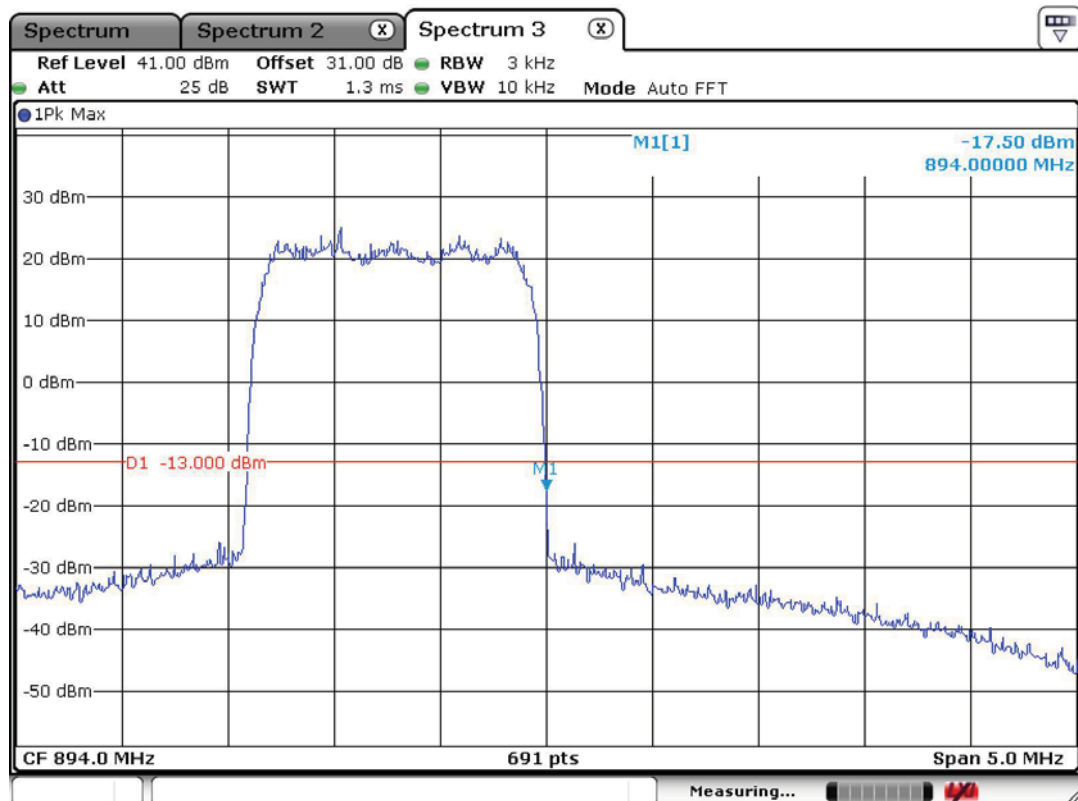


Band Edge Emissions, CDMA 850, Low_UL

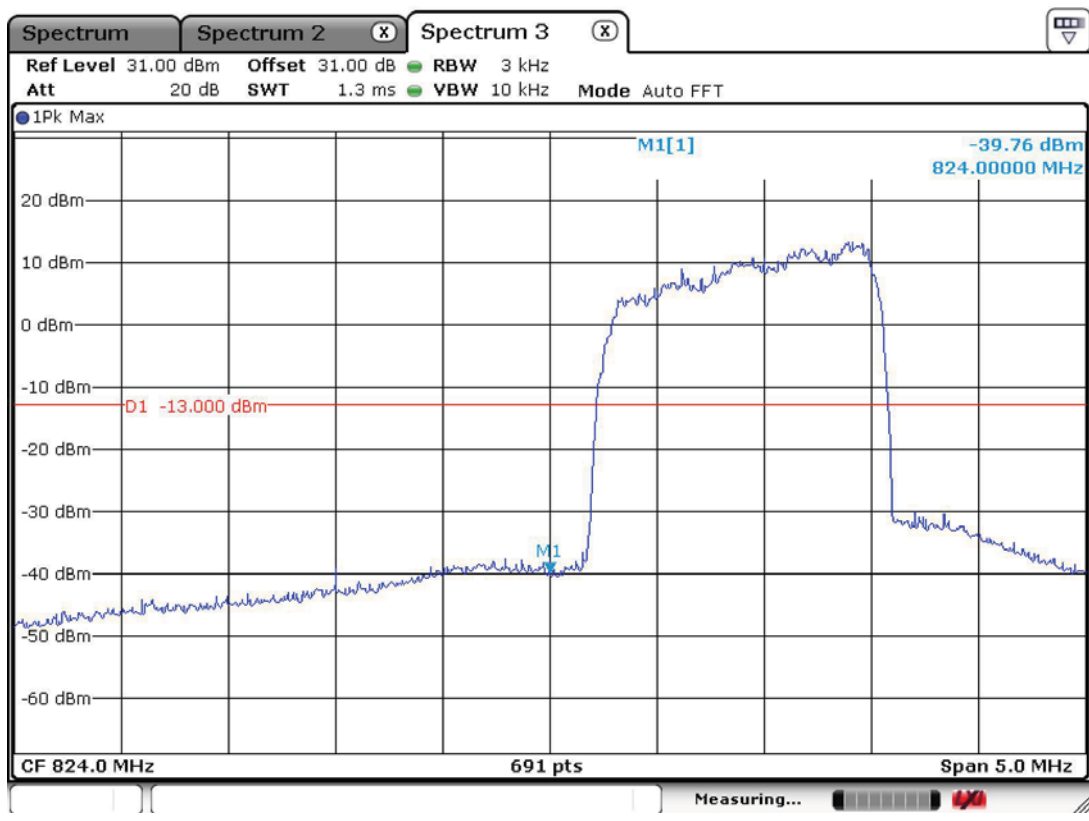


Band Edge Emissions, CDMA 850, High_UL

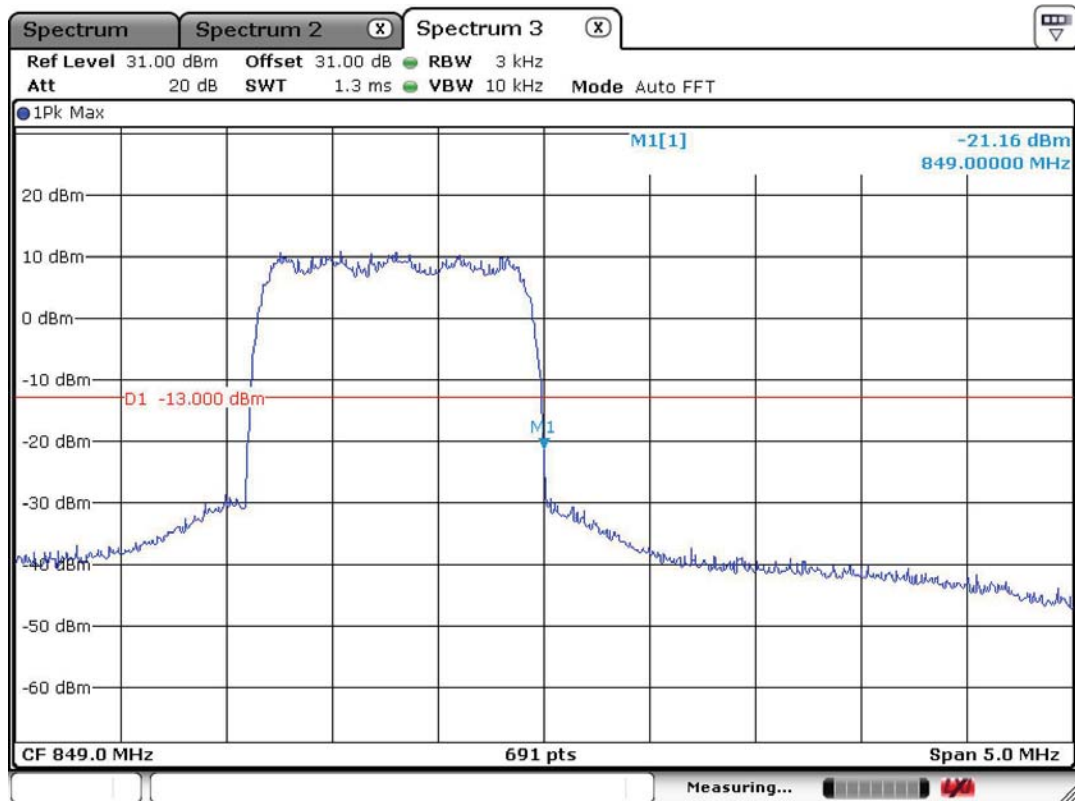


Band Edge Emissions, PCS 1900, Low_DL

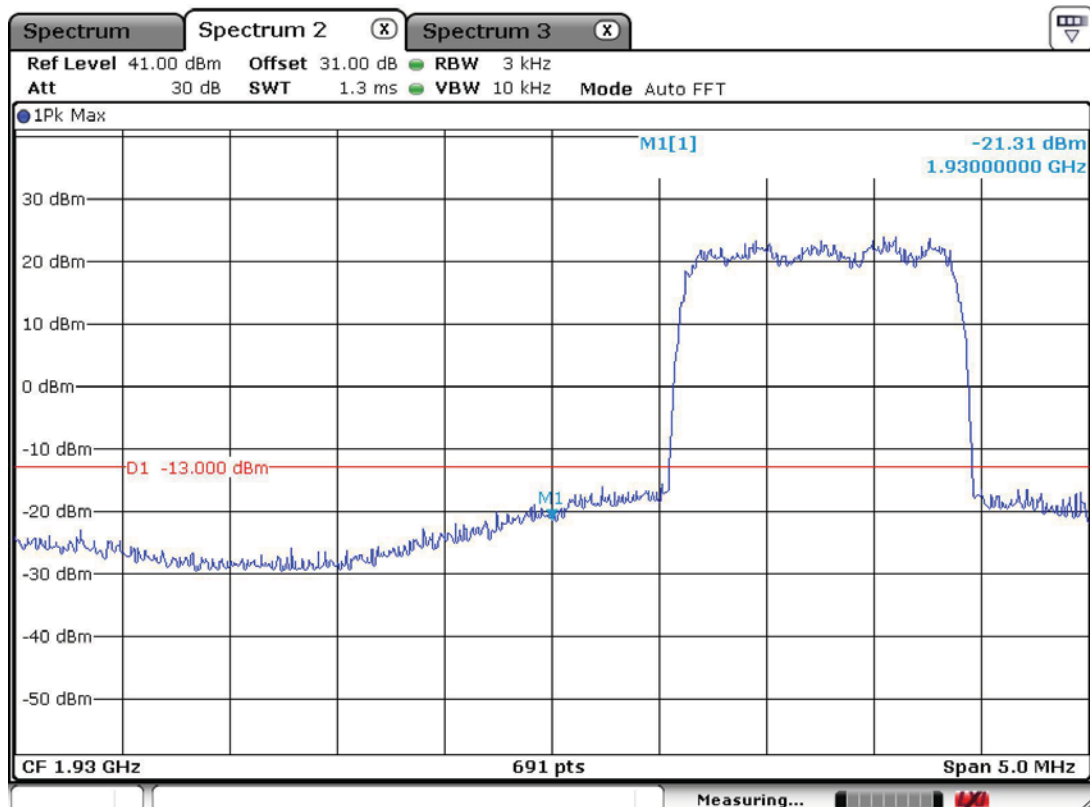


Band Edge Emissions, PCS 1900, High_DL

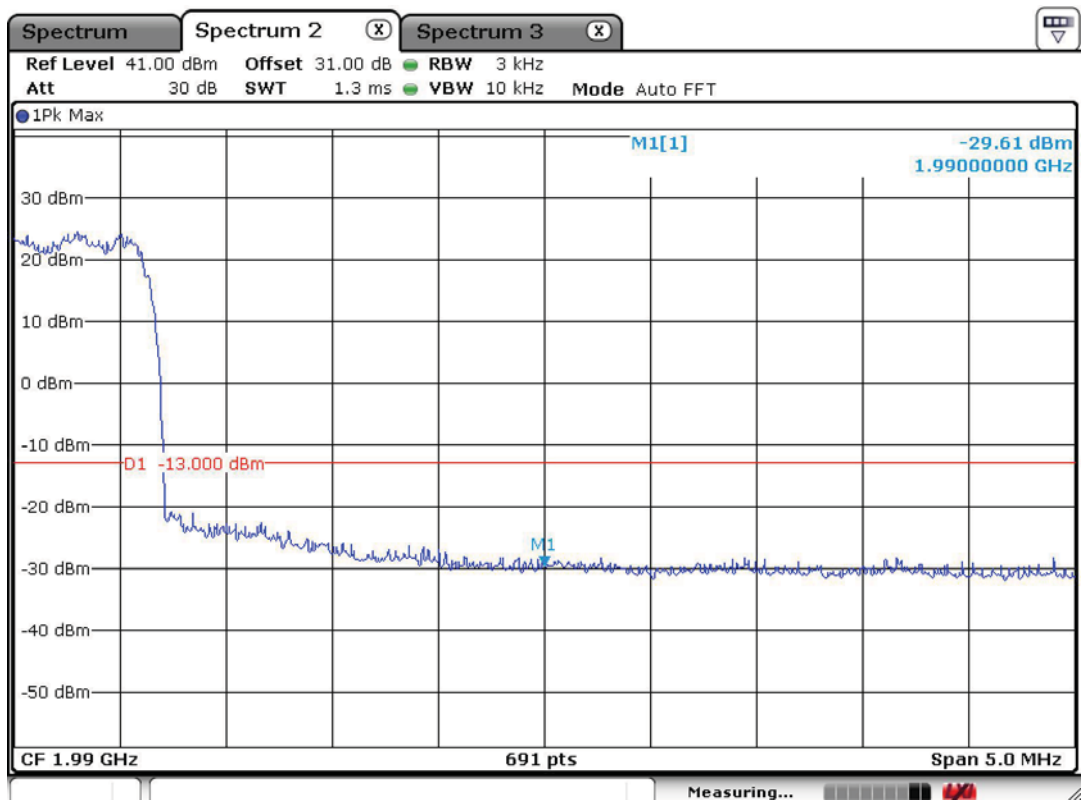

Band Edge Emissions, PCS 1900, Low_UL

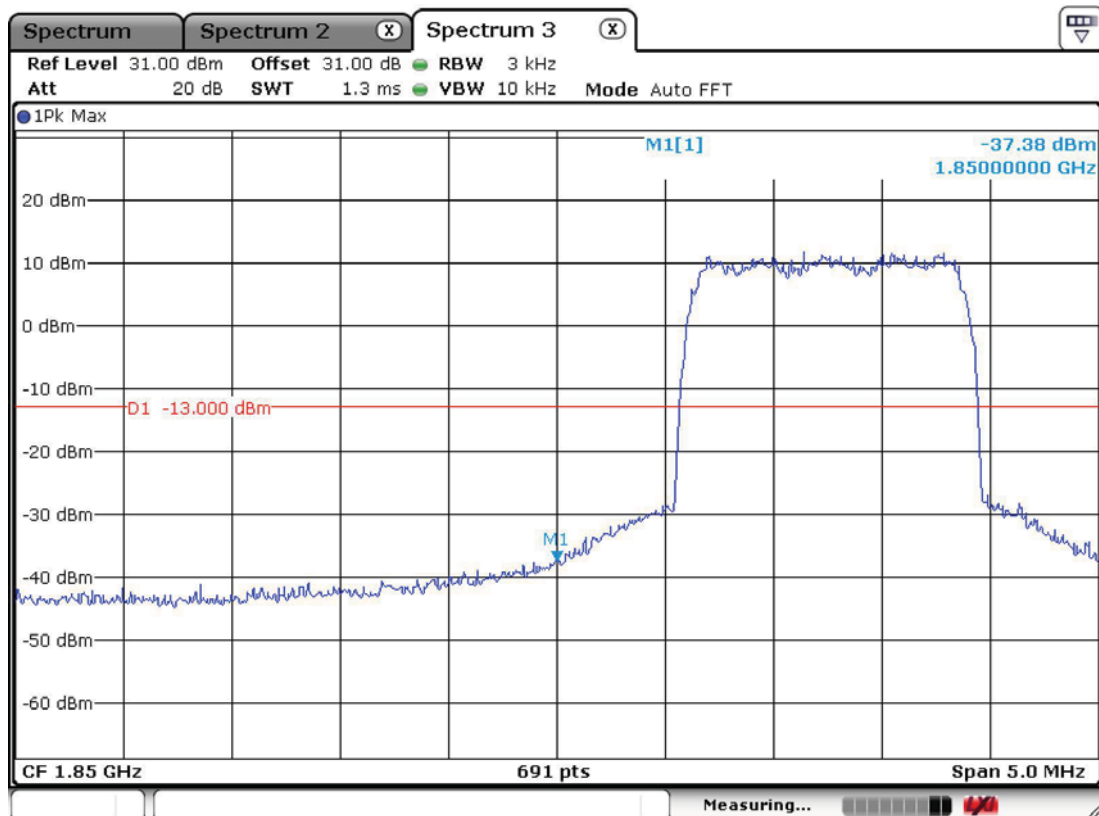

Band Edge Emissions, PCS 1900, High_UL

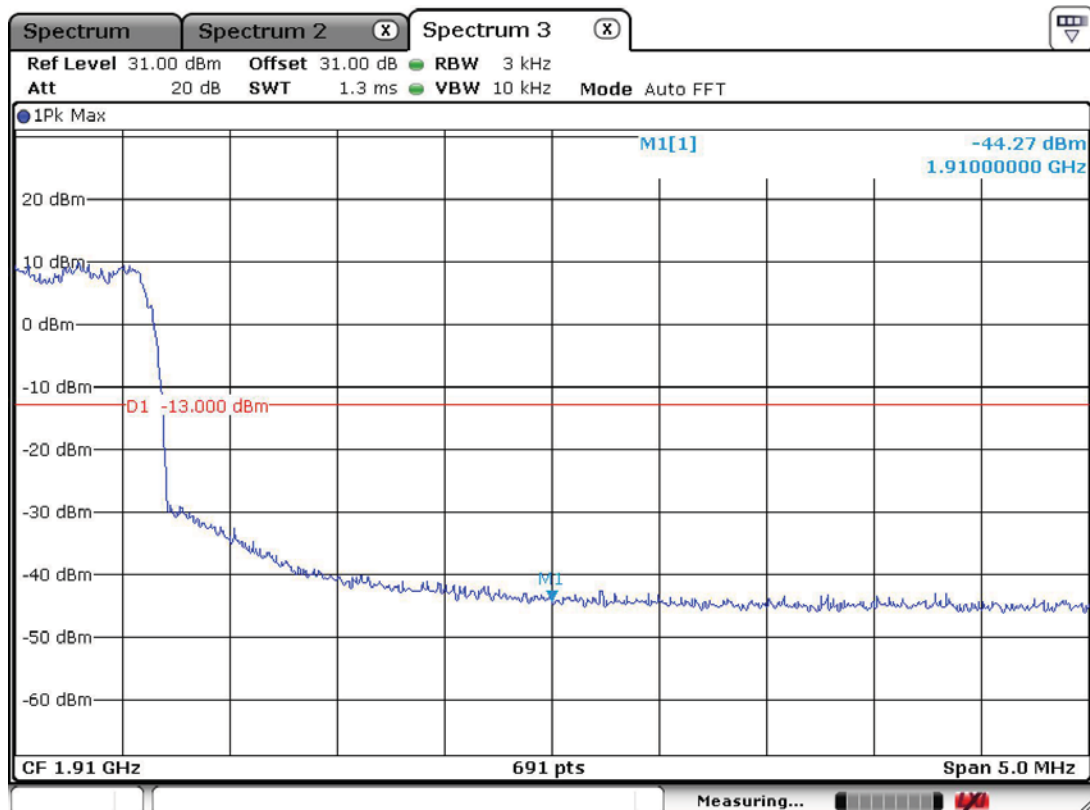

3.2.4 Intermodulation

1. Requirement

the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The limit of emission equal to -13dBm .


2. Test Procedure

Two RF signals set as inputs. The frequencies of both RF signals shall be within the repeater's operating band. The spacing between both RF signals shall be the minimum possible spacing applied in a network. The level of both RF input signals shall be increased, until the maximum rated output power per channel, as declared by the manufacturer, is reached.


3. Test Results : Complies



Refer to the following Graphs.



CDMA 850 Low DL

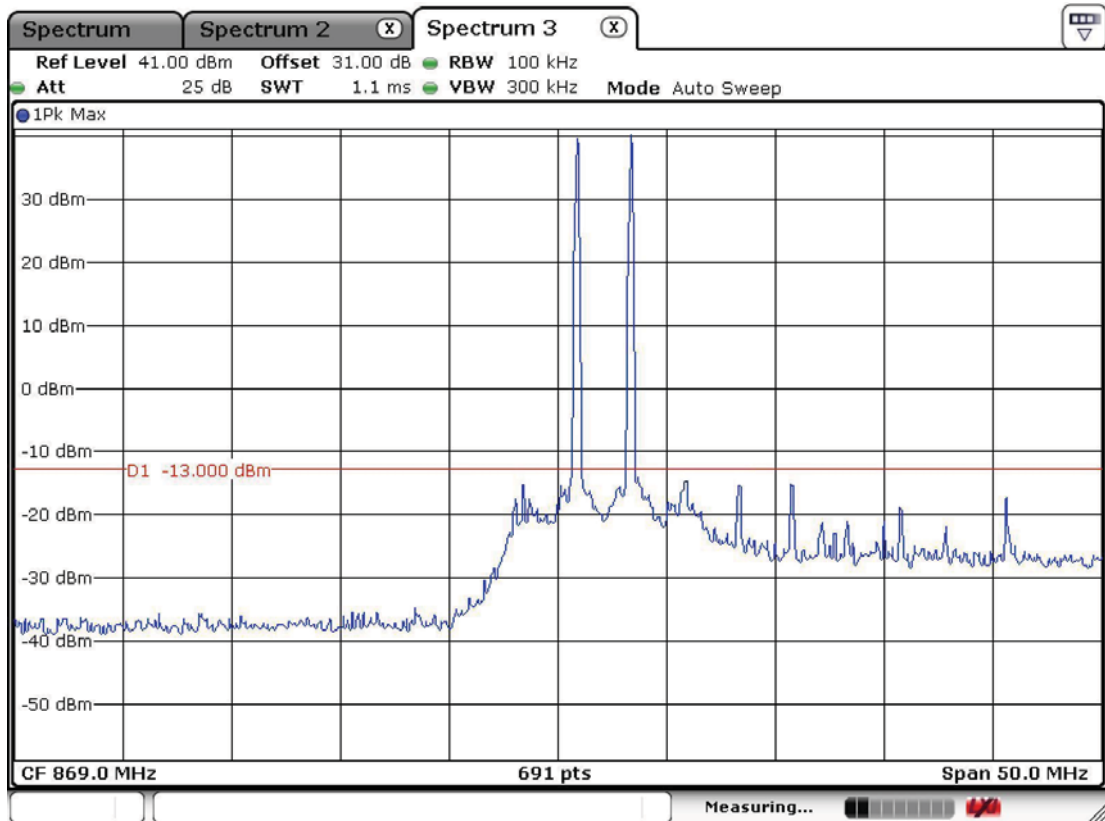


CDMA 850 High DL

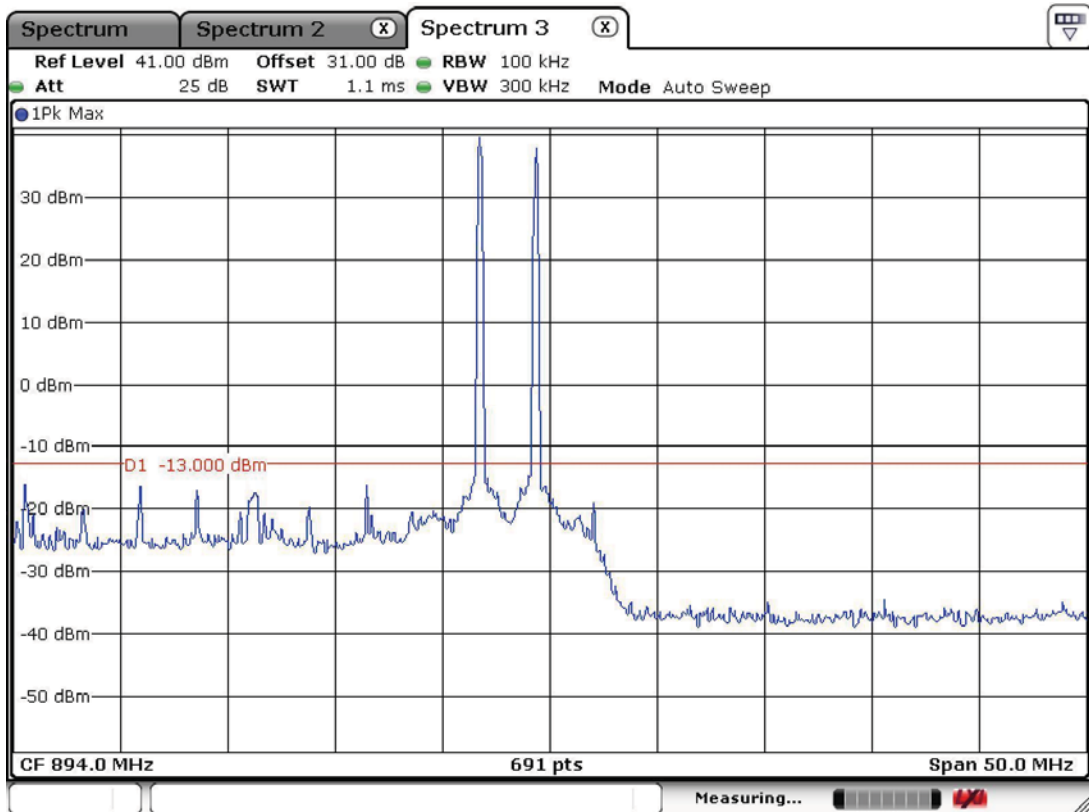

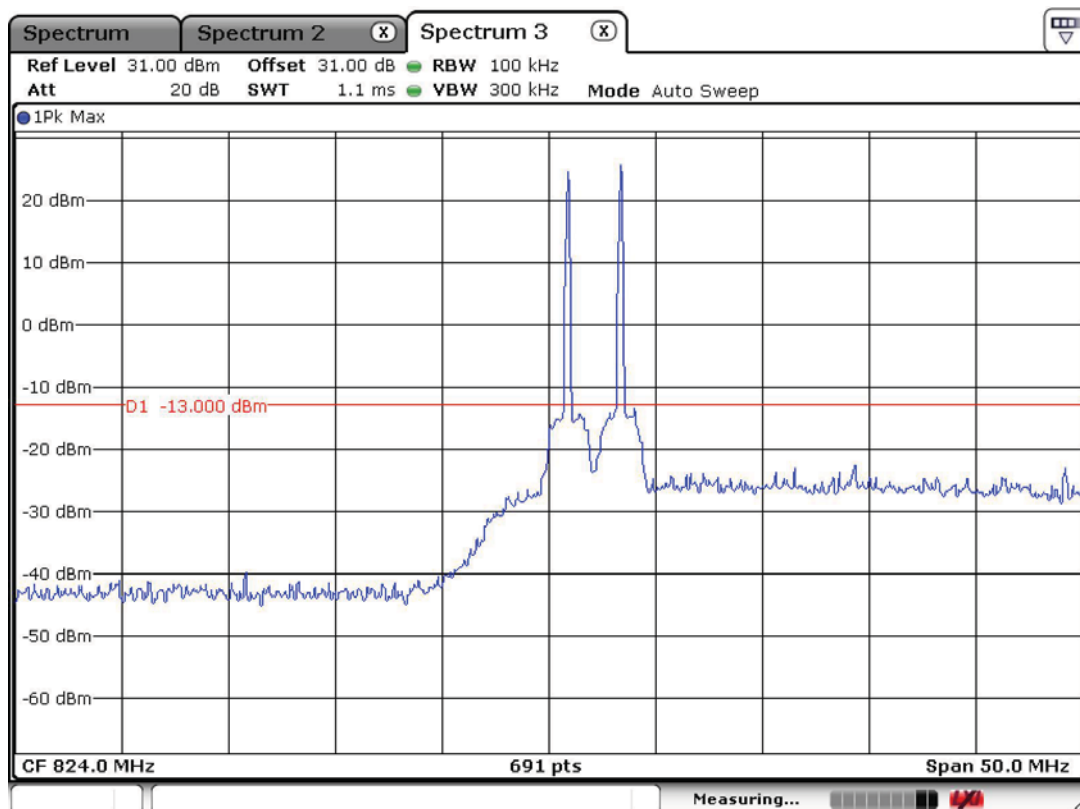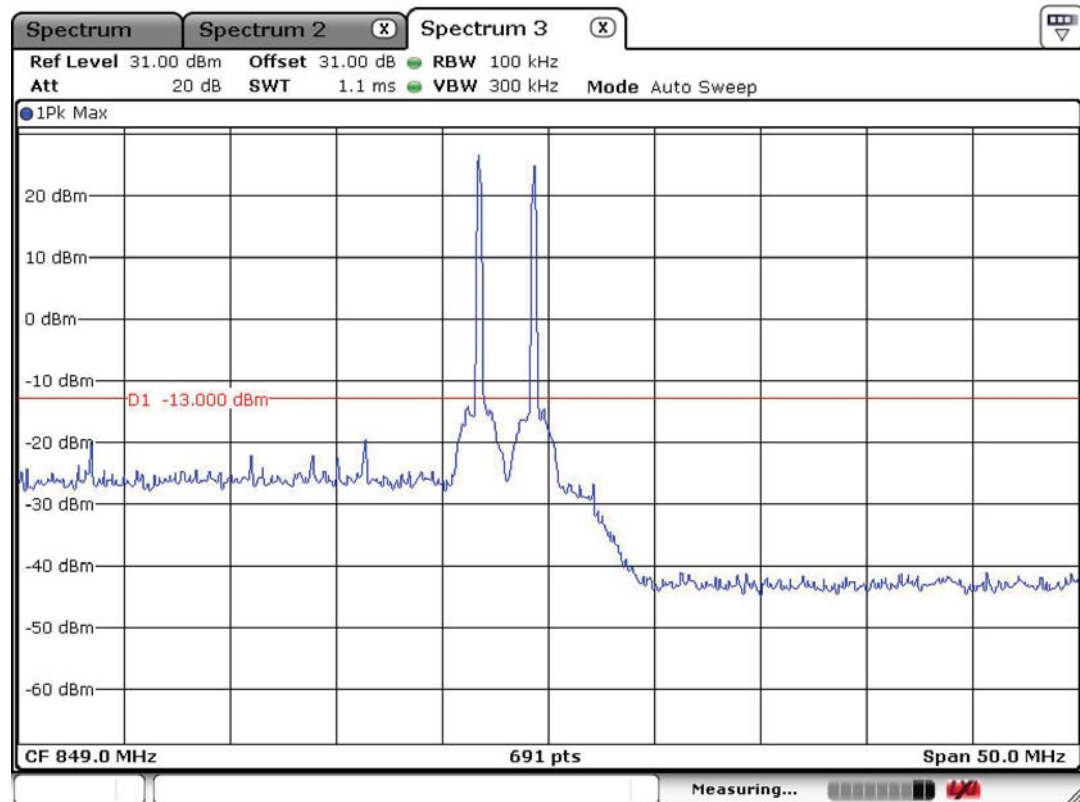
CDMA 850 Low UL**CDMA 850 High UL**

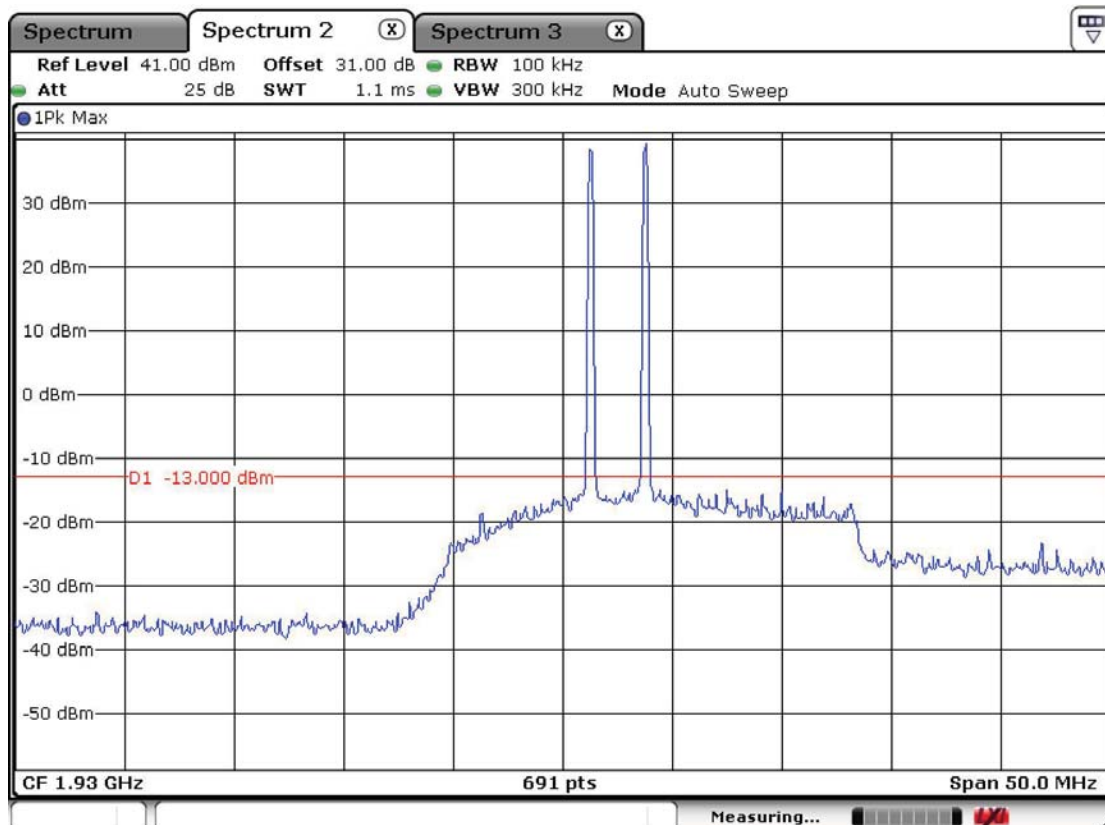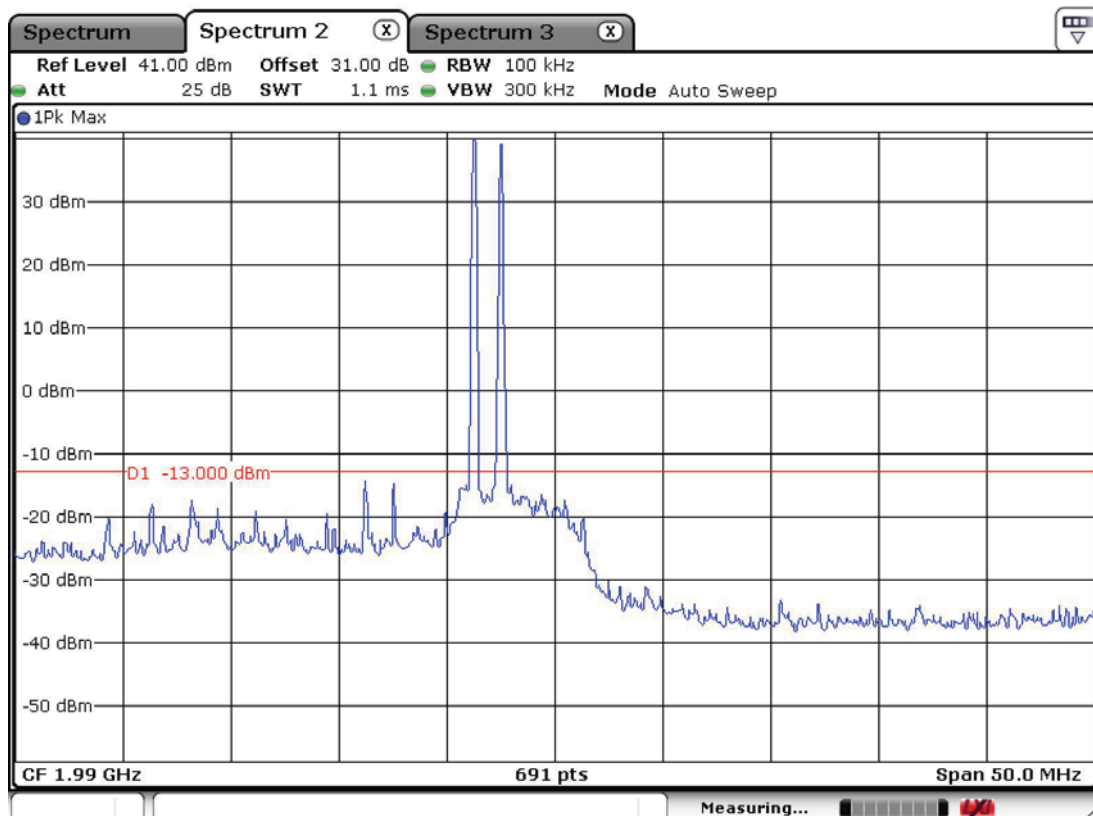PCS 1900 Low DLPCS 1900 High DL

PCS 1900 Low UL

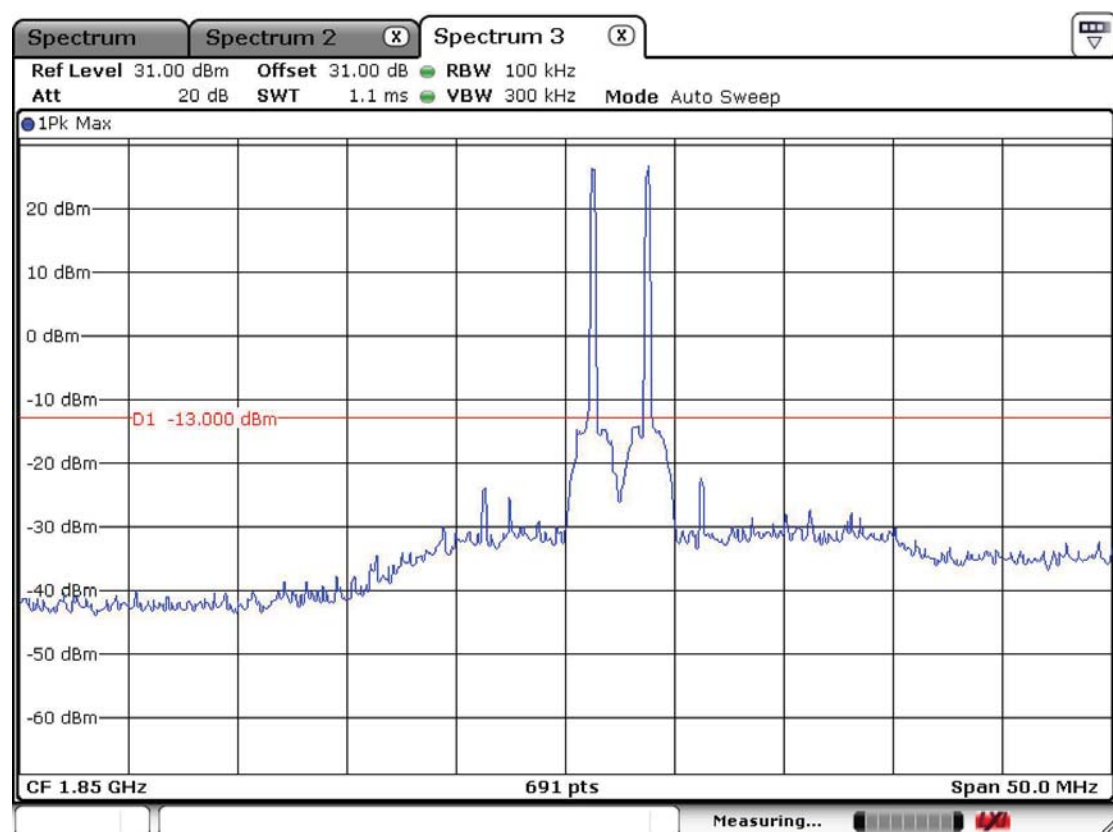

PCS 1900 High UL

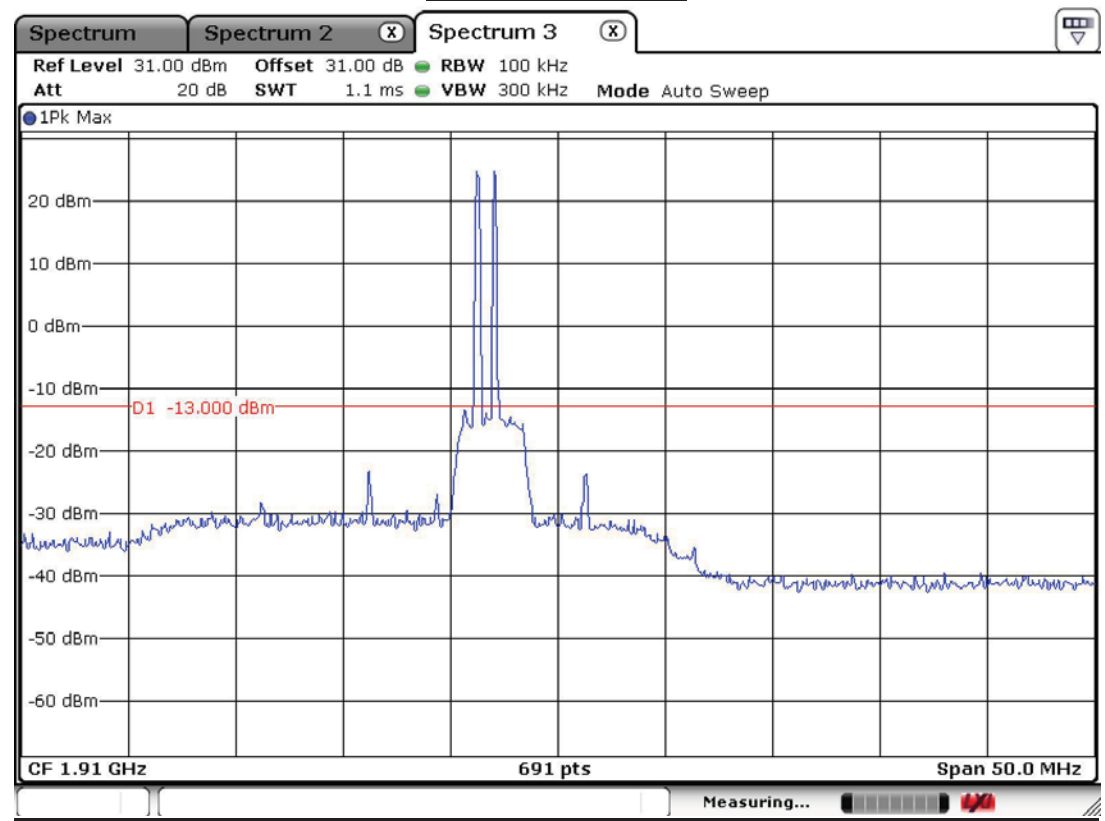

3.2.5 Transmitter Spurious Radiation

4. Requirement

The power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $(43 + 10 \log P)$ dB. Note: That corresponds to the level of -13 dBm for any radiated out-of-band and spurious emissions.

5. Test Procedure

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The frequency range up to 10-th harmonic of each of the three fundamental frequencies (low, middle, and high channels) was investigated. The worst case of emissions are reported. For spurious emissions attenuation, the substitution method was used. The EUT was substituted by a reference antenna (half-wave dipole - below 1 GHz, or Horn antenna - above 1GHz), connected to a signal generator. The signal generator output level (V_g in dBm) was adjusted to obtain the same reading as from EUT. The EIRP at the spurious emissions frequency was calculated as follows.

$$\text{EIRP(dBm)} = V_g + G \text{ (dBi)}$$

The EUT output port was connected to a 50Ω termination load.

6. Test Results : Complies

* EIRP is calculated as: $\text{EIRP(dBm)} = V_g(\text{dBm}) + G \text{ (dBi)}$

All other emissions not reported are more than 20 dB below the limit.

Transmitter Spurious Radiated Emissions – CDMA 850_DL

Frequency [MHz]	SA Reading [dBuV/m]	Signal Generator Output required to have the same SA Reading as from EUT [dBm]	EIRP [dBm]	Limit [dBm]	Margin [dB]
All other emissions not reported are more than 20 dB below the limit.					

Transmitter Spurious Radiated Emissions – CDMA 850_UL

Frequency [MHz]	SA Reading [dBuV/m]	Signal Generator Output required to have the same SA Reading as from EUT [dBm]	EIRP [dBm]	Limit [dBm]	Margin [dB]
All other emissions not reported are more than 20 dB below the limit.					

Transmitter Spurious Radiated Emissions – PCS 1900_DL


Frequency [MHz]	SA Reading [dBuV/m]	Signal Generator Output required to have the same SA Reading as from EUT [dBm]	EIRP [dBm]	Limit [dBm]	Margin [dB]
All other emissions not reported are more than 20 dB below the limit.					

Transmitter Spurious Radiated Emissions – PCS 1900_UL


Frequency [MHz]	SA Reading [dBuV/m]	Signal Generator Output required to have the same SA Reading as from EUT [dBm]	EIRP [dBm]	Limit [dBm]	Margin [dB]
All other emissions not reported are more than 20 dB below the limit.					



3.2.6 Out-of-Band Rejection

Band Pass – CDMA 850 mode DL

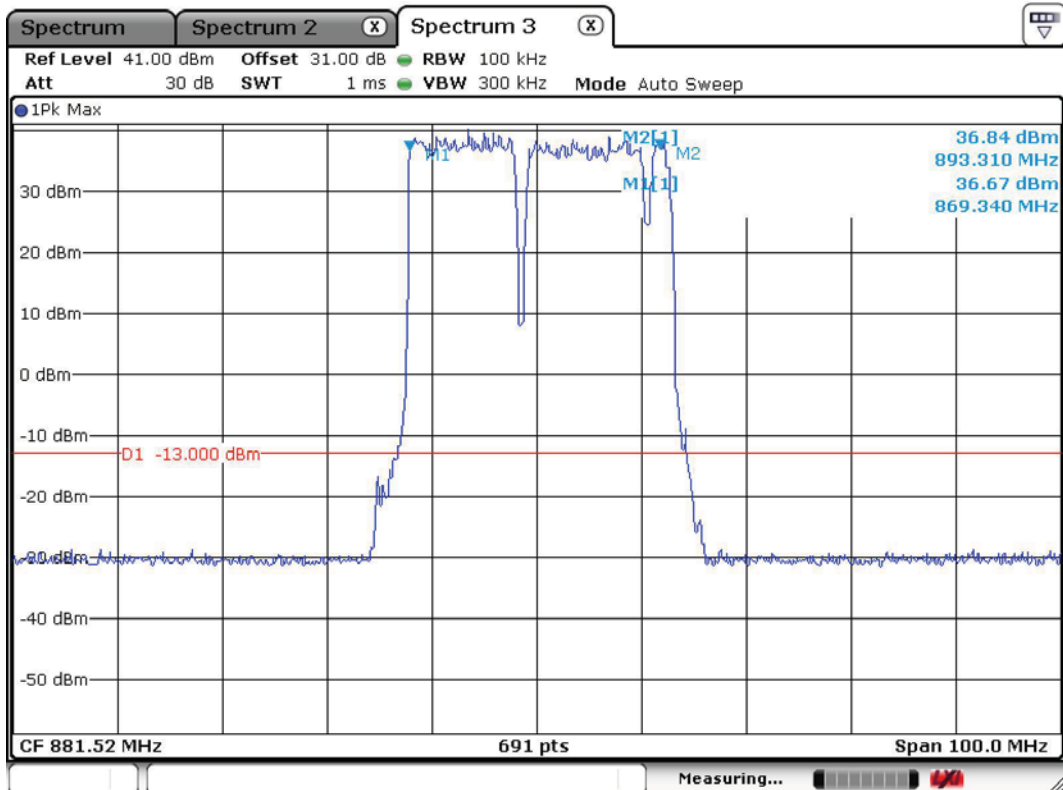

Band Pass – CDMA 850 mode UL

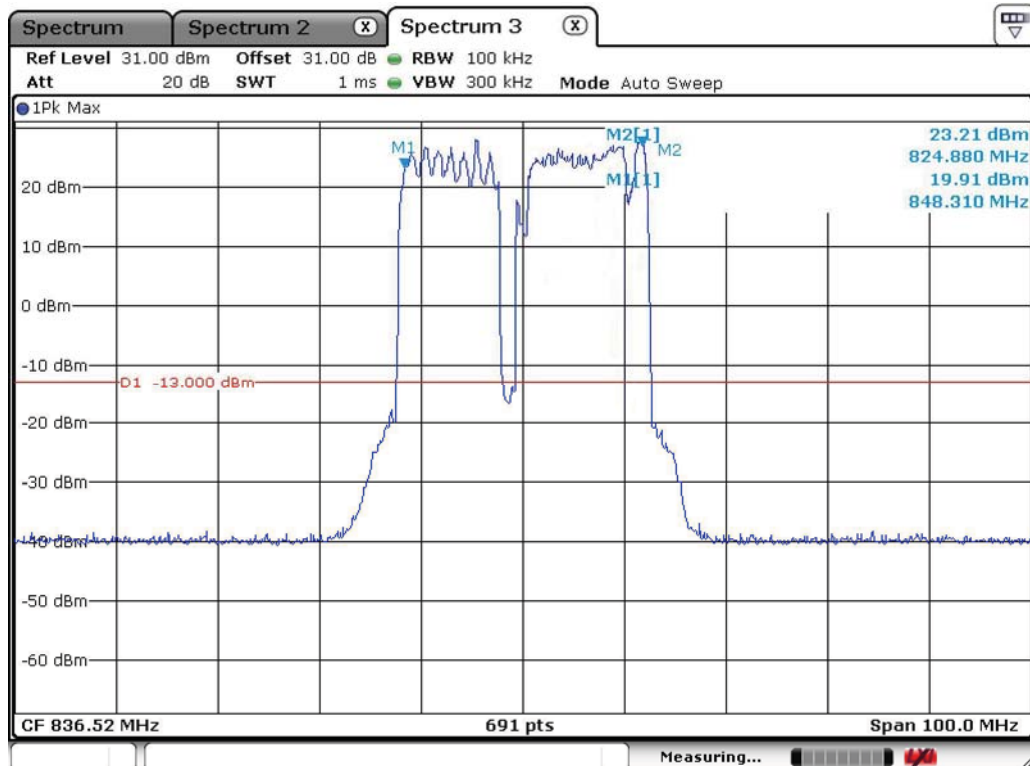

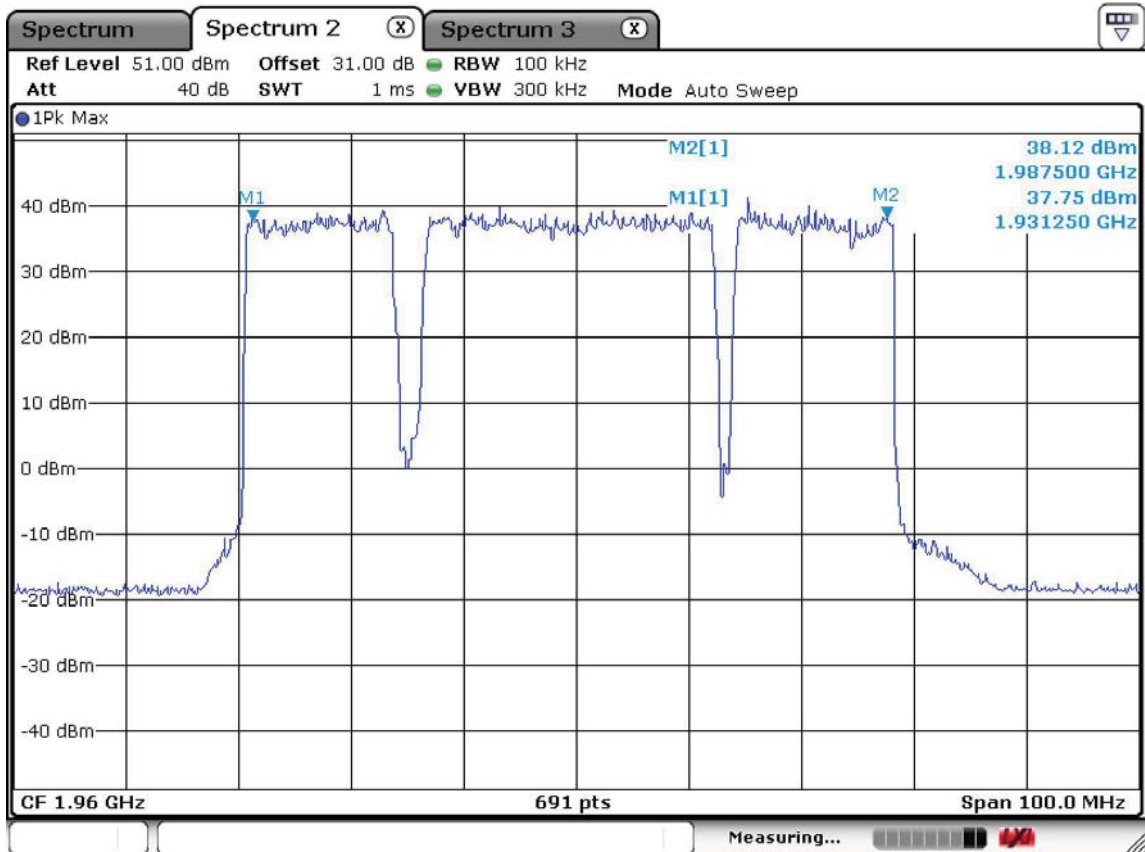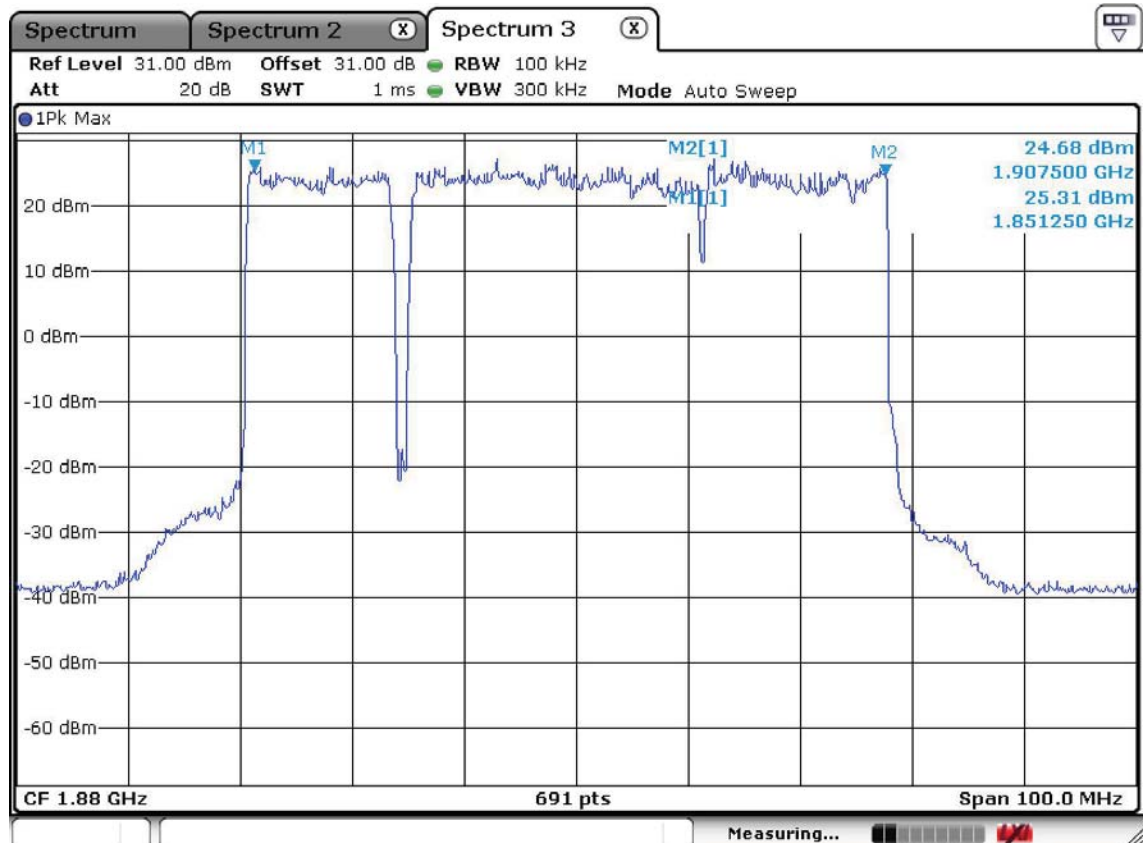Band Pass – PCS 1900 mode DL**Band Pass – PCS 1900 mode UL**

3.2.7 Frequency Stability

1. Requirement

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

2. Test Procedure

The EUT was placed inside the temperature chamber. The RF output port was connected to a spectrum analyzer. The EUT was setup to transmit the maximum power. After the temperature stabilized for approximately 20 minutes, the transmitting frequency was measured by the spectrum analyzer and recorded. At room temperature, the frequency was measured when the EUT was powered with the nominal voltage and with 85% and 115% of the nominal voltage.

3. Test Results : Complies

-refer to the next page

CDMA 850 mode DL

OPERATING FREQUENCY : 881,520,121 Hz


CHANNEL : 384(Mid)

REFERENCE VOLTAGE : 120 VAC

DEVIATION LIMIT : ± 0.00010 % or 1 ppm

VOLTAGE (%)	POWER (VAC)	TEMP (dB)	FREQ (Hz)	Deviation (%)
100%	120	+20(Ref)	881,520,121	0.000000
100%		-30	881,520,001	-0.000014
100%		-20	881,520,010	-0.000013
100%		-10	881,520,057	-0.000007
100%		0	881,520,104	-0.000002
100%		+10	881,520,116	-0.000001
100%		+20	881,520,121	0.000000
100%		+25	881,520,148	0.000003
100%		+30	881,520,179	0.000007
100%		+40	881,520,204	0.000009
100%		+50	881,520,251	0.000015
100%		+60	881,520,289	0.000019
85%	102	+20	881,520,130	0.000001
115%	138	+20	881,520,128	0.000001


Frequency Stability

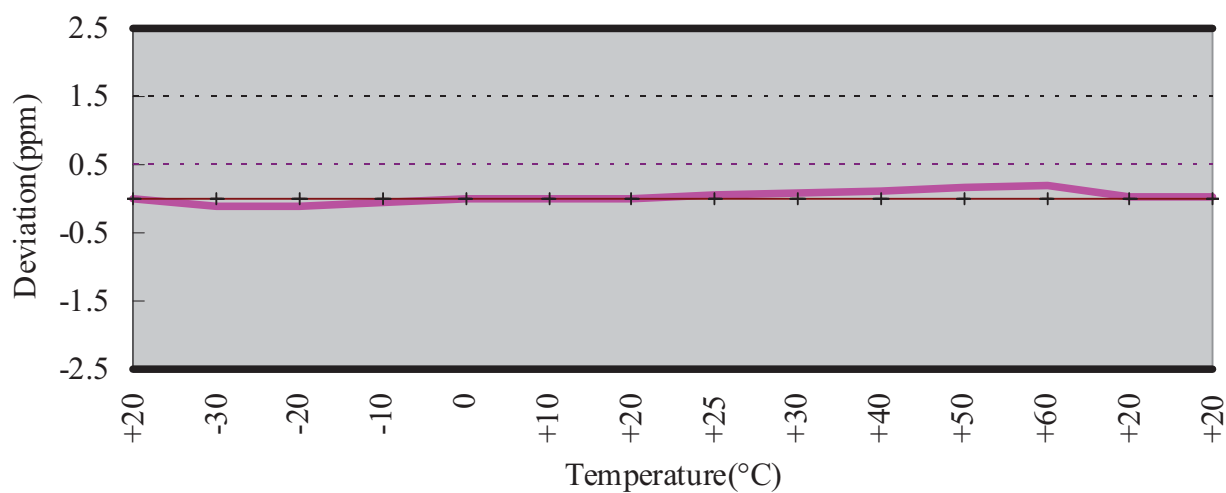

CDMA 850 mode UL

OPERATING FREQUENCY : 836,520,078 Hz
 CHANNEL : 384(Mid)
 REFERENCE VOLTAGE : 120 VAC
 DEVIATION LIMIT : ± 0.00010 % or 1 ppm

VOLTAGE (%)	POWER (VAC)	TEMP (dB)	FREQ (Hz)	Deviation (%)
100%	120	+20(Ref)	836,520,078	0.000000
100%		-30	836,520,245	0.000008
100%		-20	836,520,198	0.000005
100%		-10	836,520,143	0.000004
100%		0	836,520,101	0.000003
100%		+10	836,520,087	0.000001
100%		+20	836,520,075	0.000000
100%		+25	836,520,059	-0.000002
100%		+30	836,520,023	-0.000005
100%		+40	836,520,021	-0.000006
100%		+50	836,520,014	-0.000006
100%		+60	836,520,001	-0.000008
85%	102	+20	836,520,071	-0.000001
115%	138	+20	836,520,073	-0.000001

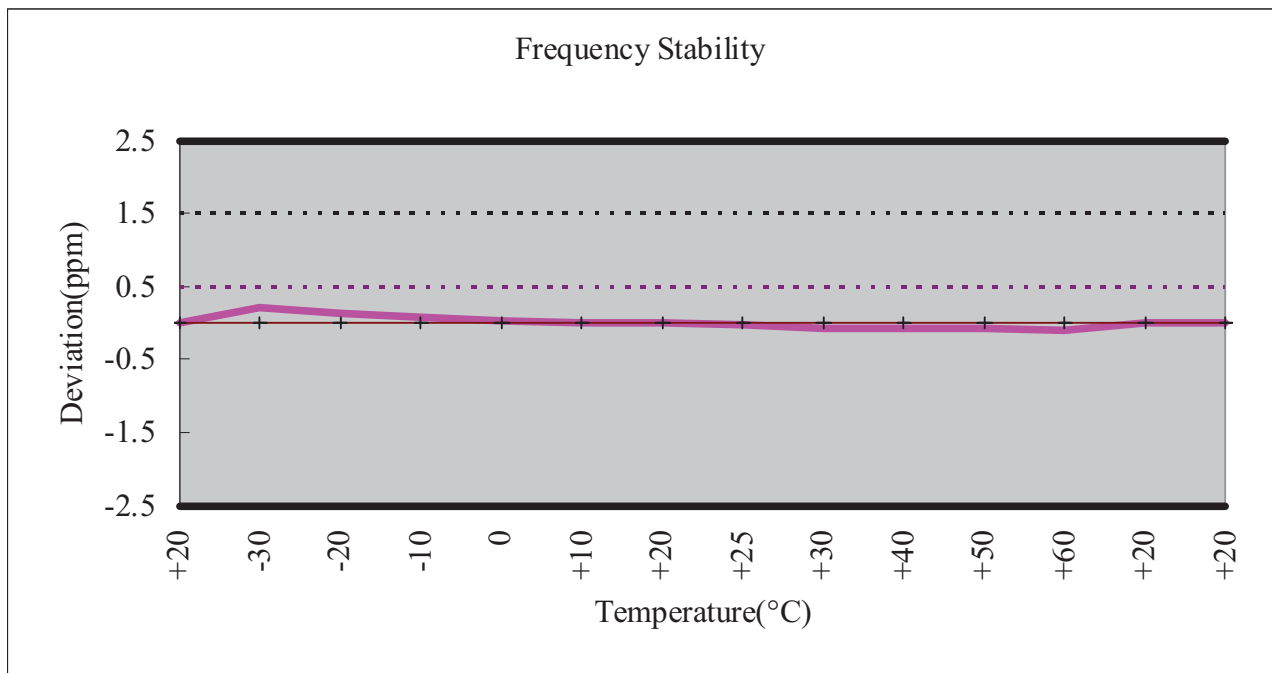

PCS 1900 mode DL

OPERATING FREQUENCY : 1960,000,482 Hz


CHANNEL : 600(Mid)

REFERENCE VOLTAGE : 120 VAC

DEVIATION LIMIT : ± 0.00010 % or 1 ppm

VOLTAGE (%)	POWER (VAC)	TEMP (dB)	FREQ (Hz)	Deviation (%)
100%	120	+20(Ref)	1,960,000,482	0.000000
100%		-30	1,960,000,748	0.000014
100%		-20	1,960,000,722	0.000012
100%		-10	1,960,000,647	0.000008
100%		0	1,960,000,634	0.000008
100%		+10	1,960,000,519	0.000002
100%		+20	1,960,000,480	0.000000
100%		+25	1,960,000,362	-0.000006
100%		+30	1,960,000,321	-0.000008
100%		+40	1,960,000,302	-0.000009
100%		+50	1,960,000,200	-0.000014
100%		+60	1,960,000,185	-0.000015
85%	102	+20	1,960,000,473	0.000000
115%	138	+20	1,960,000,471	-0.000001

Frequency Stability

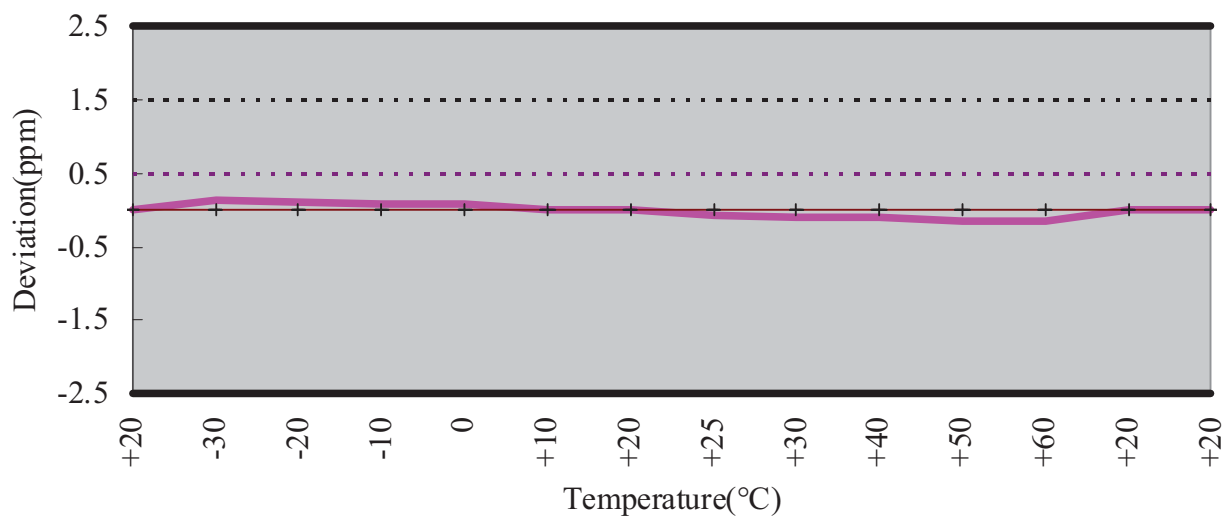


PCS 1900 mode UL

OPERATING FREQUENCY : 1880,000,534 Hz
 CHANNEL : 600(Mid)
 REFERENCE VOLTAGE : 120 VAC
 DEVIATION LIMIT : ± 0.00010 % or 1 ppm

VOLTAGE (%)	POWER (VAC)	TEMP (dB)	FREQ (Hz)	Deviation (%)
100%	120	+20(Ref)	1,880,000,534	0.000000
100%		-30	1,880,000,729	0.000010
100%		-20	1,880,000,706	0.000009
100%		-10	1,880,000,687	0.000008
100%		0	1,880,000,664	0.000007
100%		+10	1,880,000,589	0.000003
100%		+20	1,880,000,534	0.000000
100%		+25	1,880,000,480	-0.000003
100%		+30	1,880,000,398	-0.000007
100%		+40	1,880,000,276	-0.000014
100%		+50	1,880,000,121	-0.000022
100%		+60	1,880,000,127	-0.000022
85%	102	+20	1,880,000,531	0.000000
115%	138	+20	1,880,000,528	0.000000

Frequency Stability

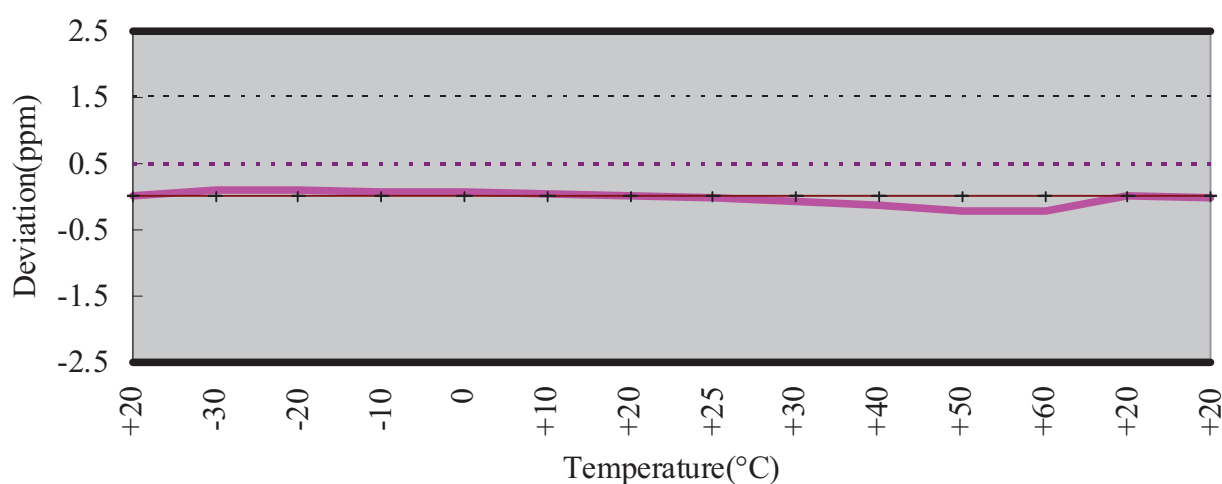

3.3 CONCLUSION

The data collected shows that the **Kisan Telecom Co., Ltd. Optical DAS Repeater FCC ID: T7MSTR250R01C** complies with all the requirements of Parts 2,22, 24 of the FCC Rules.

--- Blank ---

APPENDIX

TEST EQUIPMENT USED FOR TESTS

	Description	Model No.	Serial No.	Manufacturer	Interval	Last Cal. Date
1	Spectrum Analyzer (~30GHz)	FSV-30	100757	R&S	1 year	2011-01-24
2	Spectrum Analyzer (~2.9GHz)	8594E	3710A04074	HP	2 year	2009-10-12
3	Signal Generator (~3.2GHz)	8648C	3623A02597	HP	1 year	2011-03-30
4	Signal Generator (1~20GHz)	83711B	US34490456	HP	1 year	2011-03-30
5	Attenuator (3dB)	8491A	37822	HP	2 year	2010-10-08
6	Attenuator (10dB)	8491A	63196	HP	2 year	2010-10-08
7	Attenuator (30dB)	8498A	3318A10929	HP	2 year	2011-01-05
8	Test Receiver (~30MHz)	ESHS10	828404/009	R&S	1 year	2011-03-30
9	EMI Test Receiver (~1GHz)	ESCI7	100722	R&S	1 year	2010-10-08
10	RF Amplifier (~1.3GHz)	8447D	2439A09058	HP	2 year	2010-10-08
11	RF Amplifier (1~18GHz)	8449B	3008A02126	HP	2 year	2010-03-29
12	Horn Antenna (1~18GHz)	BBHA 9120D	9120D122	SCHWARZBECK	2 year	2010-12-24
13	Horn Antenna (18 ~ 40GHz)	SAS-574	154	Schwarzbeck	2 year	2010-11-25
14	Horn Antenna (18 ~ 40GHz)	SAS-574	155	Schwarzbeck	2 year	2010-11-25
15	TRILOG Antenna	VULB 9160	9160-3172	SCHWARZBECK	2 year	2010-10-07
16	Dipole Antenna	VHA9103	2116	SCHWARZBECK	2 year	2010-11-25
17	Dipole Antenna	VHA9103	2117	SCHWARZBECK	2 year	2010-11-25
18	Dipole Antenna	VHA9105	2261	SCHWARZBECK	2 year	2010-11-25
19	Dipole Antenna	VHA9105	2262	SCHWARZBECK	2 year	2010-11-25
20	Hygro-Thermograph	THB-36	0041557-01	ISUZU	2 year	2010-04-12
21	Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	-	-
22	Power Divider	11636A	6243	HP	2 year	2010-10-08
23	DC Power Supply	6622A	3448A03079	HP	-	-
24	Frequency Counter	5342A	2826A12411	HP	1 year	2011-03-30
25	Power Meter	EPM-441A	GB32481702	HP	1 year	2011-03-30
26	Power Sensor	8481A	US41030291	HP	1 year	2010-10-08
27	Audio Analyzer	8903B	3729A18901	HP	1 year	2010-10-08
28	Modulation Analyzer	8901B	3749A05878	HP	1 year	2010-10-08
29	TEMP & HUMIDITY Chamber	YJ-500	LTAS06041	JinYoung Tech	1 year	2010-10-08
30	Stop Watch	HS-3	601Q09R	CASIO	2 year	2010-03-31
31	LISN	ENV216	100408	R&S	1 year	2010-10-08
32	UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106243	R&S	2 year	2010-05-13
33	Highpass Filter	WHKX1.5/15G-10SS	74	Wainwright Instruments	-	-
34	Highpass Filter	WHKX3.0/18G-10SS	118	Wainwright Instruments	-	-