
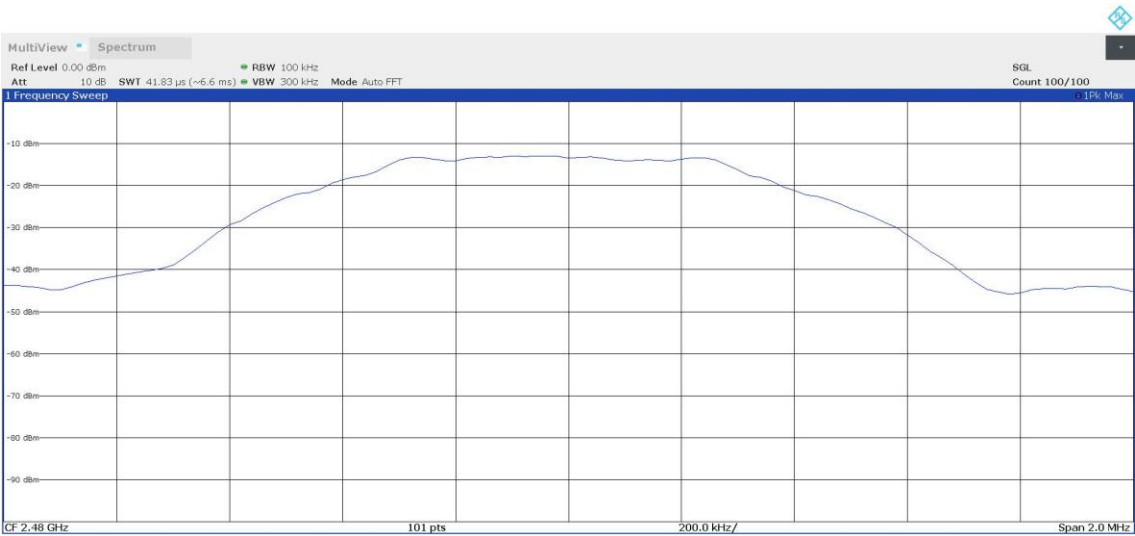




Bandwidth MHz = 1 Modulation = BTLE 5.0 (GFSK 1 Mbit/s)
Frequency MHz = 2480.00000 Antenna configuration = SISO
Active Port = 1

Images:

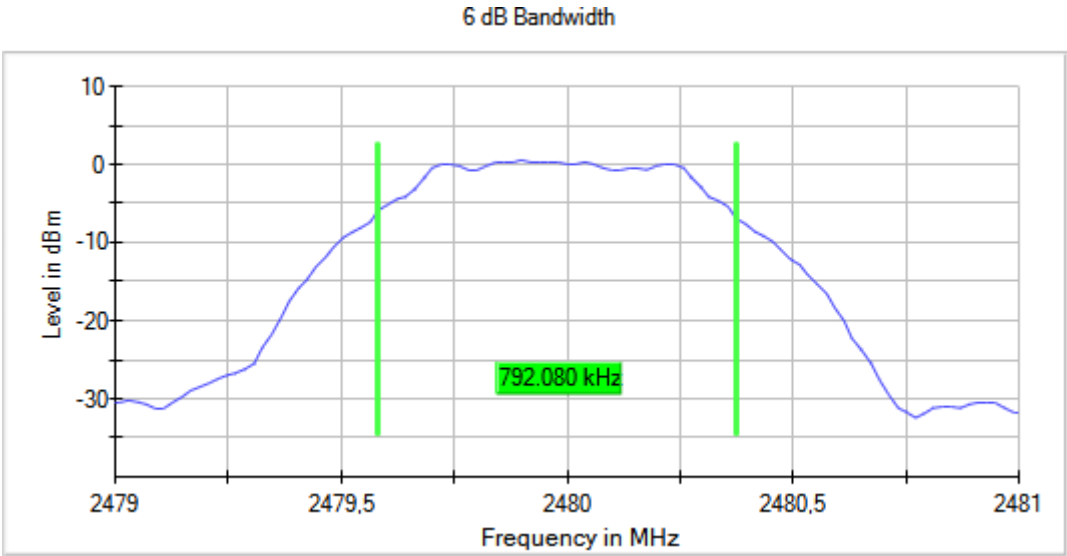



Bandwidth MHz = 2 Modulation = BTLE 5.0 (GFSK 2 Mbit/s)
Frequency MHz = 2402.00000 Antenna configuration = SISO
Active Port = 1

Images:

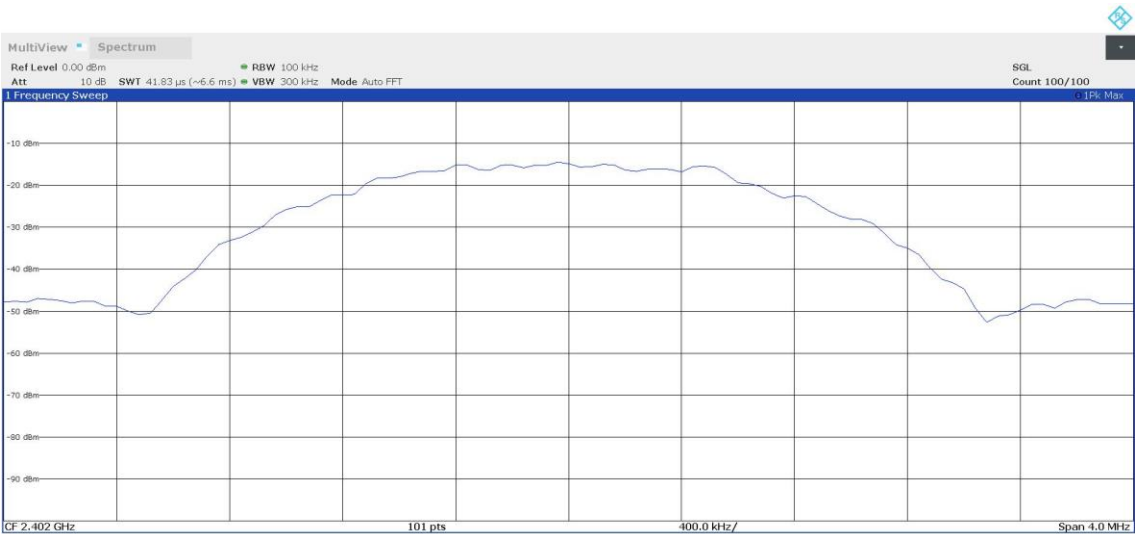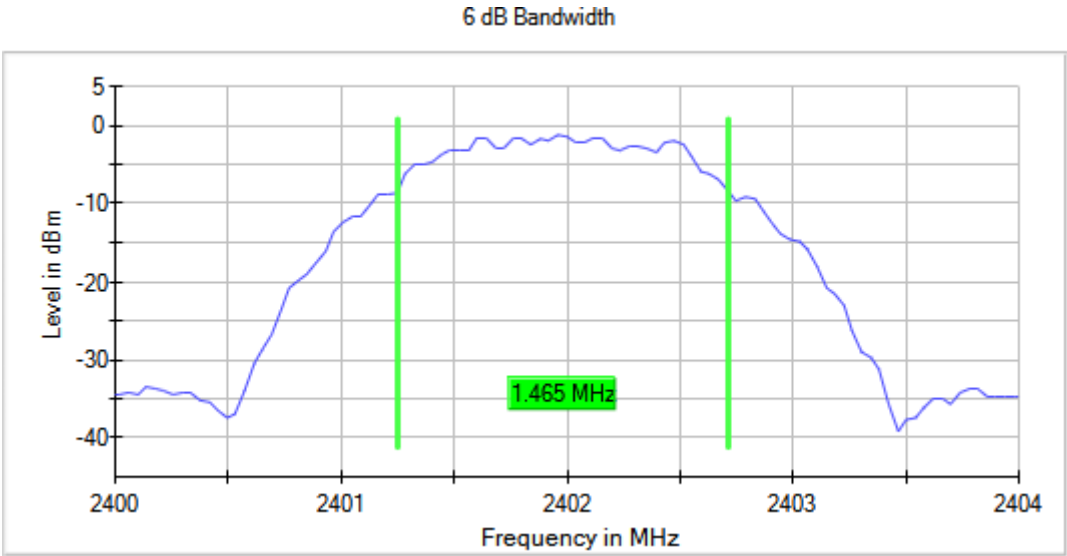



Bandwidth MHz = 2 Modulation = BTLE 5.0 (GFSK 2 Mbit/s)
Frequency MHz = 2440.00000 Antenna configuration = SISO
Active Port = 1

Images:

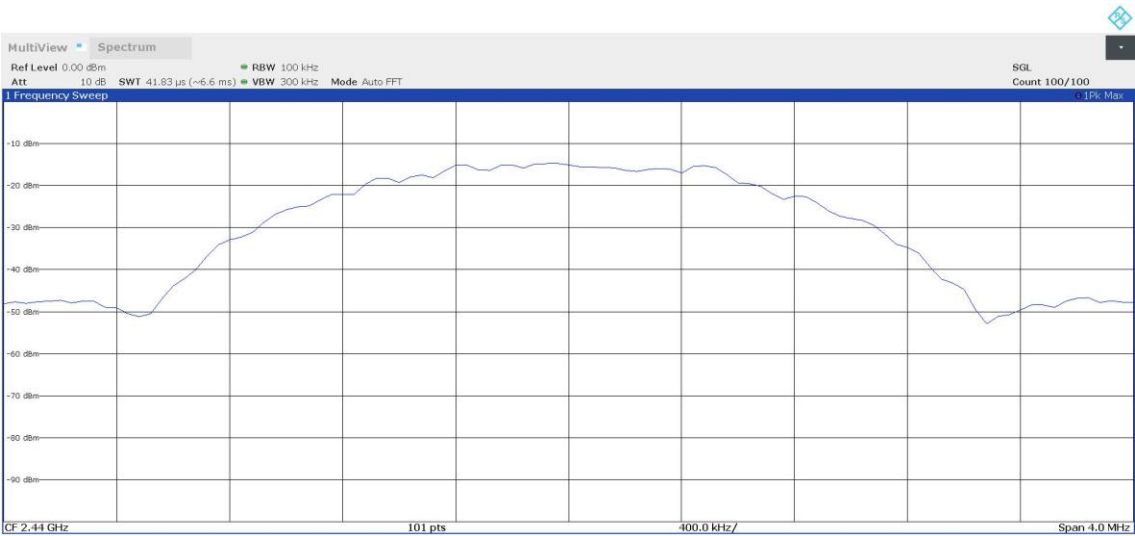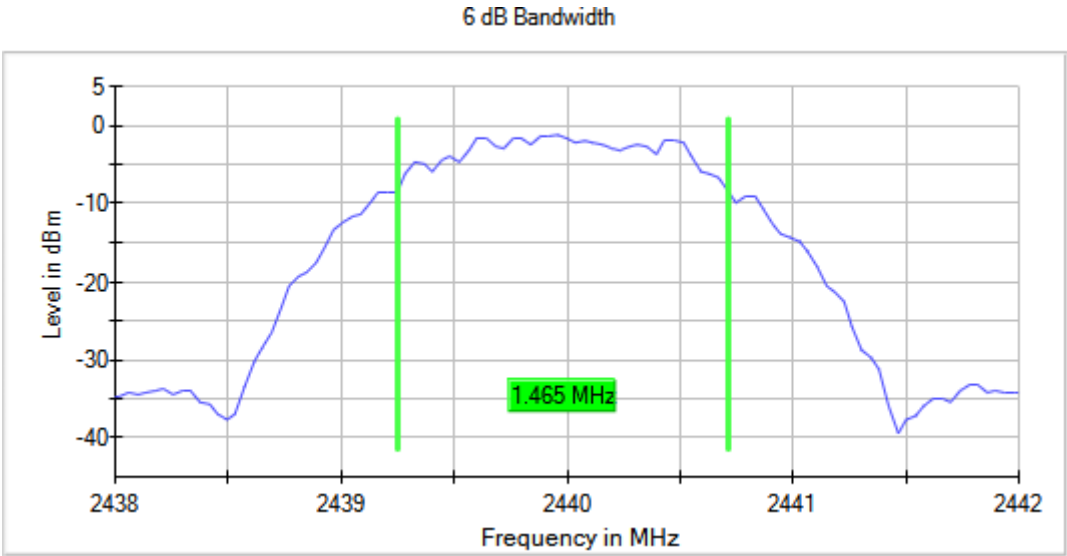

Bandwidth MHz = 2 Modulation = BTLE 5.0 (GFSK 2 Mbit/s)
Frequency MHz = 2480.00000 Antenna configuration = SISO
Active Port = 1

Images:

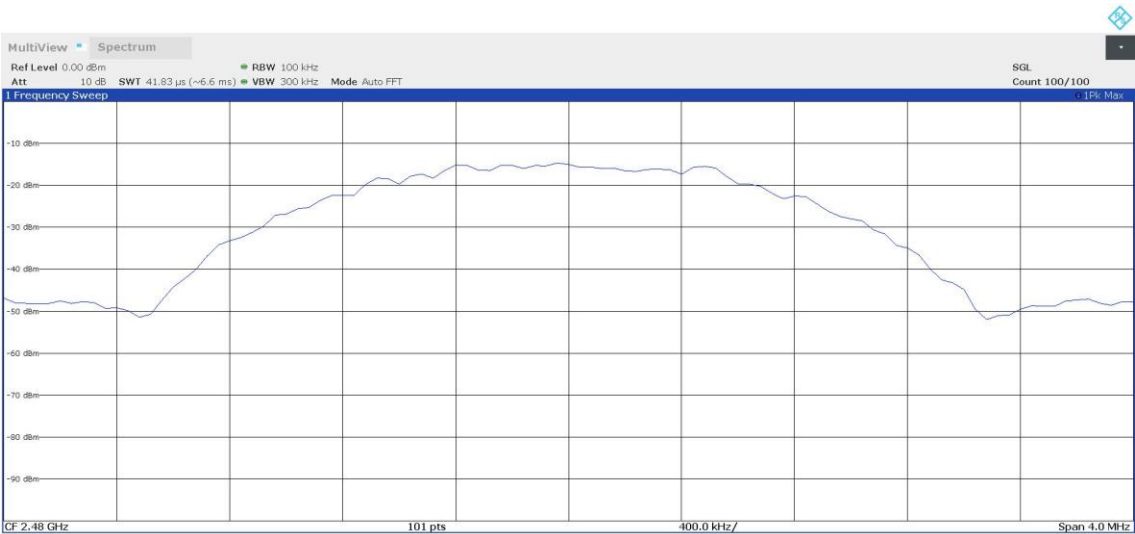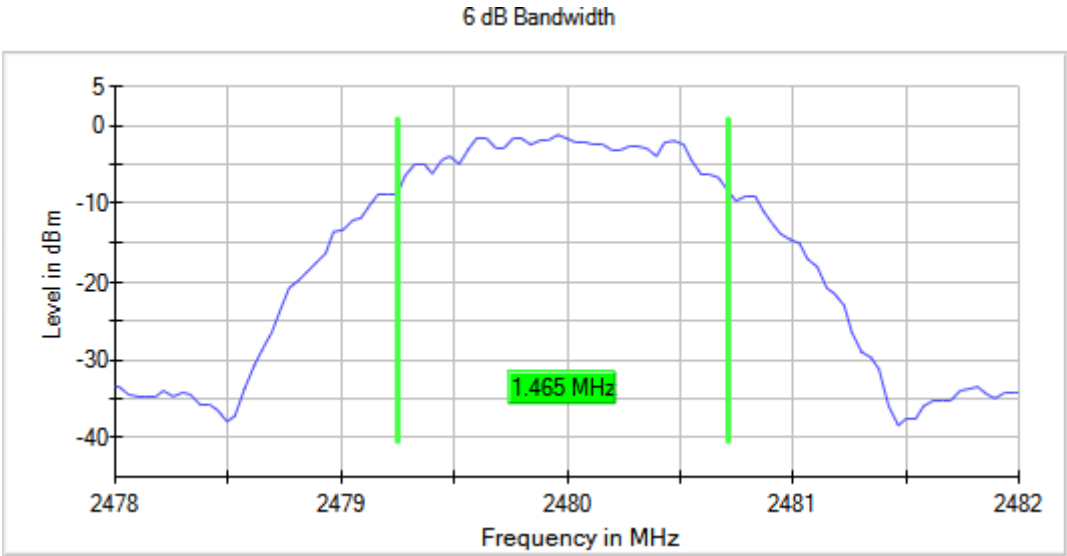

RSS-247 5.2 (b) / FCC 15.247 (e) Power spectral density

Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Modulation: BTLE 5.0 (GFSK 1 Mbit/s)

Results

Freq (MHz)	Measured Freq (MHz)	PSD (dBm)
2402.00000	2401.95750	-6.44
2440.00000	2439.95750	-6.28
2480.00000	2479.95250	-6.38

Modulation: BTLE 5.0 (GFSK 2 Mbit/s)

Results

Freq (MHz)	Measured Freq (MHz)	PSD (dBm)
2402.00000	2401.94750	-8.82
2440.00000	2439.94750	-8.80
2480.00000	2479.94750	-8.78



Verdict

Pass

Attachments



Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 1
Modulation = BTLE 5.0 (GFSK 1 Mbit/s) Frequency MHz = 2402.00000
Antenna configuration = SISO Active Port = 1

Images:

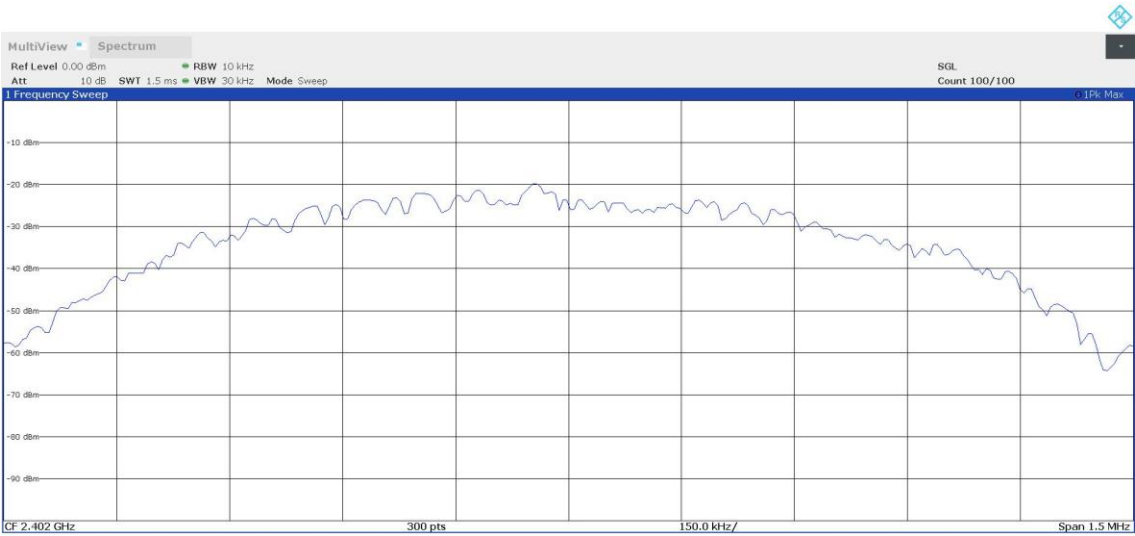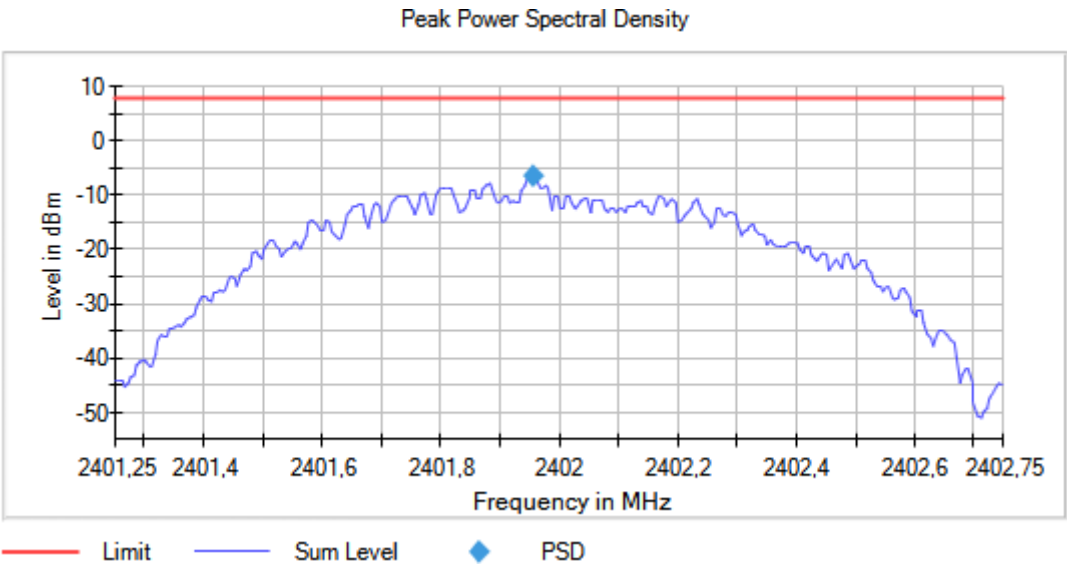



Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 1
Modulation = BTLE 5.0 (GFSK 1 Mbit/s) Frequency MHz = 2440.00000
Antenna configuration = SISO Active Port = 1

Images:

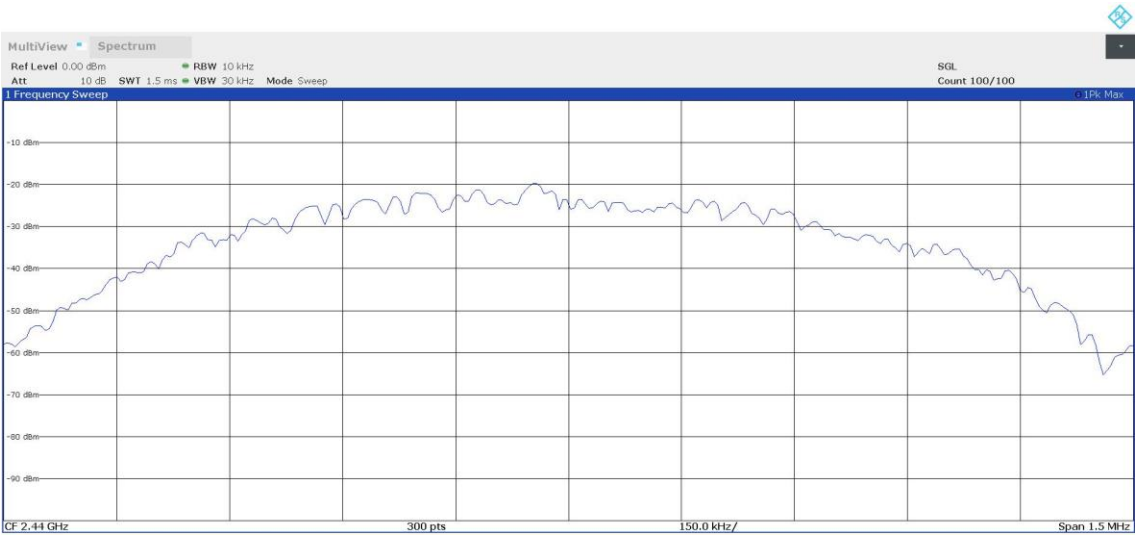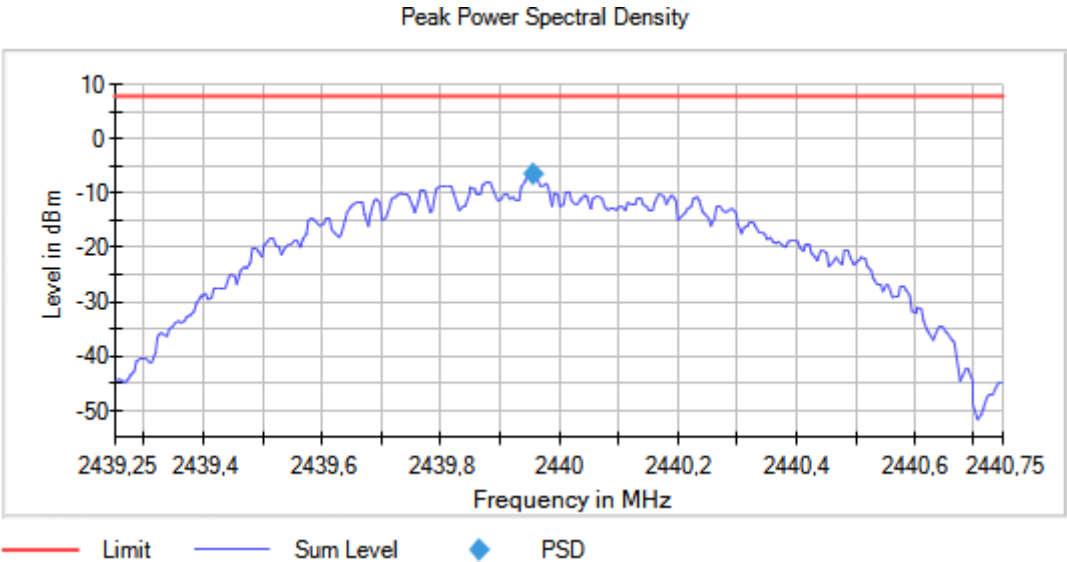



Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 1
 Modulation = BTLE 5.0 (GFSK 1 Mbit/s) Frequency MHz = 2480.00000
 Antenna configuration = SISO Active Port = 1

Images:

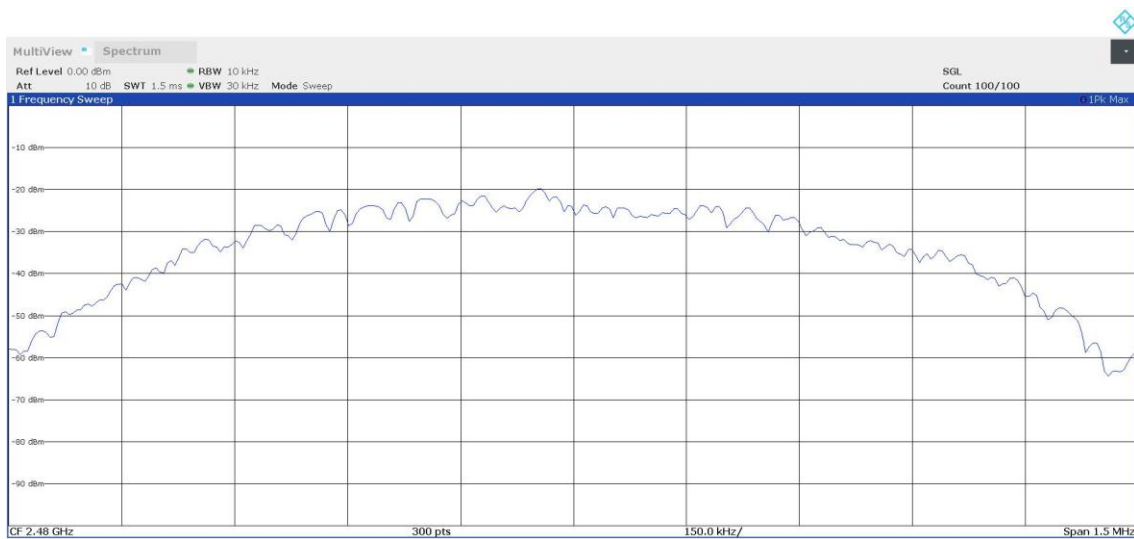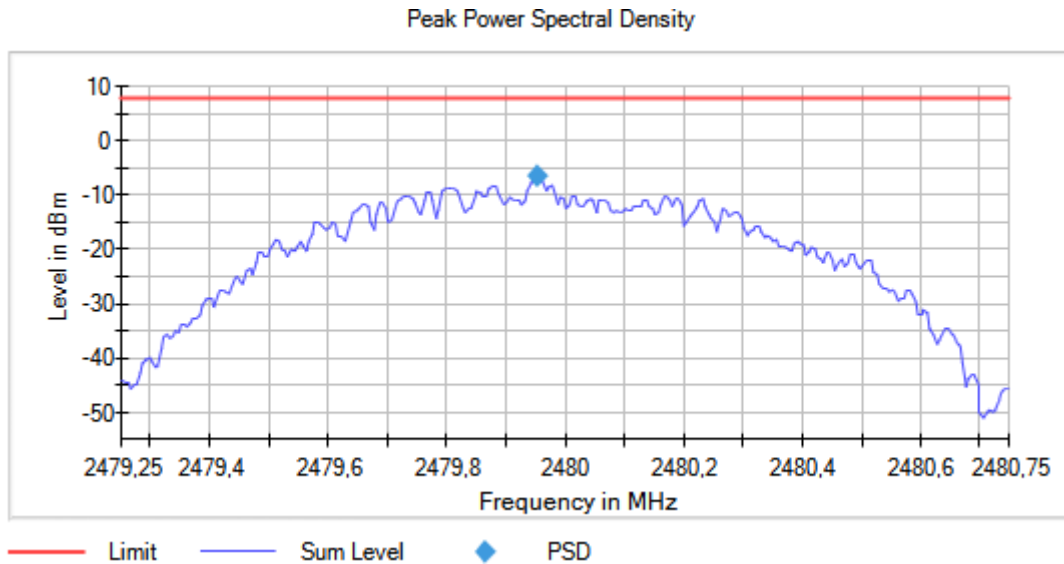



Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 2
Modulation = BTLE 5.0 (GFSK 2 Mbit/s) Frequency MHz = 2402.00000
Antenna configuration = SISO Active Port = 1

Images:

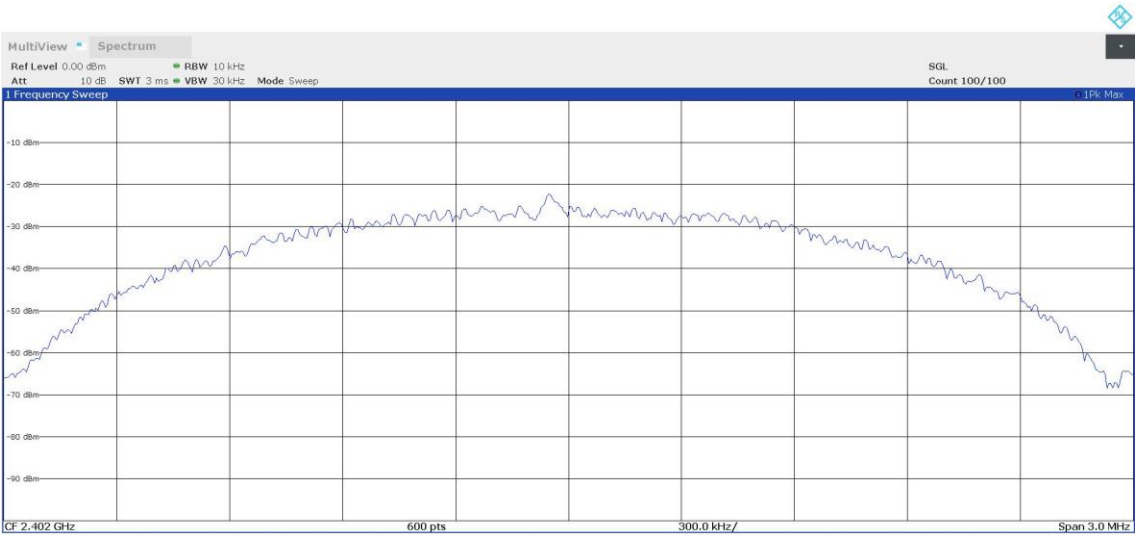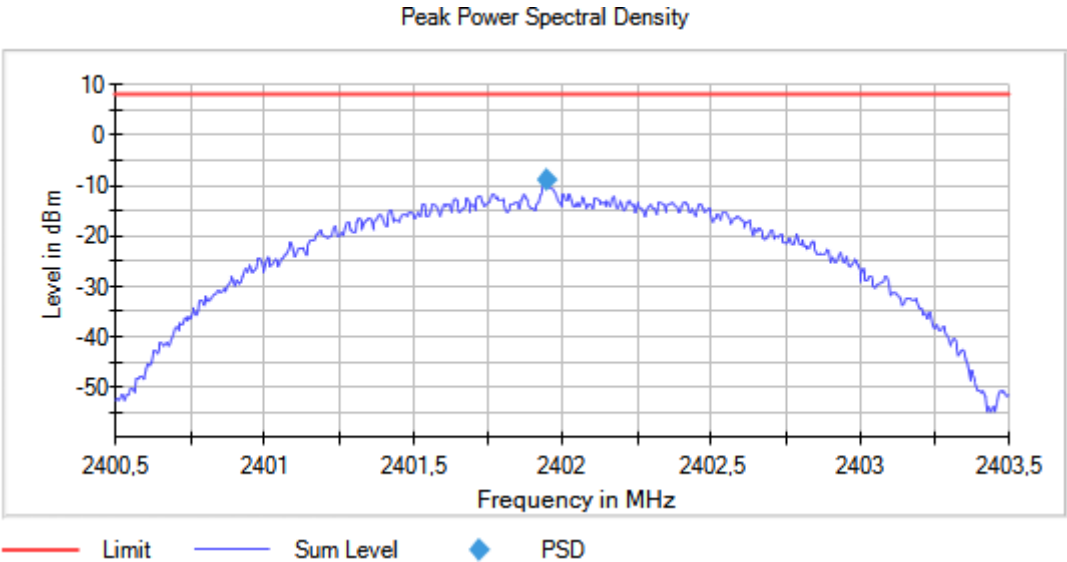



Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 2
Modulation = BTLE 5.0 (GFSK 2 Mbit/s) Frequency MHz = 2440.00000
Antenna configuration = SISO Active Port = 1

Images:

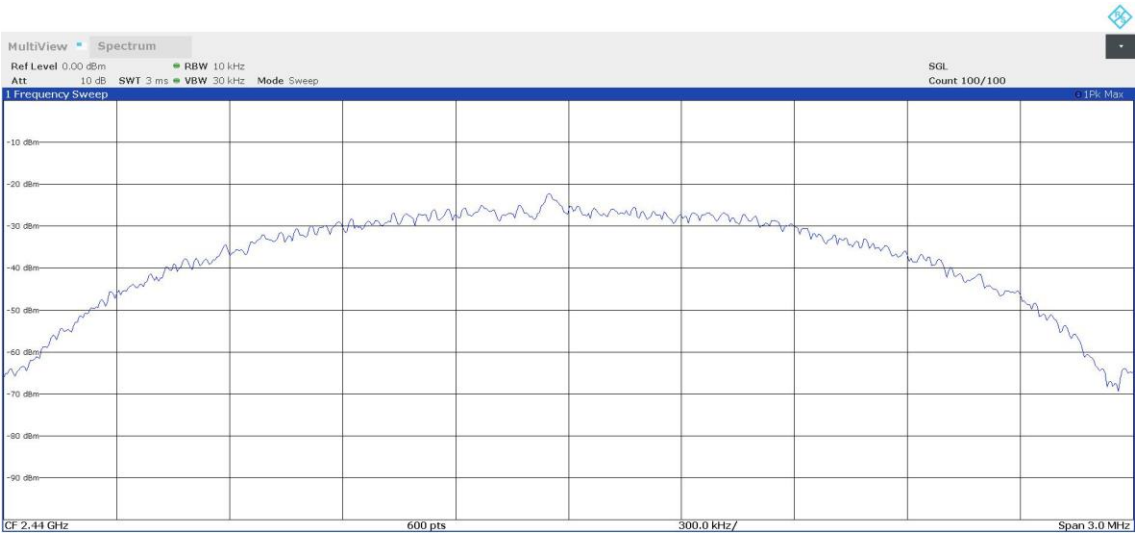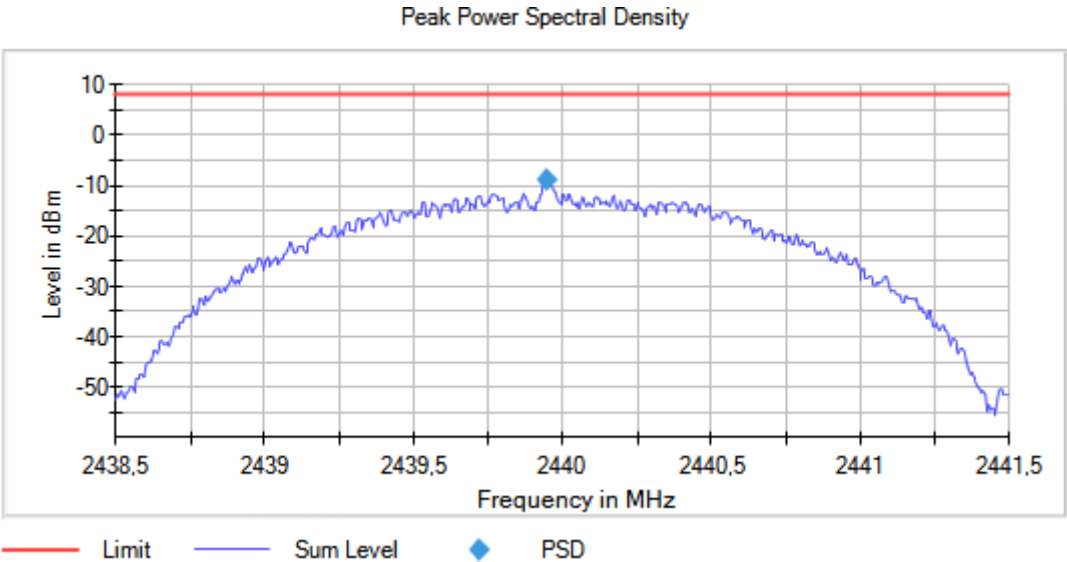

Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 2
Modulation = BTLE 5.0 (GFSK 2 Mbit/s) Frequency MHz = 2480.00000
Antenna configuration = SISO Active Port = 1

Images:

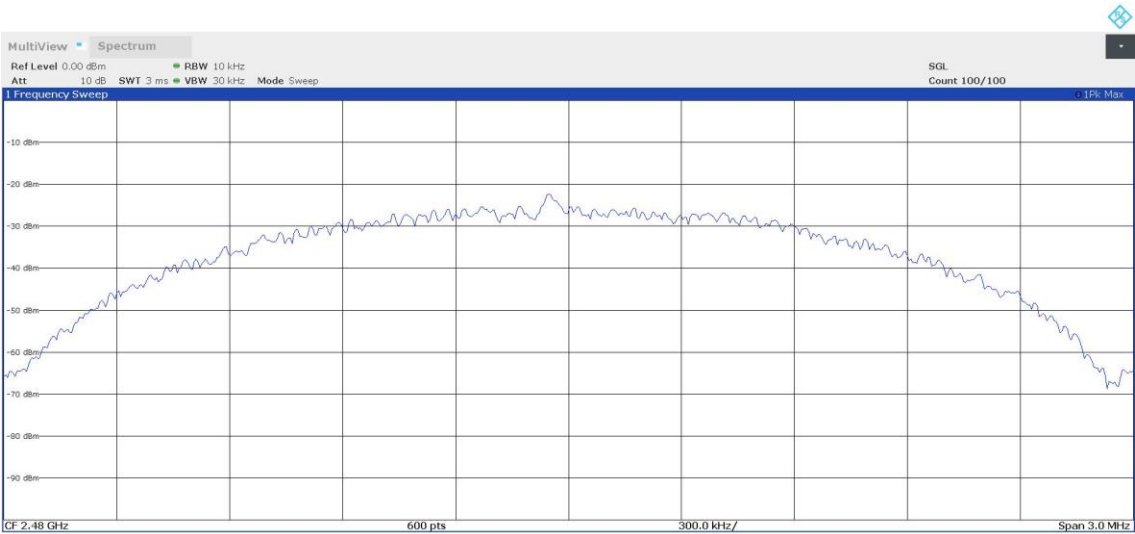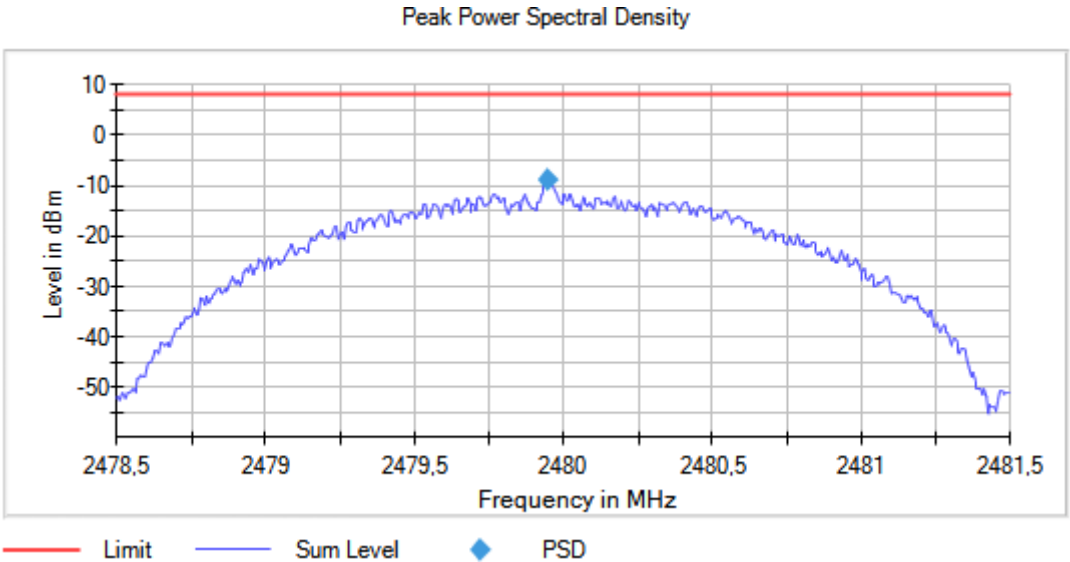

RSS-247 5.4 (d) / FCC 15.247 (b) (3) Maximum Peak Conducted output power

Limits

For systems using digital modulation in the 2400-2483.5 MHz band: 1 watt (30 dBm).
The e.i.r.p. shall not exceed 4 W (36 dBm) (Canada).
The maximum peak conducted output power level in the fundamental emission was measured using the method according to point 11.9.1.1 "RBW ≥ DTS bandwidth" of ANSI C.63.10-2013.

Modulation: BTLE 5.0 (GFSK 1 Mbit/s)

Results

Freq (MHz)	Peak Power (dBm)	Maximum EIRP Power (dBm)
2402.00000	1.987	6,687
2440.00000	2.149	7,190
2480.00000	2.008	6,708

Modulation: BTLE 5.0 (GFSK 2 Mbit/s)

Results

Freq (MHz)	Peak Power (dBm)	Maximum EIRP Power (dBm)
2402.00000	1.948	6,648
2440.00000	2.080	6,780
2480.00000	1.931	6,631



Verdict

Pass

Attachments



Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 1
Modulation = BTLE 5.0 (GFSK 1 Mbit/s) Frequency MHz = 2402.00000
Antenna configuration = SISO Active Port = 1

Images:

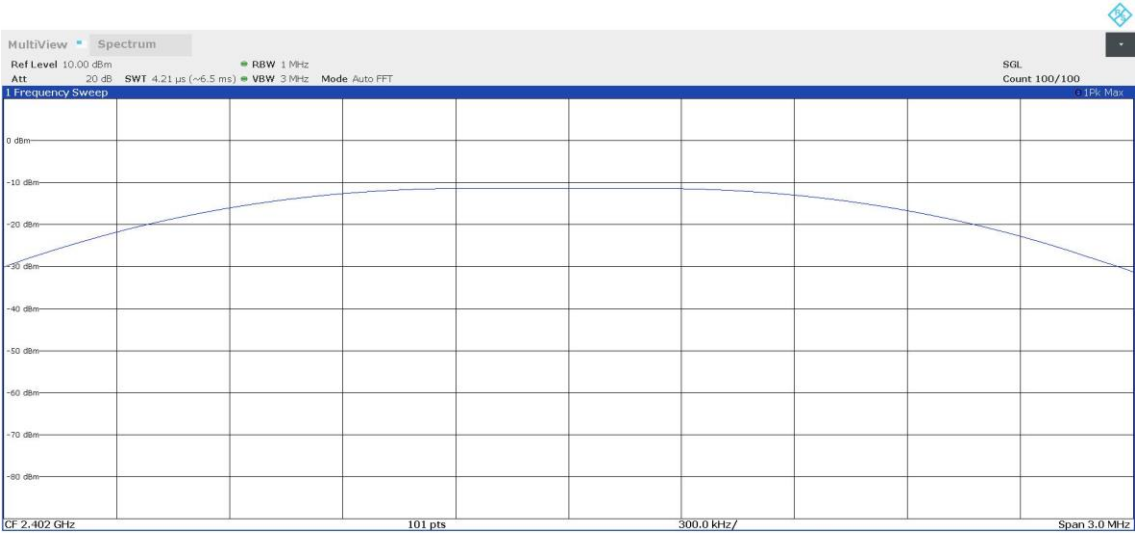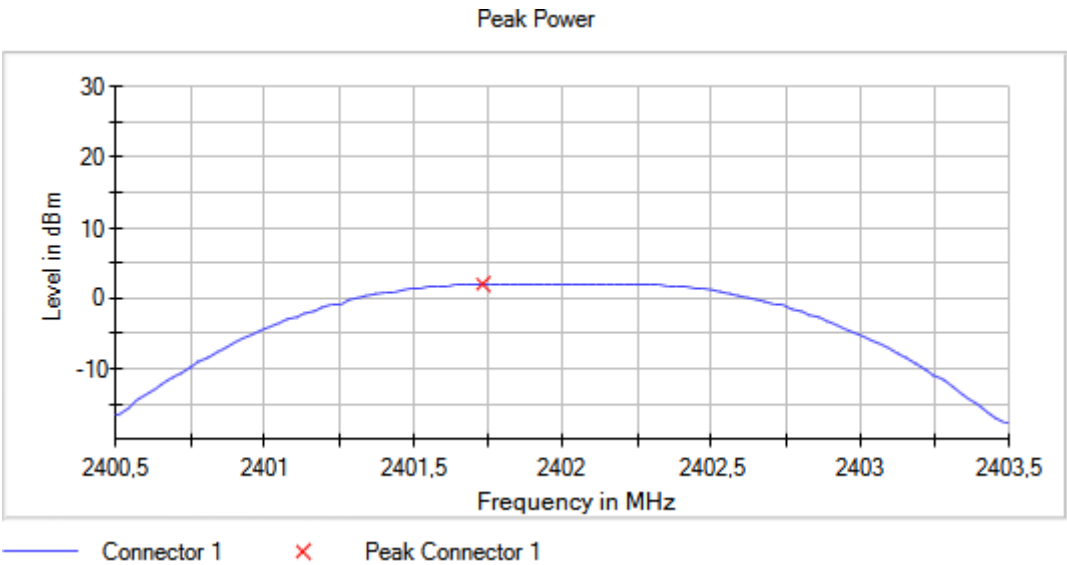



Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 1
Modulation = BTLE 5.0 (GFSK 1 Mbit/s) Frequency MHz = 2440.00000
Antenna configuration = SISO Active Port = 1

Images:

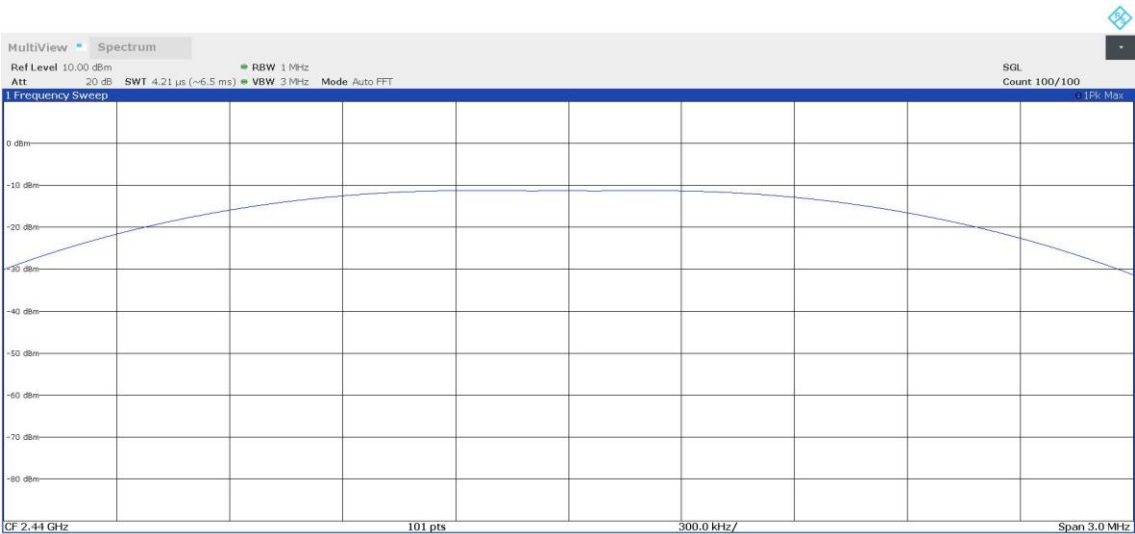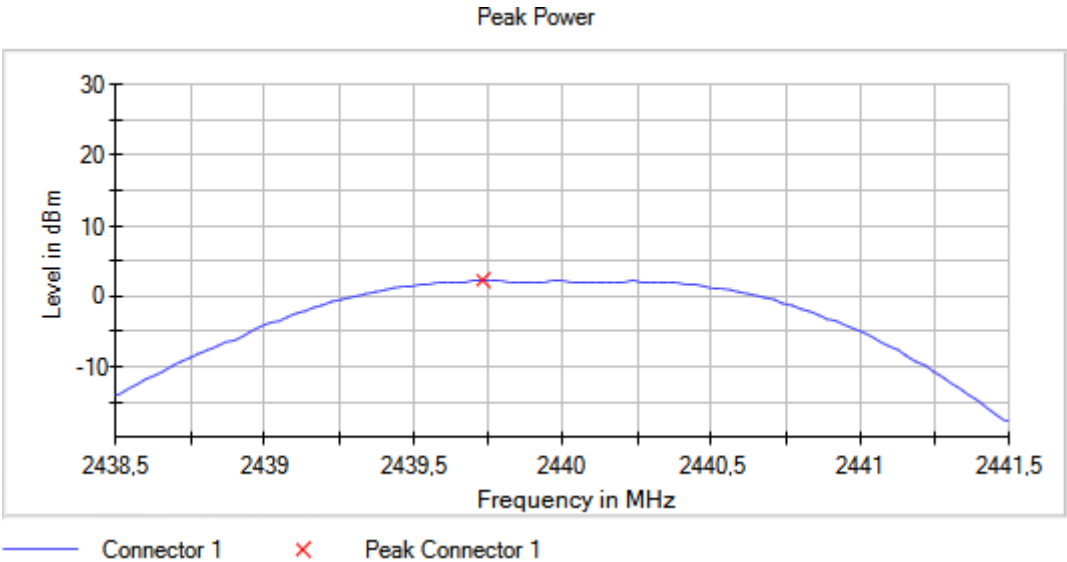



Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 1
Modulation = BTLE 5.0 (GFSK 1 Mbit/s) Frequency MHz = 2480.00000
Antenna configuration = SISO Active Port = 1

Images:

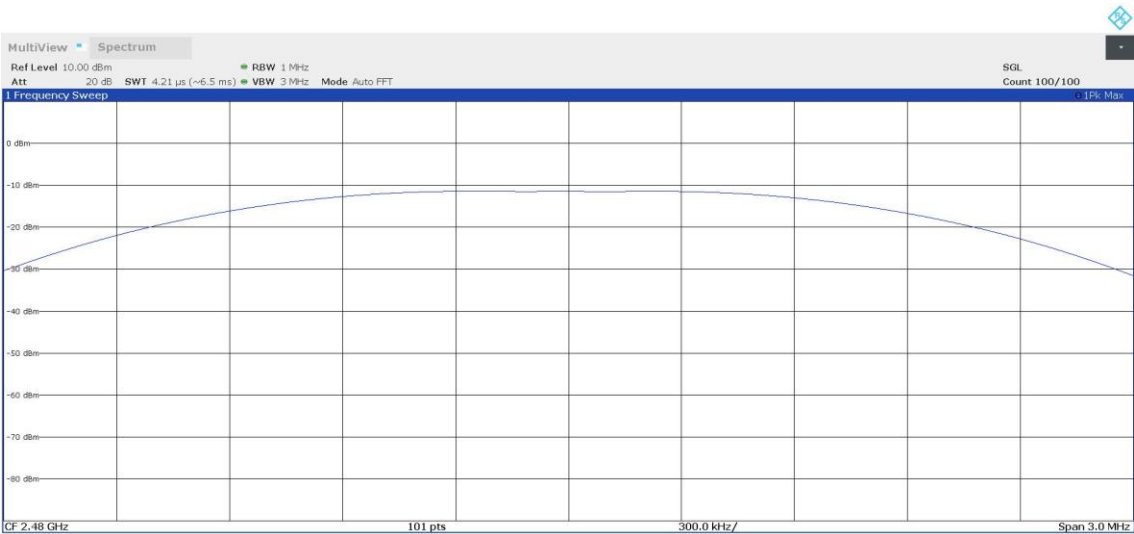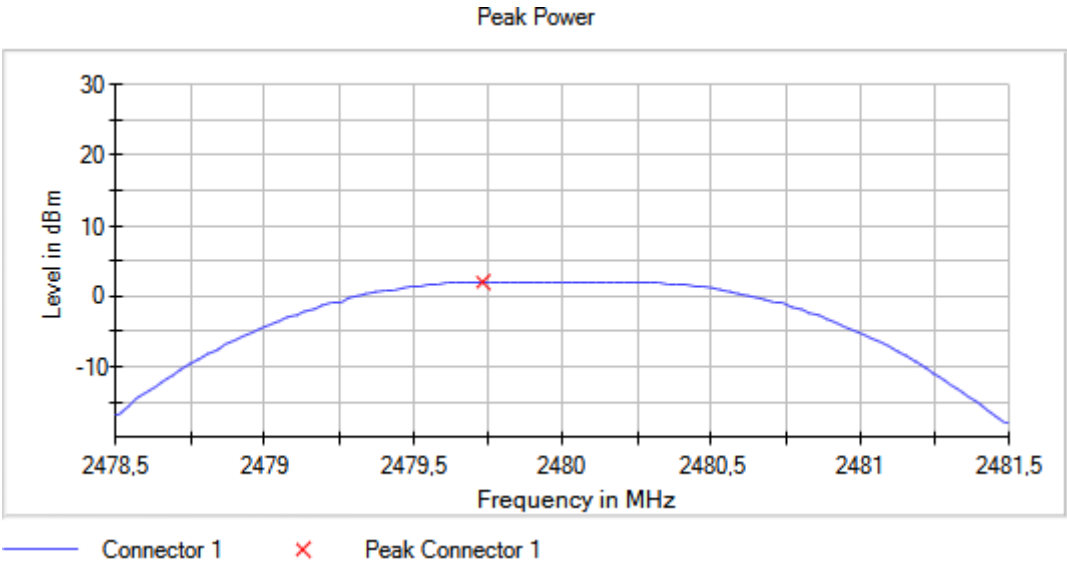



Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 2
Modulation = BTLE 5.0 (GFSK 2 Mbit/s) Frequency MHz = 2402.00000
Antenna configuration = SISO Active Port = 1

Images:

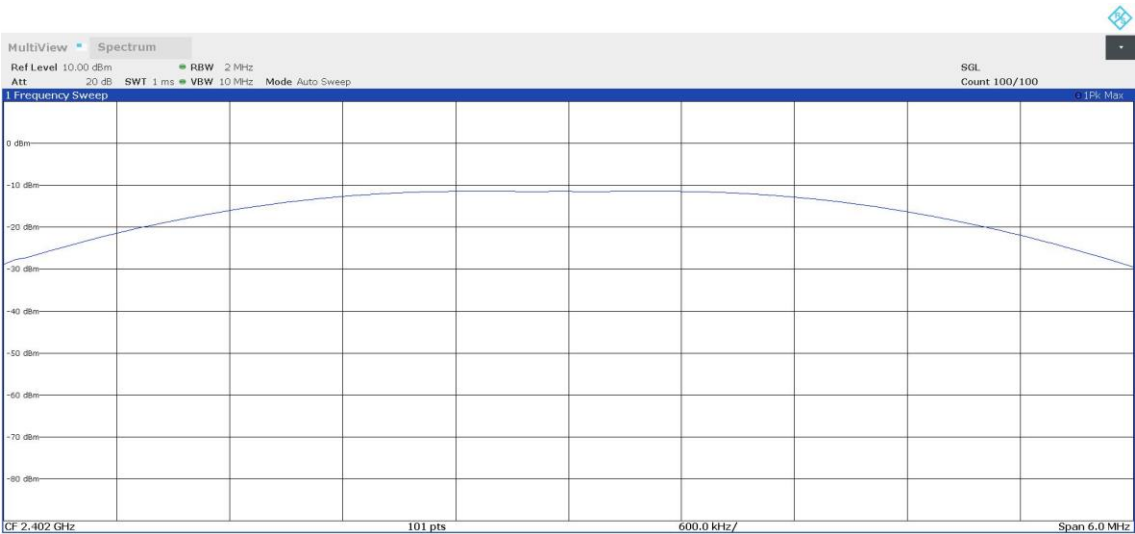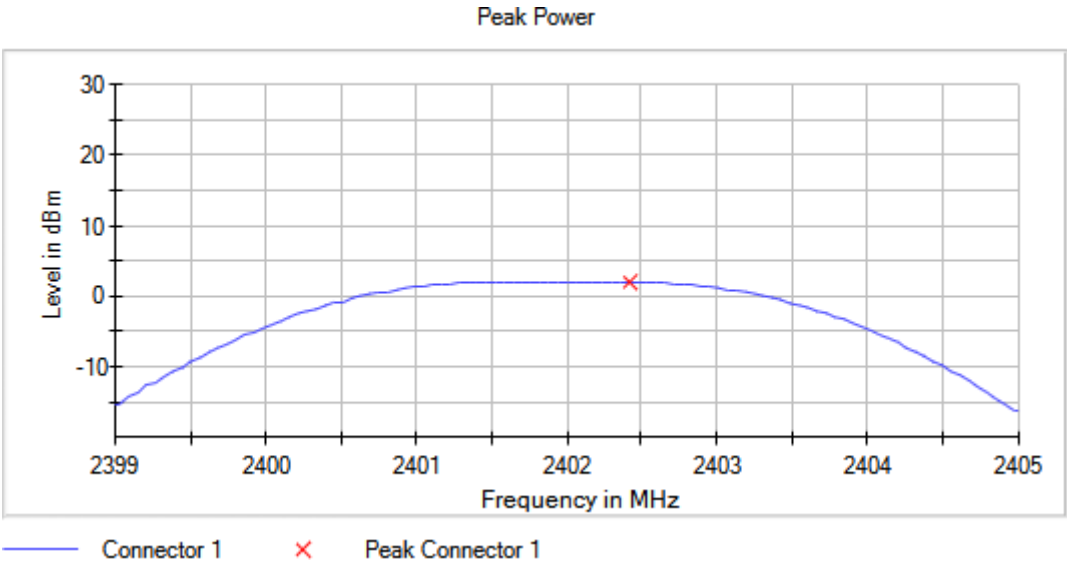



Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 2
Modulation = BTLE 5.0 (GFSK 2 Mbit/s) Frequency MHz = 2440.00000
Antenna configuration = SISO Active Port = 1

Images:

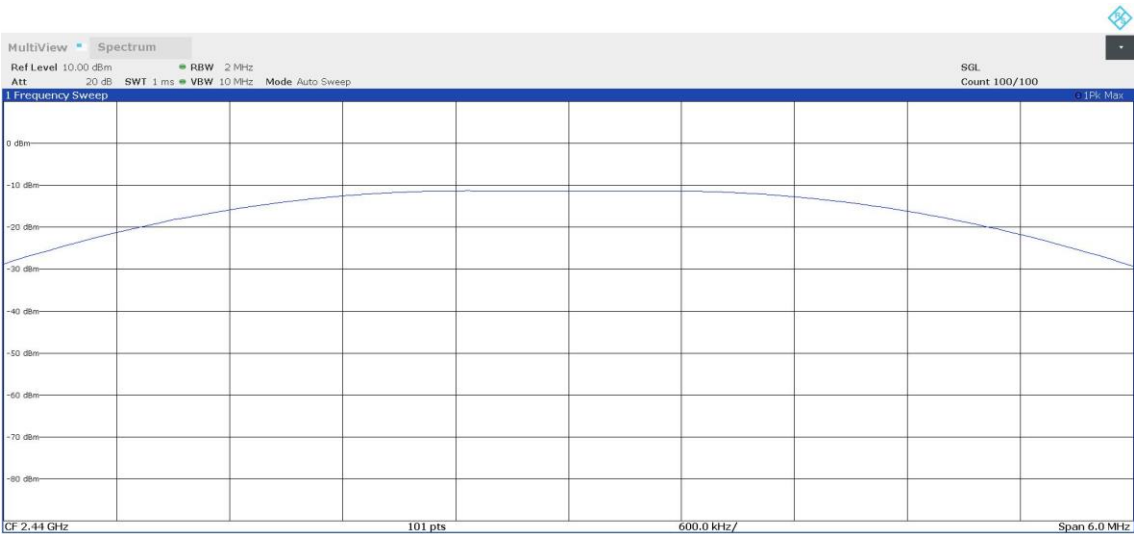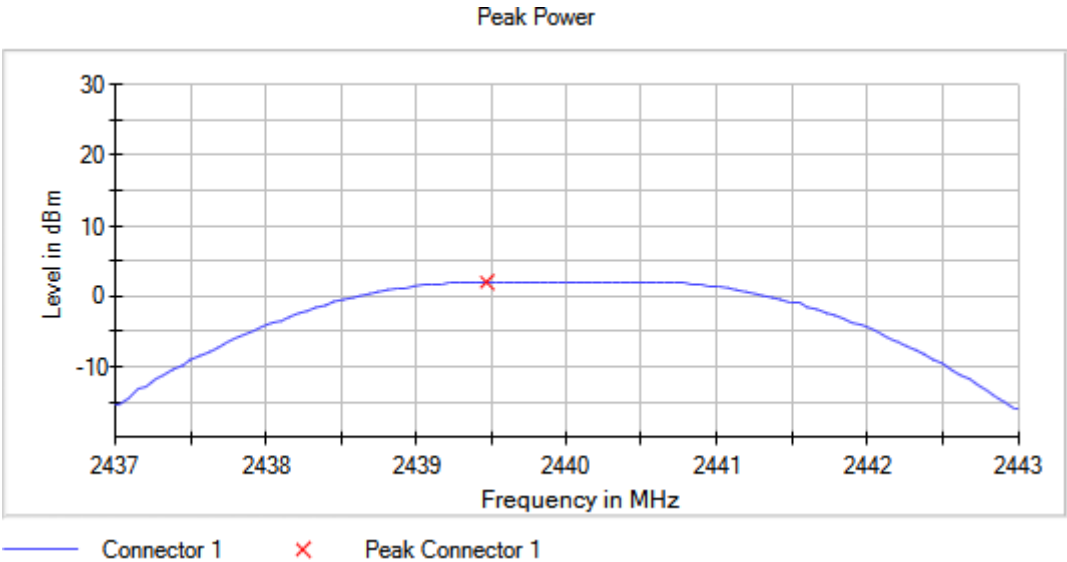

Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 2
Modulation = BTLE 5.0 (GFSK 2 Mbit/s) Frequency MHz = 2480.00000
Antenna configuration = SISO Active Port = 1

Images:

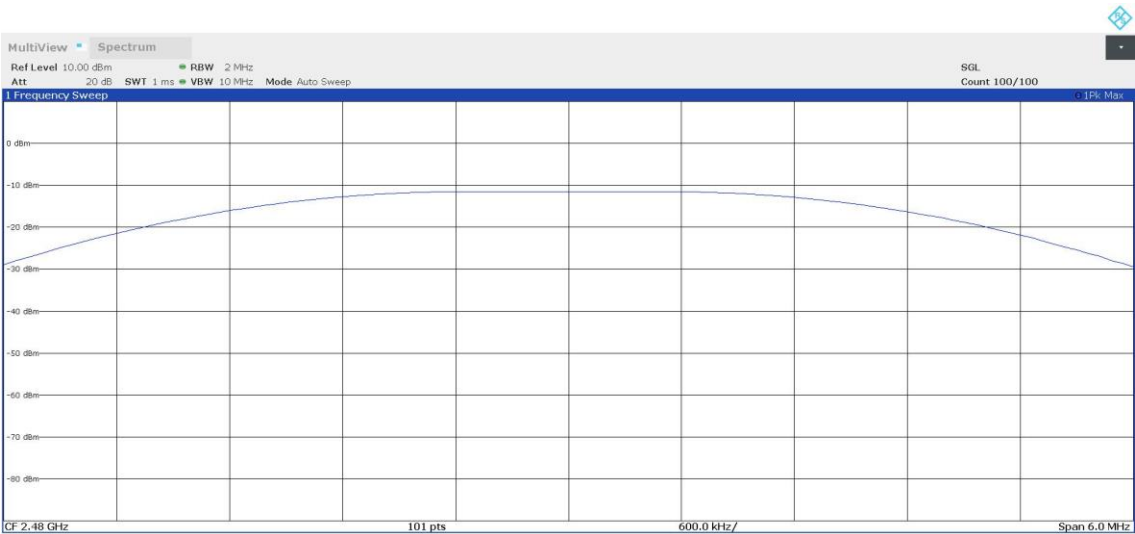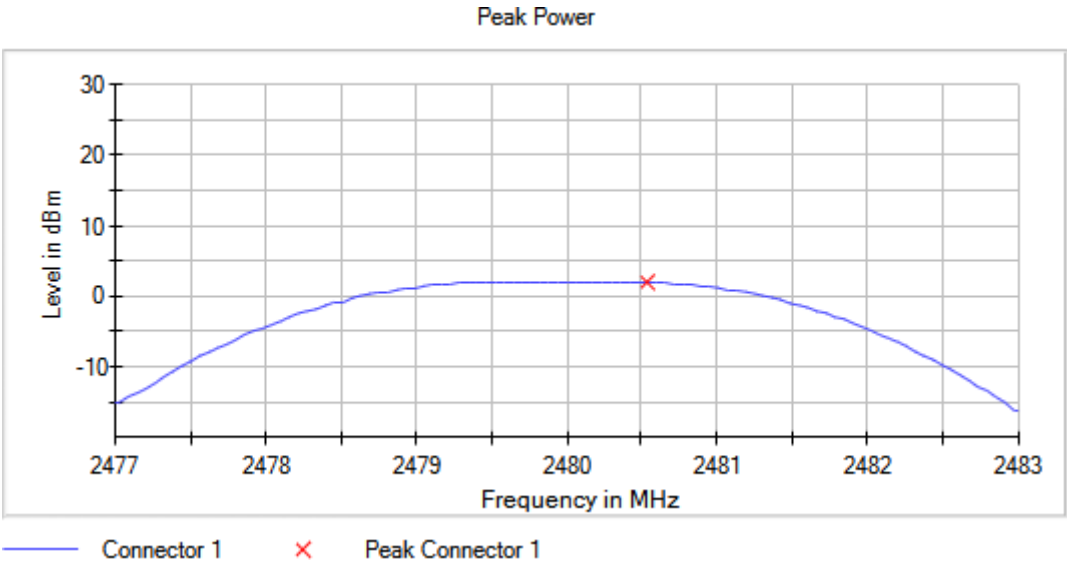

RSS-247 5.5 / FCC 15.247 (d) Band-edge emissions compliance (Transmitter)

Limits

In any 100 kHz bandwidths outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Modulation: BTLE 5.0 (GFSK 1 Mbit/s)

Results

Freq (MHz)	Measured Freq (MHz)	Level (dBm)	Limit (dBm)
2402.00000	2399.975000	-43.6	-11.935
	2399.925000	-44.7	
	2399.875000	-45.0	
	2399.825000	-45.9	
	2399.775000	-46.3	
	2399.725000	-46.7	
	2399.675000	-47.6	
	2385.825000	-48.0	
	2385.775000	-48.1	
	2385.675000	-48.2	
	2385.625000	-48.2	
	2385.925000	-48.2	
	2385.725000	-48.2	
	2385.975000	-48.3	
	2385.875000	-48.3	

Freq (MHz)	Measured Freq (MHz)	Level (dBm)	Limit (dBm)
2480.00000	2495.775000	-47.6	-11.826
	2495.925000	-47.9	
	2495.975000	-48.0	
	2496.025000	-48.1	
	2495.725000	-48.1	
	2495.825000	-48.1	
	2495.525000	-48.1	
	2495.575000	-48.1	
	2495.625000	-48.2	
	2495.875000	-48.3	
	2495.675000	-48.3	
	2496.225000	-48.5	
	2496.175000	-48.5	
	2495.475000	-48.6	
	2496.075000	-48.7	

Modulation: BTLE 5.0 (GFSK 2 Mbit/s)

Results

Freq (MHz)	Measured Freq (MHz)	Level (dBm)	Limit (dBm)
2402.00000	2399.975000	-25.4	-12.008
	2399.925000	-26.0	
	2399.875000	-28.7	
	2399.825000	-31.6	
	2399.775000	-33.4	
	2399.725000	-35.4	
	2399.675000	-38.7	
	2399.625000	-40.3	
	2399.575000	-41.1	
	2399.525000	-42.9	
	2399.475000	-43.0	
	2399.425000	-44.2	
	2399.375000	-44.2	
	2399.325000	-45.5	
	2398.975000	-46.6	

Freq (MHz)	Measured Freq (MHz)	Level (dBm)	Limit (dBm)
2480.00000	2495.475000	-47.8	-11.923
	2495.425000	-47.8	
	2495.525000	-47.9	
	2495.375000	-48.0	
	2495.325000	-48.0	
	2495.925000	-48.1	
	2495.875000	-48.1	
	2495.575000	-48.1	
	2496.025000	-48.2	
	2495.625000	-48.2	
	2495.975000	-48.3	
	2495.825000	-48.3	
	2495.775000	-48.4	
	2495.725000	-48.5	
	2495.675000	-48.6	




Verdict

Pass

Attachments



Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 1
Modulation = BTLE 5.0 (GFSK 1 Mbit/s) Frequency MHz = 2402.00000
Antenna configuration = SISO Active Port = 1

Images:

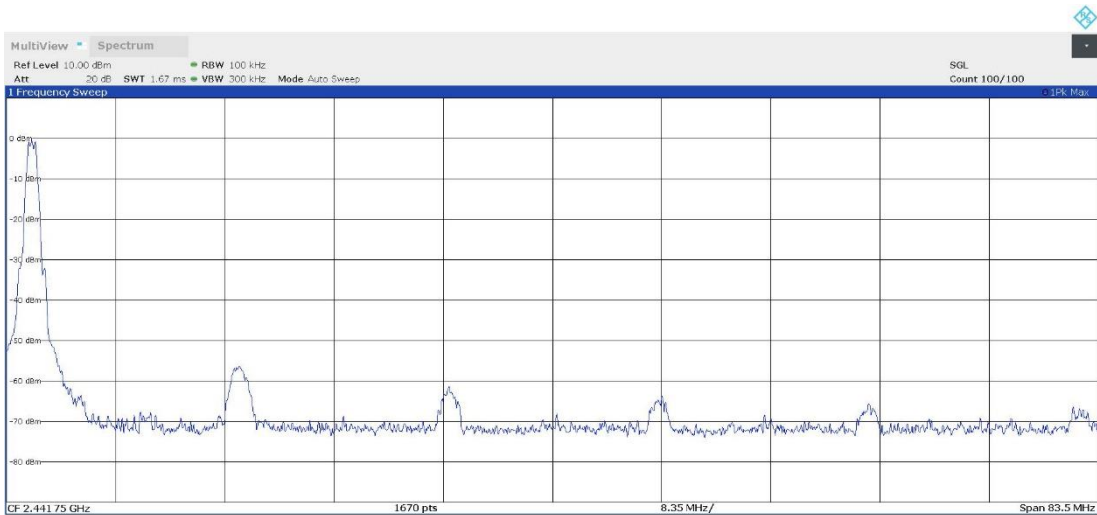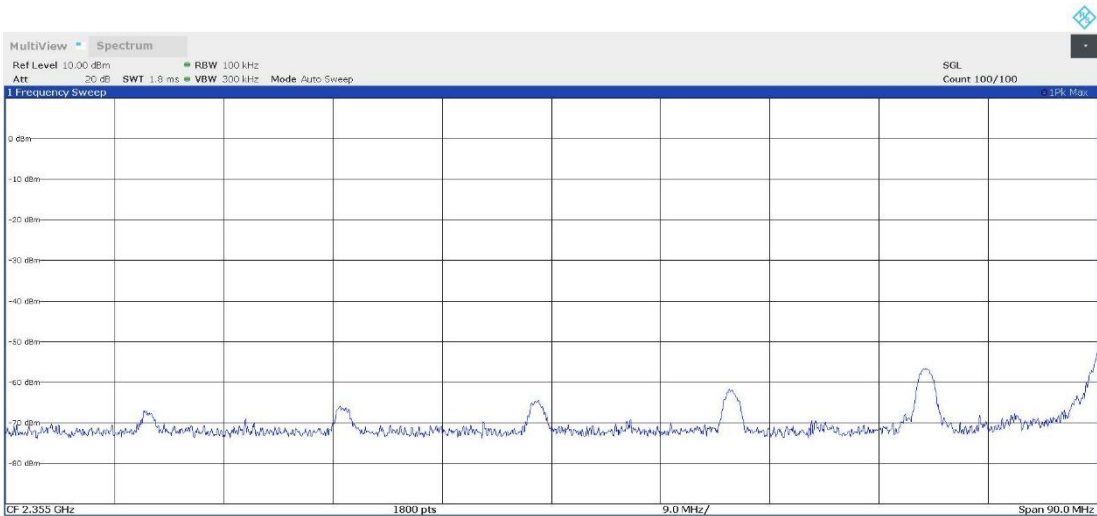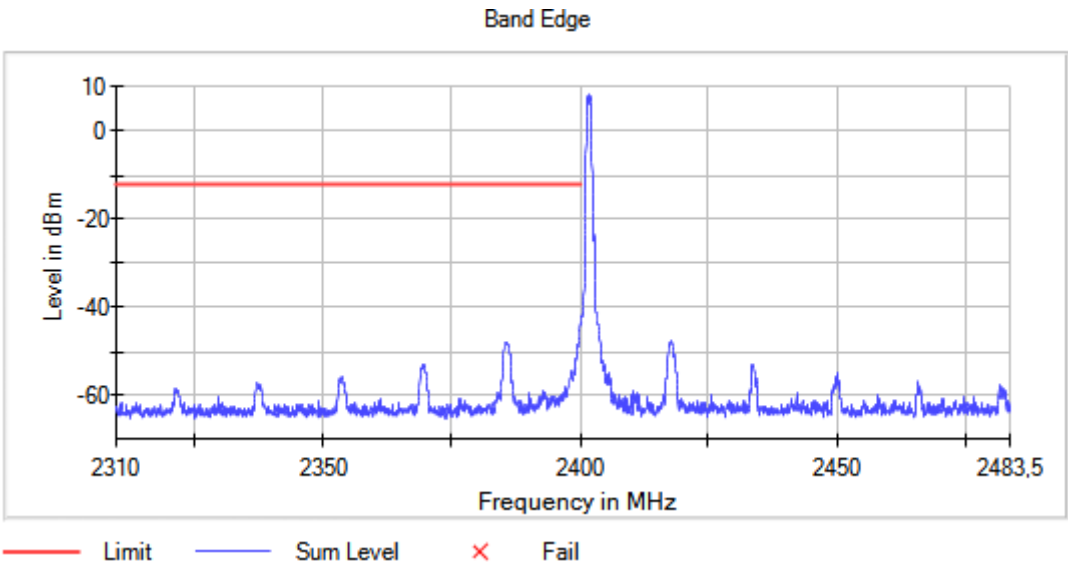




Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 1
Modulation = BTLE 5.0 (GFSK 1 Mbit/s) Frequency MHz = 2480.00000
Antenna configuration = SISO Active Port = 1

Images:

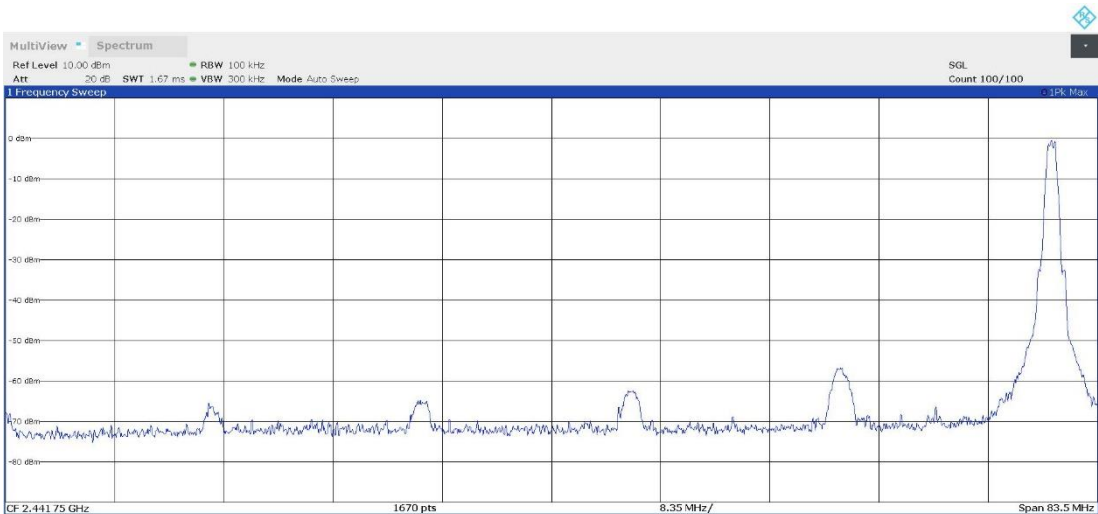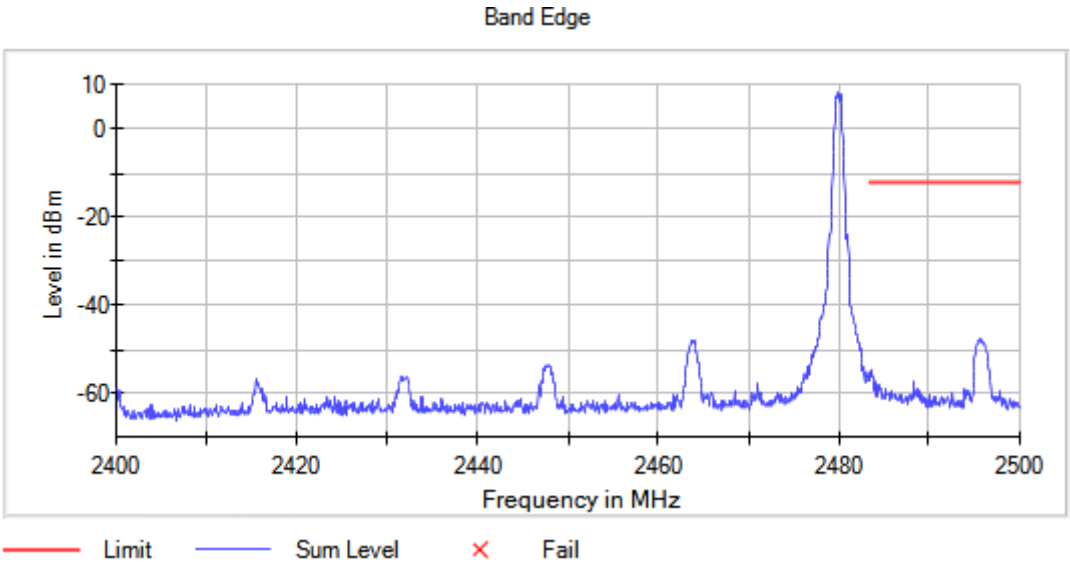




Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 2
Modulation = BTLE 5.0 (GFSK 2 Mbit/s) Frequency MHz = 2402.00000
Antenna configuration = SISO Active Port = 1

Images:

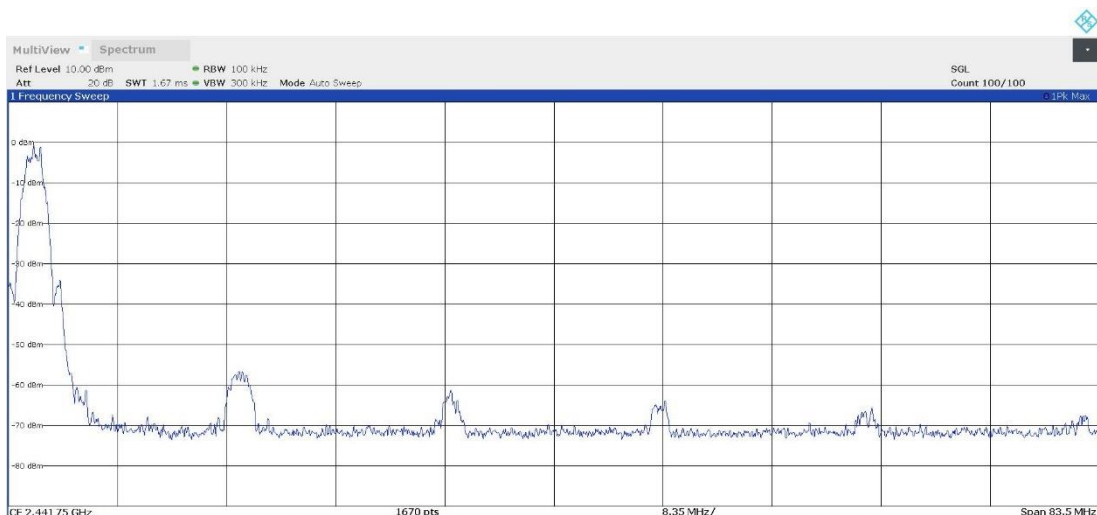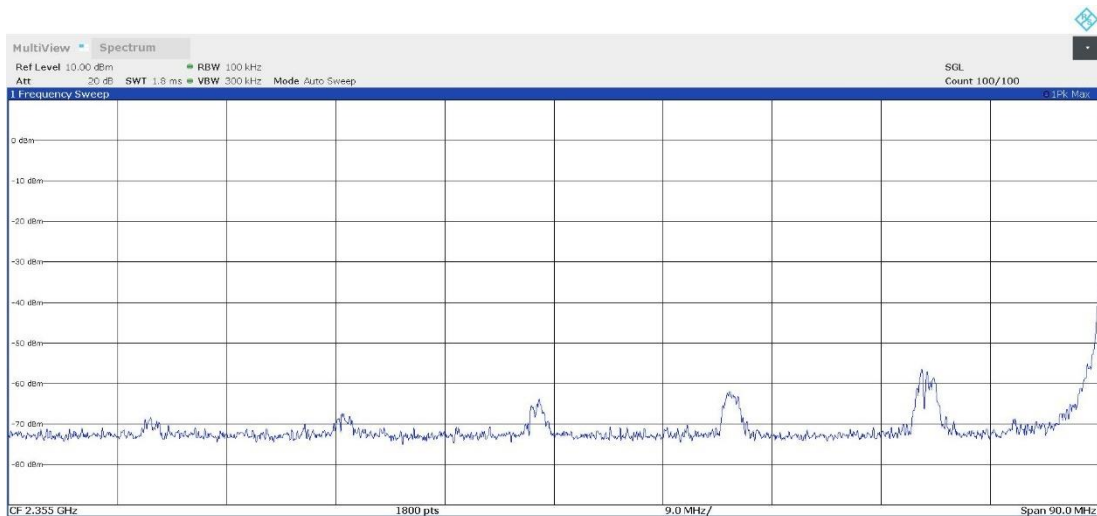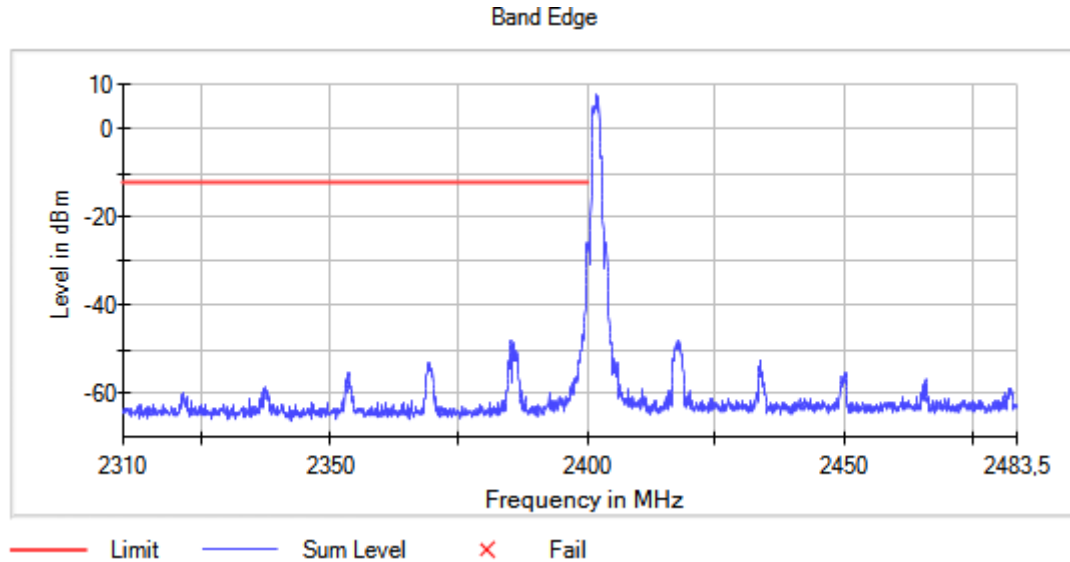

Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 2
Modulation = BTLE 5.0 (GFSK 2 Mbit/s) Frequency MHz = 2480.00000
Antenna configuration = SISO Active Port = 1

Images:

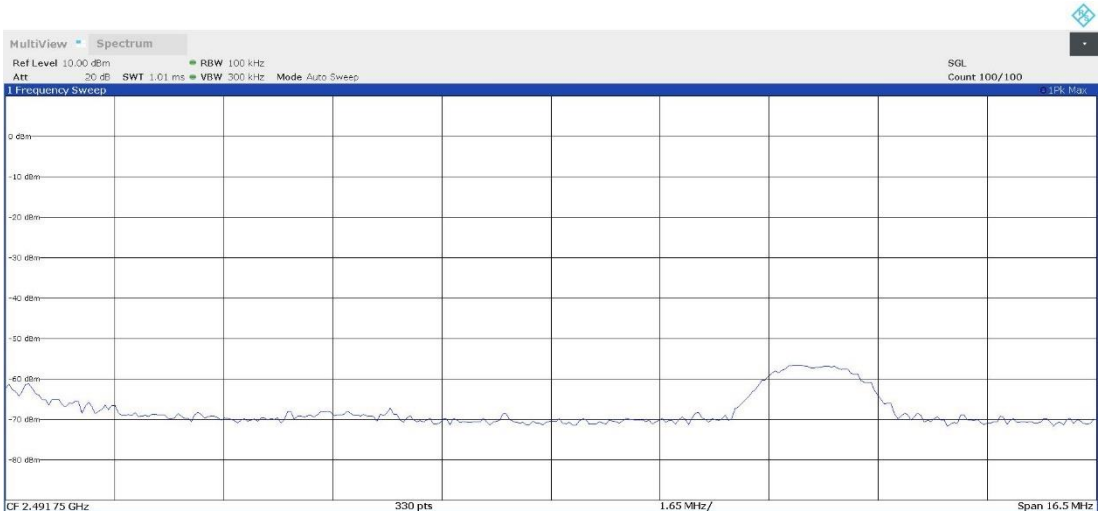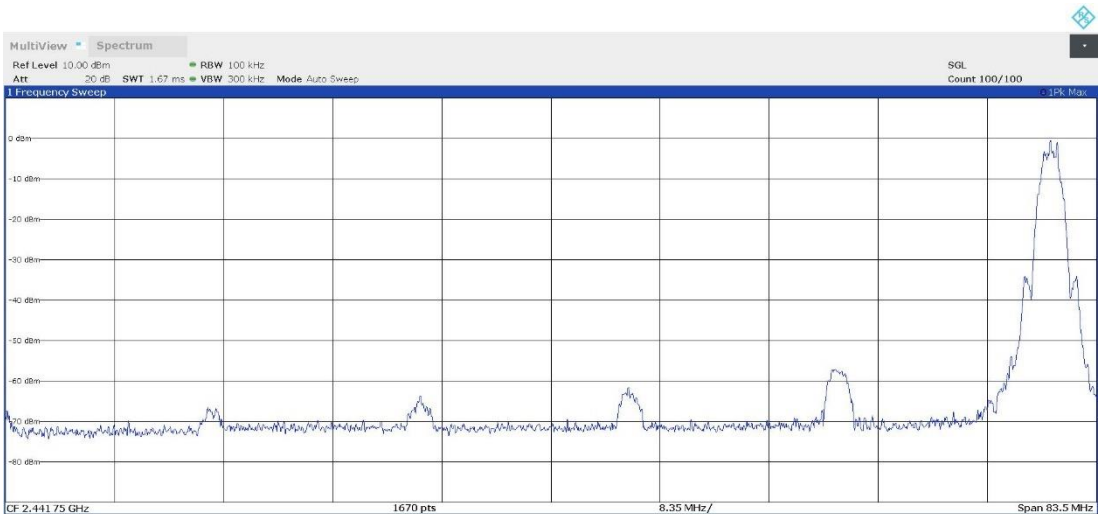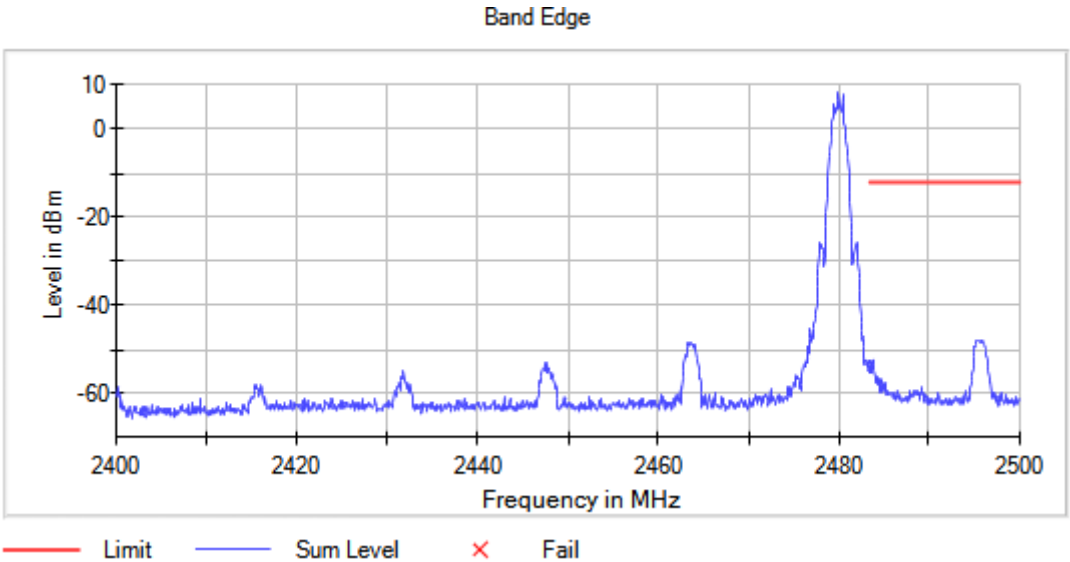

RSS-247 5.5 / FCC 15.247 (d) Emission limitations radiated (Transmitter)

Limits

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)/RSS-Gen):

Frequency Range (MHz)	Field strength ($\mu\text{V/m}$)	Field strength ($\text{dB}\mu\text{V/m}$)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RSS-247: Attenuation below the general field strength limits specified in RSS-Gen is not required.

Frequency range tested for Radiated emissions:

Start frequency: no radiofrequency signal generated in the device found below 10th sub-harmonic, no further investigation required.

Stop frequency: it has been performed the radiated spurious emissions until 10th harmonic.

Results

Modulation: The spurious frequencies detected do not depend on either the modulation or the channel.

Freq Rng (GHz)	Equipment	Freq (MHz)	Port	Unwanted Freq (MHz)	Unwanted Lvl (dBµV/m)	Pol	Detector
[0.03, 1]	Digital Transmission System (DTS)	2402.00000	1	265.952	31.65	H	PK
				265.952	25.87	H	QP
				374.981	38.17	H	PK
				374.981	34.31	H	QP
				400.007	34.87	H	PK
				400.007	31.44	H	QP
				424.984	35.55	V	PK
				424.984	32.25	V	QP
				450.010	33.11	V	PK
				450.010	29.63	V	QP
				942.818	34.68	V	PK
				942.818	26.25	V	QP

Verdict

Pass

Attachments

Frequency Range GHz = [0.03, 1]

Equipment Type = Digital Transmission System (DTS)


Modulation = The spurious frequencies detected do not depend on the modulation

Frequency MHz = The spurious frequencies detected do not depend on the operating channel.

Antenna configuration = SISO

Active Port = 1

Images:

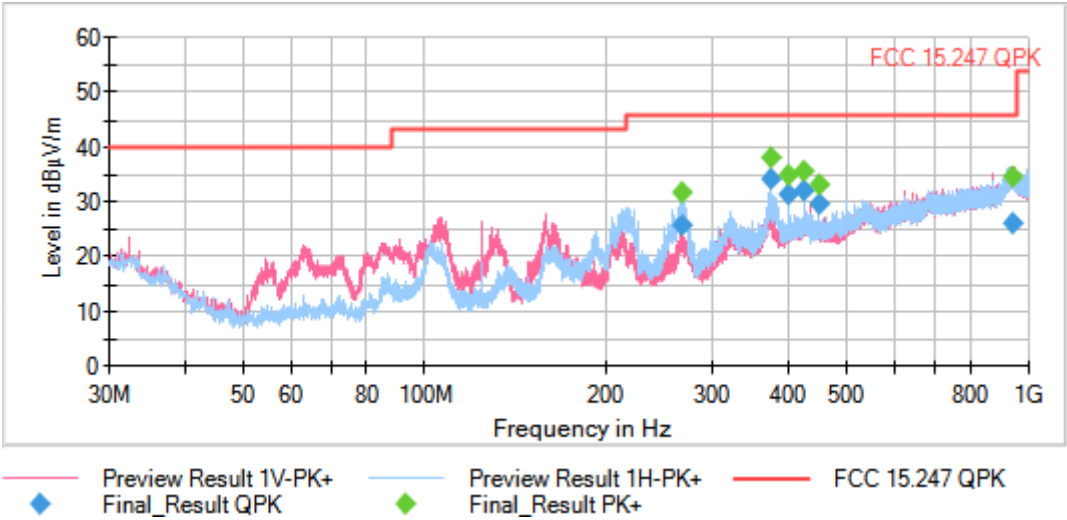

Tables:


Spectrum Analyzer Parameters

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
Receiver: [ESW 44]					
30 MHz - 1 GHz	48,5 kHz	PK+	100 kHz	1 s	20 dB


Frequency Range GHz = [1, 17] Equipment Type = Digital Transmission System (DTS)
Modulation = BTLE (GFSK 1 Mbit/s) Frequency MHz = 2402.00000
Antenna configuration = SISO Active Port = 1

Images:


Full Spectrum

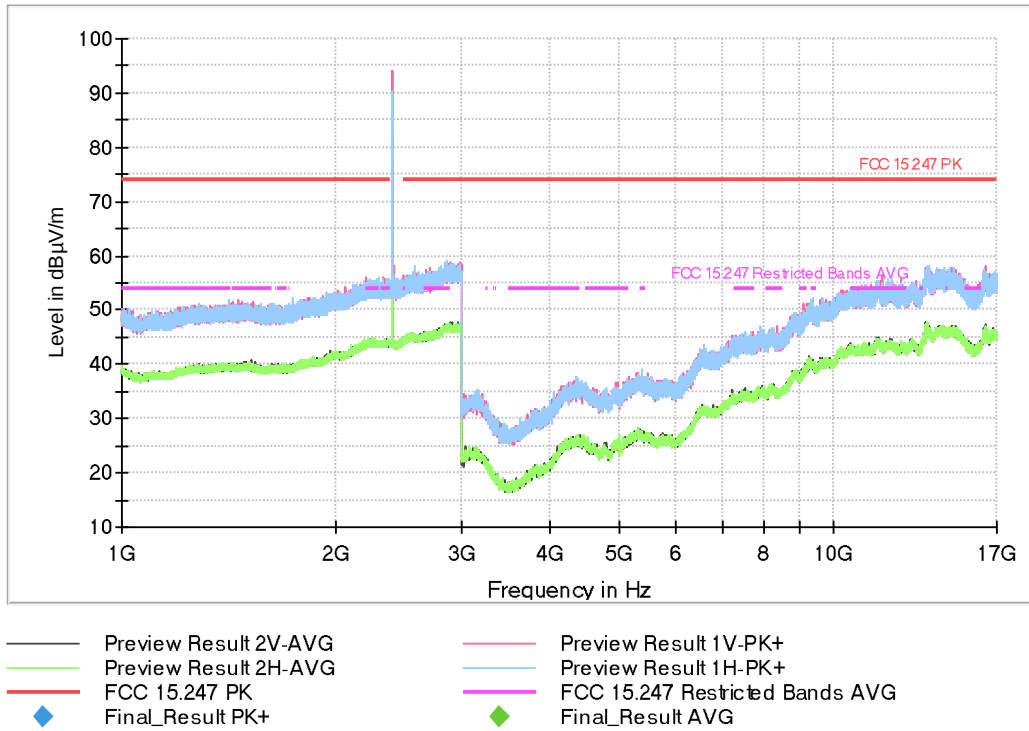

Full Spectrum

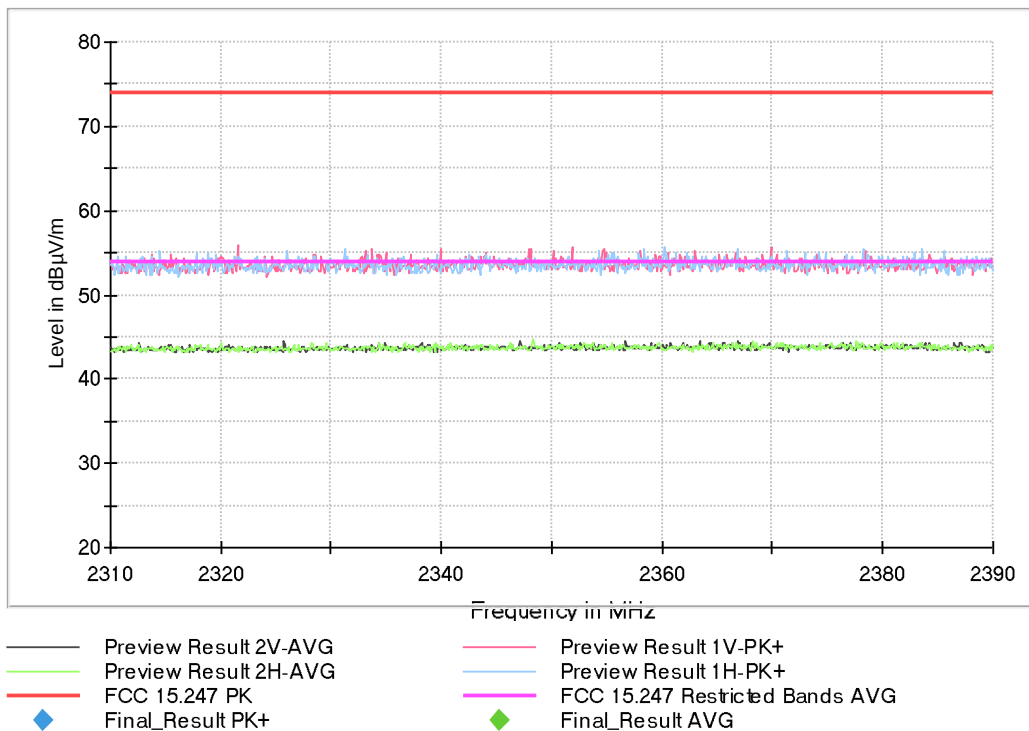

Full Spectrum

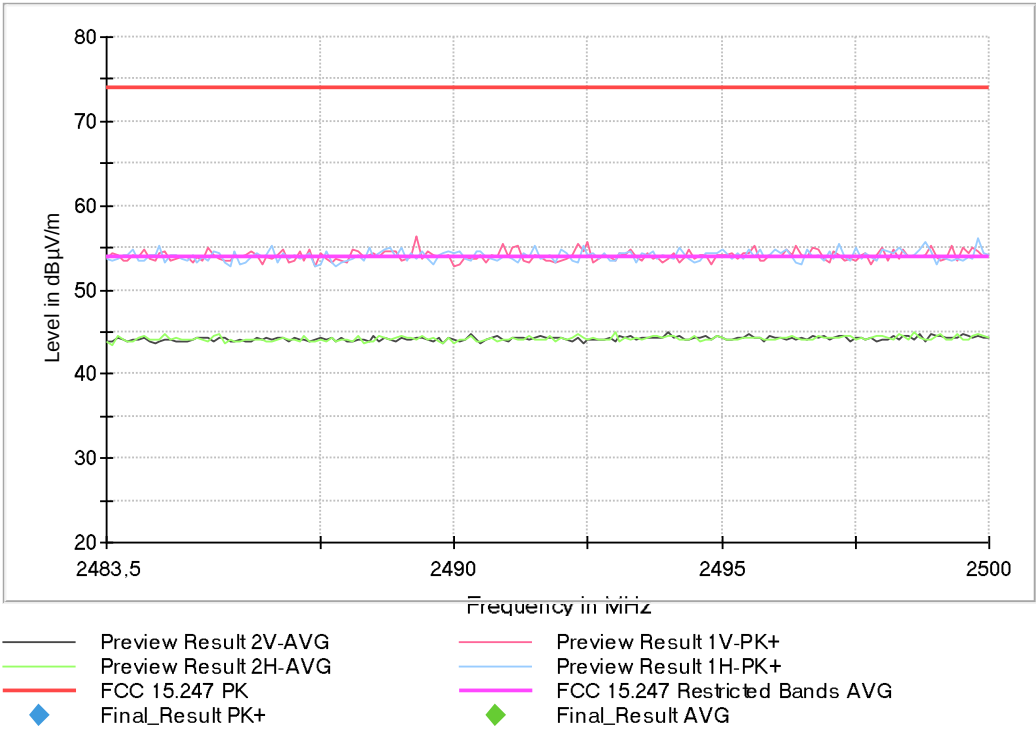



Tables:


Spectrum Analyzer Parameters

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
Receiver: [ESW 44]					
1 GHz - 2,39 GHz	400 kHz	PK+	1 MHz	0,01 s	0 dB
2,39 GHz - 2,484 GHz	40 kHz	PK+	100 kHz	0,01 s	0 dB
2,484 GHz - 3 GHz	400 kHz	PK+	1 MHz	0,01 s	0 dB
3 GHz - 17 GHz	400 kHz	PK+	1 MHz	0,01 s	0 dB

Frequency Range GHz = [1, 17] Equipment Type = Digital Transmission System (DTS)
Modulation = BTLE (GFSK 1 Mbit/s) Frequency MHz = 2440.00000
Antenna configuration = SISO Active Port = 1

Images:

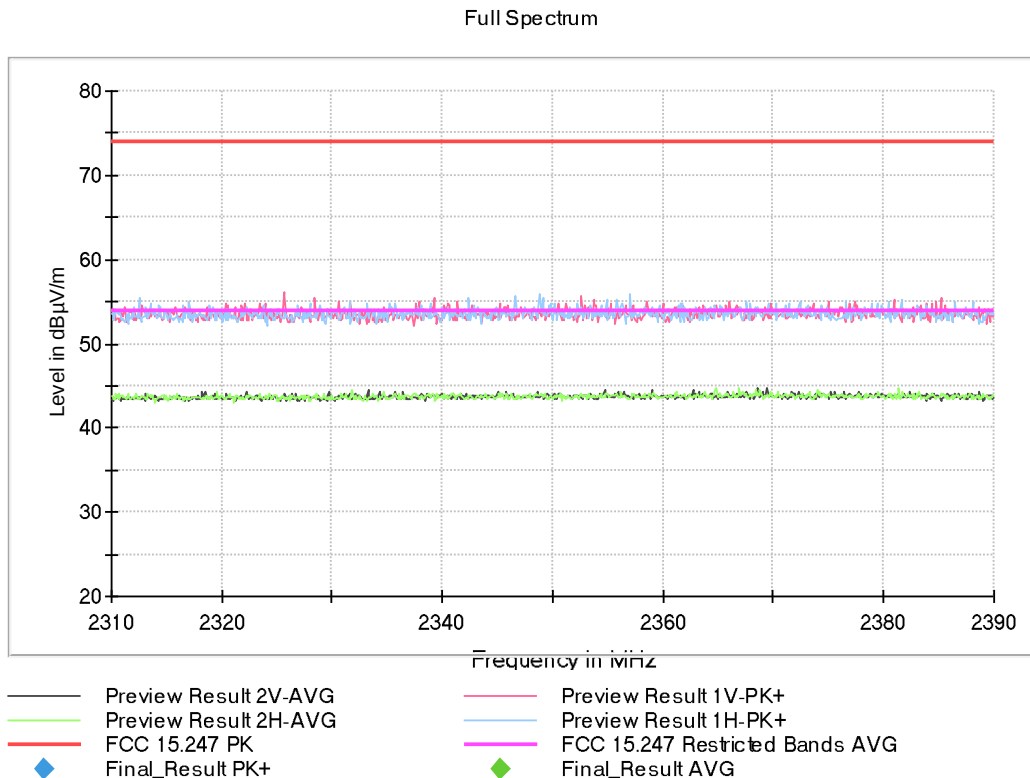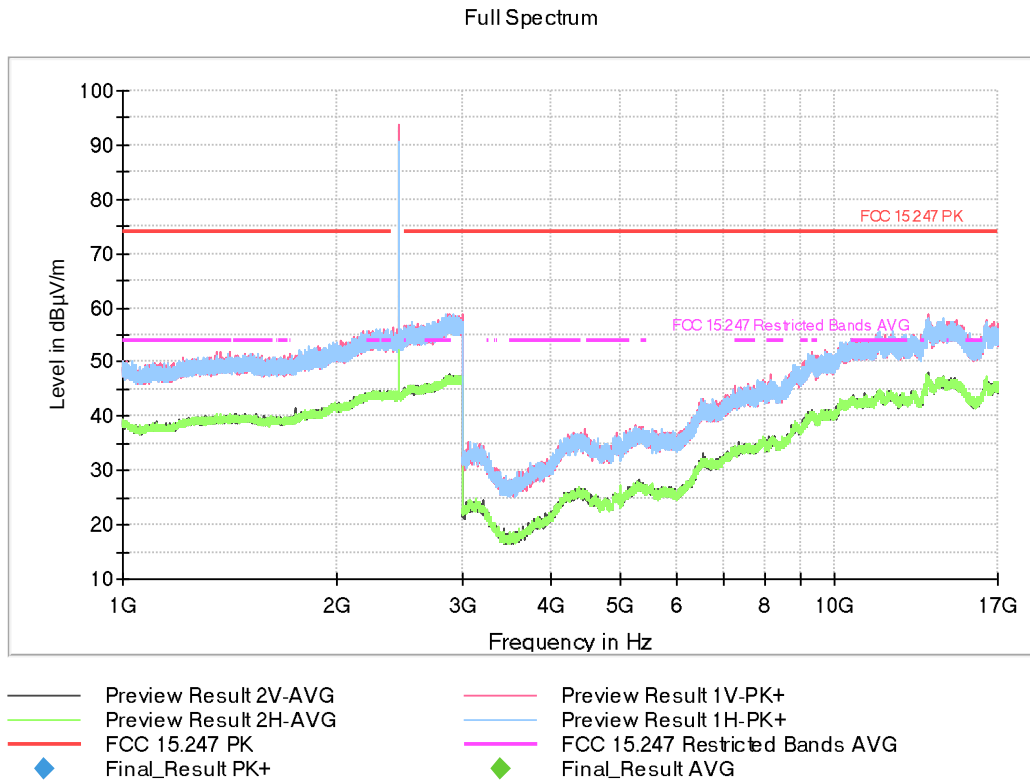

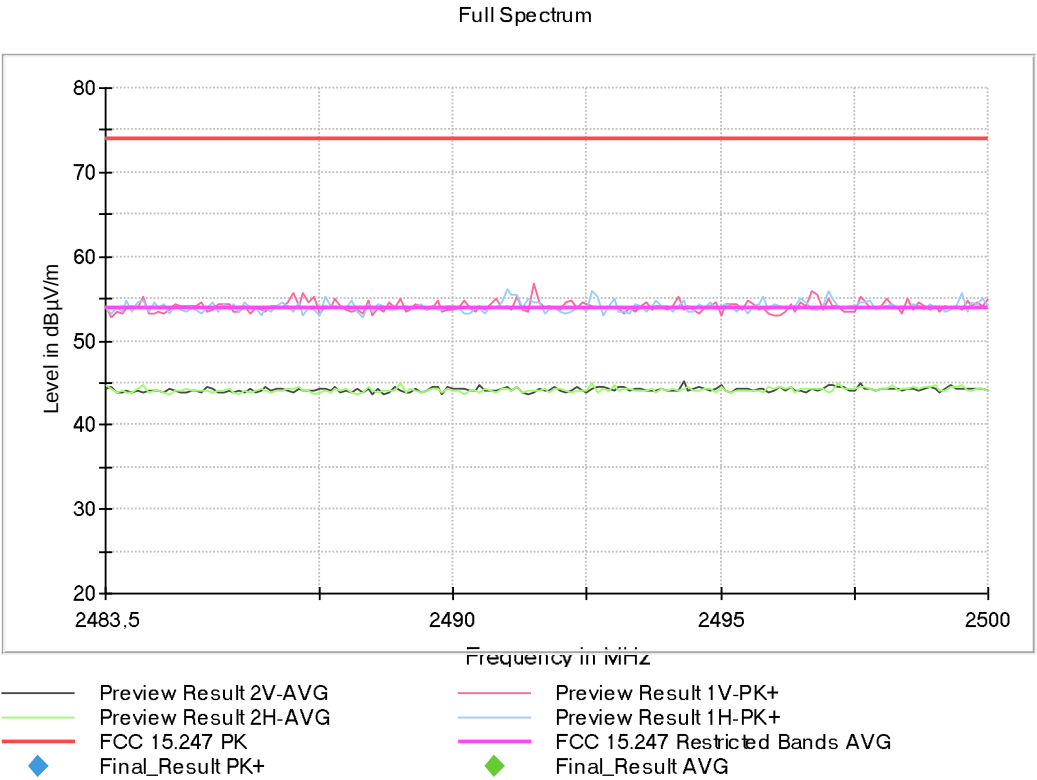

Tables:


Spectrum Analyzer Parameters

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
Receiver: [ESW 44]					
1 GHz - 2,39 GHz	400 kHz	PK+	1 MHz	0,01 s	0 dB
2,39 GHz - 2,484 GHz	40 kHz	PK+	100 kHz	0,01 s	0 dB
2,484 GHz - 3 GHz	400 kHz	PK+	1 MHz	0,01 s	0 dB
3 GHz - 17 GHz	400 kHz	PK+	1 MHz	0,01 s	0 dB


Frequency Range GHz = [1, 17] Equipment Type = Digital Transmission System (DTS)
Modulation = BTLE (GFSK 1 Mbit/s) Frequency MHz = 2480.00000
Antenna configuration = SISO Active Port = 1

Images:


Full Spectrum

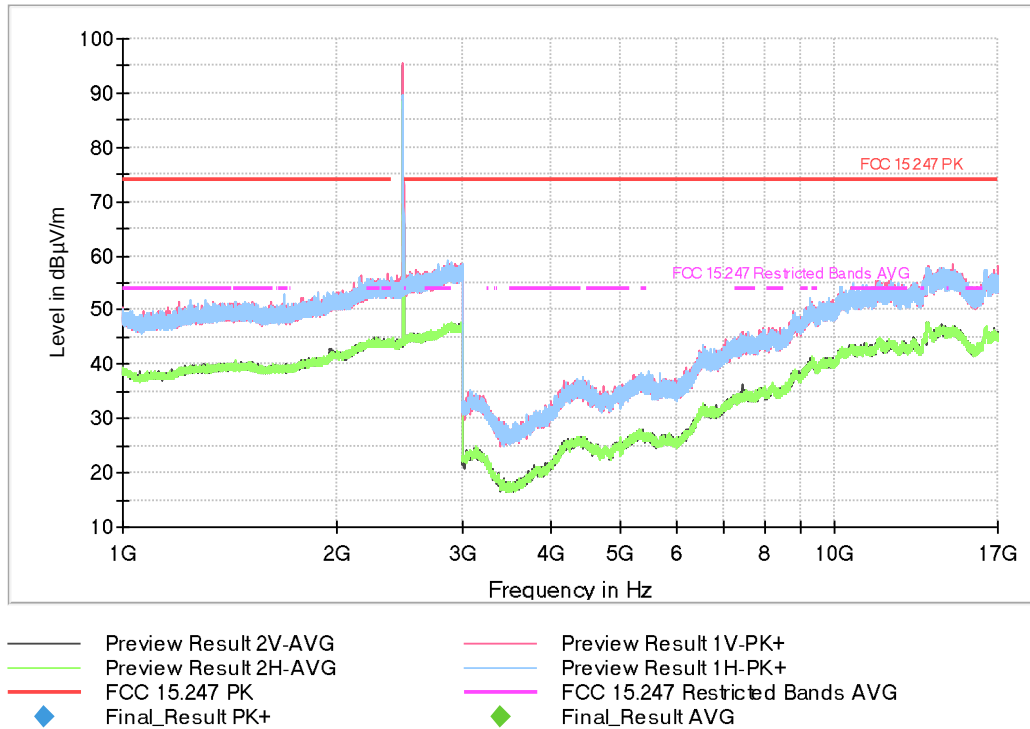

Full Spectrum

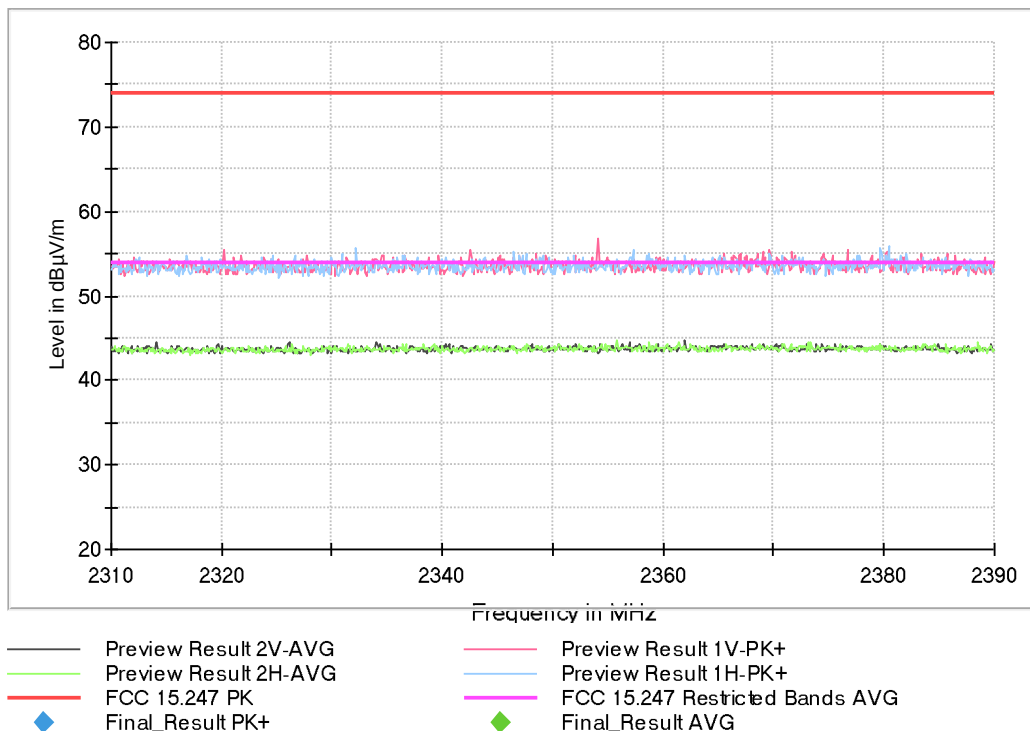

Full Spectrum

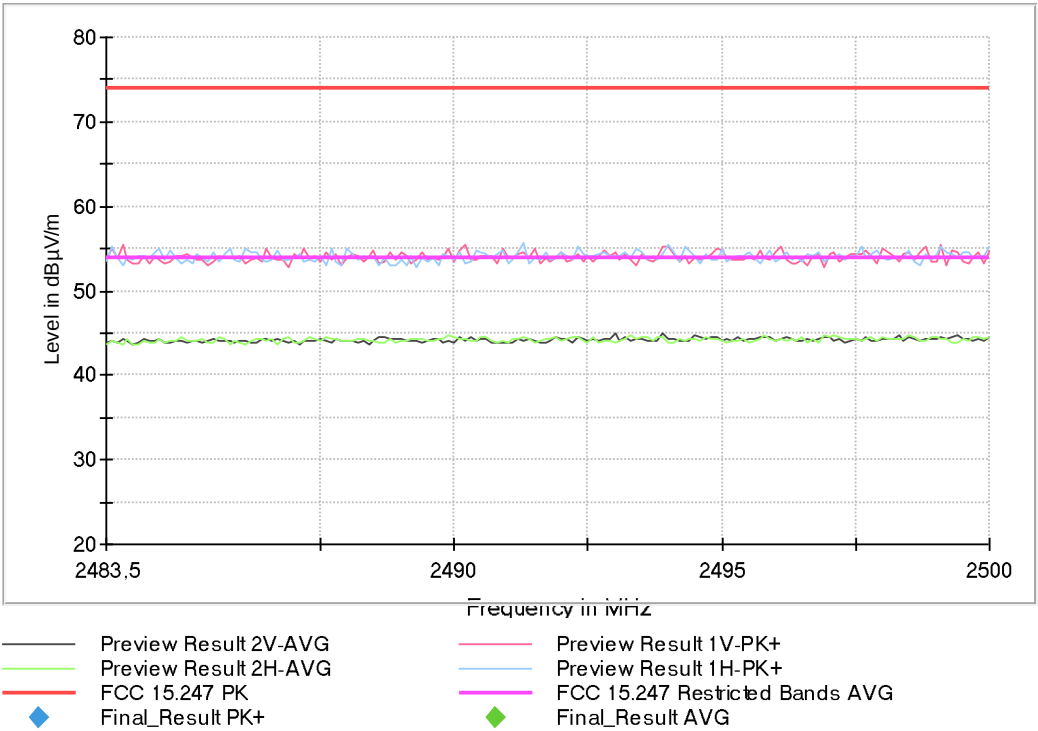


Tables:

Spectrum Analyzer Parameters

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
Receiver: [ESW 44]					
1 GHz - 2,39 GHz	400 kHz	PK+	1 MHz	0,01 s	0 dB
2,39 GHz - 2,484 GHz	40 kHz	PK+	100 kHz	0,01 s	0 dB
2,484 GHz - 3 GHz	400 kHz	PK+	1 MHz	0,01 s	0 dB
3 GHz - 17 GHz	400 kHz	PK+	1 MHz	0,01 s	0 dB


Frequency Range GHz = [1, 3] Equipment Type = Digital Transmission System (DTS)
Modulation = BTLE 5.0 (GFSK 2 Mbit/s) Frequency MHz = 2402.00000
Antenna configuration = SISO Active Port = 1

Images:

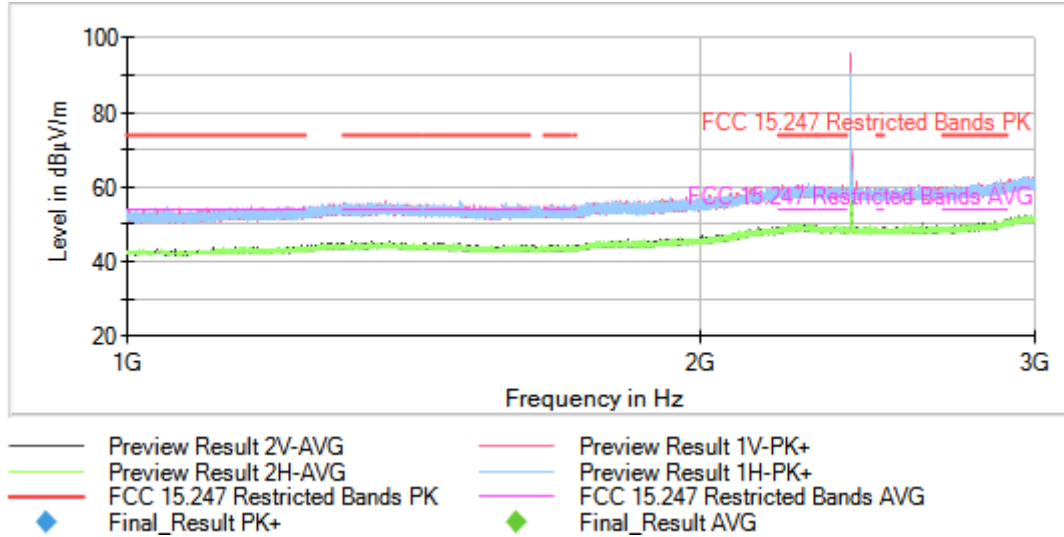

Full Spectrum



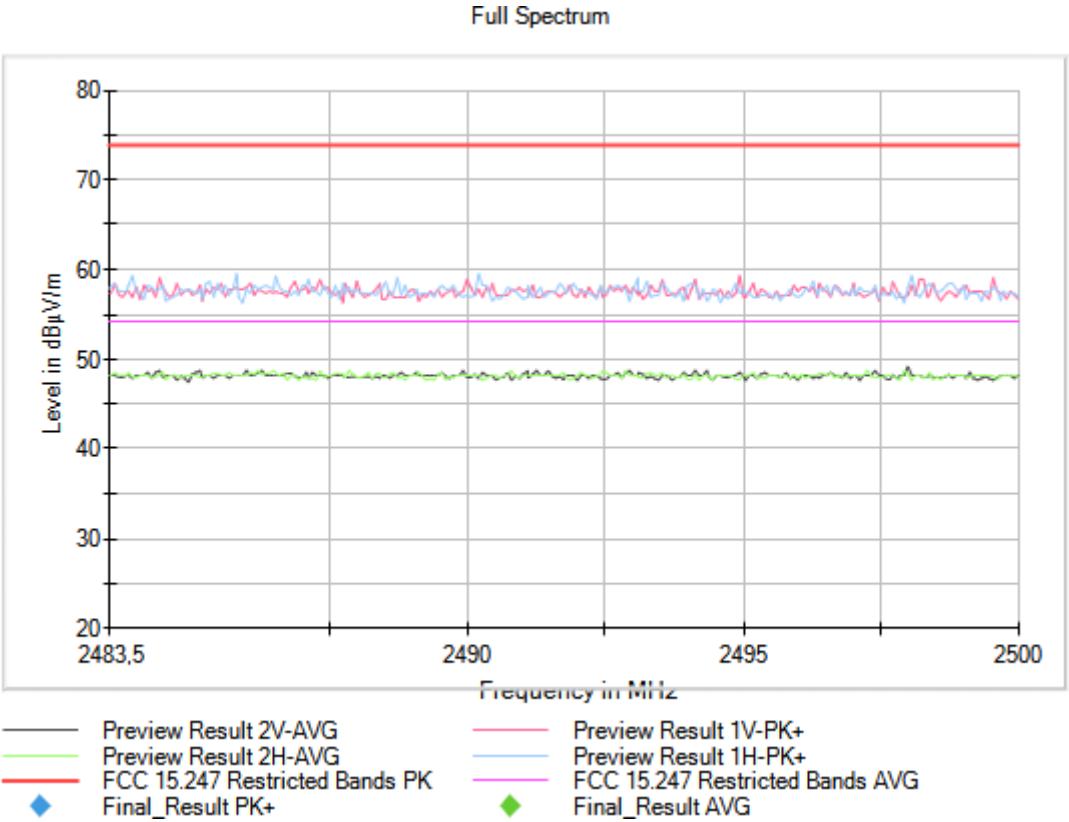


Tables:

Spectrum Analyzer Parameters


Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
Receiver: [ESW 44]					
1 GHz - 3 GHz	66,667 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [1, 3] Equipment Type = Digital Transmission System (DTS)
Modulation = BTLE 5.0 (GFSK 2 Mbit/s) Frequency MHz = 2440.00000
Antenna configuration = SISO Active Port = 1

Images:

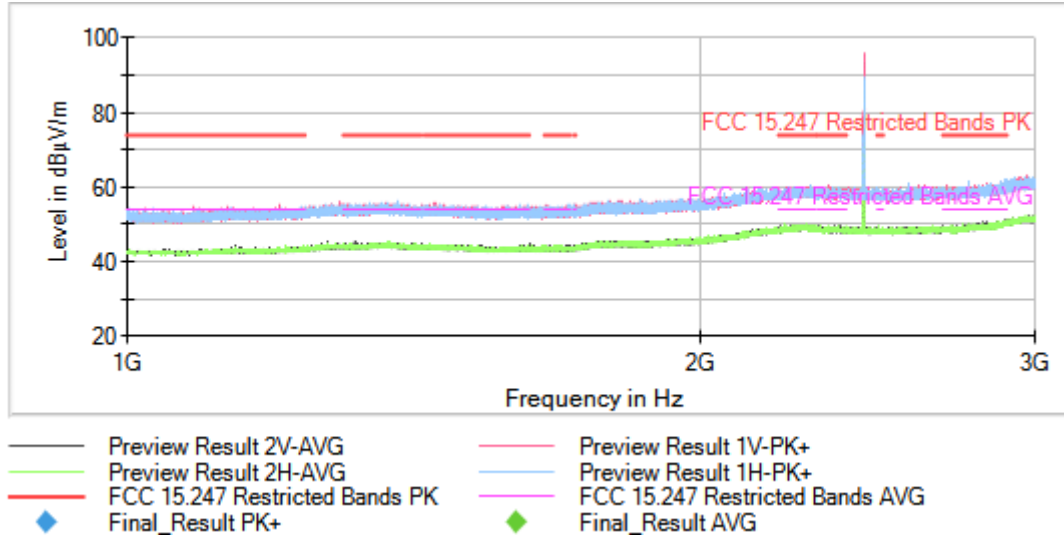

Full Spectrum

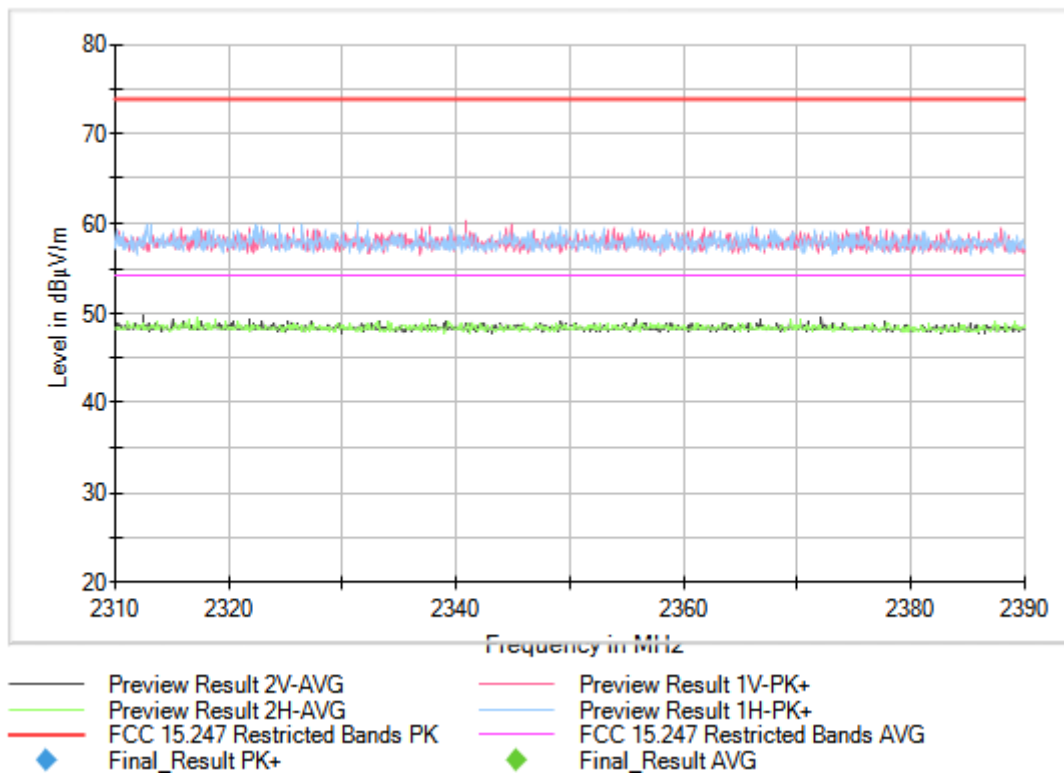




Tables:

Spectrum Analyzer Parameters


Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
Receiver: [ESW 44]					
1 GHz - 3 GHz	66,667 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [1, 3] Equipment Type = Digital Transmission System (DTS)
Modulation = BTLE 5.0 (GFSK 2 Mbit/s) Frequency MHz = 2480.00000
Antenna configuration = SISO Active Port = 1

Images:

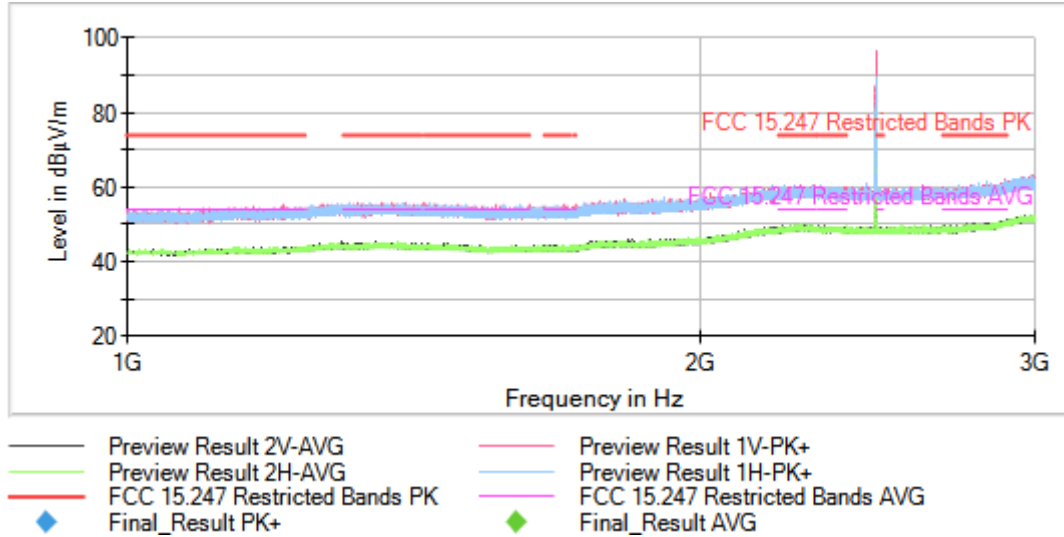

Full Spectrum

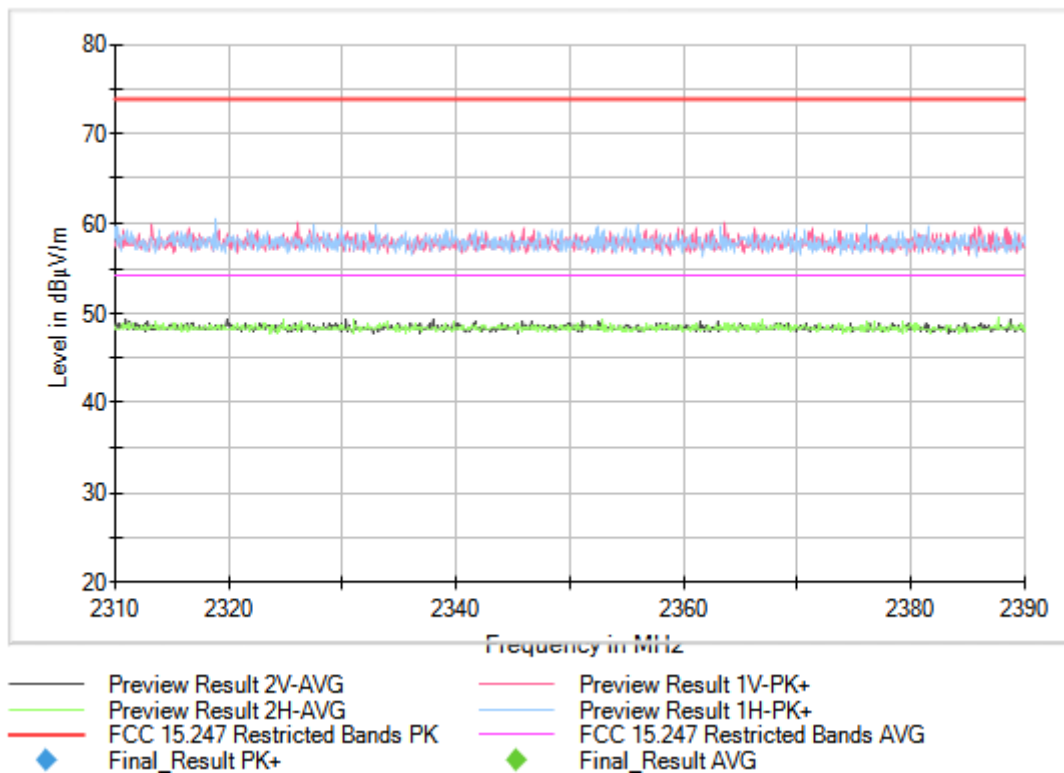




Tables:

Spectrum Analyzer Parameters

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
Receiver: [ESW 44]					
1 GHz - 3 GHz	66,667 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [3, 17] Equipment Type = Digital Transmission System (DTS)
Modulation = BTLE 5.0 (GFSK 2 Mbit/s) Frequency MHz = 2402.00000
Antenna configuration = SISO Active Port = 1

Images:

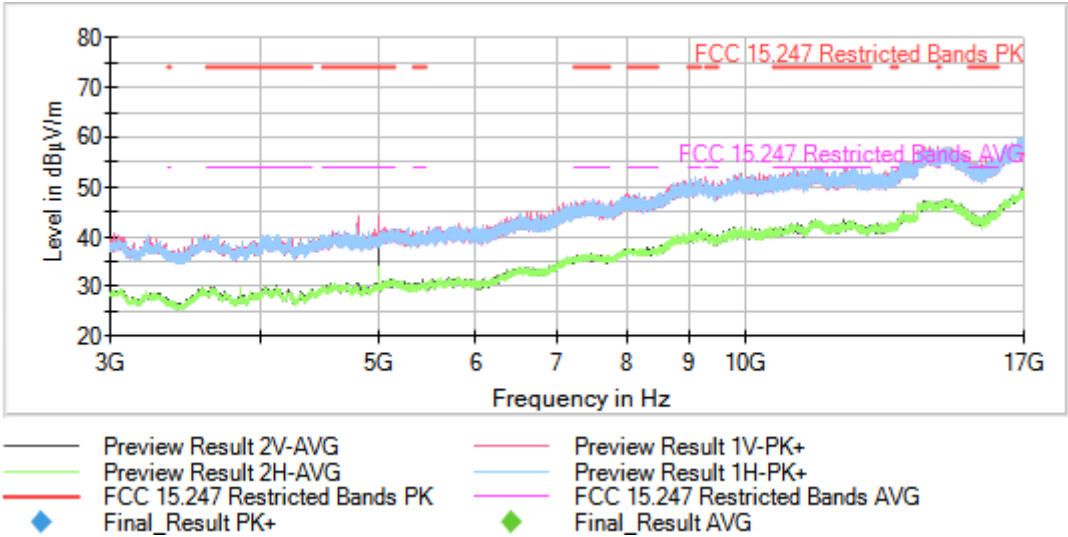


Tables:

Spectrum Analyzer Parameters

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
Receiver: [ESW 44]					
3 GHz - 17 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [3, 17] Equipment Type = Digital Transmission System (DTS)
Modulation = BTLE 5.0 (GFSK 2 Mbit/s) Frequency MHz = 2440.00000
Antenna configuration = SISO Active Port = 1

Images:

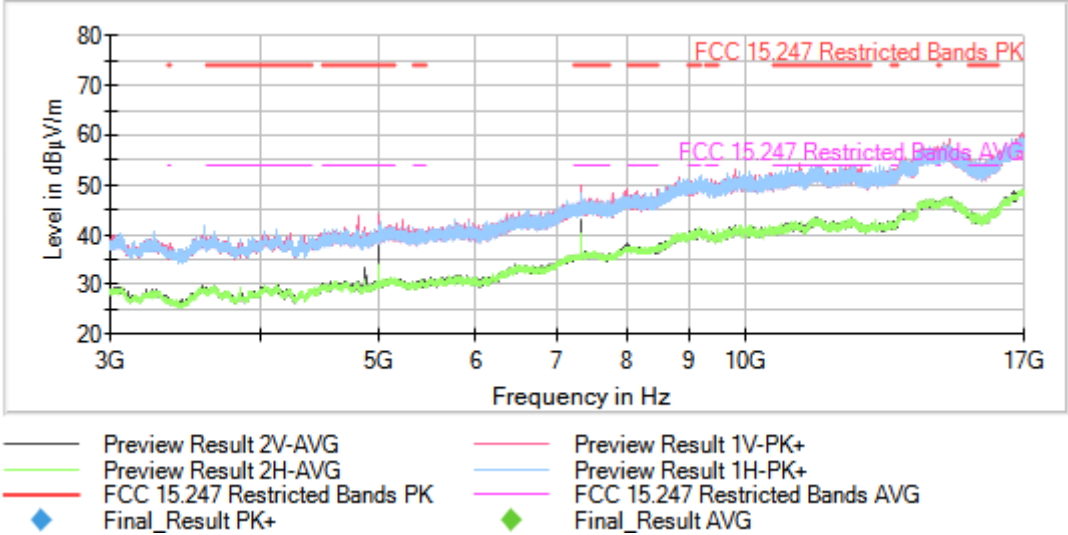


Tables:

Spectrum Analyzer Parameters

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
Receiver: [ESW 44]					
3 GHz - 17 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [3, 17] Equipment Type = Digital Transmission System (DTS)
Modulation = BTLE 5.0 (GFSK 2 Mbit/s) Frequency MHz = 2480.00000
Antenna configuration = SISO Active Port = 1

Images:

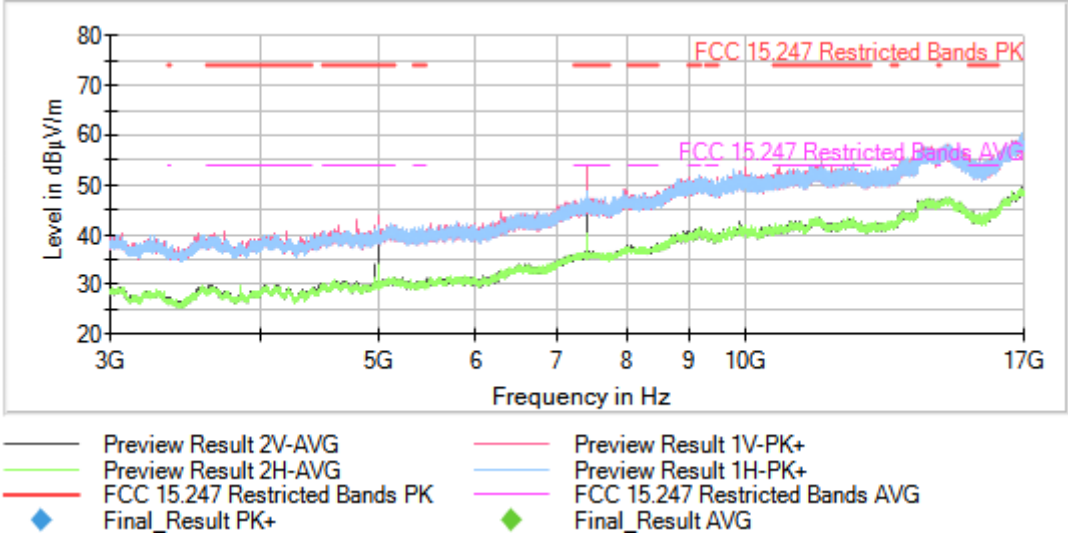

Tables:

Spectrum Analyzer Parameters

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
Receiver: [ESW 44]					
3 GHz - 17 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [17, 26]

Modulation = The spurious frequencies detected do not depend on the modulation.


Antenna configuration = SISO

Equipment Type = Digital Transmission System (DTS)

Frequency MHz = The spurious frequencies detected do not depend on the operating channel.

Active Port = 1

Images:

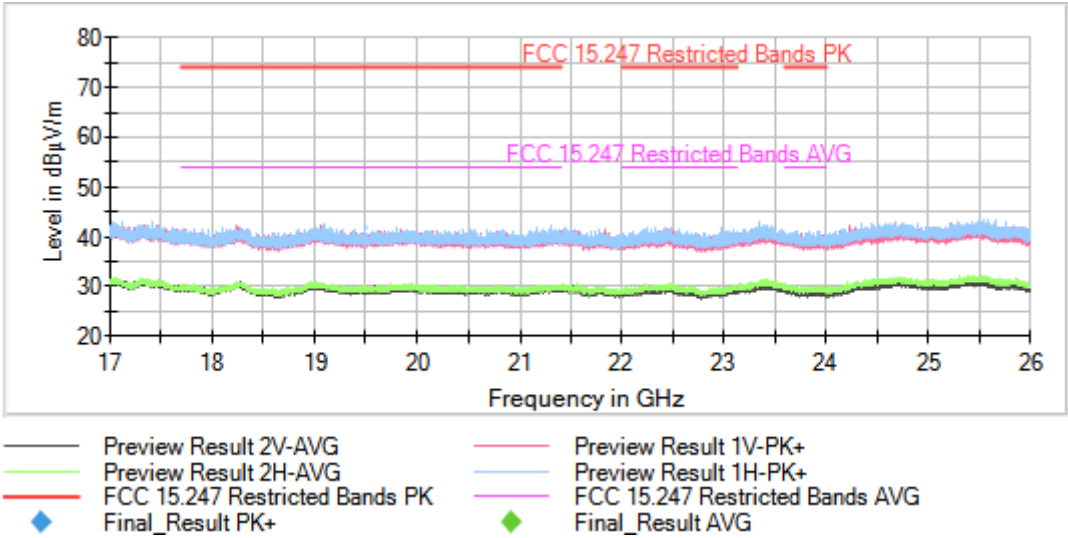

Tables:

Spectrum Analyzer Parameters

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
Receiver: [ESW 44]					
17 GHz - 26 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Appendix C: Test results. Bluetooth EDR

TEST CASES DETAILS	135
<i>Occupied Channel Bandwidth 99%</i>	<i>135</i>
<i>RSS-247 5.1 (b) / FCC 15.247 (a) (1) 20 dB Bandwidth</i>	<i>145</i>
<i>RSS-247 5.1 (b) / FCC 15.247 (a) (1) Carrier Frequency Separation</i>	<i>155</i>
<i>RSS-247 5.1 (d) / FCC 15.247 (a) (1) (iii) Time of Occupancy (Dwell Time)</i>	<i>162</i>
<i>RSS-247 5.1 (d) / FCC 15.247 (a) (1) (iii) Number of hopping channels</i>	<i>166</i>
<i>RSS-247 5.4 (b) / FCC 15.247 (b) (1) Maximum Peak Conducted output power</i>	<i>170</i>
<i>RSS-247 5.5 / FCC 15.247 (d) Band-edge emissions compliance (Transmitter)</i>	<i>181</i>
<i>RSS-247 5.5 / FCC 15.247 (d) Emission limitations radiated (Transmitter)</i>	<i>206</i>

TEST CASES DETAILS

Occupied Channel Bandwidth 99%

Specifications

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained.

Modulation: BT (GFSK)

Freq (MHz)	Occ Ch BW (MHz)
2402.00000	0.865
2441.00000	0.870
2480.00000	0.865

Modulation: BT (Pi/4 DQPSK)

Results

Freq (MHz)	Occ Ch BW (MHz)
2402.00000	1.170
2441.00000	1.170
2480.00000	1.175

Modulation: BT (8DPSK)



Results

Freq (MHz)	Occ Ch BW (MHz)
2402.00000	1.175
2441.00000	1.175
2480.00000	1.180

Attachments



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK) Frequency MHz = 2402.00000
Antenna configuration = SISO Active Port = 1

Images:

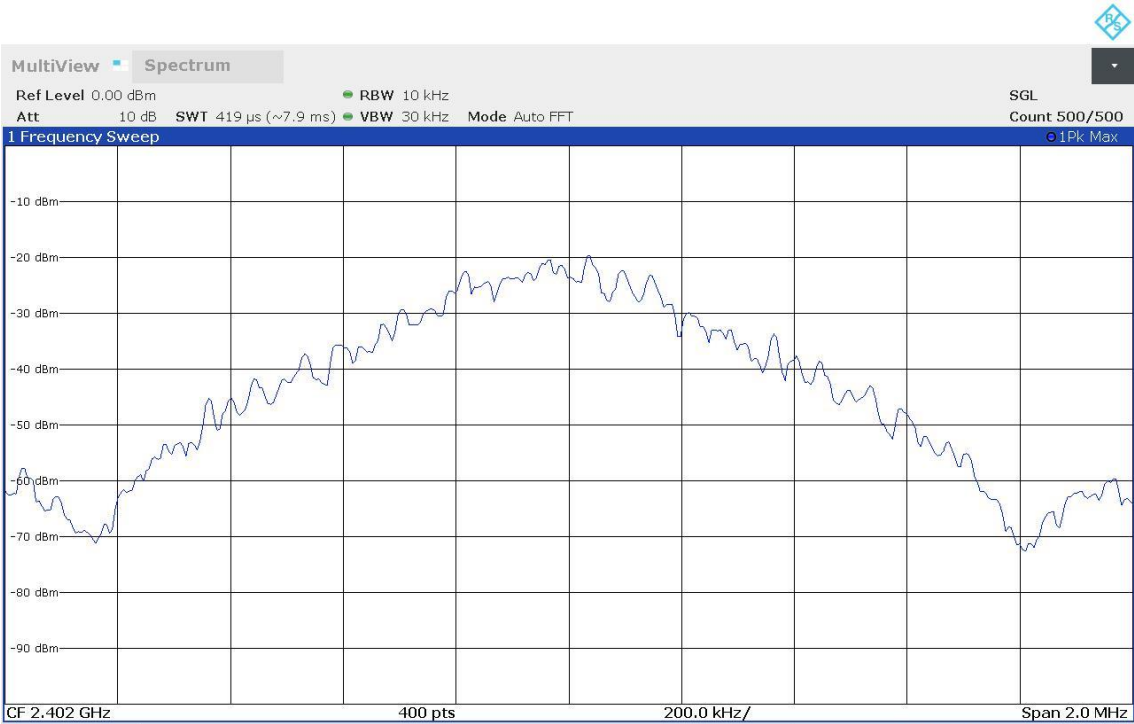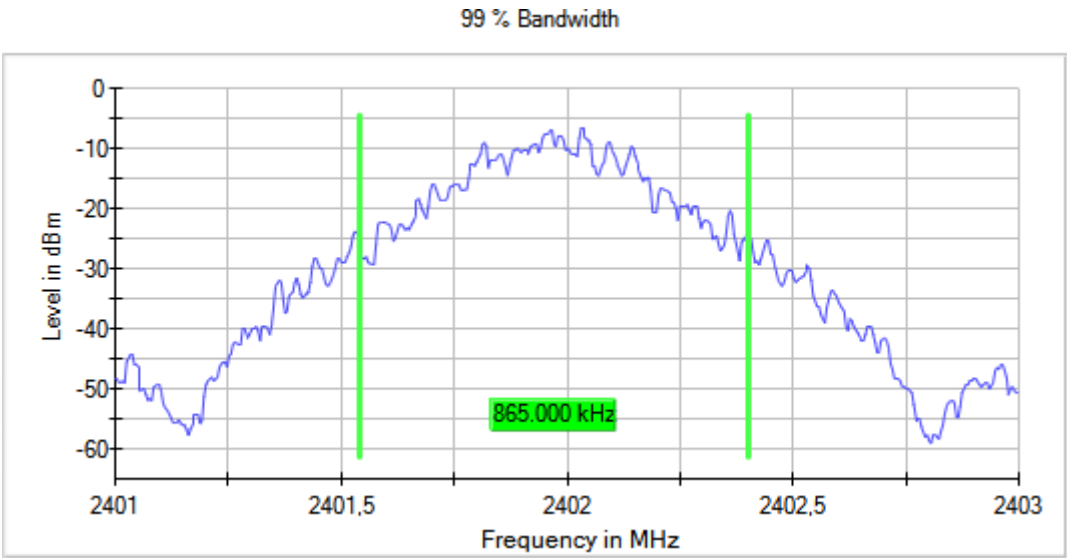



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK) Frequency MHz = 2441.00000
Antenna configuration = SISO Active Port = 1

Images:

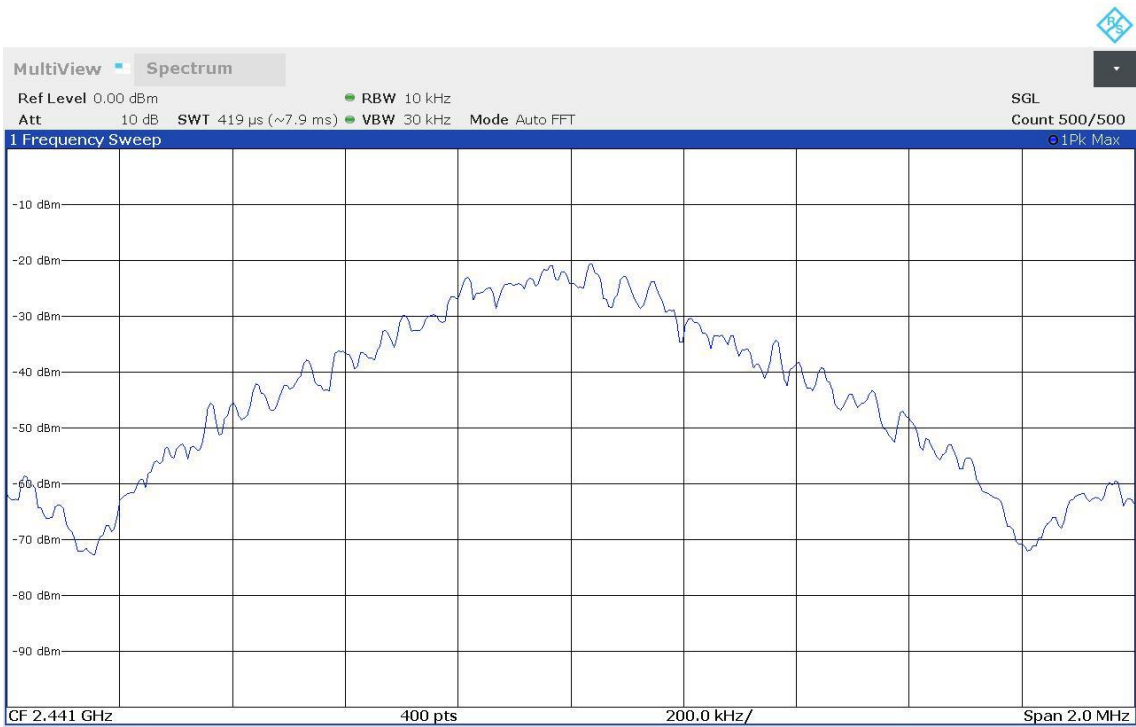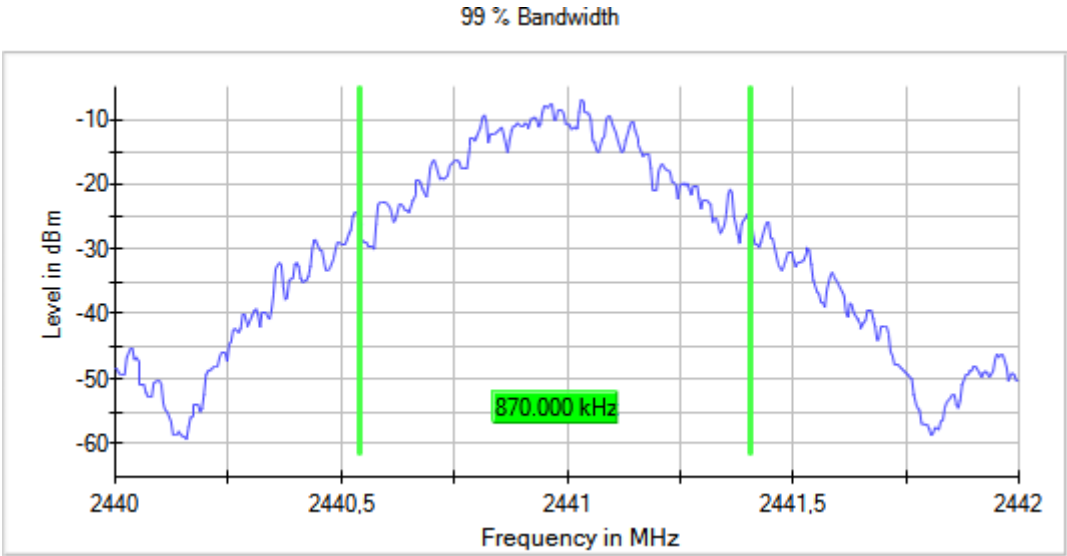



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK) Frequency MHz = 2480.00000
Antenna configuration = SISO Active Port = 1

Images:

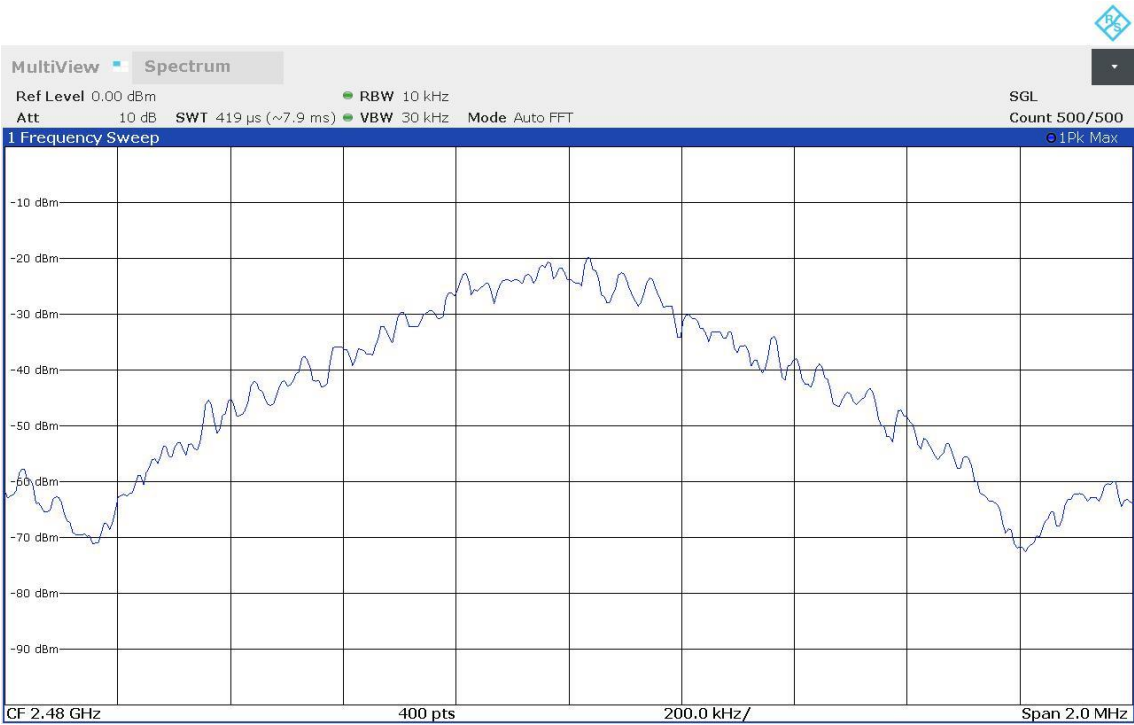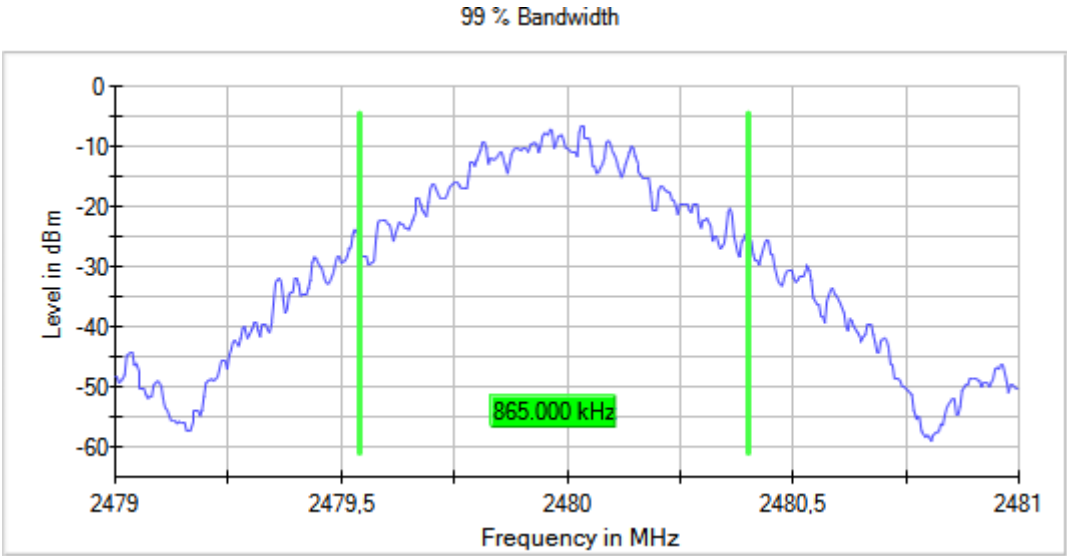



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (Pi/4 DQPSK) Frequency MHz = 2402.00000
Antenna configuration = SISO Active Port = 1

Images:

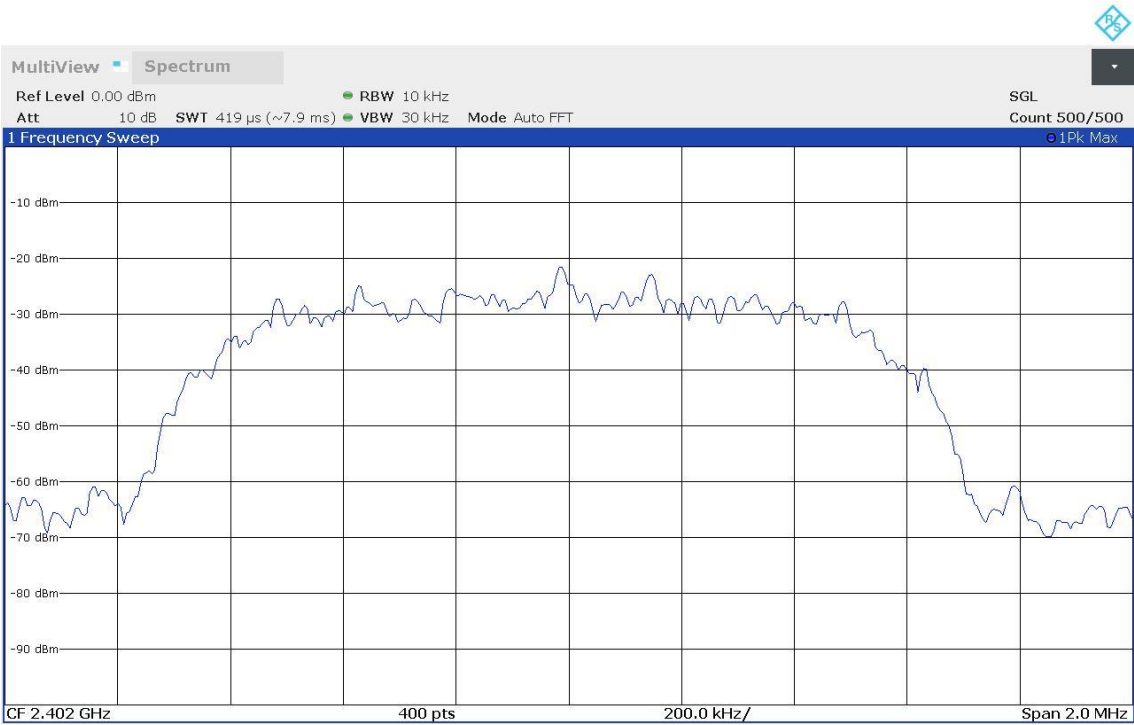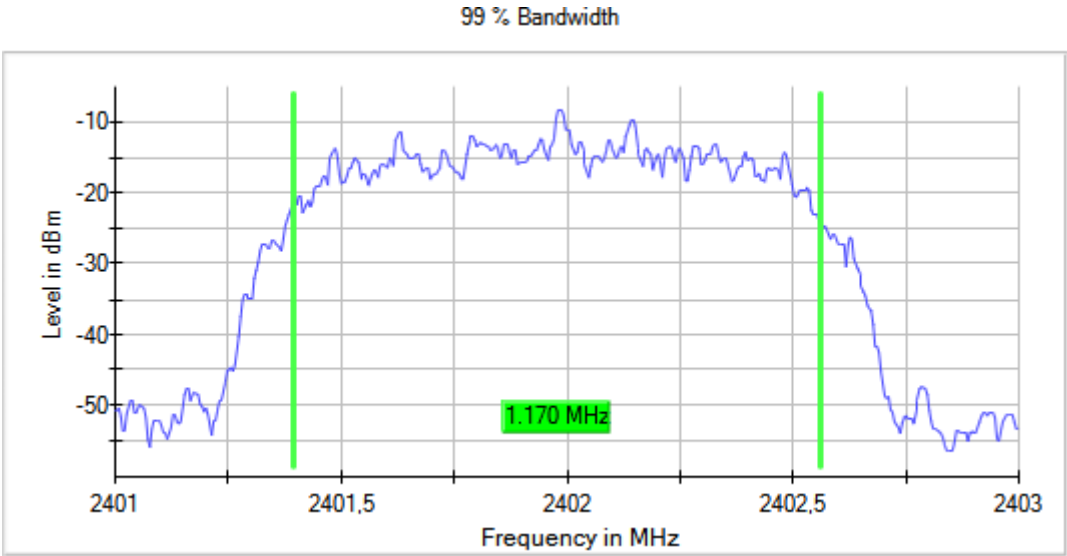



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (Pi/4 DQPSK) Frequency MHz = 2441.00000
Antenna configuration = SISO Active Port = 1

Images:

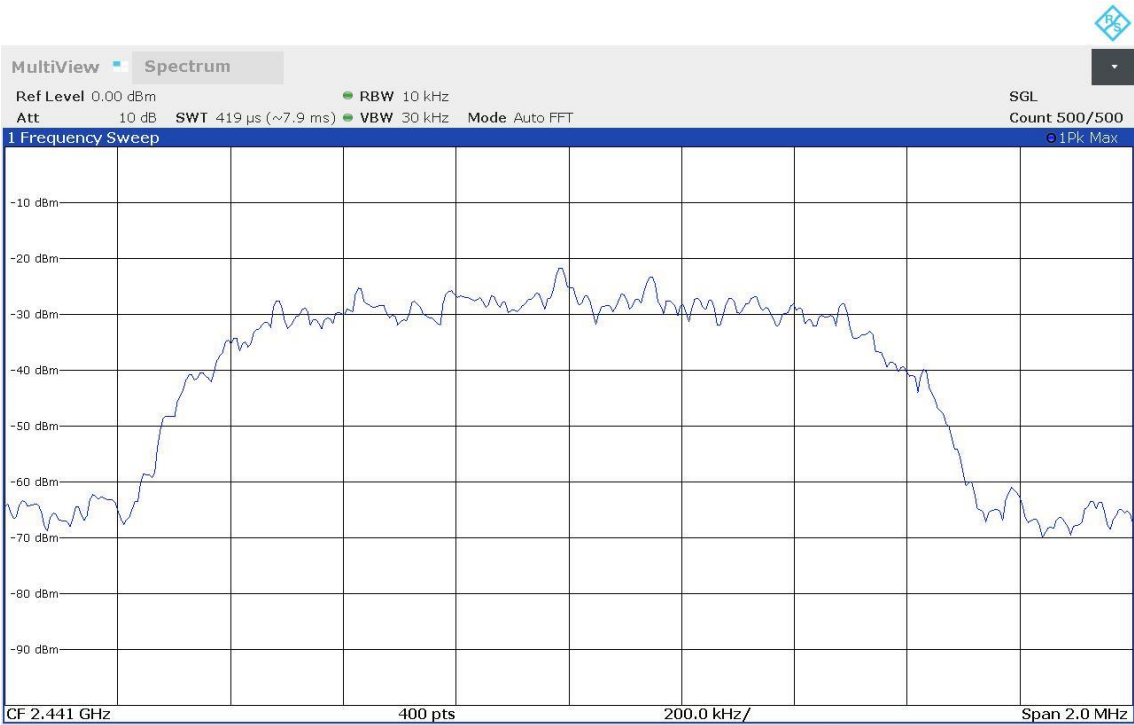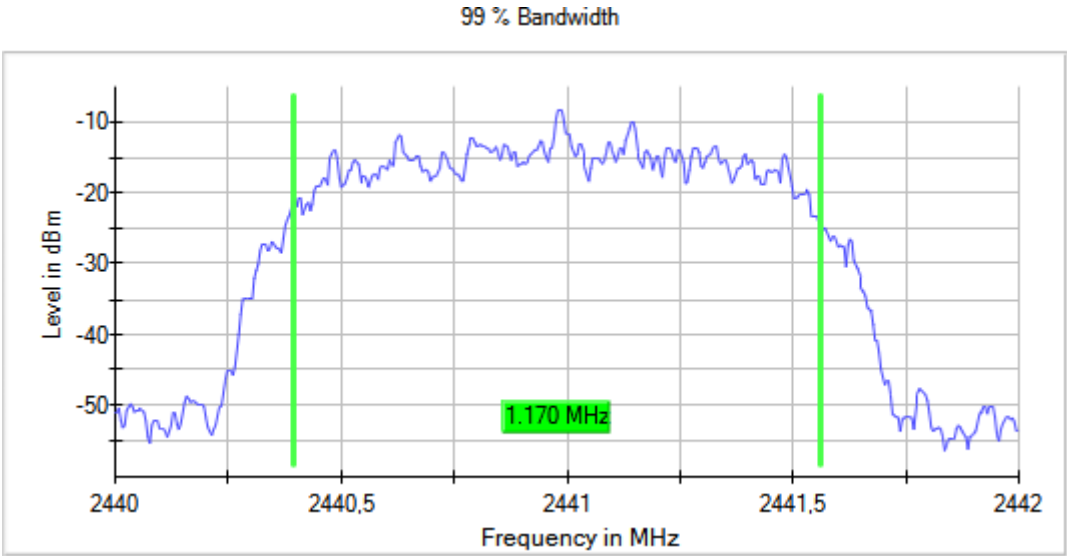



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (Pi/4 DQPSK) Frequency MHz = 2480.00000
Antenna configuration = SISO Active Port = 1

Images:

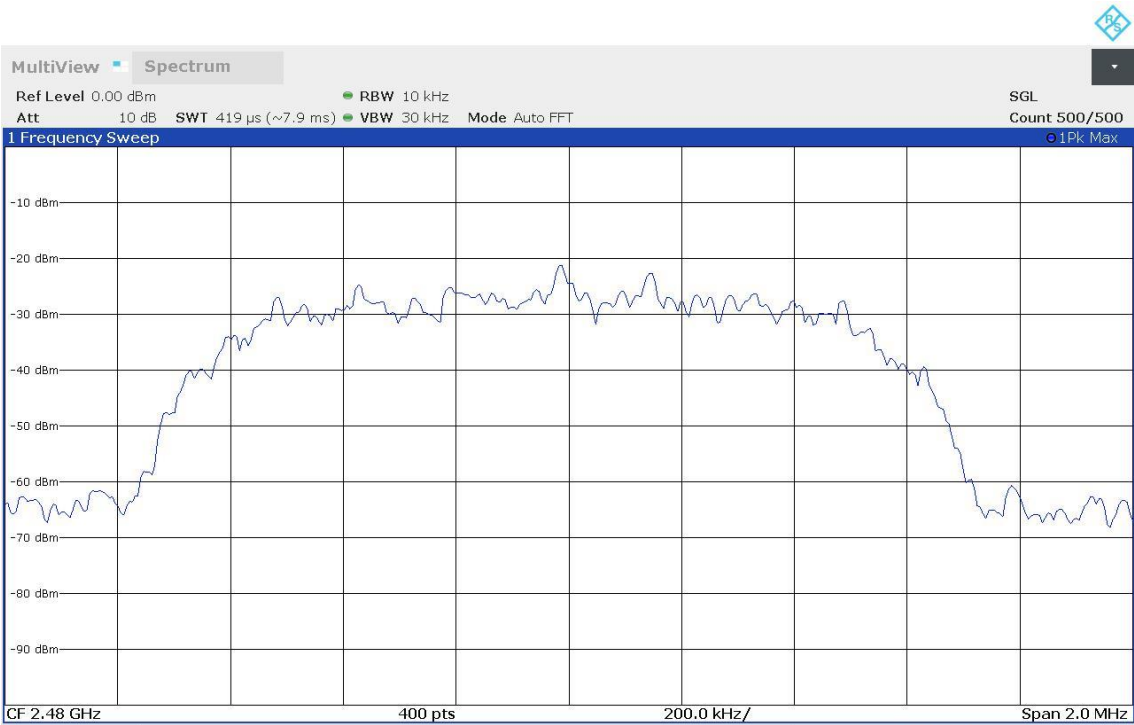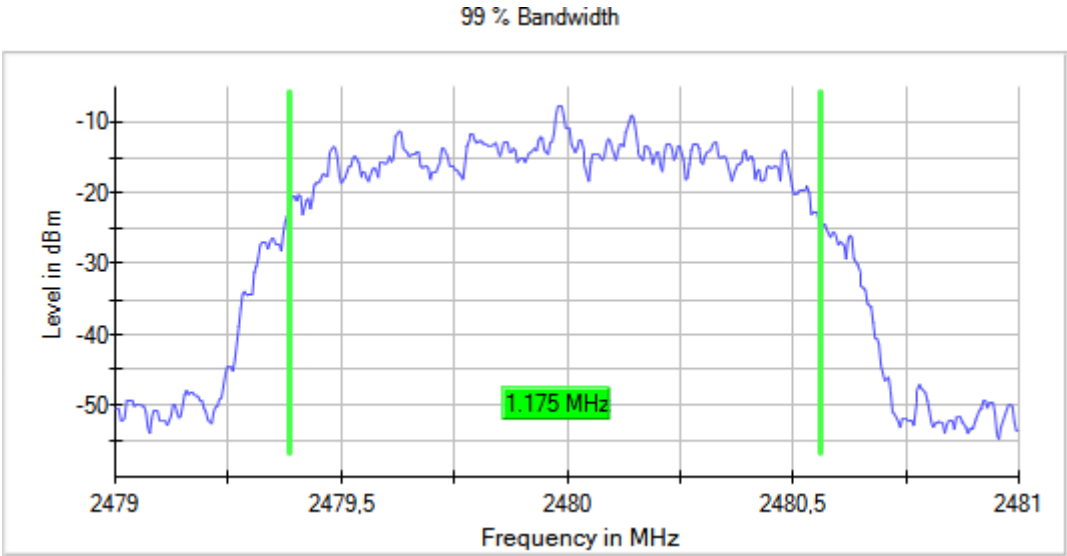



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (8DPSK) Frequency MHz = 2402.00000
Antenna configuration = SISO Active Port = 1

Images:

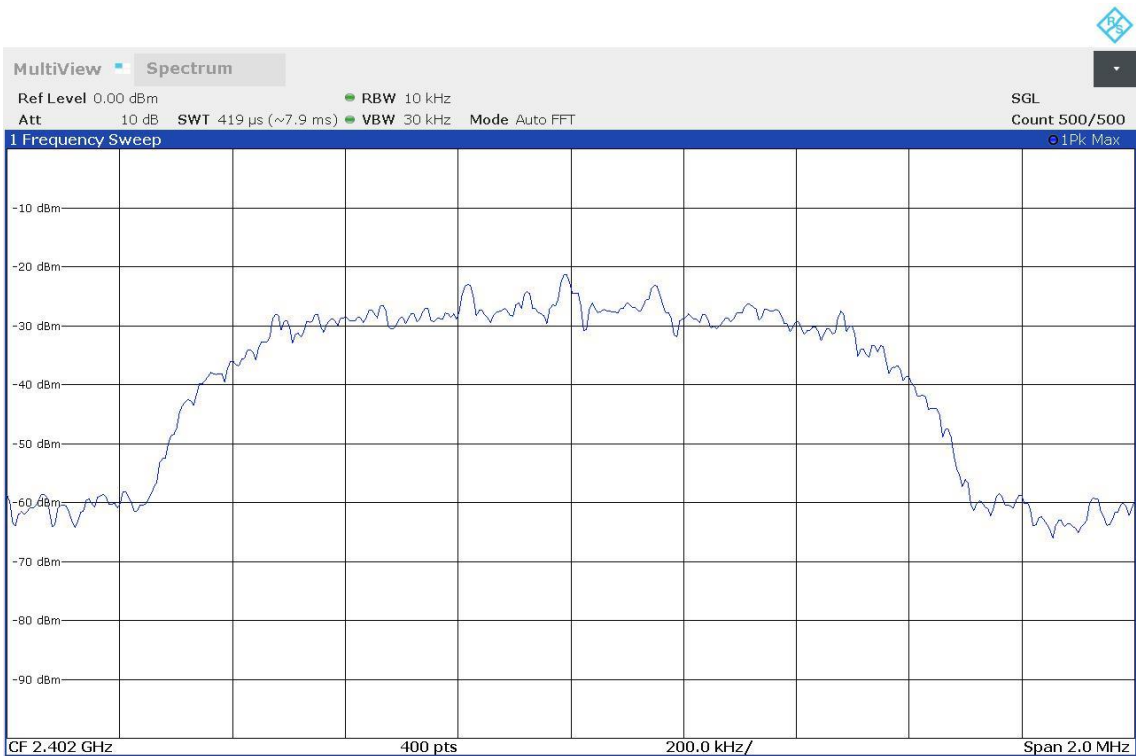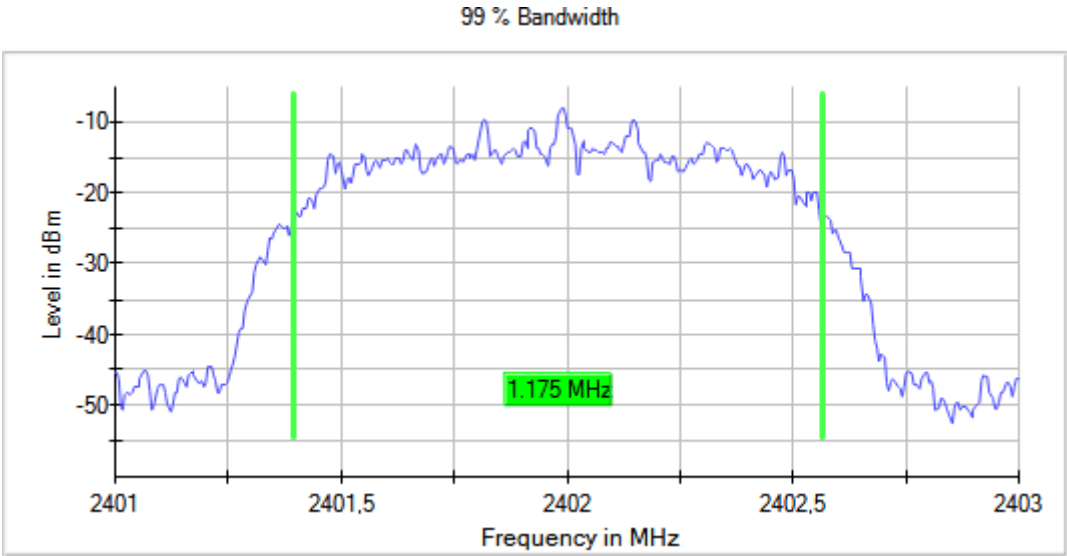



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (8DPSK) Frequency MHz = 2441.00000
Antenna configuration = SISO Active Port = 1

Images:

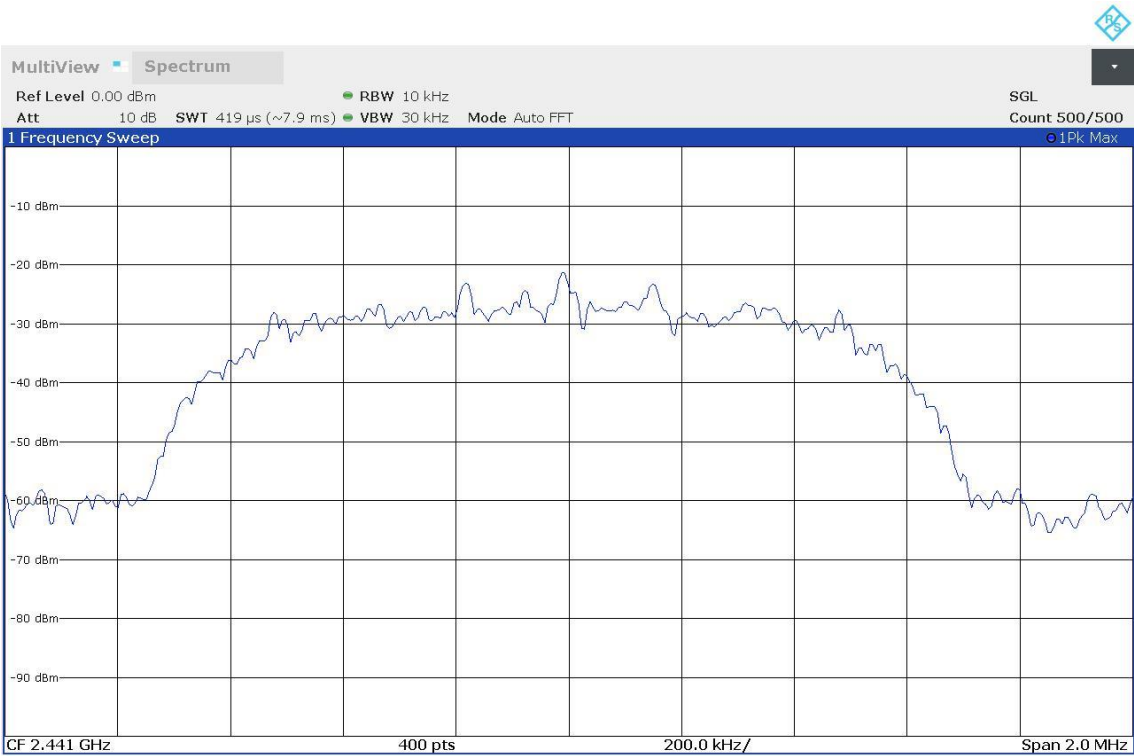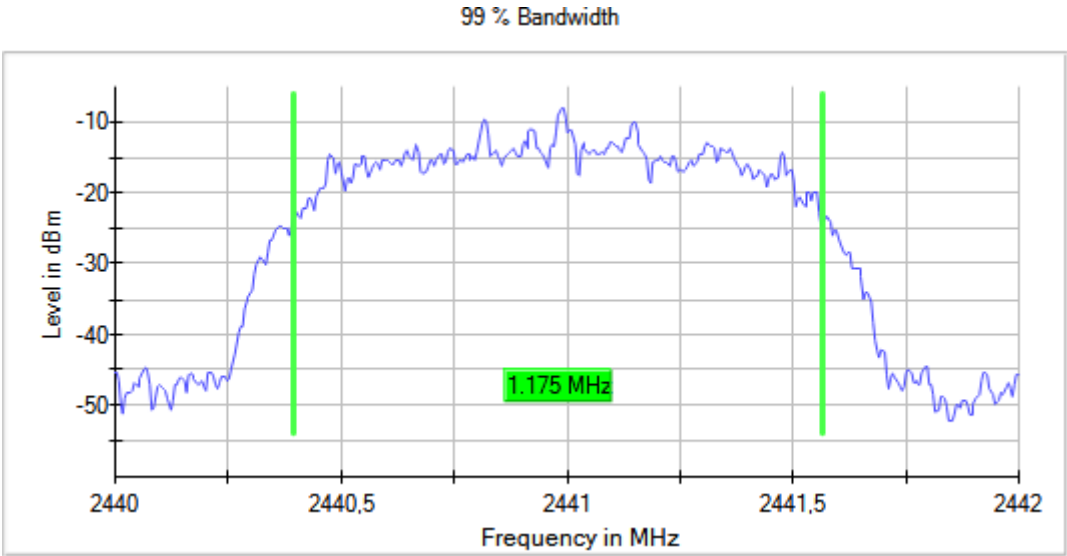

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (8DPSK) Frequency MHz = 2480.00000
Antenna configuration = SISO Active Port = 1

Images:

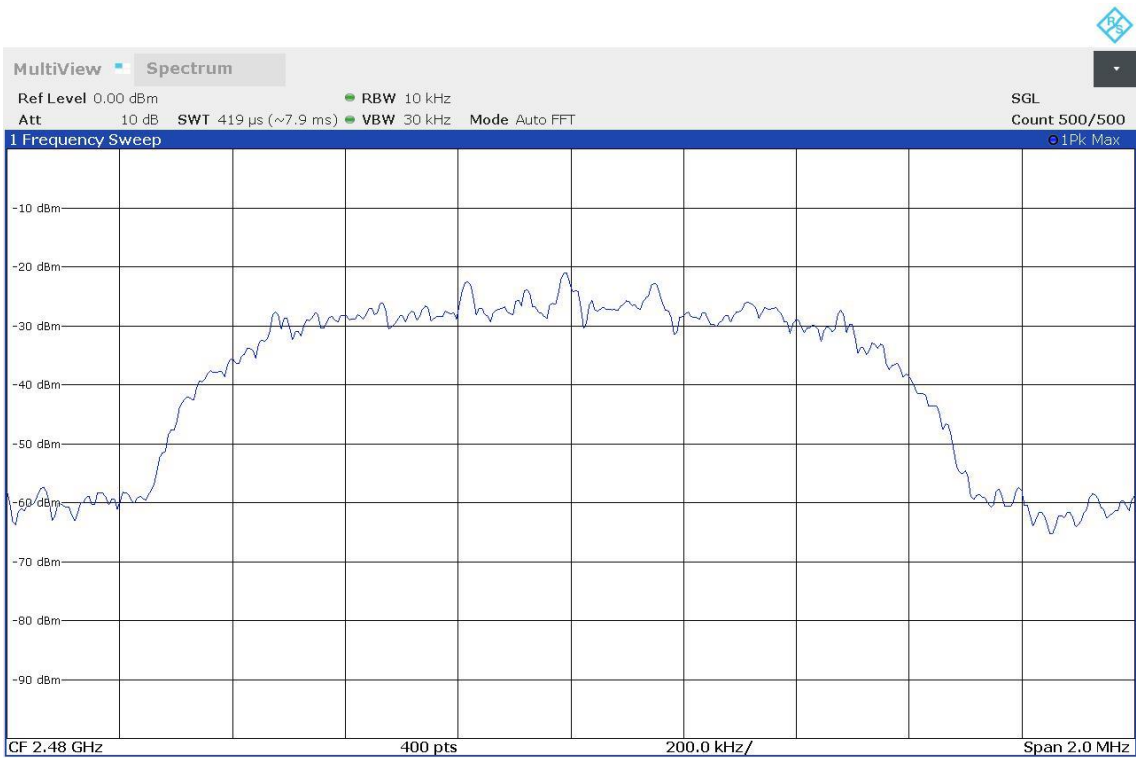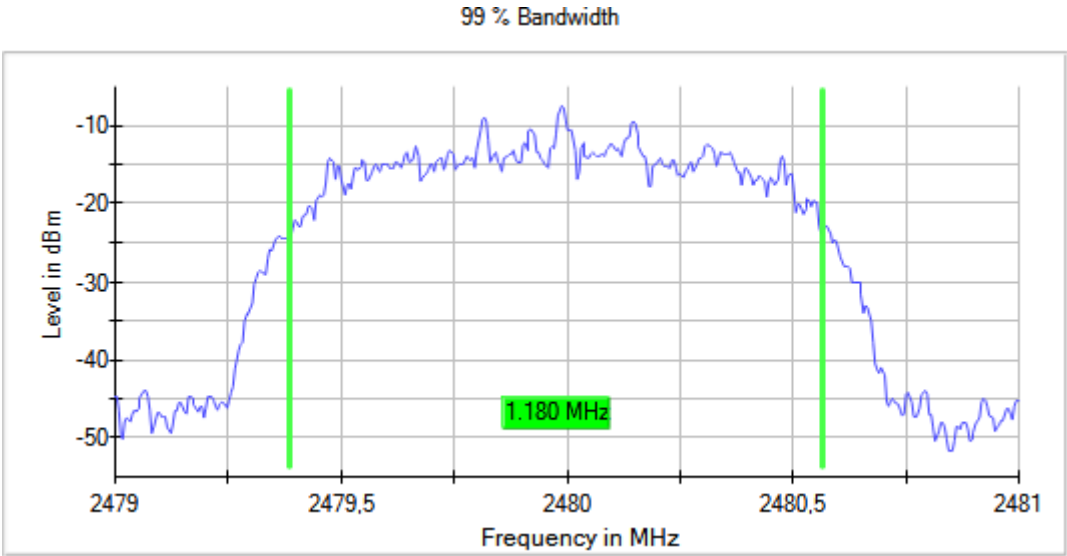

RSS-247 5.1 (b) / FCC 15.247 (a) (1) 20 dB Bandwidth

Limits

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Modulation: BT (GFSK)

Results

Freq (MHz)	20 dB Bandwidth (MHz)
2402.00000	0.930
2441.00000	0.930
2480.00000	0.930

Modulation: BT (Pi/4 DQPSK)

Results

Freq (MHz)	20 dB Bandwidth (MHz)
2402.00000	1.315
2441.00000	1.320
2480.00000	1.320

Modulation: BT (8DPSK)

Results

Freq (MHz)	20 dB Bandwidth (MHz)
2402.00000	1.275
2441.00000	1.280
2480.00000	1.280



Verdict

Pass

Attachments



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK) Frequency MHz = 2402.00000
Antenna configuration = SISO Active Port = 1

Images:

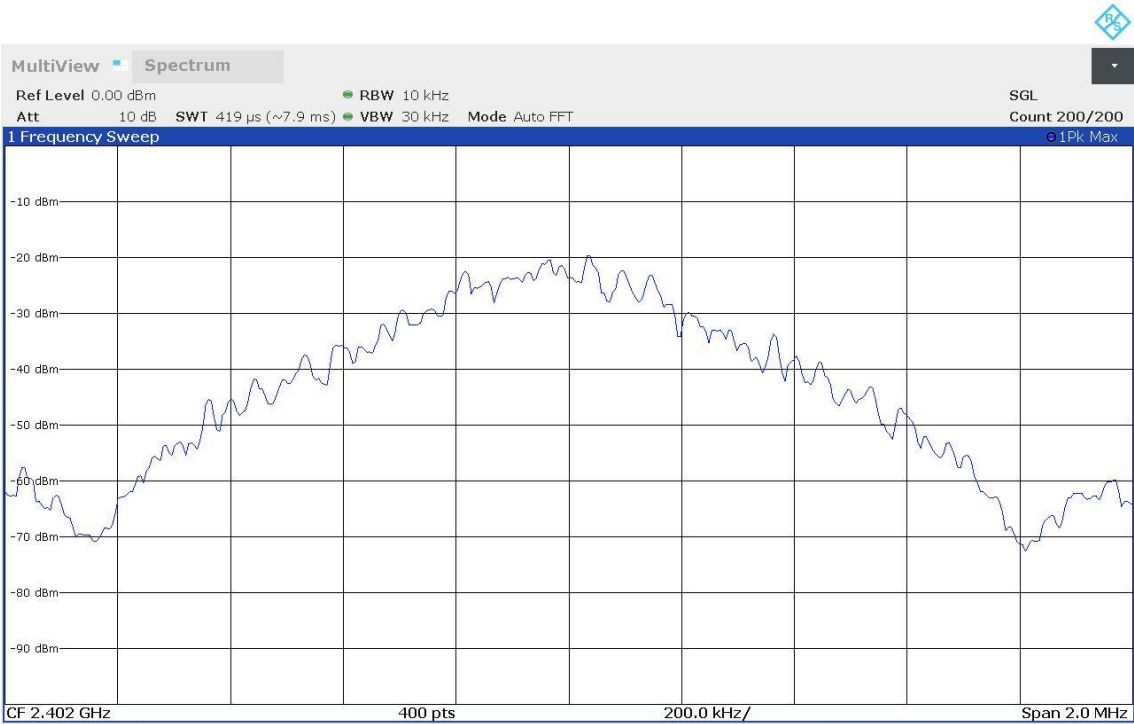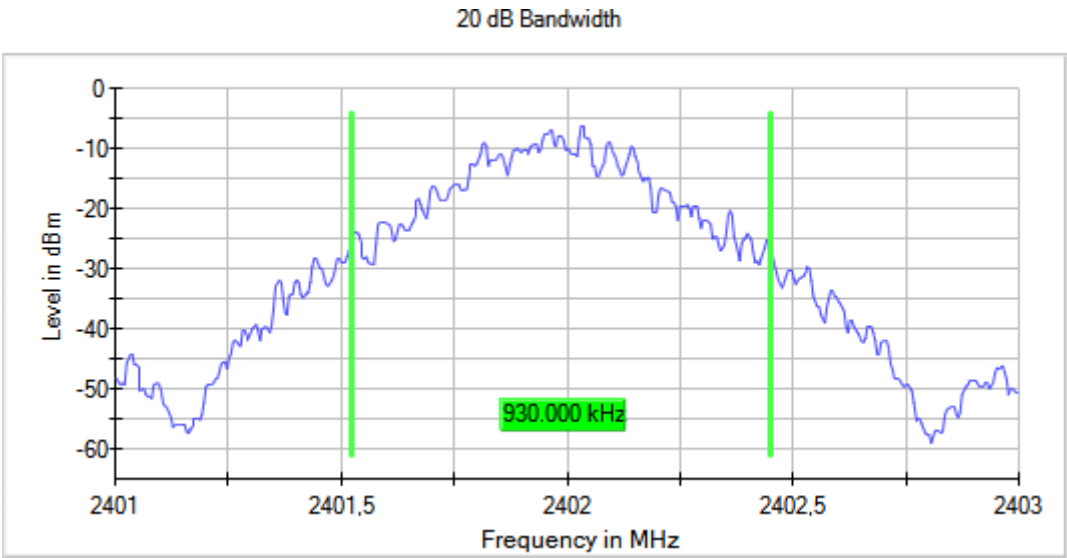



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK) Frequency MHz = 2441.00000
Antenna configuration = SISO Active Port = 1

Images:

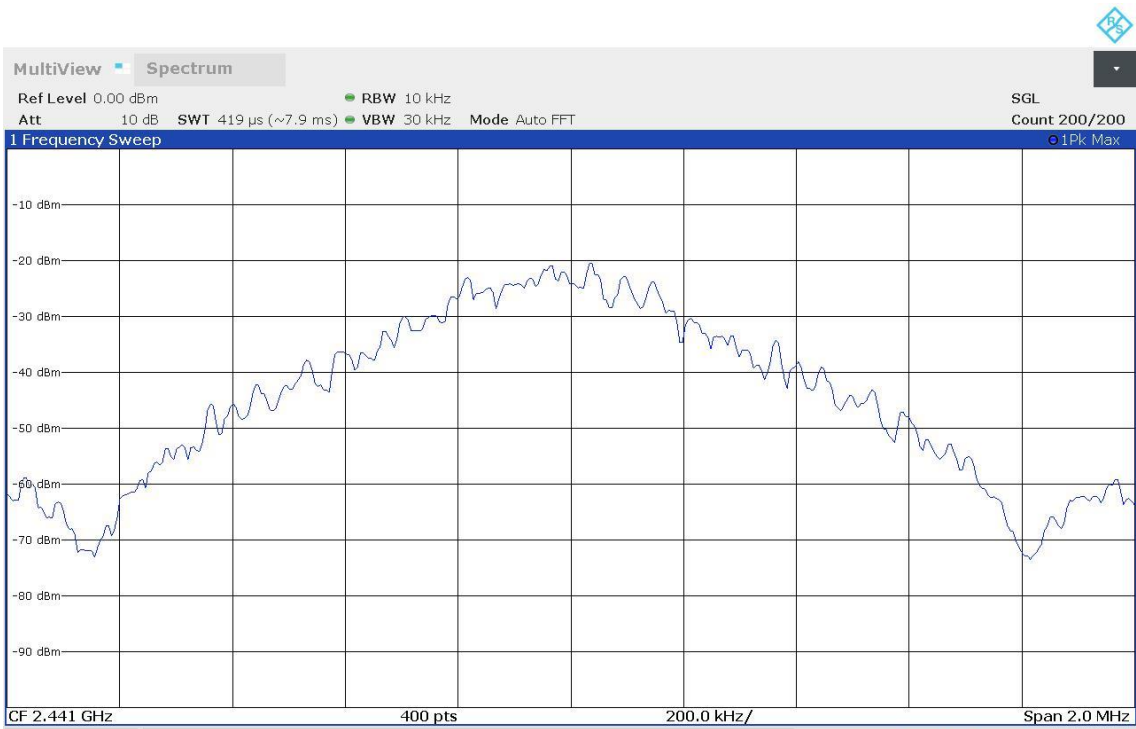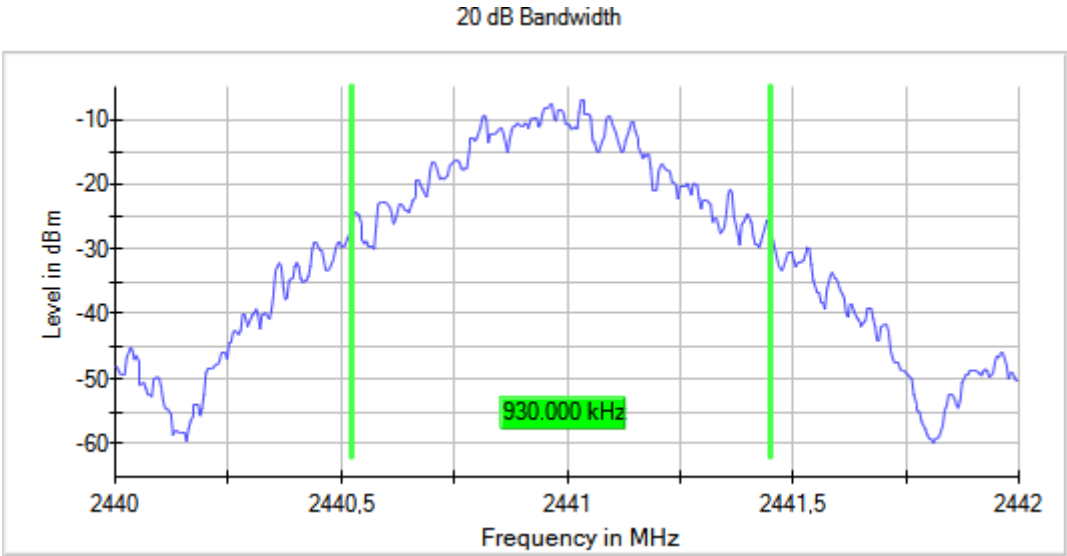



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK) Frequency MHz = 2480.00000
Antenna configuration = SISO Active Port = 1

Images:

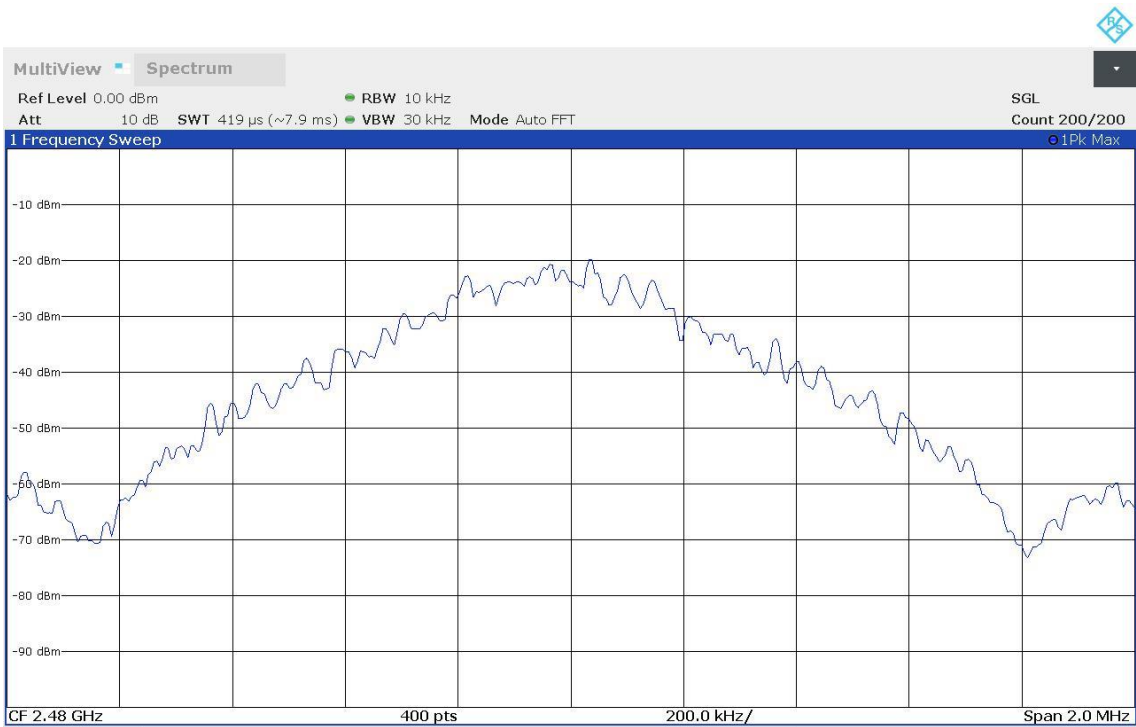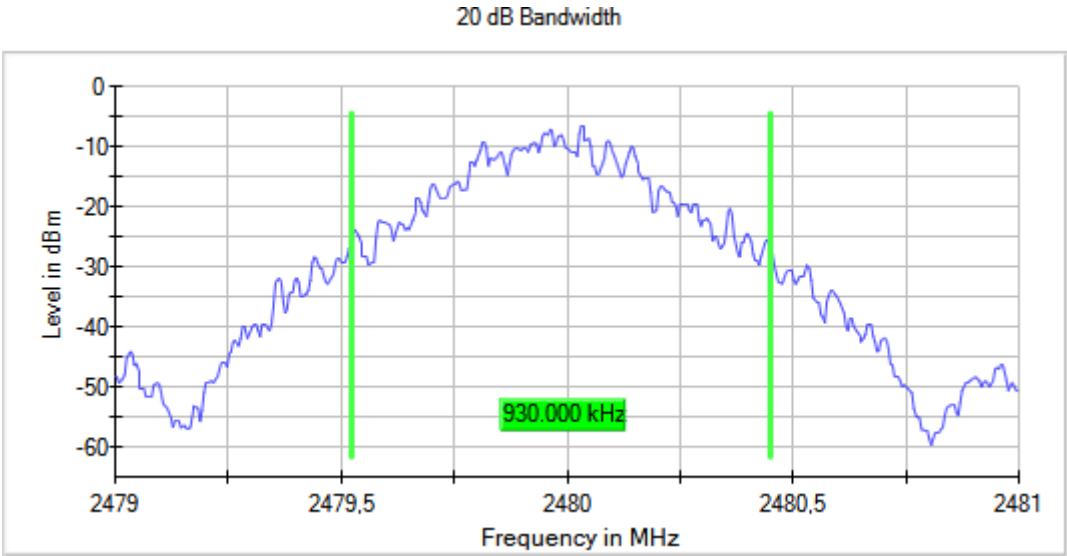



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (Pi/4 DQPSK) Frequency MHz = 2402.00000
Antenna configuration = SISO Active Port = 1

Images:

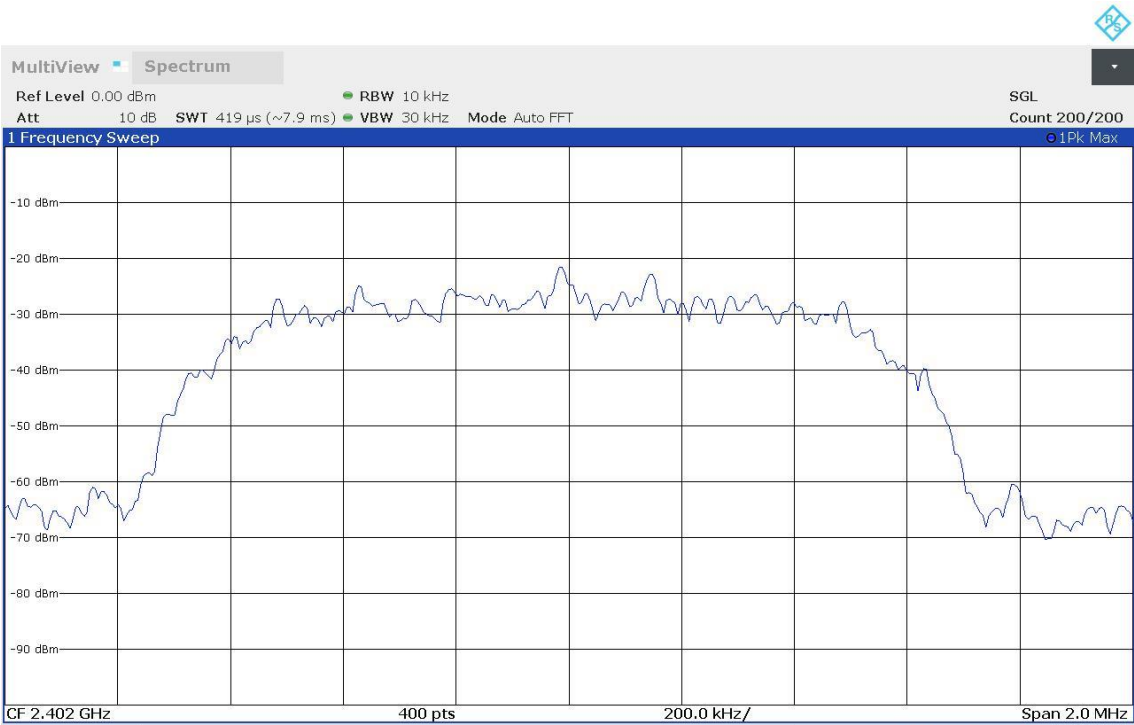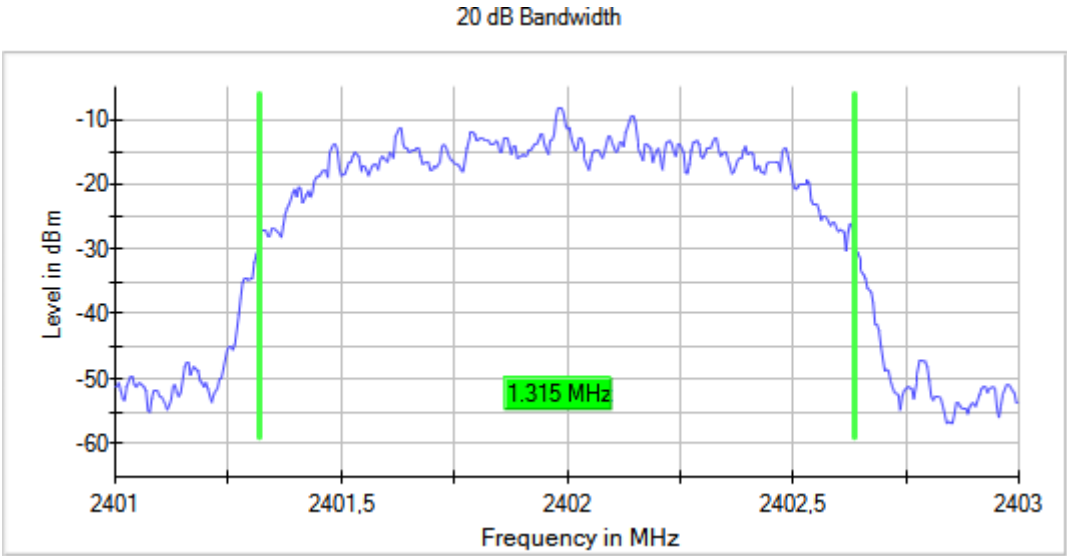



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (Pi/4 DQPSK) Frequency MHz = 2441.00000
Antenna configuration = SISO Active Port = 1

Images:

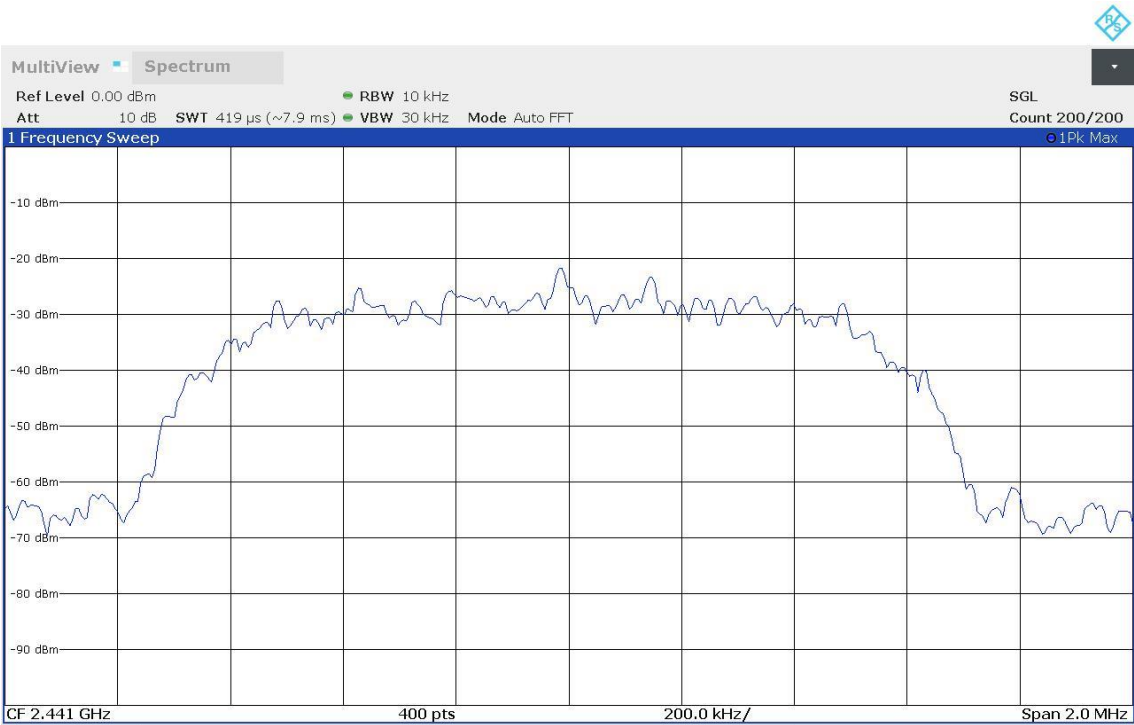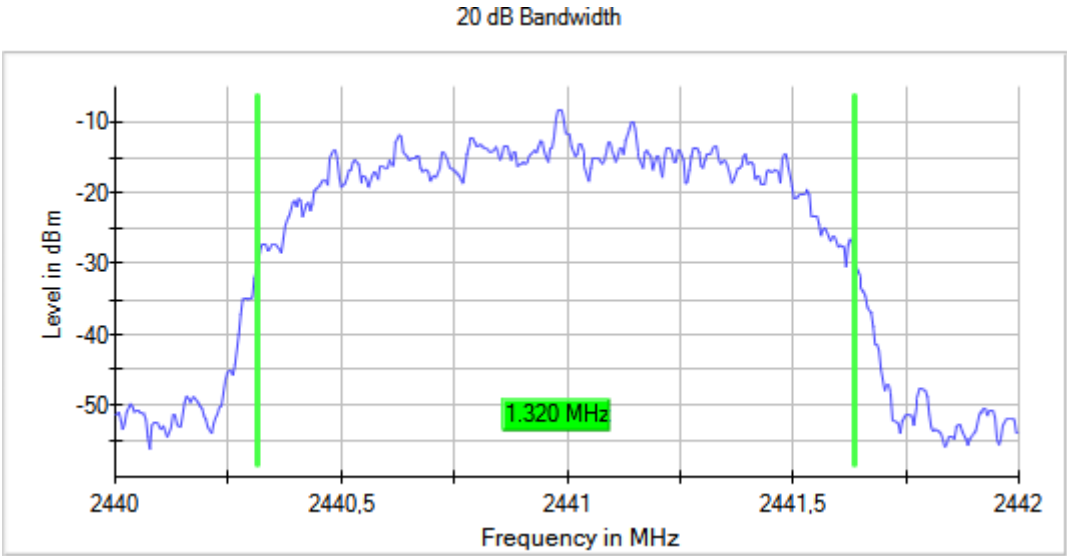



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (Pi/4 DQPSK) Frequency MHz = 2480.00000
Antenna configuration = SISO Active Port = 1

Images:

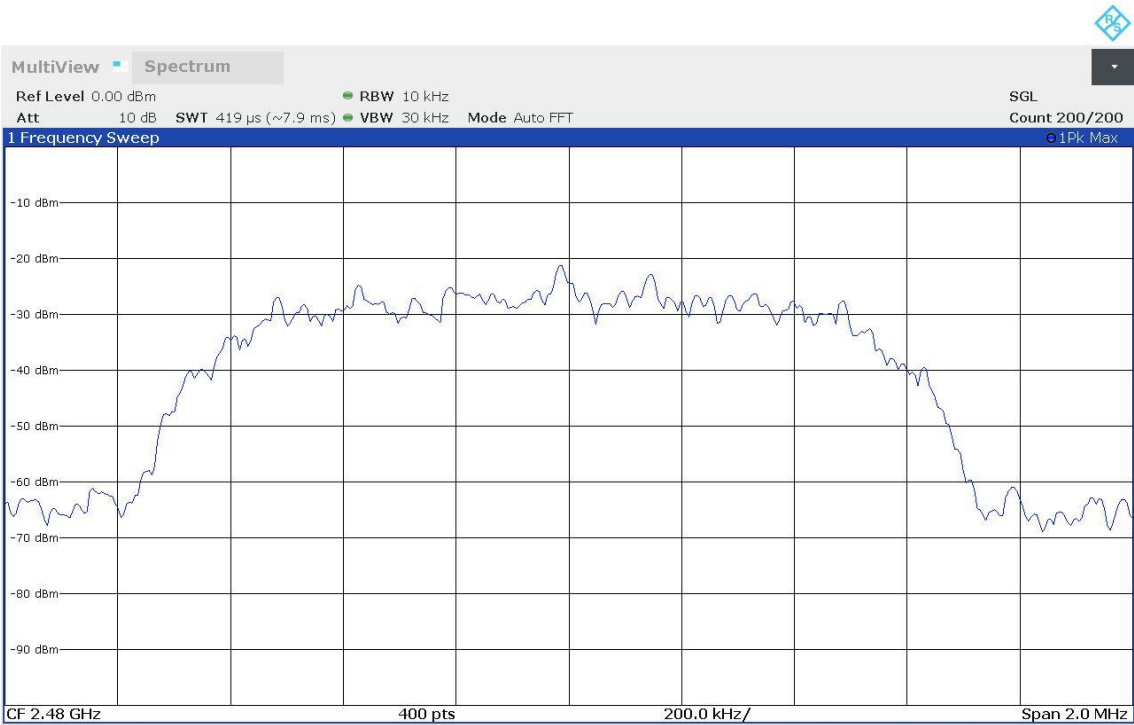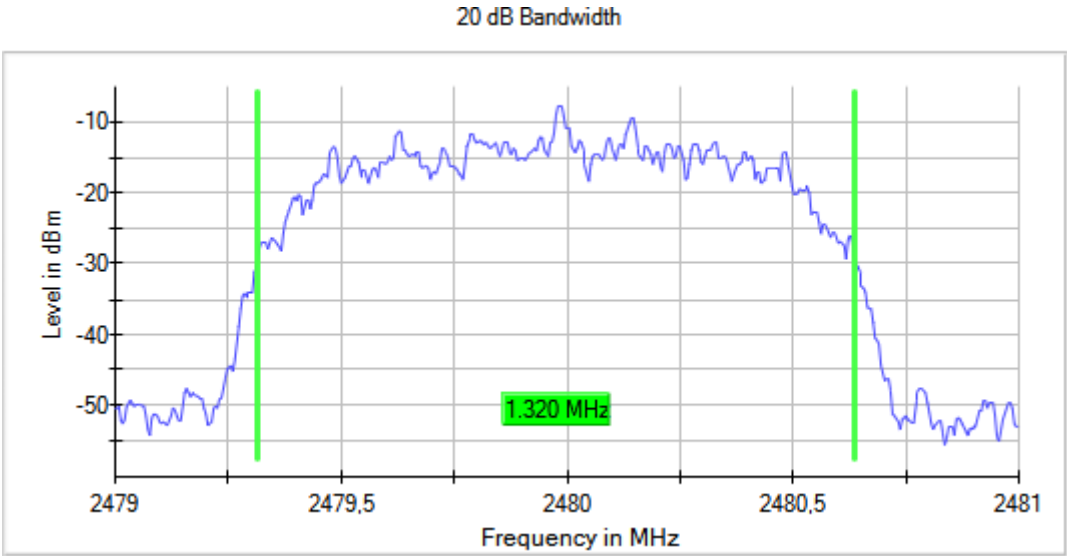



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (8DPSK) Frequency MHz = 2402.00000
Antenna configuration = SISO Active Port = 1

Images:

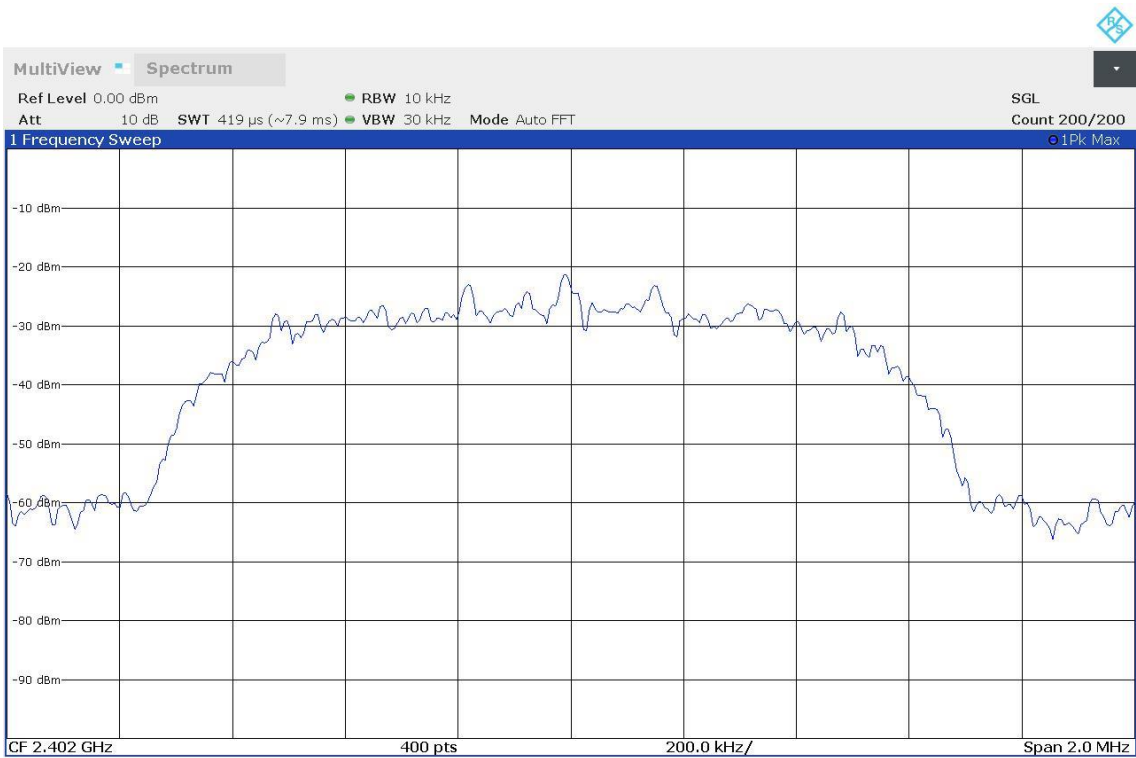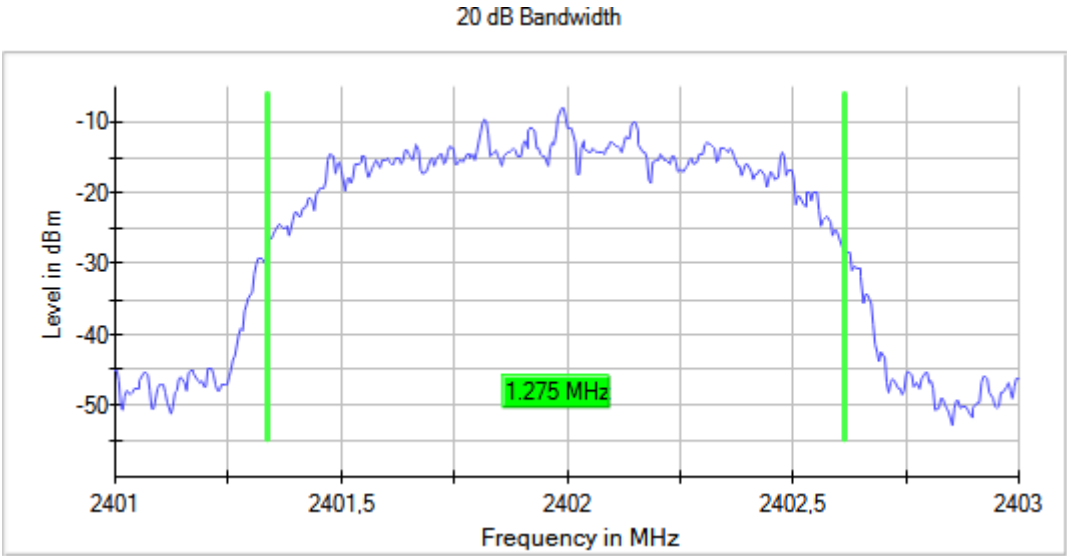



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (8DPSK) Frequency MHz = 2441.00000
Antenna configuration = SISO Active Port = 1

Images:

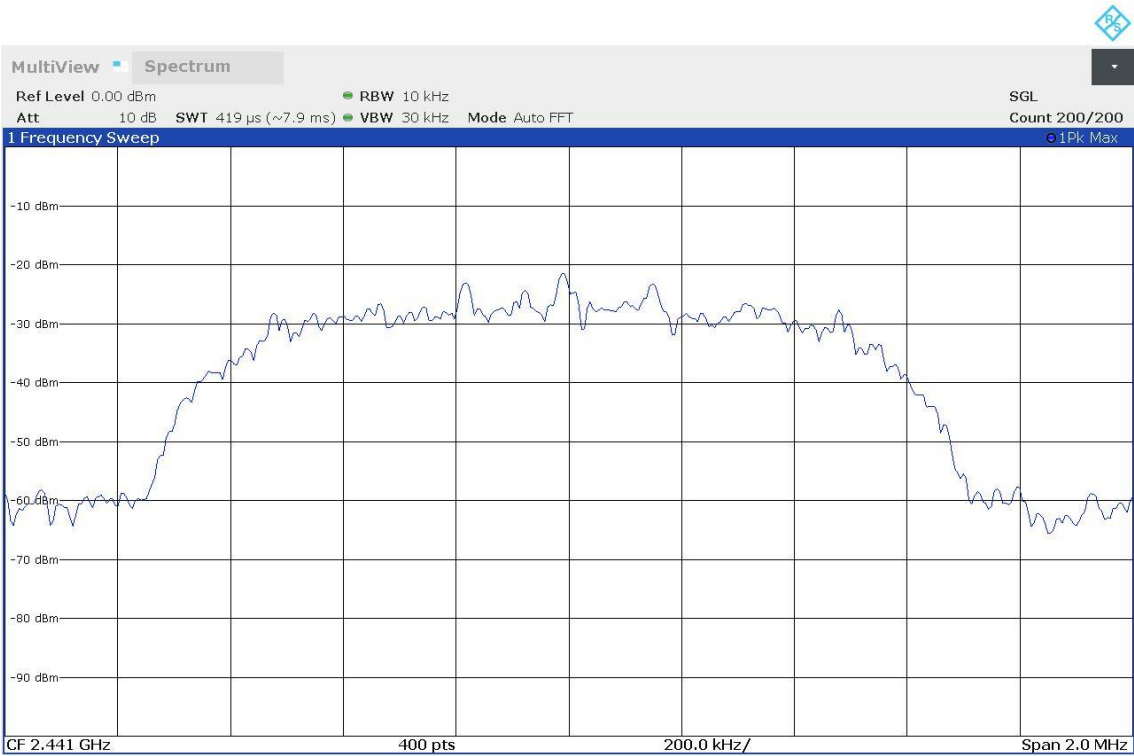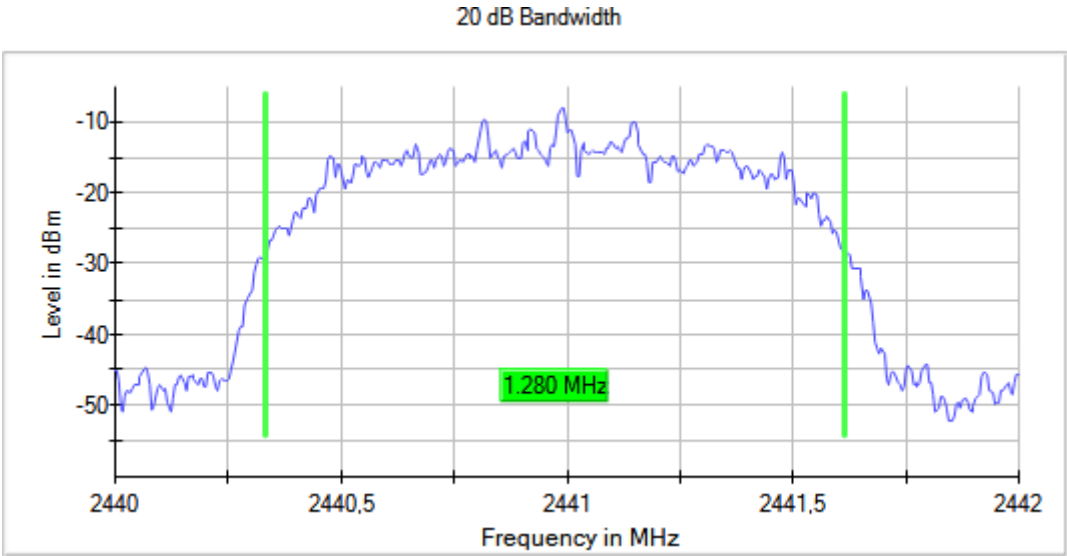

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (8DPSK) Frequency MHz = 2480.00000
Antenna configuration = SISO Active Port = 1

Images:

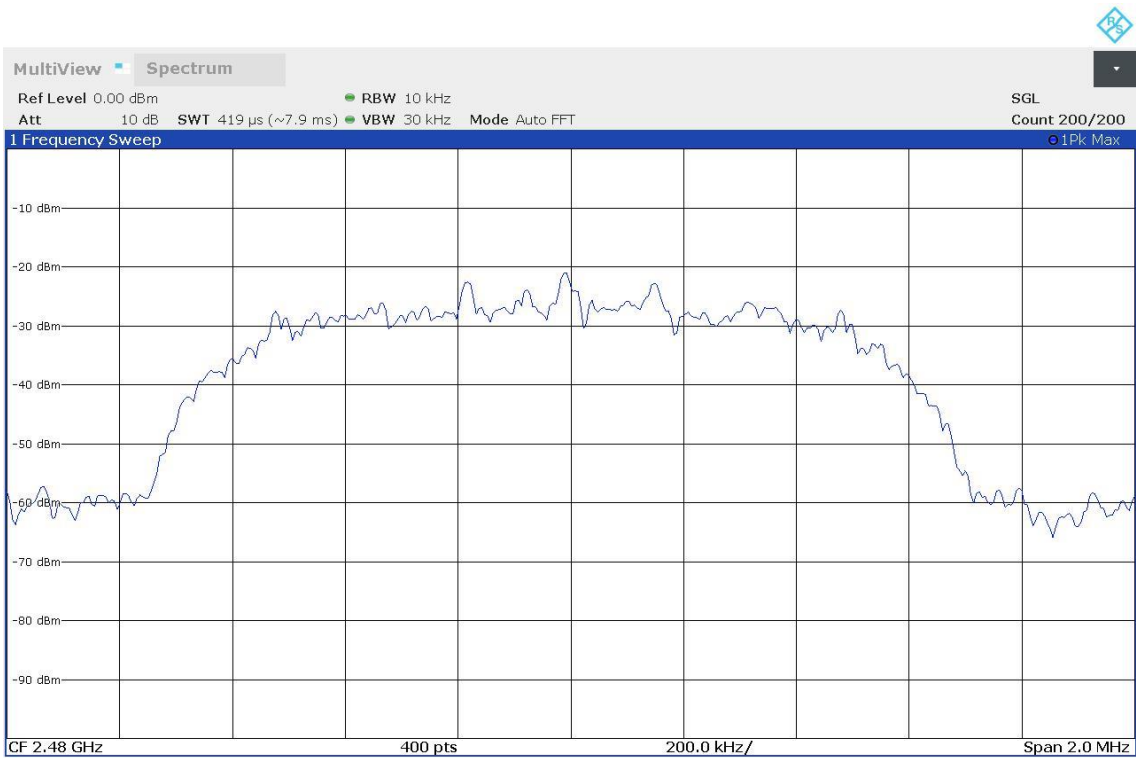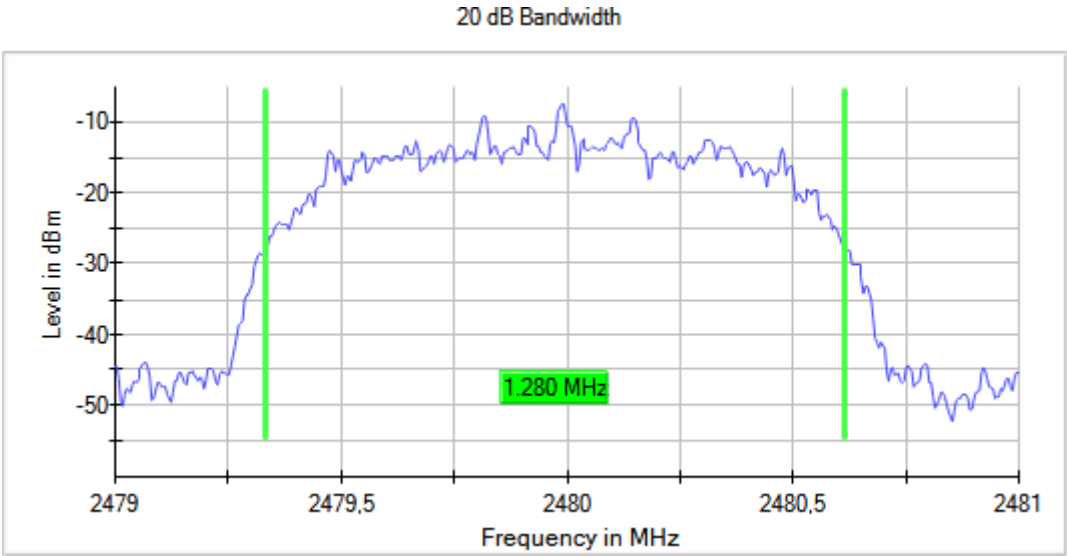

RSS-247 5.1 (b) / FCC 15.247 (a) (1) Carrier Frequency Separation

Limits

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Modulation: BT (GFSK)

Results

Equipment	BW (MHz)	Port	Freq Sep (MHz)
Frequency Hopping Spread Spectrum systems (DSS)	1	1	1.01

Modulation: BT (Pi/4 DQPSK)

Results

Equipment	BW (MHz)	Port	Freq Sep (MHz)
Frequency Hopping Spread Spectrum systems (DSS)	1	1	1.01

Modulation: BT (8DPSK)

Results

Equipment	BW (MHz)	Port	Freq Sep (MHz)
Frequency Hopping Spread Spectrum systems (DSS)	1	1	1.01

Verdict

Pass