




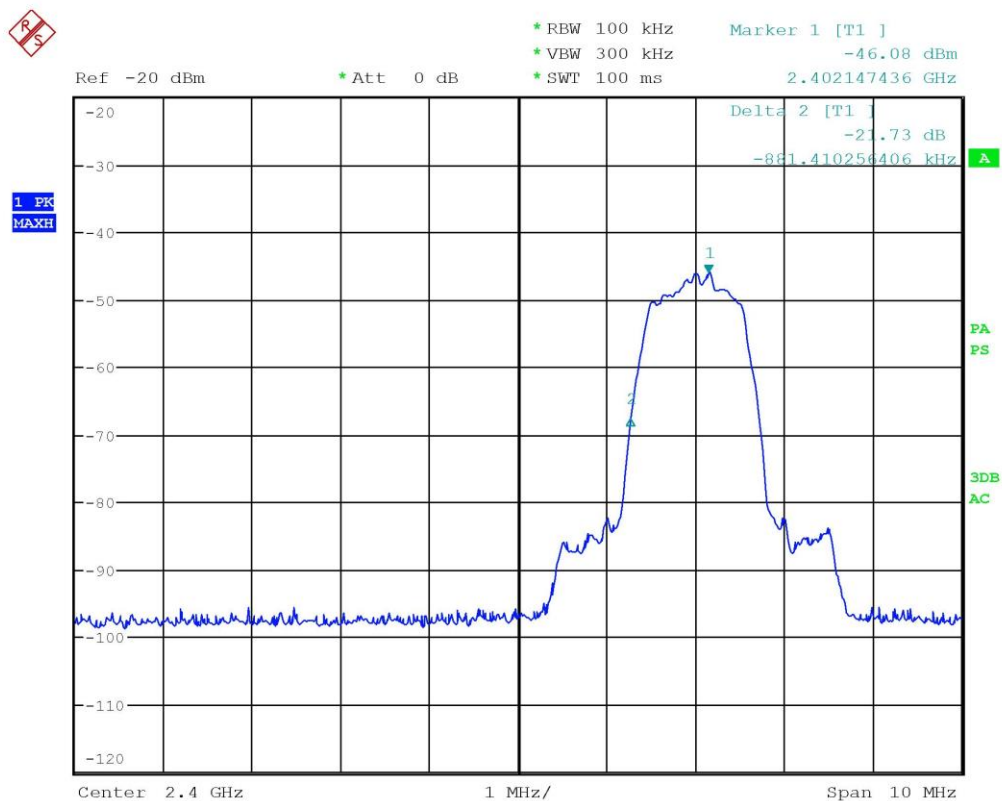


Segalla 20168841

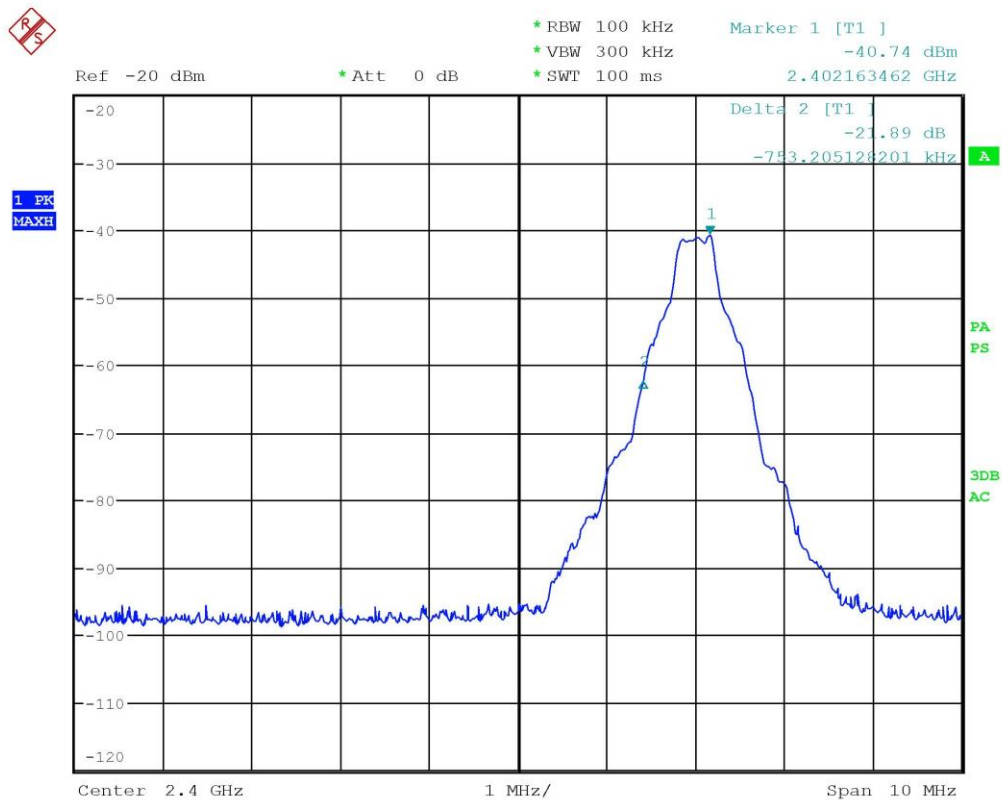


Segalla 20168842

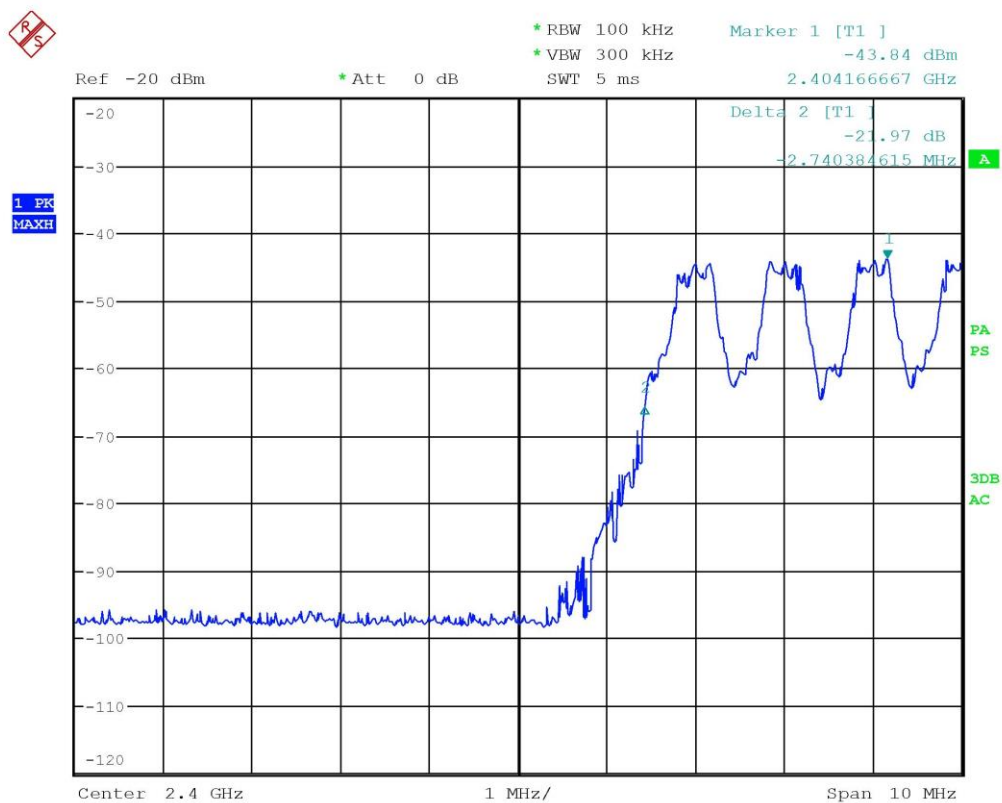


Segalla 20168843

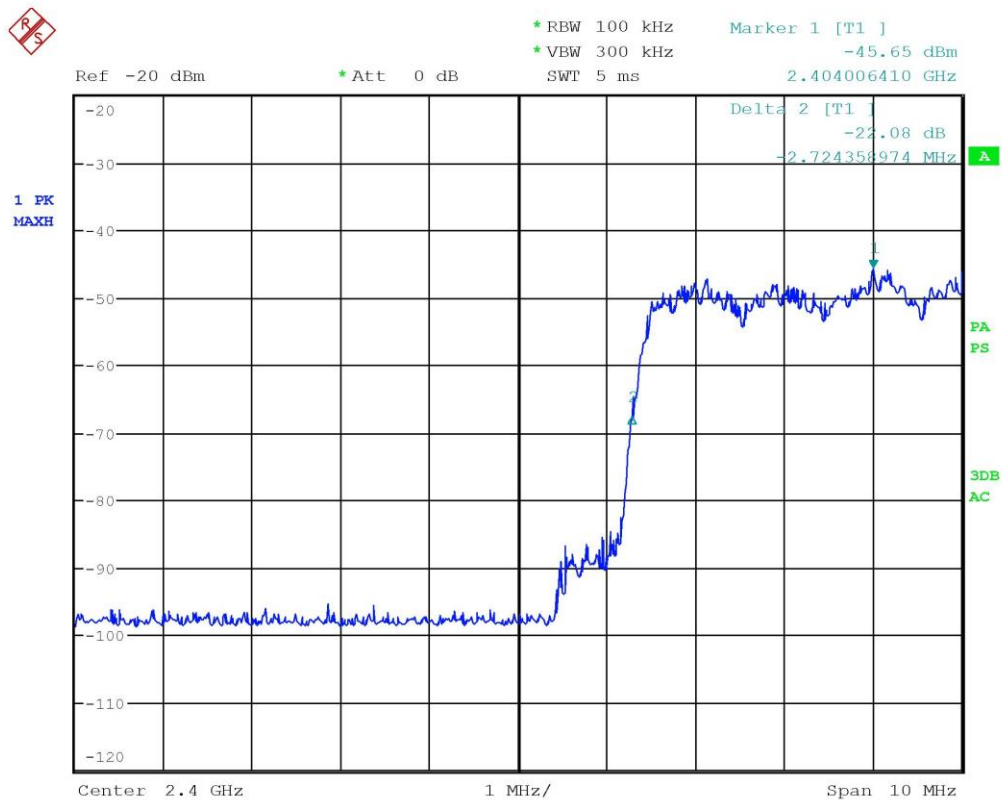


Segalla 20168844

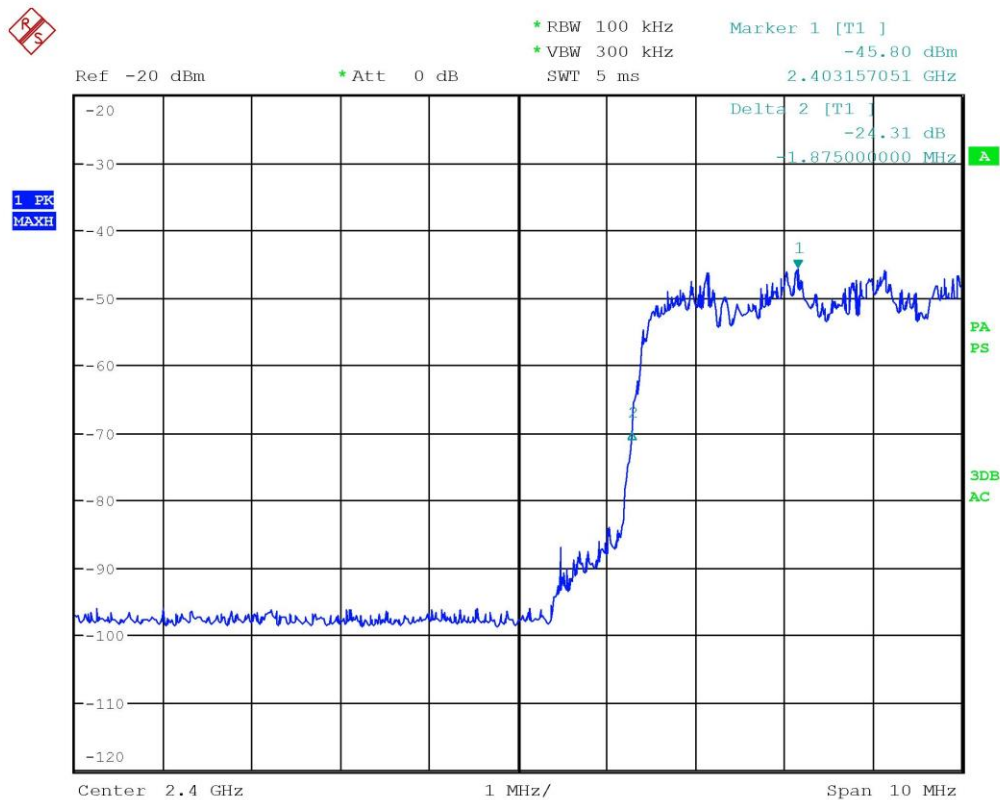


Segalla 20168845

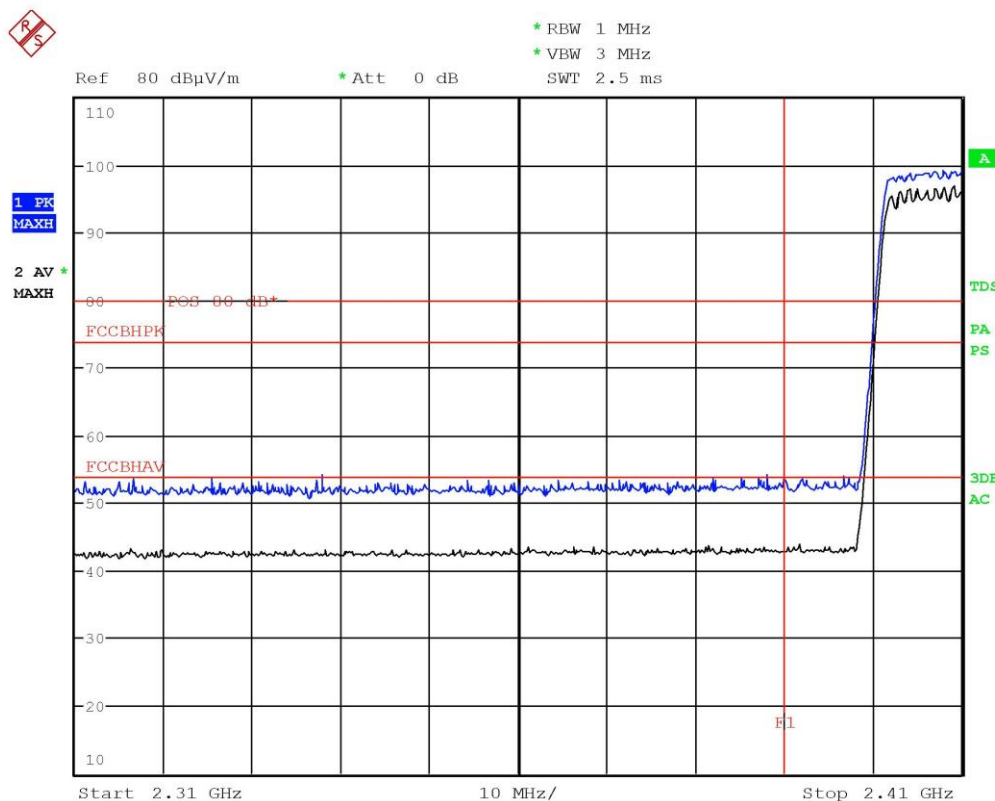


Segalla 20168846

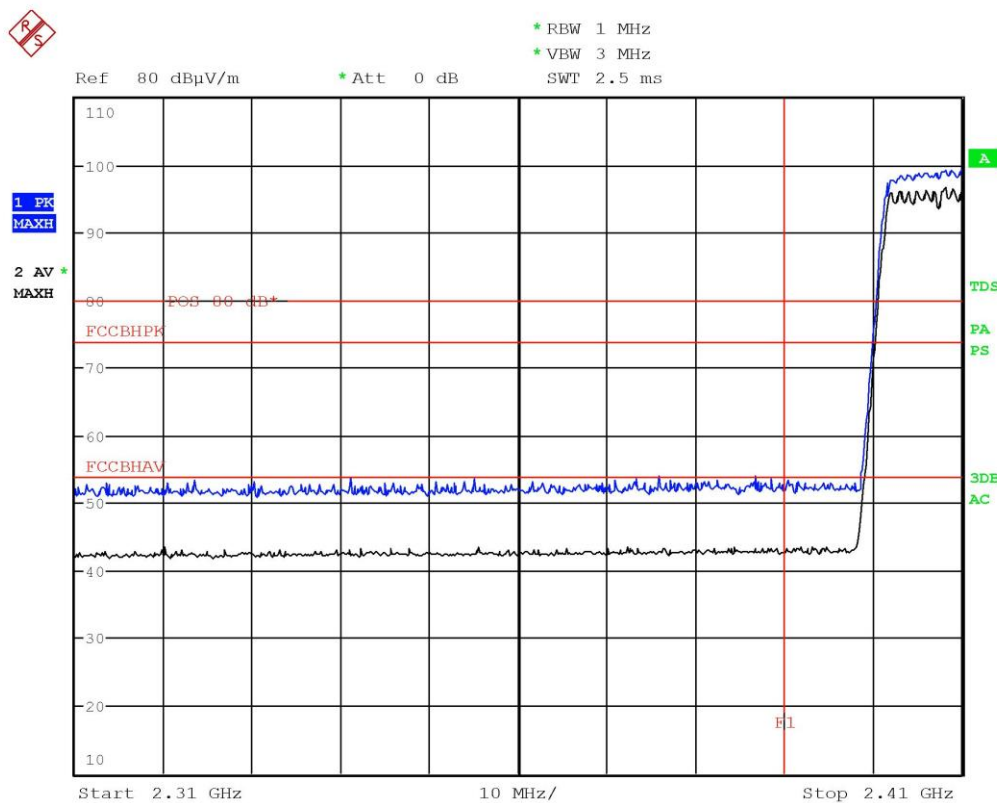


Segalla 20168847

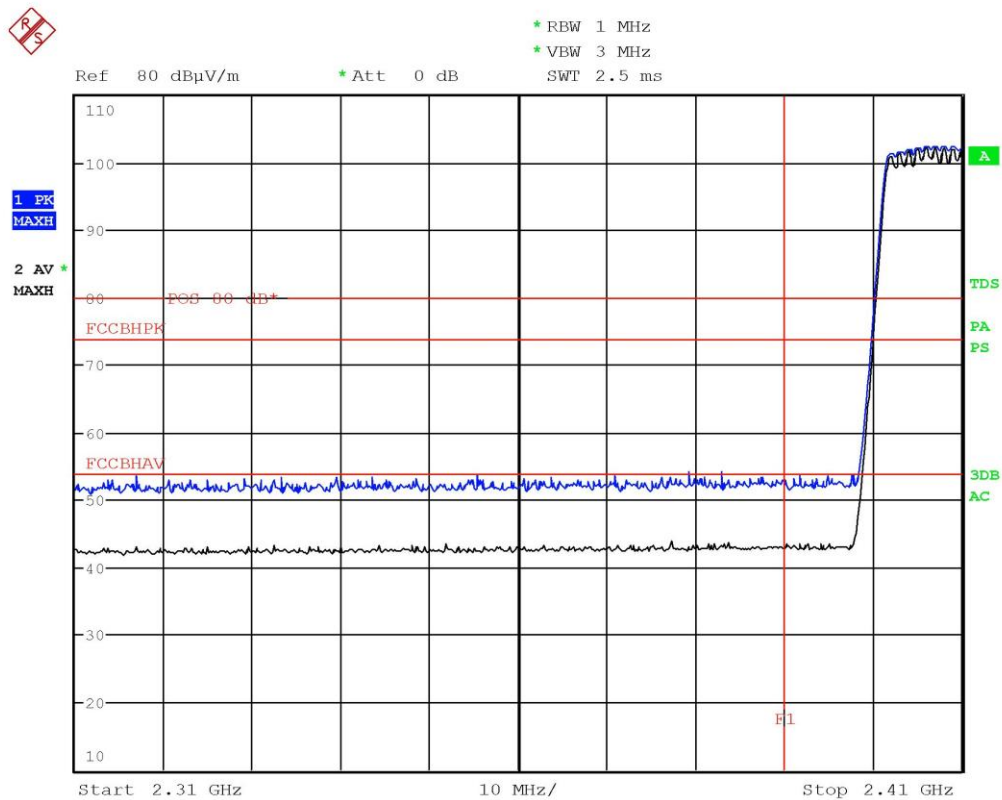


Segalla 20168848

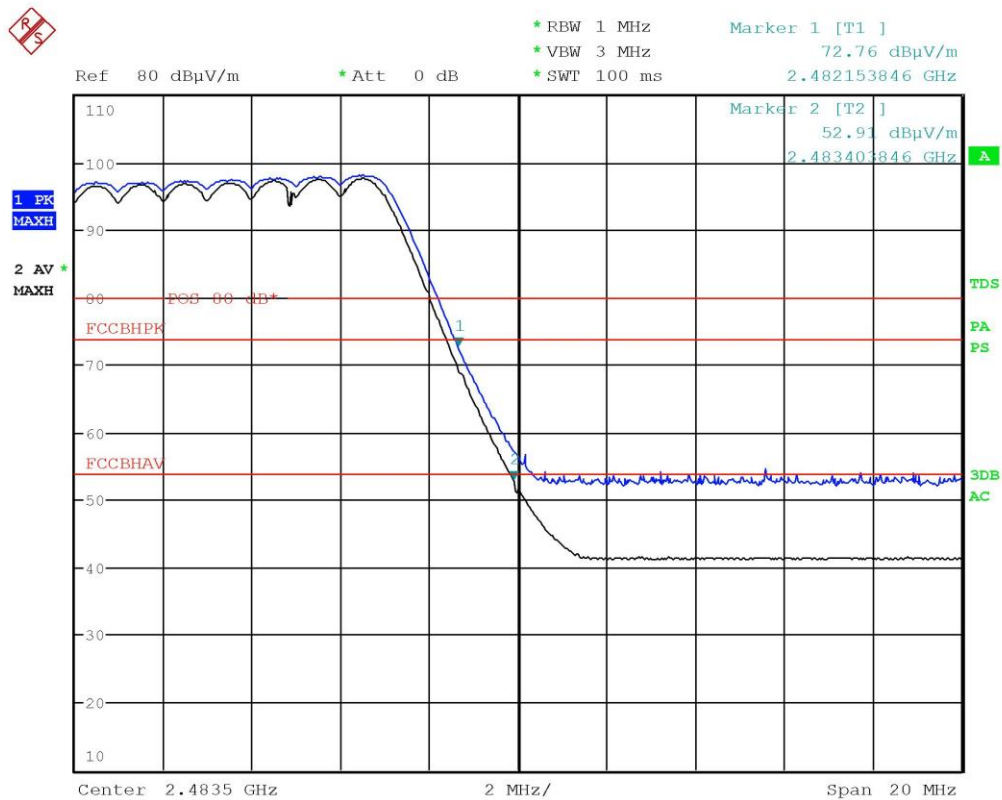


Segalla 20168849

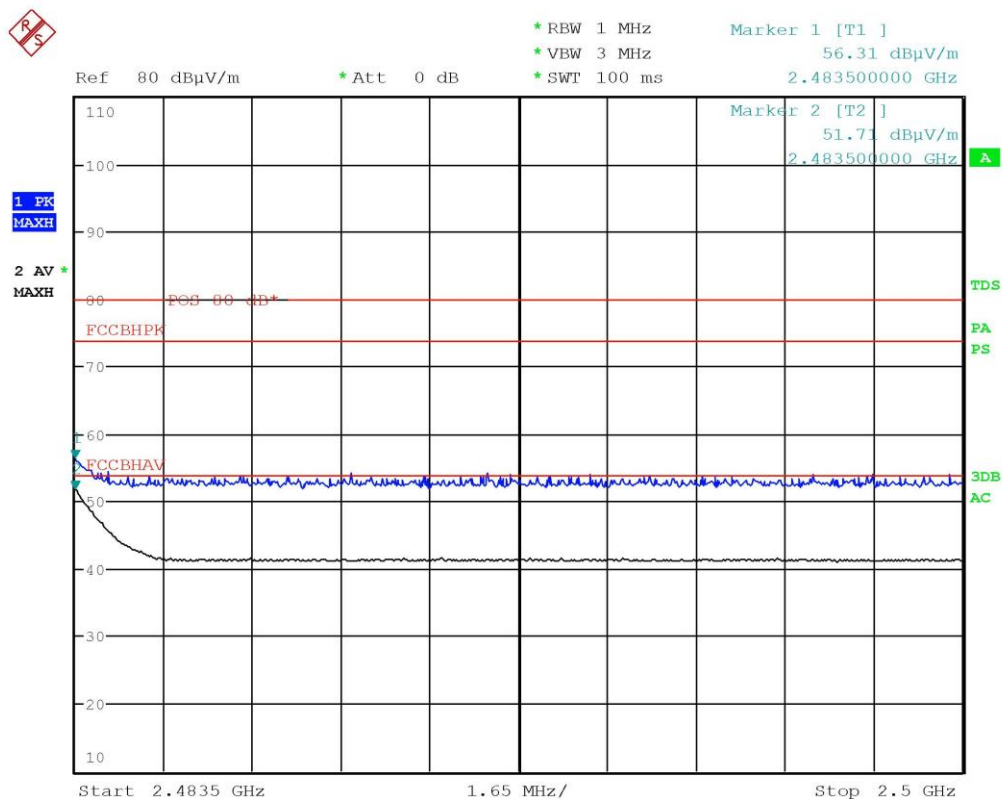


Segalla 20168850

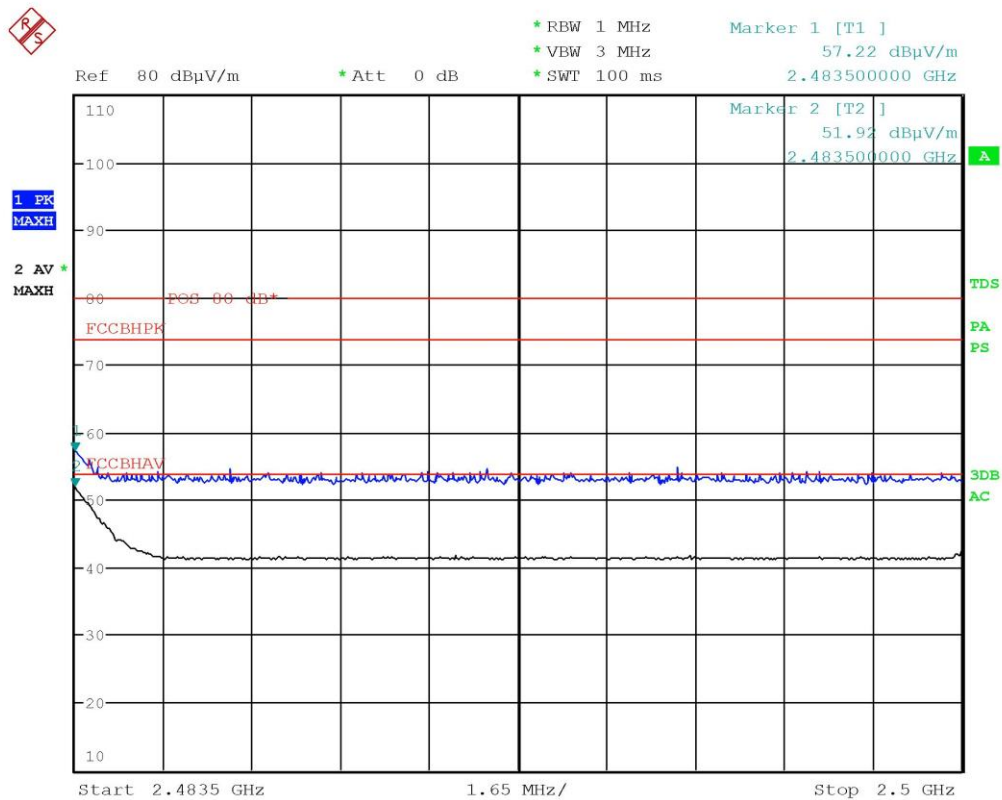


Segalla 20168851

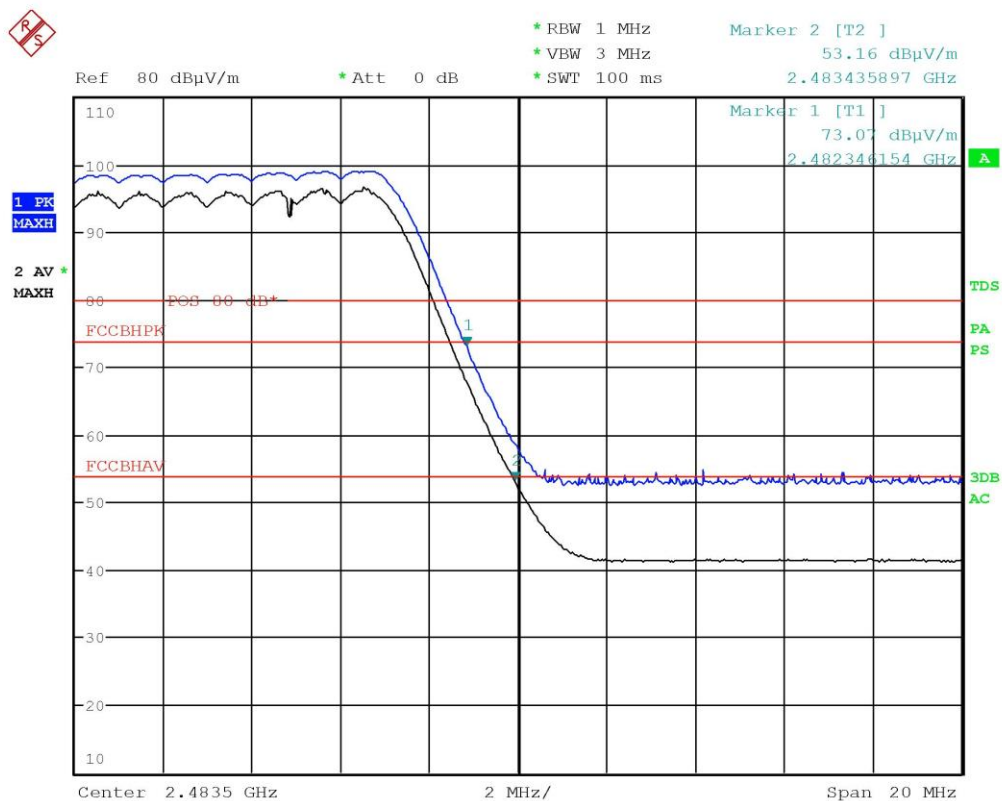


Segalla 20168852

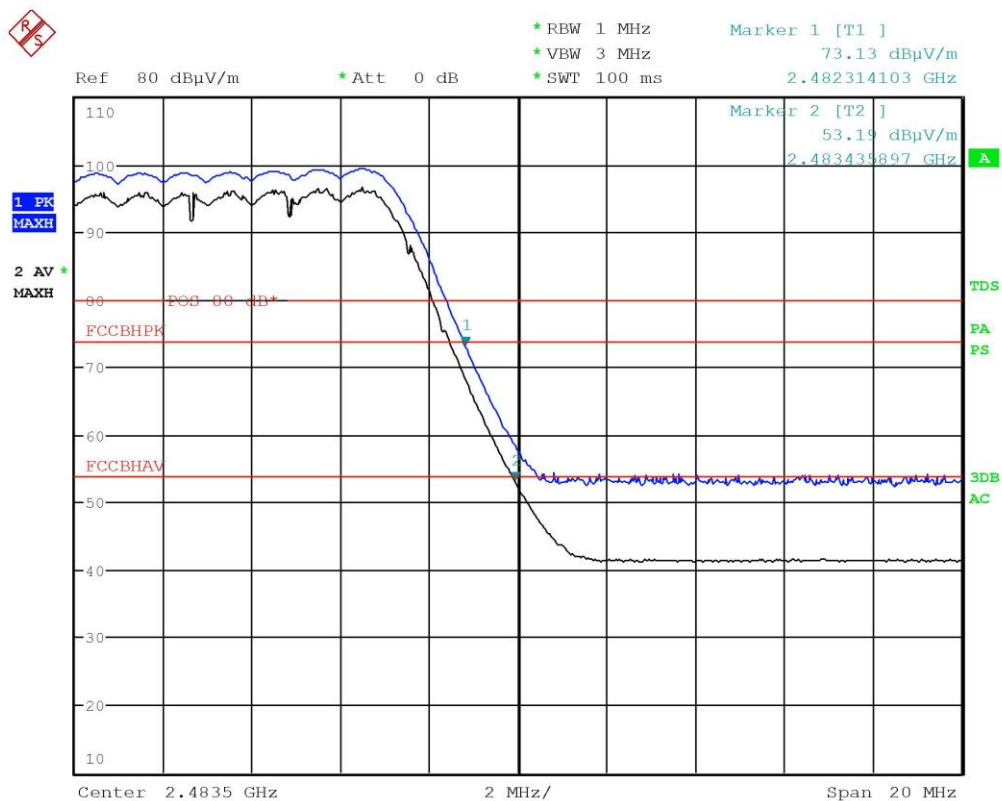


Segalla 20168853




LAB N° 0168 L

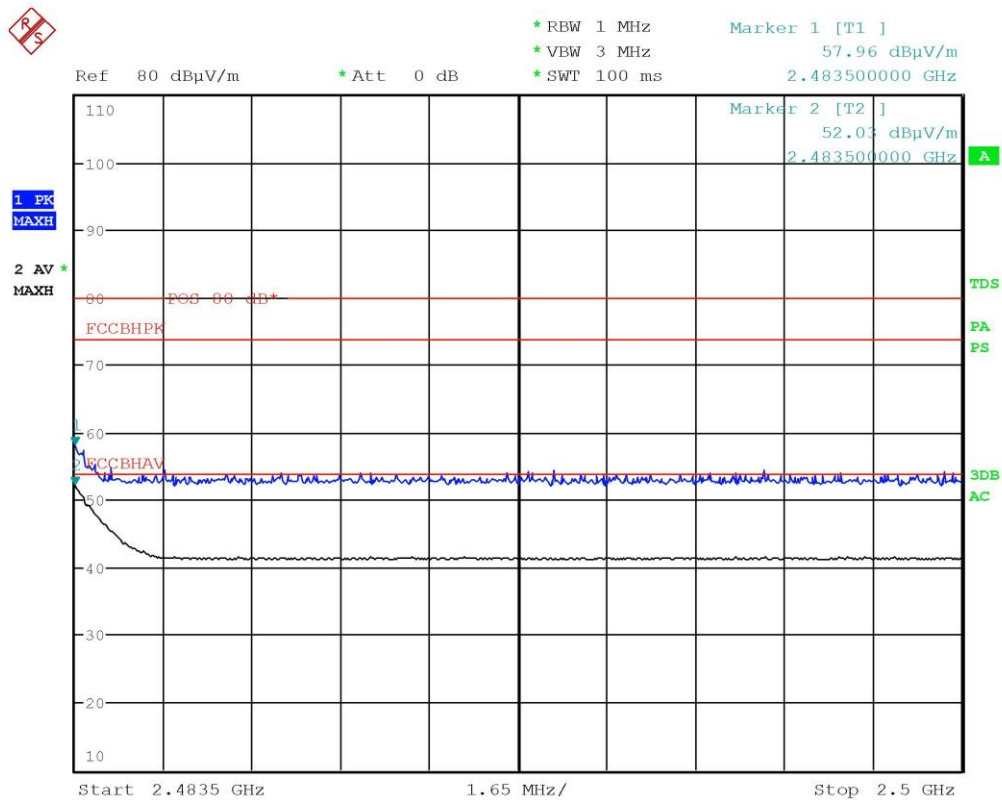


Segalla 20168854

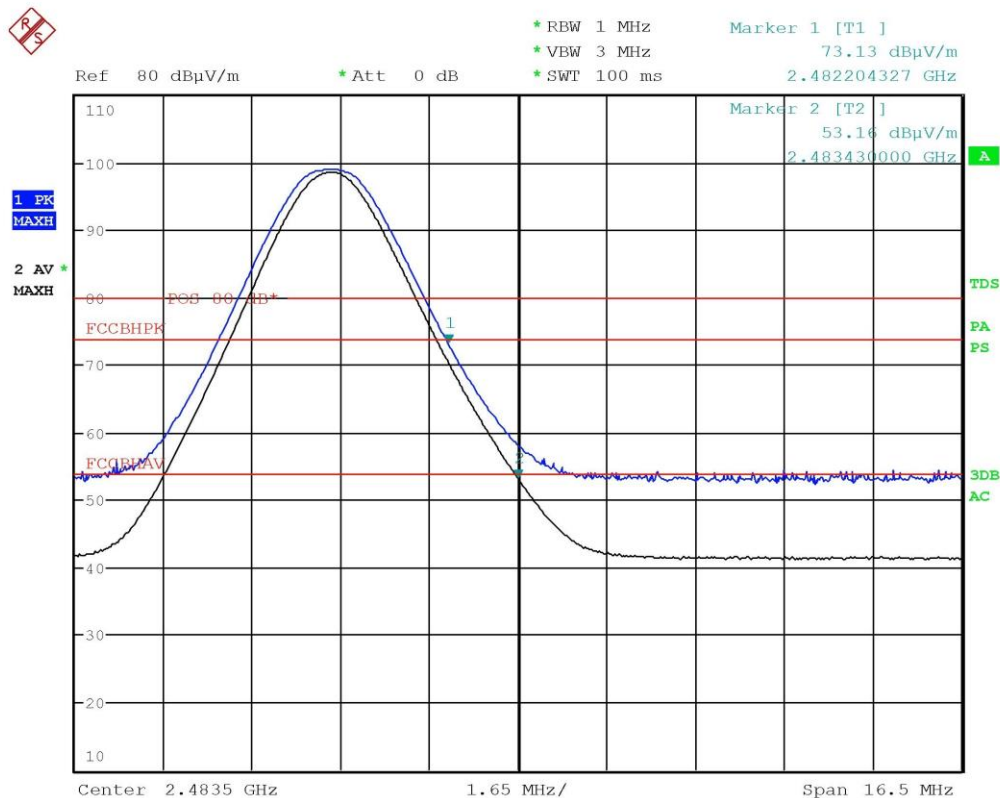


Segalla 20168855




LAB N° 0168 L

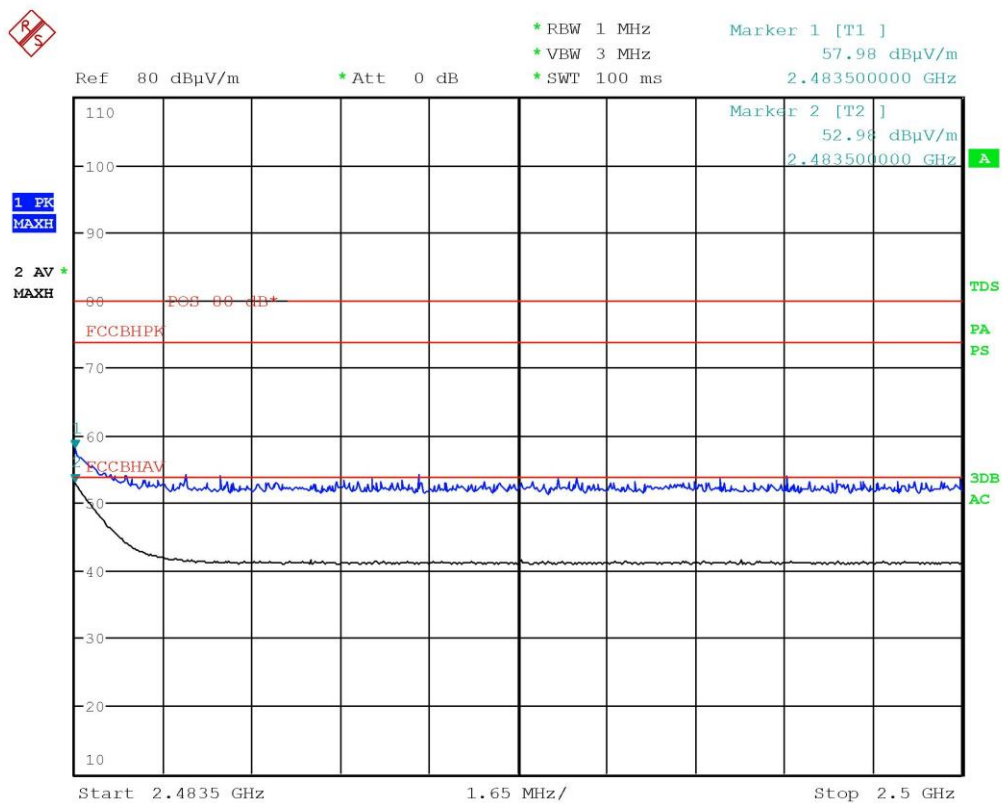


Segalla 20168856

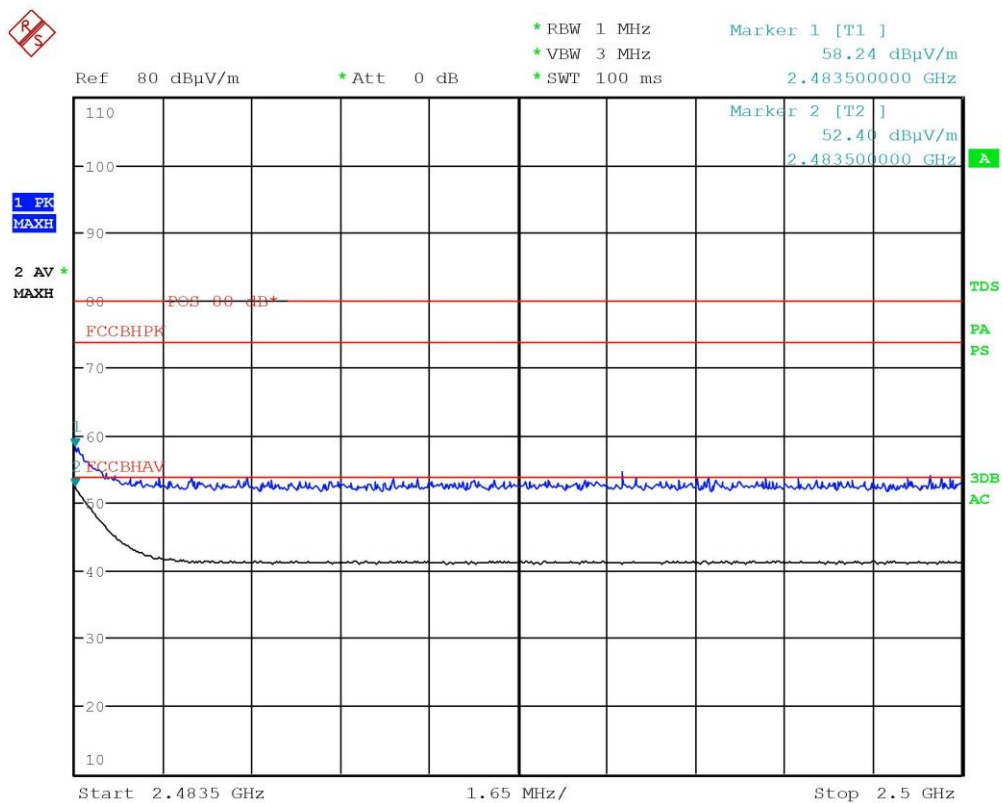


Segalla 20168857

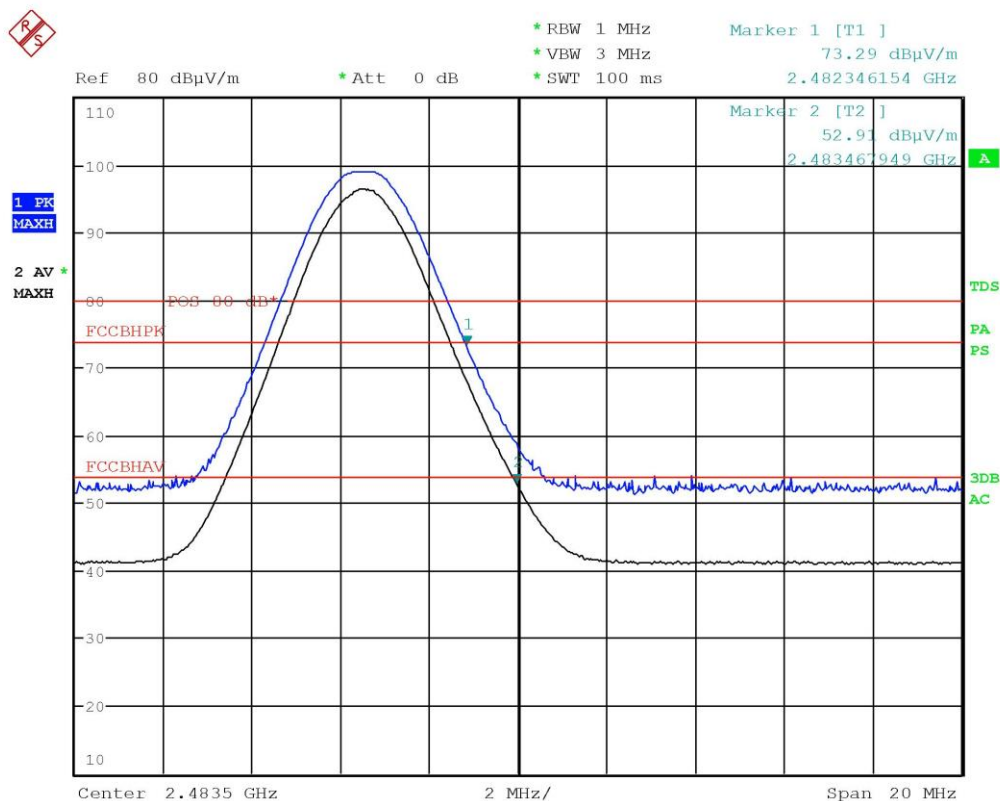

Segalla 20168858

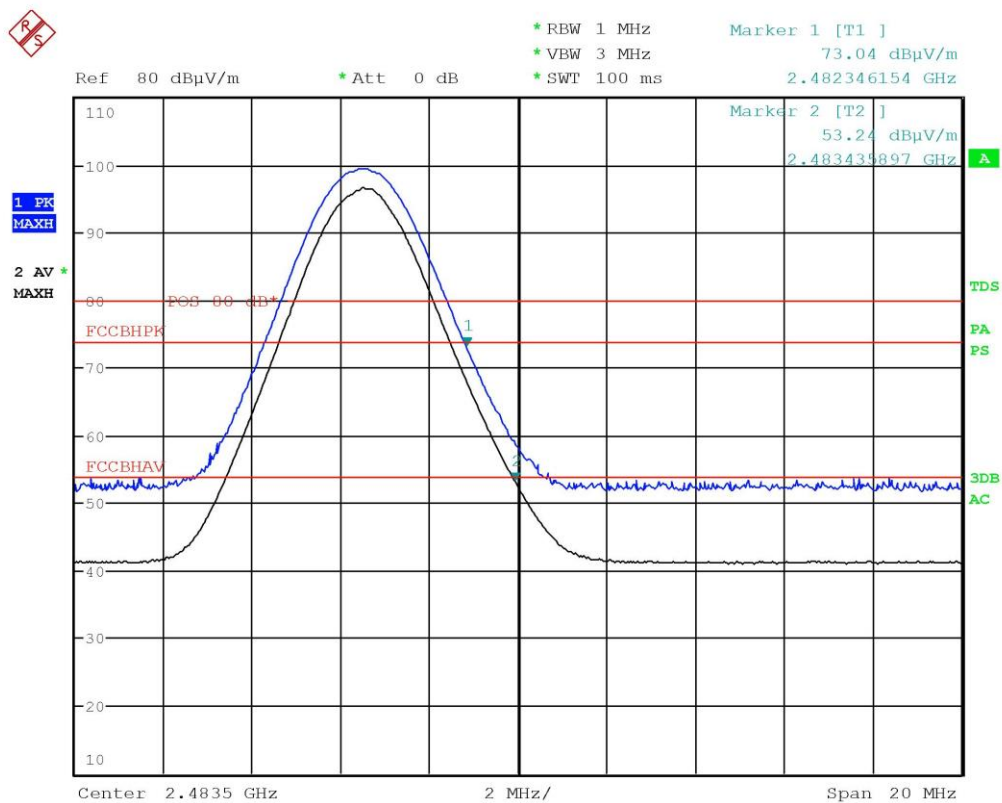

Segalla 20168859

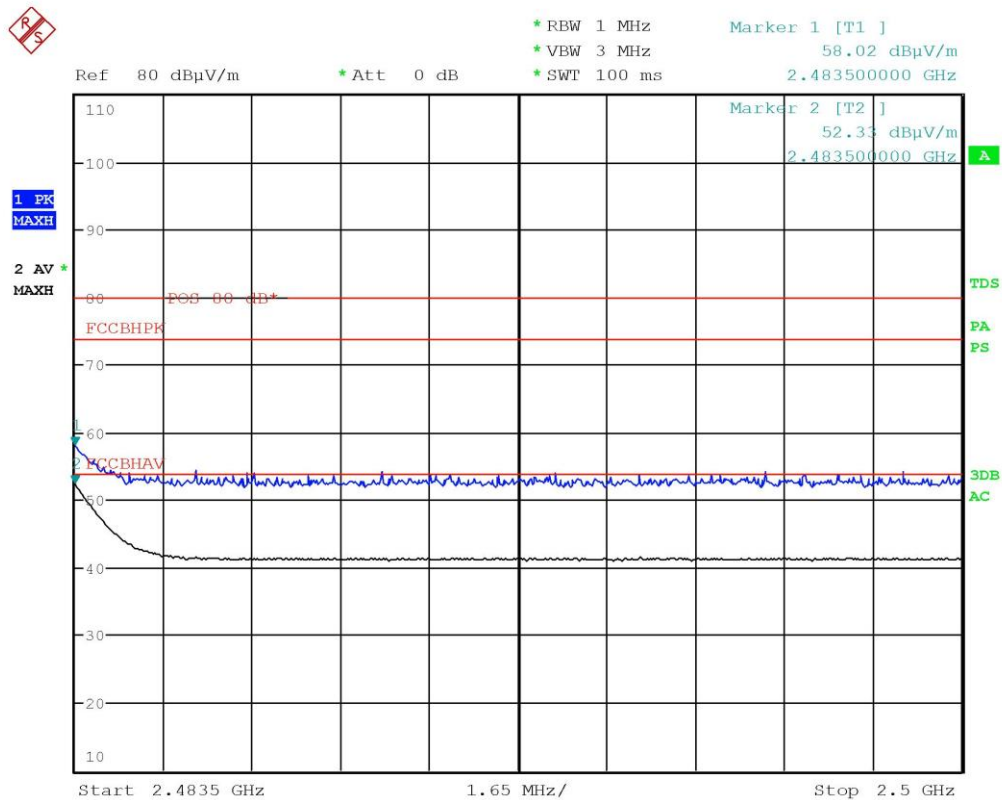

Segalla 20168860




9.8 Peak Output Power

Tested by	M. Segalla
Test date	28.09.2020
Test location (stand)	Laboratory
Reference standards	FCC Rules and Regulation; Titles 47 Part. 15.247 KDB 558074 D01 15.247 Meas Guidance v05r02 cl. 2.2 ANSI C63.10 cl. 7.8.5
Supplementary information.....	--

Acceptance limits

For frequency hopping systems operating in the 2400–2483,5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483,5 MHz band: 0,125 watts.

Test setup

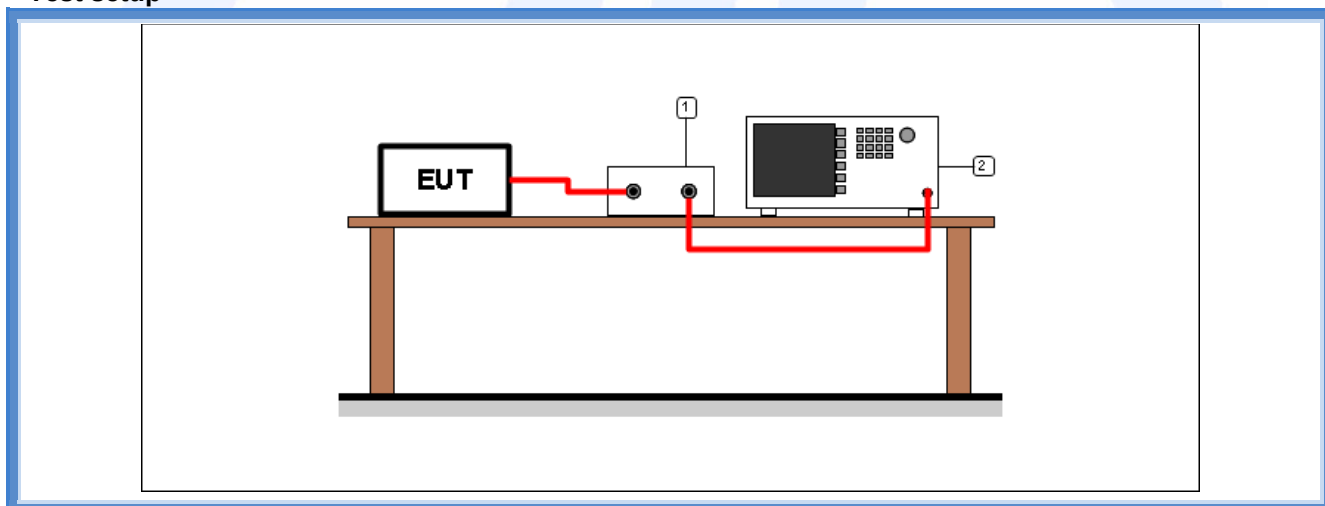

Test setup PR002_01				
Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S295	Rohde & Schwarz	FSW43	Spectrum Analyzer 43GHz
1	--	--	--	Cable + attenuator (calibrated before the test)




Result

Modulation	Frequency (MHz)	Graphs	Peak Output Power (dBm)	Peak Output Power (mW)	Limit (mW)
DH5	2402	G20168884	4,67	2,93	1000
DH5	2441	G20168887	5,21	3,32	1000
DH5	2480	G20168890	5,30	3,39	1000
2DH5	2402	G20168893	2,40	1,74	1000
2DH5	2441	G20168896	3,37	2,17	1000
2DH5	2480	G20168899	3,26	2,12	1000
3DH5	2402	G201688A03	2,79	1,90	1000
3DH5	2441	G201688A06	3,38	2,18	1000
3DH5	2480	G201688A09	3,66	2,32	1000




Graphs

Segalla 20168884

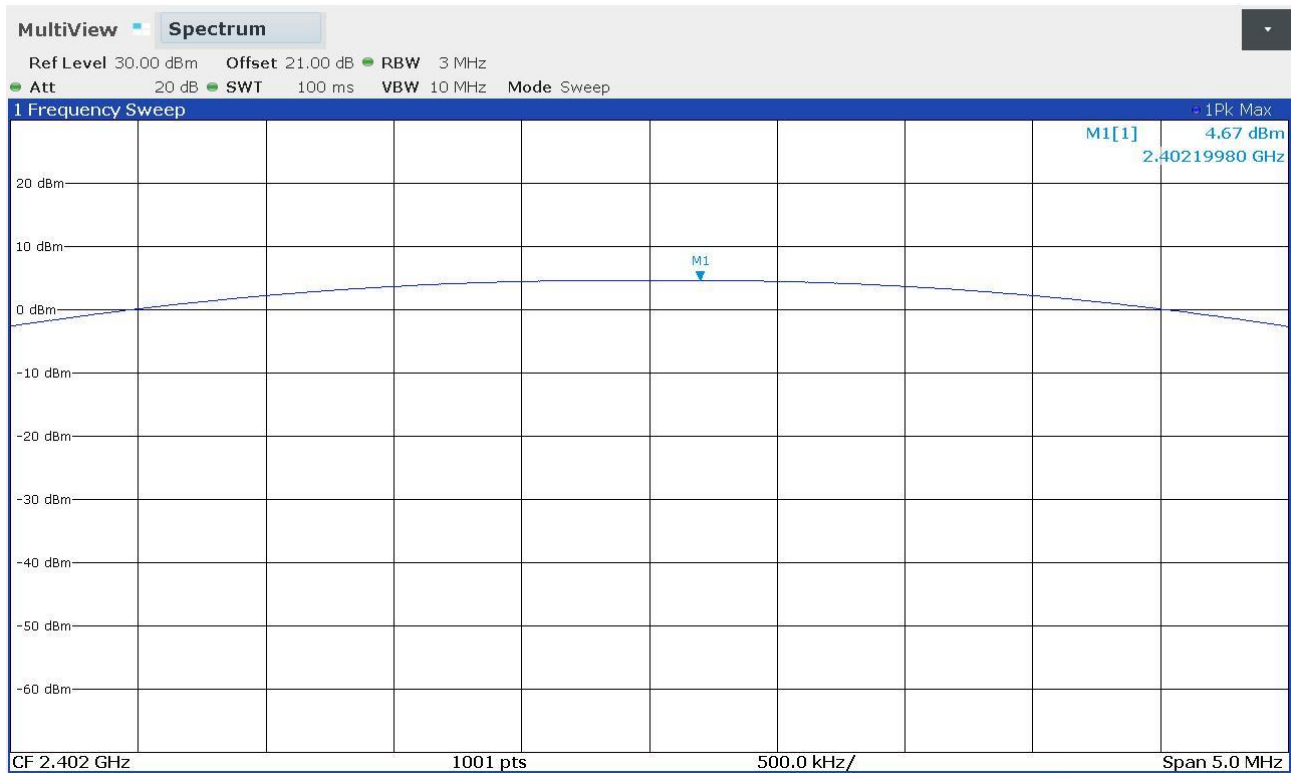


Segalla 20168887

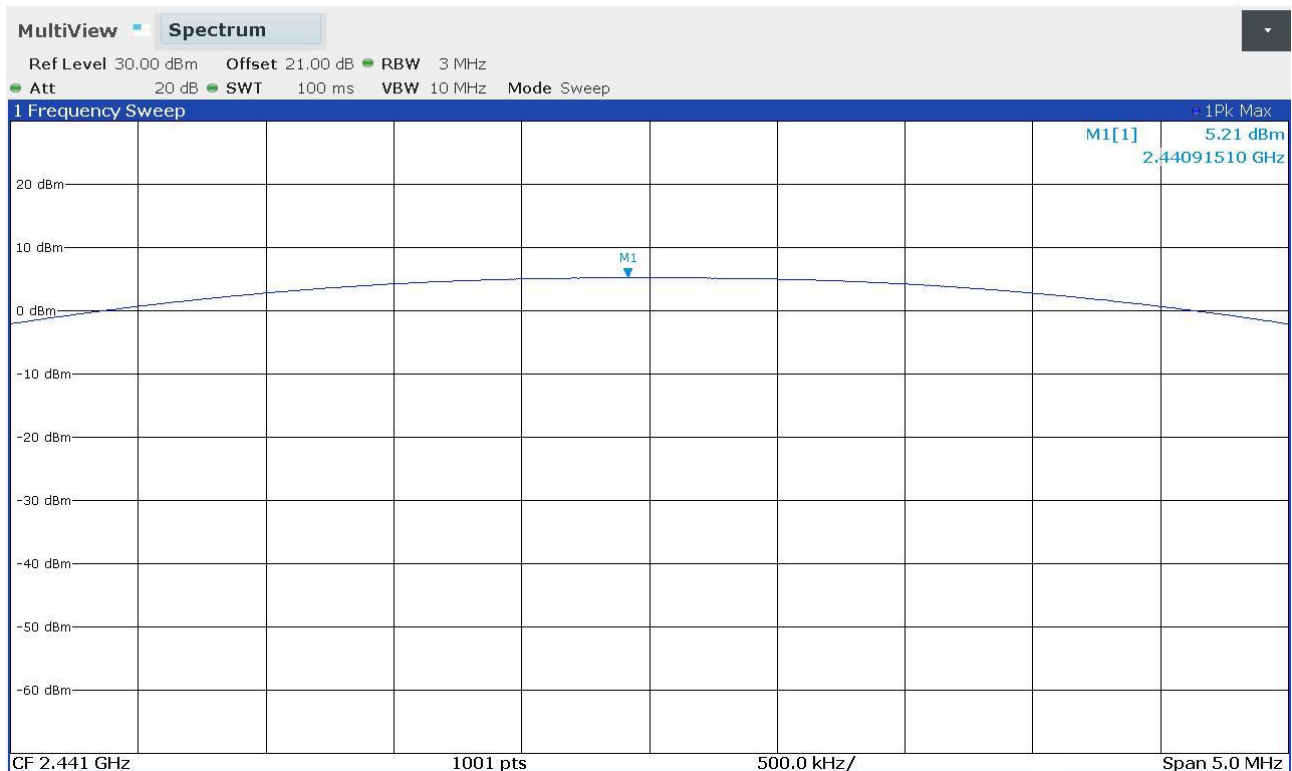




Segalla 20168890

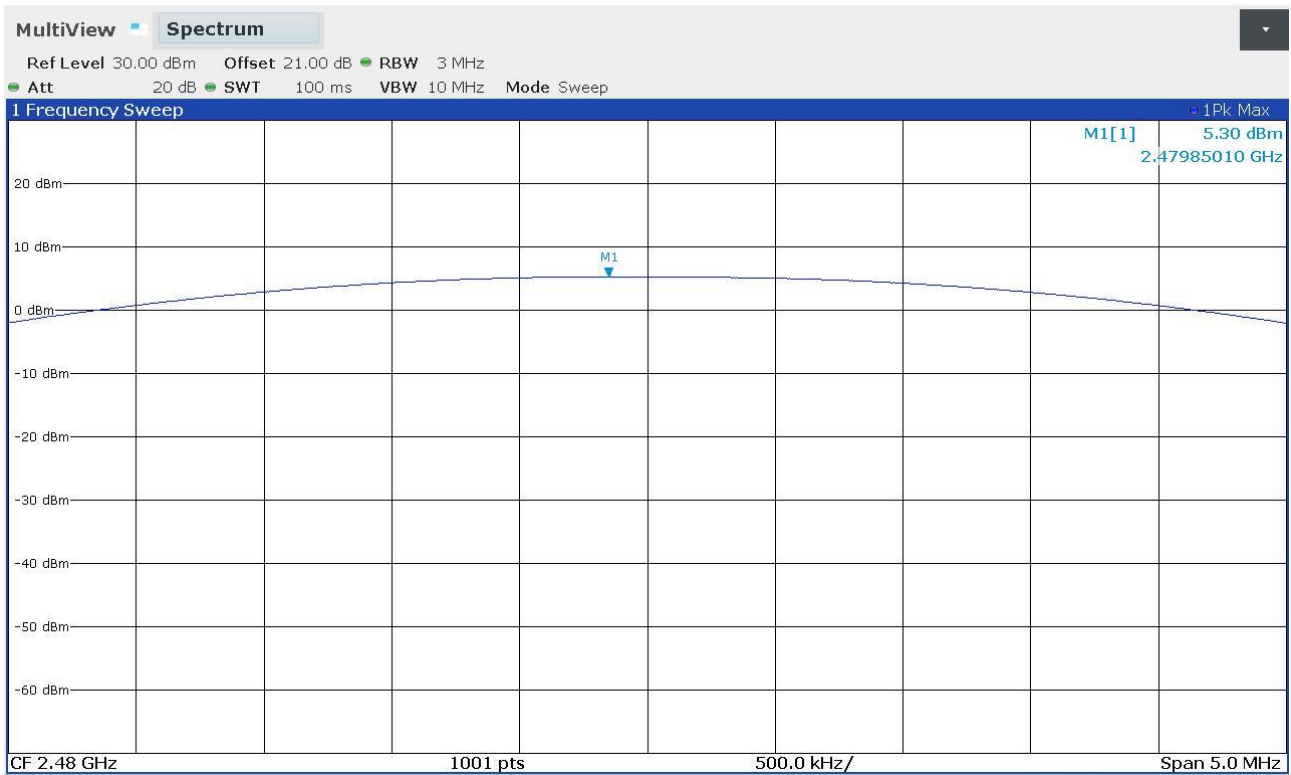


Segalla 20168893

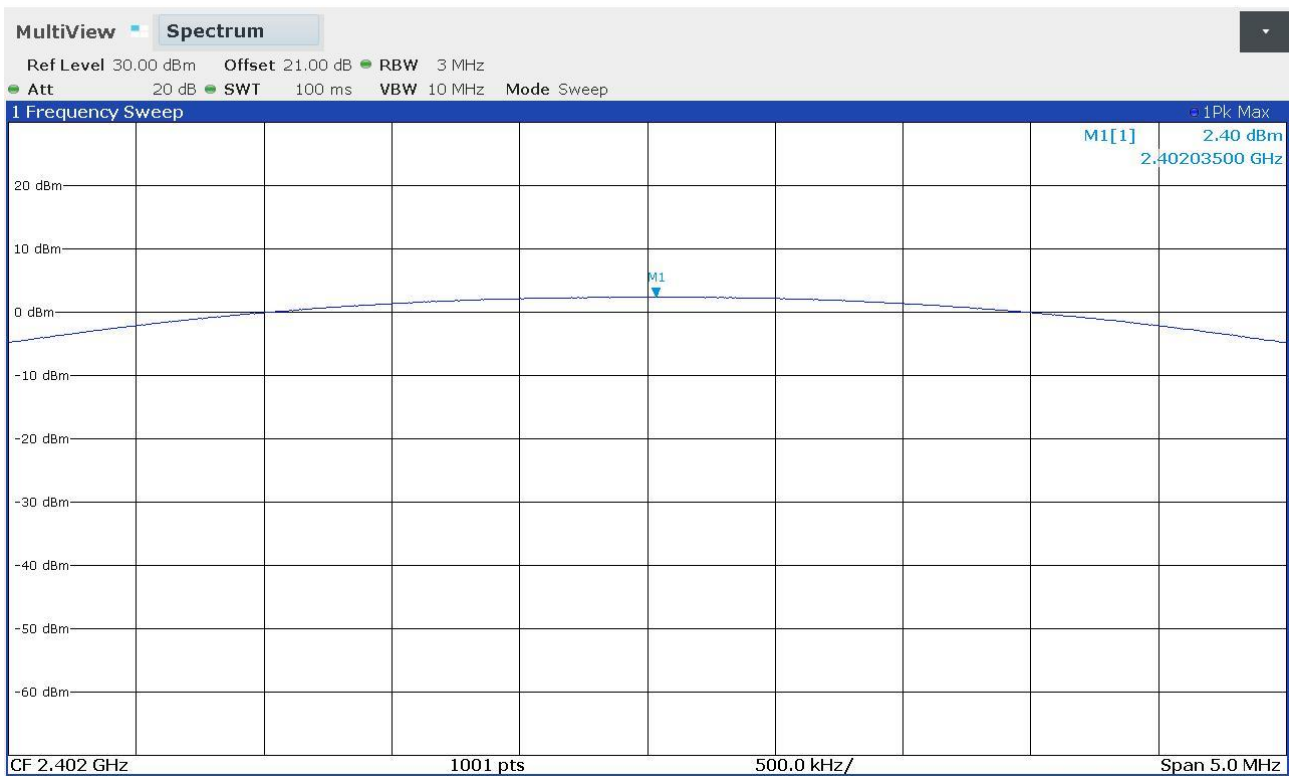




Segalla 20168896

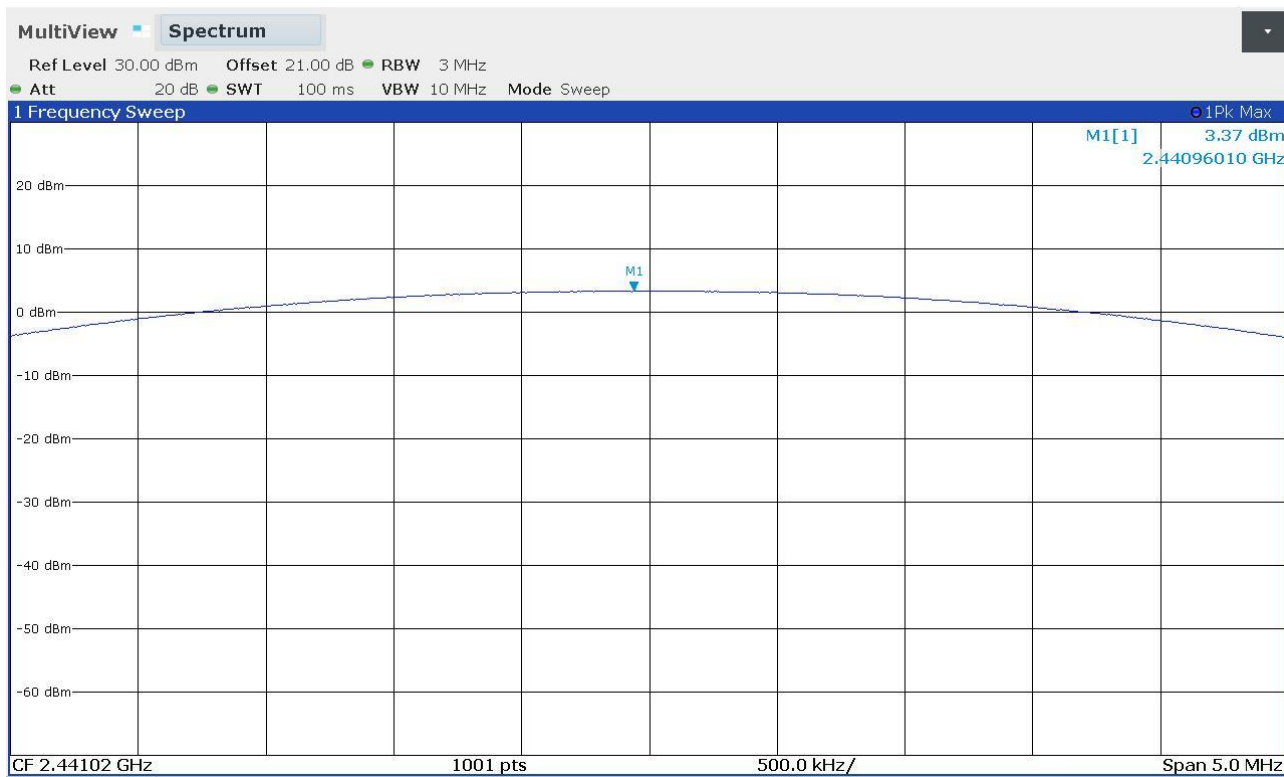


Segalla 20168899

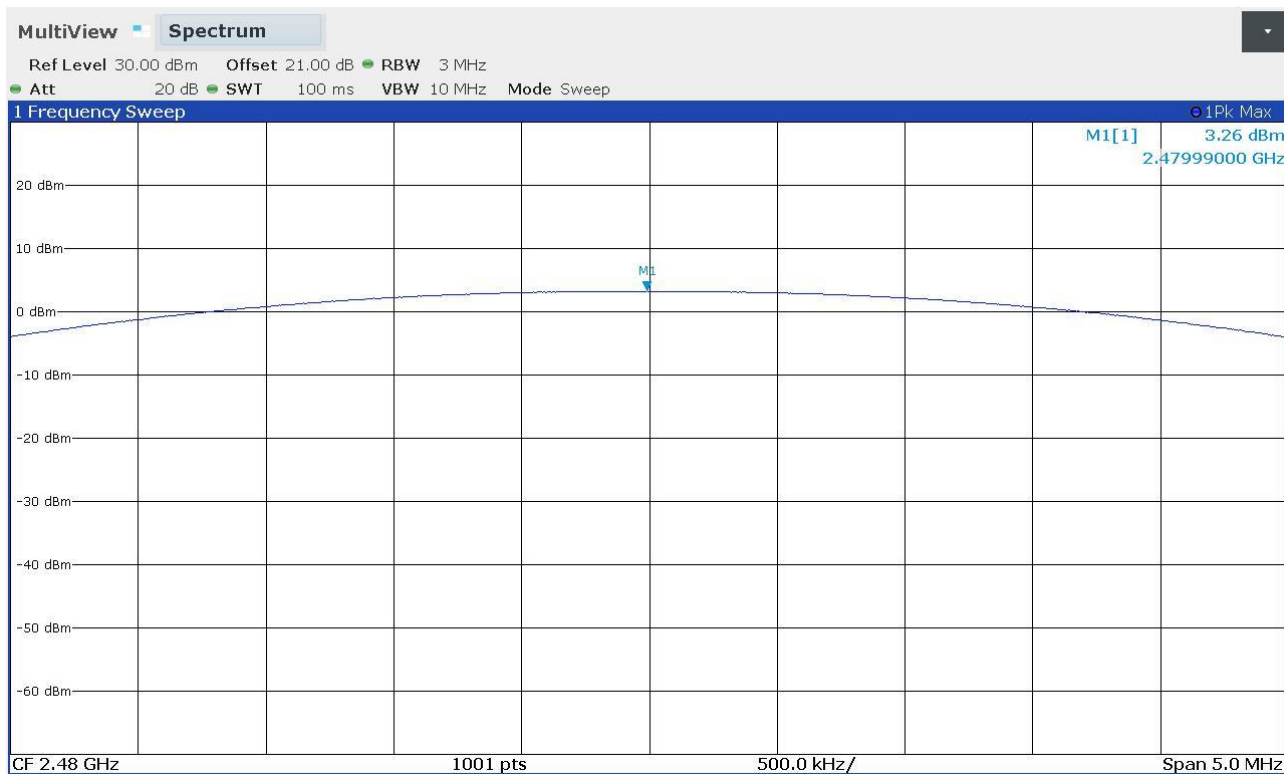




Segalla 201688A03

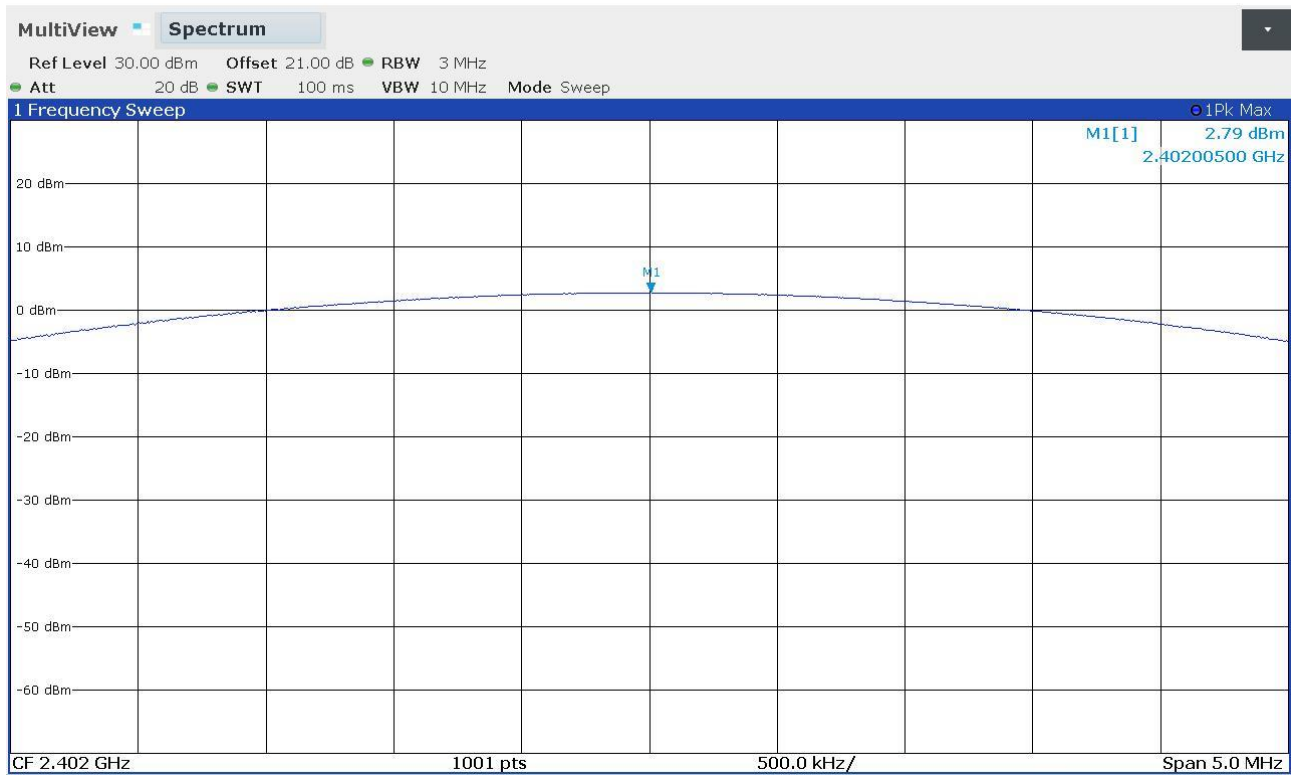


Segalla 201688A06

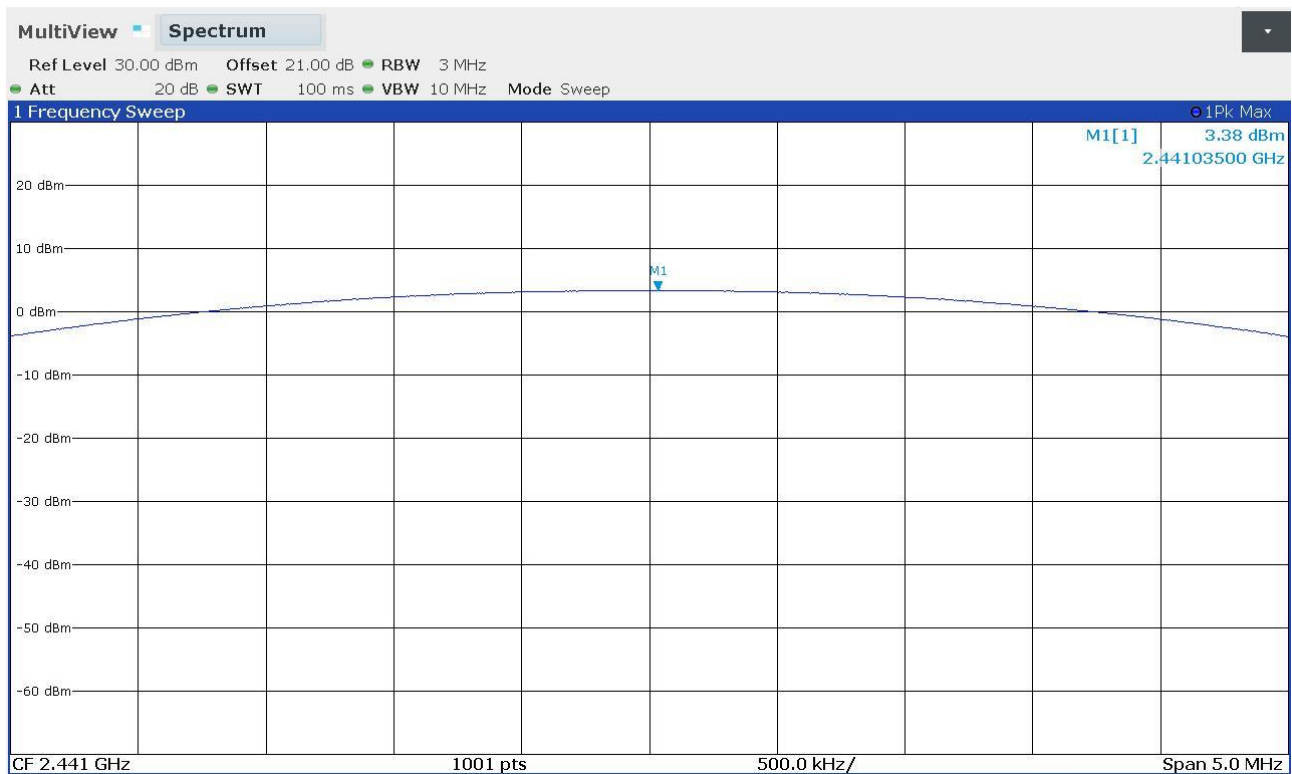



Segalla 201688A09

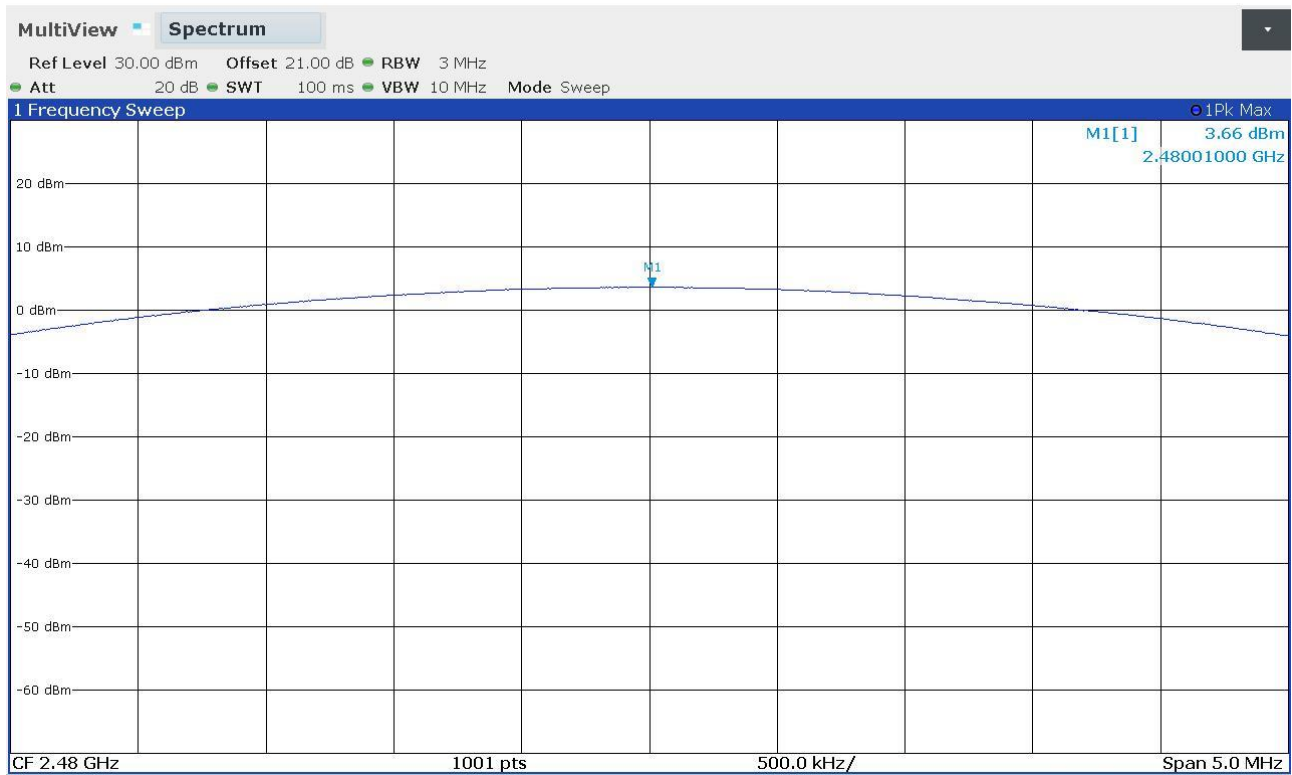



Attachment 1

Instruments list

<i>Id. number</i>	<i>Manufacturer</i>	<i>Model</i>	<i>Description</i>	<i>Serial number</i>	<i>Last calibration</i>	<i>Due date calibration</i>
CMC S010	Rohde & Schwarz	ESH3-Z2	Impulses Limiting Device	- - -	January '20	January '21
CMC S108	EMCO	3115	Horn Antenna	9811-5622	June '19	June '22
CMC S127	Schaffner	HLA6120	Loop Antenna	1191	November '18	November '23
CMC S164	Rohde & Schwarz	ESU26	EMC interference receiver	100052	January '20	January '21
CMC S200	Schwarzbeck	NSLK 8128	V-LISN	8128-273	January '20	January '21
CMC S206	Rohde & Schwarz	ESCI 7	EMC Receiver 9KHz-7GHz	100781	January '20	January '21
CMC S260	CMC	Wfr_N	Shielded Cable	Wfr_ant10-1	November '19	November '20
CMC S261	CMC	Wfr_N	Shielded Cable	Wfr_ant20-1	November '19	November '20
CMC S262	CMC	Wfr_N_fix	Shielded Cable	Wfr_fix32-1	November '19	November '20
CMC S263	CMC	Wfr_N_fix	Shielded Cable	Wfr_fix31-1	November '19	November '20
CMC S264	CMC	Wfr_N	Shielded Cable	Wfr_ext03-1	November '19	November '20
CMC S271	Schwarzbeck	BBA 9106 + VHBB 9124	Biconical Antenna (30-300MHz)	831	June '19	June '22
CMC S287	Schwarzbeck	VUSLP 9111B	Log-periodic Antenna (200 MHz-3GHz)	9111B-203	June '19	June '22
CMC S288	CMC	W_sma_white	Joint Shielded Cable	W_001	November '19	November '20
CMC S290	Schwarzbeck	BBHA 9170	Horn Antenna (15-40 GHz)	733	October '16	October '21
CMC S295	Rohde & Schwarz	FSW43	Spectrum Analyzer 43GHz	104059	November '19	November '22



Attachment 1

Measurement uncertainty

Test	Test Setup	Expanded uncertainty	Note
Conducted emission CISPR 16 LISN 50uH 0,009-0,0150 MHz	PE001_01	3,4 dB	1
Conducted emission CISPR 16 LISN 50uH 0,150-30,0 MHz	PE001_01	3,0 dB	1
Conducted emission CISPR 16 Voltage Probe 0,15-30 MHz	PE001_02	2,9 dB	1
Conducted emission CISPR 16 Current Probe 0,15-30 MHz	PE001_03	2,6 dB	1
Conducted emission CISPR 16 ISN 0,15-30 MHz	PE001_04	4,7 dB	1
Clic CISPR 16 LISN 50uH 0,150-30,0 MHz	PE001_05	2,9 dB	1
Radiated Emission CDNE 30-300 MHz	PE001_06	3,3 dB	1
Disturbance Power 30-300 MHz	PE002_01	3,6 dB	1
Radiated Emission LAS 0,15-30 MHz	PE003_01	2,0 dB	1
Radiated Emission CISPR 16 Loop Ant. 0,15-30 MHz	PE004_01	4,0 dB	1
Radiated Emission CISPR 16 Bicon. Ant. 30-300 MHz	PE004_02	3,9 dB	1
Radiated Emission CISPR 16 LogP. Ant. 300-1000 MHz	PE004_03	3,8 dB	1
Radiated Emission CISPR 16 Horn Ant. 1-18 GHz	PE004_04	4,2 dB	1
Human Exposure to electromagnetic fields	PE005_01	23,6 %	1
Harmonics	PE006_01	10 mA + 2,6 %	1
Flicker	PE007_01	4,79 %	1
Radiated Immunity 80 MHz - 6 GHz	PE102_XX	1,95 dB 0,75 V/m a 3V/m	1
Conducted Immunity 0,15 - 230 MHz	PE105_XX	1,20 dB 0,44 V a 3V	1
AC Magnetic field	PE106_01	1,55 % 0,15 A/m a 10A/m	1
Pulse Magnetic field	PE107_01	6,25 % 18,7 A/m a 300A/m	1
Dumped Magnetic field	PE108_01	6,25 % 1,87 A/m a 30A/m	1
Common mode conducted immunity	PE112_01	2,21 % 0,22 V a 10V	1



Attachment 1

Test	Test Setup	Expanded uncertainty	Note
Power/Spurious 9kHz-30MHz	PR001_01	4,0 dB	1
Power/Spurious ERP 30-1000MHz d=10m	PR001_02+03	4,7 dB	1
Misura della potenza EIRP 1-18GHz d=3m	PR001_04+05	4,7 dB	1
Misura della potenza EIRP 18-40GHz d=3m	PR001_06	5,4 dB	1
Frequency error	PR002_01+02	< 1x10 ⁻⁷	1
Timing zero span (1001pts.)	PR002_01+02	0,2 % SWT	1
Modulation bandwidth	PR002_01+02	< 1x10 ⁻⁷	1
Conducted RF power and spurious emission	PR002_01+02	1,1 dB	1
Adjacent channel power	PR002_01+02	1,1 dB	1
Blocking	PR002_01+02	1,1 dB	1

Test	Test Setup	Expanded uncertainty	Note
Electrostatic discharge immunity test	PE101_0X		2
Electrical fast transients / burst immunity test	PE103_0X		2
Surge immunity test	PE104_0X		2
Short interruption immunity test	PE109_01		2
Ring Wave immunity test	PE110_01		2
Low frequency immunity test	PE111_01		2
Dumped Oscillatory immunity test	PE113_01		2
Rev. 20_02 date 24/02/2020			

Note 1:

The expanded uncertainty reported according to the document EA-4-02 is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of p = 95%




Note 2:

It has been demonstrated that the used test equipment meets the specified requirements in the standard with at least a 95% confidence, covering factor k=2



Attachment 1

Judgement of compliance

Case 1	Case 2	Case 3	Case 4
 The sample complies with the requirements. The measurement results is within the specification limit when the measurement uncertainty is taken into account.	 The sample complies with the requirements. It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty although the measurement result is below the limit.	 The sample does not comply with the requirements. It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty also the measurement result is upper the limit.	 The sample does not comply with the requirements. The measurement results is outside the specification limit when the measurement uncertainty is taken into account.

In agreement with ILAC-G8: 03/2009 Guidelines on the Reporting of Compliance with Specification

Quality manual references – Internal procedure

Internal Procedure PM001 rev. 3.0 (Quality Manual)	Measure procedure
Internal Procedure INC_M rev. 9.1 (Quality Manual)	Measurement uncertainty calculation